

Prüfbericht-Nr.: <i>Test report no.:</i>	CN258N6G 003	Auftrags-Nr.: <i>Order no.:</i>	168530962	Seite 1 von 28 Page 1 of 28
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2025-01-15	
Auftraggeber: <i>Client:</i>	SZ DJI Osmo Technology Co., Ltd. Room S11, Floor 23, Tower 1, DJI Sky City, No. 55 Xianyuan Road, Xili Community, Xili Street, Nanshan District, Shenzhen, China.			
Prüfgegenstand: <i>Test item:</i>	DJI Mic 3 Receiver			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	DMR03 (Trademark: DJI)			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.407 RSS-247 Issue 3 August 2023 RSS-Gen Issue 5 February 2021			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2025-01-22	Please refer to photo documents		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003910619-001~004, 009			
Prüfzeitraum: <i>Testing period:</i>	2025-01-16 - 2025-04-11			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	Hardy <i>X Hardy S</i> Suo		genehmigt von: <i>authorized by:</i>	Lin Lin <i>X Lin Lin</i>
Datum: <i>Date:</i>	2025-04-16		Ausstellungsdatum: <i>Issue date:</i>	2025-04-16
Stellung / Position:	Sachverständige(r) / Expert		Stellung / Position:	Sachverständige(r) / Expert
Sonstiges / Other:	FCC ID: 2ANDR-DMR03, IC: 23060-DMR03, HVIN: DMR03 This report is for 5.2GHz SDR, 5.3GHz SDR, 5.6GHz SDR, 5.8GHz SDR and 5.8GHz Wi-Fi.			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN258N6G 003
Test report no.:

Seite 2 von 28
Page 2 of 28

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system.</i> <i>Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN258N6G 003
Test Report No.

Seite 3 von 28
Page 3 of 28

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM OUTPUT POWER

RESULT: Pass

5.1.3 POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 FREQUENCY STABILITY

RESULT: Pass

5.1.5 26dB BANDWIDTH AND 99% BANDWIDTH

RESULT: Pass

5.1.6 6dB BANDWIDTH

RESULT: Pass

5.1.7 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.8 DYNAMIC FREQUENCY SELECTION (DFS)

RESULT: Pass

5.1.9 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

TABLE OF CONTENTS

1.	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2.	TEST SITES	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	7
2.4	CALIBRATION	7
2.5	UNCERTAINTY OF MEASUREMENT.....	7
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	8
3.	GENERAL PRODUCT INFORMATION	9
3.1	PRODUCT FUNCTION AND INTENDED USE.....	9
3.2	RATINGS AND SYSTEM DETAILS	9
3.3	INDEPENDENT OPERATION MODES	12
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	13
3.5	SUBMITTED DOCUMENTS.....	13
4.	TEST SET-UP AND OPERATION MODES	14
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	14
4.2	TEST OPERATION	14
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	14
4.4	COUNTERMEASURES TO ACHIEVE ERM COMPLIANCE	14
4.5	TEST SETUP DIAGRAM.....	15
5.	TEST RESULTS	17
5.1	RADIO TEST REQUIREMENT & TEST SUITES (5GHz BANDS)	17
5.1.1	Antenna Requirement.....	17
5.1.2	Maximum output power	18
5.1.3	Power Spectral Density	21
5.1.4	Frequency Stability.....	22
5.1.5	26dB Bandwidth and 99% Bandwidth	23
5.1.6	6dB Bandwidth	24
5.1.7	Radiated Spurious Emission.....	25
5.1.8	Dynamic Frequency Selection (DFS).....	26
5.1.9	Conducted Emission on AC Mains.....	27
6.	LIST OF TABLES	28

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of 5.2G, 5.3G, 5.6G, 5.8GHz SDR

Appendix B: Test Results of 5.8GHz Wi-Fi

Appendix C: Photographs of the Test Set-up

2. Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, People's Republic of China

A2LA Certificate Number: 5162.01

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (SRD-Tonscend)						
Equip. No.	Description	Manufacturer	Model	Serial No.	Cal. Date (DD.MM.YYYY)	Cal. until (DD.MM.YYYY)
9039436	EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY60241175	26.09.2024	25.09.2025
9039437	MXG X-Series RF Vector Signal Generator	Keysight	N5182B	MY61250137	26.09.2024	25.09.2025
9039438	EXG X-Series Microwave Analog Signal Generator	Keysight	N5173B	MY61250141	26.09.2024	25.09.2025
9039439	DC Power Supply	Keysight	E3642A	MY61276100	26.09.2024	25.09.2025
9039440	Wireless Connectivity Tester	R&S	CMW270	102505	26.09.2024	25.09.2025
9039441	Power Control Unit	Tonscend	JS0806-4ADC	N/A	26.09.2024	25.09.2025
9039442	Automation Control Unit	Tonscend	JS0806-2	21C8060396	26.09.2024	25.09.2025
9039443	Test Software	Tonscend	JS1120-3	N/A	N/A	N/A
9039444	Control PC	Lenovo	TianYi510S-071MB	Y LX23JMF	N/A	N/A
G1826483	Humid & Temp Programmable Tester	BOST	NTH090-60	19040801	25.02.2025	24.02.2026
Unwanted Emission Testing (TS9975)						
Equip. No.	Description	Manufacturer	Model	Serial No.	Cal. Date (DD.MM.YYYY)	Cal. until (DD.MM.YYYY)
G1826021	EMI Test Receiver	R&S	ESR 7	102021	29.09.2024	28.09.2025
G1826023	Signal Analyzer	R&S	FSV 40	101439	29.09.2024	28.09.2025
G1826024	System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
G1826025	Filterbank	R&S	Wlan	100759	29.09.2024	28.09.2025
G1826026	OSP	R&S	OSP 120	102040	N/A	N/A
G1826028	Pre-amplifier	R&S	SCU08F1	08320031	29.09.2024	28.09.2025
G1826029	Amplifier	R&S	SCU-18F	180070	29.09.2024	28.09.2025
G1826030	Amplifier	R&S	SCU40A	100475	29.09.2024	28.09.2025
G1826031	Trilog Broadband	Schwarzbeck	VULB 9162	193	28.09.2024	27.09.2026

	Antenna (30 MHz - 7 GHz)					
G1826032	Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	28.09.2024	27.09.2026
G1826033	Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	28.09.2024	27.09.2026
G1826034	Active Loop Antenna	Schwarzbeck	FMZB 1513	302	28.09.2024	27.09.2026
G1826036	Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
G1826037	Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
G1826433	3m Semi- Anechoic Chamber	Albatross	SAC-3m	APC17151- SAC	14.09.2024	13.09.2027

Conducted Emission on AC Mains				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102680	2026-02-09
Artificial Mains Network	R&S	ENV216	102333	2025-07-22
LISN ENV216-Receiver cable in SR3	Calibration frequency range: 9 kHz~30 MHz			2025-12-20
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Uncertainty of Measurement

The value of the measurement uncertainty of each parameter is listed as below:

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
RF output power, conducted	± 0.99 dB
Occupied Channel Bandwidth	± 2.08 %
RF power density, conducted	± 0.99 dB
Unwanted Emissions, conducted	± 0.89 dB
All emissions, radiated	±4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB

2.6 Location of Original Data

Prüfbericht - Nr.: CN258N6G 003
Test Report No.

Seite 8 von 28
Page 8 of 28

The original copies of all test data taken during actual testing were attached at Appendix A & B & C of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3. General Product Information

3.1 Product Function and Intended Use

The Product is a DJI Mic 3 Receiver which supports Bluetooth LE mode, 2.4/5GHz SDR and 2.4/5.8GHz Wi-Fi functions.

*Remark: SDR means specific defined radio and cannot changes radio specification via software/firmware by end-users.

For details refer to the User Manual, Technical Description and Circuit Diagram.

For details refer to user manual and circuit diagram.

3.2 Ratings and System Details

Table 3: Technical Specification

General Information of EUT	Value
Kind of Equipment:	DJI Mic 3 Receiver
Type Designation:	DMR03
Trademark:	DJI
FCC ID:	2ANDR-DMR03
IC:	23060-DMR03
HVIN:	DMR03
Operating Voltage:	Built-in battery DC 3.87V, or Charging by Type-C port DC 5V, or Charging by DJI Mic 3 Charging Case (MN: DMC03) DC 5V
Testing Voltage:	Fully charged battery
Operating Temperature Range:	-10 °C ~ +45 °C
Radiofrequency operating mode:	1) Bluetooth: operating within 2400-2483.5MHz, Bluetooth BLE (1Mbps&2Mbps) 2) 2.4GHz SDR: operating within 2400-2483.5MHz, supports 10MHz and 20MHz Bandwidth 3) 2.4GHz Wi-Fi: operating within 2400-2483.5MHz, supports 802.11b/g/n20/ax20 4) 5GHz SDR: operating within 5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5875MHz supports 10MHz and 20MHz Bandwidth 5) 5.8GHz Wi-Fi: operating within 5725-5875MHzMHz, supports 802.11a/n20/ac20/ax20
Technical Specification of 5.2GHz&5.3GHz&5.6GHz&5.8GHz SDR	
Operating Frequency:	5176-5236MHz for 5.2GHz SDR 10MHz Bandwidth 5181-5241MHz for 5.2GHz SDR 20MHz Bandwidth 5256-5326MHz for 5.3GHz SDR 10MHz Bandwidth 5261-5321MHz for 5.3GHz SDR 20MHz Bandwidth 5496-5706MHz for 5.6GHz SDR 10MHz Bandwidth 5500-5700MHz for 5.6GHz SDR 20MHz Bandwidth 5741-5821MHz for 5.8GHz SDR 10MHz Bandwidth 5746-5826MHz for 5.8GHz SDR 20MHz Bandwidth

Type of Modulation:	OFDM(BPSK/QPSK/16QAM/64QAM)
Channel Number:	5150-5250MHz: 7 channels@10MHz BW; 4 channels@20MHz 5250-5350MHz: 8 channels@10MHz BW; 4 channels@20MHz 5470-5725MHz: 22 channels@10MHz BW; 11 channels@20MHz 5725-5850MHz: 9 channels@10MHz BW; 5 channels@20MHz
Channel Separation:	10MHz and 20MHz
Type of Product	Master Device
TX Power Control (TPC)	Supported
Antenna Type:	Integral Antenna
Antenna Number:	1Tx1Rx (ANT0 or ANT1)
Antenna Gain:	ANT0 5150-5250MHz: 0.29 dBi 5250-5350MHz: 0.29 dBi 5470-5725MHz: 1.02 dBi 5725-5850MHz: 1.07 dBi ANT1 5150-5250MHz: -0.58 dBi 5250-5350MHz: 0.01 dBi 5470-5725MHz: 0.57 dBi 5725-5850MHz: 0.11 dBi (Provided by the Client)
The type of wideband data transmission equipment:	Non-FHSS
Technical Specification of 5.8GHz Wi-Fi	
Operating Frequency	5745–5825MHz for 802.11 a/n20/ac20/ax20
Type of Modulation	OFDM (QPSK, 16QAM, 64QAM)
Channel Number	5 channels
Channel Separation	20MHz
Multi-RU	No, full RU only
Antenna Type	Integral Antenna
Antenna Number	1Tx1Rx (ANT0 or ANT1)
Antenna Gain	1.07 dBi for ANT0 0.11 dBi for ANT1 (Provided by the Client)
The type of wideband data transmission equipment	Non-FHSS
Remark: 1) Bluetooth (LE), 2.4GHz Wi-Fi and 5.8GHz Wi-Fi share the same one ANT, 2) 2.4GHz SDR and 5GHz SDR share the same one ANT, 3) Bluetooth (LE), 2.4GHz Wi-Fi and 5.8GHz Wi-Fi cannot transmit simultaneously with 2.4GHz SDR and 5GHz SDR, when EUT works in Bluetooth (LE), 2.4GHz Wi-Fi and 5.8GHz Wi-Fi modes, 2.4GHz SDR and 5GHz SDR will unavailable, vice-versa.	

Table 4: RF Channel and Frequency of 5.2/5.3/5.6/5.8GHz SDR

5.2GHz SDR, 10MHz Bandwidth (5150MHz-5250MHz)		5.2GHz SDR, 20MHz Bandwidth (5150MHz-5250MHz)
Channel	Frequency (MHz)	Frequency (MHz)
1	5176	5181
2	5186	5201
3	5196	5221
4	5206	5241
5	5216	
6	5226	
7	5236	

5.3GHz, SDR 10MHz Bandwidth (5250MHz-5350MHz)		5.3GHz SDR 20MHz Bandwidth (5250MHz-5350MHz)
Channel	Frequency (MHz)	Frequency (MHz)
1	5256	5261
2	5266	5281
3	5276	5301
4	5286	5321
5	5296	
6	5306	
7	5316	
8	5326	

5.6GHz SDR, 10MHz Bandwidth (5470MHz-5725MHz)		5.6GHz SDR, 20MHz Bandwidth (5470MHz-5725MHz)
Channel	Frequency (MHz)	Frequency (MHz)
1	5496	5500
2	5506	5520
3	5516	5540
4	5526	5560
5	5536	5580
6	5546	5600
7	5556	5620
8	5566	5640
9	5576	5660
10	5586	5680
11	5596	5700
12	5606	
13	5616	
14	5626	
15	5636	
16	5646	

17	5656	
18	5666	
19	5676	
20	5686	
21	5696	
22	5706	

5.8GHz SDR, 10MHz Bandwidth (5725MHz-5850MHz)		5.8GHz SDR, 20MHz Bandwidth (5725MHz-5850MHz)
Channel	Frequency (MHz)	Frequency (MHz)
1	5741	5746
2	5751	5766
3	5761	5786
4	5771	5806
5	5781	5826
6	5791	
7	5801	
8	5811	
9	5821	

Table 5: RF Channel and Frequency of 5.8GHz Wi-Fi

20MHz Bandwidth	
Channel	Frequency (MHz)
149	5745
153	5765
157	5785
161	5805
165	5825

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, 5.2/5.3/5.6/5.8GHz SDR wireless transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. On, 5.8GHz Wi-Fi wireless transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel

Prüfbericht - Nr.: CN258N6G 003
Test Report No.

Seite 13 von 28
Page 13 of 28

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- | | |
|----------------------|-------------------------|
| - Application Form | - Technical Description |
| - Circuit Diagram | - Bill of Material |
| - Instruction Manual | - Rating Label |
| - Photo Documents | |

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013 and ANSI C63.4: 2014.

According to clause 3.1, all tests were performed on model DMR03 in this report. All tests were performed on various ANT, and the worst case was recorded in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 6: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	T480	PF-16A6N8	N/A
DJI Mic 3 Transmitter	DJI	DMT03	N/A	N/A

4.4 Countermeasures to Achieve ERM Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF). No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

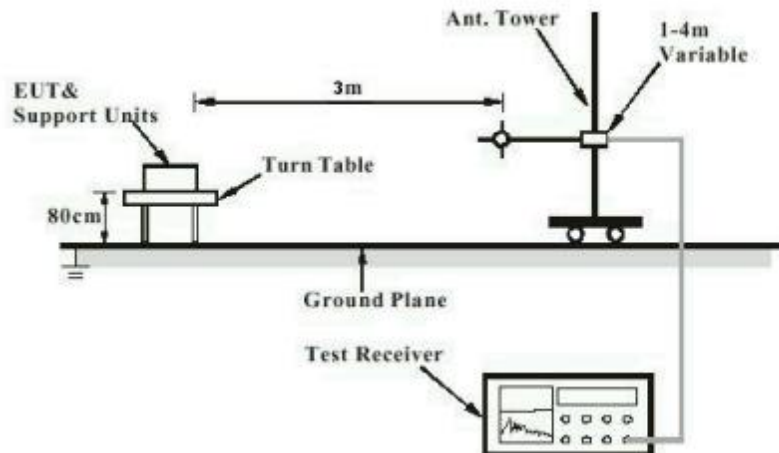


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

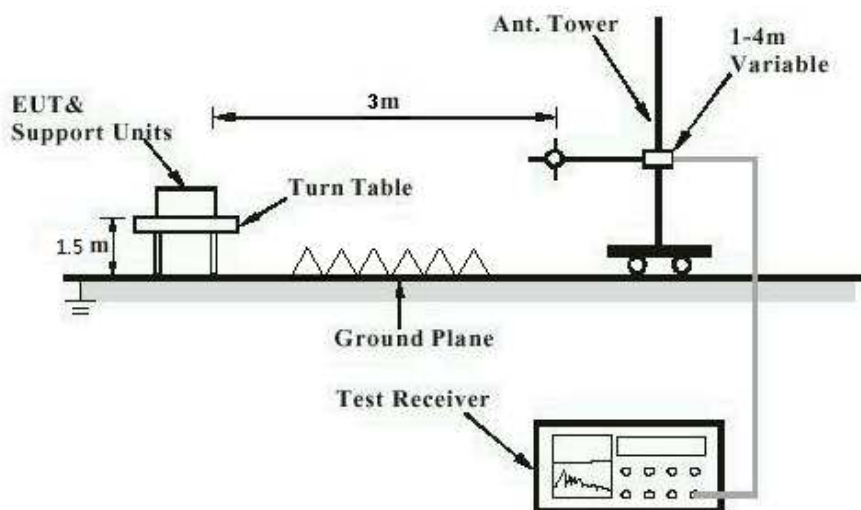


Diagram of Measurement Configuration for Mains Conduction Measurement

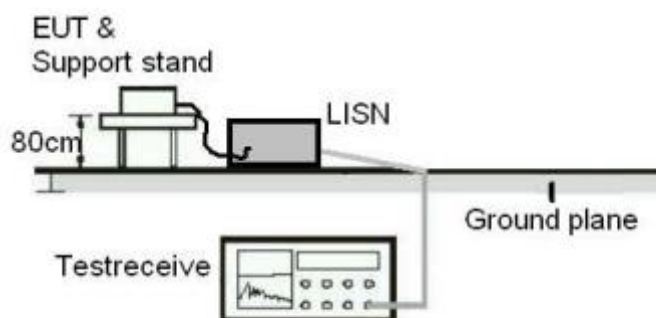


Diagram of Measurement Configuration for Conducted Transmitter Measurement


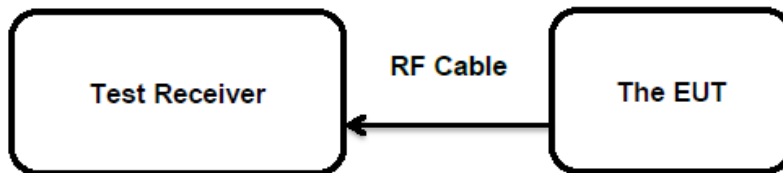


Diagram of Measurement Configuration for Dynamic Frequency Selection (DFS)

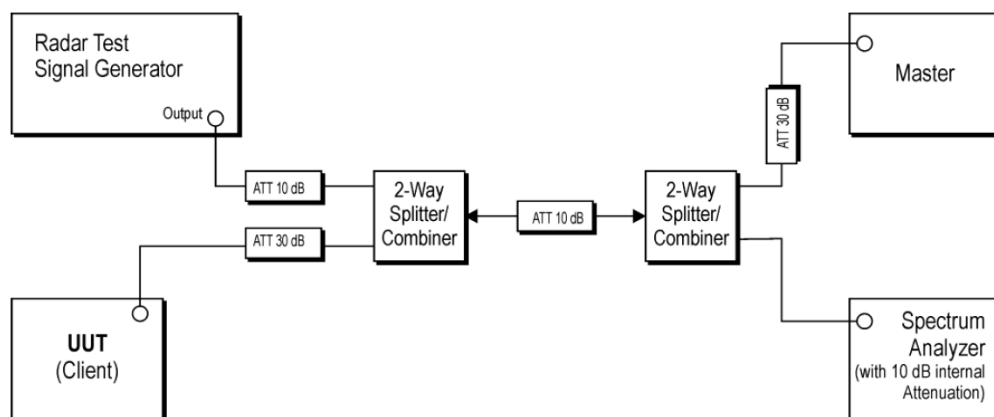

5. Test Results

5.1 Radio Test Requirement & Test Suites (5GHz Bands)

5.1.1 Antenna Requirement

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.203

The EUT has two alternative integral antennas, the maximum gain of antenna is 0.29dBi for 5150-5250MHz (5.2GHz SDR), 0.29dBi for 5250-5350MHz (5.3GHz SDR), 1.02dBi for 5470-5725MHz (5.6GHz SDR) and 1.07dBi for 5725-5850MHz (5.8GHz SDR and 5.8GHz Wi-Fi), and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum output power

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.407 (a)
: RSS-247 clause 6.2
Basic standard : ANSI C63.10:2013
FCC:
<250mW (24dBm) (5150-5250MHz)
* <250mW (24dBm) (5250-5350MHz, 5470-5725MHz)
* 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz, where is lesser.
<1W (30dBm) (5725-5850MHz)

Limits

IC:
* Max e.i.r.p. < 200mW (23dBm) (5150-5250MHz)
: * 200 mW (23dBm) or 10 dBm + 10 logB, where B is the 99% emission bandwidth in MHz, where is lesser.
* Max conducted output power < 250mW (24dBm) (5250-5350MHz)
* 250 mW (24dBm) or 11 dBm + 10 logB, where B is the 99% emission bandwidth in MHz, where is lesser.
* Max e.i.r.p. < 1W (30dBm) (5250-5350MHz)
* 1 W (30dBm) or 17 dBm + 10 log B, where B is the 99% emission bandwidth in MHz, where is lesser.
Max conducted output power < 1W (30dBm) (5725-5850MHz)

Kind of test site

: Shielded Room

Test Setup

Date of testing : 2025-01-16 - 2025-04-11
Input voltage : Fully charged battery
Operation mode : A, B
Test channel : Low / Middle / High
Ambient temperature : 25 °C
Relative humidity : 56 %
Atmospheric pressure : 101 kPa

Note: Per RSS-247 section 6.2.3, transmission on channels which overlap 5600-5650MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in 5250-5350MHz or 5470-5725MHz.

Prüfbericht - Nr.: CN258N6G 003
Test Report No.

Seite 19 von 28
Page 19 of 28

Table 7: Test Result of Maximum Conducted Output Power, 5.2GHz SDR

Test Mode	Test Channel (MHz)	Measured Power		Limit_FCC (dBm)	Limit_IC (dBm)
		(dBm)	(W)		
5.2GHz SDR, 10MHz BW	5176	16.87	0.0486	< 23.98	< 19.47 e.i.r.p.
	5206	16.65	0.0462		
	5236	16.94	0.0494		
5.2GHz SDR, 20MHz BW	5181	16.66	0.0463		
	5201	16.83	0.0482		
	5241	16.81	0.0480		
Maximum Measured Value		16.94	0.0494		
Max. e.i.r.p.=16.94dBm+0.29dBi=17.23dBm, which is less than 19.47dBm.					

Table 8: Test Result of Maximum Conducted Output Power, 5.3GHz SDR

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit_FCC (dBm)	Limit_IC (dBm)
		(dBm)	(W)		
5.3GHz SDR, 10MHz BW	5256	16.56	0.0453	< 23.98	< 20.47 and < 26.58 e.i.r.p
	5286	16.97	0.0498		
	5326	16.87	0.0486		
5.3GHz SDR, 20MHz BW	5261	16.95	0.0495		
	5281	16.82	0.0481		
	5321	16.93	0.0493		
Maximum Measured Value		16.97	0.0498		
Max. e.i.r.p.=16.97dBm+0.29dBi=17.26dBm, which is less than 20.47dBm.					

Table 9: Test Result of Maximum Conducted Output Power, 5.6GHz SDR

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit_FCC (dBm)	Limit_IC (dBm)
		(dBm)	(W)		
5.3GHz SDR, 10MHz BW	5496	16.60	0.0457	< 23.98	< 20.46 and < 26.58 e.i.r.p.
	5596	16.62	0.0459		
	5706	16.6	0.0457		
5.3GHz SDR, 20MHz BW	5500	16.9	0.0490		
	5600	16.82	0.0481		
	5700	16.88	0.0488		
Maximum Measured Value		16.90	0.0490		
Max. e.i.r.p.=16.90dBm+1.02dBi=17.92dBm, which is less than 20.46dBm.					

Table 10: Test Result of Maximum Conducted Output Power, 5.8GHz SDR

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (dBm)
		(dBm)	(W)	
5.8GHz SDR, 10MHz BW	5741	12.48	0.0177	< 30 and < 36 e.i.r.p
	5781	12.22	0.0167	
	5821	12.09	0.0162	
5.8GHz SDR, 20MHz BW	5746	12.48	0.0177	
	5786	12.29	0.0169	
	5826	12.12	0.0163	
Maximum Measured Value		12.48	0.0177	
Max. e.i.r.p.=12.48dBm+1.07dBi=13.55dBm, which is less than 36dBm=4W.				

Table 11: Test Result of Maximum Peak Conducted Output Power, 5.8GHz Wi-Fi

Test Mode	Data Rate	Test Channel (MHz)	Measured Peak Power		Limit (dBm)
			(dBm)	(W)	
802.11a	1 Mbps	5745	12.22	0.0167	< 30 and < 36 e.i.r.p
		5785	12.41	0.0174	
		5825	12.23	0.0167	
802.11n20	6 Mbps	5745	12.43	0.0175	
		5785	12.34	0.0171	
		5825	12.18	0.0165	
802.11ac20	MCS0	5745	12.18	0.0165	
		5785	12.32	0.0171	
		5825	12.27	0.0169	
802.11AX20	MCS0	5745	12.51	0.0178	
		5785	12.18	0.0165	
		5825	12.09	0.0162	
Maximum Measured Value			12.51	0.0178	
Max. e.i.r.p.=12.51dBm+1.07dBi=13.58dBm, which is less than 36dBm=4W.					

Prüfbericht - Nr.: CN258N6G 003
Test Report No.**Seite 21 von 28**
Page 21 of 28**5.1.3 Power Spectral Density****RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.407 (a)
	:	RSS-247 clause 6.2
Basic standard	:	ANSI C63.10:2013
	:	FCC:
	:	<11dBm/MHz (5150-5250MHz 5250-5350MHz, 5470-5725MHz)
	:	<30dBm/500KHz (5725-5850MHz)
Limits	:	IC:
	:	e.i.r.p. spectral density <10dBm/MHz (5150-5250MHz)
	:	<11dBm/1MHz (5250-5350MHz)
	:	<30dBm/500KHz (5725-5850MHz)
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2025-01-16 - 2025-04-11
Input voltage	:	Fully charged battery
Operation mode	:	A, B
Test channel	:	Low / Middle / High
Ambient temperature	:	25 °C
Relative humidity	:	56 %
Atmospheric pressure	:	101 kPa

Refer to attached Appendix A, B for details of test data.

5.1.4 Frequency Stability**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.407 (g)
	:	RSS-Gen Clause 6.11
Basic standard	:	ANSI C63.10:2013
Limits	:	Within assigned bands
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2025-01-16 - 2025-04-11
Input voltage	:	Fully charged battery
Operation mode	:	A, B
Test channel	:	Low / Middle / High
Ambient temperature	:	25 °C
Relative humidity	:	56 %
Atmospheric pressure	:	101 kPa

Refer to attached Appendix A, B for details of test data.

5.1.5 26dB Bandwidth and 99% Bandwidth**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.407
	:	RSS-Gen Clause 6.6
Basic standard	:	ANSI C63.10:2013
Limits	:	N/A
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2025-01-16 - 2025-04-11
Input voltage	:	Fully charged battery
Operation mode	:	A, B
Test channel	:	Low / Middle / High
Ambient temperature	:	25 °C
Relative humidity	:	56 %
Atmospheric pressure	:	101 kPa

Refer to attached Appendix A, B for details of test data.

Prüfbericht - Nr.: CN258N6G 003
Test Report No.**Seite 24 von 28**
Page 24 of 28**5.1.6 6dB Bandwidth****RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.407 (e)
	:	RSS-247 clause 6.2.4.1
Basic standard	:	ANSI C63.10:2013
Limits	:	At least 500KHz (5725-5850MHz)
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2025-01-16 - 2025-04-11
Input voltage	:	Fully charged battery
Operation mode	:	A, B
Test channel	:	Low / Middle / High
Ambient temperature	:	25 °C
Relative humidity	:	56 %
Atmospheric pressure	:	101 kPa

Refer to attached Appendix A, B for details of test data.

5.1.7 Radiated Spurious Emission

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.407(b) & FCC Part 15.205 & FCC Part 15.209
RSS-247 clause 6.2 & RSS-GEN clause 8.9 and 8.10
Basic standard : ANSI C63.10:2013

- For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 - For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
 - For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- Emissions outside the band 5470-5600 MHz and 5650-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p.
- For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - Restricted Bands meet the requirement of 15.209 limit and RSS-GEN

Limits

Kind of test site : 3m Semi-Anechoic Chamber (below 1GHz)
3m Anechoic Chamber (above 1GHz)

Test Setup

Date of testing : 2025-01-16 - 2025-04-11
Input voltage : Fully charged battery
Operation mode : A, B
Test channel : Low / Middle / High
Ambient temperature : 23 °C
Relative humidity : 48 %
Atmospheric pressure : 101 kPa

Refer to attached Appendix A, B for details of test data.

Prüfbericht - Nr.: CN258N6G 003
Test Report No.**Seite 26 von 28**
Page 26 of 28**5.1.8 Dynamic Frequency Selection (DFS)****RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.407(h)
RSS-247 clause 6.3
Basic standard : ANSI C63.10:2013
5250-5350MHz, 5470-5725MHz
Channel Move Time: Within 10 seconds.
Limits : Channel Closing Transmission Time: 200ms+aggregate of
60ms over remaining 10s period;
Non-Occupancy Period: at least 30 minutes.
Kind of test site : Shielded Room

Test Setup

Date of testing : 2025-01-16 - 2025-04-11
Input voltage : Fully charged battery
Operation mode : A
Ambient temperature : 23 °C
Relative humidity : 48 %
Atmospheric pressure : 101 kPa

Refer to attached Appendix A for details of test data.

Slave device was used for testing:

Description	Manufacturer	Model	FCC ID	IC
DJI Mic 3 Transmitter	DJI	DMT03	2ANDR-DMT03	23060-DMT03

Prüfbericht - Nr.: CN258N6G 003

Test Report No.

Seite 27 von 28

Page 27 of 28

5.1.9 Conducted Emission on AC Mains**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.207
	:	RSS-GEN clause 8.8
Basic standard	:	ANSI C63.10:2013
Frequency range	:	0.15 - 30MHz
Limits	:	FCC Part 15.207
Kind of test site	:	Shielded Room

Test Setup

Date of testing	:	2025-01-16 - 2025-04-11
Input voltage	:	AC 120V/60Hz
Operation mode	:	A, B
Earthing	:	Not connected
Ambient temperature	:	25 °C
Relative humidity	:	56 %
Atmospheric pressure	:	101 kPa

Refer to attached Appendix A, B for details of test data.

6. List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty	7
Table 3: Technical Specification	9
Table 4: RF Channel and Frequency of 5.2/5.3/5.6/5.8GHz SDR	11
Table 5: RF Channel and Frequency of 5.8GHz Wi-Fi	12
Table 6: List of Accessories and Auxiliary Equipment.....	14
Table 7: Test Result of Maximum Conducted Output Power, 5.2GHz SDR.....	19
Table 8: Test Result of Maximum Conducted Output Power, 5.3GHz SDR.....	19
Table 9: Test Result of Maximum Conducted Output Power, 5.6GHz SDR.....	19
Table 10: Test Result of Maximum Conducted Output Power, 5.8GHz SDR.....	20
Table 11: Test Result of Maximum Peak Conducted Output Power, 5.8GHz Wi-Fi.....	20

Appendix A: Test Results of 5GHz SDR

APPENDIX A: TEST RESULTS OF 5GHZ SDR.....	1
APPENDIX A.1: TEST RESULTS OF 26dB BANDWIDTH.....	2
5.2GHz SDR, 10MHz BW.....	2
5.2GHz SDR, 20MHz BW.....	4
5.3GHz SDR, 10MHz BW.....	6
5.3GHz SDR, 20MHz BW.....	8
5.6GHz SDR, 10MHz BW.....	10
5.6GHz SDR, 20MHz BW.....	12
APPENDIX A.2: TEST RESULTS OF 6dB BANDWIDTH.....	14
5.8GHz SDR, 10MHz BW.....	14
5.8GHz SDR, 20MHz BW.....	16
APPENDIX A.3: TEST RESULTS OF 99% BANDWIDTH.....	18
5.2GHz SDR, 10MHz BW.....	18
5.2GHz SDR, 20MHz BW.....	20
5.3GHz SDR, 10MHz BW.....	22
5.3GHz SDR, 20MHz BW.....	24
5.6GHz SDR, 10MHz BW.....	26
5.6GHz SDR, 20MHz BW.....	28
5.8GHz SDR, 10MHz BW.....	30
5.8GHz SDR, 20MHz BW.....	32
APPENDIX A.4: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY.....	34
5.2GHz SDR, 10MHz BW.....	34
5.2GHz SDR, 20MHz BW.....	36
5.3GHz SDR, 10MHz BW.....	38
5.3GHz SDR, 20MHz BW.....	40
5.6GHz SDR, 10MHz BW.....	42
5.6GHz SDR, 20MHz BW.....	44
5.8GHz SDR, 10MHz BW.....	46
5.8GHz SDR, 20MHz BW.....	48
APPENDIX A.5: TEST RESULTS OF FREQUENCY STABILITY.....	50
APPENDIX A.6: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	51
30MHz - 1GHz.....	51
1GHz - 18GHz	59
APPENDIX A.7: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS.....	91
5.2GHz SDR.....	91
5.3GHz SDR.....	99
5.6GHz SDR.....	107
5.8GHz SDR.....	115
APPENDIX A.8: TEST RESULTS OF DYNAMIC FREQUENCY SELECTION (DFS).....	123
DFS Detection Thresholds.....	123
Channel Availability Check Time	129
Channel Move Time and Channel Closing Transmission Time	133
Non-Occupancy Period.....	134
U-NII Detection Bandwidth	135
Statistical Performance check.....	137
APPENDIX A.9: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	145

Appendix A.1: Test Results of 26dB Bandwidth

5.2GHz SDR, 10MHz BW

TestMode	Antenna	Channel	26Db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
10M	Ant1	5176	10.600	5170.880	5181.480	---	PASS
		5206	10.380	5200.940	5211.320	---	PASS
		5236	10.340	5230.920	5241.260	---	PASS

10M_Ant1_5176



10M_Ant1_5206



10M_Ant1_5236



5.2GHz SDR, 20MHz BW

TestMode	Antenna	Channel	26Db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
20M	Ant1	5181	21.840	5170.120	5191.960	---	PASS
		5201	21.160	5190.200	5211.360	---	PASS
		5241	20.800	5230.760	5251.560	---	PASS

20M_Ant1_5181



20M_Ant1_5201



20M_Ant1_5241



5.3GHz SDR, 10MHz BW

TestMode	Antenna	Channel	26Db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
10M	Ant1	5256	10.360	5250.960	5261.320	---	PASS
		5286	10.260	5281.020	5291.280	---	PASS
		5326	10.420	5320.900	5331.320	---	PASS

10M_Ant1_5256



10M_Ant1_5286



10M_Ant1_5326



5.3GHz SDR, 20MHz BW

TestMode	Antenna	Channel	26Db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
20M	Ant1	5261	21.520	5250.240	5271.760	---	PASS
		5281	20.520	5270.680	5291.200	---	PASS
		5321	20.760	5310.880	5331.640	---	PASS

20M_Ant1_5261



20M_Ant1_5281



20M_Ant1_5321



5.6GHz SDR, 10MHz BW

TestMode	Antenna	Channel	26Db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
10M	Ant1	5496	10.100	5490.940	5501.040	---	PASS
		5596	10.120	5590.940	5601.060	---	PASS
		5706	10.020	5701.000	5711.020	---	PASS

10M_Ant1_5496



10M_Ant1_5596



10M_Ant1_5706



5.6GHz SDR, 20MHz BW

TestMode	Antenna	Channel	26Db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
20M	Ant1	5500	20.600	5490.680	5511.280	---	PASS
		5600	20.440	5590.680	5611.120	---	PASS
		5700	20.240	5690.840	5711.080	---	PASS

20M_Ant1_5500



20M_Ant1_5600



20M_Ant1_5700



Appendix A.2: Test Results of 6dB Bandwidth

5.8GHz SDR, 10MHz BW

TestMode	Antenna	Channel	DTS BW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
10M	Ant1	5741	7.540	5737.140	5744.680	0.5	PASS
		5781	7.900	5777.120	5785.020	0.5	PASS
		5821	8.100	5817.100	5825.200	0.5	PASS

10M_Ant1_5741



10M_Ant1_5781



10M_Ant1_5821



5.8GHz SDR, 20MHz BW

TestMode	Antenna	Channel	DTS BW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
20M	Ant1	5746	15.080	5738.440	5753.520	0.5	PASS
		5786	15.080	5778.440	5793.520	0.5	PASS
		5826	13.880	5818.440	5832.320	0.5	PASS

20M_Ant1_5746



20M_Ant1_5786



20M_Ant1_5826



Appendix A.3: Test Results of 99% Bandwidth

5.2GHz SDR, 10MHz BW

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
10M	Ant1	5176	8.8527	5171.5817	5180.4344	---	PASS
		5206	8.8658	5201.5875	5210.4533	---	PASS
		5236	8.8791	5231.5765	5240.4556	---	PASS

10M_Ant1_5176



10M_Ant1_5206



10M_Ant1_5236



5.2GHz SDR, 20MHz BW

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
20M	Ant1	5181	17.758	5172.1224	5189.8804	---	PASS
		5201	17.712	5192.1533	5209.8653	---	PASS
		5241	17.712	5232.1508	5249.8628	---	PASS

20M_Ant1_5181



20M_Ant1_5201



20M_Ant1_5241



5.3GHz SDR, 10MHz BW

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
10M	Ant1	5256	8.8506	5251.5935	5260.4441	---	PASS
		5286	8.8574	5281.5957	5290.4531	---	PASS
		5326	8.8630	5321.5954	5330.4584	---	PASS

10M_Ant1_5256



10M_Ant1_5286



10M_Ant1_5326



5.3GHz SDR, 20MHz BW

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
20M	Ant1	5261	17.711	5252.1525	5269.8635	---	PASS
		5281	17.728	5272.1238	5289.8518	---	PASS
		5321	17.695	5312.1545	5329.8495	---	PASS

20M_Ant1_5261



20M_Ant1_5281



20M_Ant1_5321



5.6GHz SDR, 10MHz BW

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
10M	Ant1	5496	8.8446	5491.5943	5500.4389	---	PASS
		5596	8.8325	5591.5863	5600.4188	---	PASS
		5706	8.8381	5701.5891	5710.4272	---	PASS

10M_Ant1_5496



10M_Ant1_5596



10M_Ant1_5706



5.6GHz SDR, 20MHz BW

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
20M	Ant1	5500	17.685	5492.1521	5509.8371	---	PASS
		5600	17.700	5592.1611	5609.8611	---	PASS
		5700	17.696	5692.1417	5709.8377	---	PASS

20M_Ant1_5500



20M_Ant1_5600



20M_Ant1_5700



5.8GHz SDR, 10MHz BW

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
10M	Ant1	5741	8.8414	5736.5873	5745.4287	---	PASS
		5781	8.8585	5776.5772	5785.4357	---	PASS
		5821	8.8671	5816.5748	5825.4419	---	PASS

10M_Ant1_5741



10M_Ant1_5781



10M_Ant1_5821



5.8GHz SDR, 20MHz BW

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
20M	Ant1	5746	17.668	5737.1483	5754.8163	---	PASS
		5786	17.712	5777.1599	5794.8719	---	PASS
		5826	17.655	5817.1675	5834.8225	---	PASS

20M_Ant1_5746



20M_Ant1_5786



20M_Ant1_5826



Appendix A.4: Test Results of Conducted Power Spectral Density

5.2GHz SDR, 10MHz BW

TestMode	Antenna	Channel	Result[dBm/MHz]	Limit[dBm/MHz]	Verdict
10M	Ant1	5176	9.06	≤11.00	PASS
		5206	8.89	≤11.00	PASS
		5236	8.98	≤11.00	PASS

Max. e.i.r.p. PSD = 9.06 dBm/MHz+0.29 dBi = 9.35 dBm/MHz, is less than 10 dBm/MHz.



5.2GHz SDR, 20MHz BW

TestMode	Antenna	Channel	Result[dBm/MHz]	Limit[dBm/MHz]	Verdict
20M	Ant1	5181	5.88	≤11.00	PASS
		5201	6.19	≤11.00	PASS
		5241	6.41	≤11.00	PASS

Max. e.i.r.p. PSD = 6.41 dBm/MHz+0.29 dBi = 6.70 dBm/MHz, is less than 10 dBm/MHz.

20M Ant1 5181



20M Ant1 5201



20M Ant1 5241



5.3GHz SDR, 10MHz BW

TestMode	Antenna	Channel	Result[dBm/MHz]	Limit[dBm/MHz]	Verdict
10M	Ant1	5256	9.58	≤11.00	PASS
		5286	9.69	≤11.00	PASS
		5326	10.03	≤11.00	PASS

10M_Ant1_5256



10M_Ant1_5286



10M_Ant1_5326



5.3GHz SDR, 20MHz BW

TestMode	Antenna	Channel	Result[dBm/MHz]	Limit[dBm/MHz]	Verdict
20M	Ant1	5261	6.01	≤11.00	PASS
		5281	6.00	≤11.00	PASS
		5321	6.30	≤11.00	PASS

20M Ant1 5261



20M Ant1 5281



20M Ant1 5321



5.6GHz SDR, 10MHz BW

TestMode	Antenna	Channel	Result[dBm/MHz]	Limit[dBm/MHz]	Verdict
10M	Ant1	5496	8.45	≤11.00	PASS
		5596	8.99	≤11.00	PASS
		5706	8.75	≤11.00	PASS

10M_Ant1_5496



10M_Ant1_5596



10M_Ant1_5706



5.6GHz SDR, 20MHz BW

TestMode	Antenna	Channel	Result[dBm/MHz]	Limit[dBm/MHz]	Verdict
20M	Ant1	5500	6.26	≤11.00	PASS
		5600	6.62	≤11.00	PASS
		5700	6.58	≤11.00	PASS

20M Ant1 5500



20M Ant1 5600



20M Ant1 5700



5.8GHz SDR, 10MHz BW

TestMode	Antenna	Channel	Result[dBm/500kHz]	Limit[dBm/500kHz]	Verdict
10M	Ant1	5741	2.60	≤30.00	PASS
		5781	1.97	≤30.00	PASS
		5821	1.64	≤30.00	PASS

10M_Ant1_5741



10M_Ant1_5781



10M_Ant1_5821



5.8GHz SDR, 20MHz BW

TestMode	Antenna	Channel	Result[dBm/500kHz]	Limit[dBm/500kHz]	Verdict
20M	Ant1	5746	-0.28	≤30.00	PASS
		5786	-0.75	≤30.00	PASS
		5826	-1.19	≤30.00	PASS

20M Ant1 5746



20M Ant1 5786



20M Ant1 5826



Appendix A.5: Test Results of Frequency Stability

5.2GHz SDR

Voltage							
TestMode	Antenna	Channel	Voltage [Vdc]	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
10MHz	Ant1	5176	NV	-4500.00	-0.869397	20	PASS
		5206	NV	-4000.00	-0.768344	20	PASS
		5236	NV	-4000.00	-0.763942	20	PASS
20MHz	Ant1	5181	NV	-5000.00	-0.965065	20	PASS
		5201	NV	-5000.00	-0.961354	20	PASS
		5241	NV	-4500.00	-0.858615	20	PASS

5.3GHz SDR

Voltage							
TestMode	Antenna	Channel	Voltage [Vdc]	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
10MHz	Ant1	5256	NV	-4500.00	-0.856164	20	PASS
		5286	NV	-4000.00	-0.756716	20	PASS
		5326	NV	-4000.00	-0.751033	20	PASS
20MHz	Ant1	5261	NV	-4000.00	-0.760312	20	PASS
		5281	NV	-5000.00	-0.946790	20	PASS
		5321	NV	-5000.00	-0.939673	20	PASS

5.6GHz SDR

Voltage							
TestMode	Antenna	Channel	Voltage [Vdc]	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
10MHz	Ant1	5496	NV	-4500.00	-0.818777	20	PASS
		5596	NV	-4500.00	-0.804146	20	PASS
		5706	NV	-4500.00	-0.788644	20	PASS
20MHz	Ant1	5500	NV	-5000.00	-0.909091	20	PASS
		5600	NV	-5000.00	-0.892857	20	PASS
		5700	NV	-5000.00	-0.877193	20	PASS

5.8GHz SDR

Voltage							
TestMode	Antenna	Channel	Voltage [Vdc]	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
10MHz	Ant1	5741	NV	-3000.00	-0.522557	20	PASS
		5781	NV	-4000.00	-0.691922	20	PASS
		5821	NV	-3000.00	-0.515375	20	PASS
20MHz	Ant1	5746	NV	-3000.00	-0.522102	20	PASS
		5786	NV	-3000.00	-0.518493	20	PASS
		5826	NV	-3000.00	-0.514933	20	PASS

Appendix A.6: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz

EUT Information

EUT Name:	DJI Mic 3 Receiver
Model:	DMR03
Test Mode:	SDR 5.2G_10M_Ch41
Order No/Sample No:	168530962/A003945416-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

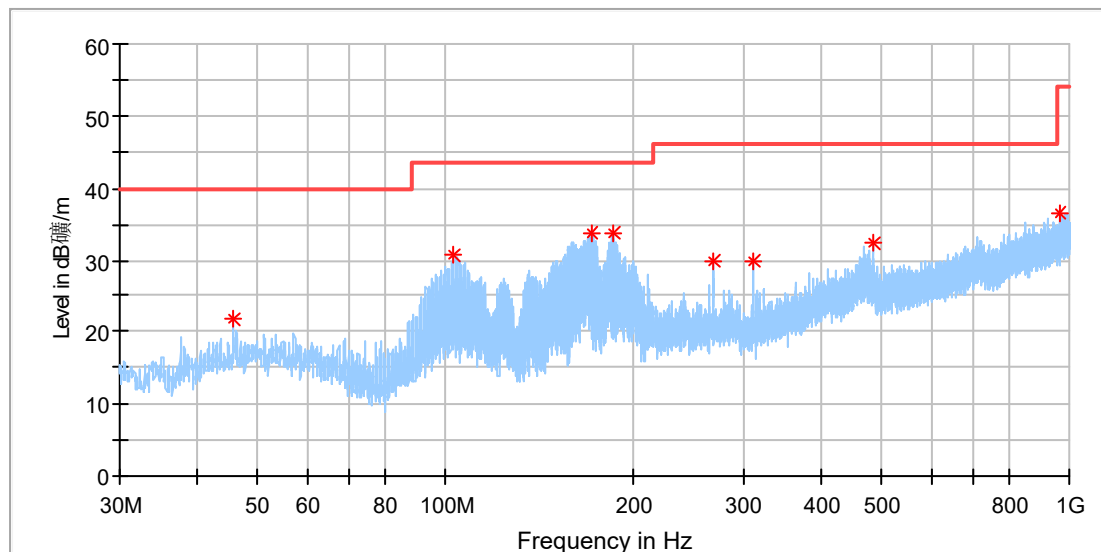

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.706539	21.77	40.00	18.23	100.0	H	165.0	-18.8
102.936539	30.67	43.50	12.83	100.0	H	188.0	-19.0
170.873846	33.69	43.50	9.81	100.0	H	0.0	-21.3
185.796923	33.87	43.50	9.63	100.0	H	357.0	-20.0
268.060385	29.83	46.00	16.17	100.0	H	242.0	-17.0
312.008846	29.74	46.00	16.26	100.0	H	204.0	-16.0
483.325769	32.27	46.00	13.73	100.0	H	242.0	-12.1
960.901539	36.46	54.00	17.54	100.0	H	173.0	-4.1

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: DJI Mic 3 Receiver
Model: DMR03
Test Mode: SDR 5.2G_10M_Ch41
Order No/Sample No: 168530962/A003945416-001
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

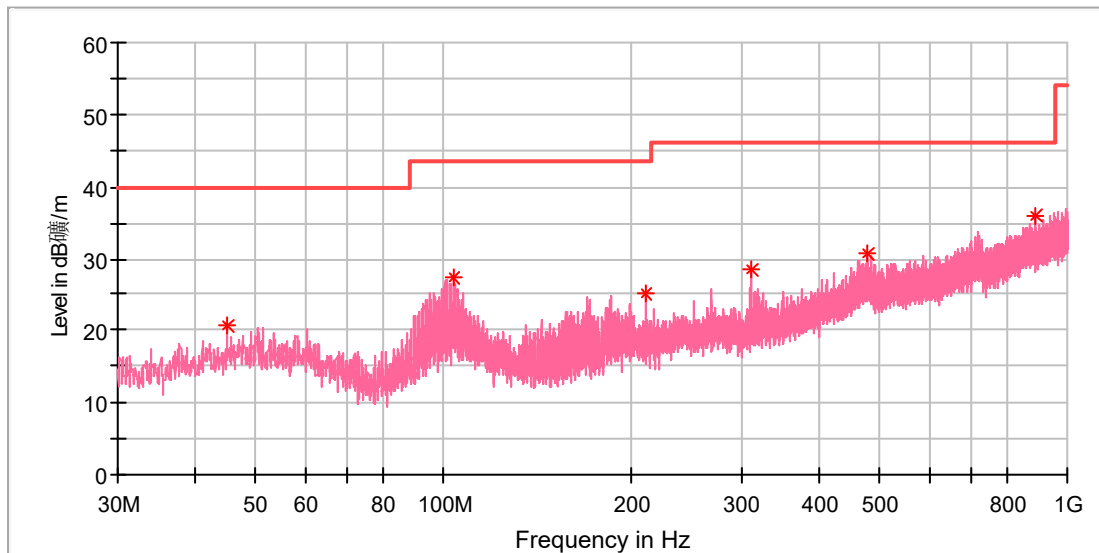

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
44.997692	20.61	40.00	19.39	100.0	V	278.0	-19.0
103.533462	27.30	43.50	16.20	100.0	V	253.0	-19.0
210.345385	25.07	43.50	18.43	100.0	V	205.0	-18.9
311.971539	28.45	46.00	17.55	100.0	V	253.0	-16.0
477.431154	30.73	46.00	15.27	100.0	V	269.0	-12.2
889.867692	35.98	46.00	10.02	100.0	V	214.0	-4.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mic 3 Receiver
Model: DMR03
Test Mode: SDR 5.3G_10M_Ch57
Order No/Sample No: 168530962/A003945416-001
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

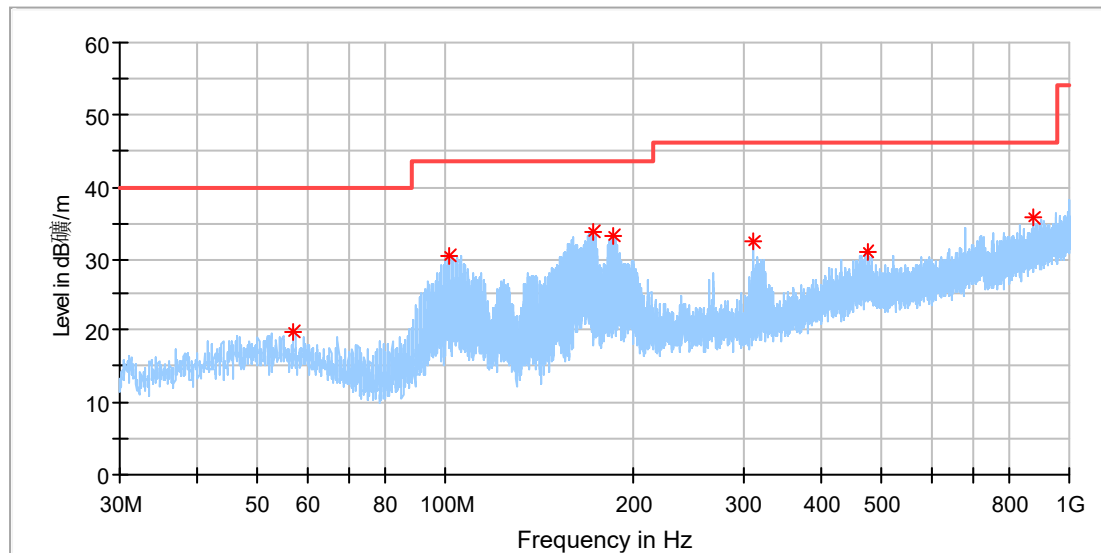

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
57.197308	19.85	40.00	20.15	100.0	H	122.0	-18.8
101.630769	30.50	43.50	13.00	100.0	H	201.0	-19.0
172.105000	33.77	43.50	9.73	100.0	H	330.0	-21.2
185.722308	33.17	43.50	10.33	100.0	H	330.0	-20.0
312.008846	32.44	46.00	13.56	100.0	H	215.0	-16.0
473.401923	30.96	46.00	15.04	100.0	H	81.0	-12.3
873.228462	35.86	46.00	10.14	100.0	H	65.0	-5.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: DJI Mic 3 Receiver
Model: DMR03
Test Mode: SDR 5.3G_10M_Ch57
Order No/Sample No: 168530962/A003945416-001
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

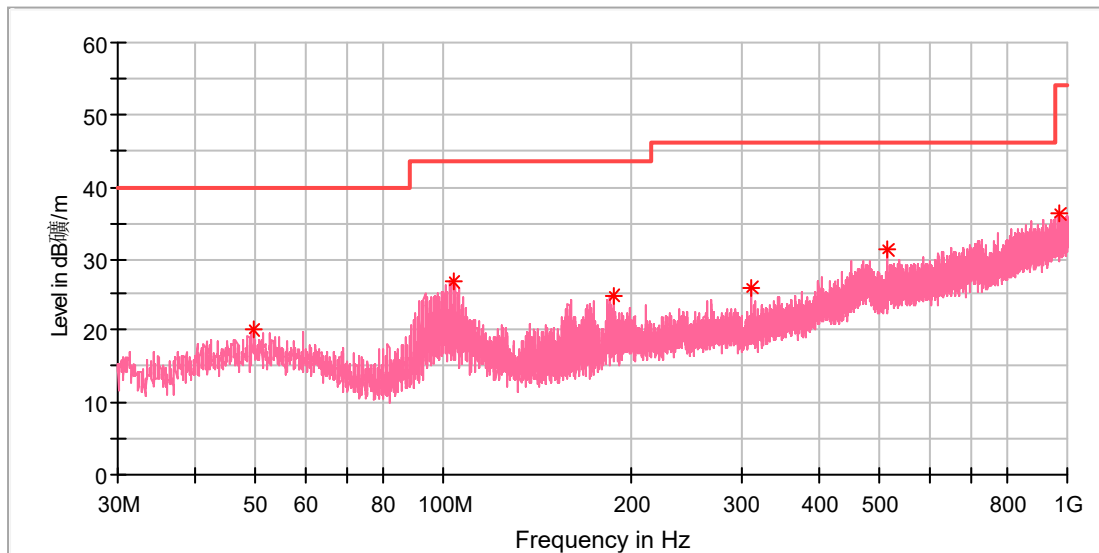

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.511923	20.13	40.00	19.87	100.0	V	286.0	-18.4
103.496154	26.91	43.50	16.59	100.0	V	301.0	-19.0
186.990769	24.93	43.50	18.57	100.0	V	121.0	-19.9
312.008846	25.82	46.00	20.18	100.0	V	318.0	-16.0
516.268462	31.13	46.00	14.87	100.0	V	279.0	-11.6
967.878077	36.31	54.00	17.69	100.0	V	326.0	-4.0

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mic 3 Receiver
Model: DMR03
Test Mode: SDR 5.6G_10M_Ch119
Order No/Sample No: 168530962/A003945416-001
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

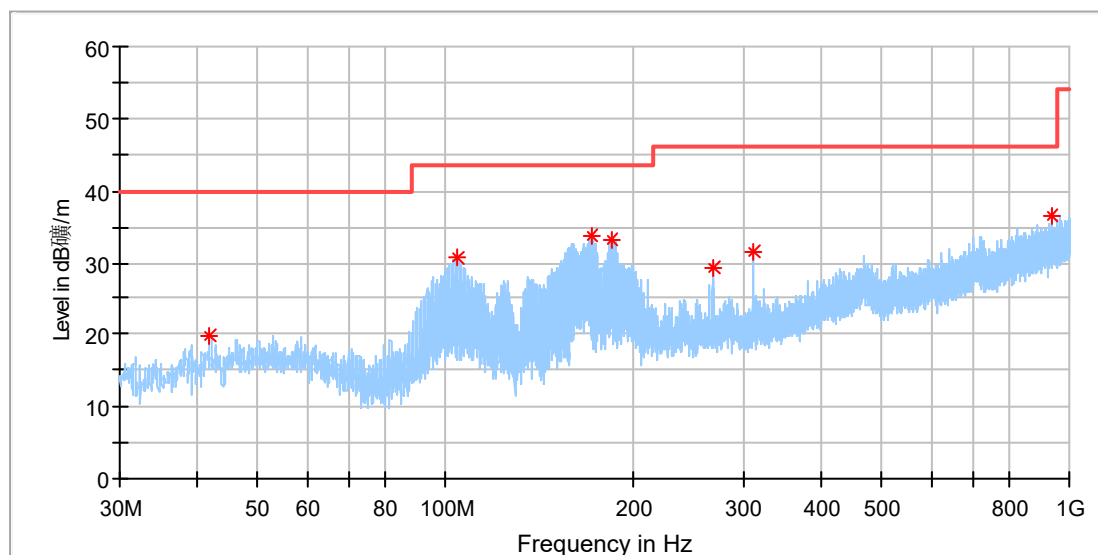

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.938462	19.68	40.00	20.32	100.0	H	264.0	-19.7
104.167692	30.56	43.50	12.94	100.0	H	336.0	-18.9
170.873846	33.70	43.50	9.80	100.0	H	0.0	-21.3
184.491154	33.33	43.50	10.17	100.0	H	352.0	-20.1
268.097692	29.33	46.00	16.67	100.0	H	289.0	-17.0
312.008846	31.60	46.00	14.40	100.0	H	199.0	-16.0
936.539615	36.66	46.00	9.34	100.0	H	208.0	-4.4

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: DJI Mic 3 Receiver
Model: DMR03
Test Mode: SDR 5.6G_10M_Ch119
Order No/Sample No: 168530962/A003945416-001
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

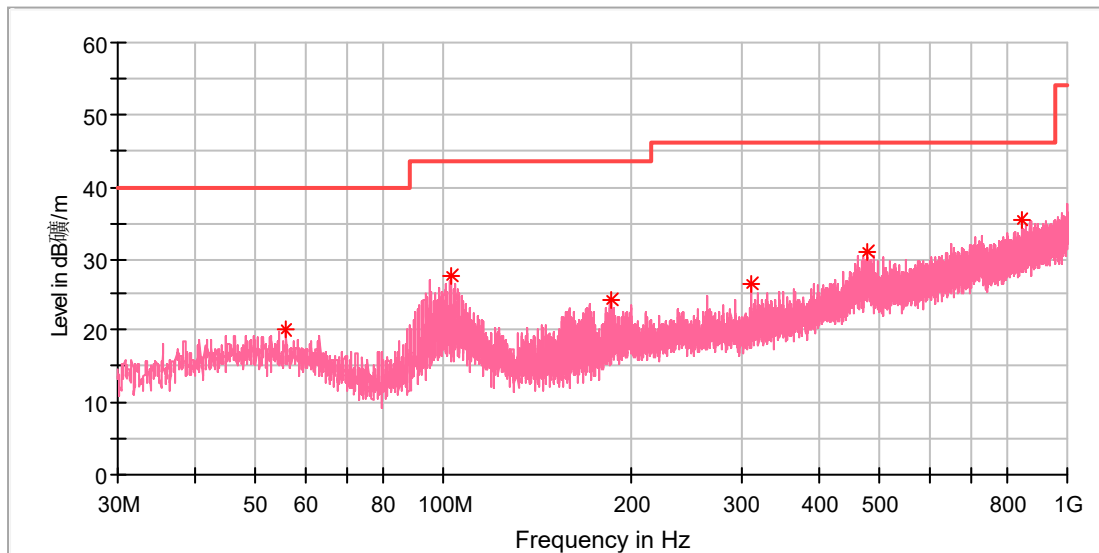

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
55.891539	20.16	40.00	19.84	100.0	V	162.0	-18.6
102.899231	27.56	43.50	15.94	100.0	V	259.0	-19.0
186.393846	24.21	43.50	19.29	100.0	V	136.0	-20.0
311.971539	26.54	46.00	19.46	100.0	V	307.0	-16.0
476.834231	30.87	46.00	15.13	100.0	V	219.0	-12.2
841.703462	35.40	46.00	10.60	100.0	V	171.0	-5.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: DJI Mic 3 Receiver
Model: DMR03
Test Mode: SDR 5.8G_10M_Ch156
Order No/Sample No: 168530962/A003945416-001
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

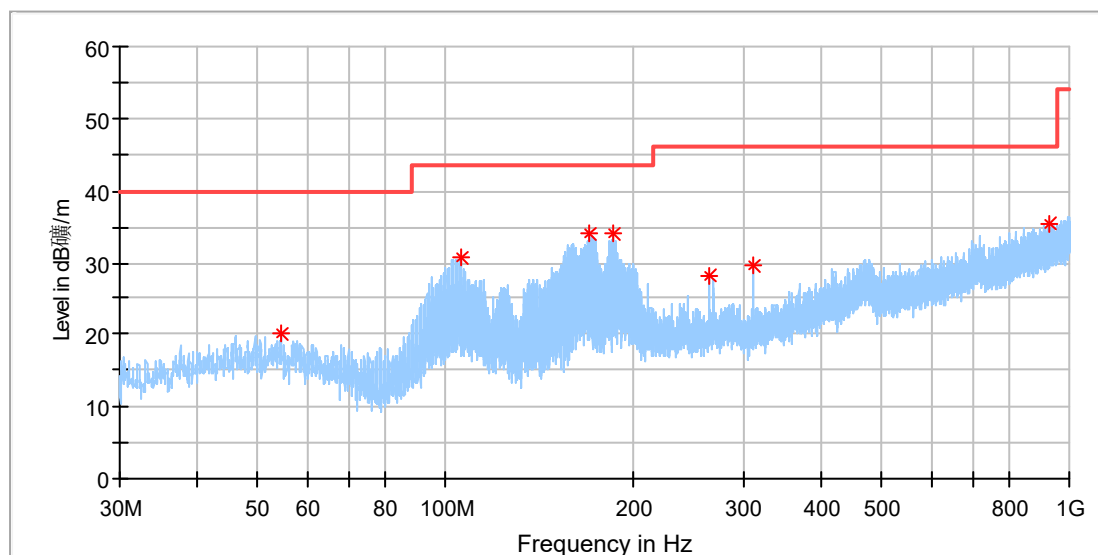

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
54.660385	20.08	40.00	19.92	100.0	H	358.0	-18.5
106.145000	30.83	43.50	12.67	100.0	H	354.0	-19.0
170.276923	34.14	43.50	9.36	100.0	H	338.0	-21.3
185.759615	34.10	43.50	9.40	100.0	H	330.0	-20.0
264.031154	28.19	46.00	17.81	100.0	H	109.0	-17.0
312.008846	29.67	46.00	16.33	100.0	H	226.0	-16.0
929.936154	35.55	46.00	10.45	100.0	H	347.0	-4.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: DJI Mic 3 Receiver
Model: DMR03
Test Mode: SDR 5.8G_10M_Ch156
Order No/Sample No: 168530962/A003945416-001
Test Voltage: Battery
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.407
Tested By: Kei Zhang
Reviewed By: Terry Yin

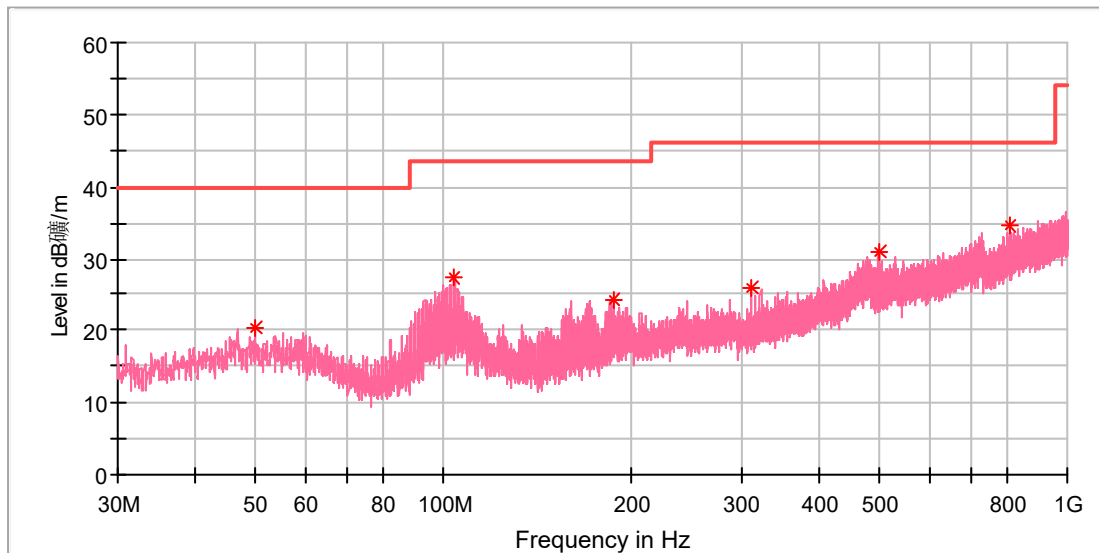

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.034231	20.33	40.00	19.67	100.0	V	147.0	-18.4
103.533462	27.46	43.50	16.04	100.0	V	272.0	-19.0
186.990769	24.40	43.50	19.10	100.0	V	115.0	-19.9
312.008846	26.01	46.00	19.99	100.0	V	303.0	-16.0
499.181539	30.97	46.00	15.03	100.0	V	0.0	-11.9
804.433077	34.50	46.00	11.50	100.0	V	185.0	-6.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.000000	100.000000	100.000000	100.000000	100.000000	100.000000		100.000000	

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
93.750 MHz	93.750 dBμV/m	93.750 dBμV/m	93.750 dBμV/m	93.750 dB	93.750 cm		93.750 deg	93.750 dB/m

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.000000	100.000000	100.000000	100.000000	100.000000	100.000000		100.000000	100.000000

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.000000	100.000000	100.000000	100.000000	100.000000	100.000000		100.000000	

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
93.750000	122.000000	118.000000	120.000000	2.000000	100.000000		0.000000	

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.000000	100.000000	100.000000	100.000000	100.000000	100.000000		100.000000	

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.000000	100.000000	100.000000	100.000000	100.000000	100.000000		100.000000	

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
100.000000	100.000000	100.000000	100.000000	100.000000	100.000000		100.000000	100.000000

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
93.7	122.5	122.5	122.5	0	100	0	0	0

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
93.7	122.0	118.0	120.0	2.0	300	V	135	0.0