

Prüfbericht-Nr.: <i>Test report no.:</i>	CN22VS19 001	Auftrags-Nr.: <i>Order no.:</i>	168376651	Seite 1 von 66 Page 1 of 66
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2022-06-05	
Auftraggeber: <i>Client:</i>	SZ DJI Osmo Technology Co., Ltd. 4F, Jingkou Community Comprehensive Service Building, No. 83 Bishui Road North, Guangming Street, Guangming District, Shenzhen			
Prüfgegenstand: <i>Test item:</i>	Osmo Mobile 6			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	OE200 (Trademark: DJI)			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	FCC CFR Title 47, Part 15, Subpart C, Section 15.247			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2022-06-15	Please refer to Photo Document		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003285103-005, 009			
Prüfzeitraum: <i>Testing period:</i>	2022-07-01 to 2022-07-05			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	<u>x Bell Hu</u> Signed by: Bell Hu		genehmigt von: <i>authorized by:</i>	<u>X Lin Lin</u> Signed by: Lin Lin
Datum: <i>Date:</i> 2022-07-26			Ausstellungsdatum: <i>Issue date:</i> 2022-07-26	
Stellung / Position: Project Manager			Stellung / Position: Reviewer	
Sonstiges / Other: FCC ID: 2ANDR-OE2002209				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be v05 uplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 99%dB BANDWIDTH

RESULT: Pass

5.1.5 6dB BANDWIDTH

RESULT: Pass

5.1.6 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH

RESULT: Pass

5.1.7 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.8 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS	13
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	13
5.1.1	<i>Antenna Requirement</i>	<i>13</i>
5.1.2	<i>Maximum Peak Conducted Output Power</i>	<i>14</i>
5.1.3	<i>Conducted Power Spectral Density</i>	<i>15</i>
5.1.4	<i>99%dB Bandwidth.....</i>	<i>19</i>
5.1.5	<i>6dB Bandwidth</i>	<i>26</i>
5.1.6	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth</i>	<i>33</i>
5.1.7	<i>Radiated Spurious Emission</i>	<i>42</i>
5.1.8	<i>Conducted Emission on AC Mains.....</i>	<i>63</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	66

Prüfbericht - Nr.: CN22VS19 001
Test Report No.

Seite 4 von 66
Page 4 of 66

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China

FCC Registration No.: 694916

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
Signal Analyzer	R&S	FSV 40	101441	09.08.2022
OSP	R&S	OSP 150	101017	02.12.2022
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A
Power Meter	R&S	NRP2	107105	02.12.2022
Wideband Power Sensor	R&S	NRP-Z81	105677	09.08.2022
Shielding Room 8#	Albatross	SR8	APC17151-SR8	22.06.2024
Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	10.08.2022
Signal Analyzer	R&S	FSV 40	101439	09.08.2022
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	09.08.2022
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	09.08.2022
Amplifier	R&S	SCU-18F	180070	09.08.2022
Amplifier	R&S	SCU40A	100475	09.08.2022
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	08.08.2022
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	08.08.2022
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	08.08.2022
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	13.09.2022

Wideband Ridged Horn Antenna (12-18 GHz)	Steatite	QMS-00208	18313	08.08.2022
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	22.06.2024

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102428	08.08.2022
Artificial Mains Network	R&S	ENV216	102333	08.08.2022
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	± 2.5 dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	± 6 dB
Radiated Emission of Receiver, valid up to 26.5 GHz	± 6 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB
Radiated Emission (3m SAC), 30MHz to 1000MHz	± 4.52 dB
Radiated Emission (3m SAC), above 1000MHz	± 4.37 dB
Temperature	± 1 °C
Humidity	± 5 %
Voltage (DC)	± 1 %
Voltage (AC, <10kHz)	± 2 %

Prüfbericht - Nr.: CN22VS19 001
Test Report No.

Seite 7 von 66
Page 7 of 66

2.6 Location of Original Data

The original copies of all test data taken during actual testing were showed in this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The Product is Osmo Mobile 6, it supports Bluetooth BLE wireless technology.
For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	Osmo Mobile 6
Type Designation:	OE200
Trademark:	DJI
FCC ID:	2ANDR-OE2002209
Operating Voltage:	DC 3.6V by Li-ion Battery or AC 120V via Adapter
Technical Specification of Bluetooth LE	
Frequency Range:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK
Channel Number:	40 channels
Data Rate:	1 Mbps, 2 Mbps
Channel Separation:	2 MHz
Antenna Type:	Integral Antenna
Antenna Gain:	2.0 dBi

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Bluetooth LE transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. On, Normal operation with Bluetooth mode
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|----------------------|------------------------------|
| - Application Form | - ID Label and Location Info |
| - Instruction Manual | - Schematics |
| - Block Diagram | - Operation Description |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

Table 3: Test environments

Environment Parameter	Values During Tests		
	Temperature	Voltage	Relative Humidity
NTNV	25°C±2°C	3.6Vdc	Ambient
NTNV	25°C±2°C	AC120V 60Hz	Ambient

Table 4: Test channel and frequency

Mode	Test Channels (MHz)	Remark
Transmitting	L/M/H: 2402MHz, 2440MHz, 2480MHz	--

4.3 Special Accessories and Auxiliary Equipment

Table 5: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N	Rating
Power Adapter	DJI	QC24-CN	N/A	Input: AC100-240V, 50/60Hz, 0.8Max Output: DC 3.6-8V 3.0A, DC 12V 2.0A
Laptop	Lenovo	T480	PF-16A6N8	N/A
Laptop	DELL	Latitude E5430	9V28XY1	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

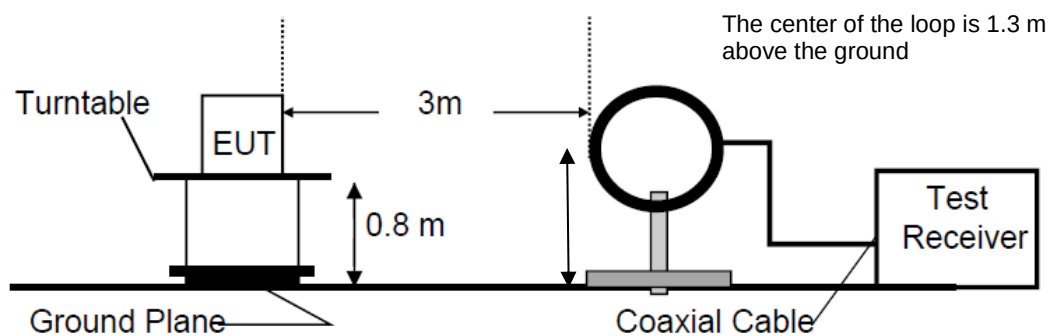


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

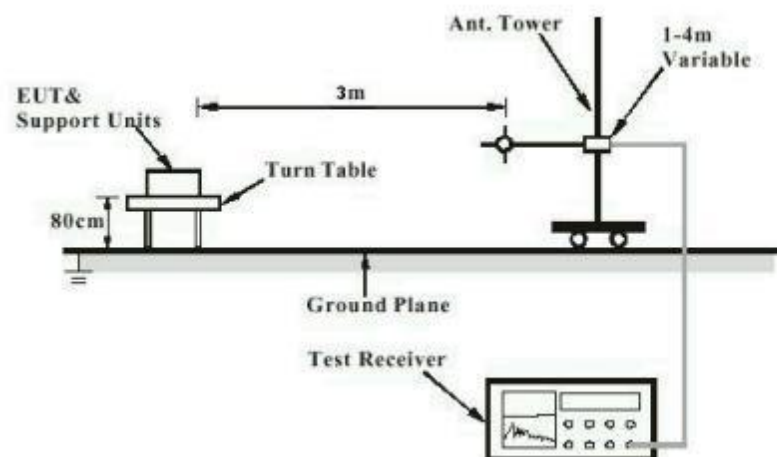


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

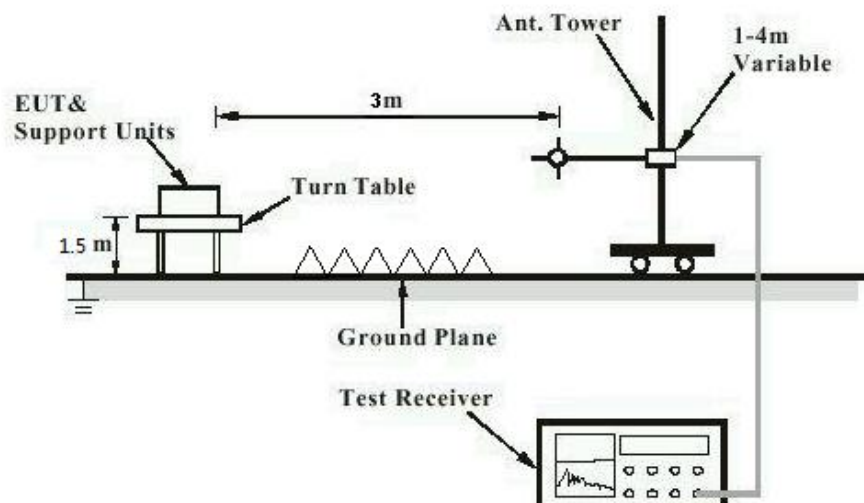


Diagram of Measurement Configuration for Mains Conduction Measurement


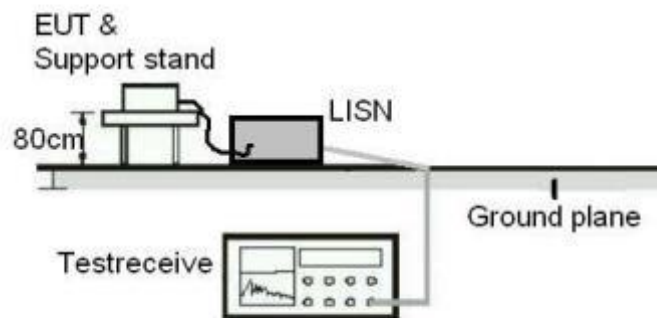


Diagram of Measurement Configuration for Conducted Transmitter Measurement

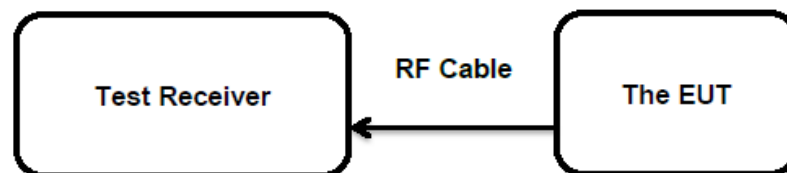

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203 &

According to the manufacturer declared, the EUT has a Integral Antenna, the gain of antenna is 2.0 dBi, which that permanent attachment and no consideration of replacement.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum Peak Conducted Output Power

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.247(b)(3)
Basic standard	: ANSI C63.10: 2013
Limits	: < 1 Watt (Maximum Conducted Peak Power)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-07-04
Input voltage	: DC 3.6V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25.7 °C
Relative humidity	: 50 %
Atmospheric pressure	: 101 kPa

Table 6: Test Result of Maximum Peak Conducted Output Power, BLE

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(mW)	
BLE_1Mbps	2402	-4.1	0.389	< 1.0
	2440	-4.3	0.372	
	2480	-4.6	0.347	
Max. Measured Value		-4.1	0.389	

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(mW)	
BLE_2Mbps	2402	-4.0	0.398	< 1.0
	2440	-4.2	0.380	
	2480	-4.5	0.355	
Max. Measured Value		-4.0	0.398	

Note:

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G): 2.0 dBi

5.1.3 Conducted Power Spectral Density

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.247(e)
Basic standard : ANSI C63.10: 2013
Limits : < 8 dBm / 3kHz
Kind of test site : Shielded Room

Test Setup

Date of testing : 2022-06-27
Input voltage : DC 3.6V
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 25.7 °C
Relative humidity : 50 %
Atmospheric pressure : 101 kPa


Table 7: Test Result of Power Spectral Density

Test Mode	Channel Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
BLE 1Mbps	2402	-18.94	8
	2440	-17.45	
	2480	-17.36	
BLE 2Mbps	2402	-17.75	8
	2440	-17.88	
	2480	-17.58	


Test Results of Conducted Power Spectral Density

For BLE_1Mbps


Low Channel

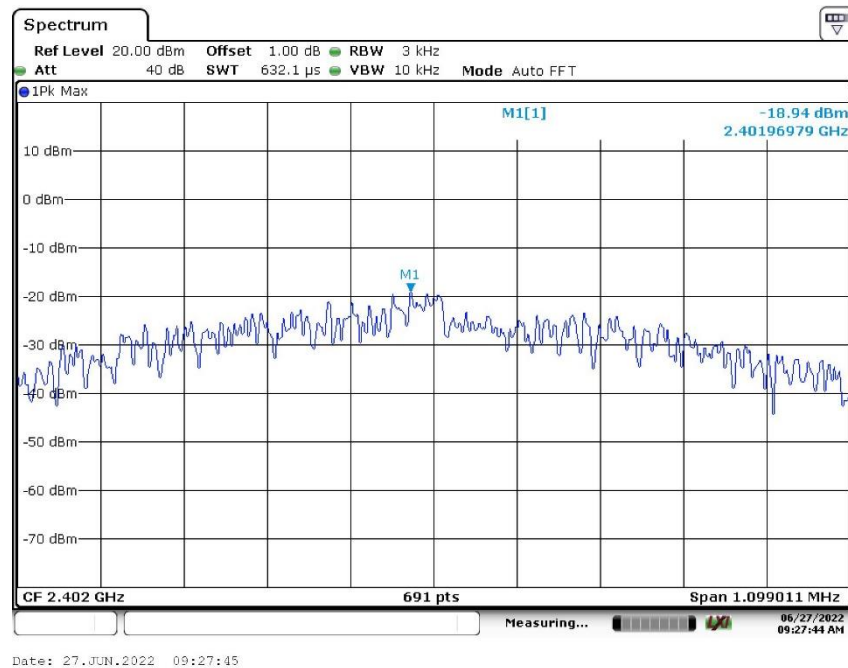

Middle Channel

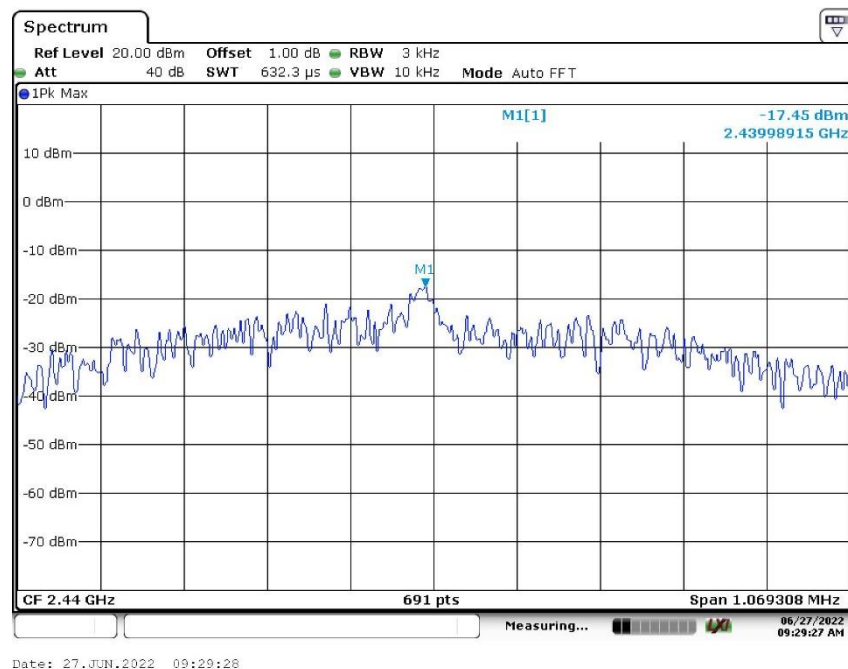


High Channel

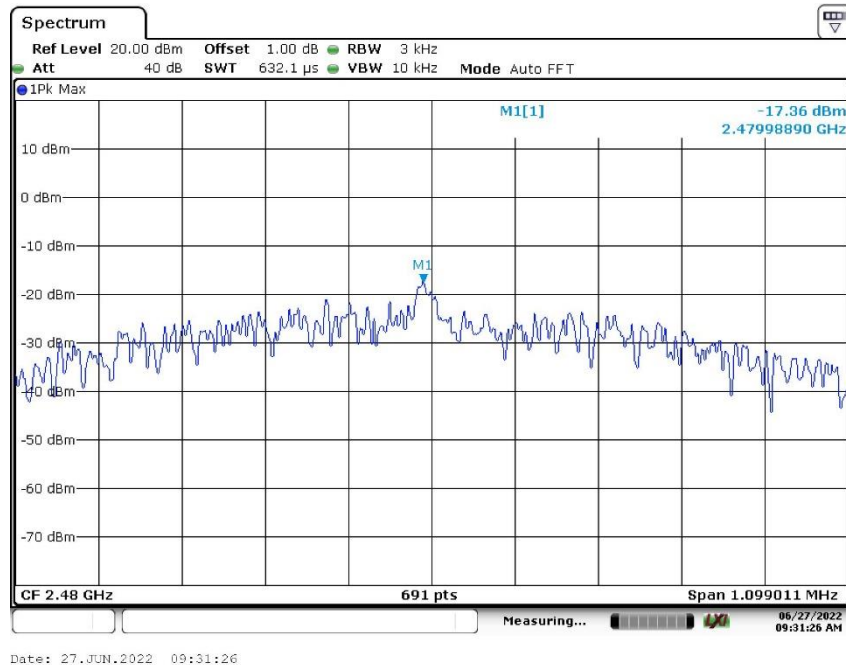


For BLE_2Mbps


Low Channel

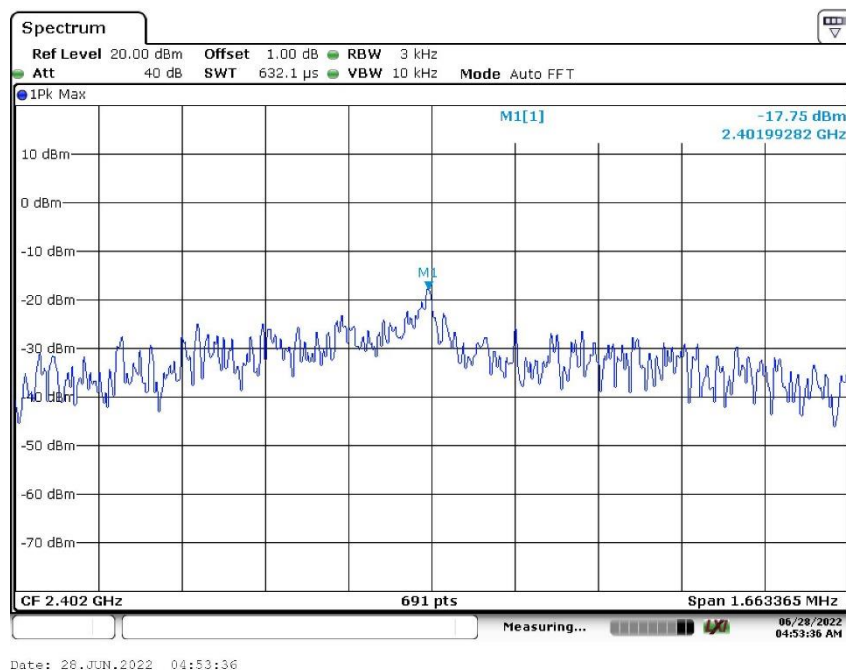

Middle Channel

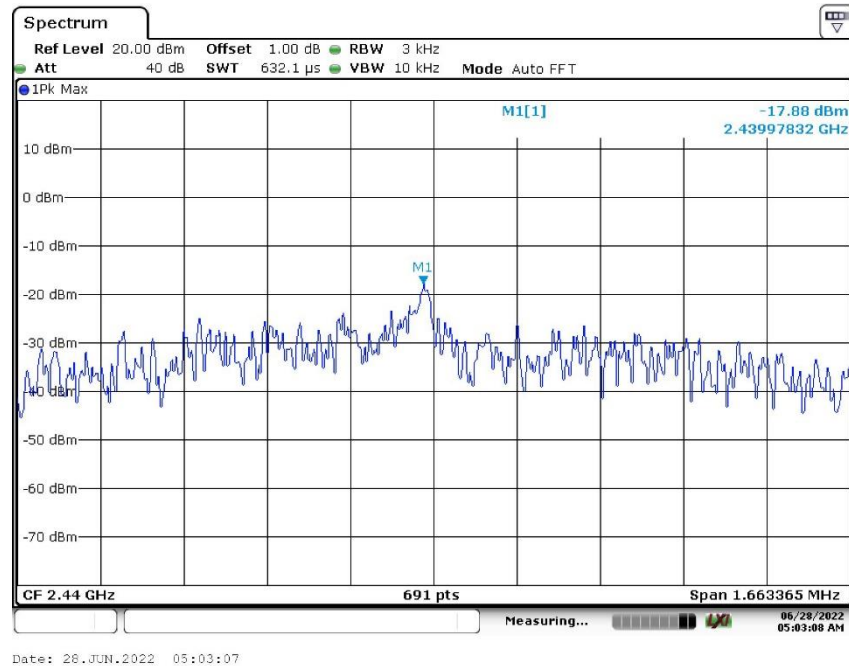

High Channel

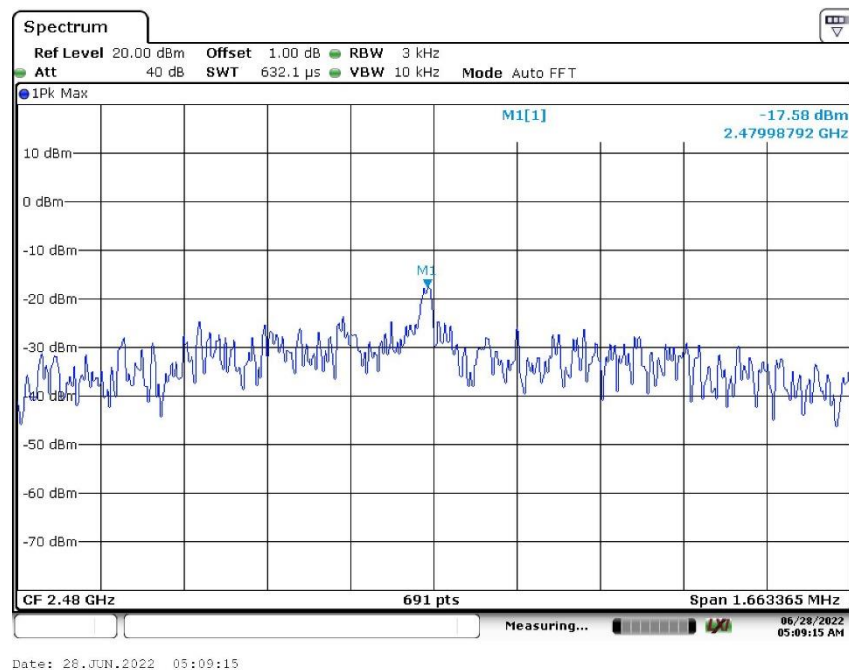

5.1.4 99%dB Bandwidth

RESULT:**Pass****Test Specification**

Test standard : RSS-Gen clause 6.7
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded Room

Test Setup

Date of testing : 2022-07-01
Input voltage : DC 3.6V
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 25.7 °C
Relative humidity : 50 %
Atmospheric pressure : 101 kPa

Table 7: Test Result of 99% Bandwidth

Test Mode	Channel Frequency (MHz)	99% Bandwidth (kHz)	Limit (kHz)
BLE 1Mbps	2402	1055	/
	2440	1045	
	2480	1070	
BLE 2Mbps	2402	2060	/
	2440	2030	
	2480	2040	

For BLE_1Mbps


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.055000	---	---	2401.477500	2402.532500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

99 % Bandwidth

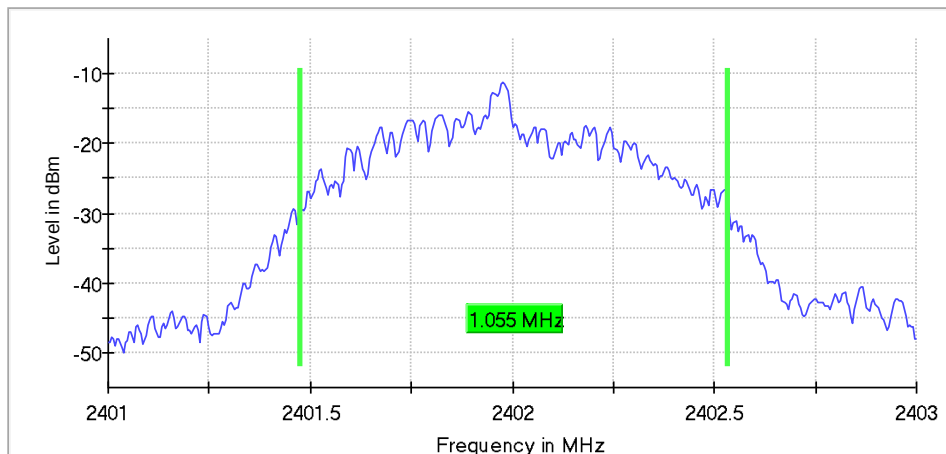

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.28 dB	0.30 dB


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.045000	---	---	2439.482500	2440.527500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

99 % Bandwidth

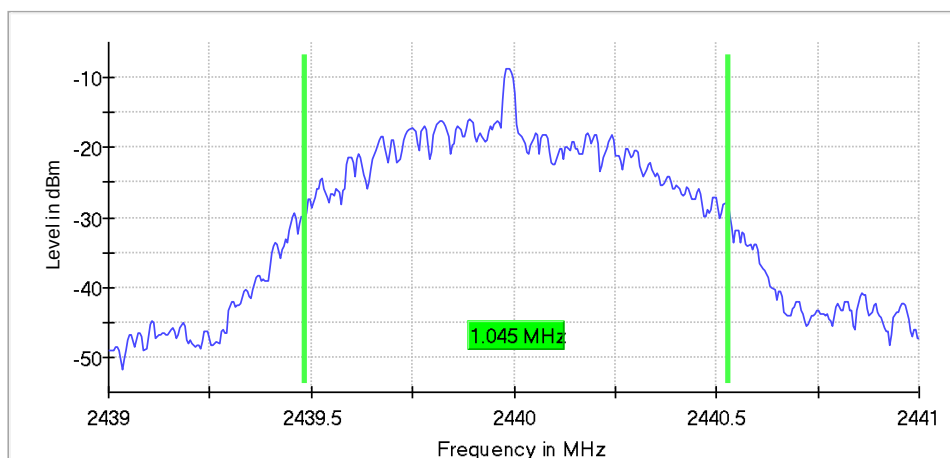

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	11 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.05 dB	0.30 dB


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.070000	---	---	2479.467500	2480.537500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

99 % Bandwidth

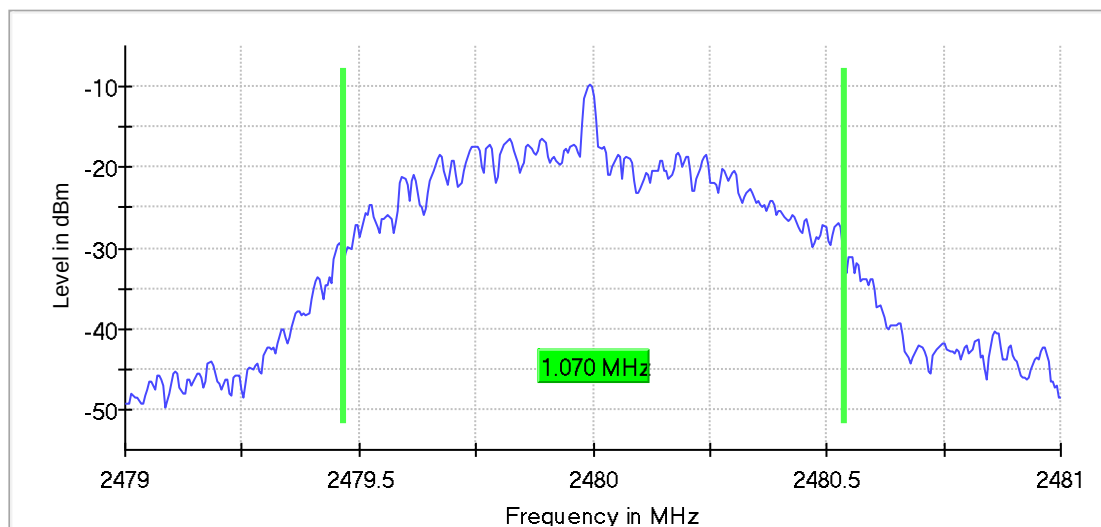

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.06 dB	0.30 dB

For BLE_2Mbps


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	2.060000	---	---	2400.985000	2403.045000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

99 % Bandwidth

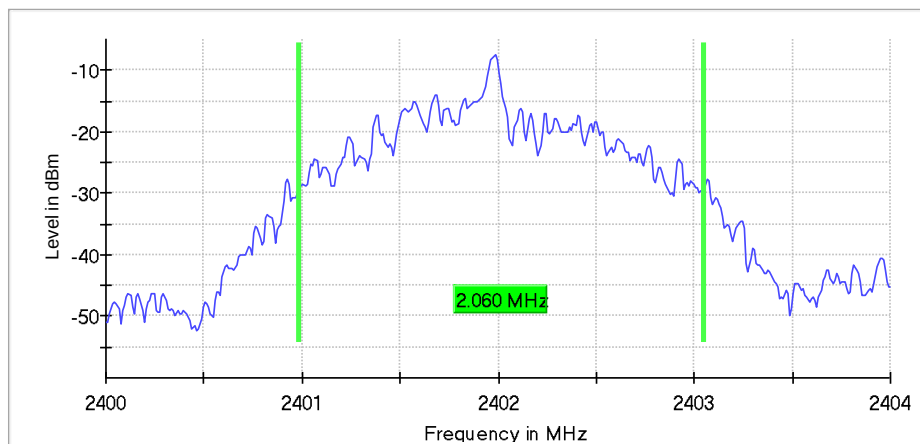

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
Sweeptime	94.824 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	8 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.30 dB


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	2.030000	---	---	2439.005000	2441.035000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

99 % Bandwidth

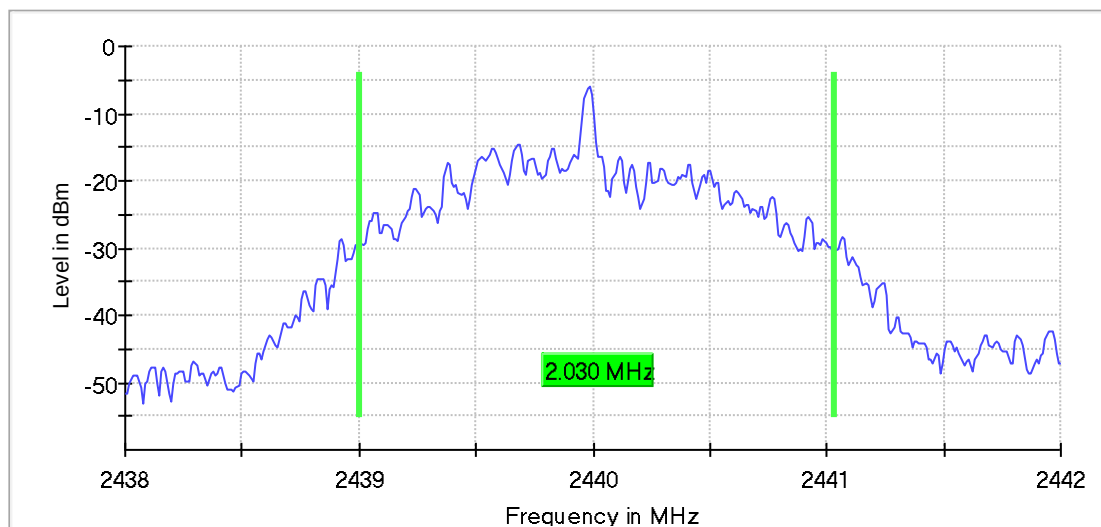

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43800 GHz	2.43800 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	94.824 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.18 dB	0.30 dB


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	2.040000	---	---	2478.995000	2481.035000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

99 % Bandwidth

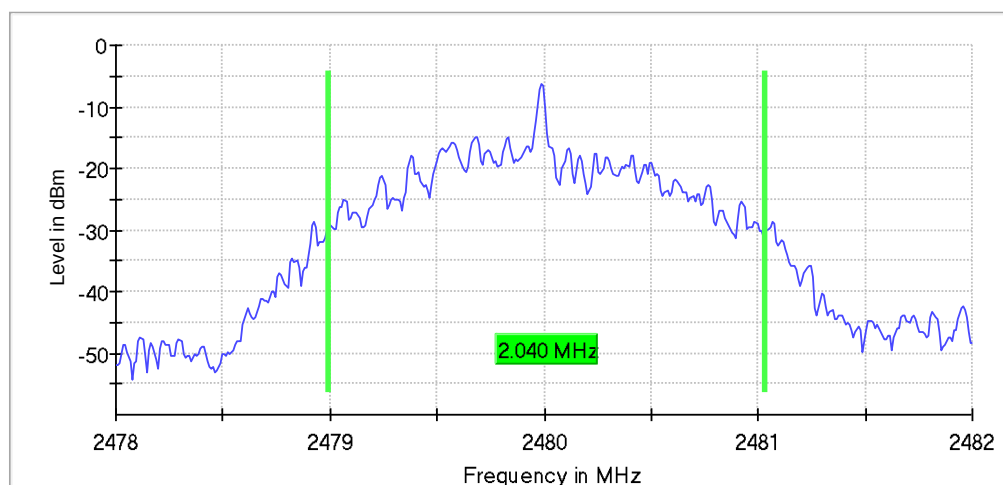

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47800 GHz	2.47800 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	94.824 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.01 dB	0.30 dB

5.1.5 6dB Bandwidth

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(a)(2)
 Basic standard : ANSI C63.10: 2013
 Limits : > 500 KHz
 Kind of test site : Shielded Room

Test Setup

Date of testing : 2022-07-01
 Input voltage : DC 3.6V
 Operation mode : A
 Test channel : Low / Middle / High
 Ambient temperature : 25.7 °C
 Relative humidity : 50 %
 Atmospheric pressure : 101 kPa

Table 7: Test Result of DTS Bandwidth

Test Mode	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)
BLE 1Mbps	2402	732.7	500
	2440	712.9	
	2480	732.7	
BLE 2Mbps	2402	1109	500
	2440	1109	
	2480	1109	

Test Results of 6dB Bandwidth

For BLE_1Mbps


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.732674	0.500000	---	2401.623762	2402.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	-5.0	PASS

6 dB Bandwidth

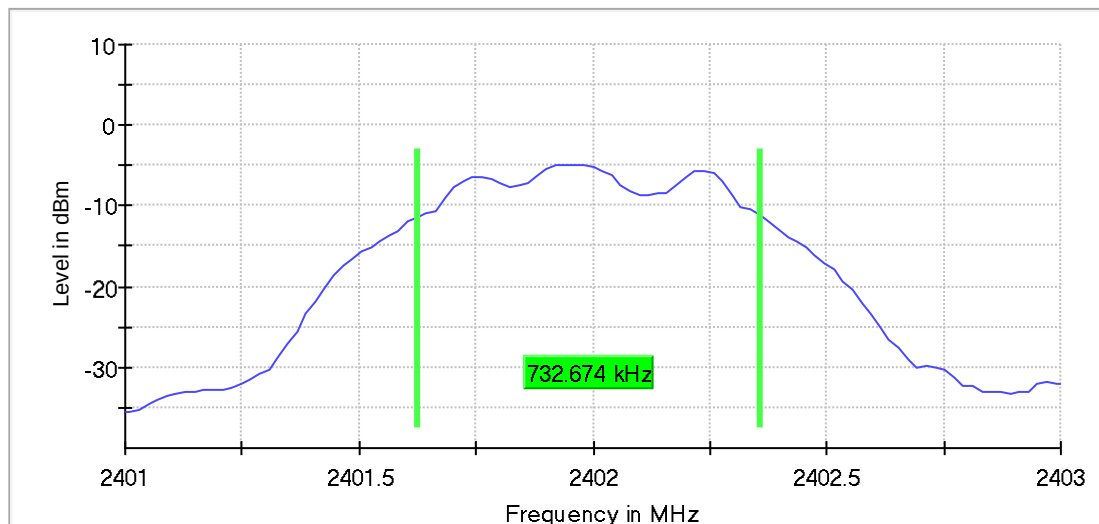

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
SweepTime	18.938 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.18 dB	0.50 dB


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	0.712872	0.500000	---	2439.643564	2440.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	-5.5	PASS

6 dB Bandwidth

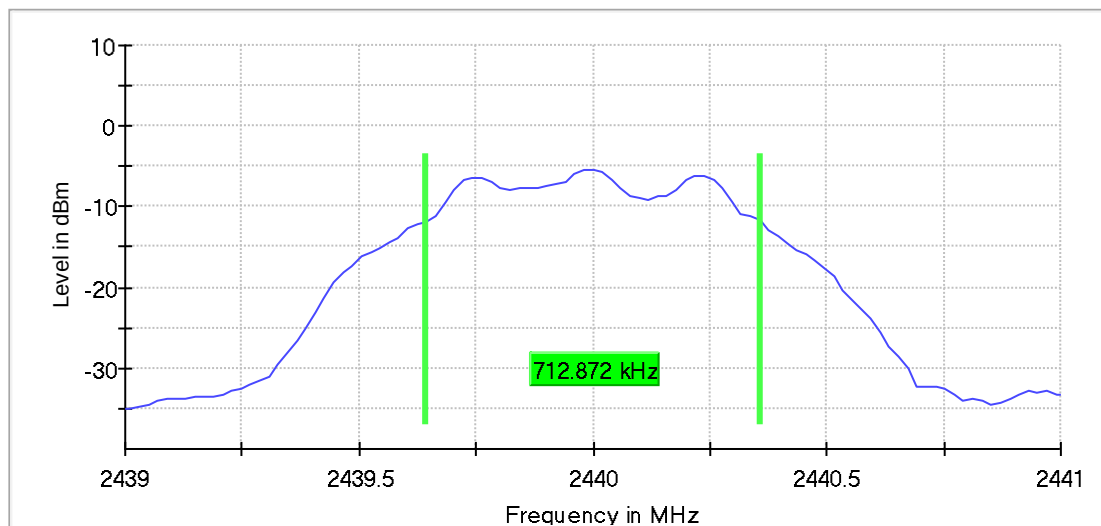

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
SweepTime	18.938 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.08 dB	0.50 dB


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.732674	0.500000	---	2479.623762	2480.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	-5.8	PASS

6 dB Bandwidth

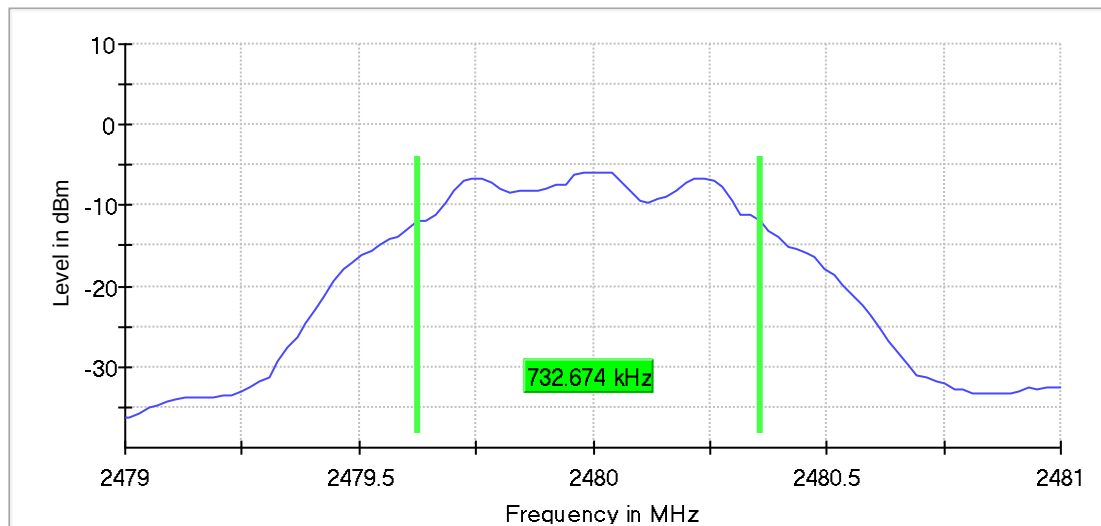

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
SweepTime	18.938 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.23 dB	0.50 dB

For BLE_2Mbps


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.108910	0.500000	---	2401.445545	2402.554455

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	-5.0	PASS

6 dB Bandwidth

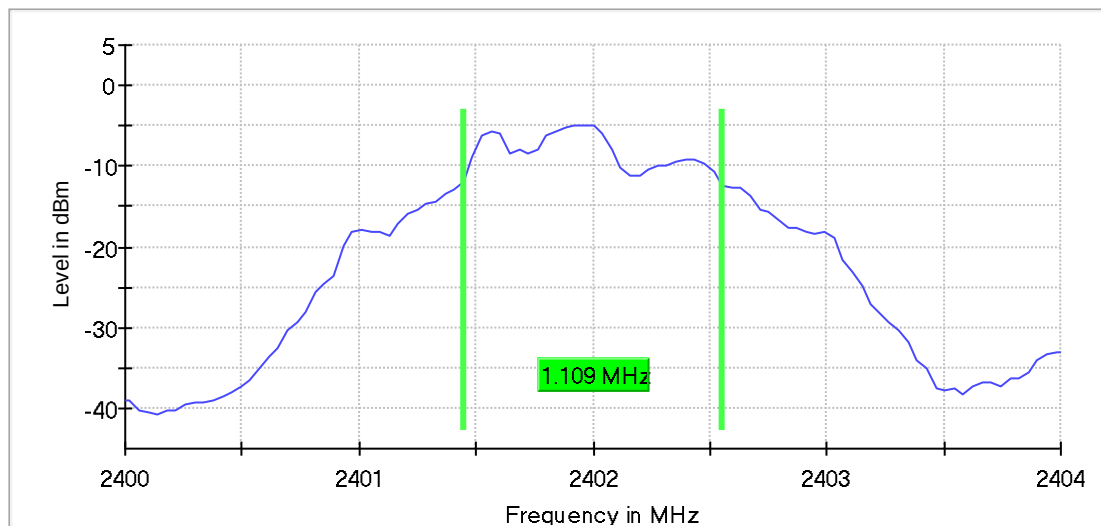

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
SweepTime	18.938 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	15 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.50 dB


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.108910	0.500000	---	2439.445545	2440.554455

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	-5.4	PASS

6 dB Bandwidth

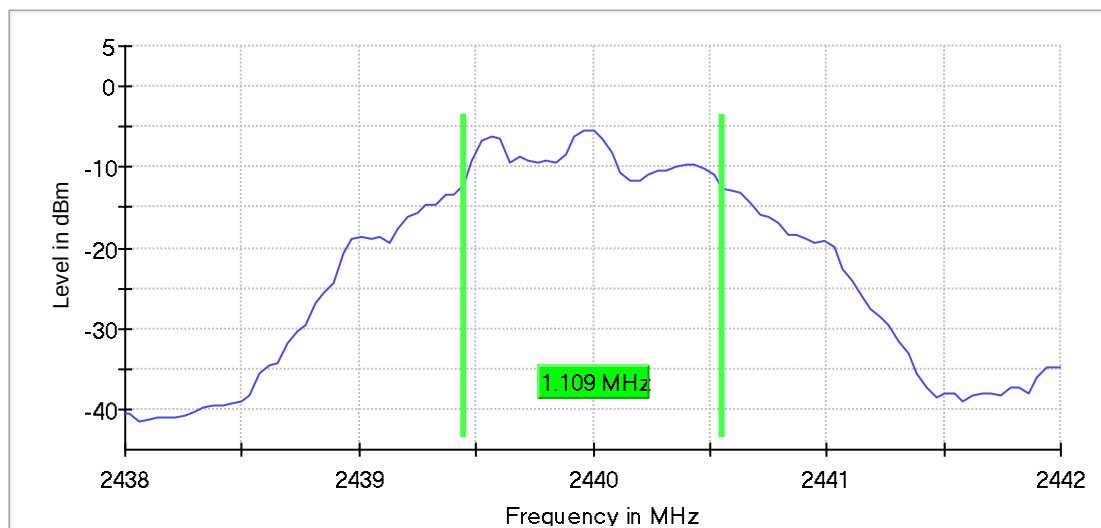

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43800 GHz	2.43800 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
SweepTime	18.938 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	5 / 5	5


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.108910	0.500000	---	2479.445545	2480.554455

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	-5.7	PASS

6 dB Bandwidth

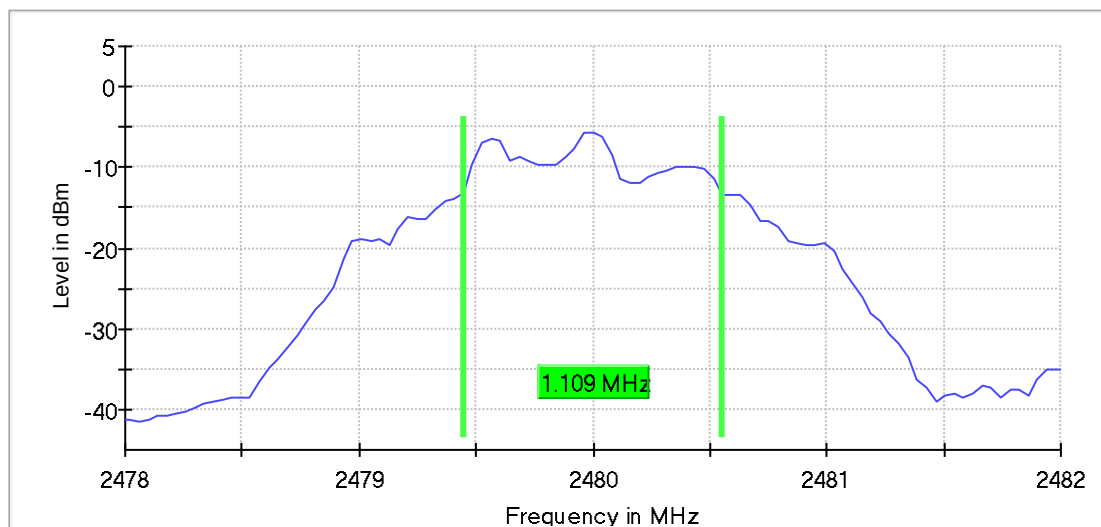

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47800 GHz	2.47800 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
SweepTime	18.938 μ s	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.50 dB

5.1.6 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d)
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2022-06-27
Input voltage	: DC 3.6V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25.7 °C
Relative humidity	: 50 %
Atmospheric pressure	: 101 kPa


Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth



BLE_1Mbps





Date: 27.JUN.2022 09:26:08

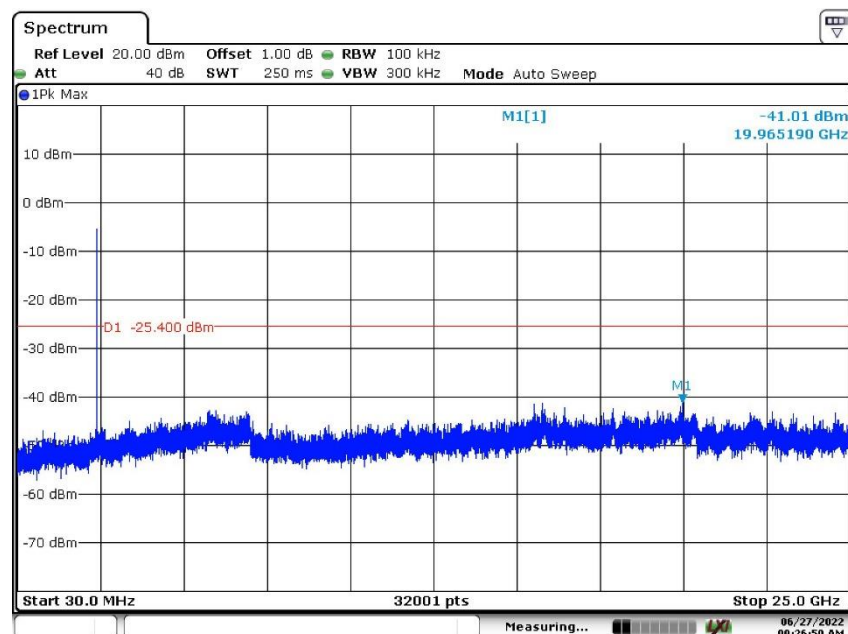


Date: 27.JUN.2022 09:26:51

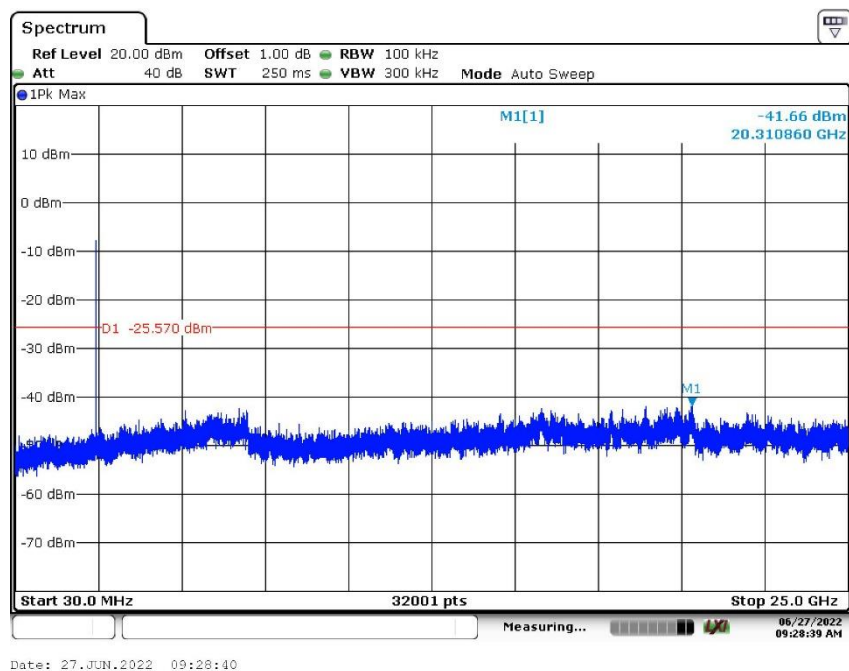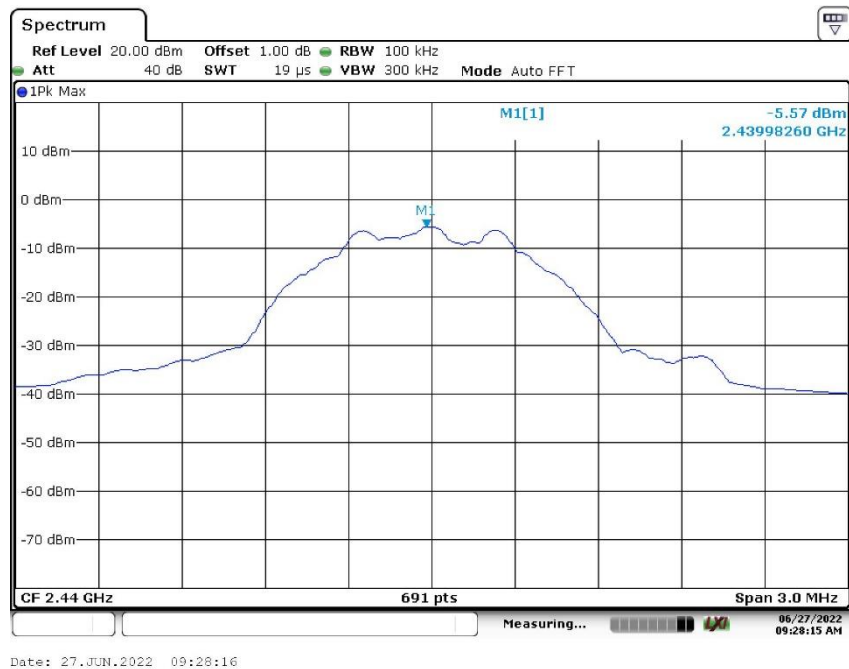


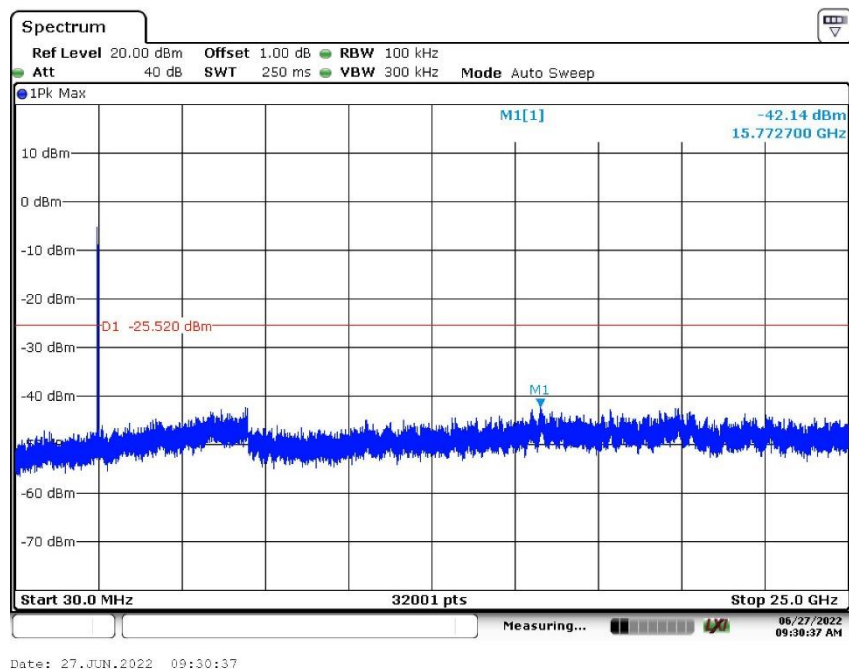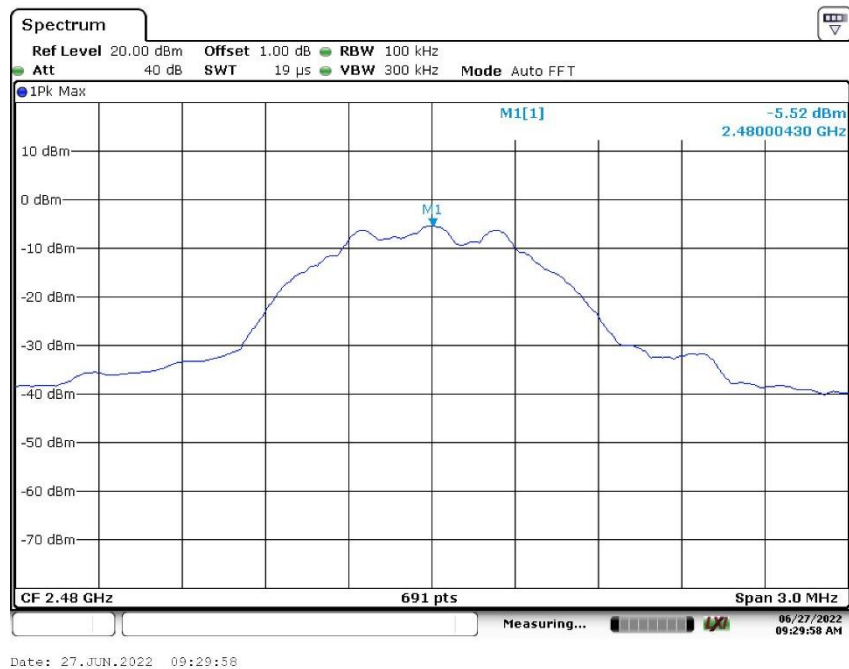

Band Edge


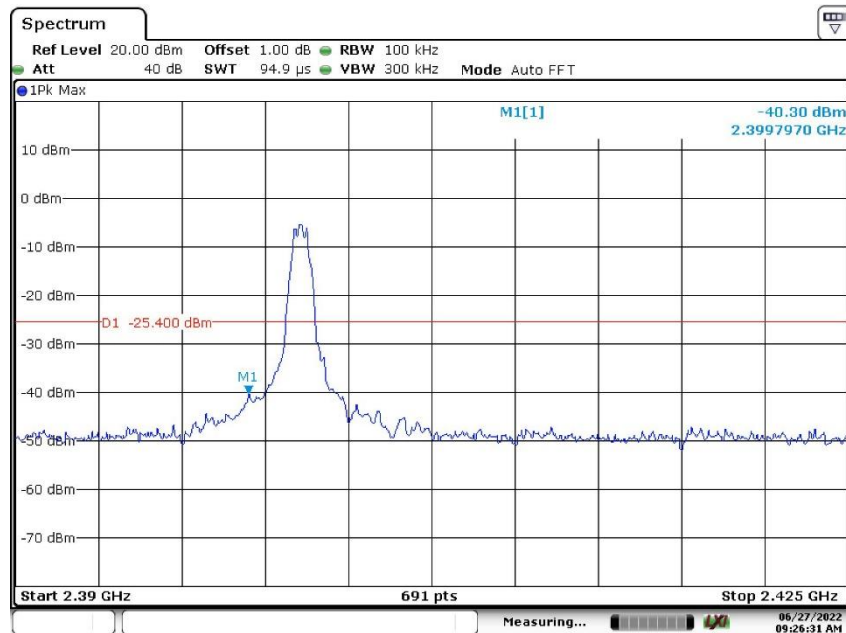


Date: 27.JUN.2022 09:26:31

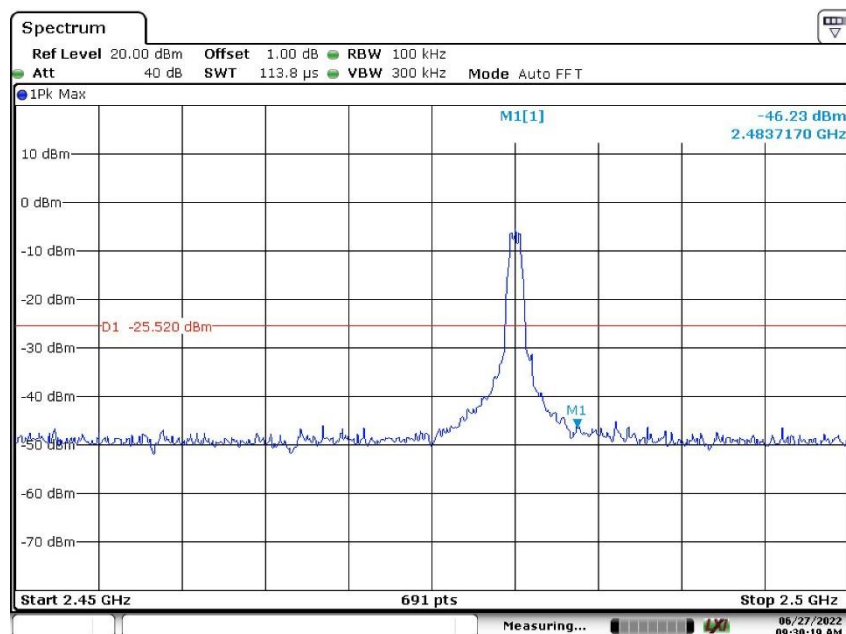


Date: 27.JUN.2022 09:30:18

BLE_2Mbps

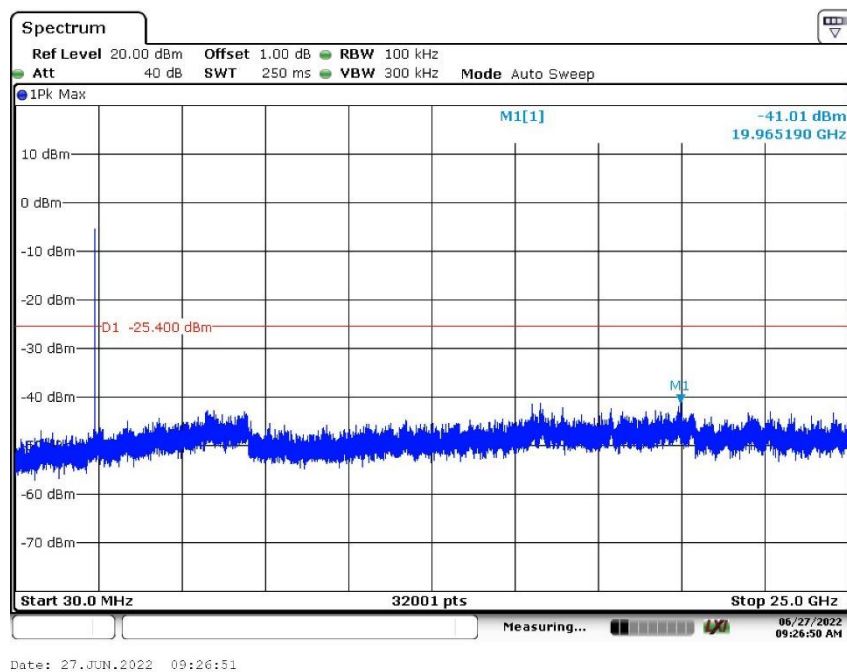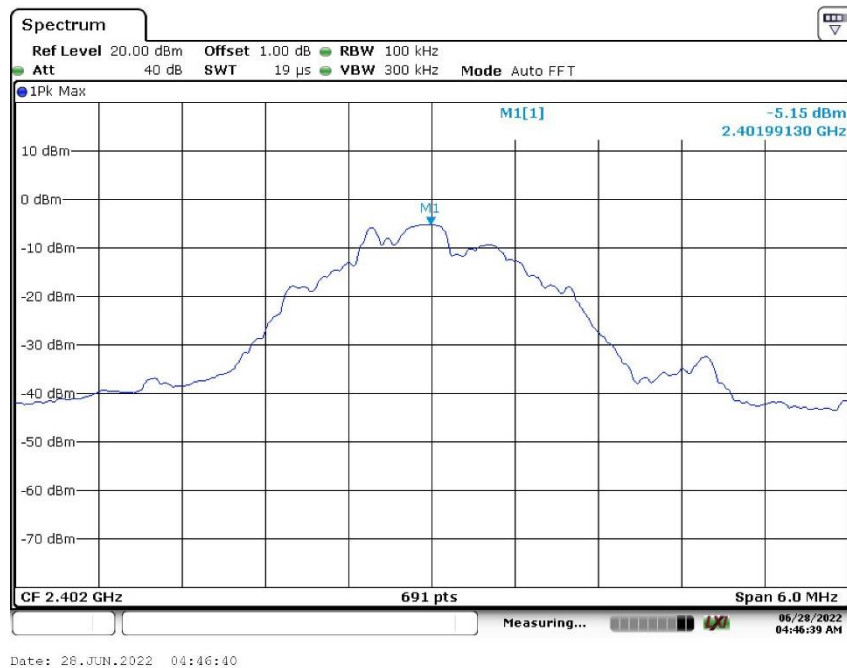





Date: 26.JUN.2022 04:57:03

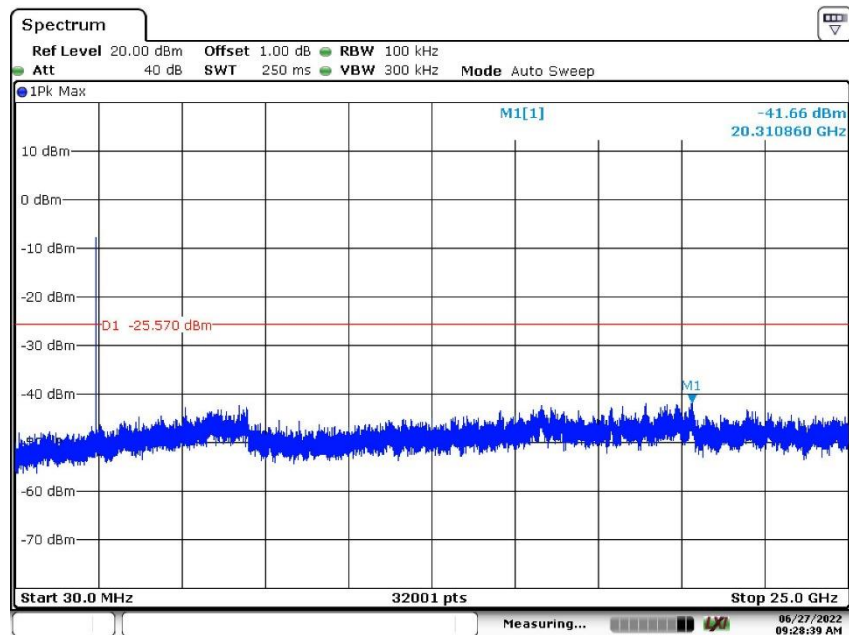

Date: 27.JUN.2022 09:28:40


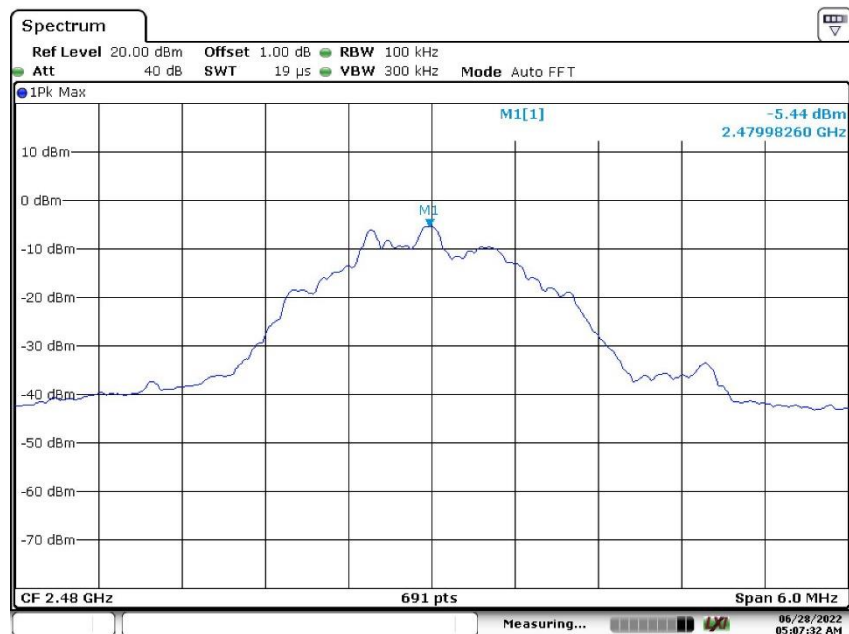


Date: 28.JUN.2022 05:07:32

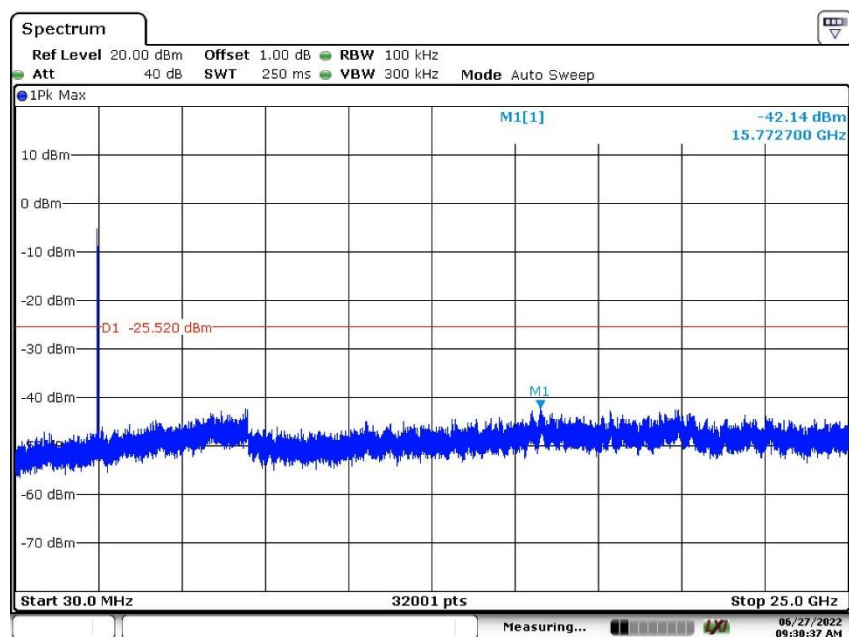

Date: 27.JUN.2022 09:30:37

Band Edge

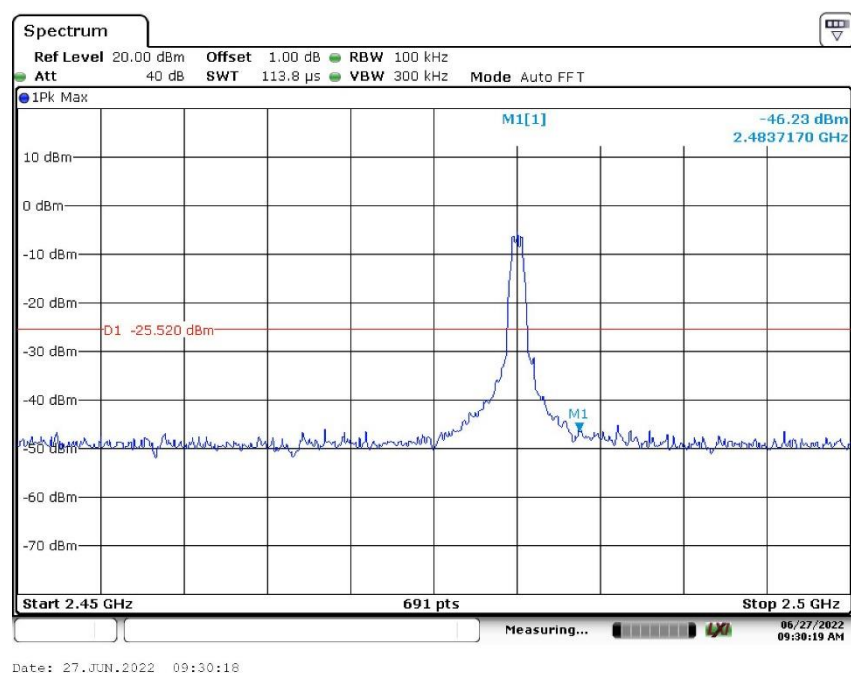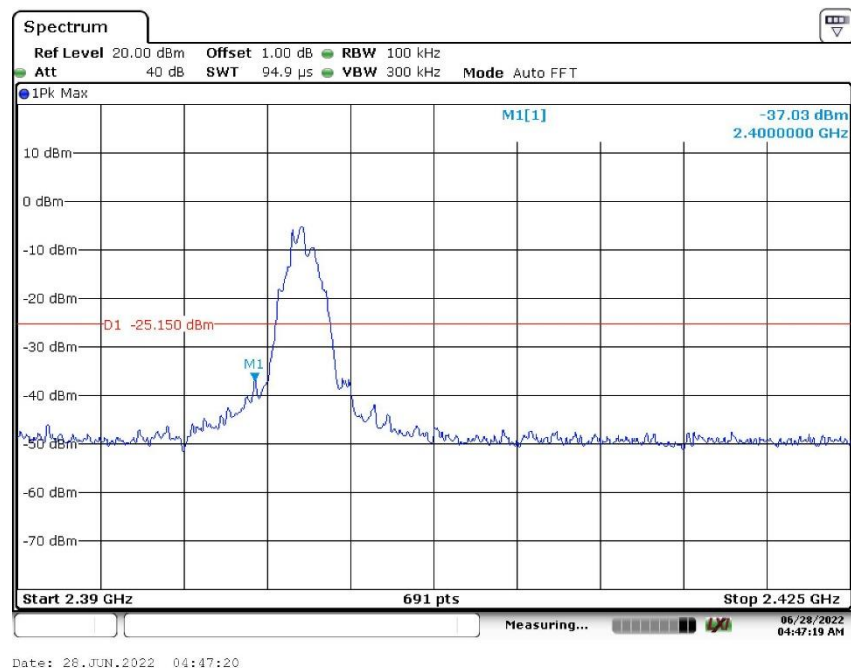

5.1.7 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d) & FCC Part 15.205
Basic standard	: ANSI C63.10: 2013
Limits	: Refer to 15.209(a) of FCC part 15.247(d)
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2022-07-02 to 2022-07-03
Input voltage	: DC 3.6V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Remark:


- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

Test Results of Radiated Spurious Emissions

30 MHz to 1GHz

EUT Information

EUT Name:	Osmo Mobile 6
Model:	OE200
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376651/A003285100-009
Test Voltage::	DC 5V From USB
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

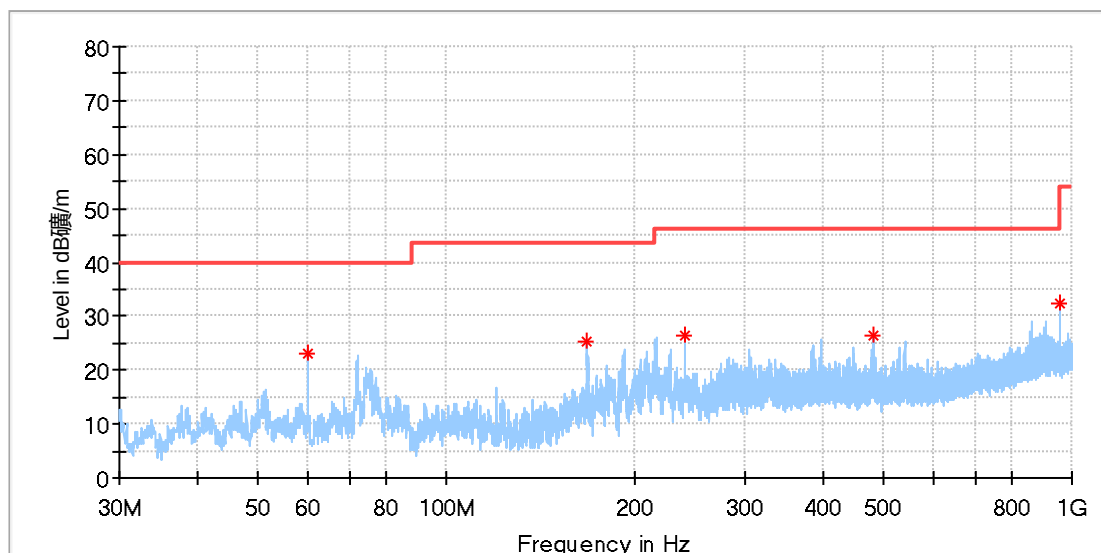

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
59.995385	23.09	40.00	16.91	100.0	H	310.0	-19.3
168.001154	25.32	43.50	18.18	100.0	H	269.0	-21.7
240.005000	26.50	46.00	19.50	100.0	H	168.0	-18.0
479.856154	26.55	46.00	19.45	100.0	H	245.0	-12.6
960.043462	32.41	54.00	21.59	100.0	H	236.0	-4.7

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name:	Osmo Mobile 6
Model:	OE200
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376651/A003285100-009
Test Voltage::	DC 5V From USB
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

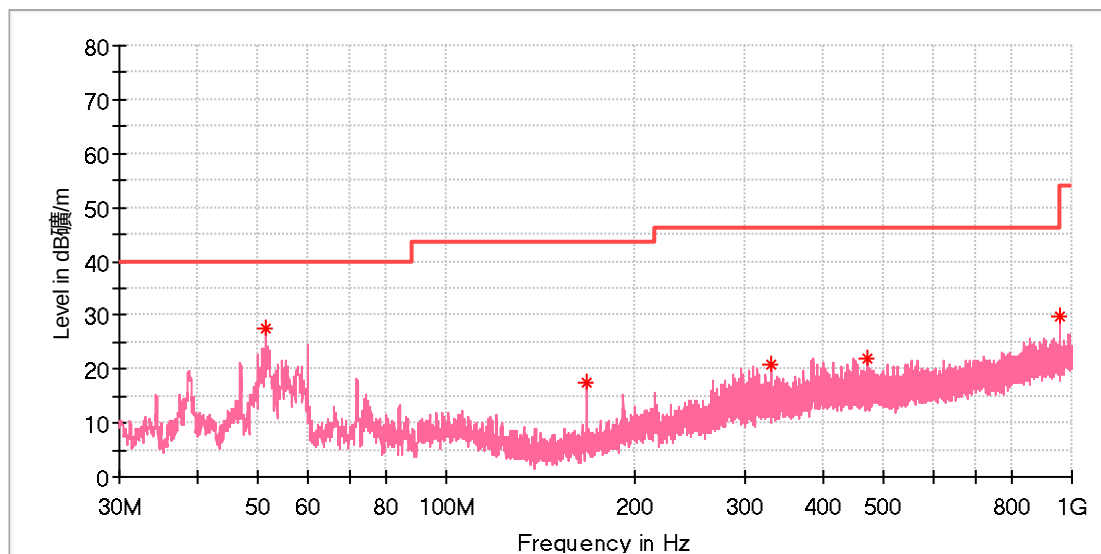

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
51.414615	27.40	40.00	12.60	100.0	V	183.0	-18.6
168.001154	17.43	43.50	26.07	100.0	V	261.0	-21.7
329.692692	20.86	46.00	25.14	100.0	V	253.0	-15.7
470.902308	21.90	46.00	24.10	100.0	V	66.0	-12.8
960.043462	29.89	54.00	24.11	100.0	V	285.0	-4.7

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Osmo Mobile 6
Model: OE200
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168376651/A003285100-009
Test Voltage:: DC 5V From USB
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

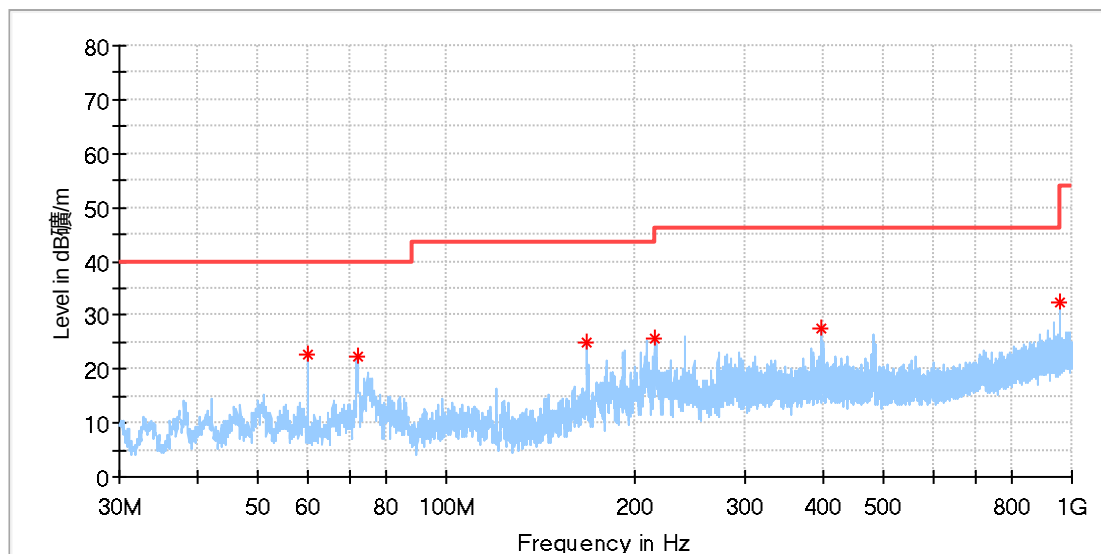

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
59.995385	22.60	40.00	17.40	100.0	H	324.0	-19.3
72.008462	22.29	40.00	17.71	100.0	H	162.0	-22.8
168.001154	24.91	43.50	18.59	100.0	H	274.0	-21.7
216.016154	25.72	46.00	20.28	100.0	H	309.0	-19.0
396.025769	27.38	46.00	18.62	100.0	H	218.0	-14.2
960.043462	32.41	54.00	21.59	100.0	H	250.0	-4.7

Final Result

Frequency (MHz)	QuasiPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Osmo Mobile 6
Model: OE200
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168376651/A003285100-009
Test Voltage:: DC 5V From USB
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

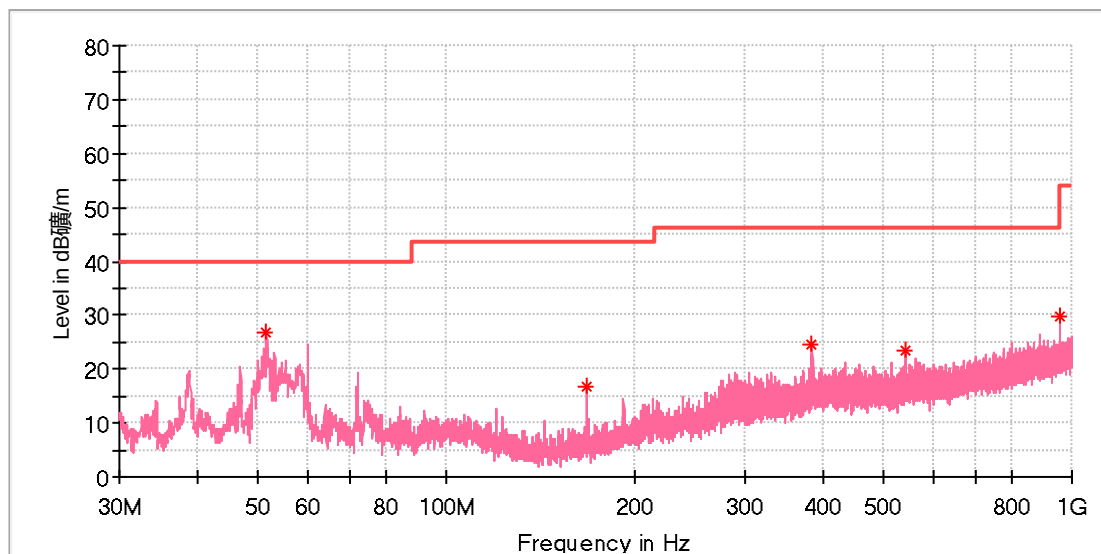

Critical Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
51.563846	26.65	40.00	13.35	100.0	V	259.0	-18.6
168.001154	16.86	43.50	26.64	100.0	V	259.0	-21.7
384.385769	24.54	46.00	21.46	100.0	V	193.0	-14.5
542.906154	23.34	46.00	22.66	100.0	V	17.0	-11.4
960.043462	29.89	54.00	24.11	100.0	V	278.0	-4.7


Final Result

Frequency (MHz)	QuasiPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Above 1GHz

EUT Information

EUT Name:	Osmo Mobile 6
Model:	OE200
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168376651/A003285100-009
Test Voltage::	DC 5V From USB
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

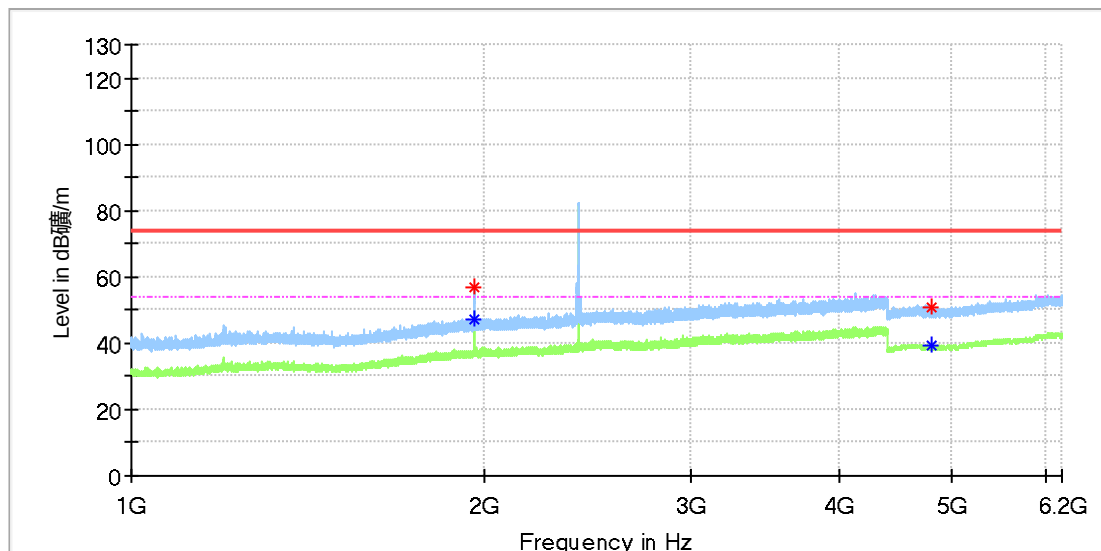

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1959.990000	56.77	---	74.00	17.23	100.0	H	141.0	5.7
1960.330000	---	47.40	54.00	6.60	100.0	H	107.0	5.7
4803.000000	50.51	---	74.00	23.49	100.0	H	56.0	11.8
4809.500000	---	39.53	54.00	14.47	100.0	H	273.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Osmo Mobile 6
Model: OE200
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168376651/A003285100-009
Test Voltage:: DC 5V From USB
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

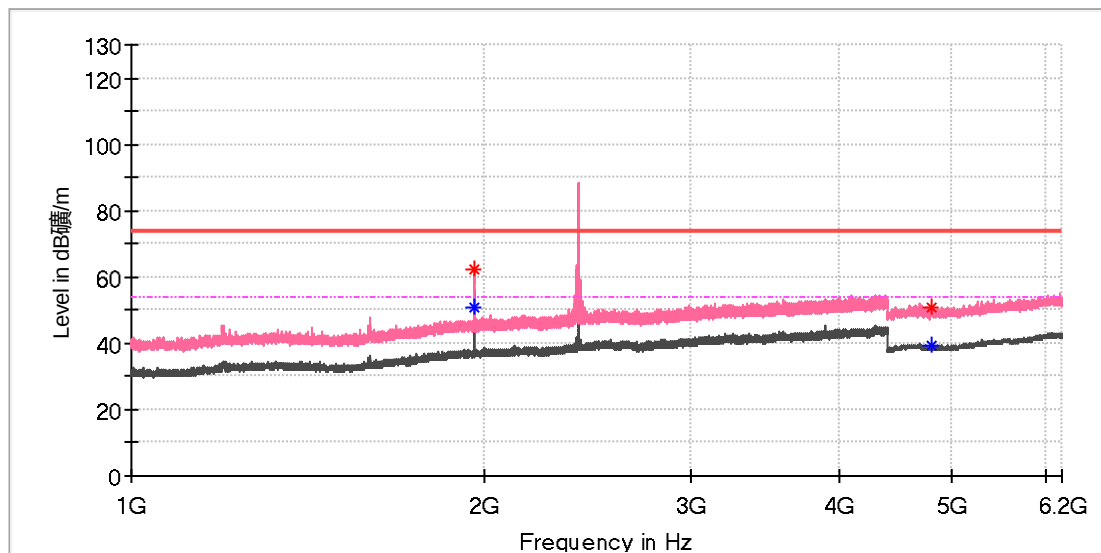

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1958.970000	---	50.64	54.00	3.36	100.0	V	280.0	5.7
1960.330000	62.28	---	74.00	11.72	100.0	V	280.0	5.7
4802.500000	50.50	---	74.00	23.50	100.0	V	50.0	11.8
4807.000000	---	39.20	54.00	14.80	100.0	V	57.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Osmo Mobile 6
Model: OE200
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168376651/A003285100-009
Test Voltage:: DC 5V From USB
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

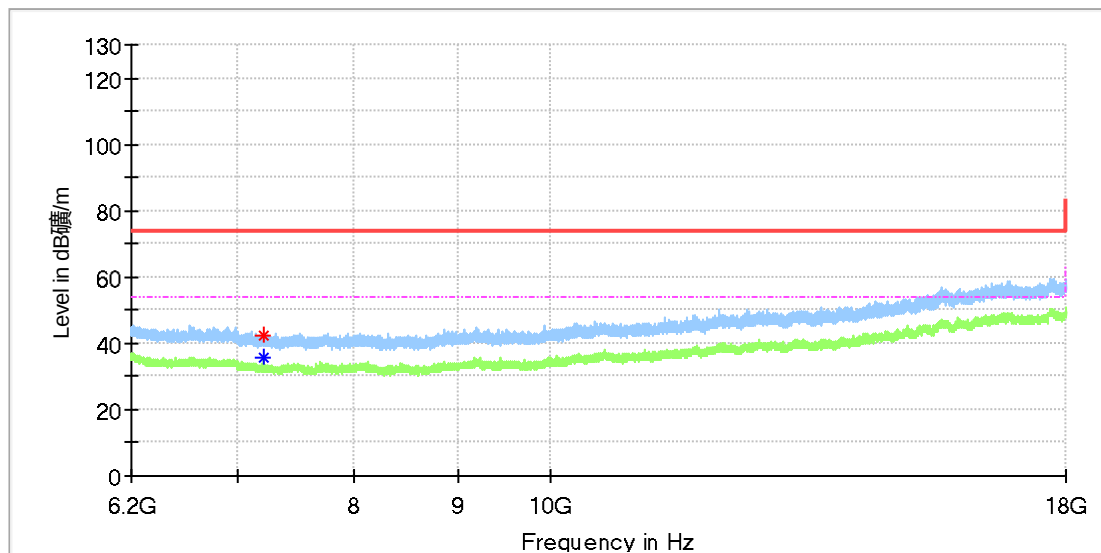

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.458333	---	35.91	54.00	18.09	100.0	H	166.0	8.8
7205.950000	42.16	---	74.00	31.84	100.0	H	130.0	8.8

Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Osmo Mobile 6
Model: OE200
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168376651/A003285100-009
Test Voltage:: DC 5V From USB
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

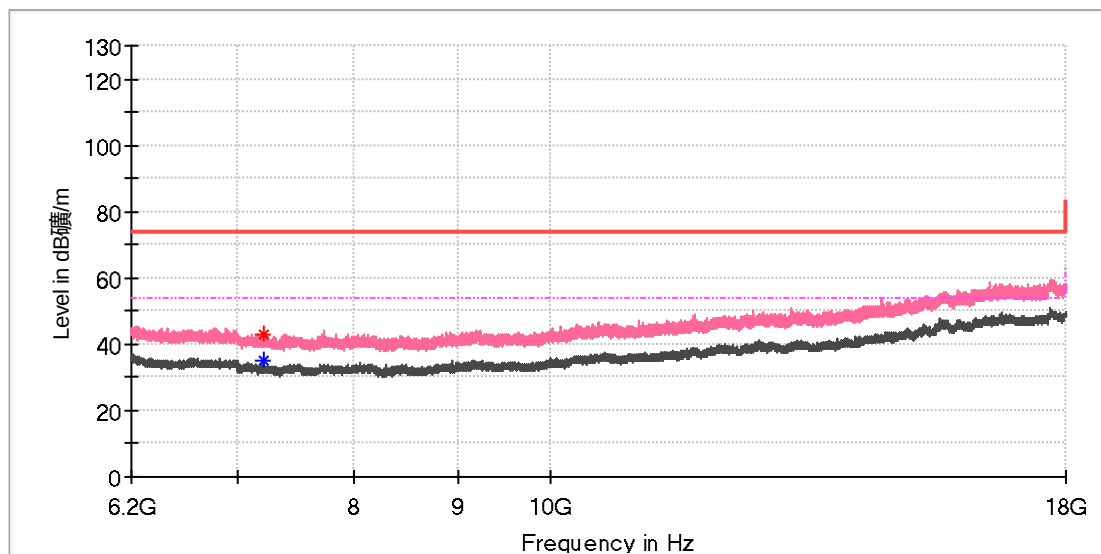

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7204.966667	42.95	---	74.00	31.05	100.0	V	60.0	8.8
7205.950000	---	34.87	54.00	19.13	100.0	V	273.0	8.8

Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Osmo Mobile 6
Model: OE200
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168376651/A003285100-009
Test Voltage:: DC 5V From USB
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

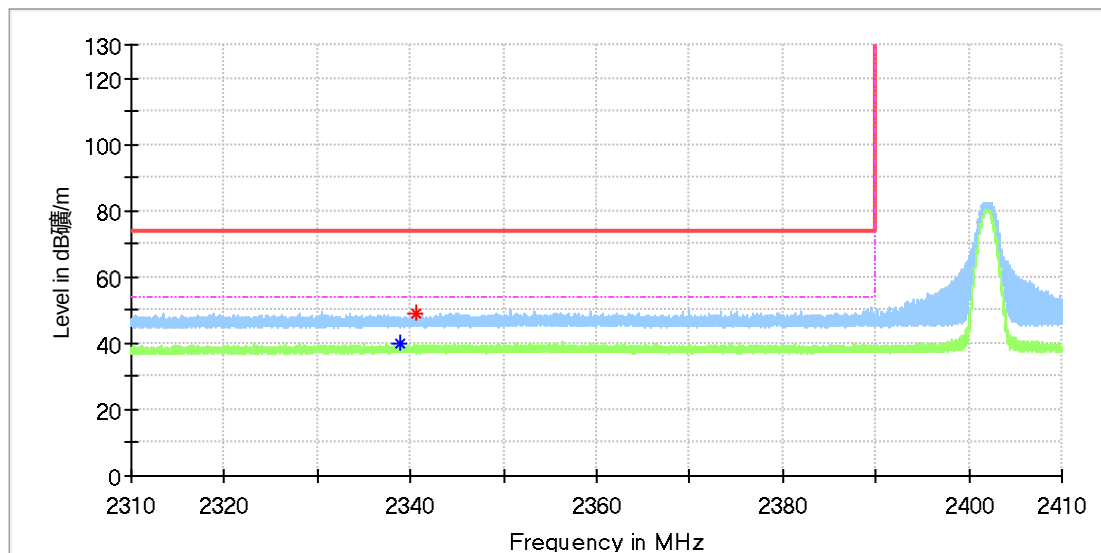

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2338.890000	---	39.77	54.00	14.23	100.0	H	22.0	6.8
2340.630000	49.08	---	74.00	24.92	100.0	H	58.0	6.8

Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Osmo Mobile 6
Model: OE200
Test Mode: BLE 1M_Low channel
Order No/Sample No: 168376651/A003285100-009
Test Voltage:: DC 5V From USB
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

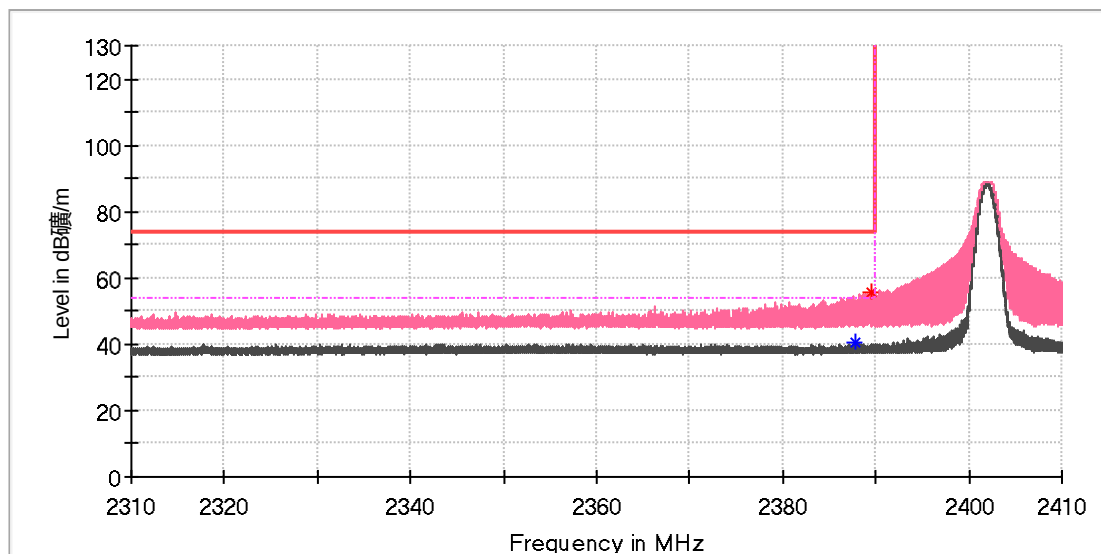

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2387.905000	---	40.76	54.00	13.24	100.0	V	123.0	7.0
2389.605000	55.35	---	74.00	18.65	100.0	V	206.0	7.0

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Osmo Mobile 6
Model: OE200
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168376651/A003285100-009
Test Voltage:: DC 5V From USB
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

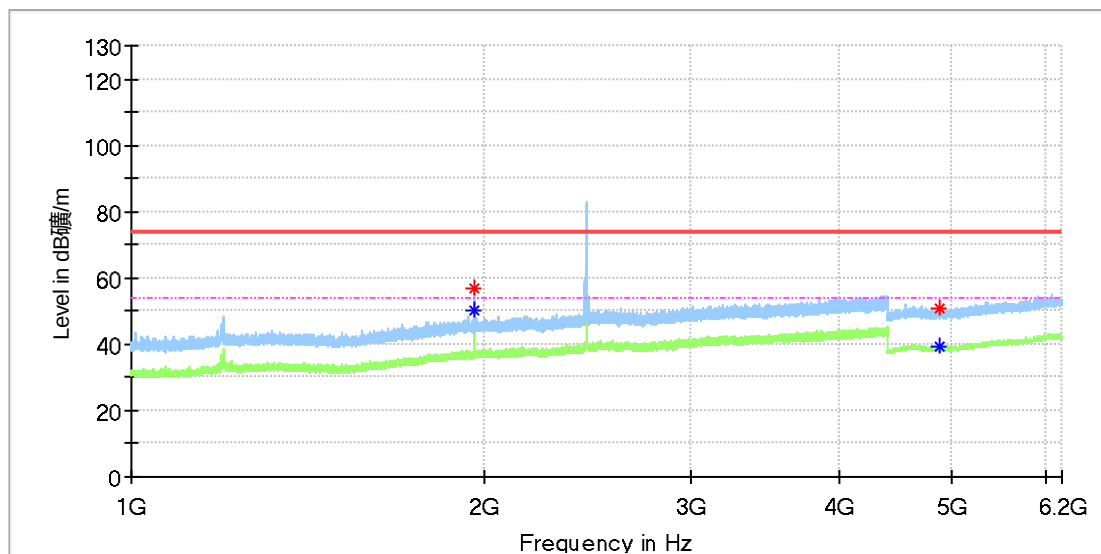

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1959.990000	---	50.00	54.00	4.00	100.0	H	209.0	5.7
1960.160000	56.56	---	74.00	17.44	100.0	H	42.0	5.7
4868.500000	---	39.19	54.00	14.81	100.0	H	38.0	11.8
4869.000000	50.67	---	74.00	23.33	100.0	H	10.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Osmo Mobile 6
Model: OE200
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168376651/A003285100-009
Test Voltage:: DC 5V From USB
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

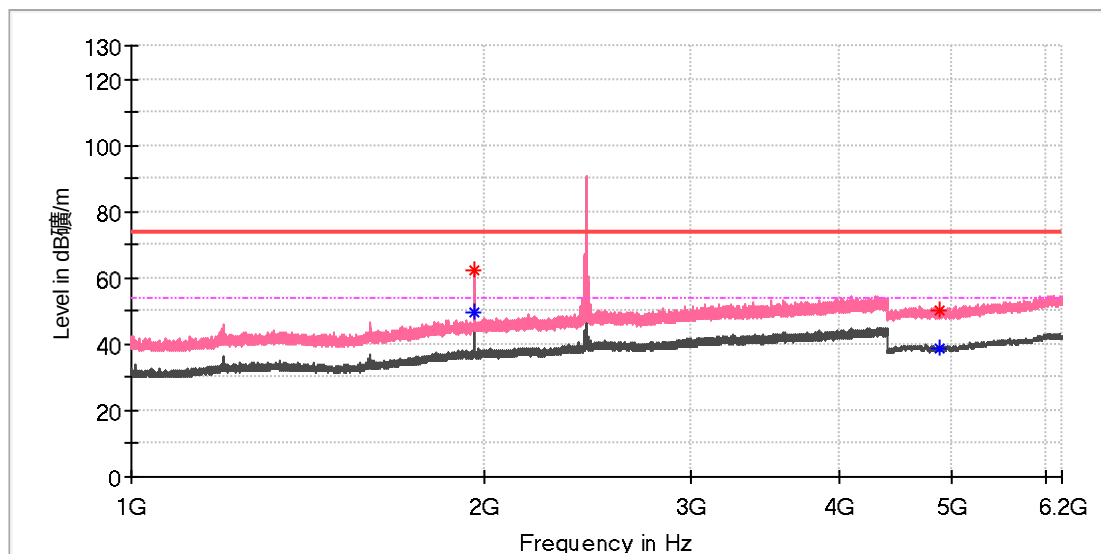

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1959.140000	---	49.32	54.00	4.68	100.0	V	207.0	5.7
1959.990000	62.30	---	74.00	11.70	100.0	V	0.0	5.7
4870.000000	50.00	---	74.00	24.00	100.0	V	170.0	11.8
4871.000000	---	38.94	54.00	15.06	100.0	V	34.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Osmo Mobile 6
Model: OE200
Test Mode: BLE 1M_Mid channel
Order No/Sample No: 168376651/A003285100-009
Test Voltage:: DC 5V From USB
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

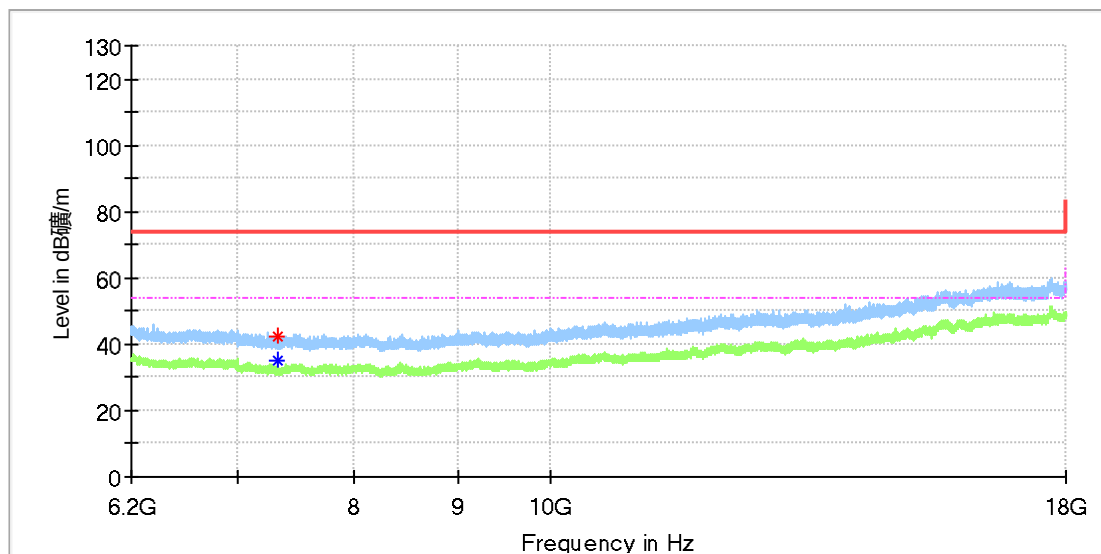

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7320.016667	---	34.85	54.00	19.15	100.0	H	158.0	8.2
7329.850000	42.11	---	74.00	31.89	100.0	H	33.0	8.1

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Osmo Mobile 6
Model:	OE200
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168376651/A003285100-009
Test Voltage::	DC 5V From USB
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

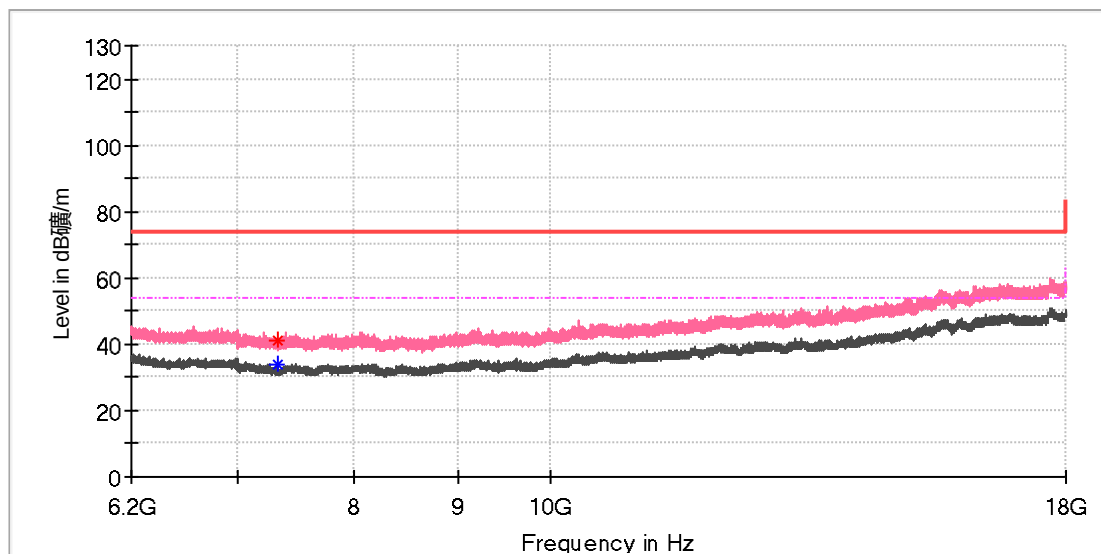

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7319.525000	---	34.01	54.00	19.99	100.0	V	16.0	8.2
7325.916667	41.32	---	74.00	32.68	100.0	V	76.0	8.2

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Osmo Mobile 6
Model: OE200
Test Mode: BLE 1M_High channel
Order No/Sample No: 168376651/A003285100-009
Test Voltage:: DC 5V From USB
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

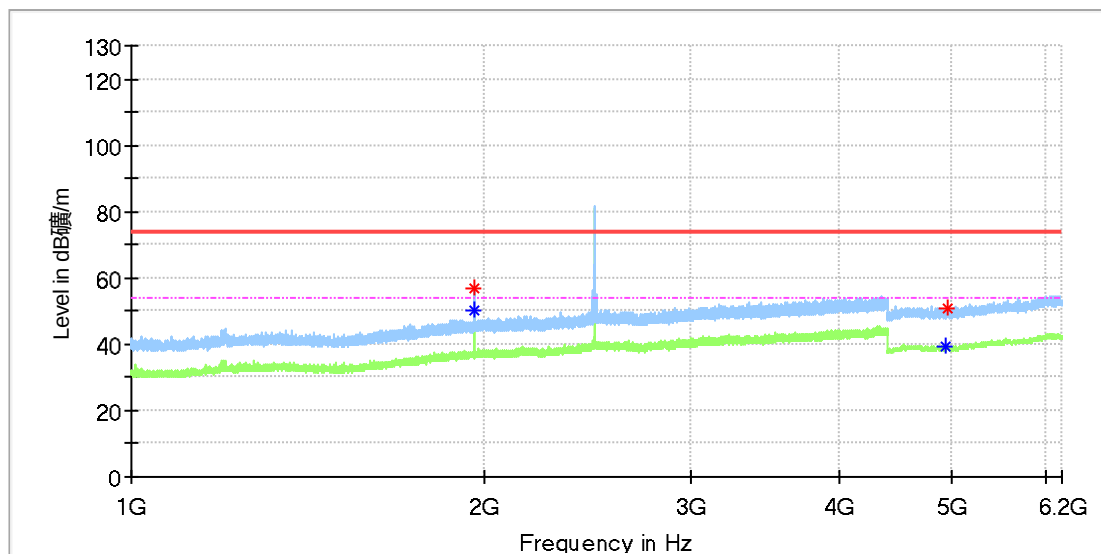

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1959.820000	---	49.99	54.00	4.01	100.0	H	353.0	5.7
1960.160000	56.80	---	74.00	17.20	100.0	H	244.0	5.7
4941.000000	---	39.06	54.00	14.94	100.0	H	147.0	11.8
4963.500000	50.70	---	74.00	23.30	100.0	H	0.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Osmo Mobile 6
Model:	OE200
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168376651/A003285100-009
Test Voltage::	DC 5V From USB
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

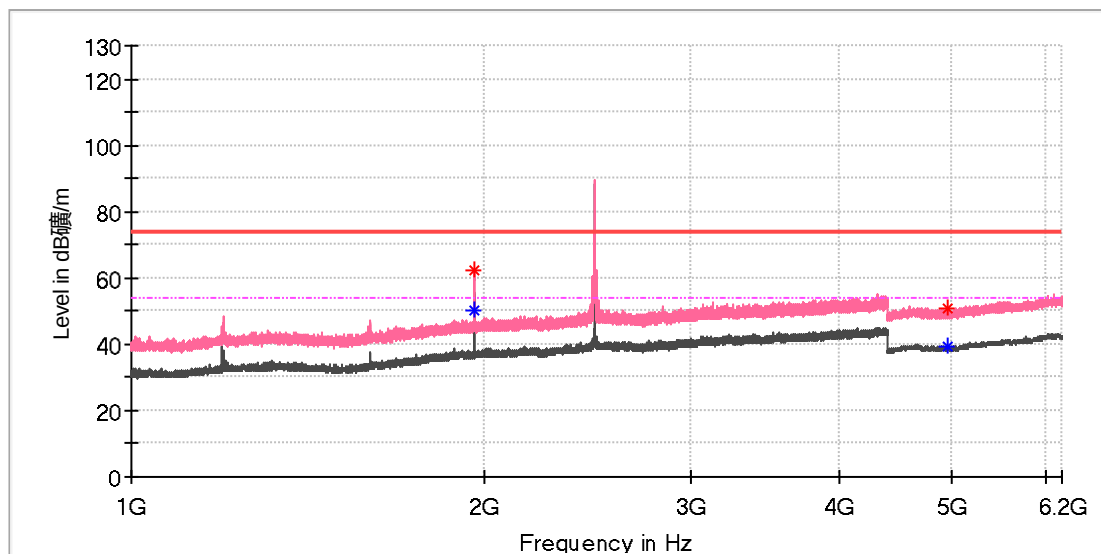

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1959.140000	---	50.33	54.00	3.67	100.0	V	272.0	5.7
1960.160000	62.52	---	74.00	11.48	100.0	V	18.0	5.7
4947.000000	---	39.24	54.00	14.76	100.0	V	12.0	11.8
4954.000000	50.61	---	74.00	23.39	100.0	V	6.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Osmo Mobile 6
Model: OE200
Test Mode: BLE 1M_High channel
Order No/Sample No: 168376651/A003285100-009
Test Voltage:: DC 5V From USB
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

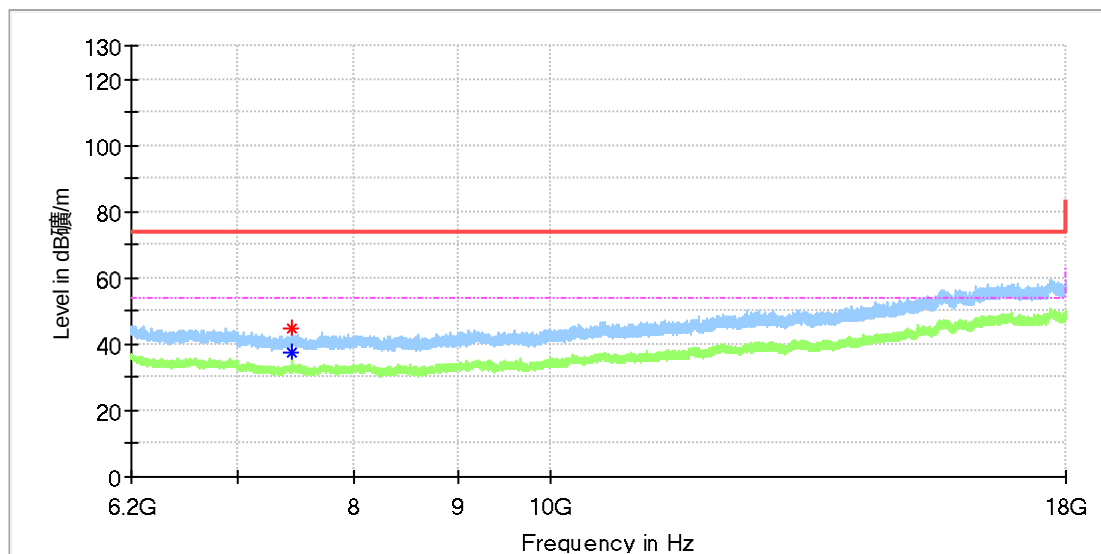

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.491667	44.59	---	74.00	29.41	100.0	H	161.0	8.4
7439.983333	---	37.34	54.00	16.66	100.0	H	337.0	8.4

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Osmo Mobile 6
Model: OE200
Test Mode: BLE 1M_High channel
Order No/Sample No: 168376651/A003285100-009
Test Voltage:: DC 5V From USB
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

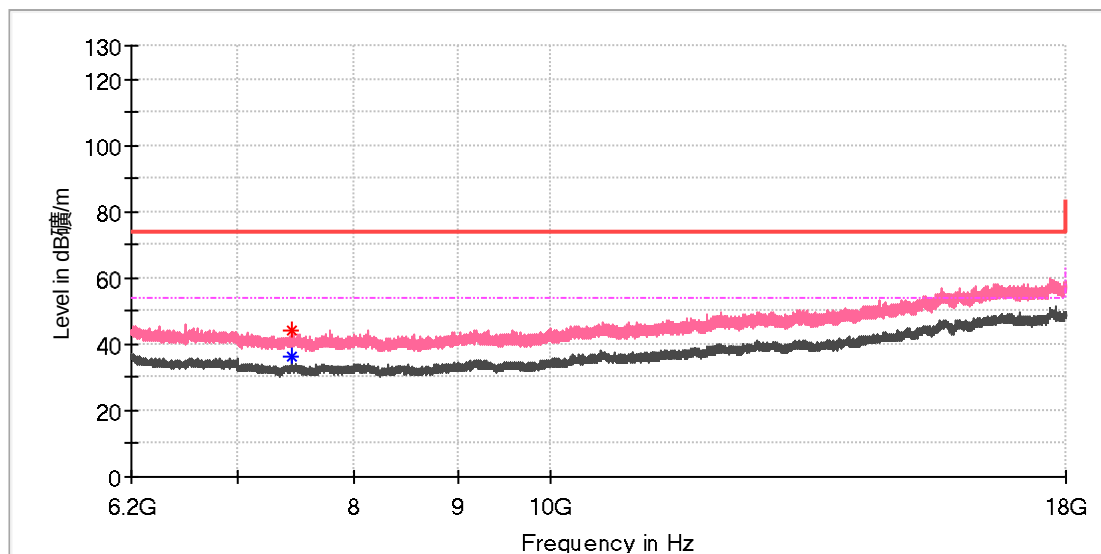

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.983333	44.27	---	74.00	29.73	100.0	V	230.0	8.4
7439.983333	---	36.12	54.00	17.88	100.0	V	230.0	8.4

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Osmo Mobile 6
Model: OE200
Test Mode: BLE 1M_High channel
Order No/Sample No: 168376651/A003285100-009
Test Voltage:: DC 5V From USB
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

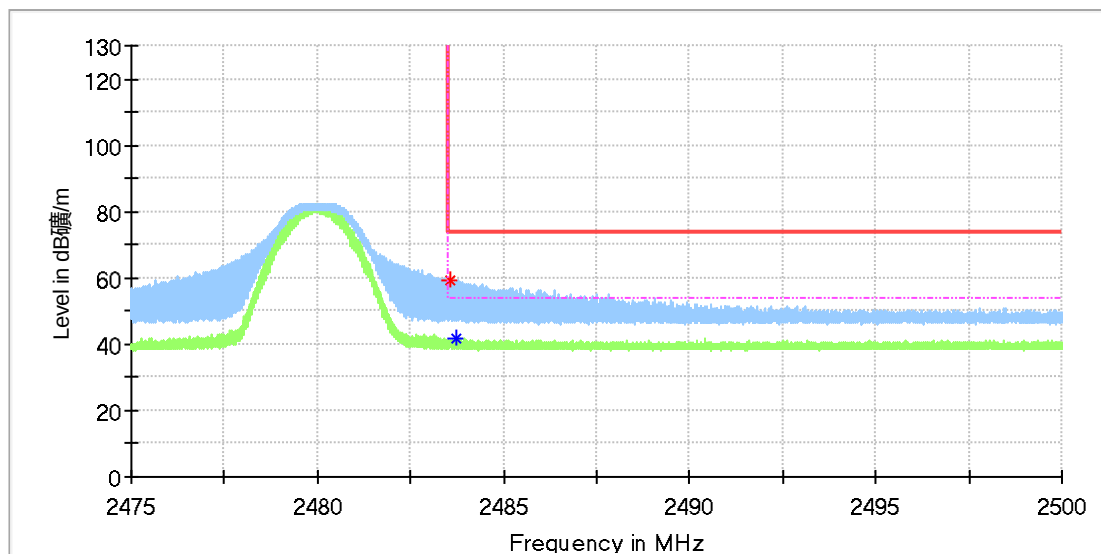

Critical Freqs


Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.576250	59.40	---	74.00	14.60	100.0	H	85.0	7.4
2483.720000	---	41.65	54.00	12.35	100.0	H	48.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Osmo Mobile 6
Model: OE200
Test Mode: BLE 1M_High channel
Order No/Sample No: 168376651/A003285100-009
Test Voltage:: DC 5V From USB
Remark: Temp 23 Humi:56%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

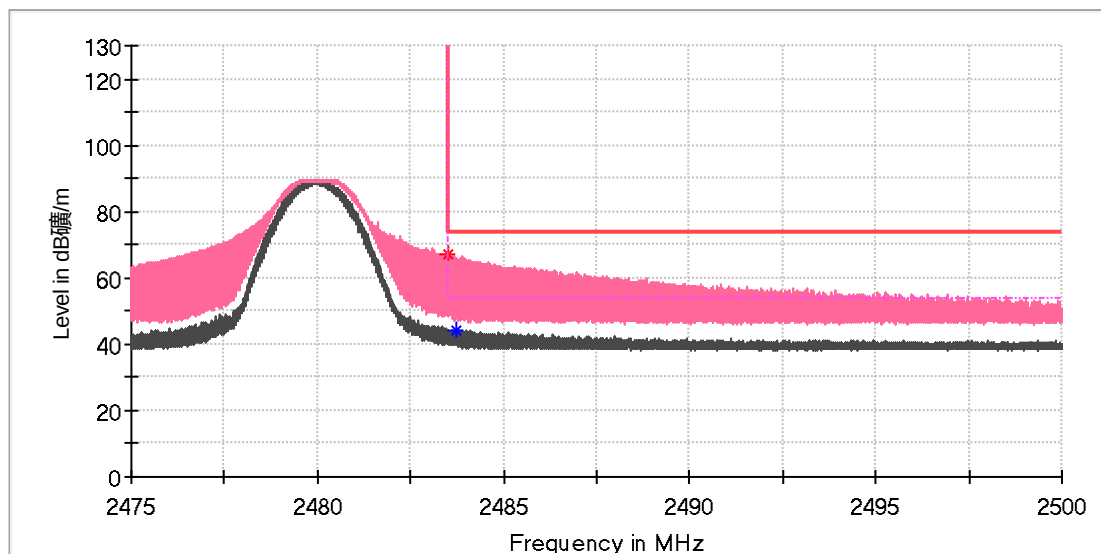

Critical Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.515000	66.90	---	74.00	7.10	100.0	V	189.0	7.4
2483.751250	---	44.43	54.00	9.57	100.0	V	189.0	7.4

Final Result

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Prüfbericht - Nr.: CN22VS19 001
Test Report No.Seite 63 von 66
Page 63 of 66

5.1.8 Conducted Emission on AC Mains

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.207(a)

Basic standard : ANSI C63.10: 2013

Frequency range : 0.15 – 30MHz

Limits : FCC Part 15.207(a)

Kind of test site : Shielded Room

Test Setup

Date of testing : 2022-07-03

Input voltage : AC 120V/60Hz

Operation mode : B

Earthing : Not connected


Ambient temperature : 25.7 °C

Relative humidity : 500 %

Atmospheric pressure : 101 kPa

EUT Information

EUT Name: DJI OM6
Order No: 168376651 120
Model: OE200
Test Mode: Bluetooth linked
Test Voltage: AC 120V/60Hz
Test By/Review By: Mac Xie/Gary Chen
Test Standard: FCC part 15B
Tem./Hum./Pressure: 24.2°C/53.4%/101kPa
Remark: SR1

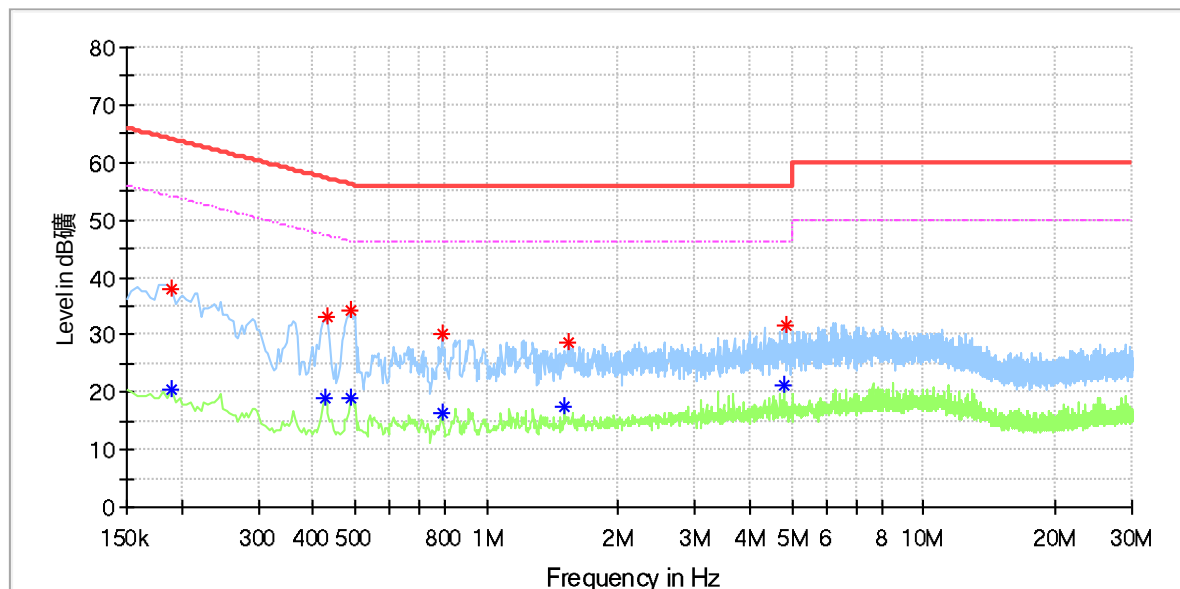


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.190000	---	20.65	54.04	33.39	N	9.6
0.190000	38.02	---	64.04	26.01	N	9.6
0.426000	---	19.00	47.33	28.33	N	9.7
0.430000	33.03	---	57.25	24.22	N	9.7
0.486000	---	18.86	46.24	27.37	N	9.7
0.490000	34.20	---	56.17	21.96	N	9.7
0.792000	30.20	---	56.00	25.80	N	9.7
0.792000	---	16.30	46.00	29.70	N	9.7
1.504000	---	17.50	46.00	28.50	N	9.7
1.548000	28.76	---	56.00	27.24	N	9.7
4.804000	---	21.26	46.00	24.74	N	10.0
4.856000	31.61	---	56.00	24.39	N	10.0

EUT Information

EUT Name: DJI OM6
Order No: 168376651 120
Model: OE200
Test Mode: Bluetooth linked
Test Voltage: AC 120V/60Hz
Test By/Review By: Mac Xie/Gary Chen
Test Standard: FCC part 15B
Tem./Hum./Pressure: 24.2°C/53.4%/101kPa
Remark: SR1

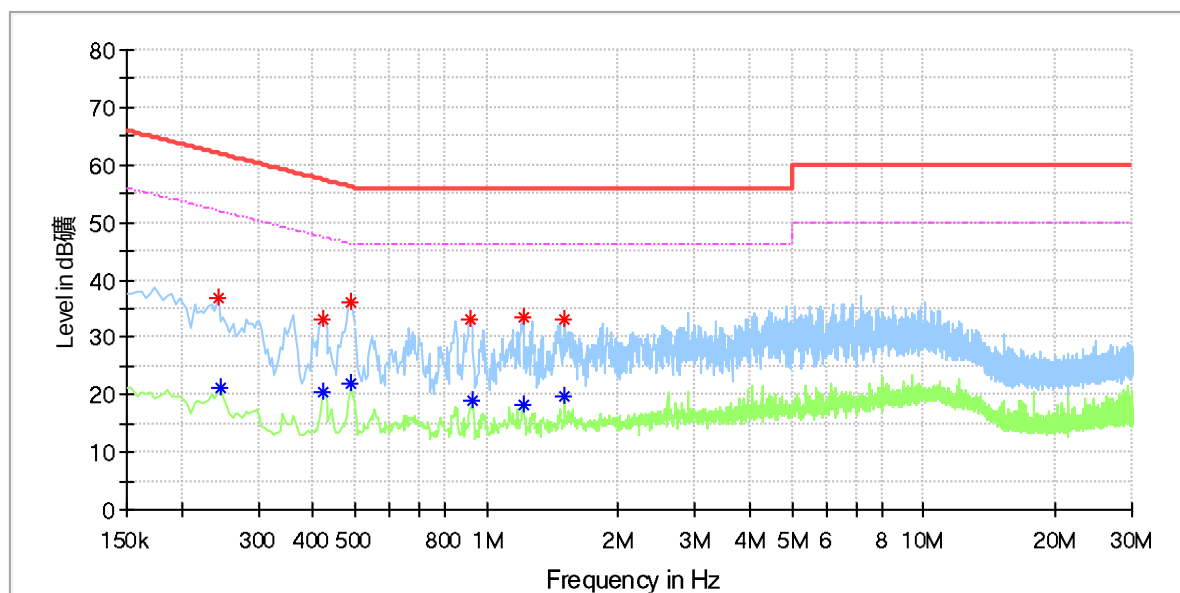

Critical Freqs

Frequency (MHz)	MaxPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
0.242000	37.02	---	62.03	25.01	L1	9.6
0.246000	---	21.20	51.89	30.69	L1	9.6
0.422000	33.20	---	57.41	24.21	L1	9.7
0.422000	---	20.30	47.41	27.10	L1	9.7
0.490000	36.24	---	56.17	19.92	L1	9.7
0.490000	---	21.94	46.17	24.23	L1	9.7
0.920000	33.17	---	56.00	22.83	L1	9.7
0.932000	---	18.90	46.00	27.10	L1	9.7
1.212000	33.34	---	56.00	22.66	L1	9.7
1.212000	---	18.27	46.00	27.73	L1	9.7
1.508000	32.95	---	56.00	23.05	L1	9.8
1.508000	---	19.89	46.00	26.11	L1	9.8

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.