

DJ TX2 2.4G 20M 2437.5MHz Right side ANT0 45mm-NV-2

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2437.5 MHz;

Medium parameters used (interpolated): $f = 2437.5$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 40.785$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.75, 7.75, 7.75); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (9x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.291 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (7x7x5)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.307 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.349 W/kg

SAR(1 g) = 0.202 W/kg; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.293 W/kg

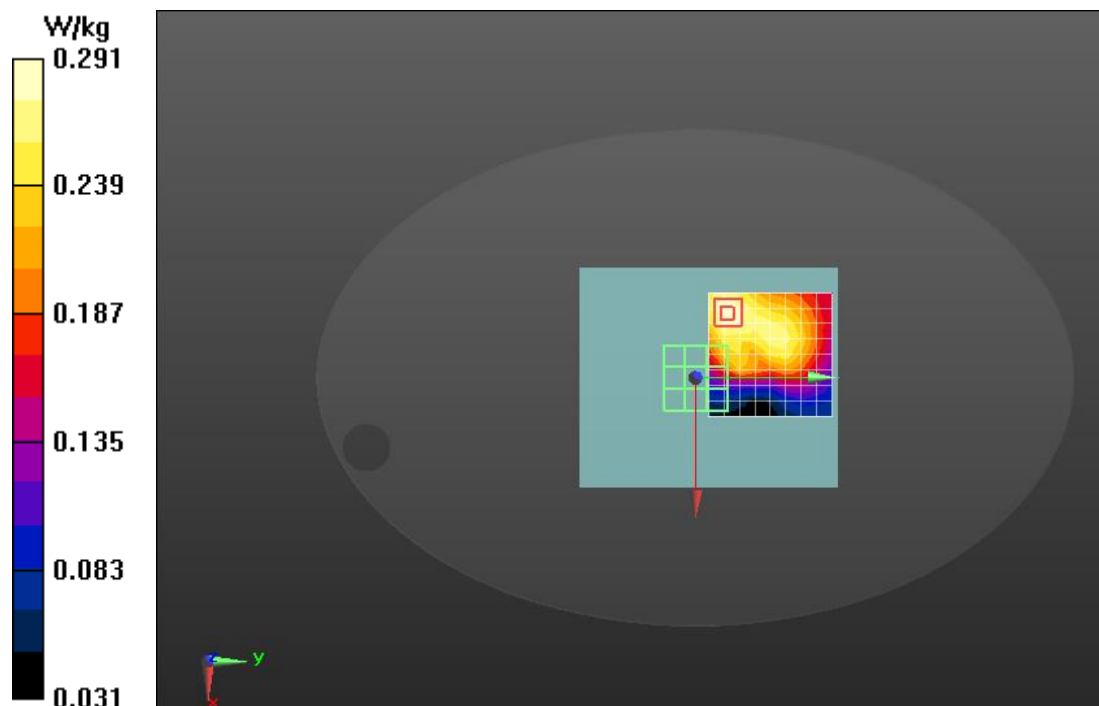

DJ TX2 2.4G 20M 2412.5MHz Right side ANT1 45mm-NV-3

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2412.5 MHz;

Medium parameters used (interpolated): $f = 2412.5$ MHz; $\sigma = 1.8$ S/m; $\epsilon_r = 40.875$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.75, 7.75, 7.75); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (9x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.283 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (7x7x5)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.824 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.342 W/kg

SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.284 W/kg

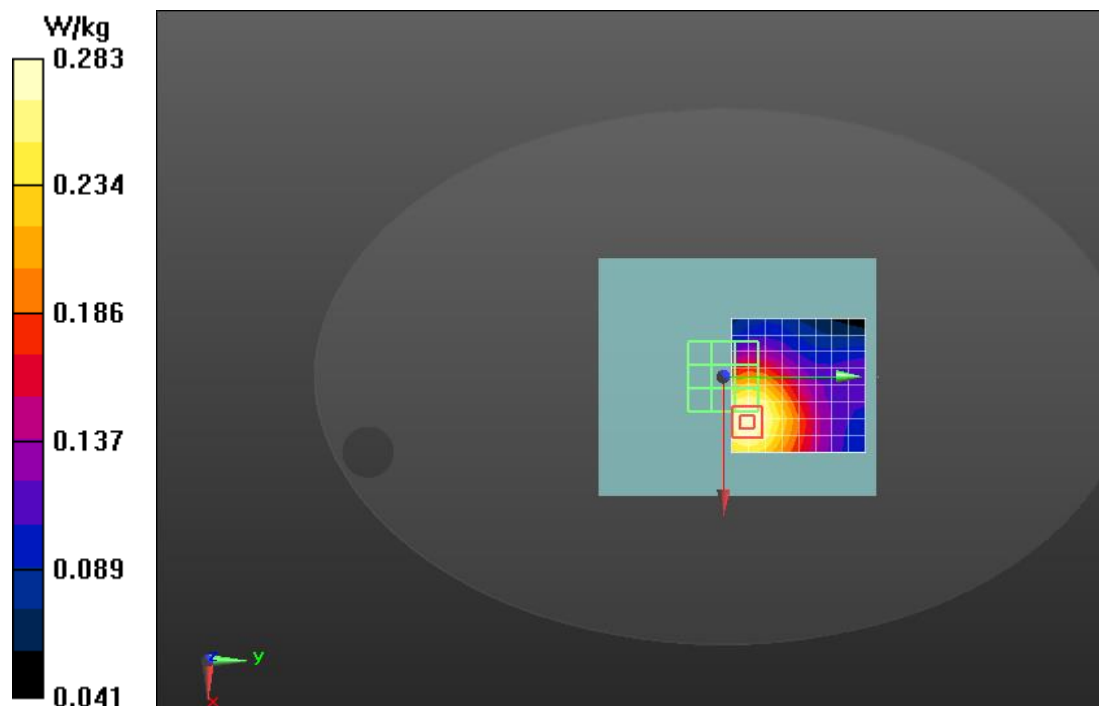

DJ TX2 2.4G 10M 2407.5MHz Right side ANT2 45mm-NV-2

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 2407.5 MHz;

Medium parameters used (interpolated): $f = 2407.5$ MHz; $\sigma = 1.796$ S/m; $\epsilon_r = 40.885$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.75, 7.75, 7.75); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (8x7x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.249 W/kg


Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (7x7x5)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.875 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.297 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.106 W/kg

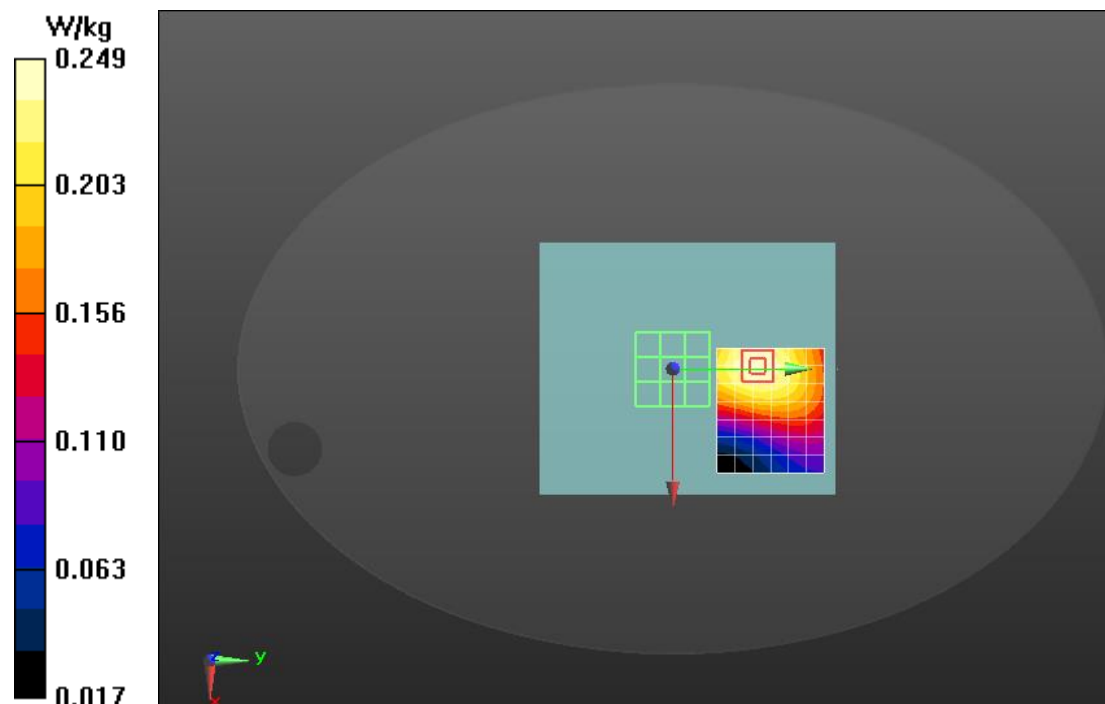

DJ TX2 10M 5730.5MHz Left side ANT0 70mm-NV-2

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5730.5 MHz;

Medium parameters used: $f = 5730.5$ MHz; $\sigma = 5.14$ S/m; $\epsilon_r = 35.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (11x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.18 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 5.115 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.565 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 1.17 W/kg

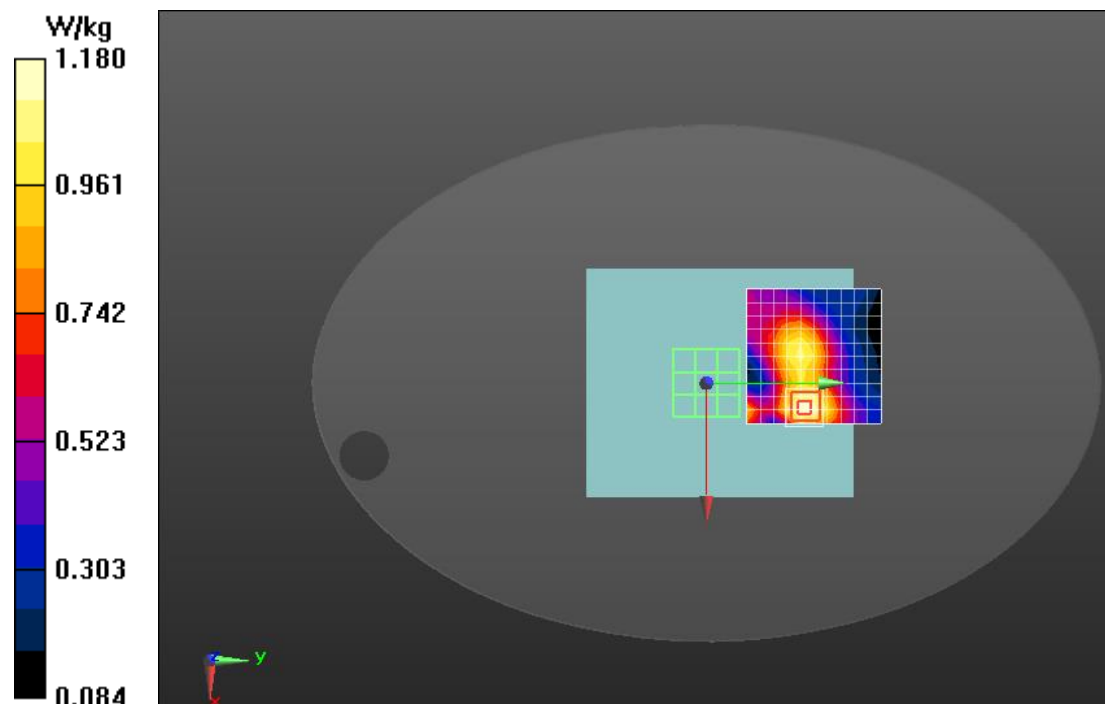

DJ TX2 20M 5735.5MHz Right side ANT1 70mm-NV-3

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5735.5 MHz;

Medium parameters used: $f = 5735.5$ MHz; $\sigma = 5.14$ S/m; $\epsilon_r = 35.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (13x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.806 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 7.331 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.391 W/kg; SAR(10 g) = 0.183 W/kg

Maximum value of SAR (measured) = 0.804 W/kg

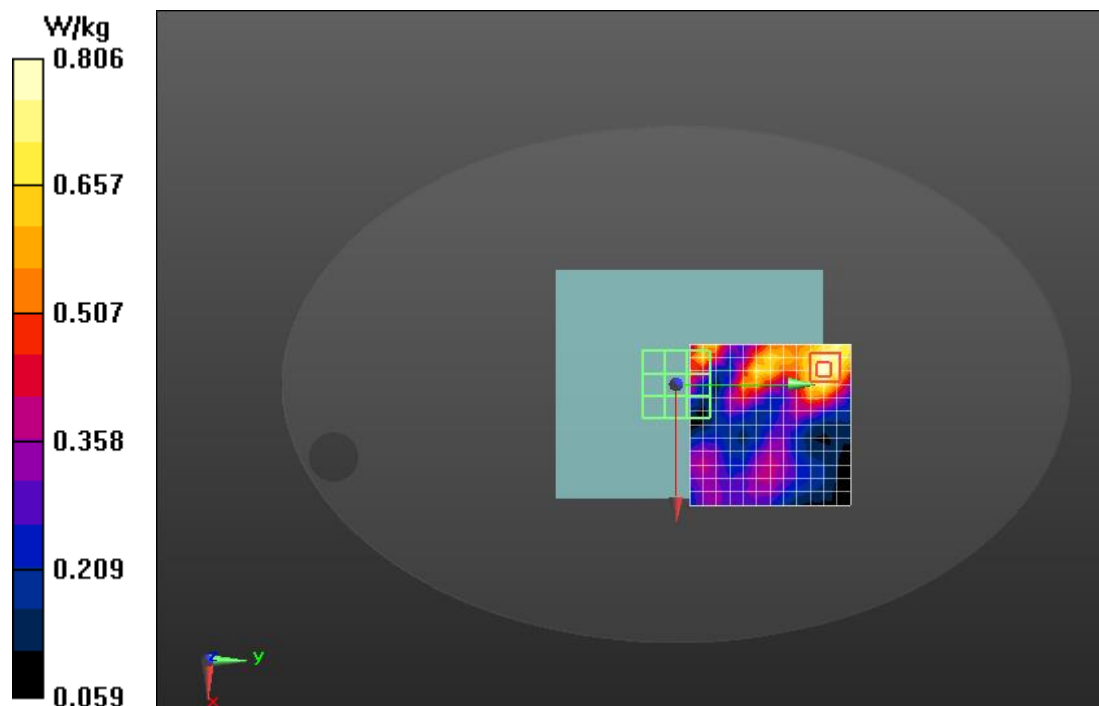

DJ TX2 20M 5839.5MHz Right side ANT2 70mm-NV-3 worst case with handle

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5839.5 MHz;

Medium parameters used: $f = 5839.5$ MHz; $\sigma = 5.3$ S/m; $\epsilon_r = 34.21$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (9x14x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.42 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 9.617 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 0.693 W/kg; SAR(10 g) = 0.328 W/kg

Maximum value of SAR (measured) = 1.45 W/kg

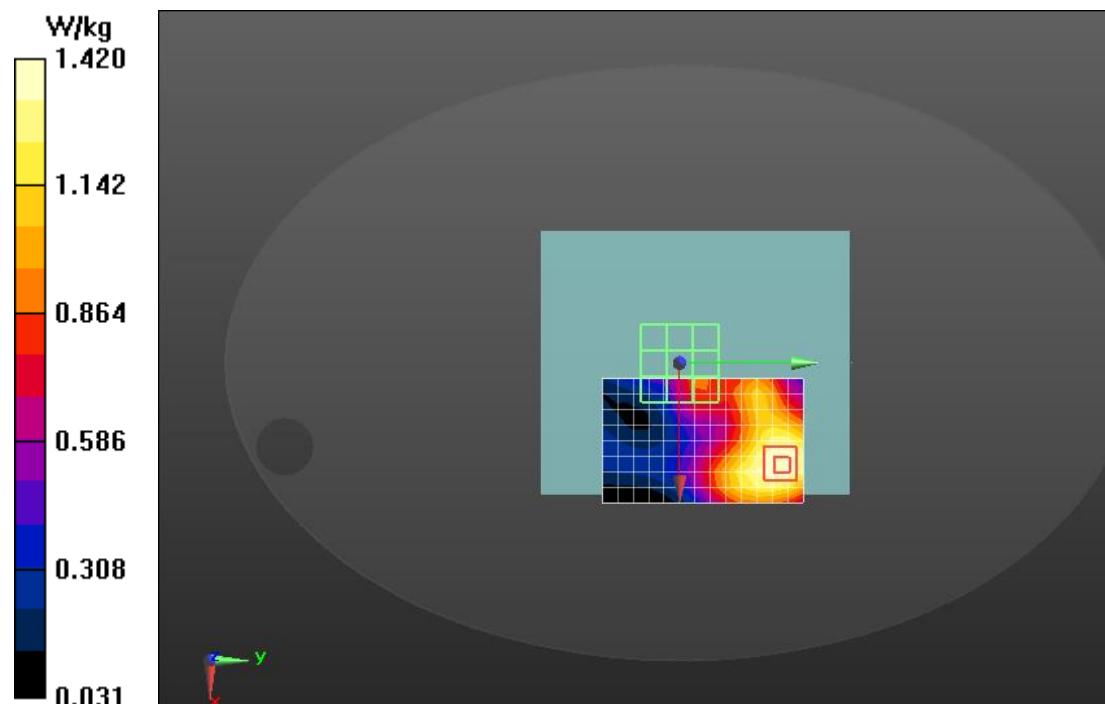

DJ TX2 5.2G 40M 5270MHz Right side ANT2 45mm-NV-3

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G

Band(5030.0 - 5825.0 MHz); Frequency: 5270 MHz;

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.78$ S/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.68, 5.68, 5.68); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (12x8x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.314 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (9x8x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.422 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.485 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.320 W/kg

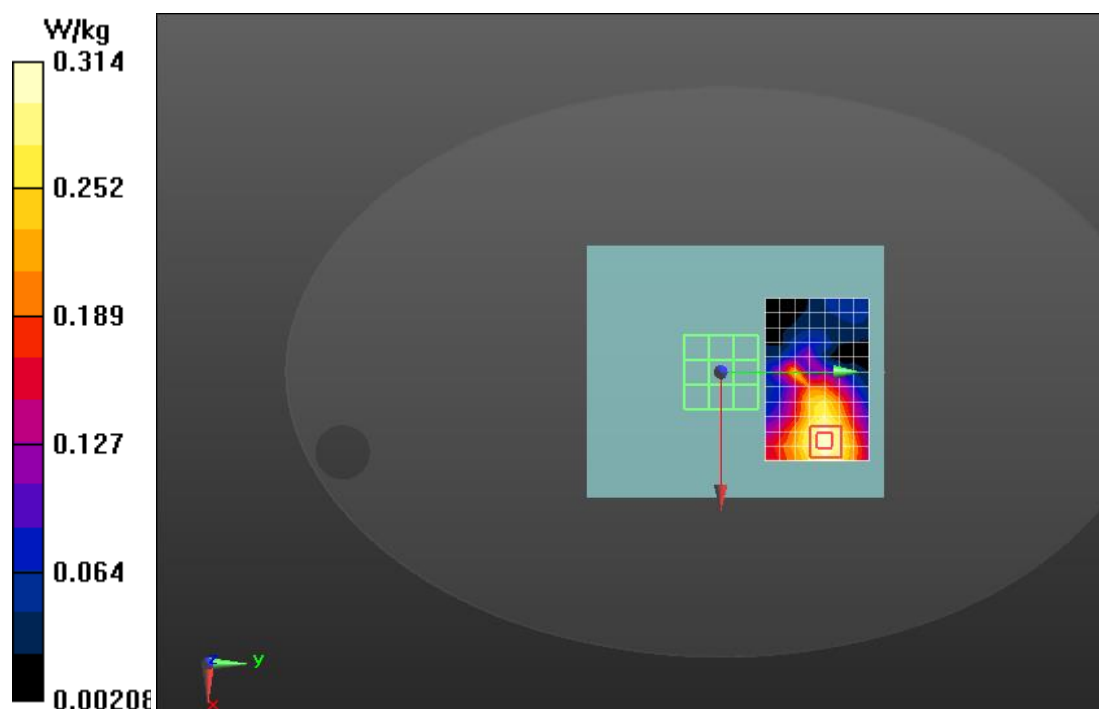

DJ TX2 5.5G 40M 5590MHz Right side ANT2 45mm-NV-3

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G

Band(5030.0 - 5825.0 MHz); Frequency: 5590 MHz;

Medium parameters used: $f = 5590$ MHz; $\sigma = 5.02$ S/m; $\epsilon_r = 35.79$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.1, 5.1, 5.1); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (8x8x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.919 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.383 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.950 W/kg

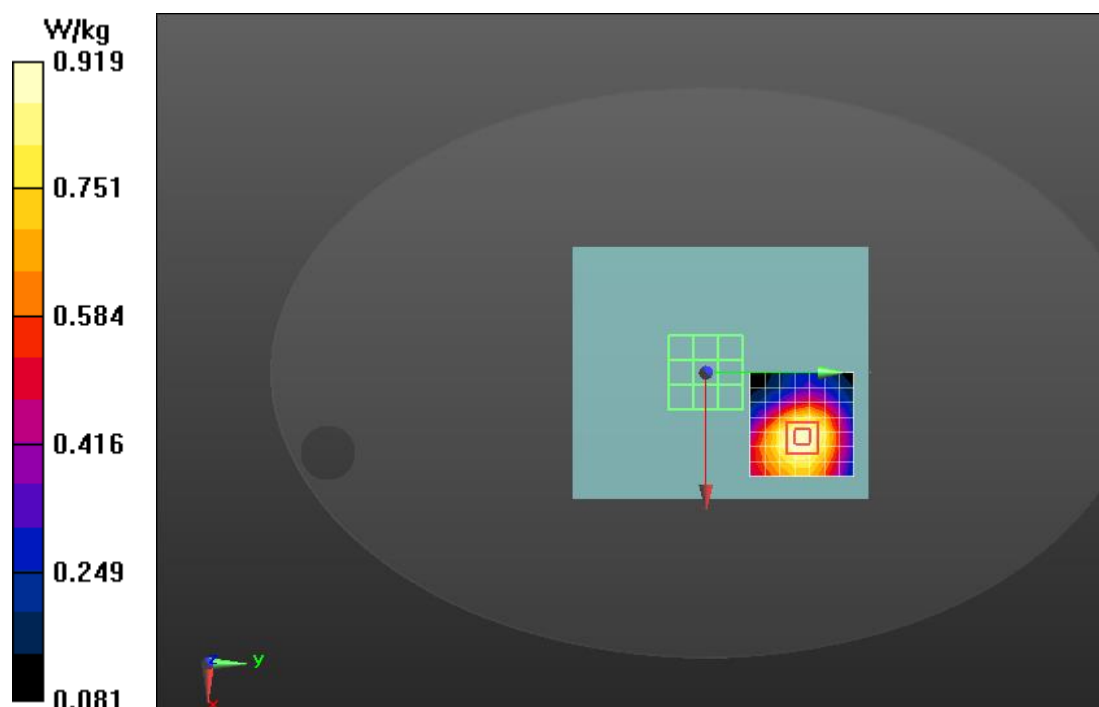

DJ TX2 20M 5839.5MHz Left side ANT3 70mm-NV-3

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5839.5 MHz;

Medium parameters used: $f = 5839.5$ MHz; $\sigma = 5.3$ S/m; $\epsilon_r = 34.21$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (8x8x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.892 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.555 V/m; Power Drift = 0.05B

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.428 W/kg; SAR(10 g) = 0.165 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

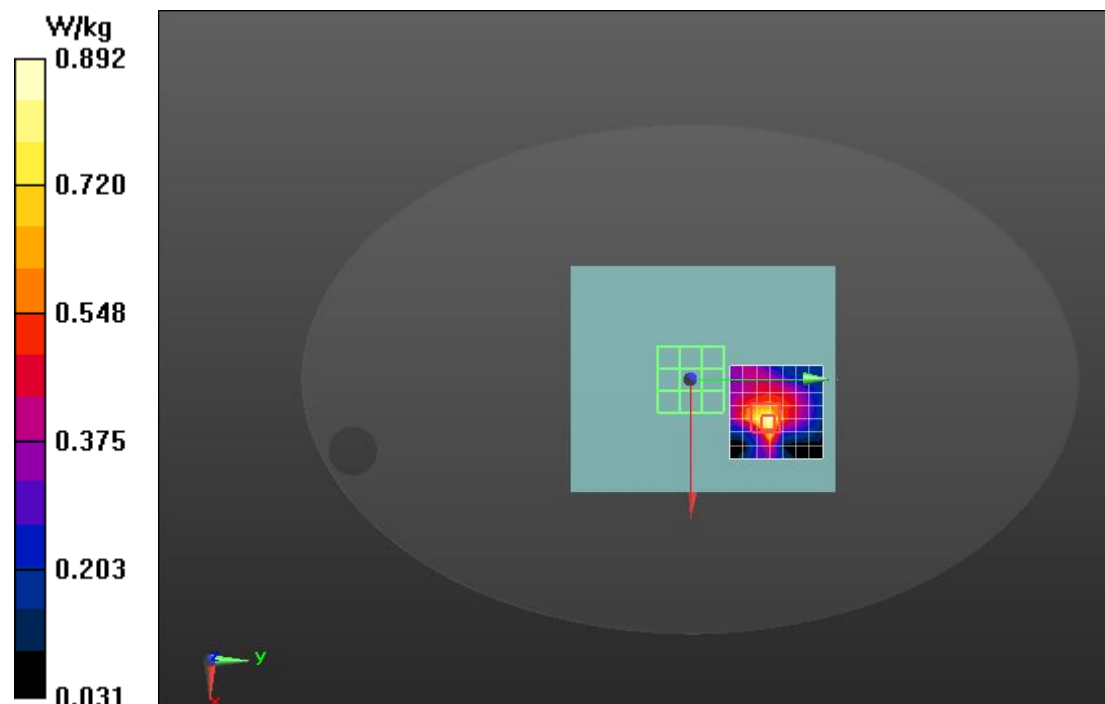

DJ TX2 5.5G 40M 5590MHz Right side ANT1 45mm-NV-3

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G

Band(5030.0 - 5825.0 MHz); Frequency: 5590 MHz;

Medium parameters used: $f = 5590$ MHz; $\sigma = 5.02$ S/m; $\epsilon_r = 35.79$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.1, 5.1, 5.1); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 29.0, -59.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x7)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 5.296 V/m; Power Drift = 0.20 dB


Peak SAR (extrapolated) = 0.414 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.253 W/kg

Configuration/OBD/Area Scan (10x8x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.238 W/kg

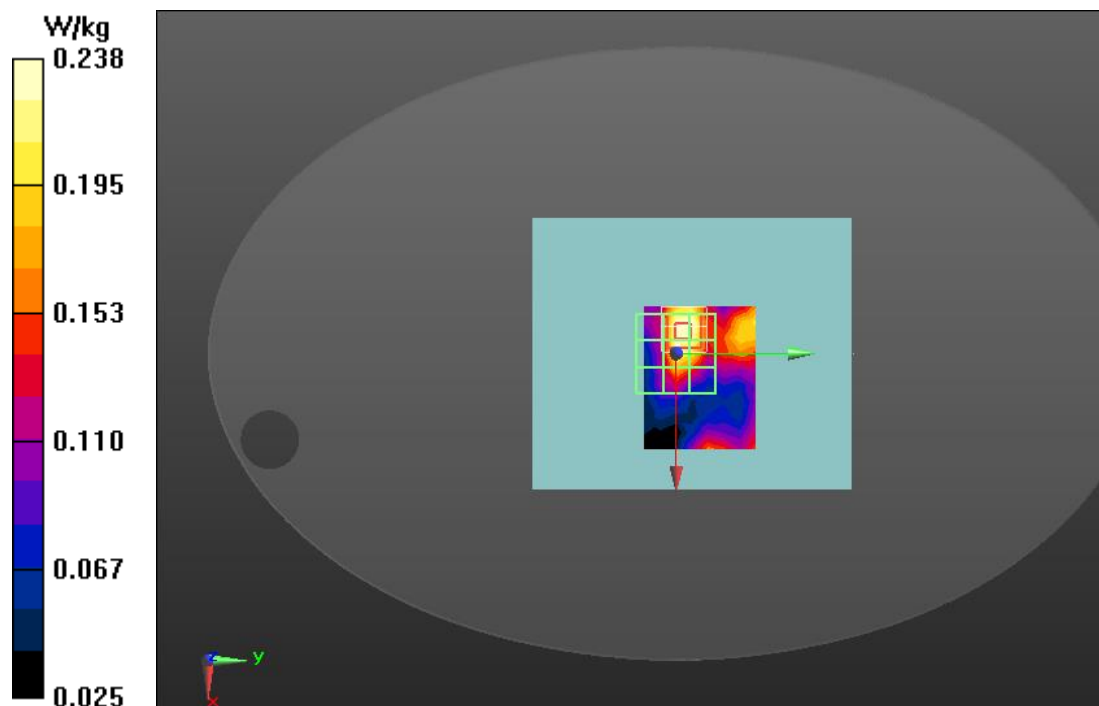

DJ TX2 5.2G 40M 5270MHz Right side ANT1 45mm-NV-3


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5270 MHz;
Medium parameters used: $f = 5270$ MHz; $\sigma = 4.78$ S/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.68, 5.68, 5.68); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (8x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.452 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (9x9x7)/Cube 0:
Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 5.399 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.677 W/kg
SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.103 W/kg
Maximum value of SAR (measured) = 0.442 W/kg

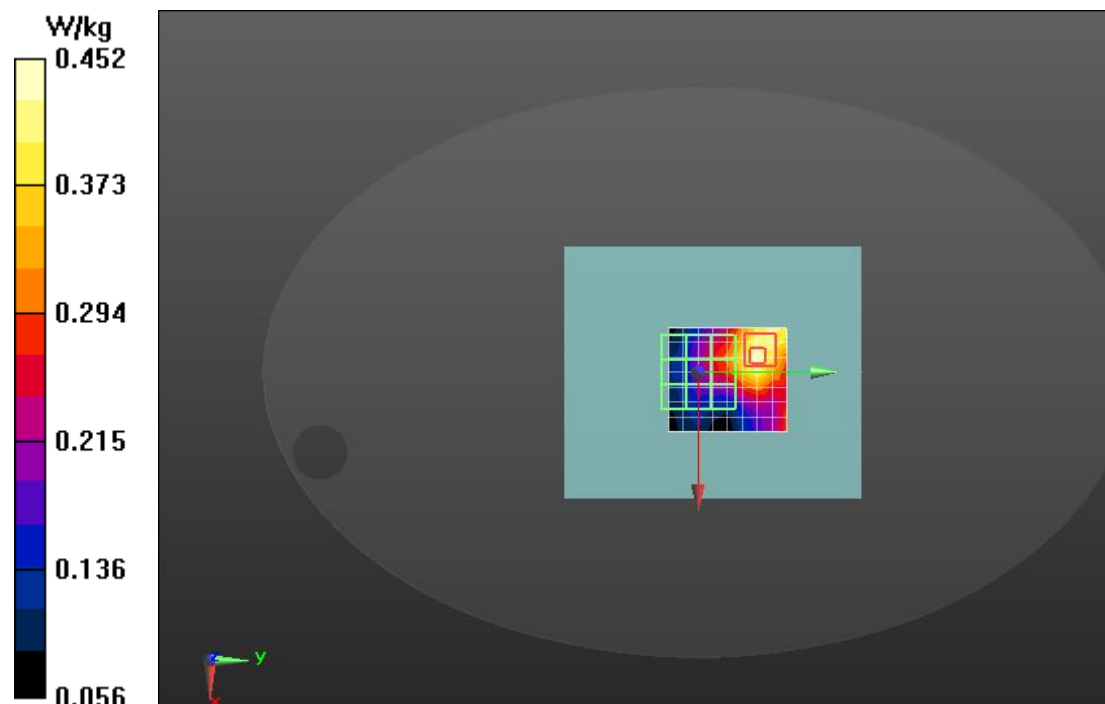

DJ TX2 20M 5320MHz Left side ANT0 45mm-NV-2


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5320 MHz;
Medium parameters used: $f = 5320$ MHz; $\sigma = 4.77$ S/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.68, 5.68, 5.68); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (9x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.552 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x7)/Cube 0:
Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 2.552 V/m; Power Drift = -0.06dB
Peak SAR (extrapolated) = 0.829 W/kg
SAR(1 g) = 0.279 W/kg; SAR(10 g) = 0.131 W/kg
Maximum value of SAR (measured) = 0.553 W/kg

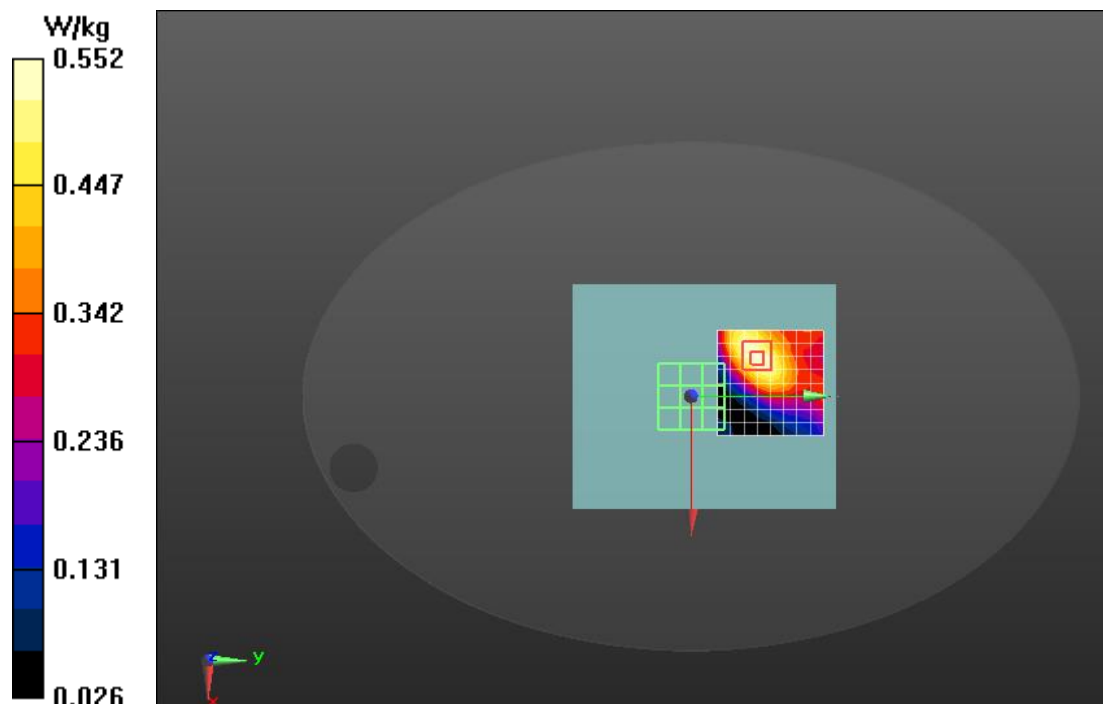

DJ TX2 40M 5670MHz Left side ANT0 45mm-NV-6

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G

Band(5030.0 - 5825.0 MHz); Frequency: 5670 MHz;

Medium parameters used: $f = 5700$ MHz; $\sigma = 5.04$ S/m; $\epsilon_r = 35.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.1, 5.1, 5.1); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (10x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.687 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.947 V/m; Power Drift = 0.17dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.333 W/kg; SAR(10 g) = 0.150 W/kg

Maximum value of SAR (measured) = 0.700 W/kg

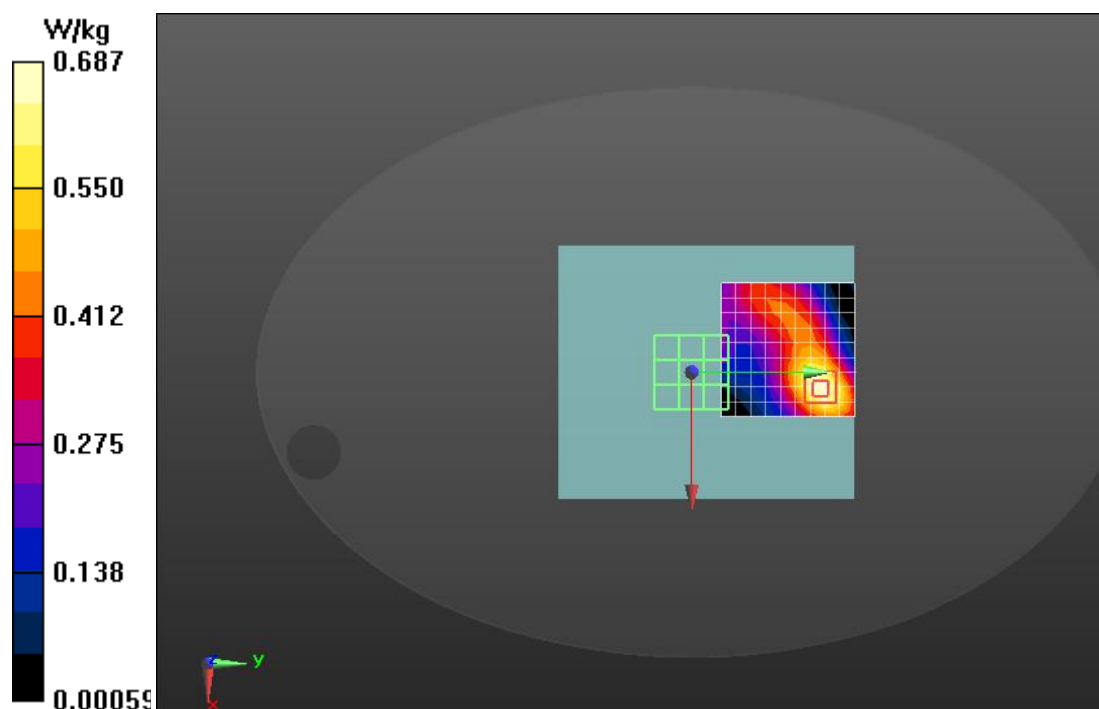

DJ TX2 5.2G 20M 5260MHz Left side ANT3 45mm-NV-2


Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5260 MHz;
Medium parameters used: $f = 5260$ MHz; $\sigma = 4.77$ S/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.68, 5.68, 5.68); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (11x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.0747 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (9x8x7)/Cube 0:
Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm
Reference Value = 1.569 V/m; Power Drift = 0.03dB
Peak SAR (extrapolated) = 0.273 W/kg
SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.010 W/kg
Maximum value of SAR (measured) = 0.0601 W/kg

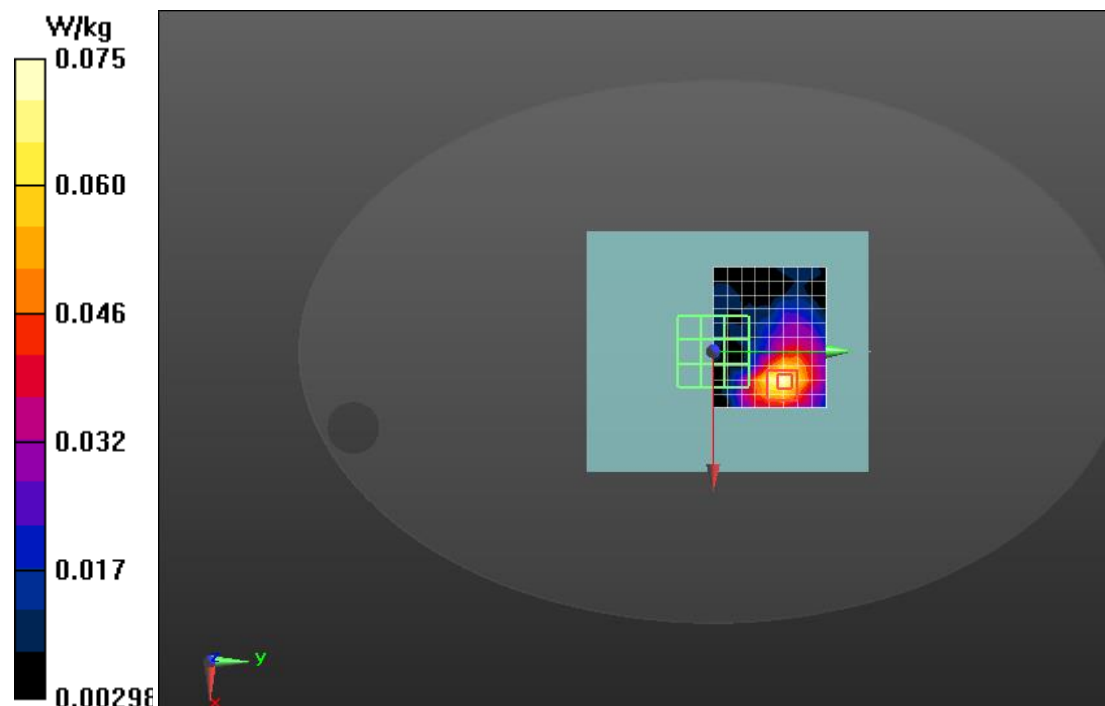

DJ TX2 5.5G 40M 5510MHz Left side ANT3 45mm-NV-9

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G

Band(5030.0 - 5825.0 MHz); Frequency: 5510 MHz;

Medium parameters used: $f = 5510$ MHz; $\sigma = 4.99$ S/m; $\epsilon_r = 36.0$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.1, 5.1, 5.1); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (9x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.143 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x9x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 1.880 V/m; Power Drift = 0.07dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.145 W/kg

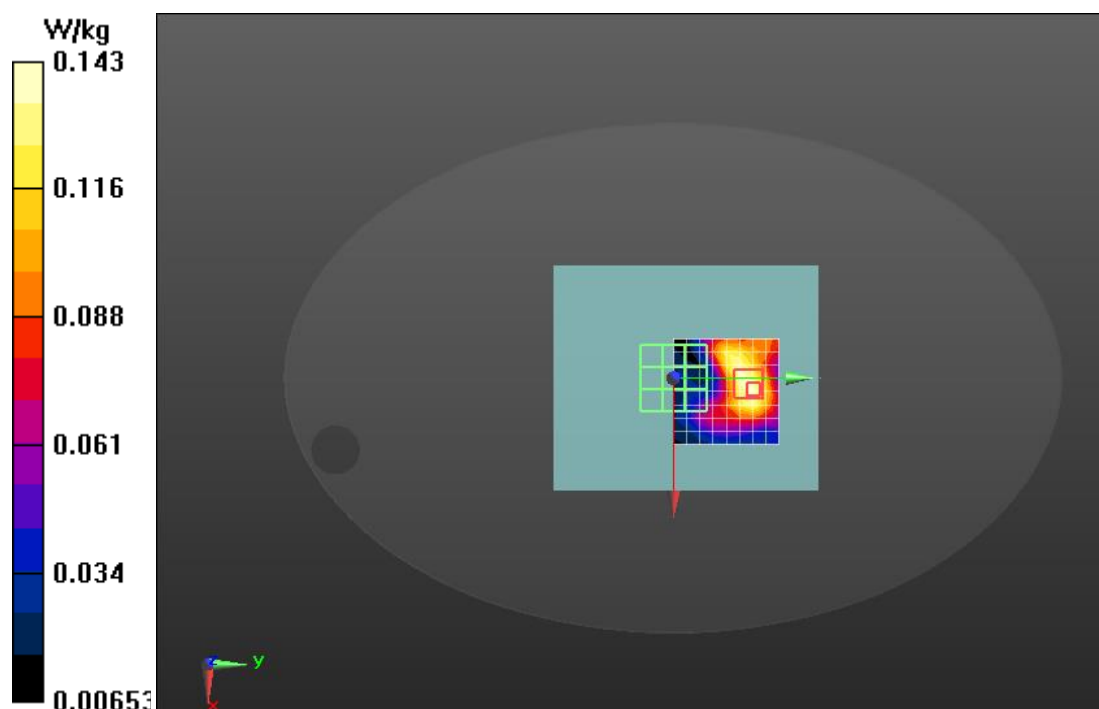

DJ TX2 20M 5839.5MHz Right side ANT2 50mm-NV-3

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;

Frequency: 5839.5 MHz;

Medium parameters used: $f = 5839.5$ MHz; $\sigma = 5.3$ S/m; $\epsilon_r = 34.21$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.12, 5.12, 5.12); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (9x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.77 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (8x8x7)/Cube 0:


Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 7.930 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 0.885 W/kg; SAR(10 g) = 0.414 W/kg

Maximum value of SAR (measured) = 1.82 W/kg

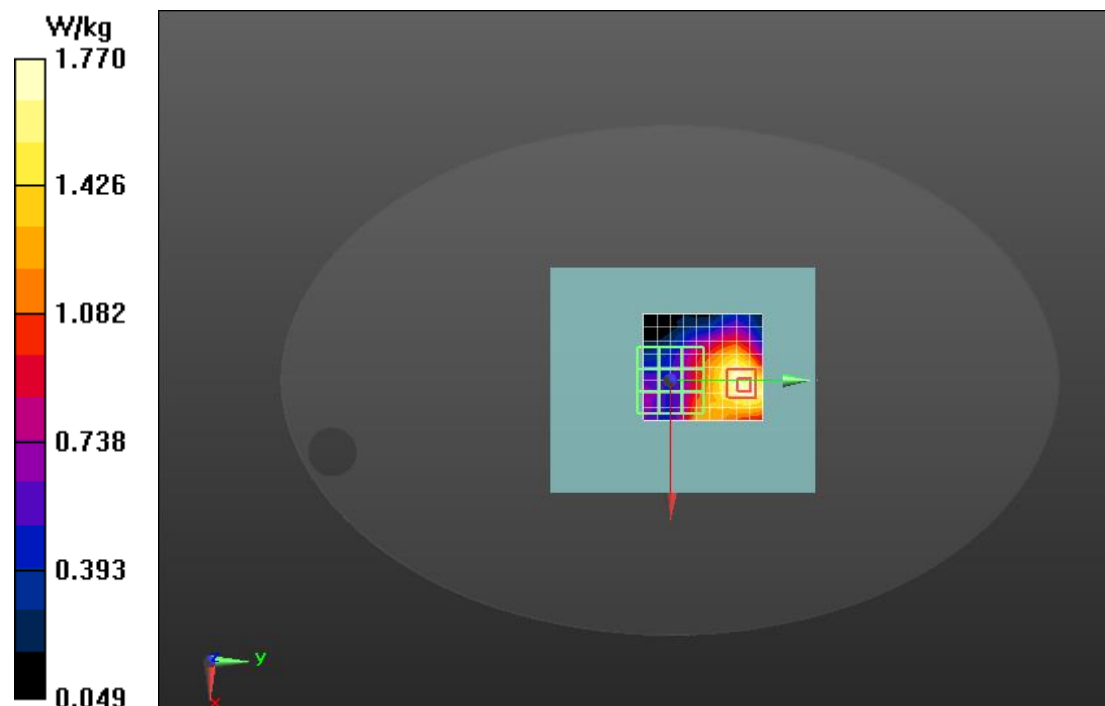

DJ TX2 2.4G 10M 2407.5MHz Left side ANT3 45mm-NV-2

Communication System: UID 0, Selfdefined (0); Communication System Band: Random;
Frequency: 2407.5 MHz;

Medium parameters used (interpolated): $f = 2407.5$ MHz; $\sigma = 1.796$ S/m; $\epsilon_r = 40.885$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.75, 7.75, 7.75); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -59.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/OBD/Area Scan (8x7x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.126 W/kg

Configuration/OBD/Zoom Scan (5x5x5mm, graded), dist=1.4mm (7x7x5)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.981 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.128 W/kg

