
FCC Test Report

Report No.: AGC05786170701FE03

FCC ID : 2ANFHEB-002

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : Bluetooth Headphone

BRAND NAME : N/A

MODEL NAME : EB-002, M02, BH-002, UltraUrban

CLIENT : HUIZHOU NEW LEADER INDUSTRY CO., LTD.

DATE OF ISSUE : Jul05, 2017

STANDARD(S) : FCC Part 15 Subpart C Section 15.249

TEST PROCEDURE(S)

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jul.05, 2017	Valid	Original Report

TABLE OF CONTENTS

1 VERIFICATION OF CONFORMITY	4
2 GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
3 MEASUREMENT UNCERTAINTY.....	6
4 DESCRIPTION OF TEST MODES.....	6
5 SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM.....	8
5.2. EQUIPMENT USED IN EUT SYSTEM.....	8
5.3. SUMMARY OF TEST RESULTS.....	8
6 TEST FACILITY	9
7 TEST METHOD	9
8 TEST EQUIPMENT LIST	9
9 RADIATED EMISSION	11
9.1TEST LIMIT.....	11
9.2. MEASUREMENT PROCEDURE.....	12
9.3. TEST SETUP	14
9.4. TEST RESULT	16
10 BAND EDGE EMISSION	31
10.1. MEASUREMENT PROCEDURE.....	31
10.2 TEST SETUP	31
10.3 RADIATED TEST RESULT	32
11 20DB BANDWIDTH.....	36
11.1. MEASUREMENT PROCEDURE	36
11.2. TEST SET-UP	36
11.3. LIMITS AND MEASUREMENT RESULTS	36
12 FCC LINE CONDUCTED EMISSION TEST	43
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	43
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	43
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	44
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	44
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	44
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	45
APPENDIX B: PHOTOGRAPHS OF EUT	47


1. VERIFICATION OF CONFORMITY

Applicant	HUIZHOU NEW LEADER INDUSTRY CO., LTD.
Address	BAIYUNSHAN ROAD, CHENJIANGTOWN, HUIZHOU, GUANGDONG, CHINA.516029
Manufacturer	HUIZHOU NEW LEADER INDUSTRY CO., LTD.
Address	BAIYUNSHAN ROAD, CHENJIANG TOWN, HUIZHOU, GUANGDONG, CHINA, 516029
Product Designation	Bluetooth Headphone
Brand Name	N/A
Test Model	EB-002
Series Model	M02, BH-002, UltraUrban
Difference description	All the same except for the model name.
Date of test	Jul.01, 2017 to Jul.02, 2017
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.

Tested By



Henry Zhang(Zhang Zhuorui)

Jul.02, 2017

Reviewed By



Forrest Lei(Lei Yonggang)

Jul.05, 2017

Approved By



Solger Zhang(Zhang Hongyi)
Authorized Officer

Jul.05, 2017

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	-0.86dBm(Max EIRP Power=Max radiation field-95.2)
Bluetooth Version	V4.1
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of channels	79 for BR/EDR
Hardware Version	V1.0
Software Version	V1.0
Antenna Designation	PCB Antenna
Antenna Gain	0dBi
Power Supply	DC 3.7V by battery
Note: 1. The USB port only be used for charging and can't be used to transfer data with PC. 2. The EUT didn't support BLE. 3. The BT function of EUT didn't work when charging.	

2.2. TABLE OF CARRIER FREQUENCIES

BR/EDR channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402MHz
	1	2403MHz
	:	:
	38	2440 MHz
	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link

Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.

Software Setting

The screenshot shows the BlueTest3 software interface. It has a blue title bar with the text 'BlueTest3' and standard window controls. The interface is divided into several sections:


- Test Mode:** A list box on the left containing the following items: PAUSE, RADIO STATUS, RADIO STATUS FULL, TXSTART, TXDATA1 (highlighted), TXDATA2, TXDATA3, TXDATA4, RXSTART1, RXSTART2, and RXDATA1.
- Test Arguments:** A section on the right with input fields for 'LO Freq. (MHz)' (value: 2402) and 'Power (Ext, Int)' (values: 55 and 50). Below these are buttons for 'Close', 'Execute', 'Cold Reset', and 'Warm Reset'.
- Test Results:** A section below the test mode list. It includes a checkbox for 'Save to file', a 'Browse for file' button, and a 'Display' section with radio buttons for 'Standard' (selected) and 'Bit Error'. Below this is a text field containing the file path '.\logfile.txt'.
- Command Log:** A large text area at the bottom displaying the following text:

```
Opening USB SPI (600732).
Transport active.
dal (Hardware ID 0x332) firmware version 8648.
Sent Command Varid 5004, parameters: 0017 0003 0011 0000 0000 0000
Radio Test CFG PKT successful
Sent Command Varid 5004, parameters: 0004 0962 FF32 0000 0000 0000
Radio Test TXDATA1 successful
Sent Command Varid 5004, parameters: 0004 0962 3232 0000 0000 0000
Radio Test TXDATA1 successful
Sent Command Varid 5004, parameters: 0004 0989 3232 0000 0000 0000
Radio Test TXDATA1 successful
Sent Command Varid 5004, parameters: 0004 0989 3228 0000 0000 0000
Radio Test TXDATA1 successful
Sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000 0000
Radio Test TXDATA1 successful
Sent Command Varid 5004, parameters: 0004 09B0 3728 0000 0000 0000
Radio Test TXDATA1 successful
Sent Command Varid 5004, parameters: 0004 0962 3728 0000 0000 0000
Radio Test TXDATA1 successful
```


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)

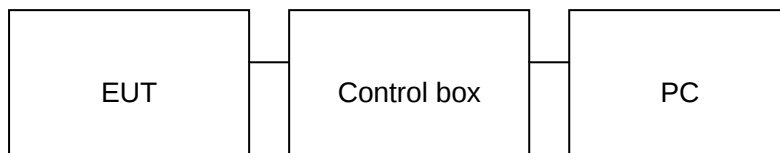

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Bluetooth Headphone	NEW LEADER	EB-002	EUT
2	Battery	SP	502627	Accessory
3	PC	SONY	E1412AYCW	A.E
4	PC Adapter	SONY	VGP-AC19V36	A.E
5	Control box	CSR	USB_SPI_TOOLS	A.E
6	USB Cable	N/A	1m unshielded	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a) §15.209	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	N/A
§15.215	Bandwidth	Compliant

Note: N/A means it's not applicable to this item.

6. TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.

7.TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

8. TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHz)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101417	July 4, 2016	July 3, 2017
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2016	July 3, 2017
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2016	July 3, 2017
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2016	July 3, 2017
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	SCHWARZBECK	FMZB1519	1519-038	June 6, 2017	June 5, 2018
Spectrum analyzer	AGILENT	E4407B	MY46185649	June 6, 2017	June 5, 2018
Radiation Cable 1	MXT	RS1	R005	June 6, 2017	June 5, 2018
Radiation Cable 2	MXT	RS1	R006	June 6, 2017	June 5, 2018
temporary antenna connector	N/A	S100	--	July 4, 2016	July 3, 2017

FOR RADIATED EMISSION TEST (1GHz ABOVE)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101417	July 4, 2016	July 3, 2017
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2016	July 10, 2017
Spectrum Analyzer	AGILENT	E4411B	MY4511453	July 4, 2016	July 3, 2017
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2016	July 6, 2017
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2016	July 7, 2017
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	June 6, 2017	June 5, 2018
Radiation Cable 1	MXT	RS1	R005	June 6, 2017	June 5, 2018
Radiation Cable 2	MXT	RS1	R006	June 6, 2017	June 5, 2018

9. RADIATED EMISSION

9.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other: 74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark: (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

9.2. MEASUREMENT PROCEDURE


1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz RBW 2MHz/ VBW 6MHz for Peak, RBW 1.5MHz/ VBW 10Hz for Average
Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

9.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

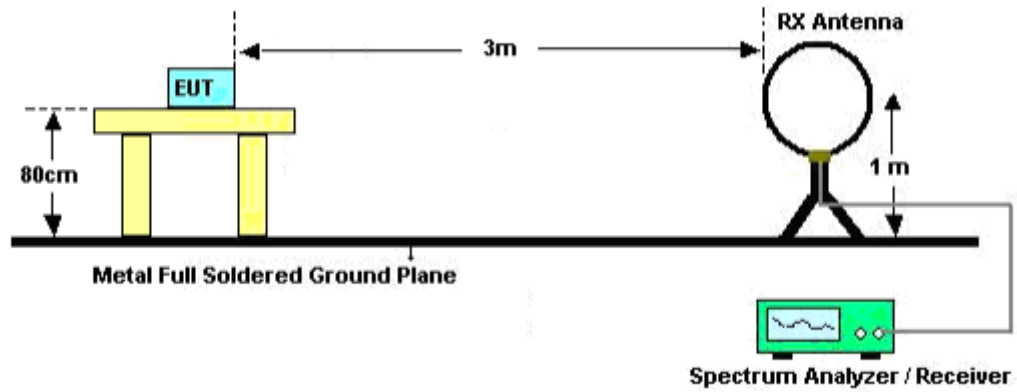

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

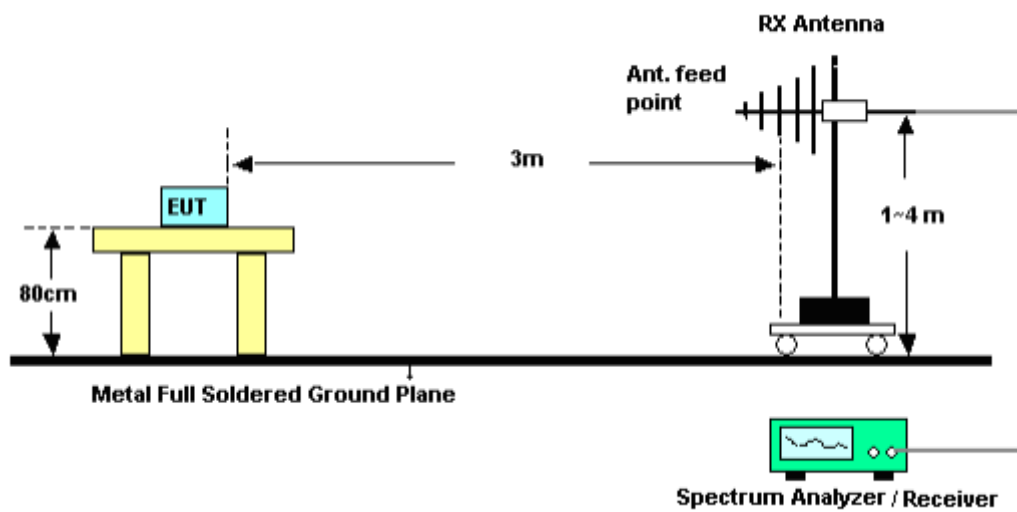

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

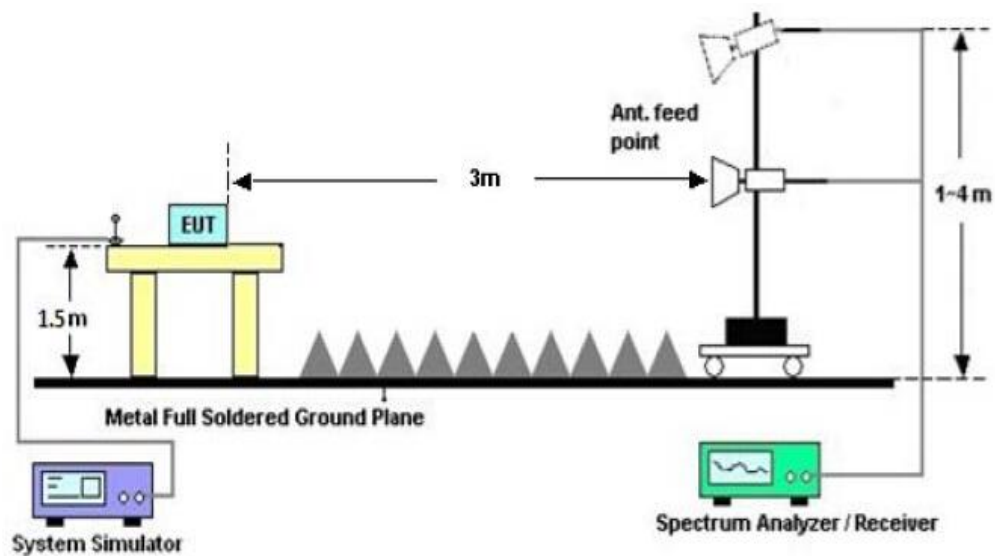

9.4. TEST RESULT

(Worst modulation:GFSK)


FOR BR/EDR

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

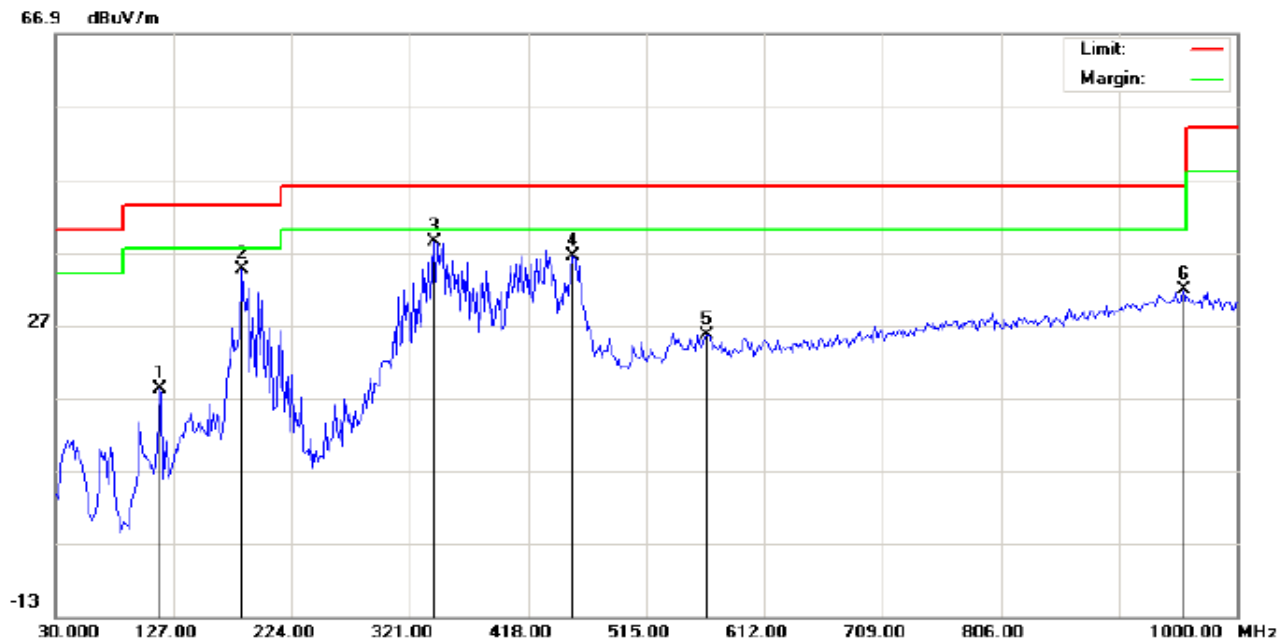

Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Bluetooth Headphone
M/N: EB-002
Mode:Low Channel TX
Note:

Polarization: **Horizontal**
Power:
Distance:

Temperature: 22.4
Humidity: 52.5 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		115.6833	11.37	6.86	18.23	43.50	-25.27	peak			
2		183.5833	23.45	11.24	34.69	43.50	-8.81	peak			
3	*	340.4000	20.36	18.10	38.46	46.00	-7.54	peak			
4		455.1833	15.70	20.65	36.35	46.00	-9.65	peak			
5		565.1167	2.73	22.86	25.59	46.00	-20.41	peak			
6		956.3500	1.82	29.94	31.76	46.00	-14.24	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL



Site: site #1

Polarization: **Vertical**

Temperature: 22.4

Limit: FCC Class B 3M Radiation

Power:

Humidity: 52.5 %

EUT:Bluetooth Headphone

Distance:

M/N: EB-002

Mode:Low Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		109.2167	20.04	1.49	21.53	43.50	-21.97	peak			
2		183.5833	16.35	13.16	29.51	43.50	-13.99	peak			
3	*	351.7167	16.10	18.75	34.85	46.00	-11.15	peak			
4		443.8667	5.45	20.40	25.85	46.00	-20.15	peak			
5		707.3833	1.41	25.40	26.81	46.00	-19.19	peak			
6		925.6333	0.98	29.32	30.30	46.00	-15.70	peak			

RESULT: PASS**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

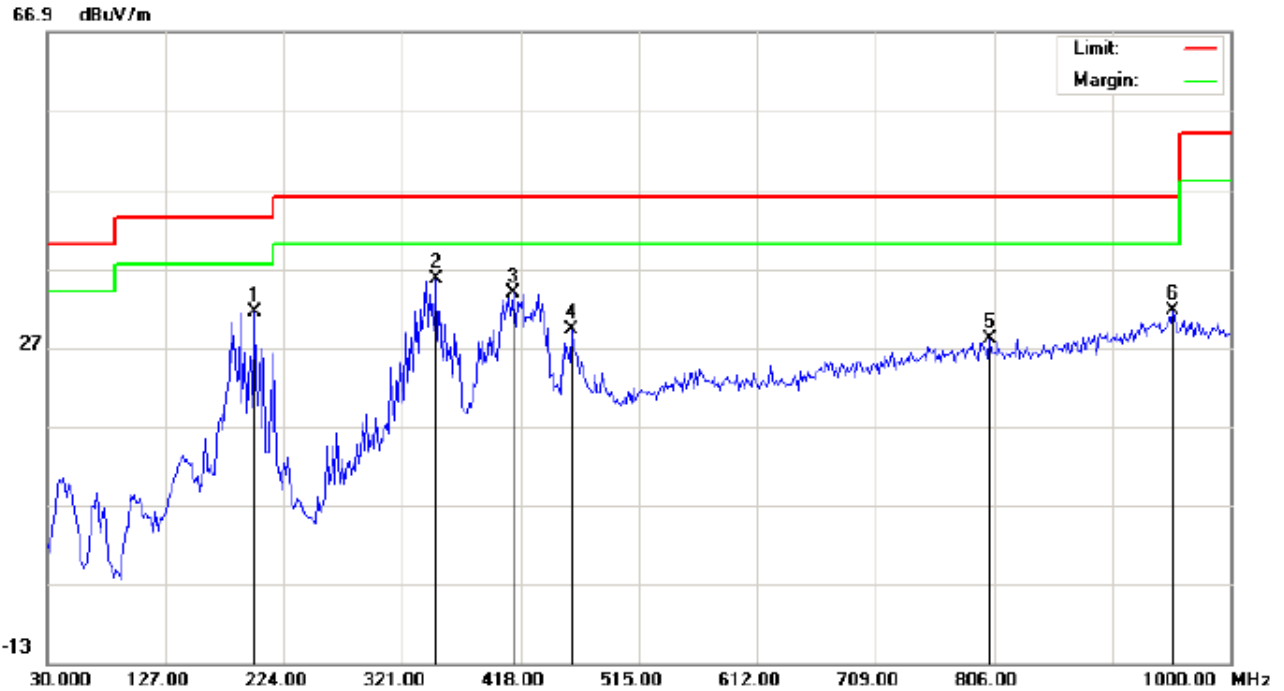

Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Bluetooth Headphone
M/N: EB-002
Mode:Middle Channel TX
Note:


Polarization: **Horizontal**
Power:
Distance:

Temperature: 22.4
Humidity: 52.5 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		199.7500	19.34	11.99	31.33	43.50	-12.17	peak			
2	*	348.4833	17.01	18.64	35.65	46.00	-10.35	peak			
3		411.5333	14.38	19.42	33.80	46.00	-12.20	peak			
4		460.0333	8.53	20.70	29.23	46.00	-16.77	peak			
5		802.7667	0.64	27.32	27.96	46.00	-18.04	peak			
6		953.1167	1.72	29.97	31.69	46.00	-14.31	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

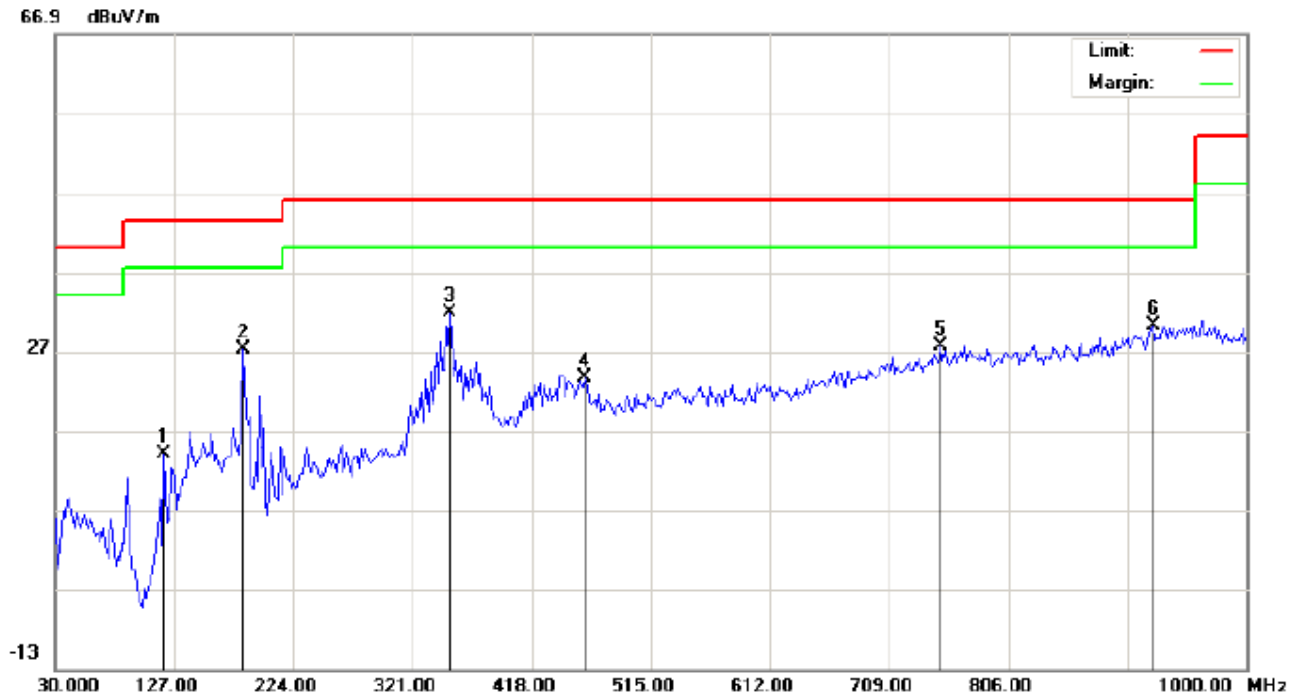

Site: site #1

Polarization: **Vertical**

Temperature: 22.4

Limit: FCC Class B 3M Radiation

Power:

Humidity: 52.5 %

EUT:Bluetooth Headphone

Distance:

M/N: EB-002

Mode:Middle Channel TX


Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		118.9167	7.73	6.32	14.05	43.50	-29.45	peak			
2		183.5833	14.03	13.16	27.19	43.50	-16.31	peak			
3	*	351.7167	13.12	18.75	31.87	46.00	-14.13	peak			
4		461.6500	2.79	20.72	23.51	46.00	-22.49	peak			
5		751.0333	1.01	26.64	27.65	46.00	-18.35	peak			
6		924.0167	1.01	29.28	30.29	46.00	-15.71	peak			

RESULT: PASS**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

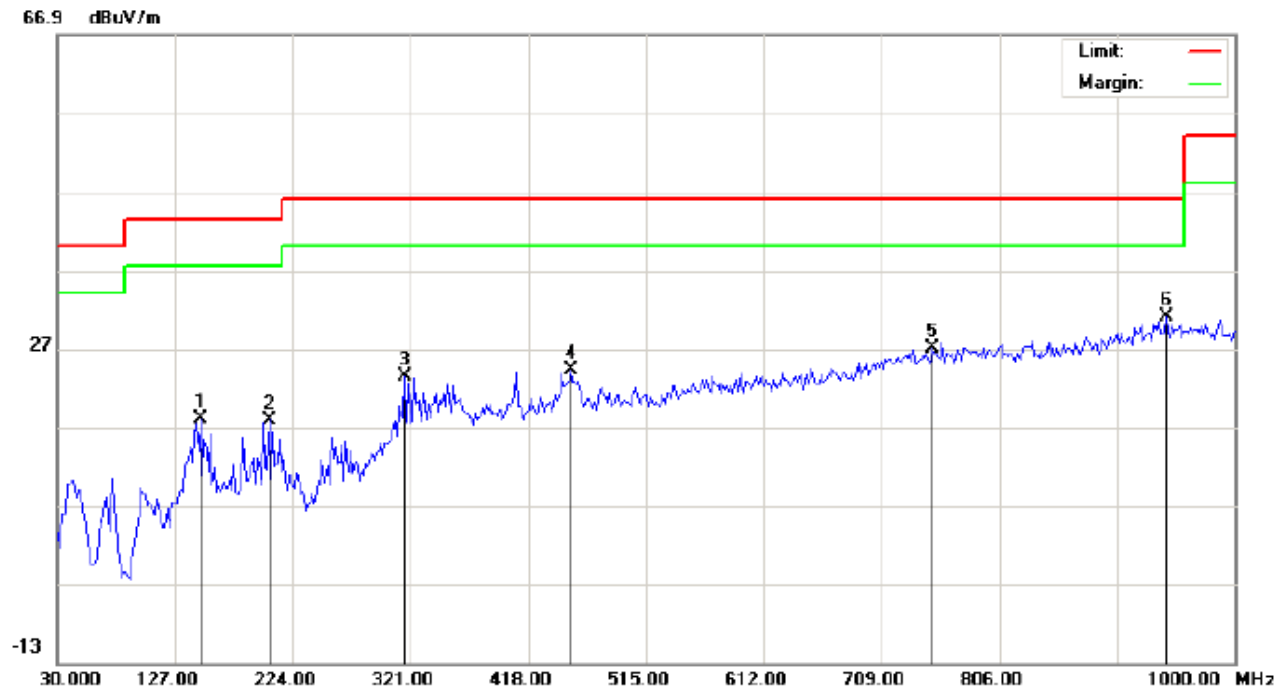

Site: site #1

Limit: FCC Class B 3M Radiation

EUT:Bluetooth Headphone

M/N: EB-002

Mode:High Channel TX

Note:

Polarization: *Horizontal*

Power:

Distance:


Temperature: 22.4

Humidity: 52.5 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		148.0167	4.78	13.25	18.03	43.50	-25.47	peak			
2		204.6000	6.37	11.53	17.90	43.50	-25.60	peak			
3		316.1500	6.96	16.49	23.45	46.00	-22.55	peak			
4		453.5667	3.56	20.63	24.19	46.00	-21.81	peak			
5		751.0333	0.40	26.64	27.04	46.00	-18.96	peak			
6	*	943.4167	1.13	29.82	30.95	46.00	-15.05	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

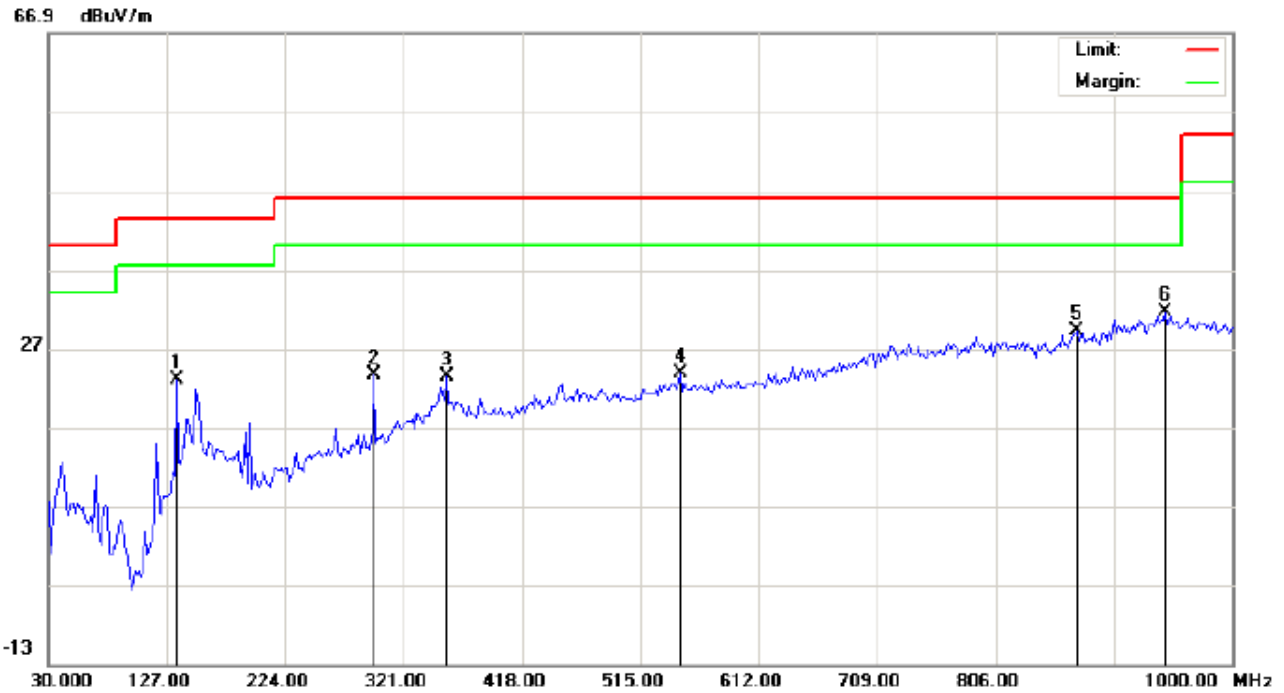

Site: site #1

Polarization: **Vertical**

Temperature: 22.4

Limit: FCC Class B 3M Radiation

Power:

Humidity: 52.5 %

EUT:Bluetooth Headphone

Distance:

M/N: EB-002


Mode:High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		135.0833	9.84	13.15	22.99	43.50	-20.51	peak			
2		296.7500	8.37	15.31	23.68	46.00	-22.32	peak			
3		356.5667	4.62	18.78	23.40	46.00	-22.60	peak			
4		547.3333	1.37	22.41	23.78	46.00	-22.22	peak			
5		872.2833	1.22	27.89	29.11	46.00	-16.89	peak			
6	*	945.0333	1.77	29.86	31.63	46.00	-14.37	peak			

RESULT: PASS**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

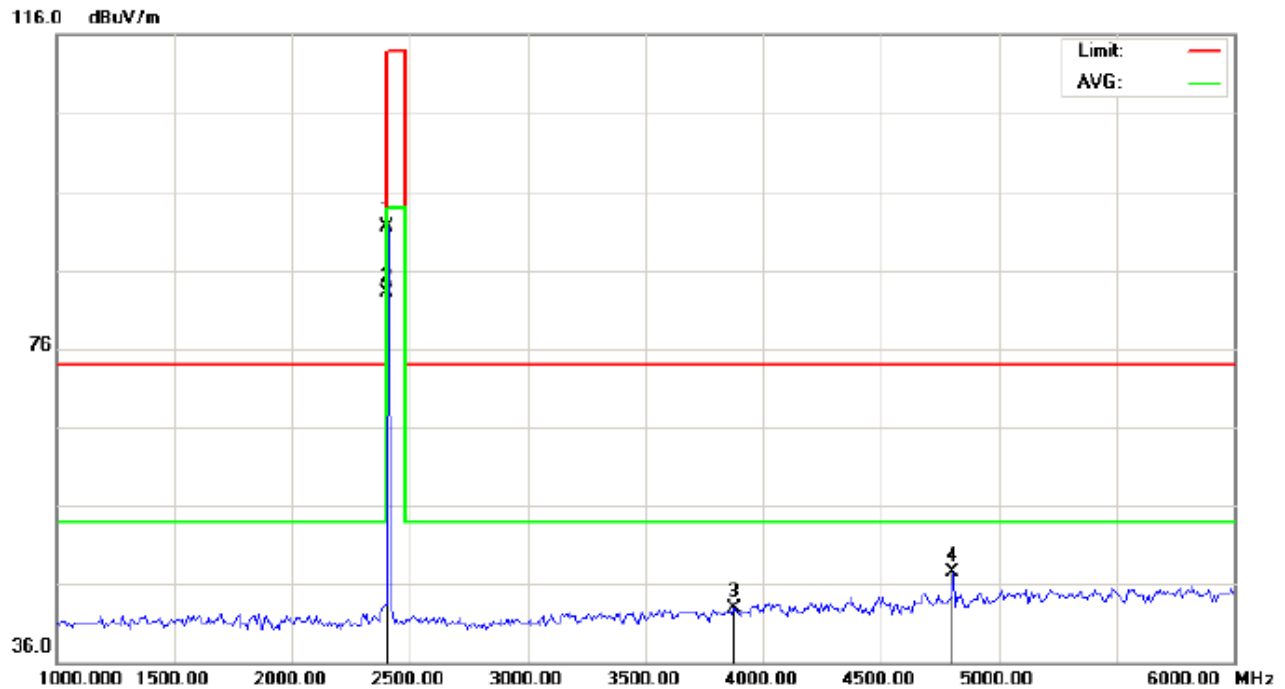RADIATED EMISSION ABOVE 1GHz**(Worst modulation: GFSK)****FOR BR/EDR****RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL**

Site: site #1

Polarization: *Horizontal*

Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Power:

Humidity: 53.6 %

EUT: Bluetooth Headphone

Distance:

M/N: EB-002


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	81.21	10.32	91.53	114.00	-22.47	peak			
2	*	2402.000	72.72	10.32	83.04	94.00	-10.96	AVG	100	75	
3		3875.000	28.43	14.42	42.85	74.00	-31.15	peak			
4		4804.000	39.74	7.69	47.43	74.00	-26.57	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

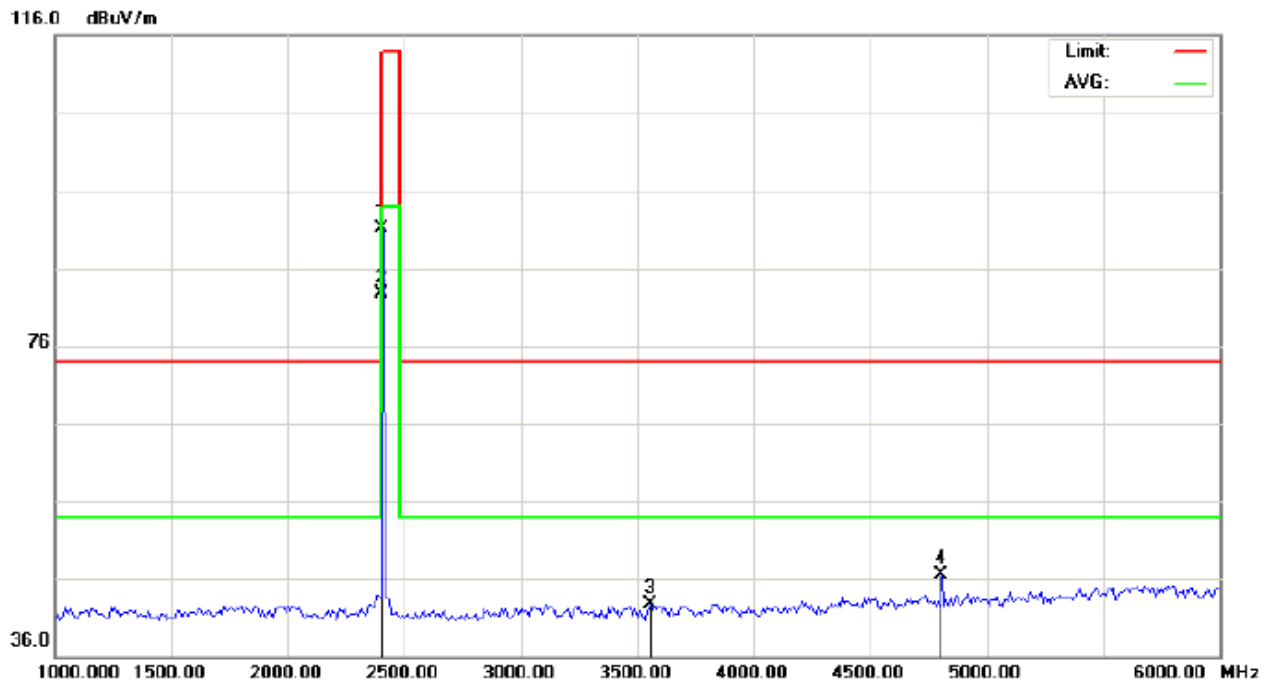

Site: site #1

Polarization: **Vertical**

Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Power:

Humidity: 53.6 %

EUT: Bluetooth Headphone

Distance:

M/N: EB-002


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	80.82	10.32	91.14	114.00	-22.86	peak			
2	*	2402.000	72.30	10.32	82.62	94.00	-11.38	AVG	100	52	
3		3558.333	30.18	12.47	42.65	74.00	-31.35	peak			
4		4804.000	38.88	7.69	46.57	74.00	-27.43	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

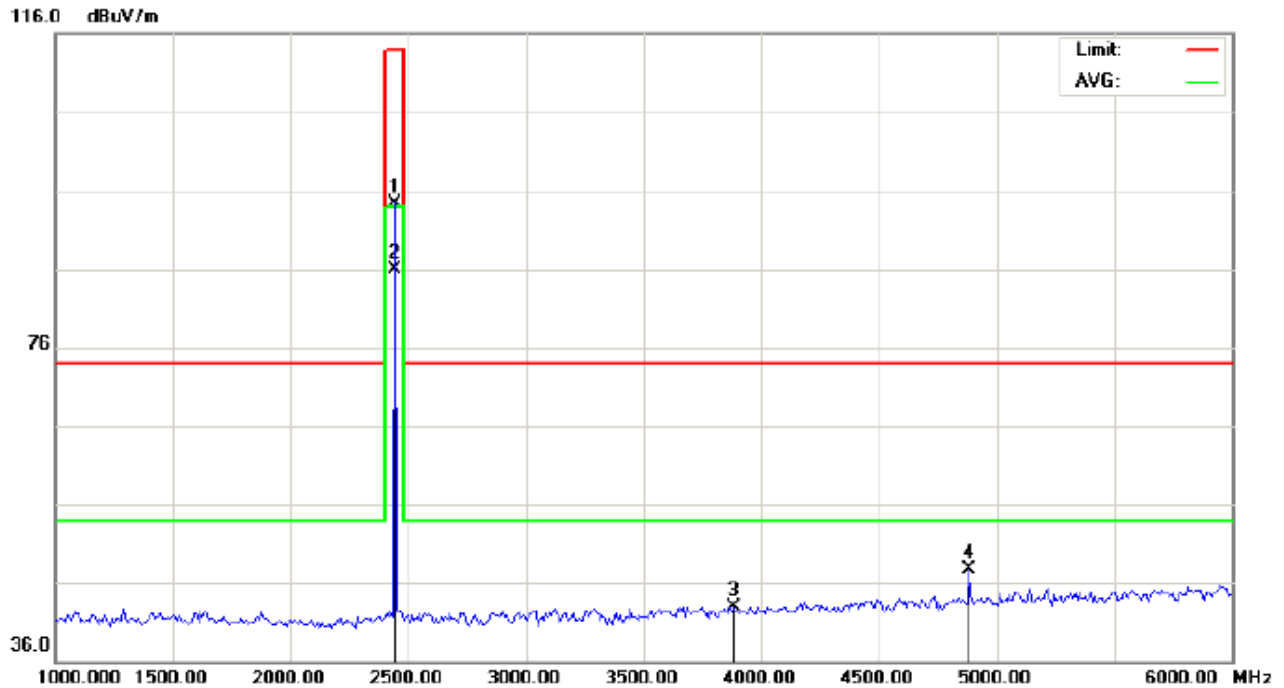

Site: site #1

Polarization: *Horizontal*

Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Power:

Humidity: 53.6 %

EUT: Bluetooth Headphone

Distance:

M/N: EB-002


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	83.98	10.36	94.34	114.00	-19.66	peak			
2	*	2441.000	75.46	10.36	85.82	94.00	-8.18	AVG	100	79	
3		3883.333	28.44	14.47	42.91	74.00	-31.09	peak			
4		4882.000	39.88	7.89	47.77	74.00	-26.23	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

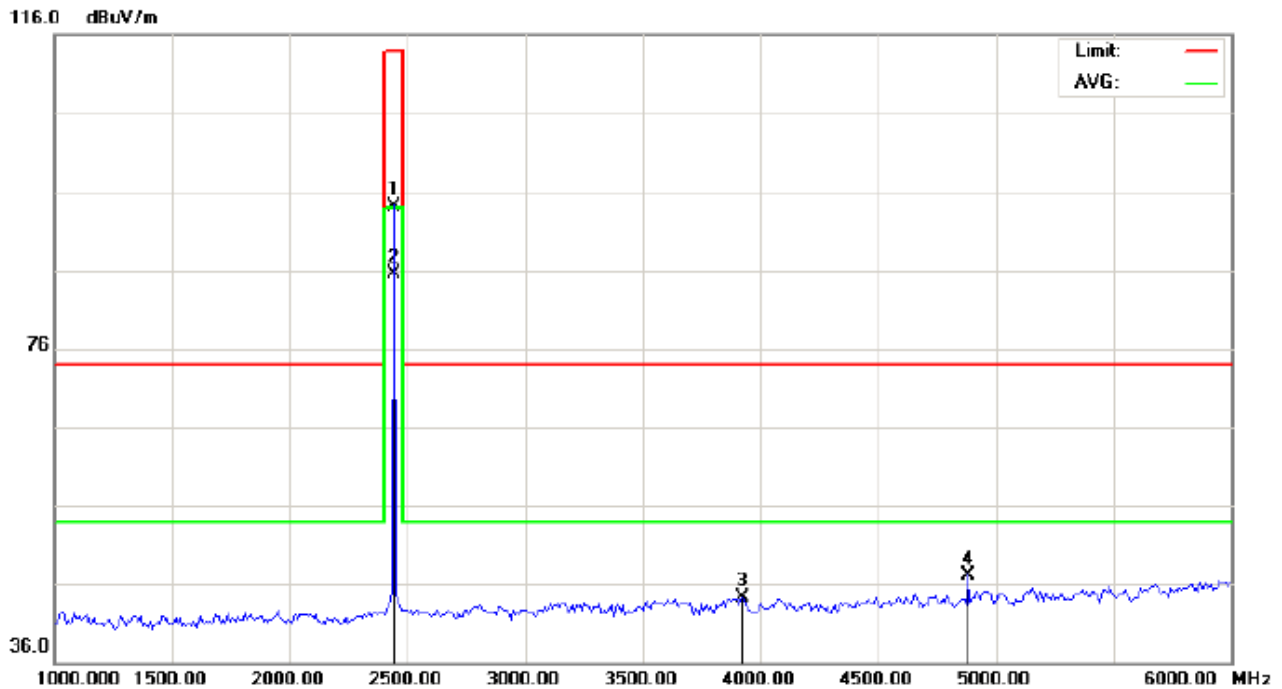

Site: site #1

Polarization: **Vertical**

Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Power:

Humidity: 53.6 %

EUT: Bluetooth Headphone

Distance:

M/N: EB-002


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	83.65	10.36	94.01	114.00	-19.99	peak			
2	*	2441.000	75.12	10.36	85.48	94.00	-8.52	AVG	100	57	
3		3925.000	29.58	14.73	44.31	74.00	-29.69	peak			
4		4882.000	39.31	7.89	47.20	74.00	-26.80	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

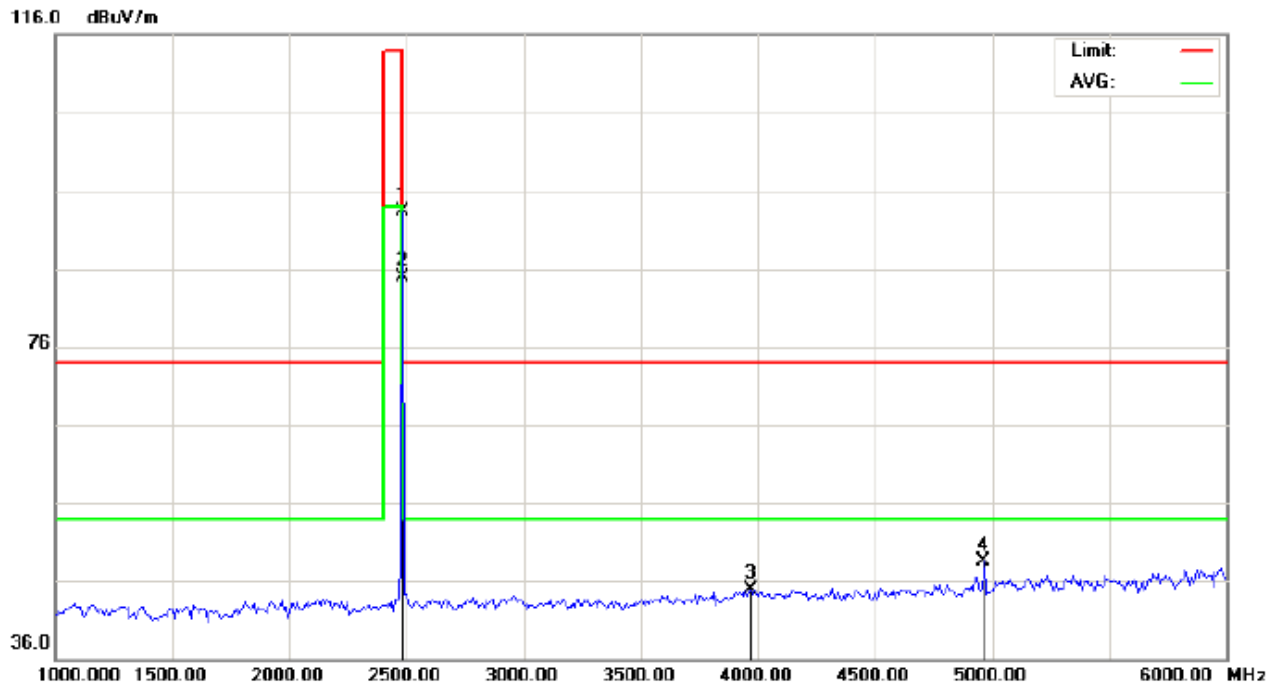

Site: site #1

Polarization: *Horizontal*

Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Power:

Humidity: 53.6 %

EUT: Bluetooth Headphone

Distance:

M/N: EB-002


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	82.97	10.41	93.38	114.00	-20.62	peak			
2	*	2480.000	74.45	10.41	84.86	94.00	-9.14	AVG	100	75	
3		3966.667	29.99	14.98	44.97	74.00	-29.03	peak			
4		4960.000	40.51	8.09	48.60	74.00	-25.40	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

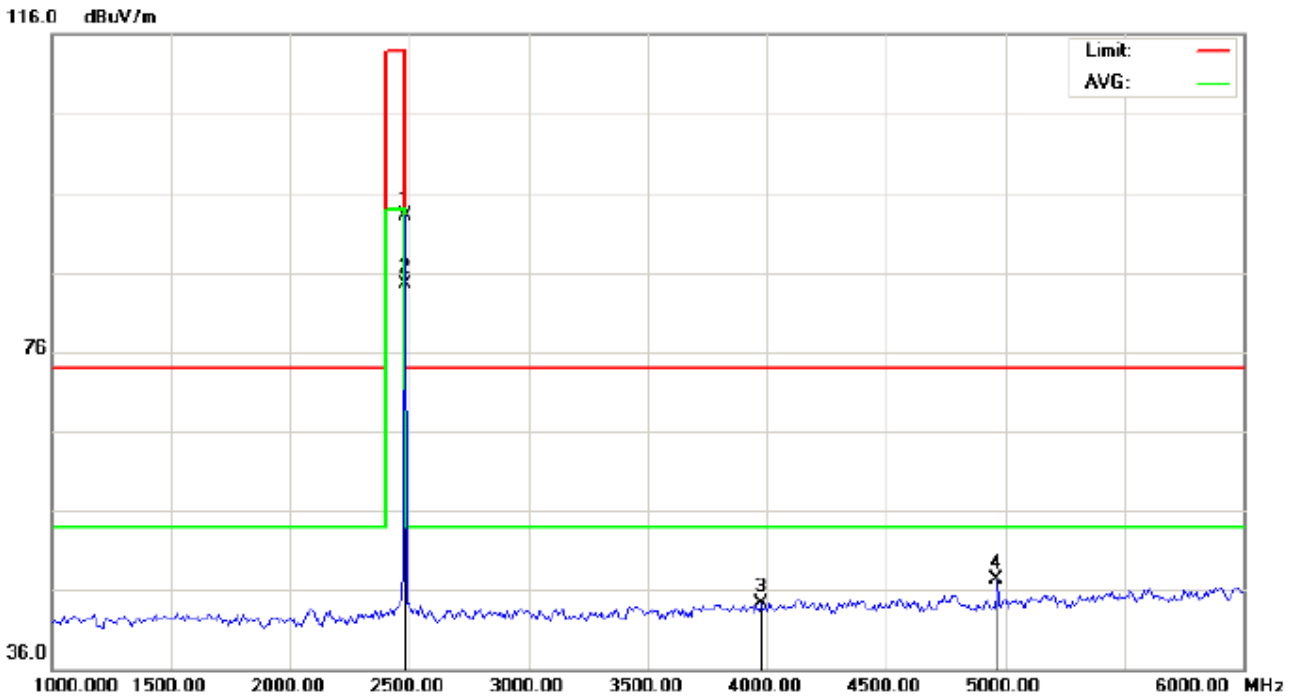

Site: site #1

Polarization: **Vertical**

Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Power:

Humidity: 53.6 %

EUT: Bluetooth Headphone

Distance:

M/N: EB-002

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	82.62	10.41	93.03	114.00	-20.97	peak			
2	*	2480.000	74.00	10.41	84.41	94.00	-9.59	AVG	100	56	
3		3975.000	29.23	15.04	44.27	74.00	-29.73	peak			
4		4960.000	39.16	8.09	47.25	74.00	-26.75	peak			

RESULT: PASS**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

1Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.21	10.32	91.53	114	-22.47	Horizontal
2402	80.82	10.32	91.14	114	-22.86	Vertical
2441	83.98	10.36	94.34	114	-19.66	Horizontal
2441	83.65	10.36	94.01	114	-19.99	Vertical
2480	82.97	10.41	93.38	114	-20.62	Horizontal
2480	82.62	10.41	93.03	114	-20.97	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	72.72	10.32	83.04	94	-10.96	Horizontal
2402	72.30	10.32	82.62	94	-11.38	Vertical
2441	75.46	10.36	85.82	94	-8.18	Horizontal
2441	75.12	10.36	85.48	94	-8.52	Vertical
2480	74.45	10.41	84.86	94	-9.14	Horizontal
2480	74.00	10.41	84.41	94	-9.59	Vertical

2Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.13	10.32	91.45	114	-22.55	Horizontal
2402	80.76	10.32	91.08	114	-22.92	Vertical
2441	83.93	10.36	94.29	114	-19.71	Horizontal
2441	83.55	10.36	93.91	114	-20.09	Vertical
2480	82.91	10.41	93.32	114	-20.68	Horizontal
2480	82.55	10.41	92.96	114	-21.04	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	72.63	10.32	82.95	94	-11.05	Horizontal
2402	72.22	10.32	82.54	94	-11.46	Vertical
2441	75.40	10.36	85.76	94	-8.24	Horizontal
2441	75.07	10.36	85.43	94	-8.57	Vertical
2480	74.37	10.41	84.78	94	-9.22	Horizontal
2480	73.91	10.41	84.32	94	-9.68	Vertical

3Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.06	10.32	91.38	114	-22.62	Horizontal
2402	80.70	10.32	91.02	114	-22.98	Vertical
2441	83.86	10.36	94.22	114	-19.78	Horizontal
2441	83.49	10.36	93.85	114	-20.15	Vertical
2480	82.83	10.41	93.24	114	-20.76	Horizontal
2480	82.46	10.41	92.87	114	-21.13	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	72.54	10.32	82.86	94	-11.14	Horizontal
2402	72.16	10.32	82.48	94	-11.52	Vertical
2441	75.32	10.36	85.68	94	-8.32	Horizontal
2441	75.00	10.36	85.36	94	-8.64	Vertical
2480	74.30	10.41	84.71	94	-9.29	Horizontal
2480	73.86	10.41	84.27	94	-9.73	Vertical

10. BAND EDGE EMISSION


10.1. MEASUREMENT PROCEDURE

- 1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2Max hold the trace of the setup 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission.

Start frequency(MHz)	Stop frequency(MHz)
2200	2405
2478	2500

10.2 TEST SETUP

RADIATED EMISSION TEST SETUP

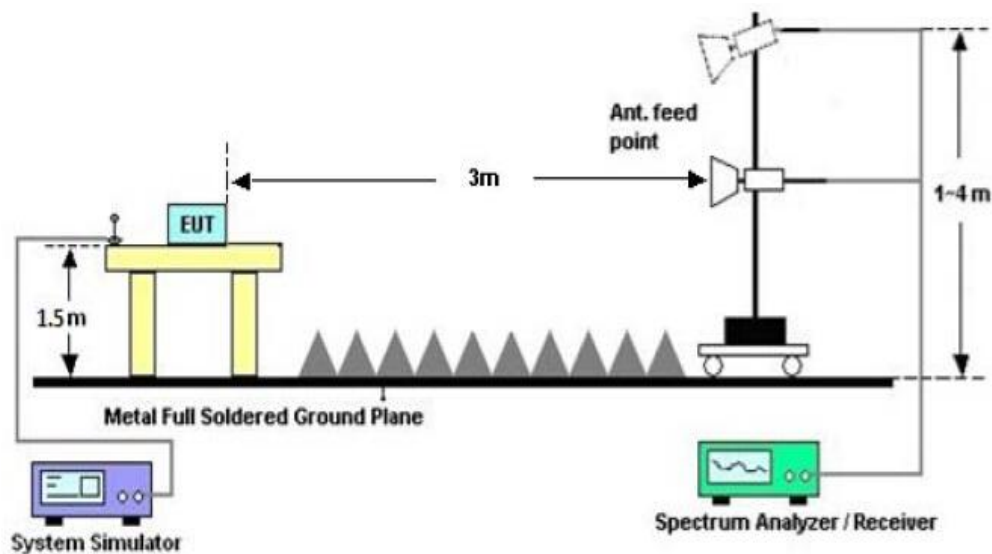


10.3 RADIATED TEST RESULT

(Worst modulation: GFSK)

FOR BR/EDR


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

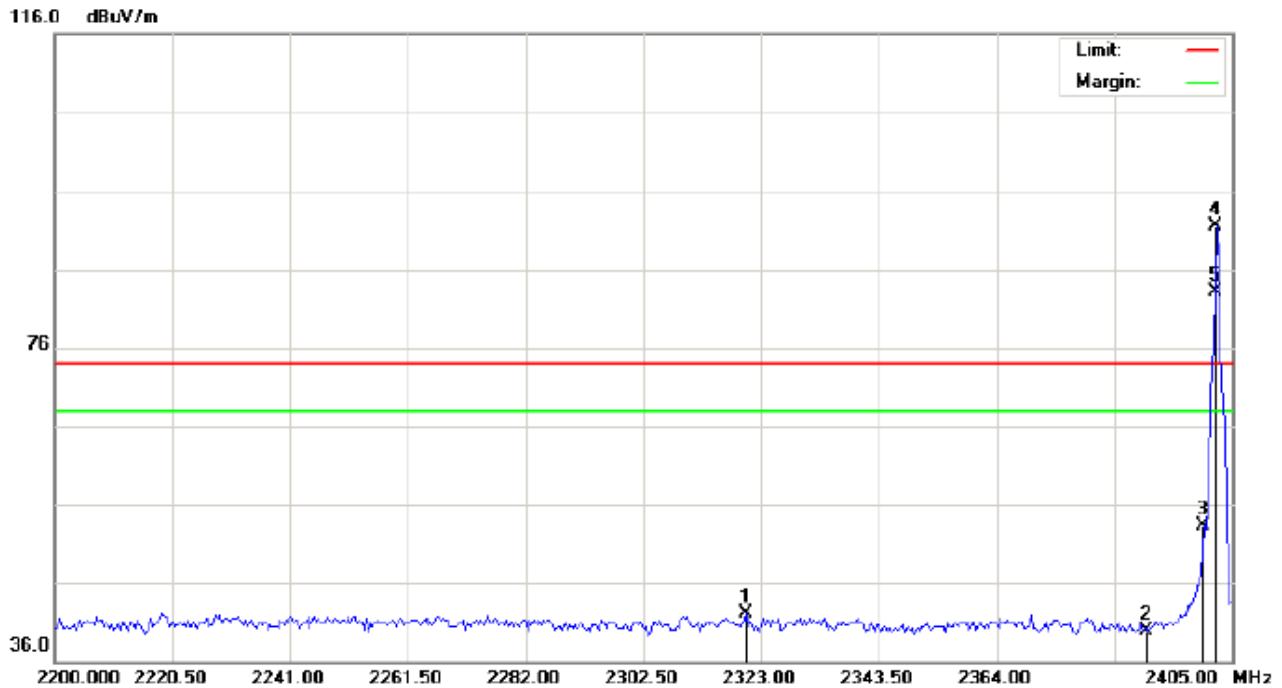

Site: site #1	Polarization: <i>Horizontal</i>	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK)	Power:	Humidity: 60 %
EUT: Bluetooth Headphone	Distance:	
M/N: EB-002		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2320.267	31.86	10.23	42.09	74.00	-31.91	peak			
2		2390.000	29.50	10.31	39.81	74.00	-34.19	peak			
3		2400.000	42.97	10.32	53.29	74.00	-20.71	peak			
4	*	2402.000	81.22	10.32	91.54	74.00	17.54	peak			
5	X	2402.000	72.73	10.32	83.05	74.00	9.05	AVG	100	78	

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

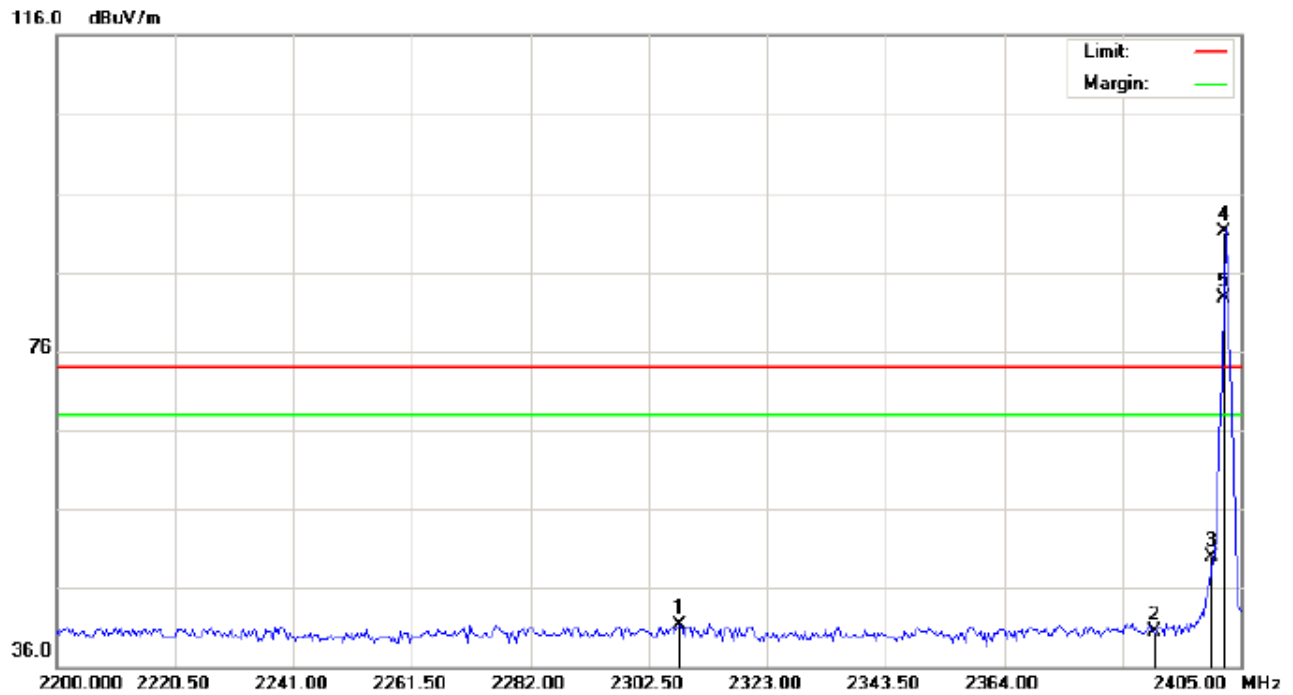

Site: site #1

Polarization: **Vertical**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHz(PK)

Power:

Humidity: 60 %

EUT: Bluetooth Headphone

Distance:


M/N: EB-002

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2307.966	31.13	10.22	41.35	74.00	-32.65	peak			
2		2390.000	30.21	10.31	40.52	74.00	-33.48	peak			
3		2400.000	39.56	10.32	49.88	74.00	-24.12	peak			
4	*	2402.000	80.79	10.32	91.11	74.00	17.11	peak			
5	X	2402.000	72.39	10.32	82.71	74.00	8.71	AVG	100	57	

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

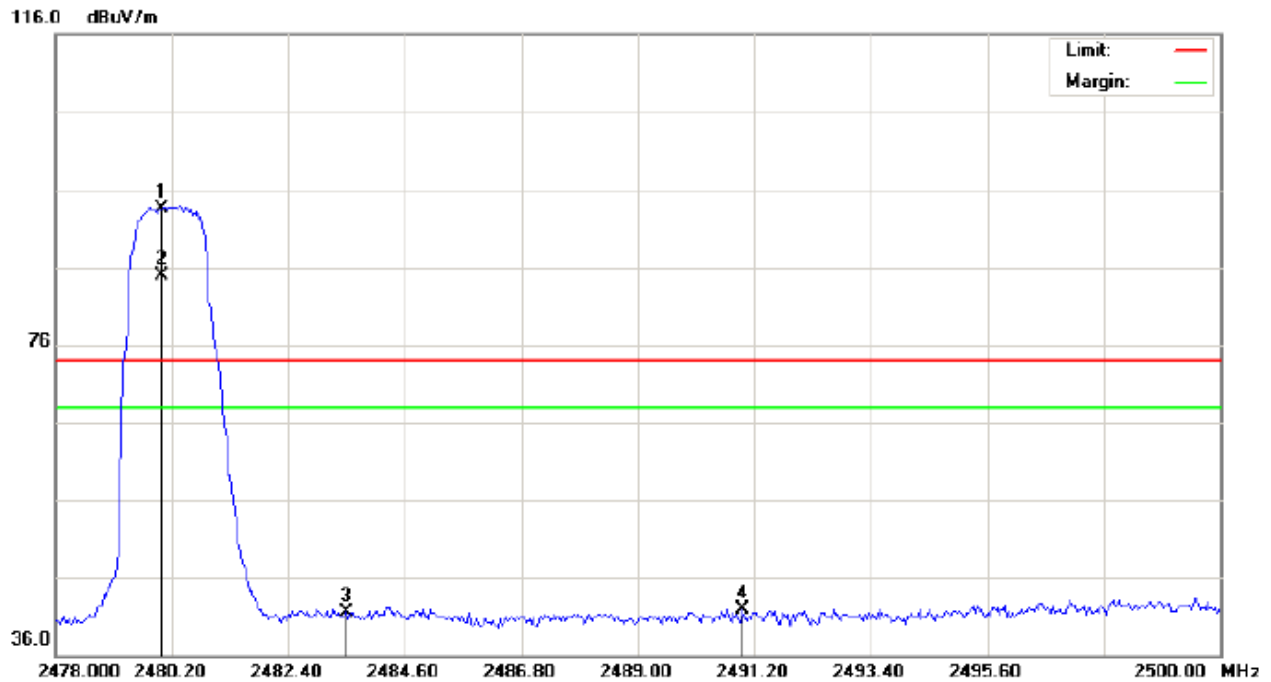

Site: site #1

Limit: FCC Class B 3M Radiation above 1GHz(PK)

EUT: Bluetooth Headphone

M/N: EB-002

Mode: High Channel TX

Note:

Polarization: *Horizontal*

Power:


Distance:

Temperature: 26

Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	83.05	10.41	93.46	74.00	19.46	peak			
2	X	2480.000	74.45	10.41	84.86	74.00	10.86	AVG	100	76	
3		2483.500	31.19	10.41	41.60	74.00	-32.40	peak			
4		2490.980	31.57	10.42	41.99	74.00	-32.01	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

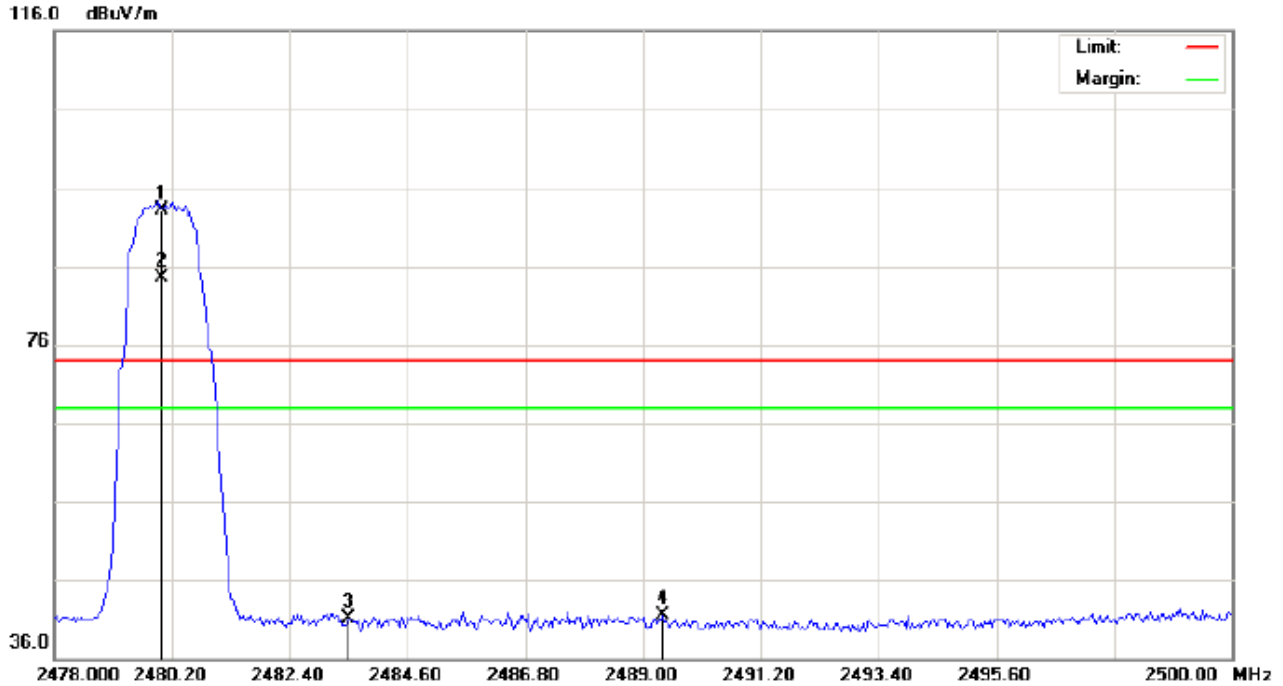

Site: site #1

Limit: FCC Class B 3M Radiation above 1GHz(PK)

EUT: Bluetooth Headphone

M/N: EB-002

Mode: High Channel TX

Note:

Polarization: **Vertical**

Power:

Distance:

Temperature: 26

Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	82.60	10.41	93.01	74.00	19.01	peak			
2	X	2480.000	74.10	10.41	84.51	74.00	10.51	AVG	100	54	
3		2483.500	30.76	10.41	41.17	74.00	-32.83	peak			
4		2489.367	31.01	10.42	41.43	74.00	-32.57	peak			

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


Hopping on mode and Hopping off mode have been tested, but only worst case reported.

11. 20DB BANDWIDTH

11.1. MEASUREMENT PROCEDURE

1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW $\geq$ 1% of the 20 dB bandwidth, VBW $\geq$ RBW; Sweep = auto; Detector function = peak
3. Set SPA Trace 1 Max hold, then View.

11.2. TEST SET-UP

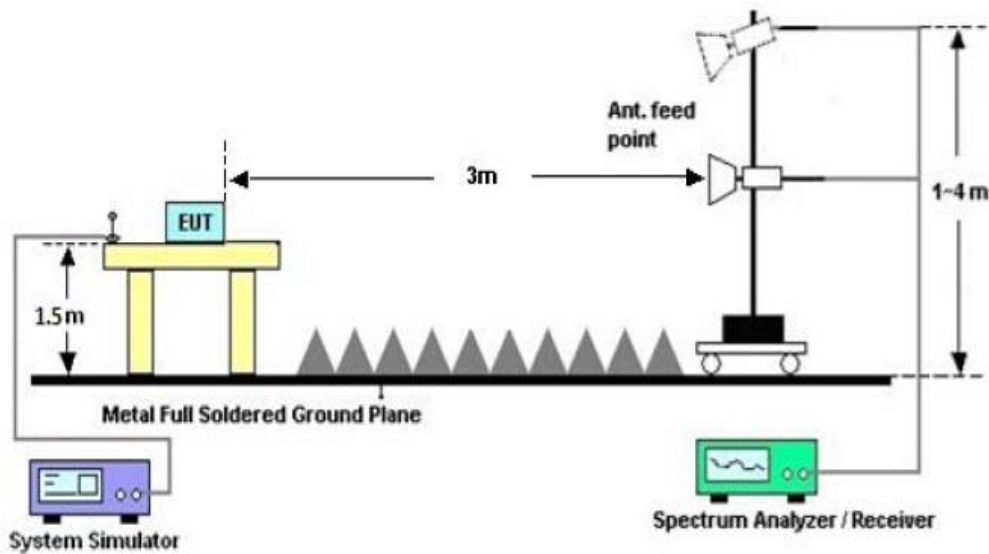


11.3. LIMITS AND MEASUREMENT RESULTS


FOR BR/EDR

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	0.935	1.092	PASS
	Middle Channel	0.909	1.062	PASS
	High Channel	0.932	1.053	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

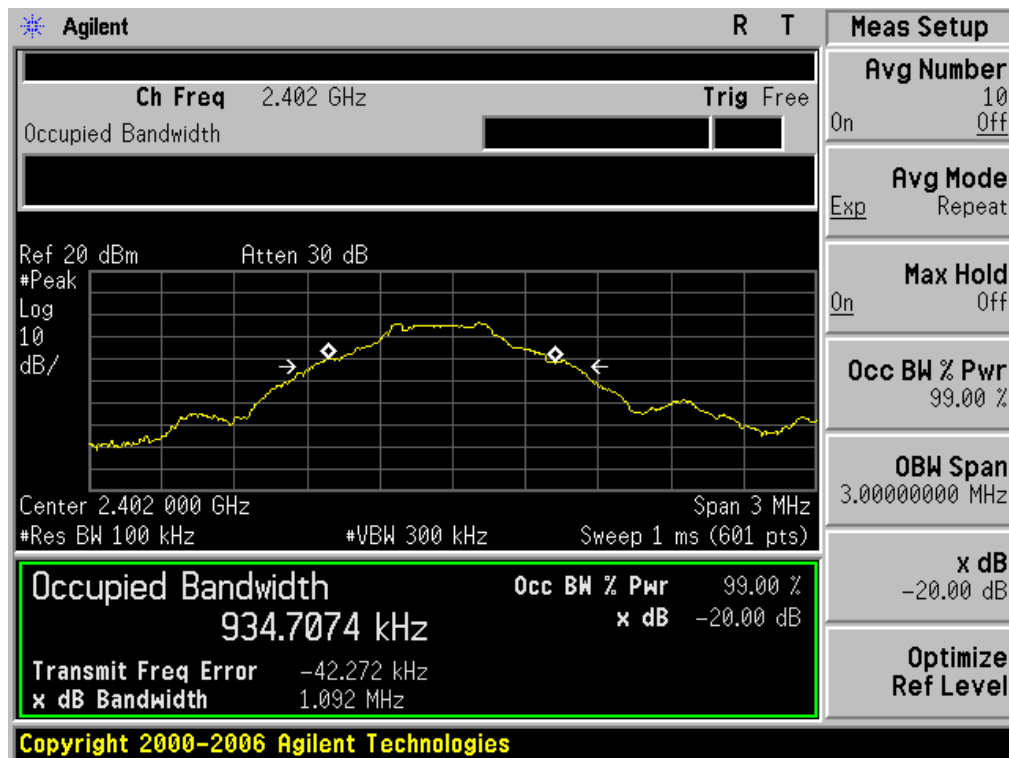

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

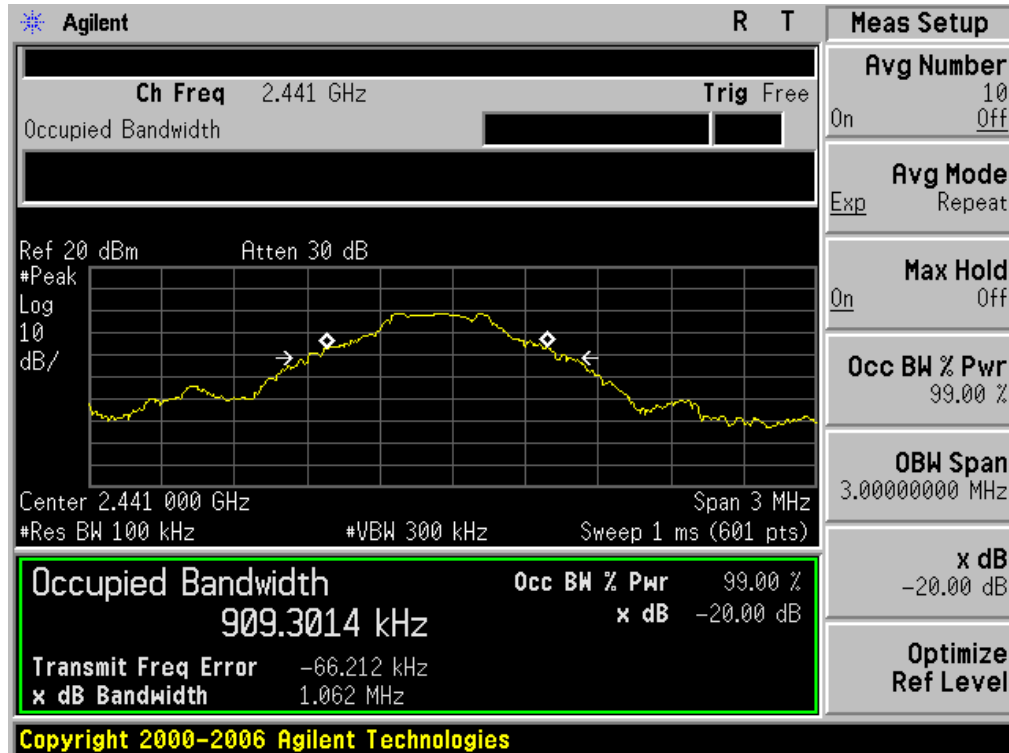


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

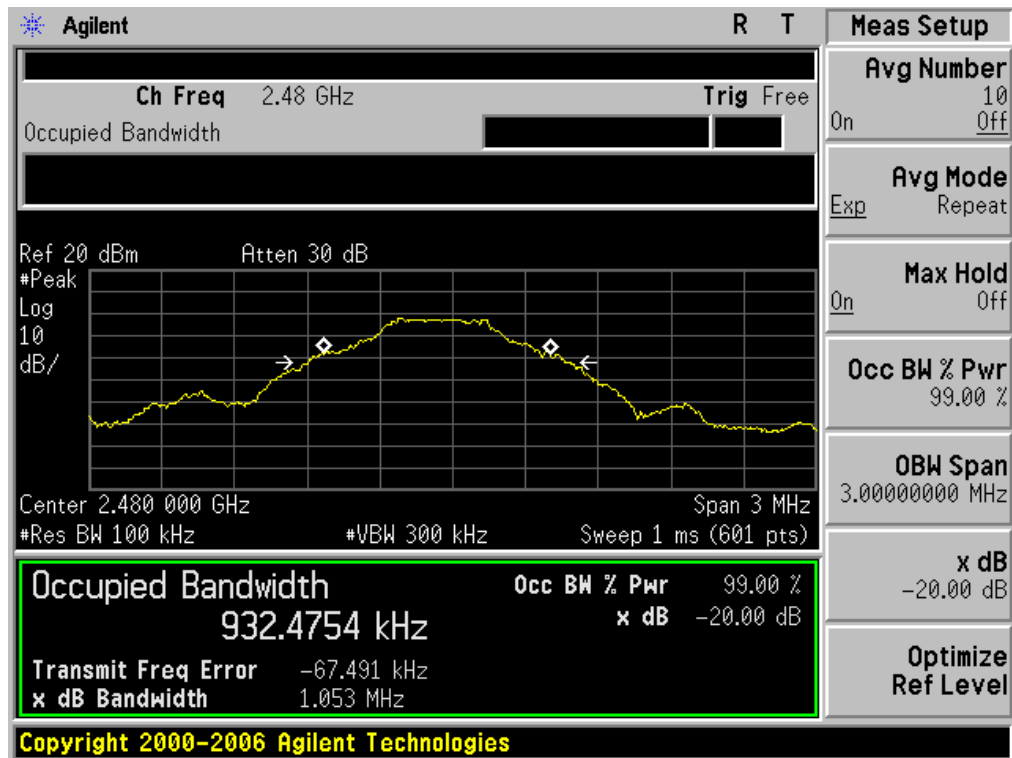


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.203	1.370	PASS
	Middle Channel	1.208	1.363	PASS
	High Channel	1.220	1.365	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

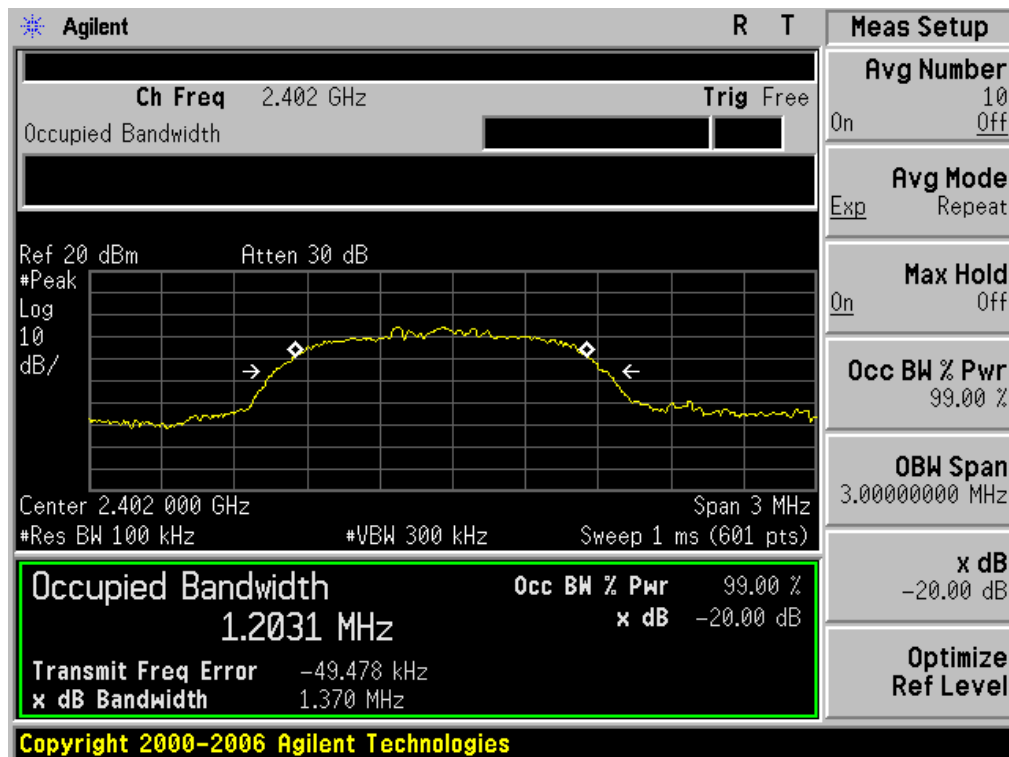

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

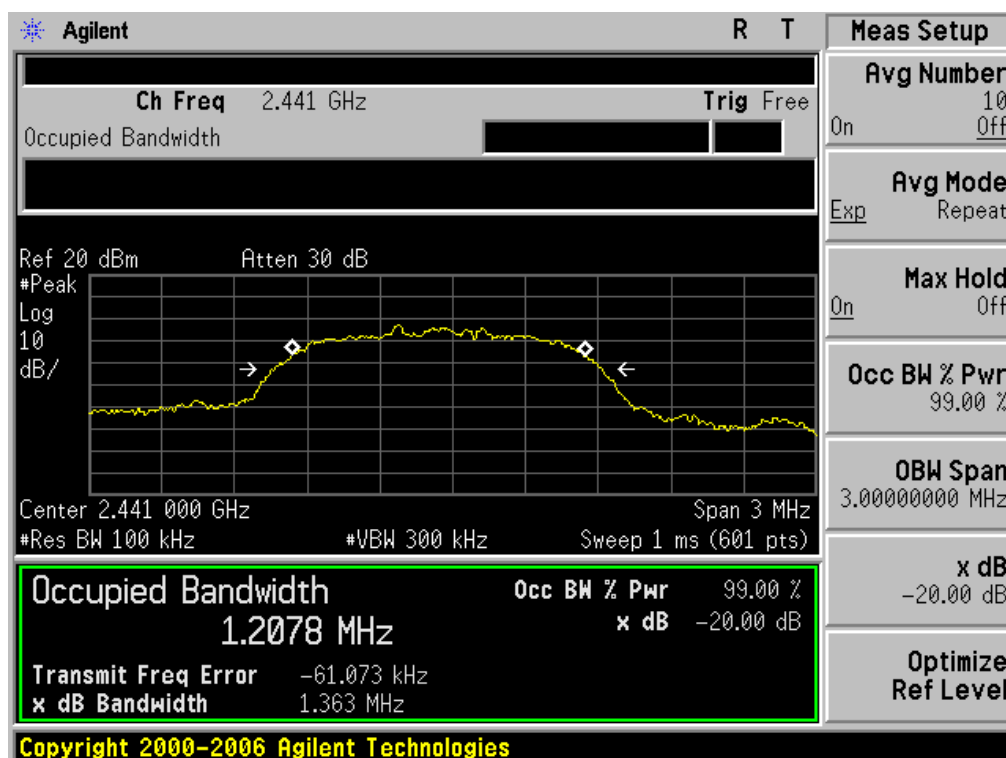


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

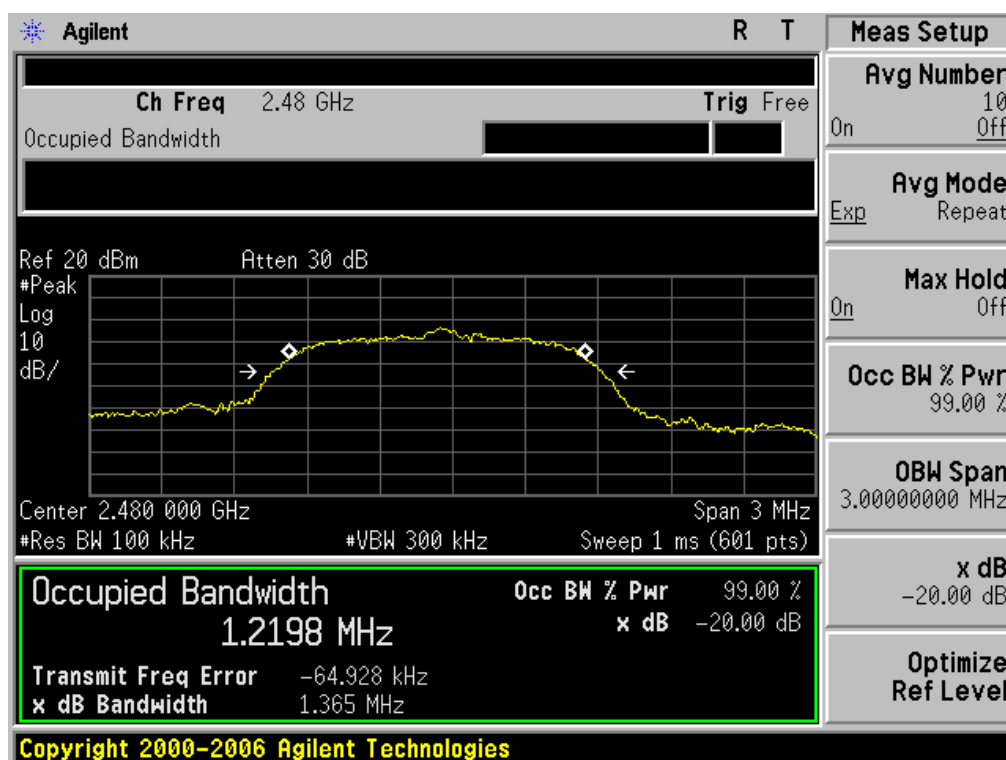


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.228	1.372	PASS
	Middle Channel	1.217	1.374	PASS
	High Channel	1.234	1.395	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

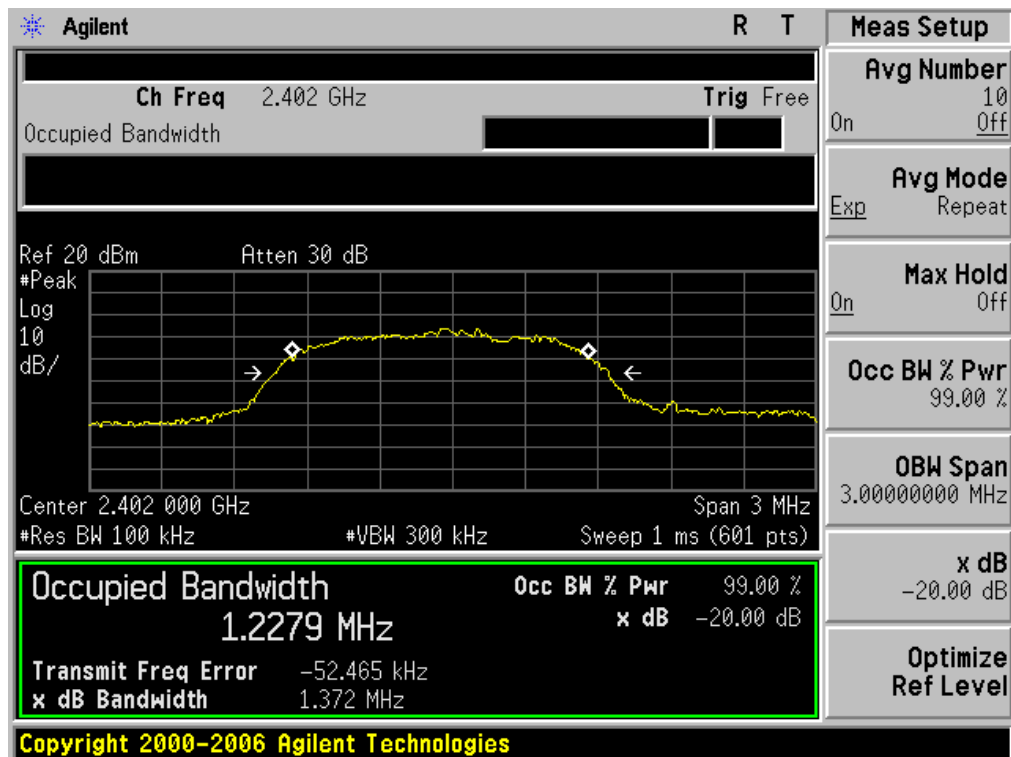

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

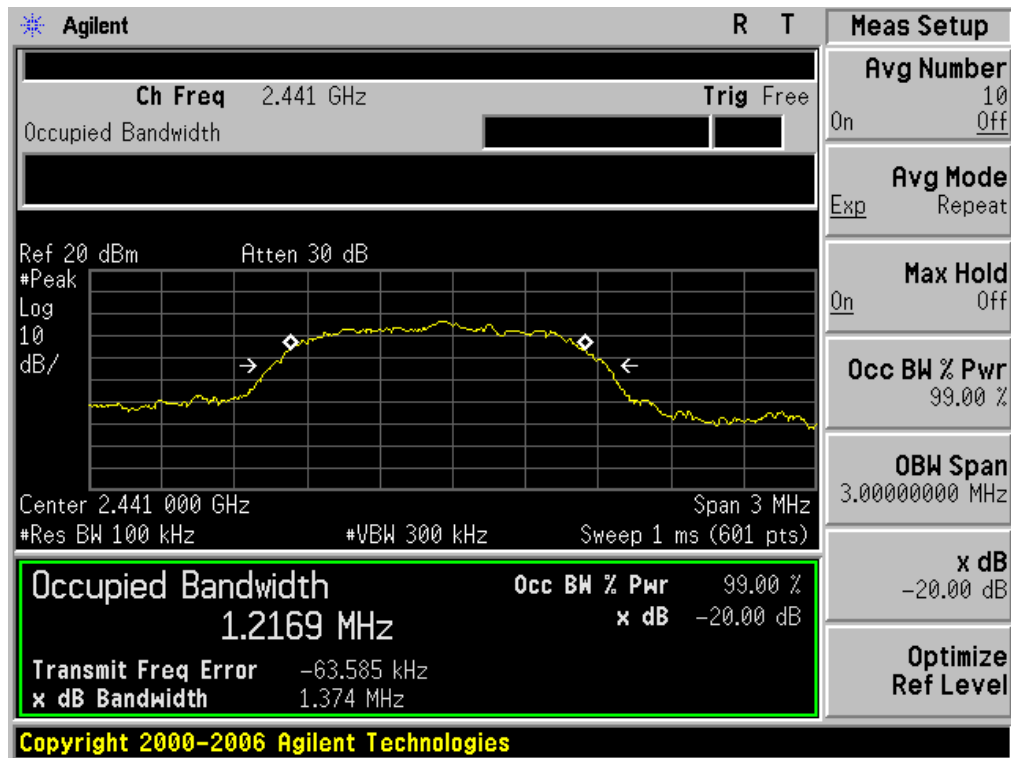

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

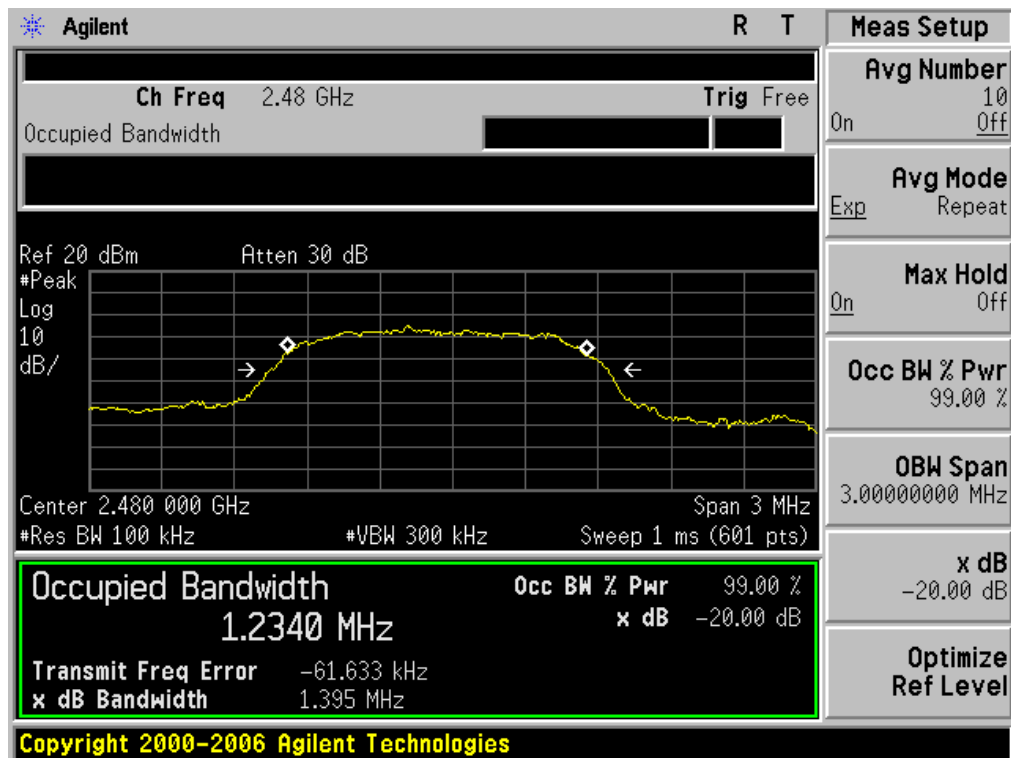

12. FCC LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

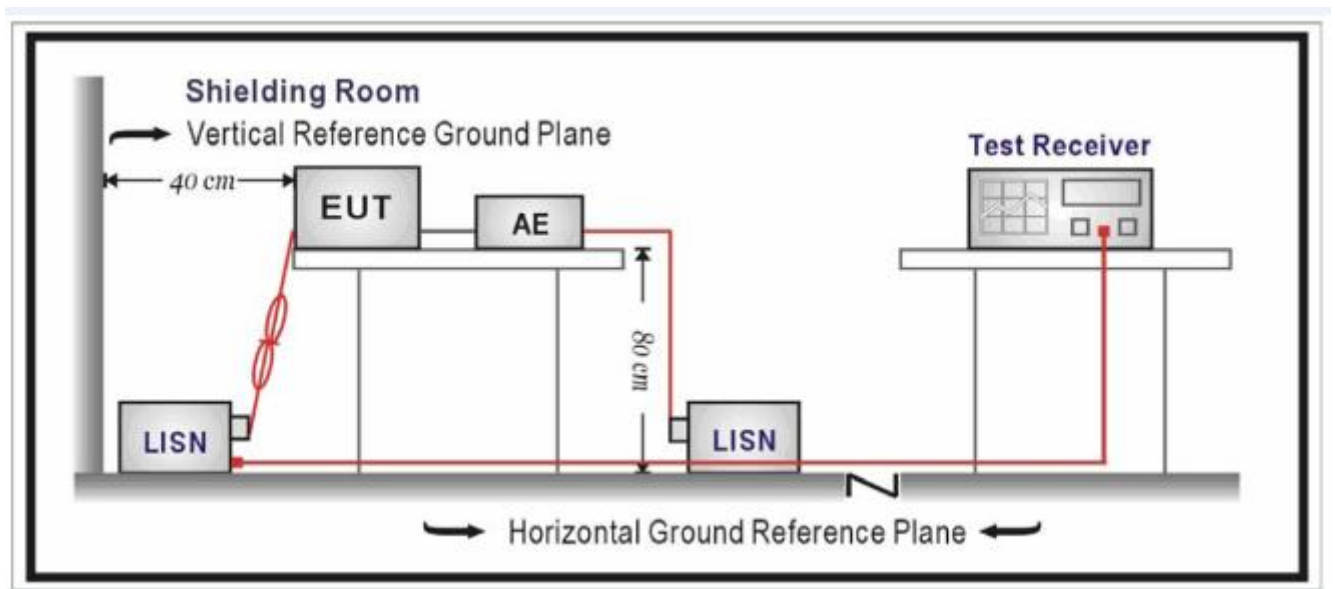

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.


12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST



N/A

Note: The BT function of EUT didn't work when charging.

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC RADIATED EMISSION TEST SETUP

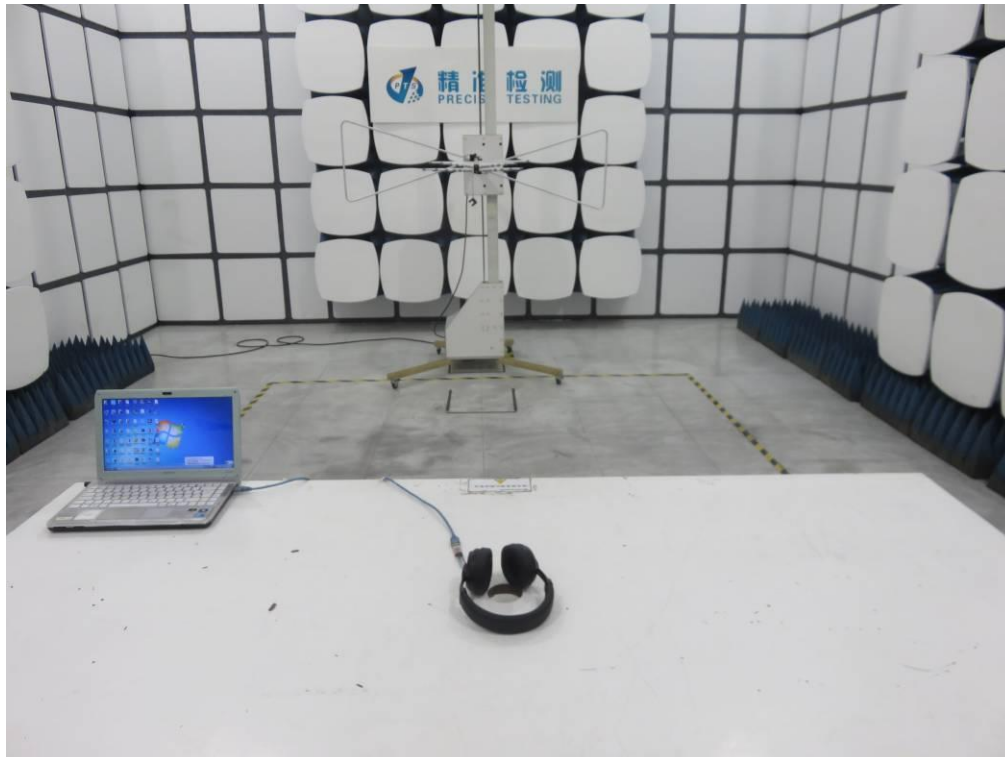

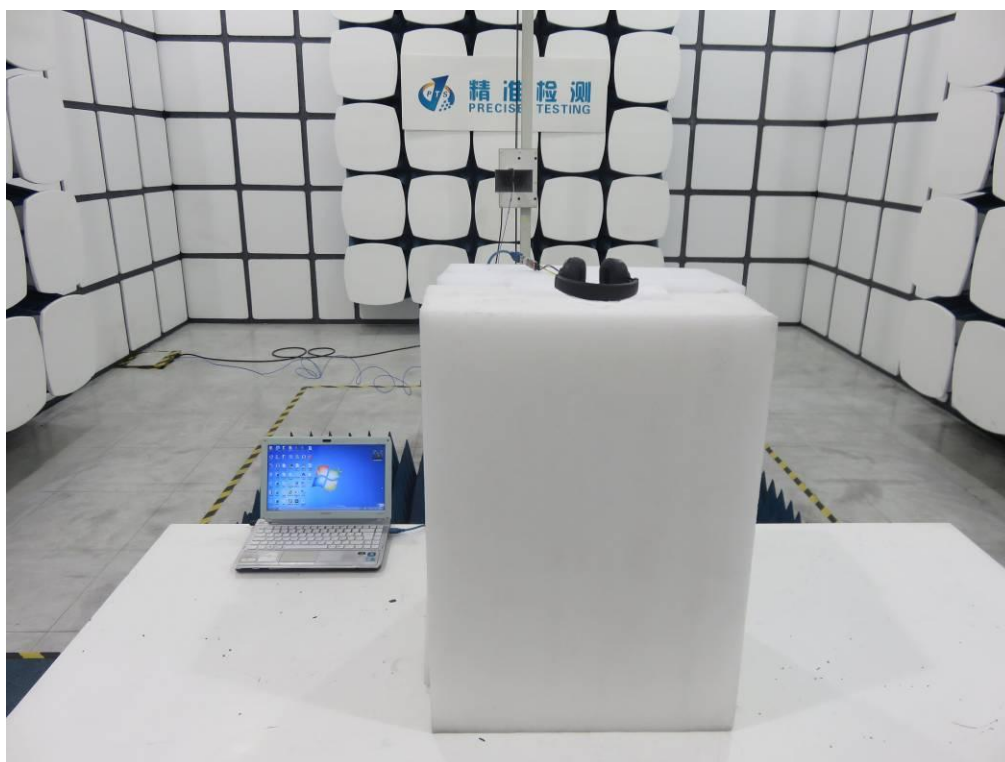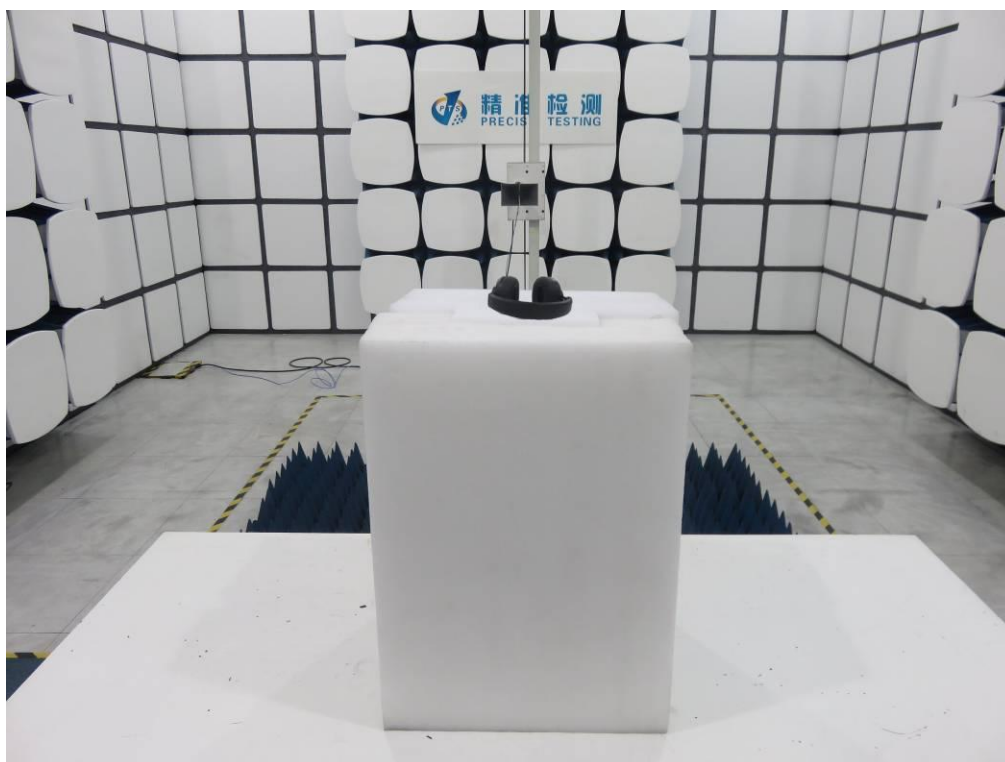

APPENDIX B: PHOTOGRAPHS OF EUT

WHOLE VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



VIEW OF EUT (PORT)-1




VIEW OF EUT (PORT)-2




OPEN VIEW OF EUT




INTERNAL VIEW OF EUT-1

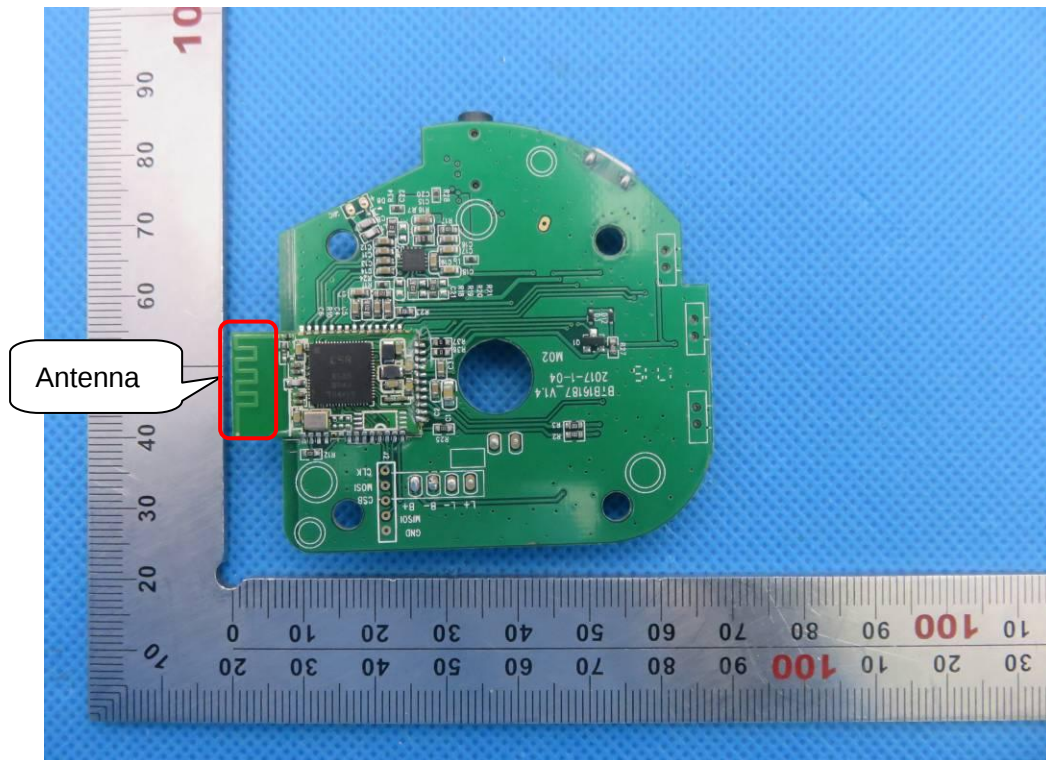

INTERNAL VIEW OF EUT-2

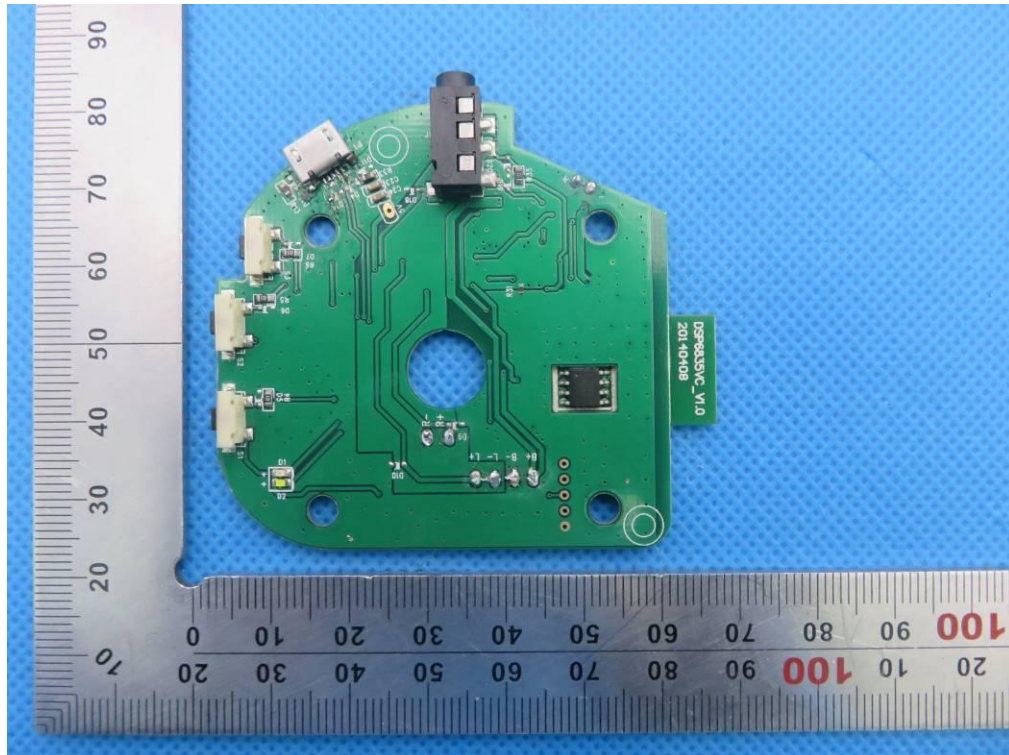

INTERNAL VIEW OF EUT-3

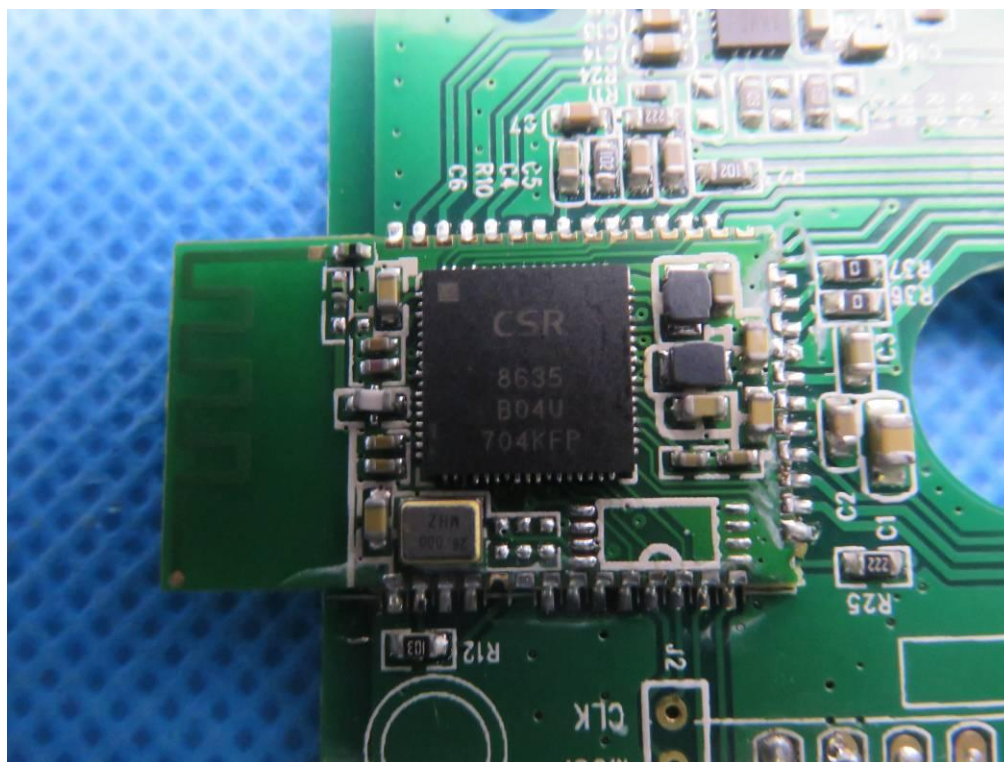

-----END OF REPORT-----