



FCC Part 15.247

TEST REPORT

For

TOPMORE TECHNOLOGY INC.

No.1-1, Taiyuan 2nd St., Zhubei City, Hsinchu County 302, Taiwan (R.O.C.)

FCC ID: 2ANH6-BS-01

Report Type: Original Report	Product Type: ROCK PLANET
Report Producer : <u>Kaylee Chiang</u>	<u>Kaylee Chiang</u>
Report Number : <u>RXZ180905001-00A</u>	
Report Date : <u>2018-11-05</u>	
Reviewed By: <u>Jerry Chang</u>	<u>Jerry Chang</u>
Prepared By: Bay Area Compliance Laboratories Corp.(Taiwan) 70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C. Tel: +886 (2) 2647 6898 Fax: +886 (2) 2647 6895 www.bacl.com.tw	

Revision History

Revision	No.	Report Number	Issue Date	Description	Author/ Revised by
1.0	RXZ180905001	RXZ180905001-00A	2018.11.05	Original Report	Kaylee

TABLE OF CONTENTS

1	General Information	5
1.1	Product Description for Equipment under Test (EUT)	5
1.2	Objective	6
1.3	Related Submittal(s)/Grant(s).....	6
1.4	Test Methodology.....	6
1.5	Test Facility.....	6
2	System Test Configuration	7
2.1	Description of Test Configuration.....	7
2.2	Equipment Modifications	7
2.3	EUT Exercise Software	7
2.4	Support Equipment List and Details.....	7
2.5	External Cable List and Details	7
2.6	Block Diagram of Test Setup	8
3	Summary of Test Results	10
4	Test Equipment List and Details.....	11
5	FCC §15.247(i), §1.1310, § 2.1091 - Maximum Permissible Exposure (MPE).....	13
5.1	Applicable Standard	13
5.2	RF Exposure Evaluation Result.....	13
6	FCC §15.203 – Antenna Requirements	14
6.1	Applicable Standard	14
6.2	Measurement Uncertainty	14
7	FCC §15.207(a) – AC Line Conducted Emissions.....	15
7.1	Applicable Standard	15
7.2	Measurement Uncertainty	15
7.3	EUT Setup	16
7.4	EMI Test Receiver Setup	16
7.5	Test Procedure.....	16
7.6	Corrected Factor & Margin Calculation.....	17
7.7	Environmental Conditions.....	17
7.8	Test Results: PASS.....	17
7.9	Test Data	18
8	FCC §15.209, §15.205 , §15.247(d) – Spurious Emissions.....	20
8.1	Applicable Standard	20
8.2	Measurement Uncertainty	21
8.3	EUT Setup	22
8.4	EMI Test Receiver & Spectrum Analyzer Setup.....	22
8.5	Test Procedure.....	23
8.6	Corrected Factor & Margin Calculation.....	23
8.7	Test Results Summary	23
8.8	Environmental Conditions.....	23
8.9	Test Results: PASS.....	23
8.10	Test Data	24
9	FCC §15.247(a)(1) – 20 dB Emission Bandwidth	39

9.1	Applicable Standard	39
9.2	Test Procedure.....	39
9.3	Environmental Conditions.....	39
9.4	Test Results	40
10	FCC §15.247(a)(1) – Channel Separation Test	45
10.1	Applicable Standard	45
10.2	Test Procedure.....	45
10.3	Environmental Conditions.....	45
10.4	Test Results	46
11	FCC§15.247(a)(1)(iii) –Time of Occupancy (Dwell Time).....	52
11.1	Applicable Standard	52
11.2	Test Procedure.....	52
11.3	Environmental Conditions.....	53
11.4	Test Results	53
12	FCC §15.247(a)(1)(iii) –Quantity of hopping channel Test	68
12.1	Applicable Standard	68
12.2	Test Procedure.....	68
12.3	Environmental Conditions.....	68
12.4	Test Results	69
13	FCC §15.247(b)(1) – Maximum Output Power	71
13.1	Applicable Standard	71
13.2	Test Procedure.....	71
13.3	Test Environmental Conditions.....	71
13.4	Test Results	71
14	FCC §15.247(d) – 100 kHz Bandwidth of Frequency Band Edge.....	72
14.1	Applicable Standard	72
14.2	Test Procedure.....	72
14.3	Test Environmental Conditions.....	72
14.4	Test Results	73

1 General Information

1.1 Product Description for Equipment under Test (EUT)

Applicant	TOPMORE TECHNOLOGY INC. No.1-1, Taiyuan 2nd St., Zhubei City, Hsinchu County 302, Taiwan (R.O.C.)
Manufacturer	TOPMORE TECHNOLOGY INC. No.1-1, Taiyuan 2nd St., Zhubei City, Hsinchu County 302, Taiwan (R.O.C.)
Brand(Trade) Name	TOPMORE
Product (Equipment)	ROCK PLANET
Main Model Name	BSM-01
Series Model Name	BS-01
Model Discrepancy	The difference is only the color and pattern on the outward appearance. Because it doesn't affect any electrical characteristic of Bluetooth, therefore one test report can be used for two models.
Frequency Range	2402 ~ 2480 MHz
Transmit Power	BR(GFSK) Mode: 2.38 dBm (0.00173W) EDR($\pi/4$ -DQPSK) Mode: 3.62 dBm (0.00230W) EDR(8DPSK) Mode: 3.98 dBm (0.00250W)
Modulation Technique	BR Mode: GFSK EDR Mode: $\pi/4$ -DQPSK EDR Mode: 8DPSK
Transmit Data Rate	BR(GFSK) Mode: 1 Mbps EDR ($\pi/4$ -DQPSK) Mode: 2 Mbps EDR (8DPSK) Mode: 3 Mbps
Number of Channels	79 Channels
Antenna Specification	PCB Antenna / 2 dBi
Output:	5V from USB 3.7V from Battery
Received Date	Sep 05, 2018
Date of Test	Sep 10, 2018 ~ Nov 05, 2018

**All measurement and test data in this report was gathered from production sample serial number: 180905001
(Assigned by BACL, Taiwan).*

1.2 Objective

This report is prepared on behalf of *TOPMORE TECHNOLOGY INC.* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine the Bluetooth BR and EDR mode of EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

1.3 Related Submittal(s)/Grant(s)

NA

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.5 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Taiwan) to collect test data is located on

70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.
 68-3, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.

Bay Area Compliance Laboratories Corp. (Taiwan) Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3180) and the FCC designation No.TW3180 under the Mutual Recognition Agreement (MRA) in FCC Test. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.10.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 974454. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

2 System Test Configuration

2.1 Description of Test Configuration

For BT mode, 79 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2402	40	2441
2	2403	--	--
3	2404	--	--
4	2405	77	2478
--	--	78	2479
39	2440	79	2480

2.2 Equipment Modifications

No modification was made to the EUT.

2.3 EUT Exercise Software

Test Software		Bluetooth MP Tool		
Test Frequency		2402MHz	2441MHz	2480MHz
Power Level Setting	GFSK	0	0	0
	$\pi/4$ -DQPSK	0	0	0
	8DPSK	0	0	0

2.4 Support Equipment List and Details

Description	Manufacturer	Model Number	BSMI	FCC ID	S/N
NB	DELL	E6410	N/A	N/A	N/A

2.5 External Cable List and Details


Cable Description	Length (m)	From	To
Micro USB Cable (For ferrite core)	1.5	NB	EUT
3.5mm Audio Cable (For ferrite core)	1.5	NB	EUT

2.6 Block Diagram of Test Setup


See test photographs attached in annex setup photos for the actual connections between EUT and support equipment.


Radiation:

Below 1GHz:

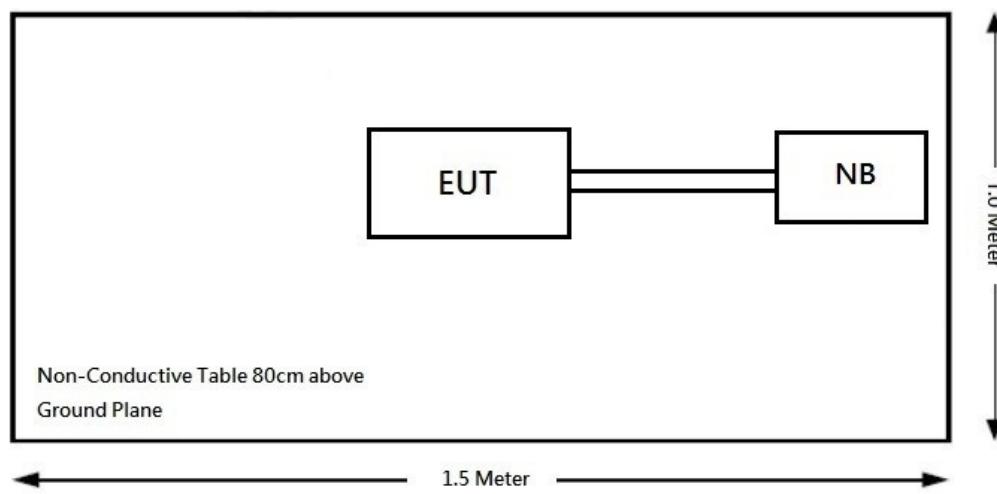

Above 1GHz:

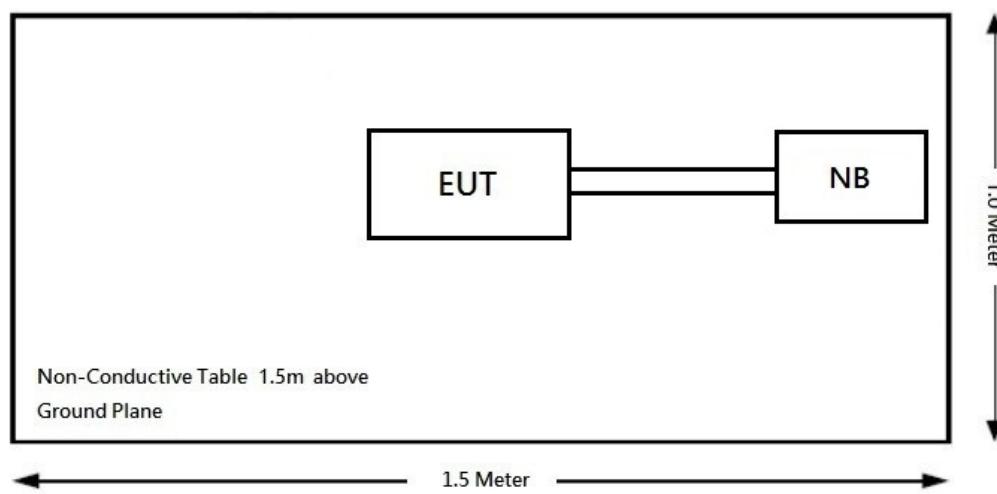

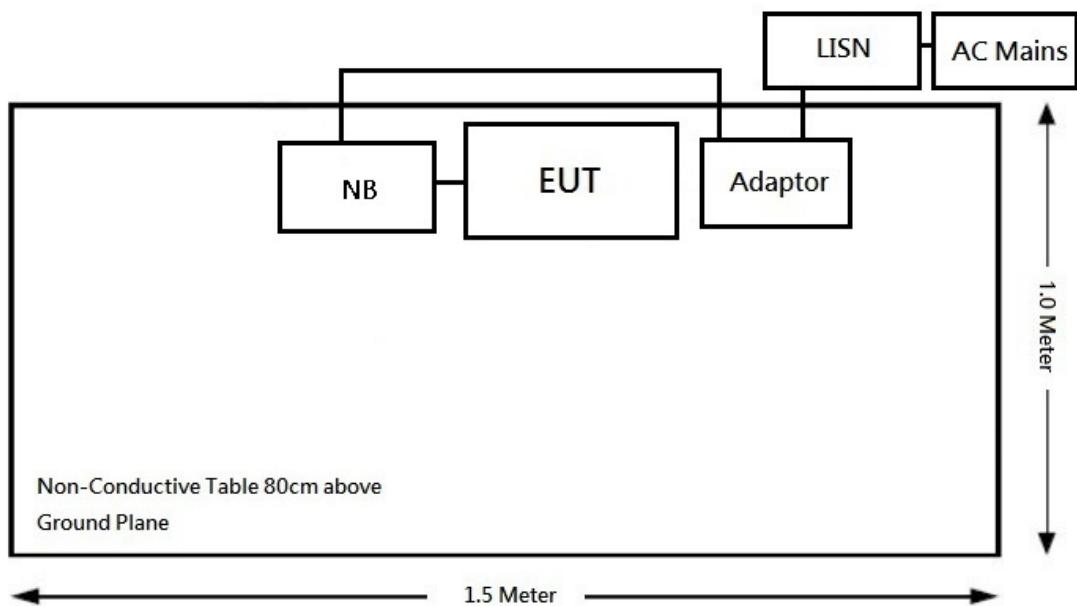Conduction:

3 Summary of Test Results

FCC Rules	Description of Test	Results
§15.247(i), §1.1310, §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance

4 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conduction Room (CON-A)					
LISN	Rohde & Schwarz	ENV216	101612	2018/02/22	2019/02/21
EMI Test Receiver	Rohde & Schwarz	ESR7	101419	2017/11/06	2018/11/05
Pulse Limiter	Rohde & Schwarz	ESH3Z2	TXZEM104	2018/08/03	2019/08/02
RF Cable	EMEC	EM-CB5D	001	2018/07/02	2019/07/01
Software	AUDIX	E3	V9.150826k	N.C.R	N.C.R
Radiated Room (966-A)					
Bilog Antenna with 6 dB Attenuator	SUNOL SCIENCES & MINI-CIRCUITS	JB6/UNAT-6+	A050115/1554 2_01	2017/12/20	2018/12/19
Horn Antenna	EMCO	3115	9311-4158	2018/04/20	2019/04/19
Horn Antenna	ETS-Lindgren	3116	62638	2018/08/29	2019/08/28
Preamplifier	Sonoma	310N	130602	2018/07/04	2019/07/03
Preamplifier	EM Electronics Corp.	EM01G18G	060657	2017/12/14	2018/12/13
Microware Preamplifier	EM Electronics Corporation	EM18G40G	060656	2018/01/15	2019/01/14
EMI Test Receiver	Rohde & Schwarz	ESR7	101419	2017/11/06	2018/11/05
Spectrum Analyzer	Rohde & Schwarz	FSV40	101435	2018/02/12	2019/02/13
Micro flex Cable	UTIFLEX	FSCM 64639 / (2M)	93D0127	2018/07/31	2019/07/30
Micro flex Cable	UTIFLEX	UFA210A-1-3149-300300	MFR64639 226389-001	2017/11/10	2018/11/09
Micro flex Cable	ROSNOL	K1K50-UP0264-K1K50-450CM	160309-1	2018/03/05	2019/03/04
Micro flex Cable	ROSNOL	K1K50-UP0264-K1K50-80CM	160309-2	2018/01/17	2019/01/16
Turn Table	Champro	TT-2000	060772-T	N.C.R	N.C.R
Antenna Tower	Champro	AM-BS-4500-B	060772-A	N.C.R	N.C.R
Controller	Champro	EM1000	60772	N.C.R	N.C.R
Software	Farad	EZ_EMC	BACL-03A1	N.C.R	N.C.R

Conducted Room					
Spectrum Analyzer	Rohde & Schwarz	FSU26	200268	2018/05/04	2019/05/03
Cable	WOKEN	SFL402	S02-160323-07	2018/02/12	2019/02/11
Attenuator	MINI-CIRCUITS	BW-S10W5+	N/A	2018/03/08	2019/03/07
Power Sensor	KEYSIGHT	U2021XA	MY54080018	2018/03/07	2019/03/06

***Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to the SI System of Units via the R.O.C. Center for Measurement Standards of the Electronics Testing Center, Taiwan (ETC) or to another internationally recognized National Metrology Institute (NMI), and were compliant with the current Taiwan Accreditation Foundation (TAF) requirements

5 FCC §15.247(i), §1.1310, § 2.1091 - Maximum Permissible Exposure (MPE)

5.1 Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

5.2 RF Exposure Evaluation Result

MPE evaluation:

Mode	Frequency Range (MHz)	Antenna Gain		Target Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
BT	2402-2480	2	1.58	4	2.51	20	0.0008	1

Result: MPE evaluation meet 20 cm the requirement of standard.

6 FCC §15.203 – Antenna Requirements

6.1 Applicable Standard

According to § 15.203,

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna does not exceed 6 dBi.

6.2 Measurement Uncertainty

Manufacturer	Type	Antenna Gain	Result
TOPMORE	PCB Antenna	2 dBi	Compliance

The EUT has one integral antenna arrangement, which was permanently attached; fulfill the requirement of this section.

7 FCC §15.207(a) – AC Line Conducted Emissions

7.1 Applicable Standard

According to §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 2}
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency.

Note 2: A linear average detector is required


7.2 Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN/ISN and receiver, LISN/ISN voltage division factor, LISN/ISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Taiwan) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report

Port	Expanded Measurement uncertainty
AC Mains	4.64 dB (k=2, 95% level of confidence)

7.3 EUT Setup

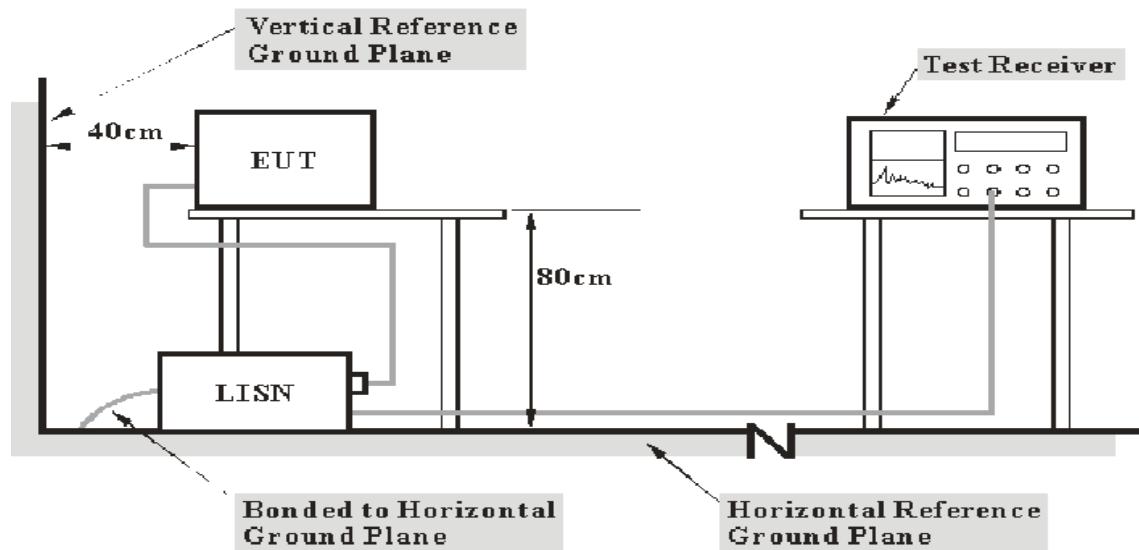

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

7.4 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

7.5 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

7.6 Corrected Factor & Margin Calculation

The factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation

The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for Over Limit calculation is as follows:

Over Limit = Level – Limit Line

7.7 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	1010 hPa


The testing was performed by Tom Hsu on 2018-09-21.

7.8 Test Results: PASS

7.9 Test Data

Test Mode: Transmitting

AC120 V, 60 Hz, Line

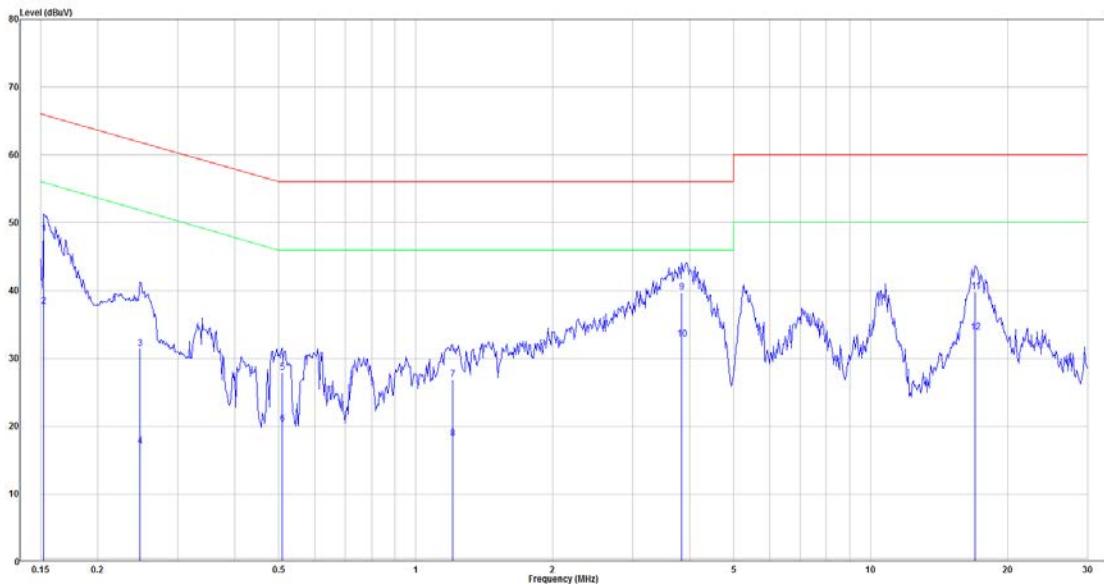


No.	Frequency (MHz)	Reading (dB μ V)	Correct Factor(dB)	Result (dB μ V)	Limit (dB μ V)	Over limit (dB)	Remark
1	0.152	28.93	19.45	48.38	65.88	-17.49	QP
2	0.152	18.23	19.45	37.68	55.88	-18.19	Average
3	0.248	12.02	19.46	31.48	61.82	-30.34	QP
4	0.248	-2.41	19.46	17.05	51.82	-34.77	Average
5	0.509	8.42	19.48	27.90	56.00	-28.10	QP
6	0.509	0.83	19.48	20.31	46.00	-25.69	Average
7	1.205	7.39	19.51	26.89	56.00	-29.11	QP
8	1.205	-1.31	19.51	18.20	46.00	-27.80	Average
9	3.848	20.10	19.58	39.68	56.00	-16.32	QP
10	3.848	13.26	19.58	32.84	46.00	-13.16	Average
11	16.996	20.03	19.77	39.80	60.00	-20.20	QP
12	16.996	14.05	19.77	33.82	50.00	-16.18	Average

Note:

Level = Read Level + Factor

Over Limit = Level - Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

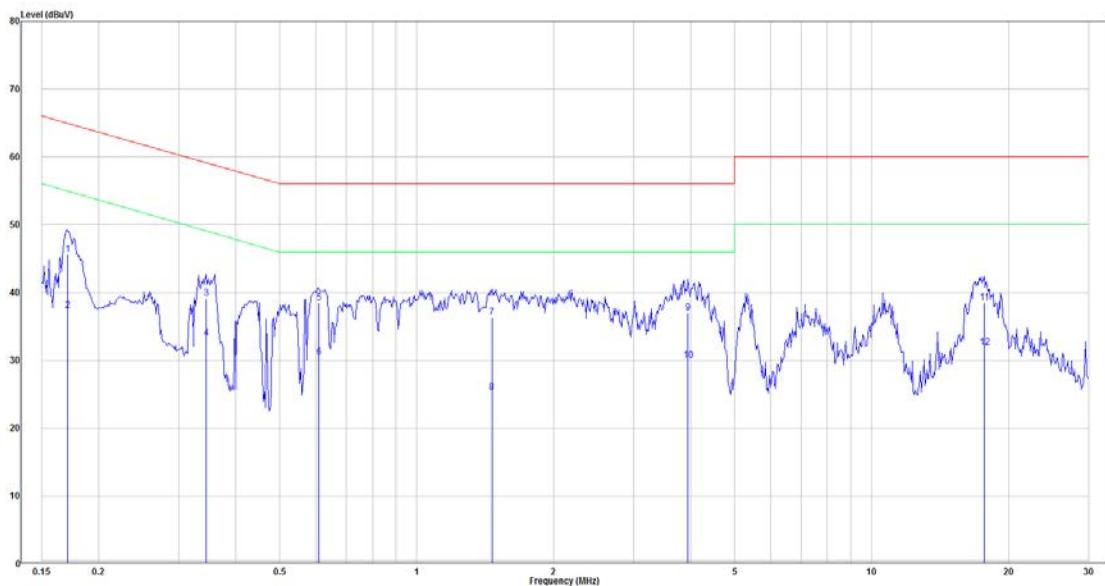AC120 V, 60 Hz, Neutral

No.	Frequency (MHz)	Reading (dB μ V)	Correct Factor(dB)	Result (dB μ V)	Limit (dB μ V)	Over limit (dB)	Remark
1	0.171	26.15	19.45	45.60	64.92	-19.33	QP
2	0.171	17.85	19.45	37.30	54.92	-17.62	Average
3	0.345	19.66	19.46	39.12	59.09	-19.97	QP
4	0.345	13.76	19.46	33.22	49.09	-15.87	Average
5	0.609	19.01	19.47	38.48	56.00	-17.52	QP
6	0.609	10.98	19.47	30.45	46.00	-15.55	Average
7	1.463	16.80	19.51	36.31	56.00	-19.69	QP
8	1.463	5.82	19.51	25.33	46.00	-20.67	Average
9	3.946	17.40	19.57	36.98	56.00	-19.02	QP
10	3.946	10.34	19.57	29.92	46.00	-16.08	Average
11	17.688	18.69	19.81	38.50	60.00	-21.50	QP
12	17.688	12.07	19.81	31.88	50.00	-18.12	Average

Note:

Level = Read Level + Factor

Over Limit = Level - Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

8 FCC §15.209, §15.205 , §15.247(d) – Spurious Emissions

8.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.2 Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Taiwan) is shown in below table. And the uncertainty will not be taken into consideration for the test data recorded in the report.


Frequency	Measurement uncertainty
30 MHz~200 MHz	4.21 dB (k=2, 95% level of confidence)
200 MHz~1 GHz	4.41 dB (k=2, 95% level of confidence)
1 GHz~6 GHz	4.51 dB (k=2, 95% level of confidence)
6 GHz~18 GHz	4.88 dB (k=2, 95% level of confidence)
18 GHz~26 GHz	4.30 dB (k=2, 95% level of confidence)
26 GHz~40 GHz	4.30 dB (k=2, 95% level of confidence)

8.3 EUT Setup

Below 1 GHz:

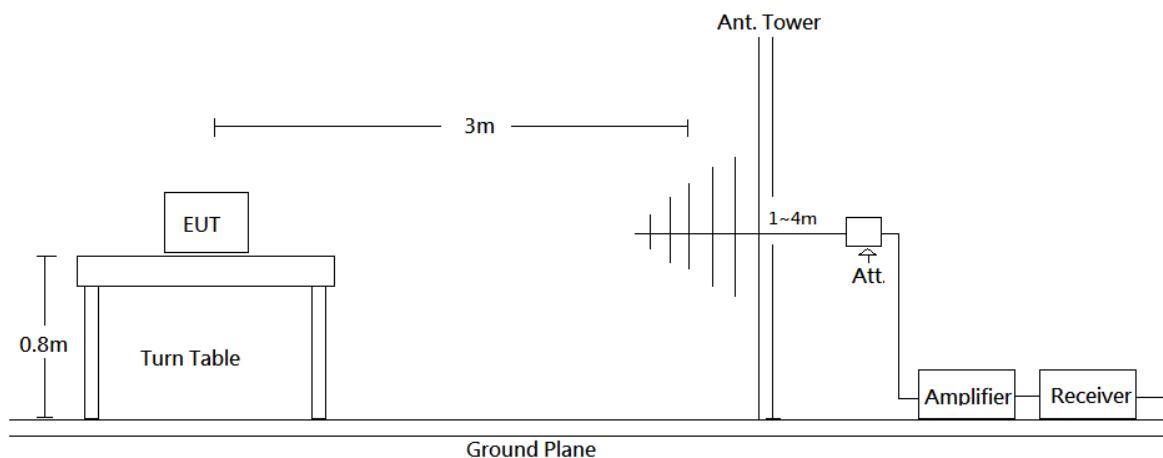

Above 1 GHz:

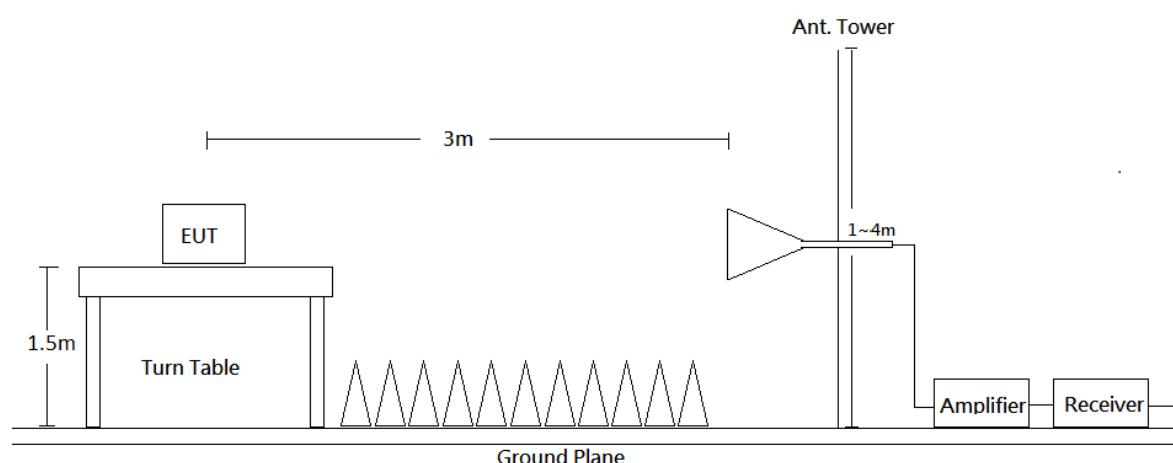

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

8.4 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 26.5 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

Frequency Range	RBW	VBW	Measurement method
30-1000 MHz	120 kHz	/	QP
Above 1 GHz	1 MHz	3 MHz	PK
	1 MHz	10 Hz	Ave

8.5 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

8.6 Corrected Factor & Margin Calculation

The Correct Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Correct Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Result} - \text{Limit}$$

8.7 Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.209 Limit. Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$Lm + U(Lm) \leq Llim + Ucisp$$

In BACL, $U(Lm)$ is less than $Ucisp$, if Lm is less than $Llim$, it implies that the EUT complies with the limit.

8.8 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	1010 hPa

The Radiation Spurious Emissions testing was performed by Tom Hsu on 2018-09-10 ~ 2018-11-05.

The Conducted Spurious Emissions testing was performed by Tom Hsu on 2018-09-11.


8.9 Test Results: PASS

8.10 Test Data


BR (GFSK) Mode

Horizontal (*worst case is BR (GFSK) mode high channel*)

30MHz-1GHz:

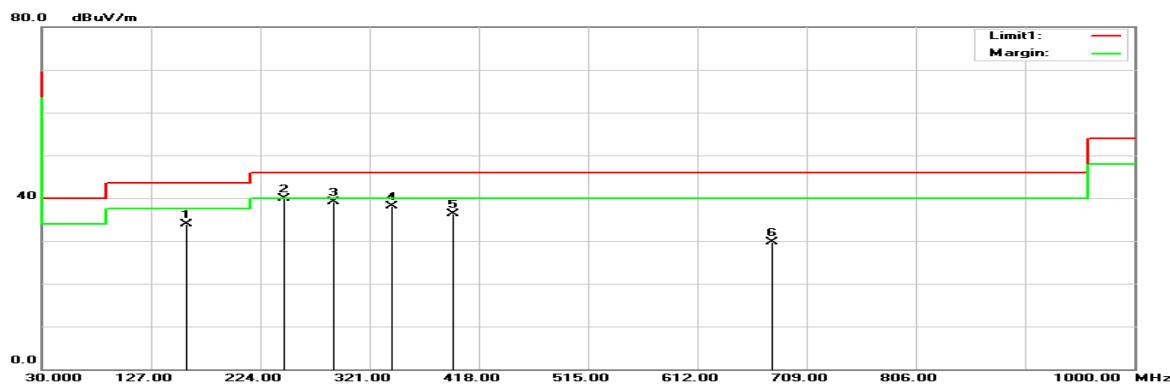

1GHz-18GHz:

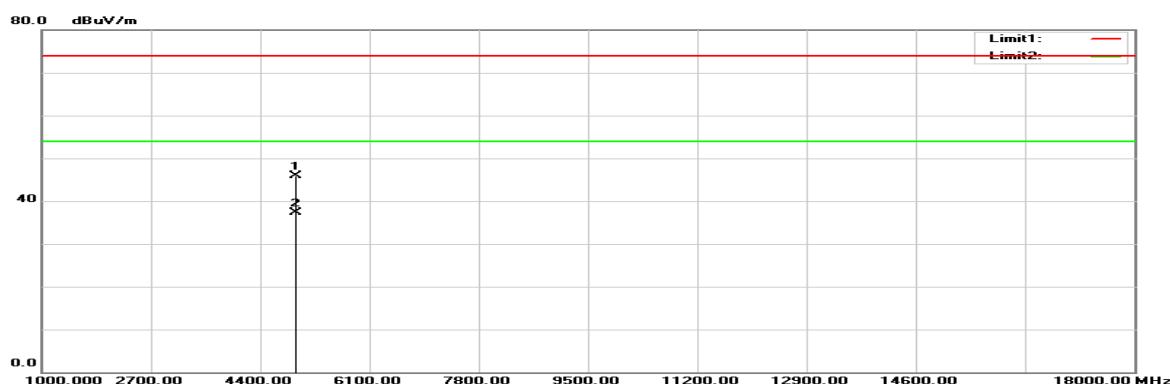


18GHz-26.5GHz:




Vertical (*worst case is BR (GFSK) mode low channel*)


30MHz-1GHz:

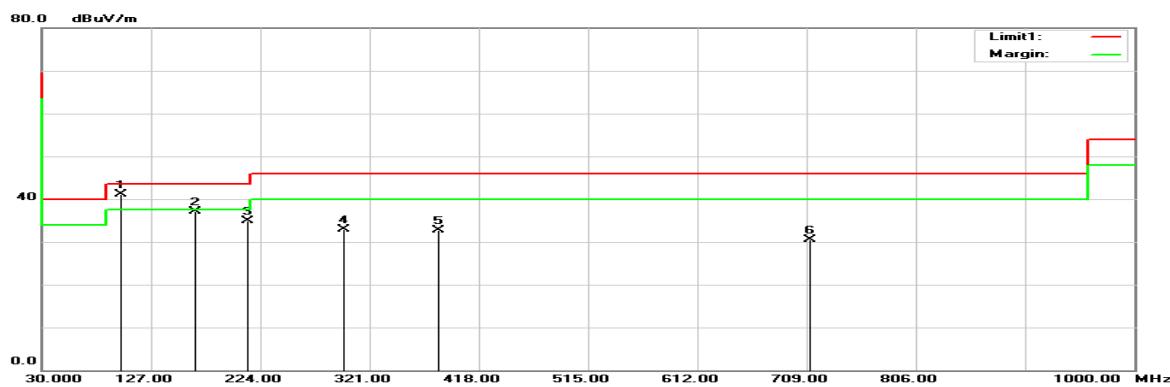

1GHz-18GHz:

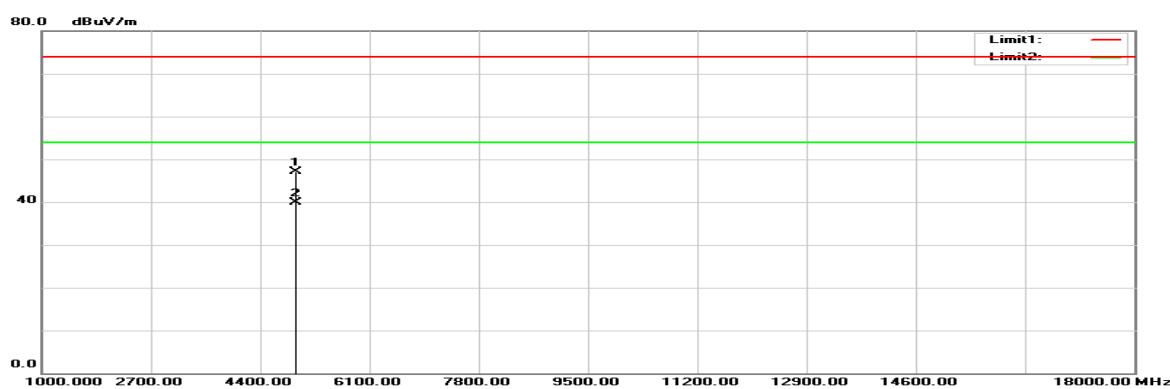


18GHz-26.5GHz:

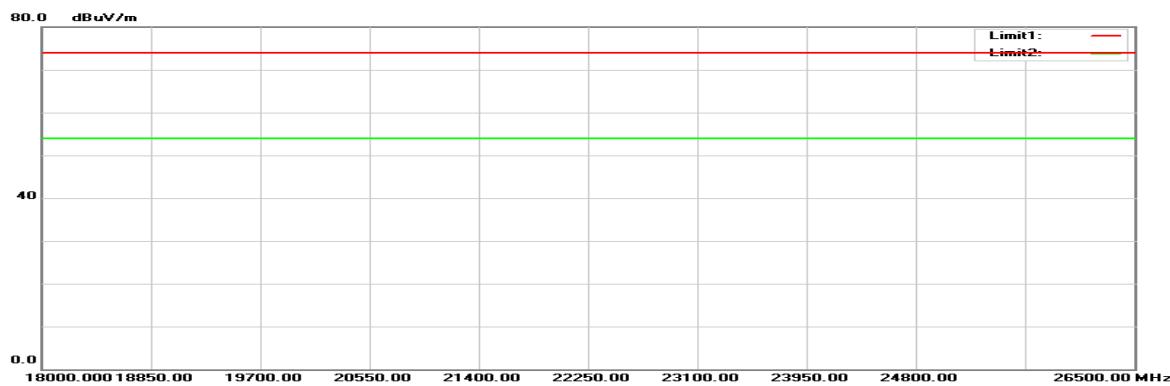


EDR ($\pi/4$ -DQPSK) Mode**Horizontal** (worst case is EDR ($\pi/4$ -DQPSK) mode high channel)


30MHz-1GHz:

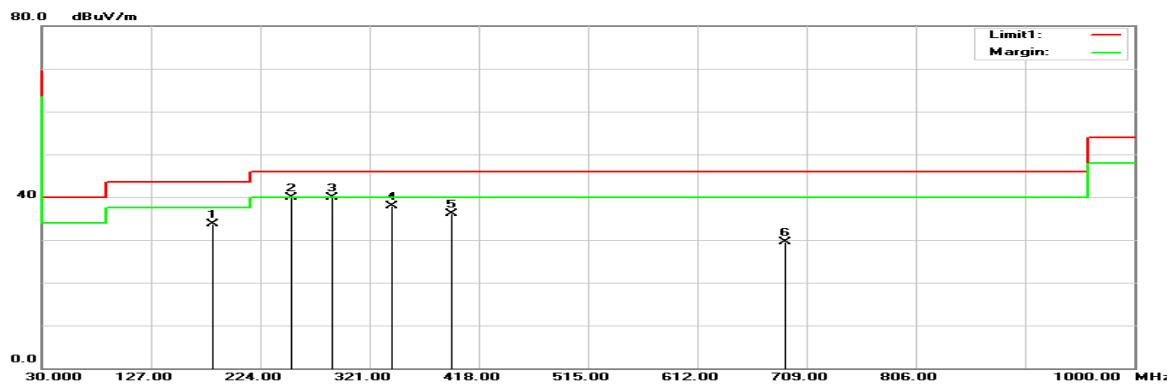

1GHz-18GHz:

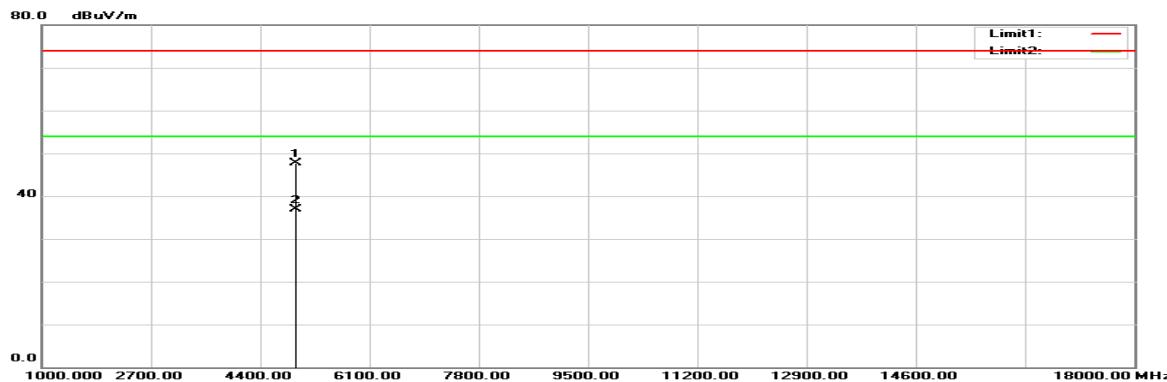


18GHz-26.5GHz:

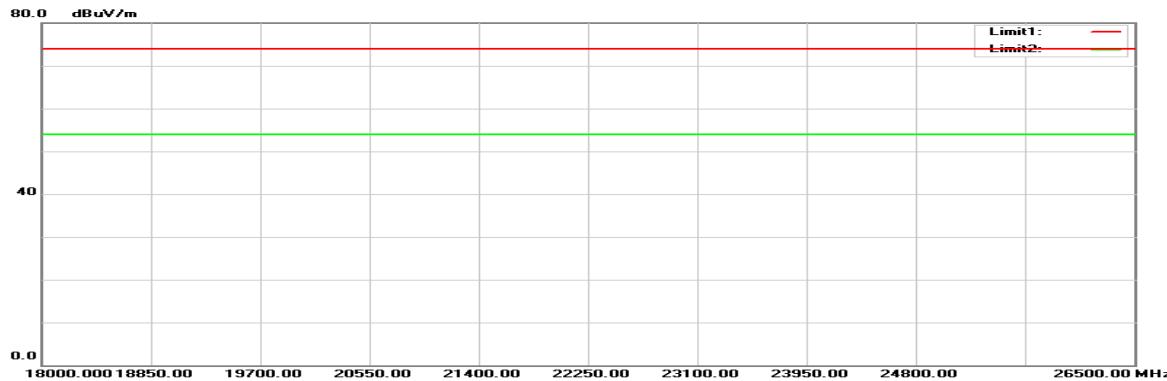


Vertical (worst case is EDR ($\pi/4$ -DQPSK) mode high channel)


30MHz-1GHz:

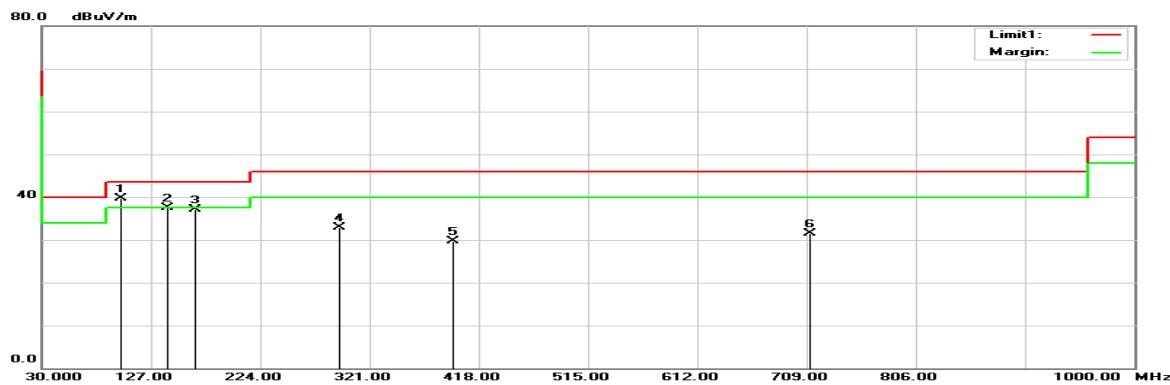

1GHz-18GHz:

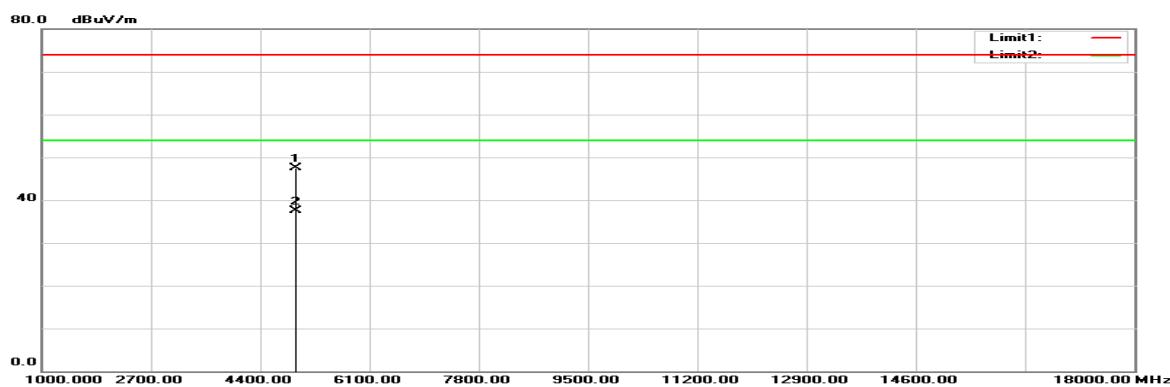


18GHz-26.5GHz:

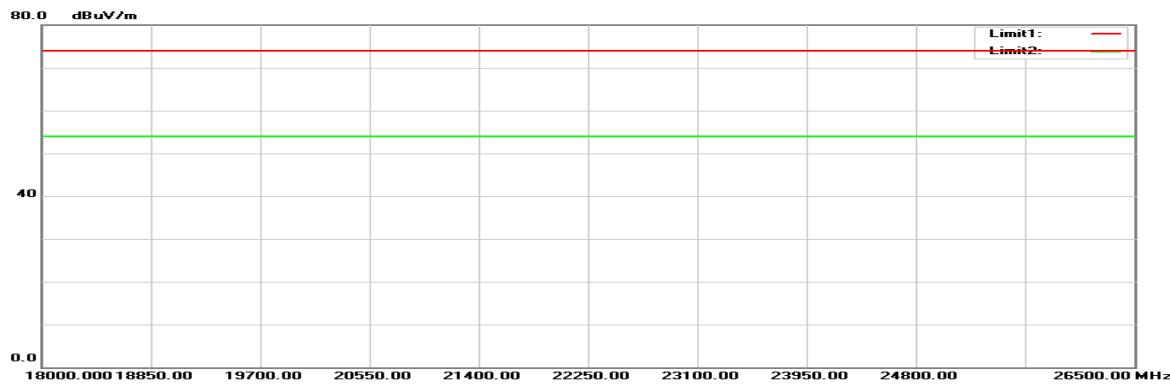

EDR (8DPSK) Mode**Horizontal** (*worst case is EDR (8DPSK) mode low channel*)

30MHz-1GHz:

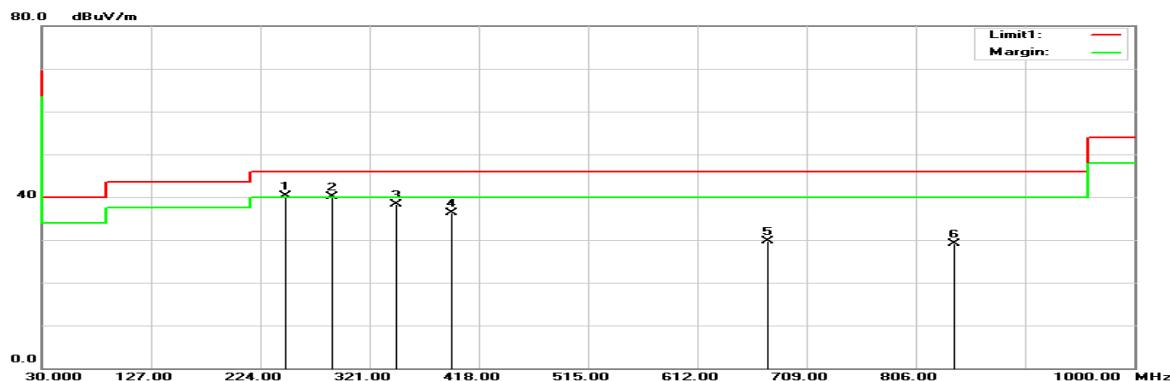

1GHz-18GHz:




18GHz-26.5GHz:




Vertical (*worst case is EDR (8DPSK) mode high channel*)


30MHz-1GHz:

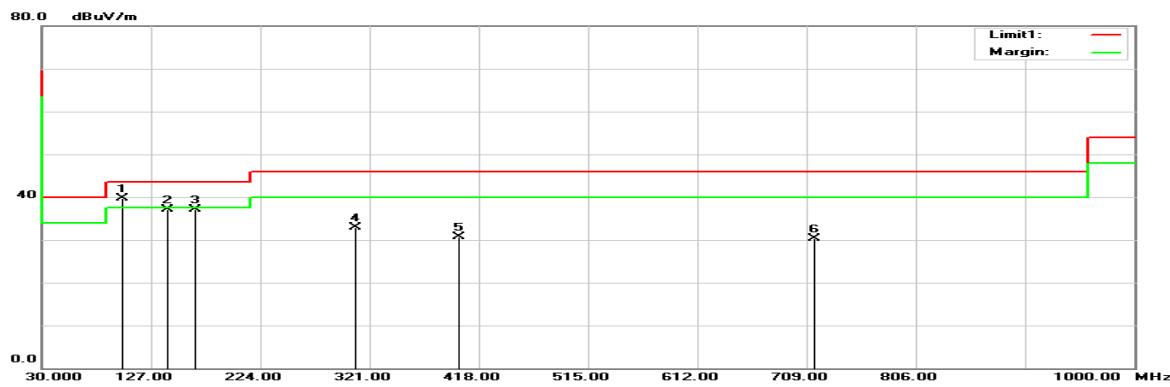

1GHz-18GHz:

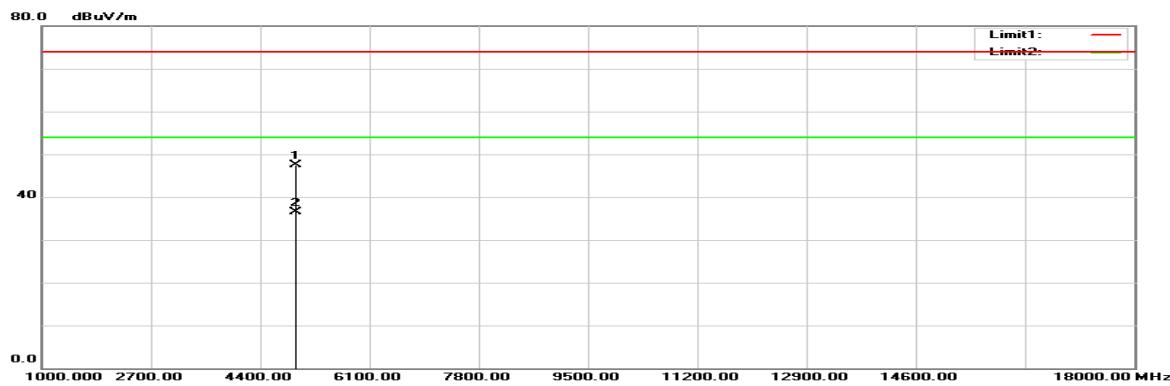

18GHz-26.5GHz:

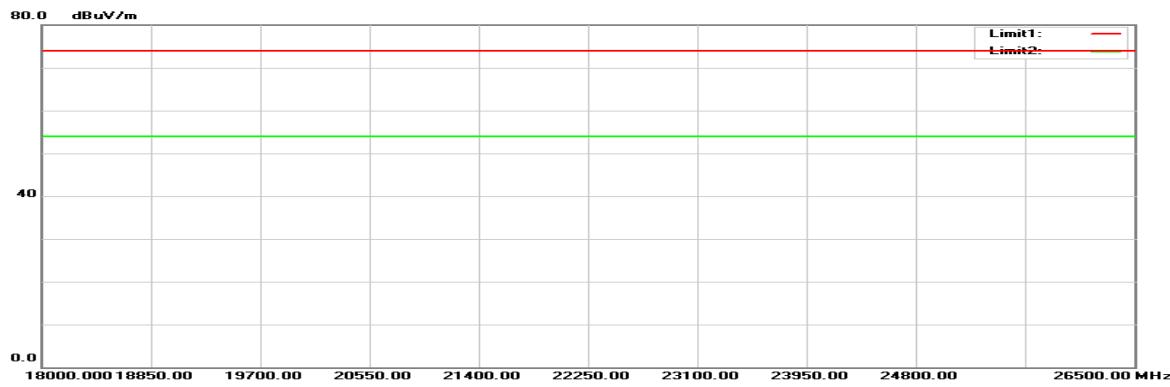

Below 1GHz**Horizontal**

Frequency (MHz)	Reading (dB μ V)	Correct Factor(dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
<i>BR (GFSK)</i>								
159.0100	43.66	-9.74	33.92	43.50	-9.58	100	70	QP
245.3400	50.17	-10.24	39.93	46.00	-6.07	100	70	QP
288.9900	47.29	-8.11	39.18	46.00	-6.82	100	65	QP
341.3700	45.12	-7.04	38.08	46.00	-7.92	100	163	QP
394.7200	42.40	-6.04	36.36	46.00	-9.64	100	223	QP
678.9300	32.18	-2.50	29.68	46.00	-16.32	100	161	QP
<i>EDR ($\pi/4$-DQPSK)</i>								
181.3200	45.16	-11.43	33.73	43.50	-9.77	100	90	QP
251.1600	49.91	-10.08	39.83	46.00	-6.17	100	344	QP
288.0200	48.04	-8.13	39.91	46.00	-6.09	100	65	QP
341.3700	44.85	-7.04	37.81	46.00	-8.19	100	31	QP
393.7500	42.09	-6.06	36.03	46.00	-9.97	100	236	QP
689.6000	31.91	-2.36	29.55	46.00	-16.45	100	156	QP
<i>EDR (8DPSK)</i>								
246.3100	50.48	-10.22	40.26	46.00	-5.74	100	87	QP
288.0200	48.14	-8.13	40.01	46.00	-5.99	100	69	QP
345.2500	45.21	-6.95	38.26	46.00	-7.74	100	108	QP
393.7500	42.39	-6.06	36.33	46.00	-9.67	100	240	QP
674.0800	32.21	-2.55	29.66	46.00	-16.34	100	147	QP
839.9500	29.07	0.02	29.09	46.00	-16.91	100	156	QP

Vertical

Frequency (MHz)	Reading (dB μ V)	Correct Factor(dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
<i>BR (GFSK)</i>								
99.8400	54.59	-13.44	41.15	43.50	-2.35	100	62	QP
166.7700	47.47	-10.36	37.11	43.50	-6.39	100	360	QP
213.3300	45.86	-10.95	34.91	43.50	-8.59	100	223	QP
298.6900	40.90	-7.96	32.94	46.00	-13.06	100	15	QP
382.1100	38.98	-6.27	32.71	46.00	-13.29	100	57	QP
711.9100	32.61	-2.13	30.48	46.00	-15.52	100	310	QP
<i>EDR ($\pi/4$-DQPSK)</i>								
99.8400	53.15	-13.44	39.71	43.50	-3.79	100	46	QP
141.5500	46.92	-9.51	37.41	43.50	-6.09	100	321	QP
166.7700	47.44	-10.36	37.08	43.50	-6.42	100	355	QP
293.8400	40.91	-8.03	32.88	46.00	-13.12	100	44	QP
394.7200	35.84	-6.04	29.80	46.00	-16.20	100	53	QP
711.9100	33.57	-2.13	31.44	46.00	-14.56	100	314	QP
<i>EDR (8DPSK)</i>								
101.7800	52.52	-12.90	39.62	43.50	-3.88	100	198	QP
141.5500	46.70	-9.51	37.19	43.50	-6.31	100	350	QP
166.7700	47.47	-10.36	37.11	43.50	-6.39	100	228	QP
308.3900	40.67	-7.76	32.91	46.00	-13.09	100	360	QP
400.5400	36.62	-5.93	30.69	46.00	-15.31	100	66	QP
715.7900	32.47	-2.09	30.38	46.00	-15.62	100	357	QP

Result = Reading + Correct Factor

Margin = Result - Limit

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

Above 1GHz**Horizontal**

Frequency (MHz)	Reading (dB μ V)	Correct Factor(dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
<i>BR (GFSK), Low channel</i>								
2390.000	63.88	-3.88	60.00	74.00	-14.00	150	46	peak
2390.000	49.54	-3.88	45.66	54.00	-8.34	150	46	AVG
2402.000	95.96	-3.86	92.10	N/A	N/A	157	167	peak
2402.000	92.53	-3.86	88.67	N/A	N/A	157	167	AVG
4804.000	42.90	1.81	44.71	74.00	-29.29	100	102	peak
4804.000	31.26	1.81	33.07	54.00	-20.93	100	102	AVG
<i>BR (GFSK), Middle channel</i>								
2441.000	98.12	-3.76	94.36	N/A	N/A	150	168	peak
2441.000	94.79	-3.76	91.03	N/A	N/A	150	168	AVG
4882.000	41.96	2.07	44.03	74.00	-29.97	100	252	peak
4882.000	31.84	2.07	33.91	54.00	-20.09	100	252	AVG
<i>BR (GFSK), High channel</i>								
2480.000	99.91	-3.66	96.25	N/A	N/A	150	166	peak
2480.000	96.49	-3.66	92.83	N/A	N/A	150	166	AVG
2483.500	63.23	-3.64	59.59	74.00	-14.41	150	74	peak
2483.500	49.84	-3.64	46.20	54.00	-7.80	150	74	AVG
4960.000	43.64	2.32	45.96	74.00	-28.04	100	308	peak
4960.000	35.00	2.32	37.32	54.00	-16.68	100	308	AVG

Vertical

Frequency (MHz)	Reading (dB μ V)	Correct Factor(dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
<i>BR (GFSK), Low channel</i>								
2390.000	63.45	-3.88	59.57	74.00	-14.43	150	177	peak
2390.000	50.23	-3.88	46.35	54.00	-7.65	150	177	AVG
2402.000	93.39	-3.86	89.53	N/A	N/A	134	325	peak
2402.000	90.11	-3.86	86.25	N/A	N/A	134	325	AVG
4804.000	43.14	1.81	44.95	74.00	-29.05	100	342	peak
4804.000	29.67	1.81	31.48	54.00	-22.52	100	342	AVG
<i>BR (GFSK), Middle channel</i>								
2441.000	94.32	-3.76	90.56	N/A	N/A	150	337	peak
2441.000	91.14	-3.76	87.38	N/A	N/A	150	337	AVG
4882.000	43.01	2.07	45.08	74.00	-28.92	142	60	peak
4882.000	33.22	2.07	35.29	54.00	-18.71	142	60	AVG
<i>BR (GFSK), High channel</i>								
2480.000	96.14	-3.66	92.48	N/A	N/A	150	337	peak
2480.000	92.86	-3.66	89.20	N/A	N/A	150	337	AVG
2483.500	63.49	-3.64	59.85	74.00	-14.15	150	87	peak
2483.500	49.65	-3.64	46.01	54.00	-7.99	150	87	AVG
4960.000	44.79	2.32	47.11	74.00	-26.89	100	62	peak
4960.000	37.58	2.32	39.90	54.00	-14.10	100	62	AVG

Result = Reading + Correct Factor

Margin = Result - Limit

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

Horizontal

Frequency (MHz)	Reading (dB μ V)	Correct Factor(dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
<i>EDR ($\pi/4$-DQPSK), Low channel</i>								
2390.000	63.31	-3.88	59.43	74.00	-14.57	150	102	peak
2390.000	49.48	-3.88	45.60	54.00	-8.40	150	102	AVG
2402.000	97.80	-3.86	93.94	N/A	N/A	157	167	peak
2402.000	91.59	-3.86	87.73	N/A	N/A	157	167	AVG
4804.000	41.77	1.81	43.58	74.00	-30.42	100	175	peak
4804.000	29.55	1.81	31.36	54.00	-22.64	100	175	AVG
<i>EDR ($\pi/4$-DQPSK), Middle channel</i>								
2441.000	99.26	-3.76	95.50	N/A	N/A	161	168	peak
2441.000	93.01	-3.76	89.25	N/A	N/A	161	168	AVG
4882.000	42.19	2.07	44.26	74.00	-29.74	100	22	peak
4882.000	30.52	2.07	32.59	54.00	-21.41	100	22	AVG
<i>EDR ($\pi/4$-DQPSK), High channel</i>								
2480.000	101.16	-3.66	97.50	N/A	N/A	123	166	peak
2480.000	95.12	-3.66	91.46	N/A	N/A	123	166	AVG
2483.500	63.22	-3.64	59.58	74.00	-14.42	150	353	peak
2483.500	49.76	-3.64	46.12	54.00	-7.88	150	353	AVG
4960.000	45.47	2.32	47.79	74.00	-26.21	100	300	peak
4960.000	34.52	2.32	36.84	54.00	-17.16	100	300	AVG

Vertical

Frequency (MHz)	Reading (dB μ V)	Correct Factor(dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
<i>EDR ($\pi/4$-DQPSK), Low channel</i>								
2390.000	62.76	-3.88	58.88	74.00	-15.12	150	92	peak
2390.000	49.49	-3.88	45.61	54.00	-8.39	150	92	AVG
2402.000	94.02	-3.86	90.16	N/A	N/A	140	349	peak
2402.000	87.90	-3.86	84.04	N/A	N/A	140	349	AVG
4804.000	43.62	1.81	45.43	74.00	-28.57	100	123	peak
4804.000	30.35	1.81	32.16	54.00	-21.84	100	123	AVG
<i>EDR ($\pi/4$-DQPSK), Middle channel</i>								
2441.000	94.41	-3.76	90.65	N/A	N/A	150	337	peak
2441.000	88.25	-3.76	84.49	N/A	N/A	150	337	AVG
4882.000	42.06	2.07	44.13	74.00	-29.87	100	201	peak
4882.000	30.21	2.07	32.28	54.00	-21.72	100	201	AVG
<i>EDR ($\pi/4$-DQPSK), High channel</i>								
2480.000	96.93	-3.66	93.27	N/A	N/A	150	337	peak
2480.000	91.13	-3.66	87.47	N/A	N/A	150	337	AVG
2483.500	63.27	-3.64	59.63	74.00	-14.37	150	294	peak
2483.500	49.71	-3.64	46.07	54.00	-7.93	150	294	AVG
4960.000	45.24	2.32	47.56	74.00	-26.44	100	61	peak
4960.000	35.14	2.32	37.46	54.00	-16.54	100	61	AVG

Result = Reading + Correct Factor

Margin = Result - Limit

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.

Horizontal

Frequency (MHz)	Reading (dB μ V)	Correct Factor(dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
<i>EDR (8DPSK), Low channel</i>								
2390.000	62.83	-3.88	58.95	74.00	-15.05	150	340	peak
2390.000	49.60	-3.88	45.72	54.00	-8.28	150	340	AVG
2402.000	97.53	-3.86	93.67	N/A	N/A	156	168	peak
2402.000	91.14	-3.86	87.28	N/A	N/A	150	168	AVG
4804.000	42.22	1.81	44.03	74.00	-29.97	100	100	peak
4804.000	30.13	1.81	31.94	54.00	-22.06	100	100	AVG
<i>EDR (8DPSK), Middle channel</i>								
2441.000	99.60	-3.76	95.84	N/A	N/A	136	168	peak
2441.000	93.15	-3.76	89.39	N/A	N/A	136	168	AVG
4882.000	41.72	2.07	43.79	74.00	-30.21	100	354	peak
4882.000	28.67	2.07	30.74	54.00	-23.26	100	354	AVG
<i>EDR (8DPSK), High channel</i>								
2480.000	100.95	-3.66	97.29	N/A	N/A	150	166	peak
2480.000	94.69	-3.66	91.03	N/A	N/A	150	166	AVG
2483.500	62.73	-3.64	59.09	74.00	-14.91	150	359	peak
2483.500	49.69	-3.64	46.05	54.00	-7.95	150	359	AVG
4960.000	44.14	2.32	46.46	74.00	-27.54	100	301	peak
4960.000	33.88	2.32	36.20	54.00	-17.80	100	301	AVG

Vertical

Frequency (MHz)	Reading (dB μ V)	Correct Factor(dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree (°)	Remark
<i>EDR (8DPSK), Low channel</i>								
2390.000	62.77	-3.88	58.89	74.00	-15.11	150	223	peak
2390.000	49.67	-3.88	45.79	54.00	-8.21	150	223	AVG
2402.000	94.18	-3.86	90.32	N/A	N/A	150	325	peak
2402.000	87.85	-3.86	83.99	N/A	N/A	150	325	AVG
4804.000	42.04	1.81	43.85	74.00	-30.15	100	303	peak
4804.000	28.30	1.81	30.11	54.00	-23.89	100	303	AVG
<i>EDR (8DPSK), Middle channel</i>								
2441.000	94.40	-3.76	90.64	N/A	N/A	150	337	peak
2441.000	88.05	-3.76	84.29	N/A	N/A	150	337	AVG
4882.000	42.72	2.07	44.79	74.00	-29.21	100	52	peak
4882.000	30.86	2.07	32.93	54.00	-21.07	100	52	AVG
<i>EDR (8DPSK), High channel</i>								
2480.000	97.03	-3.66	93.37	N/A	N/A	150	339	peak
2480.000	90.69	-3.66	87.03	N/A	N/A	150	339	AVG
2483.500	63.59	-3.64	59.95	74.00	-14.05	150	358	peak
2483.500	49.64	-3.64	46.00	54.00	-8.00	150	358	AVG
4960.000	45.12	2.32	47.44	74.00	-26.56	100	62	peak
4960.000	34.25	2.32	36.57	54.00	-17.43	100	62	AVG

Result = Reading + Correct Factor


Margin = Result - Limit

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported.


Conducted Spurious Emissions:

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
<i>BR Mode (GFSK)</i>				
Low	2402	51.60	≥ 20	PASS
Mid	2441	51.25	≥ 20	PASS
High	2480	53.45	≥ 20	PASS
<i>EDR Mode ($\pi/4$-DQPSK):</i>				
Low	2402	47.72	≥ 20	PASS
Mid	2441	46.70	≥ 20	PASS
High	2480	49.95	≥ 20	PASS
<i>EDR Mode (8DPSK):</i>				
Low	2402	45.60	≥ 20	PASS
Mid	2441	46.64	≥ 20	PASS
High	2480	47.96	≥ 20	PASS

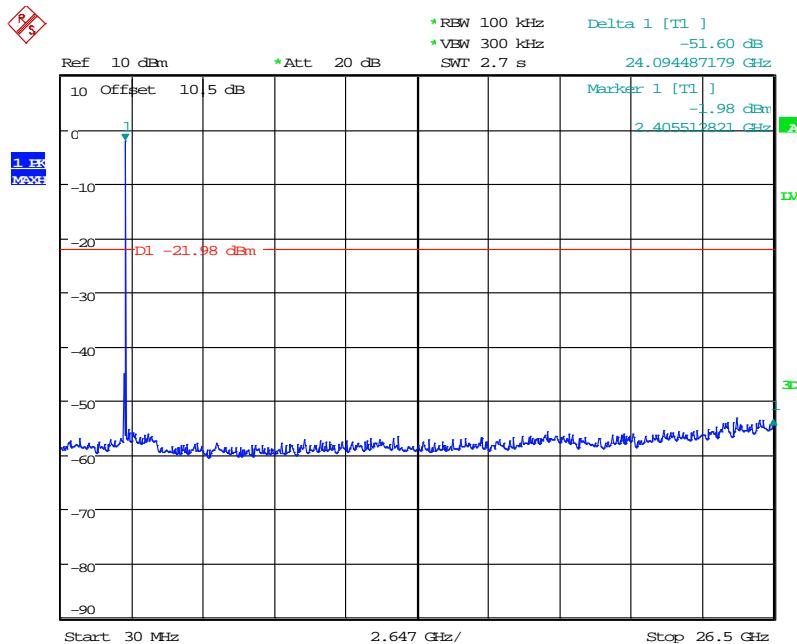BR Mode (GFSK)**Low Channel**


Date: 11.SEP.2018 14:32:13

Middle Channel

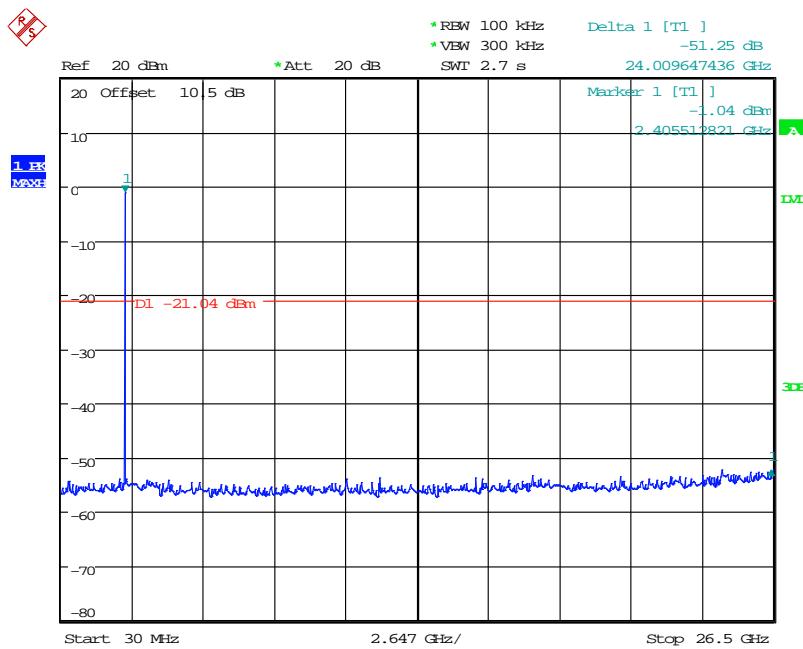

Date: 11.SEP.2018 14:34:05


High Channel

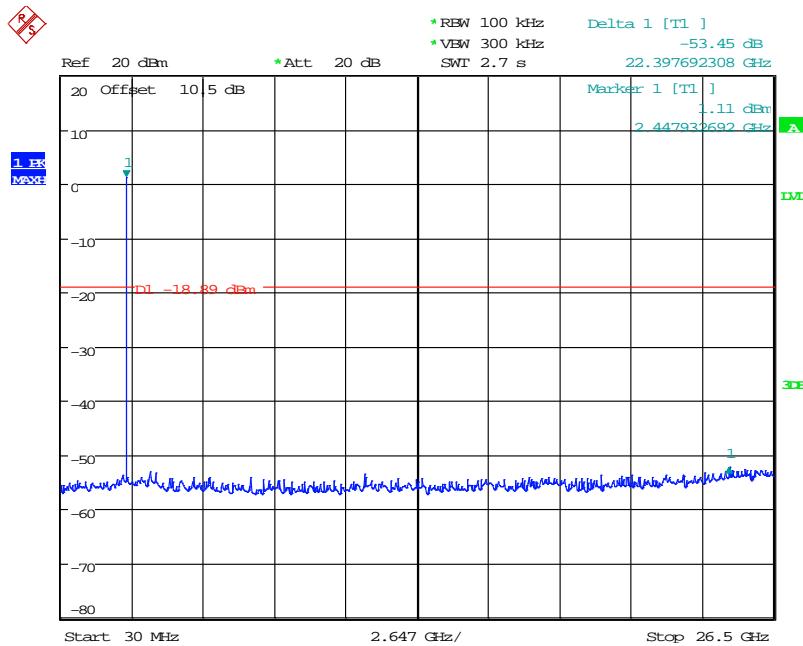

Date: 11.SEP.2018 14:35:42


EDR Mode ($\pi/4$ -DQPSK)

Low Channel

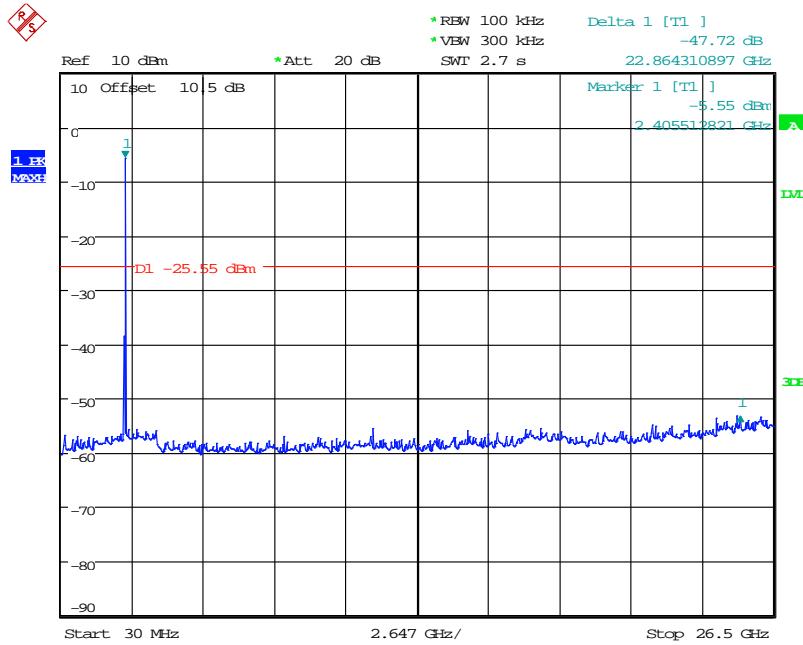


Date: 11.SEP.2018 14:43:03


Middle Channel

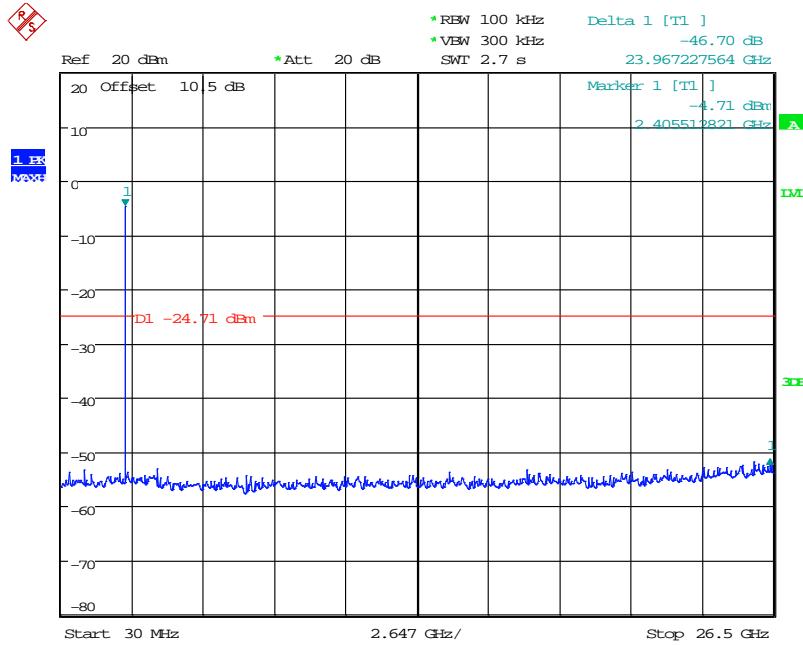

Date: 11.SEP.2018 14:39:45

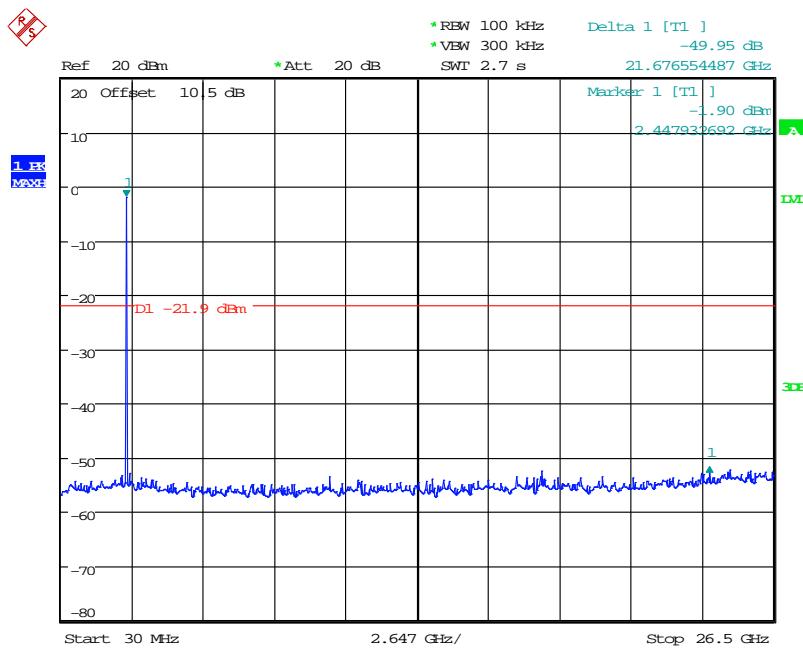
High Channel

Date: 11.SEP.2018 14:41:42

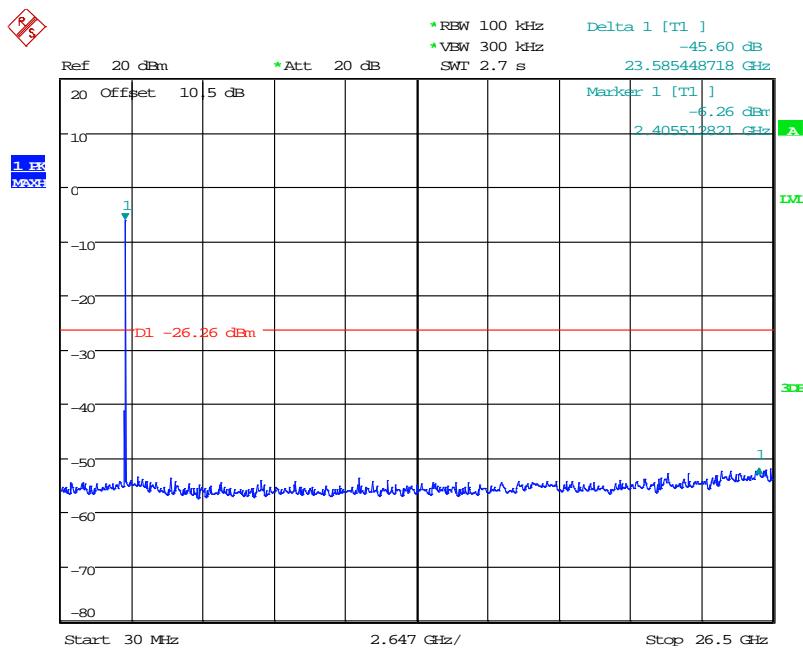EDR Mode (8DPSK)**Low Channel**


Date: 11.SEP.2018 14:45:03

Middle Channel

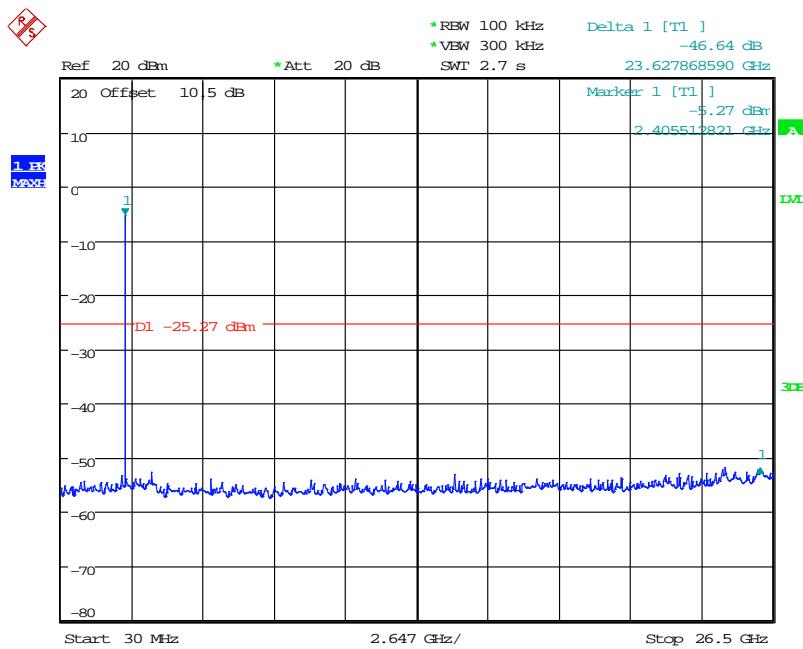

Date: 11.SEP.2018 14:46:26

High Channel

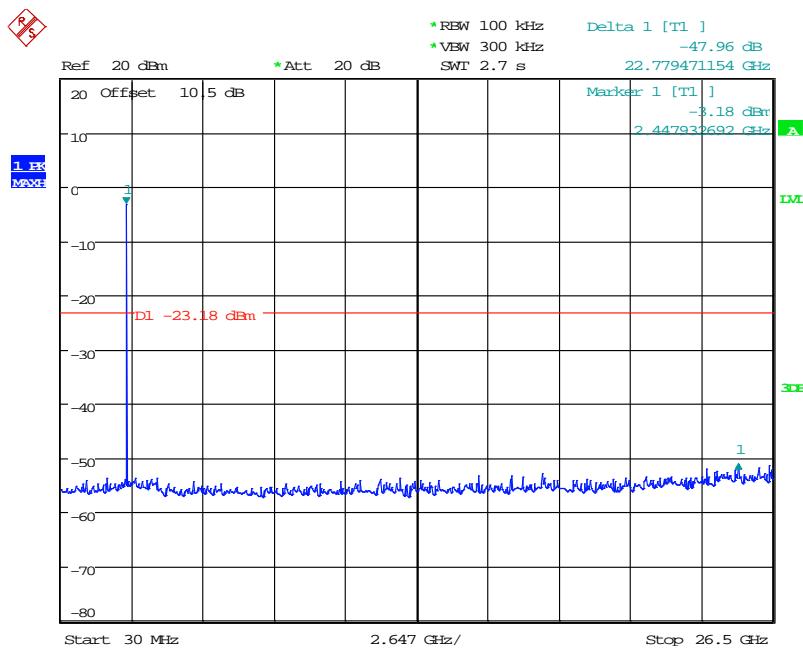

Date: 11.SEP.2018 14:48:02

9 FCC §15.247(a)(1) – 20 dB Emission Bandwidth

9.1 Applicable Standard

According to FCC §15.247(a) (1) the maximum 20 dB bandwidth of the hopping channel shall be presented.

9.2 Test Procedure

- (1) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- (2) Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- (3) Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- (4) Repeat above procedures until all frequencies measured were complete.

9.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	1010 hPa

The testing was performed by Tom Hsu on 2018-09-11.


9.4 Test Results

Channel	Frequency (MHz)	20 dBc BW (MHz)
<i>BR Mode (GFSK)</i>		
Low	2402	1.03
Middle	2441	1.03
High	2480	1.04
<i>EDR Mode ($\pi/4$-DQPSK)</i>		
Low	2402	1.28
Middle	2441	1.29
High	2480	1.28
<i>EDR Mode (8DPSK)</i>		
Low	2402	1.29
Middle	2441	1.29
High	2480	1.30


Please refer to the following plots

BR Mode (GFSK)


Low Channel

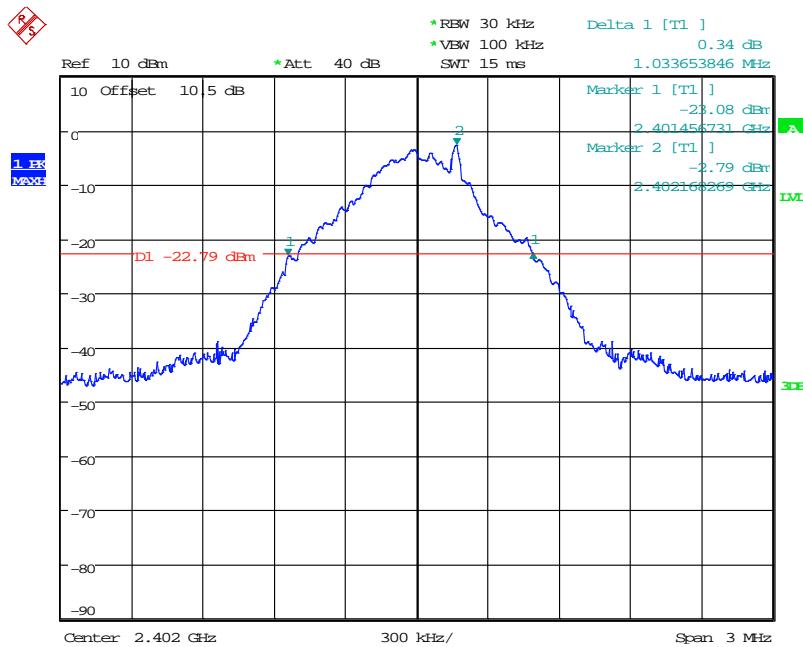

Date: 11.SEP.2018 14:31:19

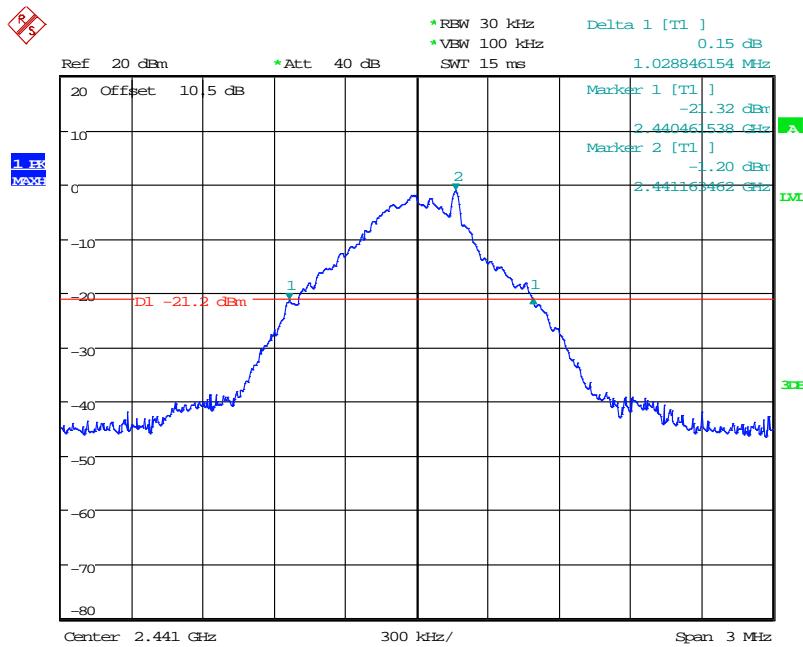Middle Channel


Date: 11.SEP.2018 14:33:29

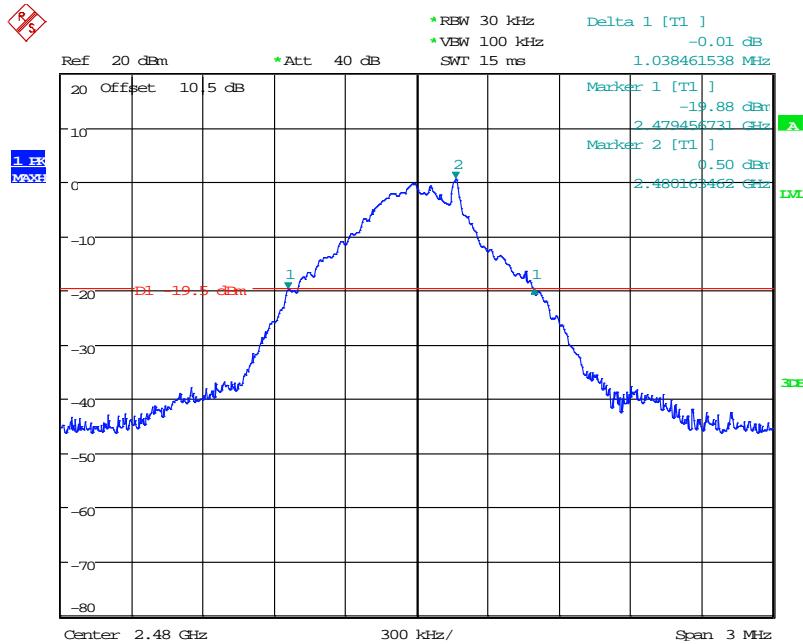High Channel

Date: 11.SEP.2018 14:34:47


EDR Mode ($\pi/4$ -DQPSK)

Low Channel

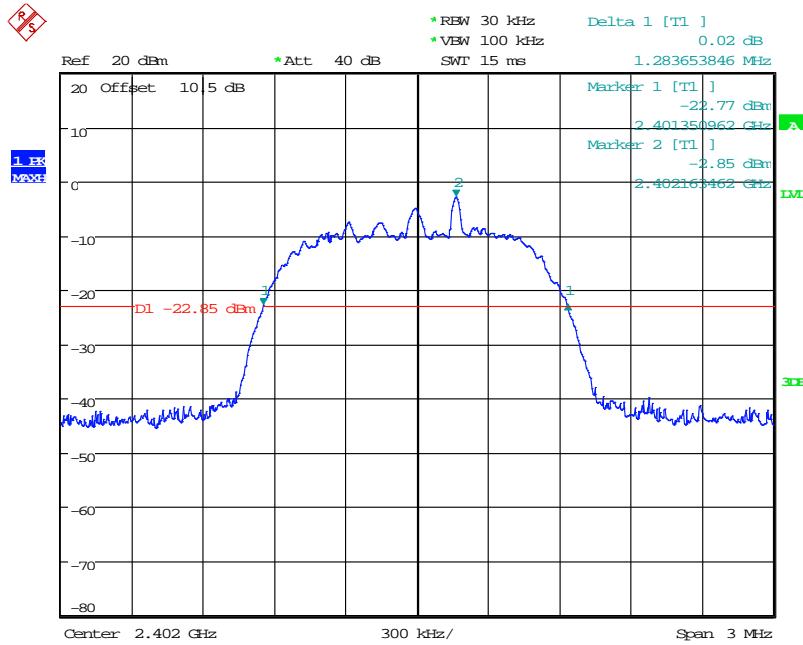


Date: 11.SEP.2018 14:37:16


Middle Channel

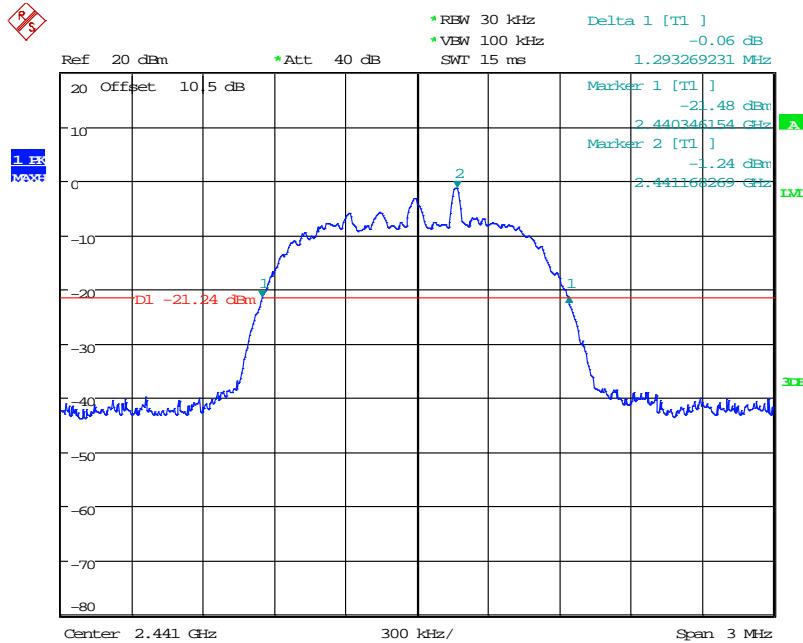

Date: 11.SEP.2018 14:39:09

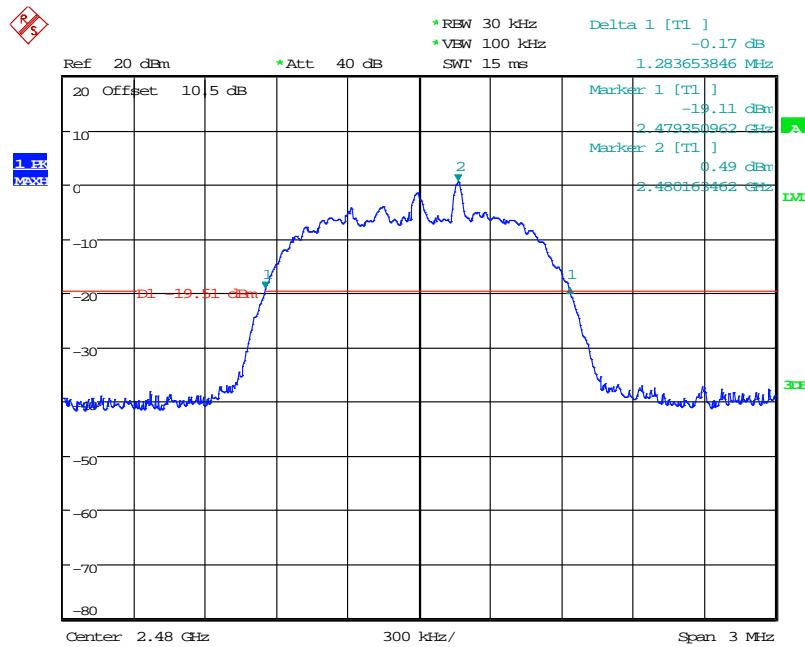
High Channel

Date: 11.SEP.2018 14:40:48

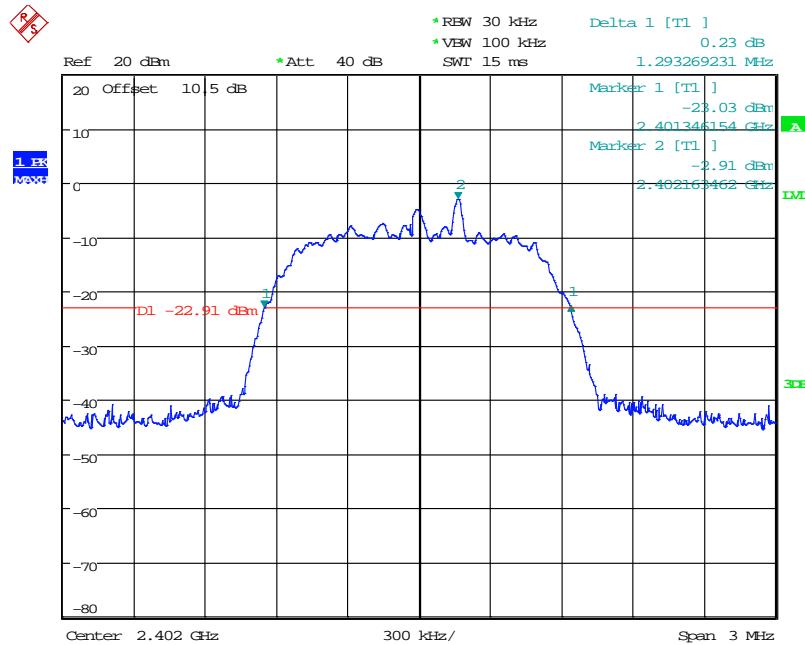EDR Mode (8DPSK)**Low Channel**


Date: 11.SEP.2018 14:44:08

Middle Channel

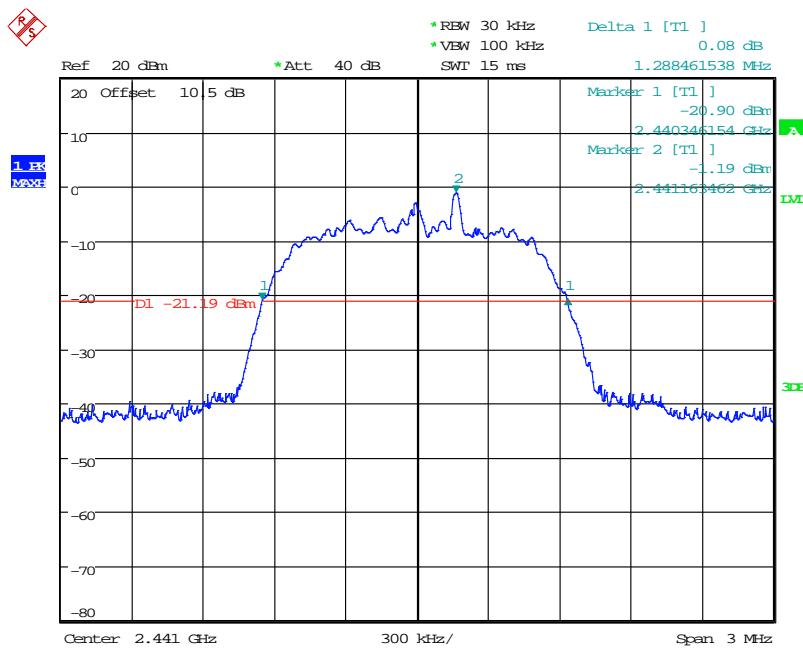

Date: 11.SEP.2018 14:45:50

High Channel

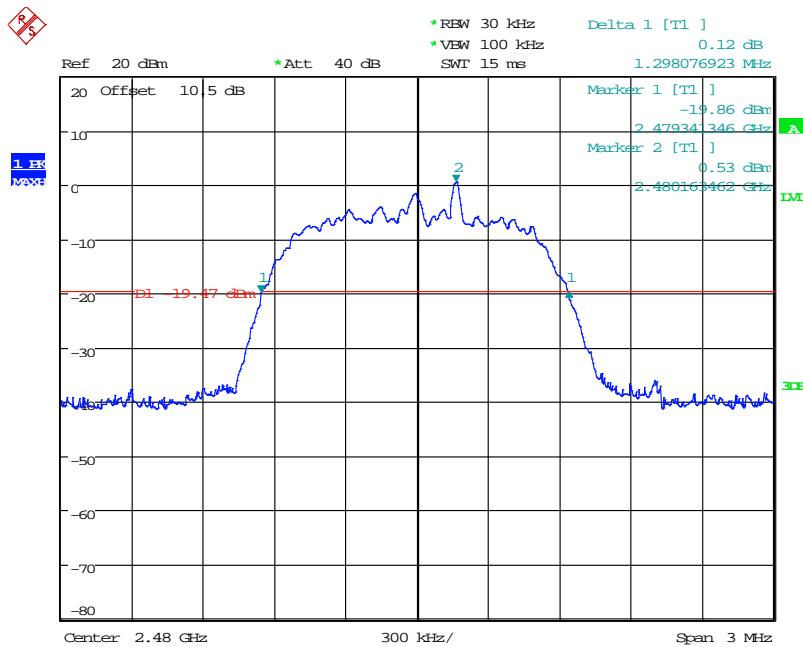

Date: 11.SEP.2018 14:47:08

10 FCC §15.247(a)(1) – Channel Separation Test

10.1 Applicable Standard

According to FCC §15.247(a) (1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

10.2 Test Procedure

1. Set the EUT in transmitting mode, max hold the channel.
2. Set the adjacent channel of the EUT and max hold another trace.
3. Measure the channel separation.

10.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	1010 hPa

The testing was performed by Tom Hsu on 2018-09-11.


10.4 Test Results

Channel	Channel Separation (MHz)	20 dBc BW (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Channel Separation Limit	Result
BR Mode (<i>GFSK</i>)					
Low	1.01	1.03	0.687	>two-thirds of the 20 dB bandwidth	Compliance
Middle	1.02	1.03	0.687	>two-thirds of the 20 dB bandwidth	Compliance
High	1.01	1.04	0.693	>two-thirds of the 20 dB bandwidth	Compliance
EDR Mode ($\pi/4$ - <i>DQPSK</i>)					
Low	1.01	1.28	0.853	>two-thirds of the 20 dB bandwidth	Compliance
Middle	1.00	1.29	0.860	>two-thirds of the 20 dB bandwidth	Compliance
High	1.01	1.28	0.853	>two-thirds of the 20 dB bandwidth	Compliance
EDR Mode (<i>8DPSK</i>)					
Low	1.01	1.29	0.860	>two-thirds of the 20 dB bandwidth	Compliance
Middle	1.00	1.29	0.860	>two-thirds of the 20 dB bandwidth	Compliance
High	0.99	1.30	0.867	>two-thirds of the 20 dB bandwidth	Compliance

Please refer to the following plots


BR Mode (GFSK)

Low Channel

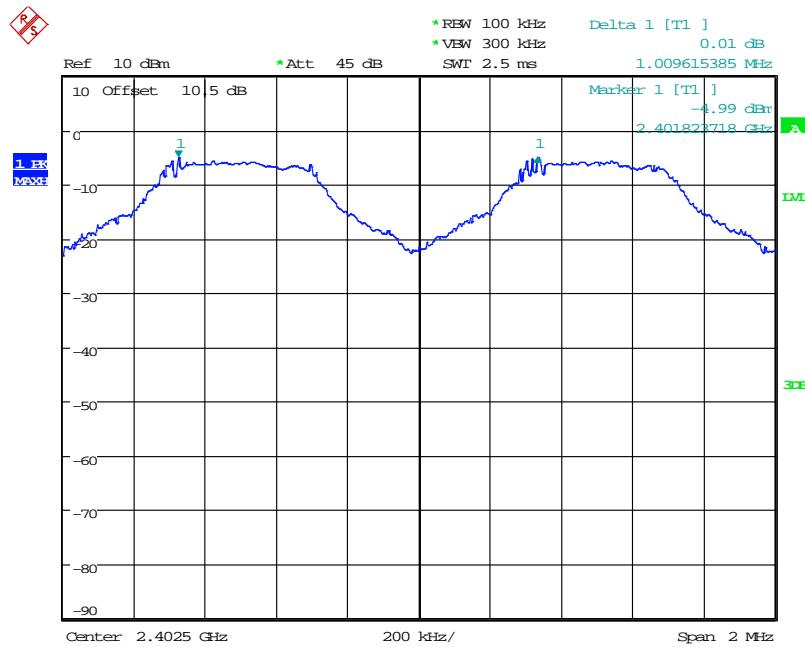


Date: 11.SEP.2018 10:39:58


Middle Channel

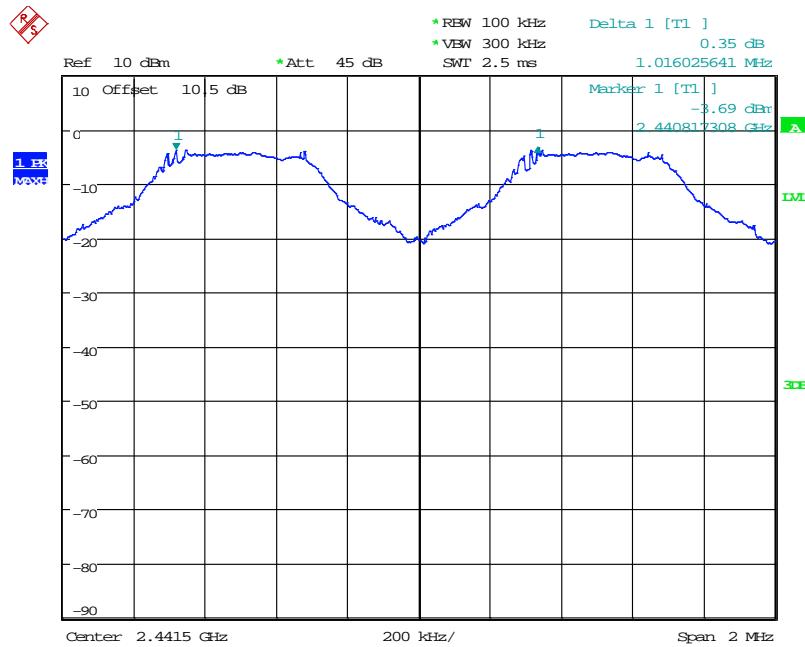


Date: 11.SEP.2018 10:53:56

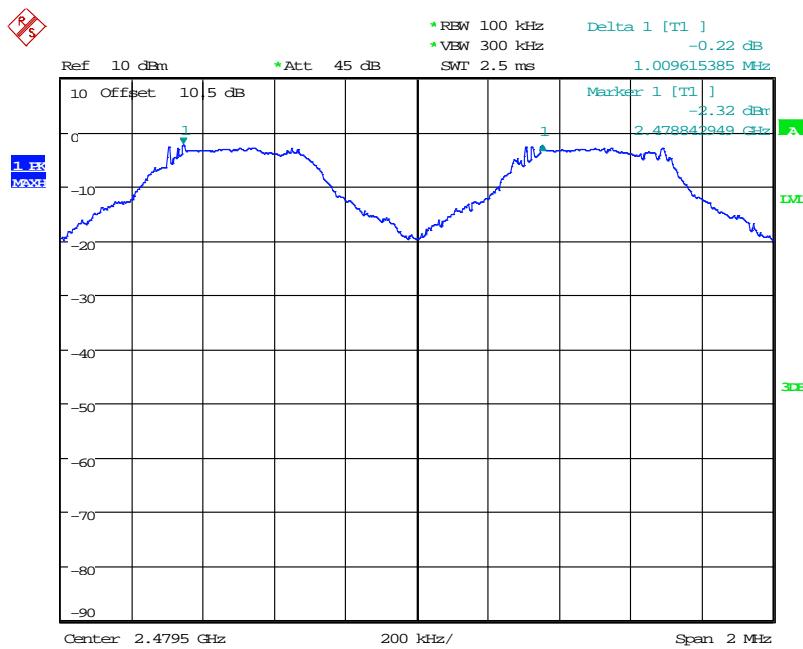High Channel


Date: 11.SEP.2018 10:34:09

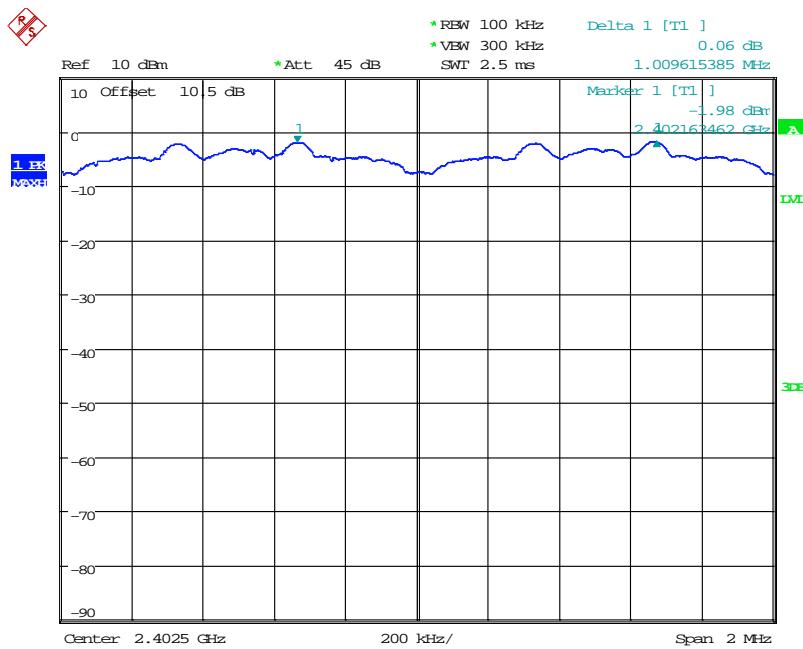*EDR Mode ($\pi/4$ -DQPSK)***Low Channel**

Date: 11.SEP.2018 13:27:37

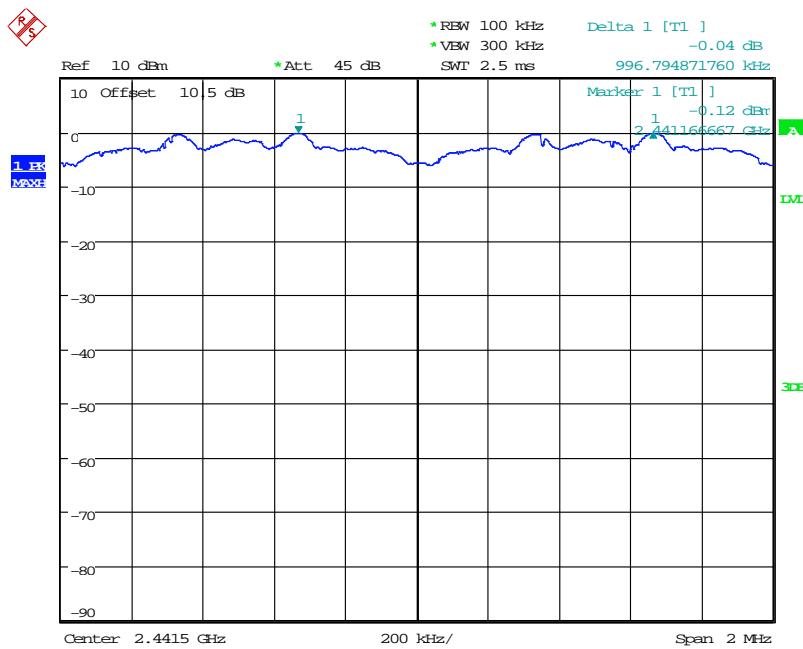Middle Channel


Date: 11.SEP.2018 13:03:53

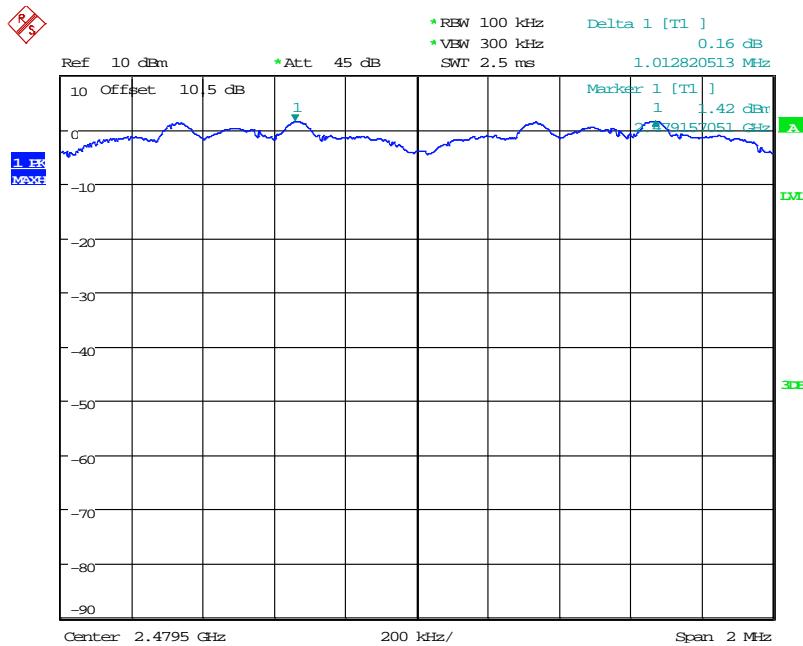High Channel

Date: 11.SEP.2018 13:22:07


EDR Mode (8DPSK)

Low Channel

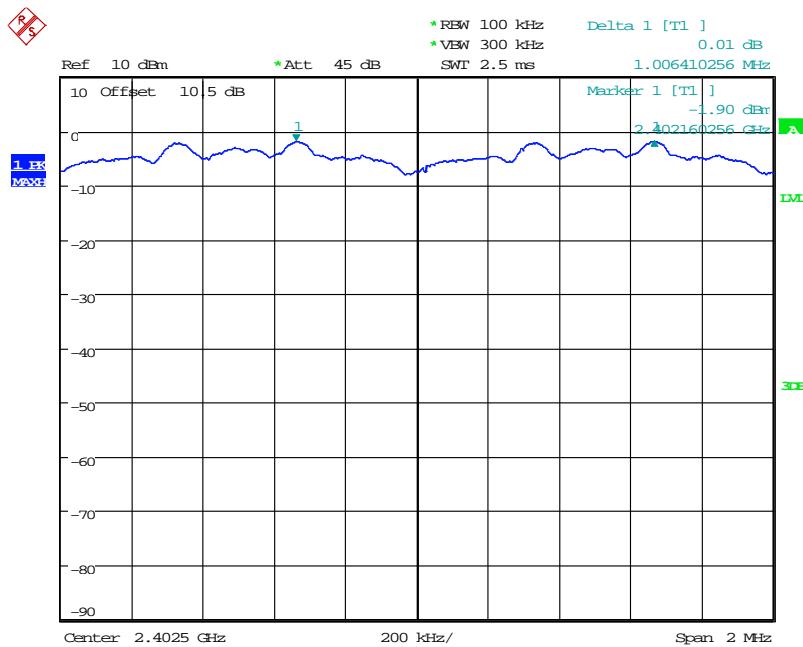


Date: 11.SEP.2018 14:07:38

Middle Channel

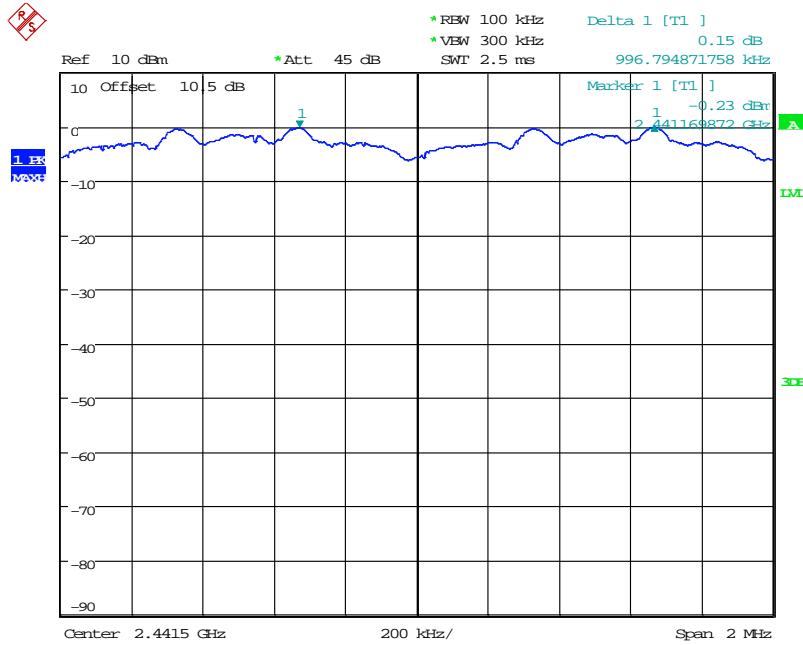

Date: 11.SEP.2018 14:05:37

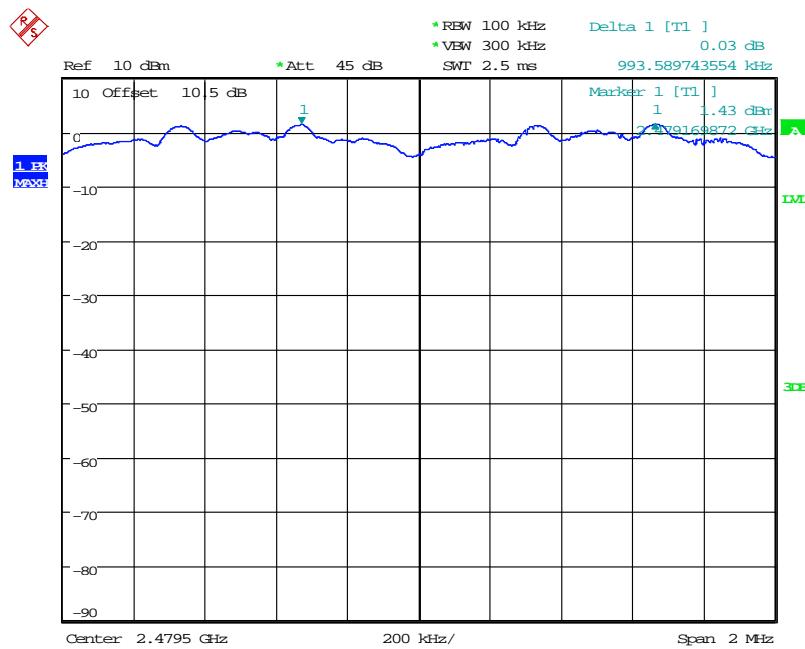High Channel

Date: 11.SEP.2018 14:03:52

11 FCC§15.247(a)(1)(iii) –Time of Occupancy (Dwell Time)

11.1 Applicable Standard

According to FCC §15.247(a) (1) (iii).

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel

$RBW \leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel

Sweep = as necessary to capture the entire dwell time per hopping channel Detector function = peak

Trace = max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements.

Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) = (number of hops on spectrum analyzer) x (period specified in the requirements / analyzer sweep time)

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

11.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	1010 hPa

The testing was performed by Tom Hsu on 2018-09-11.

11.4 Test Results

Test mode: BR mode / 2402 ~ 2480MHz (GFSK)						
Mode	Pulse Time (ms)	Hopping Number	Period Time (s)	Total of Dwell (ms)	Limit (ms)	Result
DH1	0.39	310	31.6	120.90	<400	PASS
DH3	1.65	140	31.6	231.00	<400	PASS
DH5	2.89	100	31.6	289.00	<400	PASS
Test mode: EDR mode / 2402 ~ 2480MHz ($\pi/4$ -DQPSK)						
Mode	Pulse Time (ms)	Hopping Number	Period Time (s)	Total of Dwell (ms)	Limit (ms)	Result
2DH1	0.40	290	31.6	116.00	<400	PASS
2DH3	1.65	140	31.6	231.00	<400	PASS
2DH5	2.90	100	31.6	290.00	<400	PASS
Test mode: EDR mode / 2402 ~ 2480MHz (8DPSK)						
Mode	Pulse Time (ms)	Hopping Number	Period Time (s)	Total of Dwell (ms)	Limit (ms)	Result
3DH1	0.40	310	31.6	124.00	<400	PASS
3DH3	1.65	160	31.6	264.00	<400	PASS
3DH5	2.90	100	31.6	290.00	<400	PASS

Note 1: A period time = $0.4 * 79 = 31.6$ (s), Total of Dwell=Pulse Time * Hopping Number


Note 2: Hopping Number = Hopping Number/10 * 10

Note 3: Hopping Number/10 = Total of highest signals in 3.16s. (Second high signals were other channel)

Please refer to the following plots


BR Mode (GFSK)

DH1: Pulse Width

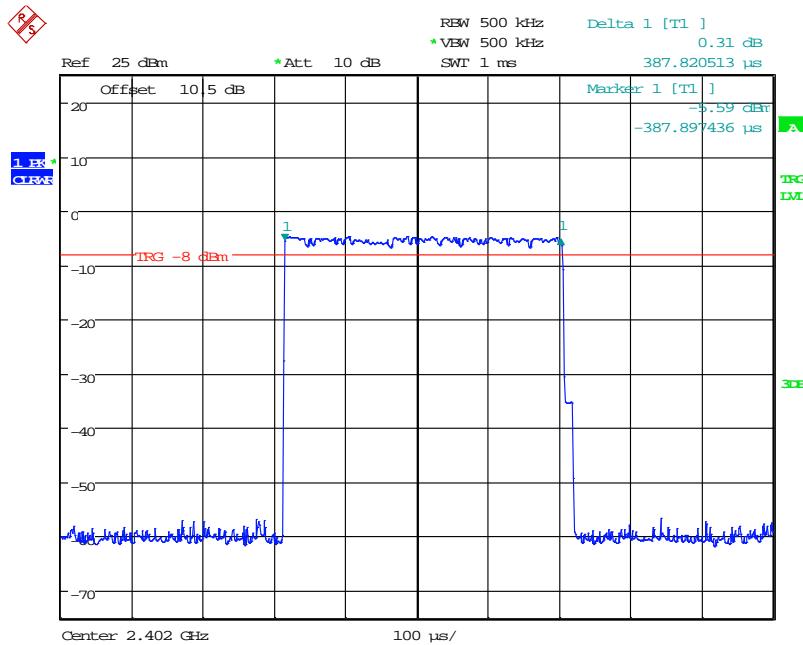

Date: 11.SEP.2018 10:14:26


DH1: Hopping Number

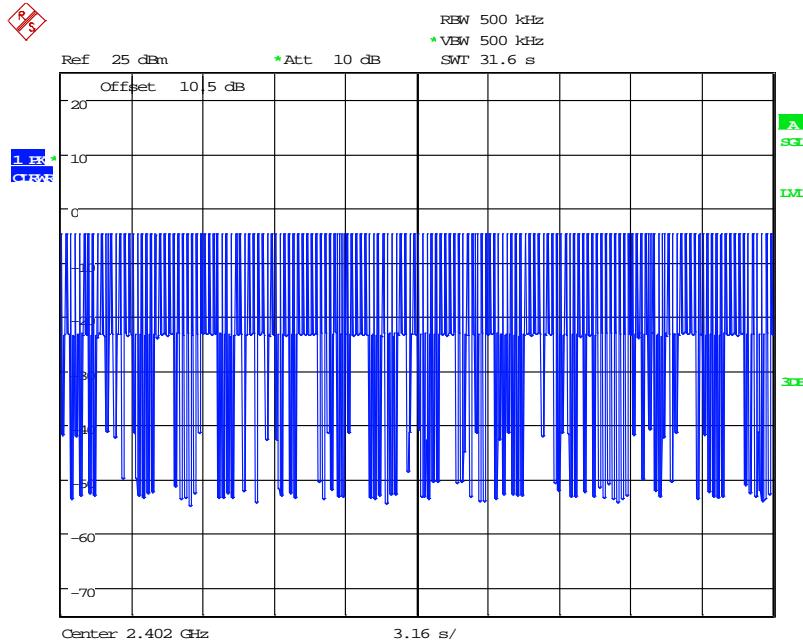

Date: 11.SEP.2018 10:15:00


DH1: Hopping Number /10

(Hopping Number = 31 in 1/10 period of highest signals, Second High signals were other channel)

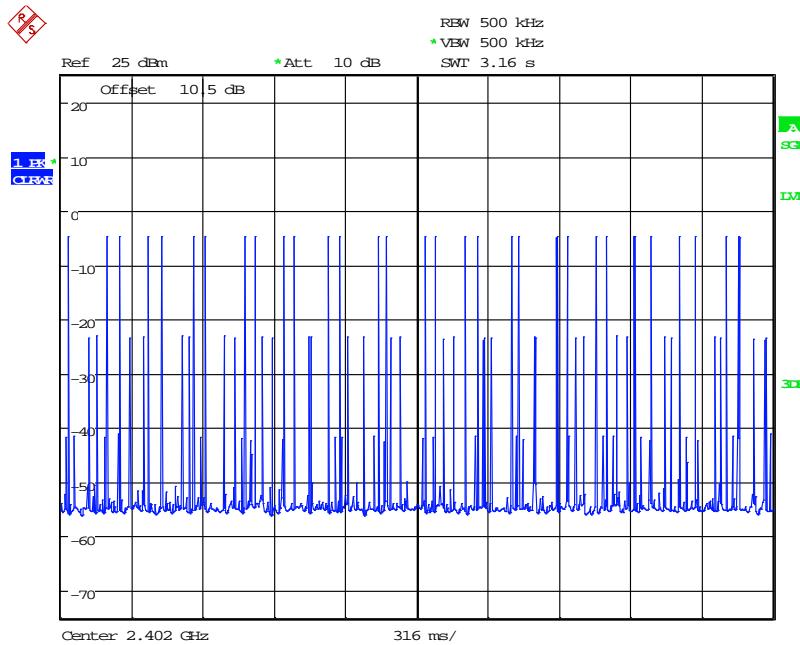


Date: 11.SEP.2018 10:15:29


DH3: Pulse Width

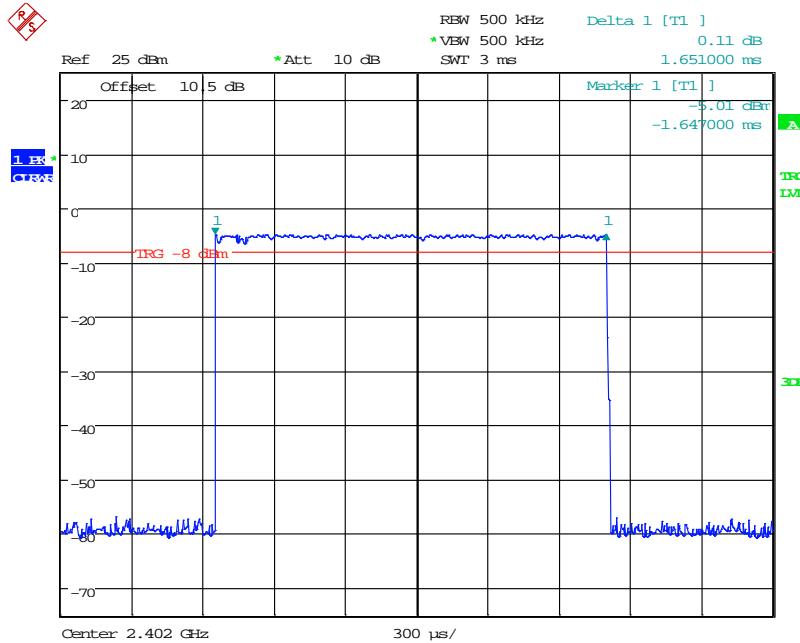


Date: 11.SEP.2018 10:16:48

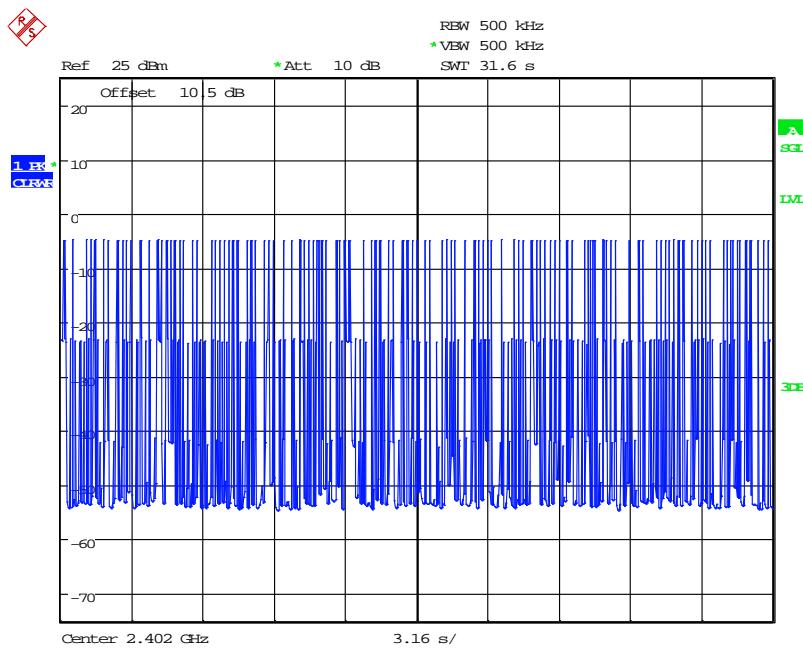DH3: Hopping Number


Date: 11.SEP.2018 10:17:21

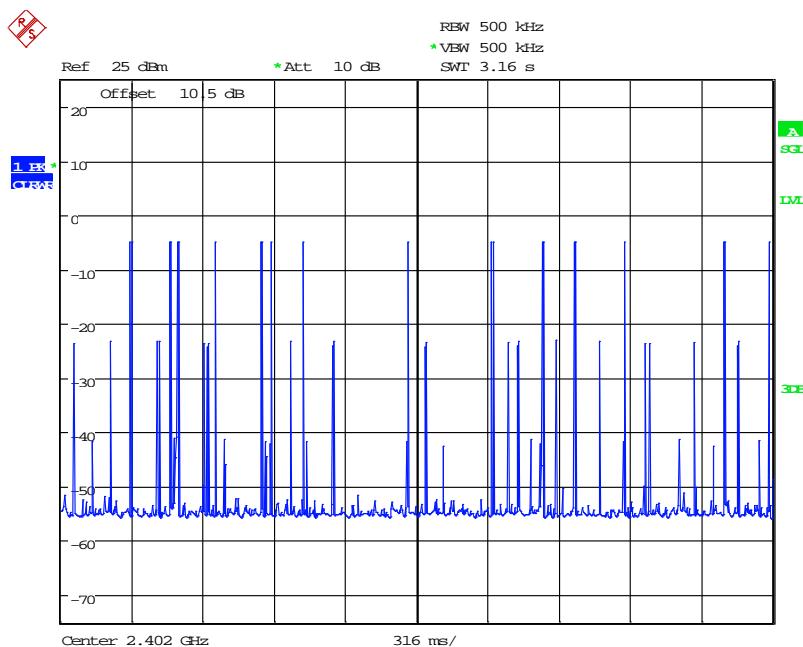DH3: Hopping Number /10**(Hopping Number = 14 in 1/10 period of highest signals, Second High signals were other channel)**

Date: 11.SEP.2018 10:17:45

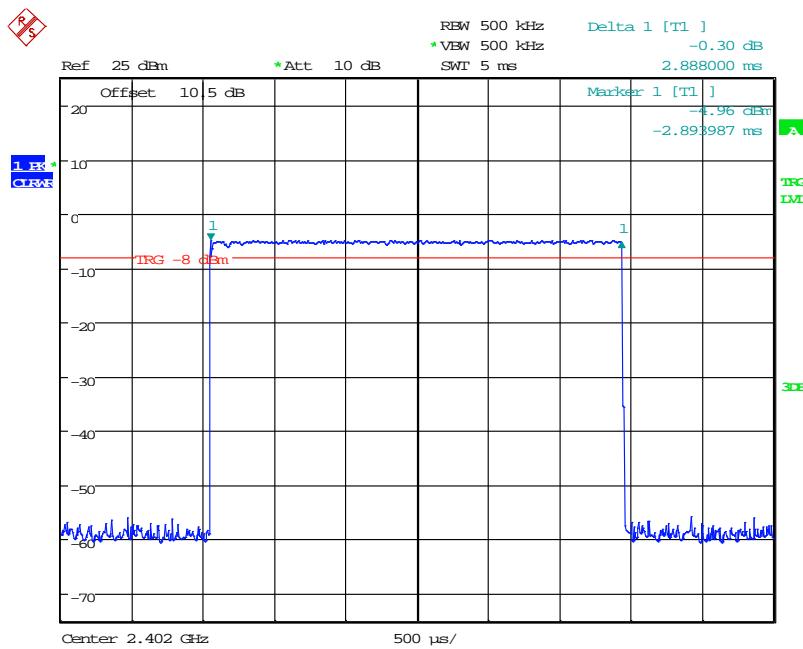DH5: Pulse Width


Date: 11.SEP.2018 10:19:34

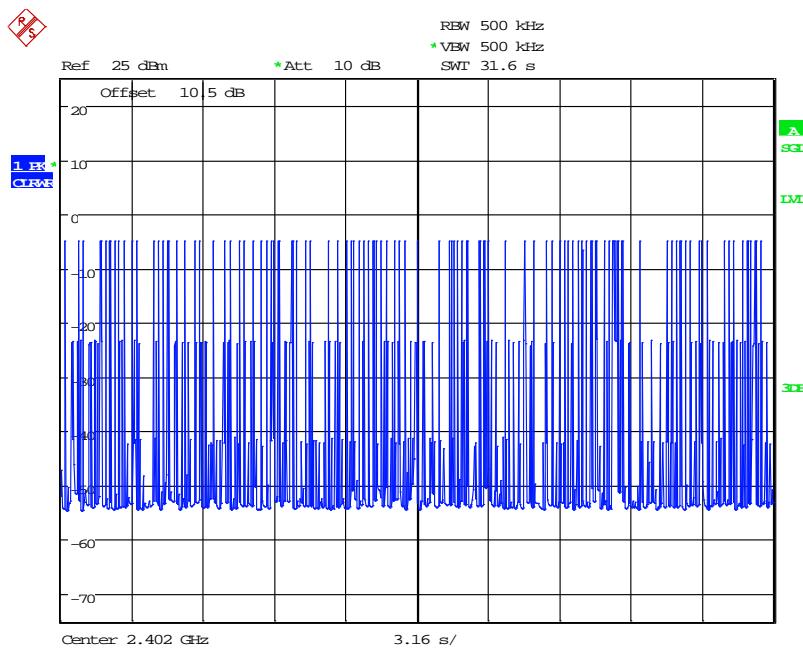DH5: Hopping Number


Date: 11.SEP.2018 10:20:06

DH5: Hopping Number /10


(Hopping Number = 10 in 1/10 period of highest signals, Second High signals were other channel)

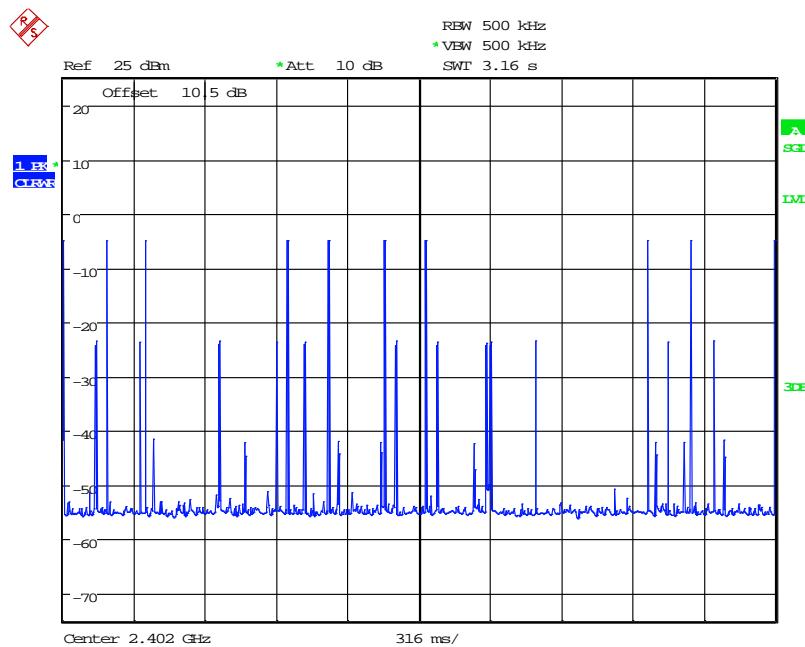

Date: 11.SEP.2018 10:24:01

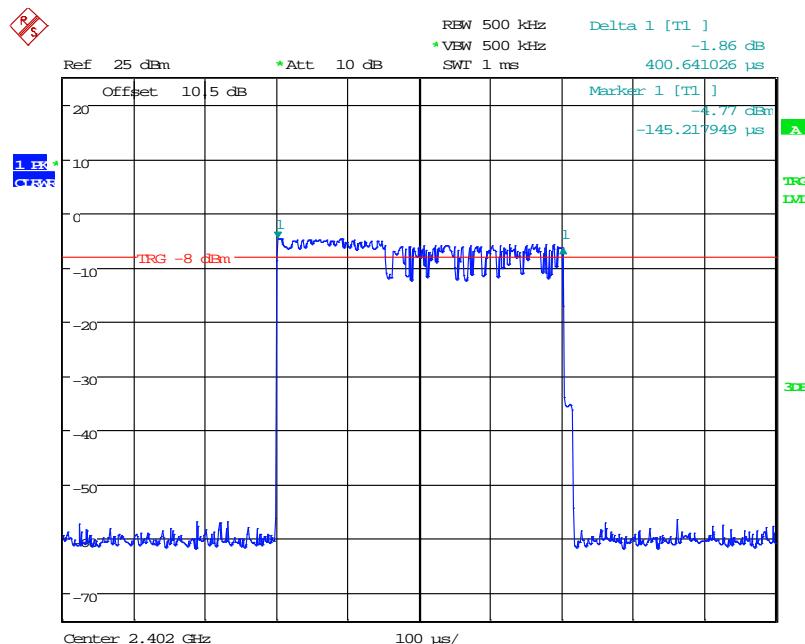EDR Mode ($\pi/4$ -DQPSK)**2DH1: Pulse Width**


Date: 11.SEP.2018 11:14:50

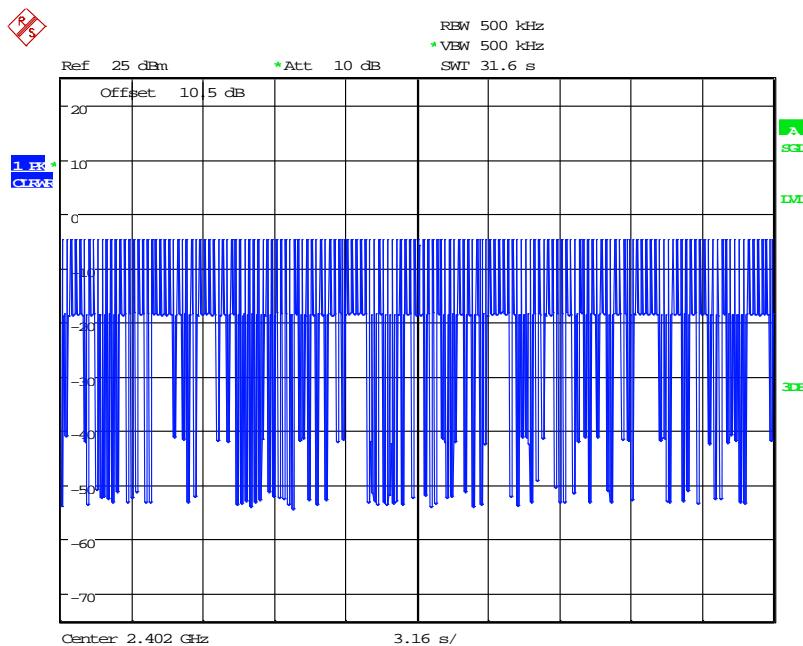2DH1: Hopping Number

Date: 11.SEP.2018 11:15:23


2DH1: Hopping Number /10

(Hopping Number = 29 in 1/10 period of highest signals, Second High signals were other channel)

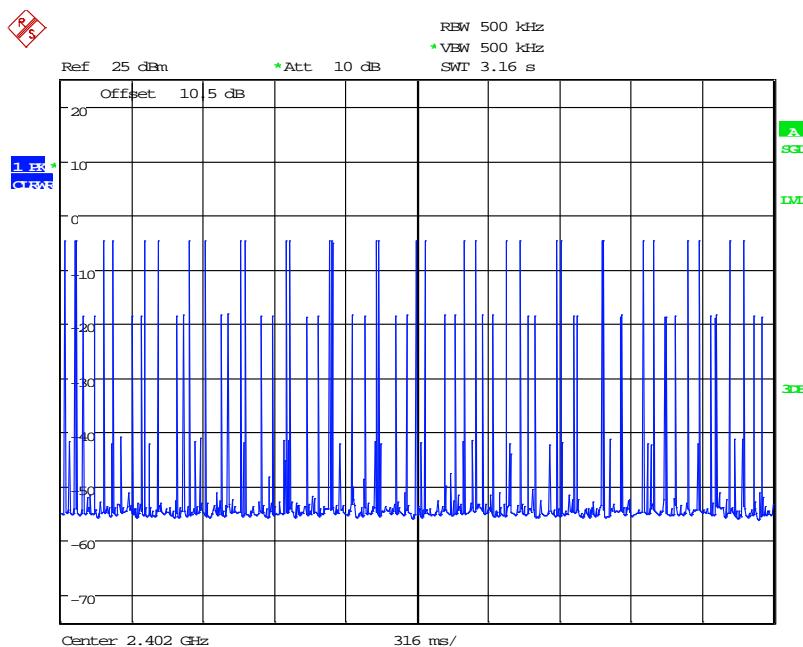


Date: 11.SEP.2018 11:15:32

2DH3: Pulse Width

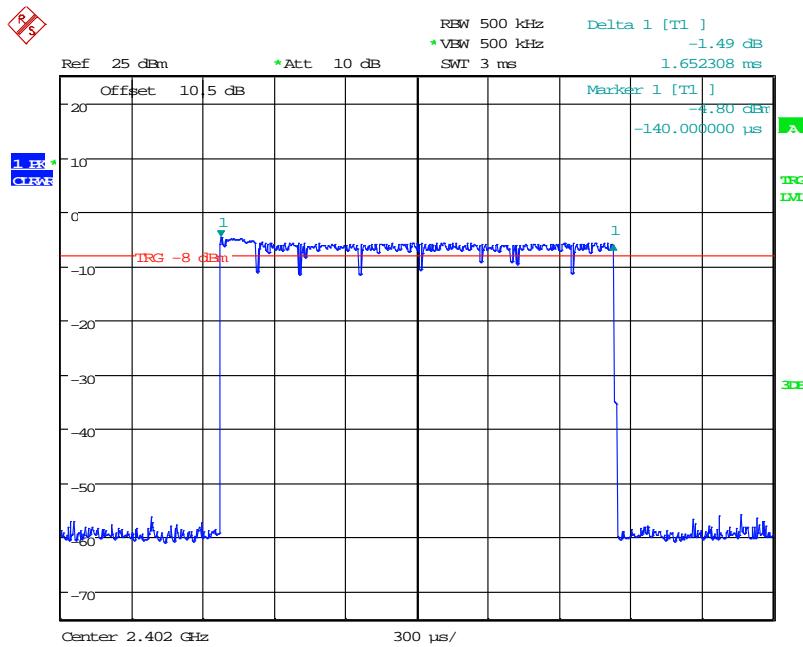

Date: 11.SEP.2018 11:16:47


2DH3: Hopping Number

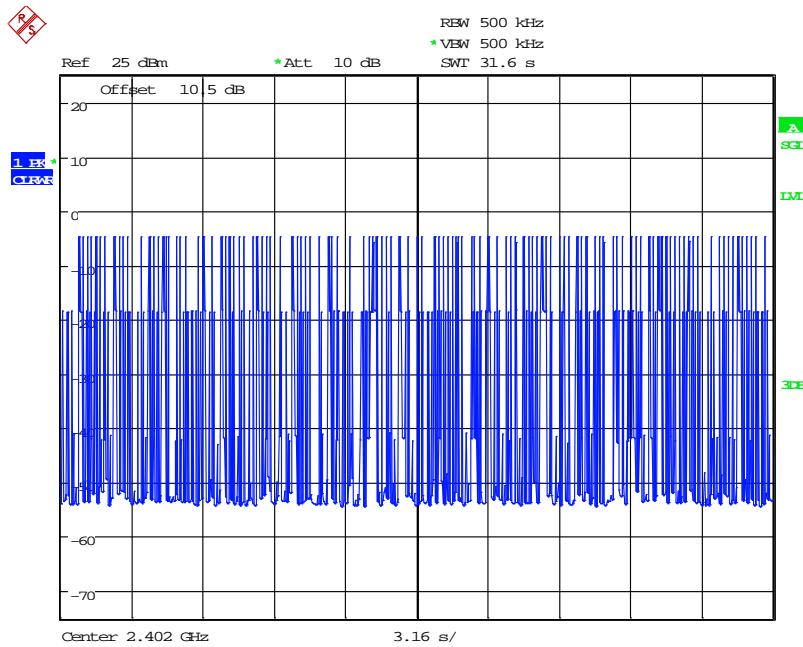

Date: 11.SEP.2018 11:17:20


2DH3: Hopping Number /10

(Hopping Number = 14 in 1/10 period of highest signals, Second High signals were other channel)

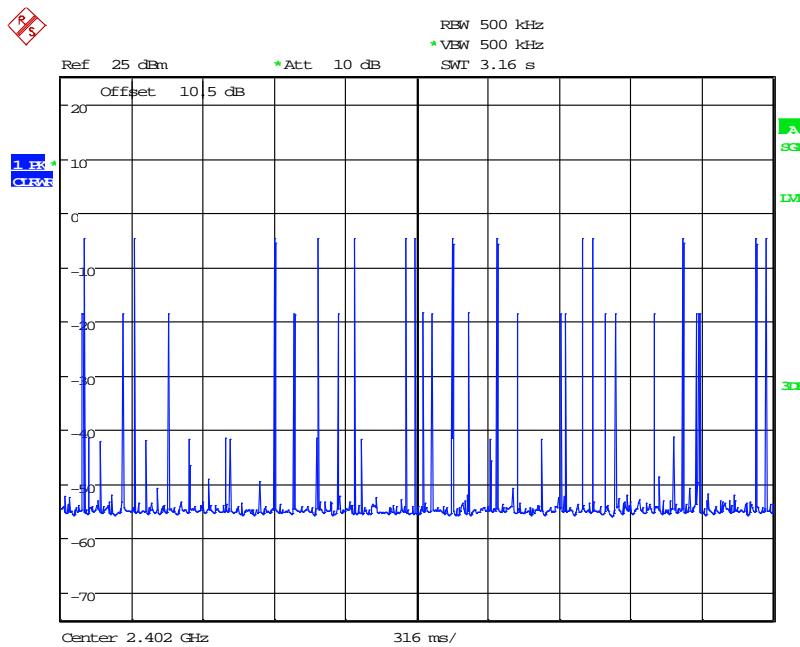


Date: 11.SEP.2018 11:17:53

2DH5: Pulse Width

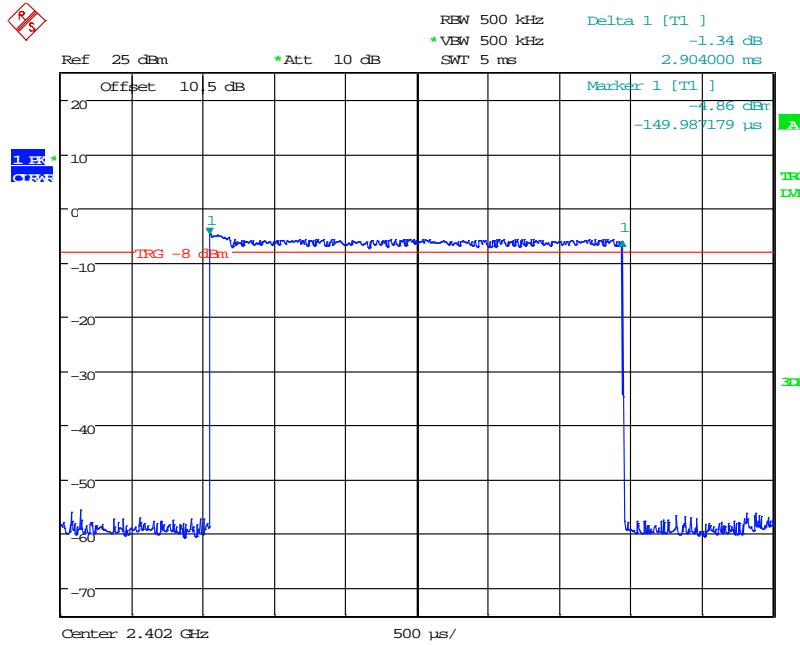


Date: 11.SEP.2018 11:19:29

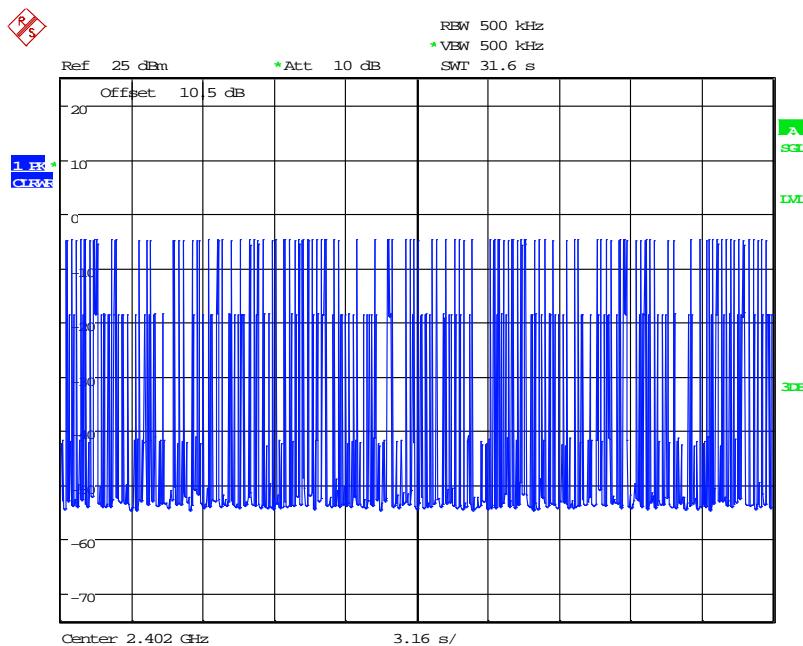2DH5: Hopping Number


Date: 11.SEP.2018 11:20:02

2DH5: Hopping Number /10


(Hopping Number = 10 in 1/10 period of highest signals, Second High signals were other channel)

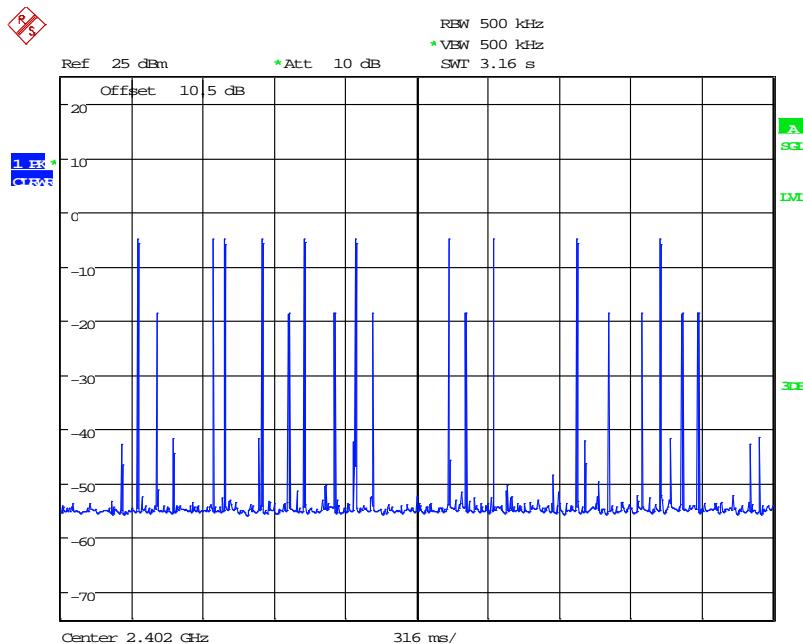

Date: 11.SEP.2018 11:22:00

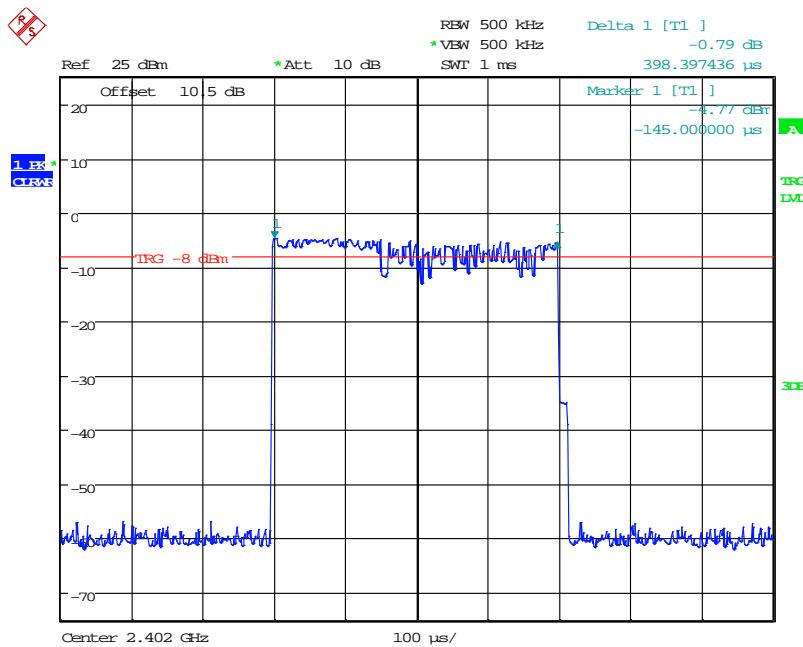*EDR Mode (8DPSK)***3DH1: Pulse Width**


Date: 11.SEP.2018 13:36:09

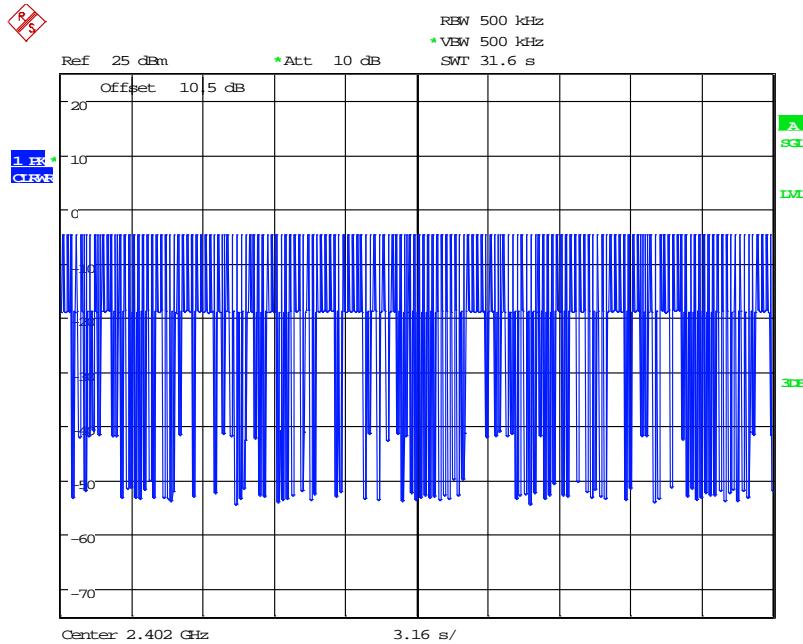3DH1: Hopping Number

Date: 11.SEP.2018 13:36:42


3DH1: Hopping Number /10

(Hopping Number = 31 in 1/10 period of highest signals, Second High signals were other channel)

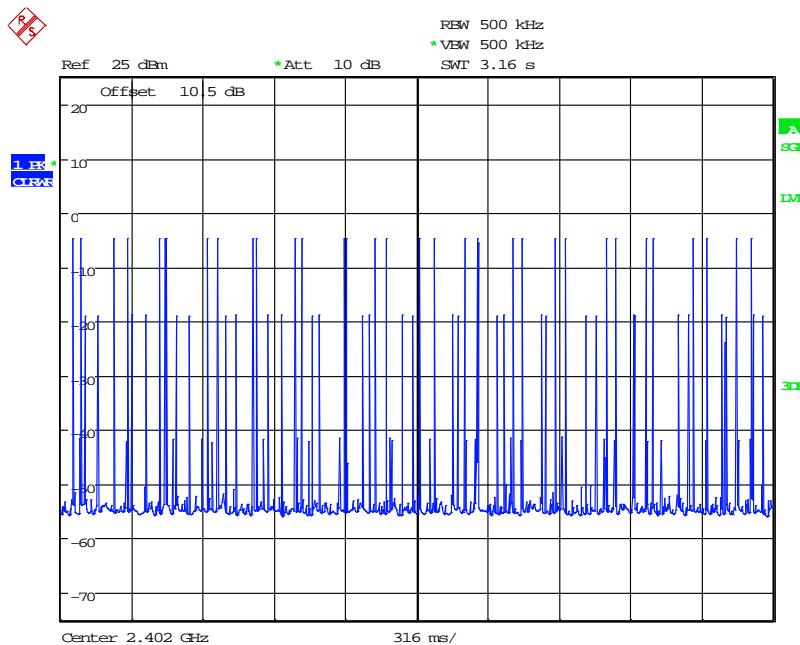


Date: 11.SEP.2018 13:37:19

3DH3: Pulse Width

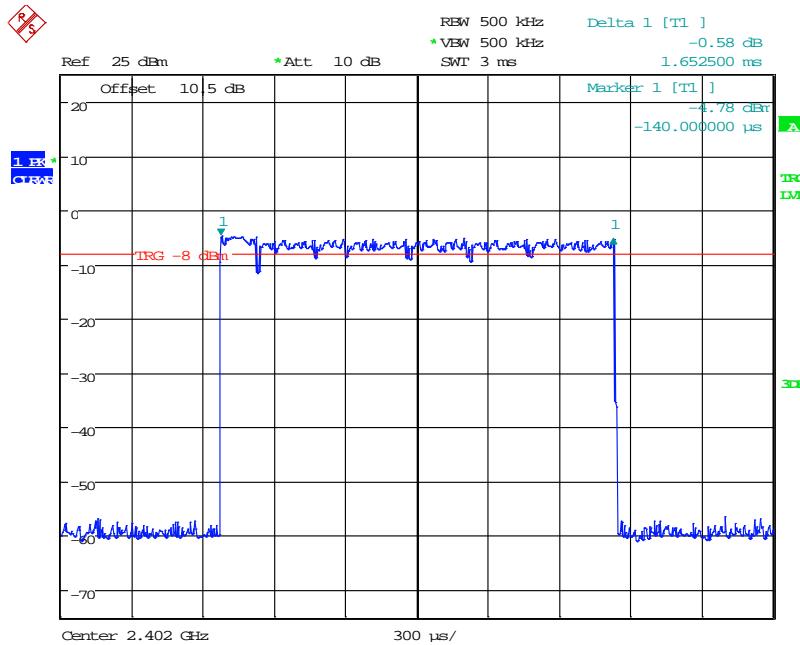

Date: 11.SEP.2018 13:41:04


3DH3: Hopping Number

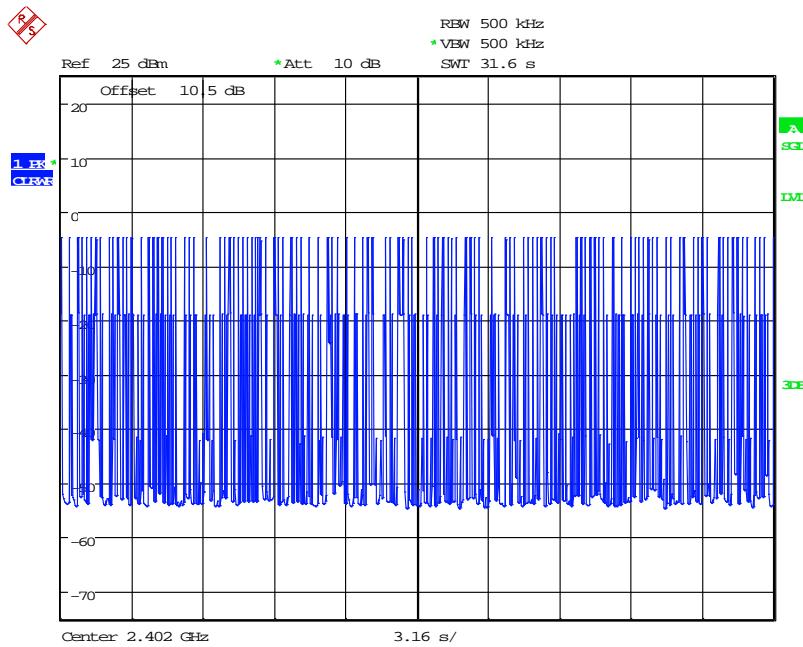

Date: 11.SEP.2018 13:41:37


3DH3: Hopping Number /10

(Hopping Number = 16 in 1/10 period of highest signals, Second High signals were other channel)

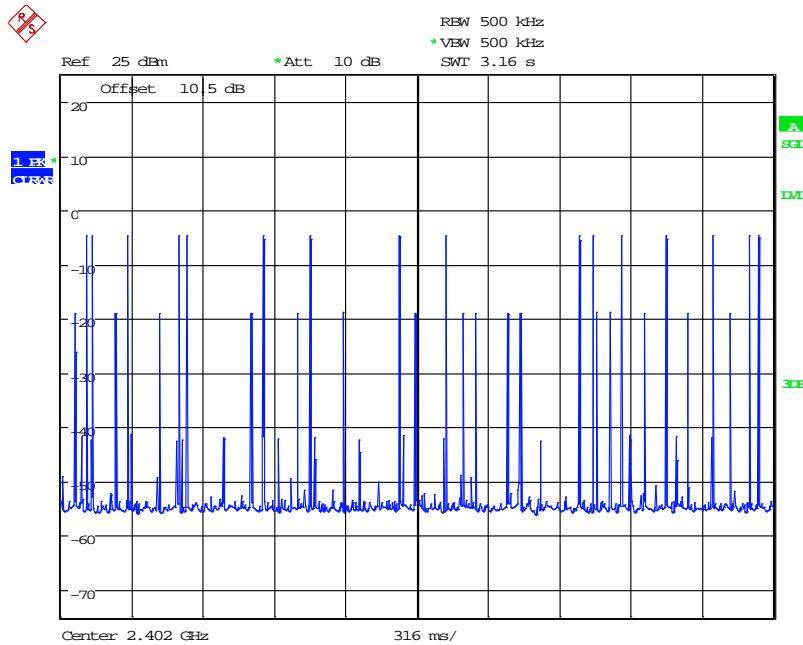


Date: 11.SEP.2018 13:41:52

3DH5: Pulse Width

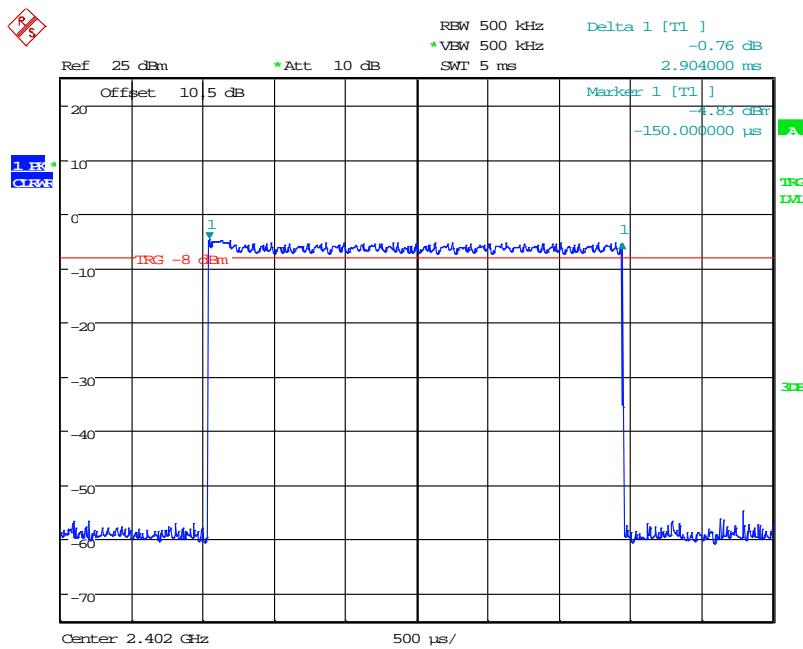


Date: 11.SEP.2018 13:42:55

3DH5: Hopping Number

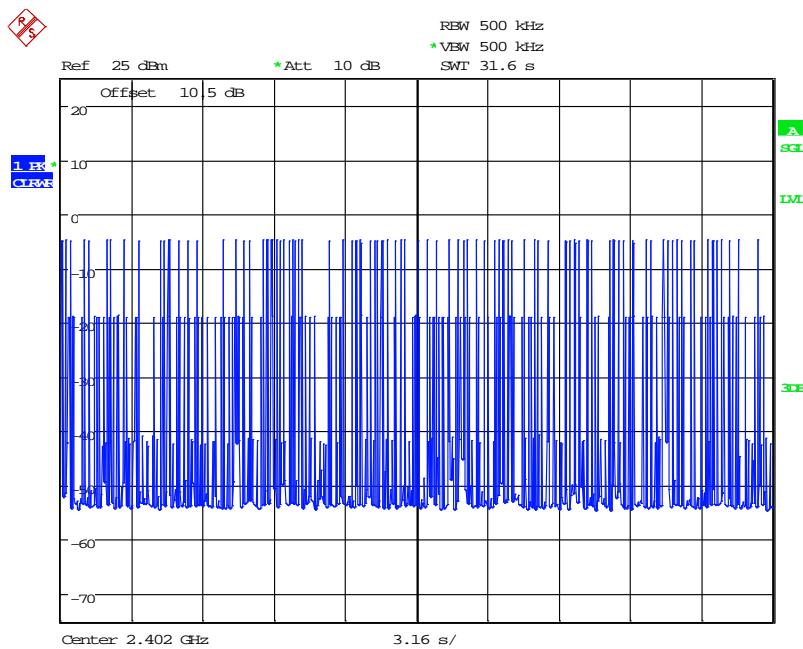

Date: 11.SEP.2018 13:43:27

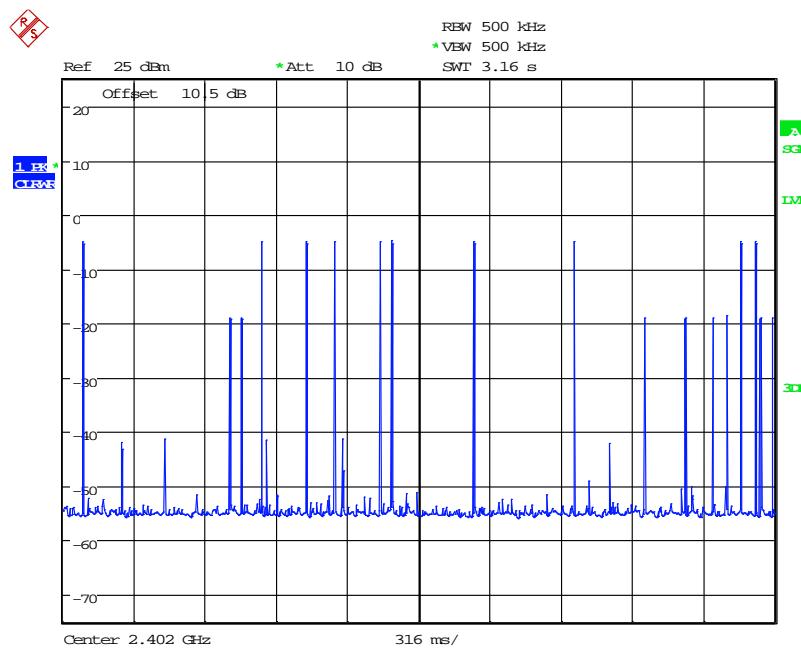3DH5: Hopping Number /10**(Hopping Number = 10 in 1/10 period of highest signals, Second High signals were other channel)**

Date: 11.SEP.2018 13:44:22

12 FCC §15.247(a)(1)(iii) –Quantity of hopping channel Test

12.1 Applicable Standard

According to FCC §15.247(a) (1) (iii).

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

12.2 Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

12.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	1010 hPa


The testing was performed by Tom Hsu on 2018-9-11.

12.4 Test Results


Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)	Result
GFSK	2402-2480	79	>15	Compliance
$\pi/4$ -DQPSK	2402-2480	79	>15	Compliance
8DPSK	2402-2480	79	>15	Compliance

Please refer to the following plots

BR Mode (GFSK)

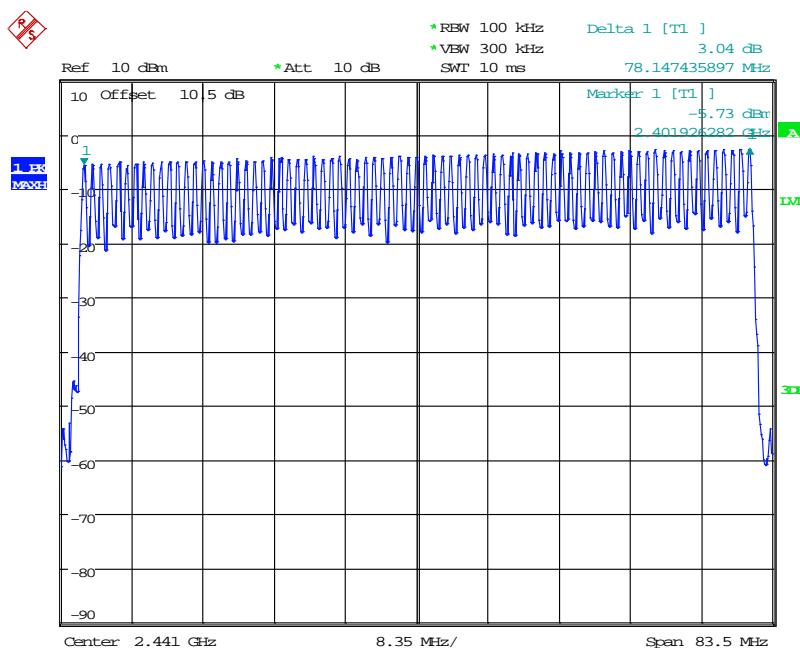


Date: 11.SEP.2018 10:44:53

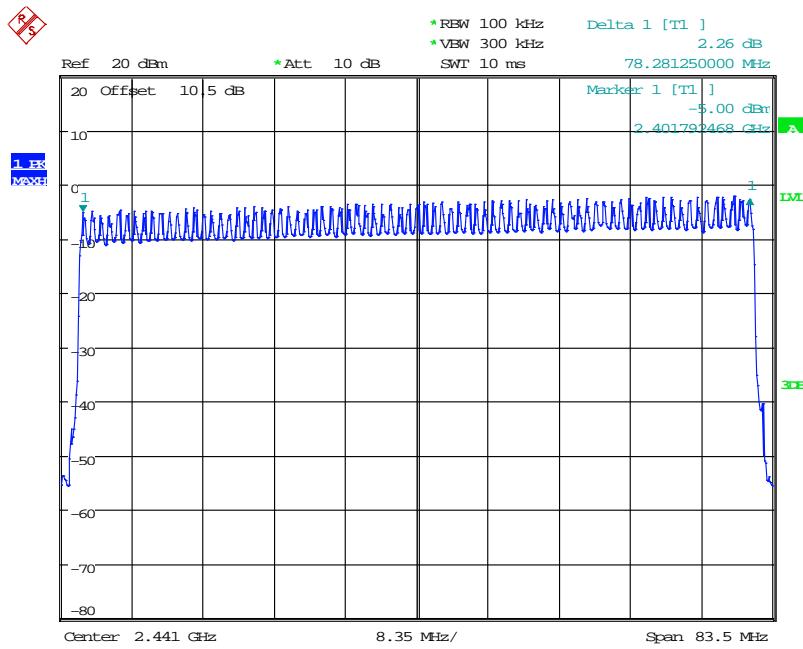EDR Mode ($\pi/4$ -DQPSK)

Date: 11.SEP.2018 13:19:22

EDR Mode (8DPSK)

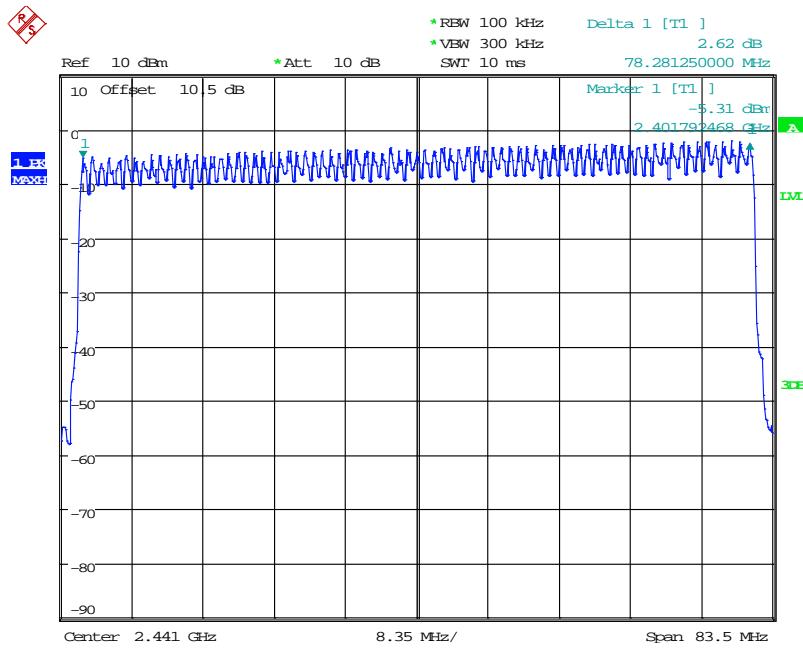

Date: 11.SEP.2018 14:23:04

13 FCC §15.247(b)(1) – Maximum Output Power

13.1 Applicable Standard

According to FCC §15.247(b) (1).

Frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725- 5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

13.2 Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to measuring equipment.

13.3 Test Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	1010 hPa

The testing was performed by Tom Hsu on 2018-09-11.

13.4 Test Results

Channel	Frequency (MHz)	Peak Conducted Output Power		Limit (W)	Result
		(dBm)	(W)		
<i>BR Mode (GFSK)</i>					
Low	2402	-0.77	0.00084	0.125	Compliance
Middle	2441	0.51	0.00112	0.125	Compliance
High	2480	2.38	0.00173	0.125	Compliance
<i>EDR Mode ($\pi/4$-DQPSK)</i>					
Low	2402	0.43	0.00110	0.125	Compliance
Middle	2441	2.03	0.00160	0.125	Compliance
High	2480	3.62	0.00230	0.125	Compliance
<i>EDR Mode (8DPSK)</i>					
Low	2402	0.87	0.00122	0.125	Compliance
Middle	2441	2.43	0.00175	0.125	Compliance
High	2480	3.98	0.00250	0.125	Compliance

14 FCC §15.247(d) – 100 kHz Bandwidth of Frequency Band Edge

14.1 Applicable Standard

According to FCC §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c)

14.2 Test Procedure

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation

RBW = 100 kHz VBW = 300 kHz

Sweep = coupled

Detector function = peak Trace = max hold

14.3 Test Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	1010 hPa

The testing was performed by Tom Hsu on 2018-09-11.


14.4 Test Results

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	RESULT
<i>BR Mode (GFSK)</i>				
Low	2402	44.98	≥ 20	PASS
High	2480	54.26	≥ 20	PASS
<i>BR Hopping Mode (GFSK)</i>				
Low	2402-2480	47.23	≥ 20	PASS
High	2402-2480	51.32	≥ 20	PASS
<i>EDR Mode ($\pi/4$-DQPSK)</i>				
Low	2402	45.29	≥ 20	PASS
High	2480	54.01	≥ 20	PASS
<i>EDR Hopping Mode ($\pi/4$-DQPSK)</i>				
Low	2402-2480	47.43	≥ 20	PASS
High	2402-2480	49.99	≥ 20	PASS
<i>EDR Mode (8DPSK)</i>				
Low	2402	44.40	≥ 20	PASS
High	2480	54.31	≥ 20	PASS
<i>EDR Hopping Mode (8DPSK)</i>				
Low	2402-2480	47.56	≥ 20	PASS
High	2402-2480	50.24	≥ 20	PASS

Please refer to the following plots


BR Mode (GFSK)

Band Edge, CH Low

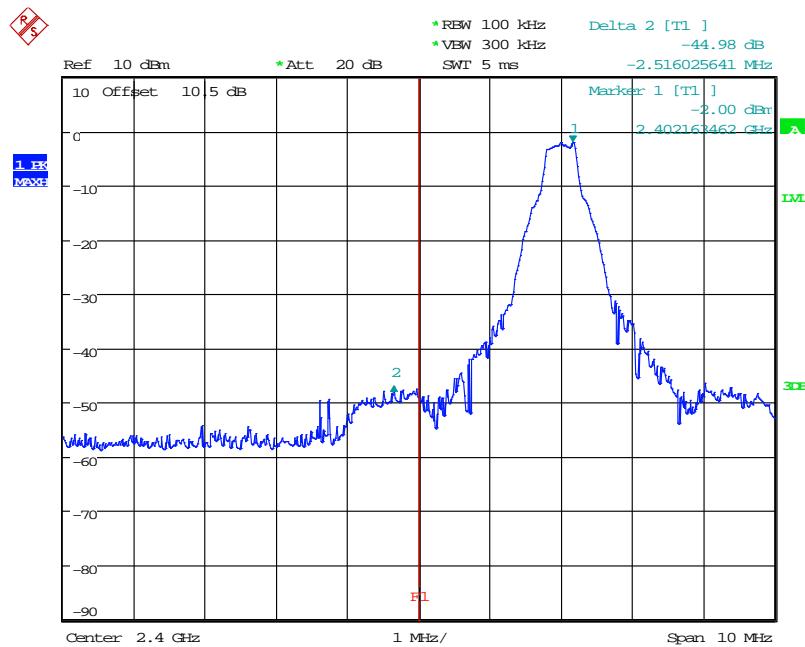

Date: 11.SEP.2018 14:31:55


Band Edge, CH High

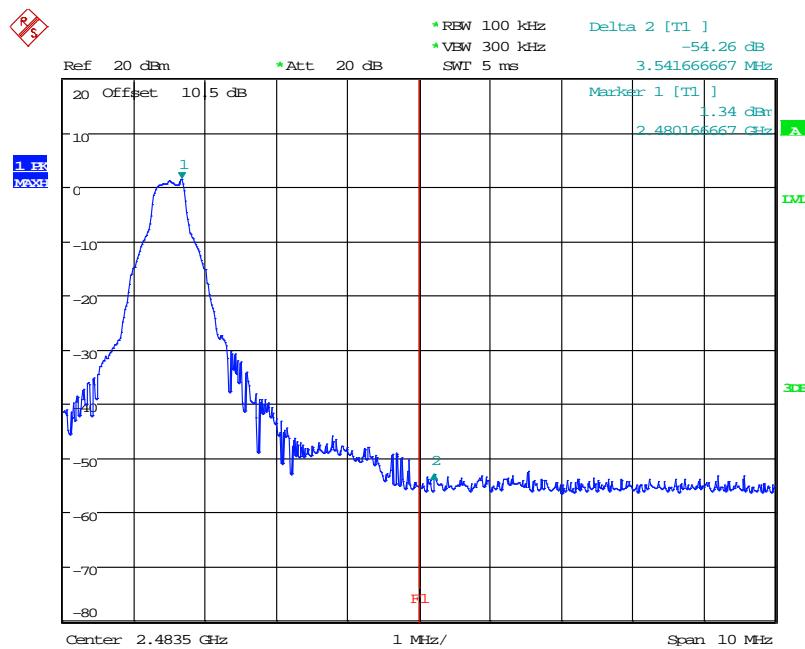

Date: 11.SEP.2018 14:35:23


BR Hopping Mode (GFSK)

Band Edge, CH Low

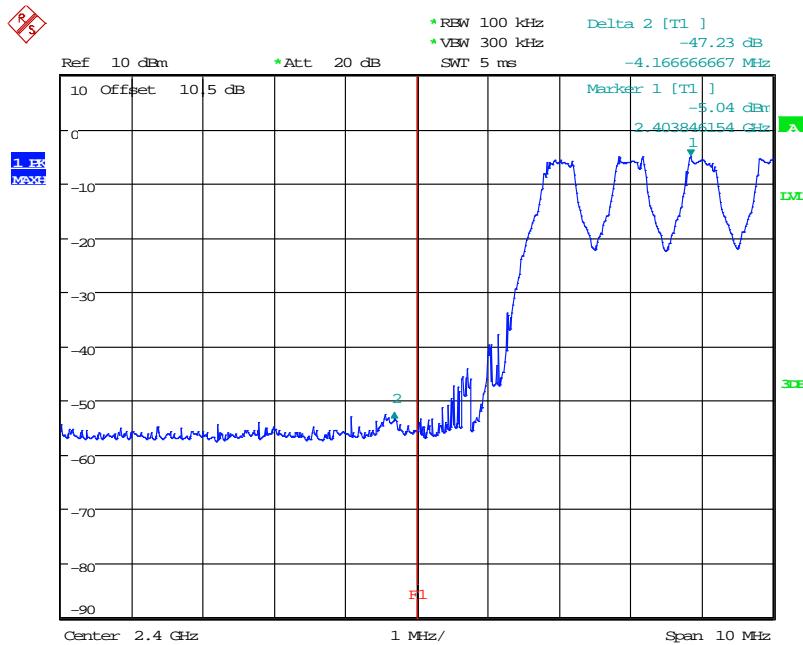

Date: 11.SEP.2018 10:27:13


Band Edge, CH High

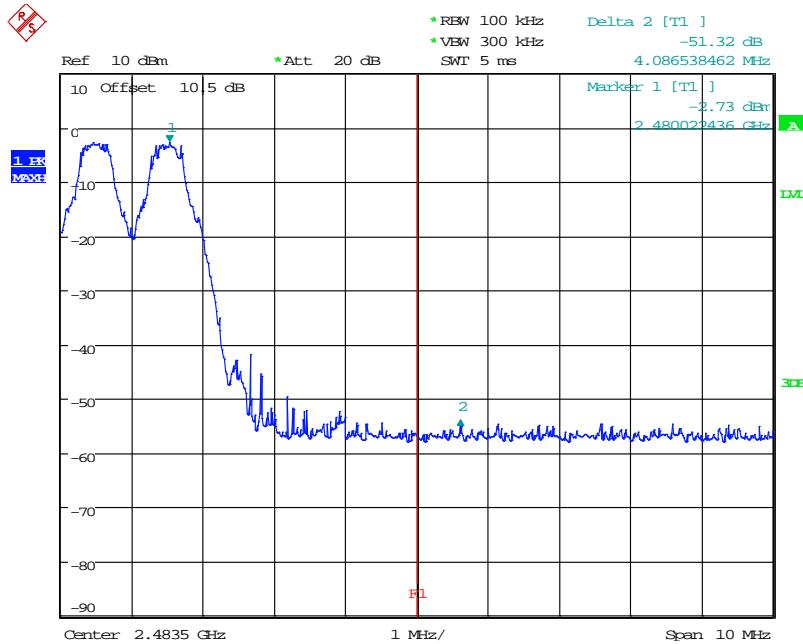

Date: 11.SEP.2018 10:27:57


EDR Mode ($\pi/4$ -DQPSK)

Band Edge, CH Low

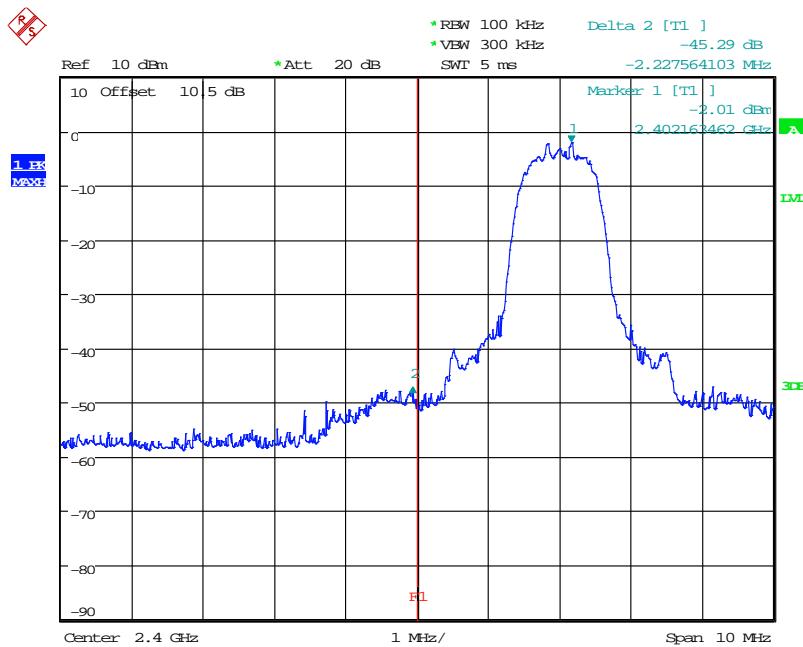

Date: 11.SEP.2018 14:37:52


Band Edge, CH High

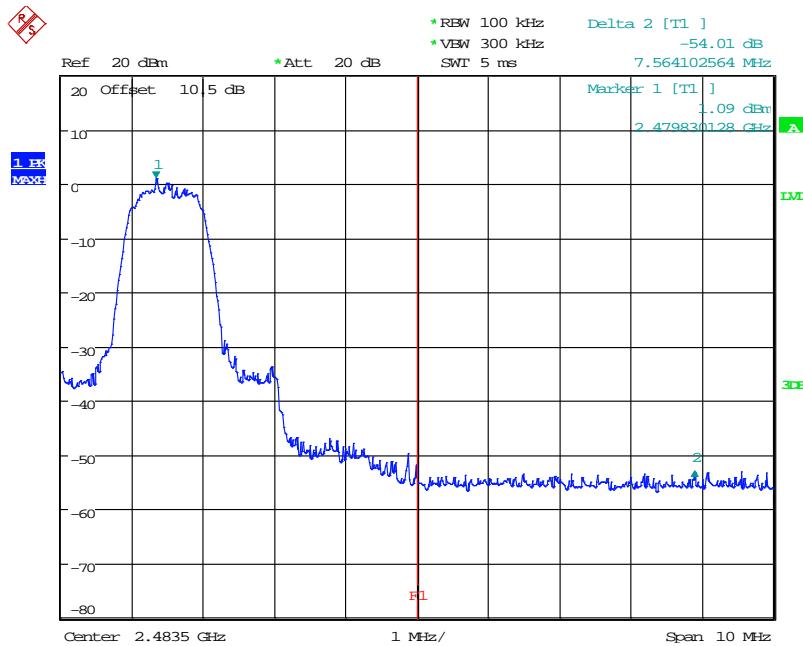

Date: 11.SEP.2018 14:41:24


EDR Hopping Mode ($\pi/4$ -DQPSK)

Band Edge, CH Low

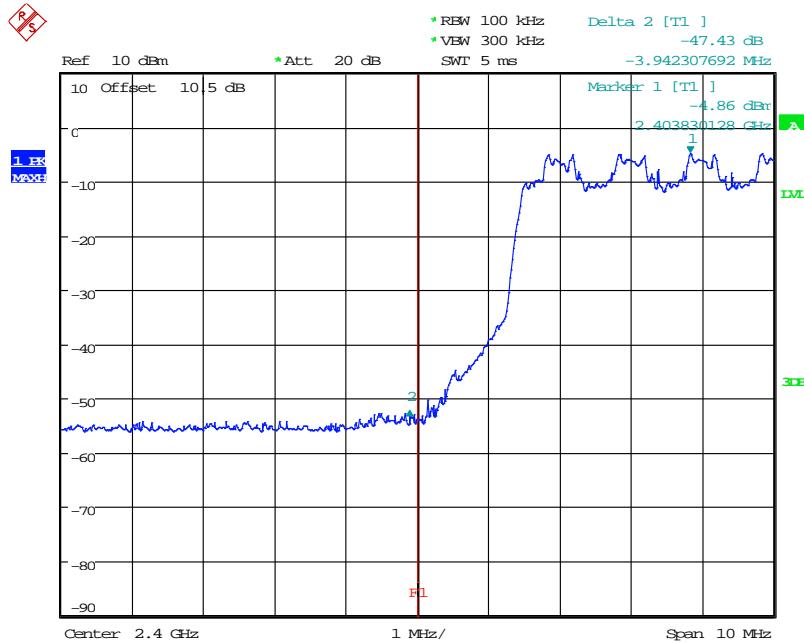

Date: 11.SEP.2018 11:58:55


Band Edge, CH High

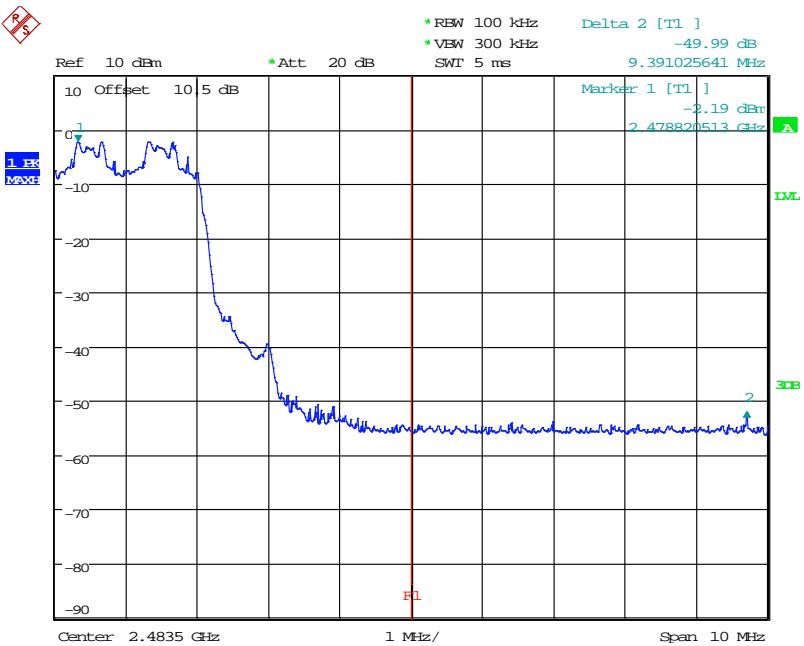

Date: 11.SEP.2018 12:21:39


EDR Mode (8DPSK)

Band Edge, CH Low

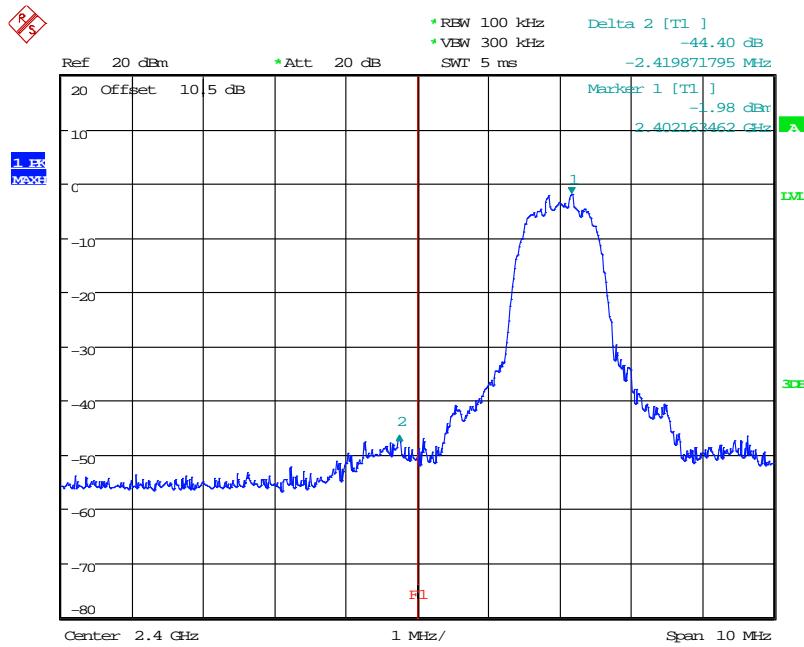

Date: 11.SEP.2018 14:50:13


Band Edge, CH High

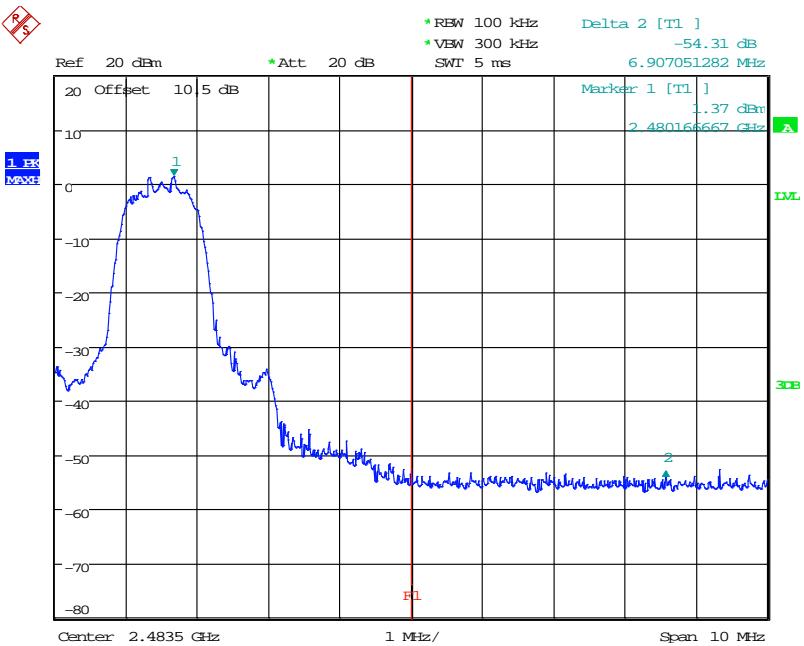

Date: 11.SEP.2018 14:47:44


EDR Hopping Mode (8DPSK)

Band Edge, CH Low

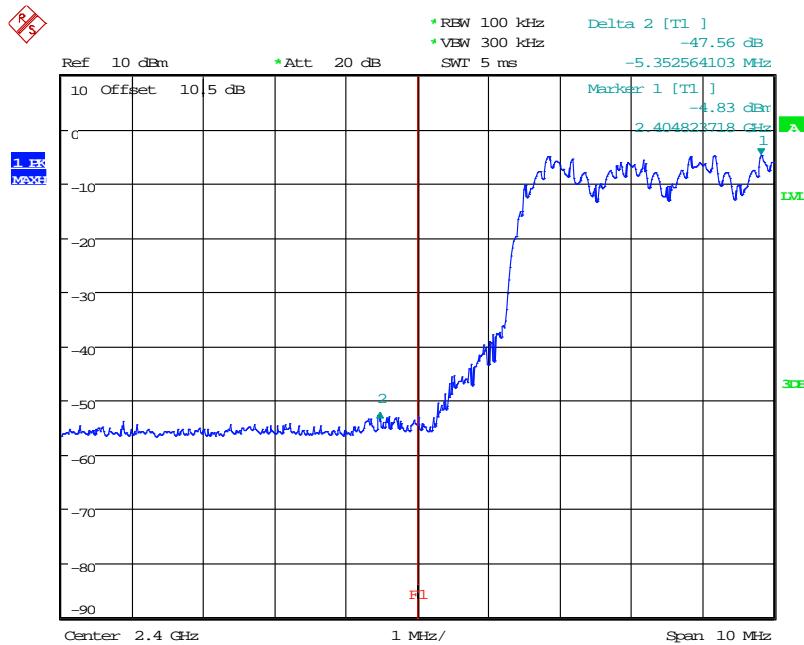

Date: 11.SEP.2018 13:54:09

Band Edge, CH High

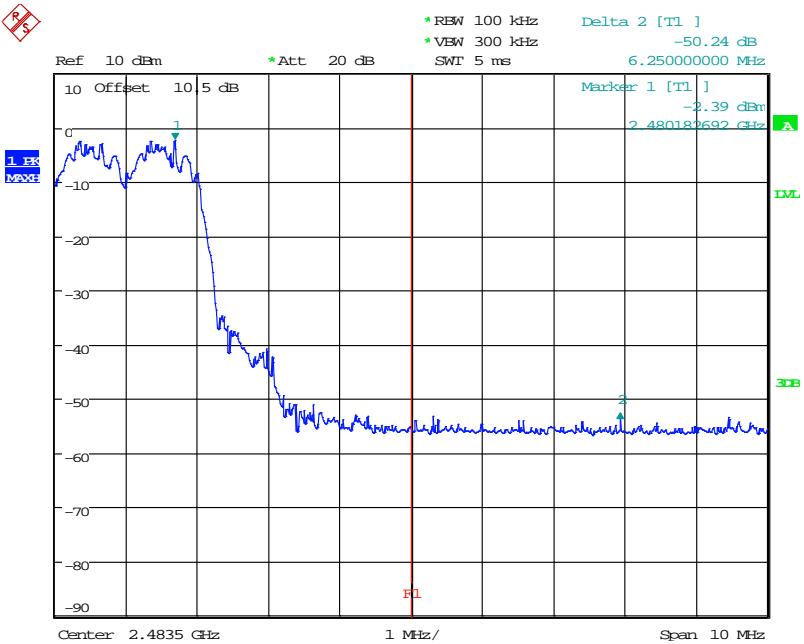

Date: 11.SEP.2018 14:01:19

----- END OF REPORT -----