

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

RC TOYS

Model No.: 500804, 500808, 500820, 500822, 3313M, 3312M, 3318, 3319

Trade Mark: N/A

FCC ID: 2ANHB-3318

Report No.: ES170817017E

Issue Date: August 25, 2017

Prepared for

**Shantou liancheng industry co.,ltd
Chenghai District, Shantou City, Guangdong Province, China**

Prepared by

EMTEK(SHENZHEN) CO., LTD.

**Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,
Guangdong, China.**

TEL: 86-755-26954280

FAX: 86-755-26954282

**This report shall not be reproduced, except in full, without the written approval of
EMTEK(SHENZEHN) CO., LTD.**

VERIFICATION OF COMPLIANCE

Applicant:	Shantou liancheng industry co.,ltd Chenghai District, Shantou City, Guangdong Province, China
Manufacturer:	Shantou liancheng industry co.,ltd Chenghai District, Shantou City, Guangdong Province, China
Product Description:	RC TOYS
Trade Mark:	N/A
Model Number:	500804, 500808, 500820, 500822, 3313M, 3312M, 3318, 3319

We hereby certify that:

The above equipment was tested by EMTEK(SHENZEHN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.249(2016).

Date of Test : August 17, 2017 to August 24, 2017

Yaping Shen

Prepared by : Yaping Shen/Editor

Joe Xia

Reviewer : Joe Xia/Supervisor

Lisa Wang

Approved & Authorized Signer : Lisa Wang/Manager

Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	ES170817017E

Table of Contents

1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION	5
1.2 TEST FACILITY	6
2. TEST CONFIGURATION	6
3. SUMMARY OF TEST RESULTS	7
4. DESCRIPTION OF TEST MODES.....	8
5. TEST SYSTEM UNCERTAINTY	9
6. 20DB BANDWIDTH TEST	10
6.1 MEASUREMENT PROCEDURE	10
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	10
6.3 MEASUREMENT EQUIPMENT USED:.....	10
6.4 MEASUREMENT RESULTS:	10
7. BAND EDGE TEST	13
7.1 MEASUREMENT PROCEDURE	13
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
7.3 MEASUREMENT EQUIPMENT USED:.....	14
7.4 MEASUREMENT RESULTS:	14
8. RADIATED EMISSION TEST	20
8.1 MEASUREMENT PROCEDURE	20
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	22
8.3 MEASUREMENT EQUIPMENT USED:.....	22
8.4 LIMIT:	24
8.5 MEASUREMENT RESULT	25
8.5 RADIATED MEASUREMENT PHOTOS:	34
9. ANTENNA REQUIREMENT	35
9.1 LIMIT	35
9.2 RESULT	35

Appendix I (Photos of EUT) (3 pages)

1. General Information

1.1 Product Description

Characteristics	Description
Product Name	RC TOYS
Model number	500804, 500808, 500820, 500822, 3313M, 3312M, 3318, 3319 (Note: The samples are the same except different color in appearance, a variety of packaging on the packaging. So 3318 was selected for full tested.)
Power Supply	DC 4*1.5V Battery
Modulation	GFSK
Operating Frequency	2405MHz-2475MHz
Number of Channels	71
Antenna Type	Internal antenna
Antenna Gain	2 dBi

1.2 Test Facility

Site Description

EMC Lab. : Accredited by CNAS, 2016.10.24
The certificate is valid until 2022.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2016.5.19
The Laboratory has been assessed according to the requirements ISO/IEC 17025.

Accredited by FCC, August 03, 2017
Designation Number: CN1204
Test Firm Registration Number: 882943

Accredited by Industry Canada, November 24, 2015
The Certificate Registration Number is 4480A.

Accredited by A2LA, July 31, 2017
The Certificate Number is 4321.01.

Name of Firm : EMTEK(SHENZHEN) CO., LTD.
Site Location : Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China.

2. Test Configuration

EUT

Table 2-1 Equipment Used in Tested System

Item	Equipment	Trade Mark	Model No.	FCC ID	Note
1.	RC TOYS	N/A	3318	2ANHB-3318	EUT

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

3. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	N/A
2.1049	20dB Bandwidth	Complies
§15.249/15.205	Band Edge	Complies
§15.249(a)	Field Strength of Fundamental Emissions	Complies
§15.249(a)(d)	Radiated Spurious Emissions	Complies
§15.203	Antenna Requirements	Complies

Note: EUT is powered by batteries only, so AC Power Conducted Emission is not applicable.

4. Description of test modes

The EUT is used as a receiver together with dongles, but it still has the function of transmitting. More detailed feature description, please refer to the operation description or Users Manual.

For Radiated: The EUT's antenna was pre-tested under the following modes:

Test Mode	Description
Mode A	X-Y axis
Mode B	Y-Z axis
Mode C	X-Z axis

From the above modes, the worst case was found in Mode B. Therefore only the test data of the mode was recorded in this report.

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2405	25	2429	49	2453
2	2406	26	2430	50	2454
3	2407	27	2431	51	2455
4	2408	28	2432	52	2456
5	2409	29	2433	53	2457
6	2410	30	2434	54	2458
7	2411	31	2435	55	2459
8	2412	32	2436	56	2460
9	2413	33	2437	57	2461
10	2414	34	2438	58	2462
11	2415	35	2439	59	2463
12	2416	36	2440	60	2464
13	2417	37	2441	61	2465
14	2418	38	2442	62	2466
15	2419	39	2443	63	2467
16	2420	40	2444	64	2468
17	2421	41	2445	65	2469
18	2422	42	2446	66	2470
19	2423	43	2447	67	2471
20	2424	44	2448	68	2472
21	2425	45	2449	69	2473
22	2426	46	2450	70	2474
23	2427	47	2451	71	2475
24	2428	48	2452		

Note:

Test of channel was included the lowest 2405MHz, middle 2445MHz and highest frequency 2475MHz in highest data rate and to perform the test, then record on this report.

5. TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$

Remark: The coverage Factor ($k=2$), and measurement Uncertainty for a level of Confidence of 95%.

6. 20dB Bandwidth test

6.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

6.2 Test SET-UP (Block Diagram of Configuration)



6.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/16/2017	05/15/2018
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/16/2017	05/15/2018
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/16/2017	05/15/2018



Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.
The cable loss is 0.4dBm, and impedance is 50 Ω for the antenna connector.


6.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	August 21, 2017
Test By:	Andy	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	GFSK		

Channel frequency (MHz)	20dB Down BW(kHz)
2405	1288
2445	1303
2475	1317

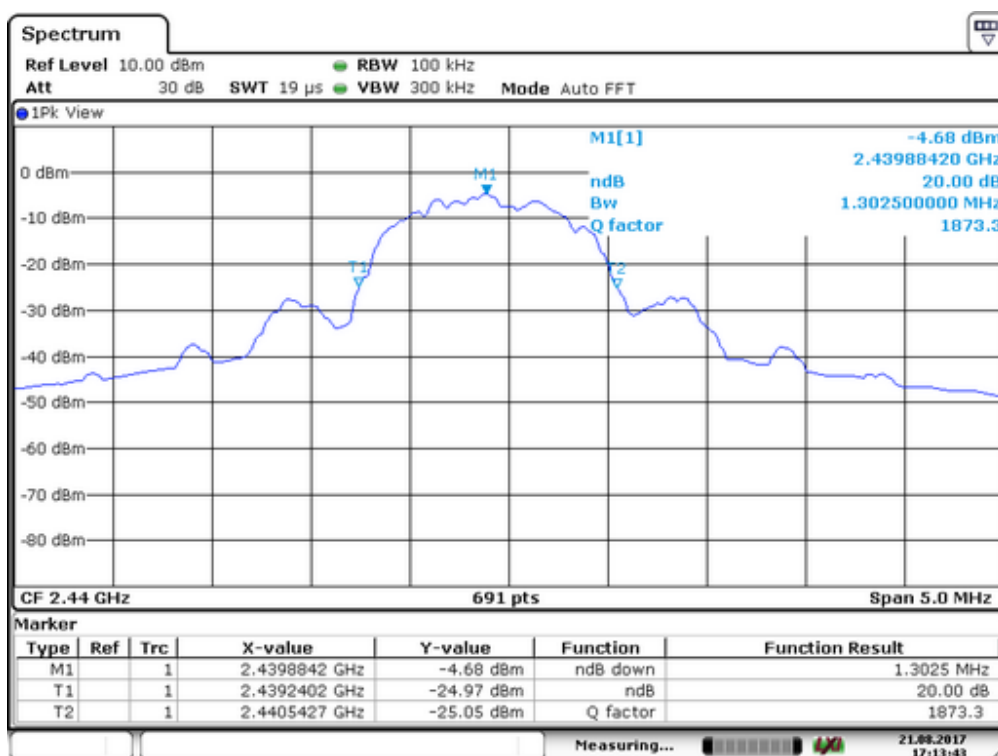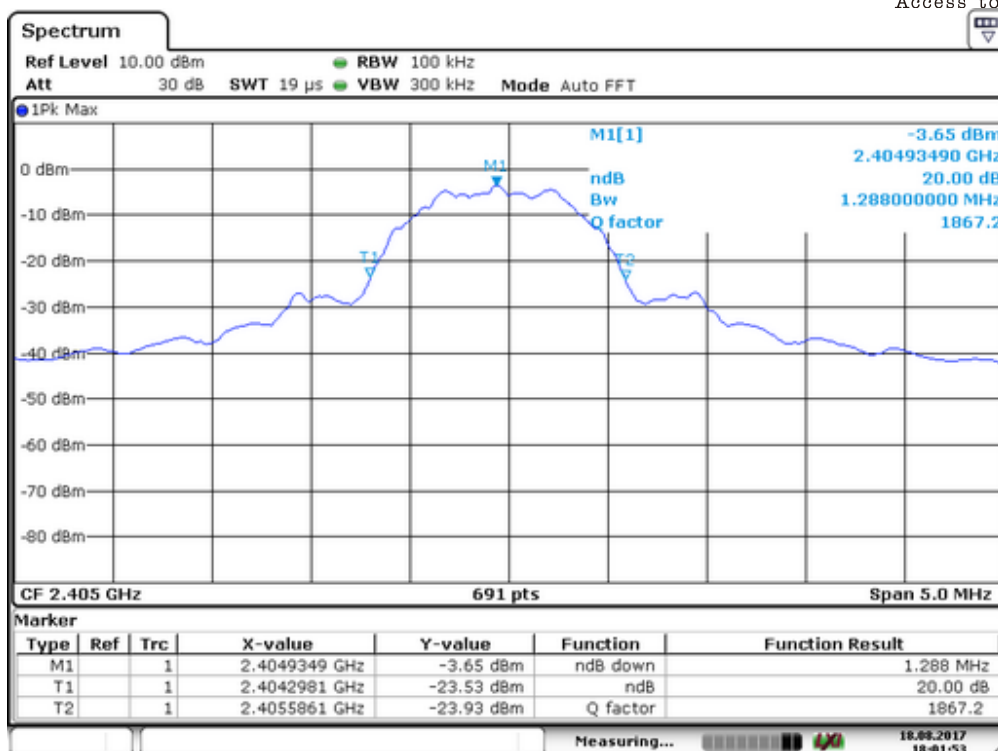

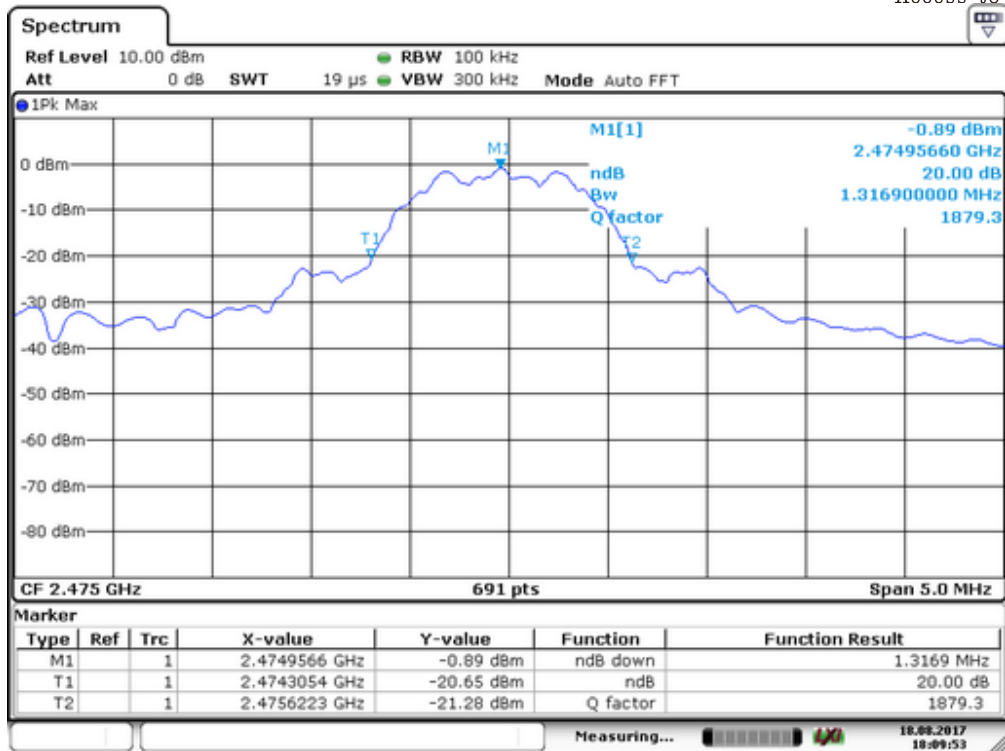

7. Band EDGE test

7.1 Measurement Procedure

The EUT was placed on a styrofoam table which is 1.5m above ground plane.

The measurement procedure at the band edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were encompassed by the span. After trace stabilization, the maximum peak was determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.

The measurements were performed at the lower end of the 2.4GHz band. Use the following spectrum analyzer settings:


When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold

7.2 Test SET-UP (Block Diagram of Configuration)

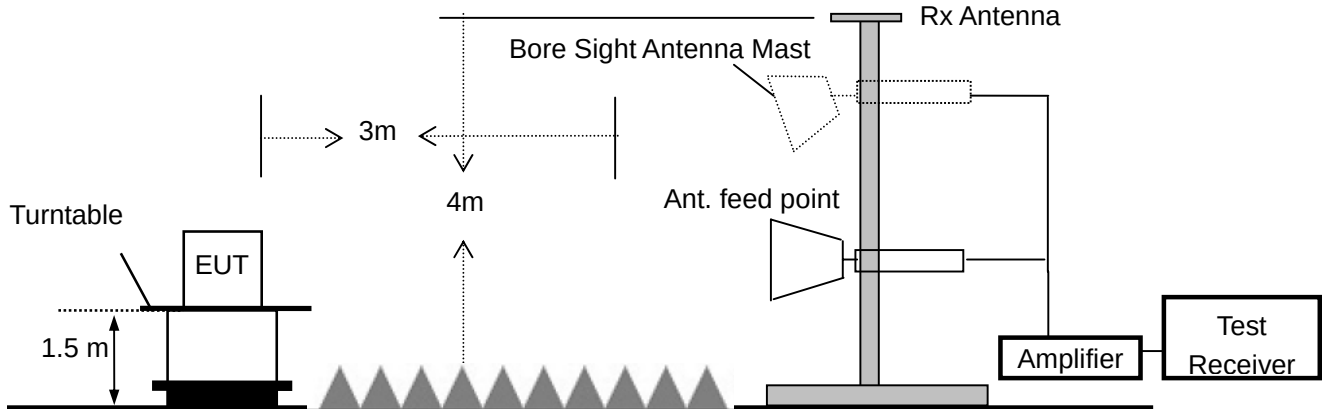



7.3 Measurement Equipment Used:


Item	Equipment	Manufacturer	Model No.	Serial No.	Characteristics	Last Cal.	Cal. Interval
1	Signal Analyzer	Rohde & Schwarz	FSV30	103040	9KHz-40GHz	05/16/2017	1 Year
2	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1272	1GHz-18GHz	05/16/2017	1 Year
3	Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	05/16/2017	1 Year
4	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/16/2017	1 Year
5	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/16/2017	1 Year
6	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/16/2017	1 Year

7.4 Measurement Results:

Spectrum Detector: PK Test Date : August 18, 2017
 Test By: Andy Temperature : 25 °C
 Test Result: PASS Humidity : 50 %

Frequency (MHz)	Modulation	Peak Power Output(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
2399.74	GFSK	-3.6	44.64	>20dBc
2490.94	GFSK	-0.57	46.73	>20dBc

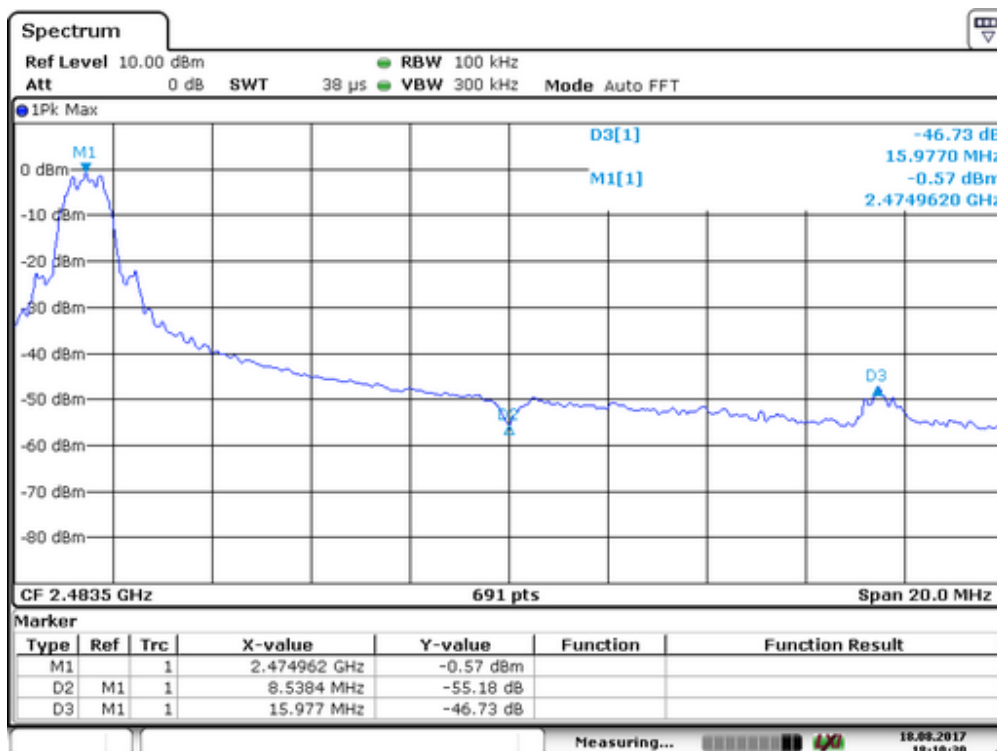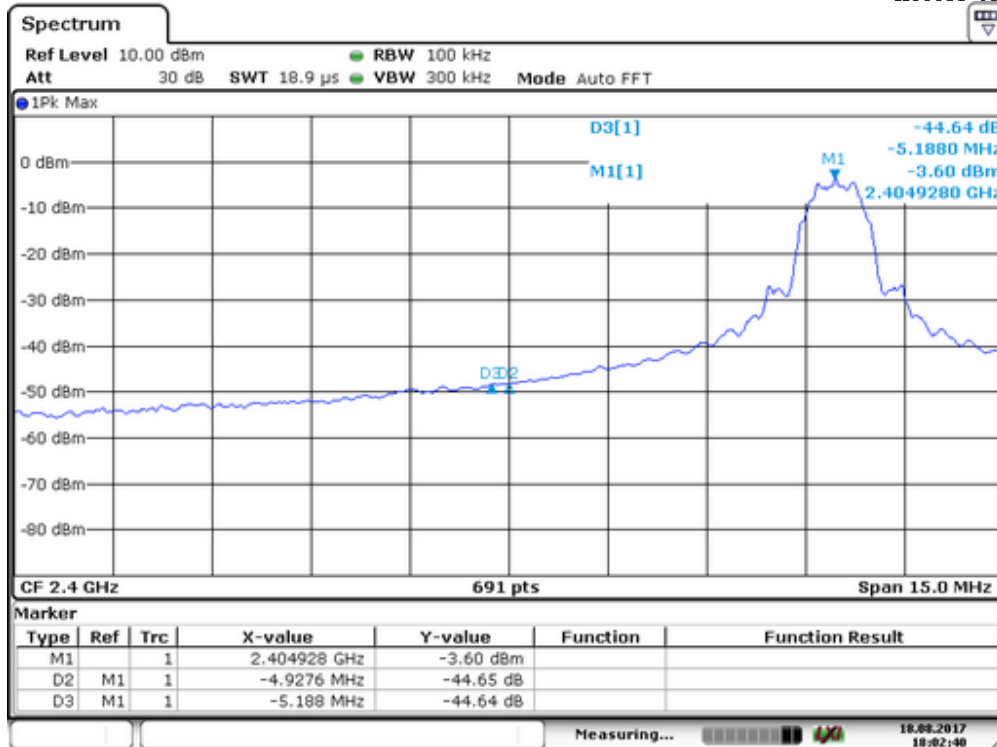

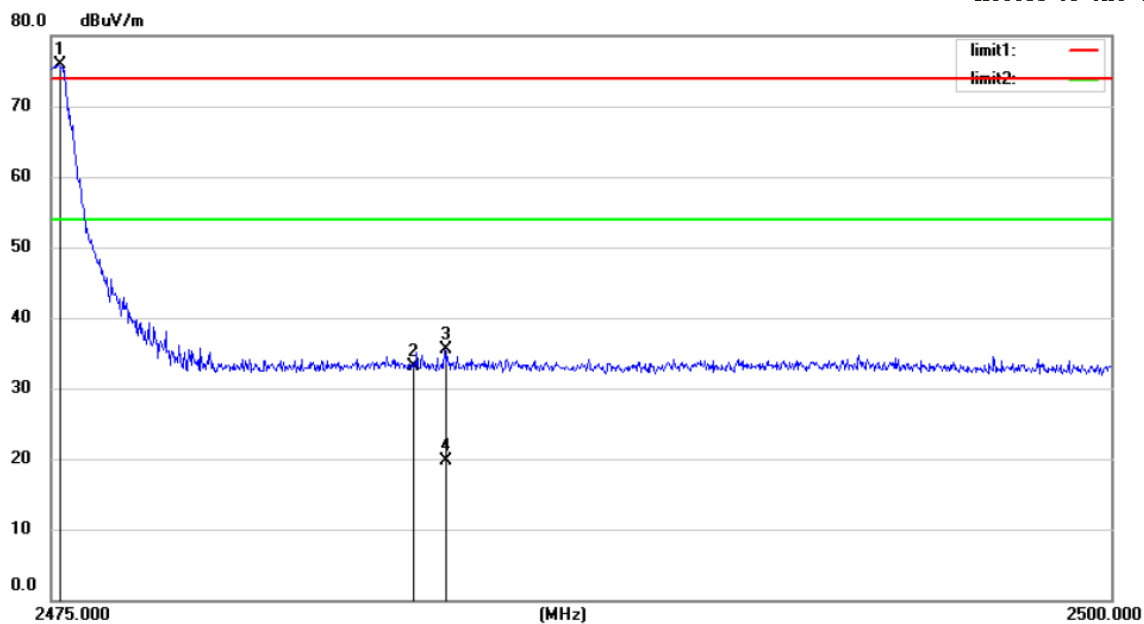

Site Chamber #1

Polarization: **Horizontal**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m_PEAK

Power: Battery 4*1.5V

Humidity: 55 %


Mode:TX2475

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	2475.175	96.54	-20.73	75.81	74.00	1.81	peak		
2		2483.500	53.91	-20.72	33.19	74.00	-40.81	peak		
3		2484.250	56.12	-20.71	35.41	74.00	-38.59	peak		
4		2484.250	40.37	-20.71	19.66	54.00	-34.34	AVG		

*:Maximum data x:Over limit !:over margin

Operator: Lin

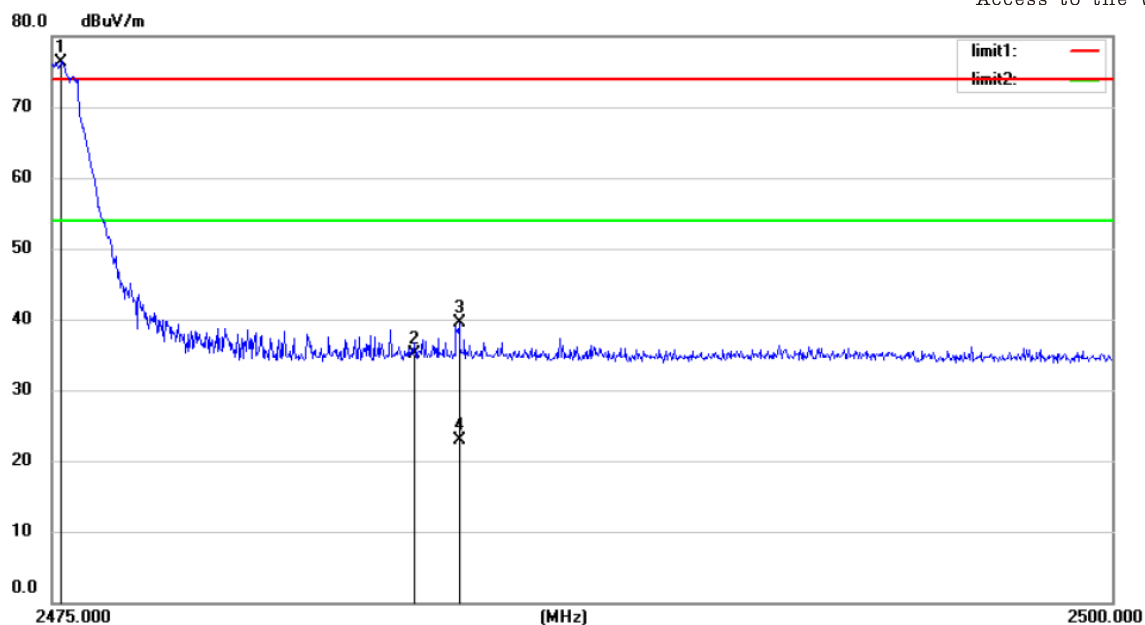

Site Chamber #1

Polarization: **Vertical**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m_PEAK

Power: Battery 4*1.5V

Humidity: 55 %


Mode:TX2475

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	2475.200	95.70	-19.32	76.38	74.00	2.38	peak		
2		2483.500	54.45	-19.27	35.18	74.00	-38.82	peak		
3		2484.575	58.76	-19.26	39.50	74.00	-34.50	peak		
4		2484.575	42.16	-19.26	22.90	54.00	-31.10	AVG		

*:Maximum data x:Over limit !:over margin

Operator: Lin

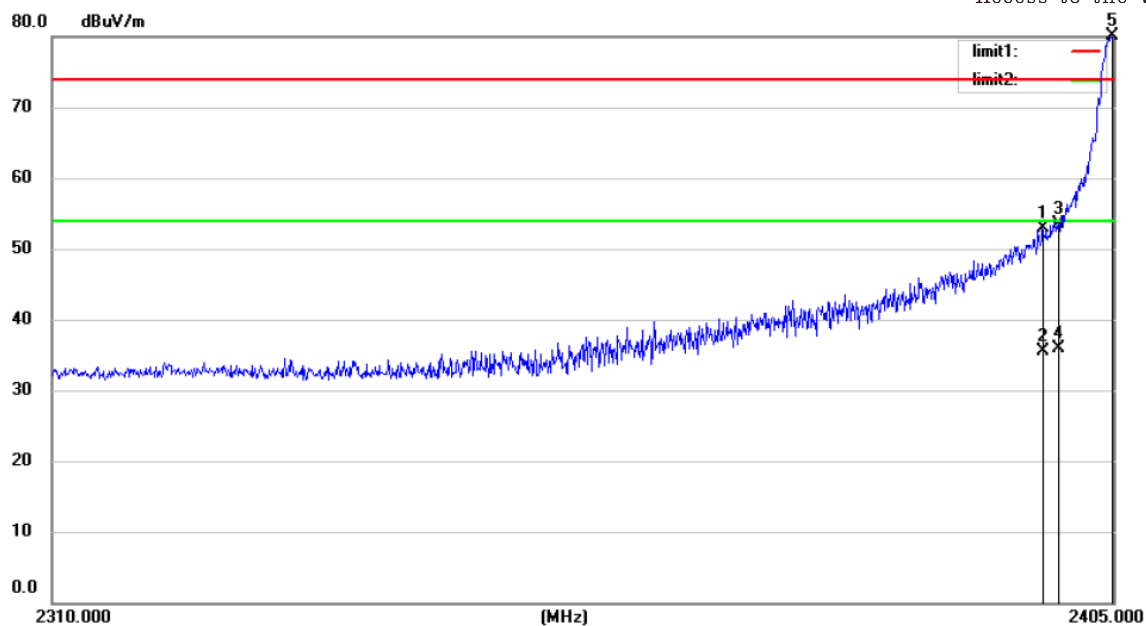

Site Chamber #1

Polarization: **Horizontal**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m_PEAK

Power: Battery 4*1.5V

Humidity: 55 %


Mode:TX2405

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		2398.540	73.76	-20.93	52.83	74.00	-21.17	peak		
2		2398.540	56.47	-20.93	35.54	54.00	-18.46	AVG		
3		2400.000	74.52	-20.93	53.59	74.00	-20.41	peak		
4		2400.000	56.89	-20.93	35.96	54.00	-18.04	AVG		
5	*	2404.810	101.04	-20.92	80.12	74.00	6.12	peak		

*:Maximum data x:Over limit !:over margin

Operator: Lin

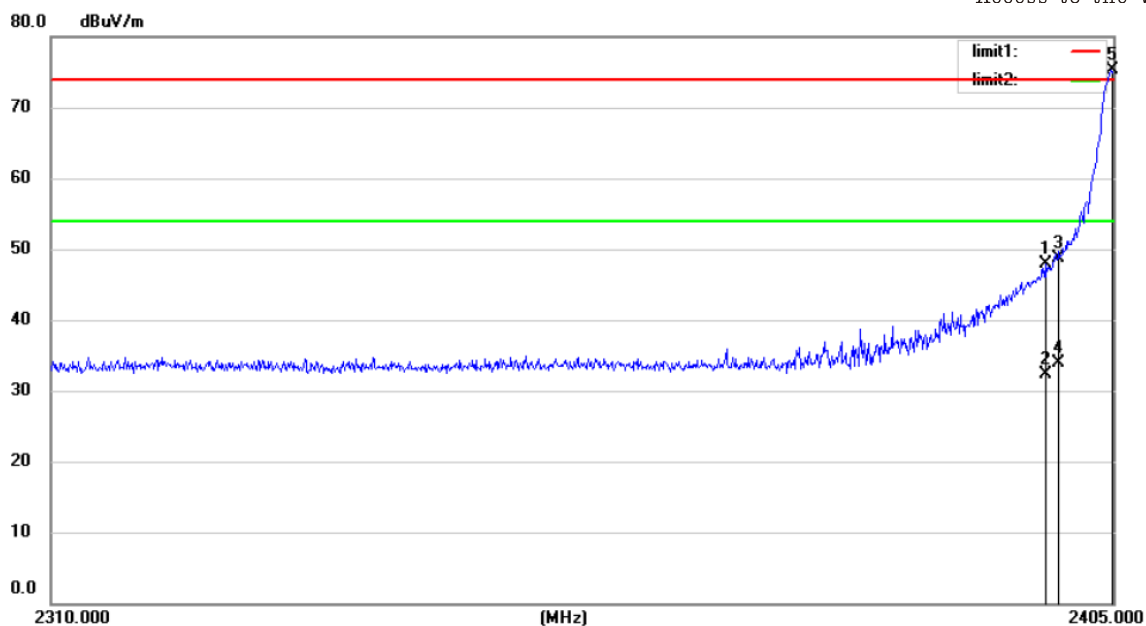

Site Chamber #1

Polarization: **Vertical**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m_PEAK

Power: Battery 4*1.5V

Humidity: 55 %

Mode: TX2405

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		2398.825	67.66	-19.78	47.88	74.00	-26.12	peak		
2		2398.825	52.16	-19.78	32.38	54.00	-21.62	AVG		
3		2400.000	68.40	-19.77	48.63	74.00	-25.37	peak		
4		2400.000	53.68	-19.77	33.91	54.00	-20.09	AVG		
5	*	2404.810	94.96	-19.74	75.22	74.00	1.22	peak		

*:Maximum data x:Over limit !:over margin

Operator: Lin

8. Radiated Emission Test

8.1 Measurement Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
6. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

The following table is the setting of spectrum analyzer:

When spectrum scanned from 30MHz to 1GHz setting resolution bandwidth 120KHz and video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	120KHz
VB	300KHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold

8.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

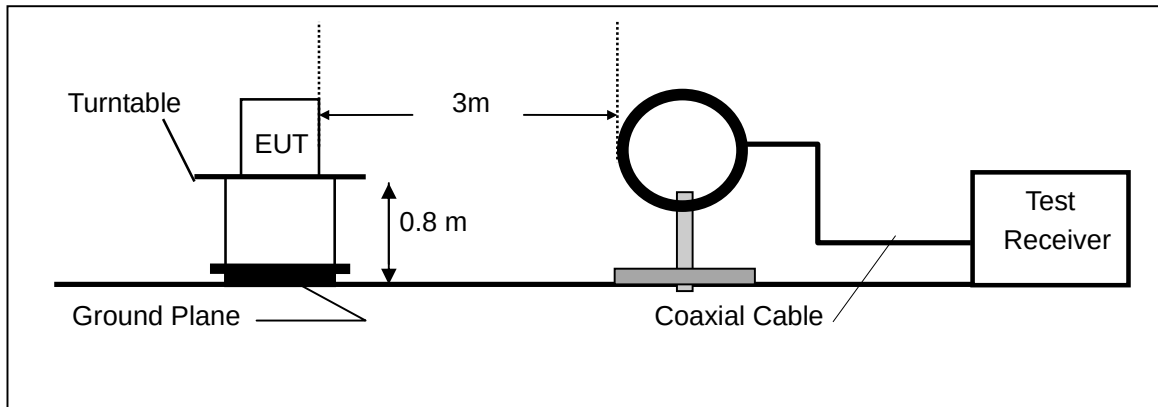

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

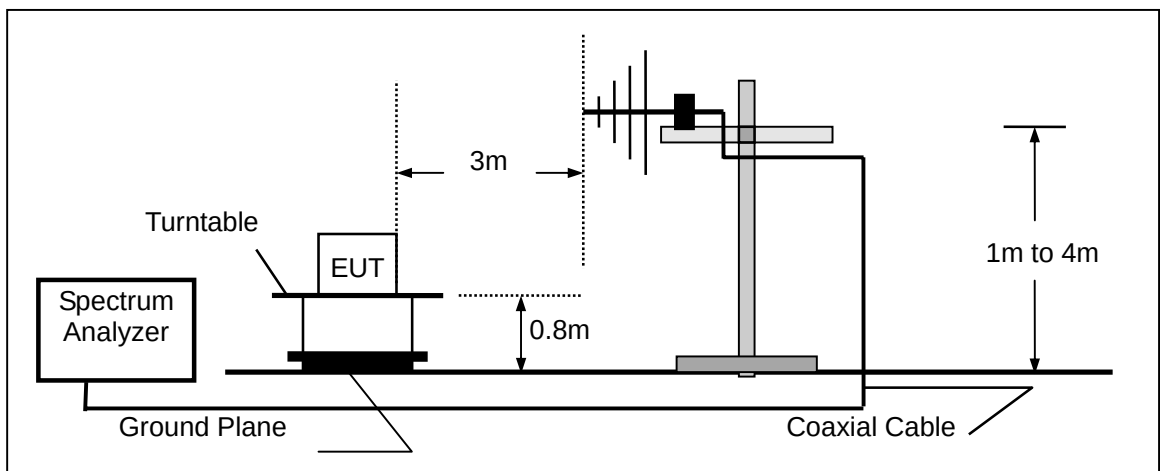

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

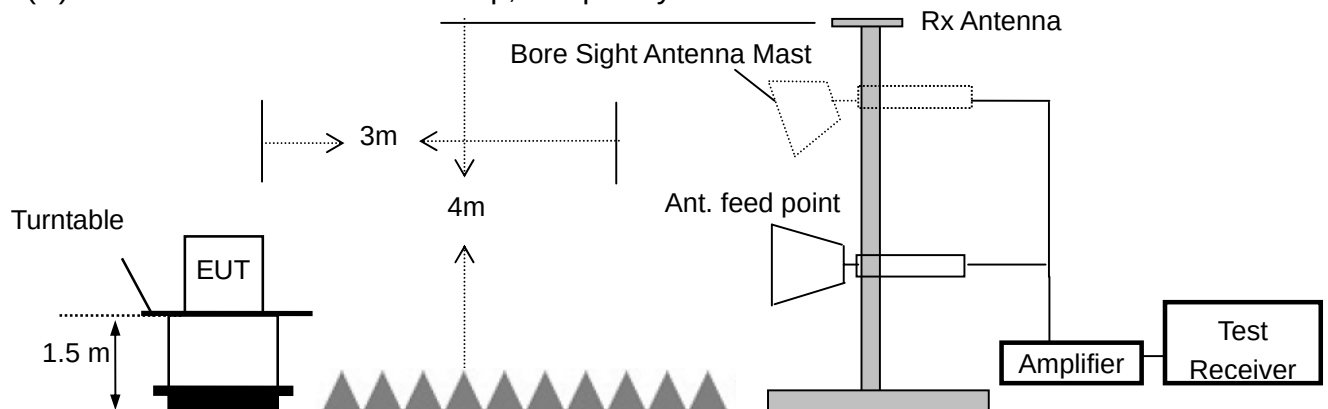

8.3 Measurement Equipment Used:

Item	Equipment	Manufacturer	Model No.	Serial No.	Characteristics	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	1166.5950.03	9KHz-3GHz	05/16/2017	1 Year
2.	Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	05/16/2017	1 Year
3.	Bilog Antenna	Schwarzbeck	VULB9163	000141	25MHz-2GHz	05/16/2017	1 Year
4.	Power Amplifier	CDS	RSU-M352	818	1MHz-1GHz	05/16/2017	1 Year
5.	Power Amplifier	HP	8447F	OPT H64	1GHz-26.5GHz	05/16/2017	1 Year
6.	Color Monitor	SUNSPO	SP-140A	N/A	--	05/16/2017	1 Year
7.	Single Line Filter	JIANLI	XL-3	N/A	--	05/16/2017	1 Year
8.	Single Phase Power Line Filter	JIANLI	DL-2X100B	N/A	--	05/16/2017	1 Year
9.	3 Phase Power Line Filter	JIANLI	DL-4X100B	N/A	--	05/16/2017	1 Year
10.	DC Power Filter	JIANLI	DL-2X50B	N/A	--	05/16/2017	1 Year
11.	Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	05/16/2017	1 Year
12.	Cable	Rosenberger	CIL02	A0783566	9KHz-3GHz	05/16/2017	1 Year
13.	Cable	Rosenberger	RG 233/U	525178	9KHz-3GHz	05/16/2017	1 Year
14.	Signal Analyzer	Rohde & Schwarz	FSV30	103040	9KHz-40GHz	05/16/2017	1 Year
15.	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1272	1GHz-18GHz	05/16/2017	1 Year
16.	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	14GHz -26.5GHz	05/16/2017	1 Year
17.	Boresight Antenna Tower	EMEC	AM-BS-4500-D	N/A	N/A	05/16/2017	1 Year
18.	Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	05/16/2017	1 Year
19.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/16/2017	1 Year
20.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/16/2017	1 Year
21.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/16/2017	1 Year

8.4 Limit:

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

- Remark: 1. Emission level in dBuV/m=20 log (uV/m)
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency(MHz)	Filed Strength of Fundamental(at 3m)		Filed Strength of Harmonics(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
902-928	114	94	74.0	54.0
2400-2483.5	114	94	74.0	54.0
5725-5875	114	94	74.0	54.0
24000-24250	128	108	88.0	68.0

8.5 Measurement Result

Below 30MHz:

Operation Mode:	TX	Test Date :	August 21, 2017
Frequency Range:	9KHz~30MHz	Temperature :	28℃
Test Result:	PASS	Humidity :	65 %
Measured Distance:	3m	Test By:	Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--


Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Below 1000MHz:

Pass.

All the modulation modes were tested the data of the mode are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following data.

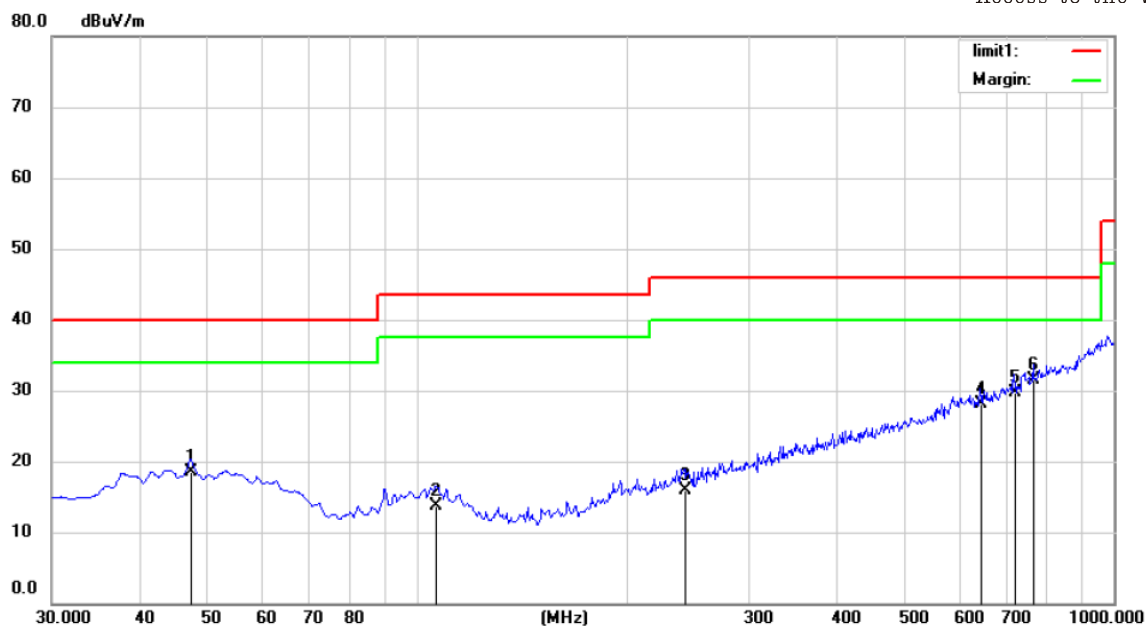

Site Chamber #1

Polarization: **Horizontal**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m

Power: Battery 4*1.5V

Humidity: 55 %


Mode: TX2405

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		47.4600	34.20	-15.69	18.51	40.00	-21.49	QP		
2		106.6300	32.00	-18.24	13.76	43.50	-29.74	QP		
3		242.4300	31.56	-15.67	15.89	46.00	-30.11	QP		
4		644.0100	33.50	-5.43	28.07	46.00	-17.93	QP		
5		720.6400	34.02	-4.24	29.78	46.00	-16.22	QP		
6	*	766.2300	34.58	-3.11	31.47	46.00	-14.53	QP		

*:Maximum data x:Over limit !:over margin

Operator: Lin

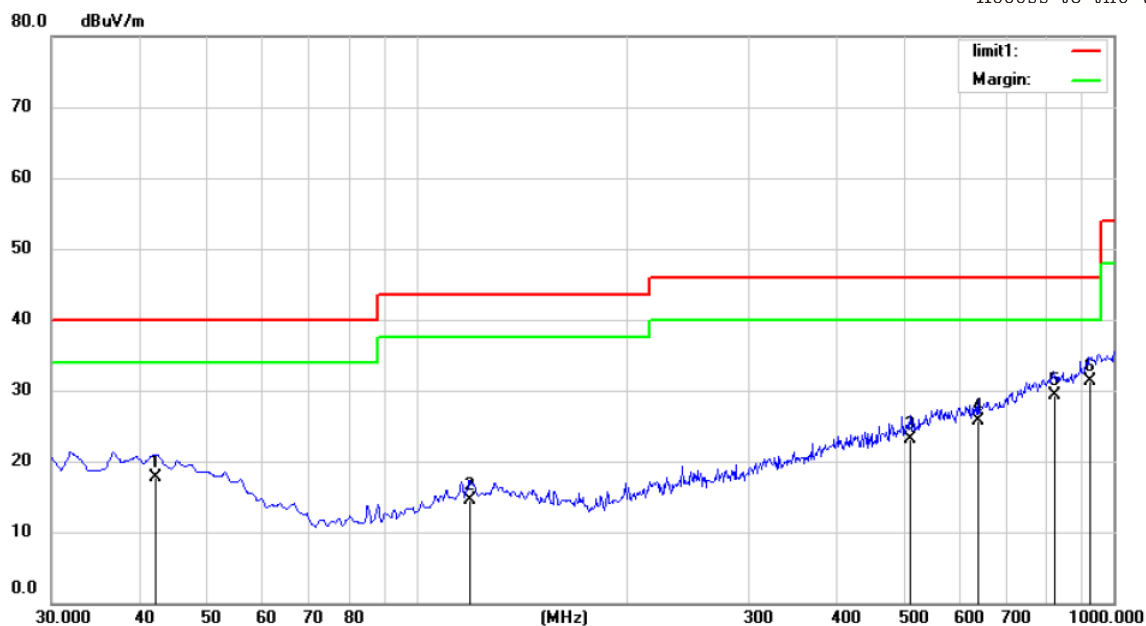

Site Chamber #1

Polarization: **Vertical**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m

Power: Battery 4*1.5V

Humidity: 55 %


Mode: TX2405

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		42.3022	31.23	-13.52	17.71	40.00	-22.29	QP		
2		119.2400	32.58	-18.10	14.48	43.50	-29.02	QP		
3		511.1200	32.60	-9.46	23.14	46.00	-22.86	QP		
4		639.1600	32.70	-6.97	25.73	46.00	-20.27	QP		
5		820.5500	32.47	-3.07	29.40	46.00	-16.60	QP		
6	*	925.3100	32.50	-1.19	31.31	46.00	-14.69	QP		

*:Maximum data x:Over limit !:over margin

Operator: Lin

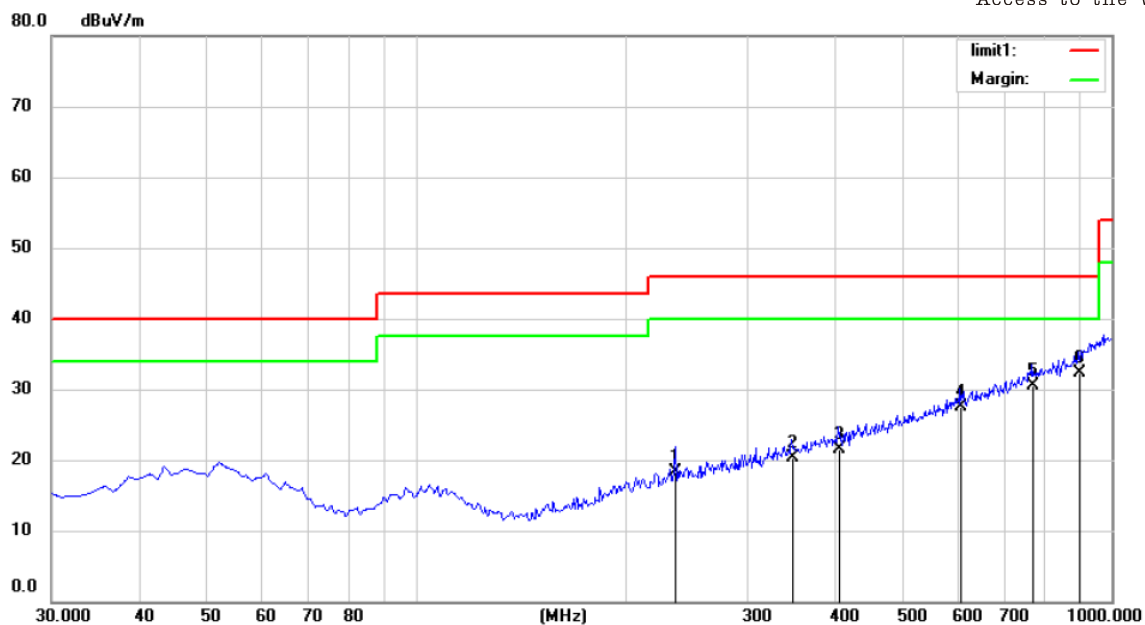

Site Chamber #1

Polarization: **Horizontal**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m

Power: Battery 4*1.5V

Humidity: 55 %


Mode:TX2445

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		236.6100	34.20	-15.98	18.22	46.00	-27.78	QP		
2		347.1900	32.50	-12.24	20.26	46.00	-25.74	QP		
3		405.3900	32.47	-10.95	21.52	46.00	-24.48	QP		
4		607.1500	33.50	-6.08	27.42	46.00	-18.58	QP		
5		771.0800	33.54	-3.05	30.49	46.00	-15.51	QP		
6	*	899.1200	32.80	-0.58	32.22	46.00	-13.78	QP		

*:Maximum data x:Over limit !:over margin

Operator: Lin

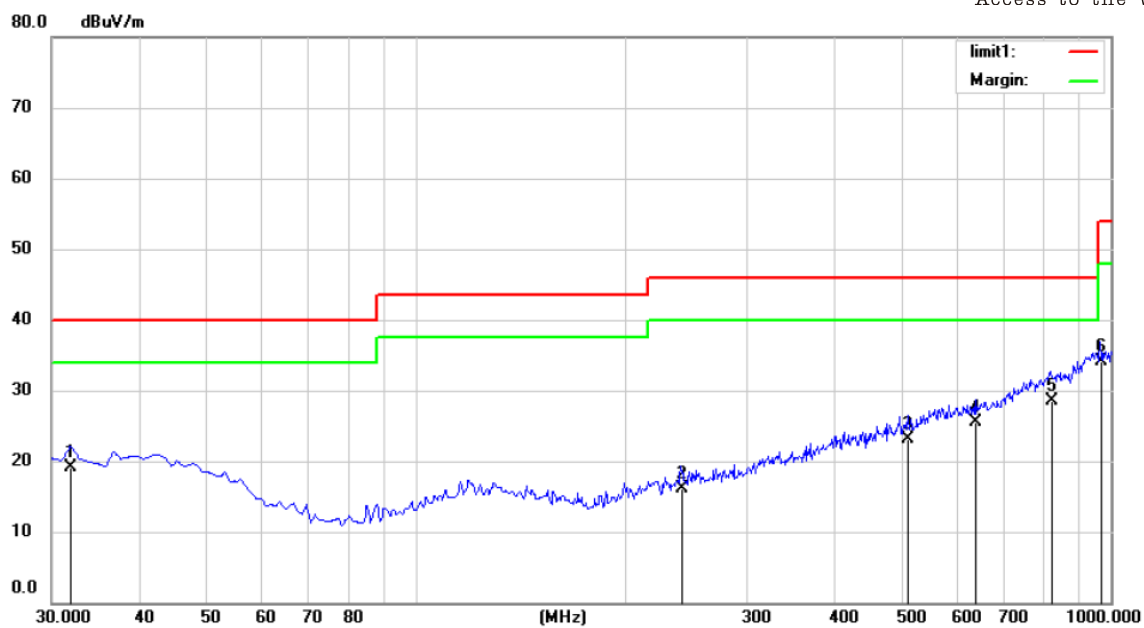

Site Chamber #1

Polarization: **Vertical**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m

Power: Battery 4*1.5V

Humidity: 55 %


Mode:TX2445

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		31.9400	34.00	-14.92	19.08	40.00	-20.92	QP		
2		241.4600	32.50	-16.44	16.06	46.00	-29.94	QP		
3		511.1200	32.54	-9.46	23.08	46.00	-22.92	QP		
4		639.1600	32.47	-6.97	25.50	46.00	-20.50	QP		
5	*	820.5500	31.58	-3.07	28.51	46.00	-17.49	QP		
6		967.0200	34.80	-0.67	34.13	54.00	-19.87	QP		

*:Maximum data x:Over limit !:over margin

Operator: Lin

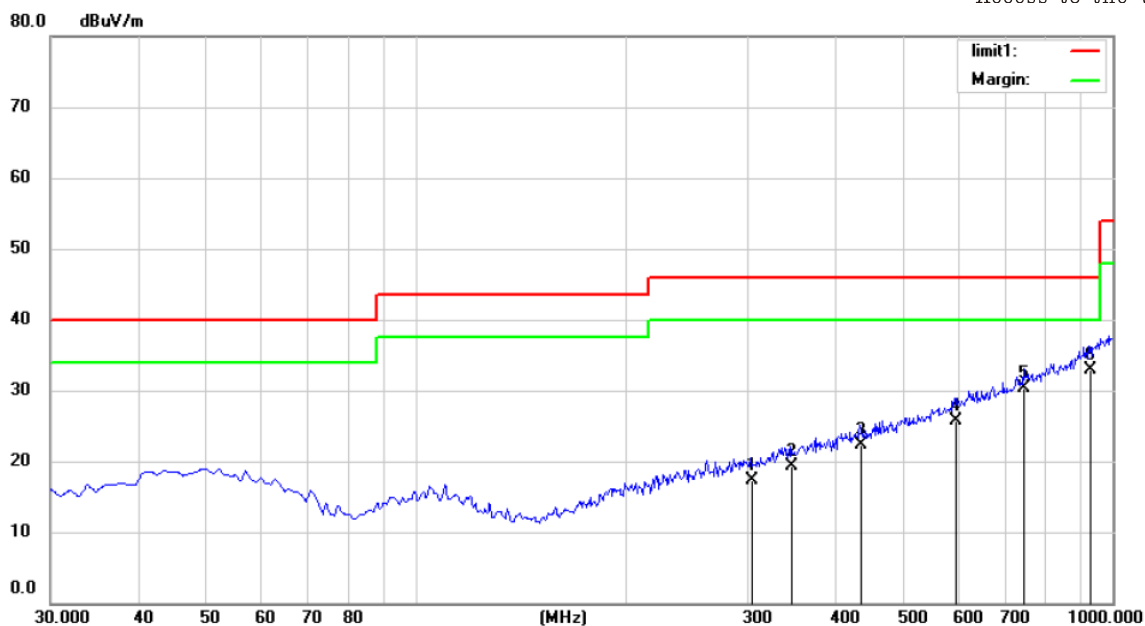

Site Chamber #1

Polarization: **Horizontal**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m

Power: Battery 4*1.5V

Humidity: 55 %


Mode: TX2475

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		302.5700	31.25	-13.89	17.36	46.00	-28.64	QP		
2		346.2200	31.50	-12.24	19.26	46.00	-26.74	QP		
3		435.4600	32.47	-10.22	22.25	46.00	-23.75	QP		
4		593.5700	32.10	-6.48	25.62	46.00	-20.38	QP		
5		744.8900	33.74	-3.46	30.28	46.00	-15.72	QP		
6	*	926.2800	32.78	0.06	32.84	46.00	-13.16	QP		

*:Maximum data x:Over limit !:over margin

Operator: Lin

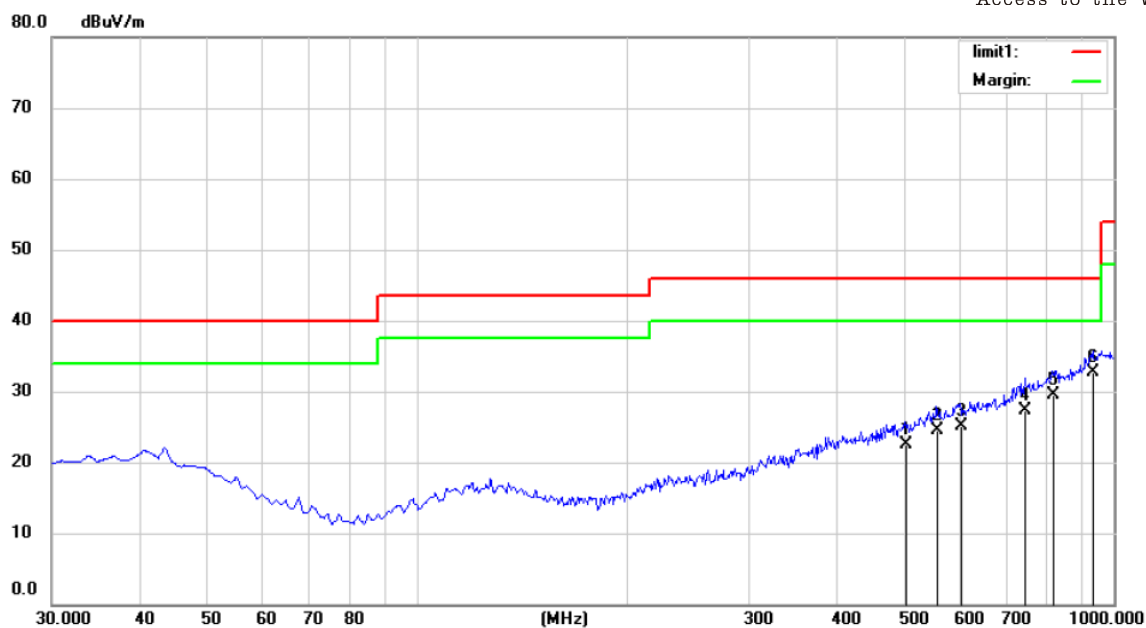

Site Chamber #1

Polarization: **Vertical**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m

Power: Battery 4*1.5V

Humidity: 55 %

Mode: TX2475

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		501.4200	32.25	-9.68	22.57	46.00	-23.43	QP		
2		558.6500	32.47	-7.99	24.48	46.00	-21.52	QP		
3		603.2700	32.40	-7.32	25.08	46.00	-20.92	QP		
4		744.8900	32.00	-4.66	27.34	46.00	-18.66	QP		
5		816.6700	32.69	-3.18	29.51	46.00	-16.49	QP		
6	*	935.0100	33.58	-0.97	32.61	46.00	-13.39	QP		

*:Maximum data x:Over limit !:over margin

Operator: Lin

Above 1000MHz~10th Harmonics:

Operation Mode: GFSK (CH0: 2405MHz) Test Date : August 21, 2017

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2405(F)	V	98.36	78.63	114	94	-15.64	-15.37
4810	V	65.85	45.63	74	54	-8.15	-8.37
7215	V	66.52	44.38	74	54	-7.48	-9.62
9620	V	64.86	42.61	74	54	-9.14	-11.39
12025	V	63.37	43.61	74	54	-10.63	-10.39
14430	V	62.91	42.16	74	54	-11.09	-11.84
16835	V	60.37	41.82	74	54	-13.63	-12.18
2405(F)	H	98.76	78.13	114	94	-15.24	-15.87
4810	H	65.38	45.16	74	54	-8.62	-8.84
7215	H	64.31	44.82	74	54	-9.69	-9.18
9620	H	63.82	43.82	74	54	-10.18	-10.18
12025	H	62.67	42.71	74	54	-11.33	-11.29
14430	H	61.95	41.92	74	54	-12.05	-12.08
16835	H	60.53	40.86	74	54	-13.47	-13.14


Operation Mode: GFSK (CH1: 2445MHz) Test Date : August 21, 2017

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2445(F)	V	97.46	77.46	114	94	-16.54	-16.54
4890	V	64.28	44.62	74	54	-9.72	-9.38
7335	V	63.94	43.85	74	54	-10.06	-10.15
9780	V	62.85	42.95	74	54	-11.15	-11.05
12225	V	61.86	41.28	74	54	-12.14	-12.72
14670	V	60.84	40.61	74	54	-13.16	-13.39
24457	V	59.46	39.82	74	54	-14.54	-14.18
2445(F)	H	98.42	79.11	114	94	-15.58	-14.89
4890	H	65.74	45.62	74	54	-8.26	-8.38
7335	H	64.82	44.61	74	54	-9.18	-9.39
9780	H	63.85	43.82	74	54	-10.15	-10.18
12225	H	62.76	42.95	74	54	-11.24	-11.05
14670	H	61.82	41.34	74	54	-12.18	-12.66
24457	H	60.84	40.37	74	54	-13.16	-13.63

Operation Mode: GFSK (CH2: 2475MHz) Test Date :

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2475(F)	V	98.62	78.36	114	94	-15.38	-15.64
4950	V	65.23	45.62	74	54	-8.77	-8.38
7425	V	64.52	44.36	74	54	-9.48	-9.64
9900	V	63.85	43.85	74	54	-10.15	-10.15
12375	V	62.34	42.03	74	54	-11.66	-11.97
14850	V	60.52	41.96	74	54	-13.48	-12.04
17325	V	59.34	40.85	74	54	-14.66	-13.15
2475(F)	H	99.82	79.54	114	94	-14.18	-14.46
4950	H	66.52	46.43	74	54	-7.48	-7.57
7425	H	65.37	45.85	74	54	-8.63	-8.15
9900	H	64.82	44.61	74	54	-9.18	-9.39
12375	H	63.66	43.96	74	54	-10.34	-10.04
14850	H	62.85	41.23	74	54	-11.15	-12.77
17325	H	61.82	40.89	74	54	-12.18	-13.11

8.5 Radiated Measurement Photos:

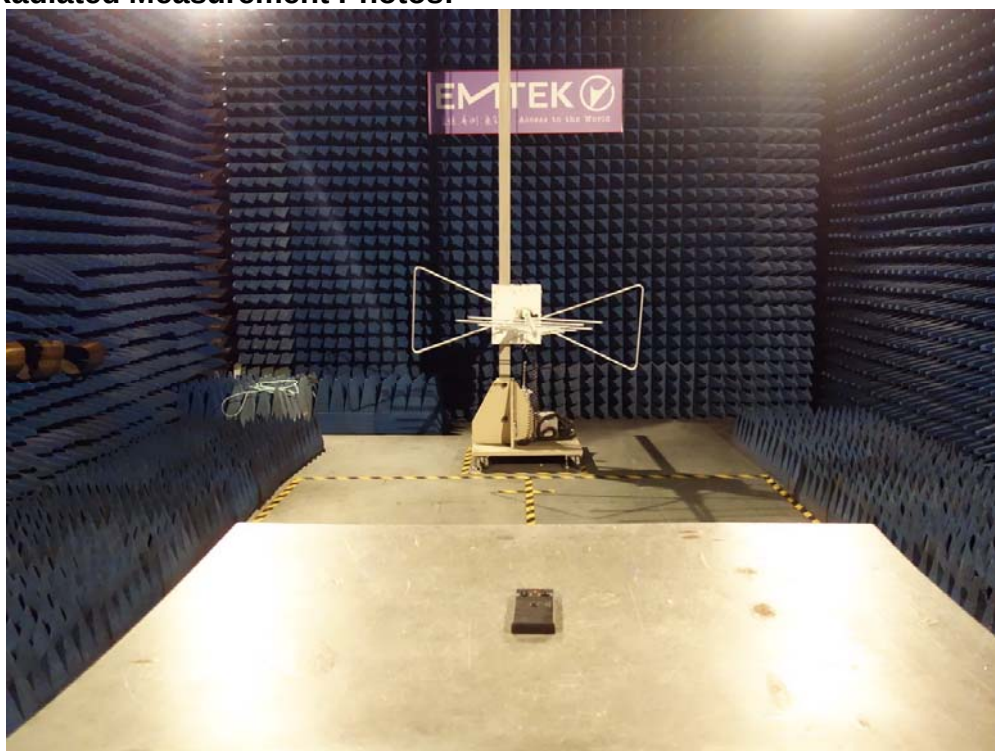

9. Antenna requirement

9.1 Limit

Except for special regulations, the Low-power Radio-Frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacture may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

9.2 Result

The EUT's antenna, permanent attached antenna, used a Internal antenna, The antenna's gain is 2 dBi and meets the requirement.

APPENDIX I (Photos of EUT)



