

# RADIO TEST REPORT

Report No:1708209W01

Issued for

JALA GROUP

EDIFICIO JALA AV. MELCHOR PEREZ DE HOLGUIN N  
2643 COCHABAMBA BOLIVIA (LATIN AMERICA)

|                       |                      |
|-----------------------|----------------------|
| <b>Product Name:</b>  | Smartphone           |
| <b>Brand Name:</b>    | Jala                 |
| <b>Model Name:</b>    | ACCIONE              |
| <b>Series Model:</b>  | N/A                  |
| <b>FCC ID:</b>        | 2ANHQACCIONE         |
| <b>Test Standard:</b> | FCC Part 22H and 24E |

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from BZT, All Test Data Presented in this report is only applicable to presented Test sample.

BZT Testing Technology Co., Ltd

Add. : Buliding 17, Xinghua Road Xingwei industrial Park Fuyong,  
Baoan District, Shenzhen, Guangdong, China  
TEL: +86-755 3307 1680 FAX: +86-755 27341758 E-mail:bruce@bzt.Cn

**TEST RESULT CERTIFICATION****Applicant's name** ..... : JALA GROUPAddress..... : EDIFICIO JALA AV. MELCHOR PEREZ DE HOLGUIN N 2643 CO  
CHABAMBA BOLIVIA (LATIN AMERICA)**Manufacture's Name** ..... : Shenzhen Kingsun Technology Co., Ltd.Address..... : 5th Floor, Block B1, Wisdom Plaza, No. 4068, Qiaoxiang Road, Nan  
shan District, Shenzhen, China

Product name..... : Smartphone

Brand name ..... : Jala

Model and/or type reference .. : ACCIONE

**Standards** ..... : FCC Part 22H and 24E

Test procedure ..... ANSI/TIA 603-D (2010)

This device described above has been tested by BZT and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BZT, this document may be altered or revised by BZT, personal only, and shall be noted in the revision of the document

**Date of Test** .....

Date of performance of tests..... 07 June. 2017~10 June. 2017

Date of Issue ..... 11 June. 2017

Test Result ..... **Pass**

Testing Engineer :



---

(Sean she)

Technical Manager :



---

(Hakim.hou)

Authorized Signatory :



---

( Vita Li )

| <b>TABLE OF CONTENTS</b>                                     | <b>Page</b> |
|--------------------------------------------------------------|-------------|
| <b>1 INTRODUCTION</b>                                        | <b>6</b>    |
| 1.1 TEST FACTORY                                             | 6           |
| 1.2 MEASUREMENT UNCERTAINTY                                  | 6           |
| <b>2 PRODUCT INFORMATION</b>                                 | <b>7</b>    |
| <b>3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST</b>          | <b>9</b>    |
| <b>4 MEASUREMENT INSTRUMENTS</b>                             | <b>10</b>   |
| <b>5 TEST ITEMS</b>                                          | <b>11</b>   |
| 5.1 CONDUCTED OUTPUT POWER                                   | 11          |
| 5.2 PEAK TO AVERAGE RATIO                                    | 12          |
| 5.3 TRANSMITTER RADIATED POWER (EIRP/ERP)                    | 13          |
| 5.4 OCCUPIED BANDWIDTH                                       | 14          |
| 5.5 FREQUENCY STABILITY                                      | 15          |
| 5.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS                  | 16          |
| 5.7 BAND EDGE                                                | 17          |
| 5.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT         | 18          |
| <b>APPENDIX A TEST RESULT</b>                                | <b>20</b>   |
| A1 CONDUCTED OUTPUT POWER                                    | 20          |
| A2 PEAK-TO-AVERAGE RADIO                                     | 24          |
| A3 TRANSMITTER RADIATED POWER (EIRP/ERP)                     | 26          |
| A4 OCCUPIED BANDWIDTH(99% OCCUPIED BANDWIDTH/26DB BANDWIDTH) | 29          |
| A5 FREQUENCY STABILITY                                       | 40          |
| A6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS                   | 45          |
| A7 BAND EDGE                                                 | 53          |
| A8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT          | 61          |
| <b>APPENDIX B PHOTOS OF TEST SETUP</b>                       | <b>69</b>   |

**Revision History**

| Rev. | Issue Date    | Report NO. | Effect Page | Contents      |
|------|---------------|------------|-------------|---------------|
| 00   | 11 June, 2017 | 1708209W01 | ALL         | Initial Issue |
|      |               |            |             |               |

## SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-D: 2010, KDB 971168 D01 v02r02 and KDB 648474 D03 v01r04

| FCC Rules                  | Test Description                                             | Test Limit                                                    | Test Result | Reference |
|----------------------------|--------------------------------------------------------------|---------------------------------------------------------------|-------------|-----------|
| 2.1049                     | Conducted OutputPower                                        | Reporting Only                                                | PASS        |           |
| 2.0146<br>24.232           | Peak-to-AverageRatio                                         | < 13 dB                                                       | PASS        |           |
| 2.1046<br>22.913<br>24.232 | Effective Radiated Power/Equivalent Isotropic Radiated Power | < 7 Watts max. ERP(Part 22)<br>< 2 Watts max. EIRP(Part 24)   | PASS        |           |
| 2.1049<br>22.917<br>24.238 | Occupied Bandwidth                                           | Reporting Only                                                | PASS        |           |
| 2.1055<br>22.355<br>24.235 | Frequency Stability                                          | < 2.5 ppm (Part 22)<br>Emission must remain in band (Part 24) | PASS        |           |
| 2.1051<br>22.917<br>24.238 | Spurious Emission at Antenna Terminals                       | < 43+10log10(P[Watts])                                        | PASS        |           |
| 2.1053<br>22.917<br>24.238 | Field Strength of Spurious Radiation                         | < 43+10log10(P[Watts])                                        | PASS        |           |
| 2.1051<br>22.917<br>24.238 | Band Edge                                                    | < 43+10log10(P[Watts])                                        | PASS        |           |

## 1 INTRODUCTION

### 1.1 TEST FACTORY

BZT Testing Technology Co., Ltd.

Add. : Buliding 17, Xinghua Road Xingwei industrial Park Fuyong,  
Baoan District, Shenzhen, Guangdong, China

FCC Registration No.: 701733

### 1.2 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the UCISPR measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance. °

| No. | Item                                       | Uncertainty         |
|-----|--------------------------------------------|---------------------|
| 1   | RF power,conducted                         | $\pm 0.71\text{dB}$ |
| 2   | Spurious emissions,conducted               | $\pm 0.63\text{dB}$ |
| 5   | All emissions,radiated(<1G) 30MHz-200MHz   | $\pm 3.80\text{dB}$ |
| 6   | All emissions,radiated(<1G) 200MHz-1000MHz | $\pm 3.97\text{dB}$ |
| 7   | All emissions,radiated(>1G)                | $\pm 3.03\text{dB}$ |

## 2 PRODUCT INFORMATION

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Designation:     | Smartphone                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Hardware version number: | PVT2.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Software version number: | J.A.00.01                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| FCC ID:                  | 2ANHQACCIONE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Tx Frequency:            | GSM/GPRS:<br>850: 824.2 MHz ~ 848.8 MHz<br>1900: 1850.2 MHz ~ 1909.8MHz<br>WCDMA:<br>Band V: 826.4 MHz ~ 846.6 MHz<br>Band II: 1852.4 MHz ~ 1907.6 MHz                                                                                                                                                                                                                                                                                                                                                                                             |
| Rx Frequency:            | GSM/GPRS:<br>850: 869.2 MHz ~ 893.8 MHz<br>1900: 1930.2 MHz ~ 1989.8 MHz<br>WCDMA:<br>Band V: 871.4 MHz ~ 891.6 MHz<br>Band II: 1932.4 MHz ~ 1987.6 MHz                                                                                                                                                                                                                                                                                                                                                                                            |
| Max RF Output Power:     | GSM850:31.98dBm, PCS1900:28.92dBm<br>GPRS850(1-Slot):31.96dBm, GPRS1900(1-Slot):28.89dBm<br>GPRS850(2-Slot):31.47dBm, GPRS1900(2-Slot):28.42dBm<br>GPRS850(3-Slot):31.05dBm, GPRS1900(3-Slot):27.99dBm<br>GPRS850(4-Slot):30.64dBm, GPRS1900(4-Slot):27.55dBm<br>EDGE 850(1-Slot):31.94dBm, EDGE 1900(1-Slot):28.87dBm<br>EDGE 850(2-Slot):31.25dBm, EDGE 1900(2-Slot):28.21dBm<br>EDGE 850(3-Slot):30.78dBm, EDGE 1900(3-Slot):27.76dBm<br>EDGE 850(4-Slot):30.42dBm, EDGE 1900(4-Slot):27.30dBm<br>WCDMA Band V:22.35dBm, WCDMA Band II:21.64dBm |
| Type of Emission:        | GSM(850): 324KGXW; GSM(1900): 320KGXW<br>GPRS(850): 317KG7W; GPRS(1900): 318KG7W<br>EDGE (850): 313KG7W; EDGE (1900): 318KG7W<br>WCDMA850: 4M69F9W<br>WCDMA1900: 4M70F9W                                                                                                                                                                                                                                                                                                                                                                           |
| SIM Card:                | SIM 1 and SIM 2 is a chipset unit and tested as single chipset,SIM 1 is used to tested                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Antenna:                 | PIFA Antenna                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Antenna gain:            | GSM 850:0dBi ,PCS 1900:0dBi<br>WCDMA 850:0dBi, WCDMA1900:0dBi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Power Supply:            | DC 3.8V by battery                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Battery parameter:       | Capacity: 2500mAh, Rated Voltage: 3.8V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Adapter:                 | Input: AC 100-240V, 50/60Hz, 500mA<br>Output: DC 5V, 2400mA, 9V, 2000mA, 9V,1500mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

|                                                                                                                                                                |                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| GPRS/EDGE Class:                                                                                                                                               | Multi-Class12                       |
| Extreme Vol. Limits:                                                                                                                                           | DC3.45 V to 4.35V (Nominal DC3.8V ) |
| Extreme Temp. Tolerance:                                                                                                                                       | -10°C to +40°C                      |
| <i>** Note: The High Voltage 4.35V and Low Voltage 3.45 V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.</i> |                                     |

### 3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850 and WCDMA Band V.
2. 30 MHz to 10th harmonic for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

|               | TEST MODES                           |                                      |
|---------------|--------------------------------------|--------------------------------------|
|               | RADIATED TCS                         | CONDUCTED TCS                        |
| BAND          |                                      |                                      |
| GSM 850       | GSM LINK<br>GPRS/ EDGE CLASS 12 LINK | GSM LINK<br>GPRS/ EDGE CLASS 12 LINK |
| GSM 1900      | GSM LINK<br>GPRS/ EDGE CLASS 12 LINK | GSM LINK<br>GPRS/ EDGE CLASS 12 LINK |
| WCDMA BAND V  | RMC 12.2KBPS LINK                    | RMC 12.2KBPS LINK                    |
| WCDMA BAND II | RMC 12.2KBPS LINK                    | RMC 12.2KBPS LINK                    |

## 4 MEASUREMENT INSTRUMENTS

| Kind of Equipment                    | Manufacturer    | Type No.        | Serial No.  | Last Calibration | Calibrated Until |
|--------------------------------------|-----------------|-----------------|-------------|------------------|------------------|
| EMI Test Receiver                    | R&S             | ESW             | 101535      | 2017.06.01       | 2018.05.31       |
| Signal Analyzer                      | Agilent         | N9020A          | MY49100060  | 2017.03.11       | 2018.03.10       |
| Test Receiver                        | R&S             | ESCI            | 101427      | 2016.10.23       | 2017.10.22       |
| Universal Radio Communication Tester | R&S             | CMW500          | 117239      | 2016.10.23       | 2017.10.22       |
| Bilog Antenna                        | TESEQ           | CBL6111D        | 34678       | 2017.03.24       | 2018.03.23       |
| Horn Antenna                         | Schwarzbeck     | BBHA 9120D      | 9120D-1343  | 2017.03.06       | 2018.03.05       |
| SHF-EHF Horn Antenna (15G-40GHz)     | BBHA 9170       | SCHWARZBECK     | BBHA9170367 | 2017.05.02       | 2018.05.01       |
| Low frequency cable                  | EM              | R01             | N/A         | 2017.03.12       | 2018.03.11       |
| Low frequency cable                  | EM              | R06             | N/A         | 2017.03.12       | 2018.03.11       |
| High frequency cable                 | SCHWARZBECK     | R04             | N/A         | 2017.03.12       | 2018.03.11       |
| High frequency cable                 | SCHWARZBECK     | R02             | N/A         | 2017.03.12       | 2018.03.11       |
| Vector signal generator              | Agilent         | E8257D-521      | MY45141029  | 2016.10.23       | 2017.10.22       |
| Pre-mpifier (0.1M-3GHz)              | EM              | EM330           | 60538       | 2017.03.12       | 2018.03.11       |
| PreAmplifier (1G-26.5GHz)            | Agilent         | 8449B           | 60538       | 2016.10.23       | 2017.10.22       |
| Pre-mpifier (18G-40G)                | MINI-CIRCUITS   | AP-040G         | 1382501     | 2017.05.15       | 2018.05.14       |
| Band Reject filter(1920-1980MHz)     | COM-MW          | ZBSF-1920-1980  | 0092        | 2016.10.23       | 2017.10.22       |
| Band Reject filter(880-915MHz)       | COM-MW          | ZBSF-C897.5-35  | 707         | 2016.10.23       | 2017.10.22       |
| Band Reject filter(1710-1785MHz)     | COM-MW          | ZBSF-C1747.5-75 | 708         | 2016.10.23       | 2017.10.22       |
| Band Reject filter(1850-1910MHz)     | COM-MW          | ZBSF-C1880-60   | 709         | 2016.10.23       | 2017.10.22       |
| Band Reject filter(2500-2570MHz)     | COM-MW          | ZBSF-C2535-70   | 710         | 2016.10.23       | 2017.10.22       |
| Highpass Filter                      | WHKX7.0/18G-8SS | Wainwright      | 18          | 2016.10.23       | 2017.10.22       |
| trun table                           | EM              | SC100_1         | 60531       | N/A              | N/A              |
| Antnna mast                          | EM              | SC100           | N/A         | N/A              | N/A              |

Equipment with a calibration date of "NCR" shown in this list was not used to make direct calibrated measurements.

## 5 TEST ITEMS

### 5.1 CONDUCTED OUTPUT POWER


#### Test overview

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

#### Test procedures

1. The transmitter output port was connected to the system simulator.
2. Set eut at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

#### Test setup

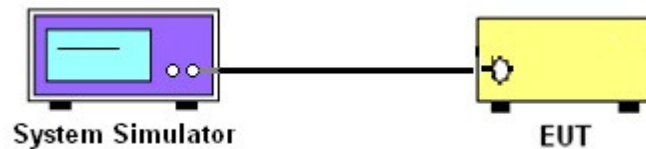

## 5.2 PEAK TO AVERAGE RATIO


### TEST OVERVIEW

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 db.

### TEST PROCEDURES

1. The testing follows fcckdb 971168 v02r02 section
2. The eut was connected to the and peak and av system simulator& spectrum analysis reads
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Set the test probe and measure average power of the spectrum analysis

### TEST SETUP

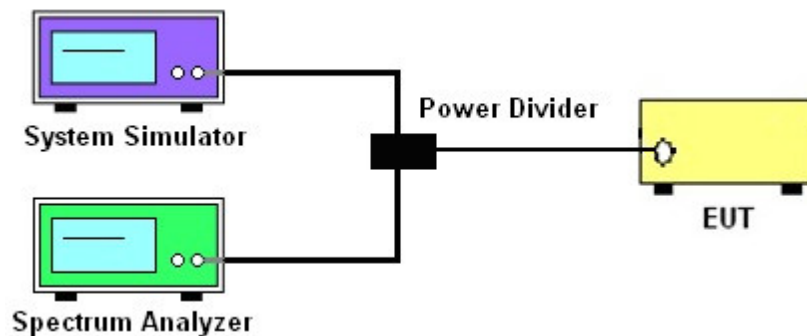

### 5.3 TRANSMITTER RADIATED POWER (EIRP/ERP)

#### TEST OVERVIEW

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

#### TEST PROCEDURE

1. The testing follows FCC KDB 971168 D01 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2 (for GSM/GPRS) and ANSI / TIA-603-D-2010 Section 2.2.17.
2. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
3. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
4. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
5. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a nonradiating cable. The absolute levels of the spurious emissions were measured by the substitution.
6. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP/ERP was calculated with the correction factor,  

$$ERP/EIRP = P_{SG} + GT - LC$$
 ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P<sub>Meas</sub> as, typically dBW or dBm);  
 P<sub>Meas</sub>(PK) = measured transmitter output power or PSD, in dBm or dBW;  
 GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);  
 LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

## 5.4 OCCUPIED BANDWIDTH

### TEST OVERVIEW

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

All modes of operation were investigated and the worst case configuration results are reported in this section.

### TEST PROCEDURE

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2.  $RBW = 1 - 5\%$  of the expected OBW
3.  $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### TEST SETUP

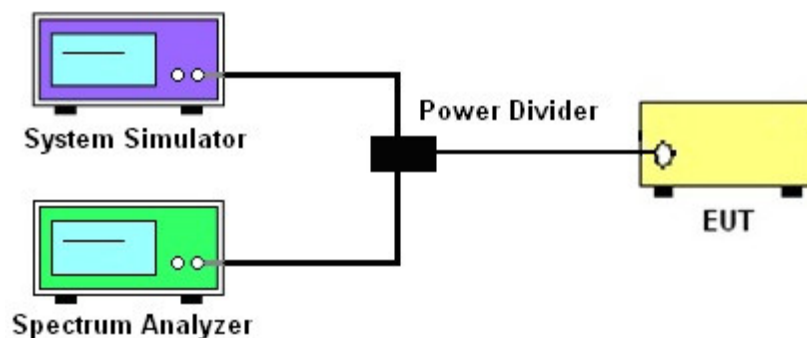

## 5.5 FREQUENCY STABILITY

### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-D-2010. The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### Test Procedure


#### Temperature Variation

1. The testing follows fccdb 971168 D01 section 9.0
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### Voltage Variation

1. The testing follows FCC KDB 971168 D01 Section 9.0.
2. The EUT was placed in a temperature chamber at  $25 \pm 5^\circ \text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

### TEST SETUP

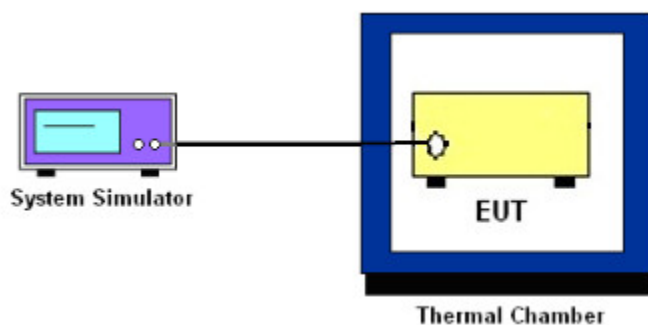

## 5.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### Test Overview


The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

### Test procedure

1. The testing FCC KDB 971168 D01 v02r02 Section 6.0. and ANSI/TIA-603-D-2010-Section 2.2.13.2(d)
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13\text{dBm}$ .

### Test Setup

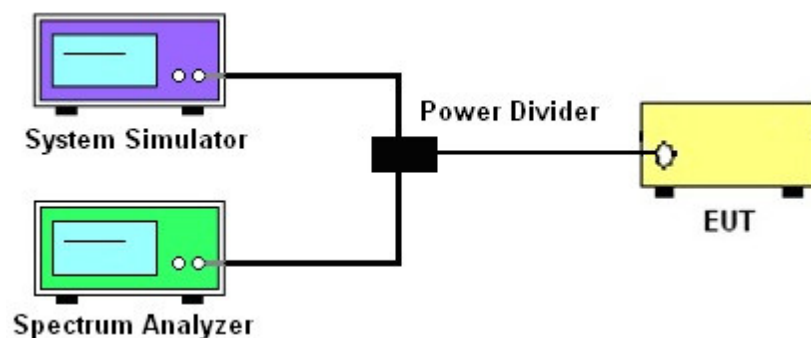

## 5.7 BAND EDGE

### OVERVIEW

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P[\text{Watts}])$ , where P is the transmitter power in Watts.

### TEST PROCEDURE

1. The testing FCC KDB 971168 D01 v02r02 Section 6.0. and ANSI/TIA-603-D-2010-Section 2.2.13.2(d)
2. Start and stop frequency were set such that the band edge would be placed in the center of the Plot.
3. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
4. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
5. The band edges of low and high channels for the highest RF powers were measured.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$

### TEST SETUP

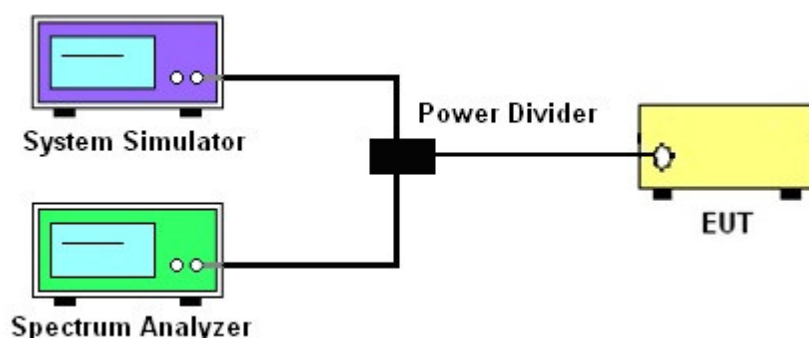

## 5.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

### Test overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-D-2010 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power and at the appropriate frequencies.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


### Test procedure

1. The testing FCC KDB 971168 D01 Section 5.8 and ANSI/TIA-603-D-2010-Section 2.2.12.2(b)
2. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $> 2 \times$  span/RBW
6. Detector = Peak
7. Trace mode = max hold
8. The trace was allowed to stabilize
9. Effective Isotropic Spurious Radiation was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP/ERP was calculated with the correction factor,  


$$\text{ERP/EIRP} = \text{P.SG} + \text{GT} - \text{LC}$$
 ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P<sub>Meas</sub>, typically dBW or dBm);  
 P.SG = measured transmitter output power or PSD, in dBm or dBW;  
 GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);  
 LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

## TEST SETUP

For radiated test from 30MHz to 1GHz

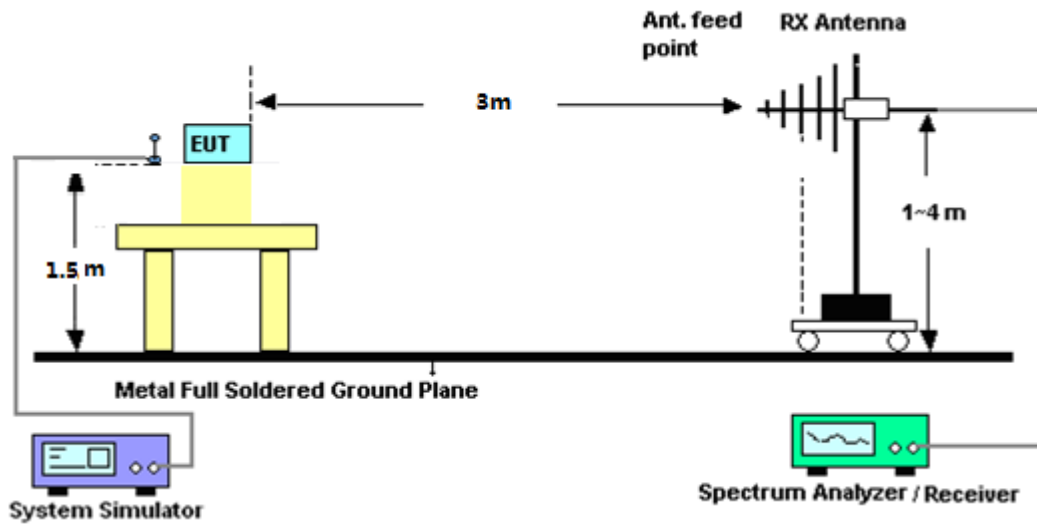

For radiated test from above 1GHz

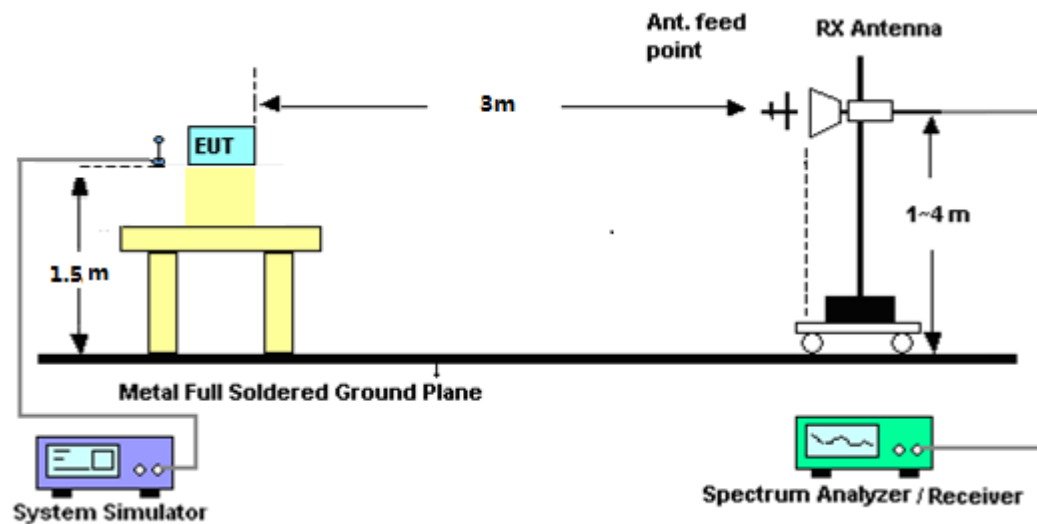

APPENDIX A TEST RESULT  
A1 CONDUCTED OUTPUT POWER

GSM 850:

| Mode               | Frequency (MHz) | AVG Power(dBm) |
|--------------------|-----------------|----------------|
| GSM                | 824.2           | <b>31.98</b>   |
|                    | 836.6           | 31.95          |
|                    | 848.8           | 31.89          |
| GPRS(GMSK,1-Slot)  | 824.2           | <b>31.96</b>   |
|                    | 836.6           | 31.93          |
|                    | 848.8           | 31.86          |
| GPRS(GMSK,2-Slot)  | 824.2           | <b>31.47</b>   |
|                    | 836.6           | 31.47          |
|                    | 848.8           | 31.46          |
| GPRS(GMSK,3-Slot)  | 824.2           | <b>31.05</b>   |
|                    | 836.6           | 31.01          |
|                    | 848.8           | 31.00          |
| GPRS(GMSK,4-Slot)  | 824.2           | <b>30.64</b>   |
|                    | 836.6           | 30.61          |
|                    | 848.8           | 30.54          |
| EGPRS(GMSK,1-Slot) | 824.2           | <b>31.94</b>   |
|                    | 836.6           | 31.92          |
|                    | 848.8           | 31.83          |
| EGPRS(GMSK,2-Slot) | 824.2           | 31.24          |
|                    | 836.6           | 31.21          |
|                    | 848.8           | <b>31.25</b>   |
| EGPRS(GMSK,2-Slot) | 824.2           | <b>30.78</b>   |
|                    | 836.6           | 30.76          |
|                    | 848.8           | 30.77          |
| EGPRS(GMSK,3-Slot) | 824.2           | <b>30.42</b>   |
|                    | 836.6           | 30.37          |
|                    | 848.8           | 30.30          |

PCS 1900:

| Mode               | Frequency (MHz) | AVG Power(dBm) |
|--------------------|-----------------|----------------|
| GSM                | 1850.2          | 28.89          |
|                    | 1880.0          | <b>28.92</b>   |
|                    | 1909.8          | 28.86          |
| GPRS(GMSK,1-Slot)  | 1850.2          | 28.87          |
|                    | 1880.0          | <b>28.89</b>   |
|                    | 1909.8          | 28.84          |
| GPRS(GMSK,2-Slot)  | 1850.2          | <b>28.42</b>   |
|                    | 1880.0          | 28.42          |
|                    | 1909.8          | 28.40          |
| GPRS(GMSK,3-Slot)  | 1850.2          | <b>27.99</b>   |
|                    | 1880.0          | 27.99          |
|                    | 1909.8          | 27.96          |
| GPRS(GMSK,4-Slot)  | 1850.2          | 27.52          |
|                    | 1880.0          | <b>27.55</b>   |
|                    | 1909.8          | 27.54          |
| EGPRS(GMSK,1-Slot) | 1850.2          | 28.85          |
|                    | 1880.0          | <b>28.87</b>   |
|                    | 1909.8          | 28.82          |
| EGPRS(GMSK,2-Slot) | 1850.2          | <b>28.21</b>   |
|                    | 1880.0          | 28.16          |
|                    | 1909.8          | 28.11          |
| EGPRS(GMSK,3-Slot) | 1850.2          | 27.74          |
|                    | 1880.0          | <b>27.76</b>   |
|                    | 1909.8          | 27.73          |
| EGPRS(GMSK,4-Slot) | 1850.2          | 27.29          |
|                    | 1880.0          | <b>27.30</b>   |
|                    | 1909.8          | 27.28          |

## UMTS BAND V

| Mode               | Frequency(MHz) | AVG Power    |
|--------------------|----------------|--------------|
| WCDMA 850<br>RMC   | 826.4          | 22.23        |
|                    | 836.6          | <b>22.35</b> |
|                    | 846.6          | 22.29        |
| HSDPA<br>Subtest 1 | 826.4          | 22.21        |
|                    | 836.6          | <b>22.32</b> |
|                    | 846.6          | 22.26        |
| HSDPA<br>Subtest 2 | 826.4          | 21.72        |
|                    | 836.6          | <b>21.89</b> |
|                    | 846.6          | 21.84        |
| HSDPA<br>Subtest 3 | 826.4          | 21.29        |
|                    | 836.6          | <b>21.49</b> |
|                    | 846.6          | 21.43        |
| HSDPA<br>Subtest 4 | 826.4          | 20.91        |
|                    | 836.6          | <b>21.09</b> |
|                    | 846.6          | 21.01        |
| HSUPA<br>Subtest 1 | 826.4          | 22.19        |
|                    | 836.6          | <b>22.26</b> |
|                    | 846.6          | 21.77        |
| HSUPA<br>Subtest 2 | 826.4          | 21.28        |
|                    | 836.6          | <b>21.33</b> |
|                    | 846.6          | 20.82        |
| HSUPA<br>Subtest 3 | 826.4          | <b>21.15</b> |
|                    | 836.6          | 20.88        |
|                    | 846.6          | 20.36        |
| HSUPA<br>Subtest 4 | 826.4          | <b>20.73</b> |
|                    | 836.6          | 20.56        |
|                    | 846.6          | 19.94        |
| HSUPA<br>Subtest 5 | 826.4          | <b>19.23</b> |
|                    | 836.6          | 19.09        |
|                    | 846.6          | 18.46        |

## UMTS BAND II

| Mode               | Frequency(MHz) | AVG Power    |
|--------------------|----------------|--------------|
| WCDMA 1900<br>RMC  | 1852.4         | 21.53        |
|                    | 1880           | <b>21.64</b> |
|                    | 1907.6         | 21.57        |
| HSDPA<br>Subtest 1 | 1852.4         | 21.51        |
|                    | 1880           | <b>21.61</b> |
|                    | 1907.6         | 21.52        |
| HSDPA<br>Subtest 2 | 1852.4         | 21.06        |
|                    | 1880           | <b>21.15</b> |
|                    | 1907.6         | 21.04        |
| HSDPA<br>Subtest 3 | 1852.4         | <b>20.67</b> |
|                    | 1880           | 20.65        |
|                    | 1907.6         | 20.72        |
| HSDPA<br>Subtest 4 | 1852.4         | 20.28        |
|                    | 1880           | 20.27        |
|                    | 1907.6         | <b>20.36</b> |
| HSUPA<br>Subtest 1 | 1852.4         | 21.45        |
|                    | 1880           | <b>21.52</b> |
|                    | 1907.6         | 21.04        |
| HSUPA<br>Subtest 2 | 1852.4         | <b>20.60</b> |
|                    | 1880           | 20.60        |
|                    | 1907.6         | 20.10        |
| HSUPA<br>Subtest 3 | 1852.4         | <b>20.44</b> |
|                    | 1880           | 20.19        |
|                    | 1907.6         | 19.71        |
| HSUPA<br>Subtest 4 | 1852.4         | <b>20.14</b> |
|                    | 1880           | 19.79        |
|                    | 1907.6         | 19.26        |
| HSUPA<br>Subtest 5 | 1852.4         | <b>18.68</b> |
|                    | 1880           | 18.31        |
|                    | 1907.6         | 17.86        |

## A2 PEAK-TO-AVERAGE RADIO

| Mode     | Frequency<br>(MHz) | PEAK Power<br>(dBm) | AVG Power<br>(dBm) | PAR<br>(dB) |
|----------|--------------------|---------------------|--------------------|-------------|
| GSM850   | 824.2              | 32.09               | 31.98              | 0.11        |
|          | 836.6              | 32.07               | 31.95              | 0.12        |
|          | 848.8              | 32.00               | 31.89              | 0.11        |
| GPRS850  | 824.2              | 32.07               | 31.96              | 0.11        |
|          | 836.6              | 32.04               | 31.93              | 0.11        |
|          | 848.8              | 31.97               | 31.86              | 0.11        |
| EDGE850  | 824.2              | 32.04               | 31.94              | 0.10        |
|          | 836.6              | 32.03               | 31.92              | 0.11        |
|          | 848.8              | 31.94               | 31.83              | 0.11        |
| PCS1900  | 1850.2             | 29.00               | 28.89              | 0.11        |
|          | 1880               | 29.02               | 28.92              | 0.10        |
|          | 1909.8             | 28.96               | 28.86              | 0.10        |
| GPRS1900 | 1850.2             | 28.98               | 28.87              | 0.11        |
|          | 1880               | 29.00               | 28.89              | 0.11        |
|          | 1909.8             | 28.95               | 28.84              | 0.11        |
| EDGE1900 | 1850.2             | 28.97               | 28.85              | 0.12        |
|          | 1880               | 28.98               | 28.87              | 0.11        |
|          | 1909.8             | 28.93               | 28.82              | 0.11        |

| Mode              | Frequency<br>(MHz) | PEAK Power<br>(dBm) | AVG Power<br>(dBm) | PAR<br>(dB) |
|-------------------|--------------------|---------------------|--------------------|-------------|
| WCDMA 850<br>RMC  | 826.4              | 25.18               | 22.23              | 2.95        |
|                   | 836.6              | 25.26               | 22.35              | 2.91        |
|                   | 846.6              | 24.92               | 22.29              | 2.63        |
| HSDPA 850         | 826.4              | 25.00               | 22.21              | 2.79        |
|                   | 836.6              | 24.97               | 22.32              | 2.65        |
|                   | 846.6              | 25.04               | 22.26              | 2.78        |
| HSUPA 850         | 826.4              | 24.91               | 22.19              | 2.72        |
|                   | 836.6              | 25.08               | 22.26              | 2.82        |
|                   | 846.6              | 24.55               | 21.77              | 2.78        |
| WCDMA 1900<br>RMC | 1852.4             | 24.37               | 21.53              | 2.84        |
|                   | 1880               | 24.58               | 21.64              | 2.94        |
|                   | 1907.6             | 24.54               | 21.57              | 2.97        |
| HSDPA 1900        | 1852.4             | 24.05               | 21.51              | 2.54        |
|                   | 1880               | 24.18               | 21.61              | 2.57        |
|                   | 1907.6             | 24.45               | 21.52              | 2.93        |
| HSUPA 1900        | 1852.4             | 24.11               | 21.45              | 2.66        |
|                   | 1880               | 24.41               | 21.52              | 2.89        |
|                   | 1907.6             | 23.68               | 21.04              | 2.64        |

## A3 TRANSMITTER RADIATED POWER (EIRP/ERP)

| Radiated Power (ERP) for GSM 850 MHZ |           |                 |            |            |                  |                          |            |
|--------------------------------------|-----------|-----------------|------------|------------|------------------|--------------------------|------------|
| Mode                                 | Frequency | Result          |            |            |                  |                          | Conclusion |
|                                      |           | S G.Level (dBm) | Cable loss | Gain (dBi) | PMeas E.R.P(dBm) | Polarization Of Max. ERP |            |
| GSM850                               | 824.2     | 23.68           | 0.44       | 6.5        | 29.74            | Horizontal               | Pass       |
|                                      | 824.2     | 25.40           | 0.44       | 6.5        | <b>31.46</b>     | Vertical                 | Pass       |
|                                      | 836.6     | 23.41           | 0.45       | 6.5        | 29.46            | Horizontal               | Pass       |
|                                      | 836.6     | 25.38           | 0.45       | 6.5        | 31.43            | Vertical                 | Pass       |
|                                      | 848.8     | 23.57           | 0.46       | 6.5        | 29.61            | Horizontal               | Pass       |
|                                      | 848.8     | 25.34           | 0.46       | 6.5        | 31.38            | Vertical                 | Pass       |
| GPRS850                              | 824.2     | 23.66           | 0.44       | 6.5        | 29.72            | Horizontal               | Pass       |
|                                      | 824.2     | 25.26           | 0.44       | 6.5        | 31.32            | Vertical                 | Pass       |
|                                      | 836.6     | 23.65           | 0.45       | 6.5        | 29.70            | Horizontal               | Pass       |
|                                      | 836.6     | 25.33           | 0.45       | 6.5        | <b>31.38</b>     | Vertical                 | Pass       |
|                                      | 848.8     | 23.37           | 0.46       | 6.5        | 29.41            | Horizontal               | Pass       |
|                                      | 848.8     | 25.13           | 0.46       | 6.5        | 31.17            | Vertical                 | Pass       |
| EDGE850                              | 824.2     | 23.65           | 0.44       | 6.5        | 29.71            | Horizontal               | Pass       |
|                                      | 824.2     | 25.39           | 0.44       | 6.5        | <b>31.45</b>     | Vertical                 | Pass       |
|                                      | 836.6     | 23.42           | 0.45       | 6.5        | 29.47            | Horizontal               | Pass       |
|                                      | 836.6     | 25.23           | 0.45       | 6.5        | 31.28            | Vertical                 | Pass       |
|                                      | 848.8     | 23.61           | 0.46       | 6.5        | 29.65            | Horizontal               | Pass       |
|                                      | 848.8     | 25.16           | 0.46       | 6.5        | 31.20            | Vertical                 | Pass       |

| Radiated Power (EIRP) for PCS 1900 MHZ |           |                    |               |               |                        |                              |            |
|----------------------------------------|-----------|--------------------|---------------|---------------|------------------------|------------------------------|------------|
| Mode                                   | Frequency | Result             |               |               |                        |                              | Conclusion |
|                                        |           | S G.Level<br>(dBm) | Cable<br>loss | Gain<br>(dBi) | PMeas<br>E.I.R.P.(dBm) | Polarization<br>Of Max.EIRP. |            |
| PCS1900                                | 1850.2    | 18.6               | 2.41          | 10.35         | 26.54                  | Horizontal                   | Pass       |
|                                        | 1850.2    | 20.43              | 2.41          | 10.35         | 28.37                  | Vertical                     | Pass       |
|                                        | 1880      | 18.69              | 2.42          | 10.35         | 26.62                  | Horizontal                   | Pass       |
|                                        | 1880      | 20.46              | 2.42          | 10.35         | <b>28.39</b>           | Vertical                     | Pass       |
|                                        | 1909.8    | 18.53              | 2.43          | 10.35         | 26.45                  | Horizontal                   | Pass       |
|                                        | 1909.8    | 20.41              | 2.43          | 10.35         | 28.33                  | Vertical                     | Pass       |
| GPRS1900                               | 1850.2    | 18.64              | 2.41          | 10.35         | 26.58                  | Horizontal                   | Pass       |
|                                        | 1850.2    | 20.2               | 2.41          | 10.35         | 28.14                  | Vertical                     | Pass       |
|                                        | 1880      | 18.54              | 2.42          | 10.35         | 26.47                  | Horizontal                   | Pass       |
|                                        | 1880      | 20.2               | 2.42          | 10.35         | 28.13                  | Vertical                     | Pass       |
|                                        | 1909.8    | 18.69              | 2.43          | 10.35         | 26.61                  | Horizontal                   | Pass       |
|                                        | 1909.8    | 20.28              | 2.43          | 10.35         | <b>28.2</b>            | Vertical                     | Pass       |
| EDGE1900                               | 1850.2    | 18.6               | 2.41          | 10.35         | 26.54                  | Horizontal                   | Pass       |
|                                        | 1850.2    | 20.35              | 2.41          | 10.35         | <b>28.29</b>           | Vertical                     | Pass       |
|                                        | 1880      | 18.76              | 2.42          | 10.35         | 26.69                  | Horizontal                   | Pass       |
|                                        | 1880      | 20.22              | 2.42          | 10.35         | 28.15                  | Vertical                     | Pass       |
|                                        | 1909.8    | 18.69              | 2.43          | 10.35         | 26.61                  | Horizontal                   | Pass       |
|                                        | 1909.8    | 20.37              | 2.43          | 10.35         | 28.29                  | Vertical                     | Pass       |

| Radiated Power (ERP) for WCDMA Band V |           |                 |            |            |                   |                         |            |
|---------------------------------------|-----------|-----------------|------------|------------|-------------------|-------------------------|------------|
| Mode                                  | Frequency | Result          |            |            |                   |                         | Conclusion |
|                                       |           | S G.Level (dBm) | Cable loss | Gain (dBi) | PMeas E.R.P (dBm) | Polarization Of Max.ERP |            |
| Band V                                | 826.4     | 13.79           | 0.44       | 6.5        | 19.85             | Horizontal              | Pass       |
|                                       | 826.4     | 15.66           | 0.44       | 6.5        | 21.72             | Vertical                | Pass       |
|                                       | 835       | 14.03           | 0.45       | 6.5        | 20.08             | Horizontal              | Pass       |
|                                       | 835       | 15.78           | 0.45       | 6.5        | <b>21.83</b>      | Vertical                | Pass       |
|                                       | 846.4     | 13.74           | 0.46       | 6.5        | 19.78             | Horizontal              | Pass       |
|                                       | 846.4     | 15.72           | 0.46       | 6.5        | 21.76             | Vertical                | Pass       |

| Radiated Power (EIRP) for WCDMA Band II |           |                 |            |            |                     |                          |            |
|-----------------------------------------|-----------|-----------------|------------|------------|---------------------|--------------------------|------------|
| Mode                                    | Frequency | Result          |            |            |                     |                          | Conclusion |
|                                         |           | S G.Level (dBm) | Cable loss | Gain (dBi) | PMeas E.I.R.P.(dBm) | Polarization Of Max.EIRP |            |
| Band II                                 | 1852.4    | 11.34           | 2.41       | 10.35      | 19.28               | Horizontal               | Pass       |
|                                         | 1852.4    | 13.07           | 2.41       | 10.35      | 21.01               | Vertical                 | Pass       |
|                                         | 1880      | 11.43           | 2.42       | 10.35      | 19.36               | Horizontal               | Pass       |
|                                         | 1880      | 13.19           | 2.42       | 10.35      | <b>21.12</b>        | Vertical                 | Pass       |
|                                         | 1907.4    | 11.2            | 2.43       | 10.35      | 19.12               | Horizontal               | Pass       |
|                                         | 1907.4    | 13.13           | 2.43       | 10.35      | 21.05               | Vertical                 | Pass       |


## A4 OCCUPIED BANDWIDTH(99% OCCUPIED BANDWIDTH/26DB BANDWIDTH)

| Occupied Bandwidth for GSM 850 band  |                |                                   |                                      |
|--------------------------------------|----------------|-----------------------------------|--------------------------------------|
| Mode                                 | Frequency(MHz) | Occupied Bandwidth<br>(99%)( kHz) | Emission Bandwidth<br>(-26dBc)( kHz) |
| Low Channel                          | 824.2          | 247.23                            | 323.6                                |
| Middle Channel                       | 836.6          | 246.73                            | 319.5                                |
| High Channel                         | 848.8          | 243.28                            | 313.9                                |
| Occupied Bandwidth for GPRS 850 band |                |                                   |                                      |
| Mode                                 | Frequency(MHz) | Occupied Bandwidth<br>(99%)( kHz) | Emission Bandwidth<br>(-26dBc)( kHz) |
| Low Channel                          | 824.2          | 244.79                            | 317.3                                |
| Middle Channel                       | 836.6          | 243.58                            | 312.6                                |
| High Channel                         | 848.8          | 241.45                            | 313.7                                |
| Occupied Bandwidth for EDGE 850 band |                |                                   |                                      |
| Mode                                 | Frequency(MHz) | Occupied Bandwidth<br>(99%)( kHz) | Emission Bandwidth<br>(-26dBc)( kHz) |
| Low Channel                          | 824.2          | 239.60                            | 311.3                                |
| Middle Channel                       | 836.6          | 244.93                            | 308.0                                |
| High Channel                         | 848.8          | 244.13                            | 313.2                                |


| Occupied Bandwidth for GSM1900 band   |                |                                   |                                      |
|---------------------------------------|----------------|-----------------------------------|--------------------------------------|
| Mode                                  | Frequency(MHz) | Occupied Bandwidth<br>(99%)( kHz) | Emission Bandwidth<br>(-26dBc)( kHz) |
| Low Channel                           | 1850.2         | 242.58                            | 320.0                                |
| Middle Channel                        | 1880.0         | 244.33                            | 310.2                                |
| High Channel                          | 1909.8         | 246.04                            | 312.0                                |
| Occupied Bandwidth for GPRS 1900 band |                |                                   |                                      |
| Mode                                  | Frequency(MHz) | Occupied Bandwidth<br>(99%)( kHz) | Emission Bandwidth<br>(-26dBc)( kHz) |
| Low Channel                           | 1850.2         | 243.32                            | 314.2                                |
| Middle Channel                        | 1880.0         | 344.05                            | 315.2                                |
| High Channel                          | 1909.8         | 245.48                            | 318.4                                |
| Occupied Bandwidth for EDGE 1900 band |                |                                   |                                      |
| Mode                                  | Frequency(MHz) | Occupied Bandwidth<br>(99%)( kHz) | Emission Bandwidth<br>(-26dBc)( kHz) |
| Low Channel                           | 1850.2         | 243.31                            | 318.3                                |
| Middle Channel                        | 1880.0         | 245.68                            | 318.1                                |
| High Channel                          | 1909.8         | 239.95                            | 313.4                                |

| Occupied Bandwidth for UMTS band V  |                |                                   |                                      |
|-------------------------------------|----------------|-----------------------------------|--------------------------------------|
| Mode                                | Frequency(MHz) | Occupied Bandwidth<br>(99%)( MHz) | Emission Bandwidth<br>(-26dBc)( MHz) |
| Low Channel                         | 826.4          | 4.1336                            | 4.690                                |
| Middle Channel                      | 836.6          | 4.1256                            | 4.683                                |
| High Channel                        | 846.6          | 4.1362                            | 4.691                                |
| Occupied Bandwidth for UMTS band II |                |                                   |                                      |
| Mode                                | Frequency(MHz) | Occupied Bandwidth<br>(99%)( MHz) | Emission Bandwidth<br>(-26dBc)( MHz) |
| Low Channel                         | 1852.4         | 4.1510                            | 4.693                                |
| Middle Channel                      | 1880           | 4.1489                            | 4.690                                |
| High Channel                        | 1907.6         | 4.1511                            | 4.704                                |


## GSM 850 CH 128

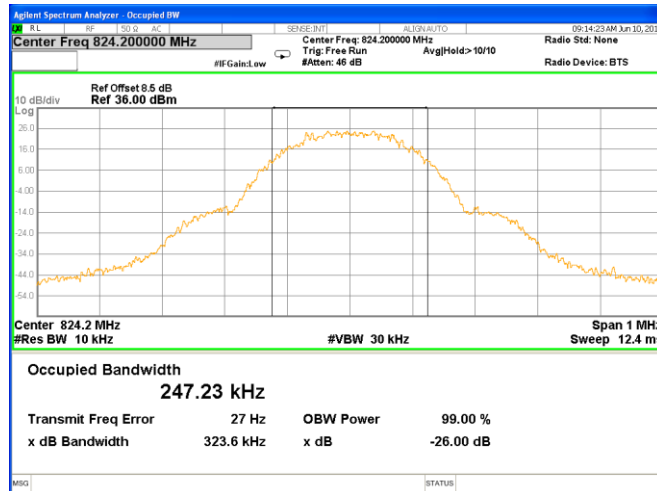


## GSM 850 CH 190

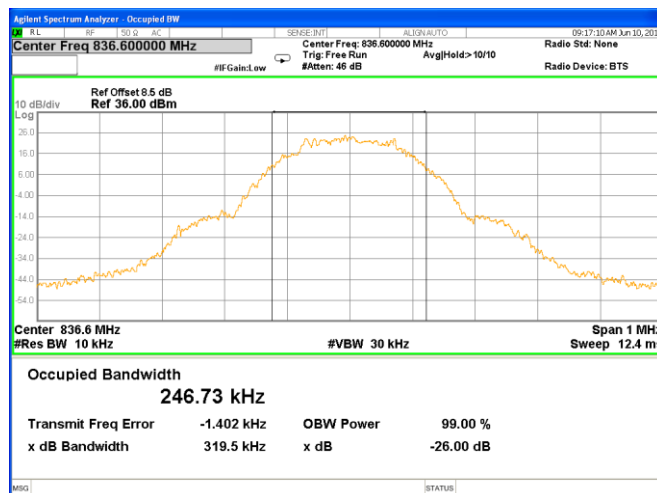


## GSM 850 CH 251

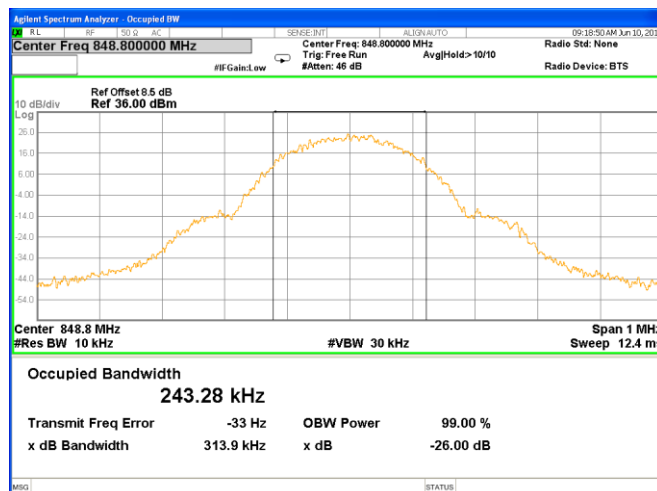


## GPRS 850 CH 128

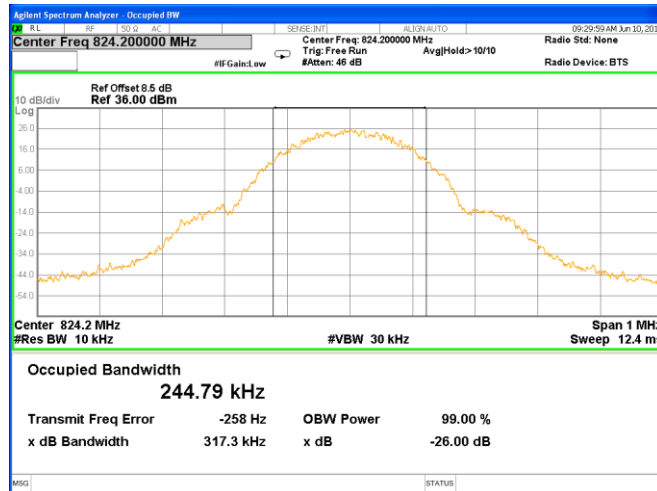


## GPRS 850 CH 190

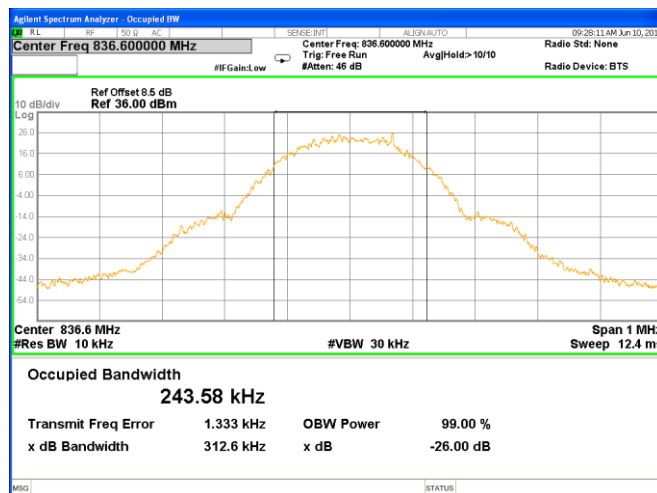


## GPRS 850 CH 251

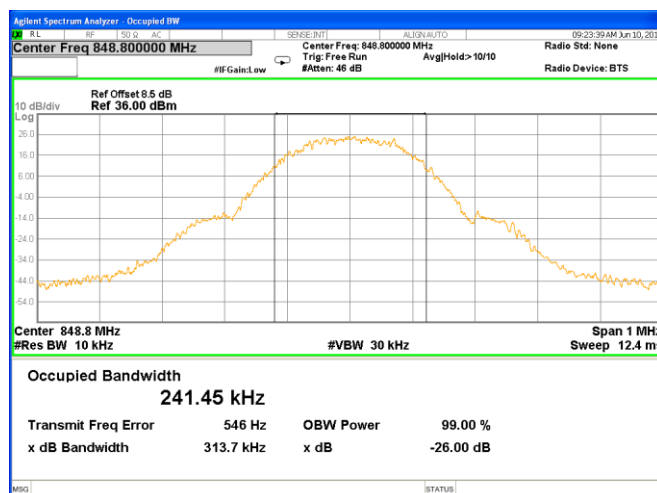


## EDGE 850 CH 128

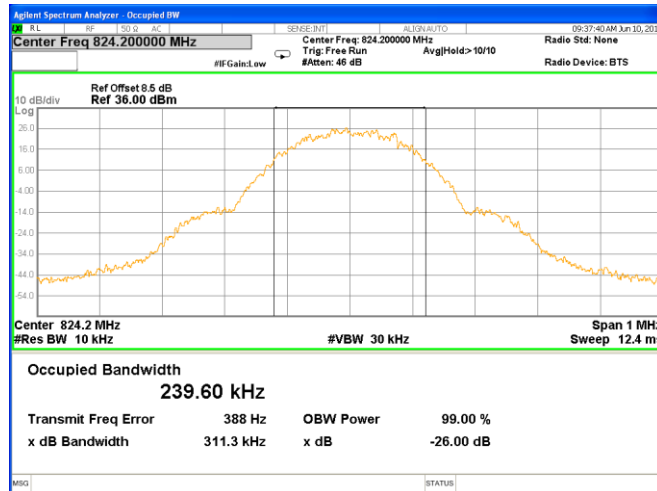


## EDGE 850 CH 190

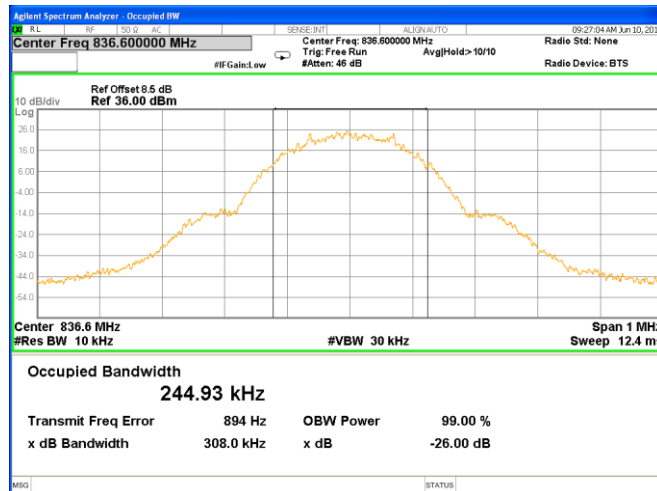


## EDGE 850 CH 251

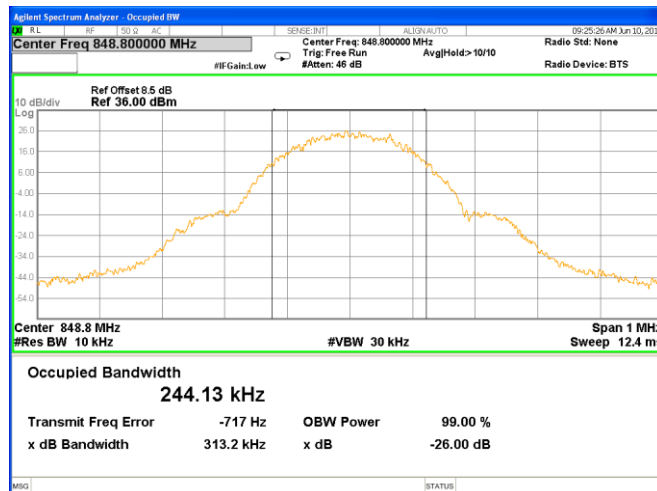


## PCS 1900 CH 512

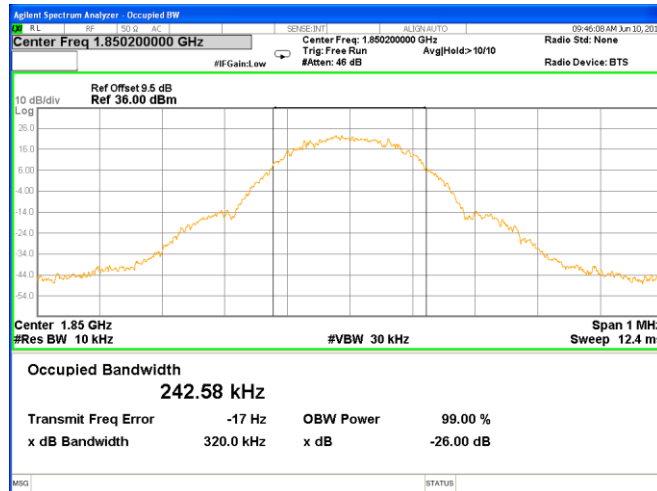


## PCS 1900 CH 661

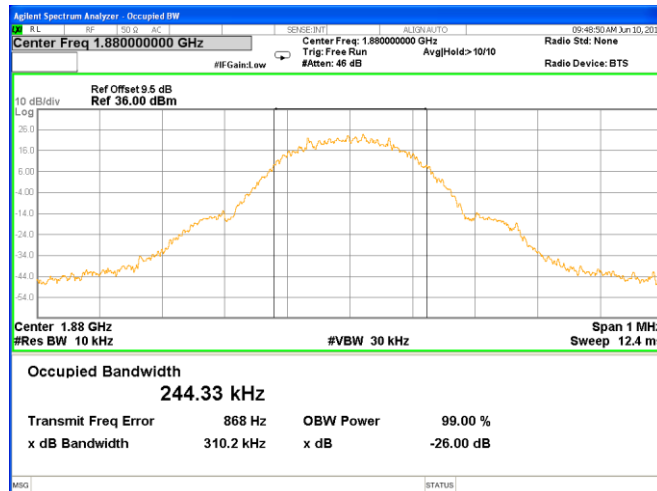


## PCS 1900 CH 810

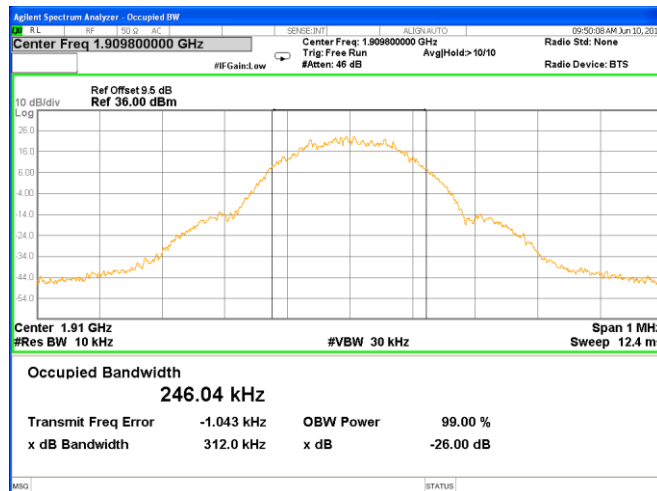


## GPRS 1900 CH 512

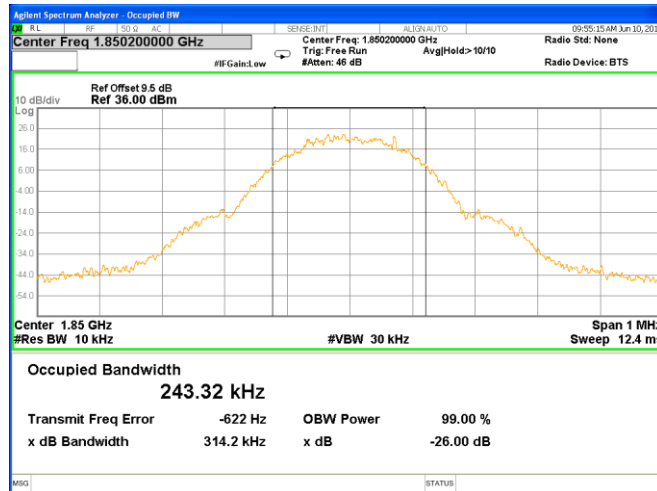


## GPRS 1900 CH 661

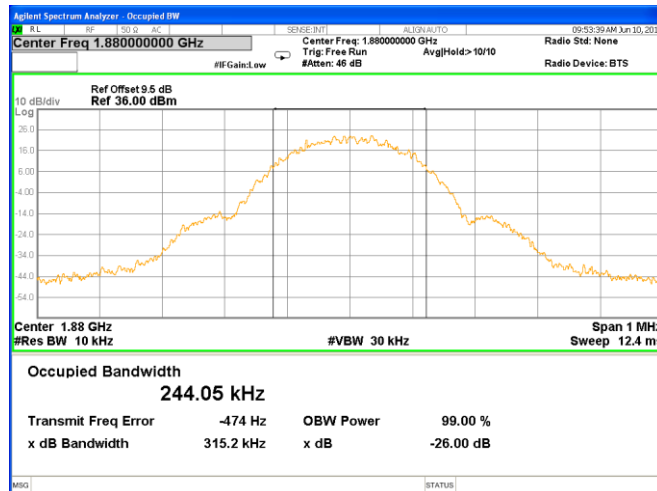


## GPRS 1900 CH 810

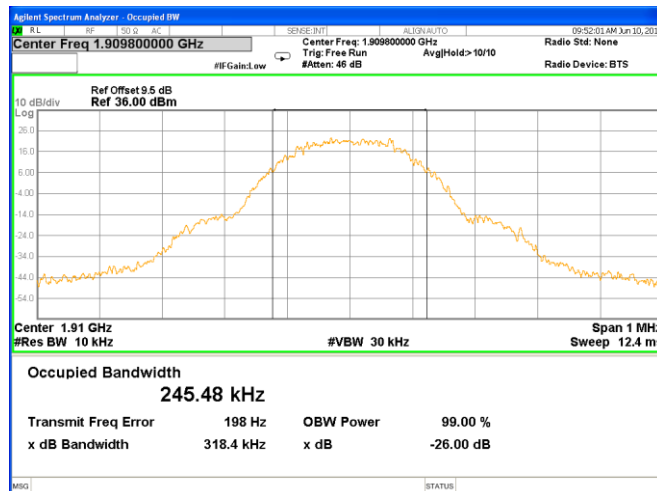


## EDGE 1900 CH 512

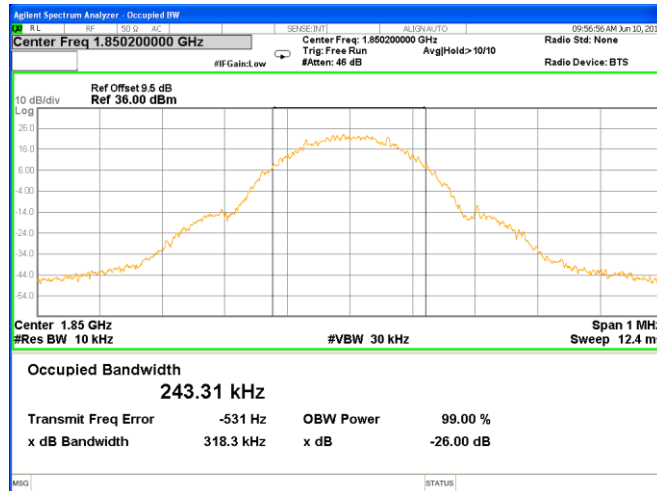


## EDGE 1900 CH 661

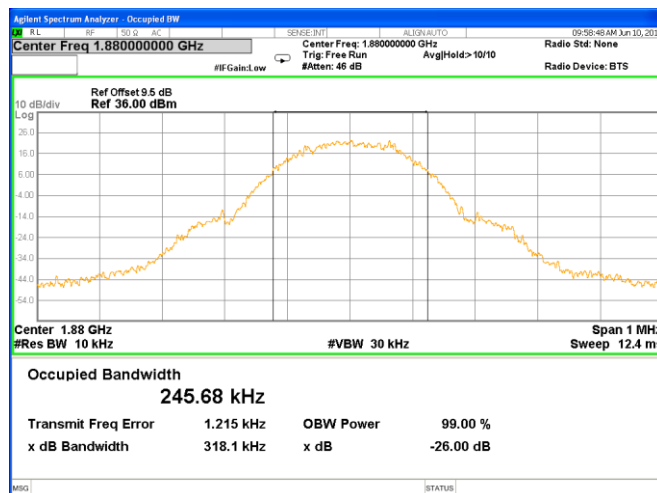


## EDGE 1900 CH 810

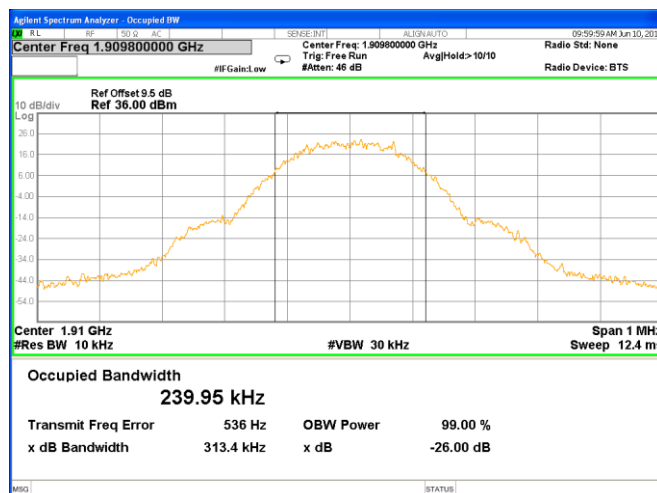


## UMTS BAND V CH 4132

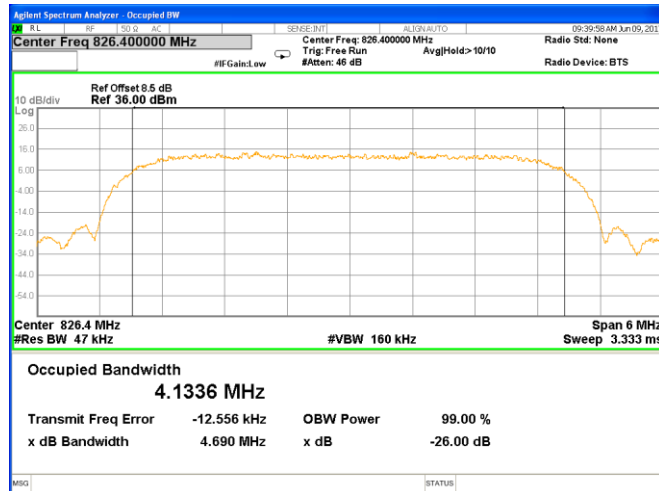


## UMTS BAND V CH 4183

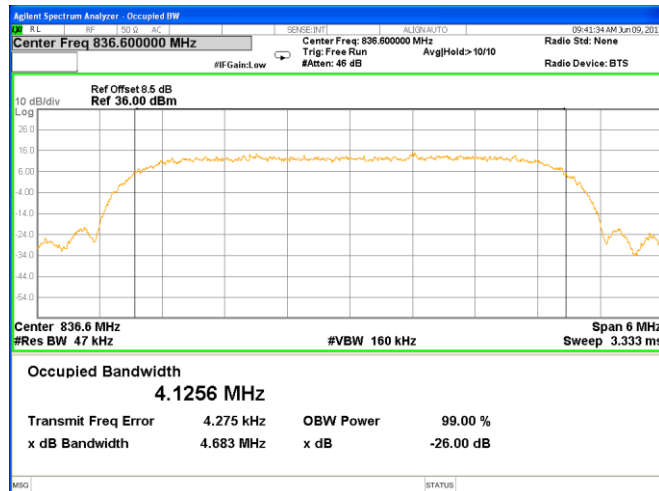


## UMTS BAND V CH 4233

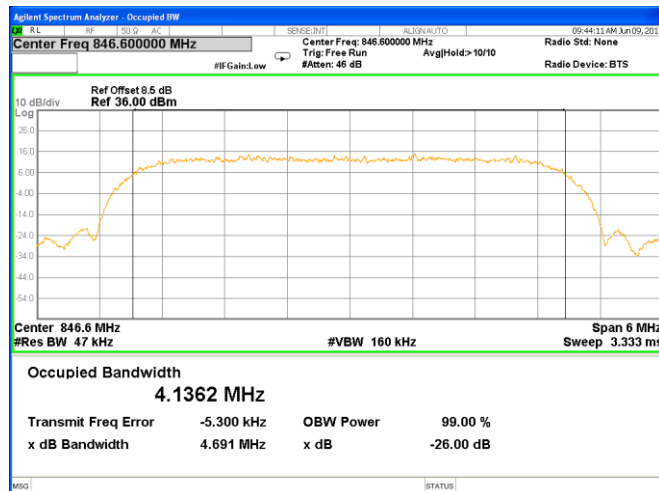


## UMTS BAND II CH 9262

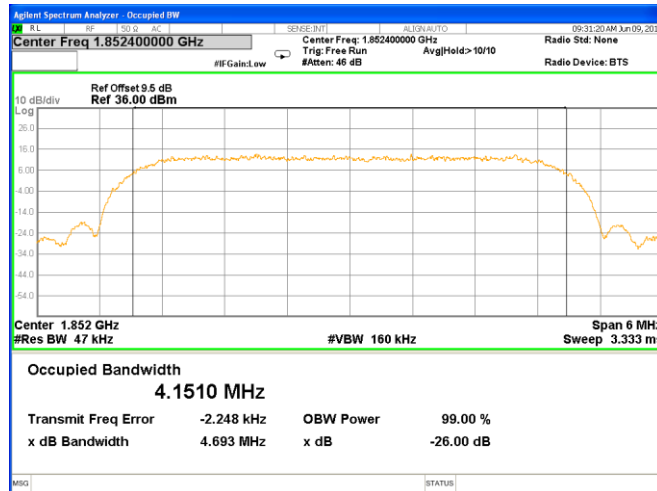

## UMTS BAND II CH 9400

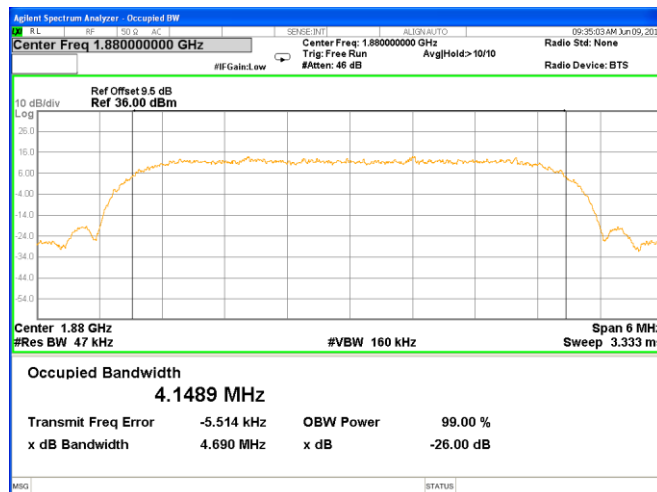

## UMTS BAND II CH 9538

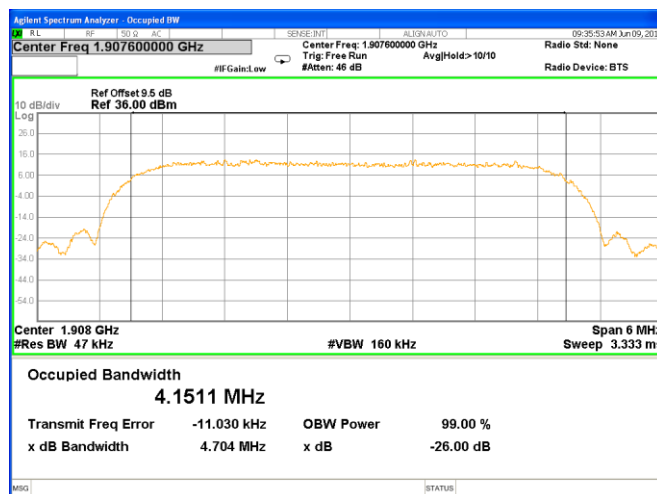

## A5 FREQUENCY STABILITY

Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.45 V.; Maximum Voltage =4.35 V

| GSM 850 Middle Channel/836.6MHz |                 |                 |                  |        |        |
|---------------------------------|-----------------|-----------------|------------------|--------|--------|
| Temperature (°C)                | Voltage (Volt)  | Freq. Dev. (Hz) | Freq. Dev. (ppm) | Limit  | Result |
| 50                              | Normal Voltage  | 21.57           | 0.026            | 2.5ppm | PASS   |
| 40                              |                 | 22.66           | 0.027            |        |        |
| 30                              |                 | 31.61           | 0.038            |        |        |
| 20                              |                 | 32.05           | 0.038            |        |        |
| 10                              |                 | 33.73           | 0.040            |        |        |
| 0                               |                 | 15.57           | 0.019            |        |        |
| -10                             |                 | 33.88           | 0.040            |        |        |
| -20                             |                 | 26.86           | 0.032            |        |        |
| -30                             |                 | 31.71           | 0.038            |        |        |
| 25                              | Maximum Voltage | 13.66           | 0.016            |        |        |
| 25                              | BEP             | 21.71           | 0.026            |        |        |

| GPRS 850 Middle Channel/836.6MHz |                 |                 |                  |        |        |
|----------------------------------|-----------------|-----------------|------------------|--------|--------|
| Temperature (°C)                 | Voltage (Volt)  | Freq. Dev. (Hz) | Freq. Dev. (ppm) | Limit  | Result |
| 50                               | Normal Voltage  | 34.23           | 0.041            | 2.5ppm | PASS   |
| 40                               |                 | 32.13           | 0.038            |        |        |
| 30                               |                 | 23.92           | 0.029            |        |        |
| 20                               |                 | 12.48           | 0.015            |        |        |
| 10                               |                 | 18.90           | 0.023            |        |        |
| 0                                |                 | 15.74           | 0.019            |        |        |
| -10                              |                 | 25.97           | 0.031            |        |        |
| -20                              |                 | 16.71           | 0.020            |        |        |
| -30                              |                 | 30.80           | 0.037            |        |        |
| 25                               | Maximum Voltage | 23.30           | 0.028            |        |        |
| 25                               | BEP             | 23.68           | 0.028            |        |        |

| EDGE 850 Middle Channel/836.6MHz |                 |                 |                  |                        |        |
|----------------------------------|-----------------|-----------------|------------------|------------------------|--------|
| Temperature (°C)                 | Voltage (Volt)  | Freq. Dev. (Hz) | Freq. Dev. (ppm) | Limit                  | Result |
| 50                               | Normal Voltage  | 12.00           | 0.014            | Within Authorized Band | PASS   |
| 40                               |                 | 36.41           | 0.044            |                        |        |
| 30                               |                 | 27.44           | 0.033            |                        |        |
| 20                               |                 | 16.21           | 0.019            |                        |        |
| 10                               |                 | 23.10           | 0.028            |                        |        |
| 0                                |                 | 17.37           | 0.021            |                        |        |
| -10                              |                 | 16.48           | 0.020            |                        |        |
| -20                              |                 | 16.14           | 0.019            |                        |        |
| -30                              |                 | 35.09           | 0.042            |                        |        |
| 25                               | Maximum Voltage | 24.05           | 0.029            |                        |        |
| 25                               | BEP             | 27.72           | 0.033            |                        |        |

| GSM 1900 Middle Channel/1880MHz |                 |                 |                  |                        |        |
|---------------------------------|-----------------|-----------------|------------------|------------------------|--------|
| Temperature (°C)                | Voltage (Volt)  | Freq. Dev. (Hz) | Freq. Dev. (ppm) | Limit                  | Result |
| 50                              | Normal Voltage  | 16.19           | 0.009            | Within Authorized Band | PASS   |
| 40                              |                 | 30.41           | 0.016            |                        |        |
| 30                              |                 | 22.57           | 0.012            |                        |        |
| 20                              |                 | 28.56           | 0.015            |                        |        |
| 10                              |                 | 15.51           | 0.008            |                        |        |
| 0                               |                 | 31.50           | 0.017            |                        |        |
| -10                             |                 | 17.92           | 0.010            |                        |        |
| -20                             |                 | 25.73           | 0.014            |                        |        |
| -30                             |                 | 14.41           | 0.008            |                        |        |
| 25                              | Maximum Voltage | 18.16           | 0.010            |                        |        |
| 25                              | BEP             | 32.06           | 0.017            |                        |        |

| GPRS 1900 Middle Channel/1880MHz |                 |                 |                  |                        |        |
|----------------------------------|-----------------|-----------------|------------------|------------------------|--------|
| Temperature (°C)                 | Voltage (Volt)  | Freq. Dev. (Hz) | Freq. Dev. (ppm) | Limit                  | Result |
| 50                               | Normal Voltage  | 26.27           | 0.014            | Within Authorized Band | PASS   |
| 40                               |                 | 32.35           | 0.017            |                        |        |
| 30                               |                 | 13.45           | 0.007            |                        |        |
| 20                               |                 | 28.46           | 0.015            |                        |        |
| 10                               |                 | 25.72           | 0.014            |                        |        |
| 0                                |                 | 34.12           | 0.018            |                        |        |
| -10                              |                 | 22.03           | 0.012            |                        |        |
| -20                              |                 | 20.86           | 0.011            |                        |        |
| -30                              |                 | 14.20           | 0.008            |                        |        |
| 25                               | Maximum Voltage | 32.67           | 0.017            |                        |        |
| 25                               | BEP             | 27.89           | 0.015            |                        |        |

| EDGE 1900 Middle Channel/1880MHz |                 |                 |                  |                        |        |
|----------------------------------|-----------------|-----------------|------------------|------------------------|--------|
| Temperature (°C)                 | Voltage (Volt)  | Freq. Dev. (Hz) | Freq. Dev. (ppm) | Limit                  | Result |
| 50                               | Normal Voltage  | 17.26           | 0.009            | Within Authorized Band | PASS   |
| 40                               |                 | 19.85           | 0.011            |                        |        |
| 30                               |                 | 33.03           | 0.018            |                        |        |
| 20                               |                 | 13.59           | 0.007            |                        |        |
| 10                               |                 | 19.26           | 0.010            |                        |        |
| 0                                |                 | 33.45           | 0.018            |                        |        |
| -10                              |                 | 21.19           | 0.011            |                        |        |
| -20                              |                 | 22.64           | 0.012            |                        |        |
| -30                              |                 | 30.67           | 0.016            |                        |        |
| 25                               | Maximum Voltage | 27.73           | 0.015            |                        |        |
| 25                               | BEP             | 35.23           | 0.019            |                        |        |

| WCDMA V Middle Channel/836.6MHz |                 |                 |                  |        |        |
|---------------------------------|-----------------|-----------------|------------------|--------|--------|
| Temperature (°C)                | Voltage (Volt)  | Freq. Dev. (Hz) | Freq. Dev. (ppm) | Limit  | Result |
| 50                              | Normal Voltage  | 15.38           | 0.018            | 2.5ppm | PASS   |
| 40                              |                 | 35.98           | 0.043            |        |        |
| 30                              |                 | 23.27           | 0.028            |        |        |
| 20                              |                 | 28.93           | 0.035            |        |        |
| 10                              |                 | 18.30           | 0.022            |        |        |
| 0                               |                 | 22.26           | 0.027            |        |        |
| -10                             |                 | 27.25           | 0.033            |        |        |
| -20                             |                 | 27.36           | 0.033            |        |        |
| -30                             |                 | 14.48           | 0.017            |        |        |
| 25                              | Maximum Voltage | 11.54           | 0.014            |        |        |
| 25                              | BEP             | 16.73           | 0.020            |        |        |

1. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.


| WCDMA II Middle Channel/1880MHz |                 |                 |                  |                        |        |
|---------------------------------|-----------------|-----------------|------------------|------------------------|--------|
| Temperature (°C)                | Voltage (Volt)  | Freq. Dev. (Hz) | Freq. Dev. (ppm) | Limit                  | Result |
| 50                              | Normal Voltage  | 24.62           | 0.013            | Within Authorized Band | PASS   |
| 40                              |                 | 23.23           | 0.012            |                        |        |
| 30                              |                 | 36.05           | 0.019            |                        |        |
| 20                              |                 | 28.28           | 0.015            |                        |        |
| 10                              |                 | 23.87           | 0.013            |                        |        |
| 0                               |                 | 24.97           | 0.013            |                        |        |
| -10                             |                 | 33.73           | 0.018            |                        |        |
| -20                             |                 | 32.24           | 0.017            |                        |        |
| -30                             |                 | 31.76           | 0.017            |                        |        |
| 25                              | Maximum Voltage | 18.39           | 0.010            |                        |        |
| 25                              | BEP             | 14.99           | 0.008            |                        |        |

1. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.


A6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

GSM 850 BAND


Lowest Channel

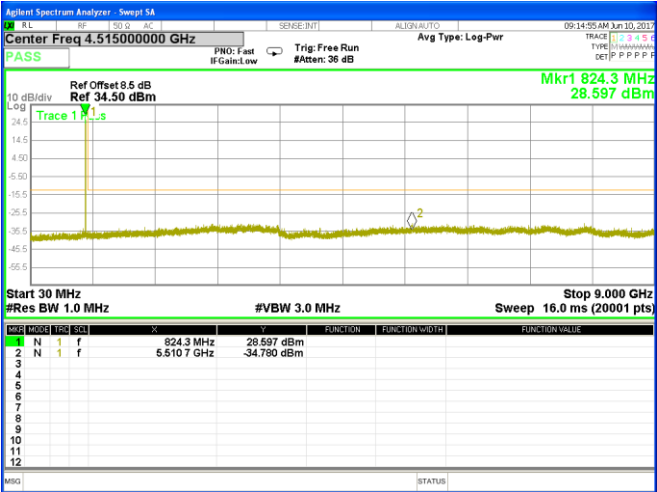

Middle Channel

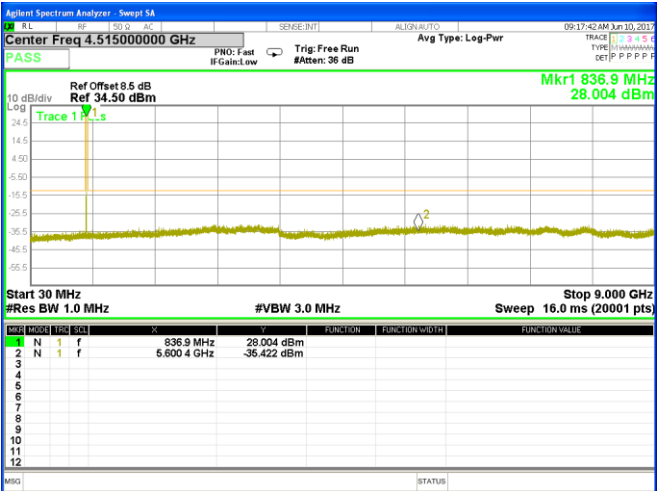


Highest Channel

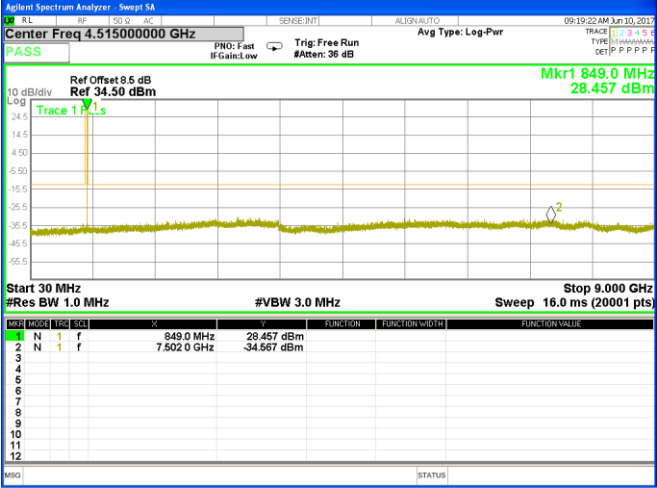




EDGE 850 BAND


Lowest Channel

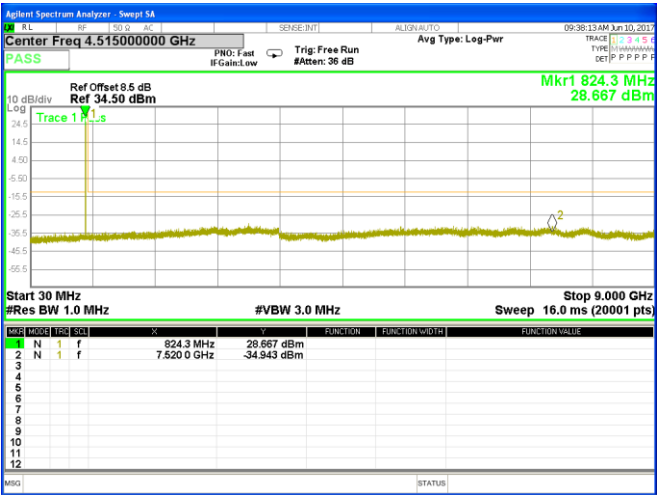

Middle Channel

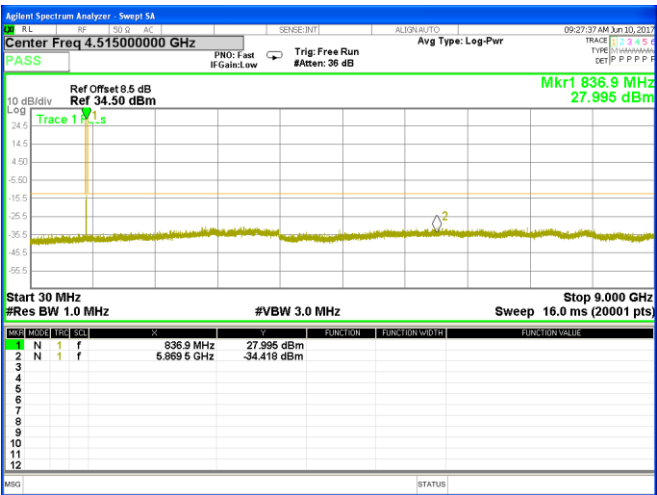


Highest Channel

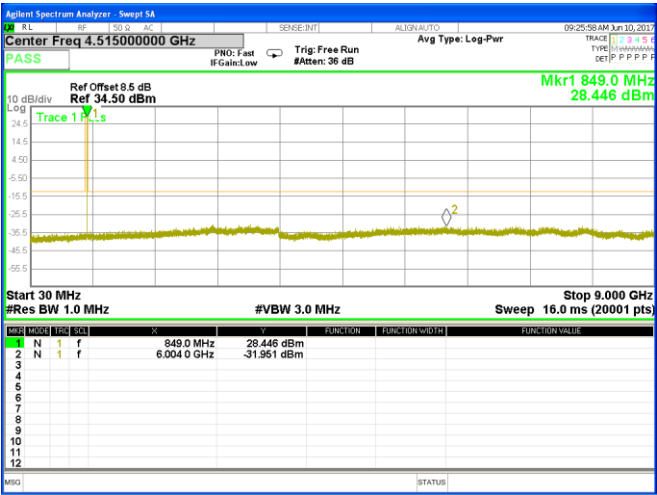


## GSM1900 BAND(30M-20G)


## Lowest Channel

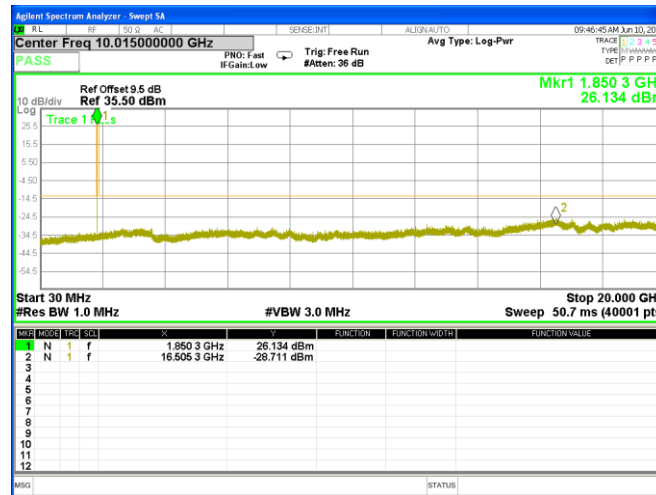

## Middle Channel

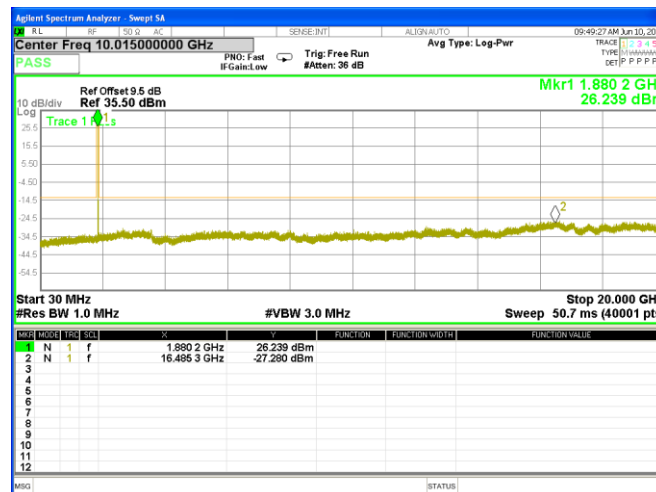


## Highest Channel

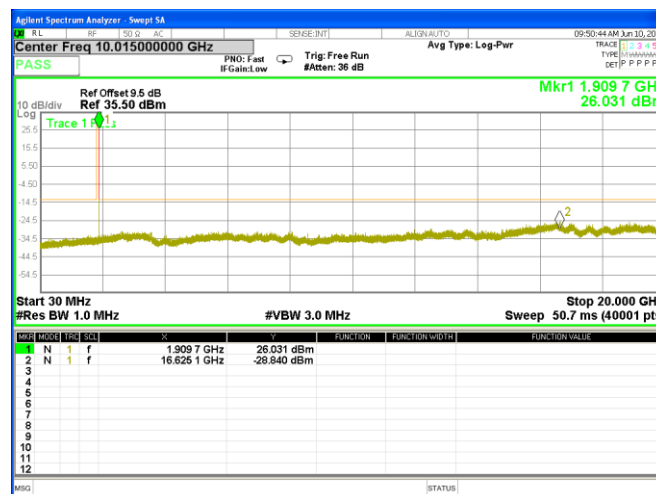


## GPRS1900 BAND(30M-20G)


## Lowest Channel

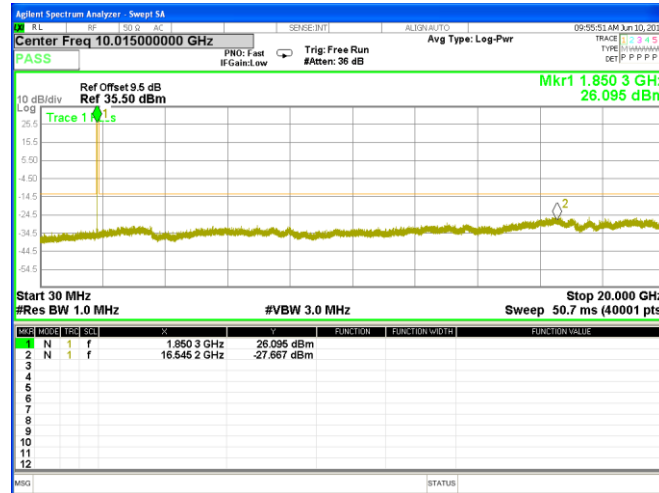

## Middle Channel

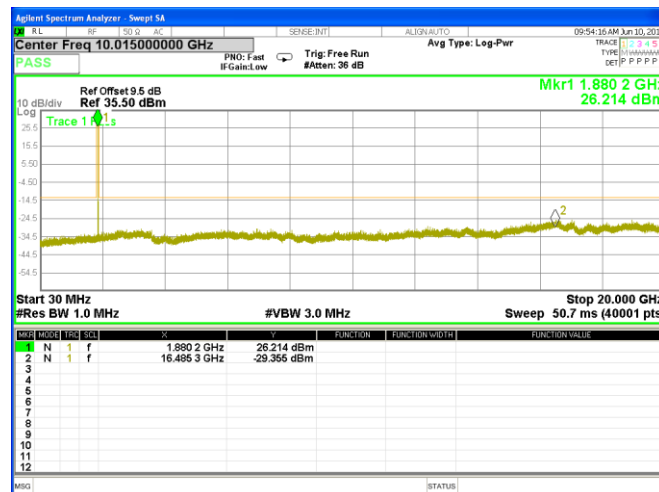


## Highest Channel

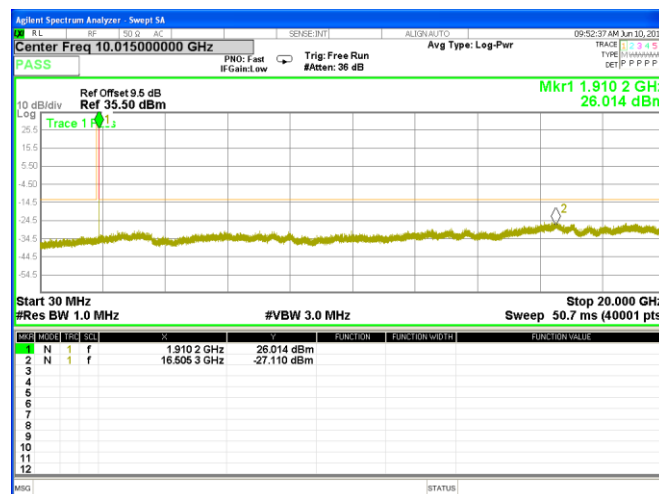


## EDGE 1900 BAND(30M-20G)


## Lowest Channel

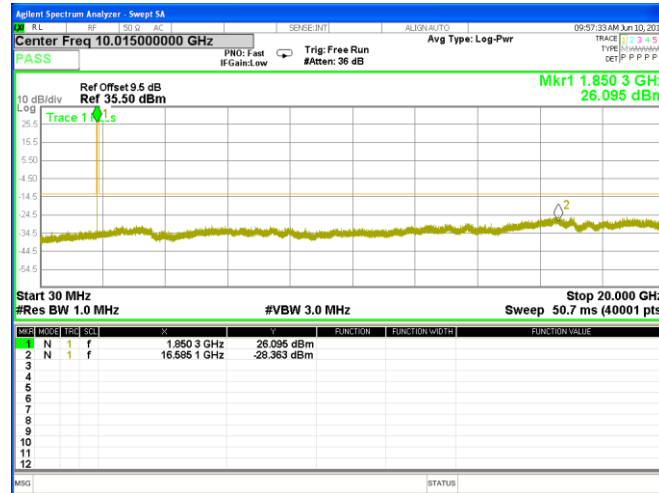

## Middle Channel

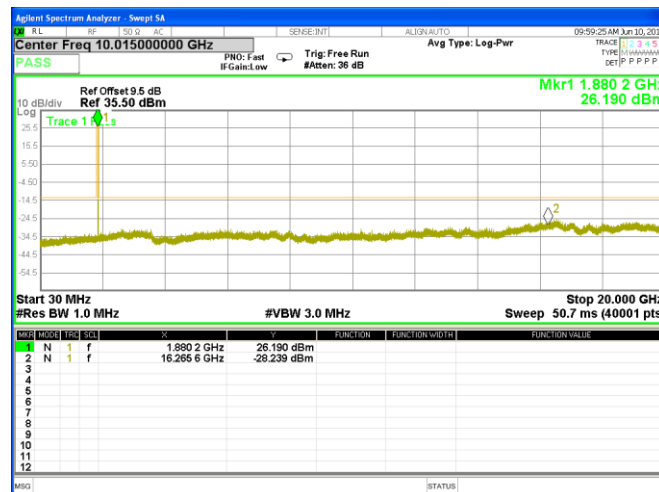

## Highest Channel

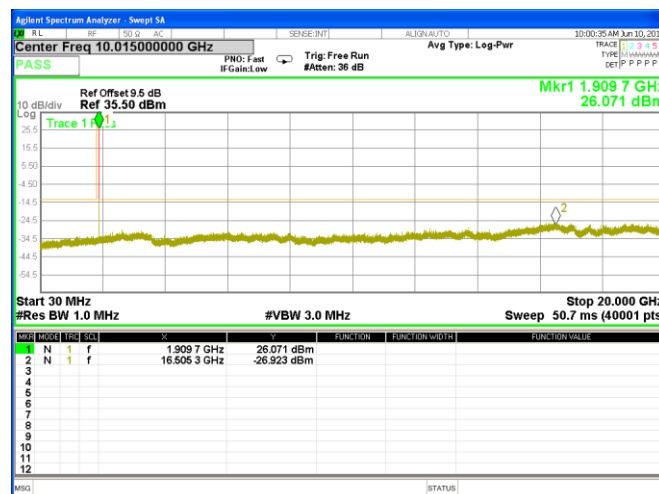


## WCDMA Band V (RMC 12.2Kbps)

## Lowest Channel



## Middle Channel

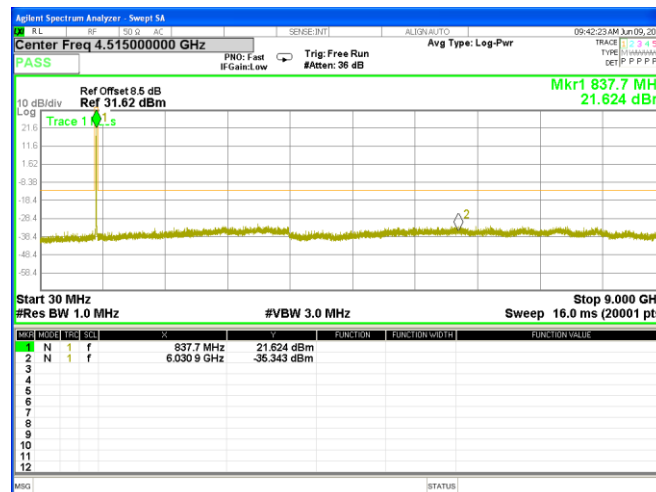


## Highest Channel




## WCDMA Band II (RMC 12.2Kbps)(30M-20G)


## Lowest Channel

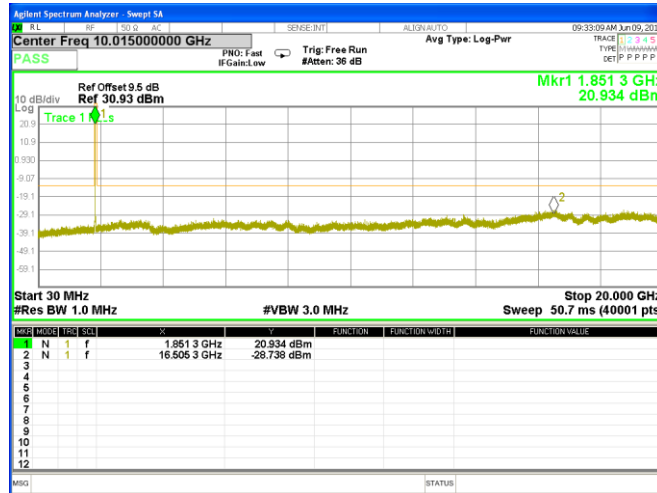

## Middle Channel

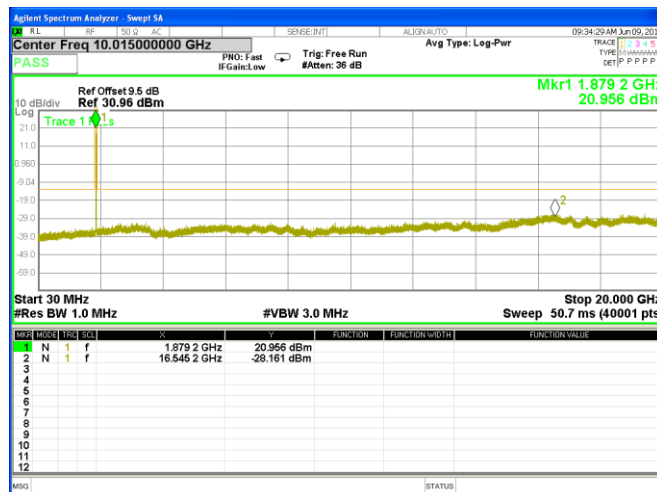

## Highest Channel

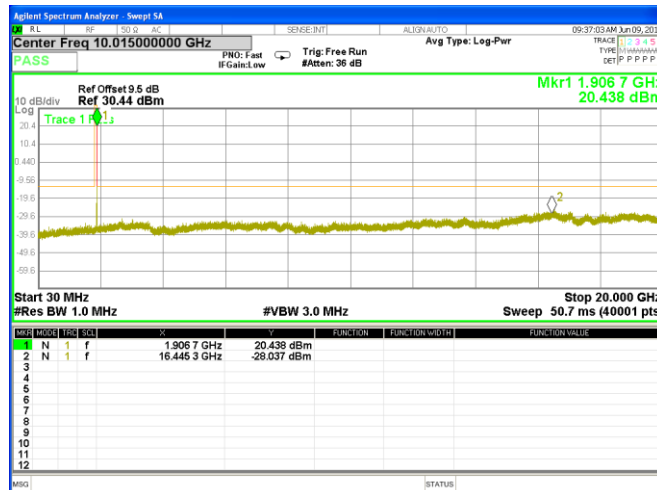

## A7 BAND EDGE

## GSM 850

## Lowest Band Edge




## Highest Band Edge



## GPRS 850

## Lowest Band Edge

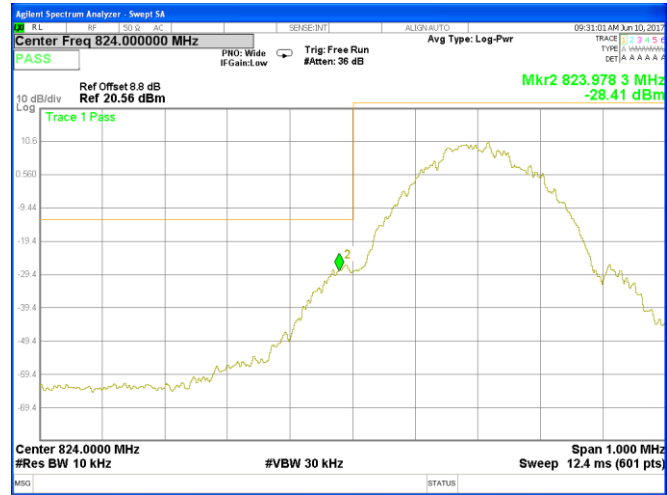


## Highest Band Edge



## EDGE 850

## Lowest Band Edge

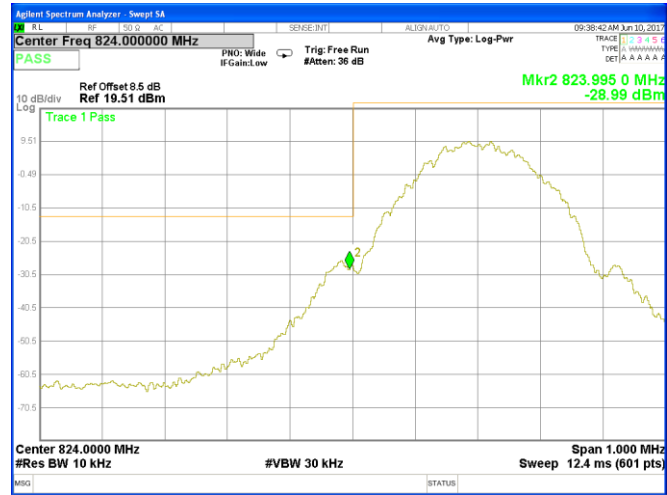


## Highest Band Edge



## GSM 1900

## Lowest Band Edge

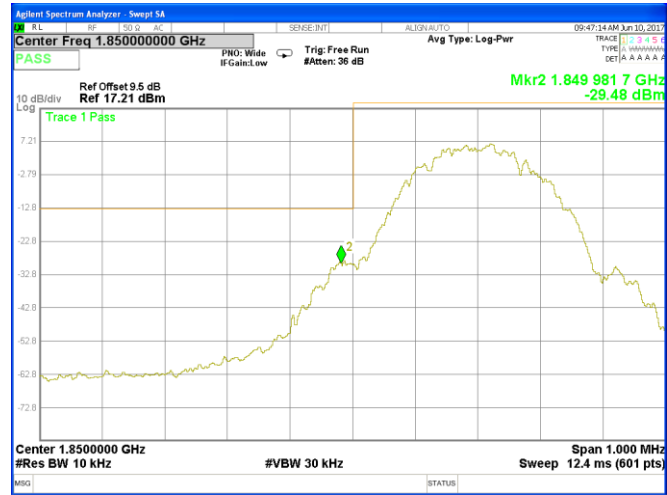


## Highest Band Edge



## GPRS 1900

## Lowest Band Edge

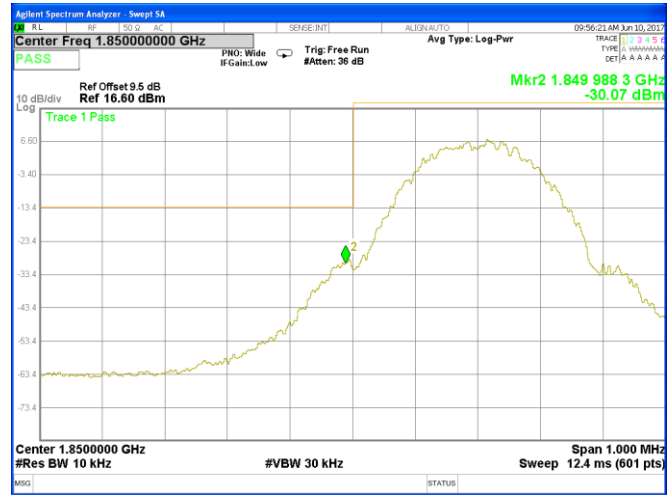


## Highest Band Edge



## EDGE 1900

## Lowest Band Edge

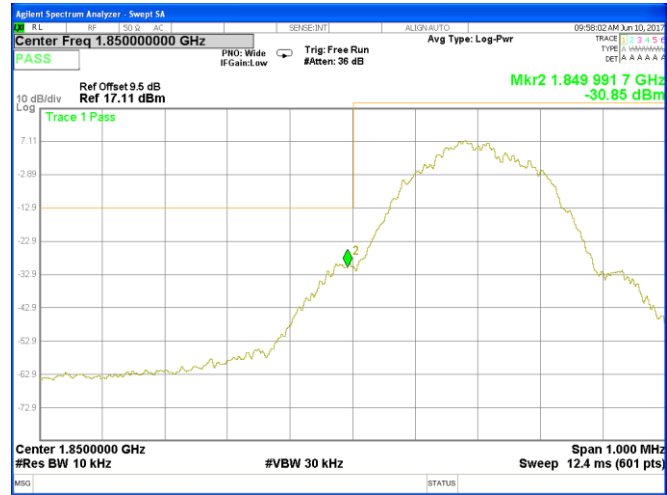


## Highest Band Edge



## WCDMA Band VRMC 12.2Kbps

## Lowest Band Edge

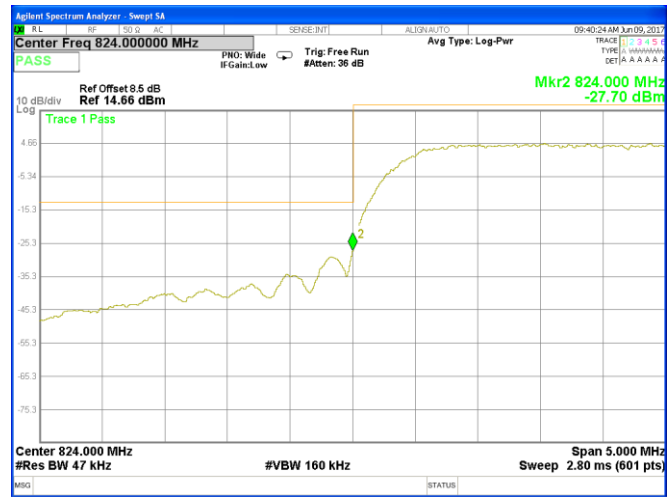


## Highest Band Edge



## WCDMA Band IIRMC 12.2Kbps

## Lowest Band Edge

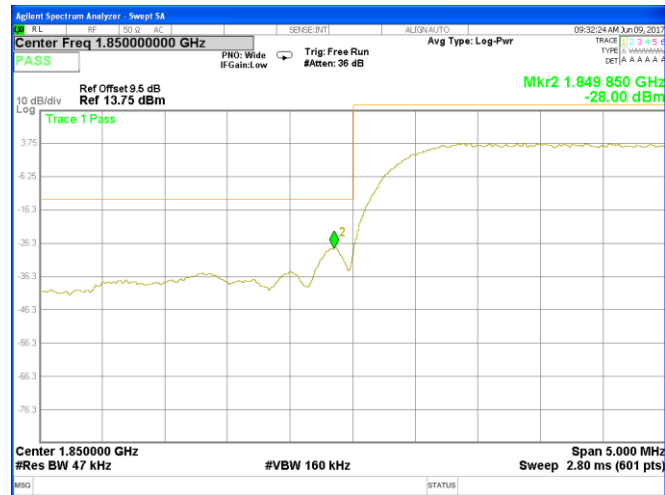

## Highest Band Edge



## A8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

GSM 850: (30-9000)MHz

| GSM 850: (30-9000)MHz                        |                  |          |       |        |        |        |          |
|----------------------------------------------|------------------|----------|-------|--------|--------|--------|----------|
| The Worst Test Results Channel 128/824.2 MHz |                  |          |       |        |        |        |          |
| Frequency(MHz)                               | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit  | Margin | Polarity |
|                                              |                  |          |       | (dBm)  | (dBm)  | (dB)   |          |
| 1648.08                                      | -40.26           | 9.40     | 4.75  | -35.61 | -13.00 | -22.61 | H        |
| 2472.27                                      | -40.60           | 10.60    | 8.39  | -38.39 | -13.00 | -25.39 | H        |
| 3296.50                                      | -32.00           | 12.00    | 11.79 | -31.79 | -13.00 | -18.79 | H        |
| 1648.25                                      | -44.19           | 9.40     | 4.75  | -39.54 | -13.00 | -26.54 | V        |
| 2472.33                                      | -45.40           | 10.60    | 8.39  | -43.19 | -13.00 | -30.19 | V        |
| 3296.62                                      | -42.69           | 12.00    | 11.79 | -42.48 | -13.00 | -29.48 | V        |
| The Worst Test Results Channel 190/836.6 MHz |                  |          |       |        |        |        |          |
| Frequency(MHz)                               | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit  | Margin | Polarity |
|                                              |                  |          |       | (dBm)  | (dBm)  | (dB)   |          |
| 1673.27                                      | -41.02           | 9.50     | 4.76  | -36.28 | -13.00 | -23.28 | H        |
| 2509.69                                      | -39.17           | 10.70    | 8.40  | -36.87 | -13.00 | -23.87 | H        |
| 3346.05                                      | -31.71           | 12.20    | 11.80 | -31.31 | -13.00 | -18.31 | H        |
| 1673.03                                      | -43.16           | 9.40     | 4.75  | -38.51 | -13.00 | -25.51 | V        |
| 2509.49                                      | -44.29           | 10.60    | 8.39  | -42.08 | -13.00 | -29.08 | V        |
| 3346.42                                      | -43.58           | 12.20    | 11.82 | -43.20 | -13.00 | -30.20 | V        |
| The Worst Test Results Channel 251/848.8 MHz |                  |          |       |        |        |        |          |
| Frequency(MHz)                               | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit  | Margin | Polarity |
|                                              |                  |          |       | (dBm)  | (dBm)  | (dB)   |          |
| 1697.22                                      | -41.21           | 9.60     | 4.77  | -36.38 | -13.00 | -23.38 | H        |
| 2546.54                                      | -39.88           | 10.80    | 8.50  | -37.58 | -13.00 | -24.58 | H        |
| 3395.25                                      | -31.36           | 12.50    | 11.90 | -30.76 | -13.00 | -17.76 | H        |
| 1697.24                                      | -43.48           | 9.60     | 4.77  | -38.65 | -13.00 | -25.65 | V        |
| 2546.14                                      | -45.36           | 10.80    | 8.50  | -43.06 | -13.00 | -30.06 | V        |
| 3395.08                                      | -42.67           | 12.50    | 11.90 | -42.07 | -13.00 | -29.07 | V        |

**Note:** (1)Below 30MHz no Spurious found is the worst condition.

(2)Above 3.5GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.

GPRS 850: (30-9000)MHz

| GPRS 850: (30-9000)MHz                       |                  |          |       |        |        |        |          |
|----------------------------------------------|------------------|----------|-------|--------|--------|--------|----------|
| The Worst Test Results Channel 128/824.2 MHz |                  |          |       |        |        |        |          |
| Frequency(MHz)                               | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit  | Margin | Polarity |
|                                              |                  |          |       | (dBm)  | (dBm)  | (dB)   |          |
| 1648.49                                      | -41.56           | 9.40     | 4.75  | -36.91 | -13.00 | -23.91 | H        |
| 2472.55                                      | -40.57           | 10.60    | 8.39  | -38.36 | -13.00 | -25.36 | H        |
| 3296.56                                      | -31.36           | 12.00    | 11.79 | -31.15 | -13.00 | -18.15 | H        |
| 1648.46                                      | -44.12           | 9.40     | 4.75  | -39.47 | -13.00 | -26.47 | V        |
| 2472.37                                      | -44.38           | 10.60    | 8.39  | -42.17 | -13.00 | -29.17 | V        |
| 3296.78                                      | -43.96           | 12.00    | 11.79 | -43.75 | -13.00 | -30.75 | V        |
| The Worst Test Results Channel 190/836.6 MHz |                  |          |       |        |        |        |          |
| Frequency(MHz)                               | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit  | Margin | Polarity |
|                                              |                  |          |       | (dBm)  | (dBm)  | (dB)   |          |
| 1673.15                                      | -40.70           | 9.50     | 4.76  | -35.96 | -13.00 | -22.96 | H        |
| 2509.78                                      | -39.87           | 10.70    | 8.40  | -37.57 | -13.00 | -24.57 | H        |
| 3346.16                                      | -31.02           | 12.20    | 11.80 | -30.62 | -13.00 | -17.62 | H        |
| 1672.94                                      | -44.42           | 9.40     | 4.75  | -39.77 | -13.00 | -26.77 | V        |
| 2509.64                                      | -44.52           | 10.60    | 8.39  | -42.31 | -13.00 | -29.31 | V        |
| 3346.35                                      | -42.58           | 12.20    | 11.82 | -42.20 | -13.00 | -29.20 | V        |
| The Worst Test Results Channel 251/848.8 MHz |                  |          |       |        |        |        |          |
| Frequency(MHz)                               | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit  | Margin | Polarity |
|                                              |                  |          |       | (dBm)  | (dBm)  | (dB)   |          |
| 1697.65                                      | -40.31           | 9.60     | 4.77  | -35.48 | -13.00 | -22.48 | H        |
| 2546.32                                      | -40.30           | 10.80    | 8.50  | -38.00 | -13.00 | -25.00 | H        |
| 3395.17                                      | -32.18           | 12.50    | 11.90 | -31.58 | -13.00 | -18.58 | H        |
| 1697.53                                      | -43.36           | 9.60     | 4.77  | -38.53 | -13.00 | -25.53 | V        |
| 2546.30                                      | -44.93           | 10.80    | 8.50  | -42.63 | -13.00 | -29.63 | V        |
| 3395.24                                      | -43.13           | 12.50    | 11.90 | -42.53 | -13.00 | -29.53 | V        |

**Note:** (1)Below 30MHz no Spurious found is the worst condition.

(2)Above 3.5GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.

EDGE 850: (30-9000)MHz

| EGPRS 850: (30-9000)MHz                      |                  |          |       |               |                |                |          |
|----------------------------------------------|------------------|----------|-------|---------------|----------------|----------------|----------|
| The Worst Test Results Channel 128/824.2 MHz |                  |          |       |               |                |                |          |
| Frequency(MHz)                               | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Polarity |
| 1648.24                                      | -41.10           | 9.40     | 4.75  | -36.45        | -13.00         | -23.45         | H        |
| 2472.51                                      | -40.21           | 10.60    | 8.39  | -38.00        | -13.00         | -25.00         | H        |
| 3296.61                                      | -31.83           | 12.00    | 11.79 | -31.62        | -13.00         | -18.62         | H        |
| 1648.39                                      | -43.19           | 9.40     | 4.75  | -38.54        | -13.00         | -25.54         | V        |
| 2472.66                                      | -45.28           | 10.60    | 8.39  | -43.07        | -13.00         | -30.07         | V        |
| 3296.78                                      | -43.38           | 12.00    | 11.79 | -43.17        | -13.00         | -30.17         | V        |
| The Worst Test Results Channel 190/836.6 MHz |                  |          |       |               |                |                |          |
| Frequency(MHz)                               | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Polarity |
| 1672.79                                      | -41.30           | 9.50     | 4.76  | -36.56        | -13.00         | -23.56         | H        |
| 2509.66                                      | -40.11           | 10.70    | 8.40  | -37.81        | -13.00         | -24.81         | H        |
| 3346.07                                      | -31.60           | 12.20    | 11.80 | -31.20        | -13.00         | -18.20         | H        |
| 1672.86                                      | -43.40           | 9.40     | 4.75  | -38.75        | -13.00         | -25.75         | V        |
| 2509.55                                      | -44.49           | 10.60    | 8.39  | -42.28        | -13.00         | -29.28         | V        |
| 3345.99                                      | -43.22           | 12.20    | 11.82 | -42.84        | -13.00         | -29.84         | V        |
| The Worst Test Results Channel 251/848.8 MHz |                  |          |       |               |                |                |          |
| Frequency(MHz)                               | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) | Polarity |
| 1697.64                                      | -40.62           | 9.60     | 4.77  | -35.79        | -13.00         | -22.79         | H        |
| 2546.52                                      | -40.46           | 10.80    | 8.50  | -38.16        | -13.00         | -25.16         | H        |
| 3395.02                                      | -32.33           | 12.50    | 11.90 | -31.73        | -13.00         | -18.73         | H        |
| 1697.39                                      | -43.50           | 9.60     | 4.77  | -38.67        | -13.00         | -25.67         | V        |
| 2546.14                                      | -44.24           | 10.80    | 8.50  | -41.94        | -13.00         | -28.94         | V        |
| 3395.22                                      | -43.51           | 12.50    | 11.90 | -42.91        | -13.00         | -29.91         | V        |

**Note:** (1)Below 30MHz no Spurious found is the worst condition.

(2)Above 3.5GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.

PCS 1900: (30-20000)MHz

| DCS 1900: (30-20000)MHz                          |                  |          |       |        |        |        |          |
|--------------------------------------------------|------------------|----------|-------|--------|--------|--------|----------|
| The Worst Test Results for Channel 512/1850.2MHz |                  |          |       |        |        |        |          |
| Frequency(MHz)                                   | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit  | Margin | Polarity |
|                                                  |                  |          |       | (dBm)  | (dBm)  | (dB)   |          |
| 3700.03                                          | -34.70           | 12.60    | 12.93 | -35.03 | -13.00 | -22.03 | H        |
| 5550.25                                          | -34.31           | 13.10    | 17.11 | -38.32 | -13.00 | -25.32 | H        |
| 7400.49                                          | -32.92           | 11.50    | 22.20 | -43.62 | -13.00 | -30.62 | H        |
| 3700.51                                          | -35.88           | 12.60    | 12.93 | -36.21 | -13.00 | -23.21 | V        |
| 5550.28                                          | -34.74           | 13.10    | 17.11 | -38.75 | -13.00 | -25.75 | V        |
| 7400.74                                          | -32.55           | 11.50    | 22.20 | -43.25 | -13.00 | -30.25 | V        |
| The Worst Test Results for Channel 661/1880.0MHz |                  |          |       |        |        |        |          |
| Frequency(MHz)                                   | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit  | Margin | Polarity |
|                                                  |                  |          |       | (dBm)  | (dBm)  | (dB)   |          |
| 3759.80                                          | -34.08           | 12.60    | 12.93 | -34.41 | -13.00 | -21.41 | H        |
| 5639.81                                          | -34.45           | 13.10    | 17.11 | -38.46 | -13.00 | -25.46 | H        |
| 7520.03                                          | -32.55           | 11.50    | 22.20 | -43.25 | -13.00 | -30.25 | H        |
| 3759.94                                          | -34.73           | 12.60    | 12.93 | -35.06 | -13.00 | -22.06 | V        |
| 5640.22                                          | -33.78           | 13.10    | 17.11 | -37.79 | -13.00 | -24.79 | V        |
| 7520.14                                          | -31.84           | 11.50    | 22.20 | -42.54 | -13.00 | -29.54 | V        |
| The Worst Test Results for Channel 810/1909.8MHz |                  |          |       |        |        |        |          |
| Frequency(MHz)                                   | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit  | Margin | Polarity |
|                                                  |                  |          |       | (dBm)  | (dBm)  | (dB)   |          |
| 3819.52                                          | -34.37           | 12.60    | 12.93 | -34.70 | -13.00 | -21.70 | H        |
| 5729.31                                          | -35.02           | 13.10    | 17.11 | -39.03 | -13.00 | -26.03 | H        |
| 7638.99                                          | -33.13           | 11.50    | 22.20 | -43.83 | -13.00 | -30.83 | H        |
| 3819.36                                          | -35.29           | 12.60    | 12.93 | -35.62 | -13.00 | -22.62 | V        |
| 5729.38                                          | -34.83           | 13.10    | 17.11 | -38.84 | -13.00 | -25.84 | V        |
| 7638.93                                          | -31.81           | 11.50    | 22.20 | -42.51 | -13.00 | -29.51 | V        |

**Note:** (1)Below 30MHz no Spurious found is the worst condition.

(2)Above 8GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.

GPRS 1900: (30-20000)MHz

| GPRS1900: (30-20000)MHz                          |                  |          |       |        |        |        |          |
|--------------------------------------------------|------------------|----------|-------|--------|--------|--------|----------|
| The Worst Test Results for Channel 512/1850.2MHz |                  |          |       |        |        |        |          |
| Frequency(MHz)                                   | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit  | Margin | Polarity |
|                                                  |                  |          |       | (dBm)  | (dBm)  | (dB)   |          |
| 3700.07                                          | -34.87           | 12.60    | 12.93 | -35.20 | -13.00 | -22.20 | H        |
| 5550.61                                          | -34.12           | 13.10    | 17.11 | -38.13 | -13.00 | -25.13 | H        |
| 7400.49                                          | -32.66           | 11.50    | 22.20 | -43.36 | -13.00 | -30.36 | H        |
| 3700.51                                          | -35.61           | 12.60    | 12.93 | -35.94 | -13.00 | -22.94 | V        |
| 5550.25                                          | -34.76           | 13.10    | 17.11 | -38.77 | -13.00 | -25.77 | V        |
| 7400.60                                          | -32.47           | 11.50    | 22.20 | -43.17 | -13.00 | -30.17 | V        |
| The Worst Test Results for Channel 661/1880.0MHz |                  |          |       |        |        |        |          |
| Frequency(MHz)                                   | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit  | Margin | Polarity |
|                                                  |                  |          |       | (dBm)  | (dBm)  | (dB)   |          |
| 3760.00                                          | -34.34           | 12.60    | 12.93 | -34.67 | -13.00 | -21.67 | H        |
| 5640.06                                          | -34.50           | 13.10    | 17.11 | -38.51 | -13.00 | -25.51 | H        |
| 7520.26                                          | -32.96           | 11.50    | 22.20 | -43.66 | -13.00 | -30.66 | H        |
| 3760.26                                          | -35.33           | 12.60    | 12.93 | -35.66 | -13.00 | -22.66 | V        |
| 5640.21                                          | -34.52           | 13.10    | 17.11 | -38.53 | -13.00 | -25.53 | V        |
| 7519.89                                          | -32.84           | 11.50    | 22.20 | -43.54 | -13.00 | -30.54 | V        |
| The Worst Test Results for Channel 810/1909.8MHz |                  |          |       |        |        |        |          |
| Frequency(MHz)                                   | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit  | Margin | Polarity |
|                                                  |                  |          |       | (dBm)  | (dBm)  | (dB)   |          |
| 3819.71                                          | -33.81           | 12.60    | 12.93 | -34.14 | -13.00 | -21.14 | H        |
| 5729.15                                          | -34.66           | 13.10    | 17.11 | -38.67 | -13.00 | -25.67 | H        |
| 7639.28                                          | -32.84           | 11.50    | 22.20 | -43.54 | -13.00 | -30.54 | H        |
| 3819.73                                          | -35.23           | 12.60    | 12.93 | -35.56 | -13.00 | -22.56 | V        |
| 5729.54                                          | -34.75           | 13.10    | 17.11 | -38.76 | -13.00 | -25.76 | V        |
| 7639.02                                          | -32.42           | 11.50    | 22.20 | -43.12 | -13.00 | -30.12 | V        |

**Note:** (1)Below 30MHz no Spurious found is the worst condition.

(2)Above 8GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.

EDGE 1900: (30-20000)MHz

| EGPRS 1900: (30-20000)MHz                        |                  |          |       |        |        |        |          |
|--------------------------------------------------|------------------|----------|-------|--------|--------|--------|----------|
| The Worst Test Results for Channel 512/1850.2MHz |                  |          |       |        |        |        |          |
| Frequency(MHz)                                   | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit  | Margin | Polarity |
|                                                  |                  |          |       | (dBm)  | (dBm)  | (dB)   |          |
| 3700.47                                          | -34.73           | 12.60    | 12.93 | -35.06 | -13.00 | -22.06 | H        |
| 5550.21                                          | -35.47           | 13.10    | 17.11 | -39.48 | -13.00 | -26.48 | H        |
| 7400.56                                          | -32.46           | 11.50    | 22.20 | -43.16 | -13.00 | -30.16 | H        |
| 3700.51                                          | -35.60           | 12.60    | 12.93 | -35.93 | -13.00 | -22.93 | V        |
| 5550.28                                          | -34.91           | 13.10    | 17.11 | -38.92 | -13.00 | -25.92 | V        |
| 7400.72                                          | -32.14           | 11.50    | 22.20 | -42.84 | -13.00 | -29.84 | V        |
| The Worst Test Results for Channel 661/1880.0MHz |                  |          |       |        |        |        |          |
| Frequency(MHz)                                   | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit  | Margin | Polarity |
|                                                  |                  |          |       | (dBm)  | (dBm)  | (dB)   |          |
| 3759.80                                          | -34.63           | 12.60    | 12.93 | -34.96 | -13.00 | -21.96 | H        |
| 5640.24                                          | -34.68           | 13.10    | 17.11 | -38.69 | -13.00 | -25.69 | H        |
| 7520.16                                          | -32.91           | 11.50    | 22.20 | -43.61 | -13.00 | -30.61 | H        |
| 3760.17                                          | -35.38           | 12.60    | 12.93 | -35.71 | -13.00 | -22.71 | V        |
| 5639.97                                          | -34.13           | 13.10    | 17.11 | -38.14 | -13.00 | -25.14 | V        |
| 7520.25                                          | -33.13           | 11.50    | 22.20 | -43.83 | -13.00 | -30.83 | V        |
| The Worst Test Results for Channel 810/1909.8MHz |                  |          |       |        |        |        |          |
| Frequency(MHz)                                   | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit  | Margin | Polarity |
|                                                  |                  |          |       | (dBm)  | (dBm)  | (dB)   |          |
| 3819.35                                          | -34.51           | 12.60    | 12.93 | -34.84 | -13.00 | -21.84 | H        |
| 5729.32                                          | -34.75           | 13.10    | 17.11 | -38.76 | -13.00 | -25.76 | H        |
| 7639.16                                          | -32.74           | 11.50    | 22.20 | -43.44 | -13.00 | -30.44 | H        |
| 3819.76                                          | -34.87           | 12.60    | 12.93 | -35.20 | -13.00 | -22.20 | V        |
| 5729.48                                          | -33.90           | 13.10    | 17.11 | -37.91 | -13.00 | -24.91 | V        |
| 7638.95                                          | -32.32           | 11.50    | 22.20 | -43.02 | -13.00 | -30.02 | V        |

**Note:** (1) Below 30MHz no Spurious found is the worst condition.

(2)Above 8GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.

UMTS band V(30-9000)MHz

| WCDMA Band V: (30-9000)MHz                   |                  |          |       |        |         |        |          |
|----------------------------------------------|------------------|----------|-------|--------|---------|--------|----------|
| The worst testresults channel 4132/826.4MHz  |                  |          |       |        |         |        |          |
| Frequency(MHz)                               | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit   | Margin | Polarity |
|                                              |                  |          |       | (dBm)  | ( dBm ) | (dB)   |          |
| 1652.41                                      | -40.26           | 9.40     | 4.75  | -35.61 | -13.00  | -22.61 | H        |
| 2479.39                                      | -40.65           | 10.60    | 8.39  | -38.44 | -13.00  | -25.44 | H        |
| 3305.80                                      | -30.99           | 12.00    | 11.79 | -30.78 | -13.00  | -17.78 | H        |
| 1652.37                                      | -44.52           | 9.40     | 4.75  | -39.87 | -13.00  | -26.87 | V        |
| 2479.64                                      | -45.35           | 10.60    | 8.39  | -43.14 | -13.00  | -30.14 | V        |
| 3305.89                                      | -43.07           | 12.00    | 11.79 | -42.86 | -13.00  | -29.86 | V        |
| The Worst Test Results Channel 4183/836.6MHz |                  |          |       |        |         |        |          |
| Frequency(MHz)                               | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit   | Margin | Polarity |
|                                              |                  |          |       | (dBm)  | ( dBm ) | (dB)   |          |
| 1673.19                                      | -40.46           | 9.50     | 4.76  | -35.72 | -13.00  | -22.72 | H        |
| 2509.50                                      | -40.55           | 10.70    | 8.40  | -38.25 | -13.00  | -25.25 | H        |
| 3346.16                                      | -31.93           | 12.20    | 11.80 | -31.53 | -13.00  | -18.53 | H        |
| 1673.20                                      | -43.36           | 9.40     | 4.75  | -38.71 | -13.00  | -25.71 | V        |
| 2509.50                                      | -44.15           | 10.60    | 8.39  | -41.94 | -13.00  | -28.94 | V        |
| 3345.96                                      | -42.75           | 12.20    | 11.82 | -42.37 | -13.00  | -29.37 | V        |
| The Worst Test Results Channel 4233/846.6MHz |                  |          |       |        |         |        |          |
| Frequency(MHz)                               | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit   | Margin | Polarity |
|                                              |                  |          |       | (dBm)  | ( dBm ) | (dB)   |          |
| 1693.58                                      | -40.75           | 9.60     | 4.77  | -35.92 | -13.00  | -22.92 | H        |
| 2539.26                                      | -39.38           | 10.80    | 8.50  | -37.08 | -13.00  | -24.08 | H        |
| 3385.98                                      | -31.52           | 12.50    | 11.90 | -30.92 | -13.00  | -17.92 | H        |
| 1693.18                                      | -43.36           | 9.60     | 4.77  | -38.53 | -13.00  | -25.53 | V        |
| 2539.44                                      | -44.36           | 10.80    | 8.50  | -42.06 | -13.00  | -29.06 | V        |
| 3386.26                                      | -43.89           | 12.50    | 11.90 | -43.29 | -13.00  | -30.29 | V        |

**Note:** (1)Below 30MHz no Spurious found is the worst condition.

(2)Above 3GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.

UMTS band II(30-20000)MHz

| WCDMA Band II: (30-20000)MHz                      |                  |          |       |        |        |        |          |
|---------------------------------------------------|------------------|----------|-------|--------|--------|--------|----------|
| The Worst Test Results for Channel 9262/1852.4MHz |                  |          |       |        |        |        |          |
| Frequency(MHz)                                    | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit  | Margin | Polarity |
|                                                   |                  |          |       | (dBm)  | (dBm)  | (dB)   |          |
| 3704.00                                           | -33.68           | 12.60    | 12.93 | -34.01 | -13.00 | -21.01 | H        |
| 5557.25                                           | -35.28           | 13.10    | 17.11 | -39.29 | -13.00 | -26.29 | H        |
| 7409.81                                           | -33.46           | 11.50    | 22.20 | -44.16 | -13.00 | -31.16 | H        |
| 3704.17                                           | -35.55           | 12.60    | 12.93 | -35.88 | -13.00 | -22.88 | V        |
| 5557.57                                           | -34.97           | 13.10    | 17.11 | -38.98 | -13.00 | -25.98 | V        |
| 7409.84                                           | -32.12           | 11.50    | 22.20 | -42.82 | -13.00 | -29.82 | V        |
| The Worst Test Results for Channel 9400/1880MHz   |                  |          |       |        |        |        |          |
| Frequency(MHz)                                    | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit  | Margin | Polarity |
|                                                   |                  |          |       | (dBm)  | (dBm)  | (dB)   |          |
| 3760.26                                           | -34.36           | 12.60    | 12.93 | -34.69 | -13.00 | -21.69 | H        |
| 5640.16                                           | -35.31           | 13.10    | 17.11 | -39.32 | -13.00 | -26.32 | H        |
| 7520.02                                           | -33.20           | 11.50    | 22.20 | -43.90 | -13.00 | -30.90 | H        |
| 3759.96                                           | -35.81           | 12.60    | 12.93 | -36.14 | -13.00 | -23.14 | V        |
| 5640.02                                           | -34.65           | 13.10    | 17.11 | -38.66 | -13.00 | -25.66 | V        |
| 7519.85                                           | -33.07           | 11.50    | 22.20 | -43.77 | -13.00 | -30.77 | V        |
| The Worst Test Results for Channel 9538/1907.6MHz |                  |          |       |        |        |        |          |
| Frequency(MHz)                                    | S G.Lev<br>(dBm) | Ant(dBi) | Loss  | PMea   | Limit  | Margin | Polarity |
|                                                   |                  |          |       | (dBm)  | (dBm)  | (dB)   |          |
| 3815.27                                           | -34.14           | 12.60    | 12.93 | -34.47 | -13.00 | -21.47 | H        |
| 5722.48                                           | -35.19           | 13.10    | 17.11 | -39.20 | -13.00 | -26.20 | H        |
| 7630.25                                           | -32.75           | 11.50    | 22.20 | -43.45 | -13.00 | -30.45 | H        |
| 3815.38                                           | -35.96           | 12.60    | 12.93 | -36.29 | -13.00 | -23.29 | V        |
| 5722.10                                           | -34.98           | 13.10    | 17.11 | -38.99 | -13.00 | -25.99 | V        |
| 7630.03                                           | -32.94           | 11.50    | 22.20 | -43.64 | -13.00 | -30.64 | V        |

**Note:** (1)Below 30MHz no Spurious found is the worst condition.

(2)Above 6GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has.

## APPENDIX B PHOTOS OF TEST SETUP

## RADIATED SPURIOUS EMISSION



※※※※※END OF THE REPORT※※※※※