

S

T

S

L

A

B



LTE RADIO TEST REPORT

Report No: STS1709125W04

Issued for

JALA GROUP

EDIFICIO JALA AV. MELCHOR PEREZ DE HOLGUIN N 2643
COCHABAMBA BOLIVIA (LATIN AMERICA)

Product Name:	Smartphone
Brand Name:	Jala
Test Model Name:	ACCIONE P
Series Model:	N/A
FCC ID:	2ANHQACCIONEP
Test Standard:	47 CFR Part 2, 24(E), 27



Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

**TEST RESULT CERTIFICATION**

Applicant's name : JALA GROUP
Address : EDIFICIO JALA AV. MELCHOR PEREZ DE HOLGUIN N 2643
COCHABAMBA BOLIVIA (LATIN AMERICA)
Manufacture's Name : Shenzhen Kingsun Technology Co., Ltd.
Address : 5th Floor, Block B1, Wisdom Plaza, No. 4068, Qiaoxiang Road,
Nanshan District, Shenzhen, China
Product description
Product name : Smartphone
Trade mark : Jala
Test model name : ACCIONE P
Series model : N/A
Standards : 47 CFR Part 2, 24(E), 27
Test procedure : ANSI / TIA 603-D-2010

This device described above has been tested by STS and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test

Date of performance of tests 13 Sep. 2017~14 Sep. 2017

Date of Issue 14 Sep. 2017

Test Result **Pass**

Testing Engineer :

(Sean she)

Technical Manager :

(Hakim.hou)

Authorized Signatory :

(Vita Li)





TABLE OF CONTENTS	Page
1. SUMMARY OF TEST RESULTS	5
2. GENERAL INFORMATION	7
3. CONDUCTED OUTPUT POWER	16
4. PEAK-TO-AVERAGE RATIO	27
5. RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER	29
6. OCCUPIED BANDWIDTH	42
7. CONDUCTED BAND EDGE	45
8. CONDUCTED SPURIOUS EMISSION	47
9. RADIATED SPURIOUS EMISSION	48
10. FREQUENCY STABILITY	70
PHOTOS OF TEST SETUP	75



**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	14 Sep. 2017	STS1709125W04	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

1.1 TEST RESULTS DESCRIPTION AND LABORATORY INFORMATION

Setion	FCC Rule	Description	Limit	Result
	§2.1046	Conducted Output Power	Reporting Only	PASS
	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS
	§2.1049 §24.238(b) §27.53(h)(3) §27.53(m)(6)	Occupied Bandwidth	Reporting Only	PASS
	§2.1051) §24.238(a) §27.53(g) §27.53(h)	Conducted Band Edge Measurement (Band 2)(Band 4) (Band 17)	<43+10log10(P[Watts])	PASS
	§27.53(m)(4)	(Band 7)	<43+10log10(P[Watts])	PASS
	§2.1051 §24.238(a) §27.53(g) §27.53(h)	Conducted Spurious Emission (Band 2)(Band 4) (Band 17)	<43+10log10(P[Watts])	PASS
	§27.53(m)(4)	Conducted Spurious Emission (Band 7)	< 55+10log10(P[Watts])	PASS
	§2.1055 §24.235 §27.54	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22 Within Authorized Band	PASS
	§27.50(c)(10)	Effective Radiated Power (Band 17)	ERP < 3 Watt	PASS
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 2)((Band 7)	EIRP < 2Watt	PASS
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	EIRP < 1Watt	PASS
	§2.1053 §24.238(a) §27.53(g) §27.53(h)	Radiated Spurious Emission (Band 2)(Band 4) (Band 17)	< 43+10log10(P[Watts])	PASS
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	< 55+10log10(P[Watts])	PASS

1.1.1 TEST FACTORY



Shenzhen STS Test Services Co., Ltd.
Add. : 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China
CNAS Registration No.: L7649;
FCC Registration No.: 625569; IC Registration No.: 12108A

1.1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	$\pm 2.88\text{dB}$
2	Conducted Emission (150KHz-30MHz)	$\pm 2.67\text{dB}$
3	RF power,conducted	$\pm 0.70\text{dB}$
4	Spurious emissions,conducted	$\pm 1.19\text{dB}$
5	All emissions,radiated(<1G) 30MHz-200MHz	$\pm 2.83\text{dB}$
6	All emissions,radiated(<1G) 200MHz-1000MHz	$\pm 2.94\text{dB}$
7	All emissions,radiated(>1G)	$\pm 3.03\text{dB}$
8	Temperature	$\pm 0.5^{\circ}\text{C}$
9	Humidity	$\pm 2\%$



2. GENERAL INFORMATION

2.1 TECHNICAL SPECIFICATIONS AND REGULATIONS

2.1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Smartphone
Hardware version:	PVT2.0
Software version:	J.A.00.01
FCC ID:	2ANHQACCIONEP
Frequency Bands:	U.S. Bands: ☒ LTE FDD Band 2 ☒ LTE FDD Band 4 ☒ LTE FDD Band 5 ☒ LTE FDD Band 7 ☐ LTE FDD Band 12 ☐ LTE FDD Band 13 ☐ LTE FDD Band 17
SIM CARD:	SIM 1 and SIM 2 is a chipset unit and tested as single chipset, SIM 1 is used to tested
Antenna:	PIFA Antenna
Antenna gain:	LTE Band 2: 0dBi LTE Band 4: 0dBi LTE Band 5: 0dBi LTE Band 7: 0dBi
Power Supply:	DC 3.8V by battery or DC 5V supplied by adapter
Battery parameter:	Capacitance: 2250mA, Rated Voltage: 3.8V
Adapter Input:	AC100-240V, 50/60Hz, 500mA
Adapter Output:	DC 5V, 2400mA



2.1.2 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Product Specification Subjective To This Standard	
Tx Frequency	LTE Band 2:1850.7~1909.3MHz LTE Band 4:1710.7~1754.3MHz LTE Band 5:824.7~848.3MHz LTE Band 7:2502.7~2567.3MHz
Rx Frequency	LTE Band 2:1930.7~1989.3MHz LTE Band 4:2110.7~2154.3MHz LTE Band 5:869.7~893.3MHz LTE Band 7:2622.7~2687.3MHz
Bandwidth	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power Limit	LTE Band 2 : 21.61dBm LTE Band 4 : 22.73 dBm LTE Band 5 : 22.97 dBm LTE Band 7 : 21.86 dBm
Type of Modulation	QPSK / 16QAM



2.1.3 EMISSION DESIGNATOR

LTE Band 2 BW(MHz)	Emission Designator (26dBc)QPSK	Emission Designator (26dBc)16QAM
1.4	1M32G7D	1M30W7D
3	2M94G7D	2M93W7D
5	5M03G7D	5M03W7D
10	9M76G7D	9M67W7D
15	14M8G7D	14M7W7D
20	19M5G7D	19M3W7D

LTE Band 4 BW(MHz)	Emission Designator (26dBc)QPSK	Emission Designator (26dBc)16QAM
1.4	1M31G7D	1M31W7D
3	2M93G7D	2M93W7D
5	5M02G7D	5M04W7D
10	9M71G7D	9M66W7D
15	14M7G7D	14M7W7D
20	19M5G7D	19M4W7D

LTE Band 5 BW(MHz)	Emission Designator (26dBc)QPSK	Emission Designator (26dBc)16QAM
1.4	1M31G7D	1M31W7D
3	2M93G7D	2M93W7D
5	5M03G7D	5M04W7D
10	9M70G7D	9M67W7D

LTE Band 7 BW(MHz)	Emission Designator (26dBc)QPSK	Emission Designator (26dBc)16QAM
5	5M03G7D	5M02W7D
10	9M72G7D	9M66W7D
15	14M8G7D	14M7W7D
20	19M2G7D	19M4W7D



2.1.4 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D02 Power Meas. License Digital Systems with maximum output power. Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Remark:

1. The mark "v" means that this configuration is chosen for testing
2. The mark "-" means that this bandwidth is not supported.
3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated

ITEMS	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	7	-	-	v	v	v	v	v	v	v	v	v	v	v	v
Peak&Avera Ratio	2						v	v	v	v		v	v	v	v
	4						v	v	v	v		v	v	v	v
	5	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	7	-	-	-	-	-	-	-	-	-	-	-	-	-	-
26dB&99% Bandwidth	2	v	v	v	v	v	v	v	v			v	v	v	v
	4	v	v	v	v	v	v	v	v			v	v	v	v
	5	v	v	v	v	-	-	v	v			v	v	v	v
	7	-	-	v	v	v	v	v	v			v	v	v	v
Conducted Band Edge	2	v	v	v	v	v	v	v	v	v		v	v	v	v
	4	v	v	v	v	v	v	v	v	v		v	v	v	v
	5	v	v	v	v	-	-	v	v	v		v	v	v	v
	7	-	-	v	v	v	v	v	v	v		v	v	v	v



ITEMS	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	2	V	V	V	V	V	V	V	V	V			V	V	V
	4	V	V	V	V	V	V	V	V	V			V	V	V
	5	V	V	V	V	-	-	V	V	V			V	V	V
	7	-	-	V	V	V	V	V	V	V			V	V	V
Frequency Stability	2				V			V				V		V	
	4				V			V				V		V	
	5				V	-	-	V				V		V	
	7	-	-		V			V				V		V	
E.R.P.& E.I.R.P.	2	V	V	V	V	V	V	V	V	V			V	V	V
	4	V	V	V	V	V	V	V	V	V			V	V	V
	5	V	V	V	V	-	-	V	V	V			V	V	V
	7	-	-	V	V	V	V	V	V	V			V	V	V
Radiated Spurious Emission	2	V	V	V	V	V	V	V		V			V	V	V
	4	V	V	V	V	V	V	V		V			V	V	V
	5	V	V	V	V	-	-	V		V			V	V	V
	7	-	-	V	V	V	V	V		V			V	V	V





2.1.5 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for filing to comply with the 47 CFR Part 2, 24(E), 27

2.1.6 SPECIAL ACCESSORIES


The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with eut intended for fcc grant together.

2.1.7 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.1.8 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

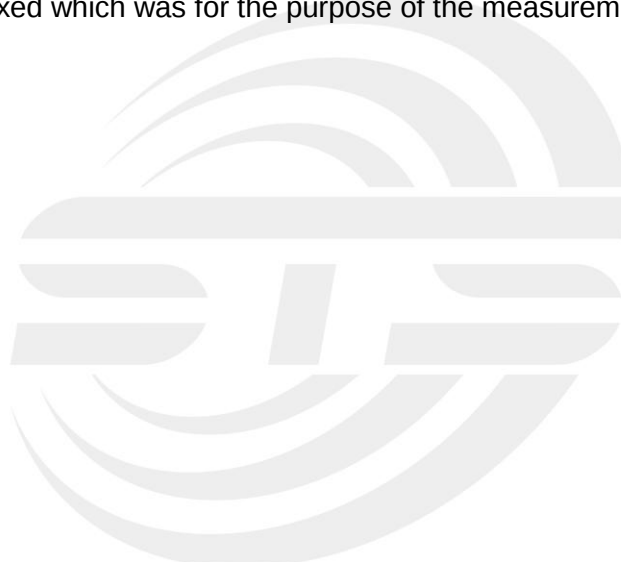



2.1.9 CONFIGURATION OF EUT SYSTEM

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

E-1
EUT

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	Serial No.	Note
E-1	Smartphone	ACCIONE P	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.1.10 MEASUREMENT INSTRUMENTS

The radiated emission testing was performed according to the procedures of ansi ANSI / TIA 603-D-2010 and FCC CFR 47 rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Spectrum Analyzer	Agilent	E4407B	MY50140340	2016.10.23	2017.10.22
Signal Analyzer	Agilent	N9020A	MY49100060	2016.10.23	2017.10.22
Test Receiver	R&S	ESCI	101427	2016.10.23	2017.10.22
Communication Tester	Agilent	8960	MY48360751	2016.10.23	2017.10.22
Wireless Communications Test Set	R&S	CMW 500	133884	2016.10.23	2017.10.22
Test Receiver	R&S	ESCI	102086	2016.10.23	2017.10.22
Bilog Antenna	TESEQ	CBL6111D	34678	2014.11.24	2017.11.23
Bilog Antenna (Calibration antenna)	TESEQ	CBL6111D	34678	2014.11.24	2017.11.23
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1343	2015.03.05	2018.03.04
Horn Antenna (Calibration antenna)	Schwarzbeck	BBHA 9120D	9120D-1343	2015.03.05	2018.03.04
MXA SIGNAL Analyzer	Agilent	N9020A	MY49100060	2016.10.23	2017.10.22
Double Ridge Horn Antenna	COM-POWER CORPORATION	AH-840	AHA-840	2016.03.06	2017.03.05
Low frequency cable	N/A	R01	N/A	NCR	NCR
High frequency cable	SCHWARZBECK	AK9515H	SN-96286/96287	NCR	NCR
Vector signal generator	Agilent	E8257D-521	MY45141029	2016.10.23	2017.10.22
Power amplifier	DESAY	ZHL-42W	9638	2016.10.23	2017.10.22
Band Reject filter(1920-1980MHz)	COM-MW	ZBSF-1920-1980	0092	2016.10.23	2017.10.22
Band Reject filter(880-915MHz)	COM-MW	ZBSF-C897.5-35	707	2016.10.23	2017.10.22
Band Reject filter(1710-1785MHz)	COM-MW	ZBSF-C1747.5-75	708	2016.10.23	2017.10.22
Band Reject filter(1850-1910MHz)	COM-MW	ZBSF-C1880-60	709	2016.10.23	2017.10.22
Band Reject filter(2500-2570MHz)	COM-MW	ZBSF-C2535-70	710	2016.10.23	2017.10.22
Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	2016.10.23	2017.10.22



2. 1.11 MEASUREMENT RESULTS EXPLANATION EXAMPLE

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF Cable Loss + Attenuator Factor.




3. CONDUCTED OUTPUT POWER

3.1 DESCRIPTION OF THE CONDUCTED OUTPUT POWER MEASUREMENT

3.1.1 MEASUREMENT METHOD

A System Simulator Was Used To Establish Communication With The EUT. Its Parameters Were Set To Force The EUT Transmitting At Maximum Output Power. The Measured Power In The Radio Frequency On The Transmitter Output Terminals Shall Be Reported. configuration follows KDB 971168 D01.

3.1.2 TEST SETUP

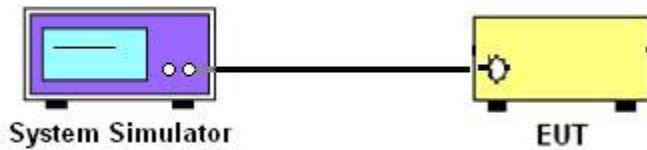

3.1.3 TEST PROCEDURES

1. The Transmitter Output Port Was Connected To The System Simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.1.4 TEST RESULTS

LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	21.37	21.32	21.36
1.4	1	2		21.09	21.09	21.09
1.4	1	5		20.87	20.87	20.89
1.4	3	0		20.60	20.60	20.61
1.4	3	1		20.39	20.36	20.34
1.4	3	2		20.19	20.13	20.08
1.4	6	0		19.98	19.88	19.85
1.4	1	0	16-QAM	21.12	21.04	21.12
1.4	1	2		20.85	20.82	20.86
1.4	1	5		20.55	20.53	20.66
1.4	3	0		20.29	20.28	20.36
1.4	3	1		20.06	19.99	20.07
1.4	3	2		19.81	19.76	19.77
1.4	6	0		19.51	19.49	19.56
3	1	0	QPSK	21.16	21.13	21.18
3	1	7		20.88	20.84	20.95
3	1	14		20.6	20.63	20.75
3	8	0		20.32	20.33	20.47
3	8	4		20.12	20.12	20.24
3	8	7		19.83	19.91	20.02
3	15	0		19.60	19.69	19.76
3	1	0	16-QAM	20.90	20.93	20.96
3	1	7		20.68	20.72	20.74
3	1	14		20.44	20.44	20.46
3	8	0		20.19	20.18	20.18
3	8	4		19.90	19.93	19.93
3	8	7		19.63	19.69	19.67
3	15	0		19.37	19.46	19.45



LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.29	21.26	21.31
5	1	12		21.02	21.05	21.04
5	1	24		20.78	20.83	20.76
5	12	0		20.54	20.55	20.46
5	12	6		20.27	20.31	20.21
5	12	11		20.04	20.01	19.95
5	25	0		19.81	19.74	19.67
5	1	0	16-QAM	21.04	21.01	21.06
5	1	12		20.80	20.73	20.80
5	1	24		20.52	20.46	20.55
5	12	0		20.29	20.23	20.32
5	12	6		19.99	19.99	20.07
5	12	11		19.74	19.70	19.83
5	25	0		19.44	19.48	19.60
10	1	0	QPSK	21.24	21.22	21.28
10	1	24		20.98	20.93	21.00
10	1	49		20.68	20.7	20.79
10	25	0		20.42	20.44	20.59
10	25	12		20.13	20.19	20.32
10	25	24		19.92	19.91	20.07
10	50	0		19.67	19.70	19.78
10	1	0	16-QAM	20.96	20.99	21.04
10	1	24		20.75	20.76	20.83
10	1	49		20.54	20.48	20.63
10	25	0		20.30	20.23	20.36
10	25	12		20.05	19.96	20.11
10	25	24		19.76	19.73	19.82
10	50	0		19.53	19.45	19.57



LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	21.38	21.41	21.46
15	1	37		21.09	21.17	21.22
15	1	74		20.83	20.87	20.93
15	36	0		20.60	20.66	20.65
15	36	18		20.32	20.40	20.38
15	36	39		20.10	20.14	20.12
15	75	0		19.82	19.86	19.83
15	1	0	16-QAM	21.12	21.14	21.26
15	1	38		20.86	20.91	21.00
15	1	75		20.58	20.70	20.70
15	36	0		20.35	20.48	20.44
15	36	18		20.08	20.28	20.24
15	36	39		19.8	20.05	19.99
15	75	0		19.54	19.83	19.73
20	1	0	QPSK	21.79	21.83	21.86
20	1	49		21.55	21.61	21.66
20	1	99		21.30	21.33	21.40
20	50	0		21.07	21.13	21.20
20	50	24		20.82	20.89	20.95
20	50	49		20.52	20.61	20.75
20	100	0		20.22	20.36	20.52
20	1	0	16-QAM	21.50	21.58	21.61
20	1	49		21.29	21.32	21.39
20	1	99		21.01	21.02	21.14
20	50	0		20.76	20.77	20.87
20	50	24		20.55	20.49	20.58
20	50	49		20.32	20.26	20.38
20	100	0		20.11	19.96	20.08



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	22.10	22.09	22.13
1.4	1	2		21.84	21.81	21.89
1.4	1	5		21.60	21.55	21.66
1.4	3	0		21.34	21.29	21.38
1.4	3	1		21.14	21.02	21.14
1.4	3	2		20.94	20.78	20.92
1.4	6	0		20.73	20.50	20.63
1.4	1	0	16-QAM	21.81	21.84	21.89
1.4	1	2		21.53	21.55	21.67
1.4	1	5		21.29	21.26	21.46
1.4	3	0		21.04	20.99	21.16
1.4	3	1		20.77	20.71	20.89
1.4	3	2		20.51	20.49	20.59
1.4	6	0		20.24	20.24	20.38
3	1	0	QPSK	21.89	21.91	21.86
3	1	7		21.60	21.66	21.64
3	1	14		21.32	21.40	21.42
3	8	0		21.08	21.19	21.15
3	8	4		20.87	20.91	20.88
3	8	7		20.66	20.66	20.61
3	15	0		20.37	20.42	20.40
3	1	0	16-QAM	21.63	21.71	21.63
3	1	7		21.33	21.47	21.37
3	1	14		21.06	21.26	21.16
3	8	0		20.84	21.02	20.89
3	8	4		20.61	20.74	20.66
3	8	7		20.40	20.47	20.42
3	15	0		20.15	20.25	20.22



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.08	22.03	22.12
5	1	12		21.87	21.81	21.84
5	1	24		21.64	21.53	21.56
5	12	0		21.40	21.32	21.30
5	12	6		21.17	21.05	21.10
5	12	11		20.96	20.81	20.86
5	25	0		20.75	20.59	20.64
5	1	0	16-QAM	21.81	21.76	21.90
5	1	12		21.58	21.53	21.60
5	1	24		21.36	21.29	21.36
5	12	0		21.08	21.01	21.14
5	12	6		20.79	20.80	20.85
5	12	11		20.57	20.50	20.61
5	25	0		20.32	20.23	20.32
10	1	0	QPSK	21.84	21.94	21.96
10	1	24		21.62	21.69	21.75
10	1	49		21.36	21.48	21.55
10	25	0		21.13	21.27	21.32
10	25	12		20.92	21.02	21.04
10	25	24		20.66	20.81	20.77
10	50	0		20.38	20.57	20.56
10	1	0	16-QAM	21.61	21.65	21.73
10	1	24		21.39	21.40	21.49
10	1	49		21.10	21.16	21.23
10	25	0		20.87	20.91	20.94
10	25	12		20.61	20.67	20.67
10	25	24		20.37	20.39	20.41
10	50	0		20.08	20.16	20.14



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	22.13	22.16	22.19
15	1	37		21.89	21.90	21.95
15	1	74		21.60	21.63	21.69
15	36	0		21.37	21.42	21.47
15	36	18		21.13	21.15	21.27
15	36	39		20.91	20.92	21.04
15	75	0		20.63	20.68	20.75
15	1	0	16-QAM	21.85	21.95	21.96
15	1	38		21.61	21.71	21.75
15	1	75		21.41	21.47	21.54
15	36	0		21.15	21.23	21.28
15	36	18		20.92	20.99	21.02
15	36	39		20.67	20.70	20.76
15	75	0		20.37	20.40	20.47
20	1	0	QPSK	22.67	22.73	22.68
20	1	49		22.45	22.50	22.44
20	1	99		22.24	22.30	22.22
20	50	0		22.04	22.09	21.96
20	50	24		21.78	21.85	21.72
20	50	49		21.53	21.64	21.44
20	100	0		21.29	21.36	21.18
20	1	0	16-QAM	22.38	22.43	22.41
20	1	49		22.10	22.22	22.18
20	1	99		21.88	22.01	21.92
20	50	0		21.66	21.79	21.72
20	50	24		21.40	21.50	21.44
20	50	49		21.16	21.26	21.21
20	100	0		20.94	21.01	20.94



LTE BAND 5

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	22.58	22.48	22.45
1.4	1	2		22.30	22.26	22.22
1.4	1	5		22.04	22.02	21.93
1.4	3	0		21.77	21.82	21.71
1.4	3	1		21.52	21.58	21.50
1.4	3	2		21.29	21.34	21.24
1.4	6	0		21.01	21.08	21.01
1.4	1	0	16-QAM	22.29	22.21	22.16
1.4	1	2		22.09	21.97	21.93
1.4	1	5		21.82	21.73	21.73
1.4	3	0		21.55	21.46	21.50
1.4	3	1		21.32	21.24	21.28
1.4	3	2		21.05	20.98	21.04
1.4	6	0		20.81	20.76	20.81
3	1	0	QPSK	22.34	22.31	22.29
3	1	7		22.06	22.06	22.02
3	1	14		21.79	21.85	21.78
3	8	0		21.52	21.61	21.57
3	8	4		21.22	21.32	21.33
3	8	7		20.98	21.09	21.09
3	15	0		20.70	20.84	20.84
3	1	0	16-QAM	22.13	22.09	22.06
3	1	7		21.87	21.85	21.78
3	1	14		21.59	21.61	21.54
3	8	0		21.35	21.36	21.30
3	8	4		21.06	21.09	21.02
3	8	7		20.83	20.84	20.78
3	15	0		20.60	20.60	20.56



LTE BAND 5

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.49	22.56	22.51
5	1	12		22.25	22.33	22.28
5	1	24		22.04	22.12	22.03
5	12	0		21.76	21.83	21.82
5	12	6		21.49	21.61	21.59
5	12	11		21.27	21.32	21.34
5	25	0		21.04	21.04	21.07
5	1	0	16-QAM	22.25	22.35	22.28
5	1	12		21.97	22.14	22.04
5	1	24		21.70	21.93	21.81
5	12	0		21.49	21.63	21.60
5	12	6		21.21	21.42	21.34
5	12	11		20.94	21.16	21.12
5	25	0		20.69	20.88	20.88
10	1	0	QPSK	22.86	22.94	22.97
10	1	24		22.58	22.66	22.68
10	1	49		22.37	22.39	22.39
10	25	0		22.08	22.13	22.18
10	25	12		21.84	21.84	21.92
10	25	24		21.58	21.55	21.67
10	50	0		21.32	21.30	21.46
10	1	0	16-QAM	22.59	22.64	22.72
10	1	24		22.38	22.41	22.50
10	1	49		22.18	22.16	22.21
10	25	0		21.88	21.88	21.91
10	25	12		21.65	21.62	21.61
10	25	24		21.44	21.35	21.40
10	50	0		21.16	21.05	21.11



LTE BAND 7

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.26	21.24	21.29
5	1	12		21.02	20.97	21.06
5	1	24		20.73	20.69	20.79
5	12	0		20.48	20.43	20.56
5	12	6		20.27	20.16	20.35
5	12	11		20.00	19.90	20.14
5	25	0		19.77	19.62	19.93
5	1	0	16-QAM	20.99	20.95	21.03
5	1	12		20.74	20.73	20.82
5	1	24		20.49	20.45	20.62
5	12	0		20.28	20.23	20.32
5	12	6		20.00	20.02	20.03
5	12	11		19.70	19.80	19.74
5	25	0		19.43	19.59	19.49
10	1	0	QPSK	21.12	21.16	21.15
10	1	24		20.85	20.90	20.90
10	1	49		20.55	20.62	20.64
10	25	0		20.31	20.36	20.41
10	25	12		20.02	20.14	20.14
10	25	24		19.82	19.87	19.87
10	50	0		19.57	19.58	19.65
10	1	0	16-QAM	20.90	20.90	20.92
10	1	24		20.62	20.66	20.62
10	1	49		20.42	20.39	20.39
10	25	0		20.14	20.13	20.11
10	25	12		19.86	19.93	19.87
10	25	24		19.58	19.68	19.59
10	50	0		19.36	19.42	19.38



LTE BAND 7

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	21.32	21.35	21.38
15	1	37		21.07	21.10	21.09
15	1	74		20.86	20.82	20.86
15	36	0		20.60	20.60	20.65
15	36	18		20.37	20.31	20.39
15	36	39		20.10	20.08	20.19
15	75	0		19.83	19.80	19.90
15	1	0	16-QAM	21.09	21.11	21.17
15	1	38		20.86	20.90	20.88
15	1	75		20.61	20.70	20.64
15	36	0		20.35	20.44	20.40
15	36	18		20.13	20.18	20.19
15	36	39		19.85	19.91	19.96
15	75	0		19.61	19.62	19.76
20	1	0	QPSK	21.76	21.81	21.86
20	1	49		21.51	21.60	21.63
20	1	99		21.24	21.32	21.41
20	50	0		20.97	21.11	21.16
20	50	24		20.75	20.88	20.90
20	50	49		20.47	20.67	20.61
20	100	0		20.23	20.44	20.33
20	1	0	16-QAM	21.47	21.60	21.63
20	1	49		21.19	21.36	21.41
20	1	99		20.91	21.14	21.13
20	50	0		20.70	20.94	20.86
20	50	24		20.42	20.70	20.63
20	50	49		20.15	20.44	20.36
20	100	0		19.93	20.18	20.12


4. PEAK-TO-AVERAGE RATIO

4.1 DESCRIPTION OF THE CONDUCTED OUTPUT POWER MEASUREMENT

4.1.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1 to measure the total peak power and record as P_{Pk}. Use one of the applicable procedures presented 4.2 to measure the total average power and record as P_{Avg}. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:
 $PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm)$.

4.1.2 TEST SETUP

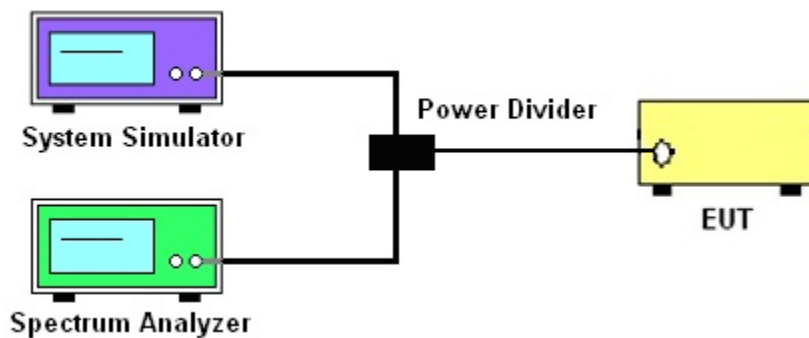

4.1.3 TEST PROCEDURES

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.2..
2. The EUT was connected to spectrum and system simulator via a power divider
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Set the test probe and measure the peak and average power of the spectrum analyzer
5. Record the deviation as Peak to Average Ratio.

	LTE					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	3MHz	6MHz	10MHz	20MHz	30MHz	40MHz
RBW	30kHz	30kHz	100kHz	100kHz	300kHz	300kHz
VBW	100kHz	100kHz	300kHz	300kHz	1000kHz	1000kHz
Detector	PK/AVG	PK/AVG	PK/AVG	PK/AVG	PK/AVG	PK/AVG
Trace	Max	Max	Max	Max	Max	Max
Sweep Count	Auto	Auto	Auto	Auto	Auto	Auto



4.1.4 TEST RESULTS

LTE BAND 2

LTE Band 2 PAR [dBm]											
BW [MHz]	RB Size	Modulation	Lowest			Middle			Highest		
			PEAK	AVG	P-A	PEAK	AVG	P-A	PEAK	AVG	P-A
20	1	QPSK	24.16	21.79	2.37	24.05	21.83	2.22	24.33	21.86	2.47
20	100		22.50	20.22	2.28	22.56	20.36	2.20	22.73	20.52	2.21
20	1	16-QAM	23.82	21.50	2.32	24.07	21.58	2.49	24.10	21.61	2.49
20	100		22.32	20.11	2.21	22.33	19.96	2.37	22.40	20.08	2.32
Limit			≤13dBm								

LTE BAND 4

LTE Band 4 PAR [dBm]											
BW [MHz]	RB Size	Modulation	Lowest			Middle			Highest		
			PEAK	AVG	P-A	PEAK	AVG	P-A	PEAK	AVG	P-A
20	1	QPSK	24.93	22.67	2.26	25.04	22.73	2.31	25.06	22.68	2.38
20	100		23.61	21.29	2.32	23.58	21.36	2.22	23.67	21.18	2.49
20	1	16-QAM	24.70	22.38	2.32	24.68	22.43	2.25	24.64	22.41	2.23
20	100		23.28	20.94	2.34	23.41	21.01	2.40	23.23	20.94	2.29
Limit			≤13dBm								

5. RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER

5.1 DESCRIPTION OF THE ERP/EIRP MEASUREMENT


5.1.1 MEASUREMENT METHOD

Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems. Mobile and portable (hand-held) stations operating are limited to average ERP, Equivalent isotropic radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas, Mobile and portable (hand-held) stations operating are limited to average EIRP.


5.1.2 TEST SETUP

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, $RSE = R_x(\text{dBuV}) + CL(\text{dB}) + SA(\text{dB}) + \text{Gain}(\text{dBi}) - 107(\text{dBuV to dBm})$ The SA is calibrated using following setup.

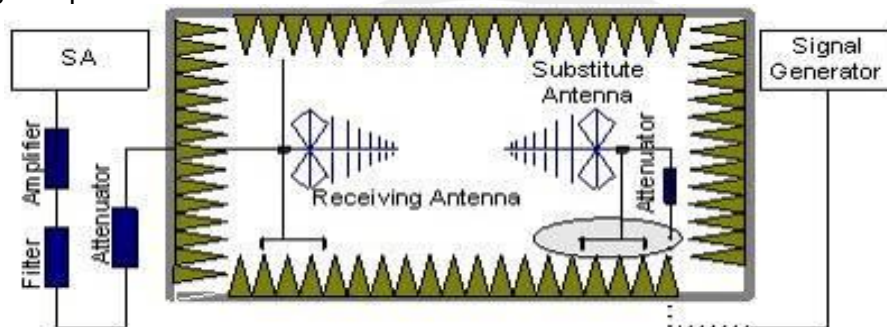

b) EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

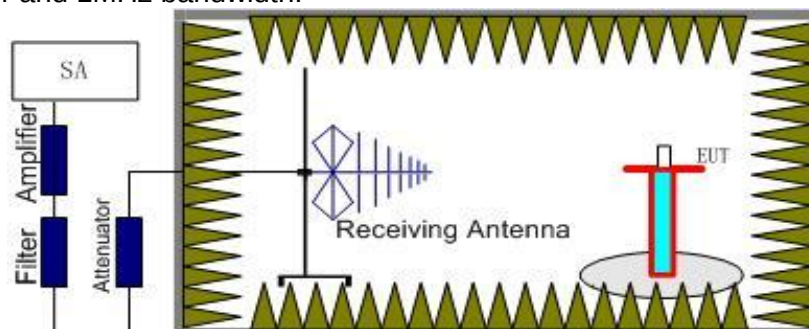

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: Pow-



er=PMea+ARpl

5.1.3 TEST PROCEDURES

1. The testing follows FCC KDB 971168 v02r02 Section 5.6. and ANSI / TIA-603-D-2010 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform 1.5 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with Peak detector.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.
5. RB Set greater than bandwidth, Vb Set spectrum analyzer Maximum support.



5.1.4 TEST RESULTS

LTE Band 2

Radiated Power (EIRP) for LTE Band 2 / 1.4M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	10.85	2.37	10.40	18.88	Horizontal	Pass
	1	0	Middle	12.80	2.39	10.42	20.83	Vertical	Pass
	1	0	Highest	11.01	2.40	10.44	19.05	Horizontal	Pass
	1	0	Lowest	12.76	2.37	10.40	20.79	Vertical	Pass
	1	0	Middle	10.86	2.39	10.42	18.89	Horizontal	Pass
	1	0	Highest	12.78	2.40	10.44	20.82	Vertical	Pass
16QAM	1	0	Lowest	11.08	2.37	10.40	19.11	Horizontal	Pass
	1	0	Middle	12.64	2.39	10.42	20.67	Vertical	Pass
	1	0	Highest	10.79	2.40	10.44	18.83	Horizontal	Pass
	1	0	Lowest	12.57	2.37	10.40	20.60	Vertical	Pass
	1	0	Middle	11.07	2.39	10.42	19.10	Horizontal	Pass
	1	0	Highest	12.70	2.40	10.44	20.74	Vertical	Pass
Limit	EIRP<2W=33dBm								



Radiated Power (EIRP) for LTE Band 2 / 3M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	10.80	2.37	10.40	18.83	Horizontal	Pass
	1	0	Middle	12.61	2.39	10.42	20.64	Vertical	Pass
	1	0	Highest	10.64	2.40	10.44	18.68	Horizontal	Pass
	1	0	Lowest	12.58	2.37	10.40	20.61	Vertical	Pass
	1	0	Middle	10.78	2.39	10.42	18.81	Horizontal	Pass
	1	0	Highest	12.61	2.40	10.44	20.65	Vertical	Pass
16QAM	1	0	Lowest	10.64	2.37	10.40	18.67	Horizontal	Pass
	1	0	Middle	12.60	2.39	10.42	20.63	Vertical	Pass
	1	0	Highest	10.87	2.40	10.44	18.91	Horizontal	Pass
	1	0	Lowest	12.44	2.37	10.40	20.47	Vertical	Pass
	1	0	Middle	10.69	2.39	10.42	18.72	Horizontal	Pass
	1	0	Highest	12.44	2.40	10.44	20.48	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 2 / 5M									
Modulation	RB		Channel	Result					Conclusion
				S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
	Size	Offset						Of Max. ERP	
QPSK	1	0	Lowest	11.03	2.37	10.40	19.06	Horizontal	Pass
	1	0	Middle	12.73	2.39	10.42	20.76	Vertical	Pass
	1	0	Highest	10.93	2.40	10.44	18.97	Horizontal	Pass
	1	0	Lowest	12.7	2.37	10.40	20.73	Vertical	Pass
	1	0	Middle	11.00	2.39	10.42	19.03	Horizontal	Pass
	1	0	Highest	12.74	2.40	10.44	20.78	Vertical	Pass
16QAM	1	0	Lowest	10.87	2.37	10.40	18.90	Horizontal	Pass
	1	0	Middle	12.60	2.39	10.42	20.63	Vertical	Pass
	1	0	Highest	10.72	2.40	10.44	18.76	Horizontal	Pass
	1	0	Lowest	12.48	2.37	10.40	20.51	Vertical	Pass
	1	0	Middle	10.89	2.39	10.42	18.92	Horizontal	Pass
	1	0	Highest	12.53	2.40	10.44	20.57	Vertical	Pass
Limit	EIRP<2W=33dBm								



Radiated Power (EIRP) for LTE Band 2 / 10M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	10.79	2.37	10.40	18.82	Horizontal	Pass
	1	0	Middle	12.68	2.39	10.42	20.71	Vertical	Pass
	1	0	Highest	10.78	2.40	10.44	18.82	Horizontal	Pass
	1	0	Lowest	12.66	2.37	10.40	20.69	Vertical	Pass
	1	0	Middle	10.73	2.39	10.42	18.76	Horizontal	Pass
	1	0	Highest	12.71	2.40	10.44	20.75	Vertical	Pass
16QAM	1	0	Lowest	10.73	2.37	10.40	18.76	Horizontal	Pass
	1	0	Middle	12.60	2.39	10.42	20.63	Vertical	Pass
	1	0	Highest	10.76	2.40	10.44	18.80	Horizontal	Pass
	1	0	Lowest	12.54	2.37	10.40	20.57	Vertical	Pass
	1	0	Middle	10.75	2.39	10.42	18.78	Horizontal	Pass
	1	0	Highest	12.46	2.40	10.44	20.50	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 2 / 15M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	10.98	2.37	10.40	19.01	Horizontal	Pass
	1	0	Middle	12.82	2.39	10.42	20.85	Vertical	Pass
	1	0	Highest	11.03	2.40	10.44	19.07	Horizontal	Pass
	1	0	Lowest	12.86	2.37	10.40	20.89	Vertical	Pass
	1	0	Middle	11.12	2.39	10.42	19.15	Horizontal	Pass
	1	0	Highest	12.87	2.40	10.44	20.91	Vertical	Pass
16QAM	1	0	Lowest	11.05	2.37	10.40	19.08	Horizontal	Pass
	1	0	Middle	12.65	2.39	10.42	20.68	Vertical	Pass
	1	0	Highest	10.92	2.40	10.44	18.96	Horizontal	Pass
	1	0	Lowest	12.70	2.37	10.40	20.73	Vertical	Pass
	1	0	Middle	10.88	2.39	10.42	18.91	Horizontal	Pass
	1	0	Highest	12.87	2.40	10.44	20.91	Vertical	Pass
Limit	EIRP<2W=33dBm								



Radiated Power (EIRP) for LTE Band 2 / 20M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	11.47	2.37	10.40	19.50	Horizontal	Pass
	1	0	Middle	13.23	2.39	10.42	21.26	Vertical	Pass
	1	0	Highest	11.43	2.40	10.44	19.47	Horizontal	Pass
	1	0	Lowest	13.28	2.37	10.40	21.31	Vertical	Pass
	1	0	Middle	11.43	2.39	10.42	19.46	Horizontal	Pass
	1	0	Highest	13.29	2.40	10.44	21.33	Vertical	Pass
16QAM	1	0	Lowest	11.29	2.37	10.40	19.32	Horizontal	Pass
	1	0	Middle	13.23	2.39	10.42	21.26	Vertical	Pass
	1	0	Highest	11.54	2.40	10.44	19.58	Horizontal	Pass
	1	0	Lowest	13.22	2.37	10.40	21.25	Vertical	Pass
	1	0	Middle	11.57	2.39	10.42	19.60	Horizontal	Pass
	1	0	Highest	13.22	2.40	10.44	21.26	Vertical	Pass
Limit	EIRP<2W=33dBm								

**LTE Band 4**

Radiated Power (EIRP) for LTE Band 4 / 1.4M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	11.93	2.35	10.13	19.71	Horizontal	Pass
	1	0	Middle	13.73	2.36	10.16	21.53	Vertical	Pass
	1	0	Highest	11.71	2.37	10.22	19.56	Horizontal	Pass
	1	0	Lowest	13.73	2.35	10.13	21.51	Vertical	Pass
	1	0	Middle	11.95	2.36	10.16	19.75	Horizontal	Pass
	1	0	Highest	13.70	2.37	10.22	21.55	Vertical	Pass
16QAM	1	0	Lowest	11.93	2.35	10.13	19.71	Horizontal	Pass
	1	0	Middle	13.57	2.36	10.16	21.37	Vertical	Pass
	1	0	Highest	11.83	2.37	10.22	19.68	Horizontal	Pass
	1	0	Lowest	13.66	2.35	10.13	21.44	Vertical	Pass
	1	0	Middle	11.87	2.36	10.16	19.67	Horizontal	Pass
	1	0	Highest	13.7	2.37	10.22	21.55	Vertical	Pass
Limit	EIRP<1W=30dBm								

Radiated Power (EIRP) for LTE Band 4 / 3M									
Modulation	RB		Channel	Result					Conclusion
				S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
	Size	Offset						Of Max. ERP	
QPSK	1	0	Lowest	11.84	2.35	10.13	19.62	Horizontal	Pass
	1	0	Middle	13.58	2.36	10.16	21.38	Vertical	Pass
	1	0	Highest	11.68	2.37	10.22	19.53	Horizontal	Pass
	1	0	Lowest	13.61	2.35	10.13	21.39	Vertical	Pass
	1	0	Middle	11.79	2.36	10.16	19.59	Horizontal	Pass
	1	0	Highest	13.50	2.37	10.22	21.35	Vertical	Pass
16QAM	1	0	Lowest	11.82	2.35	10.13	19.60	Horizontal	Pass
	1	0	Middle	13.42	2.36	10.16	21.22	Vertical	Pass
	1	0	Highest	11.67	2.37	10.22	19.52	Horizontal	Pass
	1	0	Lowest	13.50	2.35	10.13	21.28	Vertical	Pass
	1	0	Middle	11.63	2.36	10.16	19.43	Horizontal	Pass
	1	0	Highest	13.32	2.37	10.22	21.17	Vertical	Pass
Limit	EIRP<1W=30dBm								



Radiated Power (EIRP) for LTE Band 4 / 5M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	12.02	2.35	10.13	19.80	Horizontal	Pass
	1	0	Middle	13.74	2.36	10.16	21.54	Vertical	Pass
	1	0	Highest	11.68	2.37	10.22	19.53	Horizontal	Pass
	1	0	Lowest	13.71	2.35	10.13	21.49	Vertical	Pass
	1	0	Middle	11.91	2.36	10.16	19.71	Horizontal	Pass
	1	0	Highest	13.73	2.37	10.22	21.58	Vertical	Pass
16QAM	1	0	Lowest	11.93	2.35	10.13	19.71	Horizontal	Pass
	1	0	Middle	13.57	2.36	10.16	21.37	Vertical	Pass
	1	0	Highest	11.75	2.37	10.22	19.60	Horizontal	Pass
	1	0	Lowest	13.51	2.35	10.13	21.29	Vertical	Pass
	1	0	Middle	11.88	2.36	10.16	19.68	Horizontal	Pass
	1	0	Highest	13.60	2.37	10.22	21.45	Vertical	Pass
Limit	EIRP<1W=30dBm								

Radiated Power (EIRP) for LTE Band 4 / 10M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	11.72	2.35	10.13	19.50	Horizontal	Pass
	1	0	Middle	13.52	2.36	10.16	21.32	Vertical	Pass
	1	0	Highest	11.65	2.37	10.22	19.50	Horizontal	Pass
	1	0	Lowest	13.64	2.35	10.13	21.42	Vertical	Pass
	1	0	Middle	11.80	2.36	10.16	19.60	Horizontal	Pass
	1	0	Highest	13.58	2.37	10.22	21.43	Vertical	Pass
16QAM	1	0	Lowest	11.72	2.35	10.13	19.50	Horizontal	Pass
	1	0	Middle	13.33	2.36	10.16	21.13	Vertical	Pass
	1	0	Highest	11.80	2.37	10.22	19.65	Horizontal	Pass
	1	0	Lowest	13.40	2.35	10.13	21.18	Vertical	Pass
	1	0	Middle	11.92	2.36	10.16	19.72	Horizontal	Pass
	1	0	Highest	13.52	2.37	10.22	21.37	Vertical	Pass
Limit	EIRP<1W=30dBm								



Radiated Power (EIRP) for LTE Band 4 / 15M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	11.97	2.35	10.13	19.75	Horizontal	Pass
	1	0	Middle	13.79	2.36	10.16	21.59	Vertical	Pass
	1	0	Highest	11.80	2.37	10.22	19.65	Horizontal	Pass
	1	0	Lowest	13.83	2.35	10.13	21.61	Vertical	Pass
	1	0	Middle	11.91	2.36	10.16	19.71	Horizontal	Pass
	1	0	Highest	13.79	2.37	10.22	21.64	Vertical	Pass
16QAM	1	0	Lowest	11.85	2.35	10.13	19.63	Horizontal	Pass
	1	0	Middle	13.55	2.36	10.16	21.35	Vertical	Pass
	1	0	Highest	11.93	2.37	10.22	19.78	Horizontal	Pass
	1	0	Lowest	13.70	2.35	10.13	21.48	Vertical	Pass
	1	0	Middle	11.99	2.36	10.16	19.79	Horizontal	Pass
	1	0	Highest	13.54	2.37	10.22	21.39	Vertical	Pass
Limit	EIRP<1W=30dBm								

Radiated Power (EIRP) for LTE Band 4 / 20M									
Modulation	RB		Channel	Result					Conclusion
				S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
	Size	Offset						Of Max. ERP	
QPSK	1	0	Lowest	12.47	2.35	10.13	20.25	Horizontal	Pass
	1	0	Middle	14.35	2.36	10.16	22.15	Vertical	Pass
	1	0	Highest	12.62	2.37	10.22	20.47	Horizontal	Pass
	1	0	Lowest	14.43	2.35	10.13	22.21	Vertical	Pass
	1	0	Middle	12.40	2.36	10.16	20.20	Horizontal	Pass
	1	0	Highest	14.31	2.37	10.22	22.16	Vertical	Pass
16QAM	1	0	Lowest	12.39	2.35	10.13	20.17	Horizontal	Pass
	1	0	Middle	14.13	2.36	10.16	21.93	Vertical	Pass
	1	0	Highest	12.38	2.37	10.22	20.23	Horizontal	Pass
	1	0	Lowest	14.39	2.35	10.13	22.17	Vertical	Pass
	1	0	Middle	12.57	2.36	10.16	20.37	Horizontal	Pass
	1	0	Highest	14.19	2.37	10.22	22.04	Vertical	Pass
Limit	EIRP<1W=30dBm								



LTE Band 5

Radiated Power (EIRP) for LTE Band 5 / 1.4M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	14.88	1.27	6.70	20.31	Horizontal	Pass
	1	0	Middle	16.61	1.28	6.70	22.03	Vertical	Pass
	1	0	Highest	14.58	1.29	6.70	19.99	Horizontal	Pass
	1	0	Lowest	16.54	1.27	6.70	21.97	Vertical	Pass
	1	0	Middle	14.51	1.28	6.70	19.93	Horizontal	Pass
	1	0	Highest	16.52	1.29	6.70	21.93	Vertical	Pass
16QAM	1	0	Lowest	14.90	1.27	6.70	20.33	Horizontal	Pass
	1	0	Middle	16.34	1.28	6.70	21.76	Vertical	Pass
	1	0	Highest	14.70	1.29	6.70	20.11	Horizontal	Pass
	1	0	Lowest	16.29	1.27	6.70	21.72	Vertical	Pass
	1	0	Middle	14.73	1.28	6.70	20.15	Horizontal	Pass
	1	0	Highest	16.51	1.29	6.70	21.92	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 5 / 3M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	14.42	1.27	6.70	19.85	Horizontal	Pass
	1	0	Middle	16.39	1.28	6.70	21.81	Vertical	Pass
	1	0	Highest	14.50	1.29	6.70	19.91	Horizontal	Pass
	1	0	Lowest	16.35	1.27	6.70	21.78	Vertical	Pass
	1	0	Middle	14.52	1.28	6.70	19.94	Horizontal	Pass
	1	0	Highest	16.35	1.29	6.70	21.76	Vertical	Pass
16QAM	1	0	Lowest	14.58	1.27	6.70	20.01	Horizontal	Pass
	1	0	Middle	16.30	1.28	6.70	21.72	Vertical	Pass
	1	0	Highest	14.43	1.29	6.70	19.84	Horizontal	Pass
	1	0	Lowest	16.15	1.27	6.70	21.58	Vertical	Pass
	1	0	Middle	14.37	1.28	6.70	19.79	Horizontal	Pass
	1	0	Highest	16.23	1.29	6.70	21.64	Vertical	Pass
Limit	EIRP<2W=33dBm								



Radiated Power (EIRP) for LTE Band 5 / 5M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	14.59	1.27	6.70	20.02	Horizontal	Pass
	1	0	Middle	16.55	1.28	6.70	21.97	Vertical	Pass
	1	0	Highest	14.72	1.29	6.70	20.13	Horizontal	Pass
	1	0	Lowest	16.59	1.27	6.70	22.02	Vertical	Pass
	1	0	Middle	14.78	1.28	6.70	20.20	Horizontal	Pass
	1	0	Highest	16.58	1.29	6.70	21.99	Vertical	Pass
16QAM	1	0	Lowest	14.81	1.27	6.70	20.24	Horizontal	Pass
	1	0	Middle	16.54	1.28	6.70	21.96	Vertical	Pass
	1	0	Highest	14.83	1.29	6.70	20.24	Horizontal	Pass
	1	0	Lowest	16.57	1.27	6.70	22.00	Vertical	Pass
	1	0	Middle	14.58	1.28	6.70	20.00	Horizontal	Pass
	1	0	Highest	16.52	1.29	6.70	21.93	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 5 / 10M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	14.91	1.27	6.70	20.34	Horizontal	Pass
	1	0	Middle	16.92	1.28	6.70	22.34	Vertical	Pass
	1	0	Highest	15.26	1.29	6.70	20.67	Horizontal	Pass
	1	0	Lowest	16.99	1.27	6.70	22.42	Vertical	Pass
	1	0	Middle	15.08	1.28	6.70	20.50	Horizontal	Pass
	1	0	Highest	17.04	1.29	6.70	22.45	Vertical	Pass
16QAM	1	0	Lowest	15.07	1.27	6.70	20.50	Horizontal	Pass
	1	0	Middle	16.88	1.28	6.70	22.30	Vertical	Pass
	1	0	Highest	15.05	1.29	6.70	20.46	Horizontal	Pass
	1	0	Lowest	16.87	1.27	6.70	22.30	Vertical	Pass
	1	0	Middle	15.11	1.28	6.70	20.53	Horizontal	Pass
	1	0	Highest	17.01	1.29	6.70	22.42	Vertical	Pass
Limit	EIRP<2W=33dBm								



LTE Band 7

Radiated Power (EIRP) for LTE Band 7 / 5M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	10.92	2.56	10.60	18.96	Horizontal	Pass
	1	0	Middle	12.73	2.67	10.65	20.71	Vertical	Pass
	1	0	Highest	10.85	2.72	10.70	18.83	Horizontal	Pass
	1	0	Lowest	12.64	2.56	10.60	20.68	Vertical	Pass
	1	0	Middle	10.95	2.67	10.65	18.93	Horizontal	Pass
	1	0	Highest	12.75	2.72	10.70	20.73	Vertical	Pass
16QAM	1	0	Lowest	10.95	2.56	10.60	18.99	Horizontal	Pass
	1	0	Middle	12.64	2.67	10.65	20.62	Vertical	Pass
	1	0	Highest	10.95	2.72	10.70	18.93	Horizontal	Pass
	1	0	Lowest	12.56	2.56	10.60	20.60	Vertical	Pass
	1	0	Middle	11.02	2.67	10.65	19.00	Horizontal	Pass
	1	0	Highest	12.47	2.72	10.70	20.45	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 7 / 10M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	10.67	2.56	10.60	18.71	Horizontal	Pass
	1	0	Middle	12.6	2.67	10.65	20.58	Vertical	Pass
	1	0	Highest	10.9	2.72	10.70	18.88	Horizontal	Pass
	1	0	Lowest	12.58	2.56	10.60	20.62	Vertical	Pass
	1	0	Middle	10.91	2.67	10.65	18.89	Horizontal	Pass
	1	0	Highest	12.63	2.72	10.70	20.61	Vertical	Pass
16QAM	1	0	Lowest	10.78	2.56	10.60	18.82	Horizontal	Pass
	1	0	Middle	12.42	2.67	10.65	20.40	Vertical	Pass
	1	0	Highest	10.69	2.72	10.70	18.67	Horizontal	Pass
	1	0	Lowest	12.39	2.56	10.60	20.43	Vertical	Pass
	1	0	Middle	10.68	2.67	10.65	18.66	Horizontal	Pass
	1	0	Highest	12.54	2.72	10.70	20.52	Vertical	Pass
Limit	EIRP<2W=33dBm								



Radiated Power (EIRP) for LTE Band 7 / 15M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	10.82	2.56	10.60	18.86	Horizontal	Pass
	1	0	Middle	12.81	2.67	10.65	20.79	Vertical	Pass
	1	0	Highest	10.92	2.72	10.70	18.90	Horizontal	Pass
	1	0	Lowest	12.77	2.56	10.60	20.81	Vertical	Pass
	1	0	Middle	11.05	2.67	10.65	19.03	Horizontal	Pass
	1	0	Highest	12.85	2.72	10.70	20.83	Vertical	Pass
16QAM	1	0	Lowest	10.92	2.56	10.60	18.96	Horizontal	Pass
	1	0	Middle	12.56	2.67	10.65	20.54	Vertical	Pass
	1	0	Highest	11.10	2.72	10.70	19.08	Horizontal	Pass
	1	0	Lowest	12.73	2.56	10.60	20.77	Vertical	Pass
	1	0	Middle	10.89	2.67	10.65	18.87	Horizontal	Pass
	1	0	Highest	12.65	2.72	10.70	20.63	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 7 / 20M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	11.44	2.56	10.60	19.48	Horizontal	Pass
	1	0	Middle	13.26	2.67	10.65	21.24	Vertical	Pass
	1	0	Highest	11.32	2.72	10.70	19.30	Horizontal	Pass
	1	0	Lowest	13.25	2.56	10.60	21.29	Vertical	Pass
	1	0	Middle	11.54	2.67	10.65	19.52	Horizontal	Pass
	1	0	Highest	13.36	2.72	10.70	21.34	Vertical	Pass
16QAM	1	0	Lowest	11.49	2.56	10.60	19.53	Horizontal	Pass
	1	0	Middle	13.19	2.67	10.65	21.17	Vertical	Pass
	1	0	Highest	11.49	2.72	10.70	19.47	Horizontal	Pass
	1	0	Lowest	13.13	2.56	10.60	21.17	Vertical	Pass
	1	0	Middle	11.38	2.67	10.65	19.36	Horizontal	Pass
	1	0	Highest	13.24	2.72	10.70	21.22	Vertical	Pass
Limit	EIRP<2W=33dBm								

6. OCCUPIED BANDWIDTH


6.1 DESCRIPTION OF OCCUPIED BANDWIDTH MEASUREMENT

6.1.1 MEASUREMENT METHOD

1.The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

2.The 26 db emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 db below the maximum in-band spectral density of the modulated signal. spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

6.1.2 TEST SETUP

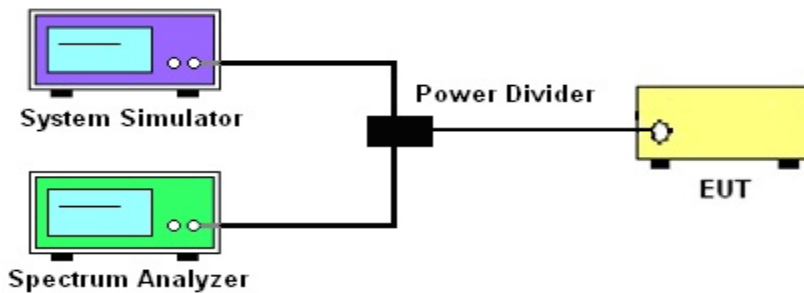

6.1.3 TEST PROCEDURES

1. The testing follows FCC KDB 971168 v02r02 Section 4.1.and 4.2
2. The EUT was connected to spectrum and system simulator via a power divider
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Set the test probe and measure the Occupied Bandwidth of the spectrum analyzer
5. Measure and record the Occupied Bandwidth from the Spectrum Analyzer.

	LTE					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	3MHz	6MHz	10MHz	20MHz	30MHz	40MHz
RBW	30kHz	30kHz	100kHz	100kHz	300kHz	300kHz
VBW	100kHz	100kHz	300kHz	300kHz	1000kHz	1000kHz
Detector	PK	PK	PK	PK	PK	PK
Trace	Max	Max	Max	Max	Max	Max
Sweep Count	Auto	Auto	Auto	Auto	Auto	Auto



6.1.4 MEASUREMENT RESULT

LTE BAND 2

LTE Band 2 Bandwidth [MHz]							
BW [MHz]	Mod	Lowest		Middle		Highest	
		26dB BW	99% BW	26dB BW	99% BW	26dB BW	99% BW
1.4	QPSK	1.295	1.0951	1.315	1.1000	1.283	1.1045
1.4	16-QAM	1.275	1.1053	1.293	1.0929	1.292	1.0964
3	QPSK	2.929	2.6920	2.938	2.6841	2.935	2.6854
3	16-QAM	2.923	2.6812	2.932	2.6790	2.930	2.6823
5	QPSK	5.032	4.5044	5.016	4.5227	5.015	4.5069
5	16-QAM	4.999	4.5056	5.025	4.5271	5.028	4.5228
10	QPSK	9.683	8.9290	9.756	8.9314	9.596	8.9095
10	16-QAM	9.658	8.9289	9.580	8.9323	9.671	8.9230
15	QPSK	14.630	13.416	14.720	13.452	14.760	13.427
15	16-QAM	14.710	13.455	14.640	13.437	14.660	13.427
20	QPSK	19.460	17.900	19.180	17.884	19.080	17.823
20	16-QAM	19.290	17.921	19.330	17.890	19.130	17.824

LTE BAND 4

LTE Band 4 Bandwidth [MHz]							
BW [MHz]	Mod	Lowest		Middle		Highest	
		26dB BW	99% BW	26dB BW	99% BW	26dB BW	99% BW
1.4	QPSK	1.301	1.0953	1.312	1.0986	1.288	1.1055
1.4	16-QAM	1.306	1.1006	1.280	1.0944	1.293	1.0960
3	QPSK	2.917	2.6889	2.933	2.6832	2.926	2.6836
3	16-QAM	2.920	2.6799	2.932	2.6774	2.930	2.6819
5	QPSK	4.993	4.5260	5.015	4.5039	5.013	4.4925
5	16-QAM	4.990	4.5056	5.013	4.5222	5.037	4.5210
10	QPSK	9.708	8.9343	9.676	8.9251	9.624	8.9276
10	16-QAM	9.603	8.9234	9.662	8.9286	9.624	8.9276
15	QPSK	14.670	13.443	14.660	13.417	14.600	13.414
15	16-QAM	14.680	13.454	14.690	13.463	14.700	13.446
20	QPSK	19.480	17.887	19.100	17.880	19.130	17.860
20	16-QAM	19.360	17.869	19.320	17.880	19.240	17.869

**LTE BAND 5**

LTE Band 7 Bandwidth [MHz]							
BW [MHz]	Mod	Lowest		Middle		Highest	
		26dB BW	99% BW	26dB BW	99% BW	26dB BW	99% BW
1.4	QPSK	1.301	1.0951	1.306	1.0966	1.284	1.1016
1.4	16-QAM	1.269	1.0917	1.289	1.0951	1.308	1.0992
3	QPSK	2.934	2.6813	2.917	2.6800	2.928	2.6891
3	16-QAM	2.924	2.6804	2.930	2.6799	2.914	2.6805
5	QPSK	4.997	4.5035	4.993	4.4934	5.028	4.5128
5	16-QAM	5.039	4.5174	4.997	4.4985	5.019	4.5330
10	QPSK	9.653	8.9304	9.700	8.9280	9.634	8.9260
10	16-QAM	9.632	8.9331	9.670	8.9136	9.634	8.9260

LTE BAND 7

LTE Band 7 Bandwidth [MHz]							
BW [MHz]	Mod	Lowest		Middle		Highest	
		26dB BW	99% BW	26dB BW	99% BW	26dB BW	99% BW
5	QPSK	5.022	4.5156	5.029	4.5193	5.017	4.5069
5	16-QAM	5.010	4.5192	5.021	4.5083	4.963	4.4987
10	QPSK	9.681	8.9324	9.723	8.9352	9.624	8.9116
10	16-QAM	9.596	8.9324	9.657	8.9226	9.633	8.9126
15	QPSK	14.760	13.455	14.770	13.464	14.530	13.366
15	16-QAM	14.670	13.465	14.620	13.446	14.610	13.424
20	QPSK	19.170	17.898	19.110	17.821	19.020	17.823
20	16-QAM	19.380	17.899	19.360	17.868	19.160	17.826

NOTE: Test chart See Appendix A



7. CONDUCTED BAND EDGE

7.1 DESCRIPTION OF CONDUCTED BAND EDGE MEASUREMENT

7.1.1 MEASUREMENT METHOD

1. §22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

2. §24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed

3. §27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


4. §27.53(m)(4)

For operations in the 2500 MHz ~ 2570 MHz band this section, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

5. §27.53 (g)

For operations in the 698 -746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

7.1.2 TEST SETUP

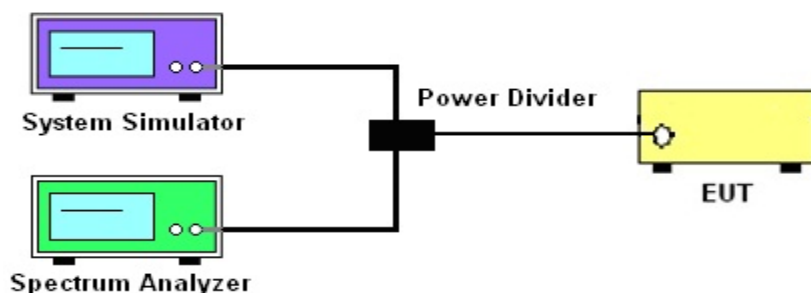

7.1.3 TEST PROCEDURES

1. The testing FCC KDB 971168 D01 v02r02 Section 6.0. and ANSI/TIA-603-D-2010-Section 2.2.13.2(d)
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Set spectrum analyzer with RMS/AVG detector
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.

Band 7:

$$\begin{aligned}
 &= P(W) - [55 + 10\log(P)] \text{ (dB)} \\
 &= [30 + 10\log(P)] \text{ (dBm)} - [55 + 10\log(P)] \text{ (dB)} \\
 &= -25 \text{ dBm.}
 \end{aligned}$$

	LTE					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	12MHz	13MHz	15MHz	20MHz	25MHz	30MHz
RBW	30kHz	30kHz	100kHz	100kHz	300kHz	300kHz
VBW	100kHz	100kHz	300kHz	300kHz	1000kHz	1000kHz
Detector	RMS	RMS	RMS	RMS	RMS	RMS
Trace	Max	Max	Max	Max	Max	Max
Sweep Count	Auto	Auto	Auto	Auto	Auto	Auto

7.1.4 MEASUREMENT RESULT

NOTE: Test chart See Appendix B

8. CONDUCTED SPURIOUS EMISSION

8.1 DESCRIPTION OF CONDUCTED SPURIOUS EMISSION MEASUREMENT

8.1.1 MEASUREMENT METHOD


The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

8.1.2 TEST SETUP

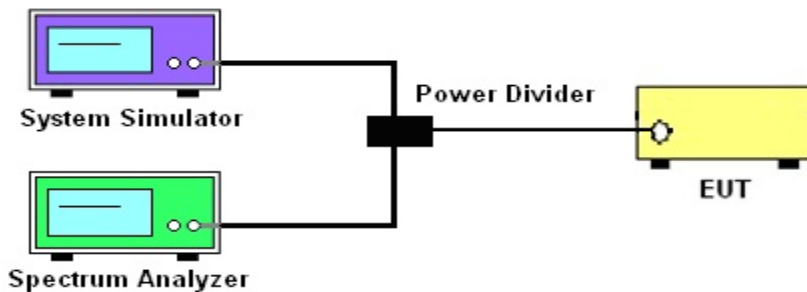

8.1.3 TEST PROCEDURES

1. The testing FCC KDB 971168 D01 v02r02 Section 6.0. and ANSI/TIA-603-D-2010-Section 2.2.13.2(d)
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement
4. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)} = [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$
For Band 7: $P(W) - [43 + 10\log(P)] \text{ (dB)} = -25\text{dBm}$

	LTE					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	Auto	Auto	Auto	Auto	Auto	Auto
RBW	1000kHz	1000kHz	1000kHz	1000kHz	1000kHz	1000kHz
VBW	3000kHz	3000kHz	3000kHz	3000kHz	3000kHz	3000kHz
Detector	PK	PK	PK	PK	PK	PK
Trace	Max	Max	Max	Max	Max	Max

8.1.4 TEST RESULTS

NOTE: Test chart See Appendix C

9. RADIATED SPURIOUS EMISSION

9.1 DESCRIPTION OF RADIATED SPURIOUS EMISSION


9.1.1 MEASUREMENT METHOD

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. For Band 7 The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB. For Band. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


5.1.2 Test Setup

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, $RSE = Rx \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + Gain \text{ (dBi)} - 107 \text{ (dBuV to dBm)}$ The SA is calibrated using following setup.

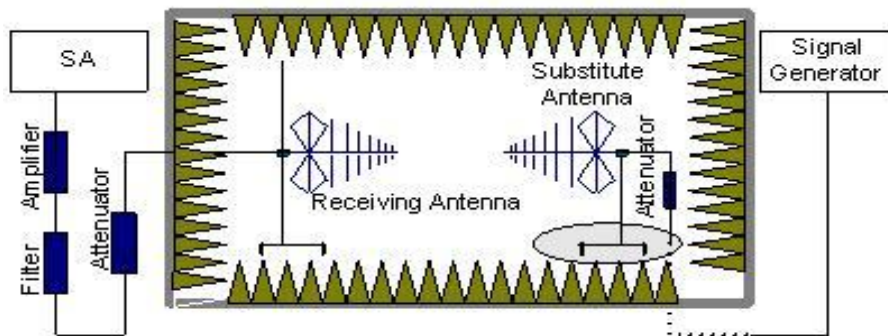

b) EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

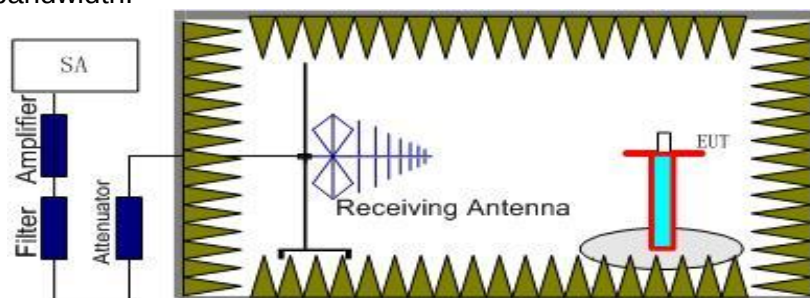

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the



cable loss and the air loss. The measurement results are obtained as described below: Power=PM_{ea}+AR_{pl}

9.1.3 TEST PROCEDURES

1. The testing FCC KDB 971168 D01 Section 5.8 and ANSI/TIA-603-D-2010-Section 2.2.12.2(b)
2. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm

For Band 7:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
= $[30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
= -25dBm

EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain

ERP (dBm) = EIRP - 2.15



9.1.4 TEST RESULTS

LTE BAND 2

LTE Band 2 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3701.24	-34.59	12.60	12.93	-34.92	-13.00	-21.92	H
5551.97	-34.82	13.10	17.11	-38.83	-13.00	-25.83	H
7402.50	-32.61	11.50	22.20	-43.31	-13.00	-30.31	H
3701.24	-34.87	12.60	12.93	-35.20	-13.00	-22.20	V
5551.97	-34.05	13.10	17.11	-38.06	-13.00	-25.06	V
7402.50	-33.12	11.50	22.20	-43.82	-13.00	-30.82	V
LTE Band 2 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3760.22	-34.19	12.60	12.93	-34.52	-13.00	-21.52	H
5640.18	-35.16	13.10	17.11	-39.17	-13.00	-26.17	H
7520.20	-32.26	11.50	22.20	-42.96	-13.00	-29.96	H
3760.22	-35.54	12.60	12.93	-35.87	-13.00	-22.87	V
5640.18	-33.79	13.10	17.11	-37.80	-13.00	-24.80	V
7520.20	-32.25	11.50	22.20	-42.95	-13.00	-29.95	V
LTE Band 2 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3818.17	-34.51	12.60	12.93	-34.84	-13.00	-21.84	H
5727.50	-34.32	13.10	17.11	-38.33	-13.00	-25.33	H
7637.07	-33.28	11.50	22.20	-43.98	-13.00	-30.98	H
3818.17	-34.53	12.60	12.93	-34.86	-13.00	-21.86	V
5727.50	-34.30	13.10	17.11	-38.31	-13.00	-25.31	V
7637.07	-32.89	11.50	22.20	-43.59	-13.00	-30.59	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line..

Test is divided into three directions, X/Y/Z. X pattern for the worst.



LTE BAND 2

LTE Band 2 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3703.47	-33.88	12.60	12.93	-34.21	-13.00	-21.21	H
5554.59	-35.09	13.10	17.11	-39.10	-13.00	-26.10	H
7406.86	-33.38	11.50	22.20	-44.08	-13.00	-31.08	H
3703.47	-35.94	12.60	12.93	-36.27	-13.00	-23.27	V
5554.59	-34.16	13.10	17.11	-38.17	-13.00	-25.17	V
7406.86	-32.03	11.50	22.20	-42.73	-13.00	-29.73	V
LTE Band 2 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3759.86	-34.12	12.60	12.93	-34.45	-13.00	-21.45	H
5639.89	-35.13	13.10	17.11	-39.14	-13.00	-26.14	H
7519.97	-32.31	11.50	22.20	-43.01	-13.00	-30.01	H
3759.86	-34.73	12.60	12.93	-35.06	-13.00	-22.06	V
5639.89	-34.07	13.10	17.11	-38.08	-13.00	-25.08	V
7519.97	-32.00	11.50	22.20	-42.70	-13.00	-29.70	V
LTE Band 2 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3816.52	-34.86	12.60	12.93	-35.19	-13.00	-22.19	H
5725.16	-35.17	13.10	17.11	-39.18	-13.00	-26.18	H
7633.31	-33.29	11.50	22.20	-43.99	-13.00	-30.99	H
3816.52	-35.56	12.60	12.93	-35.89	-13.00	-22.89	V
5725.16	-34.29	13.10	17.11	-38.30	-13.00	-25.30	V
7633.31	-32.35	11.50	22.20	-43.05	-13.00	-30.05	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.



LTE BAND 2

LTE Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3705.34	-33.93	12.60	12.93	-34.26	-13.00	-21.26	H
5557.80	-35.16	13.10	17.11	-39.17	-13.00	-26.17	H
7410.45	-32.74	11.50	22.20	-43.44	-13.00	-30.44	H
3705.34	-34.60	12.60	12.93	-34.93	-13.00	-21.93	V
5557.80	-34.53	13.10	17.11	-38.54	-13.00	-25.54	V
7410.45	-31.92	11.50	22.20	-42.62	-13.00	-29.62	V
LTE Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3760.25	-34.38	12.60	12.93	-34.71	-13.00	-21.71	H
5640.08	-35.08	13.10	17.11	-39.09	-13.00	-26.09	H
7520.12	-33.39	11.50	22.20	-44.09	-13.00	-31.09	H
3760.25	-35.91	12.60	12.93	-36.24	-13.00	-23.24	V
5640.08	-34.49	13.10	17.11	-38.50	-13.00	-25.50	V
7520.12	-33.07	11.50	22.20	-43.77	-13.00	-30.77	V
LTE Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3814.32	-34.48	12.60	12.93	-34.81	-13.00	-21.81	H
5721.26	-35.17	13.10	17.11	-39.18	-13.00	-26.18	H
7628.69	-33.26	11.50	22.20	-43.96	-13.00	-30.96	H
3814.32	-34.57	12.60	12.93	-34.90	-13.00	-21.90	V
5721.26	-34.17	13.10	17.11	-38.18	-13.00	-25.18	V
7628.69	-31.98	11.50	22.20	-42.68	-13.00	-29.68	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.



LTE BAND 2

LTE Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3710.56	-34.10	12.60	12.93	-34.43	-13.00	-21.43	H
5565.87	-34.84	13.10	17.11	-38.85	-13.00	-25.85	H
7421.15	-33.56	11.50	22.20	-44.26	-13.00	-31.26	H
3710.56	-35.24	12.60	12.93	-35.57	-13.00	-22.57	V
5565.87	-34.36	13.10	17.11	-38.37	-13.00	-25.37	V
7421.15	-32.73	11.50	22.20	-43.43	-13.00	-30.43	V
LTE Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3760.26	-33.81	12.60	12.93	-34.14	-13.00	-21.14	H
5639.81	-35.13	13.10	17.11	-39.14	-13.00	-26.14	H
7520.26	-33.39	11.50	22.20	-44.09	-13.00	-31.09	H
3760.26	-35.10	12.60	12.93	-35.43	-13.00	-22.43	V
5639.81	-35.16	13.10	17.11	-39.17	-13.00	-26.17	V
7520.26	-32.76	11.50	22.20	-43.46	-13.00	-30.46	V
LTE Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3809.16	-34.21	12.60	12.93	-34.54	-13.00	-21.54	H
5713.90	-34.72	13.10	17.11	-38.73	-13.00	-25.73	H
7618.08	-33.06	11.50	22.20	-43.76	-13.00	-30.76	H
3809.16	-35.96	12.60	12.93	-36.29	-13.00	-23.29	V
5713.90	-34.29	13.10	17.11	-38.30	-13.00	-25.30	V
7618.08	-32.46	11.50	22.20	-43.16	-13.00	-30.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.



LTE BAND 2

LTE Band 2 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3716.01	-33.77	12.60	12.93	-34.10	-13.00	-21.10	H
5574.15	-35.45	13.10	17.11	-39.46	-13.00	-26.46	H
7618.45	-33.38	11.50	22.20	-44.08	-13.00	-31.08	H
3716.01	-35.57	12.60	12.93	-35.90	-13.00	-22.90	V
5574.15	-34.47	13.10	17.11	-38.48	-13.00	-25.48	V
7618.45	-32.56	11.50	22.20	-43.26	-13.00	-30.26	V
LTE Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3760.18	-34.62	12.60	12.93	-34.95	-13.00	-21.95	H
5640.05	-34.95	13.10	17.11	-38.96	-13.00	-25.96	H
7520.28	-33.13	11.50	22.20	-43.83	-13.00	-30.83	H
3760.18	-34.79	12.60	12.93	-35.12	-13.00	-22.12	V
5640.05	-34.52	13.10	17.11	-38.53	-13.00	-25.53	V
7520.28	-32.60	11.50	22.20	-43.30	-13.00	-30.30	V
LTE Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3803.41	-34.52	12.60	12.93	-34.85	-13.00	-21.85	H
5705.45	-34.17	13.10	17.11	-38.18	-13.00	-25.18	H
7607.36	-32.22	11.50	22.20	-42.92	-13.00	-29.92	H
3803.41	-35.11	12.60	12.93	-35.44	-13.00	-22.44	V
5705.45	-33.93	13.10	17.11	-37.94	-13.00	-24.94	V
7607.36	-32.70	11.50	22.20	-43.40	-13.00	-30.40	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.



LTE BAND 2

LTE Band 2 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3721.17	-34.58	12.60	12.93	-34.91	-13.00	-21.91	H
5581.44	-34.77	13.10	17.11	-38.78	-13.00	-25.78	H
7441.88	-33.62	11.50	22.20	-44.32	-13.00	-31.32	H
3721.17	-35.15	12.60	12.93	-35.48	-13.00	-22.48	V
5581.44	-35.19	13.10	17.11	-39.20	-13.00	-26.20	V
7441.88	-31.98	11.50	22.20	-42.68	-13.00	-29.68	V
LTE Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3759.94	-33.94	12.60	12.93	-34.27	-13.00	-21.27	H
5640.16	-34.39	13.10	17.11	-38.40	-13.00	-25.40	H
7519.86	-32.87	11.50	22.20	-43.57	-13.00	-30.57	H
3759.94	-34.59	12.60	12.93	-34.92	-13.00	-21.92	V
5640.16	-34.84	13.10	17.11	-38.85	-13.00	-25.85	V
7519.86	-32.41	11.50	22.20	-43.11	-13.00	-30.11	V
LTE Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3798.45	-33.64	12.60	12.93	-33.97	-13.00	-20.97	H
5697.50	-34.76	13.10	17.11	-38.77	-13.00	-25.77	H
7596.88	-33.36	11.50	22.20	-44.06	-13.00	-31.06	H
3798.45	-35.64	12.60	12.93	-35.97	-13.00	-22.97	V
5697.50	-35.07	13.10	17.11	-39.08	-13.00	-26.08	V
7596.88	-33.06	11.50	22.20	-43.76	-13.00	-30.76	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

**LTE BAND 4**

LTE Band 4 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3422.48	-34.86	12.90	12.56	-34.52	-13.00	-21.52	H
5133.66	-34.21	13.10	12.46	-33.57	-13.00	-20.57	H
6844.93	-32.85	12.33	21.13	-41.65	-13.00	-28.65	H
3422.48	-35.17	12.90	12.76	-35.03	-13.00	-22.03	V
5133.66	-34.39	13.10	16.32	-37.61	-13.00	-24.61	V
6844.93	-32.34	12.33	21.13	-41.14	-13.00	-28.14	V
LTE Band 4 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3465.87	-34.41	12.80	12.56	-34.17	-13.00	-21.17	H
5198.91	-34.15	13.10	12.46	-33.51	-13.00	-20.51	H
6931.82	-33.36	12.33	21.13	-42.16	-13.00	-29.16	H
3465.87	-34.77	12.80	12.76	-34.73	-13.00	-21.73	V
5198.91	-34.69	13.10	16.32	-37.91	-13.00	-24.91	V
6931.82	-31.93	12.33	21.13	-40.73	-13.00	-27.73	V
LTE Band 4 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3508.64	-34.36	12.61	12.56	-34.31	-13.00	-21.31	H
5262.36	-35.05	13.12	12.46	-34.39	-13.00	-21.39	H
7016.22	-33.52	12.32	21.13	-42.33	-13.00	-29.33	H
3508.64	-35.01	12.61	12.76	-35.16	-13.00	-22.16	V
5262.36	-34.46	13.12	16.32	-37.66	-13.00	-24.66	V
7016.22	-32.55	12.32	21.13	-41.36	-13.00	-28.36	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

**LTE BAND 4**

LTE Band 4 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3424.23	-34.33	12.90	12.56	-33.99	-13.00	-20.99	H
5136.38	-35.36	13.10	12.46	-34.72	-13.00	-21.72	H
6848.58	-33.38	12.33	21.13	-42.18	-13.00	-29.18	H
3424.23	-34.81	12.90	12.76	-34.67	-13.00	-21.67	V
5136.38	-34.64	13.10	16.32	-37.86	-13.00	-24.86	V
6848.58	-32.16	12.33	21.13	-40.96	-13.00	-27.96	V
LTE Band 4 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3466.16	-34.66	12.80	12.56	-34.42	-13.00	-21.42	H
5198.91	-35.15	13.10	12.46	-34.51	-13.00	-21.51	H
6932.29	-33.16	12.33	21.13	-41.96	-13.00	-28.96	H
3466.16	-35.31	12.80	12.76	-35.27	-13.00	-22.27	V
5198.91	-34.25	13.10	16.32	-37.47	-13.00	-24.47	V
6932.29	-32.58	12.33	21.13	-41.38	-13.00	-28.38	V
LTE Band 4 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3506.35	-34.65	12.61	12.56	-34.60	-13.00	-21.60	H
5262.31	-35.11	13.12	12.46	-34.45	-13.00	-21.45	H
7013.22	-32.62	12.32	21.13	-41.43	-13.00	-28.43	H
3506.35	-34.78	12.61	12.76	-34.93	-13.00	-21.93	V
5262.31	-35.04	13.12	16.32	-38.24	-13.00	-25.24	V
7013.22	-32.66	12.32	21.13	-41.47	-13.00	-28.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

**LTE BAND 4**

LTE Band 4 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3426.21	-33.89	12.90	12.56	-33.55	-13.00	-20.55	H
5139.26	-34.52	13.10	12.46	-33.88	-13.00	-20.88	H
6852.92	-32.61	12.33	21.13	-41.41	-13.00	-28.41	H
3426.21	-36.00	12.90	12.76	-35.86	-13.00	-22.86	V
5139.26	-33.86	13.10	16.32	-37.08	-13.00	-24.08	V
6852.92	-31.97	12.33	21.13	-40.77	-13.00	-27.77	V
LTE Band 4 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3465.89	-33.76	12.80	12.56	-33.52	-13.00	-20.52	H
5199.28	-35.32	13.10	12.46	-34.68	-13.00	-21.68	H
6931.82	-33.12	12.33	21.13	-41.92	-13.00	-28.92	H
3465.89	-34.78	12.80	12.76	-34.74	-13.00	-21.74	V
5199.28	-34.64	13.10	16.32	-37.86	-13.00	-24.86	V
6931.82	-32.92	12.33	21.13	-41.72	-13.00	-28.72	V
LTE Band 4 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3506.60	-34.23	12.61	12.56	-34.18	-13.00	-21.18	H
5262.41	-34.11	13.12	12.46	-33.45	-13.00	-20.45	H
7013.30	-32.20	12.32	21.13	-41.01	-13.00	-28.01	H
3506.60	-35.61	12.61	12.76	-35.76	-13.00	-22.76	V
5262.41	-35.09	13.12	16.32	-38.29	-13.00	-25.29	V
7013.30	-31.98	12.32	21.13	-40.79	-13.00	-27.79	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

**LTE BAND 4**

LTE Band 4 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3436.24	-34.32	12.90	12.56	-33.98	-13.00	-20.98	H
5154.20	-34.45	13.10	12.46	-33.81	-13.00	-20.81	H
6872.79	-33.09	12.33	21.13	-41.89	-13.00	-28.89	H
3436.24	-35.24	12.90	12.76	-35.10	-13.00	-22.10	V
5154.20	-33.94	13.10	16.32	-37.16	-13.00	-24.16	V
6872.79	-32.77	12.33	21.13	-41.57	-13.00	-28.57	V
LTE Band 4 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3466.01	-34.51	12.80	12.56	-34.27	-13.00	-21.27	H
5199.24	-34.32	13.10	12.46	-33.68	-13.00	-20.68	H
6932.05	-33.65	12.33	21.13	-42.45	-13.00	-29.45	H
3466.01	-34.79	12.80	12.76	-34.75	-13.00	-21.75	V
5199.24	-33.93	13.10	16.32	-37.15	-13.00	-24.15	V
6932.05	-32.81	12.33	21.13	-41.61	-13.00	-28.61	V
LTE Band 4 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3494.58	-33.72	12.61	12.56	-33.67	-13.00	-20.67	H
5241.41	-34.89	13.12	12.46	-34.23	-13.00	-21.23	H
6988.27	-32.20	12.32	21.13	-41.01	-13.00	-28.01	H
3494.58	-35.31	12.61	12.76	-35.46	-13.00	-22.46	V
5241.41	-34.22	13.12	16.32	-37.42	-13.00	-24.42	V
6988.27	-32.06	12.32	21.13	-40.87	-13.00	-27.87	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

**LTE BAND 4**

LTE Band 4 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3436.07	-34.61	12.90	12.56	-34.27	-13.00	-21.27	H
5154.62	-34.33	13.10	12.46	-33.69	-13.00	-20.69	H
6872.69	-32.19	12.33	21.13	-40.99	-13.00	-27.99	H
3436.07	-34.63	12.90	12.76	-34.49	-13.00	-21.49	V
5154.62	-34.88	13.10	16.32	-38.10	-13.00	-25.10	V
6872.69	-32.89	12.33	21.13	-41.69	-13.00	-28.69	V
LTE Band 4 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3465.81	-34.90	12.80	12.56	-34.66	-13.00	-21.66	H
5199.18	-34.35	13.10	12.46	-33.71	-13.00	-20.71	H
6931.94	-32.98	12.33	21.13	-41.78	-13.00	-28.78	H
3465.81	-34.94	12.80	12.76	-34.90	-13.00	-21.90	V
5199.18	-35.17	13.10	16.32	-38.39	-13.00	-25.39	V
6931.94	-33.10	12.33	21.13	-41.90	-13.00	-28.90	V
LTE Band 4 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3494.77	-34.54	12.61	12.56	-34.49	-13.00	-21.49	H
5242.21	-34.30	13.12	12.46	-33.64	-13.00	-20.64	H
6989.44	-33.04	12.32	21.13	-41.85	-13.00	-28.85	H
3494.77	-35.47	12.61	12.76	-35.62	-13.00	-22.62	V
5242.21	-34.45	13.12	16.32	-37.65	-13.00	-24.65	V
6989.44	-31.83	12.32	21.13	-40.64	-13.00	-27.64	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

**LTE BAND 4**

LTE Band 4 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3440.25	-33.76	12.90	12.56	-33.42	-13.00	-20.42	H
5160.39	-34.09	13.10	12.46	-33.45	-13.00	-20.45	H
6880.56	-32.73	12.33	21.13	-41.53	-13.00	-28.53	H
3440.25	-34.64	12.90	12.76	-34.50	-13.00	-21.50	V
5160.39	-35.11	13.10	16.32	-38.33	-13.00	-25.33	V
6880.56	-31.87	12.33	21.13	-40.67	-13.00	-27.67	V
LTE Band 4 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3465.78	-34.53	12.80	12.56	-34.29	-13.00	-21.29	H
5199.06	-35.42	13.10	12.46	-34.78	-13.00	-21.78	H
6932.27	-32.20	12.33	21.13	-41.00	-13.00	-28.00	H
3465.78	-35.69	12.80	12.76	-35.65	-13.00	-22.65	V
5199.06	-34.81	13.10	16.32	-38.03	-13.00	-25.03	V
6932.27	-32.91	12.33	21.13	-41.71	-13.00	-28.71	V
LTE Band 4 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
3490.62	-34.18	12.61	12.56	-34.13	-13.00	-21.13	H
5235.11	-35.13	13.12	12.46	-34.47	-13.00	-21.47	H
6980.31	-32.58	12.32	21.13	-41.39	-13.00	-28.39	H
3490.62	-35.12	12.61	12.76	-35.27	-13.00	-22.27	V
5235.11	-34.83	13.12	16.32	-38.03	-13.00	-25.03	V
6980.31	-32.17	12.32	21.13	-40.98	-13.00	-27.98	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

**LTE BAND 5**

LTE Band 5 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1649.01	-34.31	9.56	9.72	-34.47	-13.00	-21.47	H
2473.77	-34.22	10.50	10.86	-34.58	-13.00	-21.58	H
3298.64	-32.96	12.78	11.57	-31.75	-13.00	-18.75	H
1649.01	-35.17	9.56	9.34	-34.95	-13.00	-21.95	V
2473.77	-34.70	10.50	10.42	-34.62	-13.00	-21.62	V
3298.64	-32.25	12.78	11.12	-30.59	-13.00	-17.59	V
LTE Band 5 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1672.70	-34.66	9.56	9.72	-34.82	-13.00	-21.82	H
2509.18	-34.63	10.50	10.86	-34.99	-13.00	-21.99	H
3345.82	-32.16	12.78	11.57	-30.95	-13.00	-17.95	H
1672.70	-34.93	9.56	9.34	-34.71	-13.00	-21.71	V
2509.18	-34.66	10.50	10.42	-34.58	-13.00	-21.58	V
3345.82	-32.69	12.78	11.12	-31.03	-13.00	-18.03	V
LTE Band 5 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1696.30	-34.27	9.56	9.72	-34.43	-13.00	-21.43	H
2544.79	-34.03	10.50	10.86	-34.39	-13.00	-21.39	H
3392.83	-32.34	12.78	11.57	-31.13	-13.00	-18.13	H
1696.30	-34.63	9.56	9.34	-34.41	-13.00	-21.41	V
2544.79	-33.86	10.50	10.42	-33.78	-13.00	-20.78	V
3392.83	-33.20	12.78	11.12	-31.54	-13.00	-18.54	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

**LTE BAND 5**

LTE Band 5 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1650.85	-33.66	9.56	9.72	-33.82	-13.00	-20.82	H
2476.17	-35.09	10.50	10.86	-35.45	-13.00	-22.45	H
3301.73	-32.69	12.78	11.57	-31.48	-13.00	-18.48	H
1650.85	-34.55	9.56	9.34	-34.33	-13.00	-21.33	V
2476.17	-34.94	10.50	10.42	-34.86	-13.00	-21.86	V
3301.73	-32.90	12.78	11.12	-31.24	-13.00	-18.24	V
LTE Band 5 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1672.75	-34.74	9.56	9.72	-34.90	-13.00	-21.90	H
2509.32	-34.41	10.50	10.86	-34.77	-13.00	-21.77	H
3345.61	-33.30	12.78	11.57	-32.09	-13.00	-19.09	H
1672.75	-35.81	9.56	9.34	-35.59	-13.00	-22.59	V
2509.32	-34.86	10.50	10.42	-34.78	-13.00	-21.78	V
3345.61	-32.49	12.78	11.12	-30.83	-13.00	-17.83	V
LTE Band 5 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1694.62	-33.96	9.56	9.72	-34.12	-13.00	-21.12	H
2542.50	-34.37	10.50	10.86	-34.73	-13.00	-21.73	H
3389.76	-32.76	12.78	11.57	-31.55	-13.00	-18.55	H
1694.62	-35.88	9.56	9.34	-35.66	-13.00	-22.66	V
2542.50	-34.48	10.50	10.42	-34.40	-13.00	-21.40	V
3389.76	-31.77	12.78	11.12	-30.11	-13.00	-17.11	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

**LTE BAND 5**

LTE Band 5 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1652.92	-33.77	9.56	9.72	-33.93	-13.00	-20.93	H
2479.32	-34.09	10.50	10.86	-34.45	-13.00	-21.45	H
3305.56	-32.52	12.78	11.57	-31.31	-13.00	-18.31	H
1652.92	-35.10	9.56	9.34	-34.88	-13.00	-21.88	V
2479.32	-34.71	10.50	10.42	-34.63	-13.00	-21.63	V
3305.56	-32.87	12.78	11.12	-31.21	-13.00	-18.21	V
LTE Band 5 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1672.60	-33.90	9.56	9.72	-34.06	-13.00	-21.06	H
2509.14	-34.21	10.50	10.86	-34.57	-13.00	-21.57	H
3345.90	-32.47	12.78	11.57	-31.26	-13.00	-18.26	H
1672.60	-35.66	9.56	9.34	-35.44	-13.00	-22.44	V
2509.14	-33.91	10.50	10.42	-33.83	-13.00	-20.83	V
3345.90	-32.27	12.78	11.12	-30.61	-13.00	-17.61	V
LTE Band 5 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1692.53	-33.66	9.56	9.72	-33.82	-13.00	-20.82	H
2539.02	-35.08	10.50	10.86	-35.44	-13.00	-22.44	H
3385.54	-32.53	12.78	11.57	-31.32	-13.00	-18.32	H
1692.53	-35.81	9.56	9.34	-35.59	-13.00	-22.59	V
2539.02	-34.64	10.50	10.42	-34.56	-13.00	-21.56	V
3385.54	-31.97	12.78	11.12	-30.31	-13.00	-17.31	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

**LTE BAND 5**

LTE Band 5 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1657.71	-34.87	9.56	9.72	-35.03	-13.00	-22.03	H
2486.92	-34.95	10.50	10.86	-35.31	-13.00	-22.31	H
3315.91	-32.31	12.78	11.57	-31.10	-13.00	-18.10	H
1657.71	-35.05	9.56	9.34	-34.83	-13.00	-21.83	V
2486.92	-34.94	10.50	10.42	-34.86	-13.00	-21.86	V
3315.91	-33.18	12.78	11.12	-31.52	-13.00	-18.52	V
LTE Band 5 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1672.86	-34.50	9.56	9.72	-34.66	-13.00	-21.66	H
2509.47	-34.66	10.50	10.86	-35.02	-13.00	-22.02	H
3345.95	-32.33	12.78	11.57	-31.12	-13.00	-18.12	H
1672.86	-34.93	9.56	9.34	-34.71	-13.00	-21.71	V
2509.47	-35.14	10.50	10.42	-35.06	-13.00	-22.06	V
3345.95	-32.51	12.78	11.12	-30.85	-13.00	-17.85	V
LTE Band 5 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
1687.86	-34.67	9.56	9.72	-34.83	-13.00	-21.83	H
2531.87	-34.26	10.50	10.86	-34.62	-13.00	-21.62	H
3375.83	-32.25	12.78	11.57	-31.04	-13.00	-18.04	H
1687.86	-34.55	9.56	9.34	-34.33	-13.00	-21.33	V
2531.87	-34.05	10.50	10.42	-33.97	-13.00	-20.97	V
3375.83	-31.84	12.78	11.12	-30.18	-13.00	-17.18	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

**LTE BAND 7**

LTE Band 7 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
5005.27	-34.74	12.66	12.54	-34.62	-25.00	-9.62	H
7507.85	-34.79	11.46	12.57	-35.90	-25.00	-10.90	H
10010.64	-32.87	12.79	21.23	-41.31	-25.00	-16.31	H
5005.27	-34.97	12.66	12.54	-34.85	-25.00	-9.85	V
7507.85	-34.86	11.46	12.57	-35.97	-25.00	-10.97	V
10010.64	-32.36	12.79	21.23	-40.80	-25.00	-15.80	V
LTE Band 7 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
5069.86	-34.09	12.72	12.55	-33.92	-25.00	-8.92	H
7605.18	-34.45	11.46	12.57	-35.56	-25.00	-10.56	H
10140.28	-32.88	12.09	21.25	-42.04	-25.00	-17.04	H
5069.86	-35.49	12.80	12.55	-35.24	-25.00	-10.24	V
7605.18	-34.35	13.10	12.57	-33.82	-25.00	-8.82	V
10140.28	-32.92	12.33	21.25	-41.84	-25.00	-16.84	V
LTE Band 7 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
5134.01	-34.48	12.76	12.57	-34.29	-25.00	-9.29	H
7701.18	-34.05	11.45	12.58	-35.18	-25.00	-10.18	H
10268.80	-32.91	12.28	21.27	-41.90	-25.00	-16.90	H
5134.01	-35.50	12.76	12.57	-35.31	-25.00	-10.31	V
7701.18	-34.18	11.45	12.58	-35.31	-25.00	-10.31	V
10268.80	-32.39	12.28	21.27	-41.38	-25.00	-16.38	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

**LTE BAND 7**

LTE Band 7 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
5010.33	-33.65	12.66	12.54	-33.53	-25.00	-8.53	H
7515.58	-34.32	11.46	12.57	-35.43	-25.00	-10.43	H
10021.00	-32.90	12.79	21.23	-41.34	-25.00	-16.34	H
5010.33	-35.24	12.66	12.54	-35.12	-25.00	-10.12	V
7515.58	-34.83	11.46	12.57	-35.94	-25.00	-10.94	V
10021.00	-32.64	12.79	21.23	-41.08	-25.00	-16.08	V
LTE Band 7 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
5070.15	-33.81	12.72	12.55	-33.64	-25.00	-8.64	H
7605.24	-34.33	11.46	12.57	-35.44	-25.00	-10.44	H
10140.10	-33.64	12.09	21.25	-42.80	-25.00	-17.80	H
5070.15	-34.87	12.80	12.55	-34.62	-25.00	-9.62	V
7605.24	-33.89	13.10	12.57	-33.36	-25.00	-8.36	V
10140.10	-32.38	12.33	21.25	-41.30	-25.00	-16.30	V
LTE Band 7 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
5129.27	-34.84	12.76	12.57	-34.65	-25.00	-9.65	H
7694.36	-34.45	11.45	12.58	-35.58	-25.00	-10.58	H
10259.02	-32.34	12.28	21.27	-41.33	-25.00	-16.33	H
5129.27	-35.06	12.76	12.57	-34.87	-25.00	-9.87	V
7694.36	-34.48	11.45	12.58	-35.61	-25.00	-10.61	V
10259.02	-32.40	12.28	21.27	-41.39	-25.00	-16.39	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

**LTE BAND 7**

LTE Band 7 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
5015.97	-34.52	12.66	12.54	-34.40	-25.00	-9.40	H
7524.31	-35.11	11.46	12.57	-36.22	-25.00	-11.22	H
10032.01	-32.52	12.79	21.23	-40.96	-25.00	-15.96	H
5015.97	-34.85	12.66	12.54	-34.73	-25.00	-9.73	V
7524.31	-33.89	11.46	12.57	-35.00	-25.00	-10.00	V
10032.01	-31.96	12.79	21.23	-40.40	-25.00	-15.40	V
LTE Band 7 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
5069.82	-34.31	12.72	12.55	-34.14	-25.00	-9.14	H
7605.16	-35.05	11.46	12.57	-36.16	-25.00	-11.16	H
10139.80	-32.92	12.09	21.25	-42.08	-25.00	-17.08	H
5069.82	-35.20	12.80	12.55	-34.95	-25.00	-9.95	V
7605.16	-34.85	13.10	12.57	-34.32	-25.00	-9.32	V
10139.80	-32.89	12.33	21.25	-41.81	-25.00	-16.81	V
LTE Band 7 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
5123.82	-33.66	12.76	12.57	-33.47	-25.00	-8.47	H
7524.23	-35.26	11.45	12.58	-36.39	-25.00	-11.39	H
10032.06	-32.89	12.28	21.27	-41.88	-25.00	-16.88	H
5123.82	-35.36	12.76	12.57	-35.17	-25.00	-10.17	V
7524.23	-34.46	11.45	12.58	-35.59	-25.00	-10.59	V
10032.06	-32.30	12.28	21.27	-41.29	-25.00	-16.29	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

**LTE BAND 7**

LTE Band 7 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
5021.15	-34.27	12.66	12.54	-34.15	-25.00	-9.15	H
7531.08	-34.46	11.46	12.57	-35.57	-25.00	-10.57	H
7523.94	-32.16	12.79	21.23	-40.60	-25.00	-15.60	H
5021.15	-35.32	12.66	12.54	-35.20	-25.00	-10.20	V
7531.08	-34.39	11.46	12.57	-35.50	-25.00	-10.50	V
7523.94	-33.17	12.79	21.23	-41.61	-25.00	-16.61	V
LTE Band 7 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
5070.02	-34.14	12.72	12.55	-33.97	-25.00	-8.97	H
7604.86	-34.25	11.46	12.57	-35.36	-25.00	-10.36	H
10139.97	-33.06	12.09	21.25	-42.22	-25.00	-17.22	H
5070.02	-34.87	12.80	12.55	-34.62	-25.00	-9.62	V
7604.86	-34.33	13.10	12.57	-33.80	-25.00	-8.80	V
10139.97	-33.01	12.33	21.25	-41.93	-25.00	-16.93	V
LTE Band 7 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dB)	Polarity
5119.00	-34.89	12.76	12.57	-34.70	-25.00	-9.70	H
7678.05	-35.25	11.45	12.58	-36.38	-25.00	-11.38	H
10237.93	-33.56	12.28	21.27	-42.55	-25.00	-17.55	H
5119.00	-34.68	12.76	12.57	-34.49	-25.00	-9.49	V
7678.05	-35.24	11.45	12.58	-36.37	-25.00	-11.37	V
10237.93	-32.43	12.28	21.27	-41.42	-25.00	-16.42	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.


10. FREQUENCY STABILITY

10.1 DESCRIPTION OF FREQUENCY STABILITY MEASUREMENT

10.1.1 MEASUREMENT METHOD

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

10.1.2 Test Setup

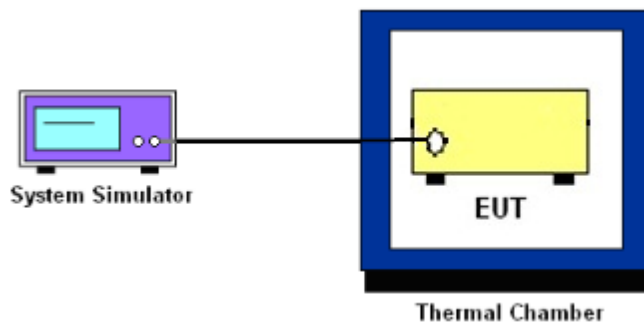

10.1.3 TEST PROCEDURES FOR TEMPERATURE VARIATION

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

10.1.4 TEST PROCEDURES FOR VOLTAGE VARIATION

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.



10.1.4 MEASUREMENT RESULT

LTE BAND 2

LTE Band 2 (QPSK) / 1880MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	16.32	0.009	2.5ppm	PASS
40		24.48	0.013		
30		26.22	0.014		
20		35.49	0.019		
10		14.19	0.008		
0		12.99	0.007		
-10		28.50	0.015		
-20		23.82	0.013		
-30		35.61	0.019		
25	Maximum Voltage	14.06	0.007		
25	BEP	29.16	0.016		

LTE Band 2 (QPSK) / 1880MHz / BW20M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	31.36	0.017	2.5ppm	PASS
40		24.04	0.013		
30		17.13	0.009		
20		20.90	0.011		
10		11.82	0.006		
0		29.99	0.016		
-10		11.62	0.006		
-20		20.67	0.011		
-30		16.44	0.009		
25	Maximum Voltage	22.86	0.012		
25	BEP	33.88	0.018		

Note: 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.45 V.; Maximum Voltage = 4.35 V

2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



LTE BAND 4

LTE Band 4 (QPSK) / 1733MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	16.07	0.009	2.5ppm	PASS
40		18.26	0.011		
30		32.07	0.019		
20		29.37	0.017		
10		36.18	0.021		
0		17.92	0.010		
-10		20.78	0.012		
-20		16.47	0.010		
-30		35.17	0.020		
25	Maximum Voltage	23.68	0.014		
25	BEP	12.40	0.007		

LTE Band 4 (QPSK) / 1733MHz / BW20M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	13.21	0.008	2.5ppm	PASS
40		33.20	0.019		
30		12.88	0.007		
20		17.79	0.010		
10		13.34	0.008		
0		29.15	0.017		
-10		14.54	0.008		
-20		29.98	0.017		
-30		29.67	0.017		
25	Maximum Voltage	14.60	0.008		
25	BEP	13.24	0.008		

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.45 V.; Maximum Voltage = 4.35 V
2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



LTE BAND 5

LTE Band 5 (QPSK) / 710MHz / BW5M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	19.30	0.027	2.5ppm	PASS
40		29.01	0.041		
30		30.69	0.043		
20		21.04	0.030		
10		21.31	0.030		
0		12.27	0.017		
-10		32.13	0.005		
-20		12.01	0.017		
-30		24.92	0.035		
25	Maximum Voltage	21.38	0.030		
25	BEP	22.21	0.031		

LTE Band 5 (QPSK) 710MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	29.45	0.041	2.5ppm	PASS
40		33.33	0.047		
30		29.18	0.041		
20		35.78	0.050		
10		11.66	0.016		
0		17.75	0.025		
-10		26.43	0.004		
-20		36.47	0.051		
-30		27.54	0.039		
25	Maximum Voltage	26.65	0.038		
25	BEP	20.16	0.028		

Note: 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.45 V.; Maximum Voltage = 4.35 V

2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



LTE BAND 7

LTE Band 7 (QPSK) / 2435MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	14.77	0.006	2.5ppm	PASS
40		14.06	0.006		
30		34.03	0.013		
20		24.96	0.010		
10		12.12	0.005		
0		17.39	0.007		
-10		30.73	0.012		
-20		19.80	0.008		
-30		19.04	0.008		
25	Maximum Voltage	29.81	0.012		
25	BEP	33.98	0.013		

LTE Band 7 (QPSK) / 2435MHz / BW20M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	25.38	0.010	2.5ppm	PASS
40		31.60	0.012		
30		34.08	0.013		
20		26.80	0.011		
10		12.12	0.005		
0		16.90	0.007		
-10		27.00	0.011		
-20		14.68	0.006		
-30		12.84	0.005		
25	Maximum Voltage	23.29	0.009		
25	BEP	31.72	0.013		

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.45 V.; Maximum Voltage = 4.35 V
2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

PHOTOS OF TEST SETUP

RADIATED SPURIOUS EMISSION



※※※※※END OF THE REPORT※※※※※