



FCC TEST REPORT

Report No: STS1708237W02

Issued for

UNITEIC COMPANY LIMITED

Gaolong Industrial, Huanzhuli Village, Changping Town
Dongguan Guangdong, China.

| | |
|-------------------------|----------------------|
| Product Name: | stealth remote |
| Brand Name: | N/A |
| Test Model Name: | PT-STEALTH HD REMOTE |
| Series Model: | N/A |
| FCC ID: | 2ANI8PT-STEALTH |
| Test Standard: | FCC Part 15.249 |

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS. All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.
1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com



**TEST RESULT CERTIFICATION**

Applicant's name : UNITEIC COMPANY LIMITED

Address : Gaolong Industrial, Huanzhuli Village, Changping Town Dongguan Guangdong, China.

Manufacture's Name : UNITEIC COMPANY LIMITED

Address : Gaolong Industrial, Huanzhuli Village, Changping Town Dongguan Guangdong, China.

Product description

Product name.....: stealth remote

Trade mark: N/A

Test model name: PT-STEALTH HD REMOTE

Series model: N/A

Standards : FCC Part15.249

Test procedure : ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test :

Date of performance of tests : 25 Aug. 2017 ~28 Aug. 2017

Date of Issue : 29 Aug. 2017

Test Result : **Pass**

Testing Engineer :

(Sean she)

Technical Manager :

(Hakim.hou)

Authorized Signatory :

(Vita Li)





| | Table of Contents | Page |
|---|-------------------|-----------|
| 1. SUMMARY OF TEST RESULTS | | 5 |
| 1.1 TEST FACTORY | | 6 |
| 1.2 MEASUREMENT UNCERTAINTY | | 6 |
| 2. GENERAL INFORMATION | | 7 |
| 2.1 GENERAL DESCRIPTION OF EUT | | 7 |
| 2.2 DESCRIPTION OF TEST MODES | | 8 |
| 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | | 8 |
| 2.4 DESCRIPTION OF SUPPORT UNITS | | 9 |
| 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS | | 10 |
| 3. EMC EMISSION TEST | | 11 |
| 3.1 CONDUCTED EMISSION MEASUREMENT | | 11 |
| 3.2 RADIATED EMISSION MEASUREMENT | | 14 |
| 4. CONDUCTED SPURIOUS & BAND EDGE EMISSION | | 23 |
| 4.1 REQUIREMENT | | 23 |
| 4.2 TEST PROCEDURE | | 23 |
| 4.3 TEST SETUP | | 23 |
| 4.4 EUT OPERATION CONDITIONS | | 23 |
| 4.5 TEST RESULTS | | 24 |
| 5. BANDWIDTH TEST | | 25 |
| 5.1 TEST PROCEDURE | | 25 |
| 5.2 TEST SETUP | | 25 |
| 5.3 EUT OPERATION CONDITIONS | | 25 |
| 5.4 TEST RESULTS | | 26 |
| 6. ANTENNA REQUIREMENT | | 27 |
| 6.1 STANDARD REQUIREMENT | | 27 |
| 6.2 EUT ANTENNA | | 27 |
| APPENDIX- PHOTOS OF TEST SETUP | | 28 |

**Revision History**

| Rev. | Issue Date | Report NO. | Effect Page | Contents |
|------|--------------|---------------|-------------|---------------|
| 00 | 29 Aug. 2017 | STS1708237W02 | ALL | Initial Issue |
| | | | | |





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part 15.249 , Subpart C | | | |
|------------------------------------|-------------------------------|----------|--------|
| Standard Section | Test Item | Judgment | Remark |
| 15.207 | Conducted Emission | N/A | |
| 15.203 | Antenna Requirement | Pass | |
| 15.249 | Radiated Spurious Emission | Pass | |
| | conduction Spurious Emission | N/A | |
| 15.205 | Radiated Band Edge Emission | N/A | |
| | conduction Band Edge Emission | N/A | |
| 15.249 | 20dB Bandwidth | Pass | |

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

(2)All tests are according to ANSI C63.10-2013



1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

CNAS Registration No.: L7649;

FCC Registration No.: 625569; IC Registration No.: 12108A

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2** · providing a level of confidence of approximately **95 %** ·

| No. | Item | Uncertainty |
|-----|---|-------------|
| 1 | Conducted Emission (9KHz-150KHz) | ±2.88dB |
| 2 | Conducted Emission (150KHz-30MHz) | ±2.67dB |
| 3 | RF power,conducted | ±0.71dB |
| 4 | Spurious emissions,conducted | ±0.63dB |
| 5 | All emissions,radiated (9KHz-30MHz) | ±3.02dB |
| 6 | All emissions,radiated (30MHz-200MHz) | ±3.80dB |
| 7 | All emissions,radiated (200MHz-1000MHz) | ±3.97dB |



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

| | | | | | | | | | |
|----------------------|--|----------------------|---------|------------------|-----|----------------------|-----------------|---------------------|-------|
| Equipment | stealth remote | | | | | | | | |
| Trade Name | N/A | | | | | | | | |
| Model Name | PT-STEALTH HD REMOTE | | | | | | | | |
| Series Model | N/A | | | | | | | | |
| Model Difference | N/A | | | | | | | | |
| Product Description | <p>The EUT is a stealth remote</p> <table border="1"><tr><td>Operation Frequency:</td><td>2450MHz</td></tr><tr><td>Modulation Type:</td><td>FSK</td></tr><tr><td>Antenna Designation:</td><td>Ceramic Antenna</td></tr><tr><td>Antenna Gain(Peak):</td><td>1 dBi</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p> | Operation Frequency: | 2450MHz | Modulation Type: | FSK | Antenna Designation: | Ceramic Antenna | Antenna Gain(Peak): | 1 dBi |
| Operation Frequency: | 2450MHz | | | | | | | | |
| Modulation Type: | FSK | | | | | | | | |
| Antenna Designation: | Ceramic Antenna | | | | | | | | |
| Antenna Gain(Peak): | 1 dBi | | | | | | | | |
| Channel List | Please refer to the Note 2. | | | | | | | | |
| Power Supply | DC 3V | | | | | | | | |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Table for Filed Antenna

| Ant | Brand | Model Name | Antenna Type | Connector | Gain (dBi) | NOTE |
|-----|-------|----------------------|--------------|-----------|------------|---------|
| 1 | NA | PT-STEALTH HD REMOTE | Ceramic | NA | 1 | Antenna |

The EUT antenna is PCB Antenna. No antenna other than that furnished by the responsible party shall be used with the device.

2.2 DESCRIPTION OF TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively..

| Pretest Mode | Description | Data/Modulation |
|--------------|-------------|-----------------|
| Mode 1 | TX CH01 | 1 MHz/FSK |


Note:

(1) All above mode have been measurement, only worst data was reported.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Radiated Spurious Emission Test



NOTE: New battery is used during all test



2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | Serial No. | Note |
|------|----------------|-----------|-------------------------|------------|------|
| E-1 | stealth remote | N/A | PT-STEALTH HD REMOTE | N/A | EUT |
| | | | | | |
| | | | | | |
| | | | | | |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
| N/A | N/A | N/A | N/A | N/A |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in «Length» column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

| Kind of Equipment | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until |
|---|--------------|-------------------|---------------|------------------|------------------|
| EMI Test Receiver | R&S | ESW | 101535 | 2017/06/01 | 2018/05/31 |
| Bilog Antenna | TESEQ | CBL6111D | 34678 | 2017/03/24 | 2018/03/23 |
| Horn Antenna | Schwarzbeck | BBHA 9120D (1201) | 9120D-1343 | 2017/03/06 | 2018/03/05 |
| Operational Manual Passive Loop (9K--30MHz) | ETS | 6512 | 00165355 | 2017/03/06 | 2018/03/05 |
| Pre-mplifier (0.1M-3GHz) | EM | EM330 | 60538 | 2017/03/12 | 2018/03/11 |
| PreAmplifier | Agilent | 8449B | 60538 | 2016/10/23 | 2017/10/22 |
| USB RF power sensor | DARE | RPR3006W | 15I00041SNO03 | 2016/10/23 | 2017/10/22 |
| Semi-anechoic chamber | Changling | 966 | N/A | 2016/10/23 | 2017/10/22 |

Conduction Test equipment

| Kind of Equipment | Manufacturer | Type No. | Serial No. | Last calibration | Calibrated until |
|------------------------|--------------|----------|------------|------------------|------------------|
| Test Receiver | R&S | ESCI | 101427 | 2016/10/23 | 2017/10/22 |
| LISN | R&S | ENV216 | 101242 | 2016/10/26 | 2017/10/25 |
| conduction Cable | EM | C01 | N/A | 2017/03/12 | 2018/03/11 |
| Temperature & Humitidy | Mieo | HH660 | N/A | 2016/10/23 | 2017/10/22 |



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 limit in the table below has to be followed.

| FREQUENCY (MHz) | Class B (dBuV) | | Standard |
|-----------------|----------------|-----------|----------|
| | Quasi-peak | Average | |
| 0.15 -0.5 | 66 - 56 * | 56 - 46 * | CISPR |
| 0.50 -5.0 | 56.00 | 46.00 | CISPR |
| 5.0 -30.0 | 60.00 | 50.00 | CISPR |

| | | | |
|-----------|-----------|-----------|-----|
| 0.15 -0.5 | 66 - 56 * | 56 - 46 * | FCC |
| 0.50 -5.0 | 56.00 | 46.00 | FCC |
| 5.0 -30.0 | 60.00 | 50.00 | FCC |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

| Receiver Parameters | Setting |
|---------------------|----------|
| Attenuation | 10 dB |
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 kHz |

3.1.2 TEST PROCEDURE

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

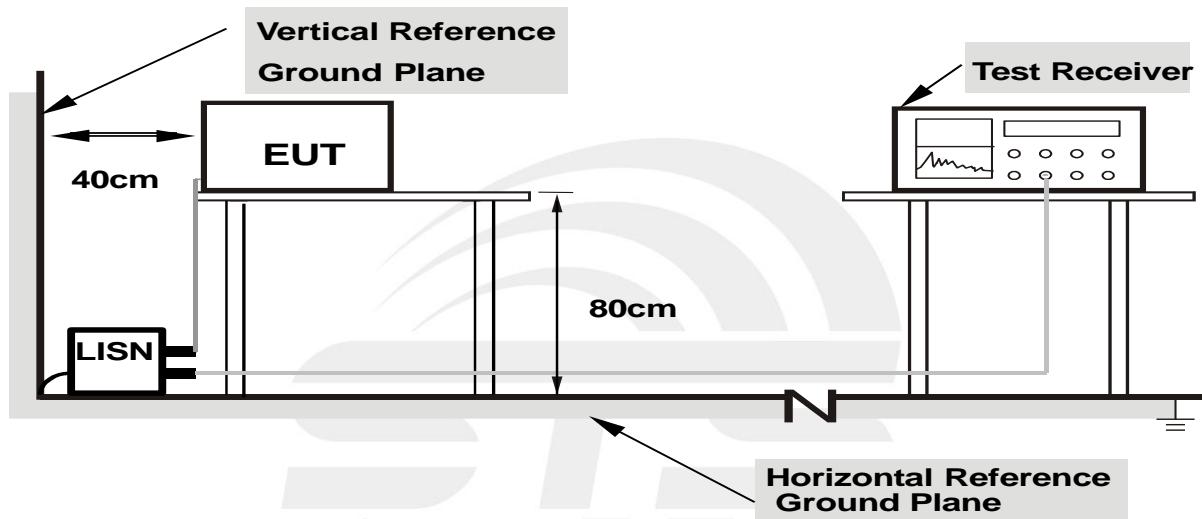

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.5 TEST RESULTS

| | | | |
|---------------|---------|--------------------|-----|
| Temperature: | 26 °C | Relative Humidity: | 54% |
| Pressure: | 1010hPa | Phase: | L/N |
| Test Voltage: | DC 3V | Test Mode: | N/A |

Note: denotes test is not applicable in this test report.





3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 and the Part 15.209(a) limit in the table below has to be followed.

Standard FCC 15.209

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|----------------------|---|----------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| 960~1000 | 500 | 3 |
| Above 1000 | Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average) | 3 |

Standard FCC 15.249

| Frequency of Emission (MHz) | Field Strength of fundamental (millivolts /meter) | Field Strength of Harmonics (microvolts/meter) |
|--------------------------------|---|--|
| 900~928 | 50 | 500 |
| 2400~2483.5 | 50 | 500 |
| 5725~5875 | 50 | 500 |
| 24000~242500 | 250 | 2500 |

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

| Spectrum Parameter | Setting |
|----------------------------------|-----------------------|
| Detector | Peak/AV |
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB (emission in restricted band) | >20BW |
| VB (emission in restricted band) | =3xRB |



| Receiver Parameter | Setting |
|------------------------|--------------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~90kHz / RB 200Hz for PK & AV |
| | 90kHz~110kHz / RB 200Hz for QP |
| | 110kHz~490kHz / RB 200Hz for PK & AV |
| | 490kHz~30MHz / RB 9kHz for QP |
| | 30MHz~1000MHz / RB 120kHz for QP |

3.2.2 TEST PROCEDURE


- a. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- b. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- c. The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform (Below 1GHz)
- f. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.
Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

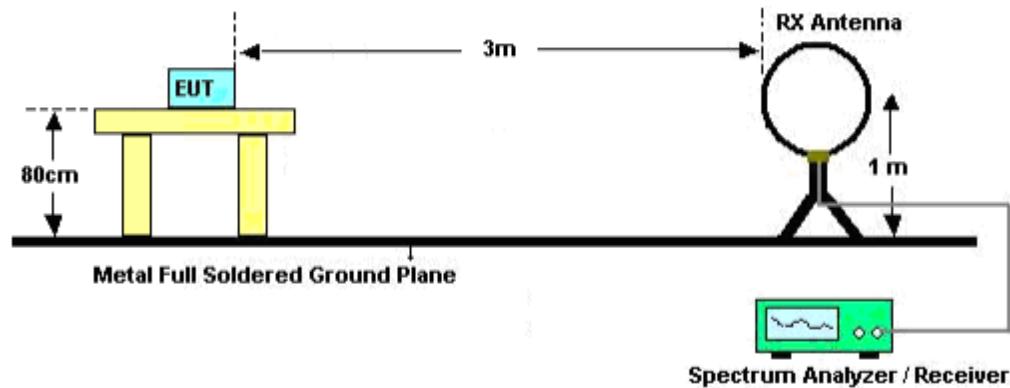

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

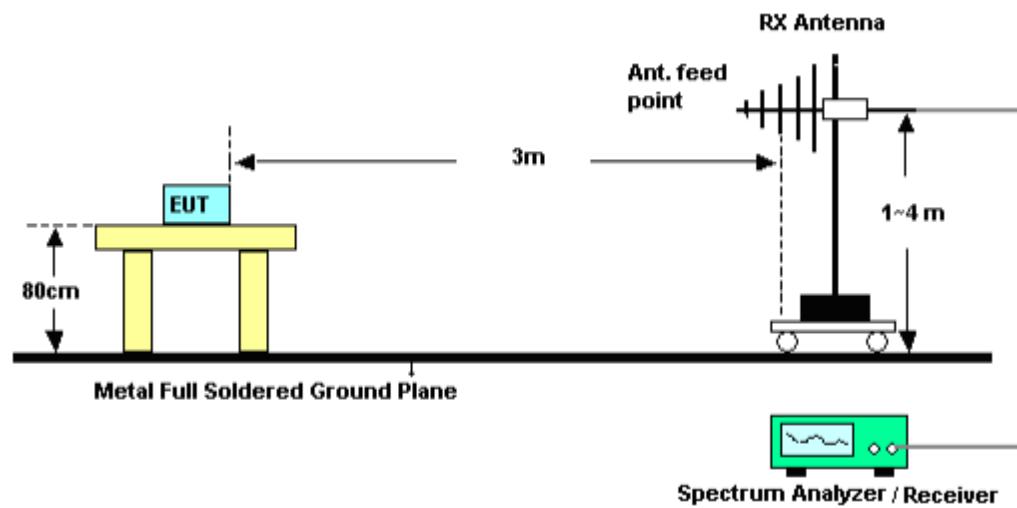

(C) Radiated Emission Test-Up Frequency Above 1GHz

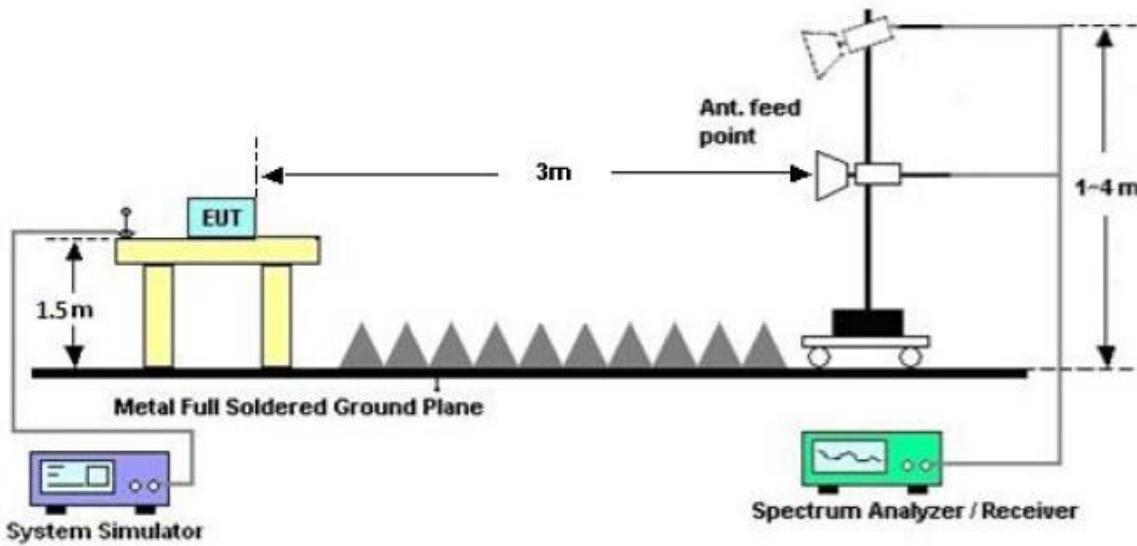



3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

| Frequency | FS | RA | AF | CL | AG | Factor |
|-----------|----------------|----------------|------|------|------|--------|
| (MHz) | (dB μ V/m) | (dB μ V/m) | (dB) | (dB) | (dB) | (dB) |
| 300 | 40 | 58.1 | 12.2 | 1.6 | 31.9 | -18.1 |

$$\text{Factor} = AF + CL - AG$$





3.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Below 30 MHz

| | | | |
|---------------|----------|--------------------|-----|
| Temperature: | 23 °C | Relative Humidity: | 50% |
| Pressure: | 1010 hPa | Polarization: | --- |
| Test Voltage: | DC 3V | | |
| Test Mode: | TX Mode | | |

| Freq. (MHz) | Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | State |
|----------------|---------------------|-------------------|----------------|-------|
| -- | -- | -- | -- | P/F |
| -- | -- | -- | -- | PASS |
| -- | -- | -- | -- | PASS |

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log \left(\frac{\text{specific distance}}{\text{test distance}} \right) \text{dB}$;
Limit line = specific limits(dBuV) + distance extrapolation factor.


Between 30MHz – 1000 MHz Radiation Spurious

| | | | |
|---------------|---------|--------------------|------------------------|
| Temperature: | 26 °C | Relative Humidity: | 60% |
| Pressure: | 1010hPa | Phase: | Horizontal |
| Test Voltage: | DC 3V | Test Mode: | Mode 1 (Model 1 worst) |

| Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|--------|
| | | | | | | |
| 49.0145 | 42.82 | -20.97 | 21.85 | 40.00 | -18.15 | QP |
| 67.9130 | 38.80 | -24.15 | 14.65 | 40.00 | -25.35 | QP |
| 135.9822 | 32.68 | -17.52 | 15.16 | 43.50 | -28.34 | QP |
| 316.5890 | 31.79 | -14.28 | 17.51 | 46.00 | -28.49 | QP |
| 552.8832 | 29.65 | -6.71 | 22.94 | 46.00 | -23.06 | QP |
| 929.0082 | 28.25 | -1.19 | 27.06 | 46.00 | -18.94 | QP |

Remark:

1. All readings are Quasi-Peak .
2. Margin = Result (Result =Reading + Factor)–Limit

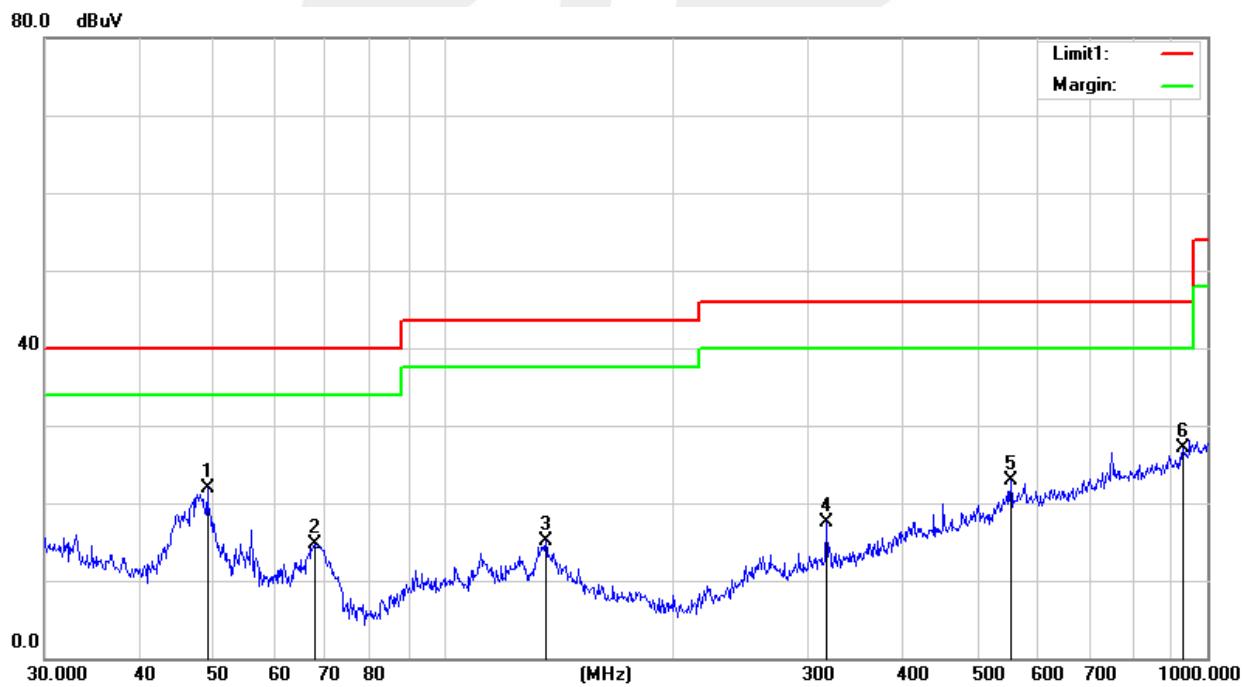

| | | | |
|---------------|---------|--------------------|------------------------|
| Temperature: | 26 °C | Relative Humidity: | 60% |
| Pressure: | 1010hPa | Phase: | Vertical |
| Test Voltage: | DC 3V | Test Mode: | Mode 1 (Model 1 worst) |

| Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|--------|
| 37.6798 | 31.98 | -15.13 | 16.85 | 40.00 | -23.15 | QP |
| 48.5016 | 36.88 | -20.71 | 16.17 | 40.00 | -23.83 | QP |
| 125.0066 | 33.07 | -17.61 | 15.46 | 43.50 | -28.04 | QP |
| 150.0108 | 37.02 | -17.97 | 19.05 | 43.50 | -24.45 | QP |
| 375.9385 | 31.58 | -12.73 | 18.85 | 46.00 | -27.15 | QP |
| 900.1474 | 31.84 | -2.26 | 29.58 | 46.00 | -16.42 | QP |

Remark:

1. All readings are Quasi-Peak.
2. Margin = Result (Result = Reading + Factor)–Limit





Fundamental frequency:

PK

| Frequency (MHz) | Reading (dB μ V/m) | Amplifier | Loss | Antenna Factor | Factor(dB) Corr. | Result (dB μ V/m) | Limit (dB μ V/m) | Margin(dB) | Polarization |
|--------------------|---------------------------|-----------|------|-------------------|---------------------|--------------------------|-------------------------|------------|--------------|
| | PEAK | (dB) | (dB) | (dB/m) | | PEAK | PEAK | PEAK | |
| 2450 | 95.894 | 44.40 | 6.03 | 27.60 | -10.77 | 85.13 | 114 | -28.87 | Vertical |
| 2450 | 93.787 | 44.40 | 6.03 | 27.60 | -10.77 | 83.02 | 114 | -30.98 | Horizontal |

AV

| Frequency (MHz) | Reading (dB μ V/m) | Amplifier | Loss | Antenna Factor | Factor(dB) Corr. | Result (dB μ V/m) | Limit (dB μ V/m) | Margin(dB) | Polarization |
|--------------------|---------------------------|-----------|------|-------------------|---------------------|--------------------------|-------------------------|------------|--------------|
| | AV | (dB) | (dB) | (dB/m) | | AV | PEAK | PEAK | |
| 2450 | 75.623 | 44.40 | 6.03 | 27.60 | -10.77 | 64.86 | 94 | -29.14 | Vertical |
| 2450 | 74.845 | 44.40 | 6.03 | 27.60 | -10.77 | 64.08 | 94 | -29.92 | Horizontal |

Note: RBW>20BW; VBW=3xRBW



Above 1G Radiation Spurious

| Frequency (MHz) | Reading (dB μ V) | Amplifier (dB) | Loss (dB) | Antenna Factor (dB/m) | Corrected Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type | Comment |
|------------------------|-------------------------|-------------------|--------------|-----------------------------|-----------------------------|-------------------------------------|--------------------------|----------------|------------------|------------|
| Mid Channel (2450 MHz) | | | | | | | | | | |
| 3264.62 | 49.29 | 44.70 | 6.70 | 28.20 | -9.80 | 39.49 | 74.00 | -34.51 | PK | Vertical |
| 3264.62 | 39.15 | 44.70 | 6.70 | 28.20 | -9.80 | 29.35 | 54.00 | -24.65 | AV | Vertical |
| 3264.72 | 48.35 | 44.70 | 6.70 | 28.20 | -9.80 | 38.55 | 74.00 | -35.45 | PK | Horizontal |
| 3264.72 | 38.25 | 44.70 | 6.70 | 28.20 | -9.80 | 28.45 | 54.00 | -25.55 | AV | Horizontal |
| 4900.49 | 59.46 | 44.20 | 9.04 | 31.60 | -3.56 | 55.90 | 74.00 | -18.10 | PK | Vertical |
| 4900.49 | 38.71 | 44.20 | 9.04 | 31.60 | -3.56 | 35.15 | 54.00 | -18.85 | AV | Vertical |
| 4900.53 | 58.75 | 44.20 | 9.04 | 31.60 | -3.56 | 55.19 | 74.00 | -18.81 | PK | Horizontal |
| 4900.53 | 38.30 | 44.20 | 9.04 | 31.60 | -3.56 | 34.74 | 54.00 | -19.26 | AV | Horizontal |
| 5359.62 | 45.19 | 44.20 | 9.86 | 32.00 | -2.34 | 42.85 | 74.00 | -31.15 | PK | Vertical |
| 5359.62 | 37.09 | 44.20 | 9.86 | 32.00 | -2.34 | 34.75 | 54.00 | -19.25 | AV | Vertical |
| 5359.69 | 46.42 | 44.20 | 9.86 | 32.00 | -2.34 | 44.08 | 74.00 | -29.92 | PK | Horizontal |
| 5359.69 | 37.83 | 44.20 | 9.86 | 32.00 | -2.34 | 35.49 | 54.00 | -18.51 | AV | Horizontal |
| 7349.73 | 51.95 | 43.50 | 11.40 | 35.50 | 3.40 | 55.35 | 74.00 | -18.65 | PK | Vertical |
| 7349.73 | 32.89 | 43.50 | 11.40 | 35.50 | 3.40 | 36.29 | 54.00 | -17.71 | AV | Vertical |
| 7349.92 | 51.15 | 43.50 | 11.40 | 35.50 | 3.40 | 54.55 | 74.00 | -19.45 | PK | Horizontal |
| 7349.92 | 32.76 | 43.50 | 11.40 | 35.50 | 3.40 | 36.16 | 54.00 | -17.84 | AV | Horizontal |
| 9799.75 | 40.96 | 43.60 | 14.30 | 39.50 | 10.20 | 51.16 | 74.00 | -22.84 | PK | Vertical |
| 9799.75 | 30.22 | 43.60 | 14.30 | 39.50 | 10.20 | 40.42 | 54.00 | -13.58 | AV | Vertical |
| 9800.06 | 40.02 | 43.60 | 14.30 | 39.50 | 10.20 | 50.22 | 74.00 | -23.78 | PK | Horizontal |
| 9800.06 | 30.68 | 43.60 | 14.30 | 39.50 | 10.20 | 40.88 | 54.00 | -13.12 | AV | Horizontal |
| 13299.20 | 40.93 | 42.60 | 15.90 | 38.90 | 12.20 | 53.13 | 74.00 | -20.87 | PK | Vertical |
| 13299.20 | 28.54 | 42.60 | 15.90 | 38.90 | 12.20 | 40.74 | 54.00 | -13.26 | AV | Vertical |
| 13299.45 | 40.10 | 42.60 | 15.90 | 38.90 | 12.20 | 52.30 | 74.00 | -21.70 | Pk | Horizontal |
| 13299.45 | 29.12 | 42.60 | 15.90 | 38.90 | 12.20 | 41.32 | 54.00 | -12.68 | AV | Horizontal |
| 15999.83 | 40.54 | 42.70 | 18.00 | 37.10 | 12.40 | 52.94 | 74.00 | -21.06 | PK | Vertical |
| 15999.83 | 28.64 | 42.70 | 18.00 | 37.10 | 12.40 | 41.04 | 54.00 | -12.96 | AV | Vertical |
| 15999.81 | 39.98 | 42.70 | 18.00 | 37.10 | 12.40 | 52.38 | 74.00 | -21.62 | PK | Horizontal |
| 15999.81 | 29.94 | 42.70 | 18.00 | 37.10 | 12.40 | 42.34 | 54.00 | -11.66 | AV | Horizontal |
| 17997.91 | 29.83 | 42.70 | 19.40 | 46.50 | 23.20 | 53.03 | 74.00 | -20.97 | PK | Vertical |
| 17997.91 | 19.21 | 42.70 | 19.40 | 46.50 | 23.20 | 42.41 | 54.00 | -11.59 | AV | Vertical |
| 17997.76 | 30.65 | 42.70 | 19.40 | 46.50 | 23.20 | 53.85 | 74.00 | -20.15 | PK | Horizontal |
| 17997.76 | 18.07 | 42.70 | 19.40 | 46.50 | 23.20 | 41.27 | 54.00 | -12.73 | AV | Horizontal |

4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

4.1 REQUIREMENT

According to FCC section 15.249, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 50dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.


4.2 TEST PROCEDURE

| Spectrum Parameter | Setting |
|---------------------------------------|---------------------------------|
| Detector | Peak |
| Start/Stop Frequency | 30 MHz to 10th carrier harmonic |
| RB / VB (emission in restricted band) | 100 KHz/300 KHz |
| Trace-Mode: | Max hold |

For Band edge

| Spectrum Parameter | Setting |
|---------------------------------------|--|
| Detector | Peak |
| Start/Stop Frequency | Lower Band Edge: 2310 – 2404 MHz Upper Band Edge: 2478 – 2500 MHz |
| RB / VB (emission in restricted band) | 100 KHz/300 KHz |
| Trace-Mode: | Max hold |

4.3 TEST SETUP

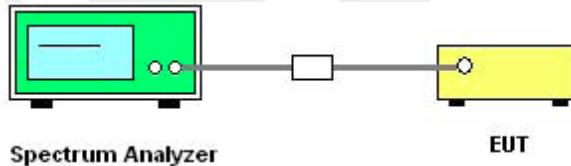

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



4.5 TEST RESULTS

| | | | |
|--------------|----------|--------------------|-------|
| Temperature: | 25 °C | Relative Humidity: | 50% |
| Pressure: | 1012 hPa | Test Voltage: | DC 3V |
| Test Mode: | N/A | | |

Note: denotes test is not applicable in this test report.



5. BANDWIDTH TEST

5.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 30KHz, VBW \geq RBW, Sweep time = Auto.

5.2 TEST SETUP



5.3 EUT OPERATION CONDITIONS

TX mode.




5.4 TEST RESULTS

| | | | |
|--------------|----------|--------------------|-------|
| Temperature: | 25 °C | Relative Humidity: | 50% |
| Pressure: | 1012 hPa | Test Voltage: | DC 3V |

| Test Channel | Frequency (MHz) | 20 dBc Bandwidth (MHz) | 99% Bandwidth (MHz) |
|--------------|--------------------|---------------------------|------------------------|
| CH01 | 2450 | 1.901 | 1.8059 |

The Lowest Channel:2450MHz

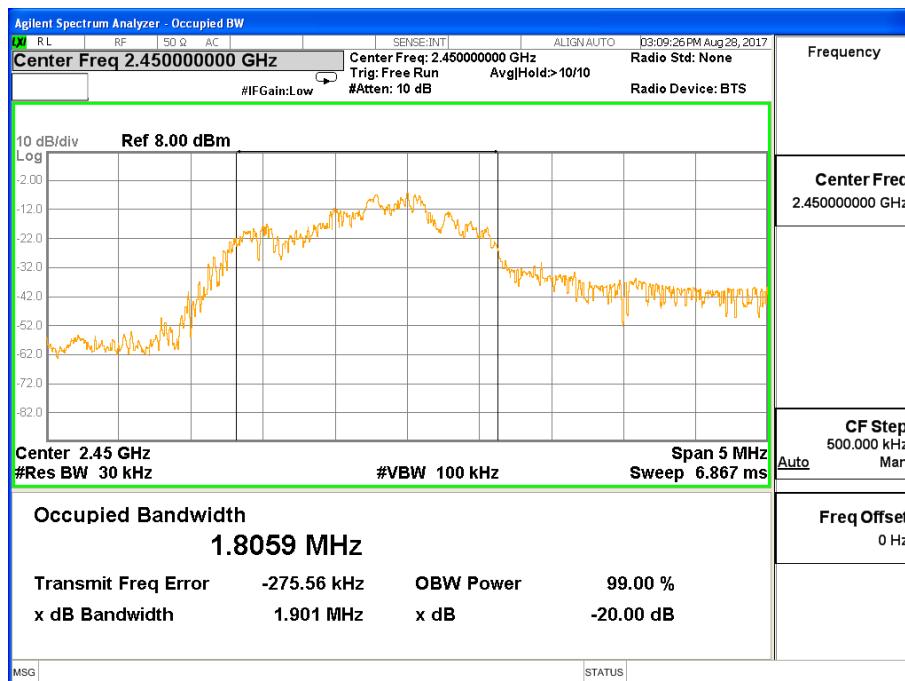



6. ANTENNA REQUIREMENT


6.1 STANDARD REQUIREMENT

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 EUT ANTENNA

The EUT antenna is Internal PCB Antenna. It conforms to the standard requirements.

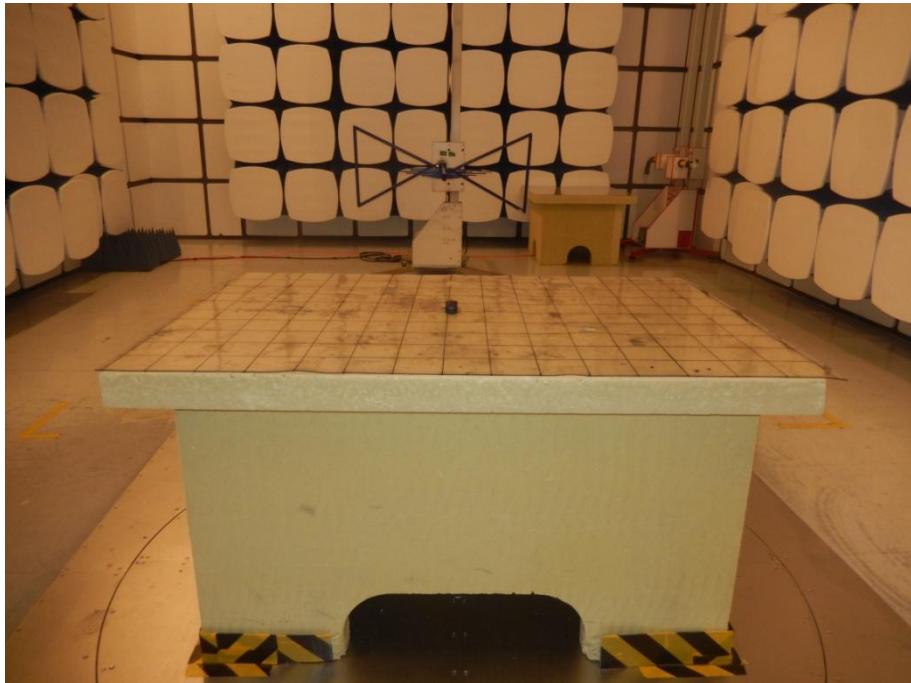

APPENDIX- PHOTOS OF TEST SETUP**Radiated Measurement Photos**

※※※※※END OF THE REPORT※※※※※