



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: LUXPAD TABLET

Address: YangGuangGaoErFU Building, No 7008 SHENNAN Road, FuTian
SHENZHEN, China

FCC ID: 2ANIRASTRO10R

Product Name: TABLET

**Standard(s): 47 CFR Part 2
47 CFR Part 22, Subpart H
47 CFR Part 24, Subpart E
47 CFR Part 27
ANSI C63.26-2015
KDB 971168 D01 Power Meas License Digital Systems
v03r01**

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR221157864-00D

Date Of Issue: 2023/1/11

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION.....	6
1.2.2 Support Equipment List and Details	10
1.2.3 Support Cable List and Details	10
1.2.4 Block Diagram of Test Setup.....	10
1.3 MEASUREMENT UNCERTAINTY	11
2. SUMMARY OF TEST RESULTS	12
3. REQUIREMENTS AND TEST PROCEDURES	13
3.1 Applicable Standard For Part 22 Subpart H:.....	13
3.1.1 RF Output Power	13
3.1.2 Spurious Emissions.....	13
3.1.3 Frequency stability.....	13
3.2 Applicable Standard For Part 24 Subpart E:	15
3.2.1 RF Output Power	15
3.2.2 Spurious Emissions	15
3.2.3 Frequency stability.....	15
3.3 Applicable Standard For Part 27:.....	16
3.3.1 RF Output Power	16
3.3.2 Spurious Emissions	16
3.3.3 Frequency stability.....	18
3.4 Test Method:	19
3.4.1 RF Output Power	19
Test Setup Block:.....	19
3.4.2 Occupied Bandwidth.....	20
Test Setup Block:.....	20
3.4.3 Spurious emissions at antenna terminals.....	21
Test Setup Block:.....	21
3.4.4 Out of band emission	22
Test Setup Block:.....	22
3.4.5 Frequency stability.....	23
Test Setup Block:.....	23
3.4.6 Field strength of spurious radiation.....	24
4. Test DATA AND RESULTS.....	26
4.1 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 850 BAND:.....	26
4.2 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 1900 BAND:.....	32
4.3 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 2:	38
4.4 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 4:	45

4.5 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 5:	52
4.6 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 2:	59
4.7 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 4:	80
4.8 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 5:	101
4.9 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 12:	117
4.10 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 17:	133
4.11 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 41:	143
4.12 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 66:	159
4.13 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 71:	180
4.14 RADIATED SPURIOUS EMISSIONS:	196

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

General:

EUT Name:	TABLET
EUT Model:	ASTRO 10R
Operation Bands and modes:	GPRS/EDGE: 850/1900 WCDMA: Band 2/4/5 LTE: Band 2/4/5/12/17/41/66/71
Modulation Type:	GMSK, 8PSK, BPSK, QPSK, 16QAM
Rated Input Voltage:	DC 5V from adapter or DC 3.8V from battery
Serial Number:	1SNT-1
EUT Received Date:	2022/12/1
EUT Received Status:	Good

Operation Voltage(V_{DC}) ▲:

Lowest:	3.5	Normal:	3.8	Highest:	4.2
---------	-----	---------	-----	----------	-----

Antenna Information▲:

Antenna Type	Operation Bands	Antenna Frequency Range (MHz)	Antenna Gain (G _r) (dBi)	L _c (dB)
FPC	GSM850	824-849	-3.49	0
	PCS1900	1850-1910	1.81	0
	WCDMA B2	1850-1910	1.81	0
	WCDMA B4	1710-1755	-5.02	0
	WCDMA B5	824-849	-3.49	0
	LTE B2	1850-1910	1.81	0
	LTE B4	1710-1755	-5.02	0
	LTE B5	824-849	-3.49	0
	LTE B12	699-716	-4.1	0
	LTE B17	704-716	-4.1	0
	LTE B41	2555-2655	-0.08	0
	LTE B66	1710-1785	-4.9	0
	LTE B71	663-698	-4.04	0

Note: L_c= Signal Attenuation in the connecting cable between the transmitter and antenna, in dB.

Accessory Information:

Accessory Description	Manufacturer	Model
Adapter	MaxWest	ASTRO 10R

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in each operation mode.
Equipment Modifications:	No
EUT Exercise Software:	No
The maximum power was configured per 3GPP Standard for each operation modes as below setting:	
GSM/GPRS/EGPRS	
Function: Menu select > GSM Mobile Station > GSM 850/1900	
Press Connection control to choose the different menus	
Press RESET > choose all the reset all settings	
Connection Press Signal Off to turn off the signal and change settings	
Network Support > GSM + GPRS or GSM + EGSM	
Main Service > Packet Data	
Service selection > Test Mode A – Auto Slot Config. off	
MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting	
> Slot configuration > Uplink/Gamma > 33 dBm for GPRS 850 > 30 dBm for GPRS 1900 > 27 dBm for EGPRS 850 > 26 dBm for EGPRS 1900	
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel	
Frequency Offset > + 0 Hz	
Mode > BCCH and TCH	
BCCH Level > -85 dBm (May need to adjust if link is not stable)	
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]	
Channel Type > Off	
P0 > 4 dB	
Slot Config > Unchanged (if already set under MS signal)	
TCH > choose desired test channel	
Hopping > Off	
Main Timeslot > 3	
Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)	
Bit Stream > 2E9-1 PSR Bit Stream	
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input	
Connection Press Signal on to turn on the signal and change settings	

WCDMA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2		4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30 15	2/15	5/15
	β_c / β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.	2.0	3.0	1.0
HSDPA Specific Settings	MPR(dB)	0	2	1	2	0
	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
HSUPA Specific Settings	$A_{hs} = \beta_{hs} / \beta_c$	30/15				
	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	A Index	20	12	1	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate k ps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI s	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 96	3	> 5	≤ 1
			5	> 6	≤ 1
			10	> 6	≤ 1
			15	> 8	≤ 1
			20	> 10	≤ 1
NS_04	6.6.2.2.2	41	5	> 6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE(TDD)

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \#$ of S + $\#$ of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
CLC	Earphone	Whiteview5.0	EP21106032W
R&S	Wideband Radio Communication Tester	CMW500	149218
Unknown	Antenna	Unknown	Unknown

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Earphone Cable	No	No	1.2	EUT	Earphone
USB Cable	No	No	1	EUT	Adapter

1.2.4 Block Diagram of Test Setup

Radiation Test:

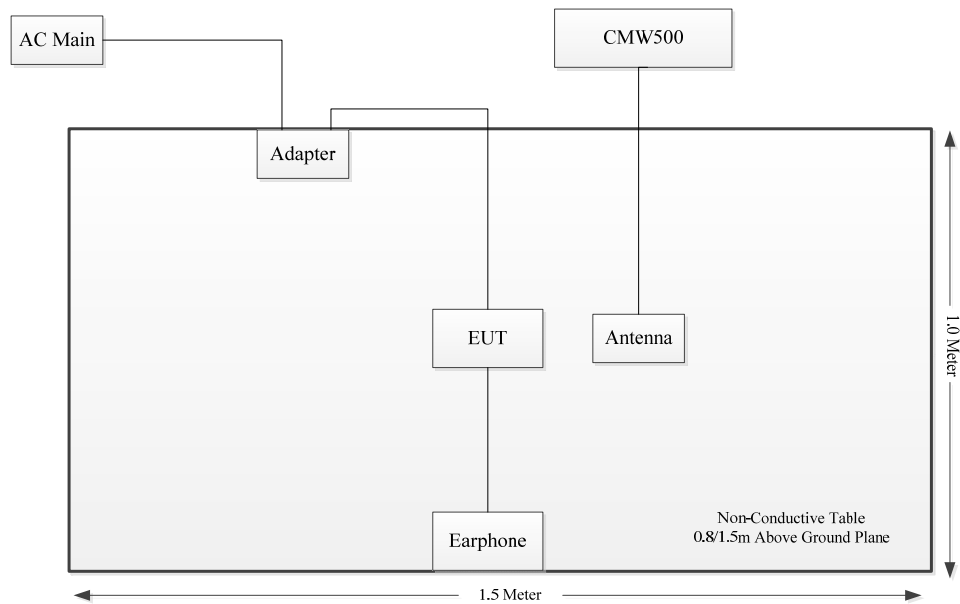

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
RF Frequency	±0.082×10 ⁻⁶

2. SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC§2.1046; § 22.913 (a); § 24.232 (c); §27.50	RF Output Power	Compliant
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 22.905 § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliant
FCC§ 2.1051, § 22.917 (a); § 24.238 (a); §27.53	Spurious Emissions at Antenna Terminal	Compliant
FCC§ 22.917 (a); § 24.238 (a); §27.53	Out of band emission, Band Edge	Compliant
FCC§ 2.1055 § 22.355; § 24.235; §27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliant
FCC§ 2.1053 § 22.917 (a); § 24.238 (a); §27.53	Field Strength of Spurious Radiation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 Applicable Standard For Part 22 Subpart H:

3.1.1 RF Output Power

FCC §22.913

(a)(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.

(d) *Power measurement.* Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-toaverage ratio (PAR) of the transmission must not exceed 13 dB. Power measurements for base transmitters and repeaters must be made in accordance with either of the following:

- (1) A Commission-approved average power technique (*see* FCC Laboratory's Knowledge Database); or
- (2) For purposes of this section, peak transmit power must be measured over an interval of continuous transmission using instrumentation calibrated in terms of an rmsequivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, *etc.*, so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

3.1.2 Spurious Emissions

FCC §22.917

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:

- (1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz

3.1.3 Frequency stability

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	2.5	2.5
928 to 929	5	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10	n/a	n/a

3.2 Applicable Standard For Part 24 Subpart E:

3.2.1 RF Output Power

FCC §24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.2.2 Spurious Emissions

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

3.2.3 Frequency stability

FCC §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.3 Applicable Standard For Part 27:

3.3.1 RF Output Power

FCC §27.50

(a)(3) *Mobile and portable stations.*

(i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

(ii) Mobile and portable stations are not permitted to transmit in the 2315-2320 MHz and 2345-2350 MHz bands.

(iii) *Automatic transmit power control.* Mobile and portable stations transmitting in the 2305-2315 MHz band or in the 2350-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications.

(iv) *Prohibition on external vehicle-mounted antennas.* The use of external vehicle-mounted antennas for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band is prohibited.

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c)(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

3.3.2 Spurious Emissions

FCC §27.53

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to – 70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and – 80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits

(1) **General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.3.3 Frequency stability

FCC §27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.4 Test Method:

3.4.1 RF Output Power

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5 and KDB 971168 D01 Power Meas License Digital Systems v03r01:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:


ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Test Setup Block:

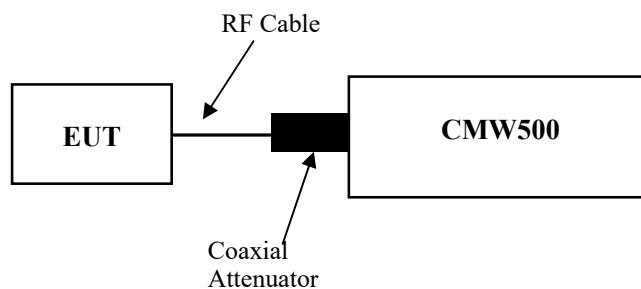

Note: The Insertion loss of the RF cable and coaxial Attenuator was offset into the Reading of CMW500.

3.4.2 Occupied Bandwidth


According to CFR Part 2.1049, ANSI C63.26-2015 Section 5.4.4

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.
- d) Set the detection mode to peak, and the trace mode to max-hold.
- e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

Test Setup Block:

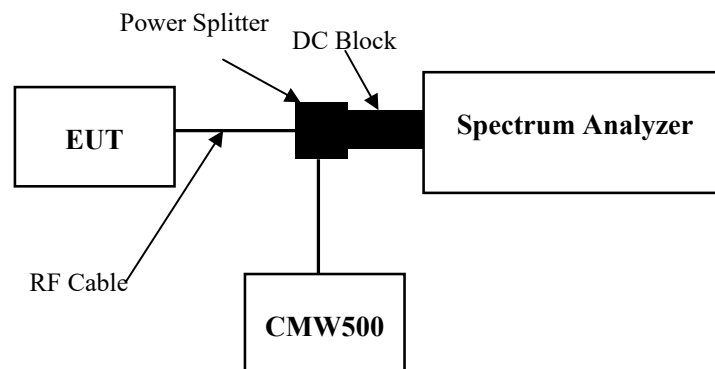


3.4.3 Spurious emissions at antenna terminals

According to CFR Part 2.1051, 22.917(a), 24.238(a) and/or 27.53, ANSI C63.26-2015 Section 5.7.4, KDB 971168 D01 Power Meas License Digital Systems v03r01:

the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz),⁸ effectively depicting the unwanted emission limit in terms of a power spectral density. In those cases where no reference bandwidth is explicitly specified, the values in the preceding sentence should be used.

Test Setup Block:

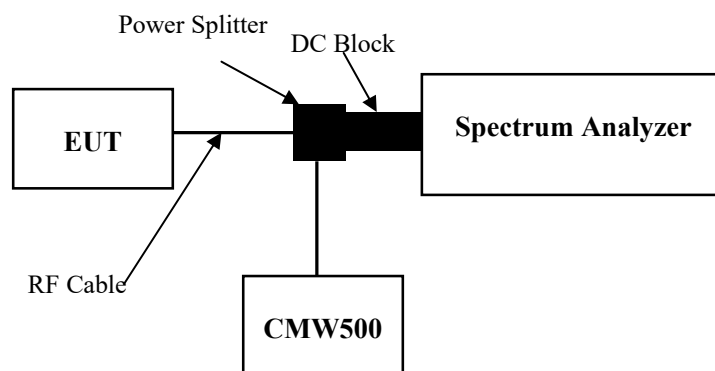


3.4.4 Out of band emission

According to CFR Part 2.1051, 22.917(a), 24.238(a), 27.53, ANSI C63.26-2015 Section 5.7.3, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/band (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of OBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.

Test Setup Block:

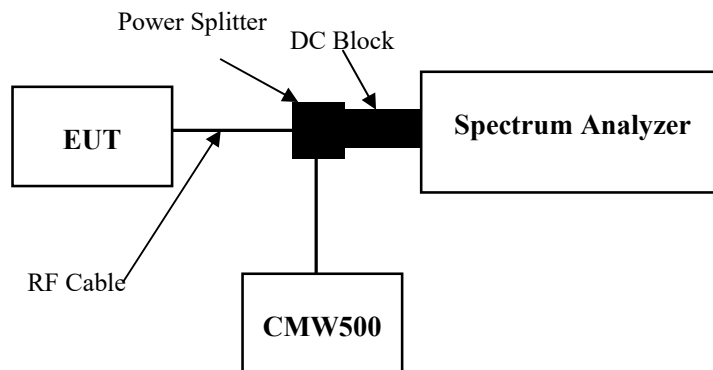

3.4.5 Frequency stability

According to CFR Part 2.1055, ANSI C63.26-2015 Section 5.6, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.


The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between –30 °C and +50 °C at the manufacturer's rated supply voltage, and
- b) At +20 °C temperature and ±15% supply voltage variations. If a product is specified to operate over a range of input voltage then the –15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

Test Setup Block:

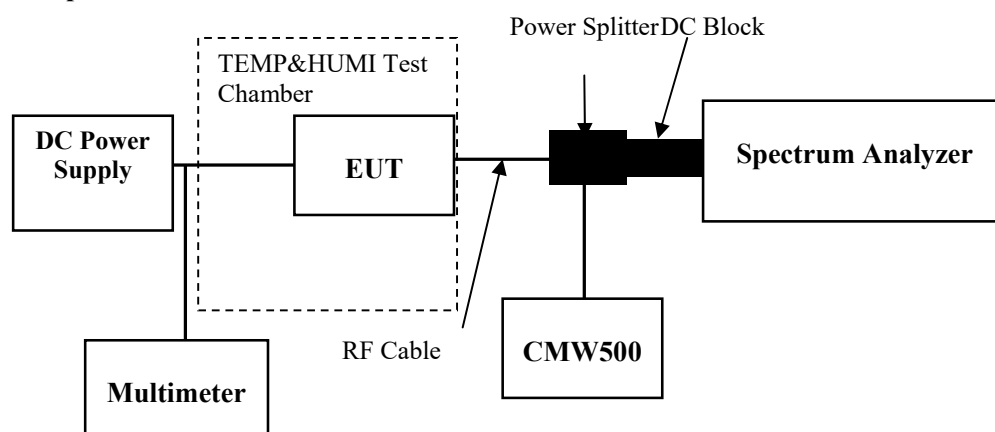

3.4.6 Field strength of spurious radiation

According to CFR Part 2.1053, 22.917(a), 24.238(a) and/or 27.53, ANSI C63.26-2015 Section 5.5.3:

Test setup:

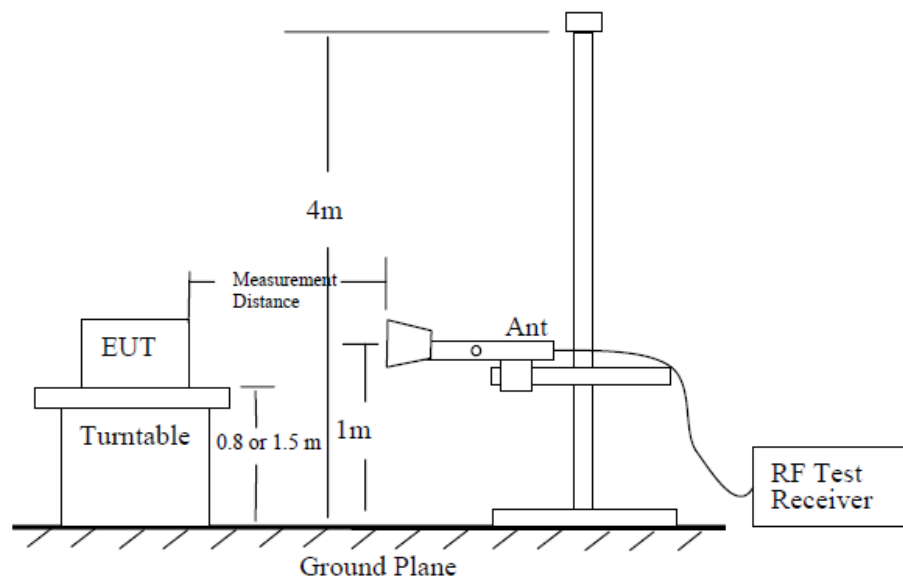


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

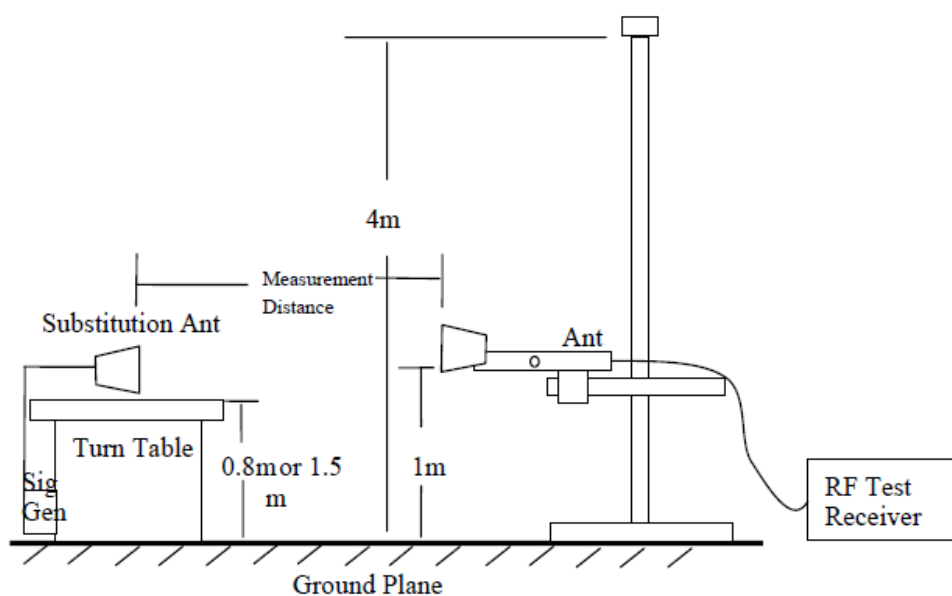


Figure 7—Substitution method set-up for radiated emission

Test Procedure:

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where

P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$. If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

4. Test DATA AND RESULTS

4.1 Antenna Port Test Data and Results for GSM 850 band:

Serial Number:	1SNT-1	Test Date:	2022/12/31-2023/1/5
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.3-22.8	Relative Humidity: (%)	38-55	ATM Pressure: (kPa)	102.1-100.9
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/4/5	2023/4/4
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	2477/9/11	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	1982/8/11	2022/4/6	2023/4/5
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GPRS	824.2	836.6	848.8
EDGE	824.2	836.6	848.8

Test Data:**FCC§2.1046;§ 22.913 (a):RF Output Power**

Test Mode	Conducted Peak Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GPRS 1 Slot	28.03	28.06	28.05	22.42	38.45
GPRS 2 Slots	27.92	27.97	27.95	22.33	38.45
GPRS 3 Slots	27.72	27.75	27.75	22.11	38.45
GPRS 4 Slots	25.35	25.34	27.73	22.09	38.45
EDGE 1 Slot	24.37	25.06	25.31	19.67	38.45
EDGE 2 Slots	24.26	24.87	24.75	19.23	38.45
EDGE 3 Slots	23.26	23.71	23.64	18.07	38.45
EDGE 4 Slots	20.92	21.37	21.29	15.73	38.45
Note: ERP= Conducted Power(dBm) - Lc(dB) + G _T (dBd) G _T (dBd)=G _T (dBi)-2.15					
				Result:	Pass

FCC §2.1049, §22.917, §22.905:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.231	0.237	0.231	0.253	0.258	0.253
EDGE	0.158	0.158	0.16	0.313	0.304	0.315
Note: The test plots please refer to the Plots of Occupied Bandwidth						

FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--


FCC §2.1051, §22.917(a):Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §22.355: Frequency Stability					
Test Modulation:	GMSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	12	0.014	2.5
	-20	3.8	9	0.011	2.5
	-10	3.8	4	0.005	2.5
	0	3.8	55	0.066	2.5
	10	3.8	7	0.008	2.5
	20	3.8	22	0.026	2.5
	30	3.8	21	0.025	2.5
	40	3.8	2	0.002	2.5
	50	3.8	2	0.002	2.5
Frequency Stability vs. Voltage	20	3.5	8	0.010	2.5
	20	4.2	5	0.006	2.5
				Result:	Pass

Test Modulation:	8PSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	1	0.001	2.5
	-20	3.8	11	0.013	2.5
	-10	3.8	5	0.006	2.5
	0	3.8	47	0.056	2.5
	10	3.8	7	0.008	2.5
	20	3.8	51	0.061	2.5
	30	3.8	21	0.025	2.5
	40	3.8	13	0.016	2.5
	50	3.8	4	0.005	2.5
Frequency Stability vs. Voltage	20	3.5	5	0.006	2.5
	20	4.2	4	0.005	2.5
				Result:	Pass

Test Plots(Note: The 4.5dB is the Insertion loss of the RF cable, Power Splitter, which was offset into the Spectrum Analyzer):


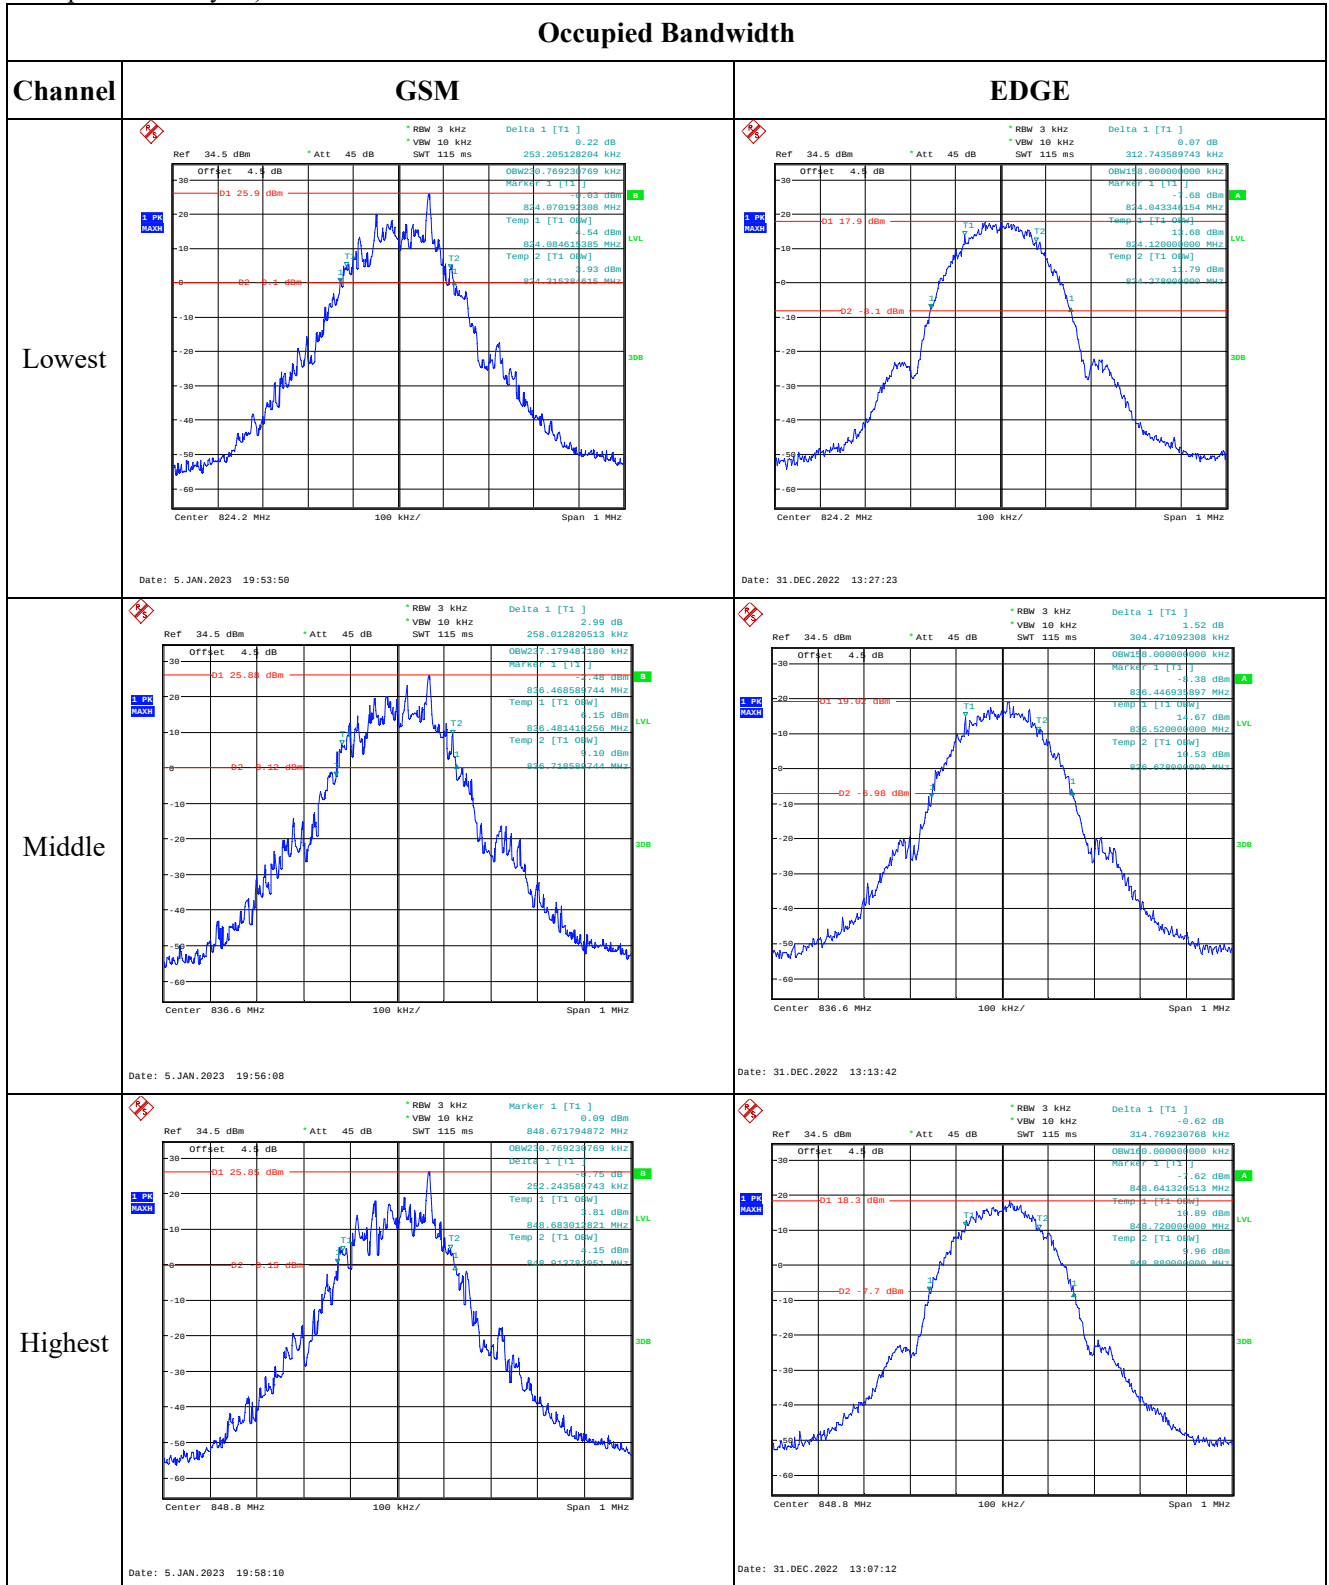


Spurious Emissions at Antenna Terminal



Channel

GSM



Lowest

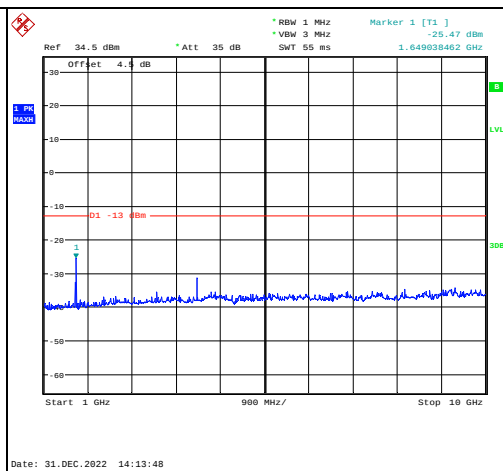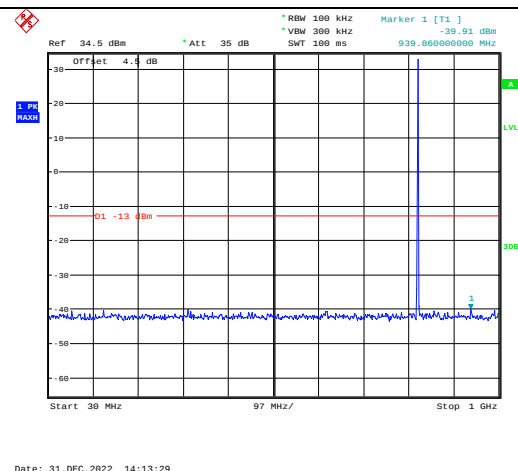





Middle

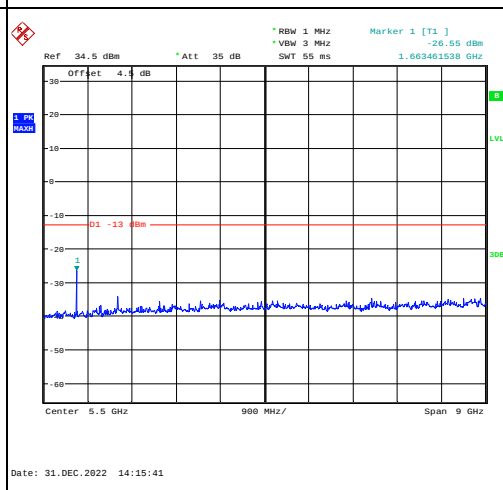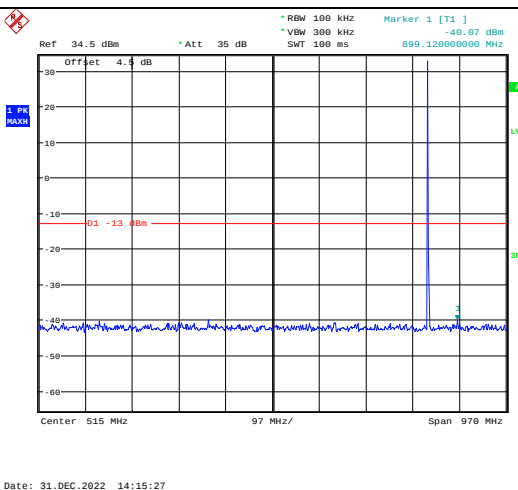

Highest

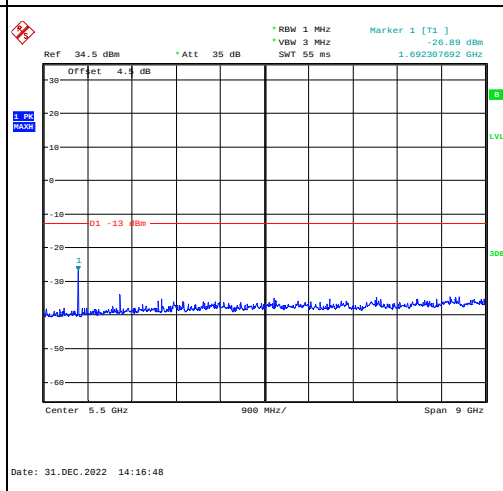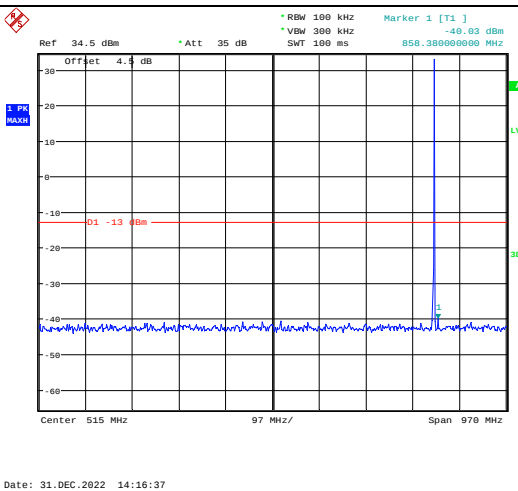

Out of band emission, Band Edge

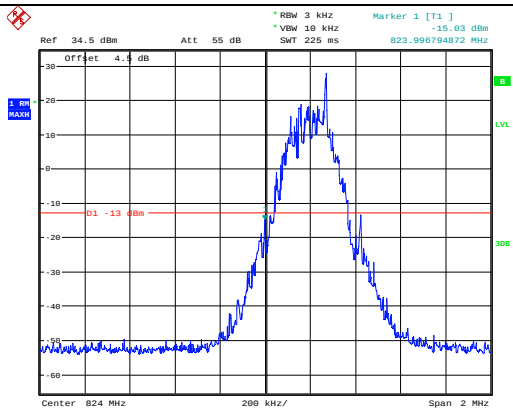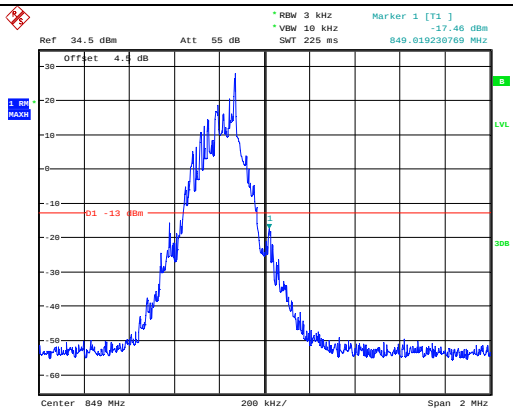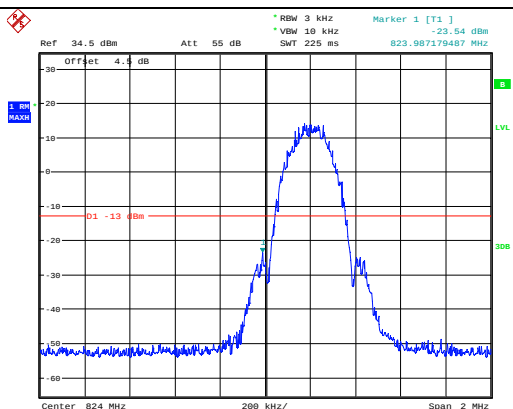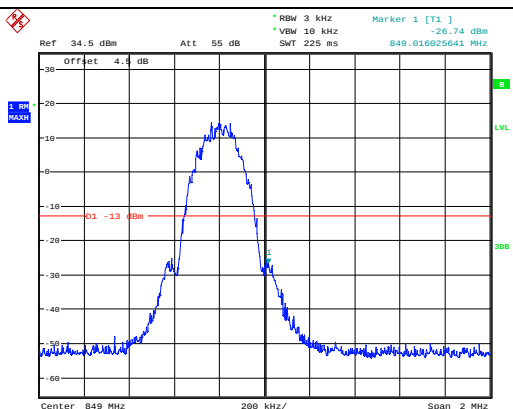Mode	Lowest	Highest
GSM	 Ref: 34.5 dBm Att: 55 dB RBW: 3 kHz VBW: 10 kHz SMT: 225 ms Marker 1 [T1]: 823.996794872 MHz -15.03 dBm Offset: 4.4 dB Center: 824 MHz Span: 2 MHz Date: 31.DEC.2022 12:51:44	 Ref: 34.5 dBm Att: 55 dB RBW: 3 kHz VBW: 10 kHz SMT: 225 ms Marker 1 [T1]: 849.019230769 MHz -17.46 dBm Offset: 4.4 dB Center: 849 MHz Span: 2 MHz Date: 31.DEC.2022 12:59:08
EDGE	 Ref: 34.5 dBm Att: 55 dB RBW: 3 kHz VBW: 10 kHz SMT: 225 ms Marker 1 [T1]: 823.987179487 MHz -23.54 dBm Offset: 4.4 dB Center: 824 MHz Span: 2 MHz Date: 31.DEC.2022 13:29:55	 Ref: 34.5 dBm Att: 55 dB RBW: 3 kHz VBW: 10 kHz SMT: 225 ms Marker 1 [T1]: 849.016025641 MHz -26.74 dBm Offset: 4.4 dB Center: 849 MHz Span: 2 MHz Date: 31.DEC.2022 13:02:34

4.2 Antenna Port Test Data and Results for GSM 1900 band:

Serial Number:	1SNT-1	Test Date:	2022/12/31-2023/1/4
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.3-22.5	Relative Humidity: (%)	38-48	ATM Pressure: (kPa)	102.1-102.5
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/4/5	2023/4/4
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/4/6	2023/4/5
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GPRS	1850.2	1880	1909.8
EDGE	1850.2	1880	1909.8

Test Data:**FCC§2.1046;§ 24.232 (c):RF Output Power**

Test Mode	Conducted Peak Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GPRS 1 Slot	27.08	27.32	27.79	29.6	33
GPRS 2 Slots	25.03	25.15	25.51	27.32	33
GPRS 3 Slots	23.48	23.61	23.95	25.76	33
GPRS 4 Slots	21.43	21.57	21.88	23.69	33
EDGE 1 Slot	24.17	24.13	23.3	25.98	33
EDGE 2 Slots	24.03	23.98	23.11	25.84	33
EDGE 3 Slots	21.67	21.74	20.76	23.55	33
EDGE 4 Slots	20.16	20.14	19.44	21.97	33

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

Result:**Pass****FCC §2.1049, §24.238:Occupied Bandwidth**

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.144	0.144	0.144	0.256	0.253	0.26
EDGE	0.158	0.16	0.16	0.31	0.308	0.259

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge


Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §24.235: Frequency Stability







Test Mode:	GMSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.108	1850.00	1909.856	1910
	-20	3.8	1850.169	1850.00	1909.888	1910
	-10	3.8	1850.160	1850.00	1909.886	1910
	0	3.8	1850.143	1850.00	1909.873	1910
	10	3.8	1850.141	1850.00	1909.874	1910
	20	3.8	1850.130	1850.00	1909.874	1910
	30	3.8	1850.166	1850.00	1909.884	1910
	40	3.8	1850.114	1850.00	1909.853	1910
	50	3.8	1850.118	1850.00	1909.850	1910
Frequency Stability vs. Voltage	20	3.5	1850.166	1850.00	1909.881	1910
	20	4.2	1850.115	1850.00	1909.854	1910
					Result:	Pass

Test Mode:	8PSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.104	1850.00	1909.860	1910
	-20	3.8	1850.126	1850.00	1909.883	1910
	-10	3.8	1850.128	1850.00	1909.885	1910
	0	3.8	1850.125	1850.00	1909.880	1910
	10	3.8	1850.102	1850.00	1909.861	1910
	20	3.8	1850.122	1850.00	1909.880	1910
	30	3.8	1850.127	1850.00	1909.887	1910
	40	3.8	1850.125	1850.00	1909.885	1910
	50	3.8	1850.132	1850.00	1909.889	1910
Frequency Stability vs. Voltage	20	3.5	1850.129	1850.00	1909.883	1910
	20	4.2	1850.132	1850.00	1909.887	1910
					Result:	Pass





Test Plots(Note: The 4.5dB is the Insertion loss of the RF cable, Power Splitter, which was offset into the Spectrum Analyzer):

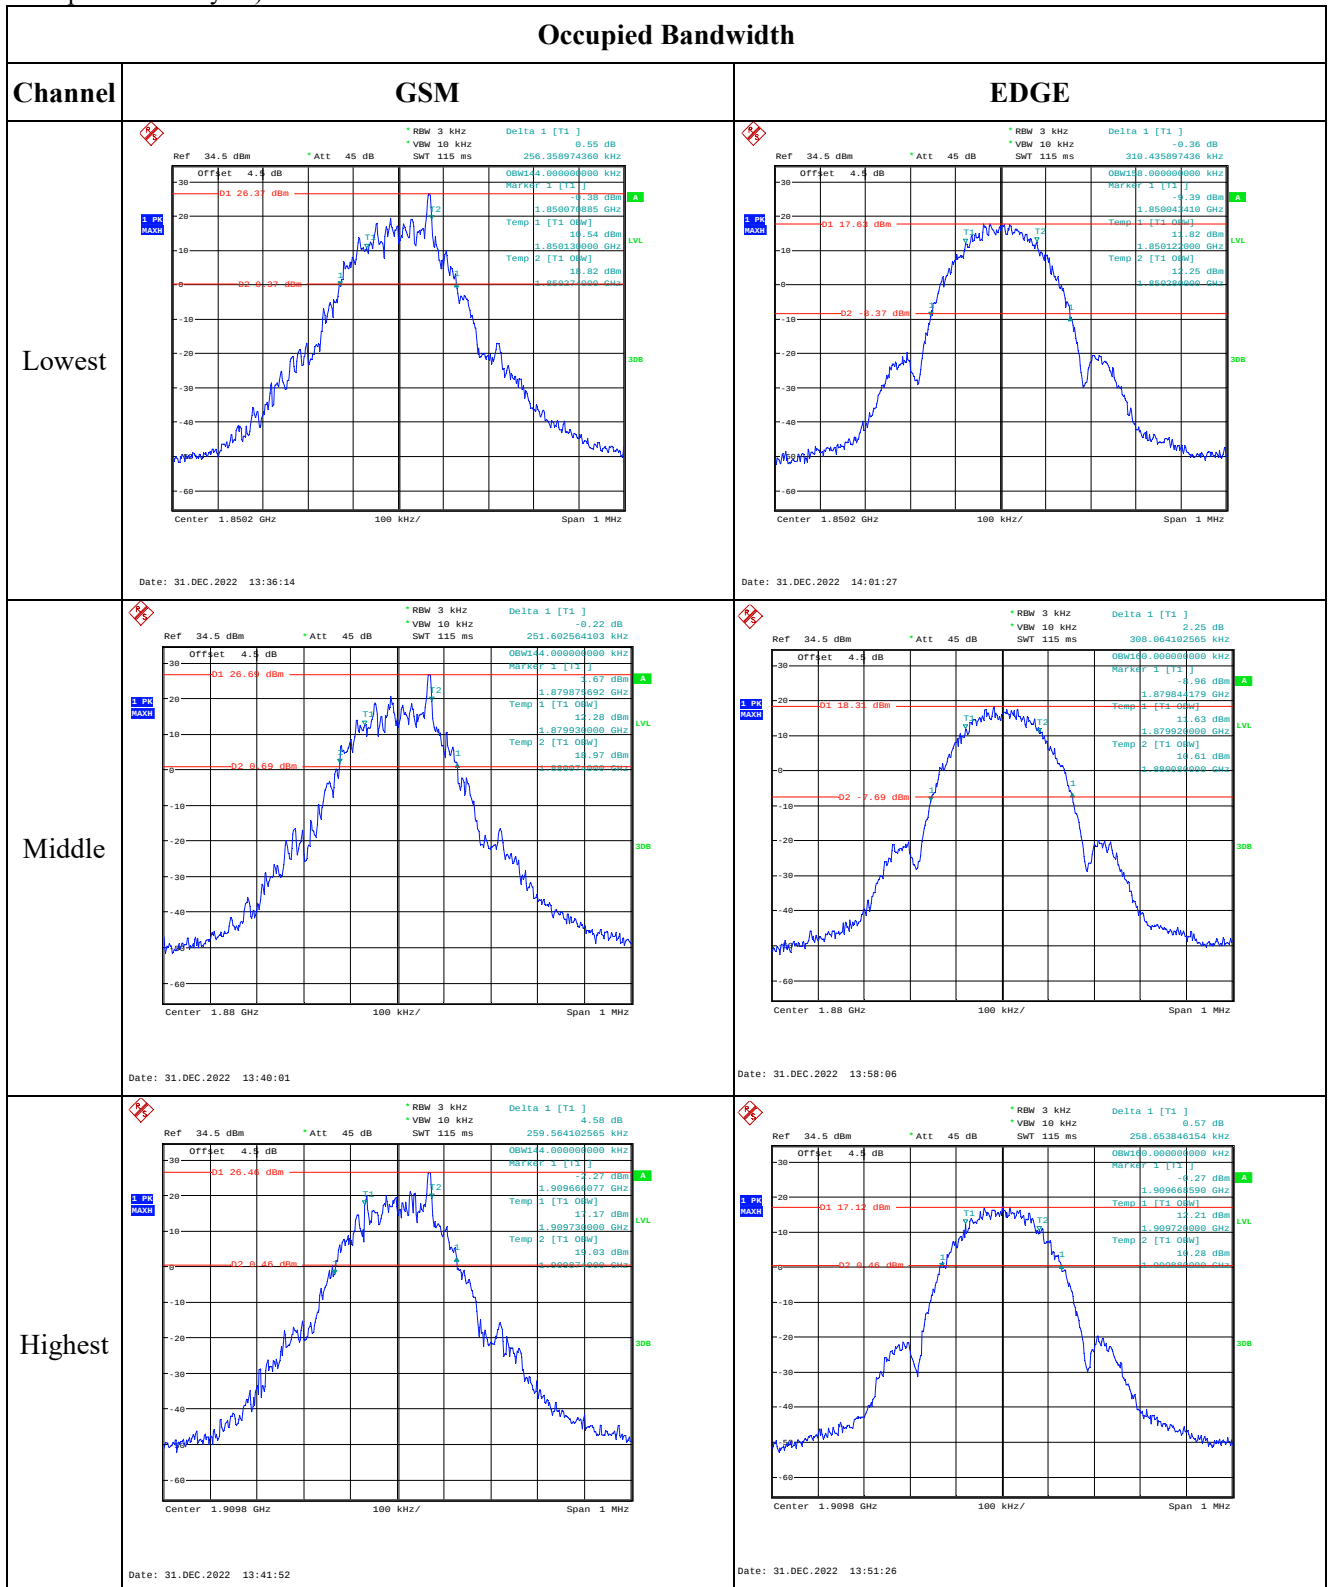

Spurious Emissions at Antenna Terminal

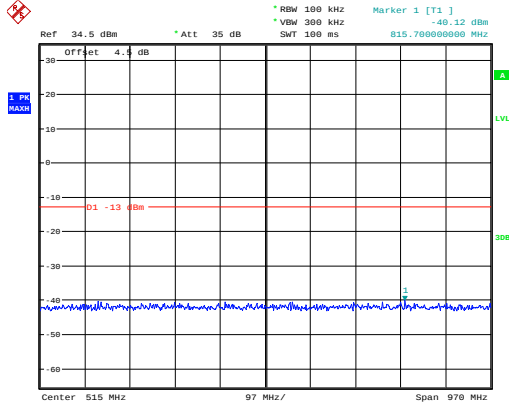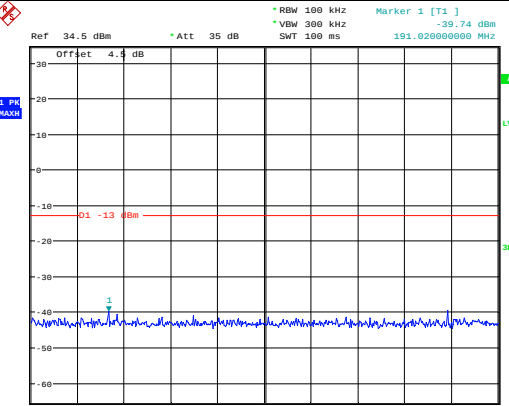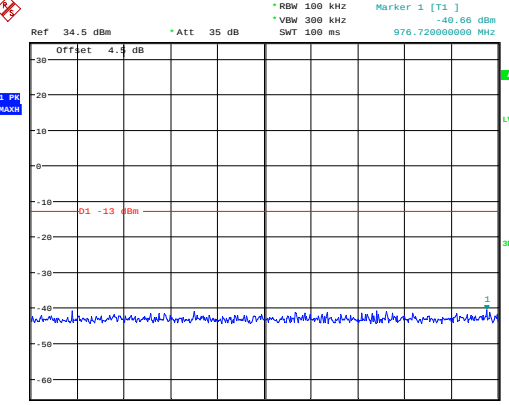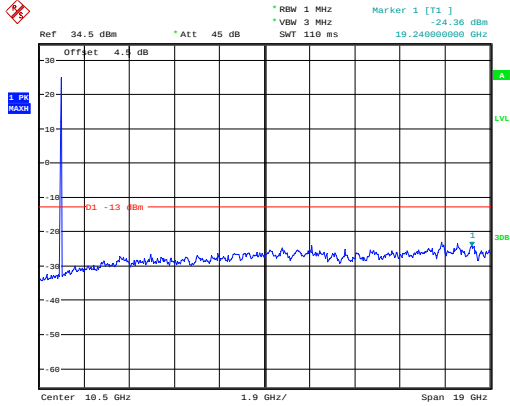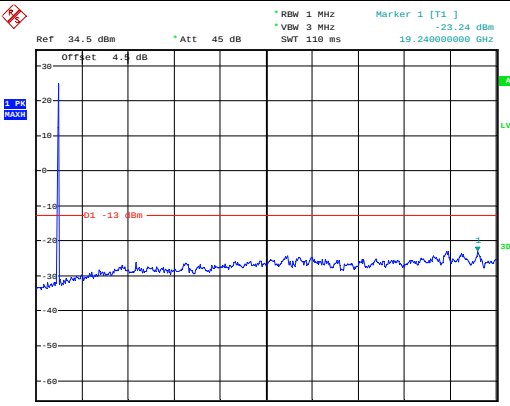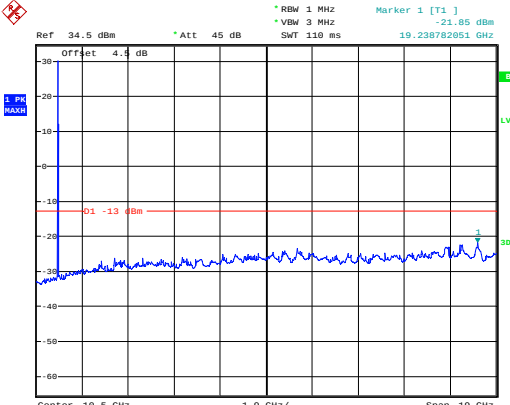Channel	GSM
Lowest	 Ref 34.5 dBm * Att 35 dB * RBW 100 kHz * VBW 300 kHz * SWT 100 ms * Marker 1 [T1] -40.12 dBm 815.700000000 MHz Offset 4.4 dB Center 515 MHz 97 MHz/ Span 970 MHz Date: 31.DEC.2022 14:19:33
Middle	 Ref 34.5 dBm * Att 35 dB * RBW 100 kHz * VBW 300 kHz * SWT 100 ms * Marker 1 [T1] -39.74 dBm 191.020000000 MHz Offset 4.4 dB Center 515 MHz 97 MHz/ Span 970 MHz Date: 31.DEC.2022 14:21:01
Highest	 Ref 34.5 dBm * Att 35 dB * RBW 100 kHz * VBW 300 kHz * SWT 100 ms * Marker 1 [T1] -40.66 dBm 976.720000000 MHz Offset 4.4 dB Center 515 MHz 97 MHz/ Span 970 MHz Date: 31.DEC.2022 14:23:01
	 Ref 34.5 dBm * Att 45 dB * RBW 1 MHz * VBW 3 MHz * SWT 110 ms * Marker 1 [T1] -24.36 dBm 19.240000000 GHz Offset 4.4 dB Center 10.5 GHz 1.9 GHz/ Span 19 GHz Date: 4.JAN.2023 15:31:42
	 Ref 34.5 dBm * Att 45 dB * RBW 1 MHz * VBW 3 MHz * SWT 110 ms * Marker 1 [T1] -23.24 dBm 19.240000000 GHz Offset 4.4 dB Center 10.5 GHz 1.9 GHz/ Span 19 GHz Date: 4.JAN.2023 15:31:10
	 Ref 34.5 dBm * Att 45 dB * RBW 1 MHz * VBW 3 MHz * SWT 110 ms * Marker 1 [T1] -21.85 dBm 19.238782051 GHz Offset 4.4 dB Center 10.5 GHz 1.9 GHz/ Span 19 GHz Date: 5.JAN.2023 17:04:08

Out of band emission, Band Edge

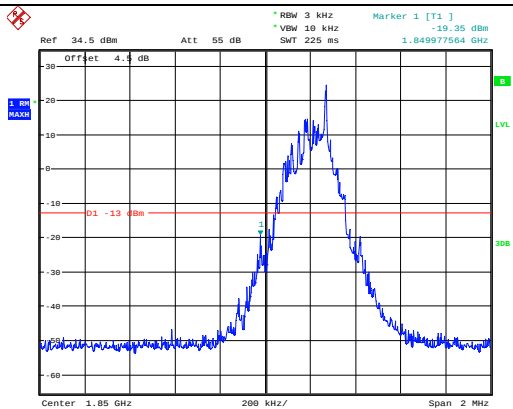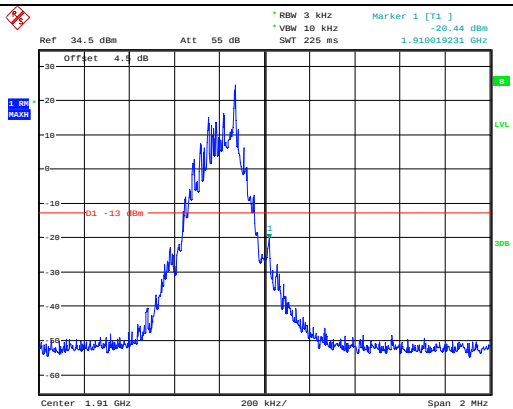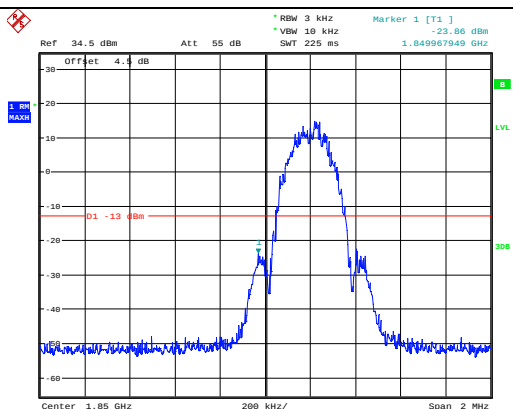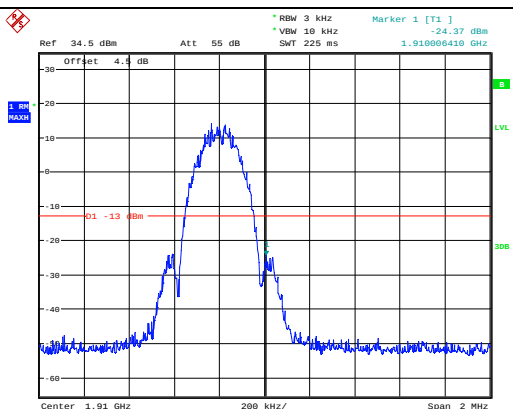Channel	Lowest	Highest
GSM	 Ref: 34.5 dBm Att: 55 dB RBW: 3 kHz VBW: 10 kHz SMT: 225 ms Marker 1 [T1]: 1.849977564 GHz -19.35 dBm Offset: 4.4 dB Center: 1.85 GHz Span: 2 MHz Date: 31.DEC.2022 13:37:26	 Ref: 34.5 dBm Att: 55 dB RBW: 3 kHz VBW: 10 kHz SMT: 225 ms Marker 1 [T1]: 1.910015231 GHz -20.44 dBm Offset: 4.4 dB Center: 1.91 GHz Span: 2 MHz Date: 31.DEC.2022 13:42:38
EDGE	 Ref: 34.5 dBm Att: 55 dB RBW: 3 kHz VBW: 10 kHz SMT: 225 ms Marker 1 [T1]: 1.849967949 GHz -23.86 dBm Offset: 4.4 dB Center: 1.85 GHz Span: 2 MHz Date: 31.DEC.2022 14:03:11	 Ref: 34.5 dBm Att: 55 dB RBW: 3 kHz VBW: 10 kHz SMT: 225 ms Marker 1 [T1]: 1.910006410 GHz -24.37 dBm Offset: 4.4 dB Center: 1.91 GHz Span: 2 MHz Date: 31.DEC.2022 13:49:31

4.3 Antenna Port Test Data and Results for WCDMA Band 2:

Serial Number:	1SNT-1	Test Date:	2022/12/31-2023/1/9
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.3-22.4	Relative Humidity: (%)	38-62	ATM Pressure: (kPa)	102.1-101.4
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/4/5	2023/4/4
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/4/6	2023/4/5
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA	1852.4	1880	1907.6

Test Data:**FCC§2.1046;§ 24.232 (c)****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	16	16.4	16.92	18.73	33
HSDPA Subtest 1	15.94	16.45	16.86	18.67	33
HSDPA Subtest 2	15.95	16.45	16.87	18.68	33
HSDPA Subtest 3	15.92	16.46	16.87	18.68	33
HSDPA Subtest 4	15.93	16.48	16.88	18.69	33
HSUPA Subtest 1	16.02	16.48	16.86	18.67	33
HSUPA Subtest 2	16.03	16.45	16.85	18.66	33
HSUPA Subtest 3	16.01	16.43	16.95	18.76	33
HSUPA Subtest 4	16.03	16.37	16.93	18.74	33
HSUPA Subtest 5	15.99	16.38	16.91	18.72	33
Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)					
				Result:	Pass

Peak-to-average Ratio(PAR)

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	3.62	3.49	3.43	13
HSDPA	4.9	4.55	4.68	13
HSUPA	4.49	4.78	4.84	13
			Result:	Pass

FCC §2.1049, §24.238:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.18	4.16	4.16	4.687	4.708	4.701
HSDPA	4.16	4.16	4.16	4.671	4.708	4.704
HSUPA	4.16	4.16	4.16	4.687	4.692	4.704

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--


FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §24.235: Frequency Stability

Test Mode:	WCDMA R99	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.307	1850.00	1909.671	1910
	-20	3.8	1850.308	1850.00	1909.673	1910
	-10	3.8	1850.293	1850.00	1909.678	1910
	0	3.8	1850.338	1850.00	1909.717	1910
	10	3.8	1850.356	1850.00	1909.681	1910
	20	3.8	1850.320	1850.00	1909.680	1910
	30	3.8	1850.333	1850.00	1909.696	1910
	40	3.8	1850.363	1850.00	1909.709	1910
	50	3.8	1850.328	1850.00	1909.690	1910
Frequency Stability vs. Voltage	20	3.5	1850.333	1850.00	1909.699	1910
	20	4.2	1850.363	1850.00	1909.716	1910
Result:					Pass	

Test Plots(Note: The 4.5dB is the Insertion loss of the RF cable, Power Splitter, which was offset into the Spectrum Analyzer):

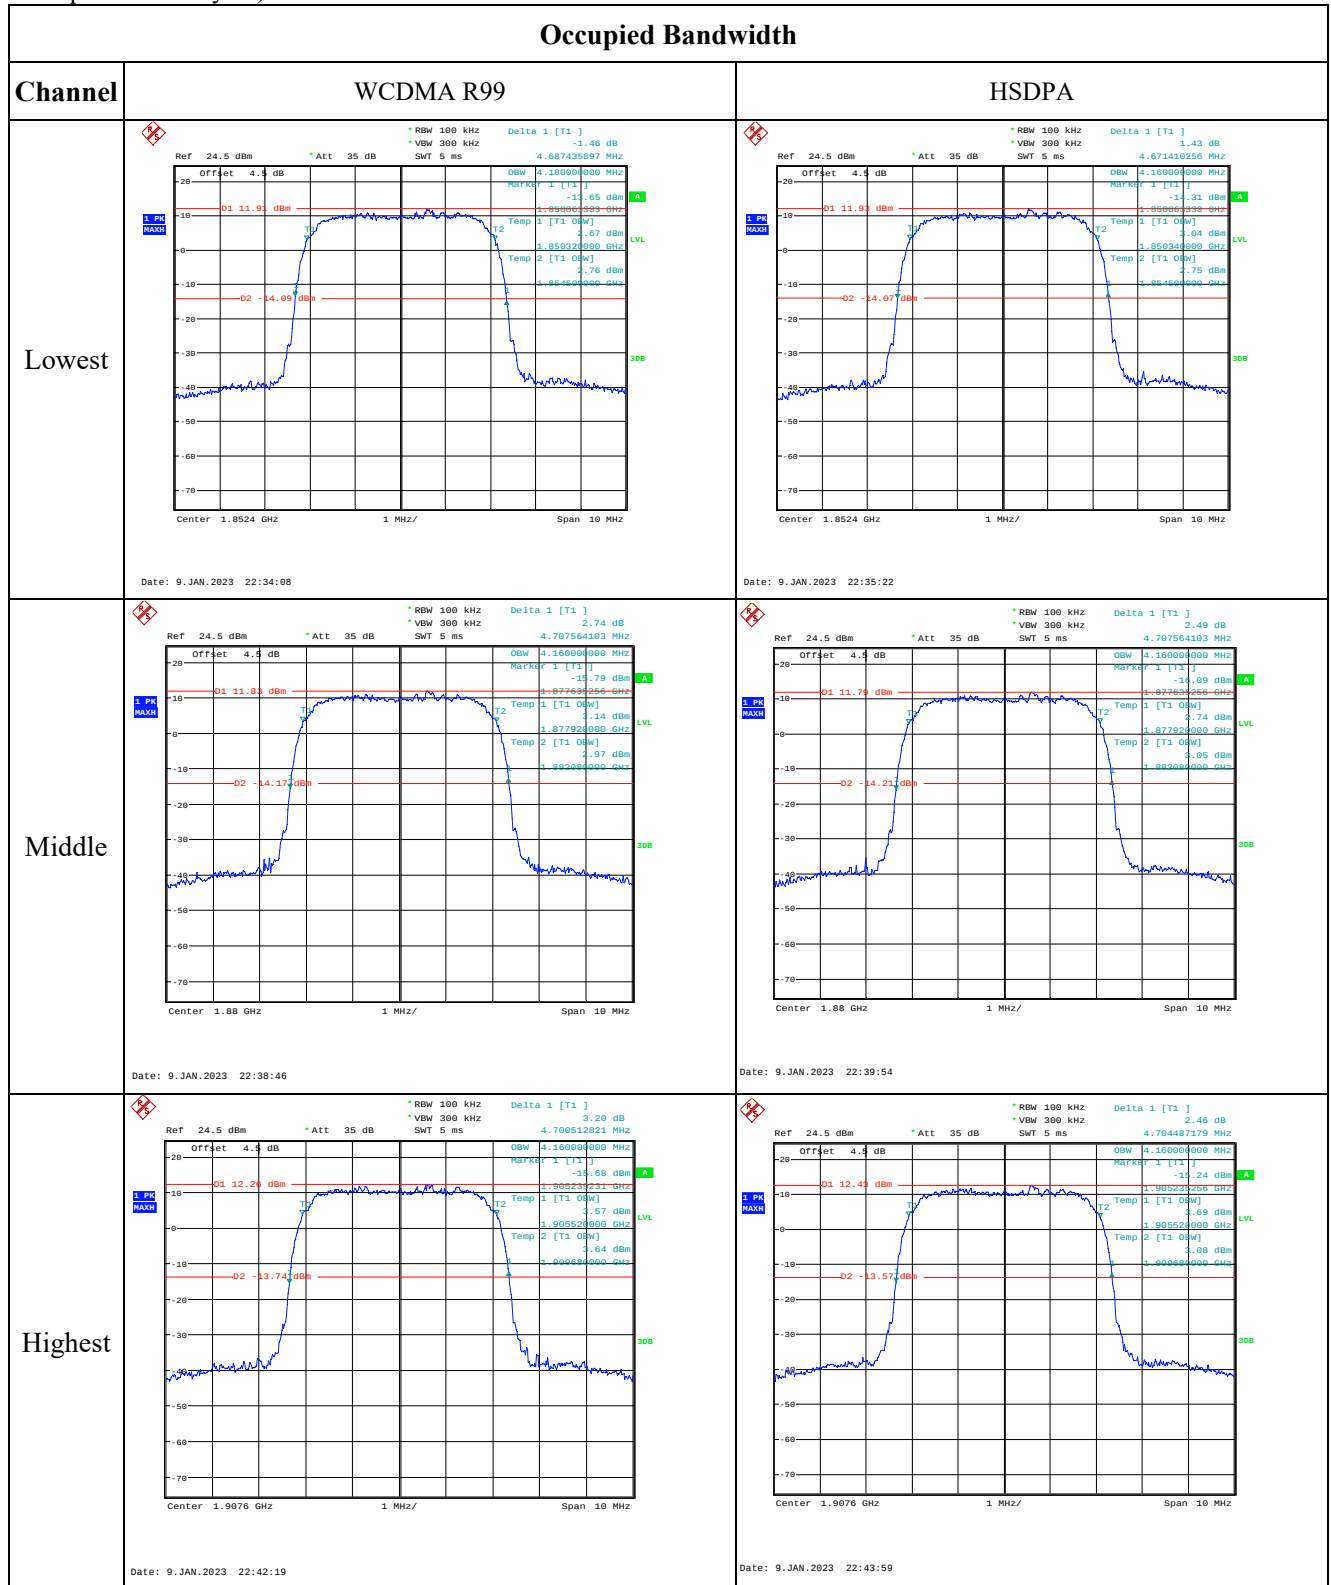


Occupied Bandwidth


Channel

HSUPA


Lowest

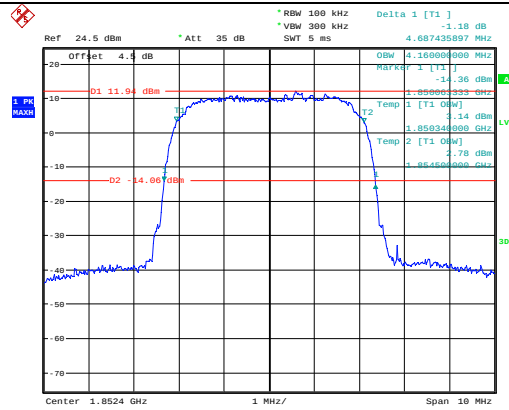

Middle

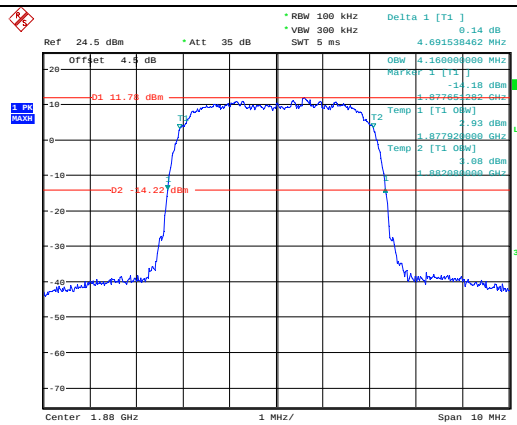

Highest


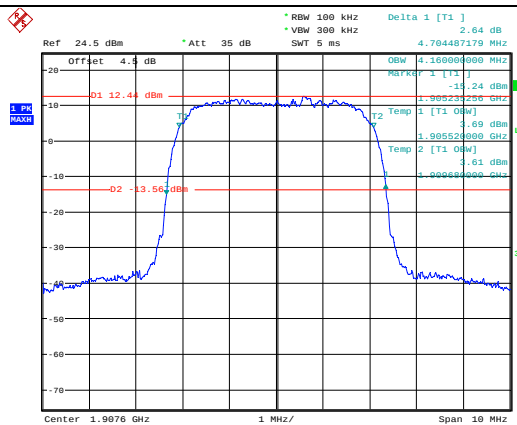


Spurious Emissions at Antenna Terminal



Channel

WCDMA R99



Lowest

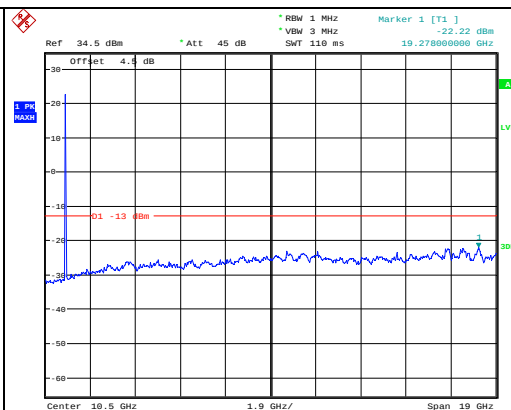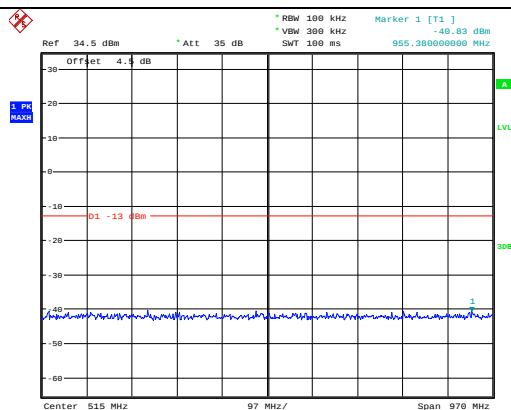







Middle

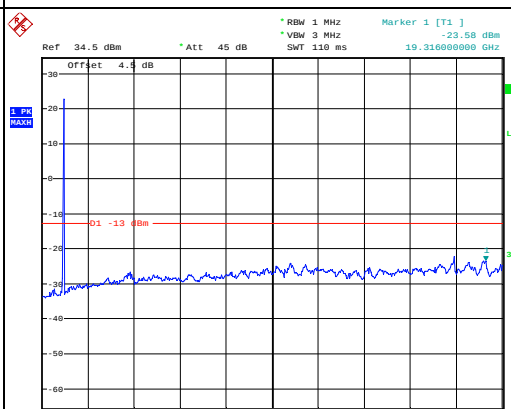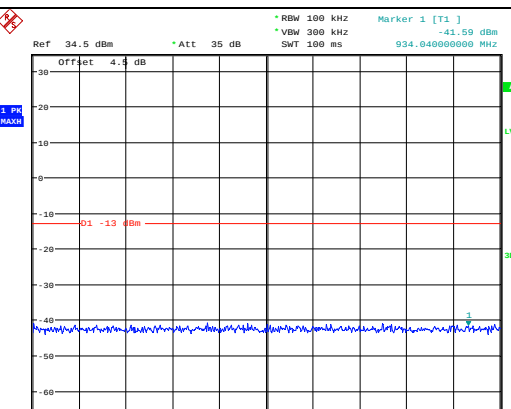

Highest

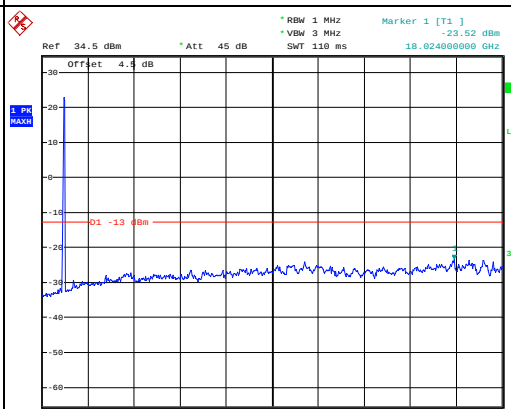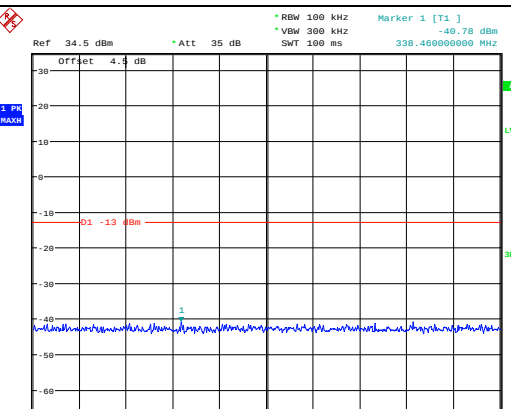

Out of band emission, Band Edge

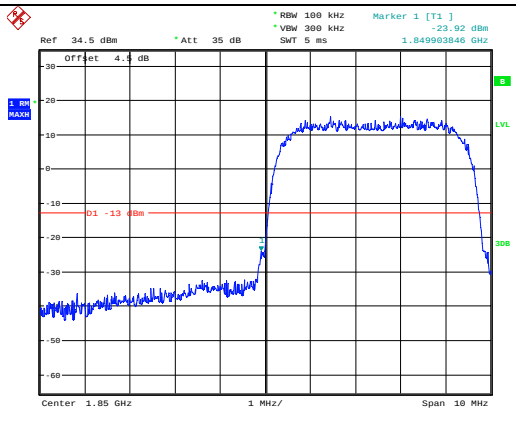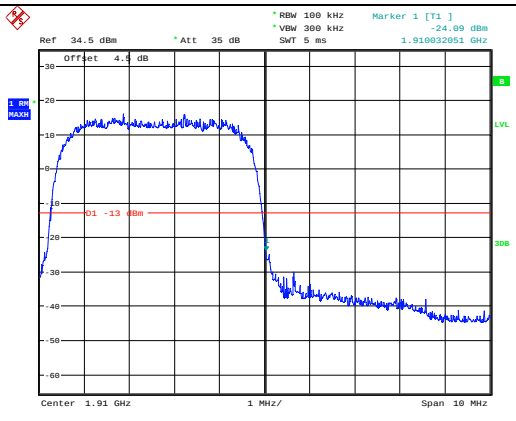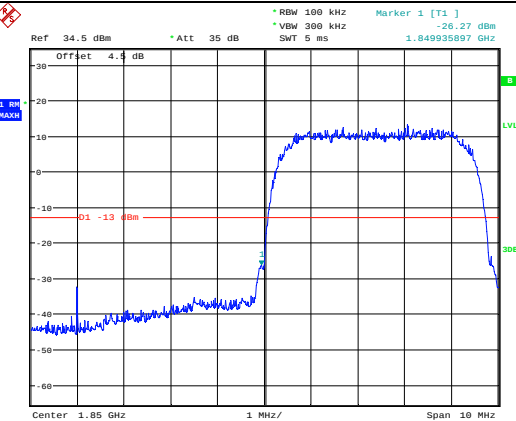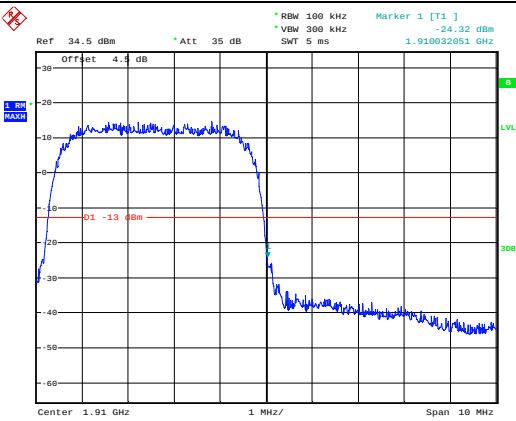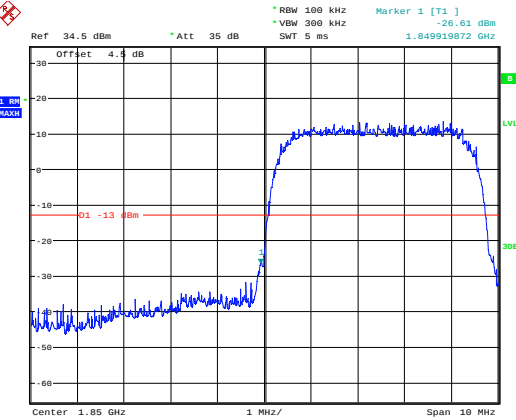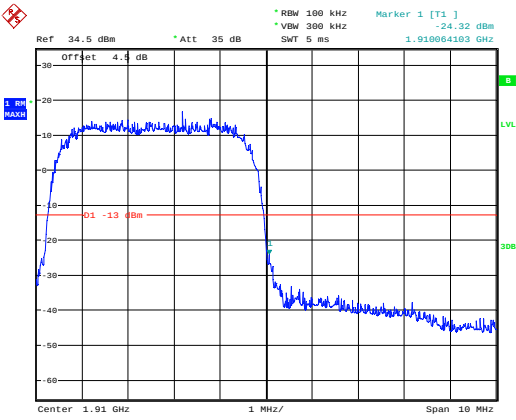Mode	Lowest	Highest
R99	 Ref 34.5 dBm Att 35 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Marker 1 [T1] -23.92 dBm 1.849983846 GHz Offset 4.4 dB Center 1.85 GHz 1 MHz/ Span 10 MHz Date: 31.DEC.2022 15:30:13	 Ref 34.5 dBm Att 35 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Marker 1 [T1] -24.09 dBm 1.910032051 GHz Offset 4.4 dB Center 1.91 GHz 1 MHz/ Span 10 MHz Date: 31.DEC.2022 15:49:13
HSUPA	 Ref 34.5 dBm Att 35 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Marker 1 [T1] -26.27 dBm 1.849935897 GHz Offset 4.4 dB Center 1.85 GHz 1 MHz/ Span 10 MHz Date: 31.DEC.2022 15:31:33	 Ref 34.5 dBm Att 35 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Marker 1 [T1] -24.32 dBm 1.910032051 GHz Offset 4.4 dB Center 1.91 GHz 1 MHz/ Span 10 MHz Date: 31.DEC.2022 15:50:09
HSDPA	 Ref 34.5 dBm Att 35 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Marker 1 [T1] -26.61 dBm 1.849939872 GHz Offset 4.4 dB Center 1.85 GHz 1 MHz/ Span 10 MHz Date: 31.DEC.2022 15:31:04	 Ref 34.5 dBm Att 35 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Marker 1 [T1] -24.32 dBm 1.910064103 GHz Offset 4.4 dB Center 1.91 GHz 1 MHz/ Span 10 MHz Date: 31.DEC.2022 15:49:47

4.4 Antenna Port Test Data and Results for WCDMA Band 4:

Serial Number:	1SNT-1	Test Date:	2022/12/31-2023/1/9
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.3-22.4	Relative Humidity: (%)	38-62	ATM Pressure: (kPa)	102.1-101.4
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/4/5	2023/4/4
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/4/6	2023/4/5
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA	1712.4	1732.6	1752.6

Test Data:**FCC§2.1046;§27.50(d)(4)****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99 Subtest 1	16.35	16.65	15.97	11.63	30
HSDPA Subtest 1	16.34	16.74	16.05	11.72	30
HSDPA Subtest 2	16.33	16.71	16.01	11.69	30
HSDPA Subtest 3	16.36	16.69	16.03	11.67	30
HSDPA Subtest 4	16.33	16.73	16.03	11.71	30
HSUPA Subtest 1	16.41	16.72	15.98	11.7	30
HSUPA Subtest 2	16.39	16.71	15.99	11.69	30
HSUPA Subtest 3	16.37	16.68	15.99	11.66	30
HSUPA Subtest 4	16.36	16.69	15.98	11.67	30
HSUPA Subtest 5	16.36	16.66	15.97	11.64	30
Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)					
				Result:	Pass

Peak-to-average Ratio(PAR)

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	3.53	3.62	3.53	13
HSDPA	4.58	4.87	4.68	13
HSUPA	4.68	4.97	4.58	13
			Result:	Pass

FCC §2.1049, §27.53:Occupied Bandwidth

Opration Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.16	4.18	4.14	4.672	4.692	4.669
HSDPA	4.16	4.16	4.14	4.676	4.692	4.669
HSUPA	4.16	4.16	4.14	4.676	4.68	4.673

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, § 27.53:Out of band emission, Band Edge


Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §27.54: Frequency Stability

Test Mode:	WCDMA R99	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1710.674	1710.00	1754.330	1755
	-20	3.8	1710.668	1710.00	1754.330	1755
	-10	3.8	1710.671	1710.00	1754.345	1755
	0	3.8	1710.664	1710.00	1754.323	1755
	10	3.8	1710.667	1710.00	1754.338	1755
	20	3.8	1710.680	1710.00	1754.320	1755
	30	3.8	1710.662	1710.00	1754.341	1755
	40	3.8	1710.679	1710.00	1754.349	1755
	50	3.8	1710.664	1710.00	1754.339	1755
Frequency Stability vs. Voltage	20	3.5	1710.680	1710.00	1754.345	1755
	20	4.2	1710.659	1710.00	1754.341	1755
Result:					Pass	

Test Plots(Note: The 4.5dB is the Insertion loss of the RF cable, Power Splitter, which was offset into the Spectrum Analyzer):

Occupied Bandwidth

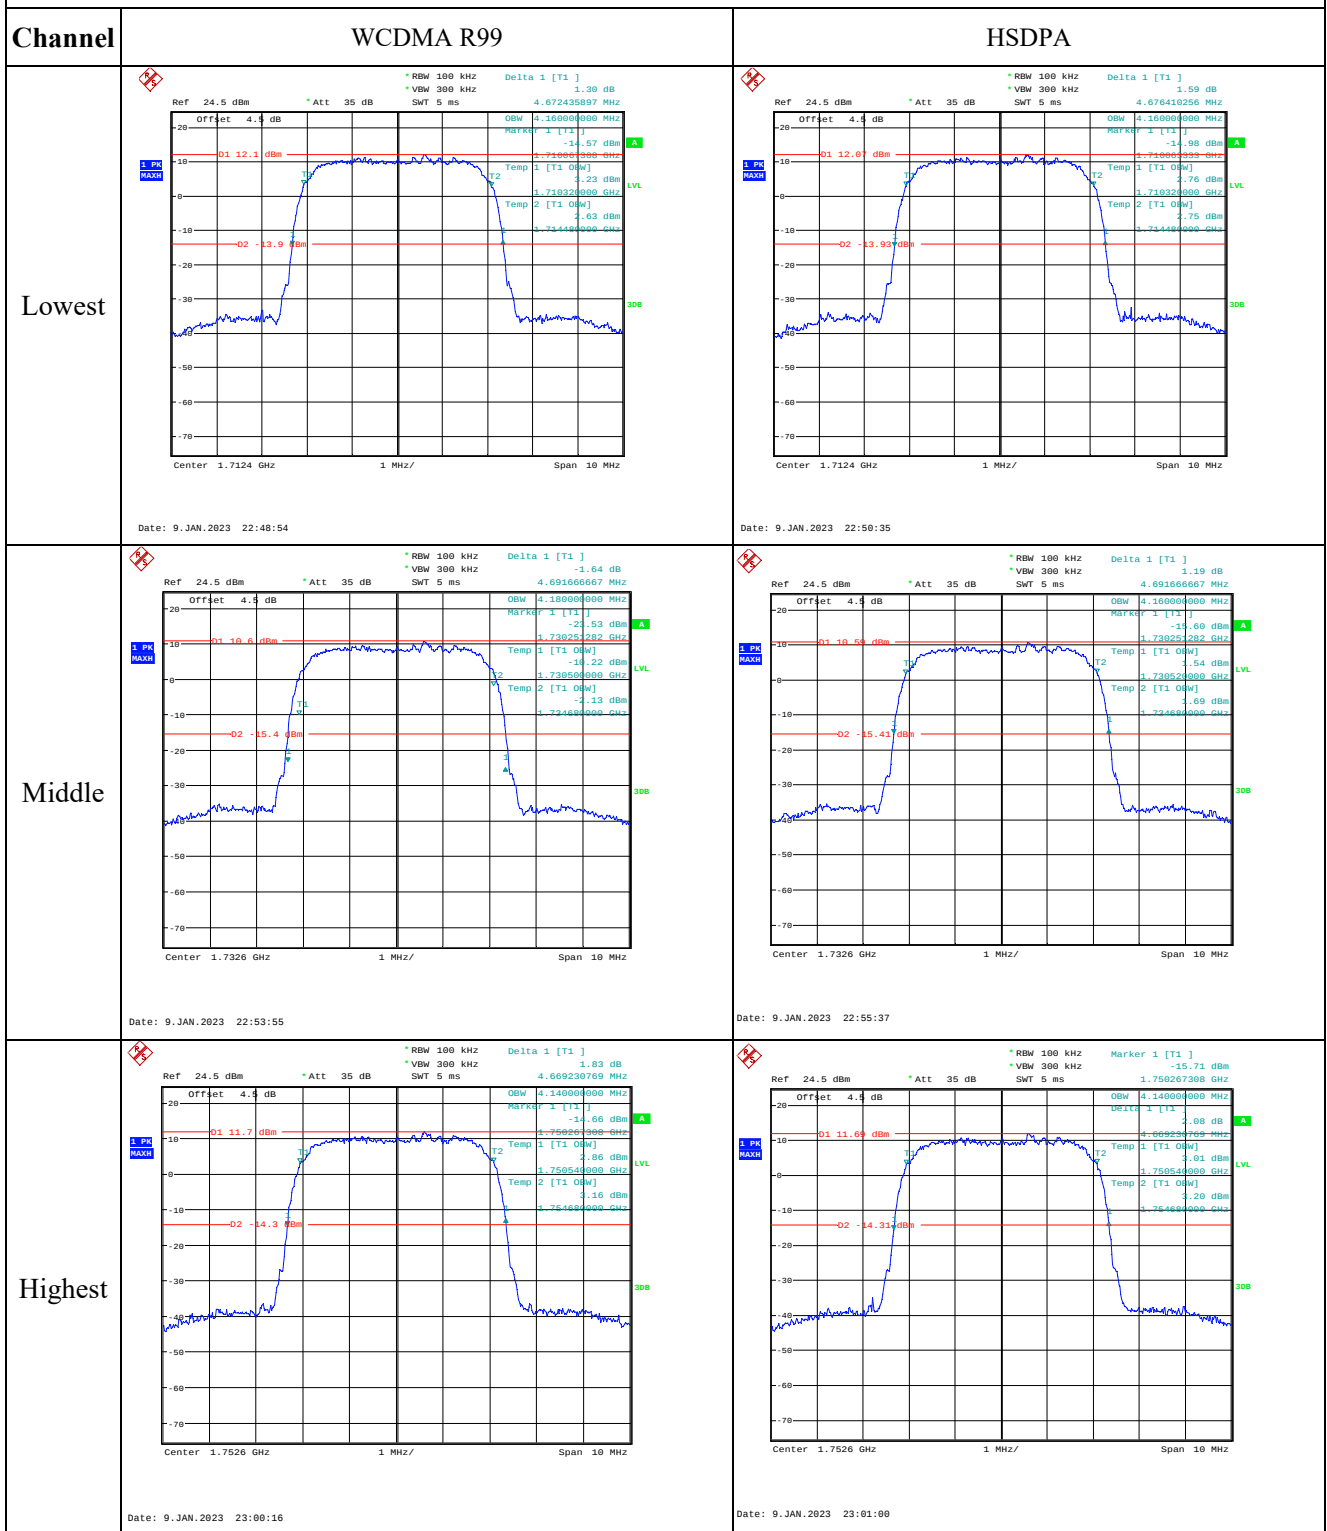


Occupied Bandwidth

Channel


HSUPA

Lowest

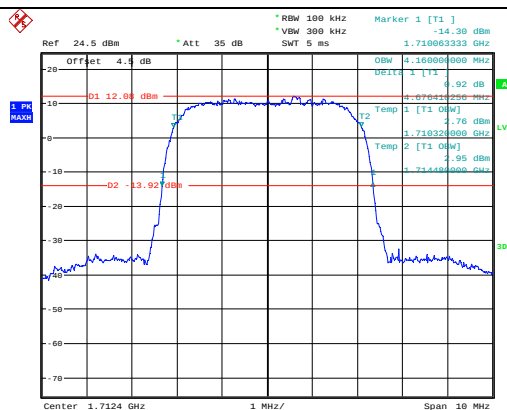


Date: 9, JAN, 2023 22:51:17

Middle

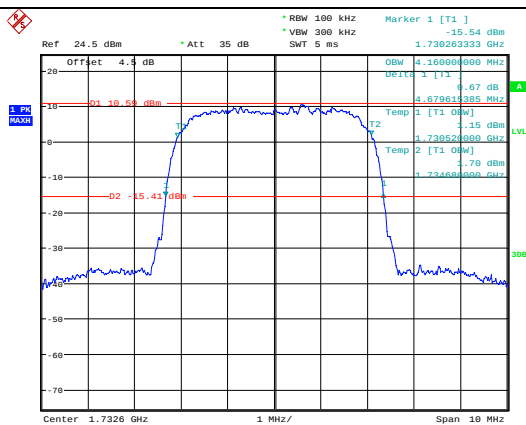

Date: 9, JAN, 2023 22:58:08

Highest

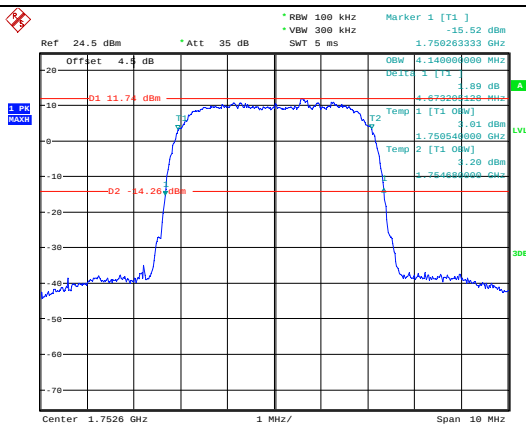



Date: 9, JAN, 2023 23:01:43

Spurious Emissions at Antenna Terminal



Channel

WCDMA R99



Lowest

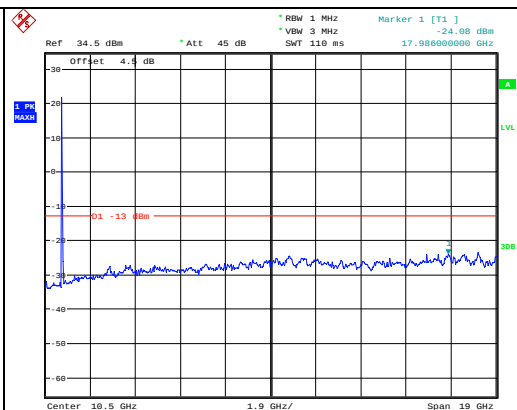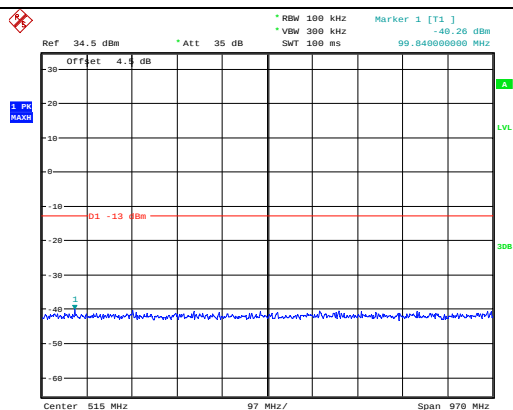







Middle

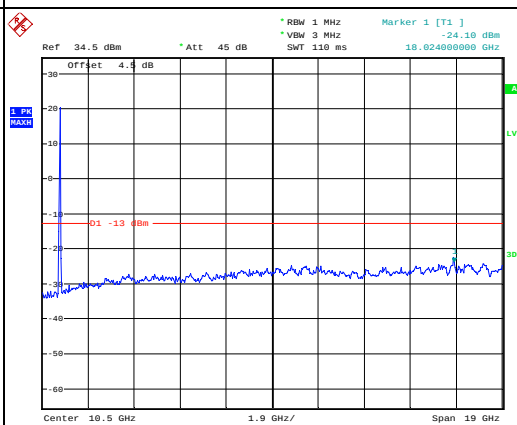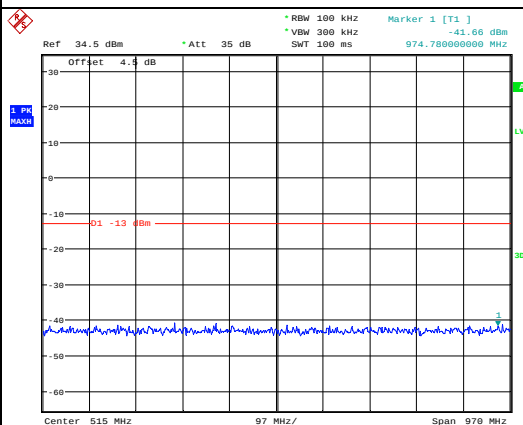

Highest

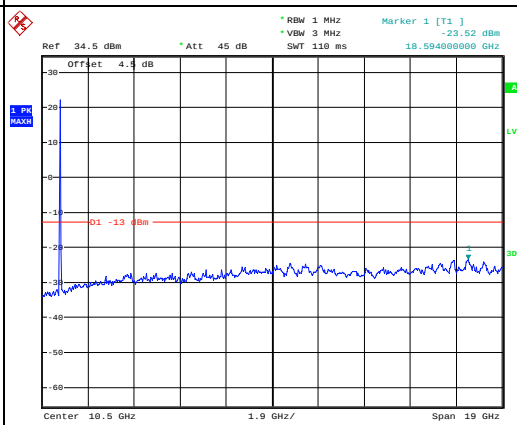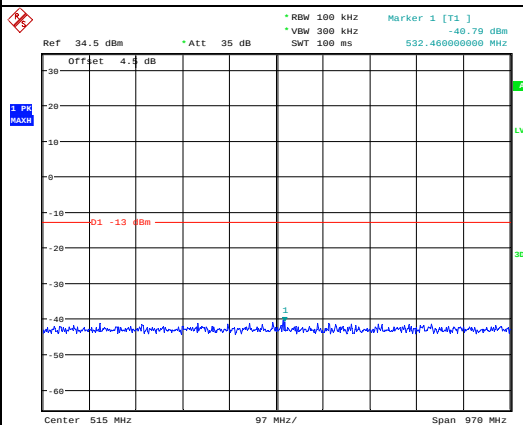

Out of band emission, Band Edge

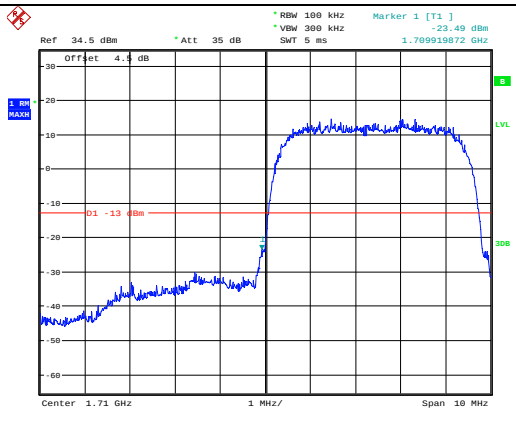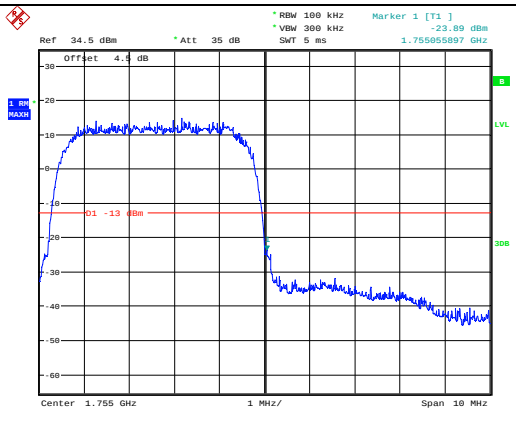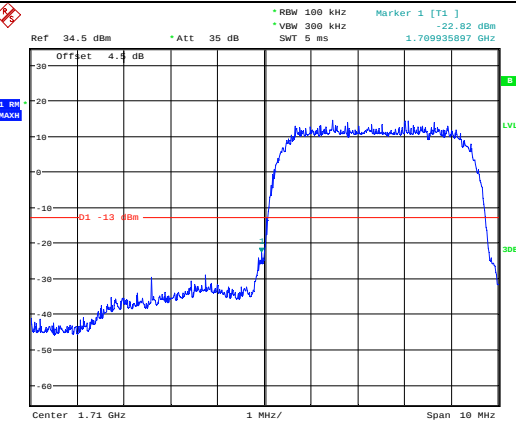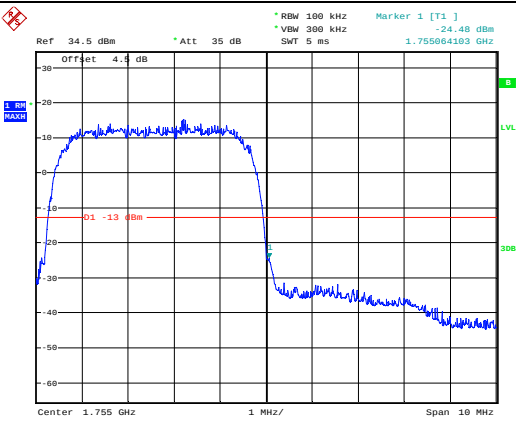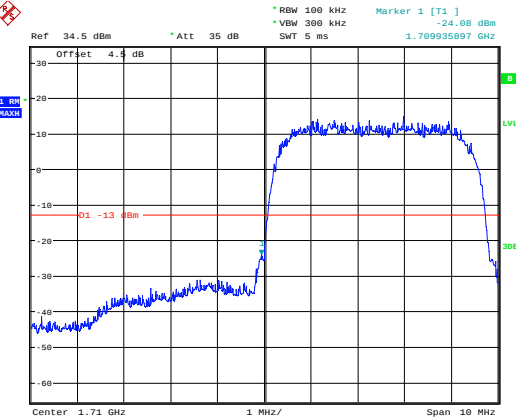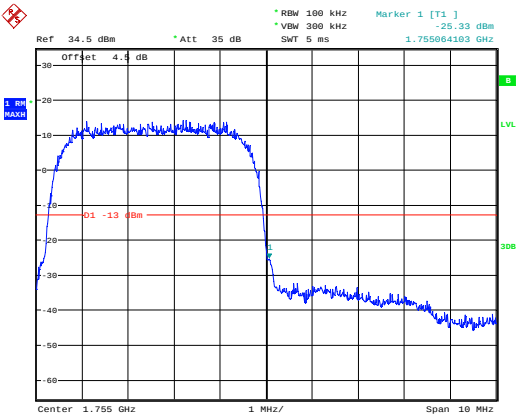Mode	Lowest	Highest
R99	 Ref 34.5 dBm Att 35 dB RBW 100 kHz VSW 300 kHz SWT 5 ms Marker 1 [T1] -23.49 dBm 1.709919872 GHz Offset 4.4 dB Center 1.71 GHz 1 MHz/ Span 10 MHz Date: 31.DEC.2022 15:52:10	 Ref 34.5 dBm Att 35 dB RBW 100 kHz VSW 300 kHz SWT 5 ms Marker 1 [T1] -23.89 dBm 1.755055897 GHz Offset 4.4 dB Center 1.755 GHz 1 MHz/ Span 10 MHz Date: 31.DEC.2022 16:07:31
HSUPA	 Ref 34.5 dBm Att 35 dB RBW 100 kHz VSW 300 kHz SWT 5 ms Marker 1 [T1] -22.82 dBm 1.709935897 GHz Offset 4.4 dB Center 1.71 GHz 1 MHz/ Span 10 MHz Date: 31.DEC.2022 15:52:57	 Ref 34.5 dBm Att 35 dB RBW 100 kHz VSW 300 kHz SWT 5 ms Marker 1 [T1] -24.48 dBm 1.755064103 GHz Offset 4.4 dB Center 1.755 GHz 1 MHz/ Span 10 MHz Date: 31.DEC.2022 16:08:15
HSDPA	 Ref 34.5 dBm Att 35 dB RBW 100 kHz VSW 300 kHz SWT 5 ms Marker 1 [T1] -24.08 dBm 1.709935897 GHz Offset 4.4 dB Center 1.71 GHz 1 MHz/ Span 10 MHz Date: 31.DEC.2022 15:52:32	 Ref 34.5 dBm Att 35 dB RBW 100 kHz VSW 300 kHz SWT 5 ms Marker 1 [T1] -25.33 dBm 1.755064103 GHz Offset 4.4 dB Center 1.755 GHz 1 MHz/ Span 10 MHz Date: 31.DEC.2022 16:07:51

4.5 Antenna Port Test Data and Results for WCDMA Band 5:

Serial Number:	1SNT-1	Test Date:	2022/12/31-2023/1/9
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.3-22.4	Relative Humidity: (%)	38-62	ATM Pressure: (kPa)	102.1-101.4
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/4/5	2023/4/4
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/4/6	2023/4/5
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA	826.4	836.6	846.6

Test Data:**FCC§2.1046;§ 22.913 (a)****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99 Subtest 1	17.23	16.43	17.24	11.6	38.45
HSDPA Subtest 1	17.25	17.35	17.26	11.71	38.45
HSDPA Subtest 2	17.25	17.32	17.24	11.68	38.45
HSDPA Subtest 3	17.24	17.36	17.22	11.72	38.45
HSDPA Subtest 4	17.27	17.37	17.22	11.73	38.45
HSUPA Subtest 1	17.27	17.4	17.24	11.76	38.45
HSUPA Subtest 2	17.26	17.31	17.21	11.67	38.45
HSUPA Subtest 3	17.24	17.39	17.2	11.75	38.45
HSUPA Subtest 4	17.23	17.29	17.23	11.65	38.45
HSUPA Subtest 5	17.22	17.39	17.19	11.75	38.45
Note: $ERP = \text{Conducted Power(dBm)} - L_c(\text{dB}) + G_T(\text{dBd})$ $G_T(\text{dBd}) = G_T(\text{dBi}) - 2.15$					
				Result:	Pass

Peak-to-average Ratio(PAR)

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	3.33	3.53	3.59	13
HSDPA	4.36	4.74	4.39	13
HSUPA	4.13	4.33	4.87	13
			Result:	Pass

FCC §2.1049, §22.917, §22.905: Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.16	4.16	4.14	4.692	4.692	4.689
HSDPA	4.14	4.16	4.16	4.676	4.692	4.689
HSUPA	4.14	4.16	4.16	4.679	4.676	4.701

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §22.917(a): Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--


FCC §2.1051, §22.917(a): Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §22.355: Frequency Stability

Test Modulation:	WCDMA R99		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	16	0.019	2.5
	-20	3.8	2	0.002	2.5
	-10	3.8	6	0.007	2.5
	0	3.8	2	0.002	2.5
	10	3.8	7	0.008	2.5
	20	3.8	13	0.016	2.5
	30	3.8	16	0.019	2.5
	40	3.8	5	0.006	2.5
	50	3.8	11	0.013	2.5
Frequency Stability vs. Voltage	20	3.5	4	0.005	2.5
	20	4.2	5	0.006	2.5
Result:				Pass	

Test Plots(Note: The 4.5dB is the Insertion loss of the RF cable, Power Splitter, which was offset into the Spectrum Analyzer):

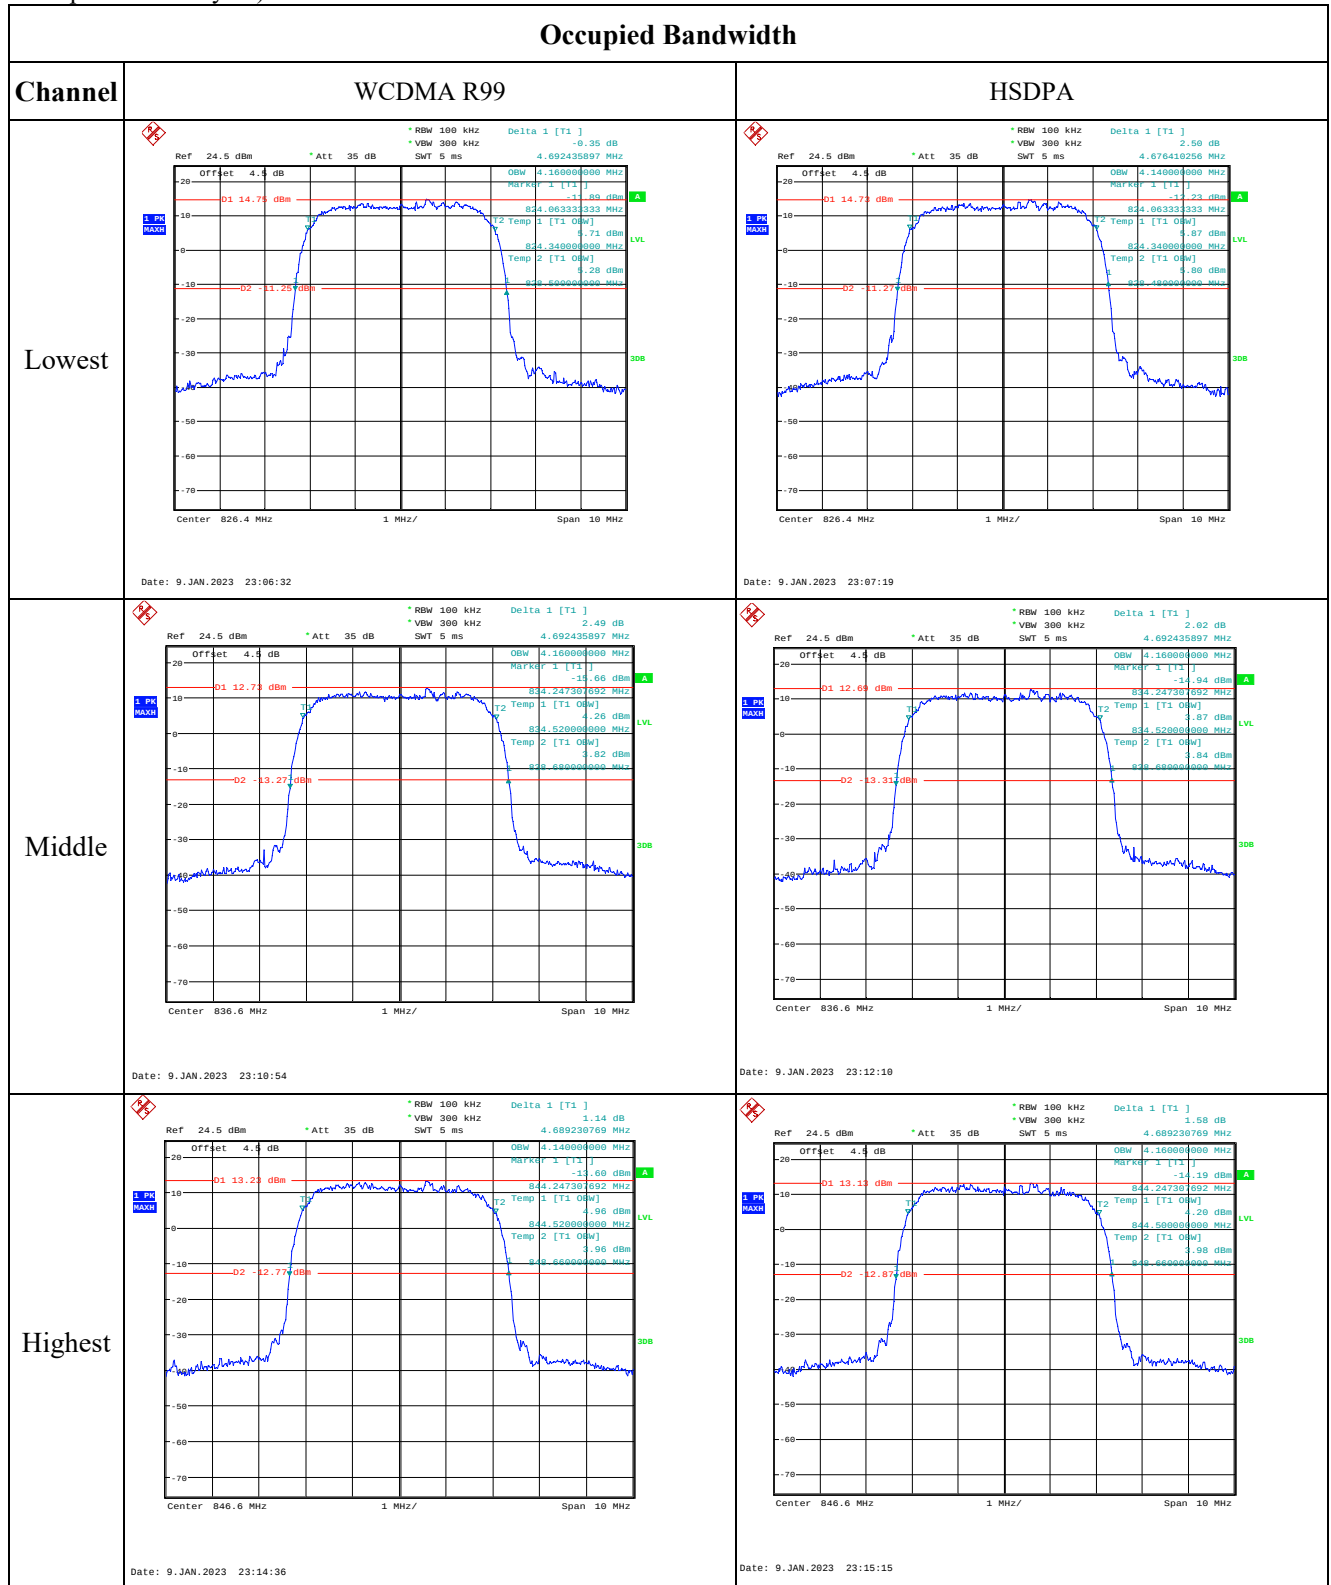


Occupied Bandwidth

Channel


HSUPA

Lowest

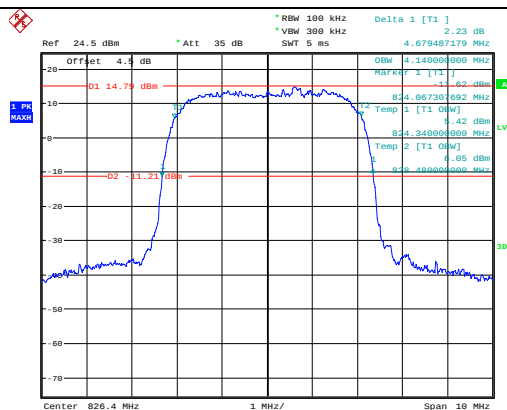


Date: 9, JAN, 2023 23:08:59

Middle

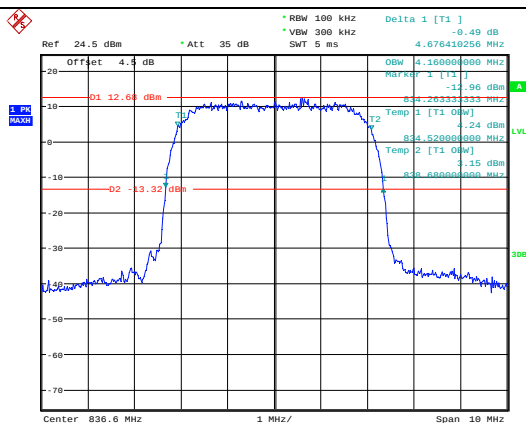

Date: 9, JAN, 2023 23:13:01

Highest

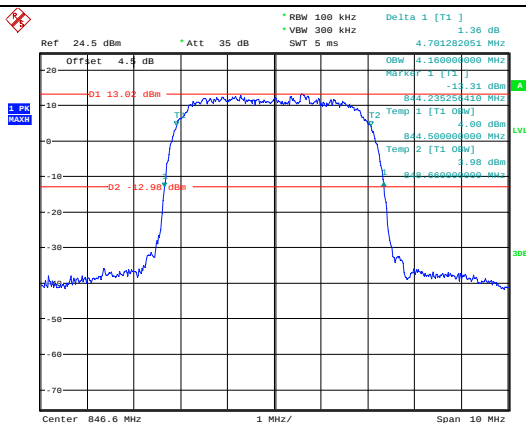


Date: 9, JAN, 2023 23:16:17

Spurious Emissions at Antenna Terminal


Channel

WCDMA R99

Lowest

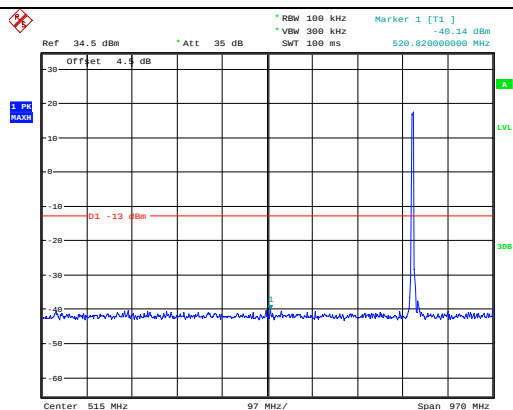


Date: 31.DEC.2022 14:54:38

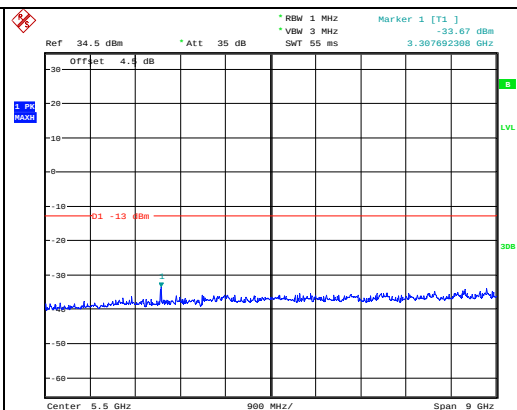


Date: 31.DEC.2022 14:52:40

Middle

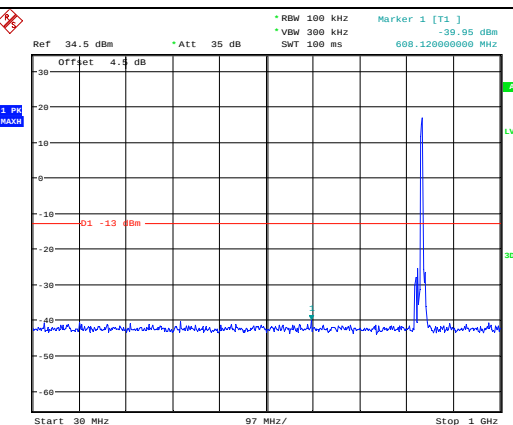


Date: 31.DEC.2022 15:01:57

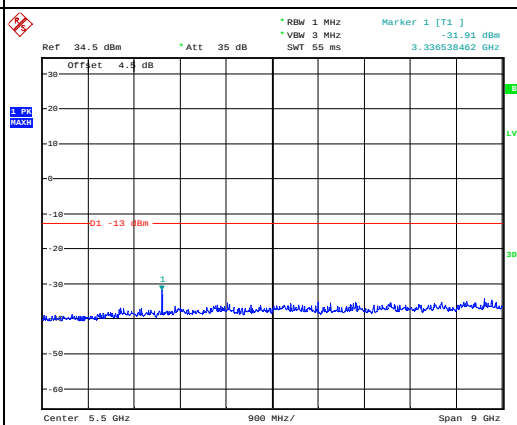


Date: 31.DEC.2022 15:02:12

Highest

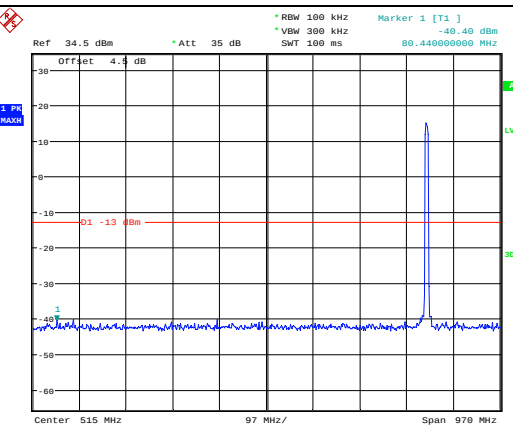

Date: 31.DEC.2022 15:03:19

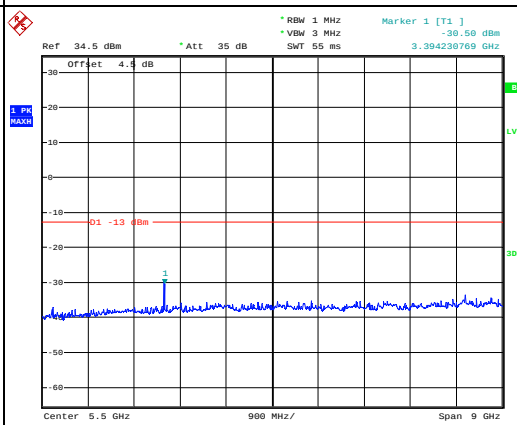

Date: 31.DEC.2022 15:02:38

Out of band emission, Band Edge

Mode	Lowest	Highest
R99	Ref 34.5 dBm Att 35 dB RBW 100 kHz VSW 300 kHz SWT 5 ms Marker 1 [T1] -27.35 dBm Center 824 MHz 1 MHz/ Span 10 MHz Date: 31.DEC.2022 16:10:07	Ref 34.5 dBm Att 35 dB RBW 100 kHz VSW 300 kHz SWT 5 ms Marker 1 [T1] -25.93 dBm Center 849 MHz 1 MHz/ Span 10 MHz Date: 31.DEC.2022 16:12:25
HSUPA	Ref 34.5 dBm Att 35 dB RBW 100 kHz VSW 300 kHz SWT 5 ms Marker 1 [T1] -28.09 dBm Center 824 MHz 1 MHz/ Span 10 MHz Date: 31.DEC.2022 16:11:04	Ref 34.5 dBm Att 35 dB RBW 100 kHz VSW 300 kHz SWT 5 ms Marker 1 [T1] -25.11 dBm Center 849 MHz 1 MHz/ Span 10 MHz Date: 31.DEC.2022 16:13:04
HSDPA	Ref 34.5 dBm Att 35 dB RBW 100 kHz VSW 300 kHz SWT 5 ms Marker 1 [T1] -22.43 dBm Center 824 MHz 1 MHz/ Span 10 MHz Date: 31.DEC.2022 16:10:39	Ref 34.5 dBm Att 35 dB RBW 100 kHz VSW 300 kHz SWT 5 ms Marker 1 [T1] -24.85 dBm Center 849 MHz 1 MHz/ Span 10 MHz Date: 31.DEC.2022 16:12:42

4.6 Antenna Port Test Data and Results for LTE Band 2

Serial Number:	1SNT-1	Test Date:	2022/12/28-2023/1/10
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.3-23.2	Relative Humidity: (%)	38-63	ATM Pressure: (kPa)	102.1-101.3
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/4/5	2023/4/4
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/4/6	2023/4/5
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1850.7	1880	1909.3
3MHz	1851.5	1880	1908.5
5MHz	1852.5	1880	1907.5
10MHz	1855	1880	1905
15MHz	1857.5	1880	1902.5
20MHz	1860	1880	1900

Test Data:**FCC§2.1046;§ 24.232****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	17.07	16.61	17.42	19.23	33
	RB1#3	17.28	16.68	17.38		
	RB1#5	17.28	16.59	17.34		
	RB3#0	17.42	16.76	17.37		
	RB3#3	17.4	16.71	17.38		
	RB6#0	16.41	16.04	16.48		
1.4MHz 16QAM	RB1#0	16.74	16.13	16.65	18.86	33
	RB1#3	17.05	15.96	16.74		
	RB1#5	17.02	16.14	16.63		
	RB3#0	16.45	16.01	16.45		
	RB3#3	16.45	16.06	16.68		
	RB6#0	16.62	15.93	16.64		
3MHz QPSK	RB1#0	17.02	17.29	17.29	19.21	33
	RB1#8	17.07	17.35	17.4		
	RB1#14	16.92	17.32	17.32		
	RB6#0	16.06	16.35	16.39		
	RB6#9	16	16.38	16.48		
	RB15#0	16.1	16.49	16.41		
3MHz 16QAM	RB1#0	16.7	16.15	16.68	18.67	33
	RB1#8	16.7	15.95	16.86		
	RB1#14	16.69	16.01	16.75		
	RB6#0	16.15	16.3	16.55		
	RB6#9	16.17	16.23	16.39		
	RB15#0	16.05	16.47	16.54		
5MHz QPSK	RB1#0	17.06	16.89	17.09	18.91	33
	RB1#13	17.1	16.99	16.99		
	RB1#24	17.05	16.86	16.99		
	RB15#0	16.05	15.96	16.06		
	RB15#10	16.02	15.99	16.13		
	RB25#0	16.07	16.05	16.01		
5MHz 16QAM	RB1#0	16.25	16	16.16	18.06	33
	RB1#13	16.01	16.09	16.11		
	RB1#24	16.03	16.02	16.15		
	RB15#0	16.17	16.08	16.2		
	RB15#10	16.14	16.04	16.17		
	RB25#0	16.13	16.05	16.24		
10MHz QPSK	RB1#0	17.32	16.5	16.9	19.13	33
	RB1#25	17.3	16.48	16.84		

	RB1#49	17.16	16.58	16.85		
	RB25#0	16.55	16.07	16.08		
	RB25#25	16.31	16.04	16.23		
	RB50#0	16.24	16.02	16.04		
10MHz 16QAM	RB1#0	16.87	15.99	16.15	18.7	33
	RB1#25	16.77	16.03	16.09		
	RB1#49	16.89	16.01	16.21		
	RB25#0	16.23	16.2	16.07		
	RB25#25	16.34	15.97	15.97		
	RB50#0	16.29	15.89	15.92		
15MHz QPSK	RB1#0	17.49	16.87	16.79	19.3	33
	RB1#38	17.37	16.97	16.82		
	RB1#74	17.46	16.93	16.78		
	RB36#0	16.37	16.08	15.9		
	RB36#39	16.37	16.06	15.87		
	RB75#0	16.3	16.05	15.83		
15MHz 16QAM	RB1#0	16.5	16.14	16.06	18.31	33
	RB1#38	16.4	16.13	16.06		
	RB1#74	16.5	16.08	16.04		
	RB36#0	15.93	15.89	15.98		
	RB36#39	15.96	15.92	15.91		
	RB75#0	15.87	16.07	15.04		
20MHz QPSK	RB1#0	17.02	17.09	17.42	19.23	33
	RB1#50	16.98	17.08	17.41		
	RB1#99	17.04	17.14	17.29		
	RB50#0	16.79	16	16.32		
	RB50#50	15.92	15.99	16.22		
	RB100#0	15.92	16.09	16.37		
20MHz 16QAM	RB1#0	16.37	16.74	16.25	18.56	33
	RB1#50	15.94	16.73	16.32		
	RB1#99	16.03	16.75	16.36		
	RB50#0	15.98	15.95	15.95		
	RB50#50	15.97	16.01	15.91		
	RB100#0	16.03	16.08	15.98		

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

Result:

Pass

Peak-to-average Ratio(PAR)					
Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	6.06	5.48	5.45	13
	RB100#0	5.83	5.77	5.64	13
20MHz 16QAM	RB1#0	7.24	6.15	6.67	13
	RB100#0	6.7	6.63	6.57	13
				Result:	Pass

FCC §2.1049, §24.238:Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.104	1.098	1.104	1.254	1.254	1.26
1.4MHz 16QAM	1.11	1.098	1.098	1.26	1.254	1.254
3MHz QPSK	2.7	2.687	2.712	3.012	3.036	3
3MHz 16QAM	2.7	2.7	2.712	3.024	3.024	3.012
5MHz QPSK	4.54	4.52	4.52	5.02	4.98	4.98
5MHz 16QAM	4.54	4.52	4.52	5.04	5	5
10MHz QPSK	9	8.96	8.96	9.8	9.84	9.76
10MHz 16QAM	8.96	8.96	8.96	9.84	9.8	9.72
15MHz QPSK	13.5	13.62	13.5	14.94	15.12	14.94
15MHz 16QAM	13.62	13.56	13.5	14.88	15.12	15
20MHz QPSK	17.92	18	18	19.52	19.76	19.52
20MHz 16QAM	17.92	18.08	18	18.72	19.52	19.68
Note: The test plots please refer to the Plots of Occupied Bandwidth						

FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §24.235: Frequency Stability						
Test Mode:	20 MHz QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1851.146	1850.00	1909.069	1910
	-20	3.8	1851.110	1850.00	1909.024	1910
	-10	3.8	1851.150	1850.00	1909.076	1910
	0	3.8	1851.107	1850.00	1909.028	1910
	10	3.8	1851.142	1850.00	1909.063	1910
	20	3.8	1851.120	1850.00	1909.040	1910
	30	3.8	1851.102	1850.00	1909.018	1910
	40	3.8	1851.121	1850.00	1909.039	1910
	50	3.8	1851.135	1850.00	1909.049	1910
Frequency Stability vs. Voltage	20	3.5	1851.114	1850.00	1909.034	1910
	20	4.2	1851.105	1850.00	1909.018	1910
Result:					Pass	

Test Mode:	20 MHz 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.712	1850.00	1909.039	1910
	-20	3.8	1850.714	1850.00	1909.037	1910
	-10	3.8	1850.724	1850.00	1909.042	1910
	0	3.8	1850.713	1850.00	1909.037	1910
	10	3.8	1850.718	1850.00	1909.037	1910
	20	3.8	1850.720	1850.00	1909.040	1910
	30	3.8	1850.705	1850.00	1909.023	1910
	40	3.8	1850.745	1850.00	1909.067	1910
	50	3.8	1850.701	1850.00	1909.017	1910
Frequency Stability vs. Voltage	20	3.5	1850.707	1850.00	1909.011	1910
	20	4.2	1850.713	1850.00	1909.019	1910
Result:					Pass	

Occupied Bandwidth

Page 64 of 209


Occupied Bandwidth

Channel


3MHz Bandwidth QPSK

3MHz Bandwidth 16QAM

Lowest

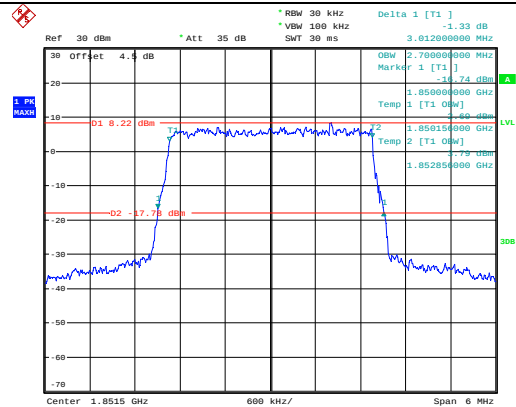


Date: 10.JAN.2023 19:00:23

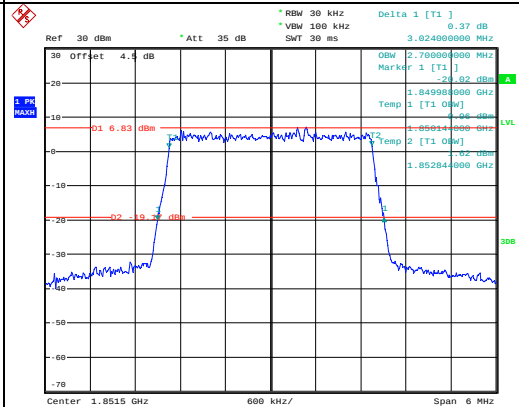


Date: 10.JAN.2023 19:00:38

Middle

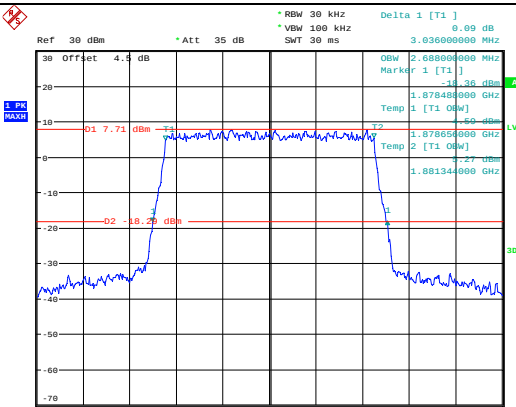


Date: 10.JAN.2023 19:00:54

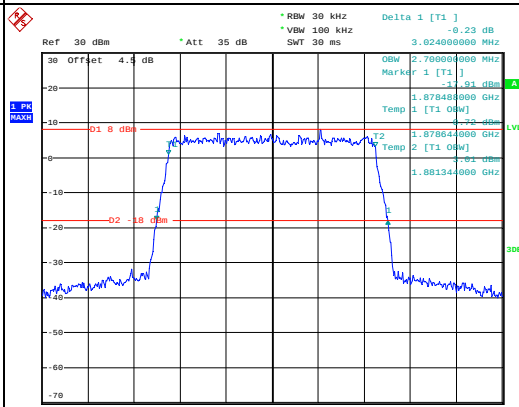


Date: 10.JAN.2023 19:01:08

Highest






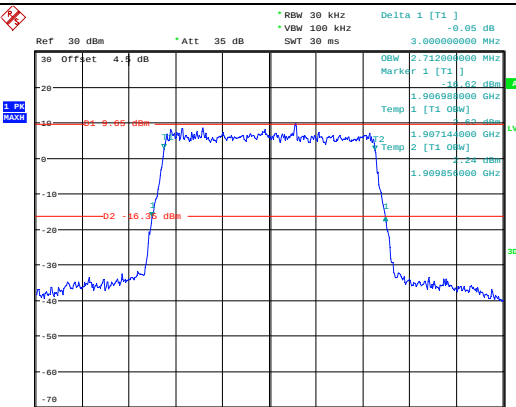


Date: 10.JAN.2023 19:01:24






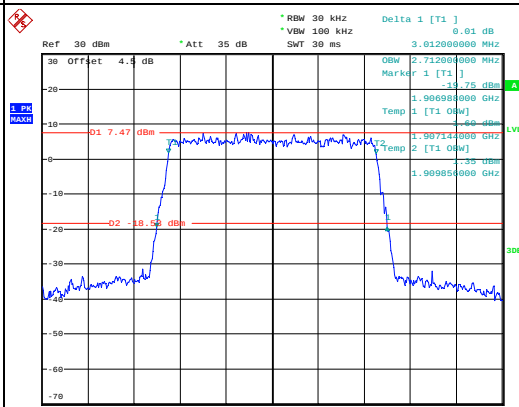


Date: 10.JAN.2023 19:01:41

Occupied Bandwidth

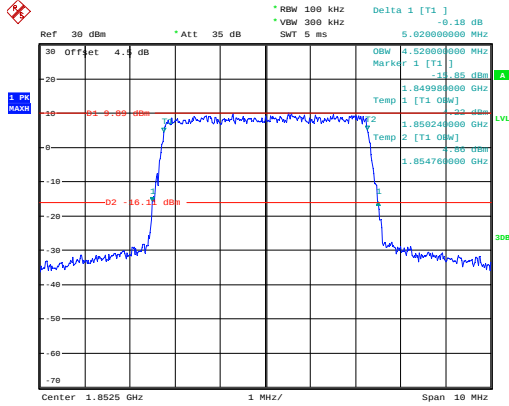
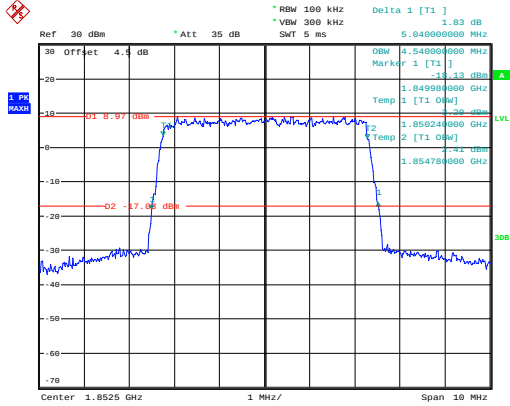
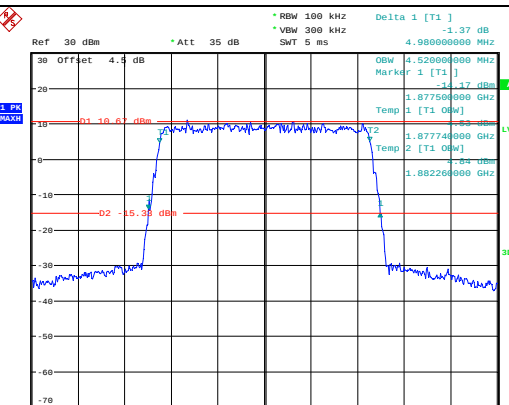
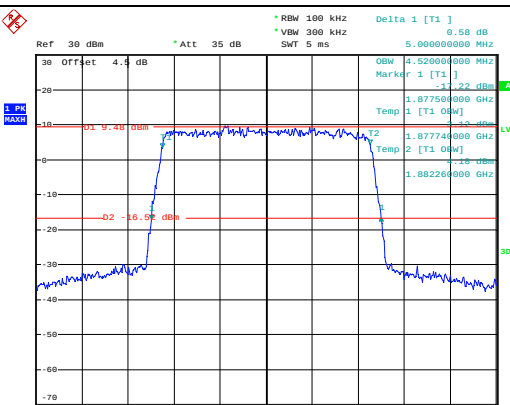
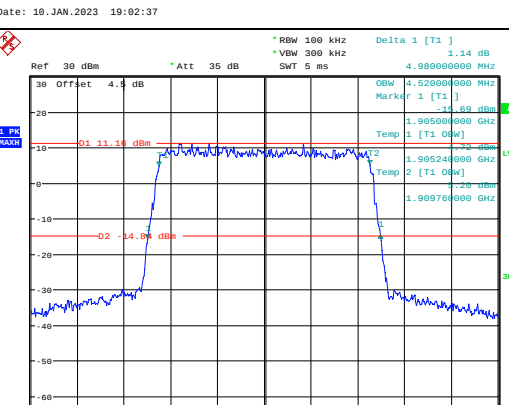
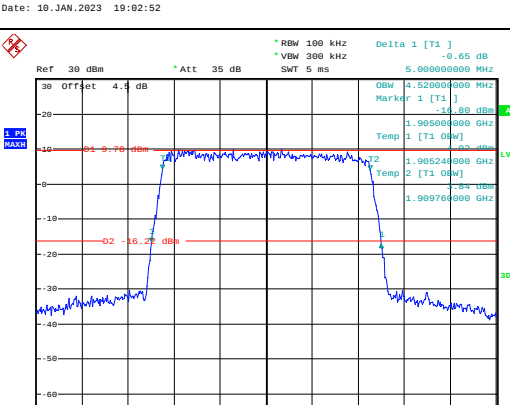
Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	 Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Delta 1 [T1] -0.10 dB OBW 4.520000000 MHz Marker 1 [T1] -10.85 dBm Temp 1 [T1 0dB] -10.85 dBm Temp 2 [T1 0dB] -10.85 dBm Center 1.8525 GHz 1 MHz/ Span 10 MHz Date: 10.JAN.2023 19:02:00	 Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Delta 1 [T1] -1.83 dB OBW 4.540000000 MHz Marker 1 [T1] -10.13 dBm Temp 1 [T1 0dB] -10.13 dBm Temp 2 [T1 0dB] -10.13 dBm Center 1.8525 GHz 1 MHz/ Span 10 MHz Date: 10.JAN.2023 19:02:21
Middle	 Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Delta 1 [T1] -1.37 dB OBW 4.980000000 MHz Marker 1 [T1] -10.47 dBm Temp 1 [T1 0dB] -10.47 dBm Temp 2 [T1 0dB] -10.47 dBm Center 1.88 GHz 1 MHz/ Span 10 MHz Date: 10.JAN.2023 19:02:37	 Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Delta 1 [T1] -0.58 dB OBW 5.000000000 MHz Marker 1 [T1] -10.22 dBm Temp 1 [T1 0dB] -10.22 dBm Temp 2 [T1 0dB] -10.22 dBm Center 1.88 GHz 1 MHz/ Span 10 MHz Date: 10.JAN.2023 19:02:52
Highest	 Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Delta 1 [T1] -1.14 dB OBW 4.980000000 MHz Marker 1 [T1] -10.69 dBm Temp 1 [T1 0dB] -10.69 dBm Temp 2 [T1 0dB] -10.69 dBm Center 1.9075 GHz 1 MHz/ Span 10 MHz Date: 10.JAN.2023 19:03:07	 Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 100 kHz VBW 300 kHz SWT 5 ms Delta 1 [T1] -0.65 dB OBW 5.000000000 MHz Marker 1 [T1] -10.65 dBm Temp 1 [T1 0dB] -10.65 dBm Temp 2 [T1 0dB] -10.65 dBm Center 1.9075 GHz 1 MHz/ Span 10 MHz Date: 10.JAN.2023 19:03:25

Occupied Bandwidth

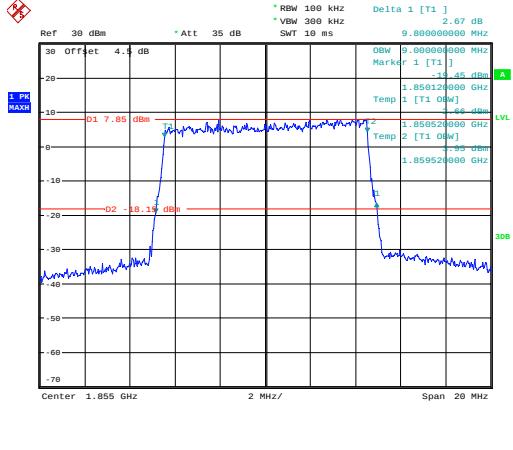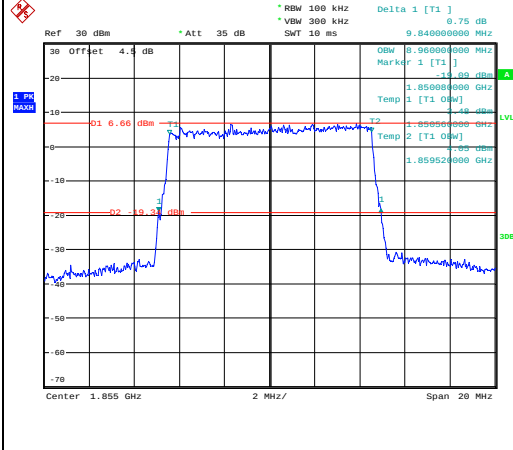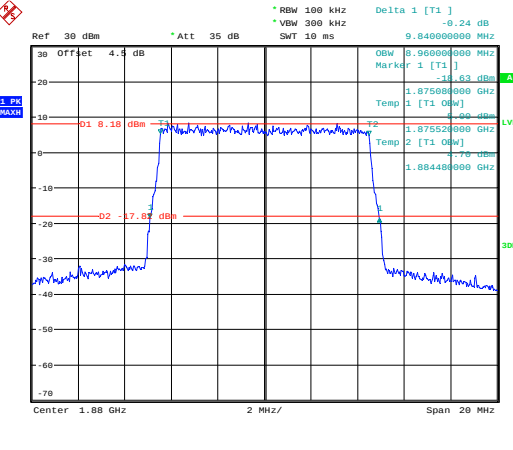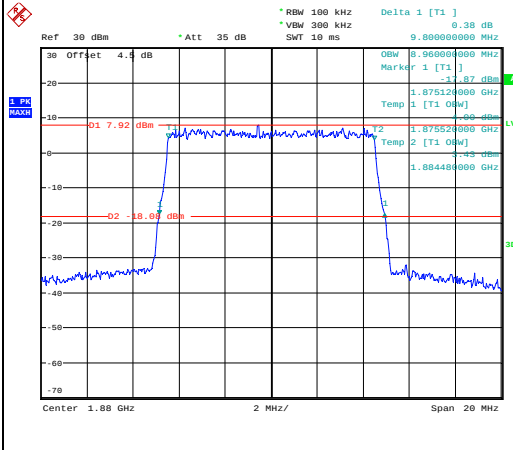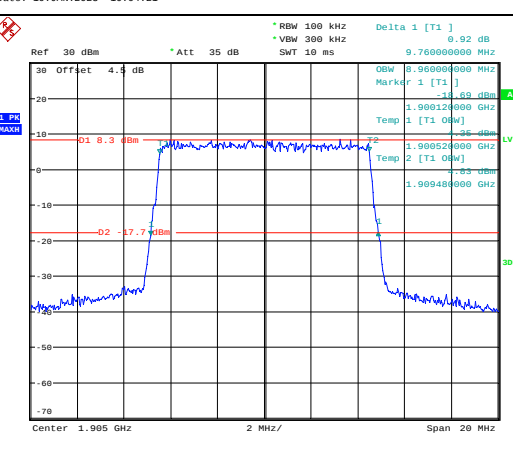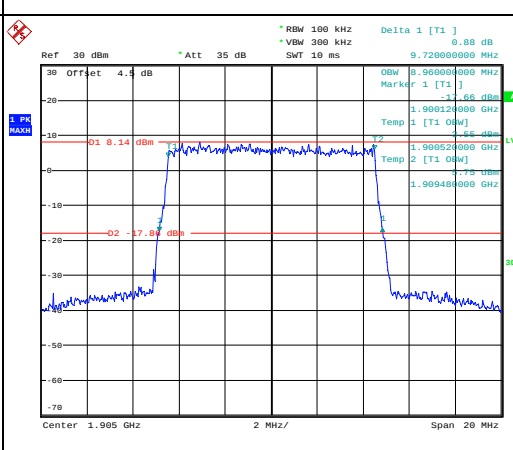Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	 Ref 30 dBm *Att 35 dB *RBW 100 kHz Delta 1 [T1] 2.67 dB *VBW 300 kHz 9.800000000 MHz SWT 10 ms OBW 9.800000000 MHz Marker 1 [T1] -17.85 dBm Temp 1 [T1] 0dBw Temp 2 [T1] 0dBw Temp 1 [T1] 0dBw Temp 2 [T1] 0dBw Center 1.855 GHz 2 MHz/ Span 20 MHz Date: 10.JAN.2023 19:03:47	 Ref 30 dBm *Att 35 dB *RBW 100 kHz Delta 1 [T1] 0.75 dB *VBW 300 kHz 9.840000000 MHz SWT 10 ms OBW 9.840000000 MHz Marker 1 [T1] -16.66 dBm Temp 1 [T1] 0dBw Temp 2 [T1] 0dBw Temp 1 [T1] 0dBw Temp 2 [T1] 0dBw Center 1.855 GHz 2 MHz/ Span 20 MHz Date: 10.JAN.2023 19:04:05
Middle	 Ref 30 dBm *Att 35 dB *RBW 100 kHz Delta 1 [T1] -0.24 dB *VBW 300 kHz 9.840000000 MHz SWT 10 ms OBW 9.840000000 MHz Marker 1 [T1] -18.18 dBm Temp 1 [T1] 0dBw Temp 2 [T1] 0dBw Temp 1 [T1] 0dBw Temp 2 [T1] 0dBw Center 1.88 GHz 2 MHz/ Span 20 MHz Date: 10.JAN.2023 19:04:21	 Ref 30 dBm *Att 35 dB *RBW 100 kHz Delta 1 [T1] 0.38 dB *VBW 300 kHz 9.800000000 MHz SWT 10 ms OBW 9.800000000 MHz Marker 1 [T1] -17.92 dBm Temp 1 [T1] 0dBw Temp 2 [T1] 0dBw Temp 1 [T1] 0dBw Temp 2 [T1] 0dBw Center 1.88 GHz 2 MHz/ Span 20 MHz Date: 10.JAN.2023 19:04:39
Highest	 Ref 30 dBm *Att 35 dB *RBW 100 kHz Delta 1 [T1] 0.92 dB *VBW 300 kHz 9.760000000 MHz SWT 10 ms OBW 9.760000000 MHz Marker 1 [T1] -18.3 dBm Temp 1 [T1] 0dBw Temp 2 [T1] 0dBw Temp 1 [T1] 0dBw Temp 2 [T1] 0dBw Center 1.905 GHz 2 MHz/ Span 20 MHz Date: 10.JAN.2023 19:04:58	 Ref 30 dBm *Att 35 dB *RBW 100 kHz Delta 1 [T1] 0.88 dB *VBW 300 kHz 9.720000000 MHz SWT 10 ms OBW 9.720000000 MHz Marker 1 [T1] -18.14 dBm Temp 1 [T1] 0dBw Temp 2 [T1] 0dBw Temp 1 [T1] 0dBw Temp 2 [T1] 0dBw Center 1.905 GHz 2 MHz/ Span 20 MHz Date: 10.JAN.2023 19:05:16

Occupied Bandwidth		
Channel	15MHz Bandwidth QPSK	15MHz Bandwidth 16QAM
Lowest	Ref 30 dBm *Att 35 dB RBW 300 kHz VBW 1 MHz SWT 2.5 ms Delta 1 [T1] -0.02 dB OBW 14.940000000 MHz Marker 1 [T1] -12.76 dBm Temp 1 [T1 0dB] 1.850120000 GHz Temp 2 [T1 0dB] 1.850840000 GHz Temp 1 [T1 0dB] 1.850840000 GHz Temp 2 [T1 0dB] 1.864340000 GHz Center 1.8575 GHz 3 MHz/ Span 30 MHz Date: 10.JAN.2023 19:05:39	Ref 30 dBm *Att 35 dB RBW 300 kHz VBW 1 MHz SWT 2.5 ms Delta 1 [T1] 0.34 dB OBW 14.880000000 MHz Marker 1 [T1] -13.84 dBm Temp 1 [T1 0dB] 1.850180000 GHz Temp 2 [T1 0dB] 1.850780000 GHz Temp 1 [T1 0dB] 1.850780000 GHz Temp 2 [T1 0dB] 1.864480000 GHz Center 1.8575 GHz 3 MHz/ Span 30 MHz Date: 10.JAN.2023 19:05:58
Middle	Ref 30 dBm *Att 35 dB RBW 300 kHz VBW 1 MHz SWT 2.5 ms Delta 1 [T1] -1.19 dB OBW 15.120000000 MHz Marker 1 [T1] -13.92 dBm Temp 1 [T1 0dB] 1.872440000 GHz Temp 2 [T1 0dB] 1.873220000 GHz Temp 1 [T1 0dB] 1.873220000 GHz Temp 2 [T1 0dB] 1.886840000 GHz Center 1.88 GHz 3 MHz/ Span 30 MHz Date: 10.JAN.2023 19:06:18	Ref 30 dBm *Att 35 dB RBW 300 kHz VBW 1 MHz SWT 2.5 ms Delta 1 [T1] 0.64 dB OBW 15.120000000 MHz Marker 1 [T1] -14.83 dBm Temp 1 [T1 0dB] 1.872440000 GHz Temp 2 [T1 0dB] 1.873220000 GHz Temp 1 [T1 0dB] 1.873220000 GHz Temp 2 [T1 0dB] 1.886780000 GHz Center 1.88 GHz 3 MHz/ Span 30 MHz Date: 10.JAN.2023 19:06:37
Highest	Ref 30 dBm *Att 35 dB RBW 300 kHz VBW 1 MHz SWT 2.5 ms Delta 1 [T1] 0.74 dB OBW 15.060000000 MHz Marker 1 [T1] -14.48 dBm Temp 1 [T1 0dB] 1.895060000 GHz Temp 2 [T1 0dB] 1.895060000 GHz Temp 1 [T1 0dB] 1.895780000 GHz Temp 2 [T1 0dB] 1.909280000 GHz Center 1.9025 GHz 3 MHz/ Span 30 MHz Date: 10.JAN.2023 19:06:54	Ref 30 dBm *Att 35 dB RBW 300 kHz VBW 1 MHz SWT 2.5 ms Delta 1 [T1] -0.36 dB OBW 15.060000000 MHz Marker 1 [T1] -15.32 dBm Temp 1 [T1 0dB] 1.895060000 GHz Temp 2 [T1 0dB] 1.895780000 GHz Temp 1 [T1 0dB] 1.895780000 GHz Temp 2 [T1 0dB] 1.909280000 GHz Center 1.9025 GHz 3 MHz/ Span 30 MHz Date: 10.JAN.2023 19:07:10

Occupied Bandwidth

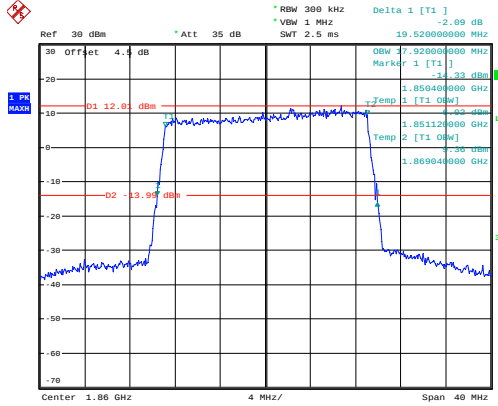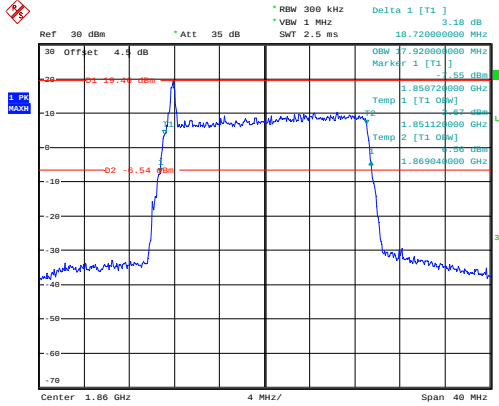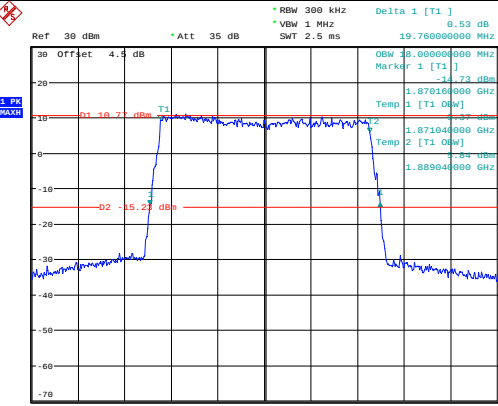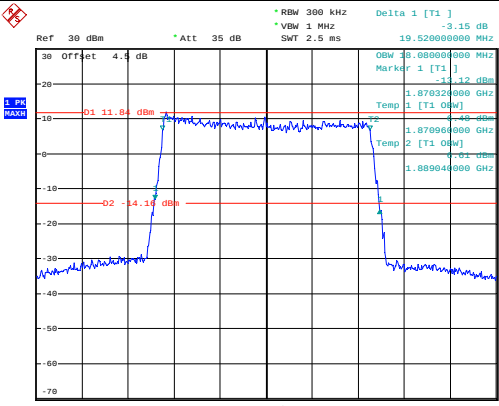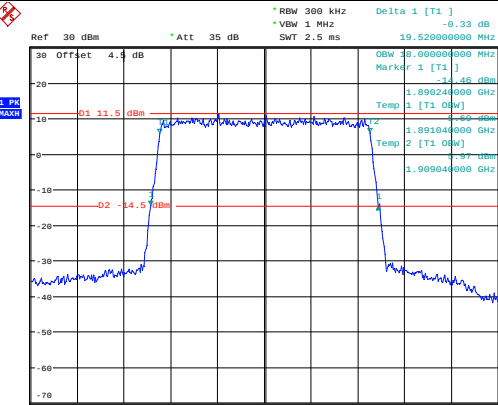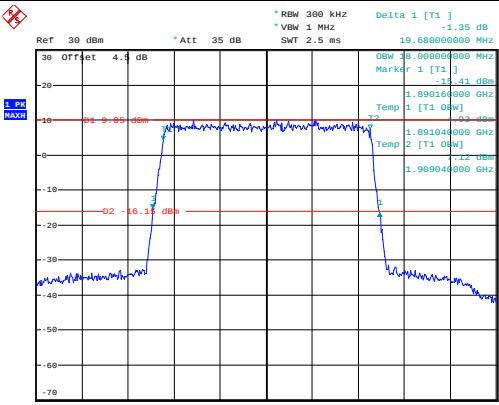
Channel	20MHz Bandwidth QPSK	20MHz Bandwidth 16QAM
Lowest	 Ref 30 dBm *Att 35 dB *RBW 300 kHz Delta 1 [T1] 0.53 dB *VBW 1 MHz SWT 2.5 ms 19.520000000 MHz Marker 1 [T1] 1.850400000 GHz Temp 1 [T1] 1.851120000 GHz Temp 2 [T1] 1.850400000 GHz Date: 10.JAN.2023 19:07:30	 Ref 30 dBm *Att 35 dB *RBW 300 kHz Delta 1 [T1] 3.10 dB *VBW 1 MHz SWT 2.5 ms 19.720000000 MHz Marker 1 [T1] 1.850720000 GHz Temp 1 [T1] 1.851120000 GHz Temp 2 [T1] 1.850400000 GHz Date: 10.JAN.2023 19:07:49
Middle	 Ref 30 dBm *Att 35 dB *RBW 300 kHz Delta 1 [T1] 0.53 dB *VBW 1 MHz SWT 2.5 ms 19.760000000 MHz Marker 1 [T1] 1.870160000 GHz Temp 1 [T1] 1.871040000 GHz Temp 2 [T1] 1.869040000 GHz Date: 10.JAN.2023 19:08:06	 Ref 30 dBm *Att 35 dB *RBW 300 kHz Delta 1 [T1] -1.15 dB *VBW 1 MHz SWT 2.5 ms 19.520000000 MHz Marker 1 [T1] 1.870320000 GHz Temp 1 [T1] 1.870960000 GHz Temp 2 [T1] 1.869040000 GHz Date: 10.JAN.2023 19:08:25
Highest	 Ref 30 dBm *Att 35 dB *RBW 300 kHz Delta 1 [T1] -0.33 dB *VBW 1 MHz SWT 2.5 ms 19.520000000 MHz Marker 1 [T1] 1.890240000 GHz Temp 1 [T1] 1.891040000 GHz Temp 2 [T1] 1.890400000 GHz Date: 10.JAN.2023 19:08:42	 Ref 30 dBm *Att 35 dB *RBW 300 kHz Delta 1 [T1] -1.35 dB *VBW 1 MHz SWT 2.5 ms 19.680000000 MHz Marker 1 [T1] 1.890160000 GHz Temp 1 [T1] 1.891040000 GHz Temp 2 [T1] 1.890400000 GHz Date: 10.JAN.2023 19:08:57

Spurious Emissions at Antenna Terminal


Channel

1.4MHz Bandwidth QPSK

Lowest

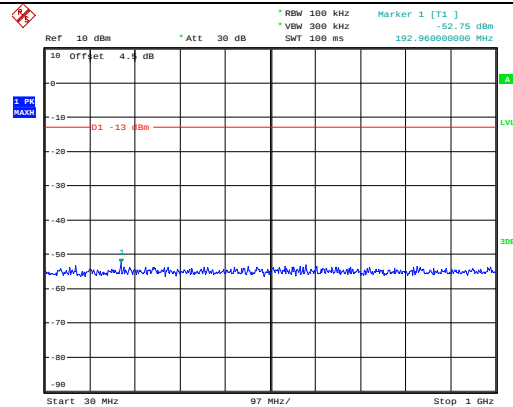


Date: 28.DEC.2022 15:13:00

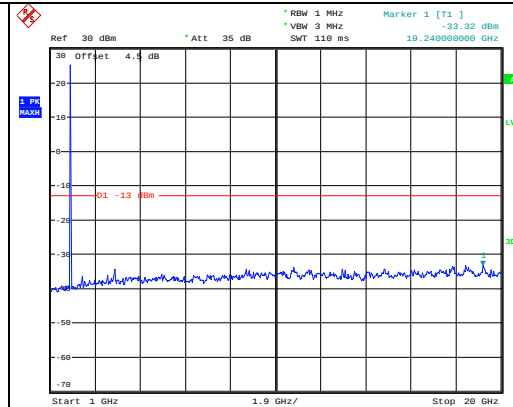


Date: 28.DEC.2022 15:13:15

Middle

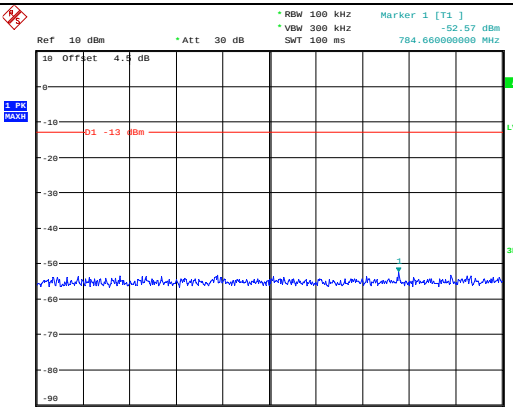


Date: 28.DEC.2022 15:13:28

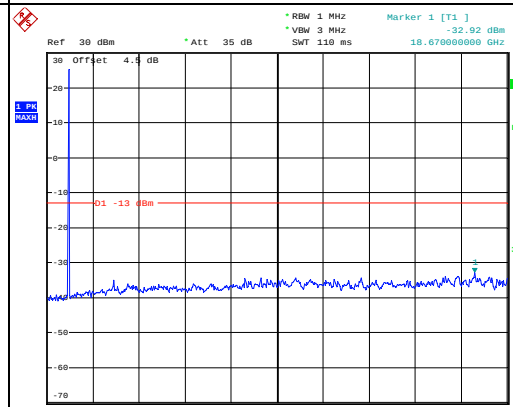


Date: 28.DEC.2022 15:13:40

Highest

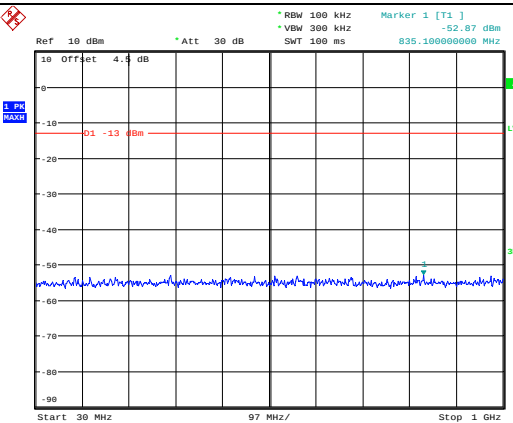

Date: 28.DEC.2022 15:13:57

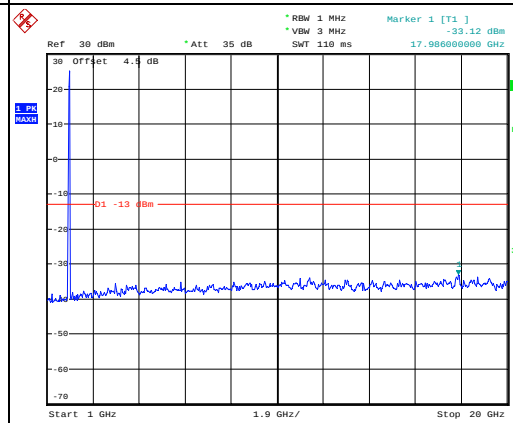


Date: 28.DEC.2022 15:14:08

Spurious Emissions at Antenna Terminal


Channel

3MHz Bandwidth QPSK

Lowest

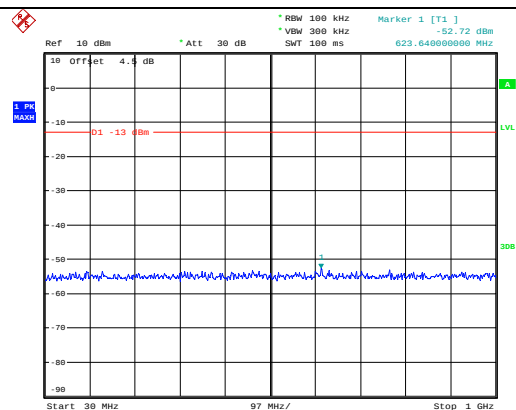


Date: 28.DEC.2022 15:14:29

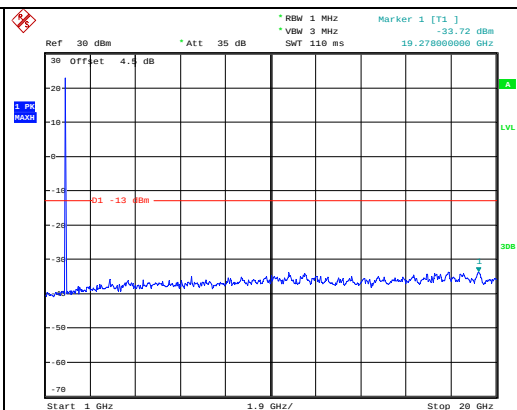


Date: 28.DEC.2022 15:14:40

Middle

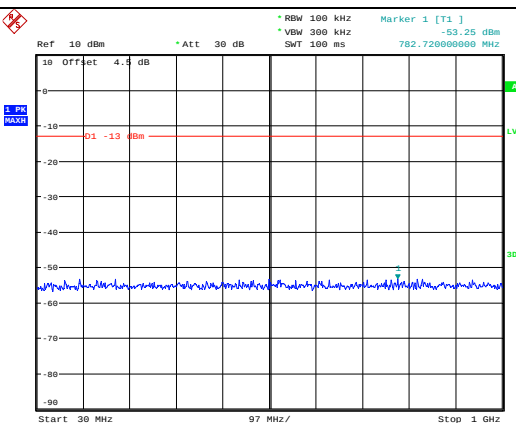


Date: 28.DEC.2022 15:14:54

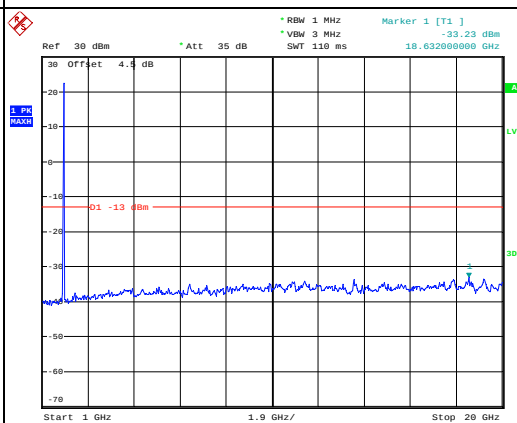


Date: 28.DEC.2022 15:15:05

Highest

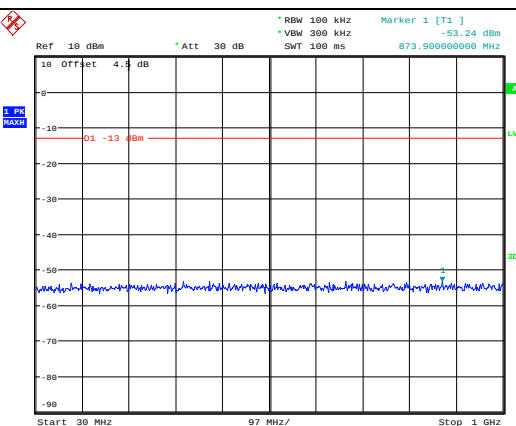

Date: 28.DEC.2022 15:15:22

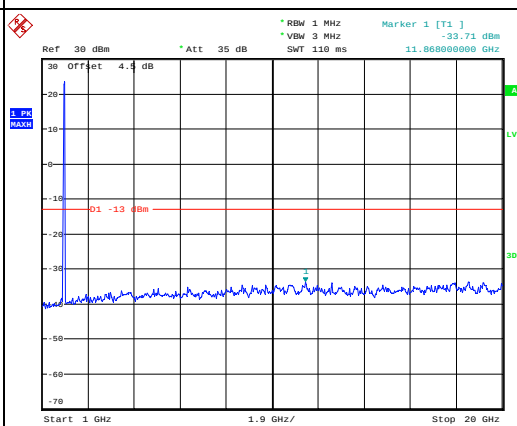


Date: 28.DEC.2022 15:15:33

Spurious Emissions at Antenna Terminal


Channel

5MHz Bandwidth QPSK

Lowest

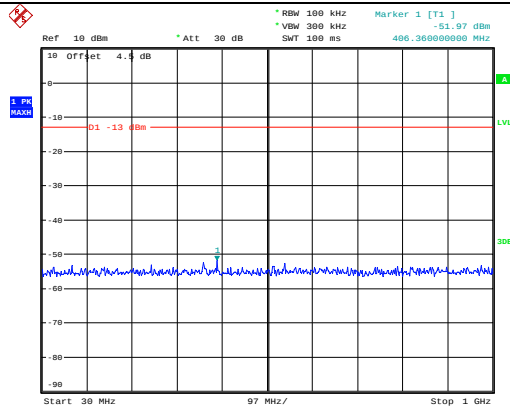


Date: 28.DEC.2022 15:15:51

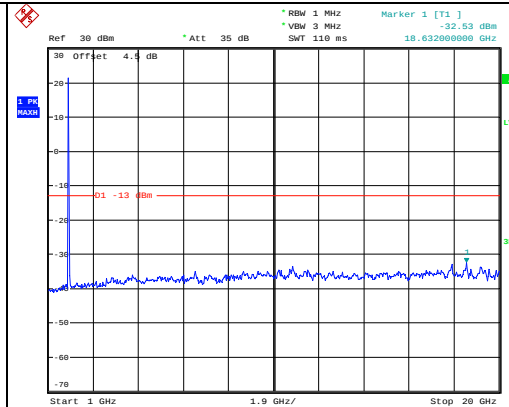


Date: 28.DEC.2022 15:16:02

Middle

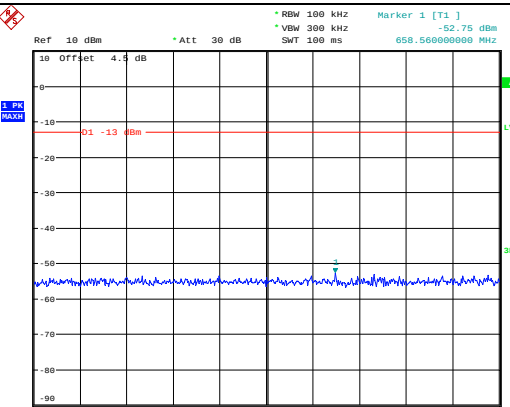


Date: 28.DEC.2022 15:16:16

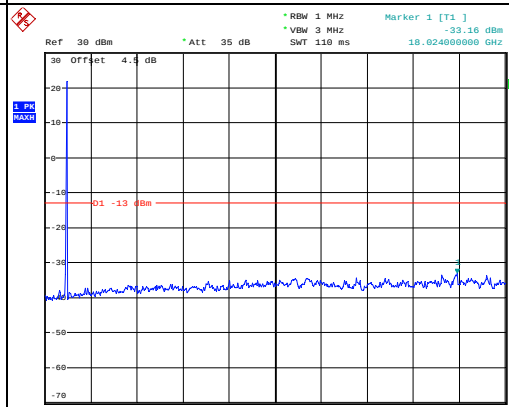


Date: 28.DEC.2022 15:16:28

Highest

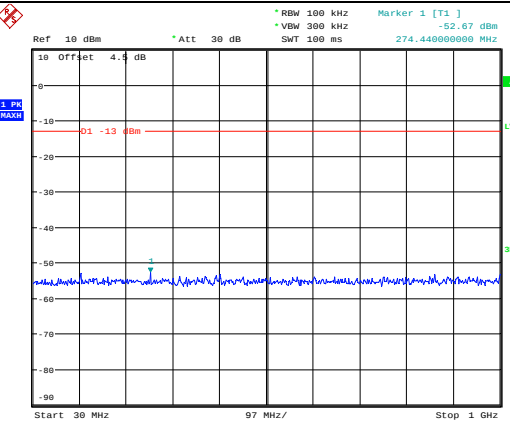

Date: 28.DEC.2022 15:16:42

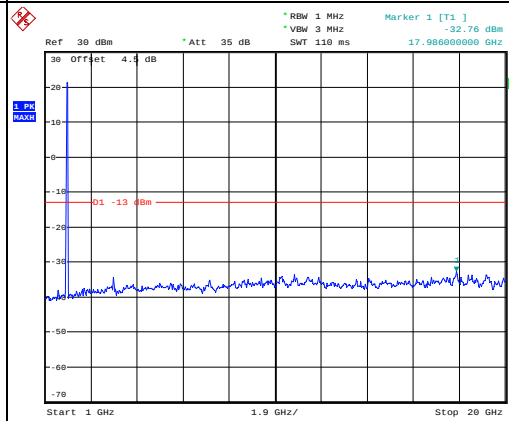


Date: 28.DEC.2022 15:16:53

Spurious Emissions at Antenna Terminal


Channel

10MHz Bandwidth QPSK

Lowest

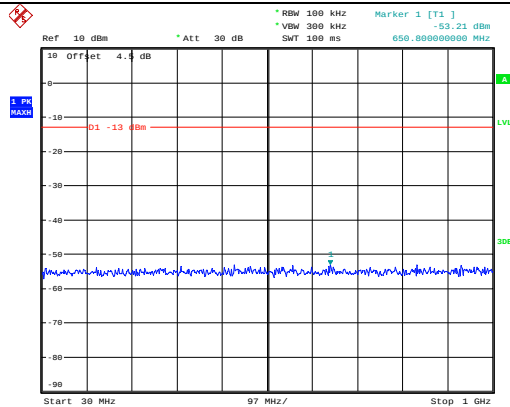


Date: 28.DEC.2022 15:17:11

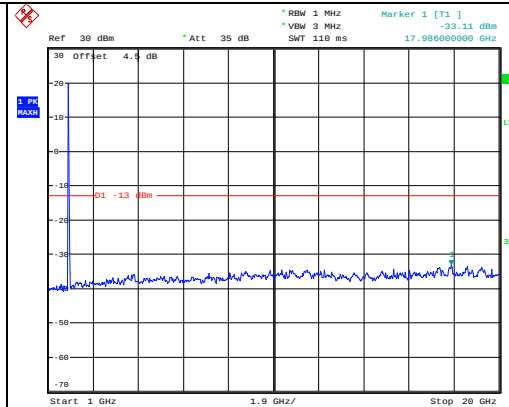


Date: 28.DEC.2022 15:17:22

Middle

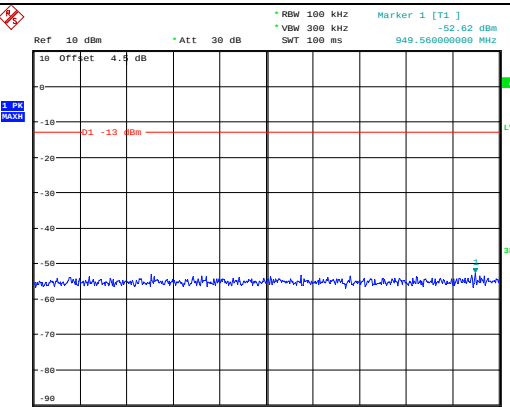


Date: 28.DEC.2022 15:17:37

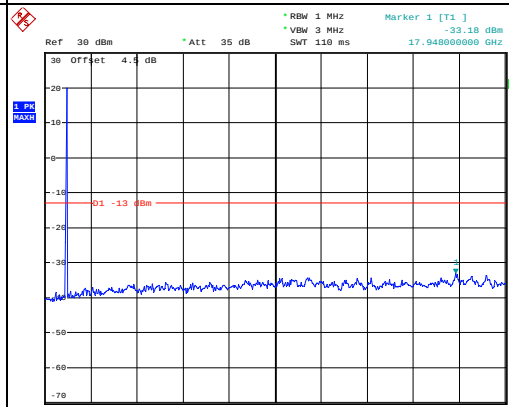


Date: 28.DEC.2022 15:17:48

Highest

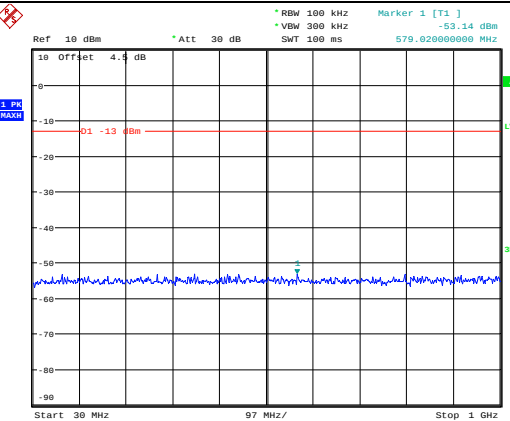

Date: 28.DEC.2022 15:18:05

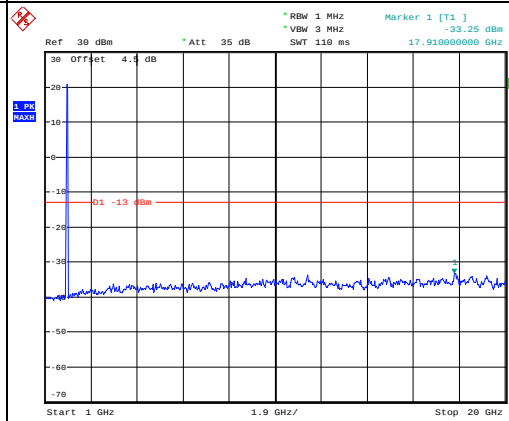


Date: 28.DEC.2022 15:18:17

Spurious Emissions at Antenna Terminal


Channel

15MHz Bandwidth QPSK

Lowest

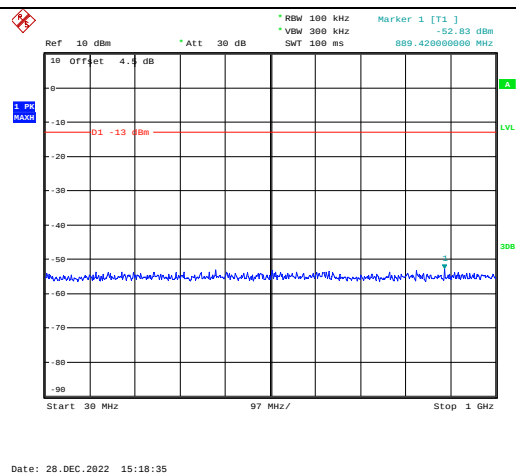


Date: 28.DEC.2022 15:18:35

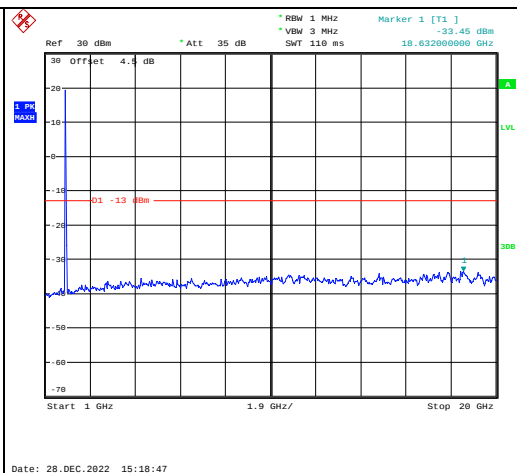


Date: 28.DEC.2022 15:18:47

Middle

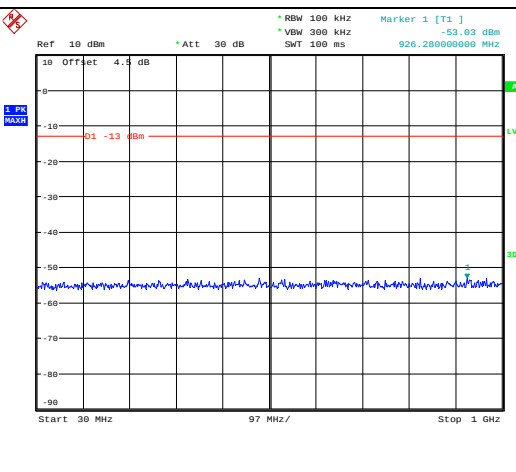


Date: 28.DEC.2022 15:19:04

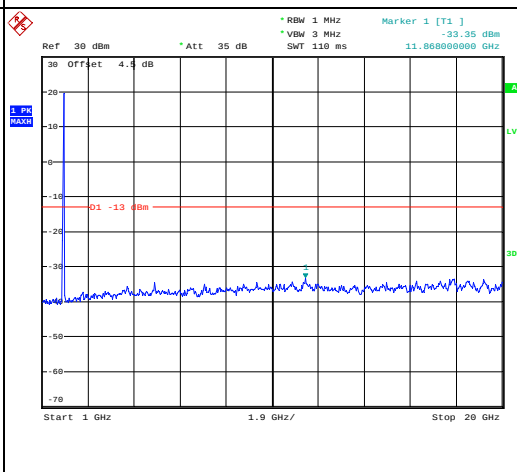


Date: 28.DEC.2022 15:19:16

Highest

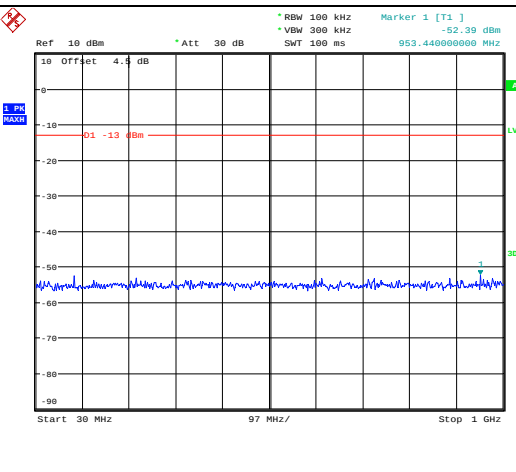

Date: 28.DEC.2022 15:19:30

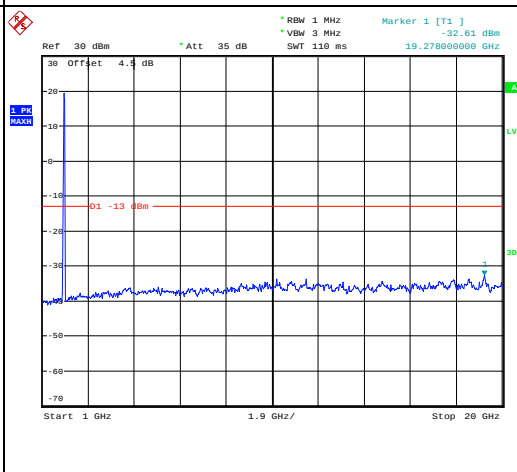



Date: 28.DEC.2022 15:19:42

Spurious Emissions at Antenna Terminal



Channel

20MHz Bandwidth QPSK



Lowest

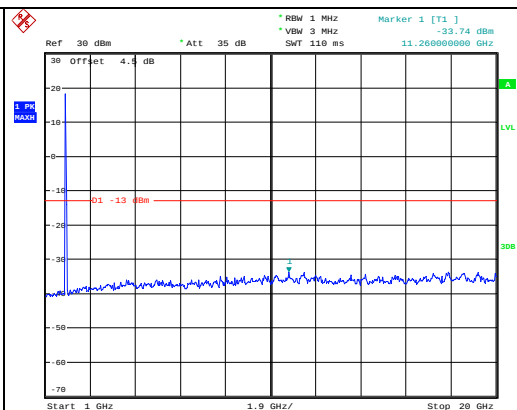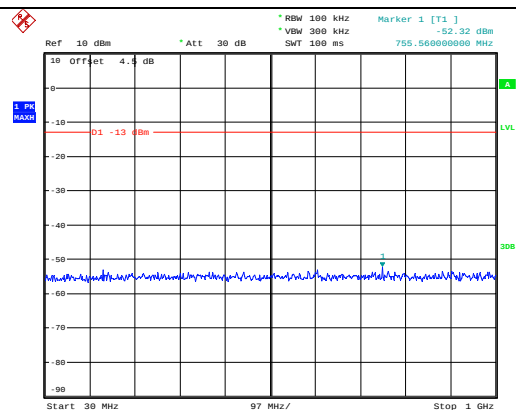







Middle

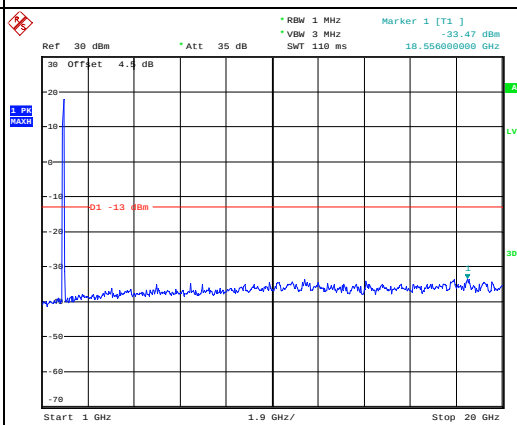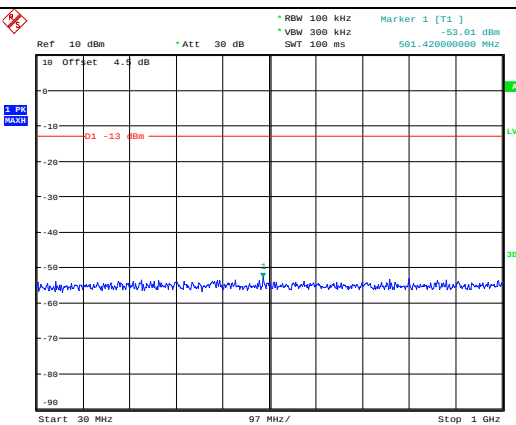


Highest

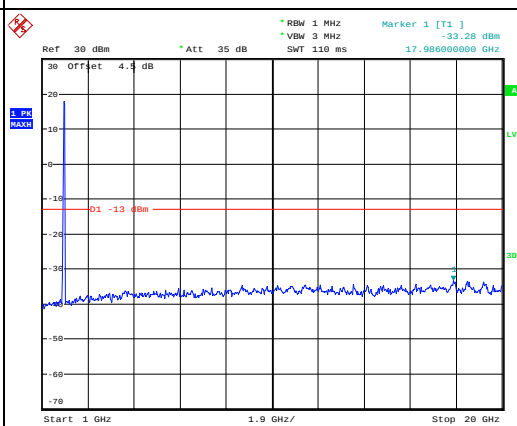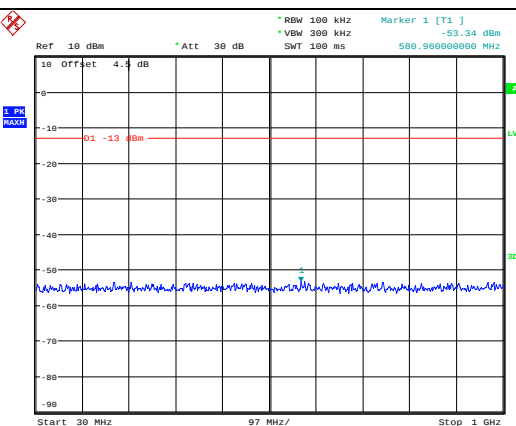







Out of band emission, Band Edge

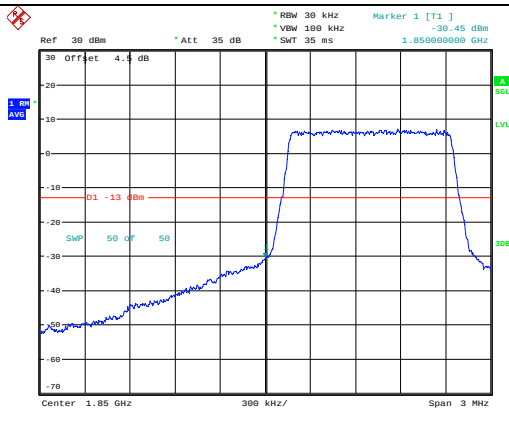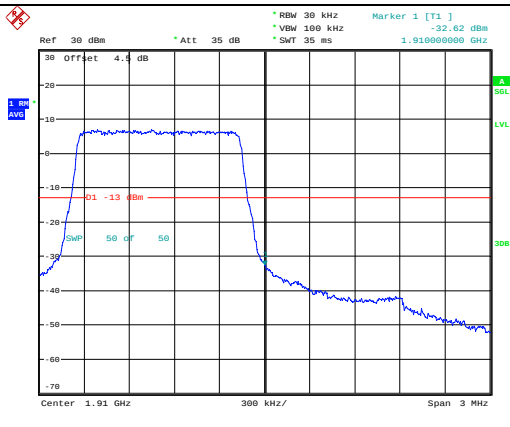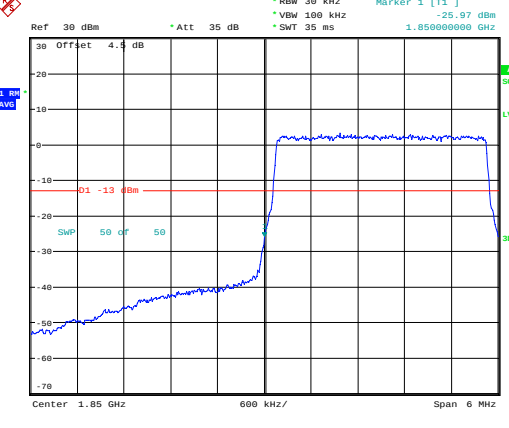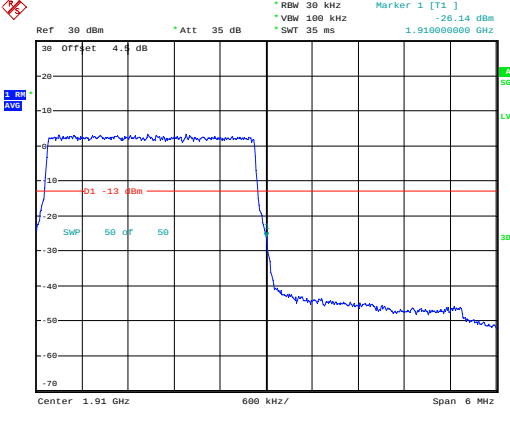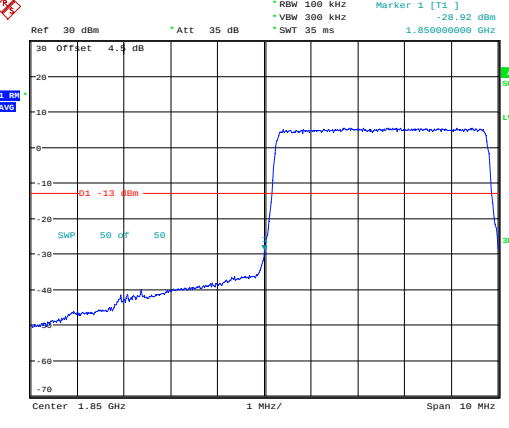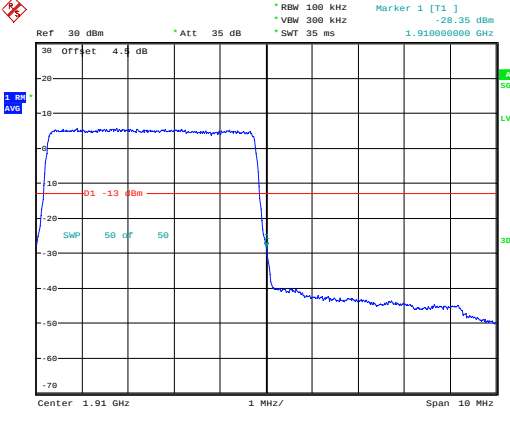Mode	Lowest	Highest
QPSK 1.4MHz	 Ref 30 dBm Att 35 dB RBW 30 kHz Marker 1 [T1] -30.45 dBm VBW 100 kHz SWT 35 ms 1.850000000 GHz 30 Offset 4.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.85 GHz 300 kHz/ Span 3 MHz Date: 28.DEC.2022 14:54:50	 Ref 30 dBm Att 35 dB RBW 30 kHz Marker 1 [T1] -32.62 dBm VBW 100 kHz SWT 35 ms 1.910000000 GHz 30 Offset 4.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.91 GHz 300 kHz/ Span 3 MHz Date: 28.DEC.2022 14:55:07
QPSK 3MHz	 Ref 30 dBm Att 35 dB RBW 30 kHz Marker 1 [T1] -25.97 dBm VBW 100 kHz SWT 35 ms 1.850000000 GHz 30 Offset 4.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.85 GHz 600 kHz/ Span 6 MHz Date: 28.DEC.2022 14:55:27	 Ref 30 dBm Att 35 dB RBW 30 kHz Marker 1 [T1] -26.14 dBm VBW 100 kHz SWT 35 ms 1.910000000 GHz 30 Offset 4.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.91 GHz 600 kHz/ Span 6 MHz Date: 28.DEC.2022 14:55:44
QPSK 5MHz	 Ref 30 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -28.92 dBm VBW 300 kHz SWT 35 ms 1.850000000 GHz 30 Offset 4.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.85 GHz 1 MHz/ Span 10 MHz Date: 28.DEC.2022 14:56:04	 Ref 30 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -28.35 dBm VBW 300 kHz SWT 35 ms 1.910000000 GHz 30 Offset 4.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.91 GHz 1 MHz/ Span 10 MHz Date: 28.DEC.2022 14:56:22







Out of band emission, Band Edge

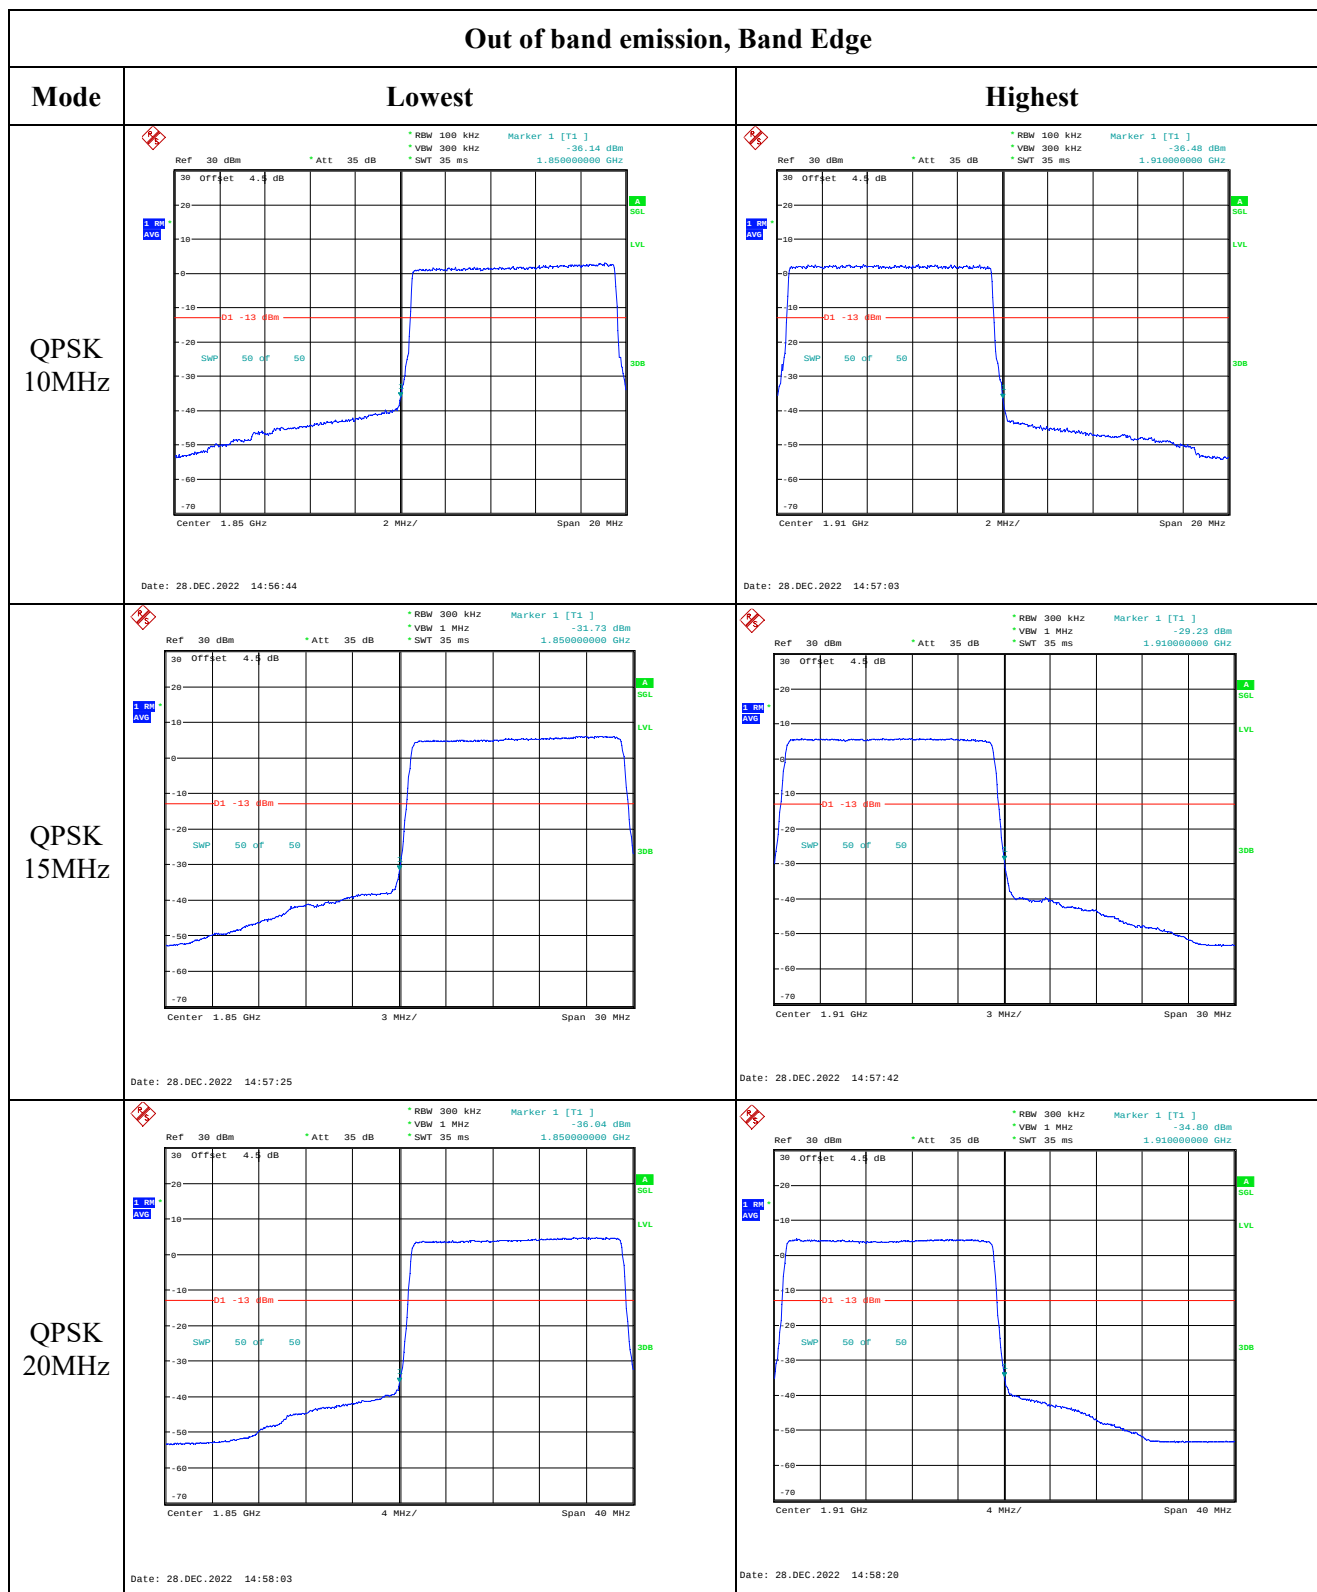

Out of band emission, Band Edge

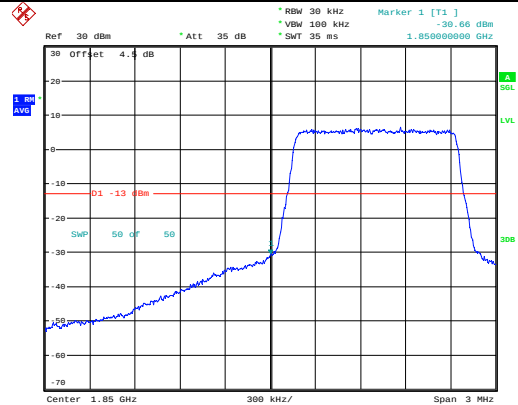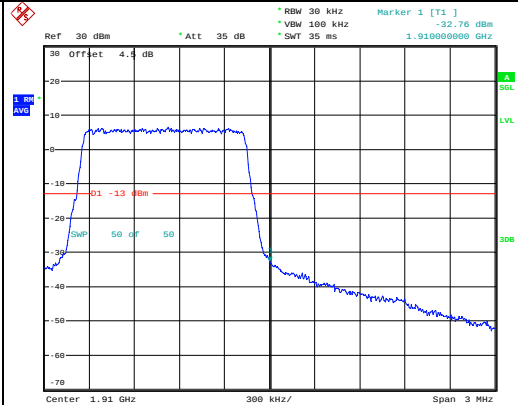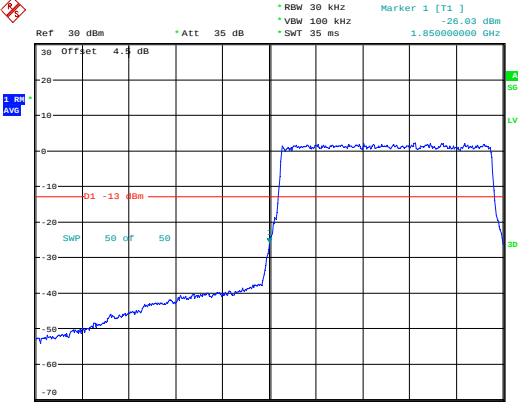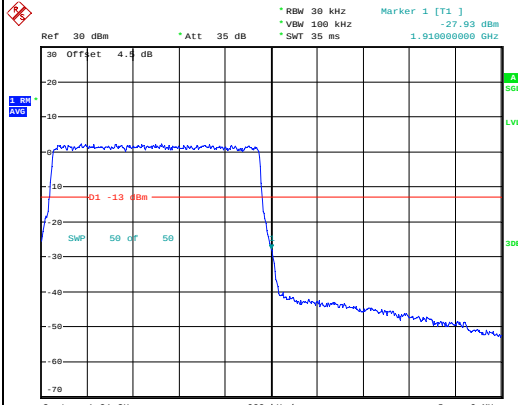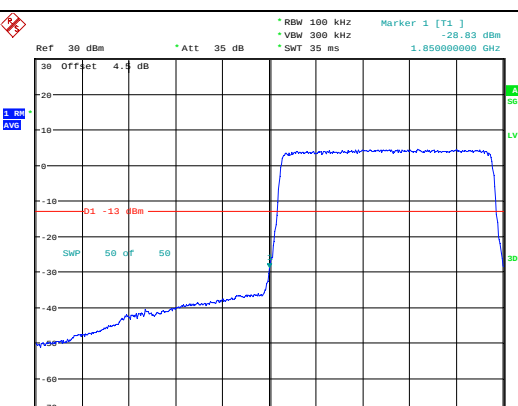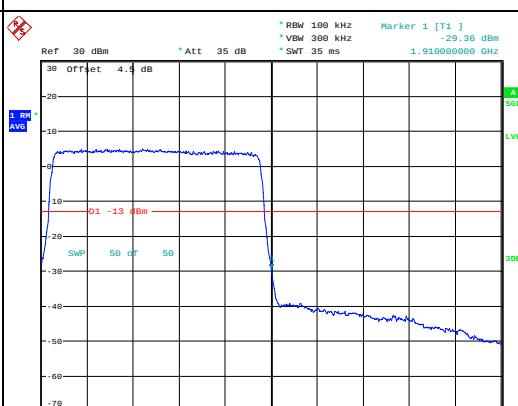Mode	Lowest	Highest
16QAM 1.4MHz	 Ref 30 dBm Att 35 dB RBW 30 kHz VBW 100 kHz SWT 35 ms Marker 1 [T1] -30.66 dBm 1.850000000 GHz 30 Offset 4.5 dB SWP 50 OF 50 Center 1.85 GHz 300 kHz/ Span 3 MHz Date: 28.DEC.2022 14:54:58	 Ref 30 dBm Att 35 dB RBW 30 kHz VBW 100 kHz SWT 35 ms Marker 1 [T1] -32.76 dBm 1.910000000 GHz 30 Offset 4.5 dB SWP 50 OF 50 Center 1.91 GHz 300 kHz/ Span 3 MHz Date: 28.DEC.2022 14:55:15
16QAM 3MHz	 Ref 30 dBm Att 35 dB RBW 30 kHz VBW 100 kHz SWT 35 ms Marker 1 [T1] -28.83 dBm 1.850000000 GHz 30 Offset 4.5 dB SWP 50 OF 50 Center 1.85 GHz 600 kHz/ Span 6 MHz Date: 28.DEC.2022 14:55:35	 Ref 30 dBm Att 35 dB RBW 30 kHz VBW 100 kHz SWT 35 ms Marker 1 [T1] -27.93 dBm 1.910000000 GHz 30 Offset 4.5 dB SWP 50 OF 50 Center 1.91 GHz 600 kHz/ Span 6 MHz Date: 28.DEC.2022 14:55:52
16QAM 5MHz	 Ref 30 dBm Att 35 dB RBW 100 kHz VBW 300 kHz SWT 35 ms Marker 1 [T1] -28.83 dBm 1.850000000 GHz 30 Offset 4.5 dB SWP 50 OF 50 Center 1.85 GHz 1 MHz/ Span 10 MHz Date: 28.DEC.2022 14:56:12	 Ref 30 dBm Att 35 dB RBW 100 kHz VBW 300 kHz SWT 35 ms Marker 1 [T1] -29.36 dBm 1.910000000 GHz 30 Offset 4.5 dB SWP 50 OF 50 Center 1.91 GHz 1 MHz/ Span 10 MHz Date: 28.DEC.2022 14:56:30

Out of band emission, Band Edge

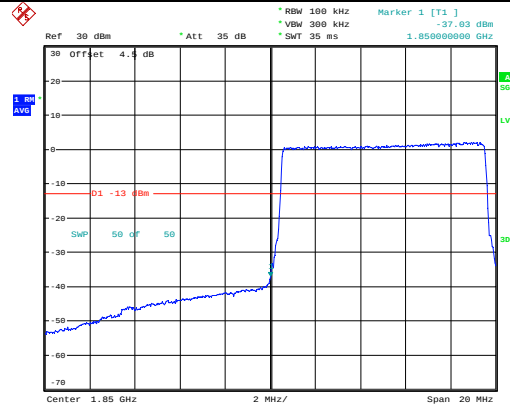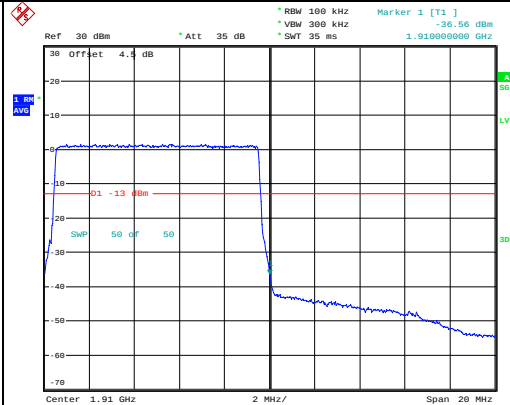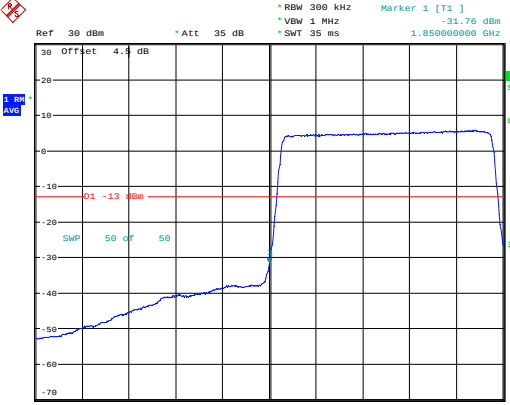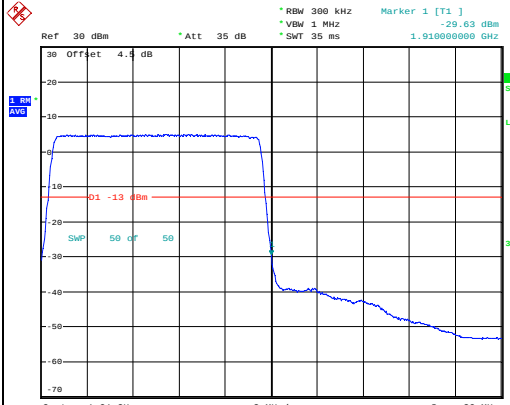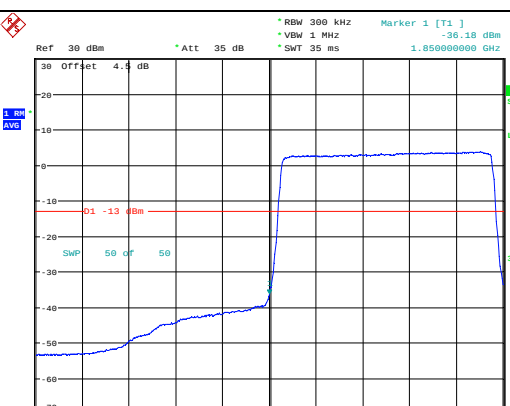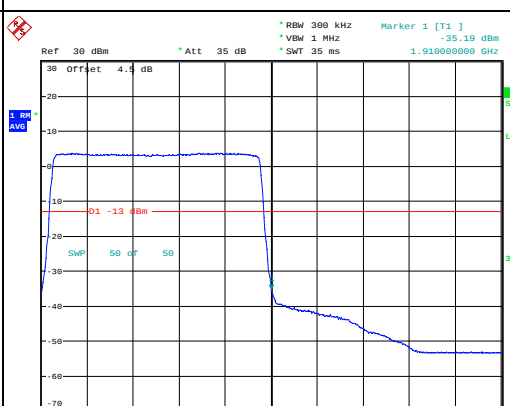Mode	Lowest	Highest
16QAM 10MHz	 Ref 30 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -37.03 dBm VBW 300 kHz SWT 35 ms 1.850000000 GHz 30 Offset 4.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.85 GHz 2 MHz/ Span 20 MHz Date: 28.DEC.2022 14:56:53	 Ref 30 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -36.56 dBm VBW 300 kHz SWT 35 ms 1.910000000 GHz 30 Offset 4.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.91 GHz 2 MHz/ Span 20 MHz Date: 28.DEC.2022 14:57:12
16QAM 15MHz	 Ref 30 dBm Att 35 dB RBW 300 kHz Marker 1 [T1] -31.76 dBm VBW 1 MHz SWT 35 ms 1.850000000 GHz 30 Offset 4.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.85 GHz 3 MHz/ Span 30 MHz Date: 28.DEC.2022 14:57:33	 Ref 30 dBm Att 35 dB RBW 300 kHz Marker 1 [T1] -29.63 dBm VBW 1 MHz SWT 35 ms 1.910000000 GHz 30 Offset 4.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.91 GHz 3 MHz/ Span 30 MHz Date: 28.DEC.2022 14:57:50
16QAM 20MHz	 Ref 30 dBm Att 35 dB RBW 300 kHz Marker 1 [T1] -36.18 dBm VBW 1 MHz SWT 35 ms 1.850000000 GHz 30 Offset 4.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.85 GHz 4 MHz/ Span 40 MHz Date: 28.DEC.2022 14:58:11	 Ref 30 dBm Att 35 dB RBW 300 kHz Marker 1 [T1] -35.19 dBm VBW 1 MHz SWT 35 ms 1.910000000 GHz 30 Offset 4.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.91 GHz 4 MHz/ Span 40 MHz Date: 28.DEC.2022 14:58:29

4.7 Antenna Port Test Data and Results for LTE Band 4

Serial Number:	1SNT-1	Test Date:	2022/12/28-2023/1/10
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.3-23.2	Relative Humidity: (%)	38-63	ATM Pressure: (kPa)	102.1-101.3
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/4/5	2023/4/4
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/4/6	2023/4/5
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1710.7	1732.5	1754.3
3MHz	1711.5	1732.5	1753.5
5MHz	1712.5	1732.5	1752.5
10MHz	1715	1732.5	1750
15MHz	1717.5	1732.5	1747.5
20MHz	1720	1732.5	1745

Test Data:**FCC§2.1046;§ 27.50(d)(4)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	16.52	16.51	16.07	11.79	30
	RB1#3	16.52	16.54	16.04		
	RB1#5	16.52	16.58	16.08		
	RB3#0	16.58	16.79	16.01		
	RB3#3	16.54	16.81	16.41		
	RB6#0	16.38	16.49	16.38		
1.4MHz 16QAM	RB1#0	16.47	16.3	16.28	11.47	30
	RB1#3	16.26	16.29	16.23		
	RB1#5	16.49	16.37	16.29		
	RB3#0	16.1	16.32	16.13		
	RB3#3	16.12	16.34	16.1		
	RB6#0	16.16	16.44	15.61		
3MHz QPSK	RB1#0	17.16	16.19	16.44	12.14	30
	RB1#8	17.05	16.17	16.44		
	RB1#14	17.06	16.07	16.39		
	RB6#0	16.49	16.37	16.45		
	RB6#9	16.36	16.3	16.39		
	RB15#0	16.42	16.29	16		
3MHz 16QAM	RB1#0	16.68	16.47	16.45	11.66	30
	RB1#8	16.59	16.41	16.43		
	RB1#14	16.61	16.47	16.42		
	RB6#0	16.04	15.78	15.36		
	RB6#9	16.01	15.74	15.36		
	RB15#0	16.44	15.88	15.48		
5MHz QPSK	RB1#0	16.89	16.44	16.27	11.87	30
	RB1#13	16.77	16.37	16.25		
	RB1#24	16.88	16.32	16.16		
	RB15#0	16.37	16.48	16.26		
	RB15#10	16.28	16.44	16.31		
	RB25#0	16.28	16.49	16.27		
5MHz 16QAM	RB1#0	16.25	16.49	15.35	11.47	30
	RB1#13	16.22	16.41	15.41		
	RB1#24	16.43	16.18	15.25		
	RB15#0	16.22	15.61	15.8		
	RB15#10	16.21	15.53	15.19		
	RB25#0	16.37	15.43	15.25		
10MHz QPSK	RB1#0	17.14	16.74	16.4	12.12	30
	RB1#25	17.04	16.61	16.56		

	RB1#49	17.01	16.68	16.45		
	RB25#0	16.3	16.4	16.01		
	RB25#25	16.02	16.24	16.02		
	RB50#0	16.47	16.26	16.11		
10MHz 16QAM	RB1#0	16.73	16.3	16.18	11.71	30
	RB1#25	16.68	16.14	16.27		
	RB1#49	16.62	16.22	16.1		
	RB25#0	16.07	16.32	16.11		
	RB25#25	16.49	16.32	16.01		
	RB50#0	16.47	16.18	16.15		
15MHz QPSK	RB1#0	17.15	16.57	16.12	12.13	30
	RB1#38	16.95	16.4	16.16		
	RB1#74	16.93	16.37	16.04		
	RB36#0	16.47	16.14	16.26		
	RB36#39	16.33	16.1	16.1		
	RB75#0	16.49	16.16	16.12		
15MHz 16QAM	RB1#0	16.08	16.46	16.49	11.47	30
	RB1#38	16.02	16.27	16.41		
	RB1#74	16.1	16.29	16.38		
	RB36#0	16.45	16.2	15.83		
	RB36#39	16.31	16.1	15.86		
	RB75#0	16.45	16.14	15.9		
20MHz QPSK	RB1#0	16.69	16.22	16.96	11.94	30
	RB1#50	16.67	16.09	16.83		
	RB1#99	16.59	16.03	16.86		
	RB50#0	16.2	16.27	16.07		
	RB50#50	16.08	16.2	16.19		
	RB100#0	16.19	16.01	16.11		
20MHz 16QAM	RB1#0	16.17	16.11	16.32	11.34	30
	RB1#50	16.1	16.36	16.26		
	RB1#99	16.12	16.18	16.18		
	RB50#0	16.1	16.16	16.13		
	RB50#50	16.02	15.87	16.2		
	RB100#0	16.02	15.94	16.22		

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

Result:

Pass

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	5.42	5.9	5.8	13
	RB100#0	5.74	5.8	5.77	13
20MHz 16QAM	RB1#0	6.54	6.41	7.02	13
	RB100#0	6.67	6.7	6.57	13
Result:					Pass

FCC §2.1049, §27.53:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.11	1.11	1.104	1.26	1.248	1.248
1.4MHz 16QAM	1.098	1.104	1.11	1.254	1.254	1.26
3MHz QPSK	2.712	2.712	2.687	3.012	3.024	2.976
3MHz 16QAM	2.687	2.7	2.687	3	3.036	3.012
5MHz QPSK	4.52	4.52	4.52	4.98	4.96	4.98
5MHz 16QAM	4.52	4.54	4.52	4.98	5	4.98
10MHz QPSK	8.96	8.96	8.96	9.76	9.84	9.72
10MHz 16QAM	8.96	9	8.92	9.84	9.8	9.68
15MHz QPSK	13.56	13.56	13.56	14.82	15.06	14.94
15MHz 16QAM	13.56	13.56	13.5	15	15.18	14.94
20MHz QPSK	18	18	18	19.52	19.76	19.52
20MHz 16QAM	18	18.08	18	19.6	19.76	19.52

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, § 27.53:Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §27.54: Frequency Stability

Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1711.025	1710.00	1754.131	1755
	-20	3.8	1711.031	1710.00	1754.131	1755
	-10	3.8	1711.039	1710.00	1754.139	1755
	0	3.8	1711.039	1710.00	1754.129	1755
	10	3.8	1711.021	1710.00	1754.140	1755
	20	3.8	1711.040	1710.00	1754.120	1755
	30	3.8	1711.018	1710.00	1754.130	1755
	40	3.8	1711.030	1710.00	1754.149	1755
	50	3.8	1711.015	1710.00	1754.125	1755
Frequency Stability vs. Voltage	20	3.5	1711.013	1710.00	1754.124	1755
	20	4.2	1711.020	1710.00	1754.123	1755
					Result:	Pass

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1710.960	1710.00	1754.125	1755
	-20	3.8	1710.939	1710.00	1754.122	1755
	-10	3.8	1710.933	1710.00	1754.123	1755
	0	3.8	1710.959	1710.00	1754.144	1755
	10	3.8	1710.943	1710.00	1754.141	1755
	20	3.8	1710.960	1710.00	1754.120	1755
	30	3.8	1710.940	1710.00	1754.137	1755
	40	3.8	1710.931	1710.00	1754.144	1755
	50	3.8	1710.942	1710.00	1754.126	1755
Frequency Stability vs. Voltage	20	3.5	1710.957	1710.00	1754.136	1755
	20	4.2	1710.945	1710.00	1754.138	1755
					Result:	Pass

Occupied Bandwidth

Page 85 of 209



Occupied Bandwidth

Channel



3MHz Bandwidth QPSK

3MHz Bandwidth 16QAM



Lowest

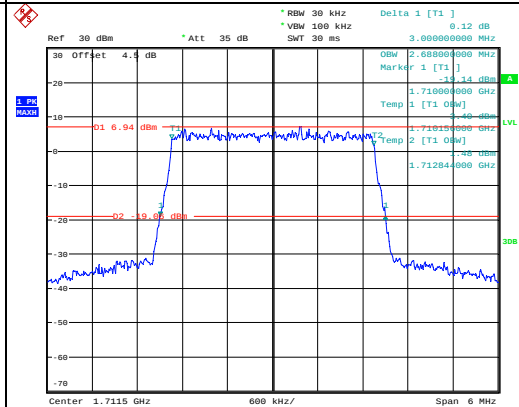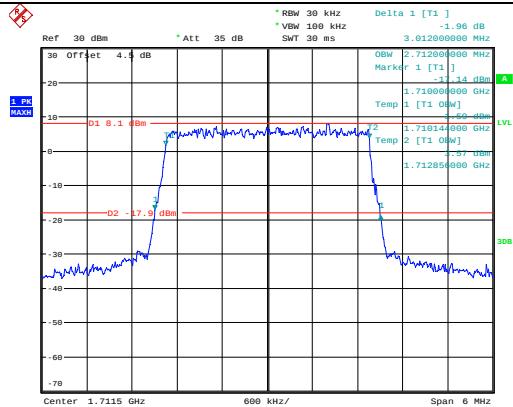

Middle

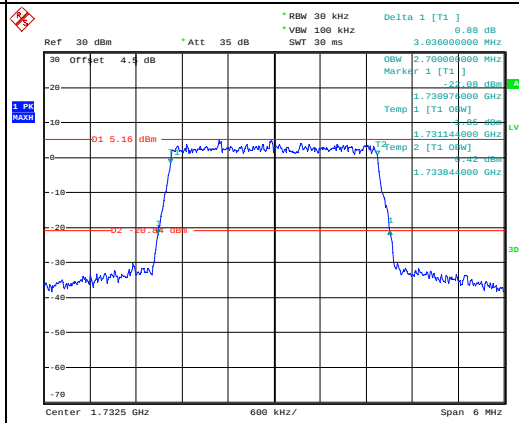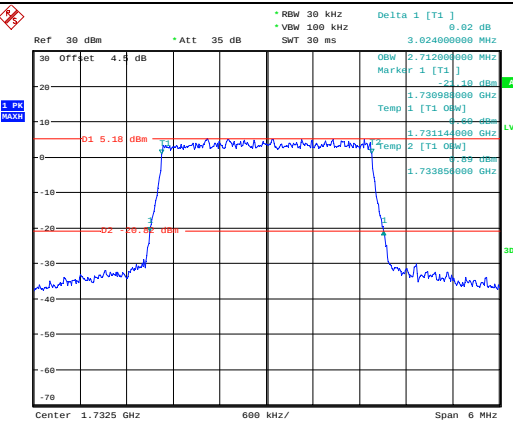

Highest

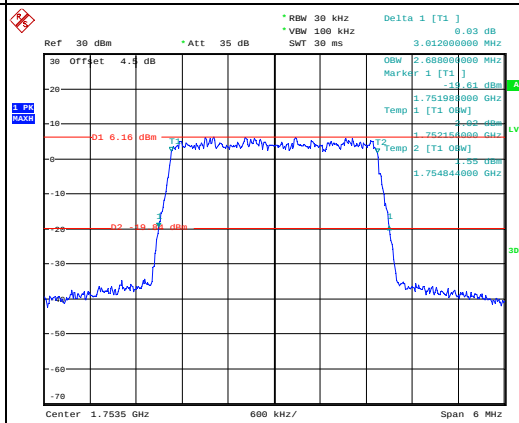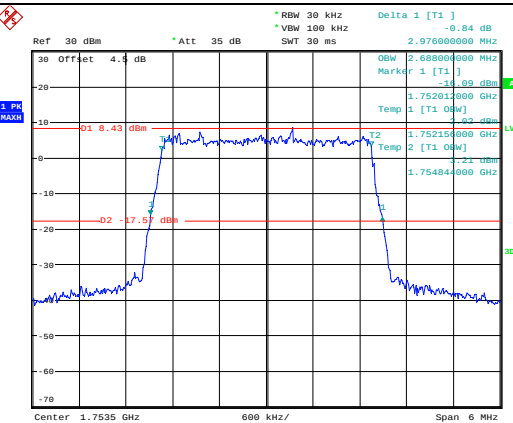



Occupied Bandwidth

Channel



5MHz Bandwidth QPSK

5MHz Bandwidth 16QAM



Lowest

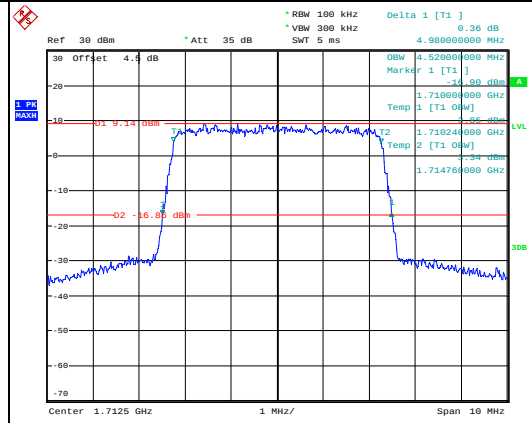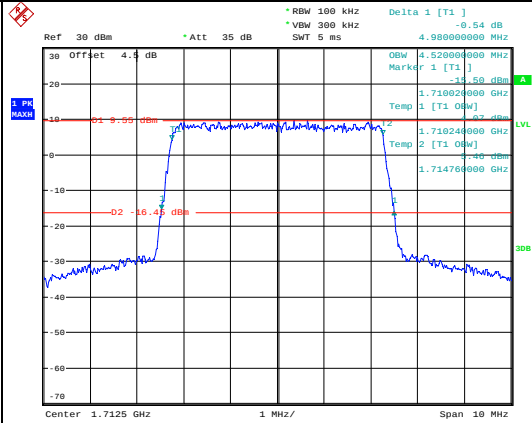

Middle

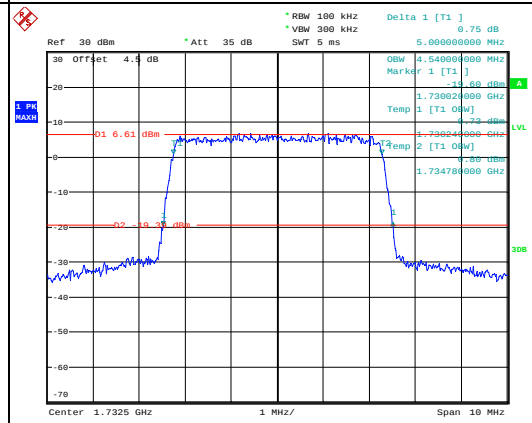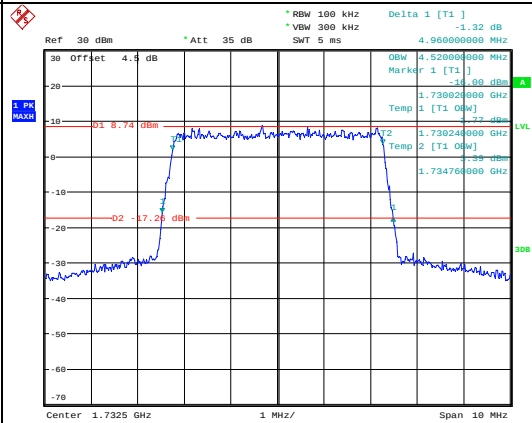

Highest

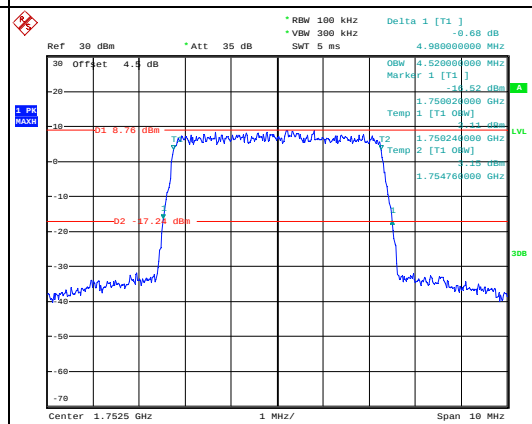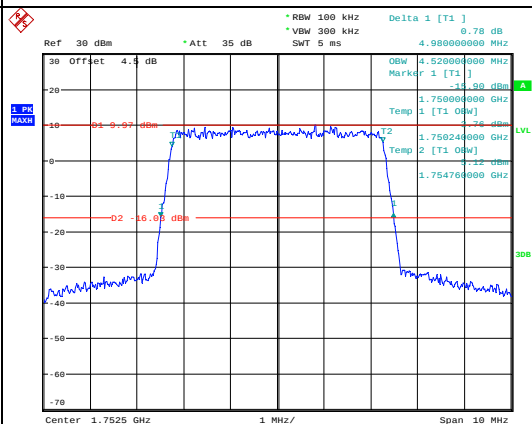







Occupied Bandwidth

Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 100 kHz VBW 300 kHz SWT 10 ms Delta 1 [T1] 1.06 dB OBW 9.760000000 MHz Marker 1 [T1] -10.84 dBm LVL -17.94 dBm Temp 1 [T1 0dB] 1.710120000 GHz Temp 2 [T1 0dB] 1.710520000 GHz Temp 1 [T1 0dB] 1.719480000 GHz Temp 2 [T1 0dB] 1.719880000 GHz Center 1.715 GHz 2 MHz/ Span 20 MHz Date: 10.JAN.2023 19:14:27	Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 100 kHz VBW 300 kHz SWT 10 ms Delta 1 [T1] 0.82 dB OBW 9.840000000 MHz Marker 1 [T1] -10.84 dBm LVL -17.94 dBm Temp 1 [T1 0dB] 1.710040000 GHz Temp 2 [T1 0dB] 1.710440000 GHz Temp 1 [T1 0dB] 1.719440000 GHz Temp 2 [T1 0dB] 1.719840000 GHz Center 1.715 GHz 2 MHz/ Span 20 MHz Date: 10.JAN.2023 19:14:45
Middle	Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 100 kHz VBW 300 kHz SWT 10 ms Delta 1 [T1] -0.40 dB OBW 9.840000000 MHz Marker 1 [T1] -10.84 dBm LVL -17.94 dBm Temp 1 [T1 0dB] 1.727620000 GHz Temp 2 [T1 0dB] 1.728020000 GHz Temp 1 [T1 0dB] 1.736980000 GHz Temp 2 [T1 0dB] 1.737380000 GHz Center 1.7325 GHz 2 MHz/ Span 20 MHz Date: 10.JAN.2023 19:15:04	Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 100 kHz VBW 300 kHz SWT 10 ms Delta 1 [T1] -1.76 dB OBW 9.800000000 MHz Marker 1 [T1] -10.84 dBm LVL -17.94 dBm Temp 1 [T1 0dB] 1.727620000 GHz Temp 2 [T1 0dB] 1.728020000 GHz Temp 1 [T1 0dB] 1.737920000 GHz Temp 2 [T1 0dB] 1.738320000 GHz Center 1.7325 GHz 2 MHz/ Span 20 MHz Date: 10.JAN.2023 19:15:19
Highest	Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 100 kHz VBW 300 kHz SWT 10 ms Delta 1 [T1] 1.74 dB OBW 9.720000000 MHz Marker 1 [T1] -10.84 dBm LVL -17.94 dBm Temp 1 [T1 0dB] 1.745100000 GHz Temp 2 [T1 0dB] 1.745500000 GHz Temp 1 [T1 0dB] 1.754480000 GHz Temp 2 [T1 0dB] 1.754880000 GHz Center 1.75 GHz 2 MHz/ Span 20 MHz Date: 10.JAN.2023 19:15:35	Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 100 kHz VBW 300 kHz SWT 10 ms Delta 1 [T1] -1.67 dB OBW 9.820000000 MHz Marker 1 [T1] -10.84 dBm LVL -17.94 dBm Temp 1 [T1 0dB] 1.745200000 GHz Temp 2 [T1 0dB] 1.745600000 GHz Temp 1 [T1 0dB] 1.754480000 GHz Temp 2 [T1 0dB] 1.754880000 GHz Center 1.75 GHz 2 MHz/ Span 20 MHz Date: 10.JAN.2023 19:15:53

Occupied Bandwidth

Channel	15MHz Bandwidth QPSK	15MHz Bandwidth 16QAM
Lowest	Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 300 kHz Delta 1 [T1] 0.52 dB VBW 1 MHz SWT 2.5 ms OBW 15.000000000 MHz Marker 1 [T1] -11.68 dBm 1.710124000 GHz 1 [T1 0dB] Temp 1.710724000 GHz 2 [T1 0dB] Temp 1.724284000 GHz 30B Center 1.7175 GHz 3 MHz/ Span 30 MHz Date: 10.JAN.2023 19:16:16	Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 300 kHz Delta 1 [T1] 1.02 dB VBW 1 MHz SWT 2.5 ms OBW 15.000000000 MHz Marker 1 [T1] -11.00 dBm 1.710004000 GHz 1 [T1 0dB] Temp 1.710724000 GHz 2 [T1 0dB] Temp 1.724284000 GHz 30B Center 1.7175 GHz 3 MHz/ Span 30 MHz Date: 10.JAN.2023 19:16:35
Middle	Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 300 kHz Delta 1 [T1] 0.52 dB VBW 1 MHz SWT 2.5 ms OBW 15.000000000 MHz Marker 1 [T1] -10.74 dBm 1.725004000 GHz 1 [T1 0dB] Temp 1.725784000 GHz 2 [T1 0dB] Temp 1.739344000 GHz 30B Center 1.7325 GHz 3 MHz/ Span 30 MHz Date: 10.JAN.2023 19:16:55	Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 300 kHz Delta 1 [T1] 0.66 dB VBW 1 MHz SWT 2.5 ms OBW 15.000000000 MHz Marker 1 [T1] -10.83 dBm 1.725004000 GHz 1 [T1 0dB] Temp 1.725784000 GHz 2 [T1 0dB] Temp 1.739344000 GHz 30B Center 1.7325 GHz 3 MHz/ Span 30 MHz Date: 10.JAN.2023 19:17:14
Highest	Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 300 kHz Delta 1 [T1] 1.08 dB VBW 1 MHz SWT 2.5 ms OBW 14.940000000 MHz Marker 1 [T1] -11.03 dBm 1.740124000 GHz 1 [T1 0dB] Temp 1.740784000 GHz 2 [T1 0dB] Temp 1.754344000 GHz 30B Center 1.7475 GHz 3 MHz/ Span 30 MHz Date: 10.JAN.2023 19:17:31	Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 300 kHz Delta 1 [T1] 0.86 dB VBW 1 MHz SWT 2.5 ms OBW 14.940000000 MHz Marker 1 [T1] -10.21 dBm 1.740044000 GHz 1 [T1 0dB] Temp 1.740844000 GHz 2 [T1 0dB] Temp 1.754344000 GHz 30B Center 1.7475 GHz 3 MHz/ Span 30 MHz Date: 10.JAN.2023 19:17:50

Occupied Bandwidth

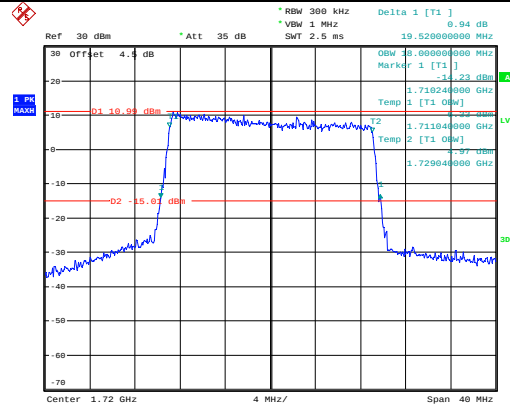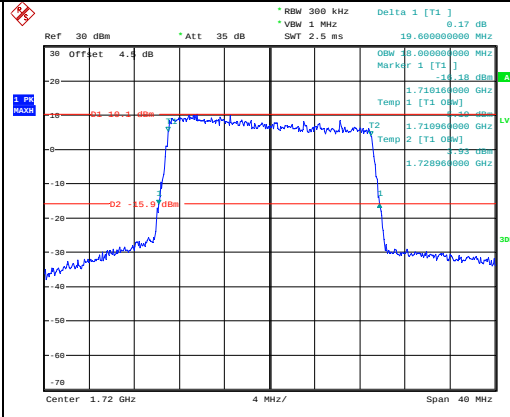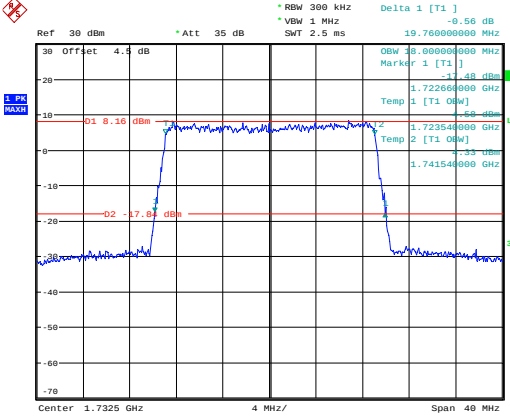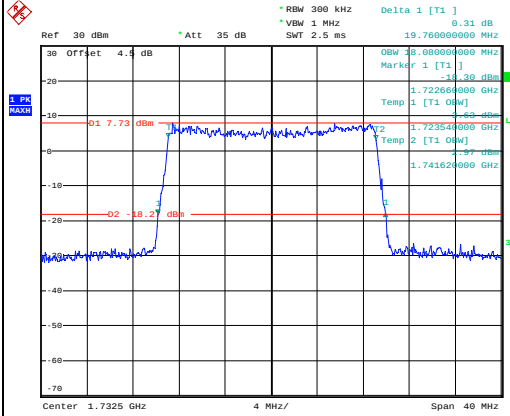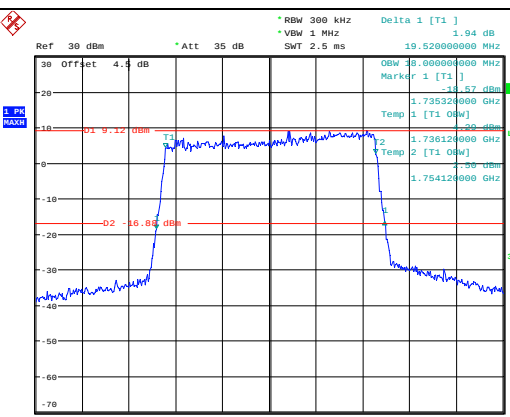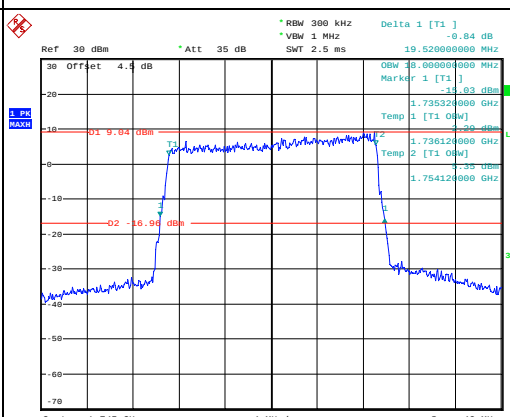
Channel	20MHz Bandwidth QPSK	20MHz Bandwidth 16QAM
Lowest	 Ref 30 dBm *Att 35 dB *RBW 300 kHz Delta 1 [T1] *VBW 1 MHz -0.94 dB SWT 2.5 ms 19.520000000 MHz Marker 1 [T1] 1.710240000 GHz -14.23 dBm Temp 1 [T1 0dB] 1.713104000 GHz -17.23 dBm Temp 2 [T1 0dB] 1.729040000 GHz -19.23 dBm Center 1.72 GHz 4 MHz/ Span 40 MHz Date: 10.JAN.2023 19:18:10	 Ref 30 dBm *Att 35 dB *RBW 300 kHz Delta 1 [T1] *VBW 1 MHz -0.17 dB SWT 2.5 ms 19.600000000 MHz Marker 1 [T1] 1.710160000 GHz -14.18 dBm Temp 1 [T1 0dB] 1.710960000 GHz -17.18 dBm Temp 2 [T1 0dB] 1.728960000 GHz -19.18 dBm Center 1.72 GHz 4 MHz/ Span 40 MHz Date: 10.JAN.2023 19:18:29
Middle	 Ref 30 dBm *Att 35 dB *RBW 300 kHz Delta 1 [T1] *VBW 1 MHz -0.56 dB SWT 2.5 ms 19.760000000 MHz Marker 1 [T1] 1.722660000 GHz -17.48 dBm Temp 1 [T1 0dB] 1.723540000 GHz -18.48 dBm Temp 2 [T1 0dB] 1.741540000 GHz -19.48 dBm Center 1.7325 GHz 4 MHz/ Span 40 MHz Date: 10.JAN.2023 19:18:49	 Ref 30 dBm *Att 35 dB *RBW 300 kHz Delta 1 [T1] *VBW 1 MHz -0.31 dB SWT 2.5 ms 19.760000000 MHz Marker 1 [T1] 1.722660000 GHz -17.30 dBm Temp 1 [T1 0dB] 1.723540000 GHz -18.30 dBm Temp 2 [T1 0dB] 1.741620000 GHz -19.30 dBm Center 1.7325 GHz 4 MHz/ Span 40 MHz Date: 10.JAN.2023 19:19:05
Highest	 Ref 30 dBm *Att 35 dB *RBW 300 kHz Delta 1 [T1] *VBW 1 MHz -1.94 dB SWT 2.5 ms 19.520000000 MHz Marker 1 [T1] 1.735320000 GHz -14.67 dBm Temp 1 [T1 0dB] 1.736120000 GHz -17.67 dBm Temp 2 [T1 0dB] 1.754120000 GHz -19.67 dBm Center 1.745 GHz 4 MHz/ Span 40 MHz Date: 10.JAN.2023 19:19:22	 Ref 30 dBm *Att 35 dB *RBW 300 kHz Delta 1 [T1] *VBW 1 MHz -0.84 dB SWT 2.5 ms 19.520000000 MHz Marker 1 [T1] 1.735320000 GHz -14.63 dBm Temp 1 [T1 0dB] 1.736120000 GHz -17.63 dBm Temp 2 [T1 0dB] 1.754120000 GHz -19.63 dBm Center 1.745 GHz 4 MHz/ Span 40 MHz Date: 10.JAN.2023 19:19:37

Spurious Emissions at Antenna Terminal


Channel

1.4MHz Bandwidth QPSK

Lowest

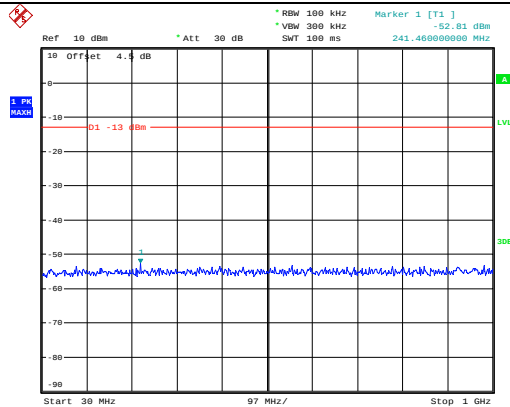


Date: 28.DEC.2022 15:21:24

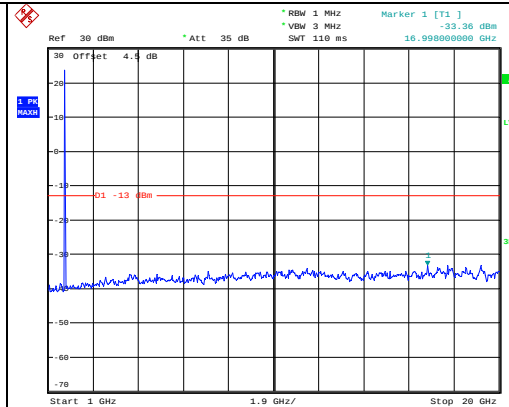


Date: 28.DEC.2022 15:21:35

Middle

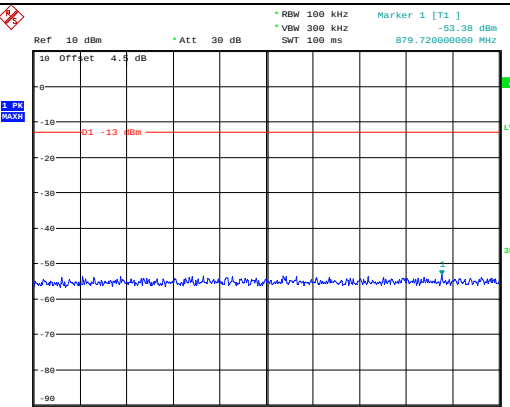


Date: 28.DEC.2022 15:21:49

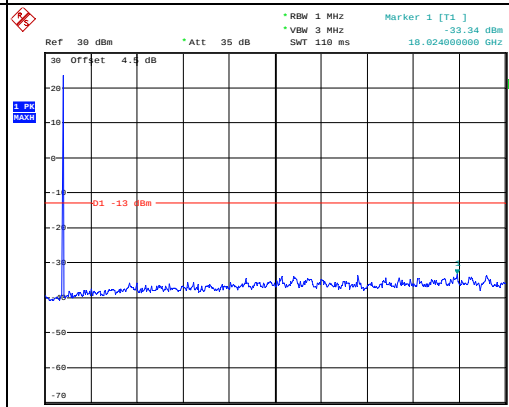


Date: 28.DEC.2022 15:22:00

Highest

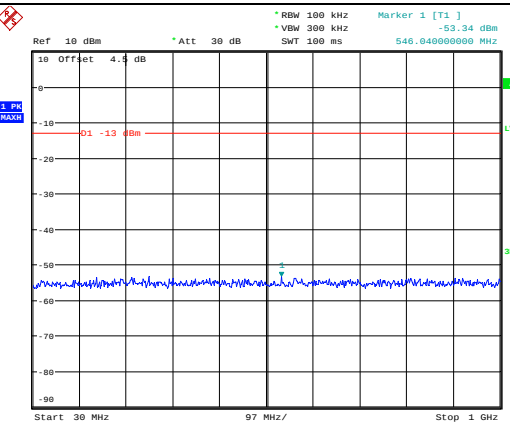

Date: 28.DEC.2022 15:22:14

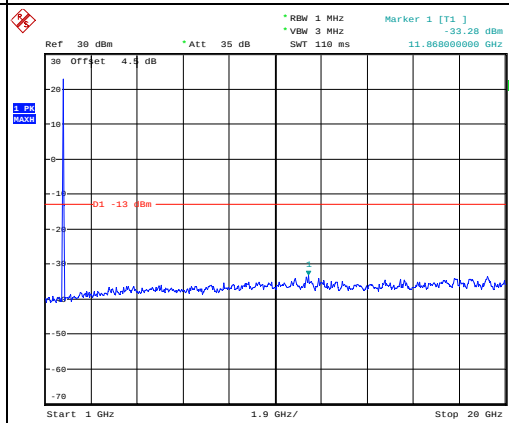


Date: 28.DEC.2022 15:22:25

Spurious Emissions at Antenna Terminal


Channel

3MHz Bandwidth QPSK

Lowest

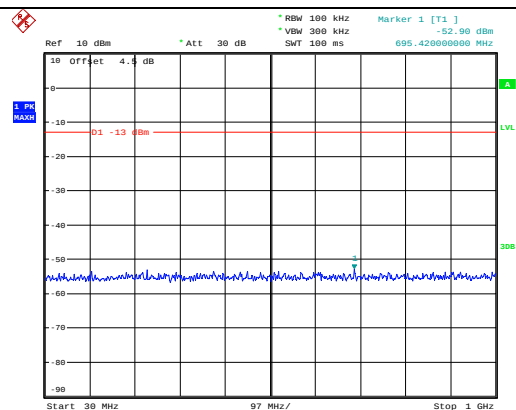


Date: 28.DEC.2022 15:22:43

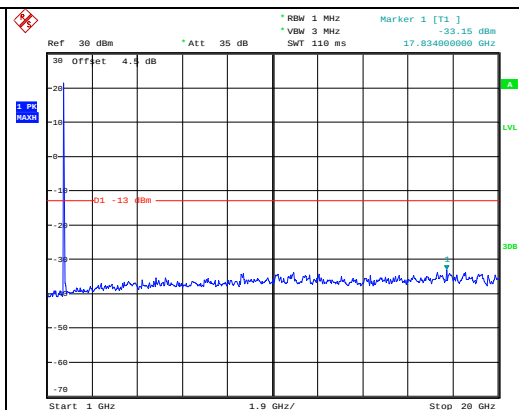


Date: 28.DEC.2022 15:22:54

Middle

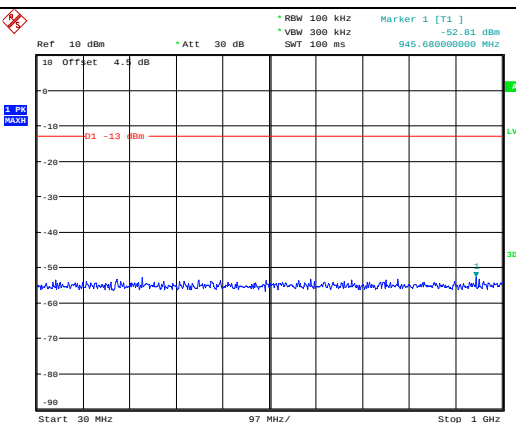


Date: 28.DEC.2022 15:23:08

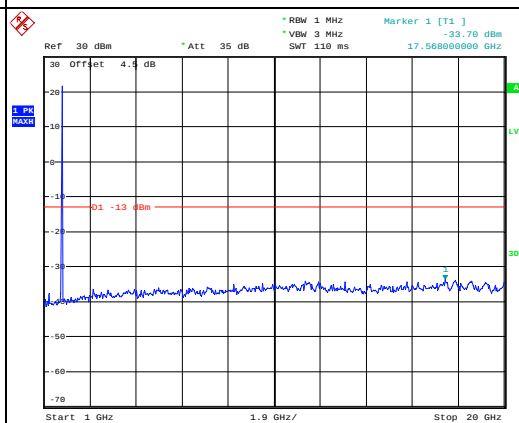


Date: 28.DEC.2022 15:23:19

Highest

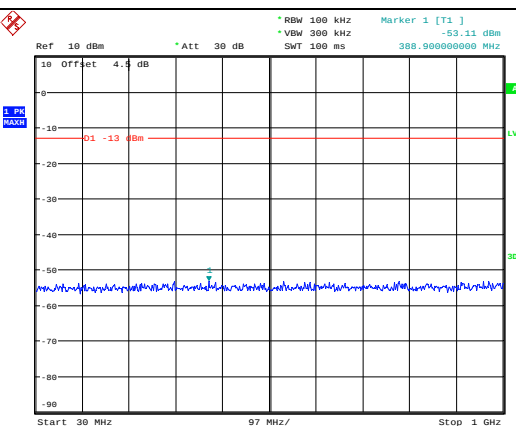

Date: 28.DEC.2022 15:23:36

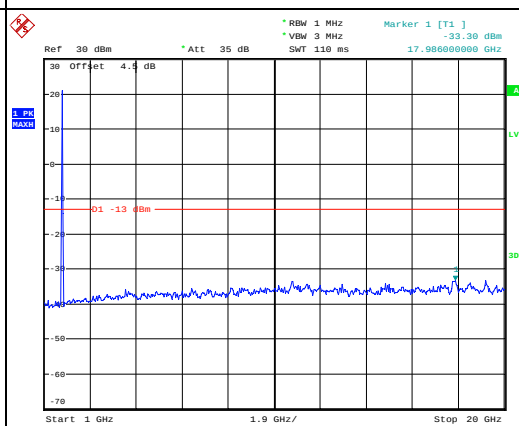


Date: 28.DEC.2022 15:23:48

Spurious Emissions at Antenna Terminal


Channel

5MHz Bandwidth QPSK

Lowest

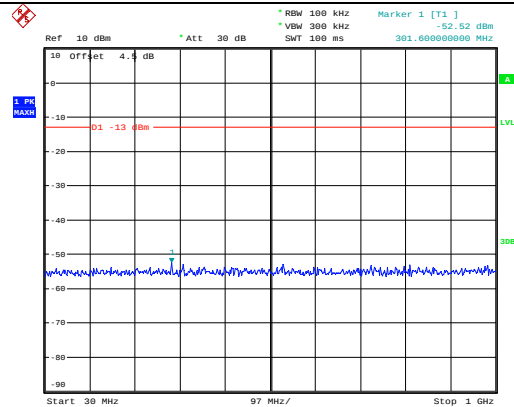


Date: 28.DEC.2022 15:24:05

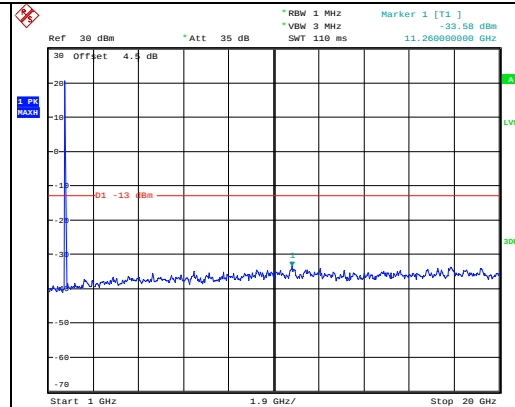


Date: 28.DEC.2022 15:24:17

Middle

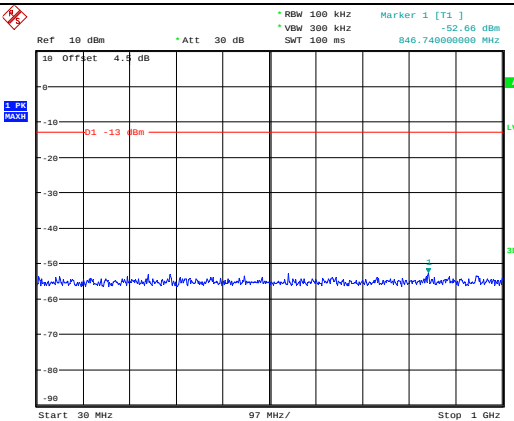


Date: 28.DEC.2022 15:24:31

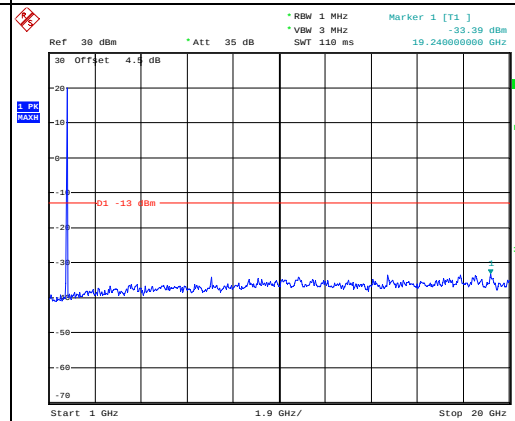


Date: 28.DEC.2022 15:24:42

Highest

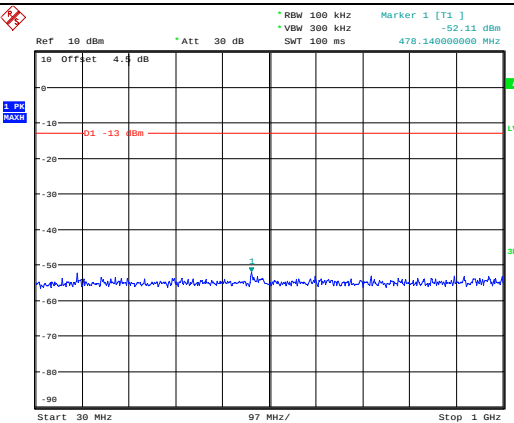


Date: 28.DEC.2022 15:24:59

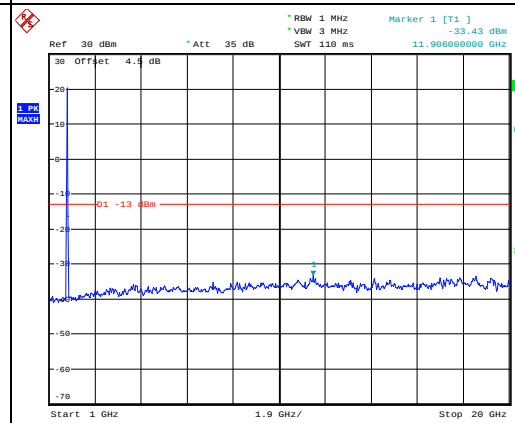

Date: 28.DEC.2022 15:25:10

Spurious Emissions at Antenna Terminal

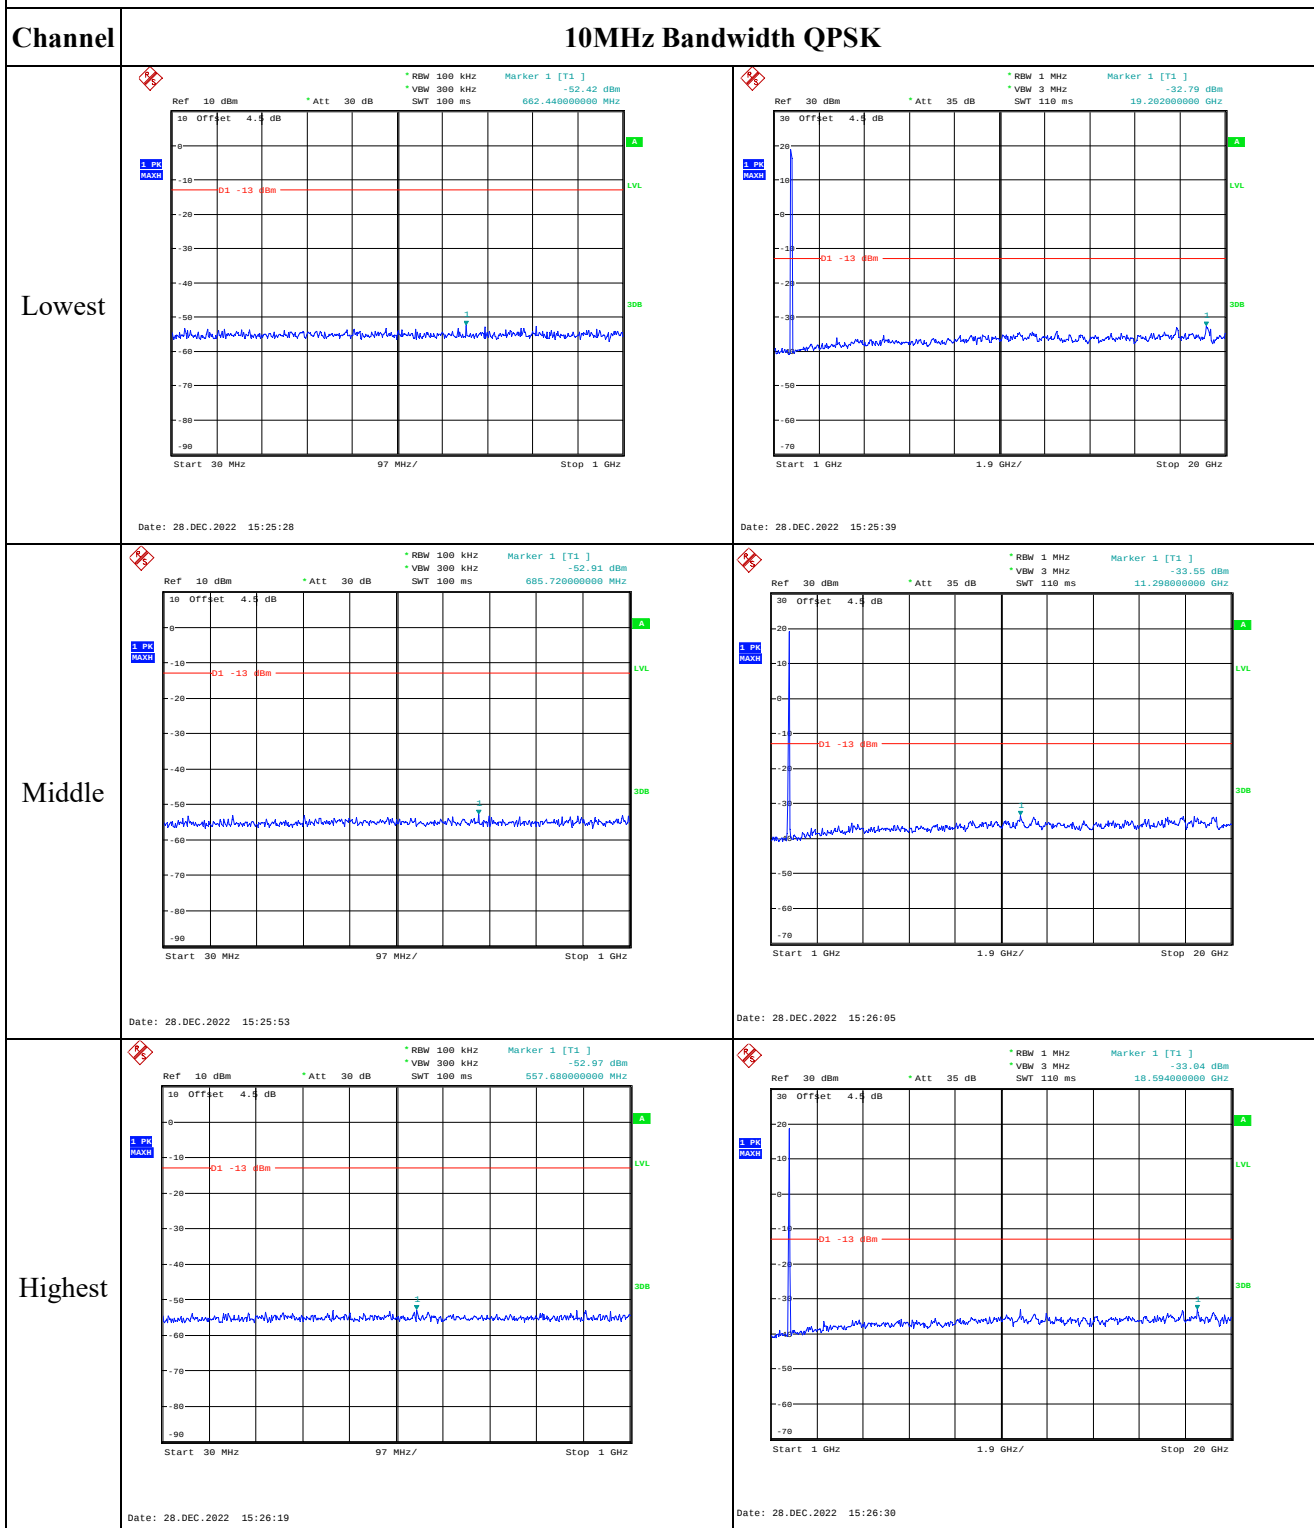


Spurious Emissions at Antenna Terminal


Channel

15MHz Bandwidth QPSK

Lowest

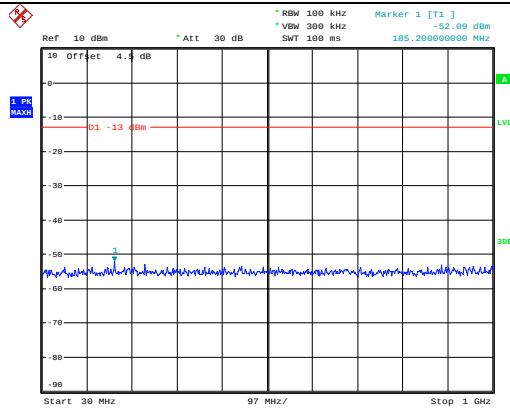


Date: 28.DEC.2022 15:26:49

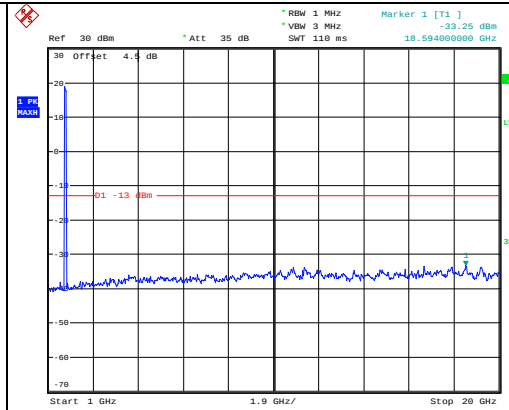


Date: 28.DEC.2022 15:27:00

Middle

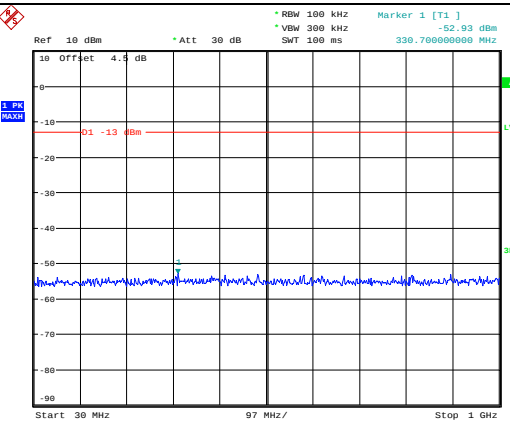


Date: 28.DEC.2022 15:27:15

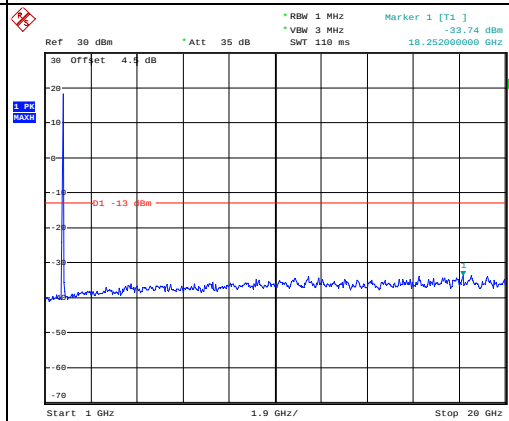


Date: 28.DEC.2022 15:27:26

Highest

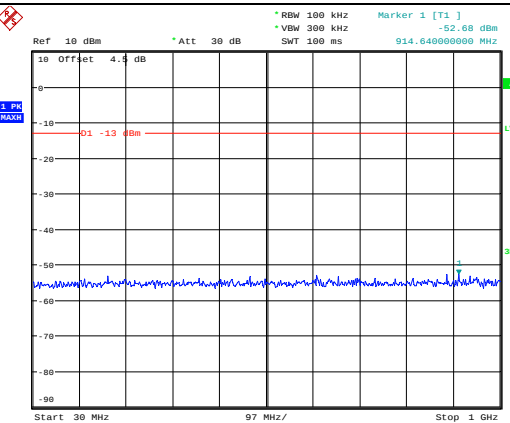

Date: 28.DEC.2022 15:27:41

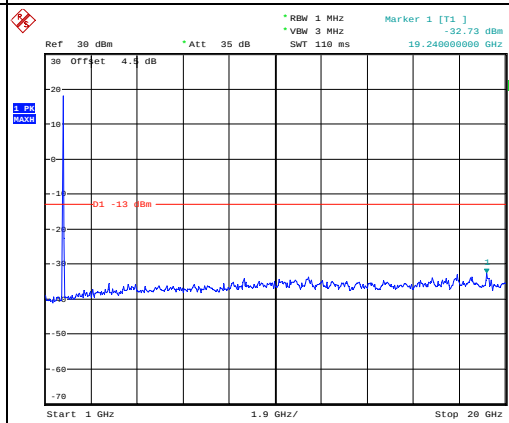


Date: 28.DEC.2022 15:27:55

Spurious Emissions at Antenna Terminal


Channel

20MHz Bandwidth QPSK

Lowest

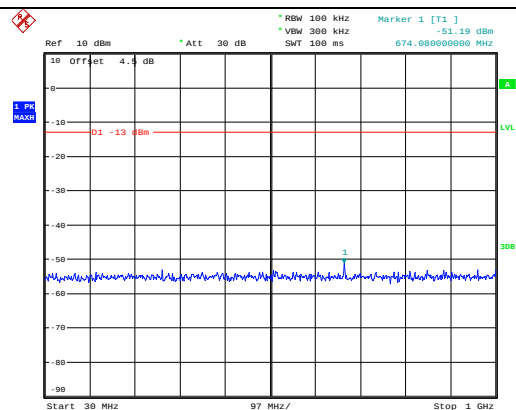


Date: 28.DEC.2022 15:28:14

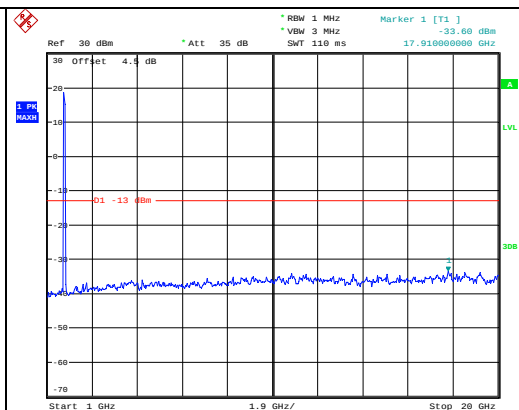


Date: 28.DEC.2022 15:28:25

Middle

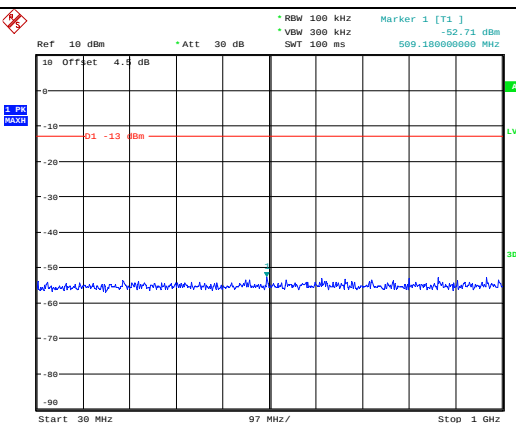


Date: 28.DEC.2022 15:28:40

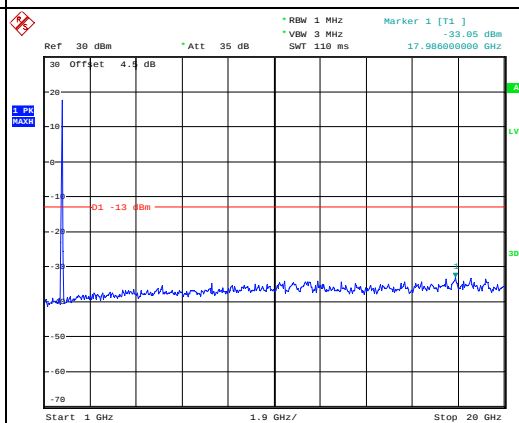


Date: 28.DEC.2022 15:28:52

Highest

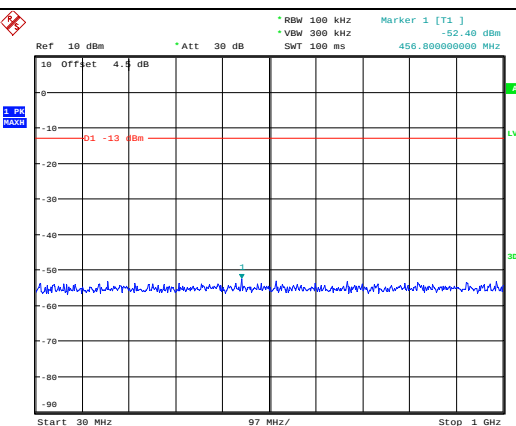

Date: 28.DEC.2022 15:29:06

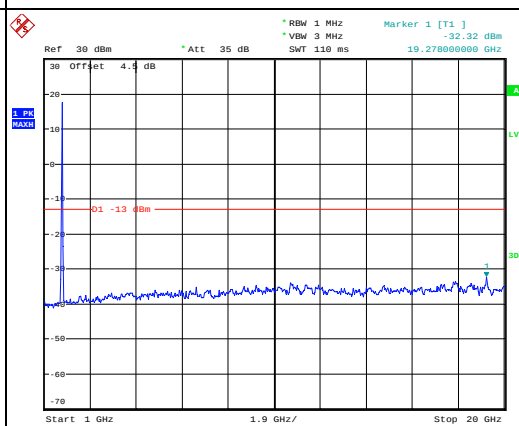


Date: 28.DEC.2022 15:29:18







Out of band emission, Band Edge

Mode	Lowest	Highest
QPSK 1.4MHz	Ref 30 dBm Att 35 dB RBW 30 kHz VBW 100 kHz SWT 35 ms Marker 1 [T1] -31.58 dBm 1.710000000 GHz 30 Offset 4.5 dB -13 dBm SWP 50 OF 50 Center 1.71 GHz 300 kHz/ Span 3 MHz Date: 28.DEC.2022 14:58:44	Ref 30 dBm Att 35 dB RBW 30 kHz VBW 100 kHz SWT 35 ms Marker 1 [T1] -34.21 dBm 1.755000000 GHz 30 Offset 4.5 dB -13 dBm SWP 50 OF 50 Center 1.755 GHz 300 kHz/ Span 3 MHz Date: 28.DEC.2022 14:59:00
QPSK 3MHz	Ref 30 dBm Att 35 dB RBW 30 kHz VBW 100 kHz SWT 35 ms Marker 1 [T1] -27.16 dBm 1.710000000 GHz 30 Offset 4.5 dB -13 dBm SWP 50 OF 50 Center 1.71 GHz 600 kHz/ Span 6 MHz Date: 28.DEC.2022 14:59:20	Ref 30 dBm Att 35 dB RBW 30 kHz VBW 100 kHz SWT 35 ms Marker 1 [T1] -28.64 dBm 1.755000000 GHz 30 Offset 4.5 dB -13 dBm SWP 50 OF 50 Center 1.755 GHz 600 kHz/ Span 6 MHz Date: 28.DEC.2022 14:59:36
QPSK 5MHz	Ref 30 dBm Att 35 dB RBW 100 kHz VBW 300 kHz SWT 35 ms Marker 1 [T1] -29.29 dBm 1.710000000 GHz 30 Offset 4.5 dB -13 dBm SWP 50 OF 50 Center 1.71 GHz 1 MHz/ Span 10 MHz Date: 28.DEC.2022 14:59:57	Ref 30 dBm Att 35 dB RBW 100 kHz VBW 300 kHz SWT 35 ms Marker 1 [T1] -29.31 dBm 1.755000000 GHz 30 Offset 4.5 dB -13 dBm SWP 50 OF 50 Center 1.755 GHz 1 MHz/ Span 10 MHz Date: 28.DEC.2022 15:00:14







Out of band emission, Band Edge

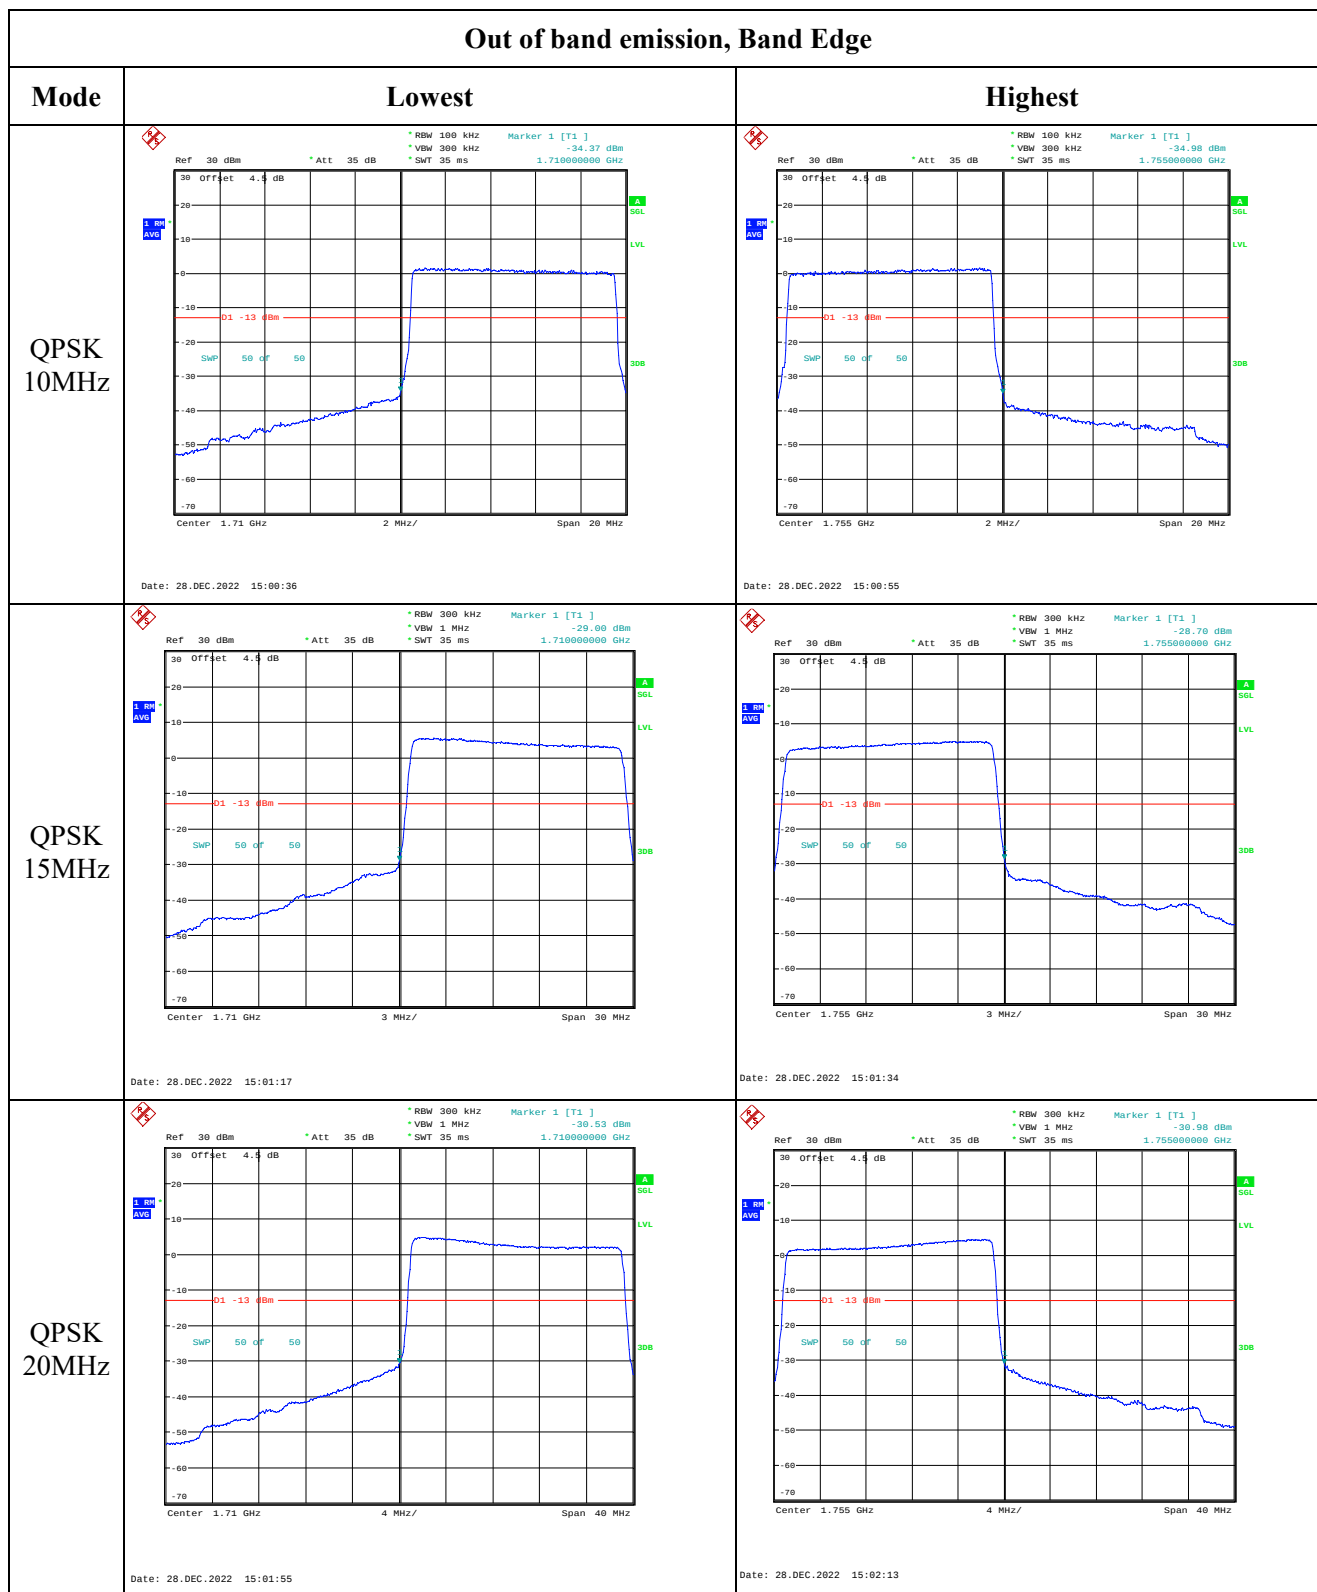

Out of band emission, Band Edge

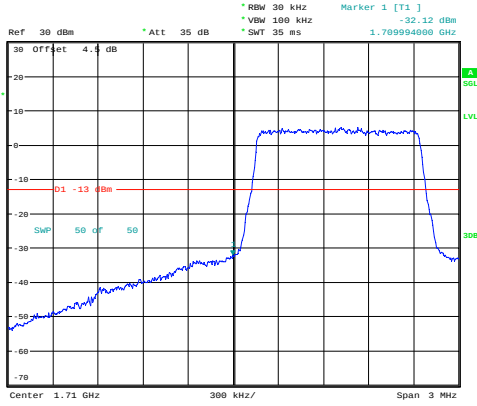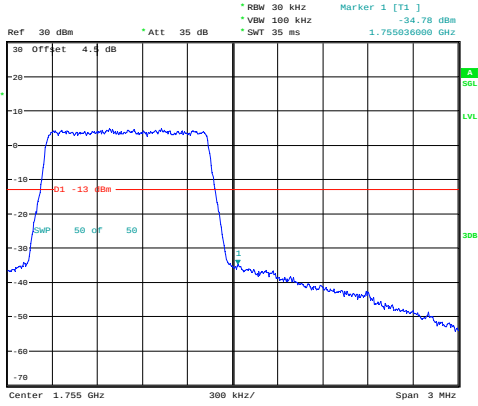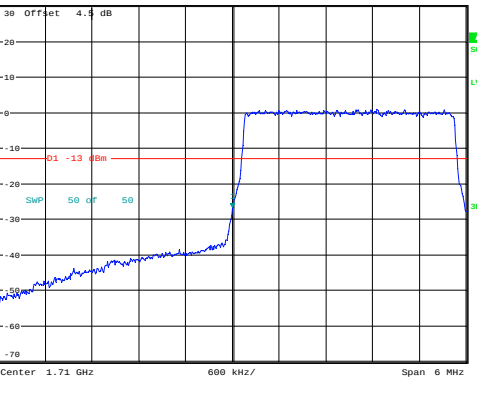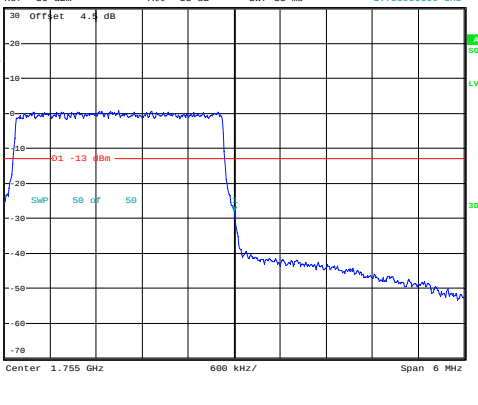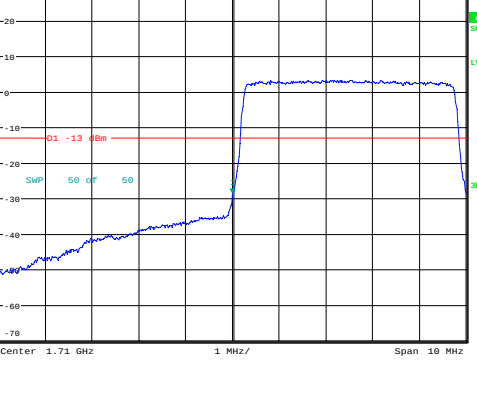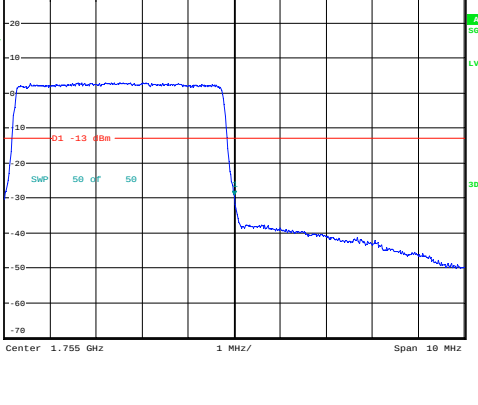Mode	Lowest	Highest
16QAM 1.4MHz	 Ref 30 dBm Att 35 dB RBW 30 kHz Marker 1 [T1] -32.12 dBm VBW 100 kHz 1.709994000 GHz SWT 35 ms Center 1.71 GHz 300 kHz/ Span 3 MHz Date: 28.DEC.2022 14:58:52	 Ref 30 dBm Att 35 dB RBW 30 kHz Marker 1 [T1] -34.78 dBm VBW 100 kHz 1.755036000 GHz SWT 35 ms Center 1.755 GHz 300 kHz/ Span 3 MHz Date: 28.DEC.2022 14:59:07
16QAM 3MHz	 Ref 30 dBm Att 35 dB RBW 30 kHz Marker 1 [T1] -26.88 dBm VBW 100 kHz 1.710000000 GHz SWT 35 ms Center 1.71 GHz 600 kHz/ Span 6 MHz Date: 28.DEC.2022 14:59:28	 Ref 30 dBm Att 35 dB RBW 30 kHz Marker 1 [T1] -28.14 dBm VBW 100 kHz 1.755000000 GHz SWT 35 ms Center 1.755 GHz 600 kHz/ Span 6 MHz Date: 28.DEC.2022 14:59:44
16QAM 5MHz	 Ref 30 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -26.58 dBm VBW 300 kHz 1.710000000 GHz SWT 35 ms Center 1.71 GHz 1 MHz/ Span 10 MHz Date: 28.DEC.2022 15:00:05	 Ref 30 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -29.42 dBm VBW 300 kHz 1.755000000 GHz SWT 35 ms Center 1.755 GHz 1 MHz/ Span 10 MHz Date: 28.DEC.2022 15:00:22

Out of band emission, Band Edge

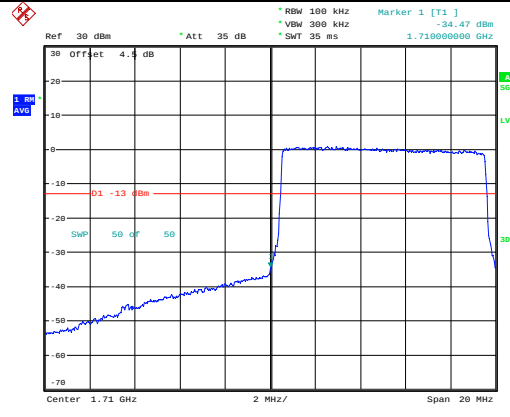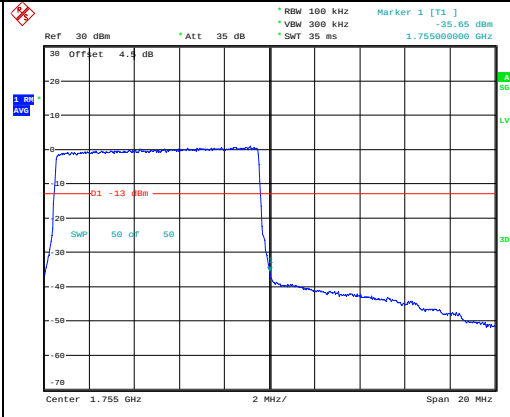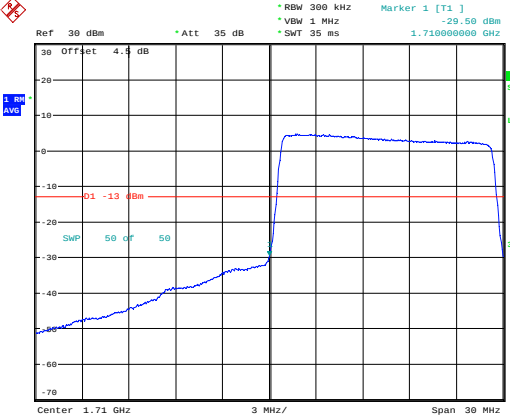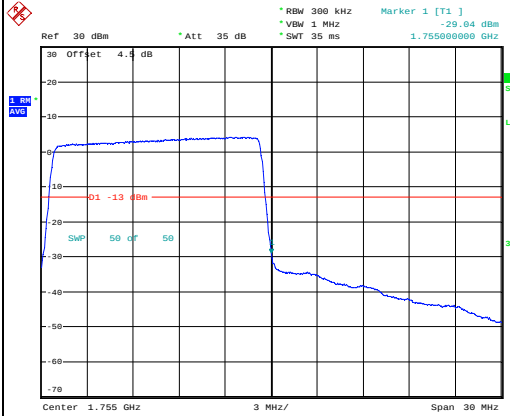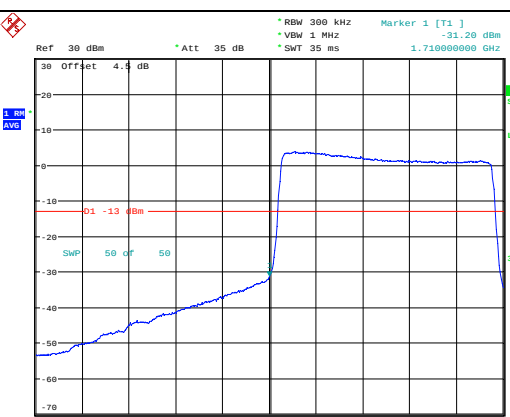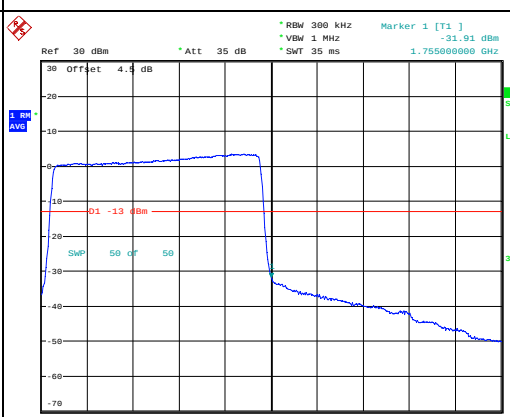Mode	Lowest	Highest
16QAM 10MHz	 Ref 30 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -34.47 dBm VBW 300 kHz SWT 35 ms 1.710000000 GHz 30 Offset 4.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.71 GHz 2 MHz/ Span 20 MHz Date: 28.DEC.2022 15:00:46	 Ref 30 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -35.05 dBm VBW 300 kHz SWT 35 ms 1.755000000 GHz 30 Offset 4.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.755 GHz 2 MHz/ Span 20 MHz Date: 28.DEC.2022 15:01:04
16QAM 15MHz	 Ref 30 dBm Att 35 dB RBW 300 kHz Marker 1 [T1] -29.50 dBm VBW 1 MHz SWT 35 ms 1.710000000 GHz 30 Offset 4.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.71 GHz 3 MHz/ Span 30 MHz Date: 28.DEC.2022 15:01:25	 Ref 30 dBm Att 35 dB RBW 300 kHz Marker 1 [T1] -29.04 dBm VBW 1 MHz SWT 35 ms 1.755000000 GHz 30 Offset 4.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.755 GHz 3 MHz/ Span 30 MHz Date: 28.DEC.2022 15:01:42
16QAM 20MHz	 Ref 30 dBm Att 35 dB RBW 300 kHz Marker 1 [T1] -31.20 dBm VBW 1 MHz SWT 35 ms 1.710000000 GHz 30 Offset 4.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.71 GHz 4 MHz/ Span 40 MHz Date: 28.DEC.2022 15:02:03	 Ref 30 dBm Att 35 dB RBW 300 kHz Marker 1 [T1] -31.91 dBm VBW 1 MHz SWT 35 ms 1.755000000 GHz 30 Offset 4.5 dB D1 -13 dBm SWP 50 OF 50 Center 1.755 GHz 4 MHz/ Span 40 MHz Date: 28.DEC.2022 15:02:21

4.8 Antenna Port Test Data and Results for LTE Band 5

Serial Number:	1SNT-1	Test Date:	2022/12/28-2023/1/10
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.3-23.2	Relative Humidity: (%)	38-63	ATM Pressure: (kPa)	102.1-101.3
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/4/5	2023/4/4
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/4/6	2023/4/5
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	824.7	836.5	848.3
3MHz	825.5	836.5	847.5
5MHz	826.5	836.5	846.5
10MHz	829	836.5	844

Test Data:**FCC§2.1046;§ 22.913 (a)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	18.88	18.54	18.81	13.27	38.45
	RB1#3	18.71	18.73	18.77		
	RB1#5	18.91	18.8	18.81		
	RB3#0	18.86	18.77	18.84		
	RB3#3	18.63	18.81	18.73		
	RB6#0	17.78	17.76	17.64		
1.4MHz 16QAM	RB1#0	18.08	17.25	18.17	12.53	38.45
	RB1#3	18.08	17.34	18.02		
	RB1#5	18.17	17.4	18.13		
	RB3#0	17.84	17.85	17.8		
	RB3#3	17.79	17.74	17.65		
	RB6#0	16.95	17.42	17.02		
3MHz QPSK	RB1#0	19.05	18.58	18.62	13.41	38.45
	RB1#8	18.72	18.71	18.81		
	RB1#14	18.92	18.62	18.79		
	RB6#0	17.74	17.74	17.69		
	RB6#9	17.92	17.7	17.68		
	RB15#0	17.52	17.76	17.82		
3MHz 16QAM	RB1#0	17.9	17.32	17.83	12.34	38.45
	RB1#8	17.7	17.35	17.98		
	RB1#14	17.95	17.25	17.93		
	RB6#0	16.99	17.01	16.73		
	RB6#9	17.12	17.42	16.79		
	RB15#0	16.69	17.23	16.77		
5MHz QPSK	RB1#0	18.72	18.75	18.53	13.18	38.45
	RB1#13	18.82	18.66	18.67		
	RB1#24	18.79	18.5	18.76		
	RB15#0	17.46	17.75	17.58		
	RB15#10	17.75	17.84	17.77		
	RB25#0	17.8	17.82	17.76		
5MHz 16QAM	RB1#0	17.69	17.5	16.64	12.29	38.45
	RB1#13	17.66	17.67	16.65		
	RB1#24	17.93	17.65	16.76		
	RB15#0	16.57	16.71	17.14		
	RB15#10	16.64	17.26	16.85		
	RB25#0	16.93	17.17	16.7		
10MHz QPSK	RB1#0	19.1	18.71	18.55	13.46	38.45
	RB1#25	18.95	18.79	18.65		

	RB1#49	18.72	18.49	18.66		
	RB25#0	18	17.84	17.82		
	RB25#25	17.89	17.81	17.74		
	RB50#0	17.92	17.98	17.93		
10MHz 16QAM	RB1#0	18.45	17.28	17.84	12.81	38.45
	RB1#25	18.44	17.21	17.9		
	RB1#49	18.39	17.14	17.8		
	RB25#0	17.03	17.06	16.73		
	RB25#25	16.84	17.03	16.65		
	RB50#0	16.93	17.31	16.82		

Note:

ERP= Conducted Power(dBm) - Lc(dB) + G_T(dBd)G_T(dBd)=G_T(dBi)-2.15**Result:****Pass****Peak-to-average Ratio(PAR)**

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit(dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	5.64	5.32	5.96	13
	RB50#0	5.64	5.77	5.77	13
10MHz 16QAM	RB1#0	6.44	6.12	7.12	13
	RB50#0	6.44	6.57	6.54	13
Result:					Pass

FCC §2.1049, §22.905:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.098	1.104	1.098	1.254	1.254	1.254
1.4MHz 16QAM	1.098	1.104	1.11	1.254	1.26	1.254
3MHz QPSK	2.7	2.7	2.7	2.988	3	2.976
3MHz 16QAM	2.7	2.7	2.7	3.012	3.012	3.012
5MHz QPSK	4.52	4.52	4.54	5.02	4.98	5
5MHz 16QAM	4.52	4.54	4.5	5.02	4.98	5
10MHz QPSK	8.96	8.96	8.96	9.68	9.76	9.68
10MHz 16QAM	8.92	9	8.96	9.76	9.76	9.76

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, §22.917(a): Out of band emission, Band Edge


Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §22.355: Frequency Stability







Test Mode:	10 MHz QPSK		Test Channel:	836.5	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	3	0.004	2.5
	-20	3.8	-6	-0.007	2.5
	-10	3.8	7	0.008	2.5
	0	3.8	5	0.006	2.5
	10	3.8	8	0.010	2.5
	20	3.8	-7	-0.008	2.5
	30	3.8	-6	-0.007	2.5
	40	3.8	10	0.012	2.5
Frequency Stability vs. Voltage	20	3.5	-6	-0.007	2.5
	20	4.2	-7	-0.008	2.5
Result:				Pass	

Test Mode:	10 MHz 16QAM		Test Channel:	836.5	MHz
Test Item	Temperature (°C)	Voltage (V _{DC})	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	4	0.005	2.5
	-20	3.8	8	0.010	2.5
	-10	3.8	-10	-0.012	2.5
	0	3.8	5	0.006	2.5
	10	3.8	-5	-0.006	2.5
	20	3.8	5	0.006	2.5
	30	3.8	-7	-0.008	2.5
	40	3.8	10	0.012	2.5
Frequency Stability vs. Voltage	20	3.5	-8	-0.010	2.5
	20	4.2	-7	-0.008	2.5
Result:				Pass	

Test Plots(Note: The 4.5dB is the Insertion loss of the RF cable, Power Splitter, which was offset into the Spectrum Analyzer):

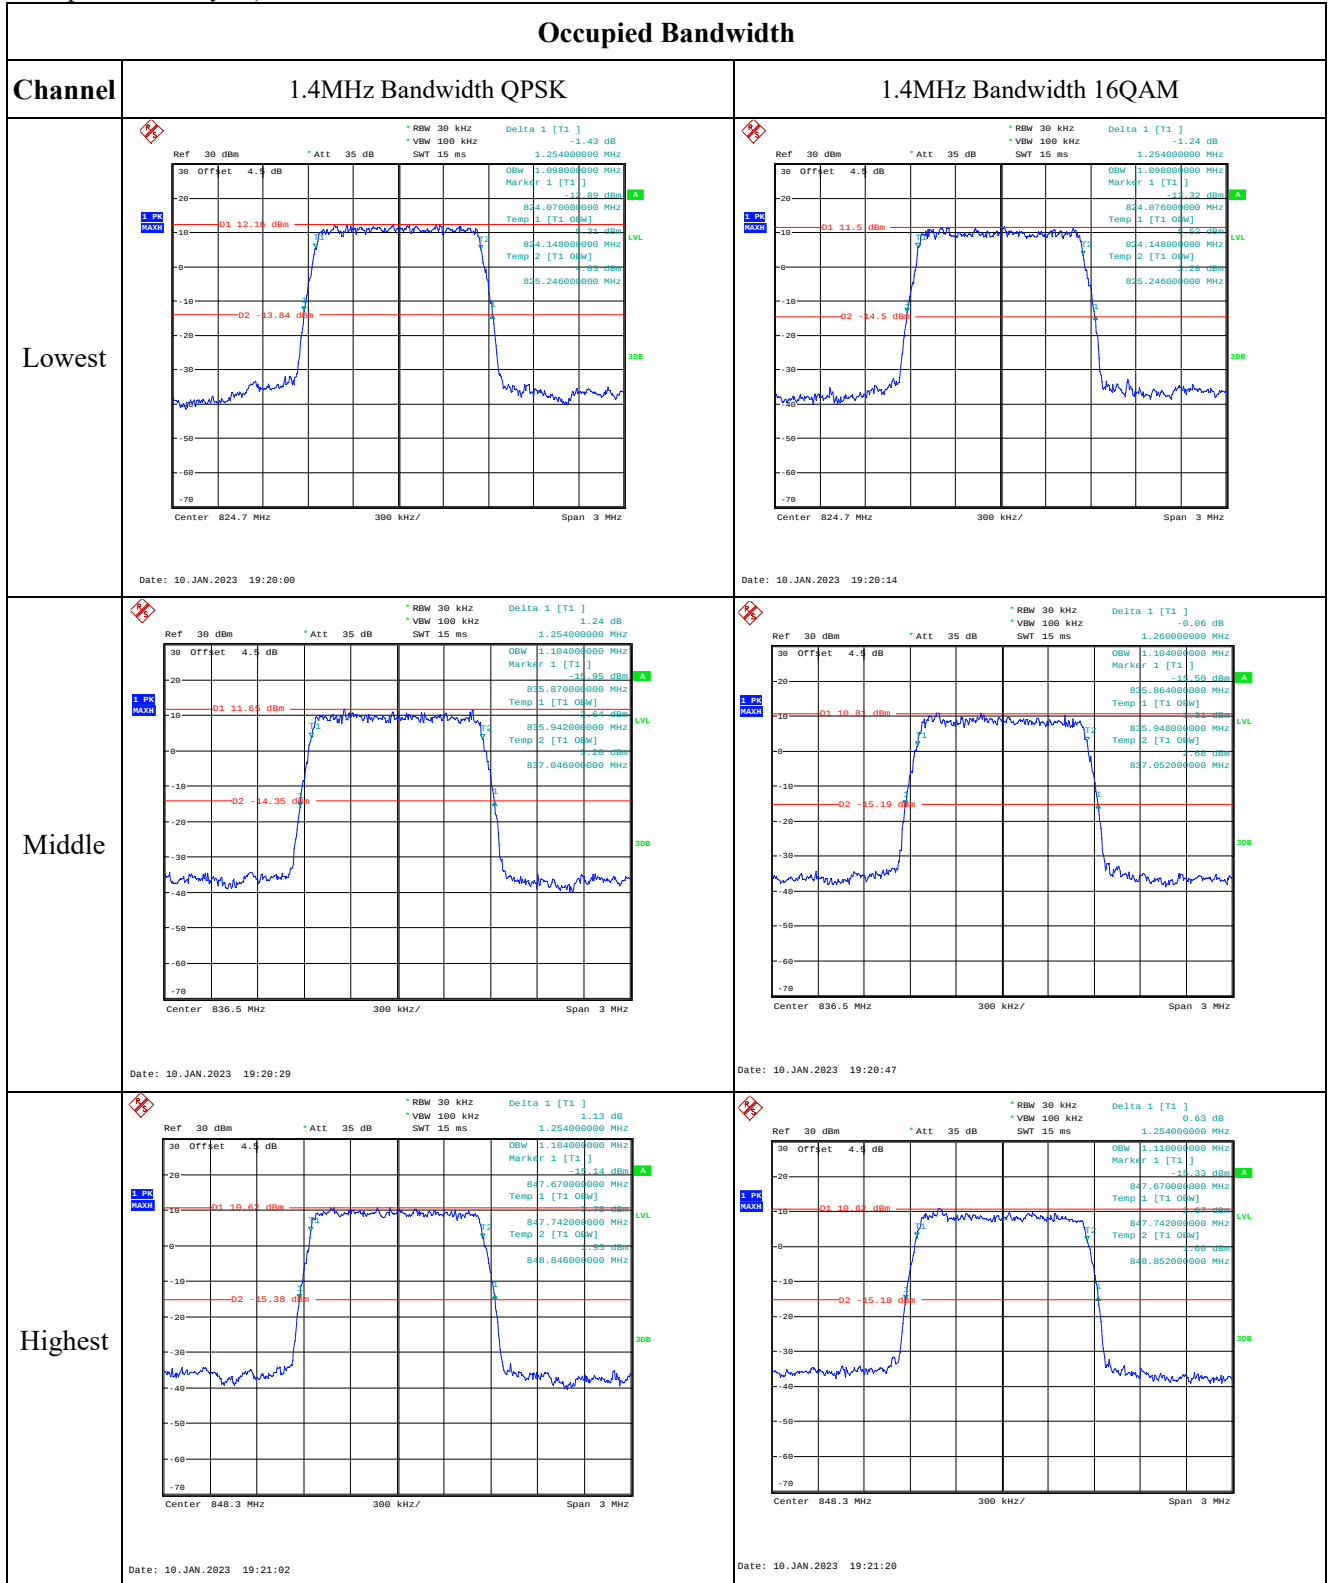

Occupied Bandwidth

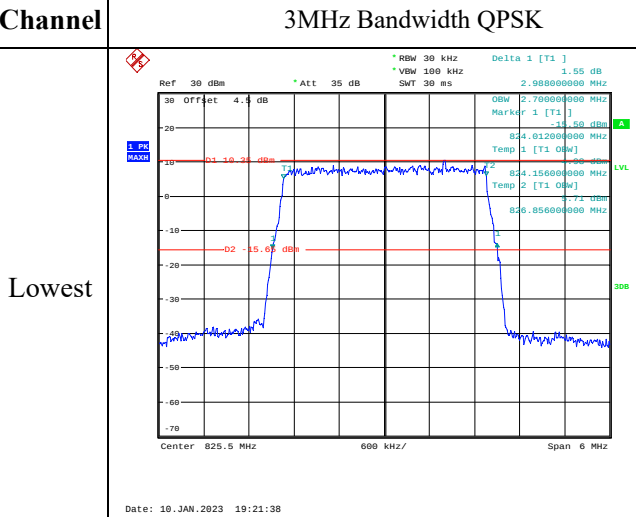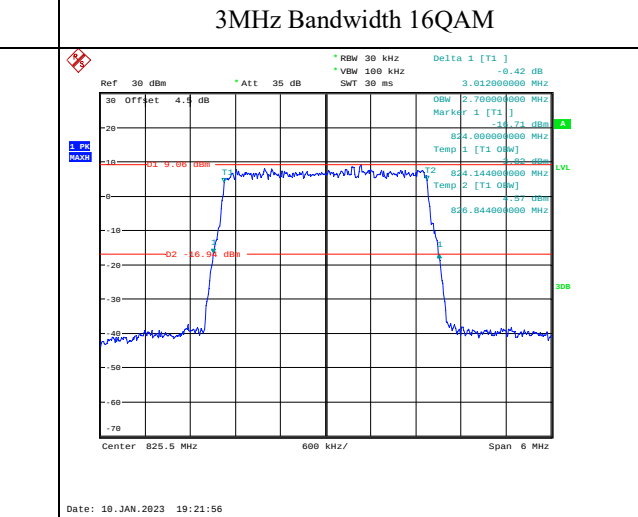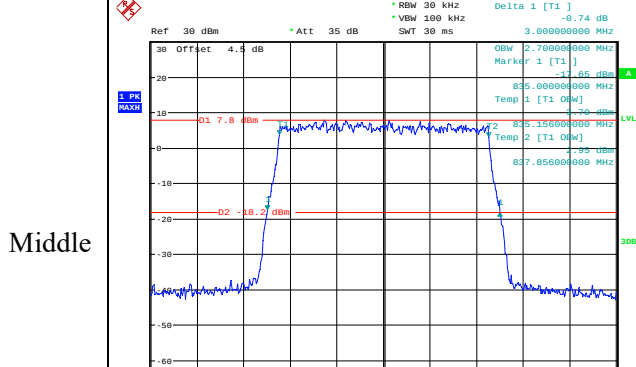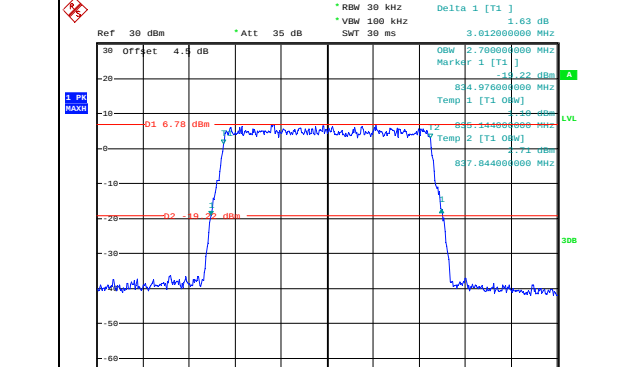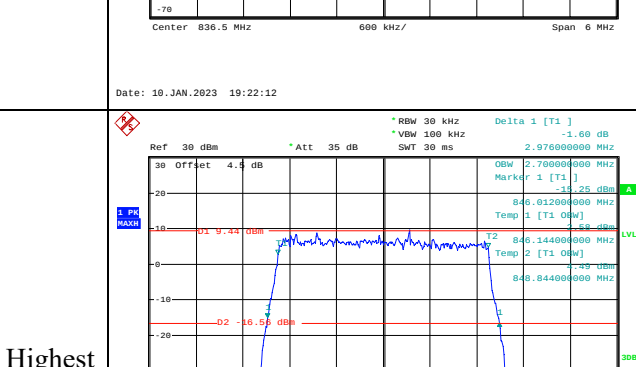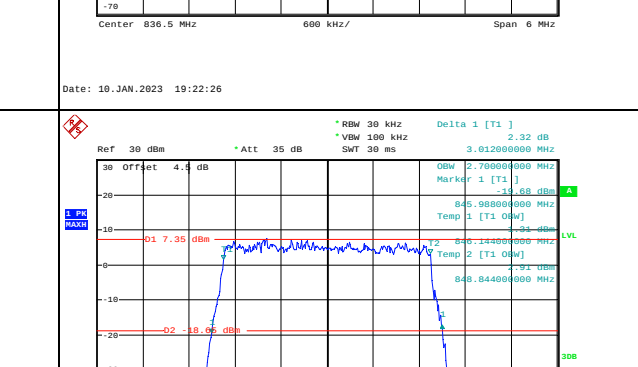Channel	3MHz Bandwidth QPSK	3MHz Bandwidth 16QAM
Lowest	 Ref 30 dBm Offset 4.5 dB Att 35 dB RBW 30 kHz VBW 100 kHz SWT 30 ms Delta 1 [T1] OBW 2.700000000 MHz Marker 1 [T1] 824.012000000 MHz Temp 1 [T1 Offw] 824.156000000 MHz Temp 2 [T1 Offw] 826.856000000 MHz Center 825.5 MHz 600 kHz/ Span 6 MHz Date: 10.JAN.2023 19:21:38	 Ref 30 dBm Offset 4.5 dB Att 35 dB RBW 30 kHz VBW 100 kHz SWT 30 ms Delta 1 [T1] OBW 2.700000000 MHz Marker 1 [T1] 824.000000000 MHz Temp 1 [T1 Offw] 824.144000000 MHz Temp 2 [T1 Offw] 826.844000000 MHz Center 825.5 MHz 600 kHz/ Span 6 MHz Date: 10.JAN.2023 19:21:56
Middle	 Ref 30 dBm Offset 4.5 dB Att 35 dB RBW 30 kHz VBW 100 kHz SWT 30 ms Delta 1 [T1] OBW 2.700000000 MHz Marker 1 [T1] 835.000000000 MHz Temp 1 [T1 Offw] 835.156000000 MHz Temp 2 [T1 Offw] 837.856000000 MHz Center 836.5 MHz 600 kHz/ Span 6 MHz Date: 10.JAN.2023 19:22:12	 Ref 30 dBm Offset 4.5 dB Att 35 dB RBW 30 kHz VBW 100 kHz SWT 30 ms Delta 1 [T1] OBW 2.700000000 MHz Marker 1 [T1] 834.976000000 MHz Temp 1 [T1 Offw] 835.144000000 MHz Temp 2 [T1 Offw] 837.844000000 MHz Center 836.5 MHz 600 kHz/ Span 6 MHz Date: 10.JAN.2023 19:22:26
Highest	 Ref 30 dBm Offset 4.5 dB Att 35 dB RBW 30 kHz VBW 100 kHz SWT 30 ms Delta 1 [T1] OBW 2.700000000 MHz Marker 1 [T1] 846.012000000 MHz Temp 1 [T1 Offw] 846.144000000 MHz Temp 2 [T1 Offw] 848.844000000 MHz Center 847.5 MHz 600 kHz/ Span 6 MHz Date: 10.JAN.2023 19:22:42	 Ref 30 dBm Offset 4.5 dB Att 35 dB RBW 30 kHz VBW 100 kHz SWT 30 ms Delta 1 [T1] OBW 2.700000000 MHz Marker 1 [T1] 845.988000000 MHz Temp 1 [T1 Offw] 846.144000000 MHz Temp 2 [T1 Offw] 848.844000000 MHz Center 847.5 MHz 600 kHz/ Span 6 MHz Date: 10.JAN.2023 19:22:56


Occupied Bandwidth

Channel


5MHz Bandwidth QPSK

5MHz Bandwidth 16QAM

Lowest

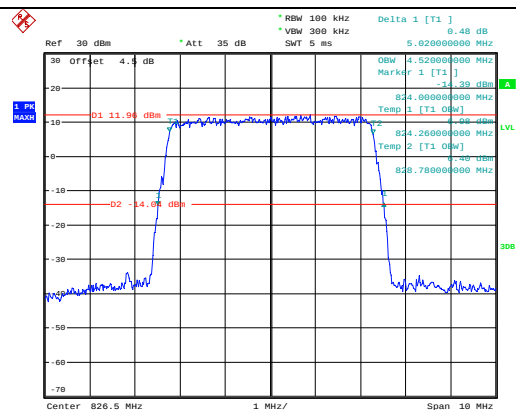


Date: 10.JAN.2023 19:23:18

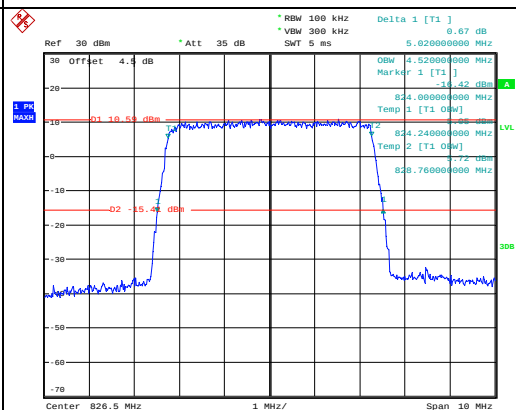


Date: 10.JAN.2023 19:23:36

Middle

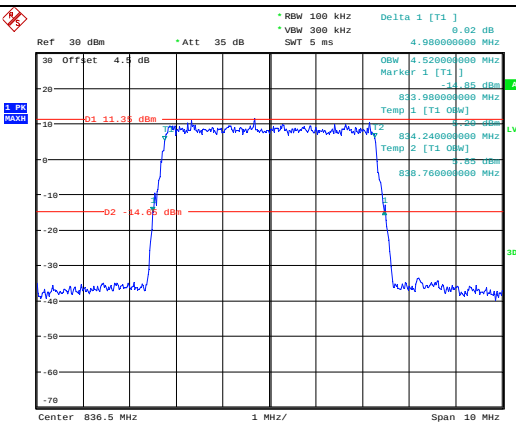


Date: 10.JAN.2023 19:23:55

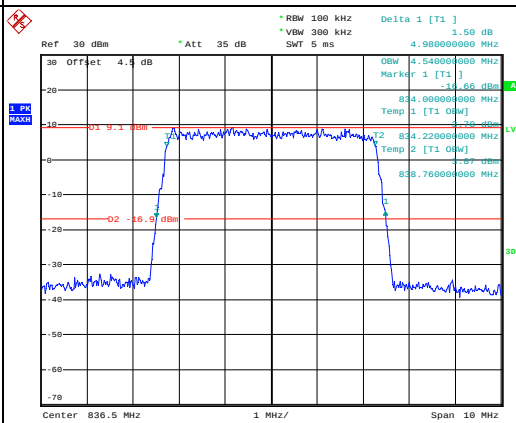


Date: 10.JAN.2023 19:24:12

Highest

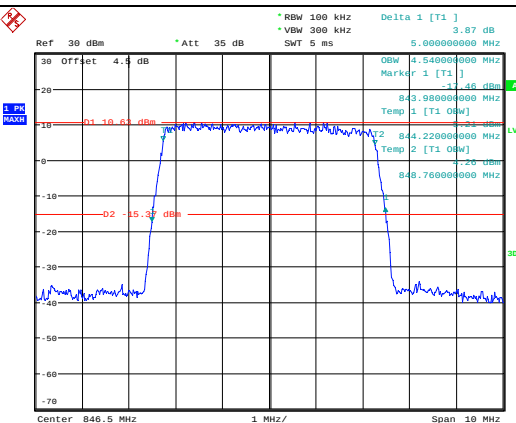

Date: 10.JAN.2023 19:24:31

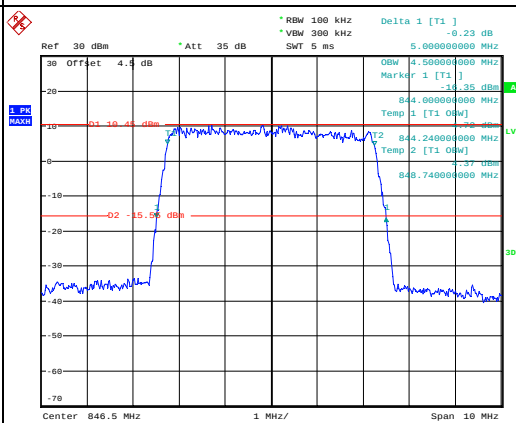

Date: 10.JAN.2023 19:24:49



Page 108 of 209

Spurious Emissions at Antenna Terminal



Channel

1.4MHz Bandwidth QPSK



Lowest

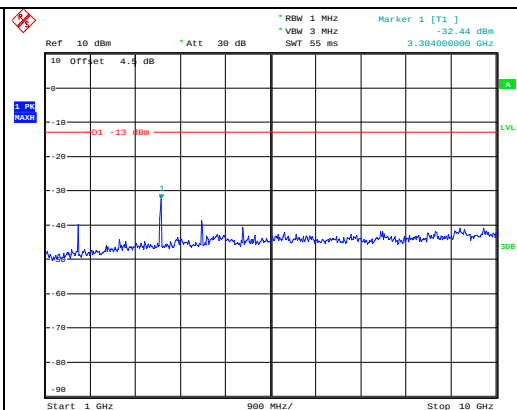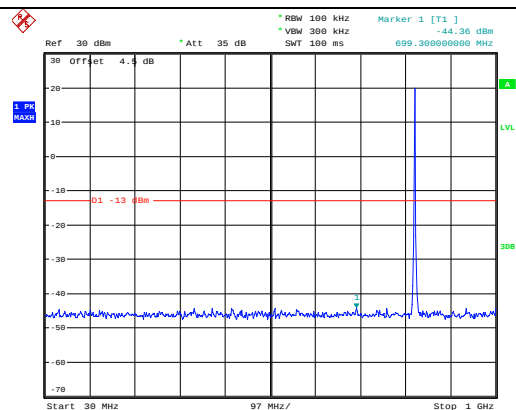

Middle

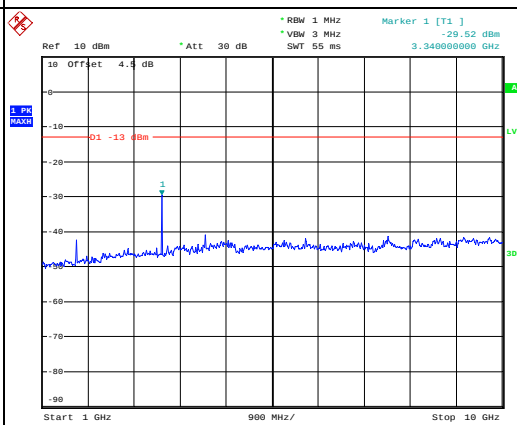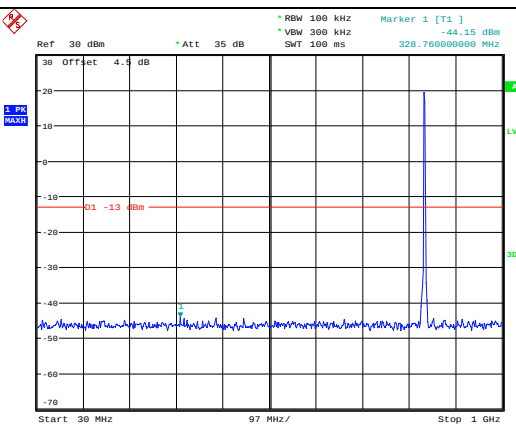

Highest

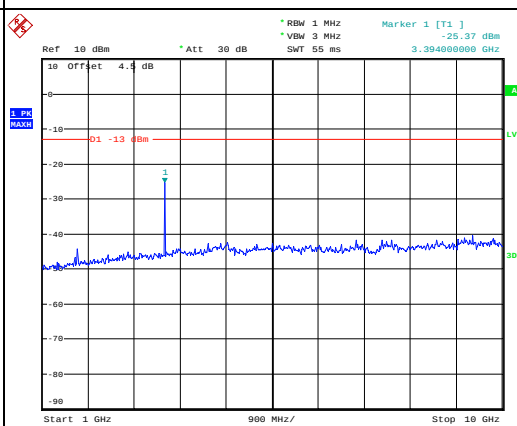
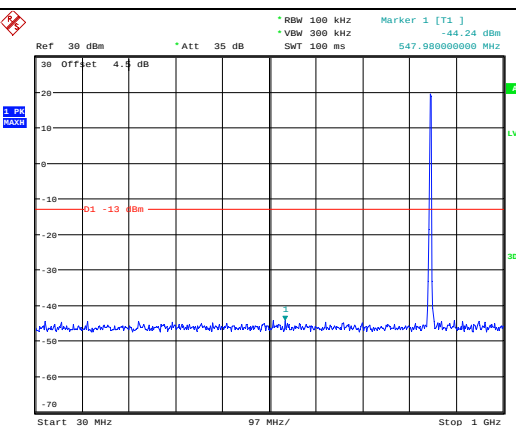


Spurious Emissions at Antenna Terminal



Channel

3MHz Bandwidth QPSK



Lowest

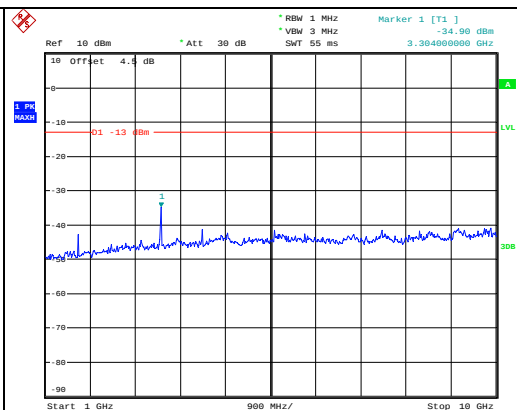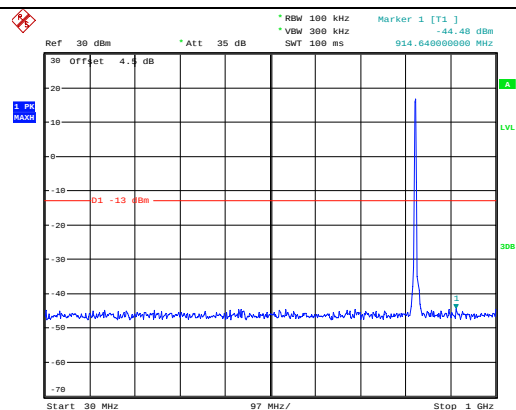

Middle

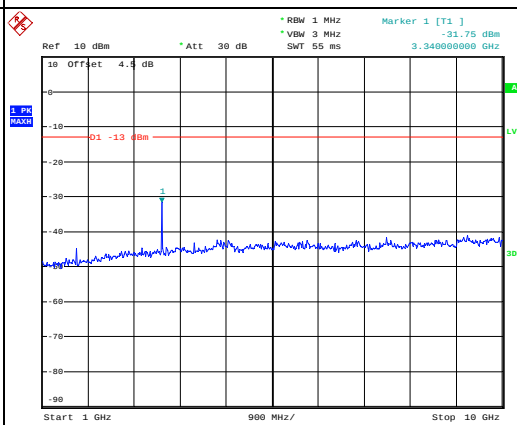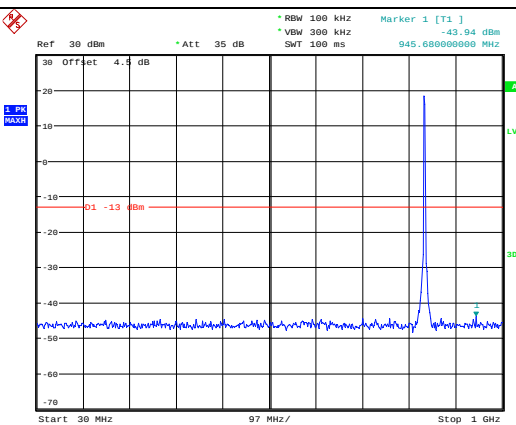

Highest

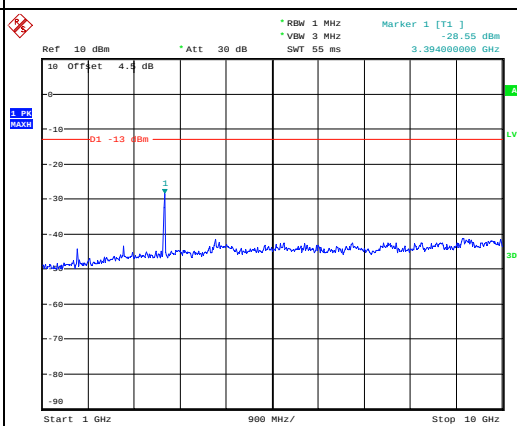
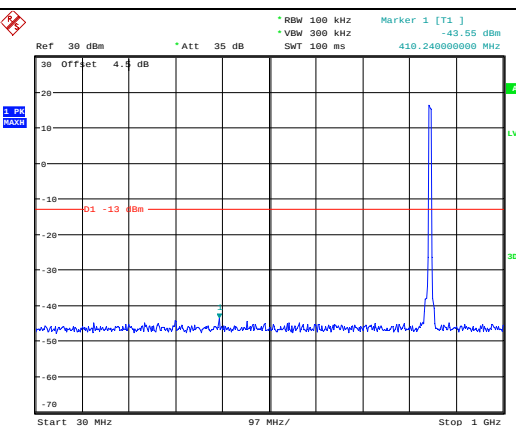


Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

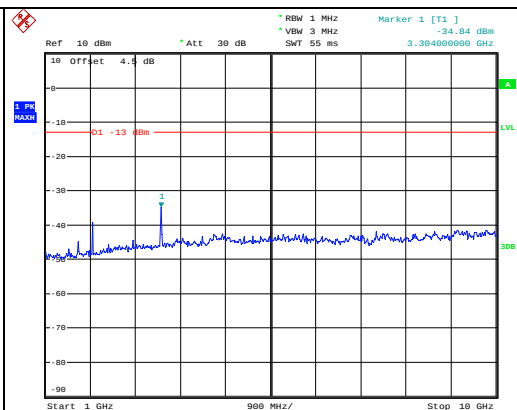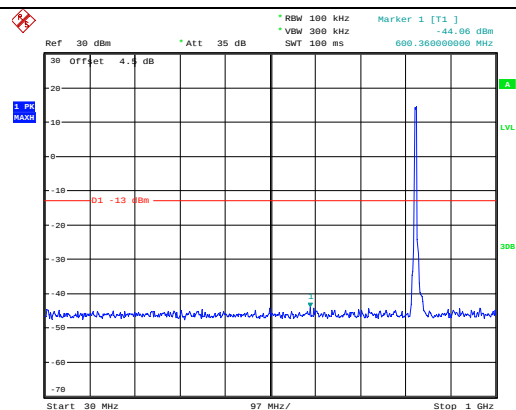


Middle

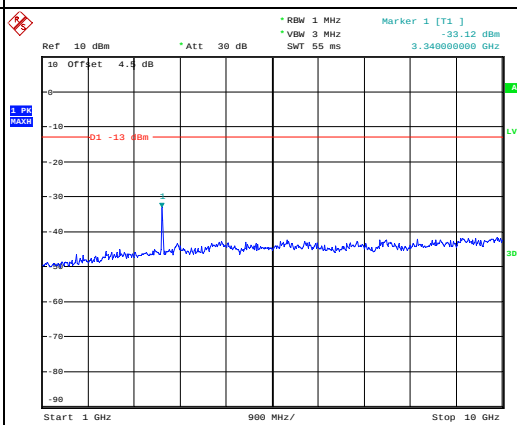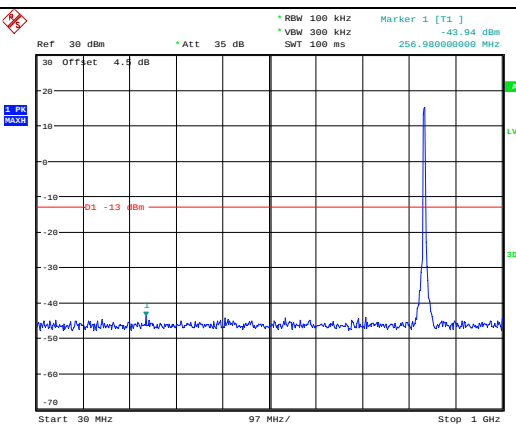


Highest

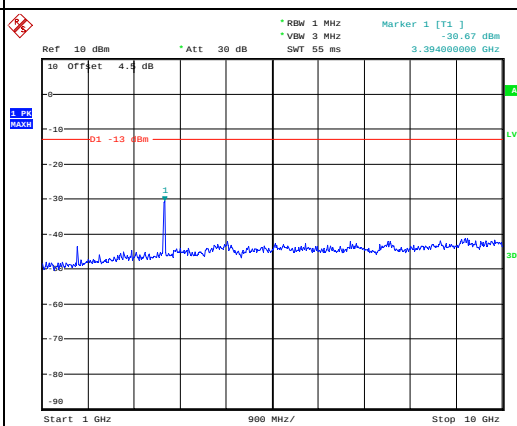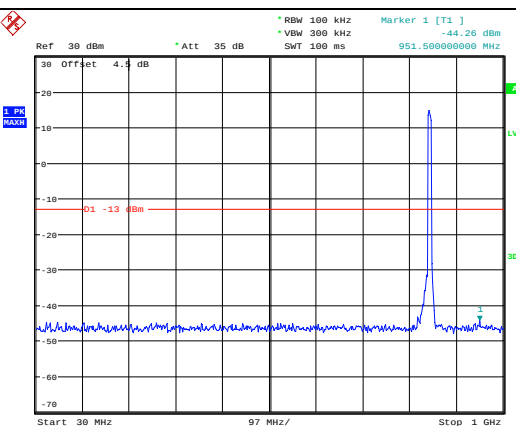


Spurious Emissions at Antenna Terminal

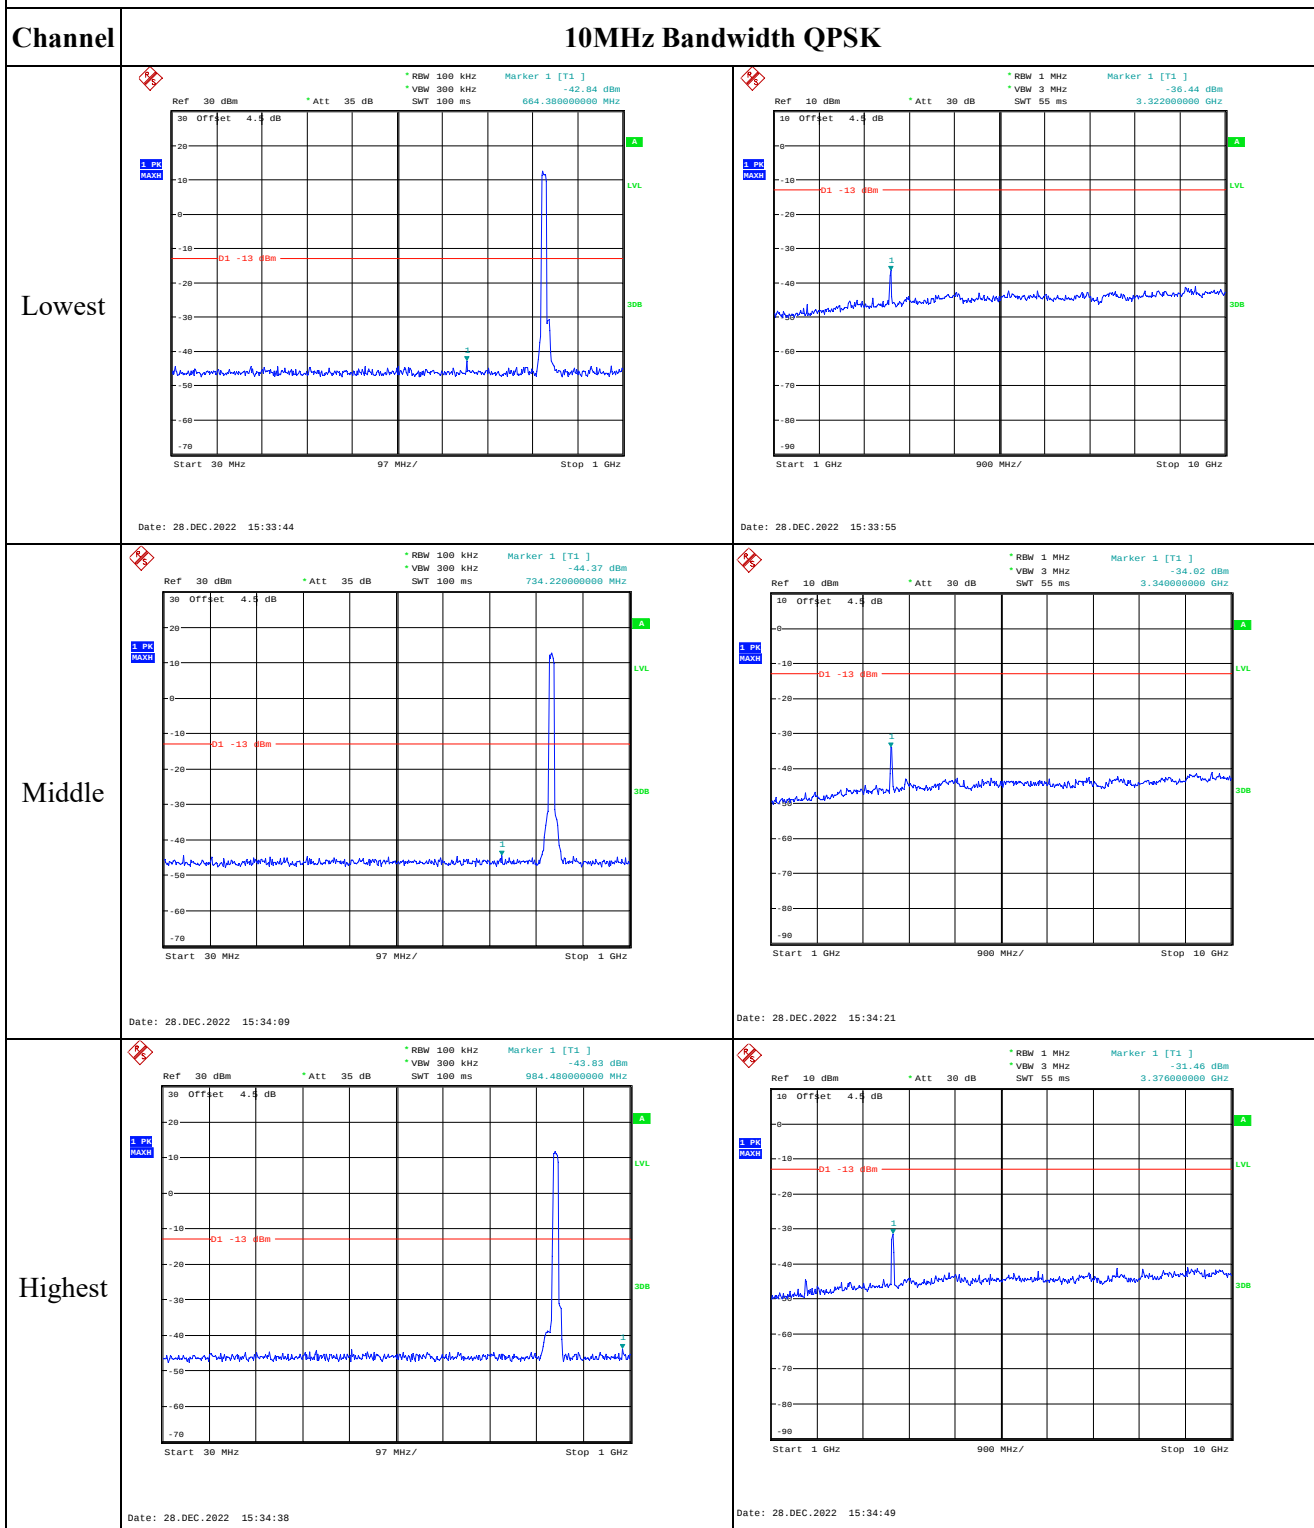







Out of band emission, Band Edge

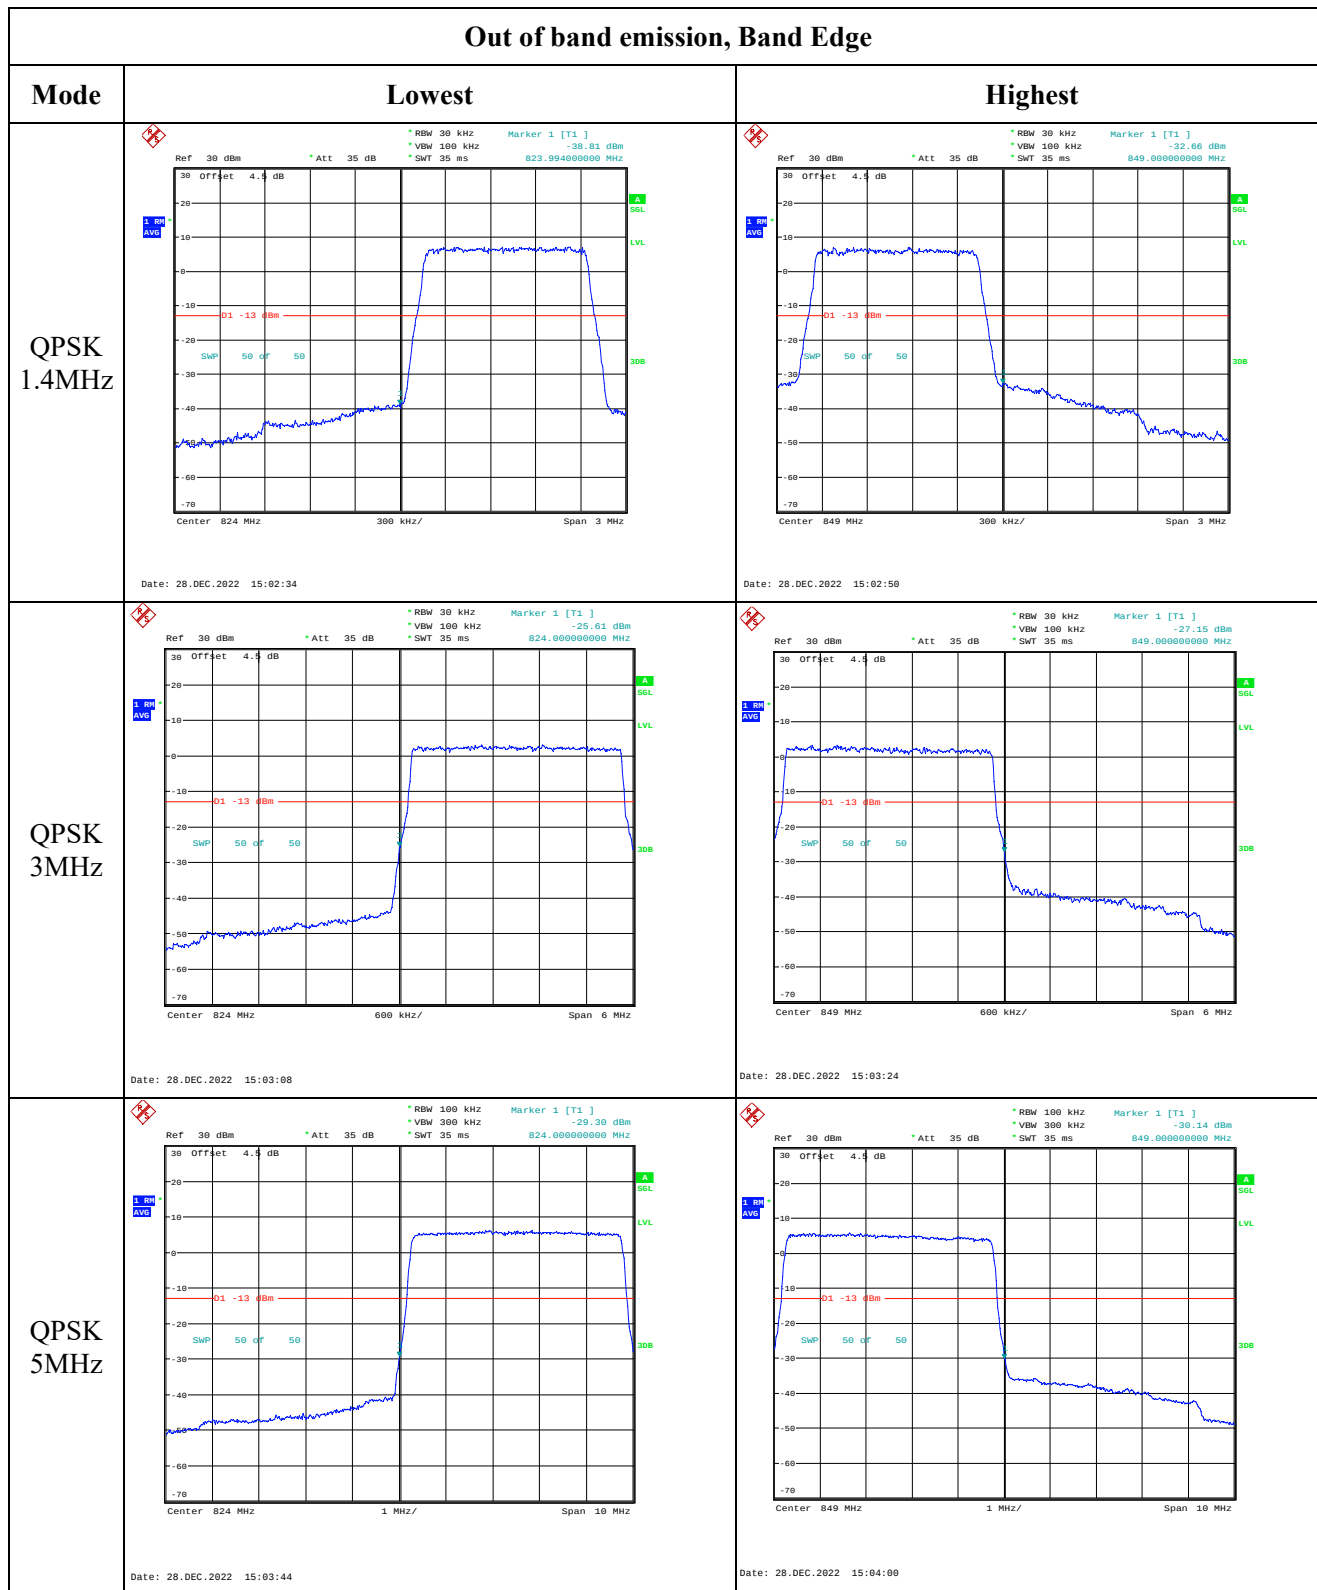


Out of band emission, Band Edge

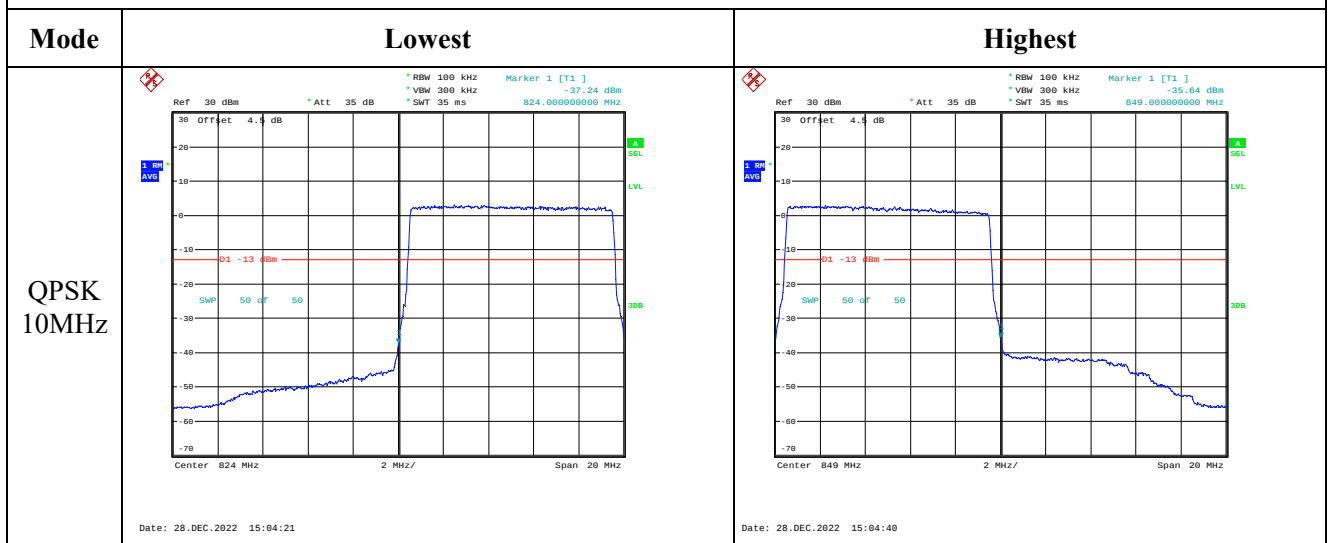

Out of band emission, Band Edge

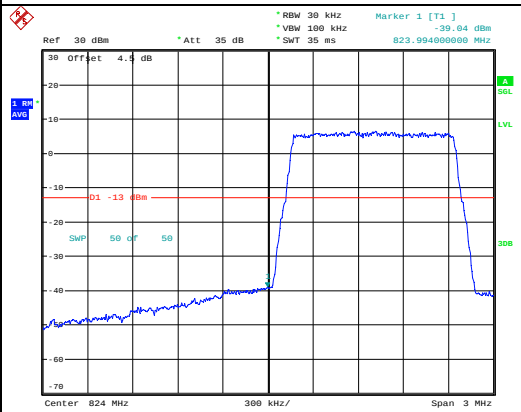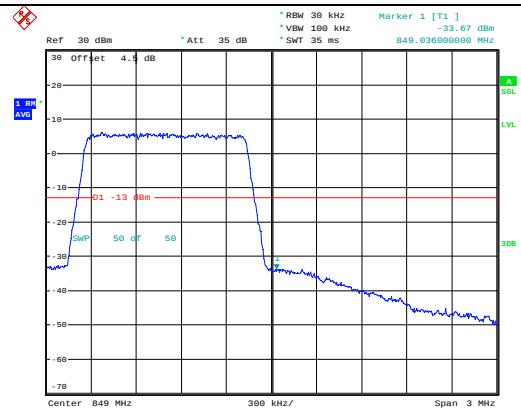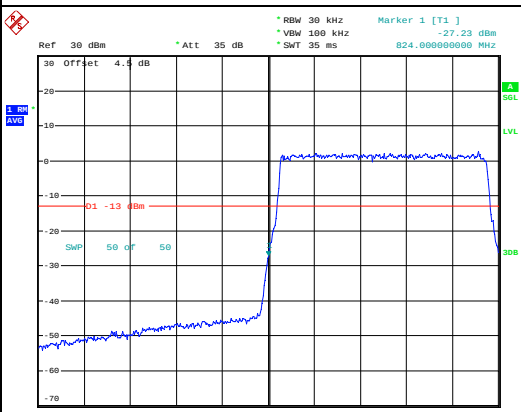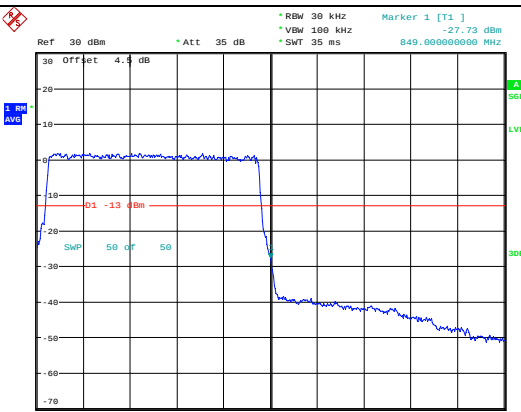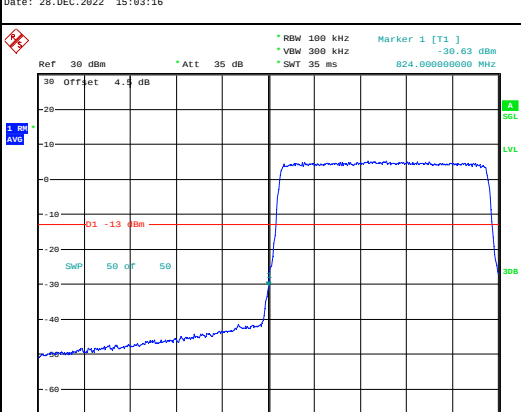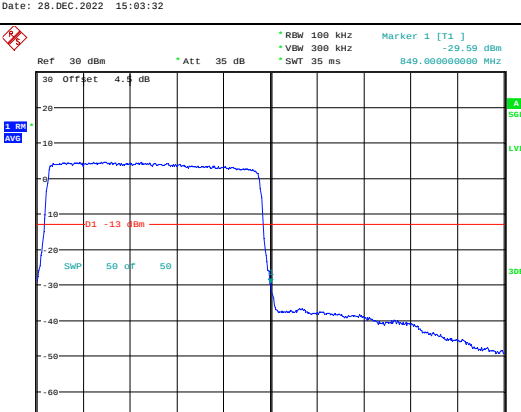Mode	Lowest	Highest
16QAM 1.4MHz	 Ref: 30 dBm *Att: 35 dB *RBW: 30 kHz *VBW: 100 kHz *SWT: 35 ms Marker 1 [T1] 823.994000000 MHz -39.04 dBm Center 824 MHz 300 kHz/ Span 3 MHz Date: 28.DEC.2022 15:02:41	 Ref: 30 dBm *Att: 35 dB *RBW: 30 kHz *VBW: 100 kHz *SWT: 35 ms Marker 1 [T1] 849.036000000 MHz -33.67 dBm Center 849 MHz 300 kHz/ Span 3 MHz Date: 28.DEC.2022 15:02:57
16QAM 3MHz	 Ref: 30 dBm *Att: 35 dB *RBW: 30 kHz *VBW: 300 kHz *SWT: 35 ms Marker 1 [T1] 824.000000000 MHz -27.23 dBm Center 824 MHz 600 kHz/ Span 6 MHz Date: 28.DEC.2022 15:03:16	 Ref: 30 dBm *Att: 35 dB *RBW: 30 kHz *VBW: 300 kHz *SWT: 35 ms Marker 1 [T1] 849.000000000 MHz -27.73 dBm Center 849 MHz 600 kHz/ Span 6 MHz Date: 28.DEC.2022 15:03:32
16QAM 5MHz	 Ref: 30 dBm *Att: 35 dB *RBW: 100 kHz *VBW: 300 kHz *SWT: 35 ms Marker 1 [T1] 824.000000000 MHz -30.63 dBm Center 824 MHz 1 MHz/ Span 10 MHz Date: 28.DEC.2022 15:03:51	 Ref: 30 dBm *Att: 35 dB *RBW: 100 kHz *VBW: 300 kHz *SWT: 35 ms Marker 1 [T1] 849.000000000 MHz -29.59 dBm Center 849 MHz 1 MHz/ Span 10 MHz Date: 28.DEC.2022 15:04:09

Out of band emission, Band Edge

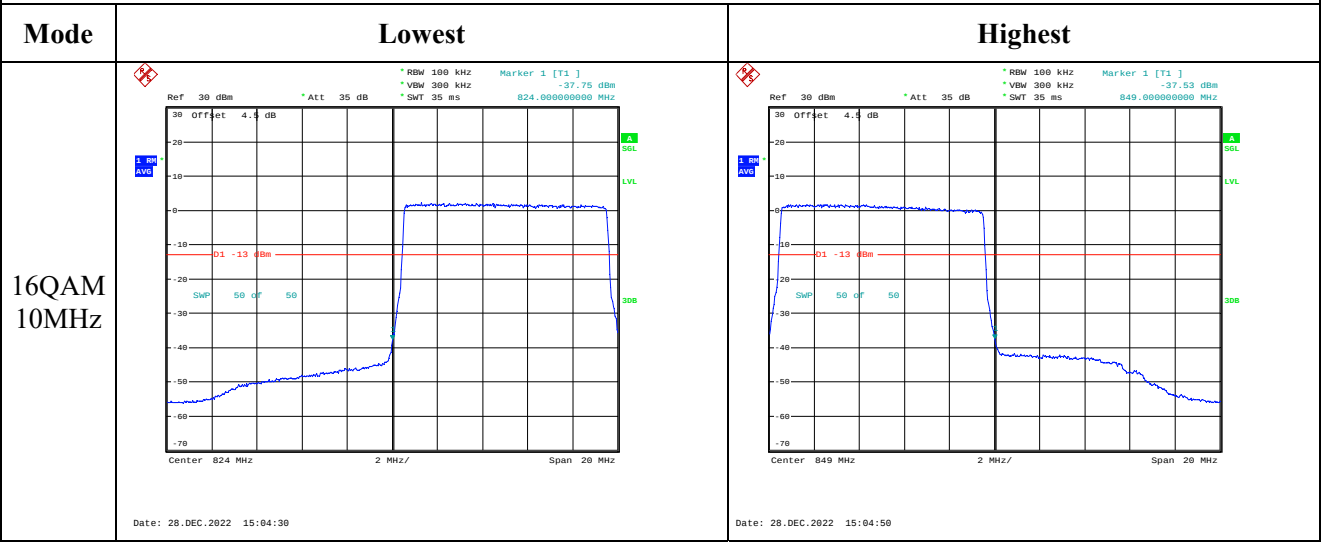

4.9 Antenna Port Test Data and Results for LTE Band 12

Serial Number:	1SNT-1	Test Date:	2022/12/28-2023/1/10
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.3-23.2	Relative Humidity: (%)	38-63	ATM Pressure: (kPa)	102.1-101.3
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/4/5	2023/4/4
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/4/6	2023/4/5
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	699.7	707.5	715.3
3MHz	700.5	707.5	714.5
5MHz	701.5	707.5	713.5
10MHz	704	707.5	711

Test Data:**FCC§2.1046;§ 27.50(c) (10)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	18.75	18.49	18.78	12.68	34.77
	RB1#3	18.92	18.61	18.8		
	RB1#5	18.82	18.55	18.75		
	RB3#0	18.89	18.72	18.86		
	RB3#3	18.93	18.72	18.93		
	RB6#0	17.88	17.66	17.93		
1.4MHz 16QAM	RB1#0	18.7	17.17	18.04	12.45	34.77
	RB1#3	18.66	17.3	18.17		
	RB1#5	18.47	17.35	18.12		
	RB3#0	17.73	17.84	17.76		
	RB3#3	17.76	17.79	17.93		
	RB6#0	17.02	16.76	17.52		
3MHz QPSK	RB1#0	18.8	18.57	18.73	12.7	34.77
	RB1#8	18.95	18.57	18.79		
	RB1#14	18.84	18.53	18.81		
	RB6#0	17.92	17.64	17.79		
	RB6#9	17.95	17.74	17.79		
	RB15#0	17.9	17.72	17.74		
3MHz 16QAM	RB1#0	18.01	17.07	17.74	12.5	34.77
	RB1#8	18.57	17.29	17.85		
	RB1#14	18.75	17.37	18.22		
	RB6#0	17.18	17.58	17.29		
	RB6#9	17.08	16.78	17.29		
	RB15#0	16.94	16.6	17.33		
5MHz QPSK	RB1#0	18.72	18.65	18.88	12.63	34.77
	RB1#13	18.67	18.65	18.76		
	RB1#24	18.87	18.66	18.75		
	RB15#0	17.85	17.66	17.94		
	RB15#10	17.98	17.7	17.92		
	RB25#0	17.97	17.75	17.82		
5MHz 16QAM	RB1#0	17.83	17.07	16.92	12.12	34.77
	RB1#13	18	17.21	16.83		
	RB1#24	18.37	17.11	16.95		
	RB15#0	16.81	17.33	17.32		
	RB15#10	16.6	16.62	17.33		
	RB25#0	16.68	16.55	17.37		
10MHz QPSK	RB1#0	18.82	18.67	18.6	12.57	34.77
	RB1#25	18.81	18.68	18.64		

	RB1#49	18.76	18.81	18.62		
	RB25#0	17.87	17.69	17.81		
	RB25#25	17.63	17.59	17.62		
	RB50#0	18.18	17.9	17.65		
10MHz 16QAM	RB1#0	17.87	17.26	18.02	12.1	34.77
	RB1#25	18.35	17.32	17.94		
	RB1#49	17.8	17.14	18.08		
	RB25#0	16.59	17.44	16.67		
	RB25#25	17.3	17.48	17.35		
	RB50#0	17.29	16.71	17.23		

Note:

ERP= Conducted Power(dBm) - Lc(dB) + G_T(dBd)G_T(dBd)=G_T(dBi)-2.15

Result:

Pass

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit(dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	5.45	5.58	6.38	13
	RB50#0	5.74	5.99	5.74	13
10MHz 16QAM	RB1#0	7.02	6.35	7.44	13
	RB50#0	6.67	6.83	6.63	13
Result:					Pass

FCC §2.1049, §27.53:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.104	1.104	1.104	1.254	1.254	1.254
1.4MHz 16QAM	1.098	1.11	1.11	1.254	1.26	1.26
3MHz QPSK	2.7	2.7	2.7	3	3.012	2.988
3MHz 16QAM	2.687	2.7	2.7	3.024	3.024	3.012
5MHz QPSK	4.52	4.52	4.52	5	4.98	4.98
5MHz 16QAM	4.52	4.52	4.5	5	4.98	4.92
10MHz QPSK	8.96	9	8.96	9.68	9.84	9.72
10MHz 16QAM	9	9	8.96	9.72	9.84	9.72

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §27.53:Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
---------	---

FCC §2.1051, §27.53: Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---


FCC §2.1055, §27.54: Frequency Stability

Test Mode:	10M QPSK	Test Channel: Lowest for Lower Edge, Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	699.497	699.00	715.534	716.00
	-20	3.8	699.502	699.00	715.542	716.00
	-10	3.8	699.494	699.00	715.534	716.00
	0	3.8	699.515	699.00	715.525	716.00
	10	3.8	699.499	699.00	715.537	716.00
	20	3.8	699.520	699.00	715.520	716.00
	30	3.8	699.494	699.00	715.548	716.00
	40	3.8	699.509	699.00	715.535	716.00
	50	3.8	699.492	699.00	715.521	716.00
Frequency Stability vs. Voltage	20	3.5	699.500	699.00	715.522	716.00
	20	4.2	699.513	699.00	715.534	716.00
Result:					Pass	

Test Mode:	10M 16QAM	Test Channel: Lowest for Lower Edge, Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	699.493	699.00	715.484	716.00
	-20	3.8	699.502	699.00	715.507	716.00
	-10	3.8	699.508	699.00	715.505	716.00
	0	3.8	699.496	699.00	715.497	716.00
	10	3.8	699.500	699.00	715.508	716.00
	20	3.8	699.520	699.00	715.480	716.00
	30	3.8	699.515	699.00	715.490	716.00
	40	3.8	699.516	699.00	715.488	716.00
	50	3.8	699.494	699.00	715.497	716.00
Frequency Stability vs. Voltage	20	3.5	699.501	699.00	715.502	716.00
	20	4.2	699.514	699.00	715.485	716.00
Result:					Pass	

Test Plots(Note: The 4.5dB is the Insertion loss of the RF cable, Power Splitter, which was offset into the Spectrum Analyzer):

Occupied Bandwidth

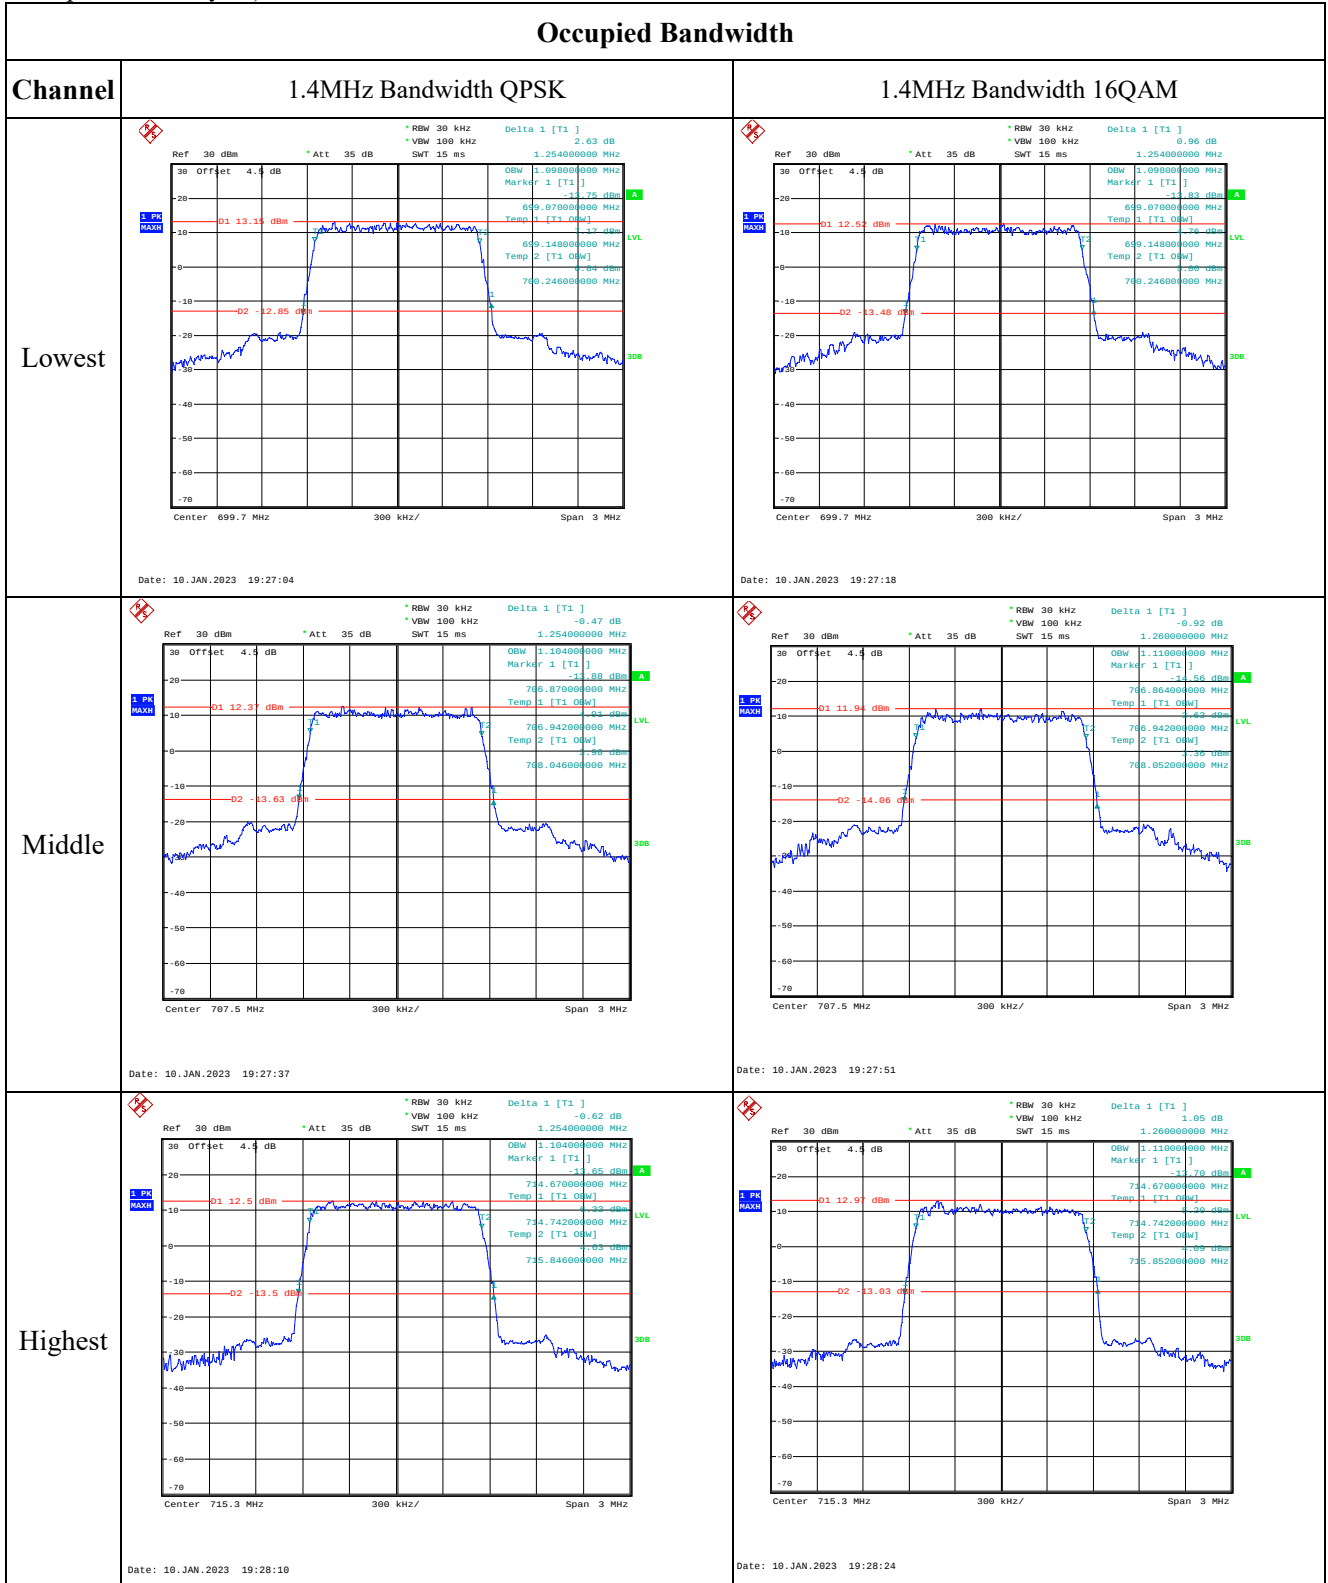



Occupied Bandwidth

Channel



3MHz Bandwidth QPSK

3MHz Bandwidth 16QAM



Lowest

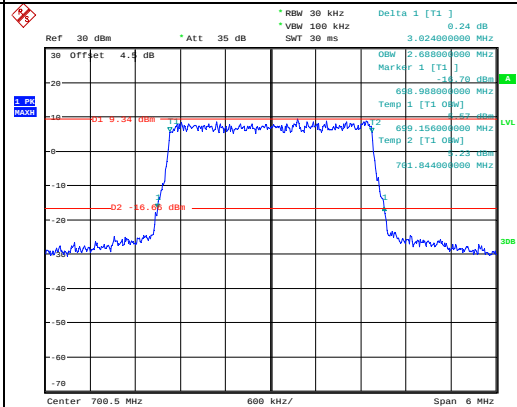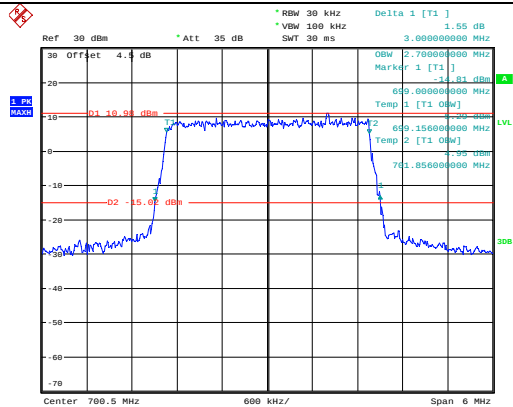

Middle

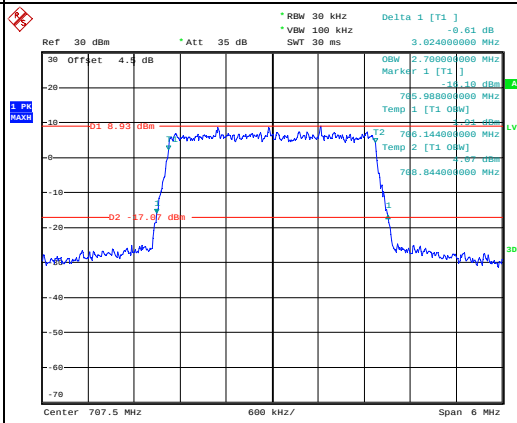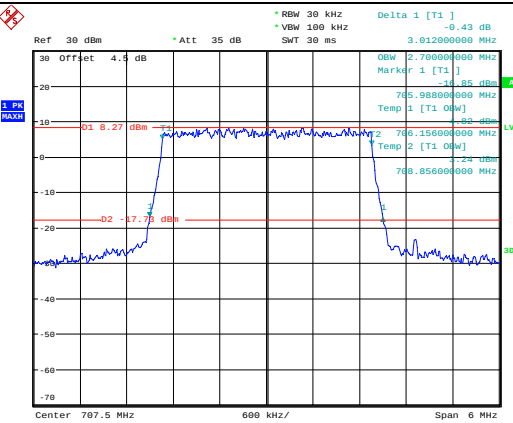

Highest

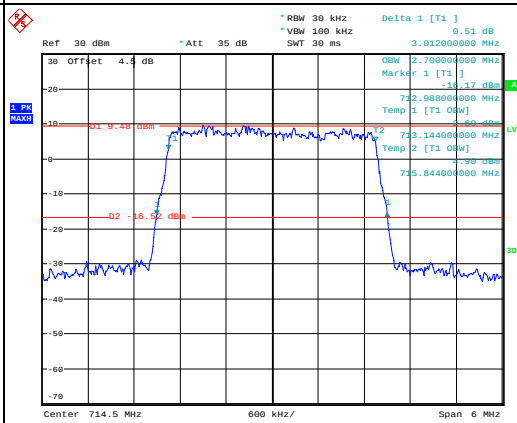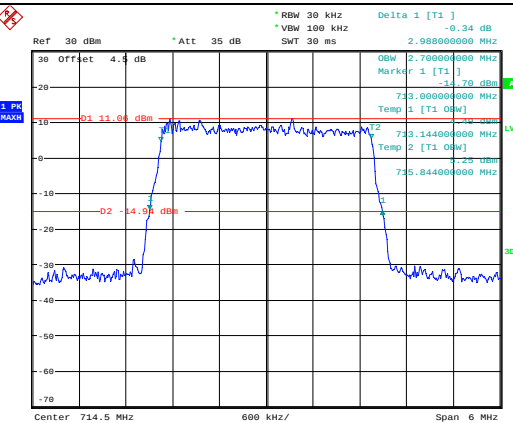

Occupied Bandwidth

Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	Date: 10.JAN.2023 19:30:31	Date: 10.JAN.2023 19:30:49
Middle	Date: 10.JAN.2023 19:31:08	Date: 10.JAN.2023 19:31:26
Highest	Date: 10.JAN.2023 19:31:45	Date: 10.JAN.2023 19:31:59



Occupied Bandwidth		
Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	Ref 30 dBm *Att 35 dB RBW 100 kHz Delta 1 [T1] 1.03 dB VSW 300 kHz SWT 10 ms 9.680000000 MHz Offset 4.5 dB Marker 1 [T1] 1.03 dB 1.03 dB -35.47 dB Center 784 MHz 2 MHz/ Span 20 MHz	Ref 30 dBm *Att 35 dB RBW 100 kHz Delta 1 [T1] -0.45 dB VSW 300 kHz SWT 10 ms 9.720000000 MHz Offset 4.5 dB Marker 1 [T1] -0.45 dB -16.7 dB Center 784 MHz 2 MHz/ Span 20 MHz
Middle	Ref 30 dBm *Att 35 dB RBW 100 kHz Delta 1 [T1] 0.54 dB VSW 300 kHz SWT 10 ms 9.840000000 MHz Offset 4.5 dB Marker 1 [T1] 0.54 dB -16.53 dB Center 787.5 MHz 2 MHz/ Span 20 MHz	Ref 30 dBm *Att 35 dB RBW 100 kHz Delta 1 [T1] -0.30 dB VSW 300 kHz SWT 10 ms 9.840000000 MHz Offset 4.5 dB Marker 1 [T1] -0.30 dB -16.93 dB Center 787.5 MHz 2 MHz/ Span 20 MHz
Highest	Ref 30 dBm *Att 35 dB RBW 100 kHz Delta 1 [T1] 0.86 dB VSW 300 kHz SWT 10 ms 9.720000000 MHz Offset 4.5 dB Marker 1 [T1] 0.86 dB -16.12 dB Center 711 MHz 2 MHz/ Span 20 MHz	Ref 30 dBm *Att 35 dB RBW 100 kHz Delta 1 [T1] -0.49 dB VSW 300 kHz SWT 10 ms 9.720000000 MHz Offset 4.5 dB Marker 1 [T1] -0.49 dB -17.43 dB Center 711 MHz 2 MHz/ Span 20 MHz

Spurious Emissions at Antenna Terminal



Channel

1.4MHz Bandwidth QPSK



Lowest

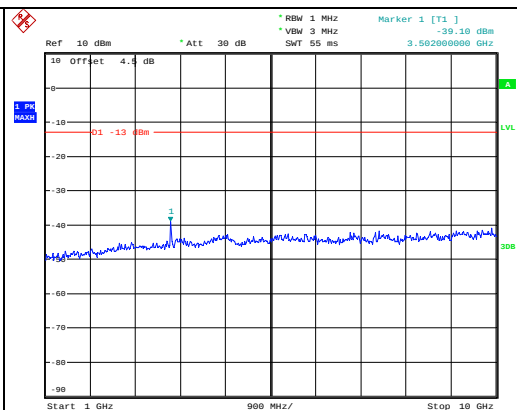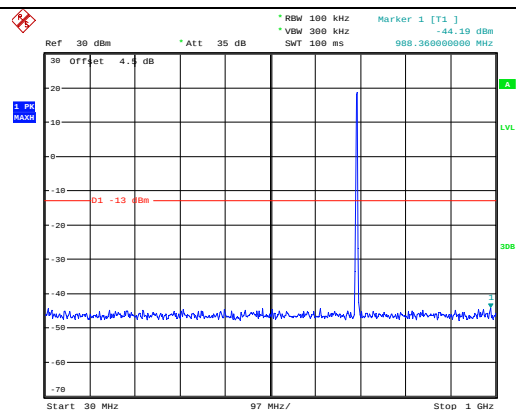

Middle

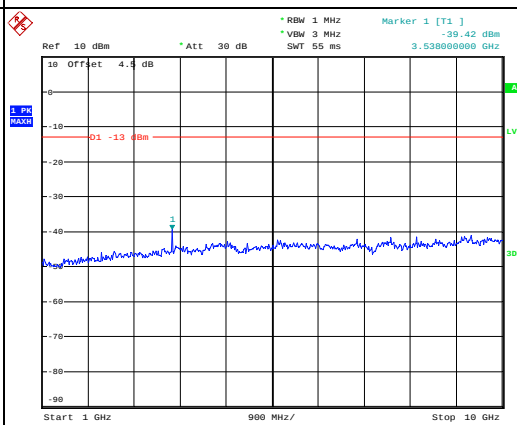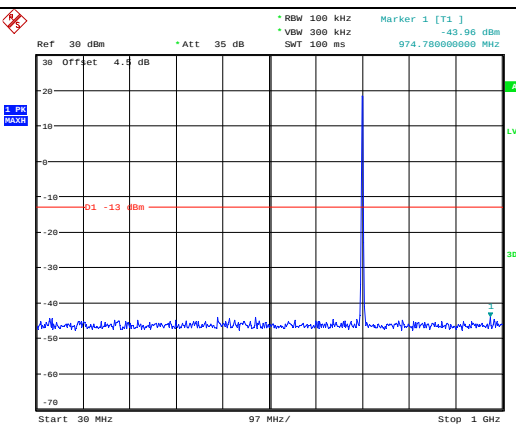

Highest

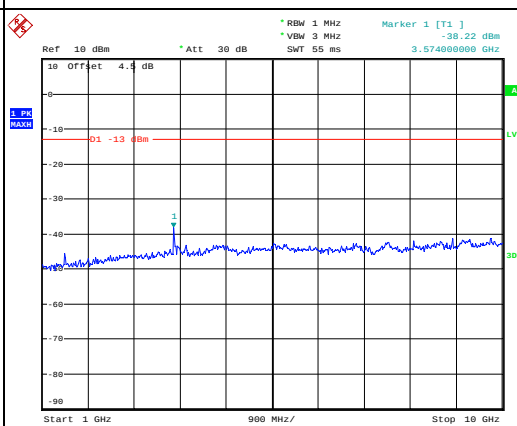
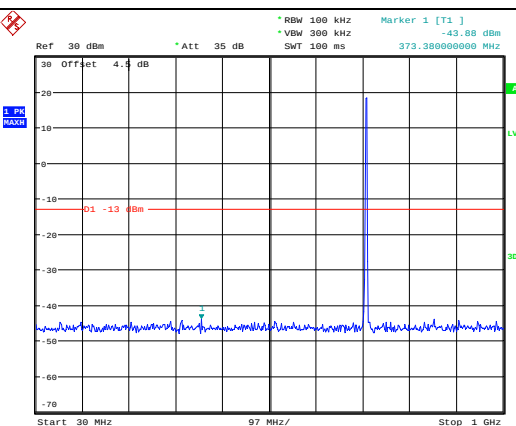


Spurious Emissions at Antenna Terminal



Channel

3MHz Bandwidth QPSK



Lowest

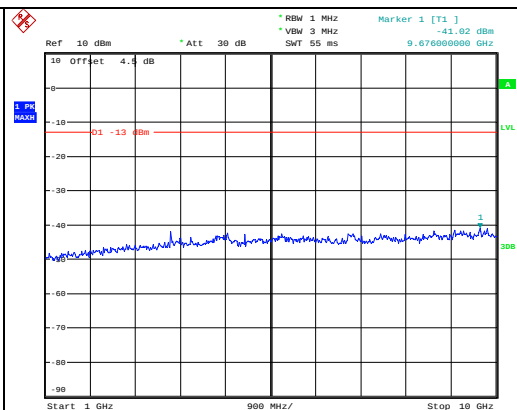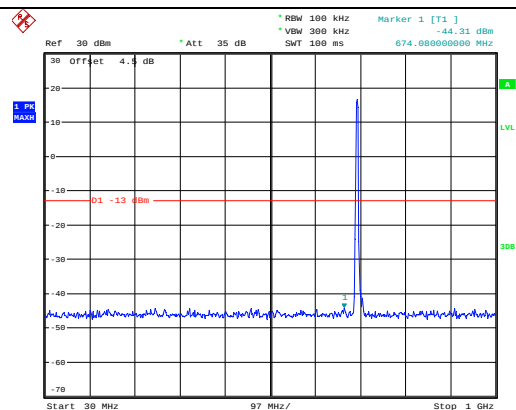

Middle

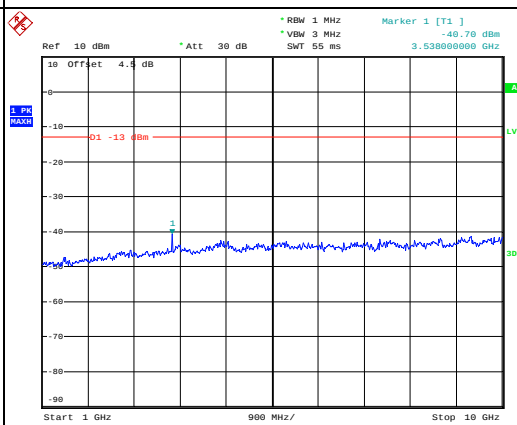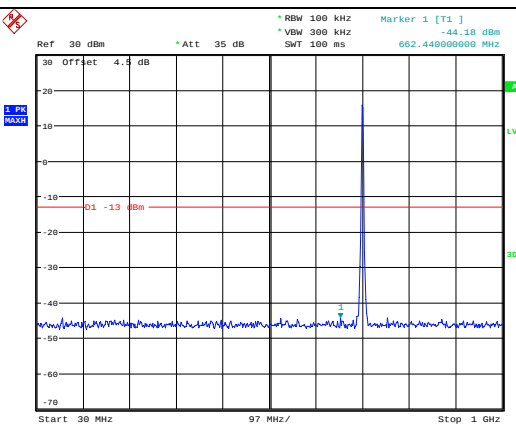

Highest

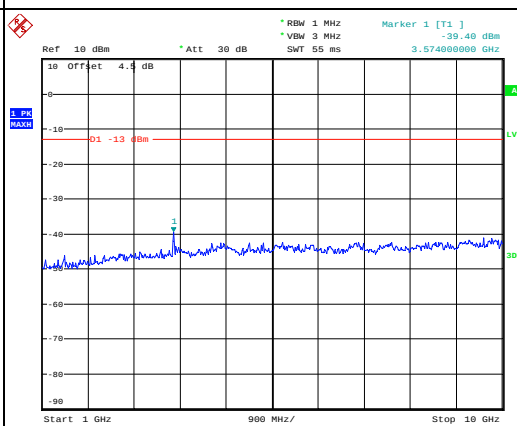
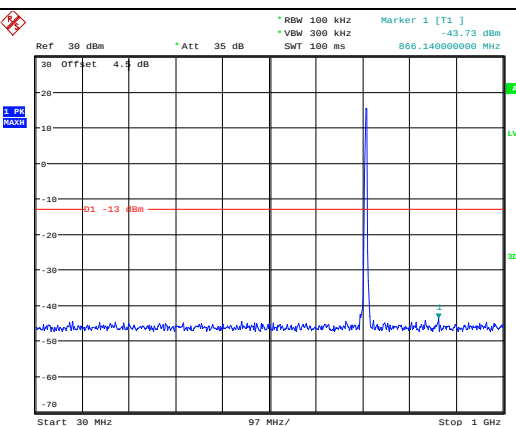


Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

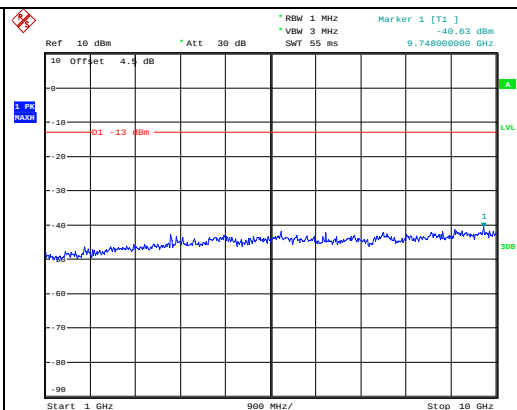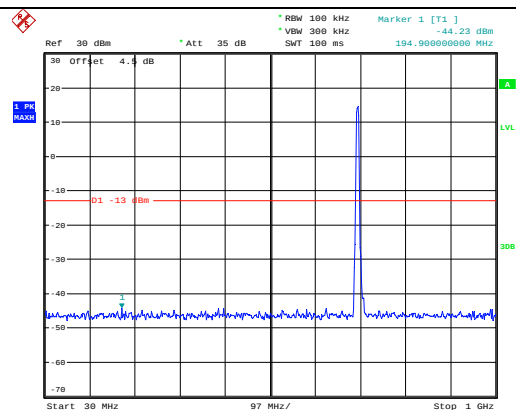


Middle

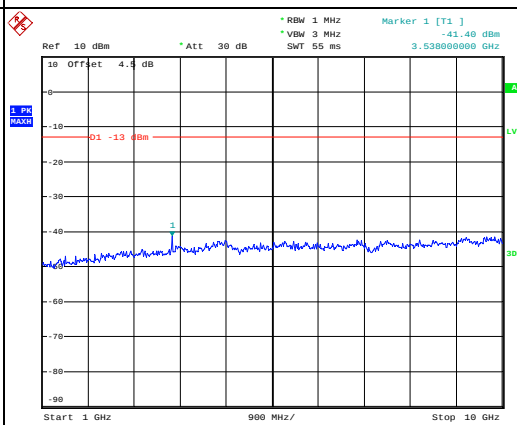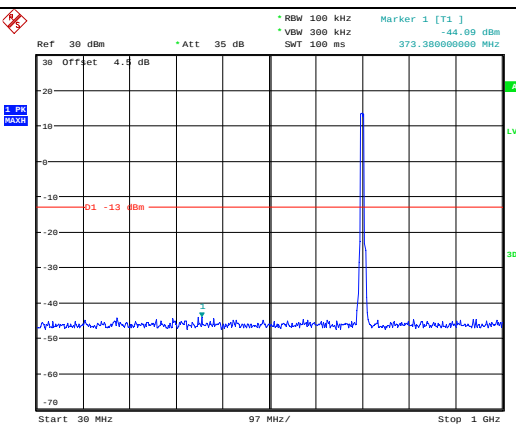


Highest

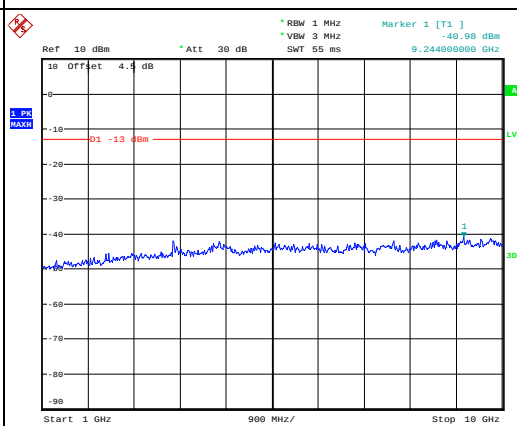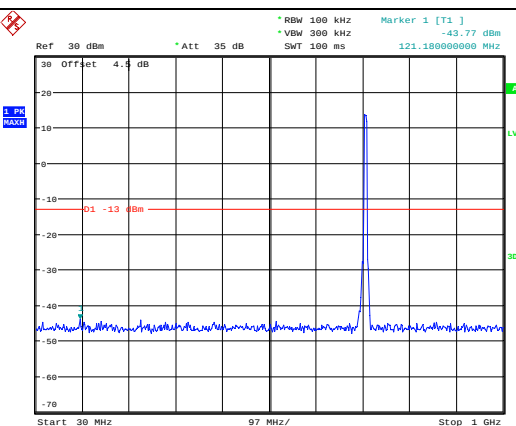


Spurious Emissions at Antenna Terminal

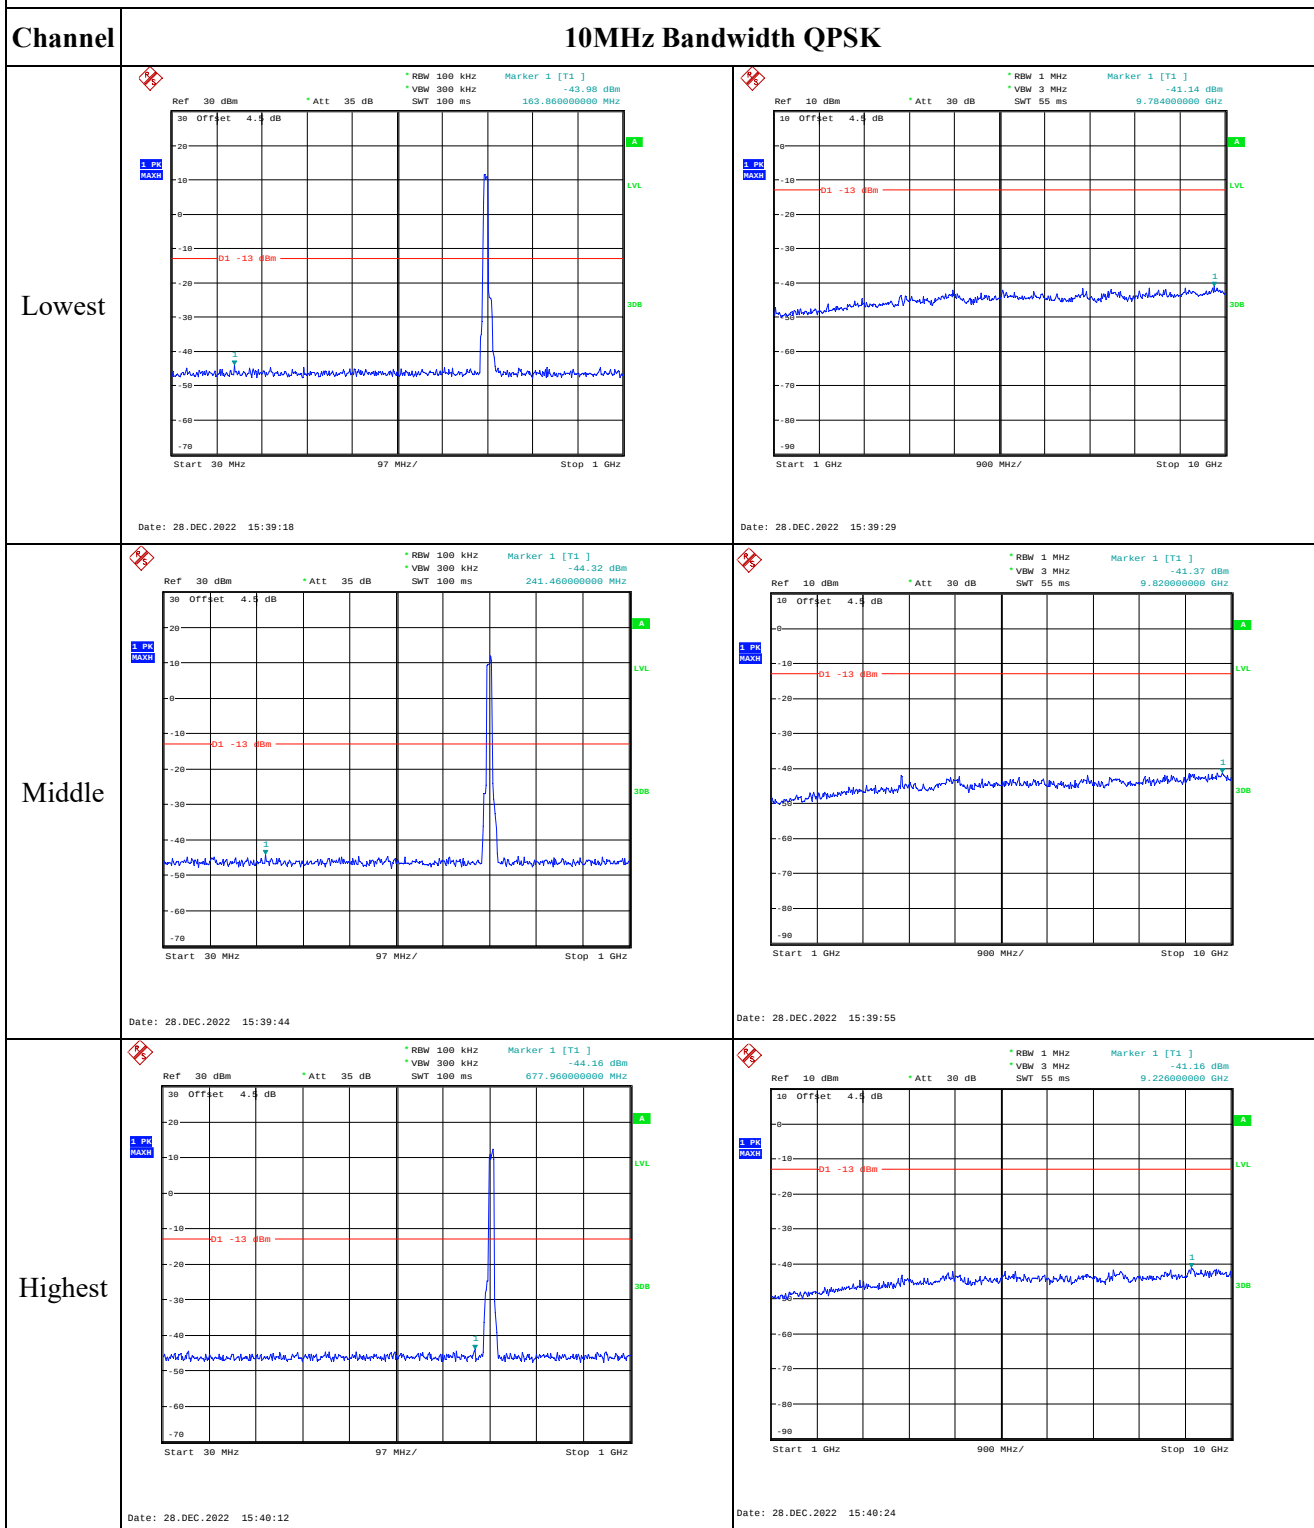







Out of band emission, Band Edge

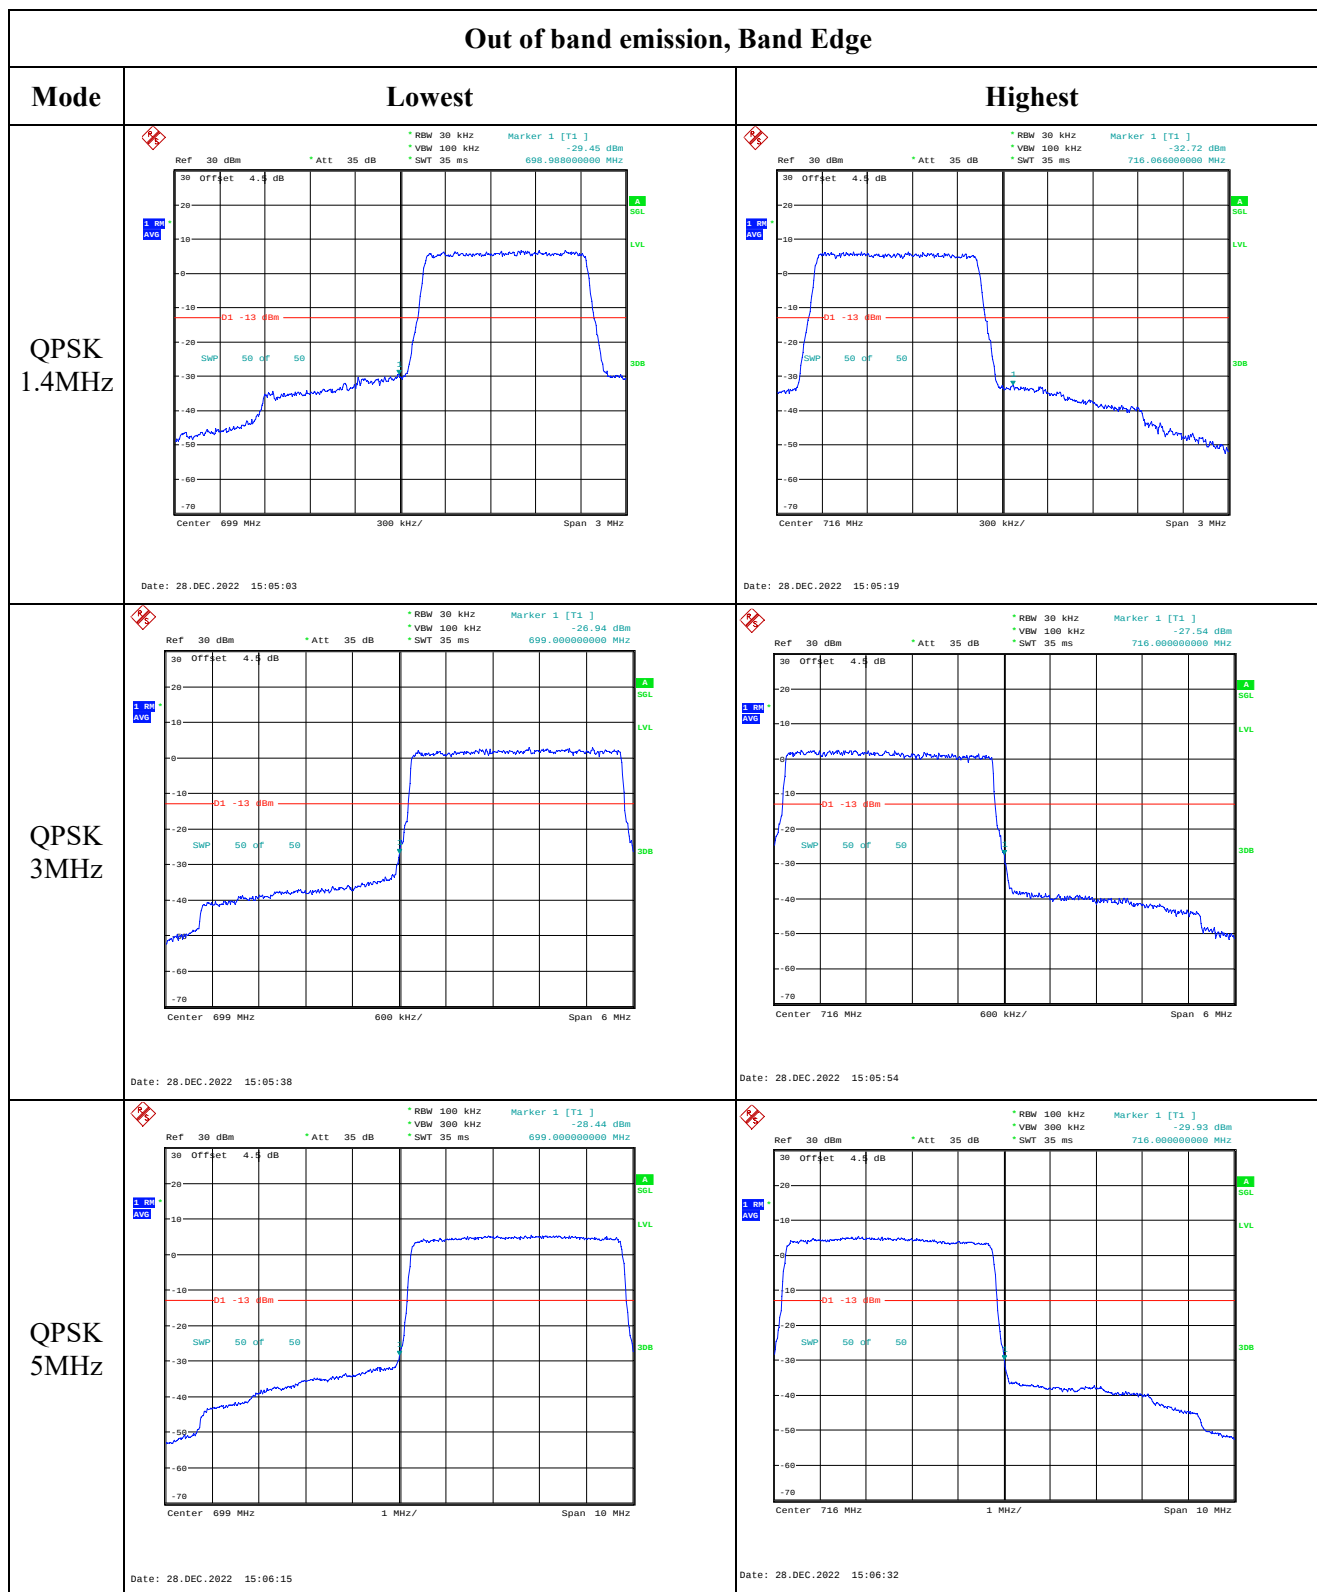


Out of band emission, Band Edge

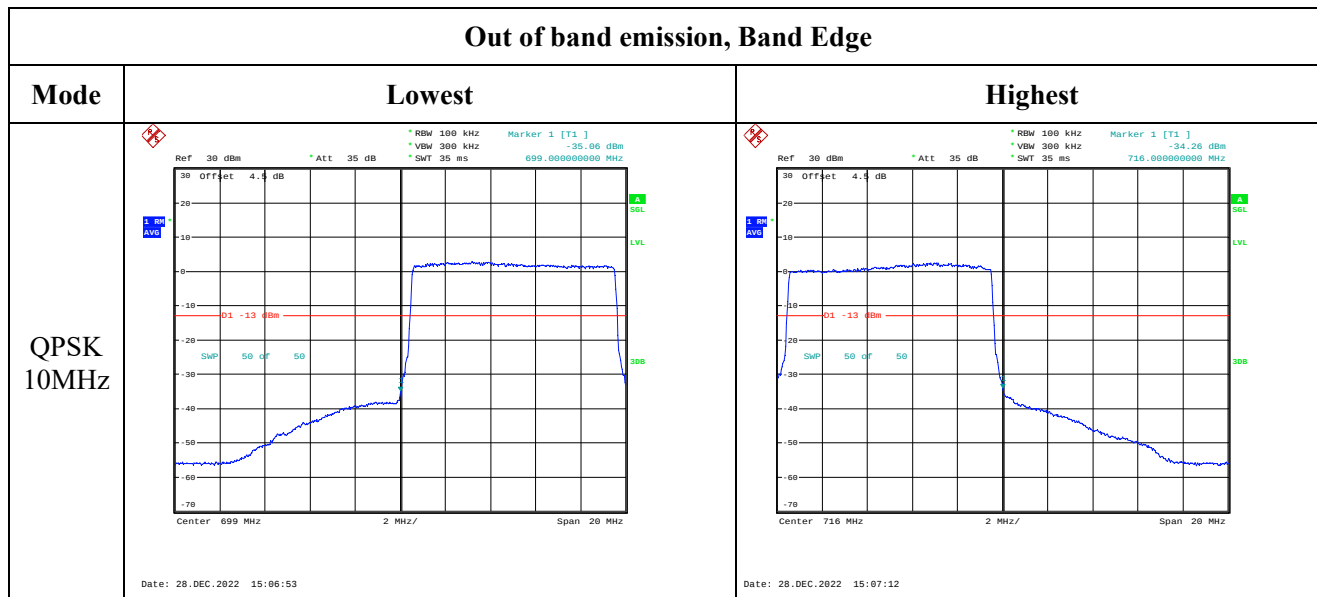

Out of band emission, Band Edge

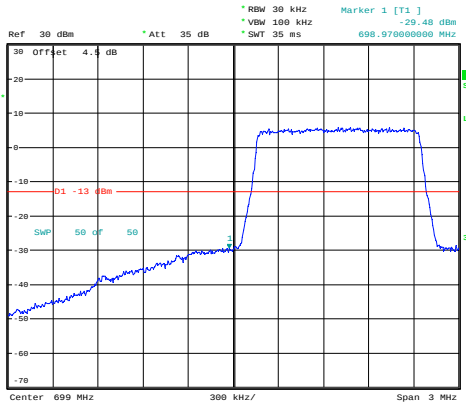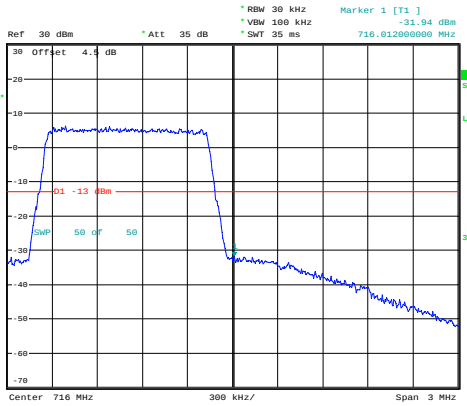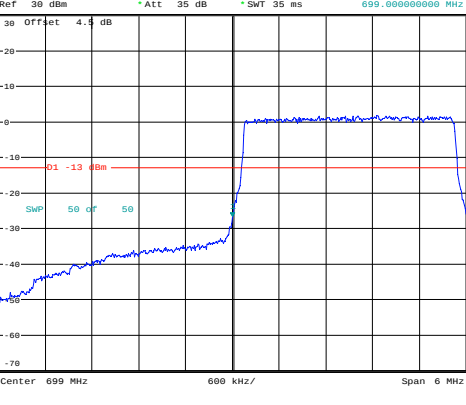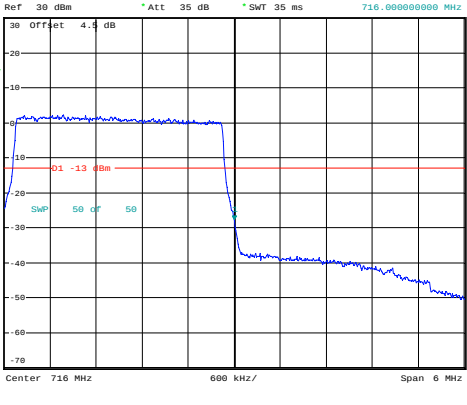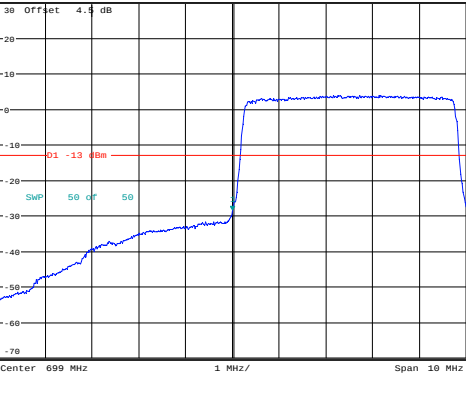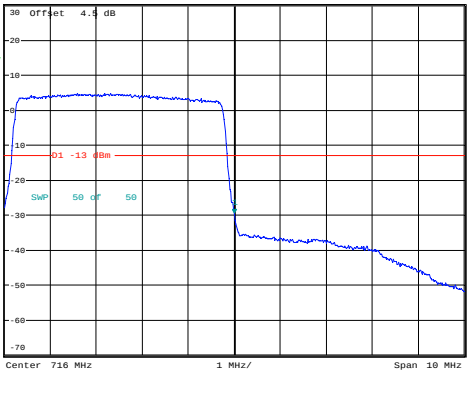Mode	Lowest	Highest
16QAM 1.4MHz	 Ref 30 dBm Att 35 dB RBW 30 kHz Marker 1 [T1] -29.48 dBm VBW 100 kHz SWT 35 ms 698.970000000 MHz 30 Offset 4.4 dB D1 -13 dBm SWP 50 OF 50 Center 699 MHz 300 kHz/ Span 3 MHz Date: 28.DEC.2022 15:05:11	 Ref 30 dBm Att 35 dB RBW 30 kHz Marker 1 [T1] -31.94 dBm VBW 100 kHz SWT 35 ms 716.612000000 MHz 30 Offset 4.4 dB D1 -13 dBm SWP 50 OF 50 Center 716 MHz 300 kHz/ Span 3 MHz Date: 28.DEC.2022 15:05:26
16QAM 3MHz	 Ref 30 dBm Att 35 dB RBW 30 kHz Marker 1 [T1] -28.53 dBm VBW 100 kHz SWT 35 ms 699.000000000 MHz 30 Offset 4.4 dB D1 -13 dBm SWP 50 OF 50 Center 699 MHz 600 kHz/ Span 6 MHz Date: 28.DEC.2022 15:05:46	 Ref 30 dBm Att 35 dB RBW 30 kHz Marker 1 [T1] -27.89 dBm VBW 100 kHz SWT 35 ms 716.000000000 MHz 30 Offset 4.4 dB D1 -13 dBm SWP 50 OF 50 Center 716 MHz 600 kHz/ Span 6 MHz Date: 28.DEC.2022 15:06:02
16QAM 5MHz	 Ref 30 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -28.51 dBm VBW 300 kHz SWT 35 ms 699.000000000 MHz 30 Offset 4.4 dB D1 -13 dBm SWP 50 OF 50 Center 699 MHz 1 MHz/ Span 10 MHz Date: 28.DEC.2022 15:06:24	 Ref 30 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -29.54 dBm VBW 300 kHz SWT 35 ms 716.000000000 MHz 30 Offset 4.4 dB D1 -13 dBm SWP 50 OF 50 Center 716 MHz 1 MHz/ Span 10 MHz Date: 28.DEC.2022 15:06:40

Out of band emission, Band Edge

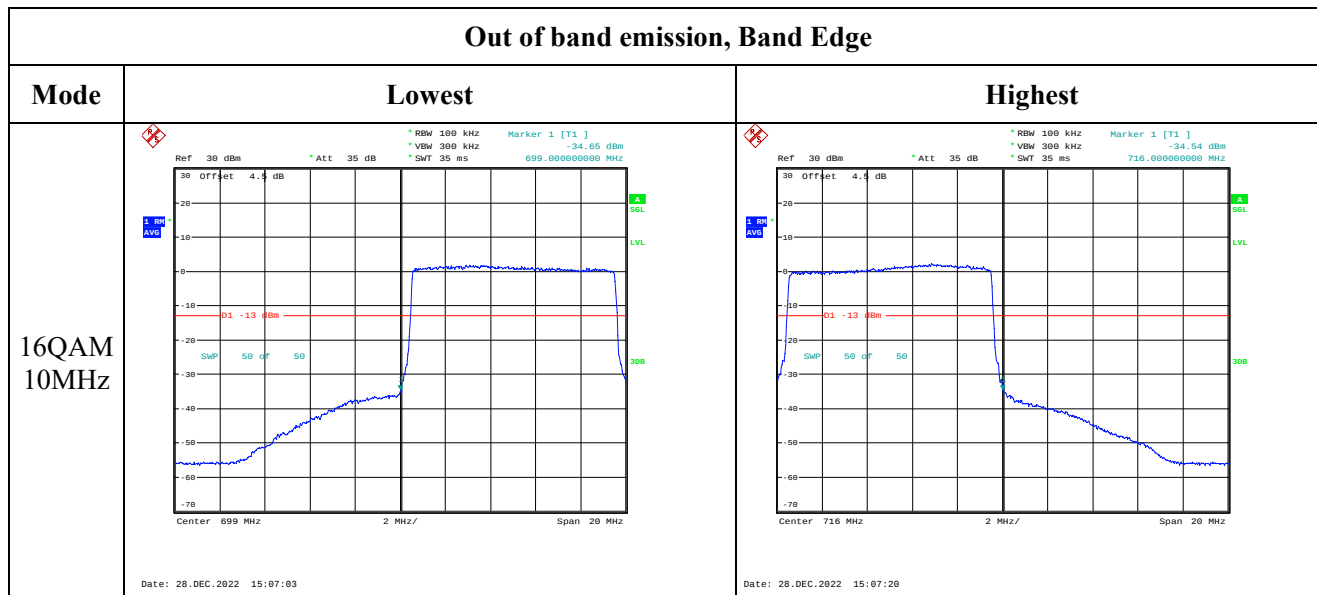

4.10 Antenna Port Test Data and Results for LTE Band 17

Serial Number:	1SNT-1	Test Date:	2022/12/28-2023/1/10
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.3-23.2	Relative Humidity: (%)	38-63	ATM Pressure: (kPa)	102.1-101.3
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/4/5	2023/4/4
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/4/6	2023/4/5
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
5MHz	706.5	710	713.5
10MHz	709	710	711

Test Data:**FCC§2.1046;§ 27.50(c) (10)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	18.69	18.66	18.83	12.58	34.77
	RB1#13	18.62	18.71	18.81		
	RB1#24	18.73	18.71	18.77		
	RB15#0	17.67	17.57	17.93		
	RB15#10	17.73	17.59	17.73		
	RB25#0	17.64	17.61	17.72		
5MHz 16QAM	RB1#0	18.25	17.51	17.12	12	34.77
	RB1#13	17.48	17.1	16.82		
	RB1#24	17.41	17.63	16.97		
	RB15#0	17.22	17.18	17.32		
	RB15#10	16.46	17.18	17.34		
	RB25#0	17.26	17.36	17.45		
10MHz QPSK	RB1#0	18.75	18.6	18.66	12.58	34.77
	RB1#25	18.83	18.76	18.67		
	RB1#49	18.8	18.73	18.61		
	RB25#0	17.65	17.65	17.76		
	RB25#25	17.73	17.75	17.61		
	RB50#0	17.79	17.64	17.55		
10MHz 16QAM	RB1#0	18.81	17.09	17.95	12.56	34.77
	RB1#25	18.29	17.06	17.94		
	RB1#49	18.18	17.01	18.09		
	RB25#0	17.37	16.7	16.65		
	RB25#25	17.41	17.38	17.38		
	RB50#0	16.68	17.24	17.23		

Note:

ERP= Conducted Power(dBm) - Lc(dB) + G_T(dBd)G_T(dBd)=G_T(dBi)-2.15**Result:****Pass****Peak-to-average Ratio(PAR)**

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	5.87	5.96	6.28	13
	RB50#0	5.93	5.83	5.77	13
10MHz 16QAM	RB1#0	6.73	6.41	7.5	13
	RB50#0	6.86	6.7	6.67	13
				Result:	Pass

FCC §2.1049, §27.53:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
5MHz QPSK	4.52	4.52	4.52	4.94	4.98	4.98
5MHz 16QAM	4.52	4.52	4.5	4.96	5	4.98
10MHz QPSK	8.96	8.96	8.96	9.72	9.76	9.68
10MHz 16QAM	9	8.96	8.96	9.8	9.72	9.76

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §27.53:Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, §27.53:Out of band emission, Band Edge


Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §27.54: Frequency Stability







Test Mode:	10M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	704.505	704.00	715.488	716.00
	-20	3.8	704.503	704.00	715.483	716.00
	-10	3.8	704.519	704.00	715.505	716.00
	0	3.8	704.516	704.00	715.488	716.00
	10	3.8	704.517	704.00	715.481	716.00
	20	3.8	704.520	704.00	715.480	716.00
	30	3.8	704.496	704.00	715.493	716.00
	40	3.8	704.501	704.00	715.487	716.00
	50	3.8	704.515	704.00	715.502	716.00
Frequency Stability vs. Voltage	20	3.5	704.516	704.00	715.484	716.00
	20	4.2	704.518	704.00	715.500	716.00
Result:					Pass	

Test Mode:	10M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	704.517	704.00	715.510	716.00
	-20	3.8	704.515	704.00	715.495	716.00
	-10	3.8	704.501	704.00	715.491	716.00
	0	3.8	704.508	704.00	715.501	716.00
	10	3.8	704.519	704.00	715.499	716.00
	20	3.8	704.520	704.00	715.487	716.00
	30	3.8	704.499	704.00	715.505	716.00
	40	3.8	704.500	704.00	715.515	716.00
	50	3.8	704.492	704.00	715.502	716.00
Frequency Stability vs. Voltage	20	3.5	704.510	704.00	715.503	716.00
	20	4.2	704.494	704.00	715.493	716.00
					Result:	Pass

Test Plots(Note: The 4.5dB is the Insertion loss of the RF cable, Power Splitter, which was offset into the Spectrum Analyzer):

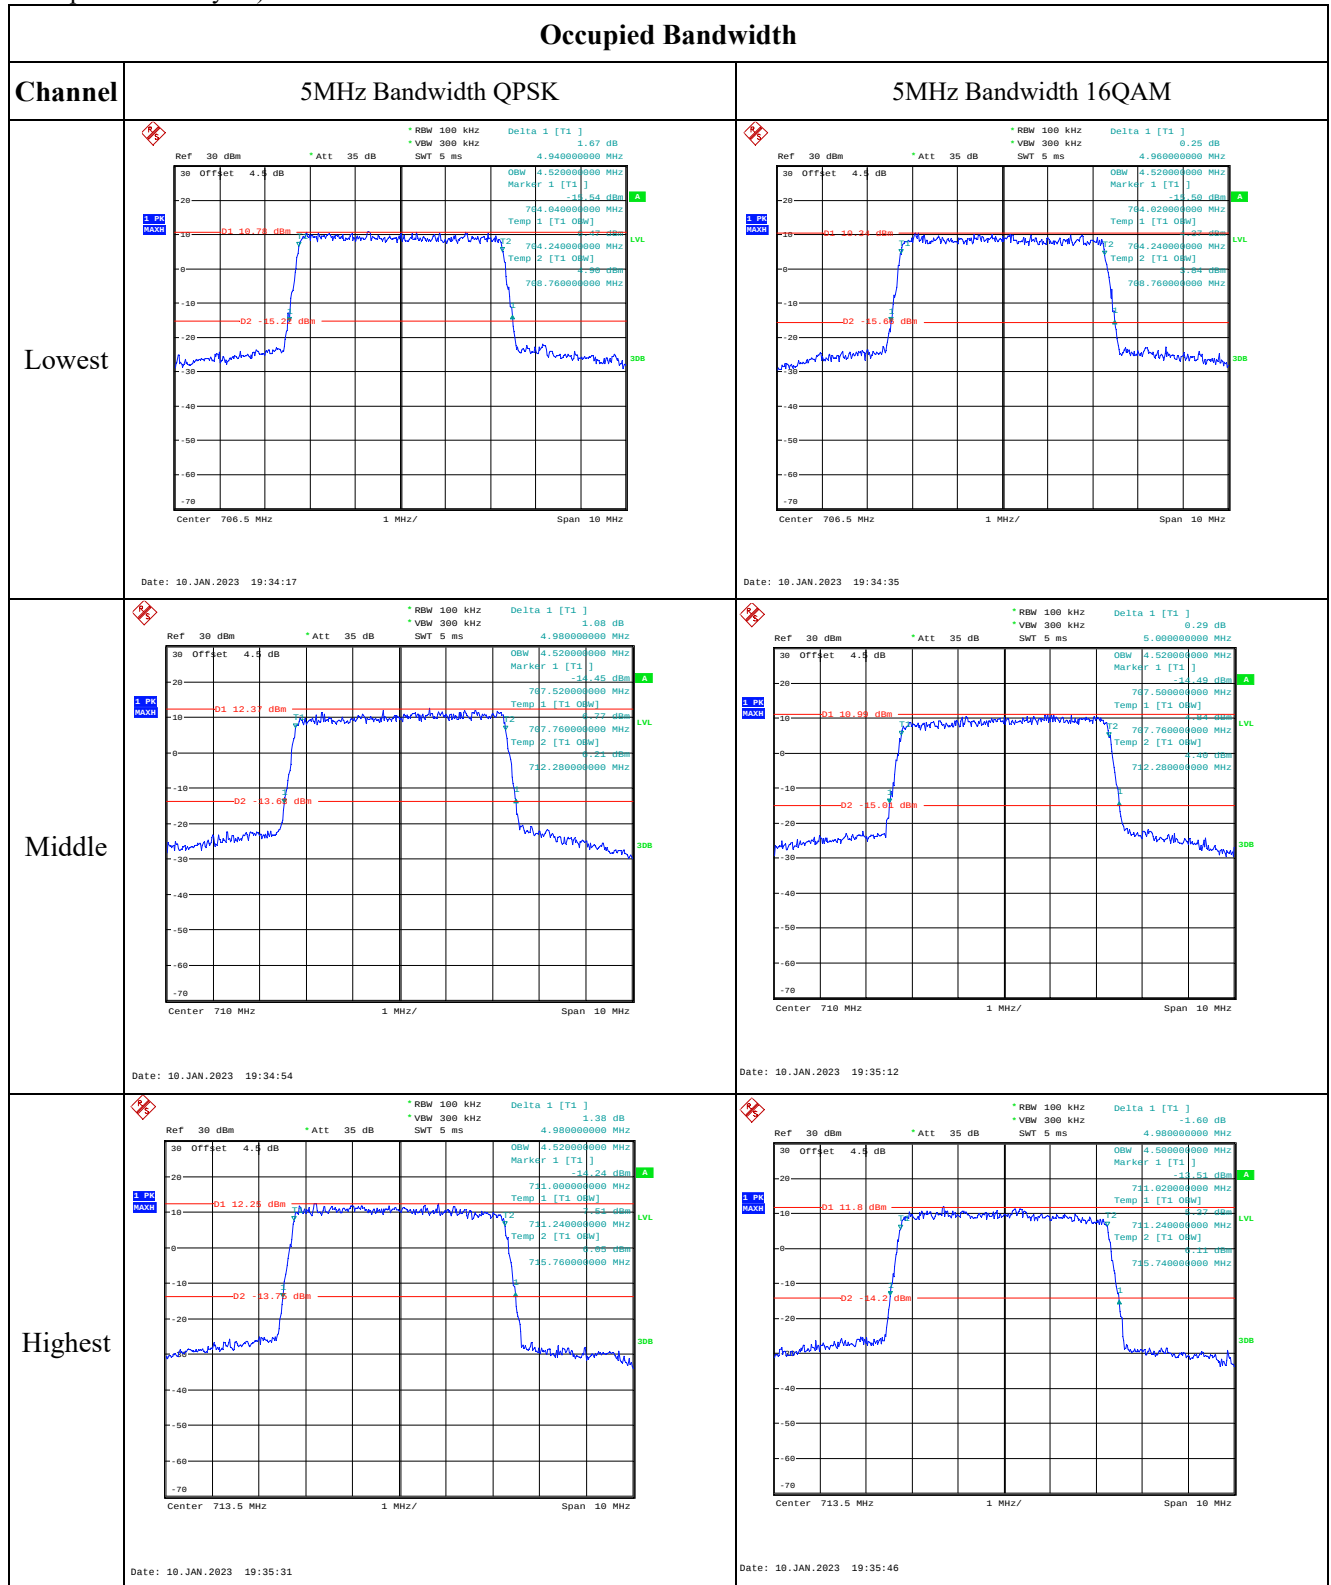

Occupied Bandwidth

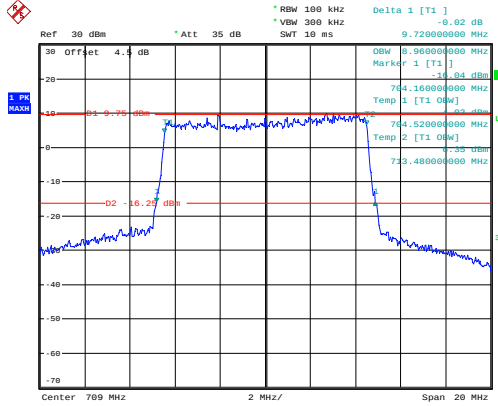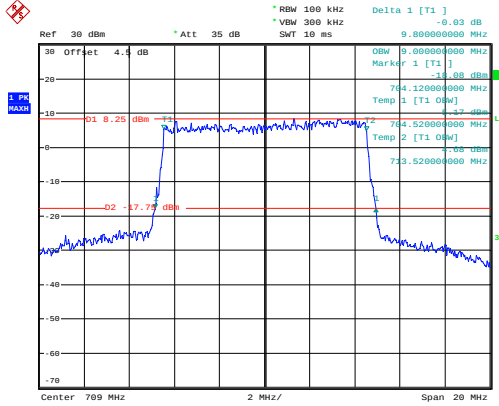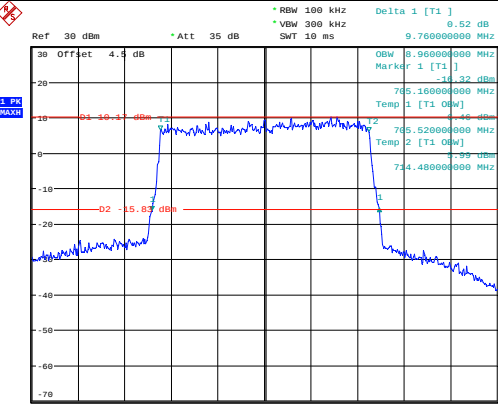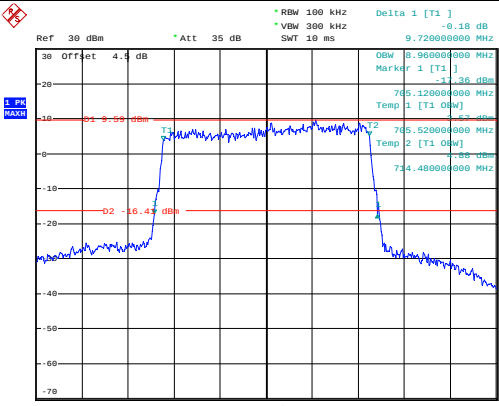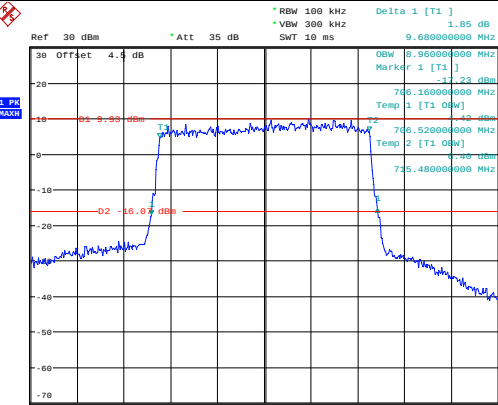
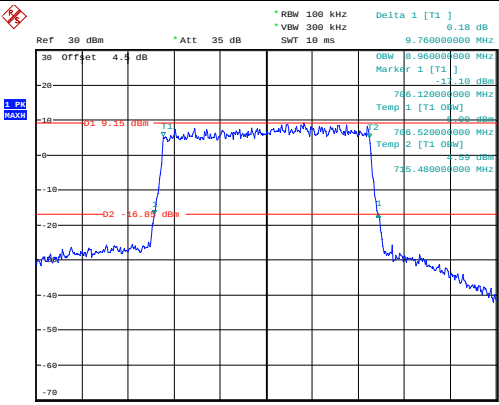
Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	 Ref 30 dBm *Att 35 dB *RBW 100 kHz Delta 1 [T1] -0.02 dB *VBW 300 kHz 9.720000000 MHz OBW 8.960000000 MHz Marker 1 [T1] -10.84 dBm 704.160000000 MHz Temp 1 [T1 0dB] -43 dBm 704.520000000 MHz Temp 2 [T1 0dB] -35 dBm 713.480000000 MHz Center 709 MHz 2 MHz/ Span 20 MHz Date: 10.JAN.2023 19:36:07	 Ref 30 dBm *Att 35 dB *RBW 100 kHz Delta 1 [T1] -0.03 dB *VBW 300 kHz 9.800000000 MHz OBW 8.960000000 MHz Marker 1 [T1] -10.88 dBm 704.120000000 MHz Temp 1 [T1 0dB] -47 dBm 704.520000000 MHz Temp 2 [T1 0dB] -35 dBm 713.520000000 MHz Center 709 MHz 2 MHz/ Span 20 MHz Date: 10.JAN.2023 19:36:25
Middle	 Ref 30 dBm *Att 35 dB *RBW 100 kHz Delta 1 [T1] 0.52 dB *VBW 300 kHz 9.760000000 MHz OBW 8.960000000 MHz Marker 1 [T1] -10.32 dBm 705.160000000 MHz Temp 1 [T1 0dB] -43 dBm 705.520000000 MHz Temp 2 [T1 0dB] -35 dBm 714.480000000 MHz Center 710 MHz 2 MHz/ Span 20 MHz Date: 10.JAN.2023 19:36:44	 Ref 30 dBm *Att 35 dB *RBW 100 kHz Delta 1 [T1] 0.18 dB *VBW 300 kHz 9.760000000 MHz OBW 8.960000000 MHz Marker 1 [T1] -10.36 dBm 705.120000000 MHz Temp 1 [T1 0dB] -43 dBm 705.520000000 MHz Temp 2 [T1 0dB] -35 dBm 714.480000000 MHz Center 710 MHz 2 MHz/ Span 20 MHz Date: 10.JAN.2023 19:36:59
Highest	 Ref 30 dBm *Att 35 dB *RBW 100 kHz Delta 1 [T1] 1.85 dB *VBW 300 kHz 9.680000000 MHz OBW 8.960000000 MHz Marker 1 [T1] -10.23 dBm 706.160000000 MHz Temp 1 [T1 0dB] -43 dBm 706.520000000 MHz Temp 2 [T1 0dB] -35 dBm 715.480000000 MHz Center 711 MHz 2 MHz/ Span 20 MHz Date: 10.JAN.2023 19:37:18	 Ref 30 dBm *Att 35 dB *RBW 100 kHz Delta 1 [T1] 0.18 dB *VBW 300 kHz 9.760000000 MHz OBW 8.960000000 MHz Marker 1 [T1] -10.18 dBm 706.120000000 MHz Temp 1 [T1 0dB] -43 dBm 706.520000000 MHz Temp 2 [T1 0dB] -35 dBm 715.480000000 MHz Center 711 MHz 2 MHz/ Span 20 MHz Date: 10.JAN.2023 19:37:36

Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

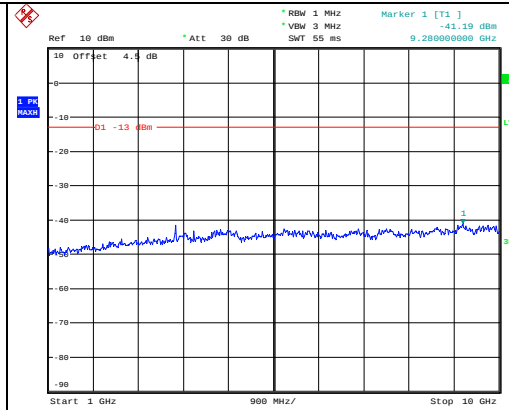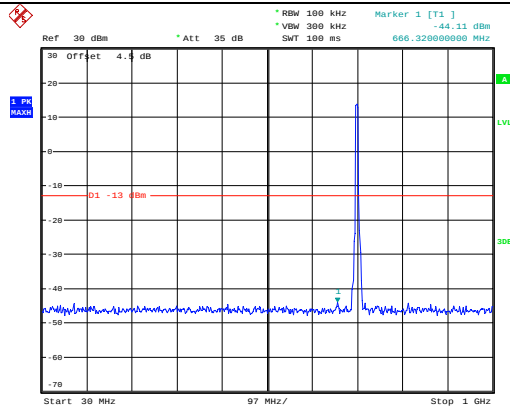

Middle

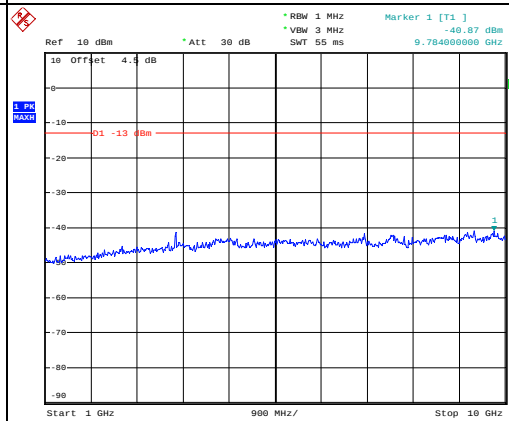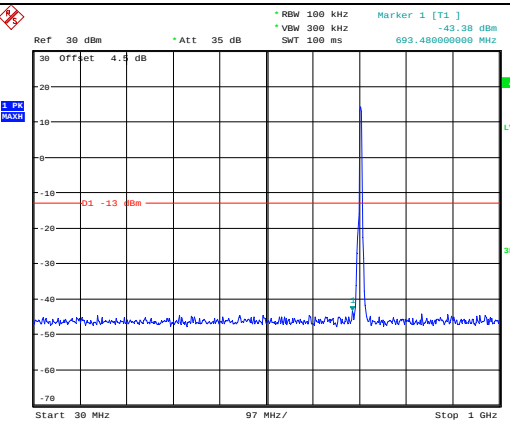

Highest

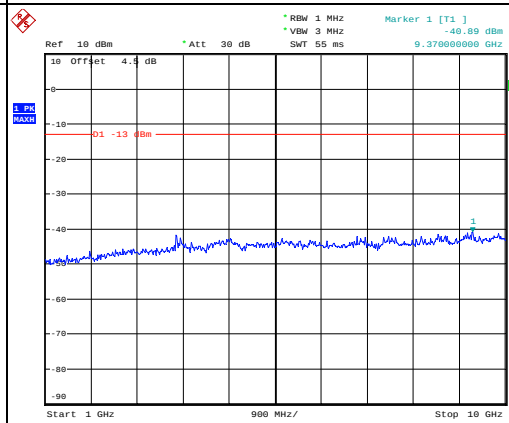
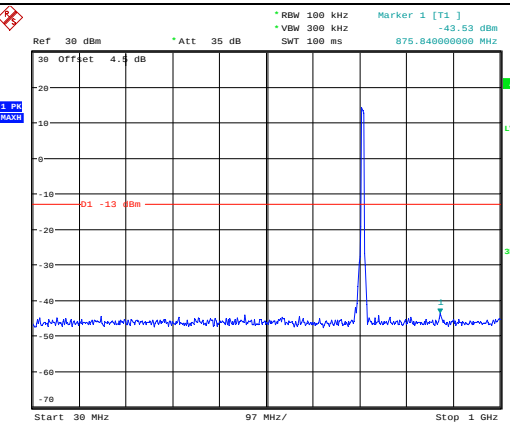


Spurious Emissions at Antenna Terminal



Channel

10MHz Bandwidth QPSK



Lowest

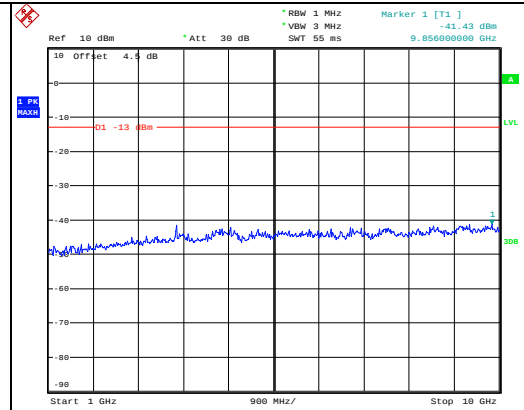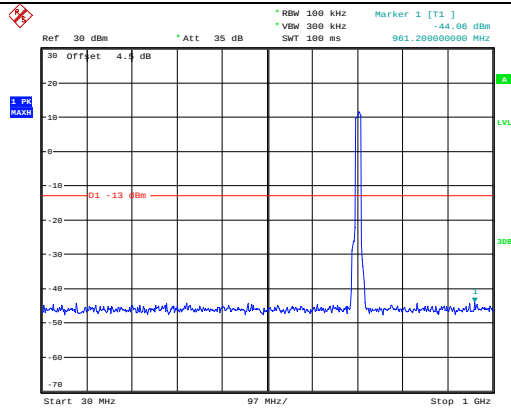


Middle

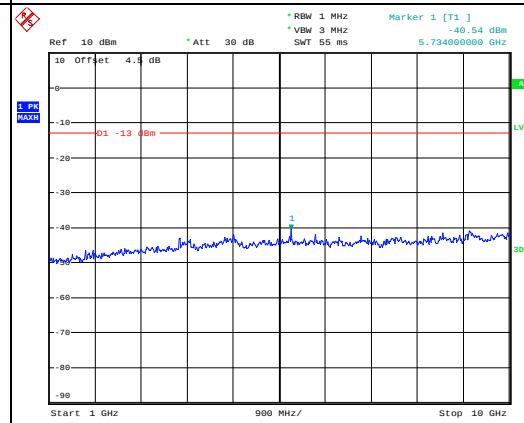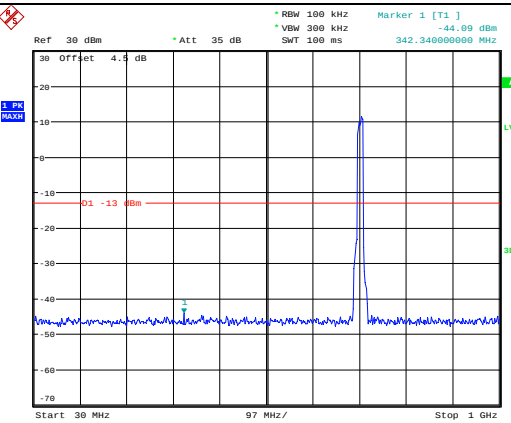


Highest

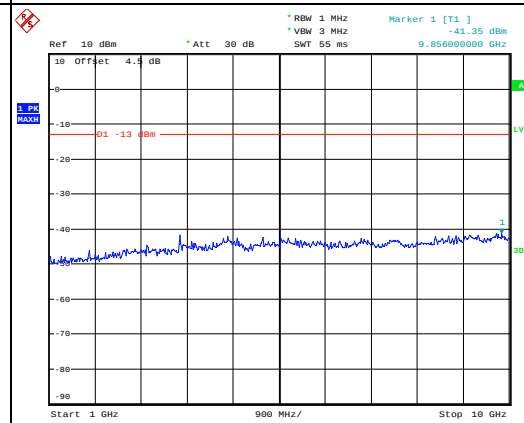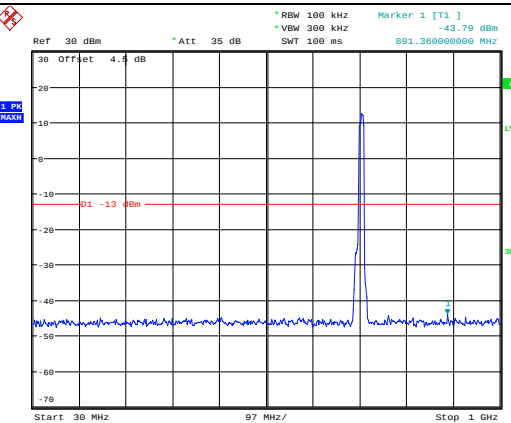

Out of band emission, Band Edge

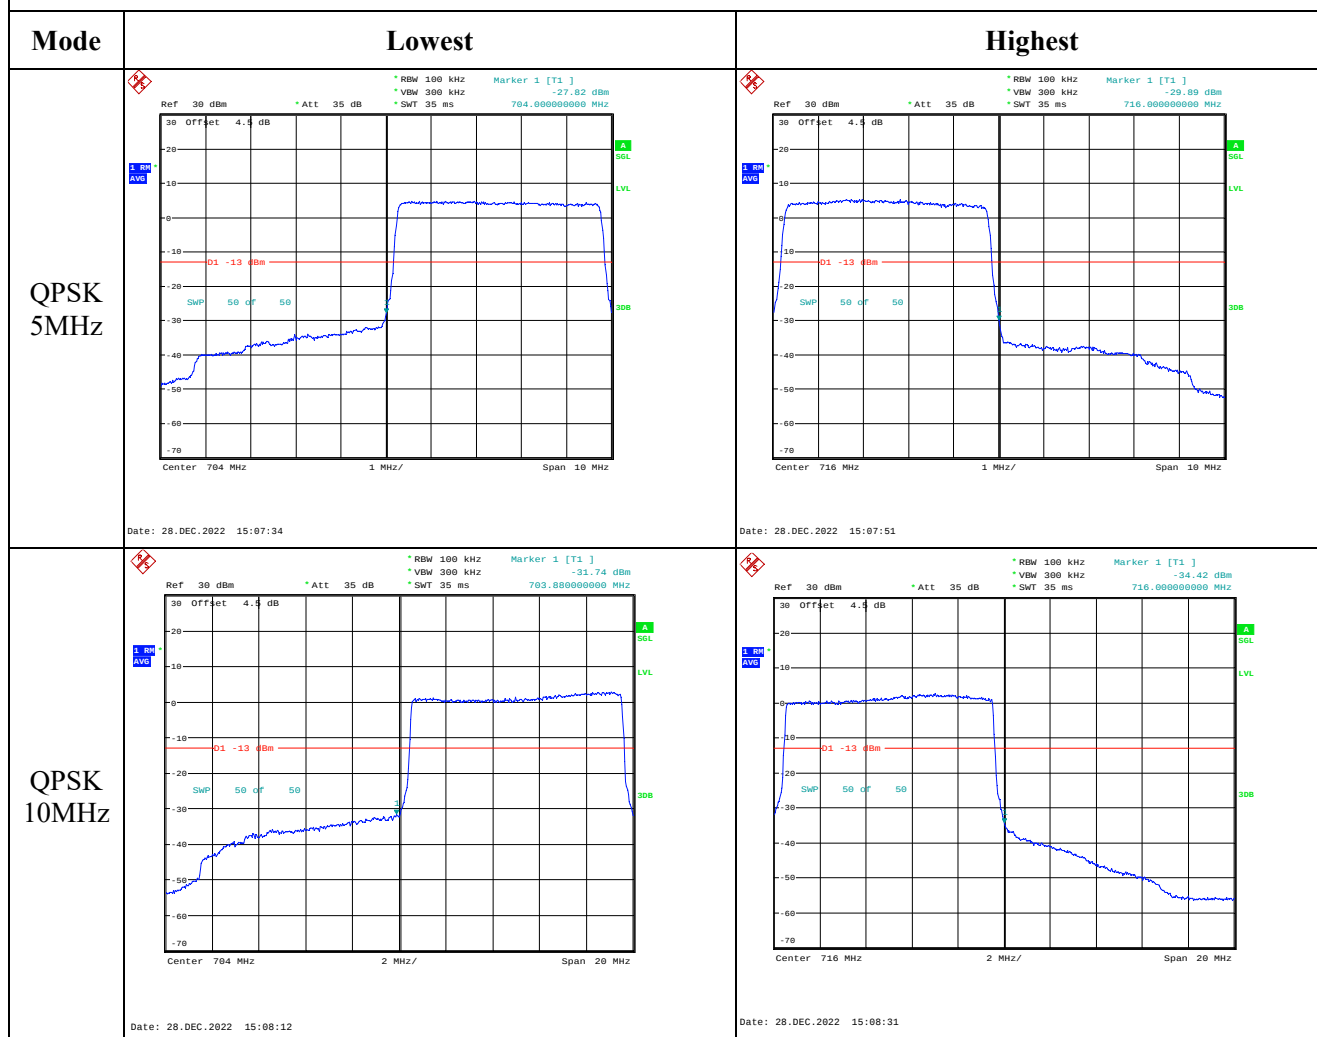

Out of band emission, Band Edge

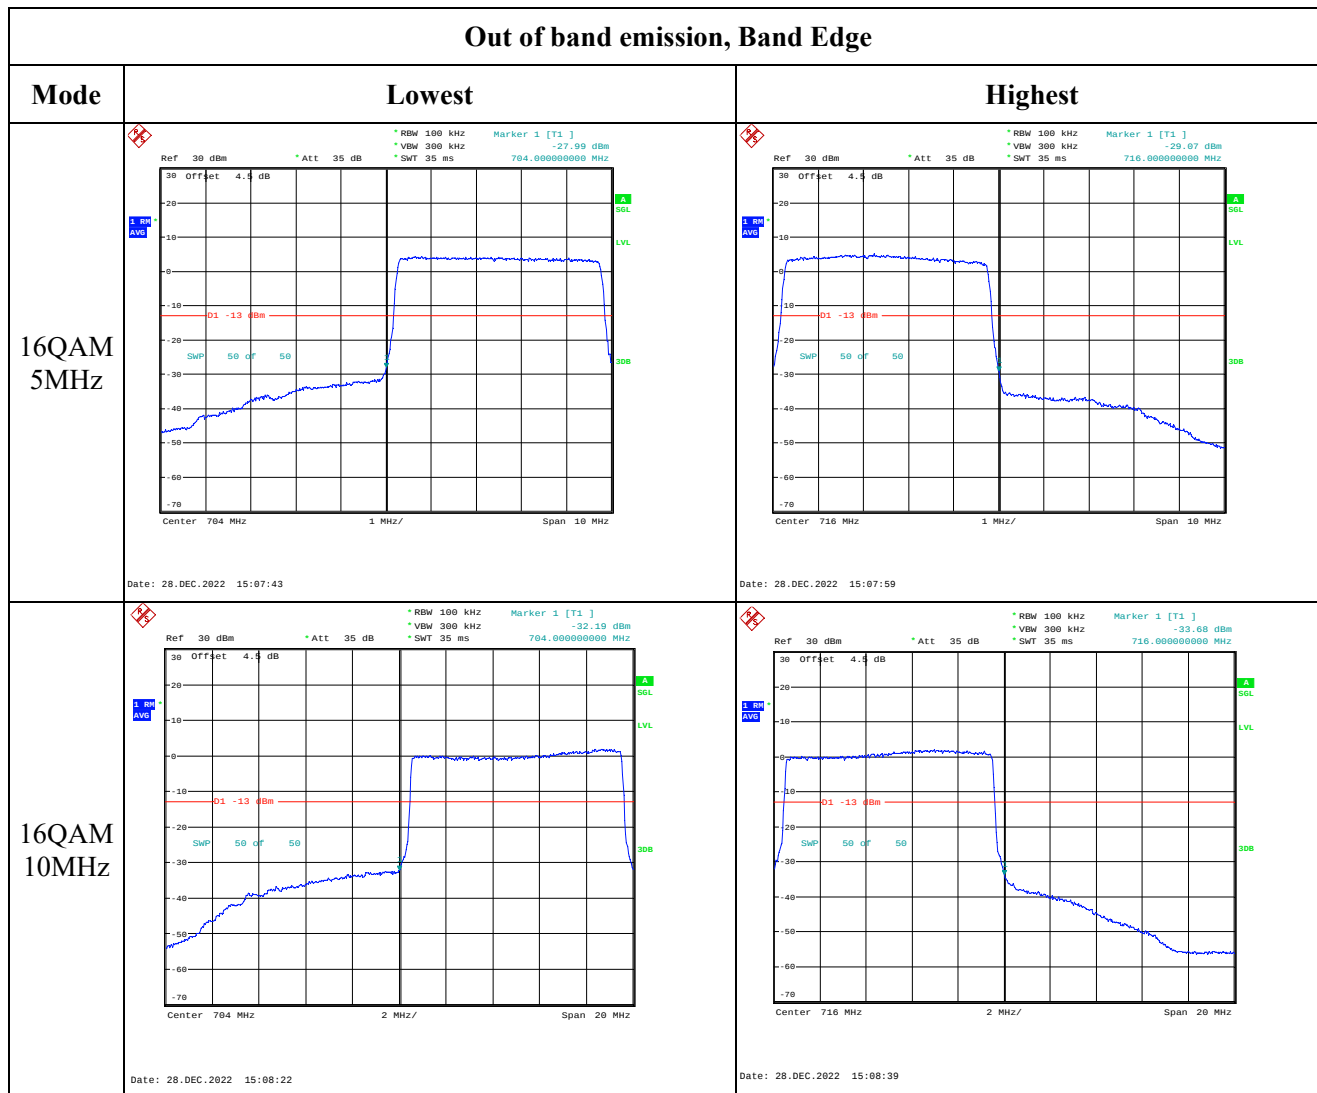

4.11 Antenna Port Test Data and Results for LTE Band 41

Serial Number:	1SNT-1	Test Date:	2022/12/28-2023/1/10
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.3-23.2	Relative Humidity: (%)	38-63	ATM Pressure: (kPa)	102.1-101.3
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/4/5	2023/4/4
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/4/6	2023/4/5
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
5MHz	2557.5	2605	2652.5
10MHz	2560	2605	2650
15MHz	2562.5	2605	2647.5
20MHz	2565	2605	2645

Test Data:**FCC§2.1046;§ 27.50(h)(2)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	16.34	16.48	16.25	16.41	33
	RB1#13	16	16.04	16.17		
	RB1#24	16.01	16.07	16.05		
	RB15#0	16.49	16.37	16.22		
	RB15#10	16.46	16.01	16.04		
	RB25#0	16.03	16.41	16.1		
5MHz 16QAM	RB1#0	16.24	16.12	16.48	16.4	33
	RB1#13	16.28	16.12	16.46		
	RB1#24	16.26	16.28	16.43		
	RB15#0	16.03	15.79	16.38		
	RB15#10	15.82	15.87	16.27		
	RB25#0	15.91	16.09	16.46		
10MHz QPSK	RB1#0	16.32	16.33	16.46	16.41	33
	RB1#25	16.33	16.37	16.34		
	RB1#49	16.48	16.31	16.25		
	RB25#0	16.47	16.33	16.22		
	RB25#25	16.42	16.34	16.12		
	RB50#0	16.49	16.31	16.18		
10MHz 16QAM	RB1#0	16.21	16.17	16.35	16.38	33
	RB1#25	16.13	16.14	16.4		
	RB1#49	16.15	16.33	16.46		
	RB25#0	16.23	15.84	16.3		
	RB25#25	16.24	15.89	16.31		
	RB50#0	15.99	15.63	16.33		
15MHz QPSK	RB1#0	16.49	16.24	16.06	16.41	33
	RB1#38	16.33	16.36	16.05		
	RB1#74	16	16.38	16.35		
	RB36#0	16.48	16.14	16.28		
	RB36#39	16.01	16.3	16.18		
	RB75#0	16.03	16.2	16.29		
15MHz 16QAM	RB1#0	16.23	16.47	16.33	16.39	33
	RB1#38	16.47	16.41	16.27		
	RB1#74	16.46	16.17	16.15		
	RB36#0	16	16.41	16.32		
	RB36#39	15.96	16.36	16.35		
	RB75#0	16.11	16.37	16.29		
20MHz QPSK	RB1#0	16	16.47	16.26	16.41	33
	RB1#50	16.48	16.02	16.15		

	RB1#99	16.1	16.07	16.11		
	RB50#0	16.07	16.46	16.15		
	RB50#50	16.15	16.49	16.12		
	RB100#0	16.45	16.46	16.13		
20MHz 16QAM	RB1#0	16.04	16.1	16.09	16.37	33
	RB1#50	16.07	16.18	16.05		
	RB1#99	16.19	16.15	16.45		
	RB50#0	16.1	15.95	16.04		
	RB50#50	16.16	15.89	16.17		
	RB100#0	16.2	15.85	16.13		
Note: EIRP=Conducted Power(dBm) - Lc(dB) + G _T (dBi)						
					Result:	Pass

Peak-to-average Ratio(PAR)					
Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	8.1	9.21	9.22	13
	RB100#0	8.85	9.13	9.19	13
20MHz 16QAM	RB1#0	9.47	10.07	10.02	13
	RB100#0	9.68	10.01	10.01	13
Result:					Pass

FCC §2.1049, §27.53:Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
5MHz QPSK	4.52	4.52	4.52	5.08	4.98	5.36
5MHz 16QAM	4.52	4.52	4.5	5.22	5	5
10MHz QPSK	9	8.96	8.96	9.8	9.92	9.72
10MHz 16QAM	8.96	8.96	8.96	9.72	9.84	9.72
15MHz QPSK	13.56	13.5	13.5	16.02	15.06	15.48
15MHz 16QAM	13.56	13.62	13.56	15.9	17.34	16.14
20MHz QPSK	18	18	18	19.6	19.84	19.6
20MHz 16QAM	18	18	18	19.68	20	19.52
Note: The test plots please refer to the Plots of Occupied Bandwidth						


FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, § 27.53:Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.

FCC §2.1055, §27.54: Frequency Stability						
Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	2556.040	2555.00	2653.978	2655
	-20	3.8	2556.036	2555.00	2653.979	2655
	-10	3.8	2556.021	2555.00	2653.989	2655
	0	3.8	2556.013	2555.00	2653.971	2655
	10	3.8	2556.022	2555.00	2653.970	2655
	20	3.8	2556.040	2555.00	2653.960	2655
	30	3.8	2556.036	2555.00	2653.988	2655
	40	3.8	2556.039	2555.00	2653.982	2655
	50	3.8	2556.031	2555.00	2653.981	2655
Frequency Stability vs. Voltage	20	3.5	2556.032	2555.00	2653.976	2655
	20	4.2	2556.040	2555.00	2653.988	2655
					Result:	Pass

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	2556.038	2555.00	2653.979	2655
	-20	3.8	2556.025	2555.00	2653.983	2655
	-10	3.8	2556.032	2555.00	2653.987	2655
	0	3.8	2556.033	2555.00	2653.967	2655
	10	3.8	2556.018	2555.00	2653.969	2655
	20	3.8	2556.040	2555.00	2653.960	2655
	30	3.8	2556.029	2555.00	2653.982	2655
	40	3.8	2556.012	2555.00	2653.968	2655
	50	3.8	2556.021	2555.00	2653.983	2655
Frequency Stability vs. Voltage	20	3.5	2556.020	2555.00	2653.963	2655
	20	4.2	2556.037	2555.00	2653.960	2655
					Result:	Pass







Test Plots(Note: The 4.5dB is the Insertion loss of the RF cable, Power Splitter, which was offset into the Spectrum Analyzer):

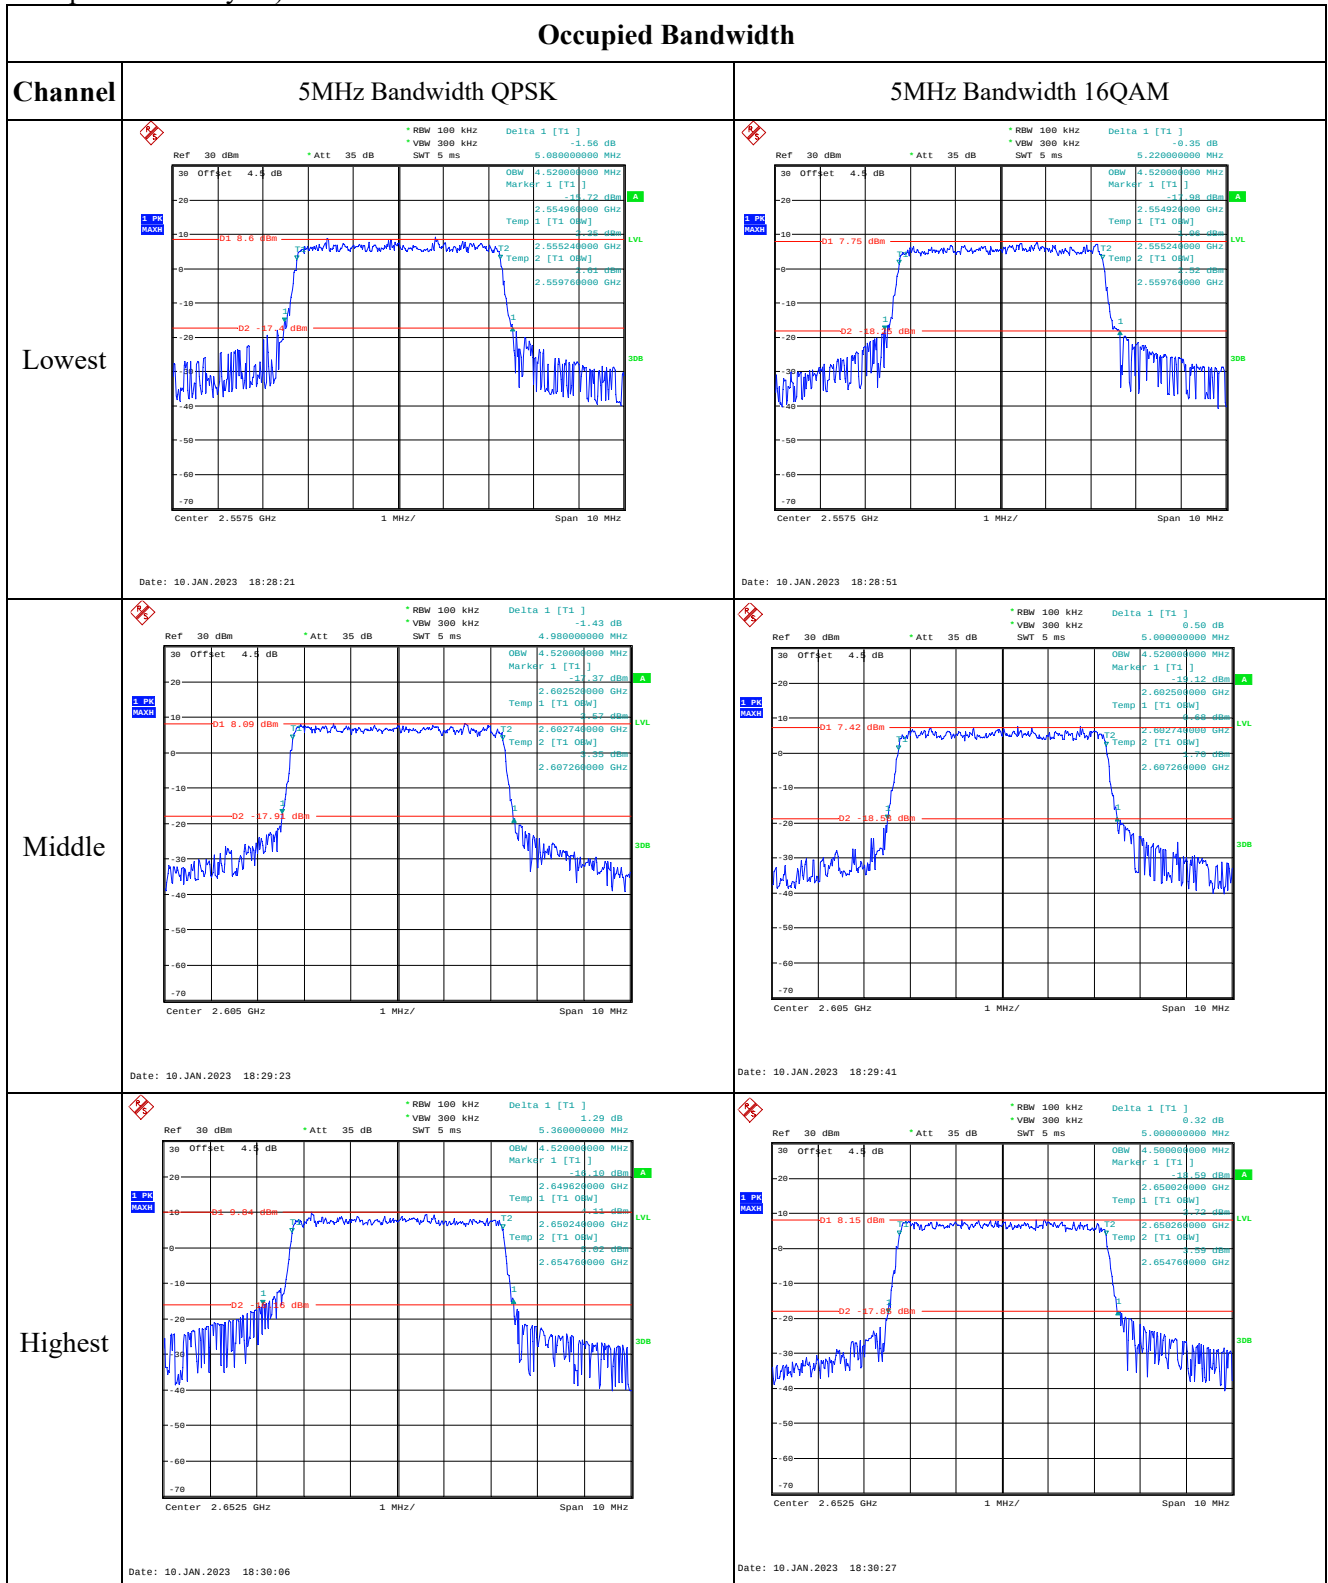

Page 148 of 209

Occupied Bandwidth		
Channel	15MHz Bandwidth QPSK	15MHz Bandwidth 16QAM
Lowest	Ref 30 dBm *Att 35 dB RBW 300 kHz Delta 1 [T1] 1.16 dB VSW 1 MHz SWT 2.5 ms 10.020000000 MHz OBW 13.560000000 MHz Marker 1 [T1] 13.56 dBm Temp 1 [T1 0dB] 13.56 dBm Temp 2 [T1 0dB] 13.56 dBm Center 2.5625 GHz 3 MHz/ Span 30 MHz Date: 10. JAN. 2023 18:35:03	Ref 30 dBm *Att 35 dB RBW 300 kHz Delta 1 [T1] -0.07 dB VSW 1 MHz SWT 2.5 ms 15.900000000 MHz OBW 13.560000000 MHz Marker 1 [T1] 13.56 dBm Temp 1 [T1 0dB] 13.56 dBm Temp 2 [T1 0dB] 13.56 dBm Center 2.5625 GHz 3 MHz/ Span 30 MHz Date: 10. JAN. 2023 18:35:35
Middle	Ref 30 dBm *Att 35 dB RBW 300 kHz Delta 1 [T1] -0.19 dB VSW 1 MHz SWT 2.5 ms 15.960000000 MHz OBW 13.560000000 MHz Marker 1 [T1] 13.56 dBm Temp 1 [T1 0dB] 13.56 dBm Temp 2 [T1 0dB] 13.56 dBm Center 2.605 GHz 3 MHz/ Span 30 MHz Date: 10. JAN. 2023 18:35:58	Ref 30 dBm *Att 35 dB RBW 300 kHz Delta 1 [T1] 0.22 dB VSW 1 MHz SWT 2.5 ms 17.340000000 MHz OBW 13.560000000 MHz Marker 1 [T1] 13.56 dBm Temp 1 [T1 0dB] 13.56 dBm Temp 2 [T1 0dB] 13.56 dBm Center 2.605 GHz 3 MHz/ Span 30 MHz Date: 10. JAN. 2023 18:36:26
Highest	Ref 30 dBm *Att 35 dB RBW 300 kHz Delta 1 [T1] -0.76 dB VSW 1 MHz SWT 2.5 ms 15.480000000 MHz OBW 13.560000000 MHz Marker 1 [T1] 13.56 dBm Temp 1 [T1 0dB] 13.56 dBm Temp 2 [T1 0dB] 13.56 dBm Center 2.6475 GHz 3 MHz/ Span 30 MHz Date: 10. JAN. 2023 18:36:56	Ref 30 dBm *Att 35 dB RBW 300 kHz Delta 1 [T1] -0.58 dB VSW 1 MHz SWT 2.5 ms 16.140000000 MHz OBW 13.560000000 MHz Marker 1 [T1] 13.56 dBm Temp 1 [T1 0dB] 13.56 dBm Temp 2 [T1 0dB] 13.56 dBm Center 2.6475 GHz 3 MHz/ Span 30 MHz Date: 10. JAN. 2023 18:37:24

Occupied Bandwidth

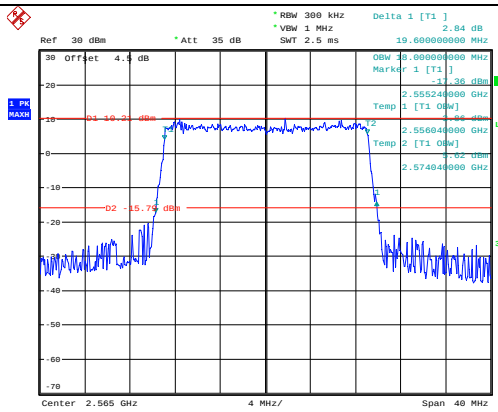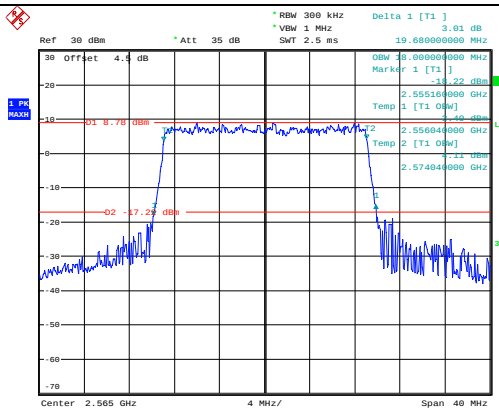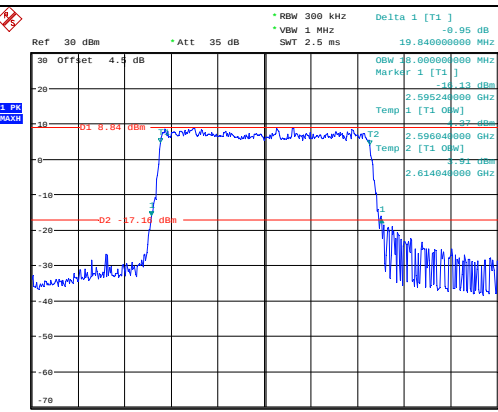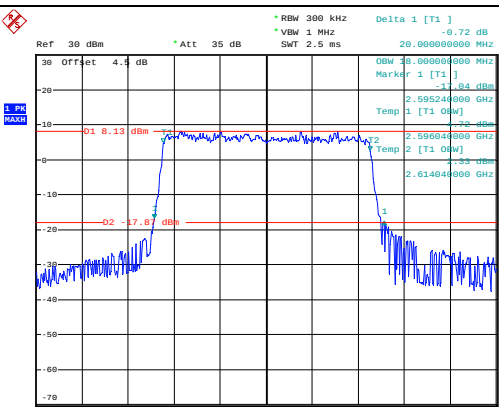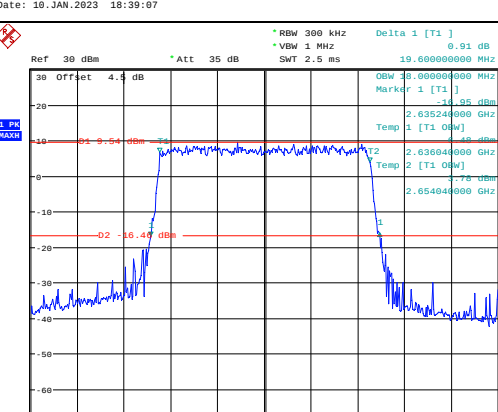
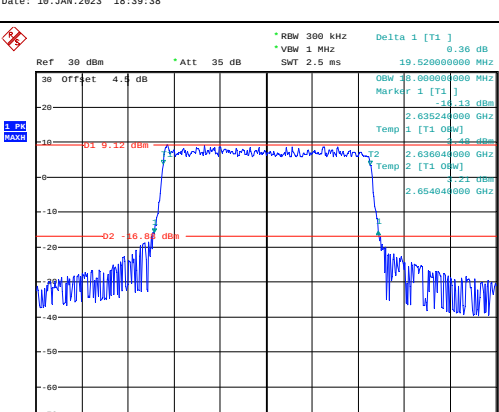
Channel	20MHz Bandwidth QPSK	20MHz Bandwidth 16QAM
Lowest	 Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 300 kHz Delta 1 [T1] 2.04 dB VBW 1 MHz SWT 2.5 ms 19.600000000 MHz Marker 1 [T1] -15.74 dBm Temp 1 [T1] 2.555240000 GHz Temp 2 [T1] 2.556040000 GHz Temp 3 [T1] 2.574040000 GHz Center 2.565 GHz 4 MHz/ Span 40 MHz Date: 10.JAN.2023 18:38:15	 Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 300 kHz Delta 1 [T1] 3.01 dB VBW 1 MHz SWT 2.5 ms 19.600000000 MHz Marker 1 [T1] -17.22 dBm Temp 1 [T1] 2.555160000 GHz Temp 2 [T1] 2.556040000 GHz Temp 3 [T1] 2.574040000 GHz Center 2.565 GHz 4 MHz/ Span 40 MHz Date: 10.JAN.2023 18:38:41
Middle	 Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 300 kHz Delta 1 [T1] 0.95 dB VBW 1 MHz SWT 2.5 ms 19.840000000 MHz Marker 1 [T1] -17.13 dBm Temp 1 [T1] 2.595240000 GHz Temp 2 [T1] 2.596040000 GHz Temp 3 [T1] 2.614040000 GHz Center 2.605 GHz 4 MHz/ Span 40 MHz Date: 10.JAN.2023 18:39:07	 Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 300 kHz Delta 1 [T1] 0.72 dB VBW 1 MHz SWT 2.5 ms 20.000000000 MHz Marker 1 [T1] -17.82 dBm Temp 1 [T1] 2.595240000 GHz Temp 2 [T1] 2.596040000 GHz Temp 3 [T1] 2.614040000 GHz Center 2.605 GHz 4 MHz/ Span 40 MHz Date: 10.JAN.2023 18:39:38
Highest	 Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 300 kHz Delta 1 [T1] 0.91 dB VBW 1 MHz SWT 2.5 ms 19.600000000 MHz Marker 1 [T1] -16.47 dBm Temp 1 [T1] 2.635240000 GHz Temp 2 [T1] 2.636040000 GHz Temp 3 [T1] 2.654040000 GHz Center 2.645 GHz 4 MHz/ Span 40 MHz Date: 10.JAN.2023 18:39:55	 Ref 30 dBm Offset 4.4 dB Att 35 dB RBW 300 kHz Delta 1 [T1] 0.36 dB VBW 1 MHz SWT 2.5 ms 19.520000000 MHz Marker 1 [T1] -16.88 dBm Temp 1 [T1] 2.635240000 GHz Temp 2 [T1] 2.636040000 GHz Temp 3 [T1] 2.654040000 GHz Center 2.645 GHz 4 MHz/ Span 40 MHz Date: 10.JAN.2023 18:40:23

Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

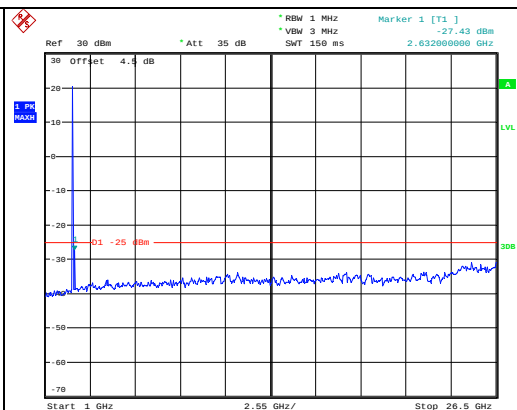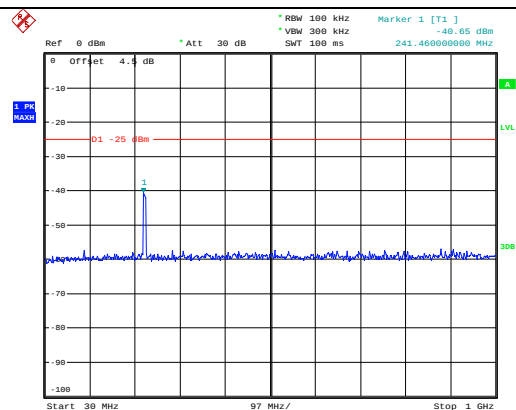

Middle

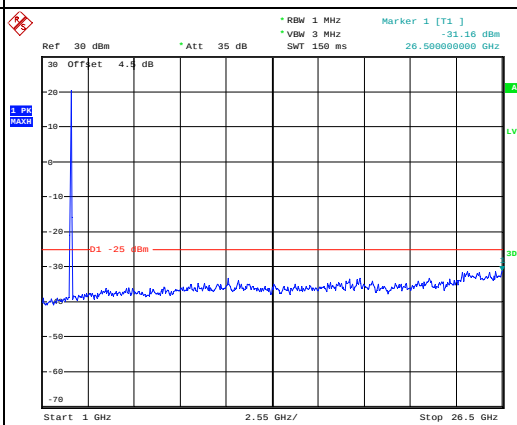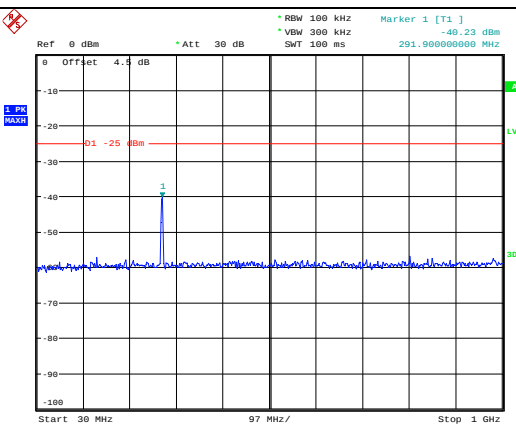

Highest

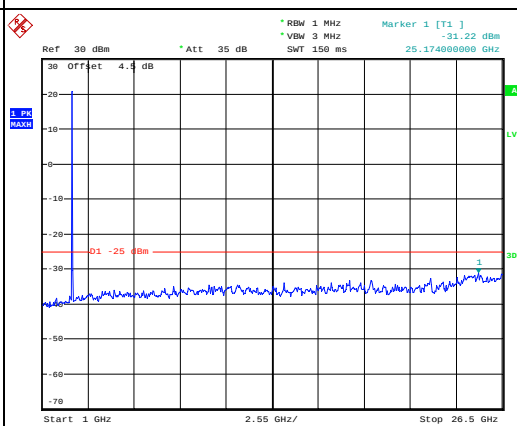
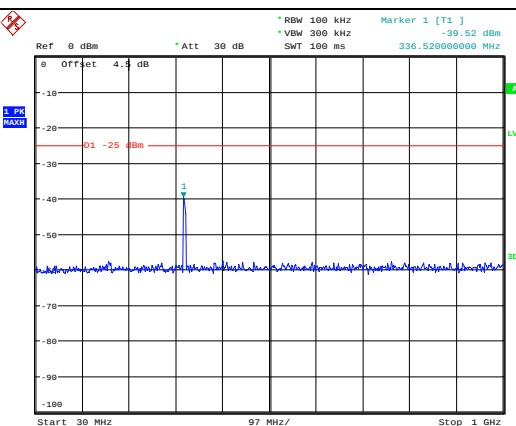


Spurious Emissions at Antenna Terminal



Channel

10MHz Bandwidth QPSK



Lowest

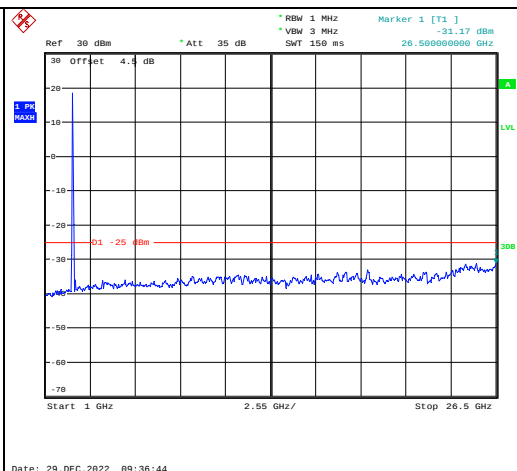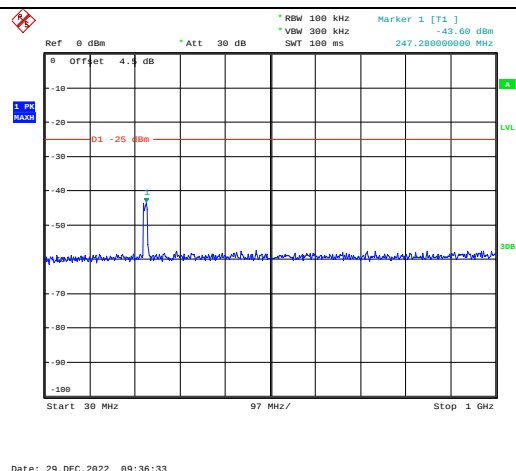

Middle

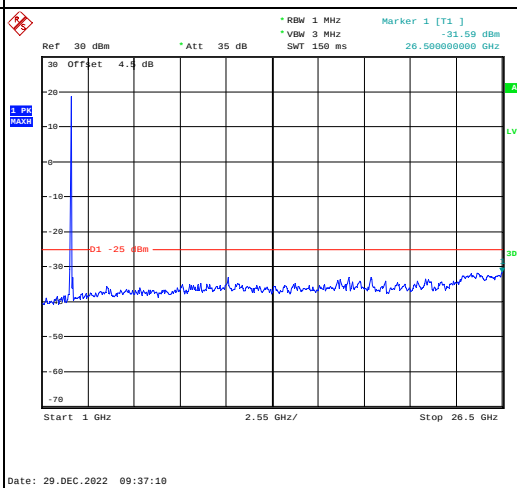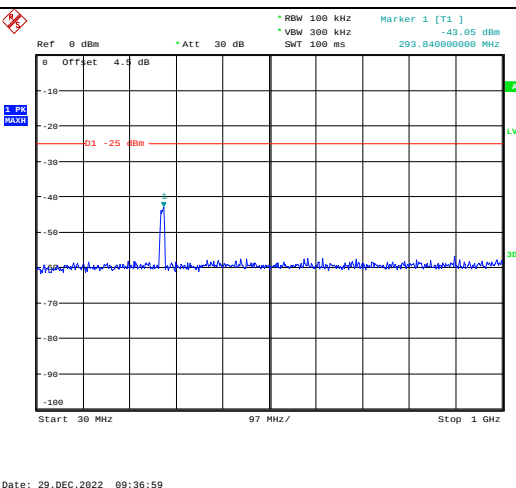

Highest

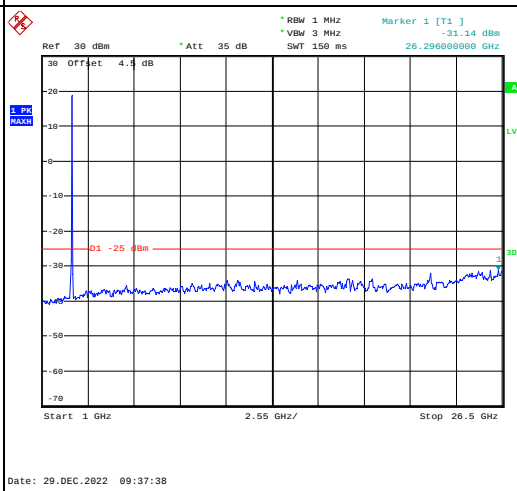
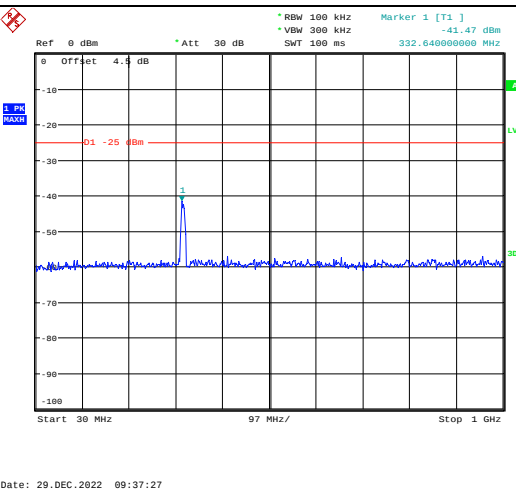


Spurious Emissions at Antenna Terminal



Channel

15MHz Bandwidth QPSK



Lowest

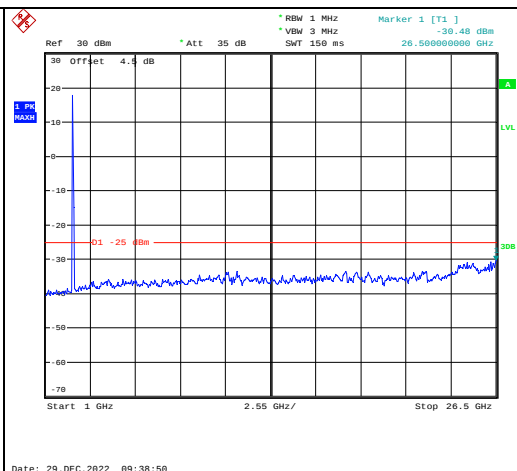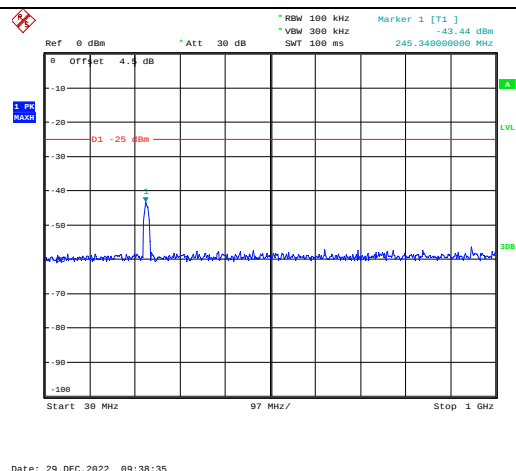

Middle

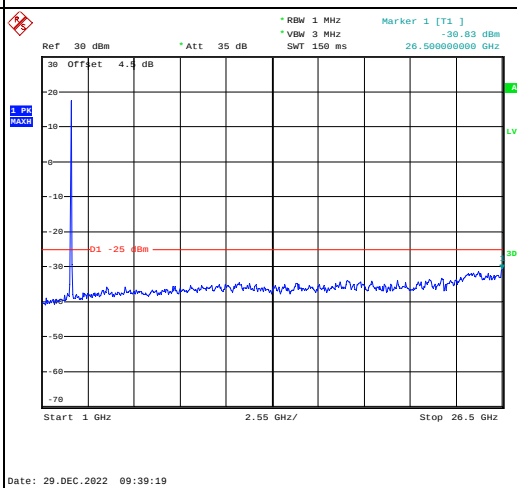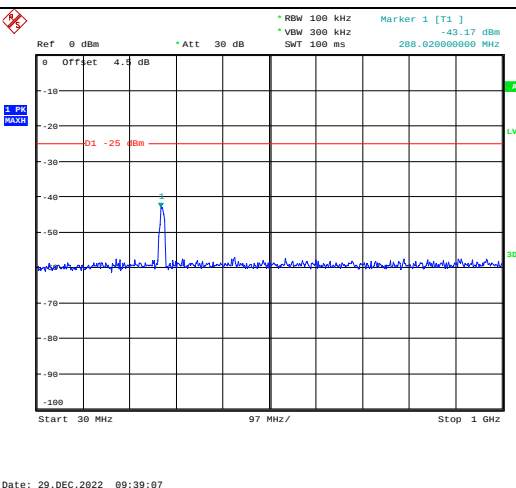

Highest

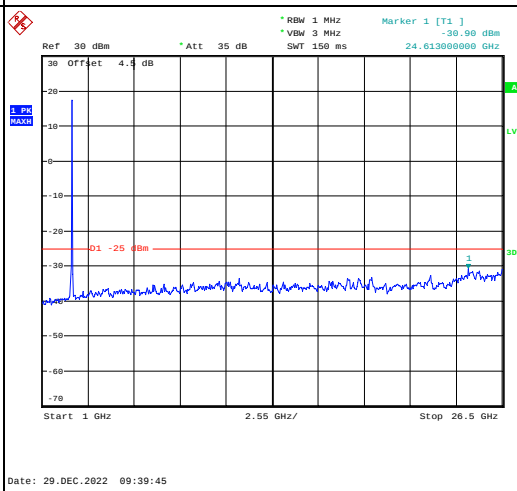
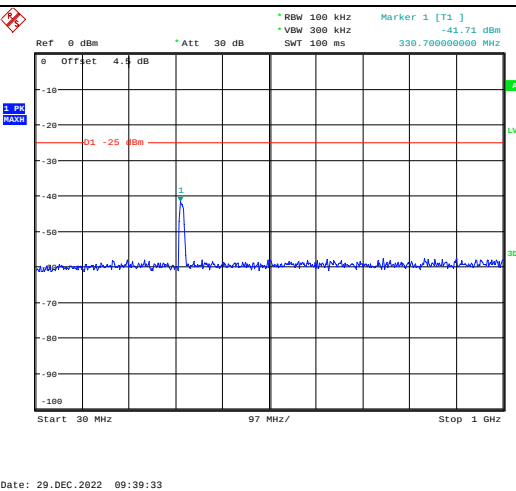


Spurious Emissions at Antenna Terminal



Channel

20MHz Bandwidth QPSK



Lowest

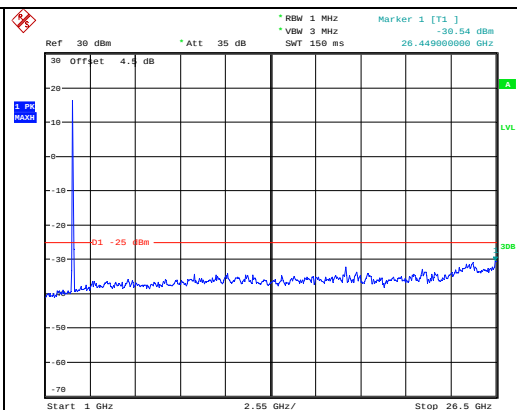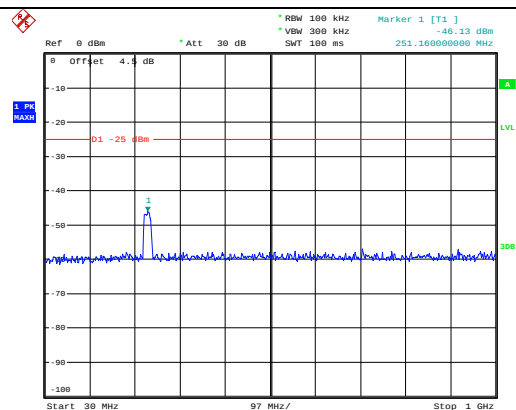







Middle

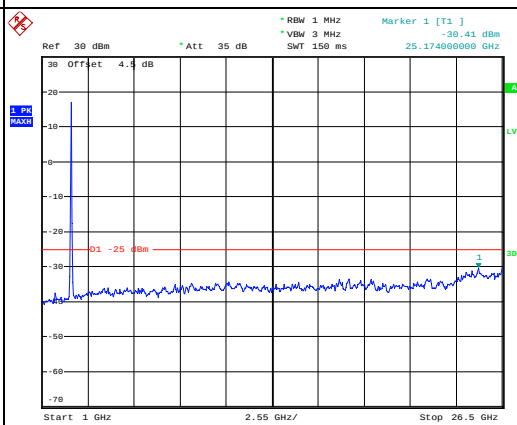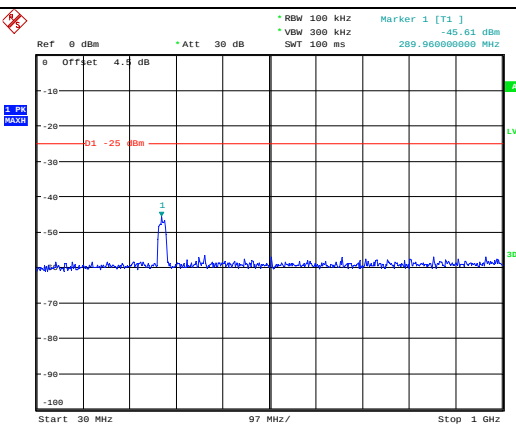


Highest

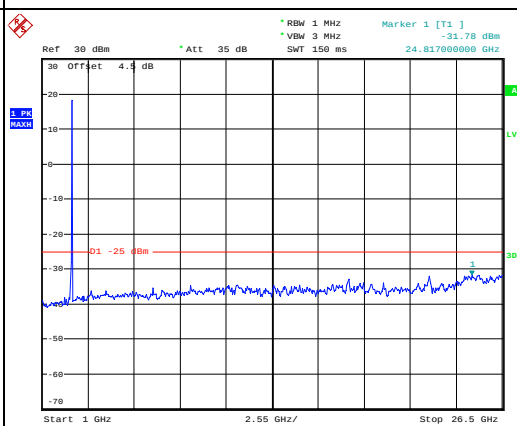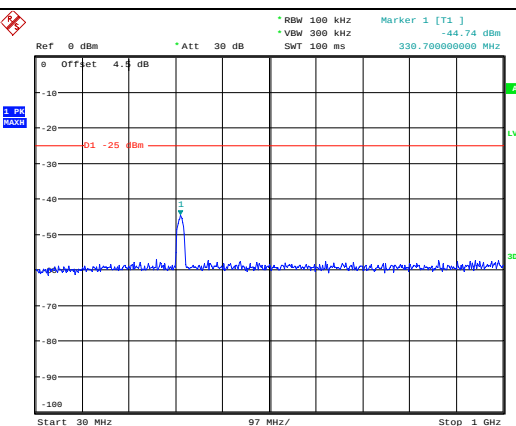


Out of band emission, Band Edge

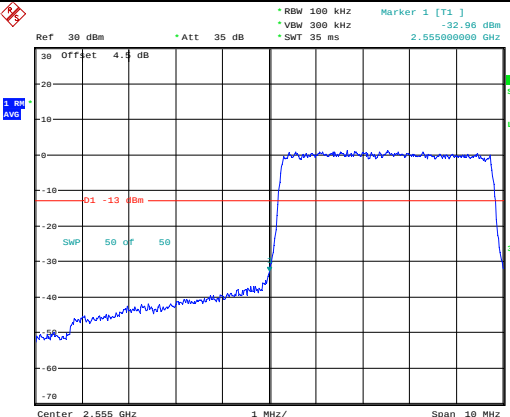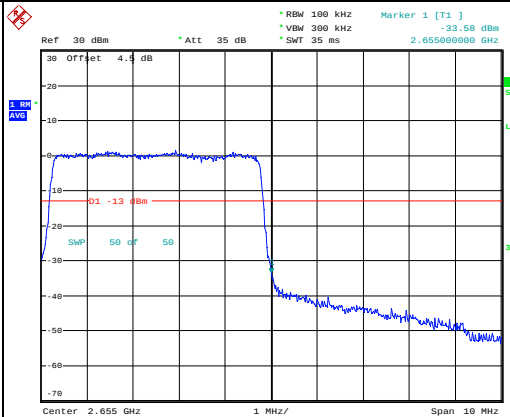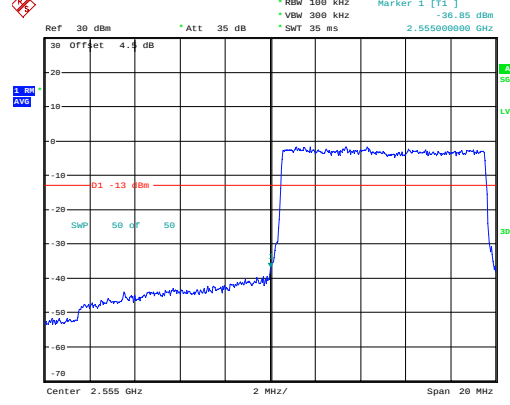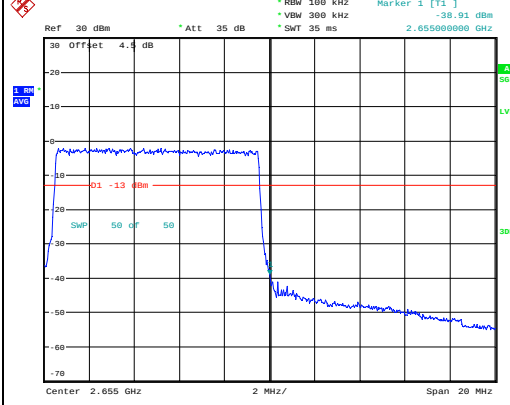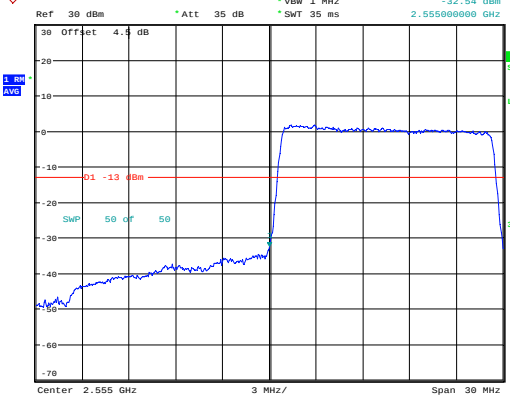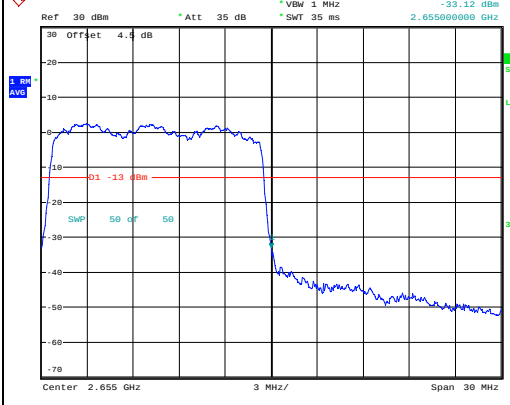Mode	Lowest	Highest
QPSK 5MHz	 Ref 30 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -32.56 dBm VBW 300 kHz SWT 35 ms 2.555000000 GHz Center 2.555 GHz 1 MHz/ Span 10 MHz Date: 29.DEC.2022 09:14:11	 Ref 30 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -33.91 dBm VBW 300 kHz SWT 35 ms 2.655000000 GHz Center 2.655 GHz 1 MHz/ Span 10 MHz Date: 29.DEC.2022 09:14:27
QPSK 10MHz	 Ref 30 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -32.56 dBm VBW 300 kHz SWT 35 ms 2.555000000 GHz Center 2.555 GHz 2 MHz/ Span 20 MHz Date: 29.DEC.2022 09:15:12	 Ref 30 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -33.91 dBm VBW 300 kHz SWT 35 ms 2.655000000 GHz Center 2.655 GHz 2 MHz/ Span 20 MHz Date: 29.DEC.2022 09:15:32
QPSK 15MHz	 Ref 30 dBm Att 35 dB RBW 300 kHz Marker 1 [T1] -32.56 dBm VBW 1 MHz SWT 35 ms 2.555000000 GHz Center 2.555 GHz 3 MHz/ Span 30 MHz Date: 29.DEC.2022 09:17:44	 Ref 30 dBm Att 35 dB RBW 300 kHz Marker 1 [T1] -33.12 dBm VBW 1 MHz SWT 35 ms 2.655000000 GHz Center 2.655 GHz 3 MHz/ Span 30 MHz Date: 29.DEC.2022 09:18:01

QPSK
20MHz

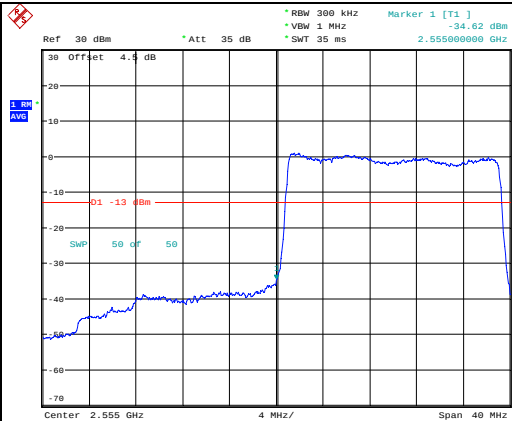


Date: 29.DEC.2022 09:18:57

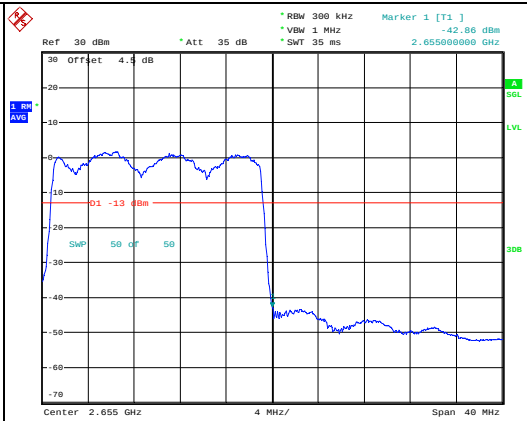


Date: 29.DEC.2022 09:19:14

Out of band emission, Band Edge

Mode	Lowest	Highest
16QAM 5MHz	Ref 30 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -31.56 dBm VBW 300 kHz SWT 35 ms 2.555000000 GHz Center 2.555 GHz 1 MHz/ Span 10 MHz Date: 29.DEC.2022 09:14:19	Ref 30 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -32.46 dBm VBW 300 kHz SWT 35 ms 2.655000000 GHz Center 2.655 GHz 1 MHz/ Span 10 MHz Date: 29.DEC.2022 09:14:34
16QAM 10MHz	Ref 30 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -30.79 dBm VBW 300 kHz SWT 35 ms 2.555000000 GHz Center 2.555 GHz 2 MHz/ Span 20 MHz Date: 29.DEC.2022 09:15:22	Ref 30 dBm Att 35 dB RBW 100 kHz Marker 1 [T1] -30.93 dBm VBW 300 kHz SWT 35 ms 2.655000000 GHz Center 2.655 GHz 2 MHz/ Span 20 MHz Date: 29.DEC.2022 09:15:40
16QAM 15MHz	Ref 30 dBm Att 35 dB RBW 300 kHz Marker 1 [T1] -33.05 dBm VBW 1 MHz SWT 35 ms 2.555000000 GHz Center 2.555 GHz 3 MHz/ Span 30 MHz Date: 29.DEC.2022 09:17:52	Ref 30 dBm Att 35 dB RBW 300 kHz Marker 1 [T1] -35.10 dBm VBW 1 MHz SWT 35 ms 2.655000000 GHz Center 2.655 GHz 3 MHz/ Span 30 MHz Date: 29.DEC.2022 09:18:09

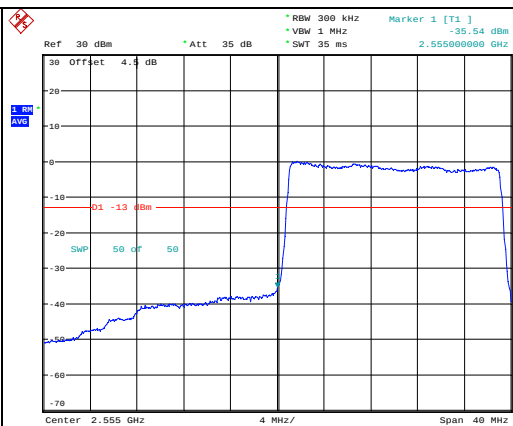16QAM
20MHz

Date: 29.DEC.2022 09:19:05

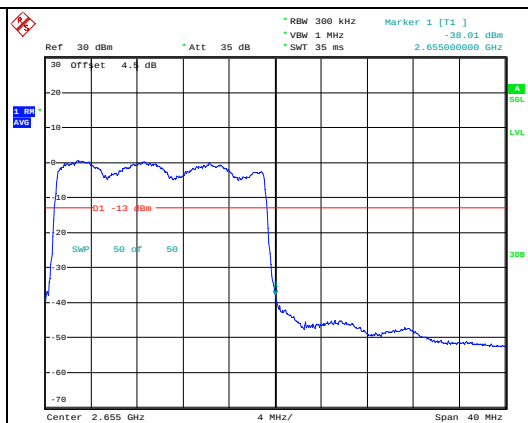

Date: 29.DEC.2022 09:19:23

4.12 Antenna Port Test Data and Results for LTE Band 66

Serial Number:	1SNT-1	Test Date:	2022/12/28-2023/1/10
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.3-23.2	Relative Humidity: (%)	38-63	ATM Pressure: (kPa)	102.1-101.3
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/4/5	2023/4/4
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Weinschel	Power Splitter	1515	RA914	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/4/6	2023/4/5
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1710.7	1745	1779.3
3MHz	1711.5	1745	1778.5
5MHz	1712.5	1745	1777.5
10MHz	1715	1745	1775
15MHz	1717.5	1745	1772.5
20MHz	1720	1745	1770

Test Data:**FCC§2.1046;§ 27.50(d)(4)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	16.75	16.46	16.11	11.85	30
	RB1#3	16.69	16.33	16.16		
	RB1#5	16.68	16.37	16.17		
	RB3#0	16.59	16.39	16.28		
	RB3#3	16.63	16.27	16.25		
	RB6#0	16.18	16.29	16.14		
1.4MHz 16QAM	RB1#0	16.08	16.47	16.38	11.57	30
	RB1#3	16.3	16.14	16.33		
	RB1#5	16.25	16.13	16.37		
	RB3#0	16.31	16.21	16.25		
	RB3#3	16.32	16.28	16.28		
	RB6#0	16.36	16.04	16.43		
3MHz QPSK	RB1#0	16.56	16.62	16.71	11.82	30
	RB1#8	16.63	16.72	16.69		
	RB1#14	16.5	16.59	16.68		
	RB6#0	16.11	16.06	16.29		
	RB6#9	16.08	16.03	16.18		
	RB15#0	16.02	16.09	16.28		
3MHz 16QAM	RB1#0	16.32	16.35	16.13	11.46	30
	RB1#8	16.25	16.36	16.01		
	RB1#14	16.18	16.2	16.07		
	RB6#0	16.22	16.26	16.23		
	RB6#9	16.22	16.16	16.08		
	RB15#0	16.04	16.16	16.3		
5MHz QPSK	RB1#0	16.82	16.11	16.41	11.92	30
	RB1#13	16.75	16.03	16.4		
	RB1#24	16.77	16.45	16.3		
	RB15#0	16.24	16.14	16		
	RB15#10	16.19	16.17	16.41		
	RB25#0	16.19	16.26	16.46		
5MHz 16QAM	RB1#0	16.46	16.27	16.48	11.58	30
	RB1#13	16.35	16.33	16.47		
	RB1#24	16.33	16.32	16.46		
	RB15#0	16.14	16.27	16.07		
	RB15#10	16.25	16.22	16.47		
	RB25#0	16.36	16.12	16.08		
10MHz QPSK	RB1#0	17.23	16.32	16.08	12.33	30
	RB1#25	17.15	16.21	16.03		

	RB1#49	17.07	16.21	16		
	RB25#0	16.47	16.22	16.25		
	RB25#25	16.42	16.23	16.22		
	RB50#0	16.06	16.24	16.16		
10MHz 16QAM	RB1#0	16.28	16.22	16.34	11.48	30
	RB1#25	16.18	16.21	16.38		
	RB1#49	16.08	16.2	16.33		
	RB25#0	16.24	16.35	16.21		
	RB25#25	16.11	16.27	16.24		
	RB50#0	16.03	16.29	16.29		
15MHz QPSK	RB1#0	17.11	16.31	16.54	12.21	30
	RB1#38	17.04	16.31	16.53		
	RB1#74	16.86	16.08	16.46		
	RB36#0	16.39	16.19	16.24		
	RB36#39	16.33	16.2	16.11		
	RB75#0	16	16.22	16.14		
15MHz 16QAM	RB1#0	16.69	16.05	16.3	11.79	30
	RB1#38	16.56	16.42	16.24		
	RB1#74	16.43	16.29	16.16		
	RB36#0	16.04	16.33	16.29		
	RB36#39	16	16.27	16.17		
	RB75#0	16.45	16.31	16.2		
20MHz QPSK	RB1#0	17.43	16.38	17.09	12.53	30
	RB1#50	17.23	16.24	16.9		
	RB1#99	17.12	16.18	16.86		
	RB50#0	16.34	16.16	16.03		
	RB50#50	16.11	16.14	16.35		
	RB100#0	16.29	16.18	16.44		
20MHz 16QAM	RB1#0	16.43	16.39	16.48	11.58	30
	RB1#50	16.28	16.4	16.35		
	RB1#99	16.24	16.4	16.3		
	RB50#0	16.32	16.21	16.01		
	RB50#50	16.23	16.17	16.02		
	RB100#0	16.21	16.29	16.47		

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

Result:

Pass

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	5.48	5.8	5.35	13
	RB100#0	5.74	5.8	5.87	13
20MHz 16QAM	RB1#0	6.22	6.28	6.51	13
	RB100#0	6.67	6.67	6.67	13
Result:					Pass

FCC §2.1049, §27.53:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.104	1.104	1.098	1.26	1.26	1.26
1.4MHz 16QAM	1.098	1.104	1.11	1.254	1.26	1.26
3MHz QPSK	2.712	2.687	2.687	3.024	3	3
3MHz 16QAM	2.7	2.687	2.7	3	3.012	3
5MHz QPSK	4.52	4.5	4.52	4.98	4.98	4.96
5MHz 16QAM	4.52	4.54	4.52	5.02	5	5
10MHz QPSK	8.96	9	8.96	9.76	9.8	9.72
10MHz 16QAM	8.96	9	8.96	9.76	9.76	9.68
15MHz QPSK	13.5	13.5	13.62	14.82	15.06	15
15MHz 16QAM	13.56	13.5	13.56	14.94	14.88	15.06
20MHz QPSK	18	18	18	19.6	19.68	19.52
20MHz 16QAM	18	18	18	19.68	19.6	19.6

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, § 27.53:Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---

FCC §2.1055, §27.54: Frequency Stability

Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1710.958	1710.00	1779.058	1780
	-20	3.8	1710.957	1710.00	1779.044	1780
	-10	3.8	1710.959	1710.00	1779.053	1780
	0	3.8	1710.936	1710.00	1779.066	1780
	10	3.8	1710.947	1710.00	1779.065	1780
	20	3.8	1710.960	1710.00	1779.040	1780
	30	3.8	1710.941	1710.00	1779.049	1780
	40	3.8	1710.935	1710.00	1779.055	1780
	50	3.8	1710.937	1710.00	1779.051	1780
Frequency Stability vs. Voltage	20	3.5	1710.942	1710.00	1779.062	1780
	20	4.2	1710.947	1710.00	1779.052	1780
					Result:	Pass

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1710.953	1710.00	1779.144	1780
	-20	3.8	1710.959	1710.00	1779.136	1780
	-10	3.8	1710.931	1710.00	1779.121	1780
	0	3.8	1710.933	1710.00	1779.121	1780
	10	3.8	1710.935	1710.00	1779.121	1780
	20	3.8	1710.960	1710.00	1779.120	1780
	30	3.8	1710.951	1710.00	1779.141	1780
	40	3.8	1710.951	1710.00	1779.131	1780
	50	3.8	1710.941	1710.00	1779.142	1780
Frequency Stability vs. Voltage	20	3.5	1710.938	1710.00	1779.147	1780
	20	4.2	1710.948	1710.00	1779.130	1780
					Result:	Pass

Test Plots(Note: The 4.5dB is the Insertion loss of the RF cable, Power Splitter, which was offset into the Spectrum Analyzer):

