


Chip Antenna model: ANT5020R24001KM1**Application:**

Manufacturer: HEKANG ELECTRONICS CO.,LTD

Address: 1F C Buiding ORICO Internet Innovation Industrial Park,24th,tangjiao Road,
Changping Town,Dongguan City, Guangdong Province,China

Features

SMD, high reliability, ultra compact, Omni-directional...

**Part number**


ANT 5020 R 2400 1K M1
 (1) (2) (3) (4) (5)

(1) Size Code	5.0x2.0mm
(2) Packing	Tape and reel
(3) Frequency	2400MHz
(4) Packing Number	1K
(5) Code	M1

Electrical Specification

Working Frequency Range	2400~2484 MHz
Peak Gain	0.9 dBi (Typ.)
Impedance	50 Ohm
VSWR	2.5 (Max)
Polarization	Linear
Azimuth Beamwidth	Omni-directional
Operation Temperature(°C)	-40 ~85°C

The specification is defined on HEK EVB.


Dimension and Terminal Configuration

Dimension (mm)	
L	5.0+/-0.15
W	2.0+/-0.15
T	1.0+/-0.10
D	0.6+/-0.15



No.	Terminal Name
1	Feeding
2	Soldering

Evaluation Board Reference

PCB Dimension

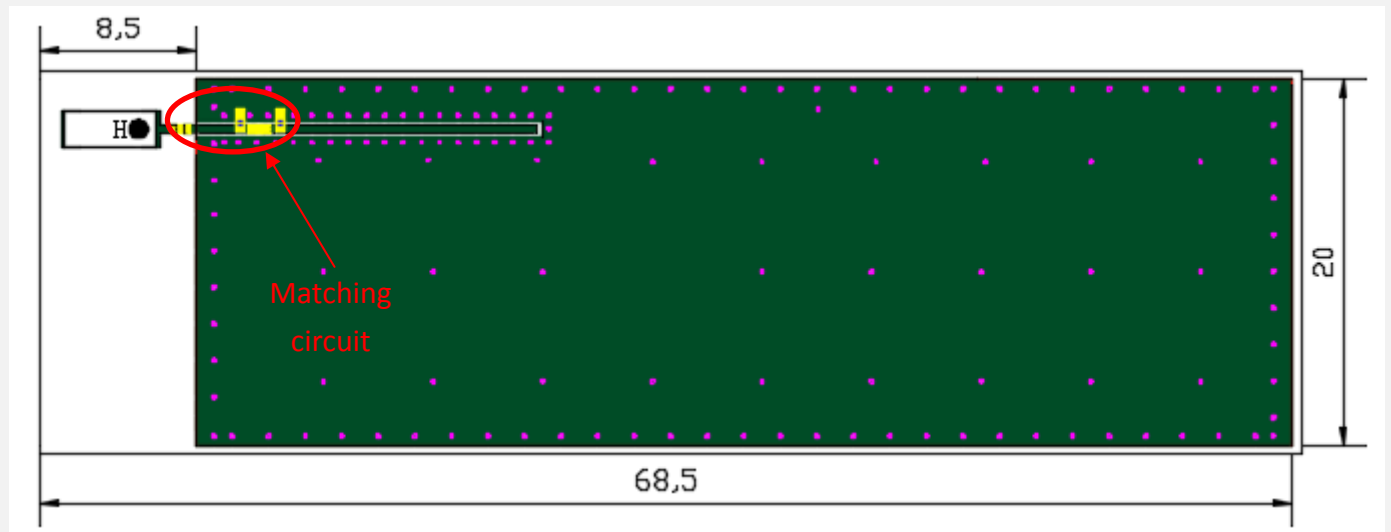

Antenna Layout Reference

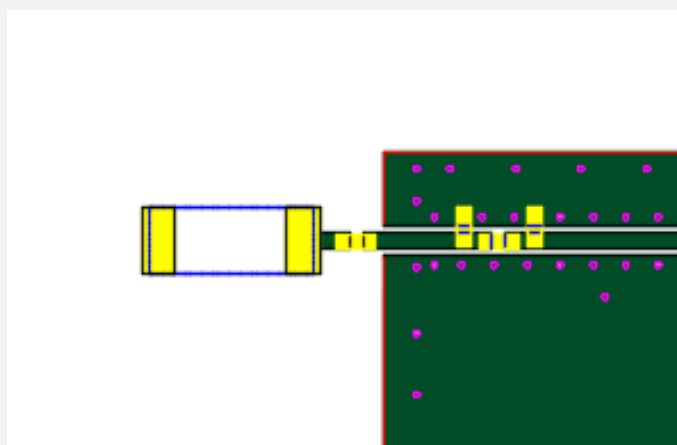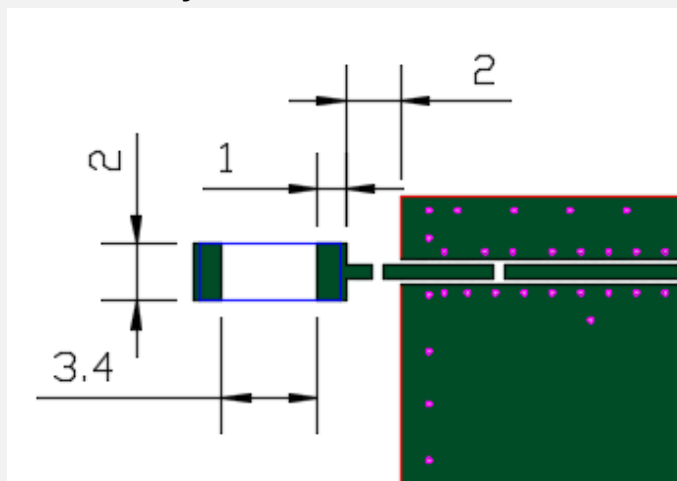

Unit : mm

 : Chip Antenna



 : Land Pattern

2.4GHz 5020 Chip Antenna: ANT5020R24001KM1


Electrical Characteristics

Return Loss & Radiation

VSWR&Efficiency

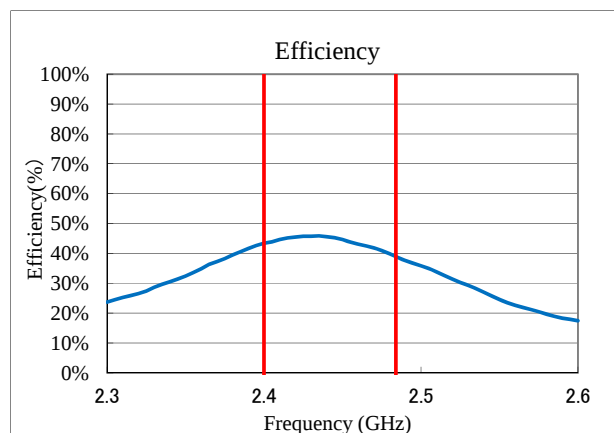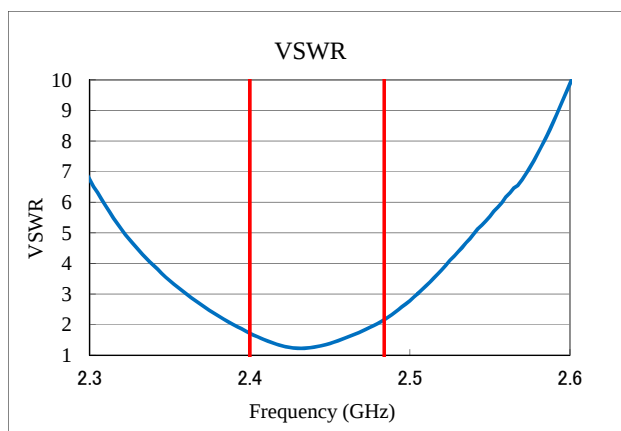


Radiation Pattern

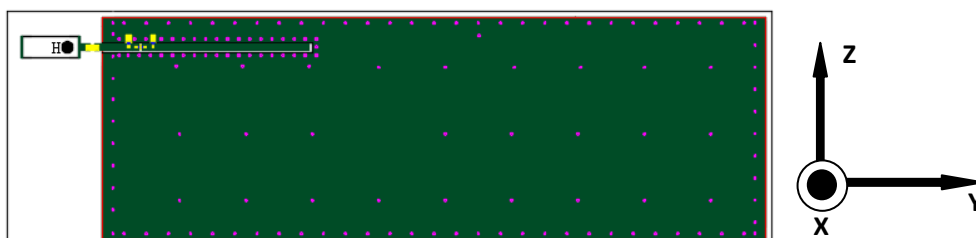


Frequency=2440MHz

ZX-Plane

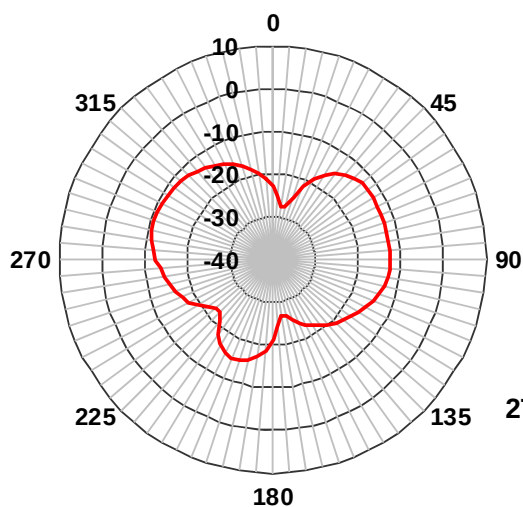


Horizontal Polarization


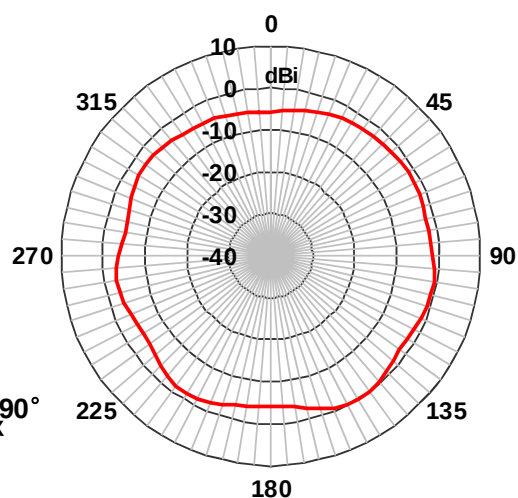


Vertical Polarization

ZY-Plane

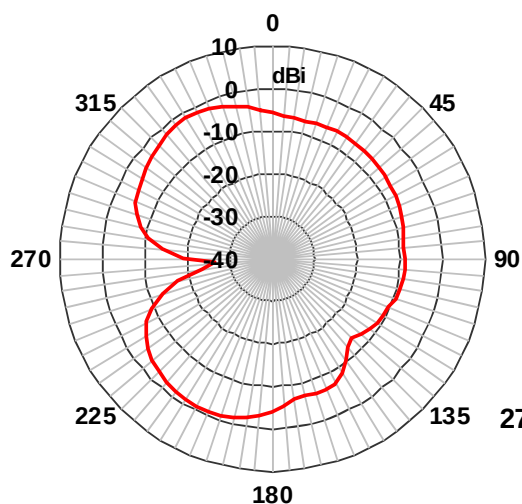


Horizontal Polarization

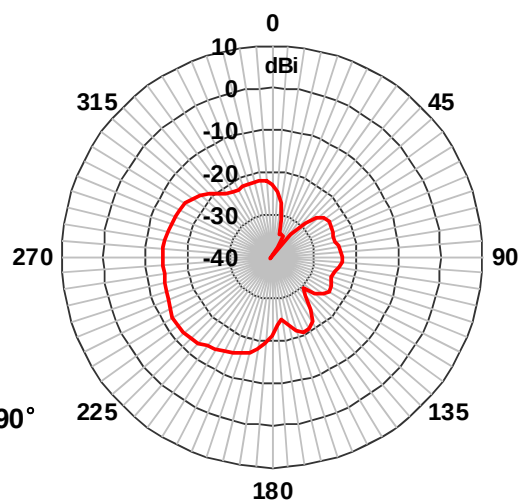



Vertical Polarization

XY-Plane

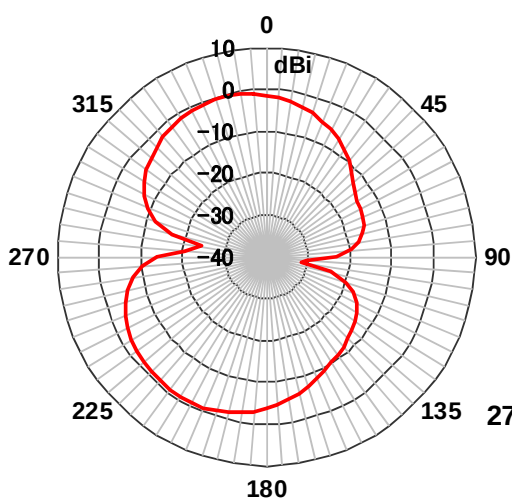

Horizontal Polarization

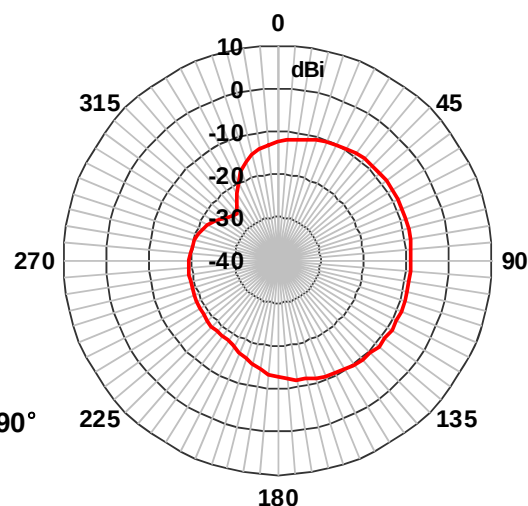


Vertical Polarization

2.4GHz 5020 Chip Antenna: ANT5020R24001KM1

Taping Specifications


Reel and Taping Specification

Reel Specification

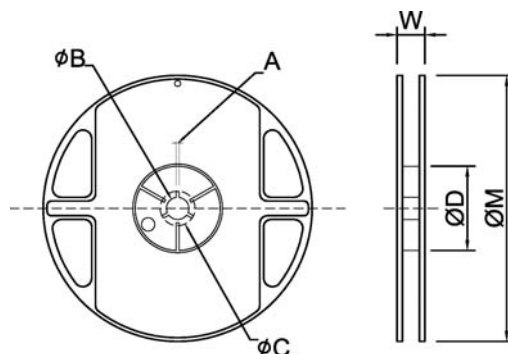

TYPE	SIZE		A	φ B	φ C	φ D	W	φ M
5020	7"	1K/Reel	2.0±0.5	13.0±1.0	21±1.0	60±1.0	16.5±2.0	178±2.0

Taping Specification

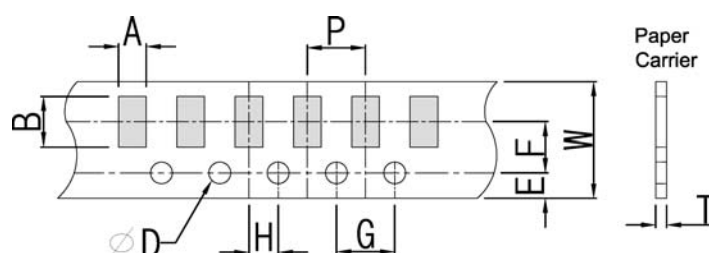


Packaging	Type	A	B	W	E	F	G	H	T	φD	P
Paper Type	5020	2.30±0.20	5.30±0.20	12.0±0.20	1.75±0.10	5.5±0.05	4.0±0.10	2.0±0.05	0.30±0.10	1.50 ^{+0.10} ₋₀	10±0.1

2.4GHz 5020 Chip Antenna: ANT5020R24001KM1

Recommended Reflow Profile

Pb free solder

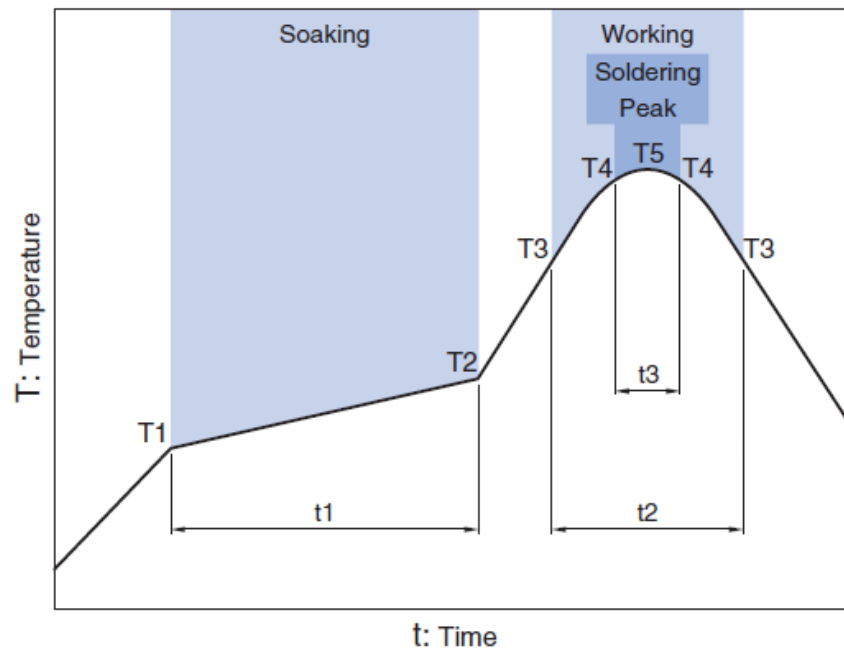

Soaking			Working		Soldering		Peak
Temp.		Time	Temp.	Time	Temp.	Time	Temp.
T1	T2	t1	T3	t2	T4	t3	T5
150°C	180°C	60 to 120sec	230°C	more than 30sec	247 to 253°C	within 10sec	260°C Max.