



TEST Report

Applicant: Dongguan MaiJia Intelligent Technology Co., Ltd.

Address of Applicant: Room 202,2F,Building A,No.2 Of ManYuan,
Hengtang,Tangxia,Dongguan,China

Manufacturer : Dongguan MaiJia Intelligent Technology Co., Ltd.

**Address of
Manufacturer :** Room 202,2F,Building A,No.2 Of ManYuan,
Hengtang,Tangxia,Dongguan,China

Equipment Under Test (EUT)

Product Name: Smart Fan-Speed Control

Model No.: US-FC-01

Series model: US-FC-02, US-FC-03, US-FC-04, US-FC-05

Trade Mark: N/A

FCC ID: 2ANJ7-USFC

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: Feb.24,2022

Date of Test: Feb.24,2022~Mar.02,2022

Date of report issued: Mar.02,2022

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.



Report No.: HTT202202301F01

1. Version

Version No.	Date	Description
00	Mar.02,2022	Original

Tested/ Prepared By Ervin Xu Date: Mar.02,2022
Project Engineer

Check By: Bruce Zhu Date: Mar.02,2022
Reviewer

Approved By : Kevin Yang Date: Mar.02,2022
Authorized Signature



2. Contents

Page

1. VERSION.....	2
2. CONTENTS.....	3
3. TEST SUMMARY.....	4
4. GENERAL INFORMATION.....	5
4.1. GENERAL DESCRIPTION OF EUT.....	5
4.2. TEST MODE.....	7
4.3. DESCRIPTION OF SUPPORT UNITS.....	7
4.4. DEVIATION FROM STANDARDS.....	7
4.5. ABNORMALITIES FROM STANDARD CONDITIONS.....	7
4.6. TEST FACILITY.....	7
4.7. TEST LOCATION.....	7
4.8. ADDITIONAL INSTRUCTIONS.....	7
5. TEST INSTRUMENTS LIST.....	8
6. TEST RESULTS AND MEASUREMENT DATA.....	9
6.1. CONDUCTED EMISSIONS.....	9
6.2. CONDUCTED PEAK OUTPUT POWER.....	12
6.3. CHANNEL BANDWIDTH.....	15
6.4. POWER SPECTRAL DENSITY.....	18
6.5. BAND EDGE.....	21
6.5.1. <i>Conducted Emission Method</i>	21
6.5.2. <i>Radiated Emission Method</i>	24
6.6. SPURIOUS EMISSION.....	26
6.6.1. <i>Conducted Emission Method</i>	26
6.6.2. <i>Radiated Emission Method</i>	31
7. TEST SETUP PHOTO.....	39
8. EUT CONSTRUCTIONAL DETAILS.....	39



3. Test Summary

Test Item	Section	Result
Antenna requirement	FCC part 15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	FCC part 15.207	Pass
Conducted Peak Output Power	FCC part 15.247 (b)(3)	Pass
Channel Bandwidth	FCC part 15.247 (a)(2)	Pass
Power Spectral Density	FCC part 15.247 (e)	Pass
Band Edge	FCC part 15.247(d)	Pass
Spurious Emission	FCC part 15.205/15.209	Pass

Remark: Test according to ANSI C63.10:2013 and RSS-Gen

Pass: The EUT complies with the essential requirements in the standard.

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	3.45 dB	(1)
Radiated Emission	1~6GHz	3.54 dB	(1)
Radiated Emission	6~40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.66 dB	(1)
Channel Bandwidth	$\pm 3\%$		(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.



4. General Information

4.1. General Description of EUT

Product Name:	Smart Fan-Speed Control
Model No.:	US-FC-01
Series model:	US-FC-02, US-FC-03, US-FC-04, US-FC-05
Test sample(s) ID:	HTT202202104-1(Engineer sample) HTT202202104-2(Normal sample)
Channel numbers:	802.11b/802.11g /802.11n(HT20): 11 802.11n(HT40):7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/802.11n(H20)/802.11n(HT40): Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	PCB Antenna
Antenna gain:	0 dBi
Power supply:	AC 120V,1A,120W



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz



4.2. Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

4.3. Description of Support Units

None.

4.4. Deviation from Standards

None.

4.5. Abnormalities from Standard Conditions

None.

4.6. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 779513 Designation Number: CN1319

Shenzhen HTT Technology Co.,Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6435.01

Shenzhen HTT Technology Co.,Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

4.7. Test Location

All tests were performed at:

Shenzhen HTT Technology Co.,Ltd.

1F, Building B, Huafeng International Robotics Industrial Park, Hangcheng Road,Nanchang Community, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China

Tel: 0755-23595200

Fax: 0755-23595201

4.8. Additional Instructions

Test Software	Special AT test command provided by manufacturer to Keep the EUT in continuously transmitting mode and hopping mode
Power level setup	Default




5. Test Instruments list

Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	Shenzhen C.R.T technology co., LTD	9*6*6	HTT-E028	Aug. 10 2020	Aug. 09 2024
2	Control Room	Shenzhen C.R.T technology co., LTD	4.8*3.5*3.0	HTT-E030	Aug. 10 2020	Aug. 09 2024
3	EMI Test Receiver	Rohde&Schwar	ESCI7	HTT-E022	May 21 2021	May 20 2022
4	Spectrum Analyzer	Rohde&Schwar	FSP	HTT-E037	May 21 2021	May 20 2022
5	Coaxial Cable	ZDecl	ZT26-NJ-NJ-0.6M	HTT-E018	May 21 2021	May 20 2022
6	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-2M	HTT-E019	May 21 2021	May 20 2022
7	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-0.6M	HTT-E020	May 21 2021	May 20 2022
8	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-8.5M	HTT-E021	May 21 2021	May 20 2022
9	Composite logarithmic antenna	Schwarzbeck	VULB 9168	HTT-E017	Aug. 22 2021	Aug. 21 2022
10	Horn Antenna	Schwarzbeck	BBHA9120D	HTT-E016	Aug. 22 2021	Aug. 21 2022
11	Loop Antenna	Zhinan	ZN30900C	HTT-E039	Aug. 22 2021	Aug. 21 2022
12	Horn Antenna	Beijing Hangwei Dayang	OBH100400	HTT-E040	Aug. 22 2021	Aug. 21 2022
13	low frequency Amplifier	Sonoma Instrument	310	HTT-E015	May 21 2021	May 20 2022
14	high-frequency Amplifier	HP	8449B	HTT-E014	May 21 2021	May 20 2022
15	Variable frequency power supply	Shenzhen Anbiao Instrument Co., Ltd	ANB-10VA	HTT-082	May 21 2021	May 20 2022
16	EMI Test Receiver	Rohde & Schwarz	ESCS30	HTT-E004	May 21 2021	May 20 2022
17	Artificial Mains	Rohde & Schwarz	ESH3-Z5	HTT-E006	May 21 2021	May 20 2022
18	Artificial Mains	Rohde & Schwarz	ENV-216	HTT-E038	May 21 2021	May 20 2022
19	Cable Line	Robinson	Z302S-NJ-BNCJ-1.5M	HTT-E001	May 21 2021	May 20 2022
20	Attenuator	Robinson	6810.17A	HTT-E007	May 21 2021	May 20 2022
21	Variable frequency power supply	Shenzhen Yanghong Electric Co., Ltd	YF-650 (5KVA)	HTT-E032	May 21 2021	May 20 2022
22	Control Room	Shenzhen C.R.T technology co., LTD	8*4*3.5	HTT-E029	May 21 2021	May 20 2022
23	DC power supply	Agilent	E3632A	HTT-E023	May 21 2021	May 20 2022
24	EMI Test Receiver	Agilent	N9020A	HTT-E024	May 21 2021	May 20 2022
25	Analog signal generator	Agilent	N5181A	HTT-E025	May 21 2021	May 20 2022
26	Vector signal generator	Agilent	N5182A	HTT-E026	May 21 2021	May 20 2022
27	Power sensor	Keysight	U2021XA	HTT-E027	May 21 2021	May 20 2022
28	Temperature and humidity meter	Shenzhen Anbiao Instrument Co., Ltd	TH10R	HTT-074	May 21 2021	May 20 2022
29	Radiated Emission Test Software	Farad	EZ-EMC	N/A	N/A	N/A
30	Conducted Emission Test Software	Farad	EZ-EMC	N/A	N/A	N/A
31	RF Test Software	panshanrf	TST	N/A	N/A	N/A

6. Test results and Measurement Data

6.1. Conducted Emissions

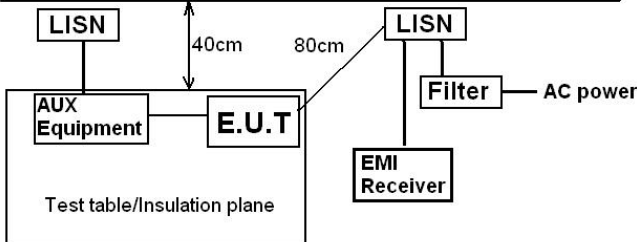
Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	5-30		60		50	
* Decreases with the logarithm of the frequency.						
Test setup:	Reference Plane  Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m					
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.




Measurement data:

Line:

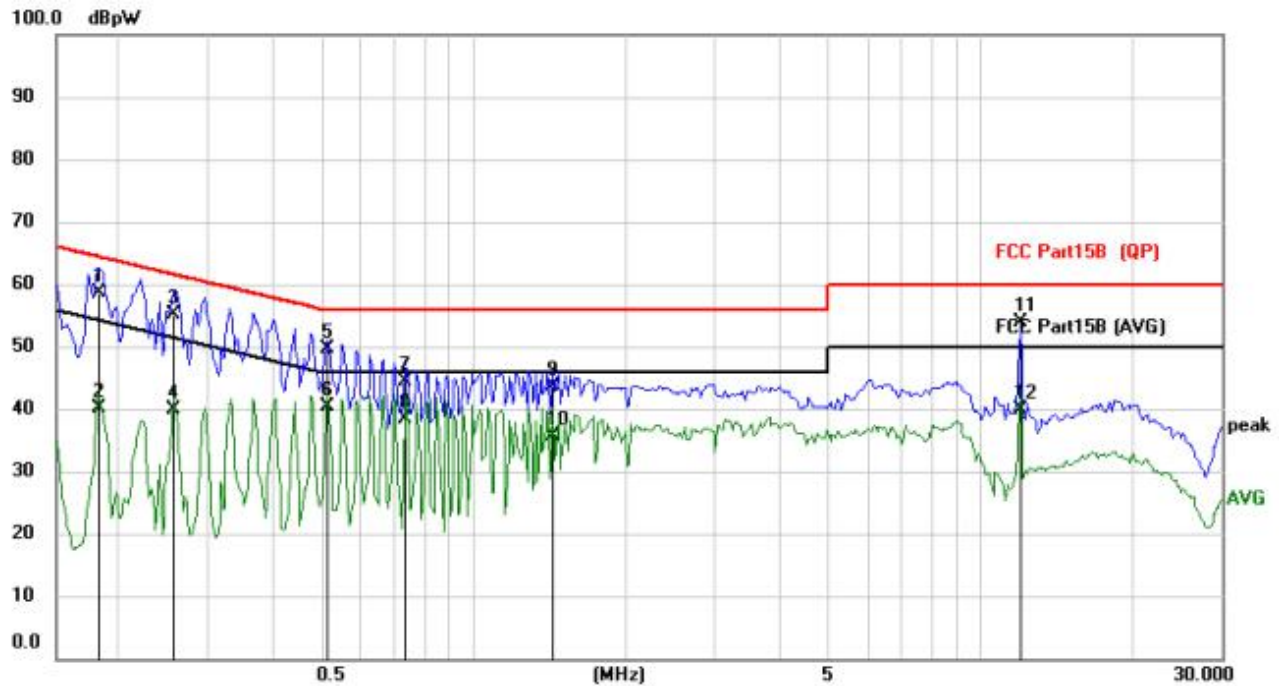

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
		MHz	Level	Factor	ment		
			dBpW	dB	dBpW	dBpW	dB
1		0.1825	48.27	10.39	58.66	64.37	-5.71
2		0.1825	29.85	10.39	40.24	54.37	-14.13
3		0.2562	44.63	10.40	55.03	61.55	-6.52
4		0.2562	29.51	10.40	39.91	51.55	-11.64
5		0.5166	39.24	10.48	49.72	56.00	-6.28
6	*	0.5166	29.83	10.48	40.31	46.00	-5.69
7		0.7350	33.61	10.77	44.38	56.00	-11.62
8		0.7350	27.52	10.77	38.29	46.00	-7.71
9		1.4370	32.64	10.87	43.51	56.00	-12.49
10		1.4370	24.64	10.87	35.51	46.00	-10.49
11		12.0090	42.15	11.74	53.89	60.00	-6.11
12		12.0090	28.21	11.74	39.95	50.00	-10.05

Neutral:

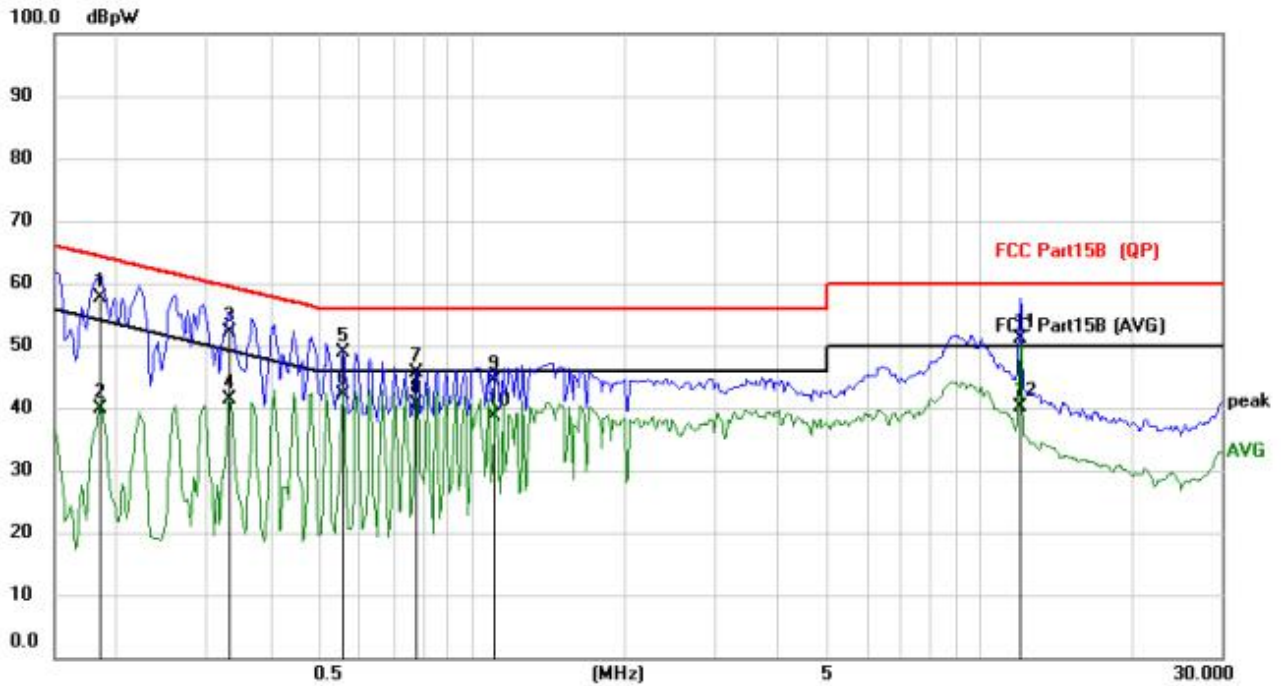


No.	Mk.	Freq. MHz	Reading Level dBpW	Correct Factor dB	Measure- ment dBpW	Limit dBpW	Over dB	Detector
1		0.1850	47.50	10.22	57.72	64.26	-6.54	QP
2		0.1850	29.55	10.22	39.77	54.26	-14.49	AVG
3		0.3333	41.87	10.26	52.13	59.37	-7.24	QP
4		0.3333	31.02	10.26	41.28	49.37	-8.09	AVG
5		0.5556	38.33	10.44	48.77	56.00	-7.23	QP
6	*	0.5556	31.76	10.44	42.20	46.00	-3.80	AVG
7		0.7779	34.90	10.69	45.59	56.00	-10.41	QP
8		0.7779	29.95	10.69	40.64	46.00	-5.36	AVG
9		1.1094	33.50	10.80	44.30	56.00	-11.70	QP
10		1.1094	27.75	10.80	38.55	46.00	-7.45	AVG
11		12.0441	39.42	11.78	51.20	60.00	-8.80	QP
12		12.0441	28.24	11.78	40.02	50.00	-9.98	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Los



6.2. Conducted Peak Output Power

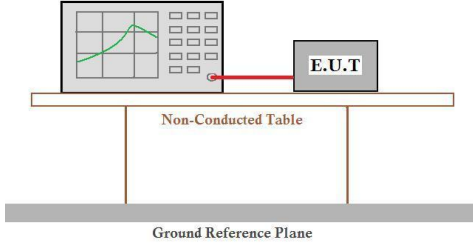Test Requirement:	FCC Part15 C Section 15.247 (b)(3)					
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02					
Limit:	30dBm					
Test setup:	Power sensor and Spectrum analyzer  Non-Conducted Table Ground Reference Plane					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data



Test CH	Peak Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	20.74	20.45	21.56	21.91	30.00	Pass
Middle	20.26	20.42	20.69	21.71		
Highest	20.12	19.93	19.35	21.55		





Report No.: HTT202202301F01

Test plot as follows:



802.11b	802.11g
---------	---------

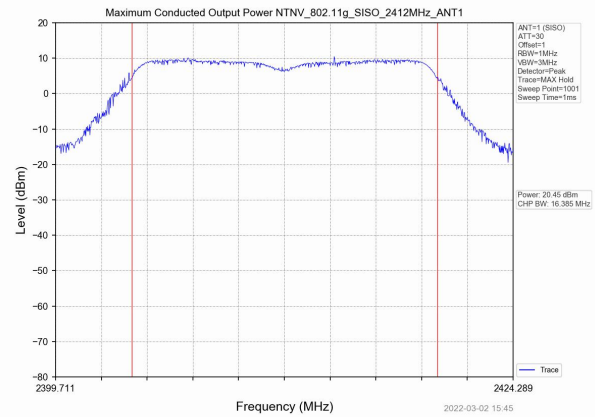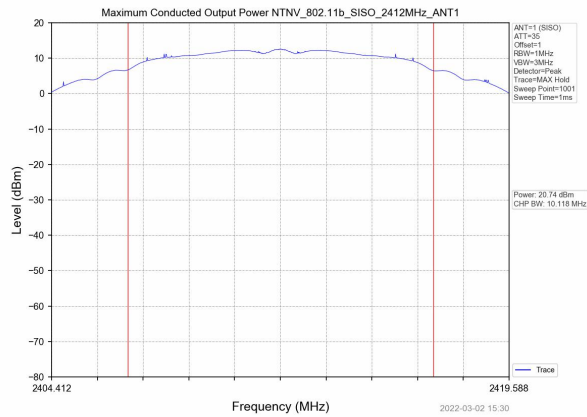

Lowest channel

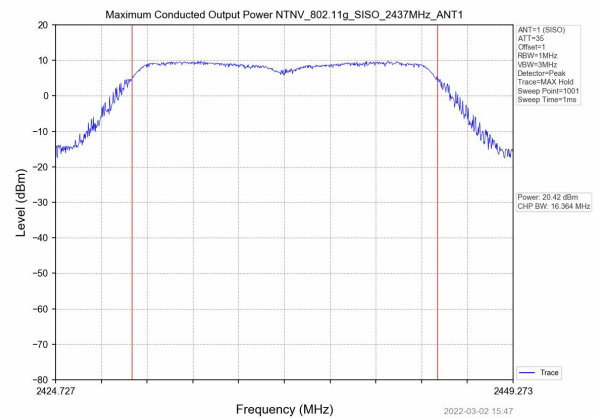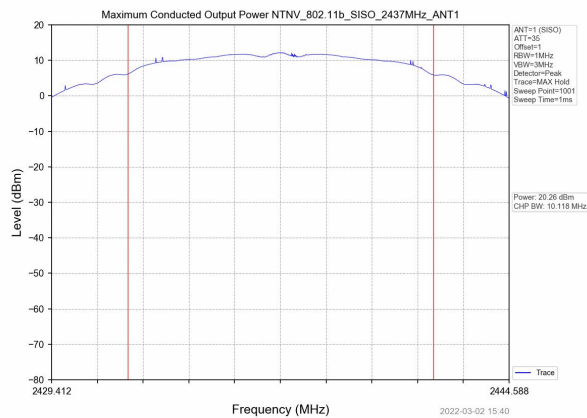

Middle channel

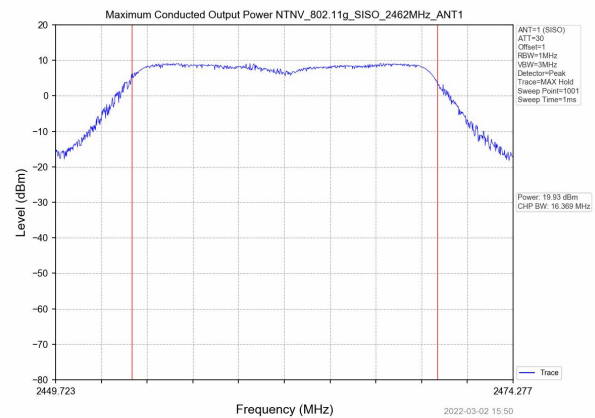
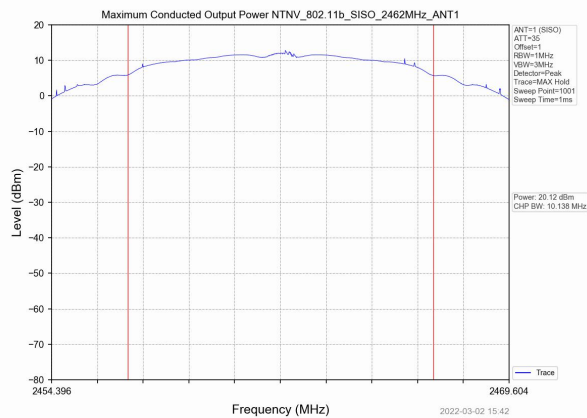


Highest channel





Report No.: HTT202202301F01



802.11n(HT20)	802.11n(HT40)
---------------	---------------

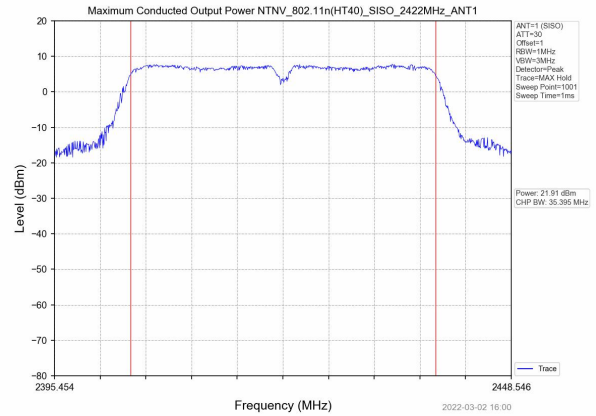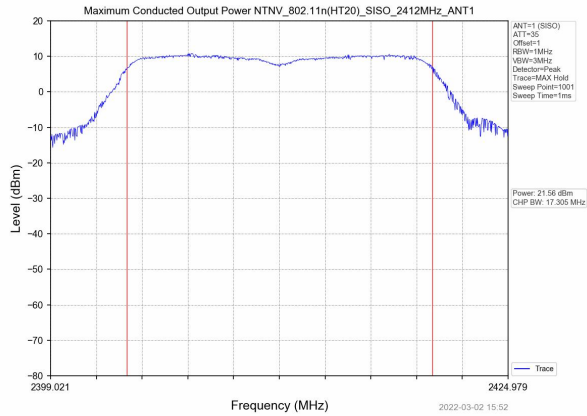

Lowest channel

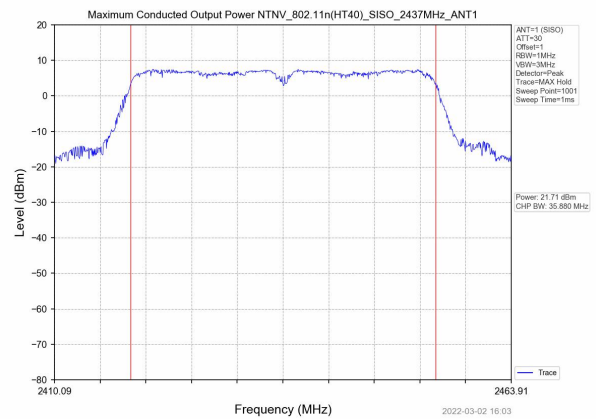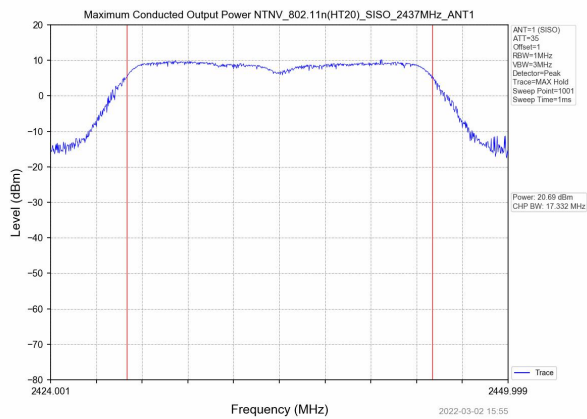


Middle channel

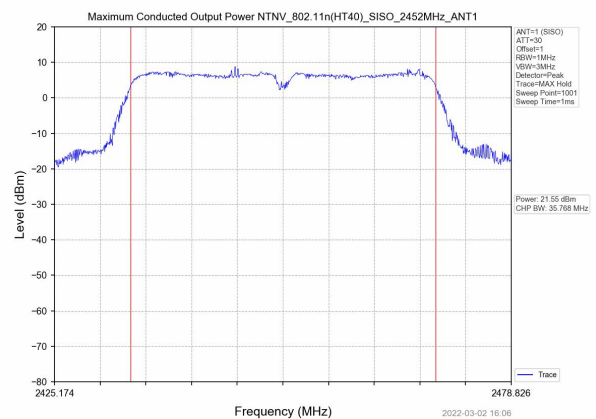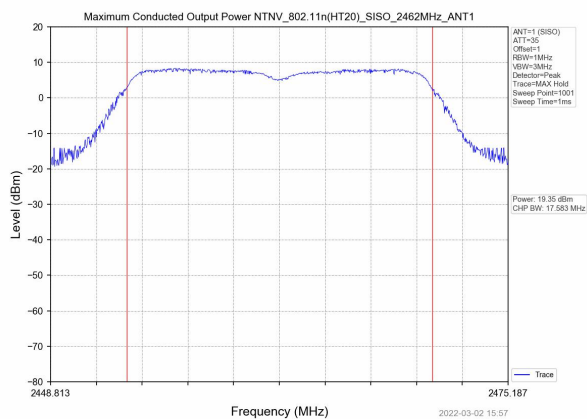

Highest channel

6.3. Channel Bandwidth

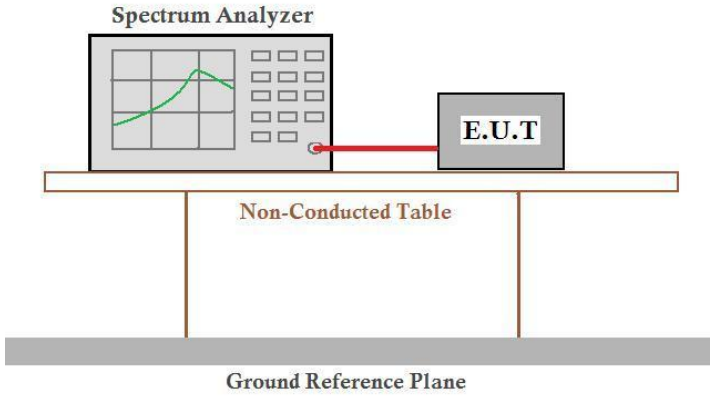Test Requirement:	FCC Part15 C Section 15.247 (a)(2)					
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02					
Limit:	>500KHz					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data



Test CH	Channel Bandwidth (MHz)				Limit(KHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	10.118	16.385	17.305	35.395	>500	Pass
Middle	10.118	16.364	17.332	35.880		
Highest	10.138	16.369	17.583	35.768		





Report No.: HTT202202301F01

Test plot as follows:



802.11b	802.11g
---------	---------

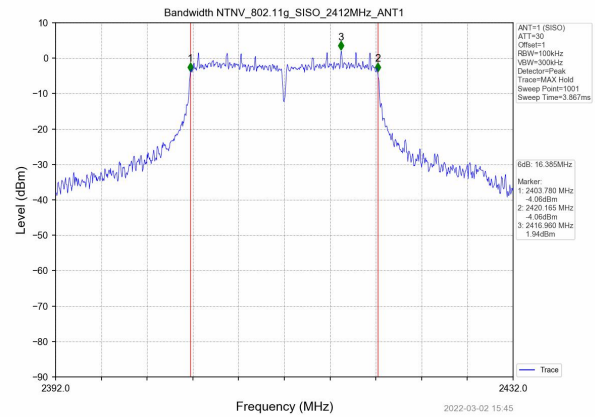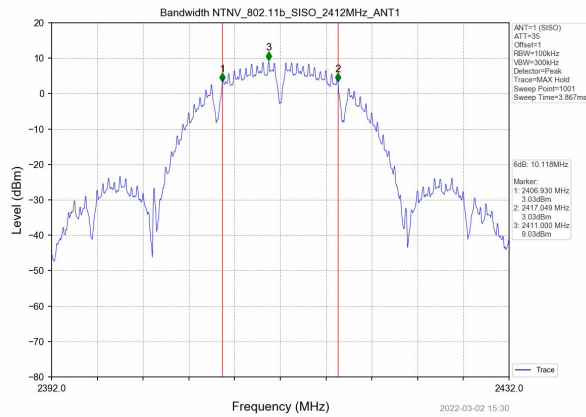

Lowest channel

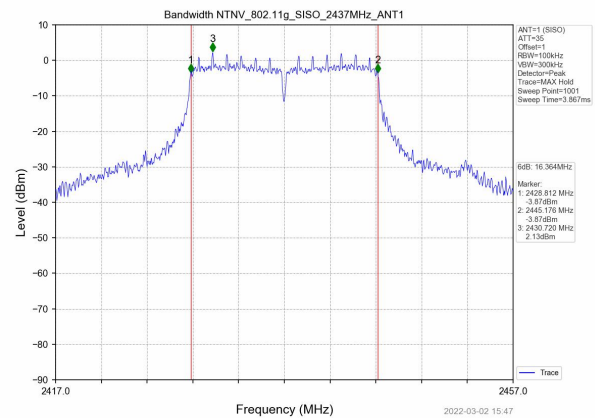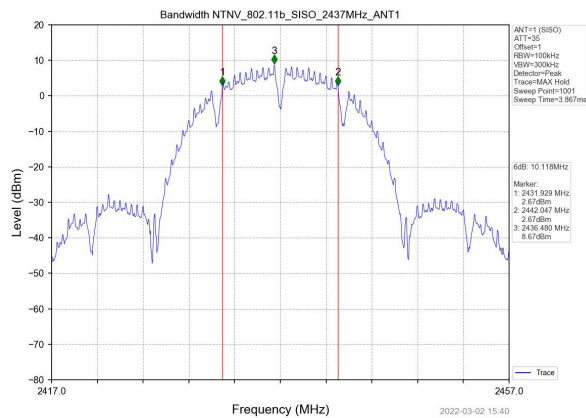

Middle channel

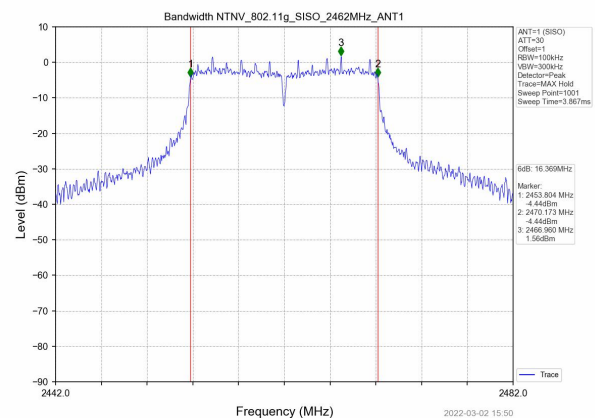
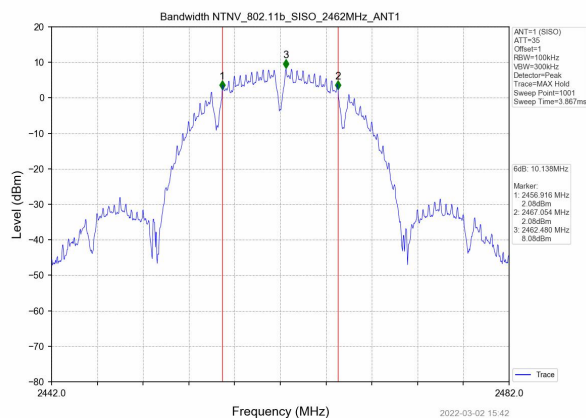


Highest channel





Report No.: HTT202202301F01



802.11n(HT20)	802.11n(HT40)
---------------	---------------

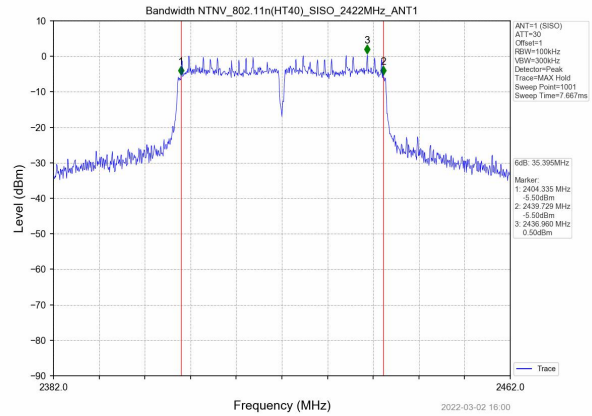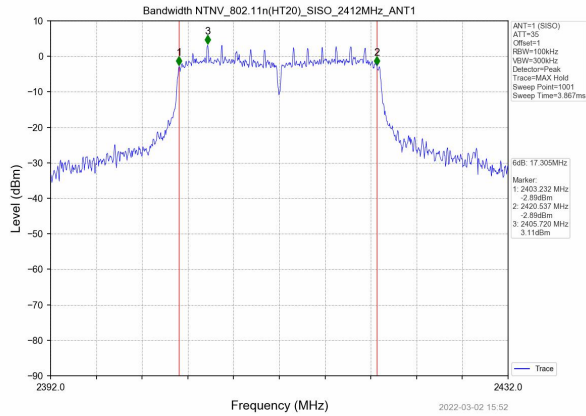

Lowest channel

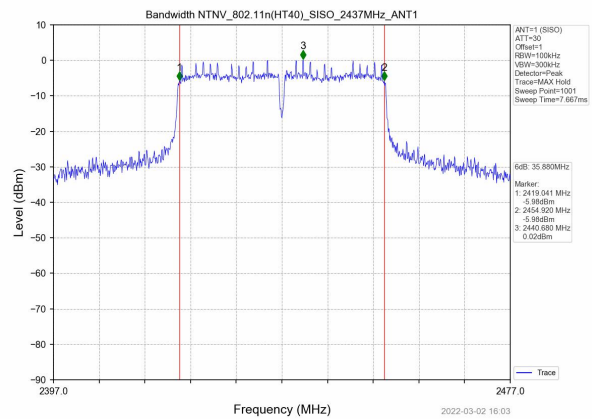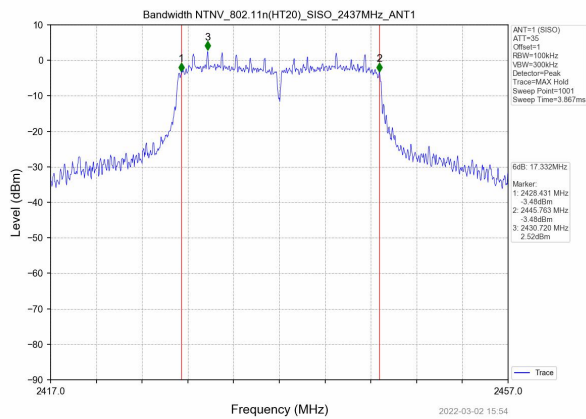


Middle channel

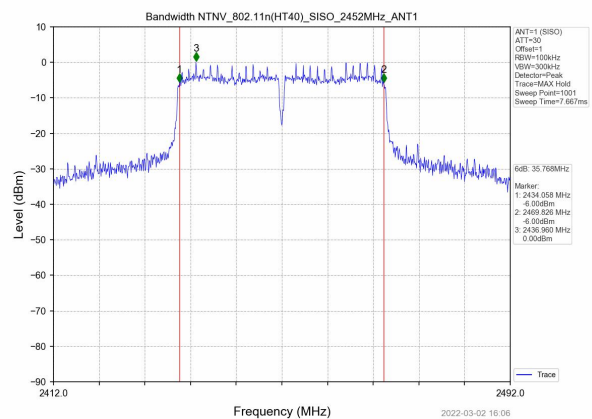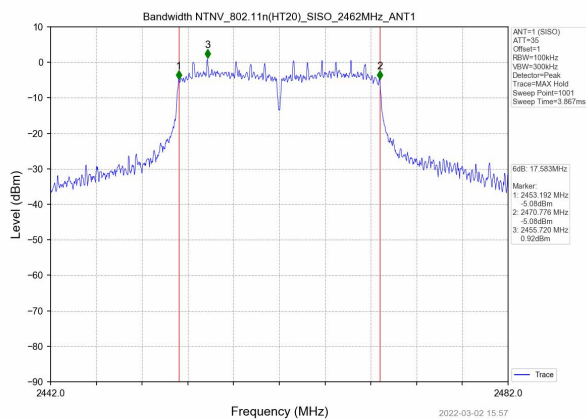

Highest channel

6.4. Power Spectral Density

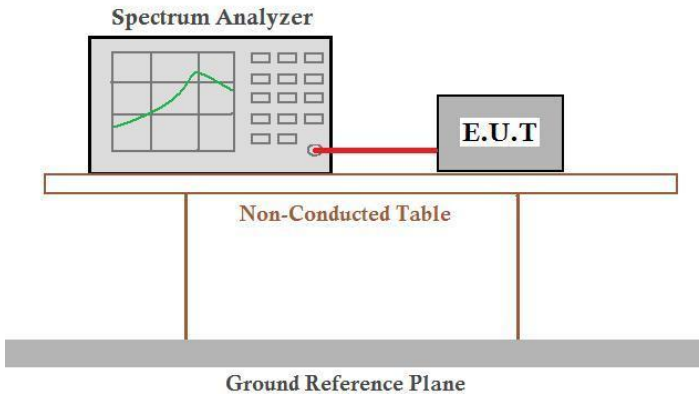Test Requirement:	FCC Part15 C Section 15.247 (e)					
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02					
Limit:	8dBm/3kHz					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Measurement Data



Test CH	Power Spectral Density (dBm/3kHz)				Limit (dBm/3kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	-4.26	-11.01	-10.76	-13.96	8.00	Pass
Middle	-5.53	-11.45	-11.30	-14.33		
Highest	-5.37	-12.85	-13.71	-14.45		

Remark: We have tested all mode at high, middle and low channel, and recorded worst case at middle





Test plot as follows:



802.11b	802.11g
---------	---------

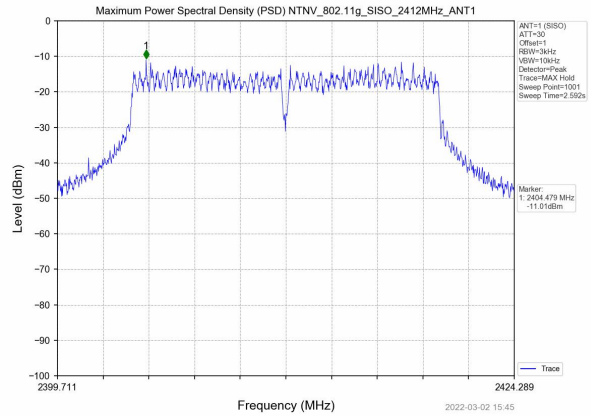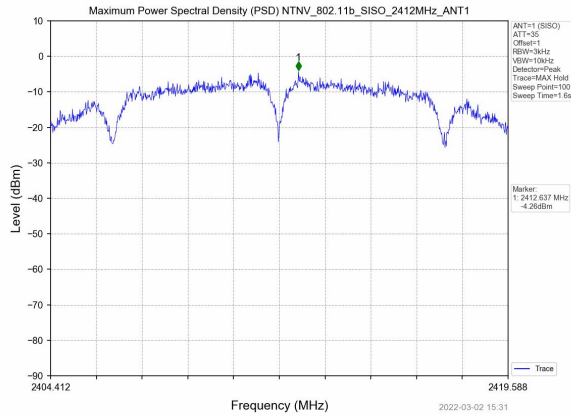

Lowest channel

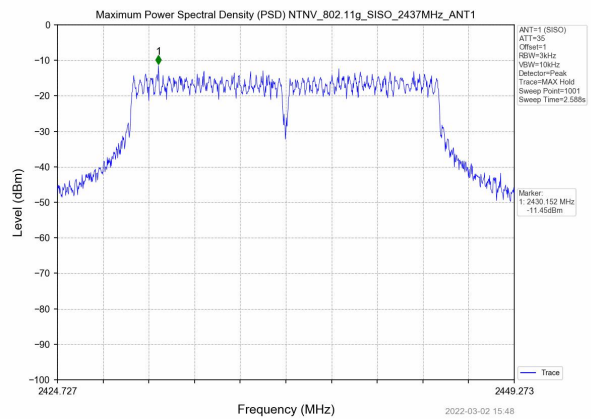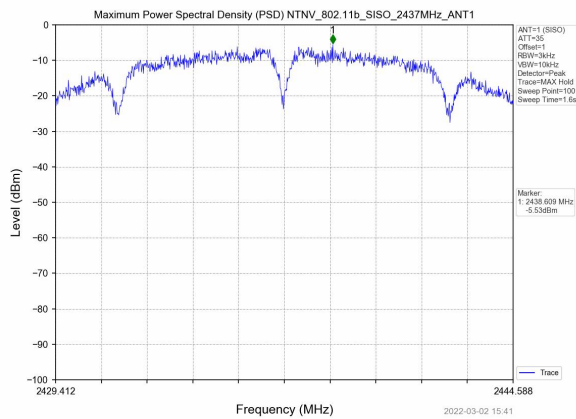

Middle channel

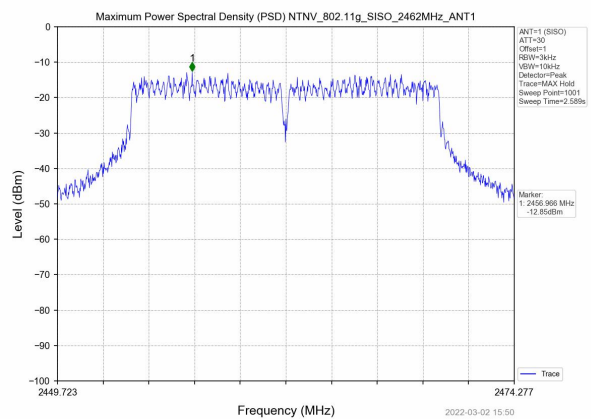
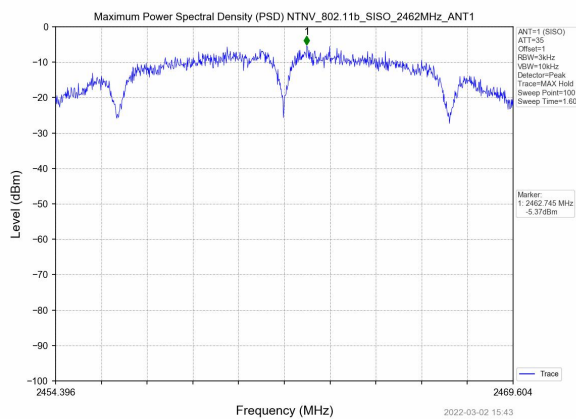


Highest channel





Report No.: HTT202202301F01



802.11n(HT20)	802.11n(HT40)
---------------	---------------

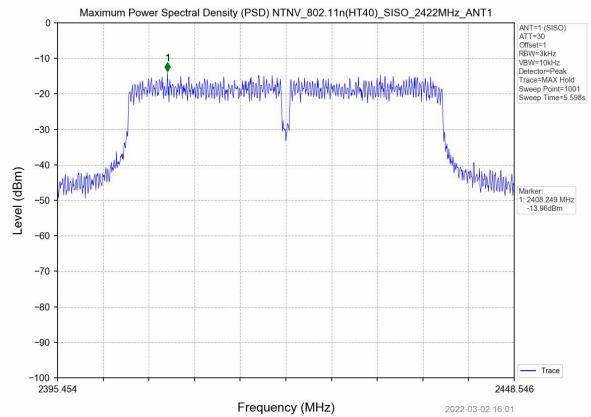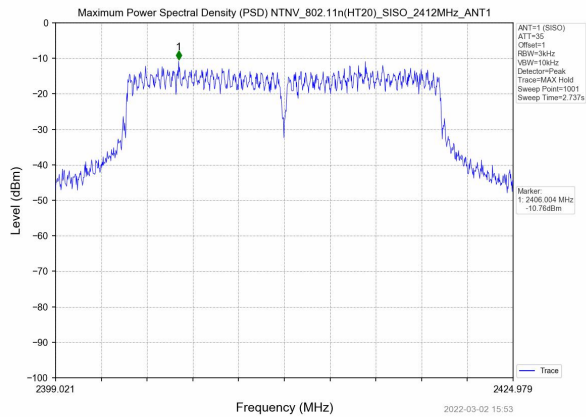

Lowest channel

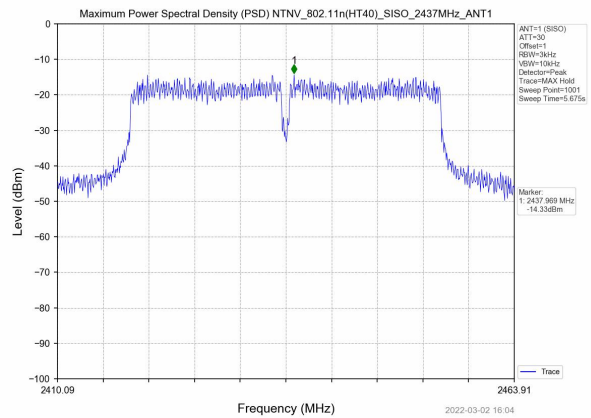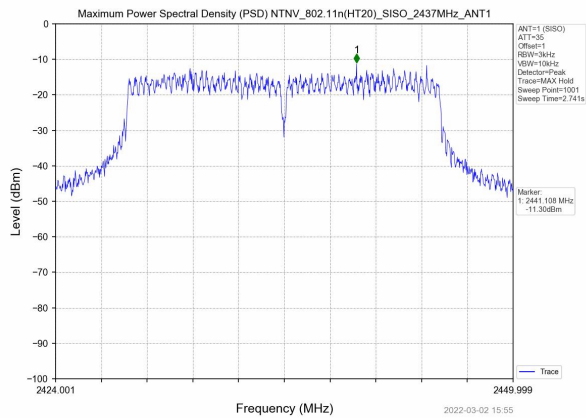

Middle channel

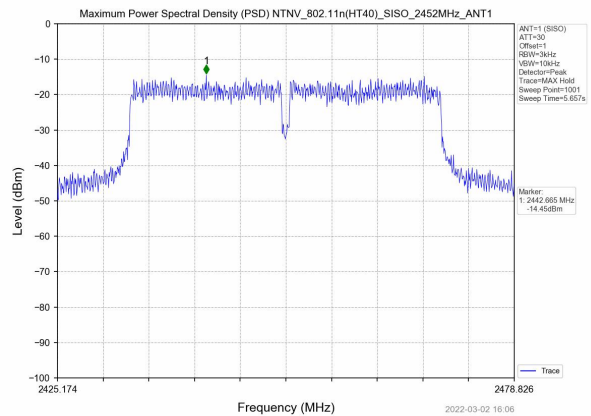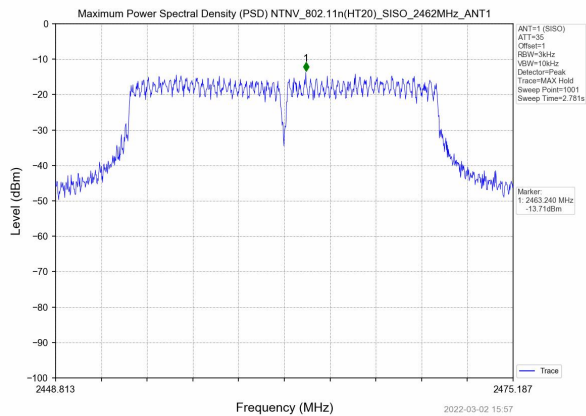

Highest channel