

## TEST REPORT

**Report Number: 21100134HKG-003**

Thomas & Darden Inc.

Application for Original Grant of 47 CFR Part 15 Certification

This report contains the data of 5GHz WLAN (WiFi) portion only.

**FCC ID: 2ANJG-KS400**

**Prepared and Checked by:**

Signed On File  
Chan Hin Man, Oscar  
Assistant Engineer

**Approved by:**

Wong Kwok Yeung, Kenneth  
Assistant Supervisor  
Date: June 20, 2022

**TEST REPORT****GENERAL INFORMATION**

<b>Applicant Name:</b>	Thomas & Darden Inc.
<b>Applicant Address:</b>	9101 Burning Tree Rd, Bethesda, MD 20817
<b>Specification Standard:</b>	FCC Part 15, October 1, 2020 Edition
<b>FCC ID:</b>	2ANJG-KS400
<b>Model:</b>	KS400B
<b>Additional Model:</b>	KS400W
<b>Type of EUT:</b>	Unlicensed National Information Infrastructure Transmitter
<b>Description of EUT:</b>	Wi-Fi, Bluetooth, Aux-in Speaker
<b>Serial Number:</b>	N/A
<b>Sample Receipt Date:</b>	October 06, 2021
<b>Date of Test:</b>	March 25, 2022 to June 16, 2022
<b>Report Date:</b>	June 20, 2022
<b>Environmental Conditions:</b>	Temperature: +10 to 40°C Humidity: 10 to 90%
<b>Conclusion:</b>	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 Certification.

**TEST REPORT****TABLE OF CONTENTS**

<b>1.0 Test Results Summary &amp; Statement of Compliance</b> .....	4
1.1 Summary of Test Results.....	4
1.2 Statement of Compliance .....	4
<b>2.0 General Description</b> .....	5
2.1 Product Description.....	5
2.2 Test Methodology .....	7
2.3 Test Facility.....	7
2.4 Related Submittal(s) Grants.....	7
<b>3.0 System Test Configuration</b> .....	8
3.1 Justification .....	8
3.2 EUT Exercising Software.....	9
3.3 Details of EUT and Description of Accessories.....	10
3.4 Measurement Uncertainty .....	10
<b>4.0 Test Results</b> .....	11
4.1 Maximum Conducted Output Power at Antenna Terminals.....	11
4.2 Minimum 6dB RF Bandwidth.....	15
4.3 Maximum Power Spectral Density .....	18
4.5 Field Strength Calculation.....	23
4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions .....	24
4.6.1 Radiated Emission Configuration Photograph .....	24
4.6.2 Radiated Emission Data .....	24
4.6.3 Radiated Emission Test Setup.....	54
4.7 AC Power Line Conducted Emission .....	55
4.7.1 AC Power Line Conducted Emission Configuration Photograph .....	55
4.7.2 AC Power Line Conducted Emission Data .....	55
4.7.3 Conducted Emission Test Setup.....	58
4.8 Frequency Stability requirement .....	59
4.9 U-NII1 99% Bandwidth Requirement .....	59
4.10 DFS Channel Shutdown and Non-occupancy period. ....	60
<b>5.0 Equipment List</b> .....	74

**TEST REPORT****1.0 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE****1.1 Summary of Test Results**

Test Items	Fcc Part 15 Section	Results	Details See Section
Antenna Requirement	15.407(a)	Pass	2.1
Max. Conducted Output Power (Peak)	15.407(a)	Pass	4.1
Transmit Power Control (TPC)	15.407(h)	N/A	See Remark
Min. 6dB RF Bandwidth	15.407(e)	Pass	4.2
26 dB emission bandwidth	15.407(a)	Pass	4.3
Occupied Bandwidth	N/A	Pass	4.3
Max. Power Density (average)	15.407(a)	Pass	4.4
Radiated Emission in Restricted Bands and Spurious Emissions	15.407(b), 15.209 & 15.109	Pass	4.5
AC Power Line Conducted Emission	15.207 & 15.107	Pass	4.7
Dynamic Frequency Selection(DFS)	15.407	Pass	4.8

Remark: not applicable if the EUT is <500mW (27dBm)

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

**1.2 Statement of Compliance**

The equipment under test is found to be complying with the following standard:

FCC Part 15, October 1, 2020 Edition

## TEST REPORT

### 2.0 GENERAL DESCRIPTION

#### 2.1 Product Description

The Equipment Under Test (EUT) that is a WiFi, Bluetooth Speaker. The EUT is powered by 100-240VAC, 50-60Hz and equipped with internal rechargeable battery. The EUT can support Bluetooth (FHSS) mode, Bluetooth 5.2 BLE mode, 2.4GHz WiFi mode and 5.0GHz WiFi mode.

The Model: KS400W is the same as the Model: KS400B in hardware aspect as declared by client. The difference in model number serves as marketing strategy as declared by client. The models are different in color only as declared by client.

#### For 5.15GHz to 5.25GHz Band:

The module operates at Frequency range of 5.18GHz to 5.24GHz.

- For 802.11a mode, it operates at frequency range of 5.18GHz to 5.24GHz with 4 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to 54Mbps.
- For 802.11n mode (20 MHz Bandwidth), it operates at frequency range of 5.18GHz to 5.24GHz with 4 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS7 65Mbps.
- For 802.11n mode (40 MHz Bandwidth), it operates at frequency range of 5.19GHz to 5.23GHz with 2 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS7 135Mbps.
- For 802.11ac mode (20 MHz Bandwidth), it operates at frequency range of 5.18GHz to 5.24GHz with 4 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS8 78Mbps.
- For 802.11ac mode (40 MHz Bandwidth), it operates at frequency range of 5.18GHz to 5.24GHz with 2 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS9 162Mbps.
- For 802.11ac mode (80 MHz Bandwidth), it operates at 5.21GHz with 1 channel. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS9 390 Mbps.

#### For 5.25GHz to 5.35GHz Band:

The module operates at Frequency range of 5.26GHz to 5.32GHz.

- For 802.11a mode, it operates at frequency range of 5.26GHz to 5.32GHz with 4 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to 54Mbps.
- For 802.11n mode (20 MHz Bandwidth), it operates at frequency range of 5.26GHz to 5.32GHz with 4 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS7 65Mbps.

## TEST REPORT

- For 802.11n mode (40 MHz Bandwidth), it operates at frequency range of 5.27GHz to 5.32GHz with 2 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS7 135Mbps.
- For 802.11ac mode (20 MHz Bandwidth), it operates at frequency range of 5.26GHz to 5.32GHz with 4 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS8 78Mbps.
- For 802.11ac mode (40 MHz Bandwidth), it operates at frequency range of 5.27GHz to 5.31GHz with 2 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS9 162 Mbps.
- For 802.11ac mode (80 MHz Bandwidth), it operates at 5.29GHz with 1 channel. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS9 390 Mbps.

### For 5.47GHz to 5.725GHz Band:

The module operates at Frequency range of 5.5GHz to 5.7GHz.

- For 802.11a mode, it operates at frequency range of 5.5GHz to 5.7GHz with 11 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to 54Mbps.
- For 802.11n mode (20 MHz Bandwidth), it operates at frequency range of 5.5GHz to 5.7GHz with 11 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS7 65Mbps.
- For 802.11n mode (40 MHz Bandwidth), it operates at frequency range of 5.51GHz to 5.67GHz with 5 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS7 135Mbps.
- For 802.11ac mode (20 MHz Bandwidth), it operates at frequency range of 5.5GHz to 5.7GHz with 11 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS8 78Mbps.
- For 802.11ac mode (40 MHz Bandwidth), it operates at frequency range of 5.51GHz to 5.67GHz with 5 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS9 162 Mbps.
- For 802.11ac mode (80 MHz Bandwidth), it operates at 5.53GHz to 5.61GHz with 2 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS9 390 Mbps.

### For 5.725GHz to 5.85GHz Band:

The module operates at Frequency range of 5.745GHz to 5.825GHz.

- For 802.11a mode, it operates at frequency range of 5.745GHz to 5.825GHz with 5 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to 54Mbps.

## TEST REPORT

- For 802.11n mode (20 MHz Bandwidth), it operates at frequency range of 5.745GHz to 5.825GHz with 5 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS7 65Mbps.
- For 802.11n mode (40 MHz Bandwidth), it operates at frequency range of 5.755GHz to 5.795GHz with 2 channels. It transmits via OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS7 135Mbps.
- For 802.11ac mode (20 MHz Bandwidth), it operates at frequency range of 5.745GHz to 5.825GHz with 5 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS8 78Mbps.
- For 802.11ac mode (40 MHz Bandwidth), it operates at frequency range of 5.755GHz to 5.795GHz with 2 channels. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS9 162 Mbps.
- For 802.11ac mode (80 MHz Bandwidth), it operates at 5775MHz with 1 channel. It transmits via OFDM/256-QAM, OFDM/64-QAM, 16-QAM, QPSK and BPSK. Maximum bit rate can be up to MCS9 390 Mbps.

### Antenna Information:

- PCB Antenna
- WLAN 802.11 a/b/g/n/ac
- For operating frequency of 2.4GHz , antenna has maximum gain of 2.55 dBi
- For operating frequency of 5GHz , antenna has maximum gain of 2.82 dBi

### 2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication KDB558074 D01 v05r01 (11-Feb-2019). All other measurements were made in accordance with the procedures in 47 CFR Part 2.

### 2.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been fully placed on file with the FCC.

### 2.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver (5G WiFi portion only).

**TEST REPORT****3.0 SYSTEM TEST CONFIGURATION****3.1 Justification**

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was power by 120VAC during test.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109.

**TEST REPORT****3.1 Justification – Cont'd**

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All relevant operation modes have been tested, and the worst-case data is included in this report.

All data rates were tested under normal mode of WiFi. Only the worst-case data is shown in the report for OFDM.

For simultaneous transmission, both WiFi and Bluetooth portions are also switched on when taking radiated emission for determining worst-case spurious emission

**3.2 EUT Exercising Software**

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

**TEST REPORT****3.3 Details of EUT and Description of Accessories****Details of EUT:**

The EUT is powered by 120VAC

**Support Equipment List and Description**

1. 1 X Power cord of 2m in length
2. 1 X USB cable of 0.5m in length with resistive load termination

**3.4 Measurement Uncertainty**

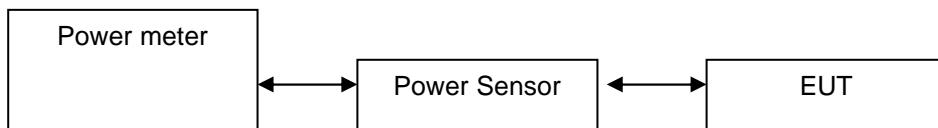
When determining of the test conclusion, the Measurement Uncertainty of test at a level of confidence of 95% has been considered. The values of the Measurement uncertainty:

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.8 dB
2	Conducted emission 150KHz-30MHz	±3.4 dB
3	Radiated emission 9KHz-30MHz	±4.9 dB
4	Radiated emission 30MHz-1GHz	±4.7 dB
5	Radiated emission 1GHz-18GHz	±5.1 dB
6	Radiated emission 18GHz-26GHz	±5.2 dB
7	Radiated emission 26GHz-40GHz	±5.2 dB

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

**TEST REPORT****4.0 TEST RESULTS****4.1 Maximum Conducted (Avg) Output Power at Antenna Terminals****RF Conduct Measurement Test Setup**

The figure below shows the test setup, which is utilized to make these measurements.



The antenna port of the EUT was connected to the input of a spectrum analyzer.

- The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals. The measurement procedure E.3.A (789033 D02 General UNII Test Procedures New Rules v02r01) was used.
- The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

**IEEE 802.11ac (20MHz) (MCS0)**

<b>Frequency (MHz)</b>	<b>Conducted output power in dBm</b>	<b>Conducted output power in mWatt</b>
5180	7	5
5200	7.4	5.5
5240	8.6	7.2
5260	8.2	6.6
5280	8.9	7.8
5320	9.7	9.3
5500	2.6	1.8
5600	3.8	2.4
5700	3	2
5745	5.1	3.2
5785	9.2	8.3
5825	8.4	6.9

**IEEE 802.11ac (40MHz) (MCS0)**

<b>Frequency (MHz)</b>	<b>Conducted output power in dBm</b>	<b>Conducted output power in mWatt</b>
5190	7	5
5230	9.5	8.9
5270	9.3	8.5
5310	9.8	9.5
5510	5.8	3.8
5590	8.1	6.5
5670	7.2	5.2
5755	10.1	10.2
5795	10.2	10.5

**TEST REPORT**
**IEEE 802.11ac (80MHz) (MCS0)**

Frequency (MHz)	Conducted output power in dBm	Conducted output power in mWatt
5210	7.1	5.1
5290	8.8	7.6
5530	2.5	1.8
5610	7.6	5.8
5775	9.8	9.5

**IEEE 802.11a (20MHz) (OFDM, 6 Mbps)**

Frequency (MHz)	Conducted output power in dBm	Conducted output power in mWatt
5180	10.9	12.3
5200	11.2	13.2
5240	12.1	16.2
5260	8.2	6.6
5280	8.9	7.8
5320	9.7	9.3
5500	11.8	15.1
5600	12.8	19.1
5700	12.2	16.6
5745	13.6	22.9
5785	14.6	28.8
5825	13.7	23.4

**IEEE 802.11n (20MHz) (OFDM, MCS0)**

Frequency (MHz)	Conducted output power in dBm	Conducted output power in mWatt
5180	9.6	9.1
5200	9.9	9.8
5240	10.9	12.3
5260	12	15.8
5280	12.6	18.2
5320	13.2	20.9
5500	11	12.6
5600	12.2	16.6
5700	11.5	14.1
5745	13.2	20.9
5785	14.1	25.7
5825	13.1	20.4

**IEEE 802.11n (40MHz) (OFDM, MCS0)**

Frequency (MHz)	Conducted output power in dBm	Conducted output power in mWatt
5190	10.4	11
5230	12.9	19.5
5270	12.5	17.8
5310	13	20
5510	10.1	10.2
5590	12	15.8
5670	11.5	14.1
5755	13.4	21.9
5795	13.5	22.4

**TEST REPORT**
**For maximum e.i.r.p. (Peak Antenna Gain = 2.82 dBi)**

IEEE 802.11ac (20MHz) (MCS0)

Frequency (MHz)	Conducted output power in dBm	EIRP in dBm	EIRP in mWatt
5180	7	9.8	9.5
5200	7.4	10.2	10.5
5240	8.6	11.4	13.8
5260	8.2	11	12.6
5280	8.9	11.7	14.8
5320	9.7	12.5	17.8
5500	2.6	5.4	3.5
5600	3.8	6.6	4.6
5700	3	5.8	3.8

IEEE 802.11ac (40MHz) (MCS0)

Frequency (MHz)	Conducted output power in dBm	EIRP in dBm	EIRP in mWatt
5190	7	9.8	9.5
5230	9.5	12.3	17
5270	9.3	12.1	16.2
5310	9.8	12.6	18.2
5510	5.8	8.6	7.2
5590	8.1	10.9	12.3
5670	7.2	10	10

IEEE 802.11ac (80MHz) (MCS0)

Frequency (MHz)	Conducted output power in dBm	EIRP in dBm	EIRP in mWatt
5210	7.1	9.9	9.8
5290	8.8	11.6	14.5
5530	2.5	5.3	3.4
5610	7.6	10.4	11

IEEE 802.11a (20MHz) (OFDM, 6 Mbps)

Frequency (MHz)	Conducted output power in dBm	EIRP in dBm	EIRP in mWatt
5180	10.9	13.7	23.4
5200	11.2	14	25.1
5240	12.1	14.9	30.9
5260	8.2	11	12.6
5280	8.9	11.7	14.8
5320	9.7	12.5	17.8
5500	11.8	14.6	28.8
5600	12.8	15.6	36.3
5700	12.2	15	31.6

**TEST REPORT**
**IEEE 802.11n (20MHz) (OFDM, MCS0)**

Frequency (MHz)	Conducted output power in dBm	EIRP in dBm	EIRP in mWatt
5180	9.6	12.4	17.4
5200	9.9	12.7	18.6
5240	10.9	13.7	23.4
5260	12	14.8	30.2
5280	12.6	15.4	34.7
5320	13.2	16	39.8
5500	11	13.8	24
5600	12.2	15	31.6
5700	11.5	14.3	26.9

**IEEE 802.11n (40MHz) (OFDM, MCS0)**

Frequency (MHz)	Conducted output power in dBm	EIRP in dBm	EIRP in mWatt
5190	10.4	13.2	20.9
5230	12.9	15.7	37.2
5270	12.5	15.3	33.9
5310	13	15.8	38
5510	10.1	12.9	19.5
5590	12	14.8	30.2
5670	11.5	14.3	26.9

 Cable loss: 1.02 dB External Attenuation: 10 dB

 Cable loss, external attenuation:  included in OFFSET function  
 added to SA raw reading

IEEE 802.11ac (20MHz) (OFDM, MCS0):

 max. conducted output level = 12.5 dBm

IEEE 802.11ac (40MHz) (OFDM, MCS0):

 max. conducted output level = 12.6 dBm

IEEE 802.11ac (80MHz) (OFDM, MCS0):

 max. conducted output level = 11.6 dBm

IEEE 802.11a (20MHz) (OFDM, 6 Mbps):

 max. conducted output level = 15.6 dBm

IEEE 802.11n (20MHz) (OFDM, MCS0):

 max. conducted output level = 15.4 dBm

IEEE 802.11n (40MHz) (OFDM, MCS0):

 max. conducted output level = 15.8 dBm

**Remark:**

1. Maximum e.i.r.p = Maximum conducted output power + Duty Cycle Factor + Antenna Gain
2. Maximum conducted output power = Conducted output power + Duty Cycle Factor
3. Duty cycle= On Time/ Period;  
 Duty Cycle factor =  $10 * \log(1/\text{Duty cycle})$ ;  
 Average factor =  $20 \log_{10} \text{Duty Cycle}$ .
4. Limits for FCC: 5150-5250MHz: 250mW (24dBm) for antennas with gains of 6dBi or less. (Client device)  
 5250-5350MHz: 250mW (24dBm)  
 5470-5725MHz: 250mW (24dBm)  
 5725-5850MHz: 1W (30dBm) for antennas with gains of 6dBi or less.
5. Limits for RSS: 5150-5250MHz: 200mW (23dBm) for antennas with gains of 6dBi or less.  
 5250-5350MHz: 250mW (24dBm)  
 5470-5725MHz: 250mW (24dBm)  
 5725-5850MHz: 1W (30dBm) for antennas with gains of 6dBi or less.

## TEST REPORT

### 4.2 Minimum 6dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

#### IEEE 802.11ac (20MHz) (MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5745	15.3	15.4
5785	15.3	15.4
5825	15.3	15.4

#### IEEE 802.11ac (40MHz) (MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5755	36.6	36.255
5795	36.6	36.554

#### IEEE 802.11ac (80MHz) (MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5775	75.3	76

#### IEEE 802.11a (20MHz) (OFDM, 6Mbps)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5745	16.5	16.8
5785	16.5	16.8
5825	16.5	16.8

#### IEEE 802.11n (40MHz) (OFDM, MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5755	36.6	36.554
5795	36.6	36.554

#### IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
5745	17.9	18
5785	17.9	17.8
5825	17.9	18

Limits:

For 5725-5850MHz:

6 db bandwidth shall be at least 500kHz

The plots of 6db RF bandwidth and occupied bandwidth are saved with filename: UNII-1&2 test data.pdf

## TEST REPORT

### 4.3 26 dB BANDWIDTH & OCCUPIED BANDWIDTH

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 26dB lower than PEAK level. The 26dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11ac (20MHz) (MCS0)

Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
5180	18.4	15.4
5200	18.2	15.4
5240	18.2	15.4
5260	18.2	15.4
5280	18.4	15.4
5320	18	15.4
5500	18.4	15.4
5600	18.4	15.4
5700	18.2	15.4
5745	18.4	15.4
5785	18.2	15.4
5825	18.4	15.4

IEEE 802.11ac (40MHz) (MCS0)

Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
5190	40.15	36.255
5230	39.85	36.554
5270	40.15	36.554
5310	39.85	36.554
5510	40.150	36.554
5590	40.150	36.554
5670	40.449	36.554
5755	39.850	36.255
5795	40.150	36.554

IEEE 802.11ac (80MHz) (MCS0)

Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
5210	83	75.5
5290	83	75.5
5530	85	75.5
5610	83	75.5
5775	83	76

**TEST REPORT**

## IEEE 802.11a (20MHz) (OFDM, 6Mbps)

Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
5180	20.8	16.6
5200	20.8	16.6
5240	20.6	16.6
5260	18.2	15.4
5280	18.4	15.4
5320	18.0	15.4
5500	21.2	16.6
5600	21.6	16.6
5700	21.4	16.6
5745	22.2	16.8
5785	22	16.8
5825	23	16.8

## IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
5180	21.4	17.8
5200	21.4	17.8
5240	21.4	17.8
5260	21.6	17.8
5280	21.6	17.8
5320	21.4	17.8
5500	21.4	17.8
5600	21.8	17.8
5700	21.6	17.8
5745	22.4	18
5785	21.8	17.8
5825	22	18

## IEEE 802.11N (40MHz) (OFDM, MCS0)

Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
5190	39.85	36.255
5230	39.55	36.255
5270	39.55	36.554
5310	39.55	36.255
5510	39.55	36.255
5590	39.85	36.554
5670	40.15	36.554
5755	49.47	36.554
5795	44.34	36.554

**TEST REPORT****4.4 Maximum Power Spectral Density**

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer.

Spectrum analyser according to the following Settings:

For U-NII-1, U-NII-2A, U-NII-2C band:

Using method SA-2

- a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b) Set RBW = 1 MHz, Set VBW  $\geq$  3 RBW, Detector = RMS
- c) Sweep time = auto, trigger set to "free run".
- d) Trace average at least 100 traces in power averaging mode.
- e) Record the max value and add 10 log (1/duty cycle)

For U-NII-3 band:

- a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b) Set RBW = 500 kHz, Set VBW  $\geq$  3 RBW, Detector = RMS
- c) Use the peak marker function to determine the maximum power level in any 500 kHz band segment within the fundamental EBW.
- d) Sweep time = auto, trigger set to "free run".
- e) Trace average at least 100 traces in power averaging mode.
- f) Record the max value and add 10 log (1/duty cycle)

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

IEEE 802.11a (20MHz) (OFDM, 6 Mbps)

Frequency (MHz)	Conducted PSD in 1MHz (dBm)
5180	0.106
5200	0.226
5240	1.269
5260	-1.908
5280	-1.585
5320	-0.676
5500	0.482
5600	1.444
5700	0.648

Frequency (MHz)	Conducted PSD in 500kHz (dBm)
5745	-0.244
5785	0.415
5825	-0.278

**TEST REPORT**
**IEEE 802.11ac (20MHz) (MCS0)**

Frequency (MHz)	Conducted PSD in 1MHz (dBm)
5180	-2.457
5200	-2.315
5240	-1.327
5260	-1.908
5280	-1.585
5320	-1.652
5500	-3.441
5600	-2.092
5700	-3.252

Frequency (MHz)	Conducted PSD in 500kHz (dBm)
5745	-1.4
5785	-1.035
5825	-1.680

**IEEE 802.11ac (40MHz) (MCS0)**

Frequency (MHz)	Conducted PSD in 1MHz (dBm)
5190	-7
5230	-4.88
5270	-5.268
5310	-4.450
5510	-7.638
5590	-5.800
5670	-6.509

Frequency (MHz)	Conducted PSD in 500kHz (dBm)
5755	-6.972
5795	-6.863

**IEEE 802.11ac (80MHz) (MCS0)**

Frequency (MHz)	Conducted PSD in 1MHz (dBm)
5210	-10.003
5290	-8.454
5530	-13.593
5610	-8.207

Frequency (MHz)	Conducted PSD in 500kHz (dBm)
5775	-9.299

**TEST REPORT****IEEE 802.11n (20MHz) (OFDM, MCS0)**

<b>Frequency (MHz)</b>	<b>Conducted</b>
	<b>PSD in 1MHz (dBm)</b>
5180	-1.563
5220	-1.461
5240	-0.257
5260	0.585
5300	0.976
5320	1.788
5500	0.116
5600	0.816
5700	-0.133

<b>Frequency (MHz)</b>	<b>Conducted</b>
	<b>PSD in 500kHz (dBm)</b>
5745	-1.148
5785	-0.298
5825	-1.414

**IEEE 802.11n (40MHz) (OFDM, MCS0)**

<b>Frequency (MHz)</b>	<b>Conducted</b>
	<b>PSD in 1MHz (dBm)</b>
5190	-3.873
5230	-1.493
5270	-2.210
5310	-1.339
5510	-4.220
5590	-2.407
5670	-2.987

<b>Frequency (MHz)</b>	<b>Conducted</b>
	<b>PSD in 500kHz (dBm)</b>
5755	-3.707
5795	-3.668

**TEST REPORT**
**For maximum e.i.r.p.**

IEEE 802.11a (20MHz) (OFDM, 6 Mbps)

Frequency (MHz)	EIRP PSD in 1MHz (dBm)
5180	0.106
5200	0.226
5240	1.269
5260	-1.908
5280	-1.585
5320	-0.676
5500	0.482
5600	1.444
5700	0.648

IEEE 802.11ac (20MHz) (MCS0)

Frequency (MHz)	EIRP PSD in 1MHz (dBm)
5180	-0.457
5200	-0.315
5240	0.673
5260	0.092
5280	0.415
5320	0.348
5500	-1.441
5600	-0.092
5700	-1.252

IEEE 802.11ac (40MHz) (MCS0)

Frequency (MHz)	EIRP PSD in 1MHz (dBm)
5190	-5
5230	-2.88
5270	-3.268
5310	-2.45
5510	-5.638
5590	-3.8
5670	-4.509

IEEE 802.11ac (80MHz) (MCS0)

Frequency (MHz)	EIRP PSD in 1MHz (dBm)
5210	-8.003
5290	-6.454
5530	-11.593
5610	-6.207

**TEST REPORT**

## IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	EIRP
	PSD in 1MHz (dBm)
5180	0.437
5200	0.539
5240	1.743
5260	2.585
5280	2.976
5320	3.788
5500	2.116
5600	2.816
5700	1.867

## IEEE 802.11n (40MHz) (OFDM, MCS0)

Frequency (MHz)	EIRP
	PSD in 1MHz (dBm)
5190	-1.873
5230	0.507
5270	-0.21
5310	0.661
5510	-2.22
5590	-0.407
5670	-0.987

**Remark:**

1. Cable Loss: 1.02 dB
2. e.i.r.p. spectral density = Power spectral density + Duty Cycle Factor + Antenna Gain
3. Power spectral density = Conducted power spectral density + Duty Cycle Factor
4. Duty cycle= On Time/ Period;  
 Duty Cycle factor =  $10 * \log(1/ \text{Duty cycle})$ ;  
 Average factor =  $20 \log_{10} \text{Duty Cycle}$ .
5. Limit:

For U-NII-1:

FCC: 11dBm/MHz for mobile/portable device.  
 RSS: 10dBm/MHz E.I.R.P

For U-NII-2:

FCC: 11dBm/MHz  
 RSS: 11dBm/MHz

For U-NII-3: in 3kHz

FCC: 30dBm/500kHz.  
 RSS: 30dBm/500kHz

The test data are saved with filename: UNII-1&amp;2 test data.pdf

**TEST REPORT****4.5 Field Strength Calculation**

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

**Example**

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dB $\mu$ V/m. This value in dB $\mu$ V/m is converted to its corresponding level in  $\mu$ V/m.

RA = 62.0 dB $\mu$ V

AF = 7.4 dB

CF = 1.6 dB

AG = 29.0 dB

PD = 0.0 dB

AV = -10 dB

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

**TEST REPORT****4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions**

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

**4.6.1 Radiated Emission Configuration Photograph**

Worst Case Restricted Band Radiated Emission  
at

5725.000 and 11510.000 MHz

The worst case radiated emission configuration photographs are saved with filename: Radiated Photo.pdf

**4.6.2 Radiated Emission Data**

The data in below tables list the significant emission frequencies, the limit and the margin of compliance.

For frequency bands UNII-1, 2A, 2C, and 3, all modulation have been considered. Only the worst case will be shown on the test report.

Judgement -

Passed by 0.1 dB margin

**TEST REPORT**

IEEE 802.11A (20MHz) (OFDM,6MBs)

**Radiated Emission Data**

5180MHz

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5150.000	26.5	33	35.7	48.8	54.0	-5.2
H	10360.000	32.7	33	40.5	42.4	54.0	-11.7
V	15540.000	28.0	33	37.7	34.5	54.0	-19.5
H	20720.000	26.5	33	37.7	38.2	54.0	-15.8
H	25900.000	32.7	33	39.3	37.7	54.0	-16.3
H	31080.000	28.0	33	42.1	43.3	54.0	-10.7

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5150.000	52.7	33	35.7	68.8	74.0	-5.2
H	10360.000	65.8	33	40.5	71.7	74.0	-2.3
V	15540.000	60.6	33	37.7	52.9	74.0	-21.1
H	20720.000	47.1	33	37.7	45.4	74.0	-28.6
H	25900.000	39.3	33	39.3	42.0	74.0	-32.0
H	31080.000	32.8	33	42.1	50.5	74.0	-23.5

5240MHz

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	10480.000	30.6	33	40.5	38.1	54.0	-15.9
V	15720.000	28.8	33	37.7	33.5	54.0	-20.5
H	20960.000	35.2	33	37.7	39.9	54.0	-14.1
V	26200.000	35.6	33	39.2	41.8	54.0	-12.2
H	31440.000	34.8	33	42.1	43.9	54.0	-10.1
H	36680.000	39.0	33	41.7	47.7	54.0	-6.3

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	10480.000	50.6	33	40.5	68.1	74.0	-5.9
V	15720.000	46.7	33	37.7	51.4	74.0	-22.6
H	20960.000	63.4	33	37.7	51.3	74.0	-22.7
V	26200.000	49.7	33	39.2	48.1	74.0	-25.9
H	31440.000	44.3	33	42.1	44.2	74.0	-29.8
H	36680.000	43.7	33	41.7	50.8	74.0	-23.2

**TEST REPORT**
**5200MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10400.000	30.4	33	40.5	37.9	54.0	-16.1
H	15600.000	28.5	33	37.7	33.2	54.0	-20.8
V	20800.000	29.8	33	37.7	34.5	54.0	-19.5
H	26000.000	29.7	33	39.2	35.9	54.0	-18.1
V	31200.000	34.6	33	42.1	43.7	54.0	-10.3
H	36400.000	39.5	33	41.7	48.2	54.0	-5.8

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10400.000	64.7	33	40.5	72.2	74.0	-1.8
H	15600.000	45.9	33	37.7	50.6	74.0	-23.4
V	20800.000	45.1	33	37.7	49.8	74.0	-24.2
H	26000.000	38.1	33	39.2	44.3	74.0	-29.7
V	31200.000	34.6	33	42.1	43.7	74.0	-30.3
H	36400.000	41.9	33	41.7	50.6	74.0	-23.4

**5260MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10520.000	31.1	33	40.4	38.5	54.0	-15.5
H	15780.000	28.2	33	37.7	32.9	54.0	-21.1
V	21040.000	28.7	33	37.9	33.6	54.0	-20.4
H	26300.000	28.8	33	39.2	35.0	54.0	-19.0
V	31560.000	36.4	33	40.4	43.8	54.0	-10.2
H	36820.000	40.4	33	41.7	49.1	54.0	-4.9

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10520.000	53.7	33	40.4	61.1	74.0	-12.9
H	15780.000	45.7	33	37.7	50.4	74.0	-23.6
V	21040.000	44.8	33	37.9	49.7	74.0	-24.3
H	26300.000	38.6	33	39.2	44.8	74.0	-29.2
V	31560.000	36.1	33	40.4	43.5	74.0	-30.5
H	36820.000	42.0	33	41.7	50.7	74.0	-23.3

**5280MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10560.000	31.3	33	40.4	38.7	54.0	-15.3
H	15840.000	28.9	33	37.7	33.6	54.0	-20.4
V	21120.000	30.4	33	37.9	35.3	54.0	-18.7
H	26400.000	28.9	33	39.2	35.1	54.0	-18.9
V	31680.000	36.1	33	40.4	43.5	54.0	-10.5
H	36960.000	39.0	33	41.7	47.7	54.0	-6.3

**TEST REPORT**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10560.000	53.6	33	40.4	61.0	74.0	-13.0
H	15840.000	45.7	33	37.7	50.4	74.0	-23.6
V	21120.000	44.6	33	37.9	49.5	74.0	-24.5
H	26400.000	37.7	33	39.2	43.9	74.0	-30.1
V	31680.000	36.5	33	40.4	43.9	74.0	-30.1
H	36960.000	42.2	33	41.7	50.9	74.0	-23.1

**5320MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5350.000	48.8	33	35.7	51.5	54.0	-2.5
H	10640.000	32.5	33	40.4	39.9	54.0	-14.1
V	15960.000	36.1	33	37.7	40.8	54.0	-13.2
V	21280.000	33.9	33	37.9	38.8	54.0	-15.2
H	26600.000	35.0	33	39.9	41.9	54.0	-12.1
H	31920.000	38.8	33	40.4	46.2	54.0	-7.8

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5350.000	61.8	33	35.7	64.5	74.0	-9.5
H	10640.000	66.4	33	39.9	73.3	74.0	-0.7
V	15960.000	46.4	33	40.8	54.2	74.0	-19.8
V	21280.000	37.7	33	38.8	43.5	74.0	-30.5
H	26600.000	36.4	33	41.9	45.3	74.0	-28.7
H	31920.000	39.0	33	46.2	52.2	74.0	-21.8

**5500MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5470.000	46.6	33	35.7	49.3	54.0	-4.7
H	11000.000	32.2	33	40.8	40.0	54.0	-14.0
V	16500.000	35.0	33	37.6	39.6	54.0	-14.4
V	22000.000	33.9	33	38.2	39.1	54.0	-14.9
H	27500.000	35.7	33	40.0	42.7	54.0	-11.3
H	33000.000	37.8	33	40.8	45.6	54.0	-8.4

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5470.000	61.8	33	35.7	64.5	74.0	-9.5
H	11000.000	54.0	33	40.8	61.8	74.0	-12.2
V	16500.000	44.6	33	37.6	49.2	74.0	-24.8
V	22000.000	45.6	33	38.2	50.8	74.0	-23.2
H	27500.000	35.5	33	40.0	42.5	74.0	-31.5
H	33000.000	35.3	33	40.8	43.1	74.0	-30.9

**5600MHz**

**TEST REPORT**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	11200.000	29.7	33	40.8	37.5	54.0	-16.5
H	16800.000	28.3	33	37.6	32.9	54.0	-21.1
H	22400.000	28.8	33	38.2	34.0	54.0	-20.0
V	28000.000	28.9	33	40.0	35.9	68.0	-32.1
H	33600.000	36.1	33	41.2	44.3	54.0	-9.7
H	39200.000	37.9	33	43.5	48.4	54.0	-5.6

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	11200.000	52.8	33	40.8	60.6	74.0	-13.4
H	16800.000	45.7	33	37.6	50.3	74.0	-23.7
H	22400.000	43.8	33	38.2	49.0	74.0	-25.0
V	28000.000	36.8	33	40.0	43.8	74.0	-30.2
H	33600.000	35.4	33	41.2	43.6	74.0	-30.4
H	39200.000	38.6	33	43.5	49.1	74.0	-24.9

**5700MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	46.8	33	36.6	50.4	54.0	-3.6
H	11400.000	31.2	33	40.8	39.0	54.0	-15.0
V	17100.000	35.7	33	37.6	40.3	54.0	-13.7
V	22800.000	33.3	33	38.3	38.6	54.0	-15.4
H	28500.000	35.7	33	40.1	42.8	54.0	-11.2
H	34200.000	38.6	33	41.1	46.7	54.0	-7.3

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	60.9	33	36.6	64.5	74.0	-9.5
H	11400.000	51.7	33	40.8	59.5	74.0	-14.5
V	17100.000	46.7	33	37.6	51.3	74.0	-22.7
V	22800.000	46.4	33	38.3	51.7	74.0	-22.3
H	28500.000	36.3	33	40.1	43.4	74.0	-30.6
H	34200.000	36.1	33	41.1	44.2	74.0	-29.8

**5745MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	50.3	33	36.6	53.9	54.0	-0.1
H	11490.000	31.2	33	40.8	39.0	54.0	-15.0
V	17235.000	35.7	33	37.6	40.3	54.0	-13.7
V	22980.000	33.3	33	38.3	38.6	54.0	-15.4
H	28725.000	35.7	33	40.1	42.8	54.0	-11.2
H	34470.000	38.6	33	41.1	46.7	54.0	-7.3

**TEST REPORT**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	67.4	33	36.6	71.0	74.0	-3.0
H	11490.000	65.4	33	40.8	73.2	74.0	-0.8
V	17235.000	49.3	33	37.6	53.9	74.0	-20.1
V	22980.000	37.9	33	38.3	43.2	74.0	-30.8
H	28725.000	39.1	33	40.1	46.2	74.0	-27.8
H	34470.000	44.0	33	41.1	52.1	74.0	-21.9

**TEST REPORT**
**5785MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	5725.000	29.8	33	36.6	33.4	54.0	-20.6
H	11570.000	31.5	33	40.5	39.0	54.0	-15.0
H	17355.000	39.3	33	37.6	43.9	54.0	-10.1
V	23140.000	39.6	33	38.6	45.2	54.0	-8.8
H	28925.000	40.9	33	40.1	48.0	54.0	-6.0
H	34710.000	44.3	33	41.3	52.6	54.0	-1.4

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	5725.000	67.4	33	36.6	71.0	74.0	-3.0
H	11570.000	64.9	33	40.5	72.4	74.0	-1.6
H	17355.000	44.8	33	37.6	49.4	74.0	-24.6
V	23140.000	39.7	33	38.6	45.3	74.0	-28.7
H	28925.000	40.9	33	40.1	48.0	74.0	-26.0
H	34710.000	44.5	33	41.3	52.8	74.0	-21.2

**5825MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	5850.000	50.2	33	36.6	53.8	54.0	-0.2
H	11650.000	31.7	33	40.5	39.2	54.0	-14.8
H	17475.000	31.0	33	37.6	35.6	54.0	-18.4
V	23300.000	31.1	33	38.6	36.7	54.0	-17.3
H	29125.000	40.5	33	40.0	47.5	54.0	-6.5
H	34950.000	42.1	33	41.3	50.4	54.0	-3.6

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	5850.000	67.0	33	36.6	70.6	74.0	-3.4
H	11650.000	63.6	33	40.5	71.1	74.0	-2.9
H	17475.000	47.5	33	37.6	52.1	74.0	-21.9
V	23300.000	39.1	33	38.6	44.7	74.0	-29.3
H	29125.000	40.9	33	40.0	47.9	74.0	-26.1
H	34950.000	45.1	33	41.3	53.4	74.0	-20.6

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

**TEST REPORT**
**IEEE 802.11N (HT20MHz) (MCS0)**
**Radiated Emission Data**
**5180MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	5150.000	49.7	33	35.7	52.4	54.0	-1.7
H	10360.000	33.0	33	40.5	40.5	54.0	-13.5
H	15540.000	38.7	33	37.7	43.4	54.0	-10.6
H	20720.000	36.5	33	37.7	41.2	54.0	-12.8
H	25900.000	33.1	33	39.3	39.4	54.0	-14.6
V	31080.000	36.0	33	42.1	45.1	54.0	-8.9

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	5150.000	70.1	33	35.7	72.8	74.0	-1.2
H	10360.000	55.6	33	40.5	63.1	74.0	-10.9
H	15540.000	44.5	33	37.7	49.2	74.0	-24.8
H	20720.000	38.8	33	37.7	43.5	74.0	-30.5
H	25900.000	35.5	33	39.3	41.8	74.0	-32.2
V	31080.000	38.6	33	42.1	47.7	74.0	-26.3

**5240MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	10480.000	29.1	33	40.5	36.6	54.0	-17.4
V	15720.000	25.6	33	37.7	30.3	54.0	-23.7
H	20960.000	28.7	33	37.7	33.4	54.0	-20.6
H	26200.000	27.6	33	39.2	33.8	54.0	-20.2
V	31440.000	30.0	33	42.1	39.1	54.0	-14.9
H	36680.000	36.5	33	41.7	45.2	54.0	-8.8

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	10480.000	50.2	33	40.5	57.7	74.0	-16.3
V	15720.000	40.4	33	37.7	45.1	74.0	-28.9
H	20960.000	58.5	33	37.7	63.2	74.0	-10.8
H	26200.000	37.3	33	39.2	43.5	74.0	-30.5
V	31440.000	36.7	33	42.1	45.8	74.0	-28.2
H	36680.000	41.2	33	41.7	49.9	74.0	-24.1

**TEST REPORT**
**5200MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10400.000	35.5	33	40.5	43.0	54.0	-11.0
H	15600.000	31.6	33	37.7	36.3	54.0	-17.7
V	20800.000	31.1	33	37.7	35.8	54.0	-18.2
H	26000.000	33.0	33	39.2	39.2	54.0	-14.8
H	31200.000	30.4	33	42.1	39.5	54.0	-14.5
H	36400.000	38.8	33	41.7	47.5	54.0	-6.5

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10400.000	66.3	33	40.5	73.8	74.0	-0.2
H	15600.000	47.0	33	37.7	51.7	74.0	-22.3
V	20800.000	47.7	33	37.7	52.4	74.0	-21.6
H	26000.000	37.2	33	39.2	43.4	74.0	-30.6
H	31200.000	33.4	33	42.1	42.5	74.0	-31.5
H	36400.000	42.1	33	41.7	50.8	74.0	-23.2

**5260MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10520.000	29.6	33	40.4	37.0	54.0	-17.0
H	15780.000	28.2	33	37.7	32.9	54.0	-21.1
V	21040.000	29.0	33	37.9	33.9	54.0	-20.1
H	26300.000	29.4	33	39.2	35.6	54.0	-18.4
V	31560.000	35.8	33	40.4	43.2	54.0	-10.8
H	36820.000	38.6	33	41.7	47.3	54.0	-6.7

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10520.000	51.6	33	40.4	59.0	74.0	-15.0
H	15780.000	45.7	33	37.7	50.4	74.0	-23.6
V	21040.000	45.9	33	37.9	50.8	74.0	-23.2
H	26300.000	38.4	33	39.2	44.6	74.0	-29.4
V	31560.000	36.7	33	40.4	44.1	74.0	-29.9
H	36820.000	40.5	33	41.7	49.2	74.0	-24.8

**5280MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10560.000	30.5	33	40.4	37.9	54.0	-16.1
H	15840.000	28.5	33	37.7	33.2	54.0	-20.8
V	21120.000	29.6	33	37.9	34.5	54.0	-19.5
H	26400.000	29.7	33	39.2	35.9	54.0	-18.1
V	31680.000	36.3	33	40.4	43.7	54.0	-10.3
H	36960.000	39.5	33	41.7	48.2	54.0	-5.8

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10560.000	53.6	33	40.4	61.0	74.0	-13.0
H	15840.000	45.7	33	37.7	50.4	74.0	-23.6
V	21120.000	44.6	33	37.9	49.5	74.0	-24.5
H	26400.000	37.7	33	39.2	43.9	74.0	-30.1
V	31680.000	36.5	33	40.4	43.9	74.0	-30.1
H	36960.000	42.2	33	41.7	50.9	74.0	-23.1

**TEST REPORT**
**5320MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5350.000	48.8	33	35.7	51.5	54.0	-2.5
H	10640.000	32.5	33	40.4	39.9	54.0	-14.1
V	15960.000	36.1	33	37.7	40.8	54.0	-13.2
V	21280.000	33.9	33	37.9	38.8	54.0	-15.2
H	26600.000	35.0	33	39.9	41.9	54.0	-12.1
H	31920.000	38.8	33	40.4	46.2	54.0	-7.8

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5350.000	61.8	33	35.7	64.5	74.0	-9.5
H	10640.000	66.4	33	39.9	73.3	74.0	-0.7
V	15960.000	46.4	33	40.8	54.2	74.0	-19.8
V	21280.000	37.7	33	38.8	43.5	74.0	-30.5
H	26600.000	36.4	33	41.9	45.3	74.0	-28.7
H	31920.000	39.0	33	46.2	52.2	74.0	-21.8

**5500MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5470.000	47.1	33	35.7	49.8	54.0	-4.2
H	11000.000	32.5	33	40.8	40.3	54.0	-13.7
V	16500.000	35.0	33	37.6	39.6	54.0	-14.4
V	22000.000	32.5	33	38.2	37.7	54.0	-16.3
H	27500.000	35.7	33	40.0	42.7	54.0	-11.3
H	33000.000	39.2	33	40.8	47.0	54.0	-7.0

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5470.000	63.7	33	35.7	66.4	74.0	-7.6
H	11000.000	51.7	33	40.8	59.5	74.0	-14.5
V	16500.000	46.3	33	37.6	50.9	74.0	-23.1
V	22000.000	43.7	33	38.2	48.9	74.0	-25.1
H	27500.000	37.0	33	40.0	44.0	74.0	-30.0
H	33000.000	35.8	33	40.8	43.6	74.0	-30.4

**5600MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	11200.000	31.0	33	40.8	38.8	54.0	-15.2
H	16800.000	28.8	33	37.6	33.4	54.0	-20.6
H	22400.000	29.2	33	38.2	34.4	54.0	-19.6
V	28000.000	27.9	33	40.0	34.9	68.0	-33.1
H	33600.000	35.4	33	41.2	43.6	54.0	-10.4
H	39200.000	37.5	33	43.5	48.0	54.0	-6.0

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	11200.000	51.9	33	40.8	59.7	74.0	-14.3
H	16800.000	45.6	33	37.6	50.2	74.0	-23.8
H	22400.000	45.3	33	38.2	50.5	74.0	-23.5
V	28000.000	38.3	33	40.0	45.3	74.0	-28.7
H	33600.000	36.0	33	41.2	44.2	74.0	-29.8
H	39200.000	40.2	33	43.5	50.7	74.0	-23.3

**TEST REPORT**
**5700MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	46.2	33	36.6	49.8	54.0	-4.2
H	11400.000	32.4	33	40.8	40.2	54.0	-13.8
V	17100.000	35.5	33	37.6	40.1	54.0	-13.9
V	22800.000	33.2	33	38.3	38.5	54.0	-15.5
H	28500.000	35.0	33	40.1	42.1	54.0	-11.9
H	34200.000	37.1	33	41.1	45.2	54.0	-8.8

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	58.9	33	36.6	62.5	74.0	-11.5
H	11400.000	51.7	33	40.8	59.5	74.0	-14.5
V	17100.000	46.7	33	37.6	51.3	74.0	-22.7
V	22800.000	46.4	33	38.3	51.7	74.0	-22.3
H	28500.000	36.3	33	40.1	43.4	74.0	-30.6
H	34200.000	36.1	33	41.1	44.2	74.0	-29.8

**5745MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	49.8	33	36.6	53.4	54.0	-0.6
H	11490.000	32.4	33	40.8	40.2	54.0	-13.8
H	17235.000	32.7	33	37.6	37.3	54.0	-16.7
H	22980.000	33.1	33	38.3	38.4	54.0	-15.6
H	28725.000	36.2	33	40.1	43.3	54.0	-10.7
H	34470.000	37.1	33	41.1	45.2	54.0	-8.8

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	69.5	33	36.6	73.1	74.0	-0.9
H	11490.000	55.9	33	40.8	63.7	74.0	-10.3
H	17235.000	36.7	33	37.6	41.3	74.0	-32.7
H	22980.000	39.2	33	38.3	44.5	74.0	-29.5
H	28725.000	40.6	33	40.1	47.7	74.0	-26.3
H	34470.000	42.8	33	41.1	50.9	74.0	-23.1

**TEST REPORT**
**5785MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	11570.000	30.2	33	40.5	37.7	54.0	-16.3
H	17355.000	27.5	33	37.6	32.1	54.0	-21.9
V	23140.000	27.3	33	38.6	32.9	54.0	-21.1
V	28925.000	29.3	33	40.1	36.4	54.0	-17.6
H	34710.000	36.7	33	41.3	45.0	54.0	-9.0
H	40495.000	36.3	33	44.5	47.8	54.0	-6.2

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	11570.000	52.5	33	40.5	60.0	74.0	-14.0
H	17355.000	43.3	33	37.6	47.9	74.0	-26.1
V	23140.000	44.7	33	38.6	50.3	74.0	-23.7
V	28925.000	36.2	33	40.1	43.3	74.0	-30.7
H	34710.000	34.9	33	41.3	43.2	74.0	-30.8
H	40495.000	38.8	33	44.5	50.3	74.0	-23.7

**5825MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5850.000	48.1	33	36.6	51.7	54.0	-2.3
H	11650.000	32.6	33	40.5	40.1	54.0	-13.9
V	17475.000	32.9	33	37.6	37.5	54.0	-16.5
H	23300.000	32.2	33	38.6	37.8	54.0	-16.2
H	29125.000	35.1	33	40.0	42.1	54.0	-11.9
H	34950.000	36.9	33	41.3	45.2	54.0	-8.8

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5850.000	68.8	33	36.6	72.4	74.0	-1.6
H	11650.000	64.8	33	40.5	72.3	74.0	-1.7
V	17475.000	46.5	33	37.6	51.1	74.0	-22.9
H	23300.000	38.6	33	38.6	44.2	74.0	-29.8
H	29125.000	43.5	33	40.0	50.5	74.0	-23.5
H	34950.000	45.5	33	41.3	53.8	74.0	-20.2

**NOTES:**

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
7. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

**TEST REPORT**
**IEEE 802.11n (40MHz) (MCS0)**
**Radiated Emission Data**
**5190MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5150.000	47.7	33	35.7	50.4	54.0	-3.6
H	10380.000	31.7	33	40.5	39.2	54.0	-14.8
H	15570.000	31.2	33	37.7	35.9	54.0	-18.1
V	20760.000	32.7	33	37.7	37.4	54.0	-16.6
H	25950.000	36.2	33	39.3	42.5	54.0	-11.5
H	31140.000	37.2	33	42.1	46.3	54.0	-7.7

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5150.000	61.8	33	35.7	64.5	74.0	-9.5
H	10380.000	65.0	33	40.5	72.5	74.0	-1.5
H	15570.000	45.8	33	37.7	50.5	74.0	-23.5
V	20760.000	40.2	33	37.7	44.9	74.0	-29.1
H	25950.000	38.4	33	39.3	44.7	74.0	-29.3
H	31140.000	39.4	33	42.1	48.5	74.0	-25.5

**5230MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10460.000	32.2	33	40.5	39.7	54.0	-14.3
H	15690.000	28.1	33	37.7	32.8	54.0	-21.2
H	20920.000	31.8	33	37.7	36.5	54.0	-17.5
V	26150.000	34.2	33	39.2	40.4	68.0	-27.6
H	31380.000	33.7	33	42.1	42.8	54.0	-11.2
H	36610.000	38.5	33	41.7	47.2	54.0	-6.8

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10460.000	66.0	33	40.5	73.5	74.0	-0.5
H	15690.000	48.5	33	37.7	53.2	74.0	-20.8
H	20920.000	37.0	33	37.7	41.7	74.0	-32.4
V	26150.000	43.6	33	39.2	49.8	68.0	-18.2
H	31380.000	36.1	33	42.1	45.2	74.0	-28.8
H	36610.000	39.8	33	41.7	48.5	74.0	-25.6

**TEST REPORT**
**5270MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10540.000	43.0	33	40.4	50.4	54.0	-3.6
H	15810.000	34.5	33	37.7	39.2	54.0	-14.8
H	21080.000	31.0	33	37.9	35.9	54.0	-18.1
V	26350.000	31.2	33	39.2	37.4	68.0	-30.6
H	31620.000	35.1	33	40.4	42.5	54.0	-11.5
H	36890.000	37.6	33	41.7	46.3	54.0	-7.7

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10540.000	57.1	33	40.4	64.5	74.0	-9.5
H	15810.000	67.8	33	37.7	72.5	74.0	-1.5
H	21080.000	45.6	33	37.9	50.5	74.0	-23.5
V	26350.000	38.7	33	39.2	44.9	68.0	-23.1
H	31620.000	37.3	33	40.4	44.7	74.0	-29.3
H	36890.000	39.8	33	41.7	48.5	74.0	-25.5

**5310MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5350.000	37.0	33	35.7	39.7	54.0	-4.3
H	10620.000	25.4	33	40.4	32.8	54.0	-21.2
H	15930.000	31.8	33	37.7	36.5	54.0	-17.5
V	21240.000	35.5	33	37.9	40.4	54.0	-13.6
H	26550.000	35.9	33	39.9	42.8	54.0	-11.2
H	31860.000	39.8	33	40.4	47.2	54.0	-6.8

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5350.000	65.9	33	35.7	68.6	74.0	-5.4
H	10620.000	45.8	33	40.4	53.2	74.0	-20.8
H	15930.000	37.0	33	37.7	41.7	74.0	-32.4
V	21240.000	44.9	33	37.9	49.8	74.0	-24.2
H	26550.000	38.3	33	39.9	45.2	74.0	-28.8
H	31860.000	41.1	33	40.4	48.5	74.0	-25.6

**5510MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5470.000	46.6	33	35.7	49.3	54.0	-4.7
H	11020.000	25.0	33	40.8	32.8	54.0	-21.2
H	16530.000	31.9	33	37.6	36.5	54.0	-17.5
V	22040.000	35.2	33	38.2	40.4	54.0	-13.6
H	27550.000	35.8	33	40.0	42.8	54.0	-11.2
H	33060.000	39.4	33	40.8	47.2	54.0	-6.8

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5470.000	64.0	33	35.7	66.7	74.0	-7.3
H	11020.000	45.4	33	40.8	53.2	74.0	-20.8
H	16530.000	37.1	33	37.6	41.7	74.0	-32.4
V	22040.000	44.6	33	38.2	49.8	74.0	-24.2
H	27550.000	38.2	33	40.0	45.2	74.0	-28.8
H	33060.000	40.7	33	40.8	48.5	74.0	-25.6

**TEST REPORT**
**5590MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	11180.000	31.9	33	40.8	39.7	54.0	-14.3
H	16770.000	28.2	33	37.6	32.8	54.0	-21.2
H	22360.000	31.3	33	38.2	36.5	54.0	-17.5
V	27950.000	33.4	33	40.0	40.4	68.0	-27.6
H	33540.000	34.6	33	41.2	42.8	54.0	-11.2
H	39130.000	36.7	33	43.5	47.2	54.0	-6.8

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	11180.000	65.7	33	40.8	73.5	74.0	-0.5
H	16770.000	48.6	33	37.6	53.2	74.0	-20.8
H	22360.000	36.5	33	38.2	41.7	74.0	-32.4
V	27950.000	42.8	33	40.0	49.8	68.0	-18.2
H	33540.000	37.0	33	41.2	45.2	74.0	-28.8
H	39130.000	38.0	33	43.5	48.5	74.0	-25.6

**5670MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	44.7	33	36.6	48.3	54.0	-5.7
H	11340.000	25.0	33	40.8	32.8	54.0	-21.2
H	17010.000	31.9	33	37.6	36.5	54.0	-17.5
V	22680.000	35.1	33	38.3	40.4	54.0	-13.6
H	28350.000	35.8	33	40.0	42.8	54.0	-11.2
H	34020.000	39.1	33	41.1	47.2	54.0	-6.8

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	59.2	33	36.6	62.8	114.0	-51.2
H	11340.000	45.4	33	40.8	53.2	74.0	-20.8
H	17010.000	37.1	33	37.6	41.7	74.0	-32.4
V	22680.000	44.5	33	38.3	49.8	74.0	-24.2
H	28350.000	38.2	33	40.0	45.2	74.0	-28.8
H	34020.000	40.4	33	41.1	48.5	74.0	-25.6

**TEST REPORT**
**5755MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	49.9	33	36.6	53.5	54.0	-0.5
H	11510.000	28.3	33	40.5	35.8	54.0	-18.2
V	17265.000	32.1	33	37.6	36.7	54.0	-17.3
V	23020.000	35.8	33	38.6	41.4	54.0	-12.6
V	28775.000	35.7	33	40.1	42.8	54.0	-11.2
H	34530.000	40.2	33	41.3	48.5	54.0	-5.5

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	66.6	33	36.6	70.2	74.0	-3.8
H	11510.000	58.7	33	40.5	66.2	74.0	-7.8
V	17265.000	36.8	33	37.6	41.4	74.0	-32.6
V	23020.000	38.2	33	38.6	43.8	74.0	-30.2
V	28775.000	38.2	33	40.1	45.3	74.0	-28.7
H	34530.000	42.6	33	41.3	50.9	74.0	-23.2

**5795MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	5850.000	46.1	33	36.6	49.7	54.0	-4.3
H	11590.000	32.3	33	40.5	39.8	54.0	-14.2
H	17385.000	31.2	33	37.6	35.8	54.0	-18.2
V	23180.000	34.8	33	38.6	40.4	54.0	-13.6
H	28975.000	36.6	33	40.1	43.7	54.0	-10.3
H	34770.000	39.3	33	41.3	47.6	54.0	-6.4

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	5850.000	59.9	33	36.6	63.5	74.0	-10.5
H	11590.000	65.4	33	40.5	72.9	74.0	-1.1
H	17385.000	46.0	33	37.6	50.6	74.0	-23.4
V	23180.000	37.5	33	38.6	43.1	74.0	-30.9
H	28975.000	37.6	33	40.1	44.7	74.0	-29.3
H	34770.000	42.0	33	41.3	50.3	74.0	-23.7

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission the restricted band meets the requirement of FCC Part 15 Section 15.205.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

**TEST REPORT**

Ac mode 20MHz

Frequency: 5210MHz

IEEE 802.11ac (20MHz) (MCS0)

**Radiated Emission Data**

5180MHz

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5150.000	37.0	33	35.7	39.7	54.0	-14.3
H	10360.000	29.5	33	40.5	37.0	54.0	-17.0
H	15540.000	31.5	33	37.7	36.2	54.0	-17.8
H	20720.000	35.1	33	37.7	39.8	54.0	-14.2
V	25900.000	35.4	33	39.3	41.7	54.0	-12.3
H	31080.000	37.0	33	42.1	46.1	54.0	-7.9

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5150.000	51.9	33	35.7	54.6	74.0	-19.4
H	10360.000	49.9	33	40.5	57.4	74.0	-16.6
H	15540.000	44.4	33	37.7	49.1	74.0	-24.9
H	20720.000	45.7	33	37.7	50.4	74.0	-23.6
V	25900.000	36.5	33	39.3	42.8	74.0	-31.2
H	31080.000	35.2	33	42.1	44.3	74.0	-29.7

5240MHz

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10480.000	25.8	33	40.5	33.3	54.0	-20.7
H	15720.000	35.0	33	37.7	39.7	54.0	-14.3
H	20960.000	30.5	33	37.7	35.2	54.0	-18.8
H	26200.000	33.3	33	39.2	39.5	54.0	-14.5
V	31440.000	33.5	33	42.1	42.6	54.0	-11.4
H	36680.000	38.8	33	41.7	47.5	54.0	-6.5

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10480.000	44.8	33	40.5	52.3	74.0	-21.7
H	15720.000	68.3	33	37.7	73.0	74.0	-1.0
H	20960.000	44.5	33	37.7	49.2	74.0	-24.8
H	26200.000	38.8	33	39.2	45.0	68.0	-23.0
V	31440.000	34.2	33	42.1	43.3	74.0	-30.7
H	36680.000	41.5	33	41.7	50.2	74.0	-23.8

**TEST REPORT**
**5200MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10400.000	31.6	33	40.5	39.1	54.0	-14.9
H	15600.000	30.4	33	37.7	35.1	54.0	-19.0
V	20800.000	31.3	33	37.7	36.0	54.0	-18.0
H	26000.000	33.1	33	39.2	39.3	54.0	-14.7
H	31200.000	33.3	33	42.1	42.4	54.0	-11.6
H	36400.000	39.9	33	41.7	48.6	54.0	-5.4

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10400.000	65.9	33	40.5	73.4	74.0	-0.6
H	15600.000	54.0	33	37.7	58.7	74.0	-15.3
V	20800.000	45.0	33	37.7	49.7	74.0	-24.3
H	26000.000	37.6	33	39.2	43.8	74.0	-30.2
H	31200.000	35.4	33	42.1	44.5	74.0	-29.5
H	36400.000	40.8	33	41.7	49.5	74.0	-24.5

**5260MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10520.000	30.0	33	40.4	37.4	54.0	-16.6
H	15780.000	27.8	33	37.7	32.5	54.0	-21.5
V	21040.000	27.6	33	37.9	32.5	54.0	-21.5
H	26300.000	29.1	33	39.2	35.3	54.0	-18.7
V	31560.000	37.0	33	40.4	44.4	54.0	-9.6
H	36820.000	39.4	33	41.7	48.1	54.0	-5.9

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10520.000	51.7	33	40.4	59.1	74.0	-14.9
H	15780.000	43.7	33	37.7	48.4	74.0	-25.6
V	21040.000	46.1	33	37.9	51.0	74.0	-23.0
H	26300.000	38.1	33	39.2	44.3	74.0	-29.7
V	31560.000	36.5	33	40.4	43.9	74.0	-30.1
H	36820.000	41.2	33	41.7	49.9	74.0	-24.1

**5280MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10560.000	31.3	33	40.4	38.7	54.0	-15.3
H	15840.000	28.9	33	37.7	33.6	54.0	-20.4
V	21120.000	30.4	33	37.9	35.3	54.0	-18.7
H	26400.000	28.9	33	39.2	35.1	54.0	-18.9
V	31680.000	36.1	33	40.4	43.5	54.0	-10.5
H	36960.000	39.0	33	41.7	47.7	54.0	-6.3

**TEST REPORT**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10560.000	52.2	33	40.4	59.6	74.0	-14.4
H	15840.000	44.7	33	37.7	49.4	74.0	-24.6
V	21120.000	45.2	33	37.9	50.1	74.0	-23.9
H	26400.000	37.5	33	39.2	43.7	74.0	-30.3
V	31680.000	35.6	33	40.4	43.0	74.0	-31.0
H	36960.000	40.9	33	41.7	49.6	74.0	-24.4

**5320MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5350.000	44.7	33	35.7	47.4	54.0	-6.6
H	10640.000	31.6	33	40.4	39.0	54.0	-15.0
V	15960.000	36.5	33	37.7	41.2	54.0	-12.8
V	21280.000	33.3	33	37.9	38.2	54.0	-15.8
H	26600.000	35.5	33	39.9	42.4	54.0	-11.6
H	31920.000	38.6	33	40.4	46.0	54.0	-8.0

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5350.000	64.8	33	35.7	67.5	74.0	-6.5
H	10640.000	50.9	33	39.9	57.8	74.0	-16.2
V	15960.000	42.5	33	40.8	50.3	74.0	-23.7
V	21280.000	44.0	33	38.8	49.8	74.0	-24.2
H	26600.000	35.9	33	41.9	44.8	74.0	-29.2
H	31920.000	29.7	33	46.2	42.9	74.0	-31.1

**5500MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5470.000	46.6	33	35.7	49.3	54.0	-4.7
H	11000.000	32.2	33	40.8	40.0	54.0	-14.0
V	16500.000	35.0	33	37.6	39.6	54.0	-14.4
V	22000.000	33.9	33	38.2	39.1	54.0	-14.9
H	27500.000	35.7	33	40.0	42.7	54.0	-11.3
H	33000.000	37.8	33	40.8	45.6	54.0	-8.4

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5470.000	59.2	33	35.7	61.9	74.0	-12.1
H	11000.000	51.4	33	40.8	59.2	74.0	-14.8
V	16500.000	42.7	33	37.6	47.3	74.0	-26.7
V	22000.000	46.4	33	38.2	51.6	74.0	-22.4
H	27500.000	38.0	33	40.0	45.0	74.0	-29.0
H	33000.000	35.9	33	40.8	43.7	74.0	-30.3

**5600MHz**

**TEST REPORT**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	11200.000	29.7	33	40.8	37.5	54.0	-16.5
H	16800.000	28.3	33	37.6	32.9	54.0	-21.1
H	22400.000	28.8	33	38.2	34.0	54.0	-20.0
V	28000.000	28.9	33	40.0	35.9	68.0	-32.1
H	33600.000	36.1	33	41.2	44.3	54.0	-9.7
H	39200.000	37.9	33	43.5	48.4	54.0	-5.6

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	11200.000	50.6	33	40.8	58.4	74.0	-15.6
H	16800.000	44.3	33	37.6	48.9	74.0	-25.1
H	22400.000	45.0	33	38.2	50.2	74.0	-23.8
V	28000.000	37.9	33	40.0	44.9	74.0	-29.1
H	33600.000	36.0	33	41.2	44.2	74.0	-29.8
H	39200.000	39.2	33	43.5	49.7	74.0	-24.3

**5700MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	49.7	33	36.6	53.3	54.0	-0.7
H	11400.000	31.2	33	40.8	39.0	54.0	-15.0
V	17100.000	34.9	33	37.6	39.5	54.0	-14.5
V	22800.000	33.8	33	38.3	39.1	54.0	-14.9
H	28500.000	36.5	33	40.1	43.6	54.0	-10.4
H	34200.000	37.4	33	41.1	45.5	54.0	-8.5

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	67.0	33	36.6	70.6	74.0	-3.4
H	11400.000	51.7	33	40.8	59.5	74.0	-14.5
V	17100.000	46.7	33	37.6	51.3	74.0	-22.7
V	22800.000	46.4	33	38.3	51.7	74.0	-22.3
H	28500.000	36.3	33	40.1	43.4	74.0	-30.6
H	34200.000	36.1	33	41.1	44.2	74.0	-29.8

**5745MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	49.8	33	36.6	53.4	54.0	-0.6
H	11490.000	31.1	33	40.8	38.9	54.0	-15.1
H	17235.000	31.7	33	37.6	36.3	54.0	-17.7
H	22980.000	33.5	33	38.3	38.8	54.0	-15.2
H	28725.000	35.0	33	40.1	42.1	54.0	-11.9
H	34470.000	39.5	33	41.1	47.6	54.0	-6.4

**TEST REPORT**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	69.3	33	36.6	72.9	74.0	-1.1
H	11490.000	50.0	33	40.8	57.8	74.0	-16.2
H	17235.000	44.1	33	37.6	48.7	74.0	-25.3
H	22980.000	46.1	33	38.3	51.4	74.0	-22.6
H	28725.000	35.3	33	40.1	42.4	74.0	-31.6
H	34470.000	35.6	33	41.1	43.7	74.0	-30.3

**TEST REPORT**
**5785MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	31.1	33	36.6	34.7	54.0	-19.3
H	11570.000	31.5	33	40.5	39.0	54.0	-15.0
H	17355.000	32.0	33	37.6	36.6	54.0	-17.4
V	23140.000	33.9	33	38.6	39.5	54.0	-14.5
H	28925.000	36.1	33	40.1	43.2	54.0	-10.8
H	34710.000	37.9	33	41.3	46.2	54.0	-7.8

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	48.6	33	36.6	52.2	74.0	-21.8
H	11570.000	64.9	33	40.5	72.4	74.0	-1.6
H	17355.000	44.9	33	37.6	49.5	74.0	-24.5
V	23140.000	38.5	33	38.6	44.1	74.0	-30.0
H	28925.000	38.9	33	40.1	46.0	74.0	-28.0
H	34710.000	45.5	33	41.3	53.8	74.0	-20.2

**5825MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5850.000	38.3	33	36.6	41.9	54.0	-12.1
H	11650.000	30.5	33	40.5	38.0	54.0	-16.0
H	17475.000	30.6	33	37.6	35.2	54.0	-18.8
H	23300.000	32.3	33	38.6	37.9	54.0	-16.1
V	29125.000	36.0	33	40.0	43.0	54.0	-11.0
H	34950.000	37.5	33	41.3	45.8	54.0	-8.2

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5850.000	59.3	33	36.6	62.9	74.0	-11.1
H	11650.000	63.4	33	40.5	70.9	74.0	-3.1
H	17475.000	46.6	33	37.6	51.2	74.0	-22.8
H	23300.000	39.1	33	38.6	44.7	74.0	-29.3
V	29125.000	35.7	33	40.0	42.7	74.0	-31.3
H	34950.000	42.9	33	41.3	51.2	74.0	-22.9

**TEST REPORT**

Ac mode 40MHz

Frequency: 5210MHz

IEEE 802.11ac (40MHz) (MCS0)

**Radiated Emission Data**

5190MHz

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5150.000	48.5	33	35.7	51.2	54.0	-2.8
H	10380.000	32.0	33	40.5	39.5	54.0	-14.6
V	15570.000	31.0	33	37.7	35.7	54.0	-18.3
H	20760.000	32.1	33	37.7	36.8	54.0	-17.2
H	25950.000	35.7	33	39.3	42.0	54.0	-12.0
H	31140.000	38.0	33	42.1	47.1	54.0	-6.9

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5150.000	62.2	33	35.7	64.9	74.0	-9.1
H	10380.000	66.0	33	40.5	73.5	74.0	-0.5
V	15570.000	45.6	33	37.7	50.3	74.0	-23.7
H	20760.000	41.1	33	37.7	45.8	74.0	-28.3
H	25950.000	39.5	33	39.3	45.8	74.0	-28.2
H	31140.000	42.2	33	42.1	51.3	74.0	-22.7

5230MHz

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10460.000	29.6	33	40.5	37.1	54.0	-16.9
H	15690.000	29.8	33	37.7	34.5	54.0	-19.5
H	20920.000	30.7	33	37.7	35.4	54.0	-18.6
V	26150.000	31.2	33	39.2	37.4	54.0	-16.6
H	31380.000	31.5	33	42.1	40.6	54.0	-13.4
H	36610.000	38.1	33	41.7	46.8	54.0	-7.2

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10460.000	63.8	33	40.5	71.3	74.0	-2.7
H	15690.000	46.6	33	37.7	51.3	74.0	-22.7
H	20920.000	44.7	33	37.7	49.4	74.0	-24.6
V	26150.000	38.5	33	39.2	44.7	74.0	-29.3
H	31380.000	32.5	33	42.1	41.6	74.0	-32.4
H	36610.000	39.9	33	41.7	48.6	74.0	-25.4

**TEST REPORT**
**5270MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10540.000	29.4	33	40.4	36.8	54.0	-17.2
H	15810.000	28.9	33	37.7	33.6	54.0	-20.4
H	21080.000	29.1	33	37.9	34.0	54.0	-20.0
V	26350.000	30.5	33	39.2	36.7	68.0	-31.3
H	31620.000	35.9	33	40.4	43.3	54.0	-10.7
H	36890.000	39.4	33	41.7	48.1	54.0	-5.9

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	10540.000	52.5	33	40.4	59.9	74.0	-14.1
H	15810.000	44.3	33	37.7	49.0	74.0	-25.0
H	21080.000	45.4	33	37.9	50.3	74.0	-23.7
V	26350.000	38.7	33	39.2	44.9	68.0	-23.1
H	31620.000	37.0	33	40.4	44.4	74.0	-29.6
H	36890.000	42.0	33	41.7	50.7	74.0	-23.3

**5310MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5350.000	47.0	33	35.7	49.7	54.0	-4.3
H	10620.000	31.2	33	40.4	38.6	54.0	-15.4
H	15930.000	36.4	33	37.7	41.1	54.0	-12.9
V	21240.000	33.0	33	37.9	37.9	54.0	-16.1
H	26550.000	35.3	33	39.9	42.2	54.0	-11.8
H	31860.000	38.8	33	40.4	46.2	54.0	-7.8

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5350.000	63.8	33	35.7	66.5	74.0	-7.5
H	10620.000	53.0	33	40.4	60.4	74.0	-13.6
H	15930.000	44.4	33	37.7	49.1	74.0	-24.9
V	21240.000	46.5	33	37.9	51.4	74.0	-22.6
H	26550.000	38.3	33	39.9	45.2	74.0	-28.8
H	31860.000	35.1	33	40.4	42.5	74.0	-31.5

**5510MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5470.000	49.0	33	35.7	51.7	54.0	-2.3
H	11020.000	32.1	33	40.8	39.9	54.0	-14.1
H	16530.000	35.3	33	37.6	39.9	54.0	-14.1
V	22040.000	34.2	33	38.2	39.4	54.0	-14.6
H	27550.000	35.8	33	40.0	42.8	54.0	-11.2
H	33060.000	38.2	33	40.8	46.0	54.0	-8.0

**TEST REPORT**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5470.000	64.0	33	35.7	66.7	74.0	-7.3
H	11020.000	45.4	33	40.8	53.2	74.0	-20.8
H	16530.000	37.1	33	37.6	41.7	74.0	-32.4
V	22040.000	44.6	33	38.2	49.8	74.0	-24.2
H	27550.000	38.2	33	40.0	45.2	74.0	-28.8
H	33060.000	40.7	33	40.8	48.5	74.0	-25.6

**5590MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	11180.000	29.9	33	40.8	37.7	54.0	-16.3
H	16770.000	29.2	33	37.6	33.8	54.0	-20.2
H	22360.000	27.5	33	38.2	32.7	54.0	-21.3
V	27950.000	28.4	33	40.0	35.4	68.0	-32.6
H	33540.000	35.2	33	41.2	43.4	54.0	-10.6
H	39130.000	36.8	33	43.5	47.3	54.0	-6.7

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	11180.000	51.7	33	40.8	59.5	74.0	-14.5
H	16770.000	44.0	33	37.6	48.6	74.0	-25.4
H	22360.000	44.3	33	38.2	49.5	74.0	-24.5
V	27950.000	37.4	33	40.0	44.4	68.0	-23.6
H	33540.000	36.2	33	41.2	44.4	74.0	-29.6
H	39130.000	40.3	33	43.5	50.8	74.0	-23.2

**5670MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	45.4	33	36.6	49.0	54.0	-5.0
H	11340.000	32.1	33	40.8	39.9	54.0	-14.1
H	17010.000	35.9	33	37.6	40.5	54.0	-13.5
V	22680.000	33.8	33	38.3	39.1	54.0	-14.9
H	28350.000	37.0	33	40.0	44.0	54.0	-10.0
H	34020.000	37.7	33	41.1	45.8	54.0	-8.2

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	66.1	33	36.6	69.7	114.0	-44.3
H	11340.000	50.2	33	40.8	58.0	74.0	-16.0
H	17010.000	43.1	33	37.6	47.7	74.0	-26.3
V	22680.000	45.3	33	38.3	50.6	74.0	-23.4
H	28350.000	36.8	33	40.0	43.8	74.0	-30.2
H	34020.000	34.2	33	41.1	42.3	74.0	-31.7

**TEST REPORT**
**5755MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	49.2	33	36.6	52.8	54.0	-1.2
H	11510.000	32.4	33	40.5	39.9	54.0	-14.1
V	17265.000	32.3	33	37.6	36.9	54.0	-17.1
V	23020.000	31.9	33	38.6	37.5	54.0	-16.5
V	28775.000	35.7	33	40.1	42.8	54.0	-11.2
H	34530.000	40.0	33	41.3	48.3	54.0	-5.7

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	67.2	33	36.6	70.8	74.0	-3.2
H	11510.000	66.4	33	40.5	73.9	74.0	-0.1
V	17265.000	46.5	33	37.6	51.1	74.0	-22.9
V	23020.000	38.4	33	38.6	44.0	74.0	-30.0
V	28775.000	39.0	33	40.1	46.1	74.0	-27.9
H	34530.000	43.2	33	41.3	51.5	74.0	-22.5

**5795MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5850.000	49.8	33	36.6	53.4	54.0	-0.6
H	11590.000	31.3	33	40.5	38.8	54.0	-15.2
V	17385.000	31.2	33	37.6	35.8	54.0	-18.2
H	23180.000	34.8	33	38.6	40.4	54.0	-13.6
H	28975.000	35.2	33	40.1	42.3	54.0	-11.7
V	34770.000	40.5	33	41.3	48.8	54.0	-5.2

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5850.000	67.6	33	36.6	71.2	74.0	-2.8
H	11590.000	65.9	33	40.5	73.4	74.0	-0.6
V	17385.000	40.5	33	37.6	45.1	74.0	-28.9
H	23180.000	51.5	33	38.6	57.1	74.0	-16.9
H	28975.000	37.5	33	40.1	44.6	74.0	-29.4
V	34770.000	42.1	33	41.3	50.4	74.0	-23.6

**TEST REPORT**

Ac mode 80MHz

Frequency: 5210MHz

IEEE 802.11ac (80MHz) (MCS0)

**Radiated Emission Data**

5210MHz

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5150.000	48.2	33	35.7	50.9	54.0	-3.1
H	10360.000	29.6	33	40.5	37.1	54.0	-16.9
H	15540.000	30.4	33	37.7	35.1	54.0	-18.9
H	20720.000	33.1	33	37.7	37.8	54.0	-16.2
V	25900.000	33.3	33	39.3	39.6	54.0	-14.4
H	31080.000	32.3	33	42.1	41.4	54.0	-12.6

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5150.000	61.1	33	35.7	63.8	74.0	-10.3
H	10360.000	62.6	33	40.5	70.1	74.0	-3.9
H	15540.000	46.7	33	37.7	51.4	74.0	-22.6
H	20720.000	39.4	33	37.7	44.1	74.0	-30.0
V	25900.000	35.3	33	39.3	41.6	74.0	-32.4
H	31080.000	36.0	33	42.1	45.1	74.0	-28.9

5290MHz

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5350.000	44.6	33	35.7	47.3	54.0	-6.7
H	10580.000	29.7	33	40.4	37.1	54.0	-16.9
H	15870.000	30.4	33	37.7	35.1	54.0	-18.9
H	21160.000	32.9	33	37.9	37.8	54.0	-16.2
V	26450.000	33.4	33	39.2	39.6	54.0	-14.4
H	31740.000	34.0	33	40.4	41.4	54.0	-12.6

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5350.000	57.5	33	35.7	60.2	74.0	-13.8
H	10580.000	62.7	33	40.4	70.1	74.0	-3.9
H	15870.000	46.7	33	37.7	51.4	74.0	-22.6
H	21160.000	39.2	33	37.9	44.1	74.0	-30.0
V	26450.000	35.4	33	39.2	41.6	74.0	-32.4
H	31740.000	37.7	33	40.4	45.1	74.0	-28.9

**TEST REPORT**
**5530MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5470.000	44.8	33	35.7	47.5	54.0	-6.5
H	11060.000	29.3	33	40.8	37.1	54.0	-16.9
H	16590.000	30.5	33	37.6	35.1	54.0	-18.9
H	22120.000	32.6	33	38.2	37.8	54.0	-16.2
V	27650.000	32.6	33	40.0	39.6	54.0	-14.4
H	33180.000	33.6	33	40.8	41.4	54.0	-12.6

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5470.000	59.0	33	35.7	61.7	74.0	-12.3
H	11060.000	62.3	33	40.8	70.1	74.0	-3.9
H	16590.000	46.8	33	37.6	51.4	74.0	-22.6
H	22120.000	38.9	33	38.2	44.1	74.0	-30.0
V	27650.000	34.6	33	40.0	41.6	74.0	-32.4
H	33180.000	37.3	33	40.8	45.1	74.0	-28.9

**5610MHz**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	45.2	33	36.6	48.8	94.0	-45.2
H	11220.000	29.3	33	40.8	37.1	54.0	-16.9
H	16830.000	30.5	33	37.6	35.1	54.0	-18.9
H	22440.000	32.6	33	38.2	37.8	54.0	-16.2
V	28050.000	32.6	33	40.0	39.6	54.0	-14.4
H	33660.000	33.2	33	41.2	41.4	54.0	-12.6

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	59.4	33	36.6	63.0	114.0	-51.0
H	11220.000	62.3	33	40.8	70.1	74.0	-3.9
H	16830.000	46.8	33	37.6	51.4	74.0	-22.6
H	22440.000	38.9	33	38.2	44.1	74.0	-30.0
V	28050.000	34.6	33	40.0	41.6	74.0	-32.4
H	33660.000	36.9	33	41.2	45.1	74.0	-28.9

**TEST REPORT**
**5775MHz**

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	3m - Average (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	49.2	33	36.6	52.8	54.0	-1.2
V	5850.000	46.3	33	36.6	49.9	54.0	-4.1
V	11550.000	27.8	33	40.5	35.3	54.0	-18.7
V	17325.000	33.1	33	37.6	37.7	54.0	-16.3
H	23100.000	34.5	33	38.6	40.1	54.0	-13.9
H	28875.000	40.2	33	40.1	47.3	54.0	-6.7

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	5725.000	65.6	33	36.6	69.2	74.0	-4.8
V	5850.000	61.5	33	36.6	65.1	74.0	-8.9
V	11550.000	36.4	33	40.5	43.9	74.0	-30.1
V	17325.000	46.9	33	37.6	51.5	74.0	-22.5
H	23100.000	40.6	33	38.6	46.2	74.0	-27.9
H	28875.000	42.5	33	40.1	49.6	74.0	-24.4

NOTES:

1. Peak detector is used for the emission measurement.
2. Average detector is used for the average data of emission measurement
3. All measurements were made at 3 meters.
4. Value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205.
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

**TEST REPORT**

Mode: Transmitting + Charging Internal Battery + USB Charging Out

**Radiated Emission Data**

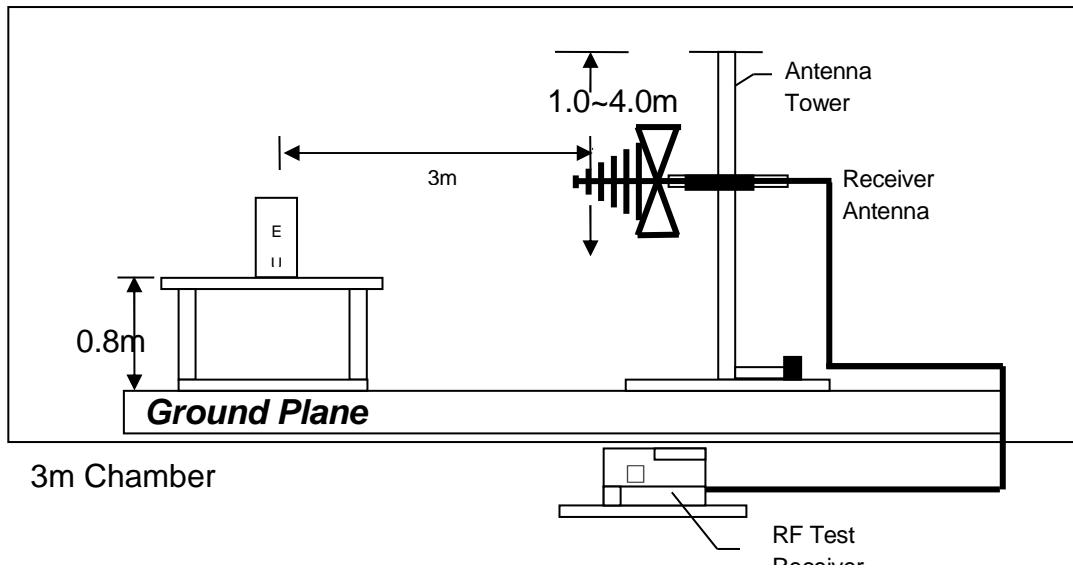
Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	49.128	27.8	16	11.0	22.8	40.0	-17.2
V	106.045	37.5	16	13.0	34.5	43.5	-9.0
H	246.312	34.6	16	20.0	38.6	46.0	-7.4
V	626.788	25.8	16	29.0	38.8	46.0	-7.2
V	724.956	29.5	16	30.0	43.5	46.0	-2.5
V	750.025	30.2	16	30.0	44.2	46.0	-1.8
V	774.224	25.8	16	31.0	40.8	46.0	-5.2
V	792.265	27.8	16	31.0	42.8	46.0	-3.2

NOTES: 1. Quasi-Peak detector is used for the emission measurement.  
2. All measurements were made at 3 meters.  
3. Value in the margin column shows emission below limit.  
4. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205.

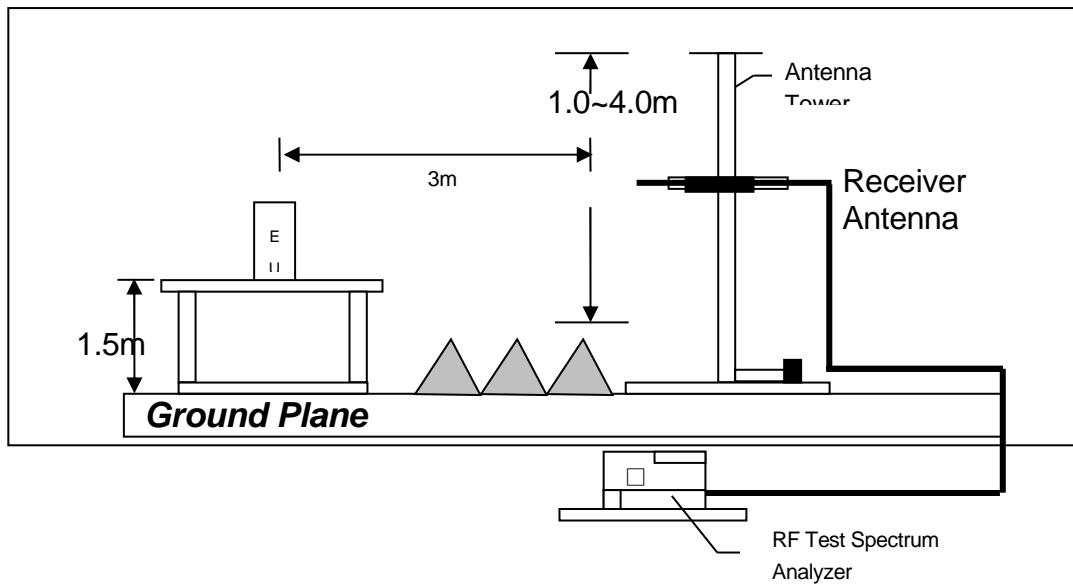
## TEST REPORT

### 4.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.



Test setup of radiated emissions up to 1GHz



Test setup of radiated emissions above 1GHz

**TEST REPORT****4.7 AC Power Line Conducted Emission**

- Not applicable – EUT is only powered by battery for operation.
- EUT connects to AC power line. Emission Data is listed in following pages.
- Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

**4.7.1 AC Power Line Conducted Emission Configuration Photograph**

Worst Case Line-Conducted Configuration  
at

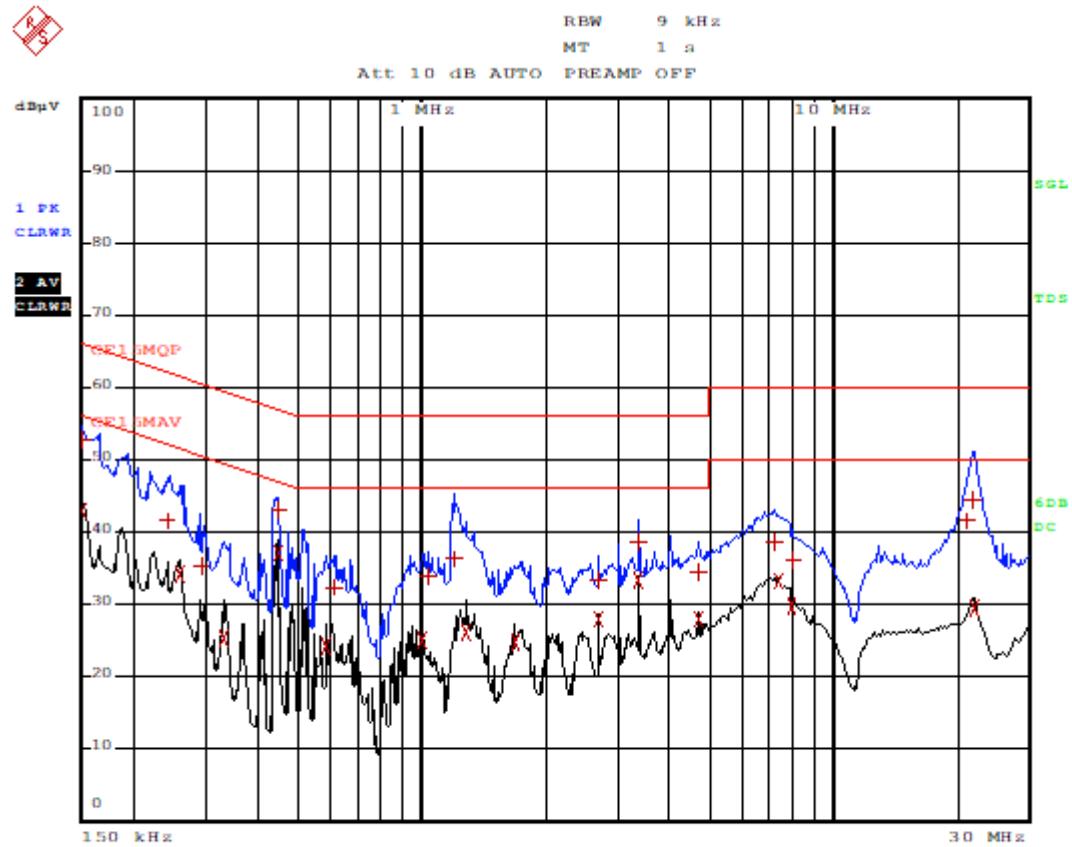
0.447 MHz

The worst-case line conducted configuration photographs are attached in the Appendix and saved with filename: Conduct Photo.pdf

**4.7.2 AC Power Line Conducted Emission Data**

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

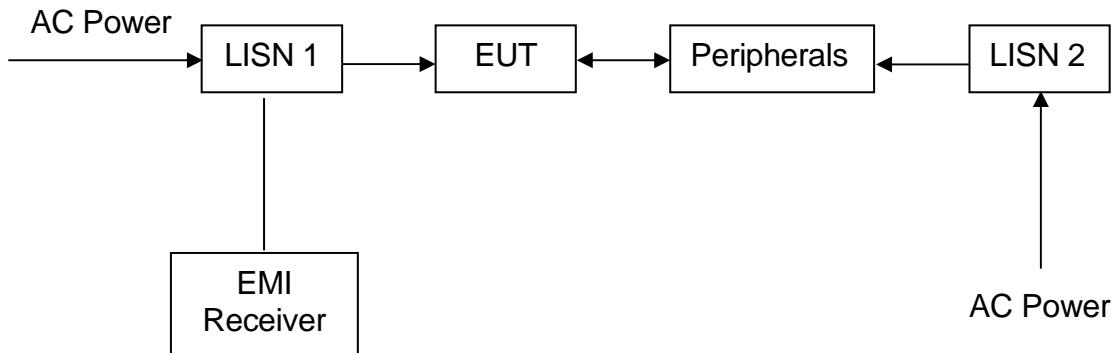
Passed by 9.7dB margin

**TEST REPORT****Worse Case Operating Mode: Transmitting + Charging Internal Battery + USB Charging Out**

**TEST REPORT****Worse Case Operating Mode: Transmitting + Charging Internal Battery + USB Charging Out**

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	C32MBQP				
Trace2:	C32MBAV				
Trace3:	---				
TRACE	FREQUENCY	LEVEL dB $\mu$ V	DELTA	LIMIT dB	
2	CISPR Average 150 kHz	42.91 L1	-13.08		
1	Quasi Peak 150 kHz	52.80 L1	-13.19		
1	Quasi Peak 244.5 kHz	41.51 L1	-20.42		
2	CISPR Average 258 kHz	34.30 L1	-17.19		
1	Quasi Peak 294 kHz	35.42 L1	-24.98		
2	CISPR Average 330 kHz	25.30 L1	-24.14		
2	CISPR Average 447 kHz	37.19 L1	-9.74		
1	Quasi Peak 447 kHz	43.16 L1	-13.76		
2	CISPR Average 582 kHz	24.29 L1	-21.70		
1	Quasi Peak 609 kHz	32.40 L1	-23.60		
2	CISPR Average 1.0095 MHz	25.19 N	-20.81		
1	Quasi Peak 1.041 MHz	34.11 N	-21.88		
1	Quasi Peak 1.2075 MHz	36.43 L1	-19.57		
2	CISPR Average 1.284 MHz	26.05 L1	-19.94		
2	CISPR Average 1.6935 MHz	24.82 L1	-21.18		
1	Quasi Peak 2.6925 MHz	33.44 L1	-22.55		
2	CISPR Average 2.697 MHz	27.98 L1	-18.01		
2	CISPR Average 3.3675 MHz	33.59 L1	-12.40		
1	Quasi Peak 3.3675 MHz	38.75 L1	-17.24		
2	CISPR Average 4.7175 MHz	27.87 L1	-18.12		

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	C32MBQP				
Trace2:	C32MBAV				
Trace3:	---				
TRACE	FREQUENCY	LEVEL dB $\mu$ V	DELTA	LIMIT dB	
1	Quasi Peak 4.7175 MHz	34.42 N	-21.57		
1	Quasi Peak 7.2645 MHz	38.67 L1	-21.32		
2	CISPR Average 7.386 MHz	33.18 N	-16.81		
2	CISPR Average 8.007 MHz	29.87 N	-20.13		
1	Quasi Peak 8.034 MHz	36.21 N	-23.78		
1	Quasi Peak 21.5385 MHz	41.54 N	-18.45		
1	Quasi Peak 22.0515 MHz	44.40 L1	-15.59		
2	CISPR Average 22.29 MHz	29.60 N	-20.39		

**TEST REPORT****4.7.3 Conducted Emission Test Setup**

## TEST REPORT

### 4.8 Frequency Stability Requirement

Frequency (MHz)	Mode	Measured Value (ppm) (0°C)	Measured Value (ppm) (10°C)	Measured Value (ppm) (20°C)	Measured Value (ppm) (30°C)	Measured Value (ppm) (40°C)	Measured Value (ppm) (50°C)
5180	A	0.804	0.952	4.054	4.102	3.840	3.700
5260		0.799	0.854	4.021	4.125	3.754	3.654
5500		0.755	0.825	4.025	4.258	3.574	3.655
5745		0.725	0.854	4.090	4.894	3.842	4.418

Temperature (°C)	Frequency (MHz)	Mode	Measured Value (ppm)	Measured Value (ppm)	Measured Value (ppm)
			120VAC	138VAC	102VAC
25	5180	A	4.054	4.601	3.893
25	5260		3.954	4.215	3.548
25	5745		3.845	4.871	3.452
25	5745		4.09	3.568	4.496

The Maximum value is +4.894ppm.

It is proved that the frequency stability such that an emission is maintained within the band of operation under all condition.

### 4.9 U-NII1 99% Bandwidth Requirement

For the case if a channel operating in U-NII 1 band has a 26-dB bandwidth that straddles into U-NII 2A band but its 99% occupied power bandwidth does not. For this rare case, DFS requirement does not apply.

The plots of U-NII1 99% bandwidth is saved with filename: DATA.pdf proved that no further test for DFS.

**TEST REPORT****4.10 DFS Channel Shutdown and Non-occupancy period.**

According to standard 905462 DO2 UNII DFS Compliance procedures New Pules v02 section 5.1.1 and 5.1.2.

**Master Devices**

- a) The *Master Device* will use DFS in order to detect *Radar Waveforms* with received signal strength above the *DFS Detection Threshold* in the 5250 - 5350 MHz and 5470- 5725 MHz bands. DFS is not required in the 5150 - 5250 MHz or 5725 - 5825 MHz bands.
- b) Before initiating a network on a *Channel*, the *Master Device* will perform a *Channel Availability Check* for a specified time duration (*Channel Availability Check Time*) to ensure that there is no radar system operating on the *Channel*, using DFS described under subsection a) above.
- c) The *Master Device* initiates a U-NII network by transmitting control signals that will enable other U-NII devices to *Associate* with the *Master Device*.
- d) During normal operation, the *Master Device* will monitor the *Channel* (*In-Service Monitoring*) to ensure that there is no radar system operating on the *Channel*, using DFS described under a).
- e) If the *Master Device* has detected a *Radar Waveform* during *In-Service Monitoring* as described under d), the *Operating Channel* of the U-NII network is no longer an *Available Channel*. The *Master Device* will instruct all associated *Client Device(s)* to stop transmitting on this *Channel* within the *Channel Move Time*. The transmissions during the *Channel Move Time* will be limited to the *Channel Closing Transmission Time*.
- f) Once the *Master Device* has detected a *Radar Waveform* it will not utilize the *Channel* for the duration of the *Non-Occupancy Period*. 3
- g) If the *Master Device* delegates the *In-Service Monitoring* to a *Client Device*, then the combination will be tested to the requirements described under d) through f) above.

## TEST REPORT

### Client Devices

- a) A *Client Device* will not transmit before having received appropriate control signals from a *Master Device*.
- b) A *Client Device* will stop all its transmissions whenever instructed by a *Master Device* to which it is associated and will meet the *Channel Move Time* and *Channel Closing Transmission Time* requirements. The *Client Device* will not resume any transmissions until it has again received control signals from a *Master Device*.
- c) If a *Client Device* is performing *In-Service Monitoring* and detects a *Radar Waveform* above the *DFS Detection Threshold*, it will inform the *Master Device*. This is equivalent to the *Master Device* detecting the *Radar Waveform* and d) through f) of section 5.1.1 apply.
- d) Irrespective of *Client Device* or *Master Device* detection the *Channel Move Time* and *Channel Closing Transmission Time* requirements remain the same.
- e) The client test frequency must be monitored to ensure no transmission of any type has occurred for 30 minutes. Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-Occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear.

#### 4.10.1 Applicability of DFS requirement during normal operation.

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>DFS Detection Threshold</i>	Yes	Not required
<i>Channel Closing Transmission Time</i>	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>U-NII Detection Bandwidth and Statistical Performance Check</i>	All BW modes must be tested	Not required
<i>Channel Move Time and Channel Closing Transmission Time</i>	Test using widest BW mode available	Test using the widest BW mode available for the link
<i>All other tests</i>	Any single BW mode	Not required
<b>Note:</b> Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

The operational behavior and individual DFS requirements that are associated with these modes are as follows:

**TEST REPORT****4.10.2 Response Requirements**

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

**Note 1:** *Channel Move Time* and the *Channel Closing Transmission Time* should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

**Note 2:** The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate a *Channel move* (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

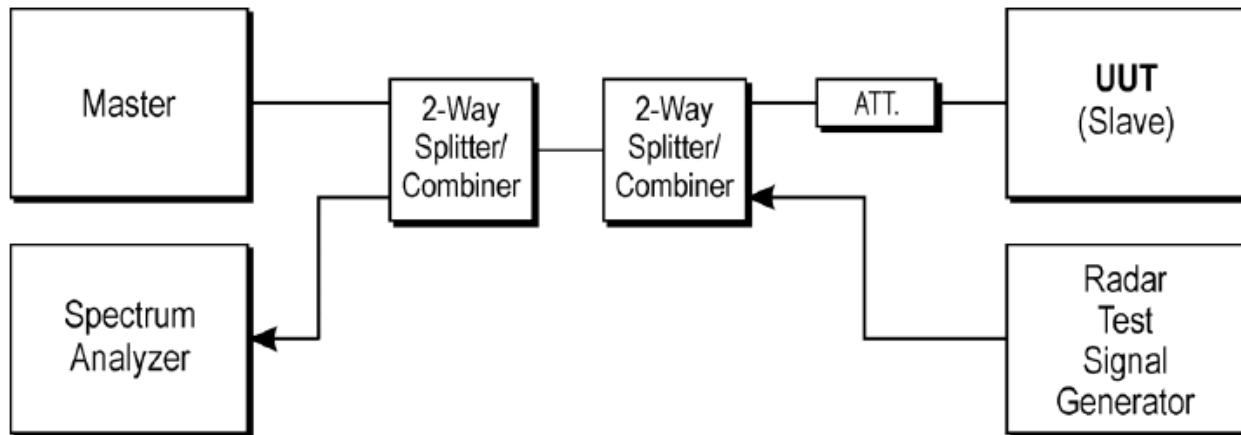
**Note 3:** During the *U-NII Detection Bandwidth* detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

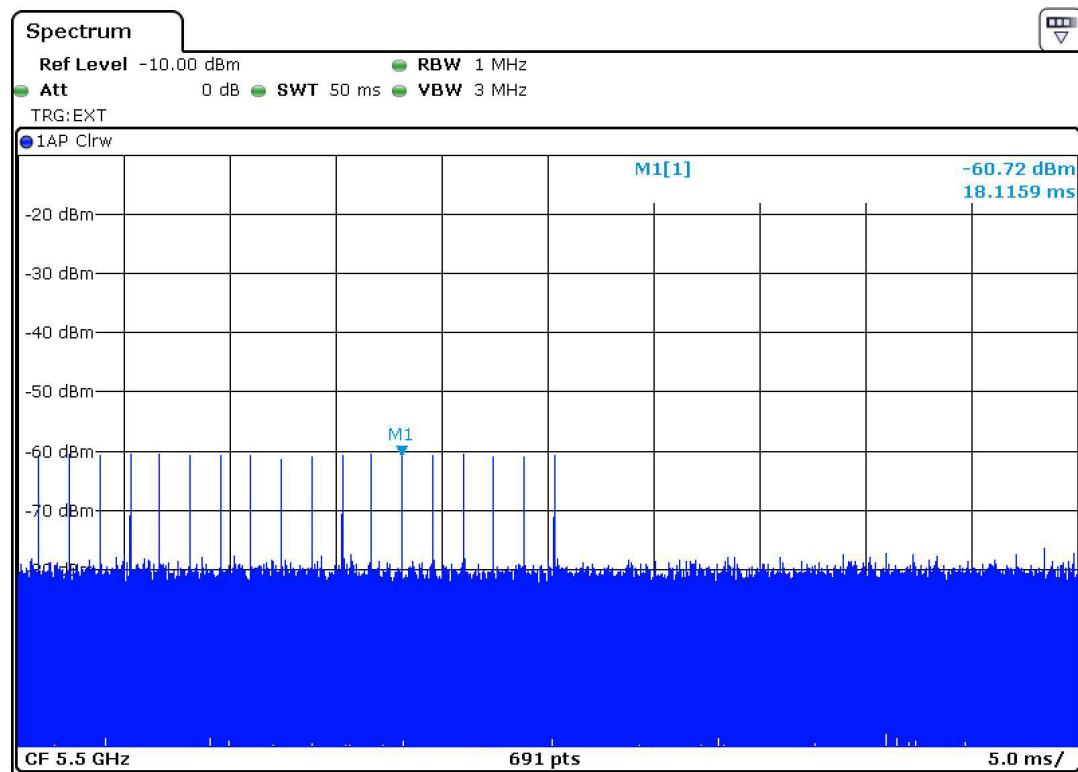
**TEST REPORT**
**4.10.3 Short pulse Radar test Wave forms**

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	Roundup $\left\lceil \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\rceil$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
<b>Note 1:</b> Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

**TEST REPORT****4.10.5 Calibration Setup and DFS Test Results****4.10.5.1 Calibration of Radar Waveform****4.10.5.2 Calibration Procedure:**

The Interference Radar Detection Threshold Level is  $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$  that had been taken into account the output power range and antenna gain. The following equipment setup was used to calibrate the conducted Radar Waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the Master or client device. The Spectrum analyzer was switched was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 1MHz or 3MHz respectively to measure the type 0 radar waveform. The spectrum analyzer had offset to compensate and RF cable loss. The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm. Capture the spectrum analyzer plots on short pulse radar waveform.

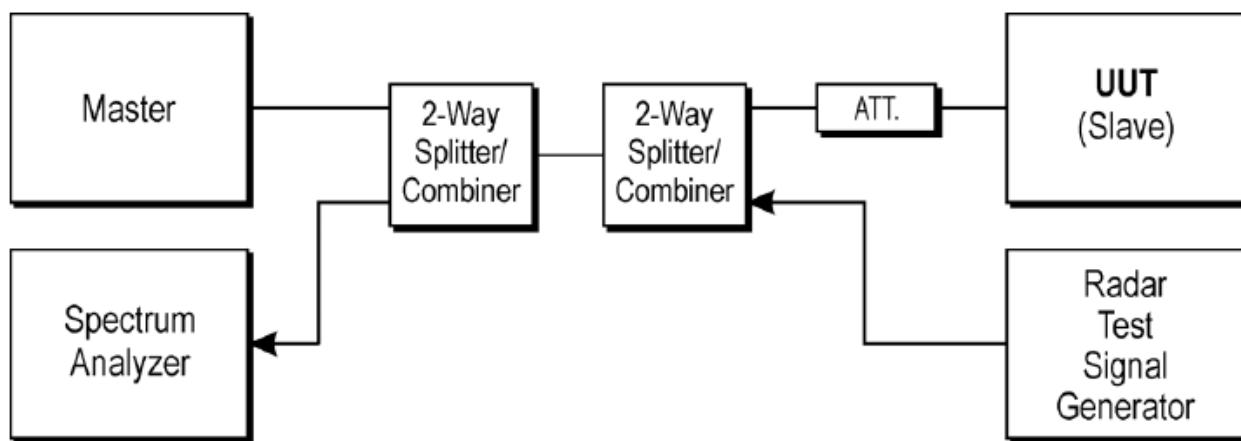
**4.10.5.3 Conducted Setup**

**TEST REPORT****4.10.7 Radar Waveform Calibration Result****4.10.8 Test Deviation**

There is no deviation with the original standard.

**TEST REPORT****10.11.1 Test Procedures**

1. The radar pulse generator is setup to provide a pulse at frequency that the Master and Client are operating. A type 0 radar pulse with a 1us pulse width and a 1428 us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pules) at a level approximately -62dBm at the antenna of the Master device.
3. An external trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. A U-NII device operating as a Client Device (EUT) will associate with the Master at same channel. The MEPG file “TestFile.mpg” specified by the FCC is streamed from the “file computer” through the master to the client device (EUT).
5. When a radar burst with a level equal to the DFS Detection Threshold + 1dB is generated on the operating Channel of the U-NII device. At time T0 the Radar Waveform generator sends a Burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmission of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the EUT during the observation time. One 20seconds plot is reported for the short pulse Radar Type 0. The plot for the short pulse radar types start at the end if the radar burst.
7. Measurement of the aggregate duration of the Channel Closing Transmission Time method:  
Center Frequency: operating frequency  
Span: Zero  
RBW: 1MHz  
VBW: 3MHz  
Sweep Time: 32Sec  
Detector: Max Peak  
Sweep: Single.
8. Measure the EUT for more than 30mintes following the Channel move time to verify the no transmission or beacons occur on this Channel.

**4.11.2 Test Setup****4.11.3 Test Deviation**

There is no deviation with the original standard.

## TEST REPORT

### 4.11.4 Test result

Mode : 802.11AC VHT 80

## Measurement Summary

DUT Frequency (MHz)	Radar Type No.	Type of Measurement value	Overall Result
5290.000000	0	Channel Move Time	PASS
5290.000000	0	Channel Closing Transmission Time	PASS
5290.000000	0	Non-occupancy period	PASS

## Channel Move Time Detailed Results

DUT Frequency (MHz)	Radar Type No.	CMT Tx Time (s)	CMT Limit (s)	CMT Result	CMT Comment
5290.000000	0	1.005	10.000	PASS	Tx Time value is last trailing edge found within sweep. See Note 1.

## Channel Closing Transmission Time Detailed Results

DUT Frequency (MHz)	Radar Type No.	CCTT Type of Value	CCTT No. of Pulses found	CCTT Tx Time (ms)	CCTT Tx Time Limit (ms)	CCTT Result
5290.000000	0	first 200 ms	7	0.356	200.000	PASS
5290.000000	0	remaining 10 second period	19	1.464	60.000	PASS

(continuation of the "Channel Closing Transmission Time Detailed Results" table from column 7 ...)

DUT Frequency (MHz)	CCTT Comment
5290.000000	See Note 1.
5290.000000	See Note 1.

## Non-occupancy period Detailed Results

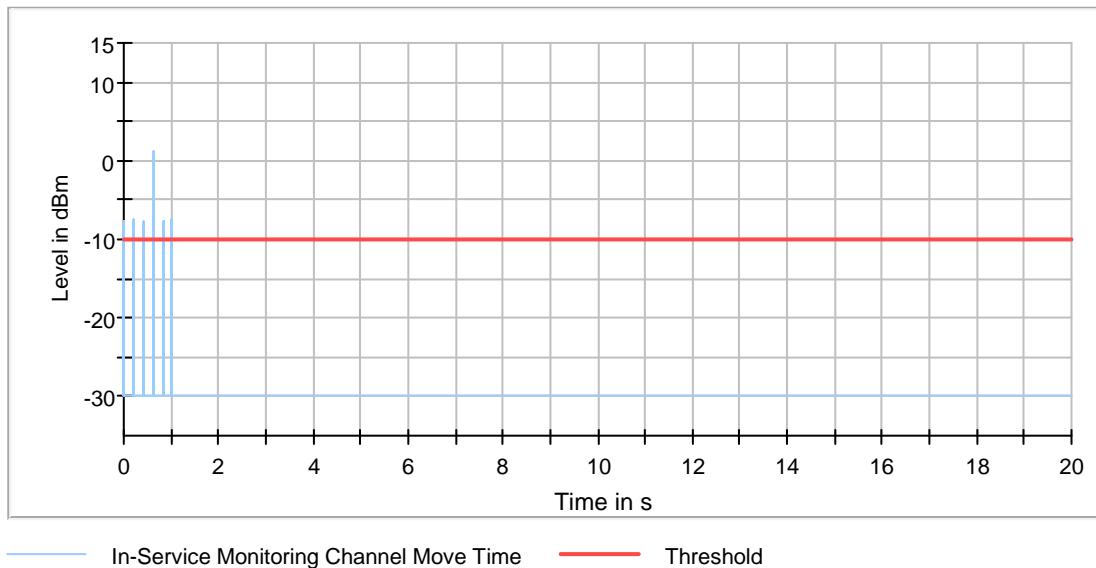
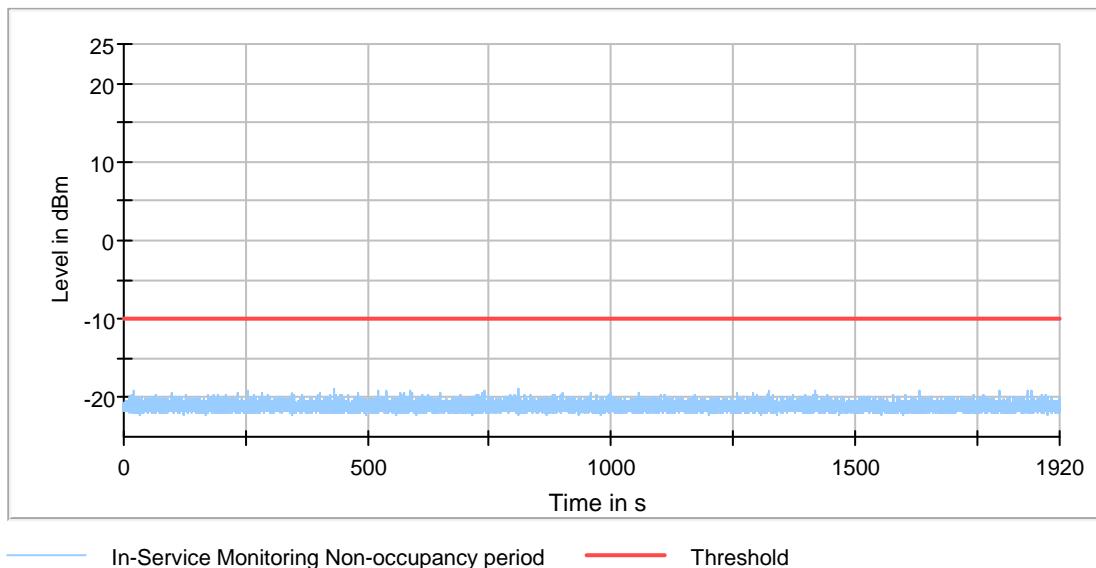
DUT Frequency (MHz)	Radar Type No.	NOP No. of Pulses found	NOP No. of Pulses Limit	NOP Tx Time (s)	NOP Tx Time Limit (s)	NOP Result	NOP Comment
5290.000000	0	0	0	0.000	0.000	PASS	

## Transmitting Test Detailed Results

DUT Frequency (MHz)	Tx-Test Tx Time (s)	Tx-Test No. of Pulses found	Tx-Test Result	Tx-Test Comment
5290.000000	---	---	---	not performed / not finished

## Additional Information

Note	Description
Note 1:	Because of the radar pulse event at the beginning, the investigation of the trace begins with an offset of 28.7 ms conforming to the end of the Radar burst.
Note 2:	-

**TEST REPORT****Channel Move Time****Channel Closing Transmission Time**

**TEST REPORT**

Mode : 802.11AC VHT 80

**Measurement Summary**

DUT Frequency (MHz)	Radar Type No.	Type of Measurement value	Overall Result
5530.000000	0	Channel Move Time	PASS
5530.000000	0	Channel Closing Transmission Time	PASS
5530.000000	0	Non-occupancy period	PASS

**Channel Move Time Detailed Results**

DUT Frequency (MHz)	Radar Type No.	CMT Tx Time (s)	CMT Limit (s)	CMT Result	CMT Comment
5530.000000	0	0.000	10.000	PASS	Tx Time value is last trailing edge found within sweep. See Note 1.

**Channel Closing Transmission Time Detailed Results**

DUT Frequency (MHz)	Radar Type No.	CCTT Type of Value	CCTT No. of Pulses found	CCTT Tx Time (ms)	CCTT Tx Time Limit (ms)	CCTT Result
5530.000000	0	first 200 ms	0	0.000	200.000	PASS
5530.000000	0	remaining 10 second period	0	0.000	60.000	PASS

(continuation of the "Channel Closing Transmission Time Detailed Results" table from column 7 ...)

DUT Frequency (MHz)	CCTT Comment
5530.000000	See Note 1.
5530.000000	See Note 1.

**Non-occupancy period Detailed Results**

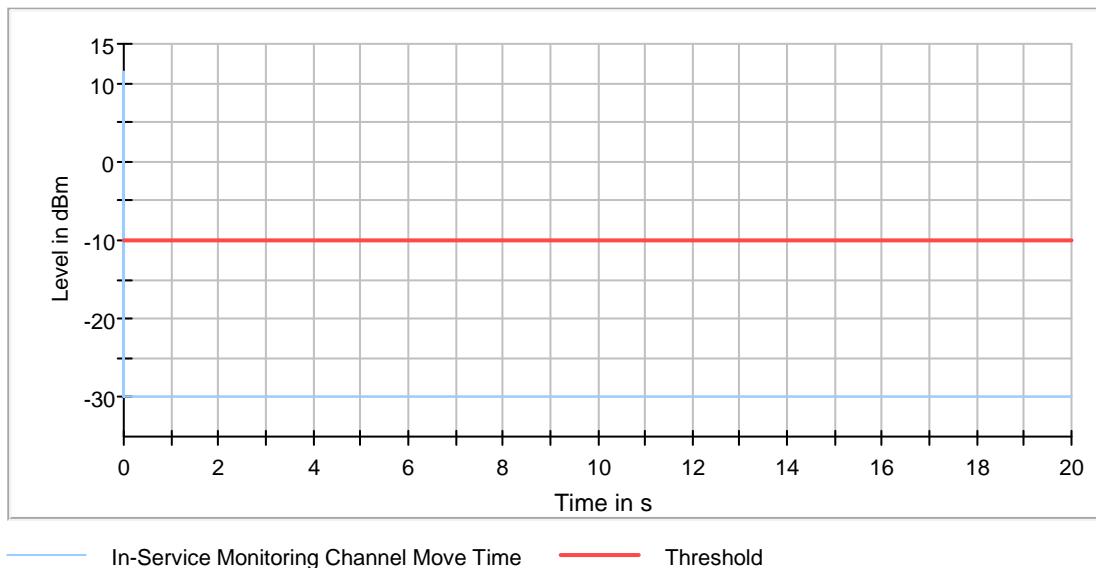
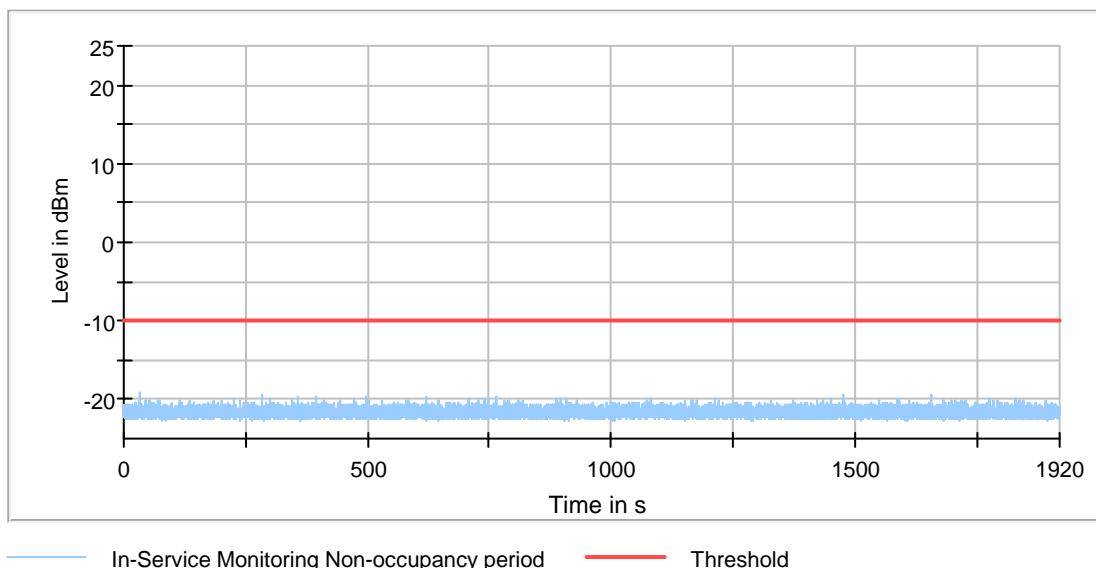
DUT Frequency (MHz)	Radar Type No.	NOP No. of Pulses found	NOP No. of Pulses Limit	NOP Tx Time (s)	NOP Tx Time Limit (s)	NOP Result	NOP Comment
5530.000000	0	0	0	0.000	0.000	PASS	

**Transmitting Test Detailed Results**

DUT Frequency (MHz)	Tx-Test Tx Time (s)	Tx-Test No. of Pulses found	Tx-Test Result	Tx-Test Comment
5530.000000	---	---	---	not performed / not finished

**Additional Information**

Note	Description
Note 1:	Because of the radar pulse event at the beginning, the investigation of the trace begins with an offset of 28.7 ms conforming to the end of the Radar burst.
Note 2:	-

**TEST REPORT****Channel Move Time****Channel Closing Transmission Time**

**TEST REPORT**

Mode : 802.11AC VHT 80

**Measurement Summary**

DUT Frequency (MHz)	Radar Type No.	Type of Measurement value	Overall Result	Overall Comment
5610.000000	0	Channel Move Time	PASS	
5610.000000	0	Channel Closing Transmission Time	PASS	
5610.000000	0	Non-occupancy period	PASS	

**Channel Move Time Detailed Results**

DUT Frequency (MHz)	Radar Type No.	CMT Tx Time (s)	CMT Limit (s)	CMT Result	CMT Comment
5610.000000	0	0.000	10.000	PASS	Tx Time value is last trailing edge found within sweep. See Note 1.

**Channel Closing Transmission Time Detailed Results**

DUT Frequency (MHz)	Radar Type No.	CCTT Type of Value	CCTT No. of Pulses found	CCTT Tx Time (ms)	CCTT Tx Time Limit (ms)	CCTT Result
5610.000000	0	first 200 ms	0	0.000	200.000	PASS
5610.000000	0	remaining 10 second period	0	0.000	60.000	PASS

(continuation of the "Channel Closing Transmission Time Detailed Results" table from column 7 ...)

DUT Frequency (MHz)	CCTT Comment
5610.000000	See Note 1.
5610.000000	See Note 1.

**Non-occupancy period Detailed Results**

DUT Frequency (MHz)	Radar Type No.	NOP No. of Pulses found	NOP No. of Pulses Limit	NOP Tx Time (s)	NOP Tx Time Limit (s)	NOP Result	NOP Comment
5610.000000	0	0	0	0.000	0.000	PASS	

**Transmitting Test Detailed Results**

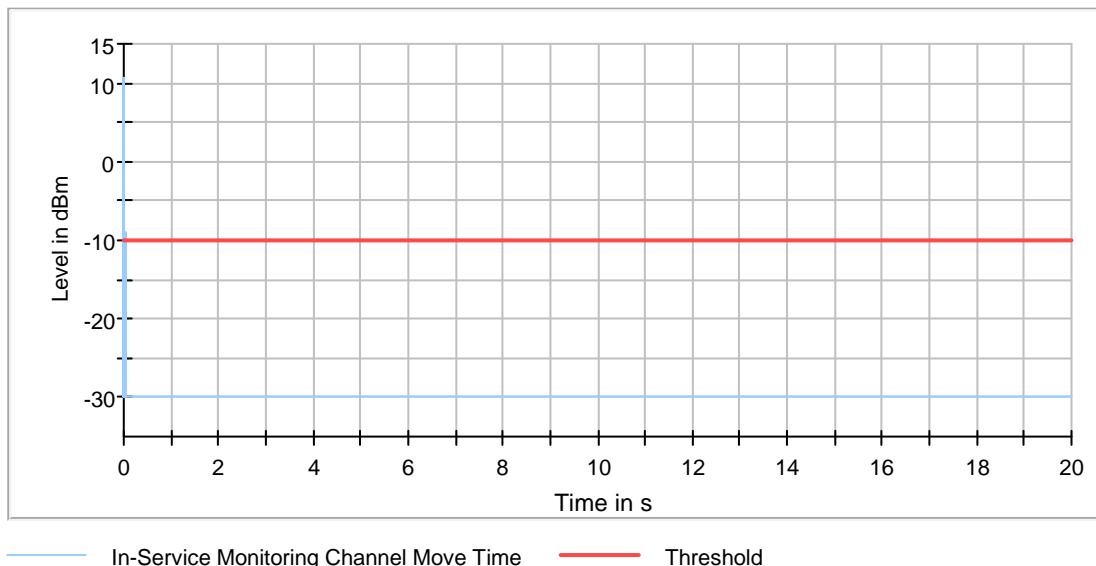
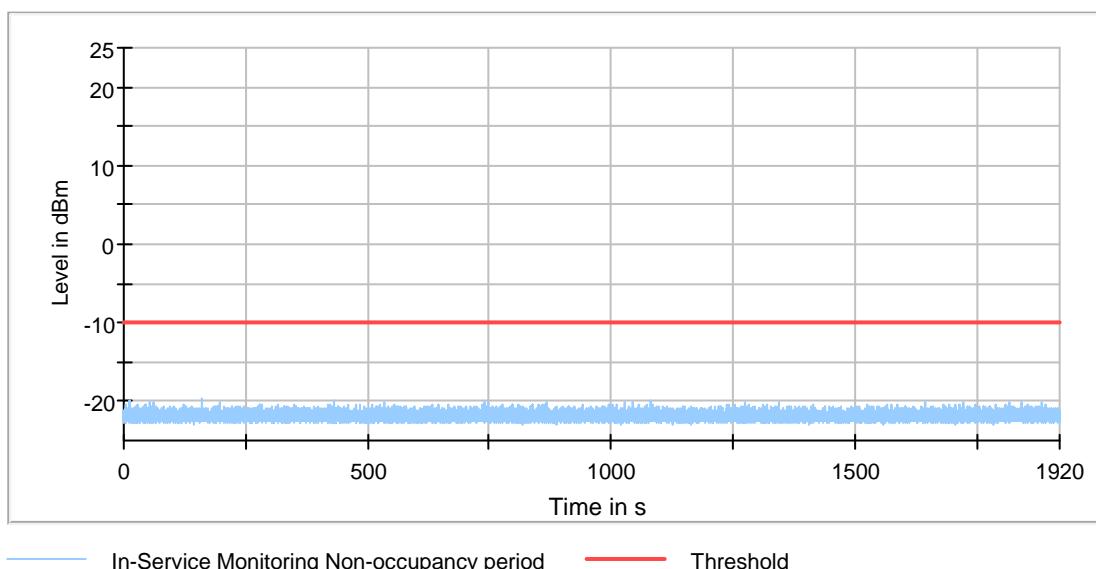
DUT Frequency (MHz)	Tx-Test Tx Time (s)	Tx-Test No. of Pulses found	Tx-Test Result	Tx-Test Comment
5610.000000	---	---	---	not performed / not finished

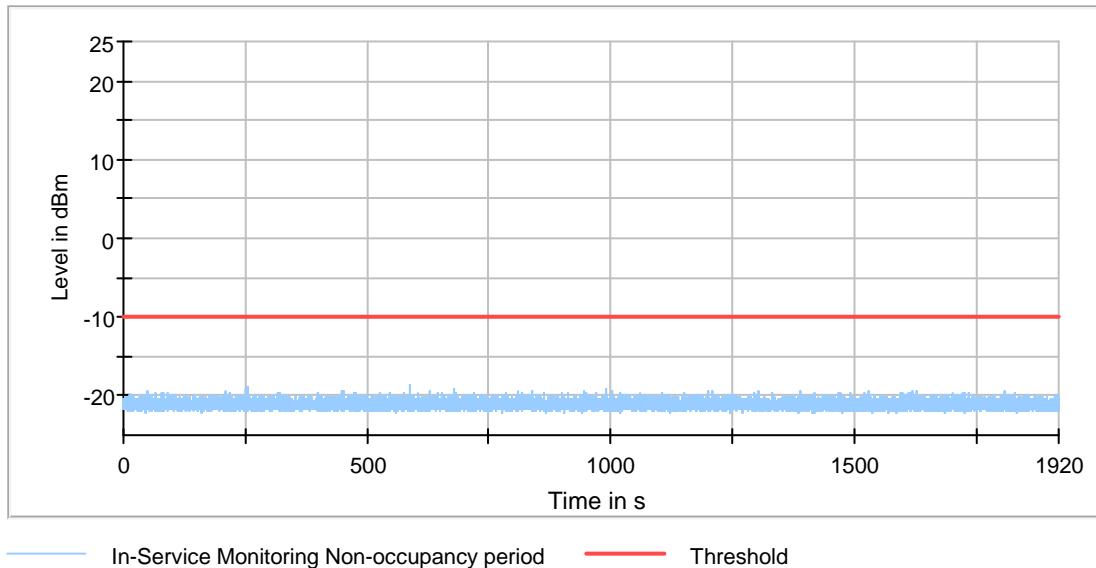
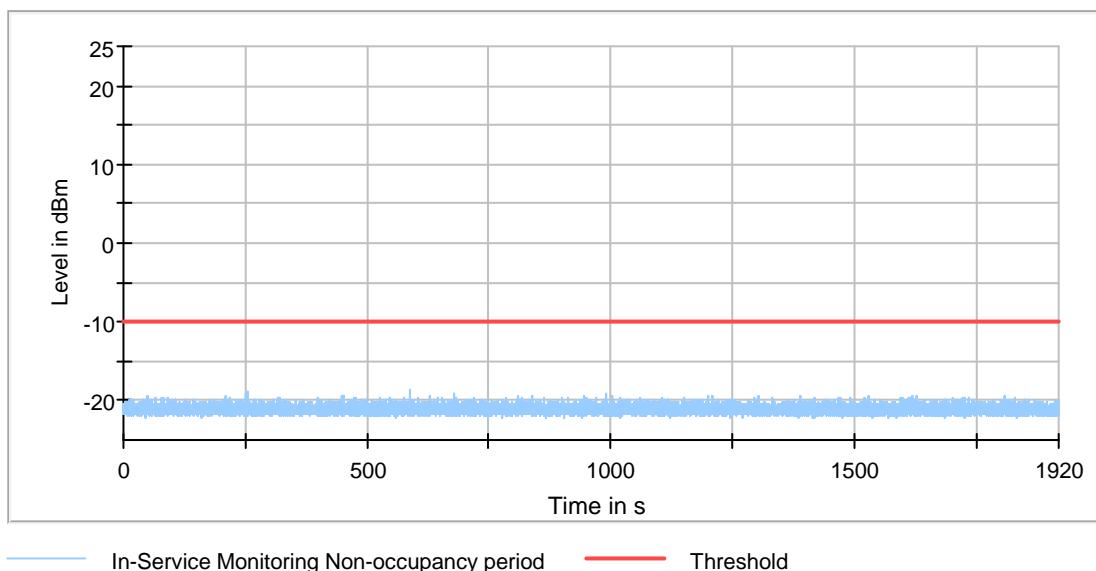
**Additional Information**

Note	Description
Note 1:	Because of the radar pulse event at the beginning, the investigation of the trace begins with an offset of 28.7 ms conforming to the end of the Radar burst.
Note 2:	-

**DFS Channel Shutdown and Non-Occupancy period**

DUT Frequency (MHz)	CCTT (s)	Limit CCTT (s)	Non Occupancy Time (s)	Limit Non Occupancy Time (s)	Result	Comment
5610.000000	0.000	1.000	1860.062	1800.000	PASS	

**TEST REPORT****Channel Move Time****Channel Closing Transmission Time**

**TEST REPORT****4.11.5 Nosie floor of the Testing equipment****4.11.6 Spot of EUT without companion device**

**TEST REPORT**
**5.0 EQUIPMENT LIST**

## 1) Radiated Emissions Test

Equipment	Signal and Spectrum Analyzer (10Hz to 40GHz)	Biconical Antenna (20MHz to 200MHz)	EMI Test Receiver 7GHz
Registration No.	EW-3016	EW-3061	EW-3481
Manufacturer	ROHDE SCHWARZ	EMCO	ROHDE SCHWARZ
Model No.	FSV40	3142E	ESR7
Calibration Date	October 29, 2021	February 02, 2021	December 21, 2021
Calibration Due Date	October 29, 2022	August 02, 2022	December 21, 2022
Equipment	Log Periodic Antenna	Double Ridged Guide Antenna	Active Loop H-field (9kHz to 30MHz)
Registration No.	EW-3243	EW-1133	EW-3302
Manufacturer	EMCO	EMCO	EMCO
Model No.	3148B	3115	6502
Calibration Date	June 03, 2021	May 26, 2021	December 13, 2021
Calibration Due Date	December 30, 2022	November 26, 2022	June 13, 2023
Equipment	RF Preamplifier (9kHz to 6000MHz)	2.4GHz Notch Filter	14m Double Shield RF Cable (20MHz to 6GHz)
Registration No.	EW-3006b	EW-3435	EW-2074
Manufacturer	SCHWARZBECK	MICROWAVE	RADIALL
Model No.	BBV9718	N0324413	N(m)-RG142-BNC(m) L=14M
Calibration Date	November 25, 2019	November 16, 2019	November 14, 2019
Calibration Due Date	June 25, 2022	June 16, 2022	August 14, 2022
Equipment	RF Cable 14m (1GHz to 26.5GHz)	Pyramidal Horn Antenna	
Registration No.	EW-2781	EW-0905	
Manufacturer	GREATBILLION	EMCO	
Model No.	SMA m/SHF5MPU /SMA m ra14m,26G	3160-09	
Calibration Date	November 24, 2020	July 23, 2019	
Calibration Due Date	November 24, 2022	June 23, 2022	

**TEST REPORT**

## 2) Conducted Emissions Test

Equipment	EMI Test Receiver	Artificial Mains Network	RF Cable
Registration No.	EW-3156	EW-3360	EW-3272
Manufacturer	R&S	R&S	GREATBILLION
Model No.	ESCI7	ENV216	bnc m st / 142 / bnc m st 100cm
Calibration Date	December 21, 2021	November 09, 2021	November 24, 2021
Calibration Due Date	December 21, 2022	November 09, 2022	November 24, 2022

## 3) Conductive Measurement Test

Equipment	Spectrum Analyzer	Digital Power Meter	RF Cable
Registration No.	EW-3016	EW-3279	EW-2107
Manufacturer	R&S	YOKOGAWA	N/A
Model No.	FSP40	WT310E	SMA-M to SMA-M
Calibration Date	October 29, 2021	March 04, 2022	December 11, 2021
Calibration Due Date	October 29, 2022	October 11, 2023	December 11, 2022

## 4) Bandwidth/Bandedge Measurement Test

Equipment	Spectrum Analyzer	RF Cable
Registration No.	EW-2466	EW-2107
Manufacturer	ROHDE SCHWARZ	N/A
Model No.	FSP30	SMA-M to SMA-M
Calibration Date	November 18, 2019	December 11, 2021
Calibration Due Date	August 18, 2022	December 11, 2022

## 5) Control Software for Radiated Emission

Software Information	
Software Name	EMC32
Manufacturer	ROHDE SCHWARZ
Software version	10.50.40

END OF TEST REPORT