




NEOS

2020.03.19
V1.0 创建

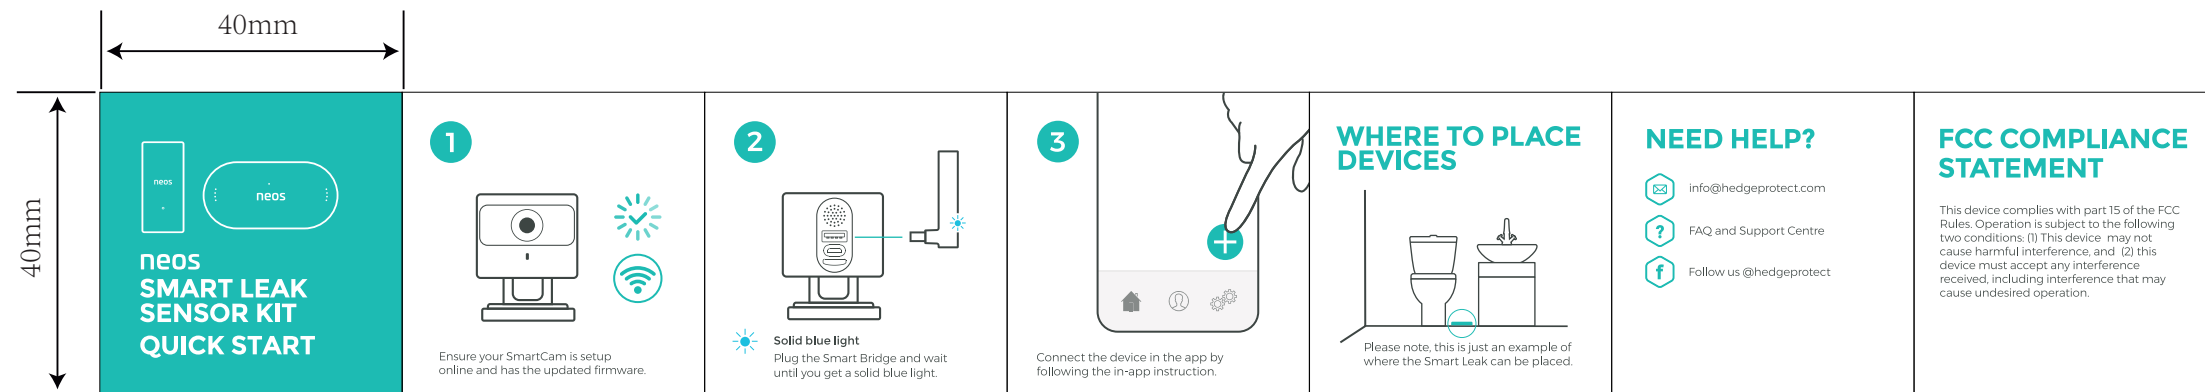

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

Output power listed is conducted. The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons. Users and installers must be provided with antenna installation instructions and transmitter operating conditions for satisfying RF exposure compliance. This product supports 20 MHz and 40 MHz bandwidth modes.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Instructions for safe use
To avoid malfunction or damage to your Neos Smart Leak Sensor please observe the following:

- Designed for indoor use only.
- Ensure battery compartment is closed and sealed properly, so not expose the batteries or internal workings of the Neos Smart Leak Sensor to water or moisture at any time.
- The Neos Smart Leak Sensor is designed for reliable operation between the temperatures of -10°C to 50°C.

Battery
When your Neos Smart Leak Sensor replacing we recommend replacing with the following:

2 new AAA lithium battery for the Neos Smart Leak Sensor To avoid environmental and health problems due to hazardous substances in electrical and electronic goods, the following symbol indicates that this product and/or battery should not be disposed of with household waste. When you decide to dispose of this product and / or its battery, do so in accordance with local environmental laws.

Your local authority will be able to advise you on the location of the nearest recycling centre that is authorised to accept this type of waste. Please recycle responsibly.

型号:N-SMP-US1

规格:
N-SMP-US1-
KSZP01 V1.0


物料编码:

UPC:
5060621670087

样品

样品数量 ▶

切刀
压线
齿刀
开槽
半穿
粘合



Scale 1:1 Unit:mm

产品名 ► NEOS门磁红外套装（美）
快速指南

印刷颜色 ► **CY**+PANTONE 2398C+PANTONE 446C

物料材质 ▶ 105g无光铜

设计于 ▶ 于树媛

成品尺寸 ▶ 40*40mm

特种工艺 ▶