



Test report

REP081719-2R1TRFWL

Date of issue: March 21, 2025

Applicant:

Echodyne Corporation

Product:

Ku Band Radar

Model:

EchoShield

Model Number(s):

700025-300-100

700025-300-200

700025-300-300

700025-300-400

700025-350-100

700025-350-200

700025-350-300

700025-350-400

FCC ID: 2ANLB-MESA00055

Specifications:

◆ **FCC CFR 47 Part 90**

Private land mobile radio services – radiolocation service

◆ **FCC CFR 47 Part 2**

Frequency Allocations and Radio Treaty Matters, General Rules and Regulations

Lab and test locations

Company name	Nemko USA Inc.
Address	2210 Faraday Ave, Suite 150
City	Carlsbad
State	California
Postal code	92008
Country	USA
Telephone	+1 760 444 3500
Website	www.nemko.com
FCC Site Number	Test Firm Registration Number: 392943; Designation Number: US5058
ISED Test Site	2040B-3
Tested by	Chenhao Ma Wireless test technician
Reviewed by	James Cunningham, EMC/Wireless Manager
Review date	March 21, 2025
Reviewer signature	

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko USA's ISO/IEC 17025 accreditation.

Copyright notification

Nemko USA Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko USA Inc.

Table of Contents

Table of Contents	3
Section 1 Report summary	4
1.1 Test specifications	4
1.2 Test methods	4
1.3 Exclusions	4
1.4 Statement of compliance	4
1.5 Test report revision history	4
Section 2 Summary of test results	5
2.1 FCC Part 2 and Part 90 test results	5
Section 3 Equipment under test (EUT) details	6
3.1 Disclaimer	6
3.2 Sample information	6
3.3 Testing period	6
3.4 Applicant	6
3.5 Manufacturer	6
3.6 EUT information	6
3.7 EUT exercise and monitoring details	7
3.8 EUT setup details	7
Section 4 Engineering considerations	8
4.1 Modifications incorporated in the EUT	8
4.2 Technical judgement	8
4.3 Deviations from laboratory test procedures	8
Section 5 Test conditions	9
5.1 Atmospheric conditions	9
5.2 Power supply range	9
Section 6 Measurement uncertainty	10
6.1 Uncertainty of measurement	10
Section 7 Test equipment	11
7.1 Test equipment list	11
Section 8 Testing data	12
8.1 Bandwidth of emission (99%)	12
8.2 Bandwidth of emission (26 dB)	18
8.3 Power and antenna height limits	23
8.4 Emission mask	30
8.5 Transmitter spurious emissions	43
8.6 Frequency stability	66

Section 1 Report summary

1.1 Test specifications

FCC CFR 47 Part 2	Frequency Allocations and Radio Treaty Matters General Rules and Regulations
FCC 47 CFR Part 90	Private land mobile radio services

1.2 Test methods

ANSI C63.26-2015	American National Standard of Procedures for Compliance Testing of Transmitters Used in Licensed Radio Services
------------------	---

1.3 Exclusions

None.

1.4 Statement of compliance

Testing was performed against all relevant requirements of the test standard(s).

Results obtained indicate that the product under test complies in full with the tested requirements.

The test results relate only to the item(s) tested.

See "Section 2 Summary of test results" for full details.

1.5 Test report revision history

Table 1.5-1: Test report revision history

Revision #	Issue Date	Details of changes made to test report
REP081719-2TRFEMC	February 27, 2025	Original report issued
REP081719-2R1TRFEMC	March 21, 2205	Updated model numbers, correction to duty cycle table 8.3-1

Section 2 Summary of test results

2.1 FCC Part 2 and Part 90 test results

Part	Test description	Verdict
§90.205	Power and antenna height limits	Pass
§90.207	Types of emissions	Pass
§90.209	Bandwidth limitations (99% OBW)	Pass
§90.209	Frequency stability	Pass
§90.210	Emission masks: Emission limitations	Pass
§90.210	Emission masks: Transmitter spurious emissions	Pass

Section 3 Equipment under test (EUT) details

3.1 Disclaimer

This section contains information provided by the applicant and has been utilized to support the test plan. Inaccurate information provided by the applicant can affect the validity of the results within this test report. Nemko accepts no responsibility for the information contained within this section and the impact it may have on the test plan and resulting measurements.

3.2 Sample information

Receipt date	10-Feb-25
Nemko sample ID number	REP081719

3.3 Testing period

Test start date	10-Feb-25
Test end date	14-Feb-25

3.4 Applicant

Company name	Echodyne Corporation
Address	12112 115th Ave NE
City	Kirkland
State	WA
Postal/Zip code	98034
Country	United States of America

3.5 Manufacturer

Company name	Echodyne Corporation
Address	12112 115th Ave NE
City	Kirkland
State	WA
Postal/Zip code	98034
Country	United States of America

3.6 EUT information

Product name	Ku Band Radar
Model	EchoShield
Model Number(s)	700025-300-100 700025-300-200 700025-300-300 700025-300-400 700025-350-100 700025-350-200 700025-350-300 700025-350-400
Serial number	N/A
Part number	N/A
Power requirements	28 VDC
Description/theory of operation	Ground-based location and navigation radar
Software details	N/A
Operating band	Ku Band: 15.7 GHz - 17.3 GHz
Operational frequencies	15.75 GHz – 16.15 GHz – 16.55 GHz (25 MHz BW); 15.80 GHz – 16.15 GHz – 16.50 GHz (50 MHz BW); 15.85 GHz – 16.15 GHz – 16.45 GHz (100 MHz BW); 15.90 GHz – 16.15 GHz – 16.40 GHz (200 MHz BW).
Antenna type	AESA (Active Electronically Scanned Array)
Antenna gain (declared)	27 dBi

3.7 EUT exercise and monitoring details

EUT description of the methods used to exercise the EUT and all relevant ports:

- EUT was configured with a channel frequency and bandwidth fixed via ethernet port using a computer (via client's software).

EUT setup/configuration rationale:

- The EUT was set up in a configuration that was expected to produce the highest amplitude emissions.

3.8 EUT setup details

Table 3.8-1: EUT sub assemblies

Description	Brand name	Model/Part number	Serial number	Rev.
N/A	N/A	N/A	N/A	N/A

Table 3.8-2: EUT interface ports


Description	Qty.
1G Base-T Ethernet.	1

Table 3.8-3: Support equipment

Description	Brand name	Model/Part number	Serial number	Rev.
Control PC	ThinkPad	N/A	N/A	--
Universal AC/DC Power supply	Echodyne	N/A	N/A	--
Junction Box (1 Channel)	Echodyne	N/A	N/A	--

Table 3.8-4: Inter-connection cables

Cable description	From	To	Length (m)
Primary radar cable	EUT	Junction Box (1 CH)	2
CAT5e 1G Ethernet cable	Junction Box (1 CH)	Control PC	5
DC Power cable	Junction Box (1 CH)	Universal AC/DC Power supply	2
NEMA 5-15P Cable	AC Outlet	Universal AC/DC Power supply	1

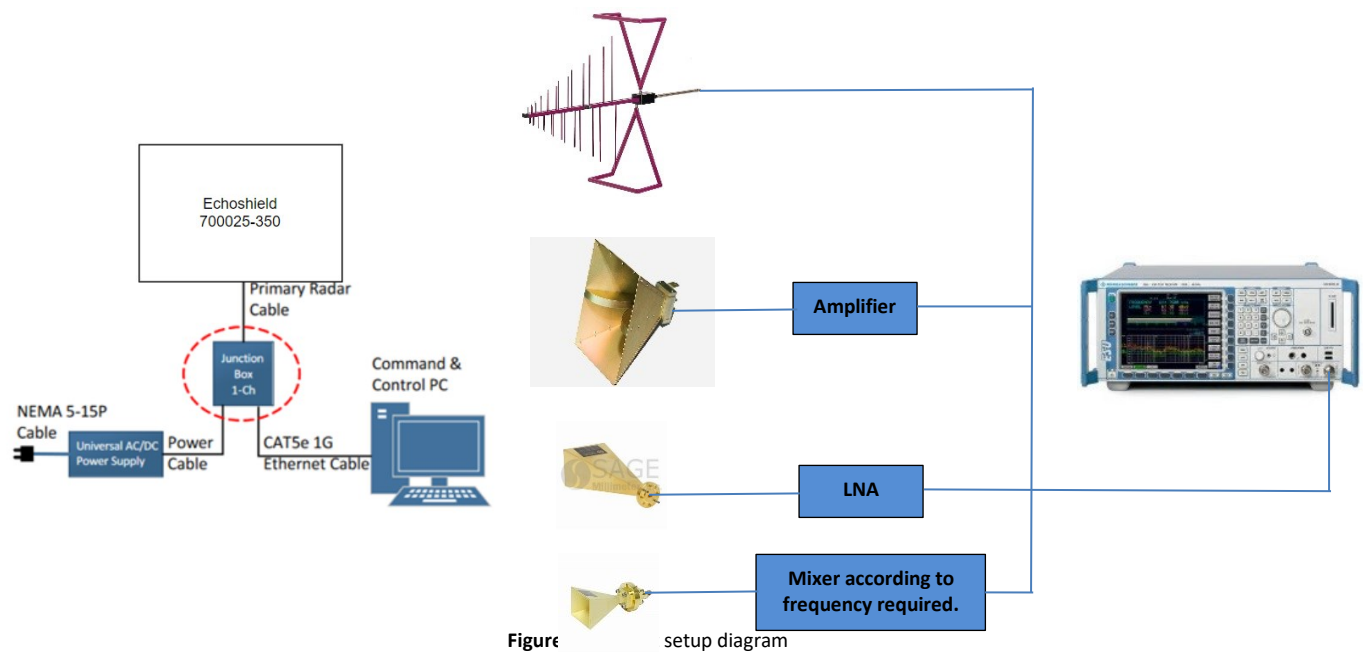

Section 4 Engineering considerations

4.1 Modifications incorporated in the EUT

None.

4.2 Technical judgement

None.

4.3 Deviations from laboratory test procedures

None.

Section 5 Test conditions

5.1 Atmospheric conditions

Temperature	15–30 °C
Relative humidity	20–75 %
Air pressure	86–106 kPa

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages ± 5 %, for which the equipment was designed.

Section 6 Measurement uncertainty

6.1 Uncertainty of measurement

Nemko USA Inc. has calculated measurement uncertainty and is documented in EMC/MUC/001 "Uncertainty in EMC measurements." Measurement uncertainty was calculated using the methods described in CISPR 16-4-2 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-2: Uncertainties, statistics, and limit modelling – Measurement instrumentation uncertainty. The expression of Uncertainty in EMC testing. Measurement uncertainty calculations assume a coverage factor of K=2 with 95% certainty.

Table 6.1-1: Measurement uncertainty calculations

Measurement		U_{cispr} dB	U_{lab} dB
Conducted disturbance at AC mains and other port power using a V-AMN	9 kHz to 150 kHz	3.8	2.9
	150 kHz to 30 MHz	3.4	2.3
Conducted disturbance at telecommunication port using AAN	150 kHz to 30 MHz	5.0	4.3
Conducted disturbance at telecommunication port using CVP	150 kHz to 30 MHz	3.9	2.9
Conducted disturbance at telecommunication port using CP	150 kHz to 30 MHz	2.9	1.4
Conducted disturbance at telecommunication port using CP and CVP	150 kHz to 30 MHz	4.0	3.1
Radiated disturbance (electric field strength in a SAC)	30 MHz to 1 GHz	6.3	5.5
Radiated disturbance (electric field strength in a FAR)	1 GHz to 6 GHz	5.2	4.7
Radiated disturbance (electric field strength in a FAR)	6 GHz to 18 GHz	5.5	5.0

- Notes:
- Compliance assessment:
 - If U_{lab} is less than or equal to U_{cispr} then:
 - compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
 - non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit
 - If U_{lab} is greater than U_{cispr} then:
 - compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cispr}})$, exceeds the disturbance limit;
 - non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cispr}})$, exceeds the disturbance limit

V-AMN: V type artificial mains network
 AAN: Asymmetric artificial network
 CP: Current probe
 CVP: Capacitive voltage probe
 SAC: Semi-anechoic chamber
 FAR: Fully anechoic room

Section 7 Test equipment

7.1 Test equipment list

Table 7.1-1: Test equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
Signal & Spectrum Analyzer 2Hz / 43.5 GHz	Rohde & Schwarz	FSW43	E1302	1 year	Jan-22-2026
Antenna Horn	EMCO	3115	1033	2 years	Nov-02-2026
EMC Test Receiver	Rohde & Schwarz	ESU 40	E1121	1 year	Dec-14-2025
Antenna, Bilog	Schaffner-Chase	CBL6111C	1480	2 years	June-28-2026
Antenna, Horn	ETS-Lingren	3117-PA	E1160	2 years	Feb-13-2027
Standard Gain Horn Antenna	Eravant	SAZ-2410-42-S1	EW107	1 year	Dec-05-2025
Standard Gain Horn Antenna	Eravant	SAZ-2410-2-S1	EW108	1 year	Dec-05-2025
Low Noise Amplifier	Sage Millimeter	SBL-1834034030-KFKF-SI	E1228	NCR	NCR
Antenna, Horn	Sage Millimeter	SAR-2309-19-S2	E1144	NCR	NCR
Mixer	Rohde & Schwarz	FS-Z60	E1138	VOU	VOU
Antenna, Horn	Sage Millimeter	SAR-2408-15-S2	E1152	NCR	NCR
Mixer	Rohde & Schwarz	FS-Z75	E1149	VOU	VOU
Antenna, Horn	Sage Millimeter	SAR-2507-10-S2	E1146	NCR	NCR
Mixer	Rohde & Schwarz	FS-Z110	E1154	VOU	VOU
Low pass filter	RF-Lambda	RLPF13G14	PBC	VOU	VOU
High pass filter	Anatech Electronics	AE18000SSH6616	PBC	VOU	VOU
High pass filter	Anatech Electronics	AE18000SSH6615	PBC	VOU	VOU

Notes: N/A – not applicable
 NCR – no calibration required
 VOU – verify on use
 PBC – provided by client

Table 7.1-2: Test software details

Manufacturer of Software	Details
Rohde & Schwarz	EMC 32 V10.60.15

Notes: None

Section 8 Testing data

8.1 Bandwidth of emission (99%)

8.1.1 References and limits

- FCC 47 CFR Part 90: §90.209
- Test method: ANSI C63.26-2015 (5.4.4)

Each authorization issued to a station licensed under this part will show an emission designator representing the class of emission authorized. The designator will be prefixed by a specified necessary bandwidth. This number does not necessarily indicate the bandwidth occupied by the emission at any instant. In those cases where § 2.202 of this chapter does not provide a formula for the computation of necessary bandwidth, the occupied bandwidth, as defined in part 2 of this chapter, may be used in lieu of the necessary bandwidth.

8.1.2 Test summary

Verdict	Pass		
Test date	February 10, 2025; February 11, 2025;	Temperature	20°C; 18°C
Test engineer	Chenhao Ma, Wireless Test Technician	Air pressure	1002mbar; 1001mbar
Test location	☐ Wireless bench ☒ Other: 3M Chamber	Relative humidity	59%; 56%

8.1.3 Notes

Testing was performed with the transmitter operating on a fixed channel at full power.

Two modes related to the width of the radar pulse were tested and the summary of the time duration of each pulse is described in the following table:

Frequency	Bandwidth declared	Type of pulse	Time duration
15.75 GHz	25 MHz ¹	Longest pulse	30 µs
16.15 GHz	25 MHz ¹	Longest pulse	30 µs
16.55 GHz	25 MHz ¹	Longest pulse	30 µs
15.80 GHz	50 MHz ¹	Longest pulse	30 µs
16.15 GHz	50 MHz ¹	Longest pulse	30 µs
16.50 GHz	50 MHz ¹	Longest pulse	30 µs
15.85 GHz	100 MHz ¹	Longest pulse	30 µs
16.15 GHz	100 MHz ¹	Longest pulse	30 µs
16.45 GHz	100 MHz ¹	Longest pulse	30 µs
15.90 GHz	200 MHz ¹	Longest pulse	28.494 µs
16.15 GHz	200 MHz ¹	Longest pulse	28.494 µs
16.40 GHz	200 MHz ¹	Longest pulse	28.494 µs
15.75 GHz	25 MHz ¹	Shortest pulse	2 µs
16.15 GHz	25 MHz ¹	Shortest pulse	1 µs
16.55 GHz	25 MHz ¹	Shortest pulse	2 µs
15.80 GHz	50 MHz ¹	Shortest pulse	5 µs
16.15 GHz	50 MHz ¹	Shortest pulse	500 ns
16.50 GHz	50 MHz ¹	Shortest pulse	5 µs
15.85 GHz	100 MHz ¹	Shortest pulse	5 µs
16.15 GHz	100 MHz ¹	Shortest pulse	500 ns
16.45 GHz	100 MHz ¹	Shortest pulse	5 µs
15.90 GHz	200 MHz ¹	Shortest pulse	15 µs
16.15 GHz	200 MHz ¹	Shortest pulse	500 ns
16.40 GHz	200 MHz ¹	Shortest pulse	15 µs

Note 1: These bandwidths are declared only as reference, the real number is shown in table 8.1-2 of this section.

Table 8.1-1: Pulse description table.

Testing was done at 3 meters with the antenna and turntable fixed. A maximization of the signal was done to define the position of the max power

8.1.4 Setup details

EUT power input during test	28 V DC
EUT setup configuration	☐ Table-top ☐ Floor standing ☒ Other: Tripod mounted (1.5 m)

Receiver settings:

Resolution bandwidth	1 MHz
Video bandwidth	3 MHz
Detector mode	Peak
Trace mode	Max Hold
Measurement time	Long enough for trace to stabilize

8.1.5 Test data

Frequency	Bandwidth	Type of pulse	Time duration
15.75 GHz	26.826MHz	Longest pulse	30 µs
16.15 GHz	24.965MHz	Longest pulse	30 µs
16.55 GHz	24.739MHz	Longest pulse	30 µs
15.80 GHz	48.571MHz	Longest pulse	30 µs
16.15 GHz	48.485MHz	Longest pulse	30 µs
16.50 GHz	48.139MHz	Longest pulse	30 µs
15.85 GHz	95.959MHz	Longest pulse	30 µs
16.15 GHz	96.137MHz	Longest pulse	30 µs
16.45 GHz	95.353MHz	Longest pulse	30 µs
15.90 GHz	191.015MHz	Longest pulse	28.494 µs
16.15 GHz	190.792MHz	Longest pulse	28.494 µs
16.40 GHz	190.064MHz	Longest pulse	28.494 µs
15.75 GHz	27.023MHz	Shortest pulse	2 µs
16.15 GHz	28.802MHz	Shortest pulse	1 µs
16.55 GHz	26.835MHz	Shortest pulse	2 µs
15.80 GHz	48.967MHz	Shortest pulse	5 µs
16.15 GHz	57.708MHz	Shortest pulse	500 ns
16.50 GHz	48.514MHz	Shortest pulse	5 µs
15.85 GHz	96.29MHz	Shortest pulse	5 µs
16.15 GHz	102.751MHz	Shortest pulse	500 ns
16.45 GHz	95.693MHz	Shortest pulse	5 µs
15.90 GHz	191.199MHz	Shortest pulse	15 µs
16.15 GHz	191.901MHz	Shortest pulse	500 ns
16.40 GHz	190.152MHz	Shortest pulse	15 µs

Table 8.1-2: 99% OBW results.

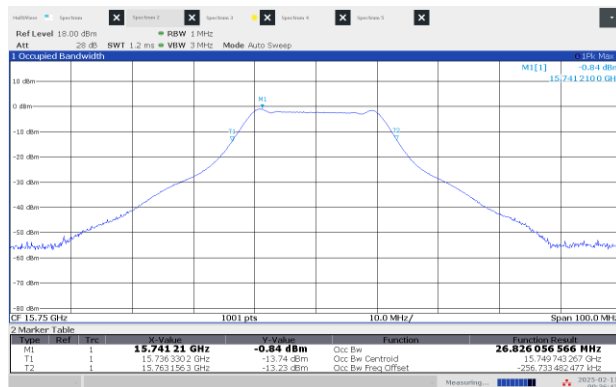


Figure 8.1-1: 99% OBW Low channel: 15.75 GHz, longest pulse (25 MHz BW)

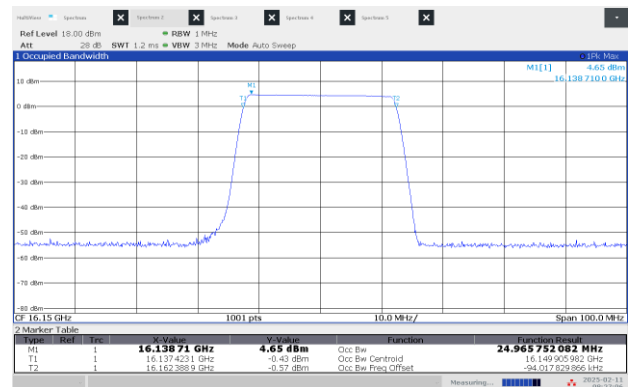


Figure 8.1-2: 99% OBW Middle channel: 16.15 GHz, longest pulse (25 MHz BW)

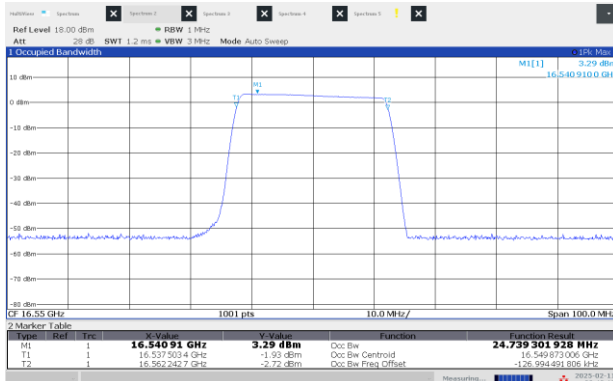


Figure 8.1-3: 99% OBW High channel: 16.55 GHz, longest pulse (25 MHz BW)

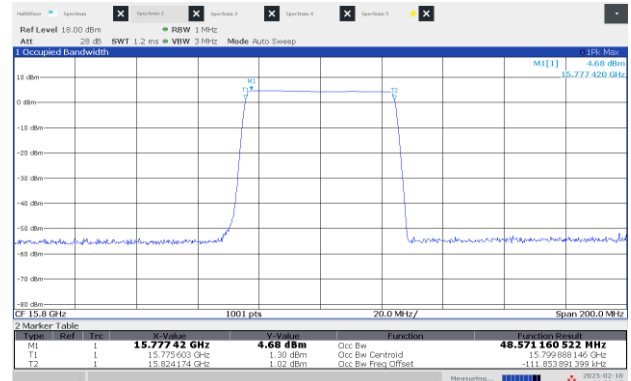


Figure 8.1-4: 99% OBW Low channel: 15.80 GHz, longest pulse (50 MHz BW)

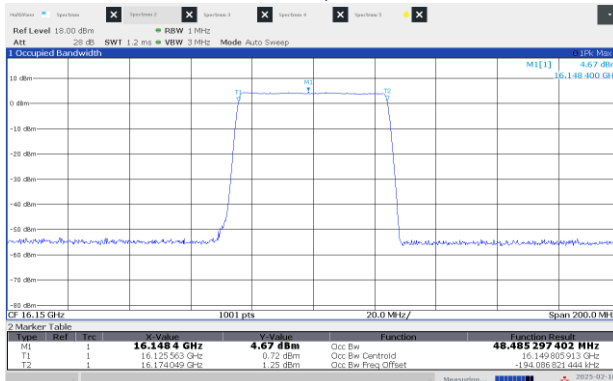


Figure 8.1-5: 99% OBW Middle channel: 16.15 GHz, longest pulse (50 MHz BW)

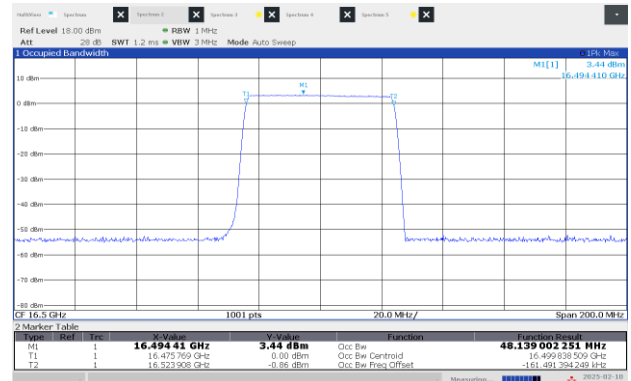


Figure 8.1-6: 99% OBW High channel: 16.50 GHz, longest pulse (50 MHz BW)

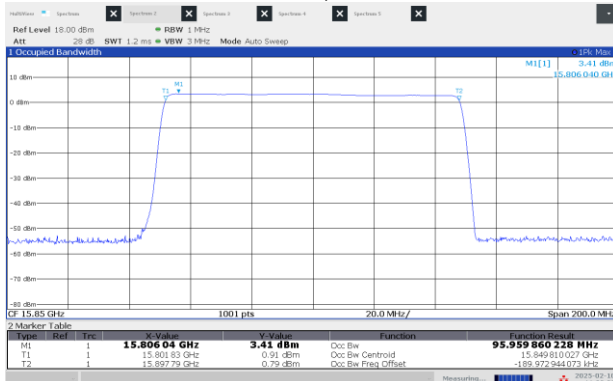


Figure 8.1-7: 99% OBW Low channel: 15.85 GHz, longest pulse (100 MHz BW)

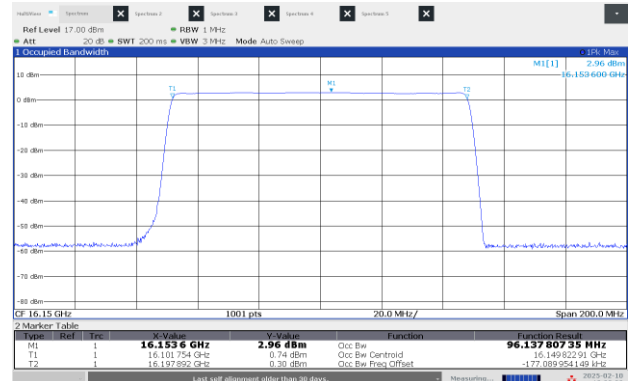


Figure 8.1-8: 99% OBW Middle channel: 16.15 GHz, longest pulse (100 MHz BW)

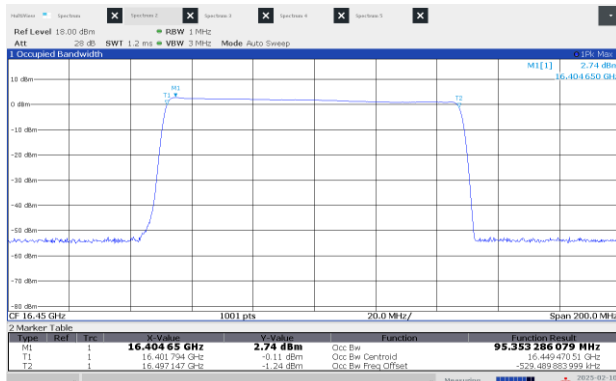


Figure 8.1-9: 99% OBW High channel: 16.45 GHz, longest pulse (100 MHz BW)

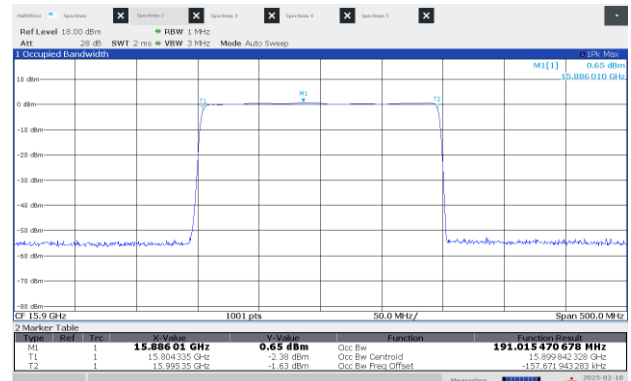


Figure 8.1-10: 99% OBW Low channel: 15.90 GHz, longest pulse (200 MHz BW)

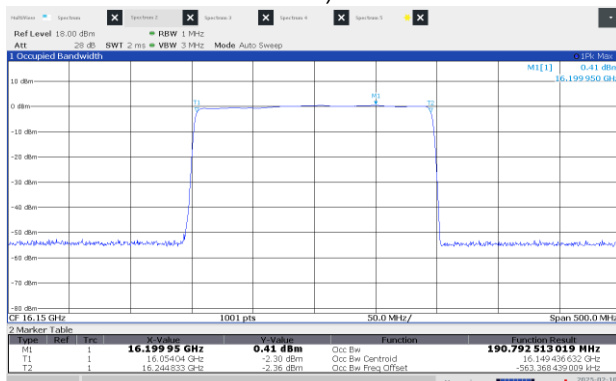


Figure 8.1-11: 99% OBW Middle channel: 16.15 GHz, longest pulse (200 MHz BW)

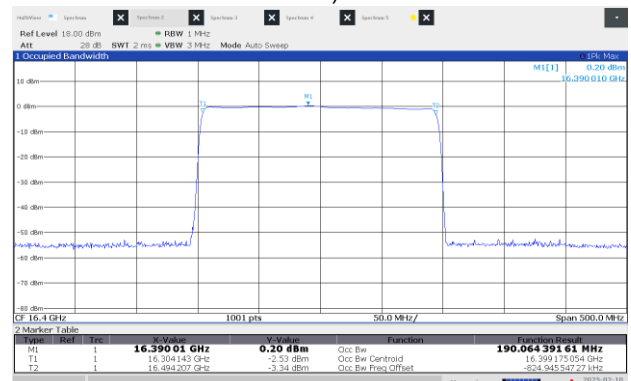


Figure 8.1-12: 99% OBW High channel: 16.40 GHz, longest pulse (200 MHz BW)

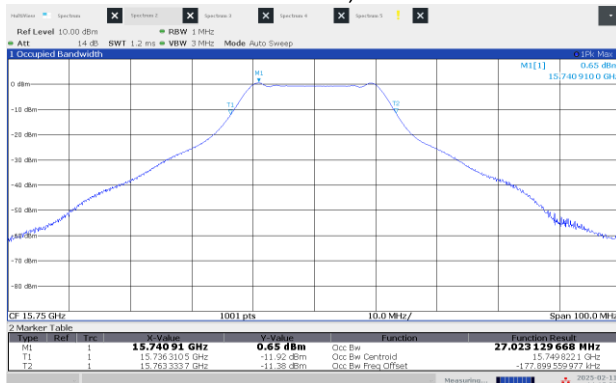


Figure 8.1-13: 99% OBW Low channel: 15.75 GHz, shortest pulse (25 MHz BW)

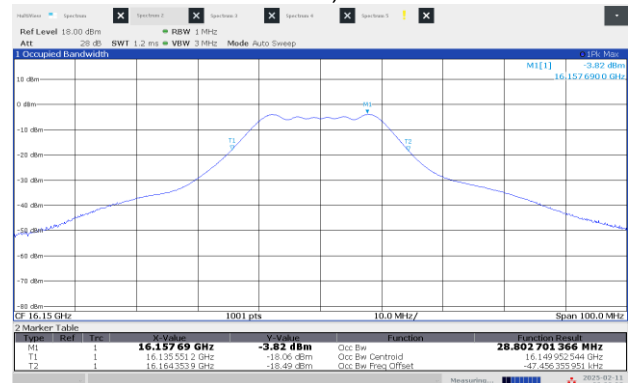


Figure 8.1-14: 99% OBW Middle channel: 16.15 GHz, shortest pulse (25 MHz BW)

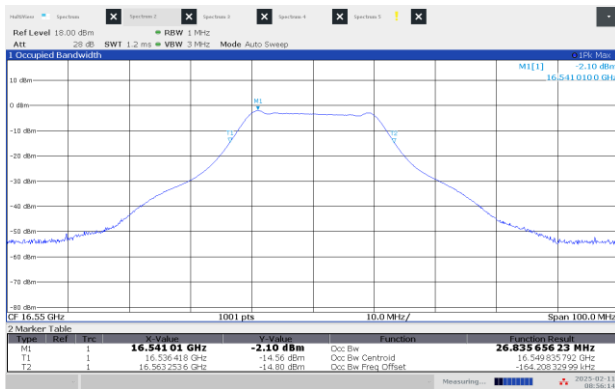


Figure 8.1-15: 99% OBW High channel: 16.55 GHz, shortest pulse (25 MHz BW)

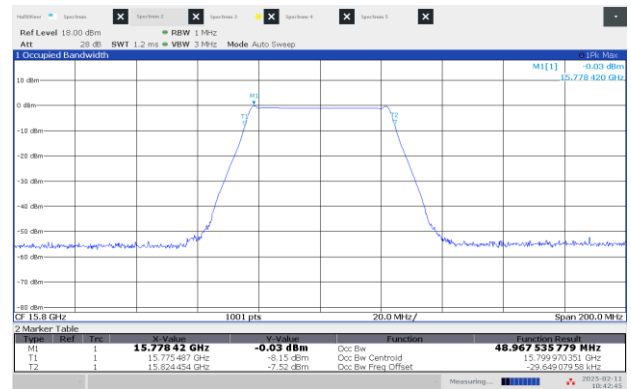


Figure 8.1-16: 99% OBW Low channel: 15.80 GHz, shortest pulse (50 MHz BW)

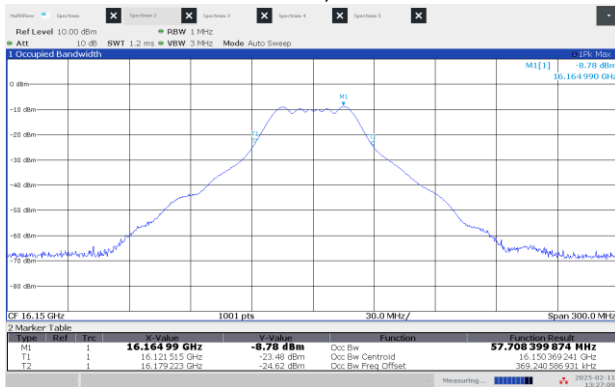


Figure 8.1-17: 99% OBW Middle channel: 16.15 GHz, shortest pulse (50 MHz BW)

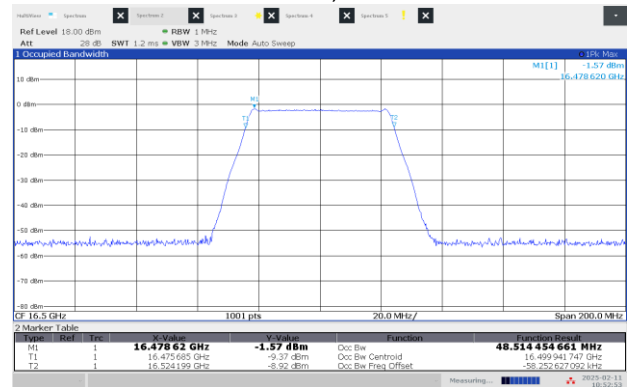


Figure 8.1-18: 99% OBW High channel: 16.50 GHz, shortest pulse (50 MHz BW)

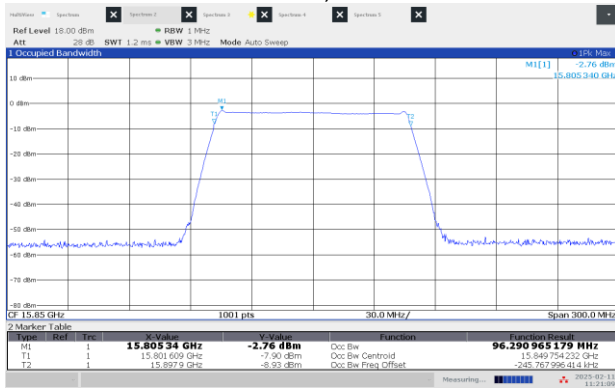


Figure 8.1-19: 99% OBW Low channel: 15.85 GHz, shortest pulse (100 MHz BW)

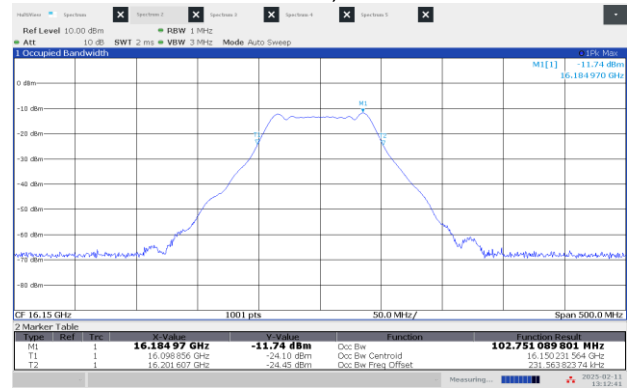


Figure 8.1-20: 99% OBW Middle channel: 16.15 GHz, shortest pulse (100 MHz BW)

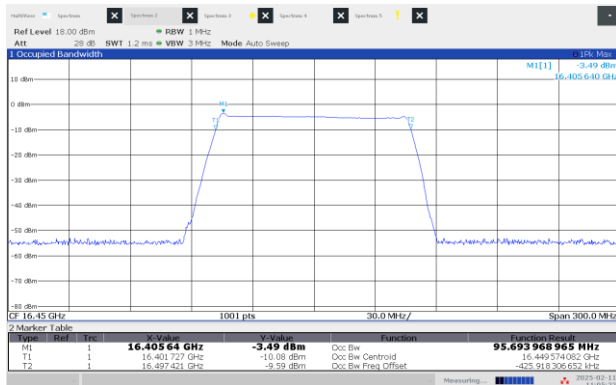


Figure 8.1-21: 99% OBW High channel: 16.45 GHz, shortest pulse (100 MHz BW)

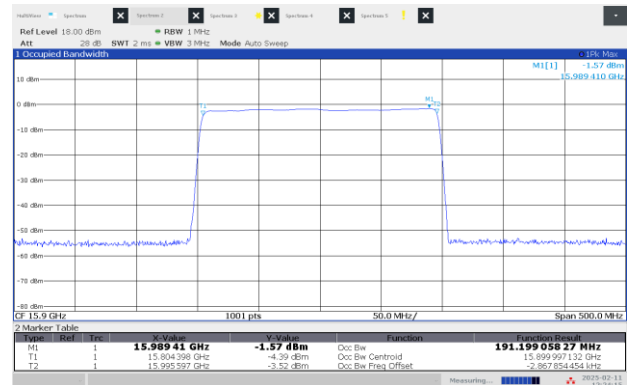


Figure 8.1-22: 99% OBW Low channel: 15.90 GHz, shortest pulse (200 MHz BW)

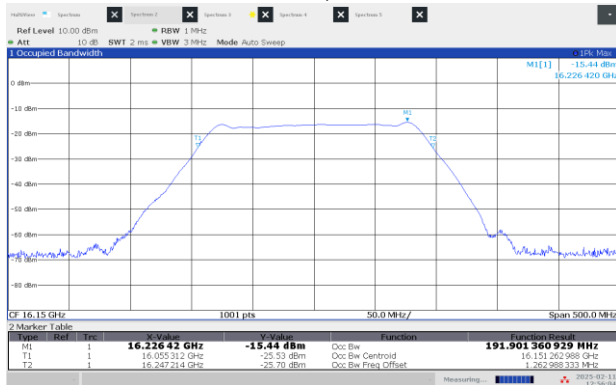


Figure 8.1-23: 99% OBW Middle channel: 16.15 GHz, shortest pulse (200 MHz BW)

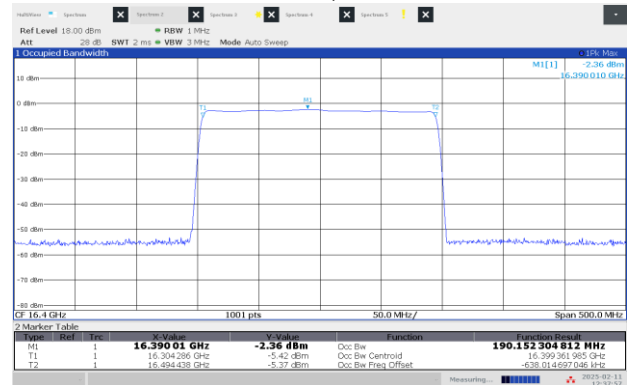


Figure 8.1-24: 99% OBW High channel: 16.40 GHz, shortest pulse (200 MHz BW)

8.2 Bandwidth of emission (26 dB)

8.2.1 References and limits

- Test method: ANSI C63.26-2015 (5.4.3)

8.2.2 Test summary

Verdict	Pass		
Test date	February 10, 2025; February 11, 2025;	Temperature	20°C; 18°C
Test engineer	Chenhao Ma, Wireless Test Technician	Air pressure	1002mbar; 1001mbar
Test location	☐ Wireless bench ☒ Other: 3M Chamber	Relative humidity	59%; 56%

8.2.3 Notes

Testing was performed with the transmitter operating on a fixed channel at full power following the cases shown on table 8.1-1 from section 8.1.3 of this document. This measurement is not a requirement, but it is used for the mask calculation in section 8.4 of this document.

Testing was done at 3 meters with the antenna and turntable fixed. A maximization of the signal was done to define the position of the max power:

8.2.4 Setup details

EUT power input during test	28 V DC
EUT setup configuration	☐ Table-top ☐ Floor standing ☒ Other: Tripod mounted (1.5 m)

Receiver settings:

Resolution bandwidth	1 MHz
Video bandwidth	3 MHz
Detector mode	Peak
Trace mode	Max Hold
Measurement time	Long enough for trace to stabilize

8.2.5 Test data

Frequency	Bandwidth	Type of pulse	Time duration
15.75 GHz	28.27MHz	Longest pulse	30 µs
16.15 GHz	27.85MHz	Longest pulse	30 µs
16.55 GHz	27.51MHz	Longest pulse	30 µs
15.80 GHz	52.45MHz	Longest pulse	30 µs
16.15 GHz	52.31MHz	Longest pulse	30 µs
16.50 GHz	51.90MHz	Longest pulse	30 µs
15.85 GHz	101.64MHz	Longest pulse	30 µs
16.15 GHz	101.69MHz	Longest pulse	30 µs
16.45 GHz	100.86MHz	Longest pulse	30 µs
15.90 GHz	200.33MHz	Longest pulse	28.494 µs
16.15 GHz	200.03MHz	Longest pulse	28.494 µs
16.40 GHz	199.63MHz	Longest pulse	28.494 µs
15.75 GHz	37.82MHz	Shortest pulse	2 µs
16.15 GHz	41.64MHz	Shortest pulse	1 µs
16.55 GHz	38.08MHz	Shortest pulse	2 µs
15.80 GHz	59.95MHz	Shortest pulse	5 µs
16.15 GHz	87.56MHz	Shortest pulse	500 ns
16.50 GHz	58.81MHz	Shortest pulse	5 µs
15.85 GHz	110.03MHz	Shortest pulse	5 µs
16.15 GHz	142.91MHz	Shortest pulse	500 ns
16.45 GHz	108.32MHz	Shortest pulse	5 µs
15.90 GHz	201.68MHz	Shortest pulse	15 µs
16.15 GHz	240.38MHz	Shortest pulse	500 ns
16.40 GHz	200.73MHz	Shortest pulse	15 µs

Table 8.2-1: 26 dB OBW results

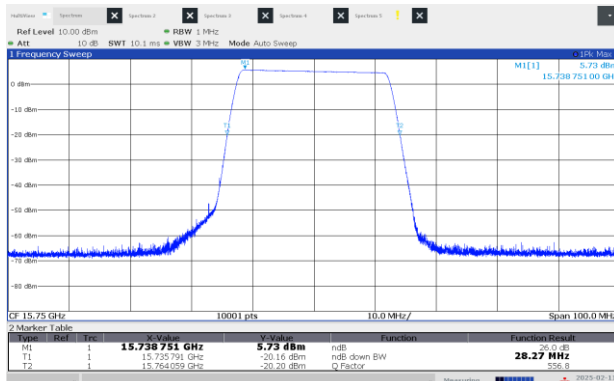


Figure 8.2-1: 26 dB OBW Low channel: 15.75 GHz, longest pulse (25 MHz BW)

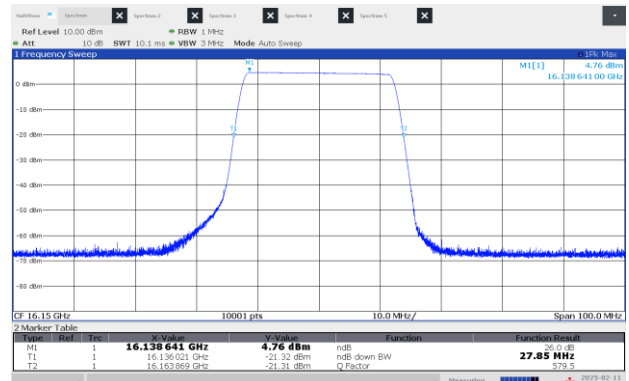


Figure 8.2-2: 26 dB OBW Middle channel: 16.15 GHz, longest pulse (25 MHz BW)

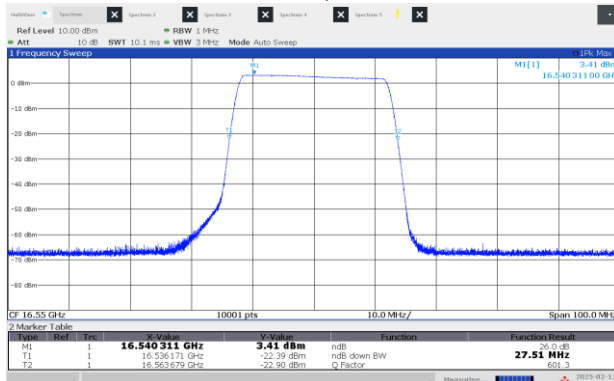


Figure 8.2-3: 26 dB OBW High channel: 16.55 GHz, longest pulse (25 MHz BW)

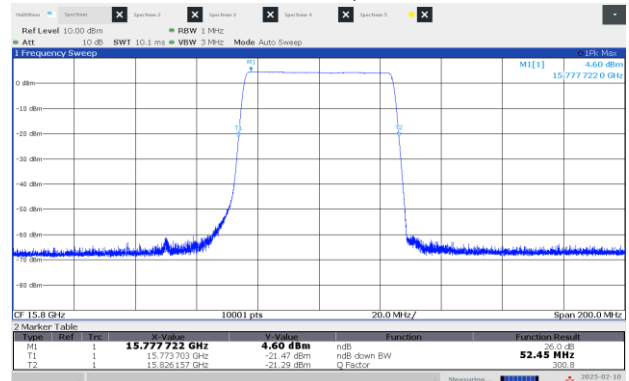


Figure 8.2-4: 26 dB OBW Low channel: 15.80 GHz, longest pulse (50 MHz BW)

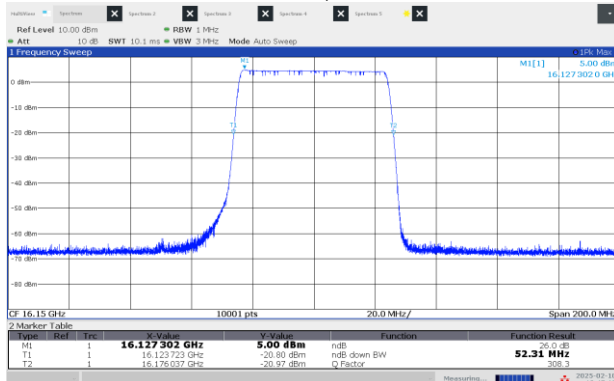


Figure 8.2-5: 26 dB OBW Middle channel: 16.15 GHz, longest pulse (50 MHz BW)

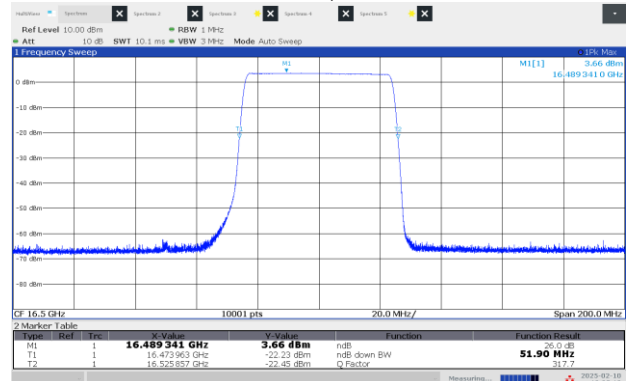


Figure 8.2-6: 26 dB OBW High channel: 16.50 GHz, longest pulse (50 MHz BW)

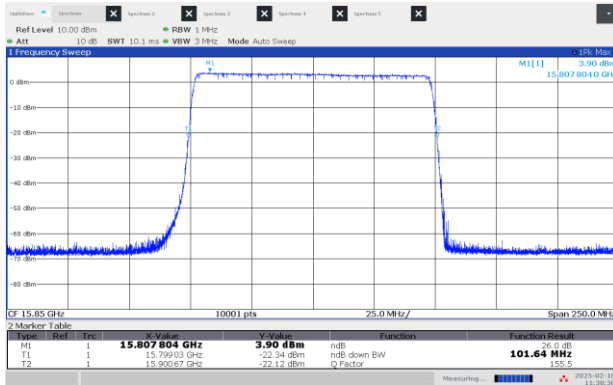


Figure 8.2-7: 26 dB OBW Low channel: 15.85 GHz, longest pulse (100 MHz BW)

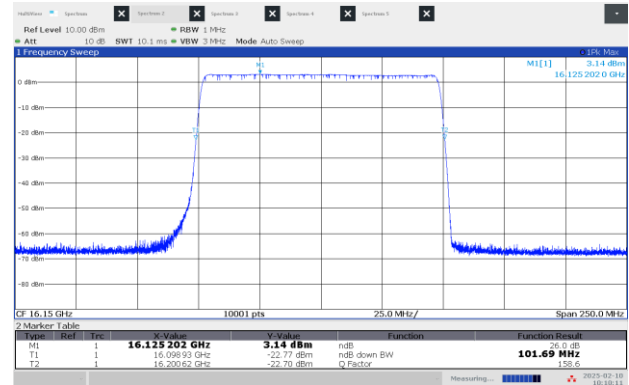


Figure 8.2-8: 26 dB OBW Middle channel: 16.15 GHz, longest pulse (100 MHz BW)

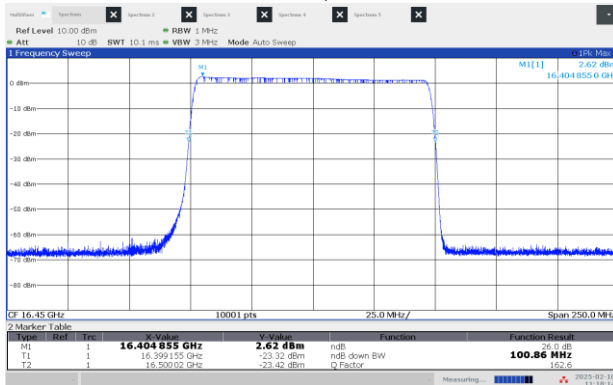


Figure 8.2-9: 26 dB OBW High channel: 16.45 GHz, longest pulse (100 MHz BW)

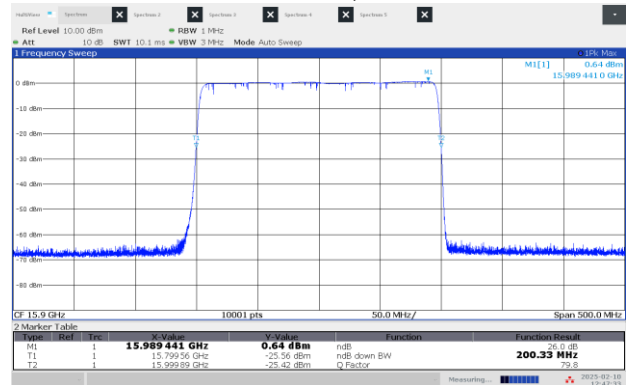


Figure 8.2-10: 26 dB OBW Low channel: 15.90 GHz, longest pulse (200 MHz BW)

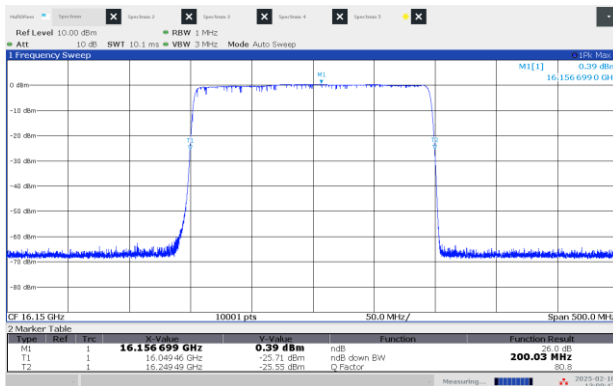


Figure 8.2-11: 26 dB OBW Middle channel: 16.15 GHz, longest pulse (200 MHz BW)

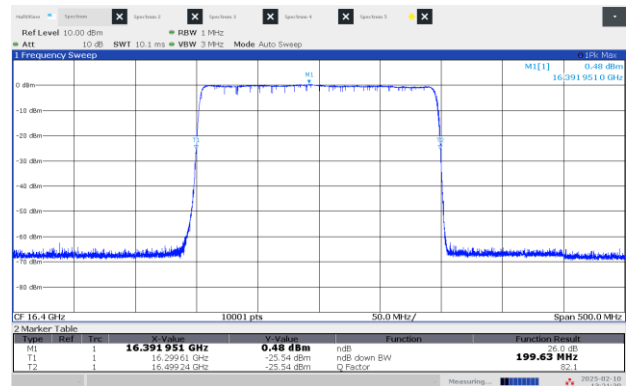


Figure 8.2-12: 26 dB OBW High channel: 16.40 GHz, longest pulse (200 MHz BW)

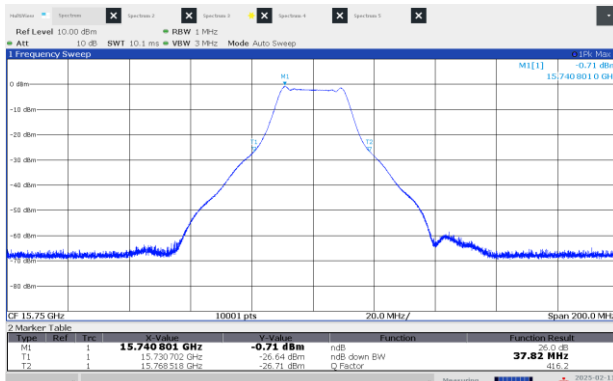


Figure 8.2-13: 26 dB OBW Low channel: 15.75 GHz, shortest pulse (25 MHz BW)

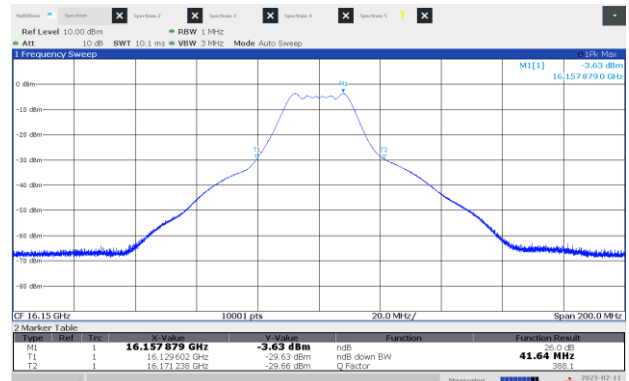


Figure 8.2-14: 26 dB OBW Middle channel: 16.15 GHz, shortest pulse (25 MHz BW)

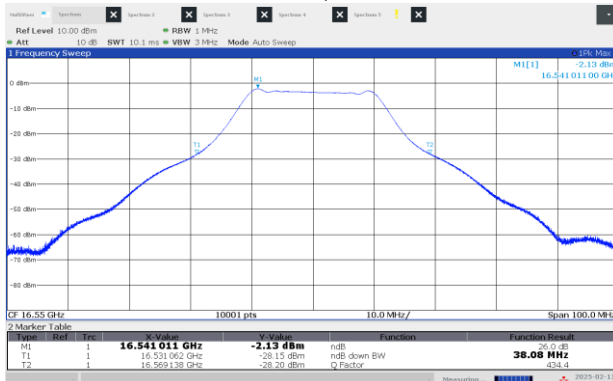


Figure 8.2-15: 26 dB OBW High channel: 16.55 GHz, shortest pulse (25 MHz BW)

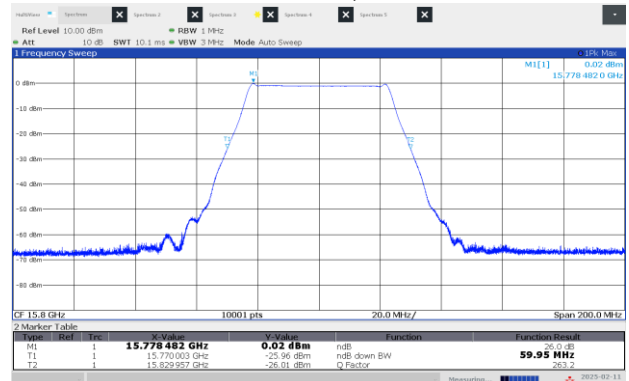


Figure 8.2-16: 26 dB OBW Low channel: 15.80 GHz, shortest pulse (50 MHz BW)

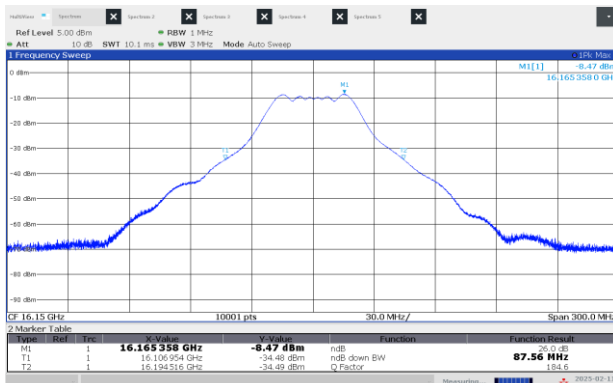


Figure 8.2-17: 26 dB OBW Middle channel: 16.15 GHz, shortest pulse (50 MHz BW)

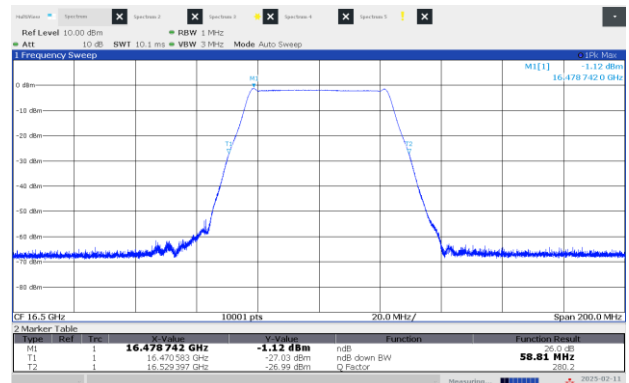


Figure 8.2-18: 26 dB OBW High channel: 16.50 GHz, shortest pulse (50 MHz BW)

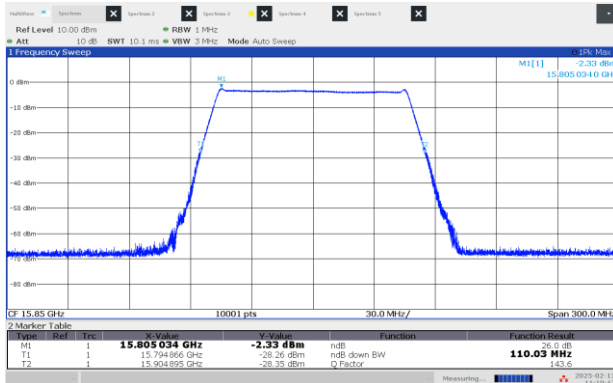


Figure 8.2-19: 26 dB OBW Low channel: 15.85 GHz, shortest pulse (100 MHz BW)

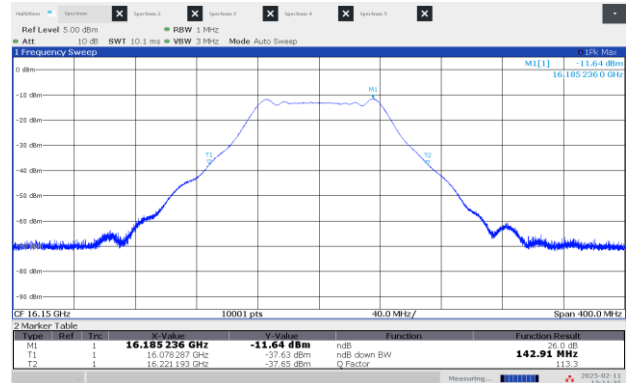


Figure 8.2-20: 26 dB OBW Middle channel: 16.15 GHz, shortest pulse (100 MHz BW)

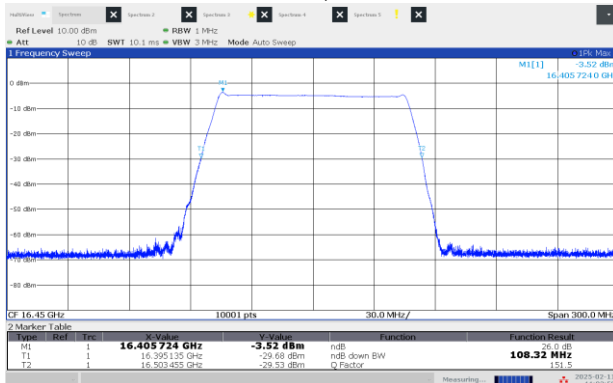


Figure 8.2-21: 26 dB OBW High channel: 16.45 GHz, shortest pulse (100 MHz BW)

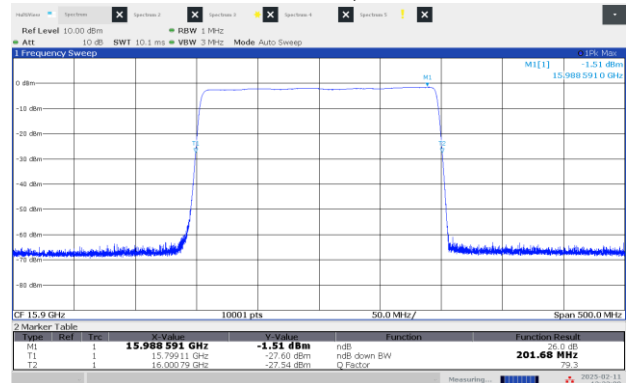


Figure 8.2-22: 26 dB OBW Low channel: 15.90 GHz, shortest pulse (200 MHz BW)

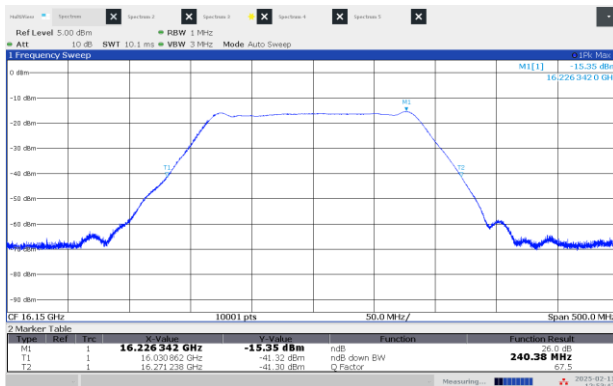


Figure 8.2-23: 26 dB OBW Middle channel: 16.15 GHz, shortest pulse (200 MHz BW)

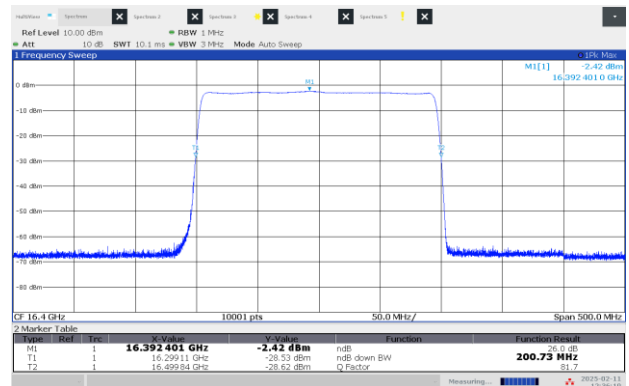


Figure 8.2-24: 26 dB OBW High channel: 16.40 GHz, shortest pulse (200 MHz BW)

8.3 Power and antenna height limits

8.3.1 References and limits

- FCC 47 CFR Part 90: §90.205
- Test method: ANSI C63.26-2015 (5.2.4.4.2)

Applicants for licenses must request and use no more power than the actual power necessary for satisfactory operation. Except where otherwise specifically provided for, the maximum power that will be authorized to applicants whose license applications for new stations are filed after August 18, 1995, is as follows:

(r) All other frequency bands. Requested transmitter power will be considered and authorized on a case by case basis.

8.3.2 Test summary

Verdict	Pass		
Test date	February 10, 2025; February 11, 2025;	Temperature	20°C; 18°C
Test engineer	Chenhao Ma, Wireless Test Technician	Air pressure	1002mbar; 1001mbar
Test location	☐ Wireless bench ☒ Other: 3M Chamber	Relative humidity	59%; 56%

8.3.3 Notes

Testing was performed with the transmitter operating on a fixed channel at full power following the cases shown on table 8.1-1 from section 8.1.3 of this document. All correction factors corresponding cables losses, receiving antenna gain, and air path losses were compensated to get the real EIRP value of the product. Both polarizations were evaluated, horizontal and vertical (linear polarization per client declaration) and only the worst case (max power) was taken for the testing purposes: horizontal polarization. The duty cycle correction factor was added according to each frequency channel tested. Table 8.3-1 shows the constant duty cycle corresponding to each case.

The equation to calculate the total correction factor corresponding to each frequency tested is given by the following expression as well as the table with the corresponding duty cycle to each case:

$$E.I.R.P = P_r - G_r - 20 \log_{10} \left(\frac{\lambda}{4\pi d} \right)$$

Adding cable losses and duty cycle correction factors (absolute values):

$$E.I.R.P = P_r - G_r - 20 \log_{10} \left(\frac{\lambda}{4\pi d} \right) + L_{cable} + 10 \log_{10} \left(\frac{1}{Duty\ cycle} \right)$$

Where:

P_r = Power received in the spectrum analyzer

λ = Wavelength of the signal

L_{cable} = Losses corresponding to interconnexion cables

d = Measuring distance (3 meters)

G_r = Receiving antenna gain

DC = Duty cycle declared

Example:

$$E.I.R.P = P_r - 16.535 - 20 \log_{10} \left(\frac{299792458}{1575000000 \cdot 4\pi(3)} \right) + 19.96 + 10 \log_{10} \left(\frac{1}{0.15} \right)$$

$$E.I.R.P = P_r - 16.535 - (-65.935) + 19.96 + 8.239 = P_r + 77.637 \text{ (offset)}$$

DC = Duty cycle declared

Testing was done at 3 meters with the antenna and turntable fixed. A maximization of the signal was done to define the position of the max power:

Frequency	Type of pulse	Time duration	Duty cycle
15.75 GHz	Longest pulse	30 μ s	15%
16.15 GHz	Longest pulse	30 μ s	15%
16.55 GHz	Longest pulse	30 μ s	15%
15.80 GHz	Longest pulse	30 μ s	15%
16.15 GHz	Longest pulse	30 μ s	15%
16.50 GHz	Longest pulse	30 μ s	15%
15.85 GHz	Longest pulse	30 μ s	15%
16.15 GHz	Longest pulse	30 μ s	15%
16.45 GHz	Longest pulse	30 μ s	15%
15.90 GHz	Longest pulse	28.494 μ s	15%
16.15 GHz	Longest pulse	28.494 μ s	15%
16.40 GHz	Longest pulse	28.494 μ s	15%
15.75 GHz	Shortest pulse	2 μ s	15%
16.15 GHz	Shortest pulse	1 μ s	15%
16.55 GHz	Shortest pulse	2 μ s	15%
15.80 GHz	Shortest pulse	5 μ s	15%
16.15 GHz	Shortest pulse	500 ns	10%
16.50 GHz	Shortest pulse	5 μ s	15%
15.85 GHz	Shortest pulse	5 μ s	15%
16.15 GHz	Shortest pulse	500 ns	10%
16.45 GHz	Shortest pulse	5 μ s	15%
15.90 GHz	Shortest pulse	15 μ s	15%
16.15 GHz	Shortest pulse	500 ns	10%
16.40 GHz	Shortest pulse	15 μ s	15%

Table 8.3-1: Duty cycle table.

8.3.4 Setup details

EUT power input during test	28 V DC
EUT setup configuration	☐ Table-top ☐ Floor standing ☒ Other: Tripod mounted (1.5 m)

Receiver settings:

Resolution bandwidth	1 MHz
Video bandwidth	3 MHz
Detector mode	RMS
Trace mode	Average (at least 100 traces)
Measurement points	$\geq (2 \times \text{span}) / \text{RBW}$
Span	2 times or 3 times the 99% OBW

8.3.5 Test data

Frequency	Type of pulse	Time duration	Power (EIRP)
15.75 GHz	Longest pulse	30 μ s	72.59dBm
16.15 GHz	Longest pulse	30 μ s	74.02dBm
16.55 GHz	Longest pulse	30 μ s	73.63dBm
15.80 GHz	Longest pulse	30 μ s	74.74dBm
16.15 GHz	Longest pulse	30 μ s	76.33dBm
16.50 GHz	Longest pulse	30 μ s	76.27dBm
15.85 GHz	Longest pulse	30 μ s	77.81dBm
16.15 GHz	Longest pulse	30 μ s	76.17dBm
16.45 GHz	Longest pulse	30 μ s	76.69dBm
15.90 GHz	Longest pulse	28.494 μ s	74.67dBm
16.15 GHz	Longest pulse	28.494 μ s	76.03dBm
16.40 GHz	Longest pulse	28.494 μ s	76.47dBm
15.75 GHz	Shortest pulse	2 μ s	71.72dBm
16.15 GHz	Shortest pulse	1 μ s	73.12dBm
16.55 GHz	Shortest pulse	2 μ s	74.01dBm
15.80 GHz	Shortest pulse	5 μ s	72.64dBm
16.15 GHz	Shortest pulse	500 ns	74.52dBm
16.50 GHz	Shortest pulse	5 μ s	74.15dBm
15.85 GHz	Shortest pulse	5 μ s	73.12dBm
16.15 GHz	Shortest pulse	500 ns	74.55dBm
16.45 GHz	Shortest pulse	5 μ s	74.75dBm
15.90 GHz	Shortest pulse	15 μ s	72.79dBm
16.15 GHz	Shortest pulse	500 ns	72.27dBm
16.40 GHz	Shortest pulse	15 μ s	74.43dBm

Table 8.3-2: Power results (EIRP.).

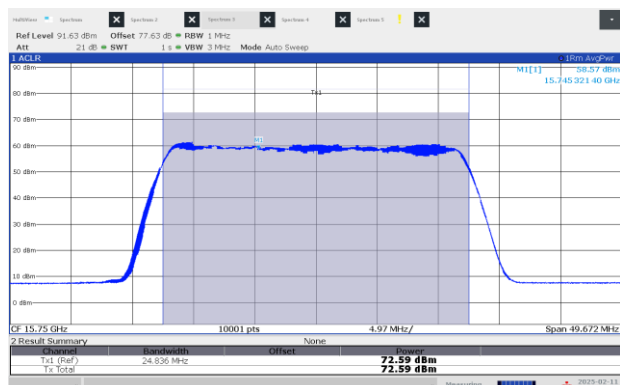


Figure 8.3-1: EIRP Power, Low channel: 15.75 GHz, longest pulse (25 MHz BW)

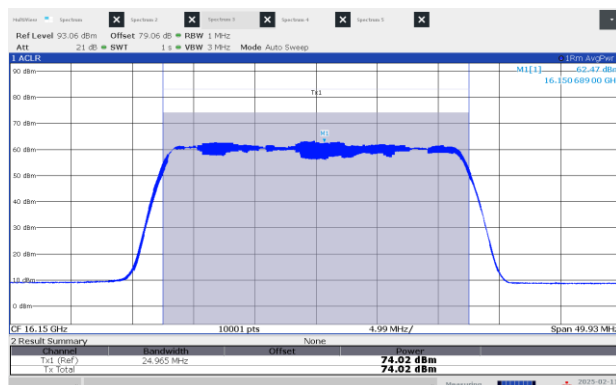


Figure 8.3-2: EIRP Power, Middle channel: 16.15 GHz, longest pulse (25 MHz BW)

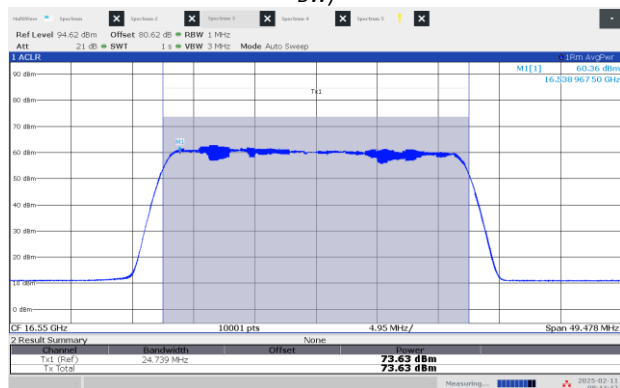


Figure 8.3-3: EIRP Power, High channel: 16.55 GHz, longest pulse (25 MHz BW)

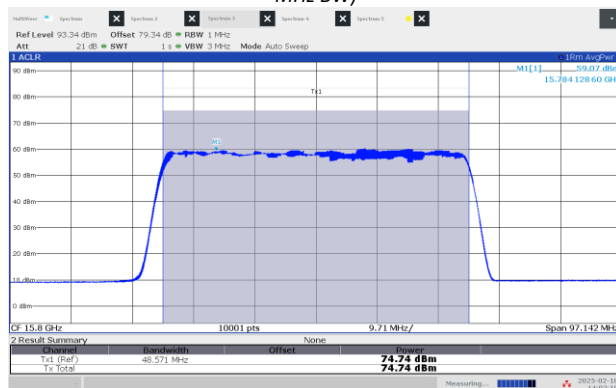


Figure 8.3-4: EIRP Power, Low channel: 15.80 GHz, longest pulse (50 MHz BW)

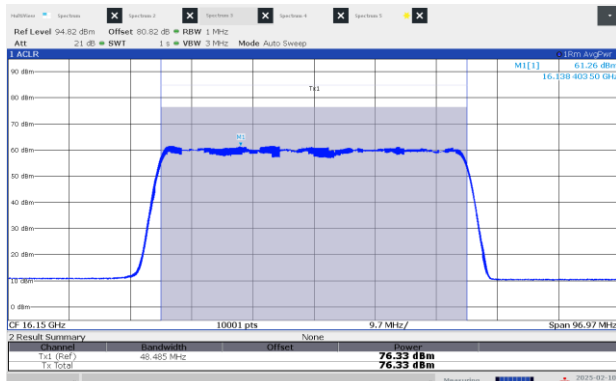


Figure 8.3-5: EIRP Power, Middle channel: 16.15 GHz, longest pulse (50 MHz BW)

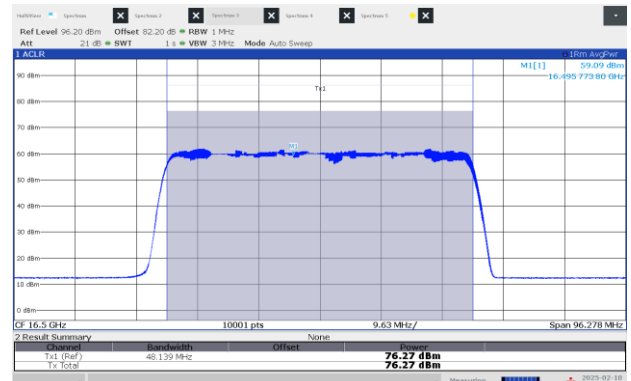


Figure 8.3-6: EIRP Power, High channel: 16.50 GHz, longest pulse (50 MHz BW)

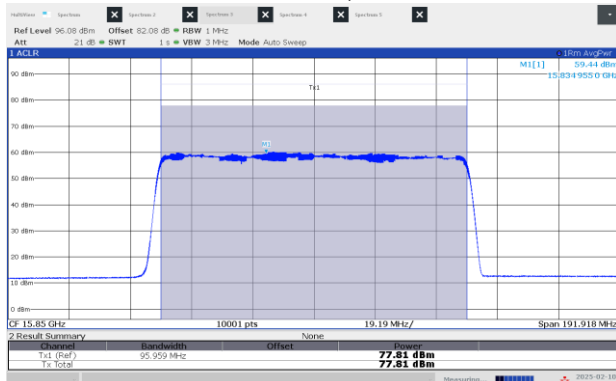


Figure 8.3-7: EIRP Power, Low channel: 15.85 GHz, longest pulse (100 MHz BW)

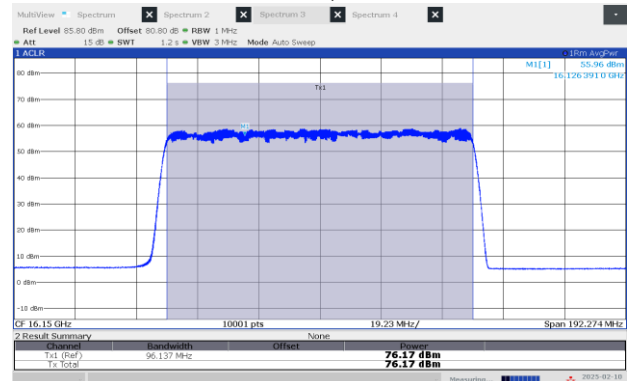


Figure 8.3-8: EIRP Power, Middle channel: 16.15 GHz, longest pulse (100 MHz BW)

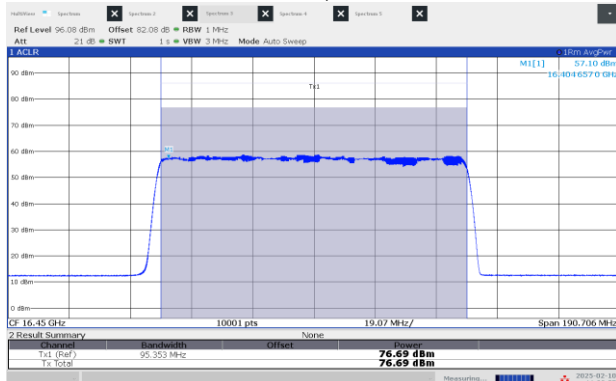


Figure 8.3-9: EIRP Power, High channel: 16.45 GHz, longest pulse (100 MHz BW)

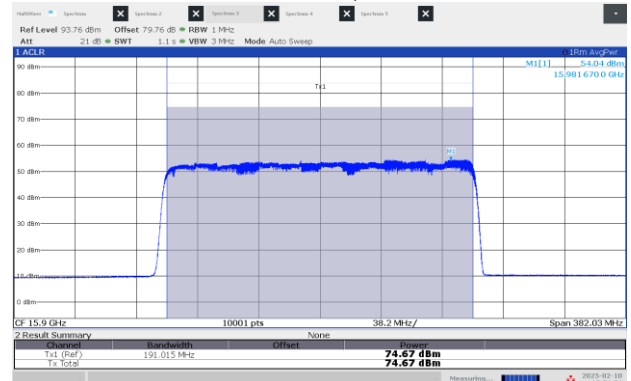


Figure 8.3-10: EIRP Power, Low channel: 15.90 GHz, longest pulse (200 MHz BW)

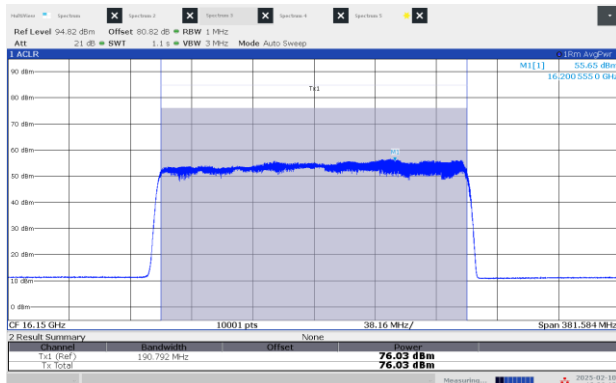


Figure 8.3-11: EIRP Power, Middle channel: 16.15 GHz, longest pulse (200 MHz BW)

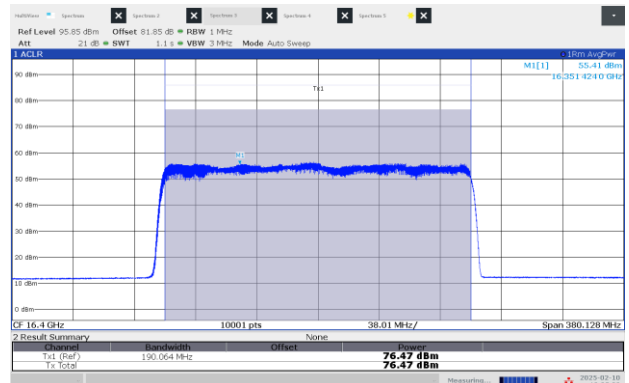


Figure 8.3-12: EIRP Power, High channel: 16.40 GHz, longest pulse (200 MHz BW)

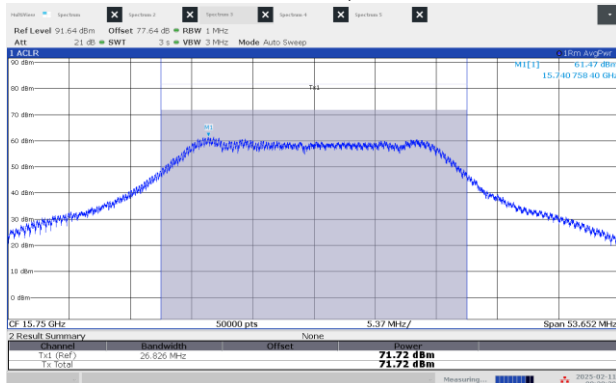


Figure 8.3-13: EIRP Power, Low channel: 15.75 GHz, shortest pulse (25 MHz BW)

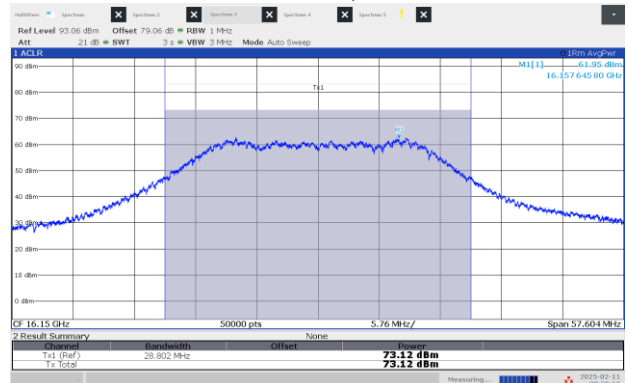


Figure 8.3-14: EIRP Power, Middle channel: 16.15 GHz, shortest pulse (25 MHz BW)

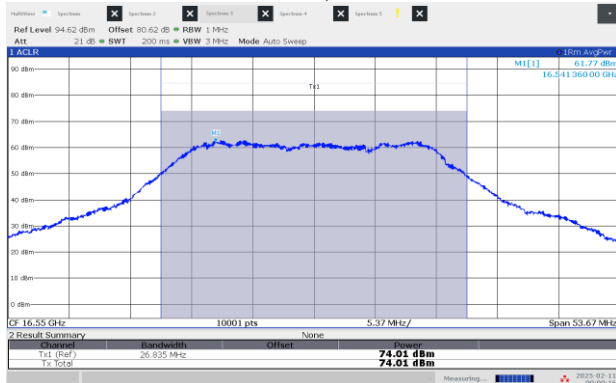


Figure 8.3-15: EIRP Power, High channel: 16.55 GHz, shortest pulse (25 MHz BW)

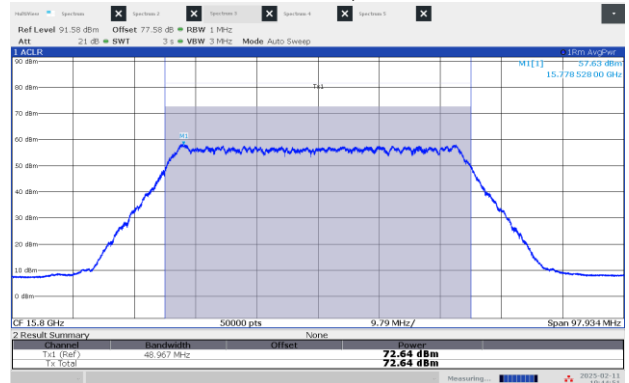


Figure 8.3-16: EIRP Power, Low channel: 15.80 GHz, shortest pulse (50 MHz BW)

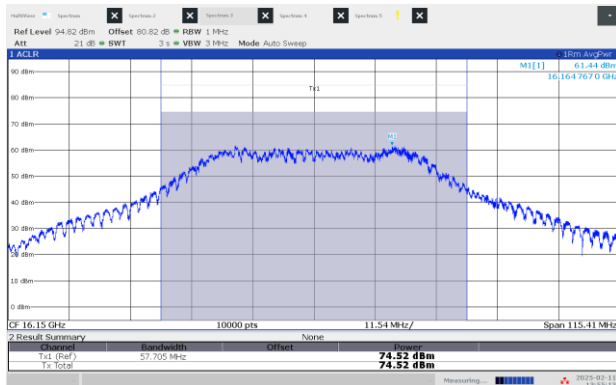


Figure 8.3-17: EIRP Power, Middle channel: 16.15 GHz, shortest pulse (50 MHz BW)

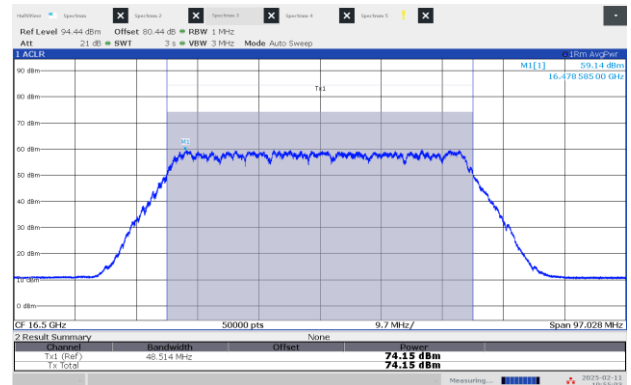


Figure 8.3-18: EIRP Power, High channel: 16.50 GHz, shortest pulse (50 MHz BW)

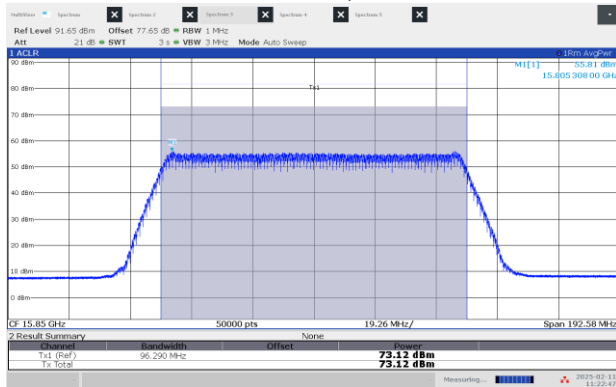


Figure 8.3-19: EIRP Power, Low channel: 15.85 GHz, shortest pulse (100 MHz BW)

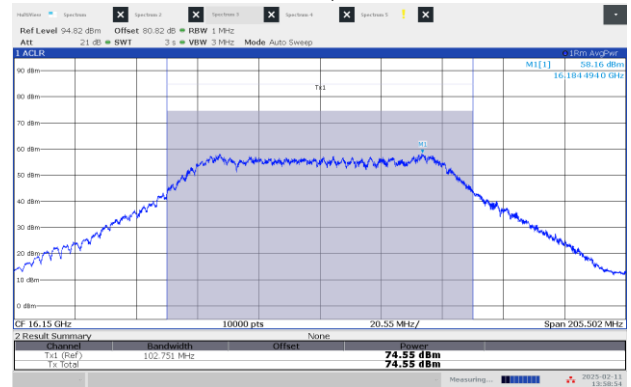


Figure 8.3-20: EIRP Power, Middle channel: 16.15 GHz, shortest pulse (100 MHz BW)

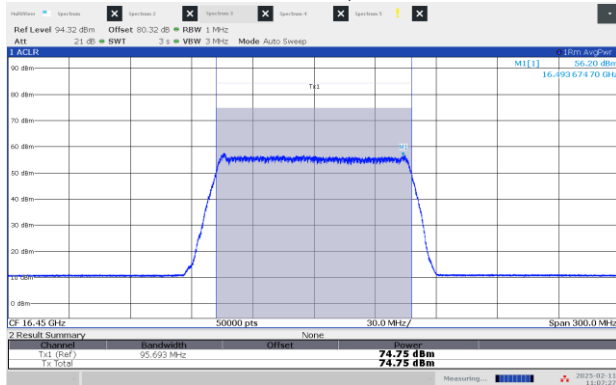


Figure 8.3-21: EIRP Power, High channel: 16.45 GHz, shortest pulse (100 MHz BW)

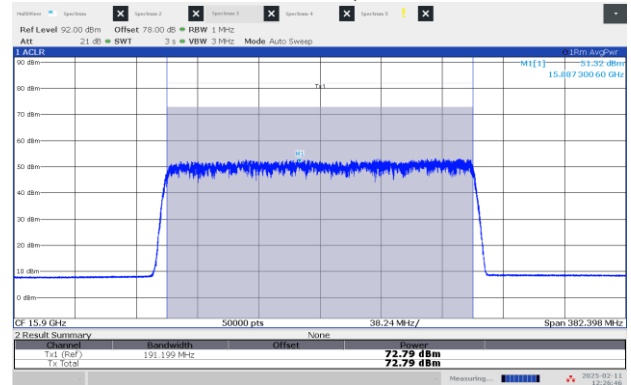


Figure 8.3-22: EIRP Power, Low channel: 15.90 GHz, shortest pulse (200 MHz BW)

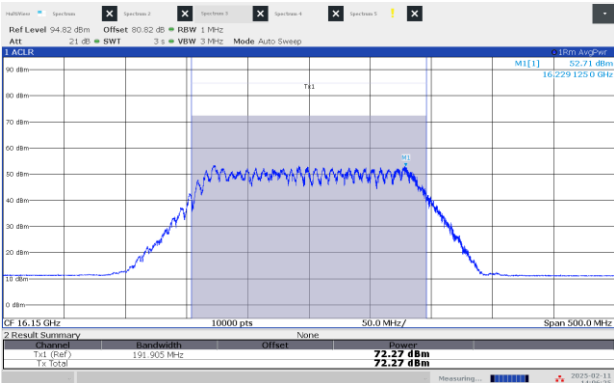


Figure 8.3-23: EIRP Power, Middle channel: 16.15 GHz, shortest pulse (200 MHz BW)

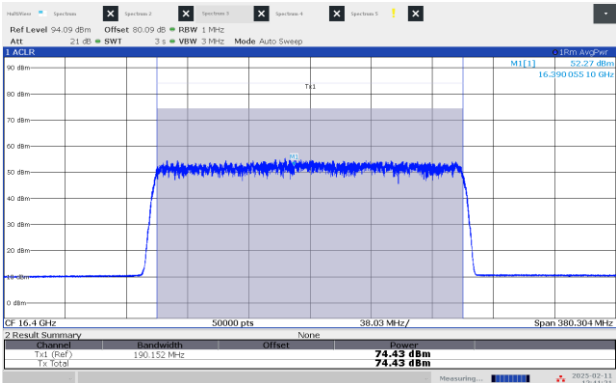


Figure 8.3-24: EIRP Power, High channel: 16.40 GHz, shortest pulse (200 MHz BW)

8.4 Emission mask

8.4.1 References and limits

- FCC 47 CFR Part 90: §90.210
- Test method: ANSI C63.26-2015 (5.5)

(b) Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log(P)$ dB.

8.4.2 Test summary

Verdict	Pass		
Test date	February 10, 2025; February 11, 2025;	Temperature	20°C; 18°C
Test engineer	Chenhao Ma, Wireless Test Technician	Air pressure	1002mbar; 1001mbar
Test location	☐ Wireless bench ☒ Other: 3M Chamber	Relative humidity	59%; 56%

8.4.3 Notes

Testing was performed with the transmitter operating on a fixed channel at full power following the cases shown on table 8.1-1 from section 8.1.3 of this document. The width of the mask was defined according to the 26 dB bandwidth results (one measured bandwidth selected for each declared bandwidth and each pulse width) shown in table 8.2-1 from section 8.2.5 of this document.

The range between the $\pm 250\%$ is a relative limit, therefore, no correction factors were added. For the frequency range beyond $\pm 250\%$ the limit is an absolute value (-13 dBm), which means the corrections factors corresponding to air path losses and interconnexion cables were added as an offset in the spectrum analyzer.

In this section, offset equivalent to RBW/2 in the edges of frequency can be applied, according to the basic guidelines described on C63.26 (5.7.2).

8.4.4 Setup details

EUT power input during test	28 V DC
EUT setup configuration	☐ Table-top ☐ Floor standing ☒ Other: Tripod mounted (1.5 m)

Receiver settings:

Resolution bandwidth	1 MHz
Video bandwidth	3 MHz
Detector mode	RMS
Trace mode	Average (at least 100 traces)
Span	Enough to see the spectrum under investigation

8.4.5 Test data

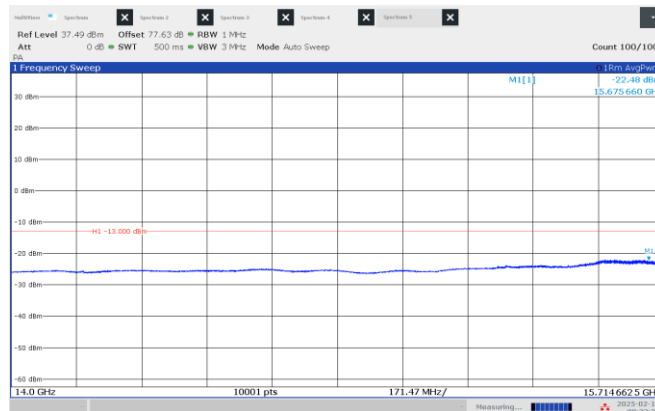


Figure 8.4-1: Emission mask, beyond $\pm 250\%$ of BW (low frequency range), Low channel: 15.75 GHz, longest pulse. (25 MHz BW)

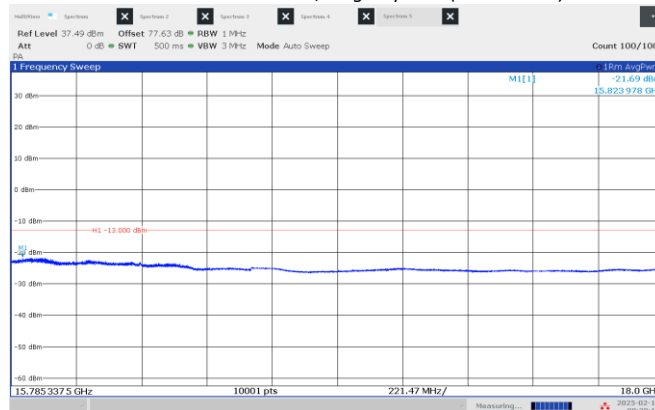


Figure 8.4-3: Emission mask, beyond $\pm 250\%$ of BW (high frequency range), Low channel: 15.75 GHz, longest pulse. (25 MHz BW)

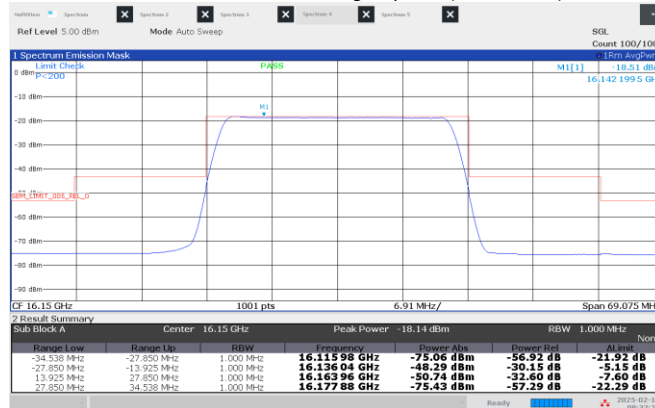


Figure 8.4-5: Emission mask, Middle channel: 16.15 GHz, longest pulse. (25 MHz BW)

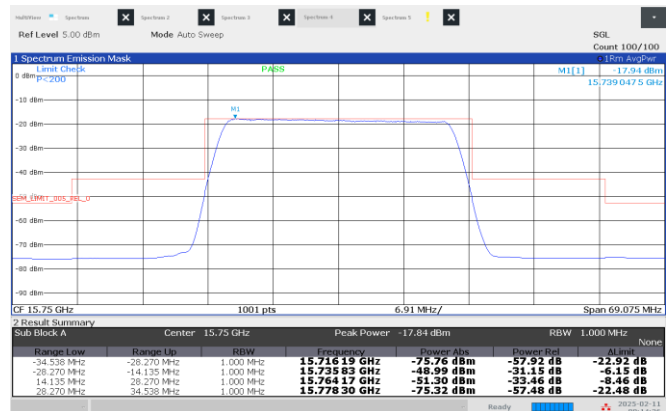


Figure 8.4-2: Emission mask, Low channel: 15.75 GHz, longest pulse. (25 MHz BW)

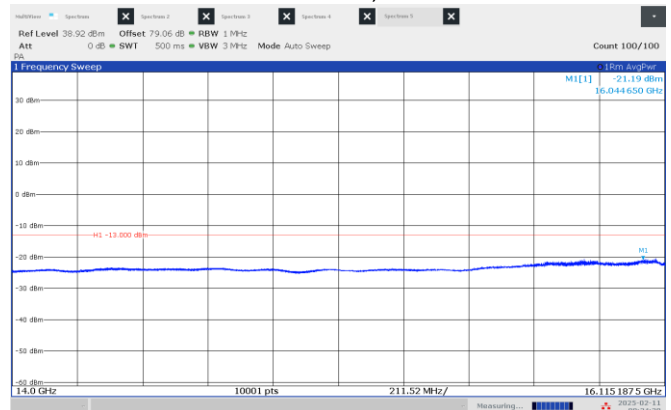


Figure 8.4-4: Emission mask, beyond $\pm 250\%$ of BW (low frequency range), Middle channel: 16.15 GHz, longest pulse. (25 MHz BW)

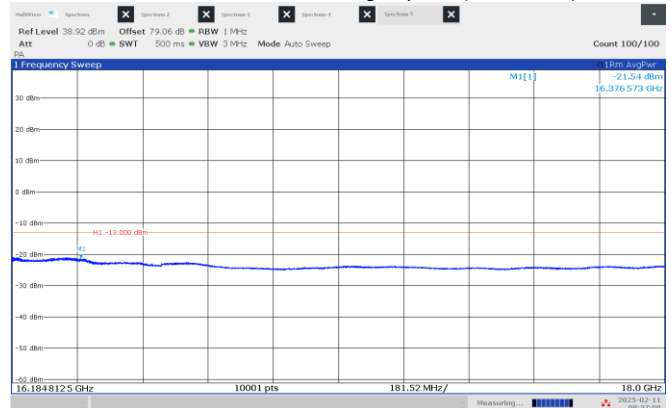


Figure 8.4-6: Emission mask, beyond $\pm 250\%$ of BW (high frequency range), Middle channel: 16.15 GHz, longest pulse. (25 MHz BW)

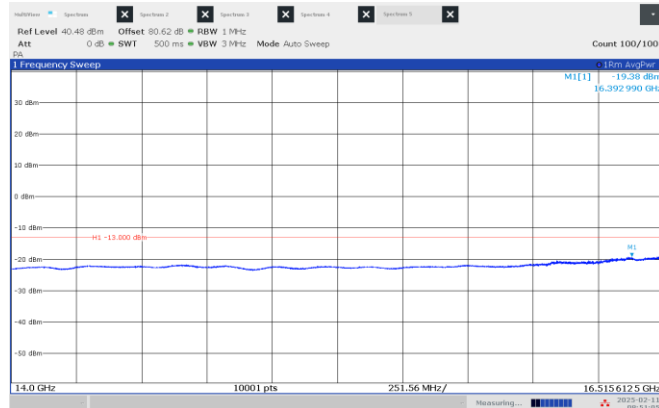


Figure 8.4-7: Emission mask, beyond $\pm 250\%$ of BW (low frequency range), High channel: 16.55 GHz, longest pulse. (25 MHz BW)

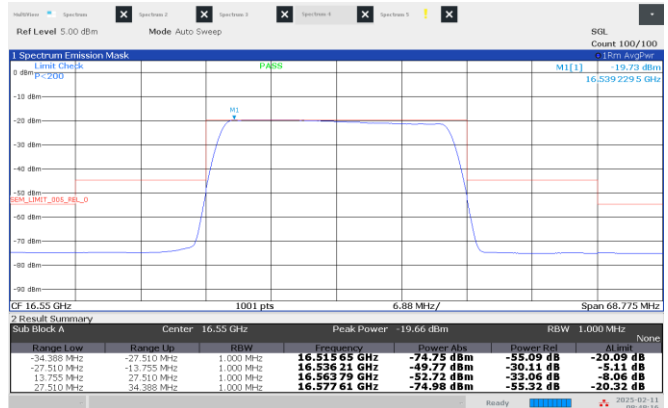


Figure 8.4-8: Emission mask, High channel: 16.55 GHz, longest pulse. (25 MHz BW)

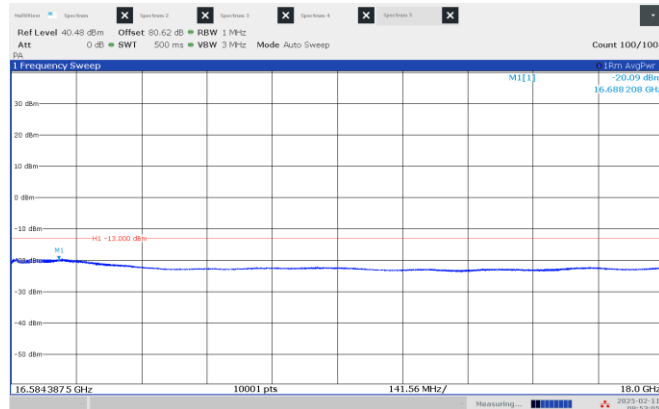


Figure 8.4-9: Emission mask, beyond $\pm 250\%$ of BW (high frequency range), High channel: 16.55 GHz, longest pulse. (25 MHz BW)

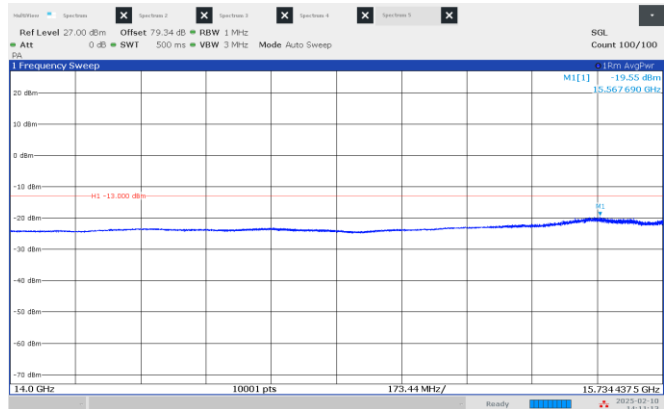


Figure 8.4-10: Emission mask, beyond $\pm 250\%$ of BW (low frequency range), Low channel: 15.80 GHz, longest pulse. (50 MHz BW)



Figure 8.4-11: Emission mask, Low channel: 15.80 GHz, longest pulse. (50 MHz BW)

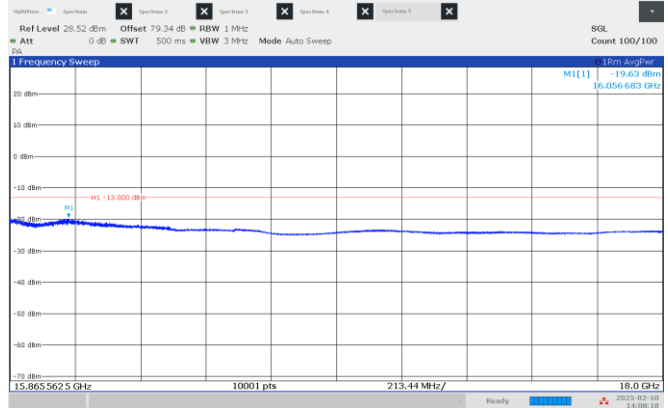


Figure 8.4-12: Emission mask, beyond $\pm 250\%$ of BW (high frequency range), Low channel: 15.80 GHz, longest pulse. (50 MHz BW)

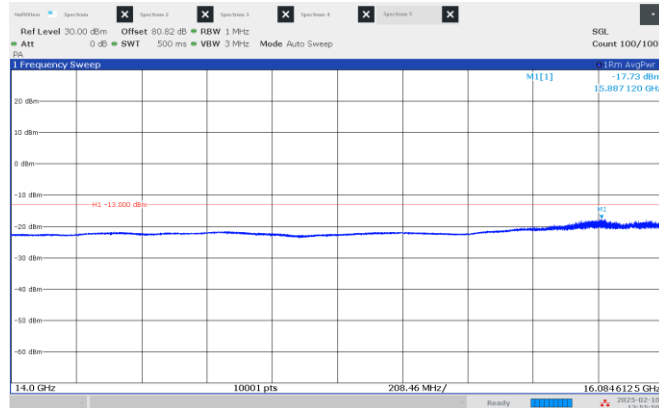


Figure 8.4-13: Emission mask, beyond $\pm 250\%$ of BW (low frequency range), Middle channel: 16.15 GHz, longest pulse. (50 MHz BW)

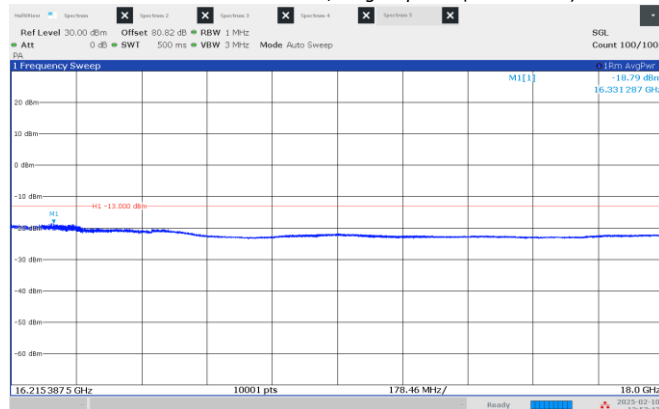


Figure 8.4-15: Emission mask, beyond $\pm 250\%$ of BW (high frequency range), Middle channel: 16.15 GHz, longest pulse. (50 MHz BW)



Figure 8.4-17: Emission mask, High channel: 16.50 GHz, longest pulse. (50 MHz BW)

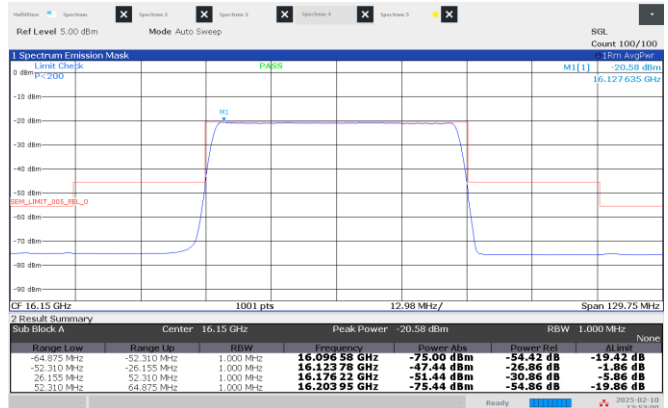


Figure 8.4-14: Emission mask, Middle channel: 16.15 GHz, longest pulse. (50 MHz BW)

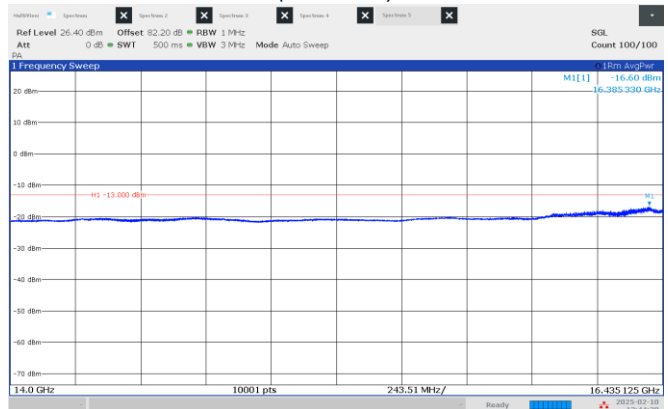


Figure 8.4-16: Emission mask, beyond $\pm 250\%$ of BW (low frequency range), High channel: 16.50 GHz, longest pulse. (50 MHz BW)

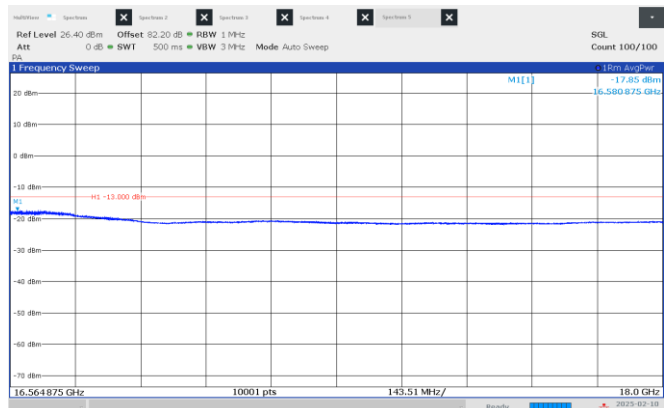


Figure 8.4-18: Emission mask, beyond $\pm 250\%$ of BW (high frequency range), High channel: 16.50 GHz, longest pulse. (50 MHz BW)

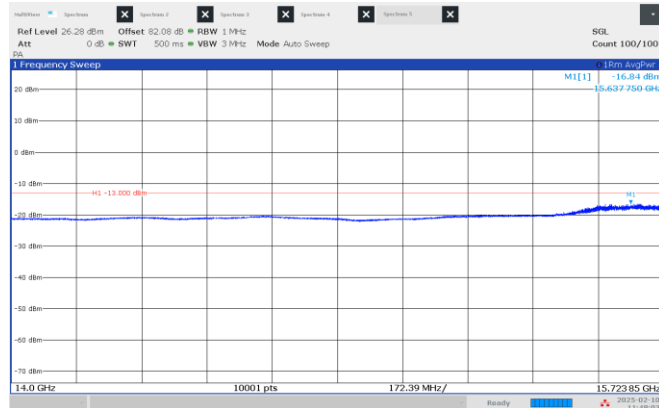


Figure 8.4-19: Emission mask, beyond $\pm 250\%$ of BW (low frequency range), Low channel: 15.85 GHz, longest pulse. (100 MHz BW)

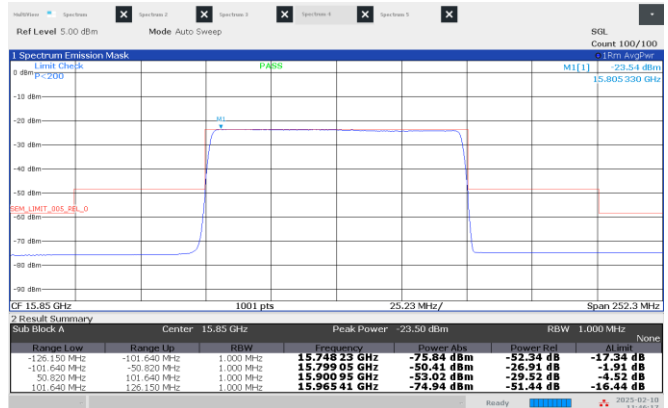


Figure 8.4-20: Emission mask, Low channel: 15.85 GHz, longest pulse. (100 MHz BW)

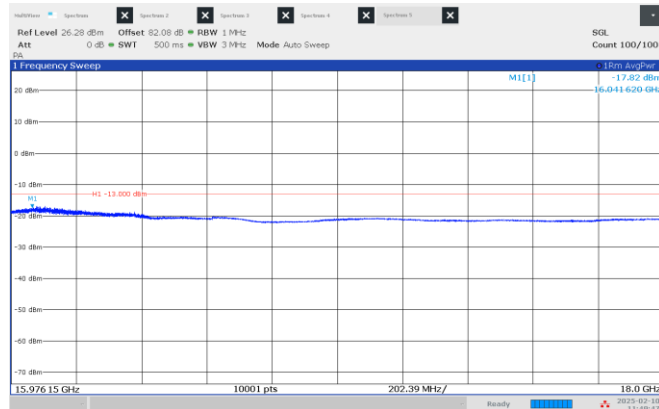


Figure 8.4-21: Emission mask, beyond $\pm 250\%$ of BW (high frequency range), Low channel: 15.85 GHz, longest pulse. (100 MHz BW)

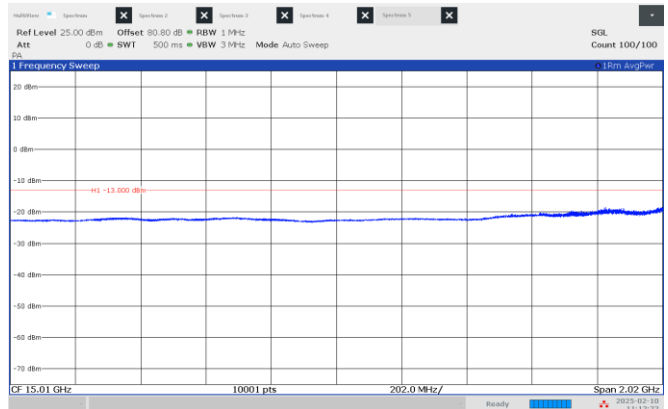


Figure 8.4-22: Emission mask, beyond $\pm 250\%$ of BW (low frequency range), Middle channel: 16.15 GHz, longest pulse. (100 MHz BW)



Figure 8.4-23: Emission mask, Middle channel: 16.15 GHz, longest pulse. (100 MHz BW)

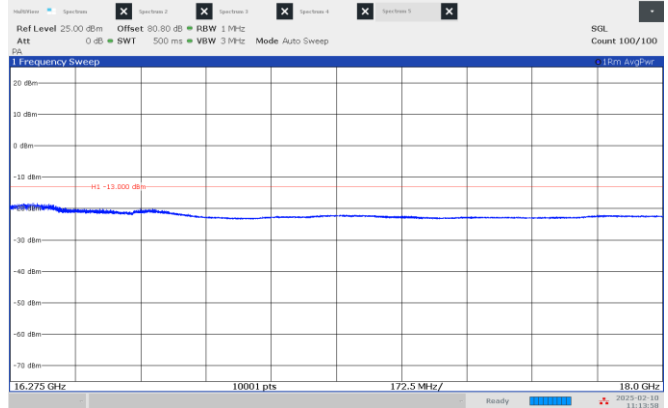


Figure 8.4-24: Emission mask, beyond $\pm 250\%$ of BW (high frequency range), Middle channel: 16.15 GHz, longest pulse. (100 MHz BW)

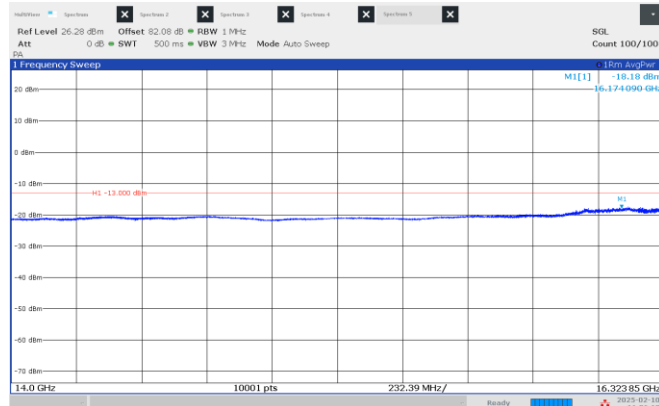


Figure 8.4-25: Emission mask, beyond $\pm 250\%$ of BW (low frequency range), High channel: 16.45 GHz, longest pulse. (100 MHz BW)

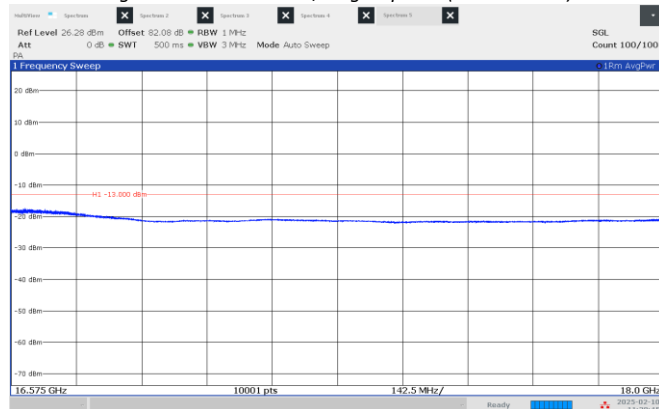


Figure 8.4-27: Emission mask, beyond $\pm 250\%$ of BW (high frequency range), High channel: 16.45 GHz, longest pulse. (100 MHz BW)

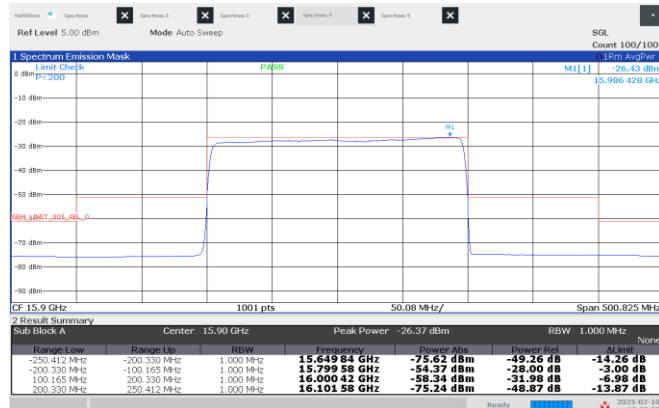


Figure 8.4-29: Emission mask, Low channel: 15.90 GHz, longest pulse. (200 MHz BW)

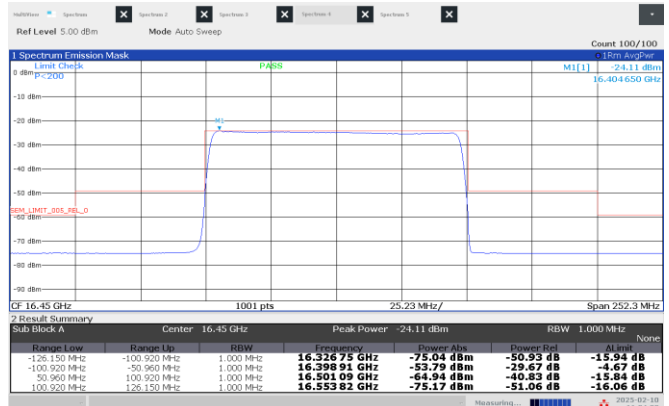


Figure 8.4-26: Emission mask, High channel: 16.45 GHz, longest pulse. (100 MHz BW)

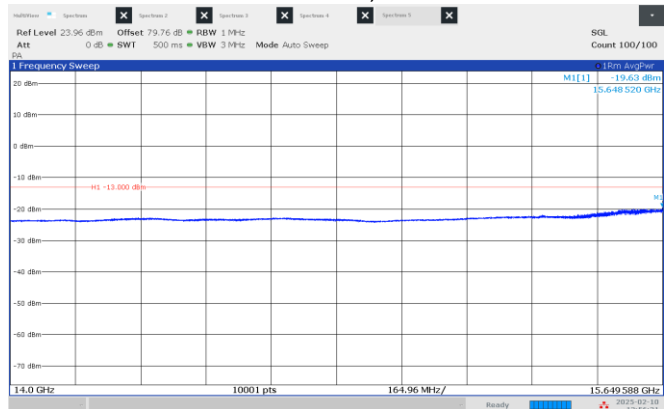


Figure 8.4-28: Emission mask, beyond $\pm 250\%$ of BW (low frequency range), Low channel: 15.90 GHz, longest pulse. (200 MHz BW)

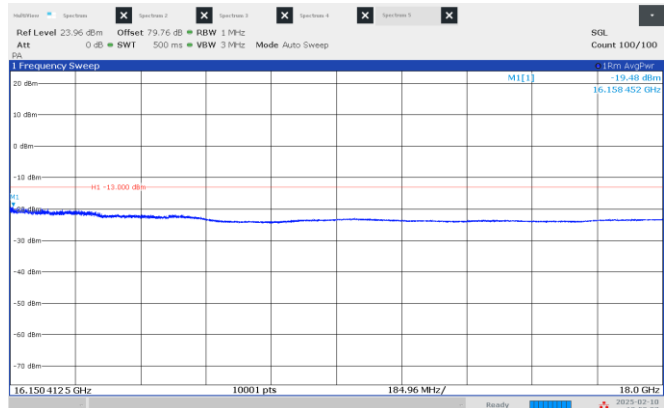


Figure 8.4-30: Emission mask, beyond $\pm 250\%$ of BW (high frequency range), Low channel: 15.90 GHz, longest pulse. (200 MHz BW)

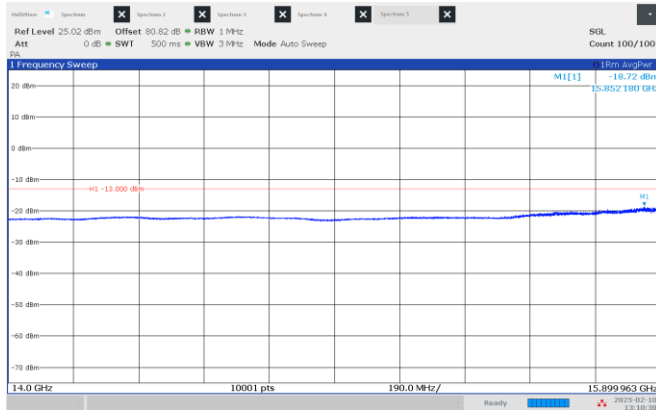


Figure 8.4-31: Emission mask, beyond $\pm 250\%$ of BW (low frequency range), Middle channel: 16.15 GHz, longest pulse. (200 MHz BW)

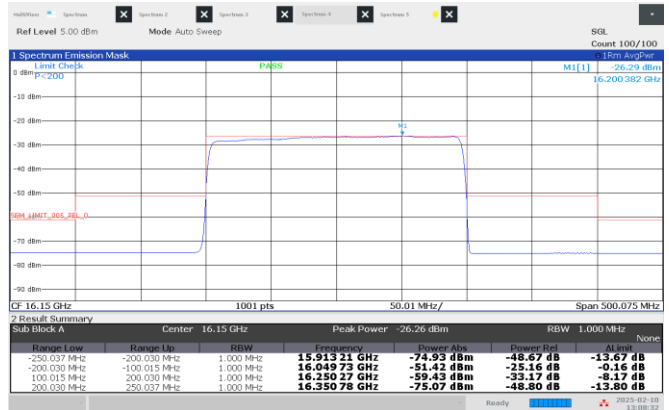


Figure 8.4-32: Emission mask, Middle channel: 16.15 GHz, longest pulse. (200 MHz BW)

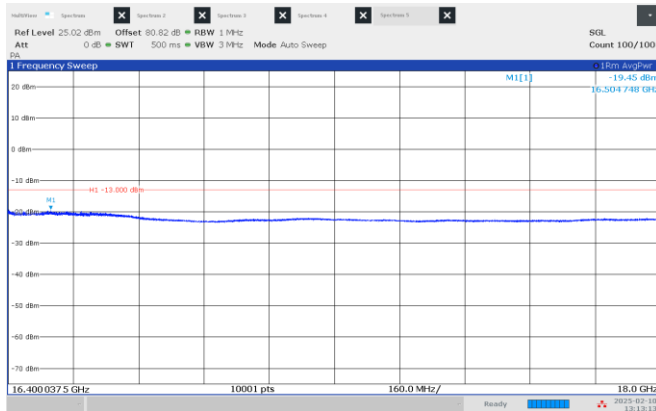


Figure 8.4-33: Emission mask, beyond $\pm 250\%$ of BW (high frequency range), Middle channel: 16.15 GHz, longest pulse. (200 MHz BW)

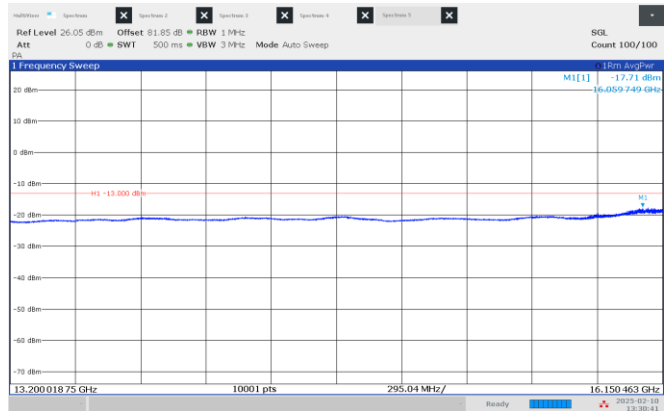


Figure 8.4-34: Emission mask, beyond $\pm 250\%$ of BW (low frequency range), High channel: 16.40 GHz, longest pulse. (200 MHz BW)



Figure 8.4-35: Emission mask, High channel: 16.40 GHz, longest pulse. (200 MHz BW)

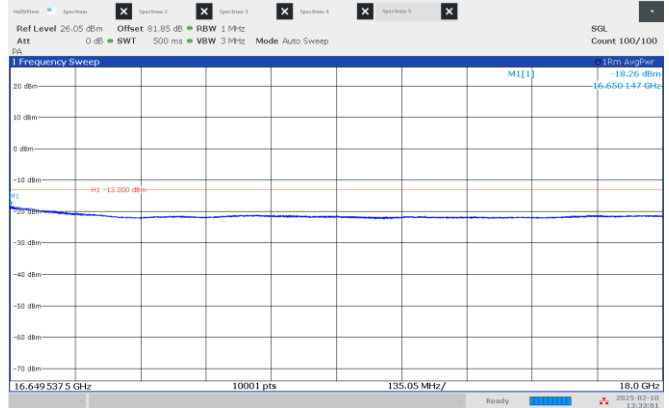


Figure 8.4-36: Emission mask, beyond $\pm 250\%$ of BW (high frequency range), High channel: 16.40 GHz, longest pulse. (200 MHz BW)

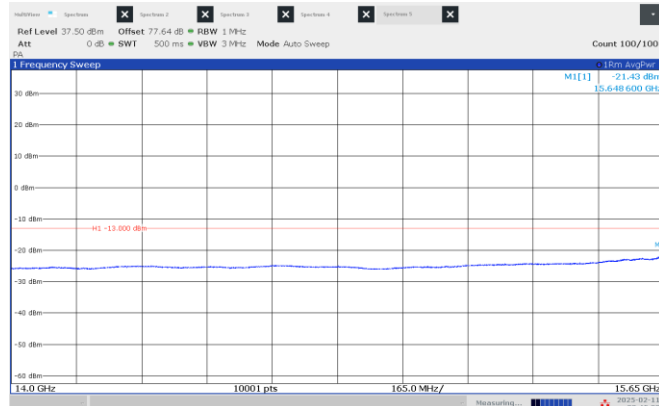


Figure 8.4-37: Emission mask, beyond $\pm 250\%$ of BW (low frequency range), Low channel: 15.75 GHz, shortest pulse. (25 MHz BW)

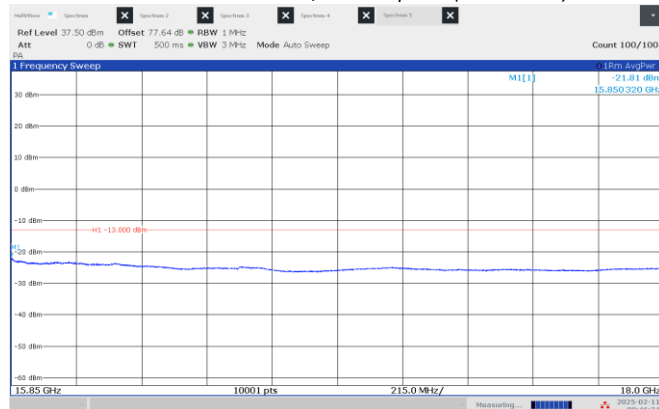


Figure 8.4-39: Emission mask, beyond $\pm 250\%$ of BW (high frequency range), Low channel: 15.75 GHz, shortest pulse. (25 MHz BW)

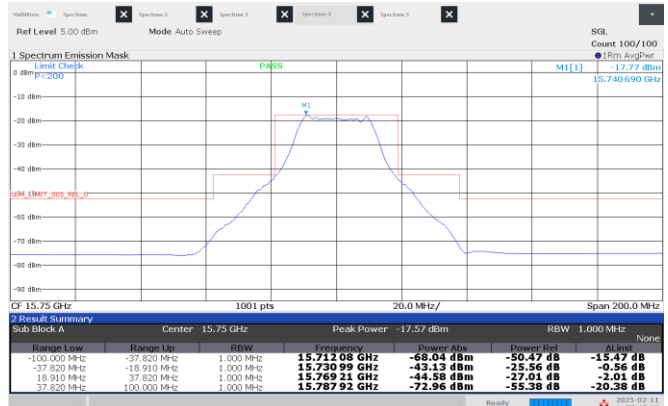


Figure 8.4-38: Emission mask, Low channel: 15.75 GHz, shortest pulse. (25 MHz BW)

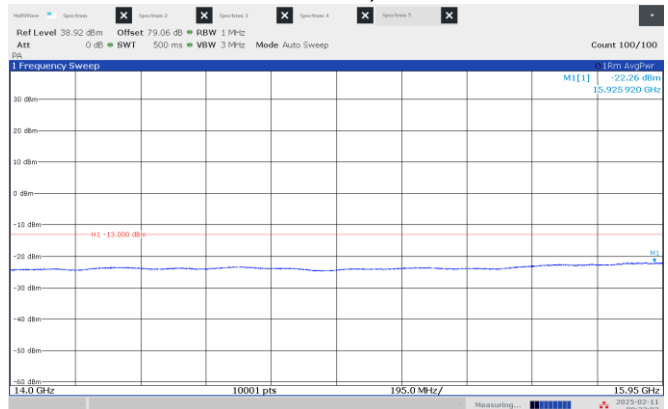


Figure 8.4-40: Emission mask, beyond $\pm 250\%$ of BW (low frequency range), Middle channel: 16.15 GHz, shortest pulse. (25 MHz BW)

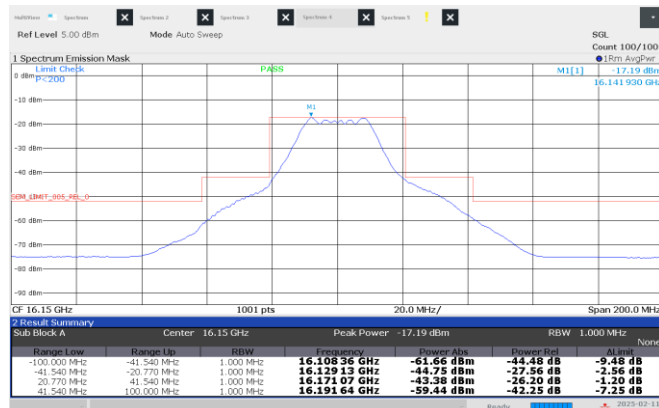


Figure 8.4-41: Emission mask, Middle channel: 16.15 GHz, shortest pulse. (25 MHz BW)

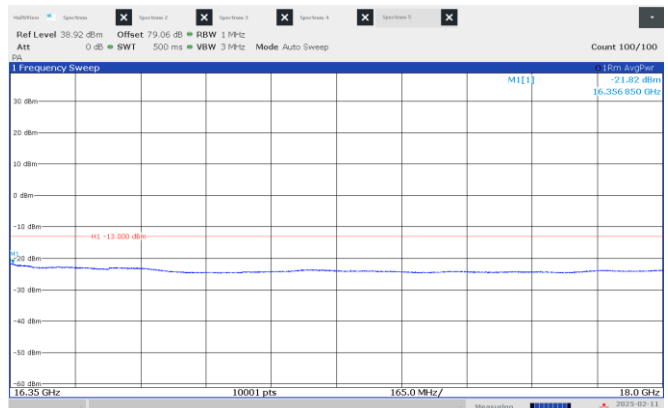


Figure 8.4-42: Emission mask, beyond $\pm 250\%$ of BW (high frequency range), Middle channel: 16.15 GHz, shortest pulse. (25 MHz BW)

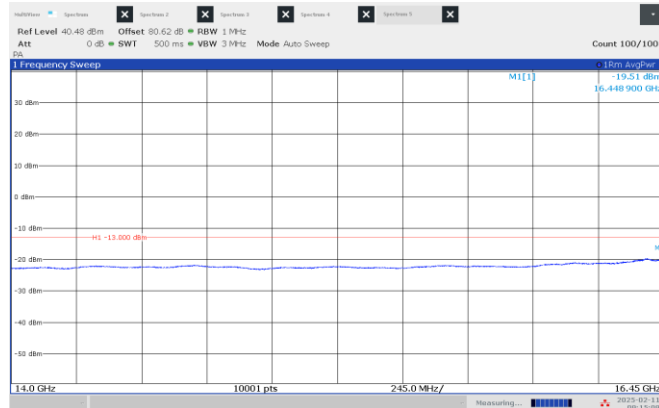


Figure 8.4-43: Emission mask, beyond $\pm 250\%$ of BW (low frequency range), High channel: 16.55 GHz, shortest pulse. (25 MHz BW)

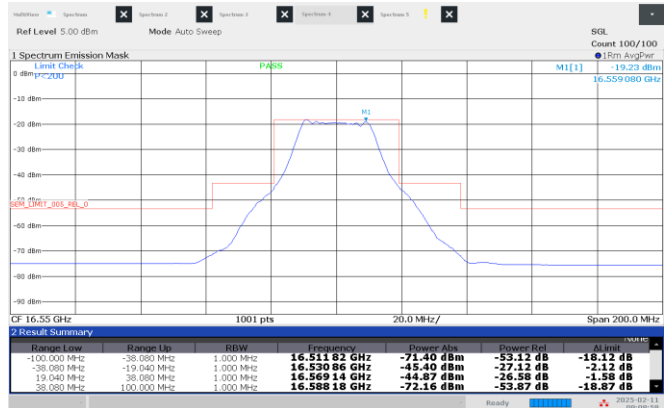


Figure 8.4-44: Emission mask, High channel: 16.55 GHz, shortest pulse. (25 MHz BW)

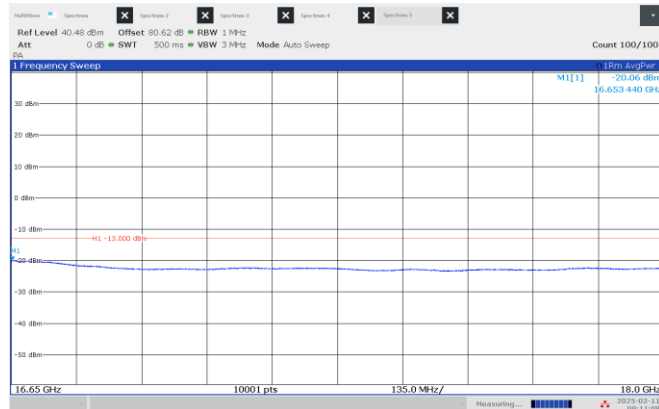


Figure 8.4-45: Emission mask, beyond $\pm 250\%$ of BW (high frequency range), High channel: 16.55 GHz, shortest pulse. (25 MHz BW)

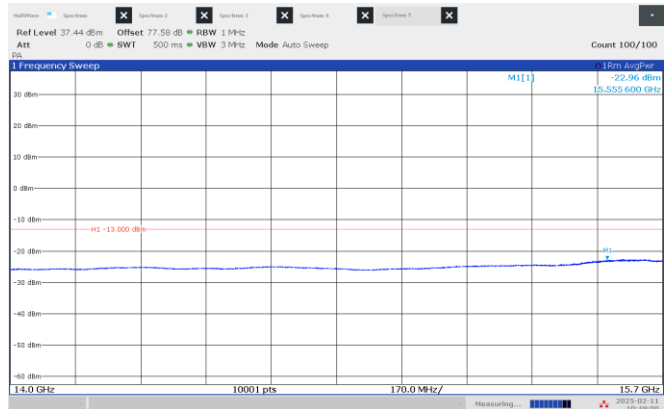


Figure 8.4-46: Emission mask, beyond $\pm 250\%$ of BW (low frequency range), Low channel: 15.80 GHz, shortest pulse. (50 MHz BW)

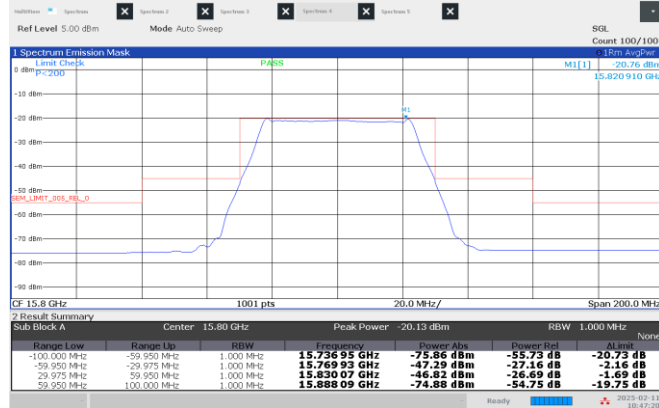


Figure 8.4-47: Emission mask, Low channel: 15.80 GHz, shortest pulse. (50 MHz BW)

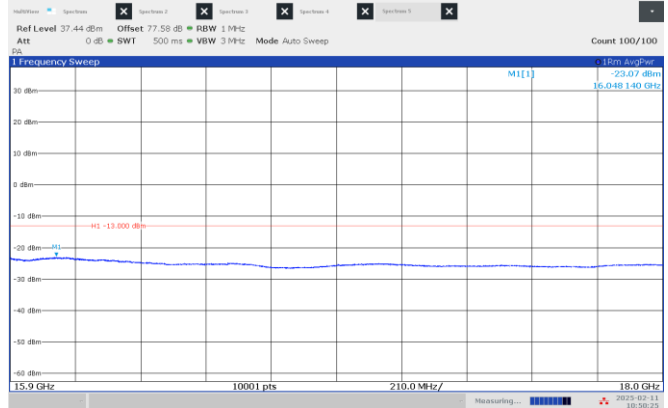


Figure 8.4-48: Emission mask, beyond $\pm 250\%$ of BW (high frequency range), Low channel: 15.80 GHz, shortest pulse. (50 MHz BW)

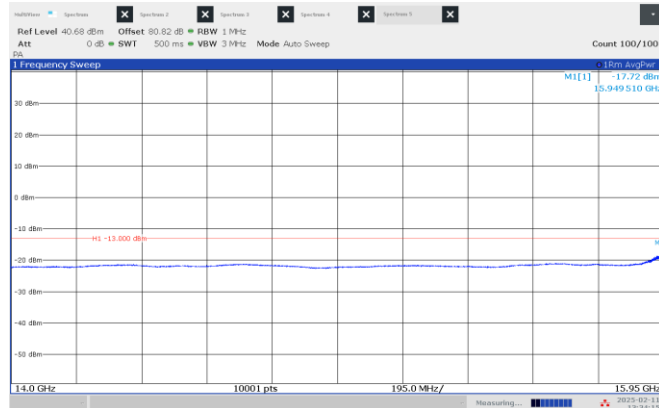


Figure 8.4-49: Emission mask, beyond $\pm 250\%$ of BW (low frequency range), Middle channel: 16.15 GHz, shortest pulse. (50 MHz BW)

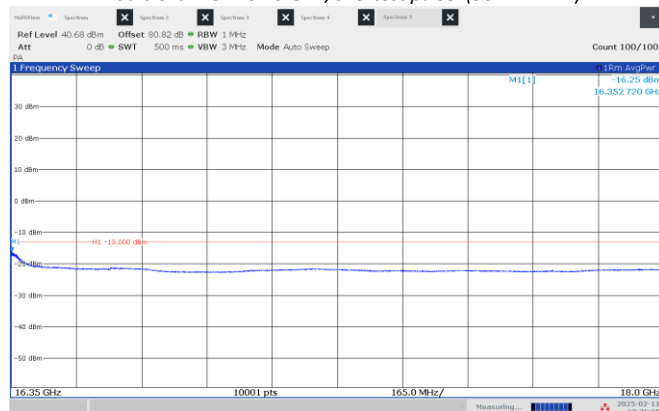


Figure 8.4-51: Emission mask, beyond $\pm 250\%$ of BW (high frequency range), Middle channel: 16.15 GHz, shortest pulse. (50 MHz BW)

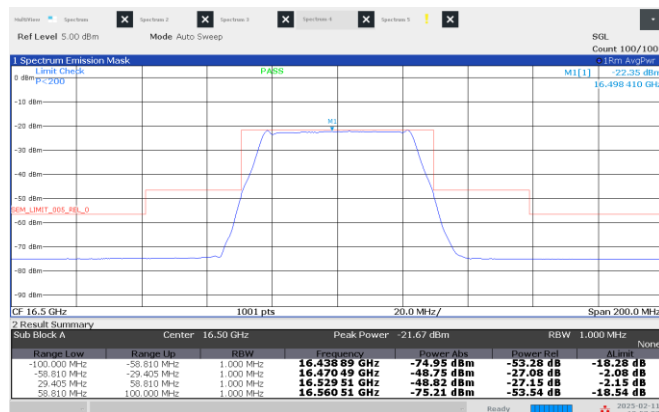


Figure 8.4-53: Emission mask, High channel: 16.50 GHz, shortest pulse. (50 MHz BW)



Figure 8.4-50: Emission mask, Middle channel: 16.15 GHz, shortest pulse. (50 MHz BW)

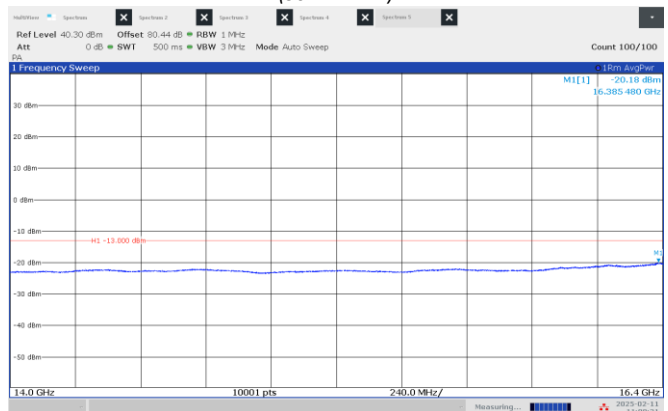


Figure 8.4-52: Emission mask, beyond $\pm 250\%$ of BW (low frequency range), High channel: 16.50 GHz, shortest pulse. (50 MHz BW)

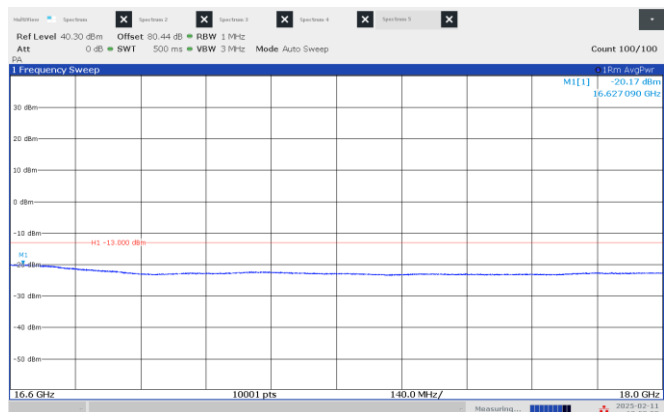


Figure 8.4-54: Emission mask, beyond $\pm 250\%$ of BW (high frequency range), High channel: 16.50 GHz, shortest pulse. (50 MHz BW)