

TEST REPORT

Product : Zigbee PCB Module
Trade mark : ENNFU
Model/Type reference : T30PA127F2.4G
Serial Number : N/A
Report Number : EED32J00193101
FCC ID : 2ANLK-T30A
Date of Issue : Dec. 08, 2017
Test Standards : 47 CFR Part 15Subpart C
Test result : PASS

Prepared for:

Ennfu Scientific Company Limited
A606, 6F, Area A, University Of Pioneer Park, No. 99, Daxue Road,
Tongshan District, Xuzhou, Jiangsu Province, P.R.China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Tom - chen

Tom chen (Test Project)

Compiled by:

Max . Liang

Max liang (Project Engineer)

Reviewed by:

Ware Xin

Ware xin (Reviewer)

Approved by:

Sheek . Luo

Sheek Luo (Lab supervisor)

Date:

Dec. 08, 2017



Check No.:2827583977

2 Version

Version No.	Date	Description
00	Dec. 08, 2017	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
6dB Occupied Bandwidth	47 CFR Part 15Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
Power Spectral Density	47 CFR Part 15Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
RF Conducted Spurious Emissions	47 CFR Part 15Subpart C Section 15.247(d)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
Radiated Spurious Emissions	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
6.4 DESCRIPTION OF SUPPORT UNITS	8
6.5 TEST LOCATION	8
6.6 DEVIATION FROM STANDARDS	8
6.7 ABNORMALITIES FROM STANDARD CONDITIONS	8
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	8
7 EQUIPMENT LIST	9
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	11
Appendix A): 6dB Occupied Bandwidth	12
Appendix B): Conducted Peak Output Power	14
Appendix C): Band-edge for RF Conducted Emissions	16
Appendix D): RF Conducted Spurious Emissions	18
Appendix E): Power Spectral Density	22
Appendix F): Antenna Requirement	24
Appendix G): AC Power Line Conducted Emission	25
Appendix H): Restricted bands around fundamental frequency (Radiated)	28
Appendix I): Radiated Spurious Emissions	32
PHOTOGRAPHS OF TEST SETUP	37
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	40

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

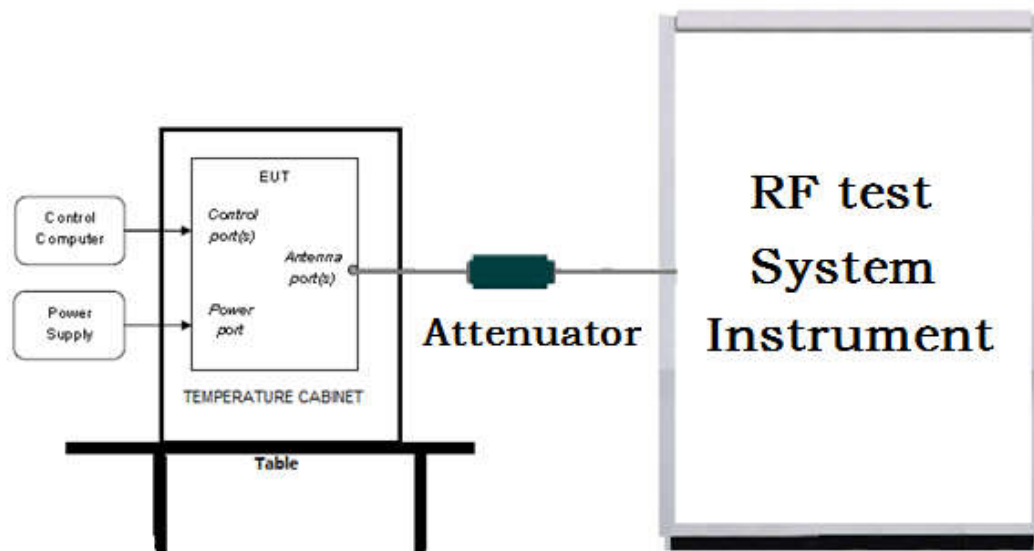

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

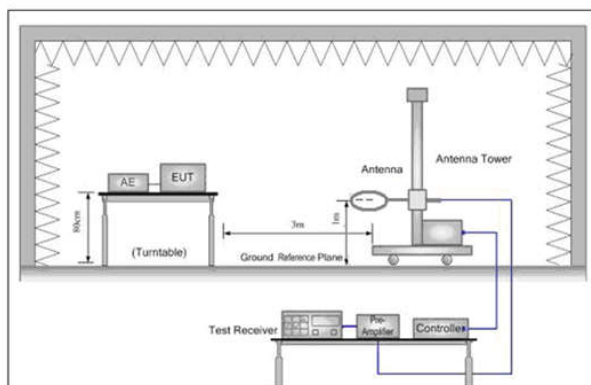


Figure 1. Below 30MHz

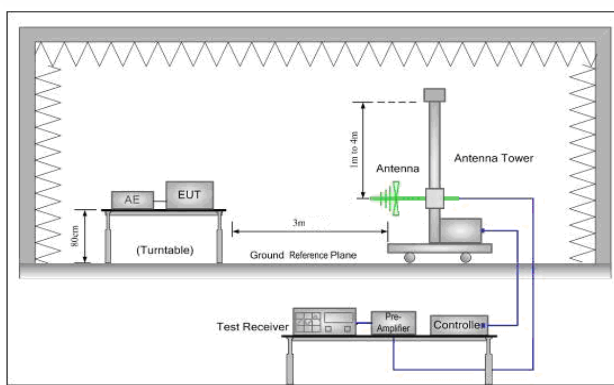


Figure 2. 30MHz to 1GHz


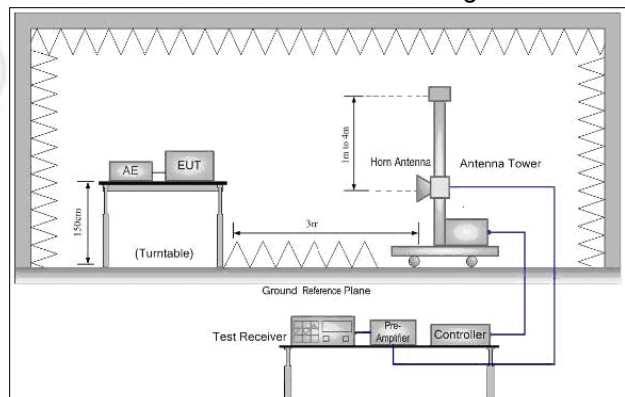


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

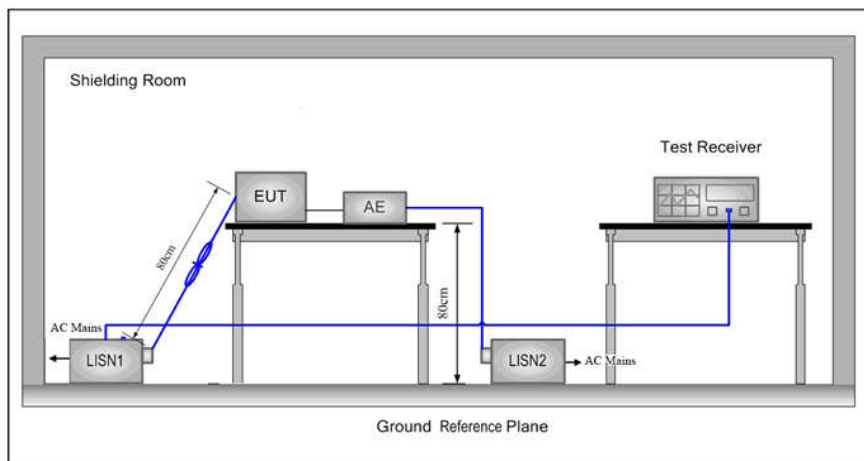

5.2 Test Environment

Operating Environment:	
Temperature:	24.6 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
QPFSK	2405MHz ~2480 MHz	Channel 1	Channel 8	Channel 16
		2405MHz	2440MHz	2480MHz
Transmitting mode:	The EUT transmitted the continuous signal at the specific channel(s).			

6 General Information

6.1 Client Information

Applicant:	Ennpu Scientific Company Limited
Address of Applicant:	A606, 6F, Area A, University Of Pioneer Park, No. 99, Daxue Road, Tongshan District, Xuzhou, Jiangsu Province, P.R.China
Manufacturer:	Ennpu Scientific Company Limited
Address of Manufacturer:	A606, 6F, Area A, University Of Pioneer Park, No. 99, Daxue Road, Tongshan District, Xuzhou, Jiangsu Province, P.R.China
Factory:	Ennpu Scientific Company Limited
Address of Factory:	A606, 6F, Area A, University Of Pioneer Park, No. 99, Daxue Road, Tongshan District, Xuzhou, Jiangsu Province, P.R.China

6.2 General Description of EUT

Product Name:	Zigbee PCB Module
Model No.(EUT):	T30PA127F2.4G
Trade mark:	ENNPU
EUT Supports Radios application:	Zigbee
Power Supply:	DC 3.3V
Sample Received Date:	Aug. 30, 2017
Sample tested Date:	Aug. 30, 2017 to Dec. 07, 2017

6.3 Product Specification subjective to this standard

Operation Frequency:	2405MHz-2480MHz
Modulation Type:	QPSK
Number of Channel:	16
Test Power Grade:	N/A
Test Software of EUT:	SmartRF_Studio_7-2.6.0(manufacturer declare)
Antenna Type and Gain:	Antenna type:Modular antenna Antenna Gain: 3dBi
Test Voltage:	DC 3.3V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2405MHz	5	2425MHz	9	2445MHz	13	2465MHz
2	2410MHz	6	2430MHz	10	2450MHz	14	2470MHz
3	2415MHz	7	2435MHz	11	2455MHz	15	2475MHz
4	2420MHz	8	2440MHz	12	2460MHz	16	2480MHz

6.4 Description of Support Units

None.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-14-2017	03-13-2018
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-14-2017	03-13-2018
Signal Generator	Keysight	N5182B	MY53051549	03-14-2017	03-13-2018
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-11-2017	01-10-2018
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-11-2017	01-10-2018
DC Power	Keysight	E3642A	MY54436035	03-14-2017	03-13-2018
PC-1	Lenovo	R4960d	---	04-01-2017	03-31-2018
BT&WI-FI Automatic control	R&S	OSP120	101374	03-14-2017	03-13-2018
RF control unit	JS Tonscend	JS0806-2	158060006	03-14-2017	03-13-2018
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	03-14-2017	03-13-2018

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100009	06-14-2017	06-13-2018
Temperature/ Humidity Indicator	TAYLOR	1451	1905	05-08-2017	05-07-2018
LISN	R&S	ENV216	100098	06-13-2017	06-12-2018
LISN	schwarzbeck	NNLK8121	8121-529	06-13-2017	06-12-2018
Voltage Probe	R&S	ESH2-Z3	--	06-13-2017	06-11-2020
Current Probe	R&S	EZ17	100106	06-13-2017	06-12-2018
ISN	TESEQ GmbH	ISN T800	30297	02-23-2017	02-22-2018

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-05-2016	06-05-2019
TRILOG Broadband Antenna	SCHWARZBEC K	VULB9163	9163-484	05-23-2017	05-22-2018
Microwave Preamplifier	Agilent	8449B	3008A02425	02-16-2017	02-15-2018
Horn Antenna	ETS-LINDGREN	3117	00057407	07-20-2015	07-18-2018
Loop Antenna	ETS	6502	00071730	07-30-2016	07-28-2018
Microwave Preamplifier	A.H.SYSTEMS	PAP-1840-60	6041.6042	06-30-2015	06-28-2018
Horn Antenna	A.H.SYSTEMS	SAS-574 374	---	06-30-2015	06-28-2018
Spectrum Analyzer	R&S	FSP40	100416	06-13-2017	06-12-2018
Receiver	R&S	ESCI	100435	06-14-2017	06-13-2018
Multi device Controller	maturo	NCD/070/10711 112	---	01-11-2017	01-10-2018
LISN	schwarzbeck	NNBM8125	81251547	06-13-2017	06-12-2018
LISN	schwarzbeck	NNBM8125	81251548	06-13-2017	06-12-2018
Signal Generator	Agilent	E4438C	MY45095744	03-14-2017	03-13-2018
Signal Generator	Keysight	E8257D	MY53401106	03-14-2017	03-13-2018
Temperature/ Humidity Indicator	TAYLOR	1451	1905	05-08-2017	05-07-2018
Cable line	Fulai(7M)	SF106	5219/6A	01-11-2017	01-10-2018
Cable line	Fulai(6M)	SF106	5220/6A	01-11-2017	01-10-2018
Cable line	Fulai(3M)	SF106	5216/6A	01-11-2017	01-10-2018
Cable line	Fulai(3M)	SF106	5217/6A	01-11-2017	01-10-2018
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-11-2017	01-10-2018
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-11-2017	01-10-2018

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C (2015)	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(2)	ANSI C63.10	6dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (b)(3)	ANSI C63.10	Conducted Peak Output Power	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix I)

Appendix A): 6dB Occupied Bandwidth

Test Result

Mode	Channel	6dB Bandwidth [MHz]	99% OBW[MHz]	Verdict	Remark
Zigbee	LCH	1.603	2.4024	PASS	Peak detector
Zigbee	MCH	1.597	2.4113	PASS	
Zigbee	HCH	1.588	2.4204	PASS	

Test Graphs




Graphs	
LCH	
MCH	
HCH	

Appendix B): Conducted Peak Output Power

Test Result

Mode	Channel	Conduct Peak Power[dBm]	Verdict
Zigbee	LCH	1.802	PASS
Zigbee	MCH	1.435	PASS
Zigbee	HCH	1.191	PASS

Test Graphs

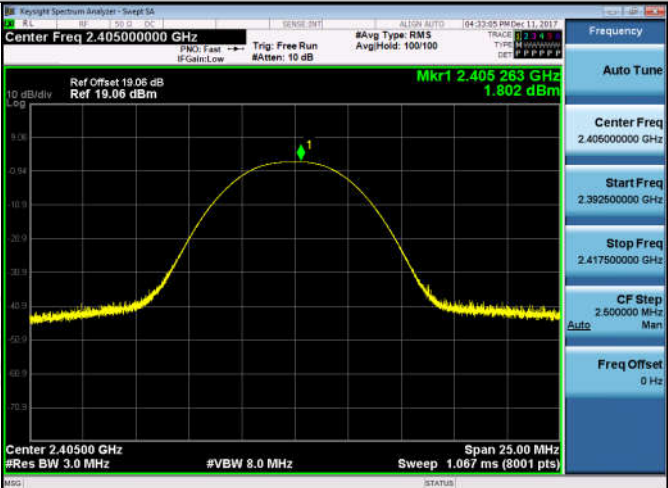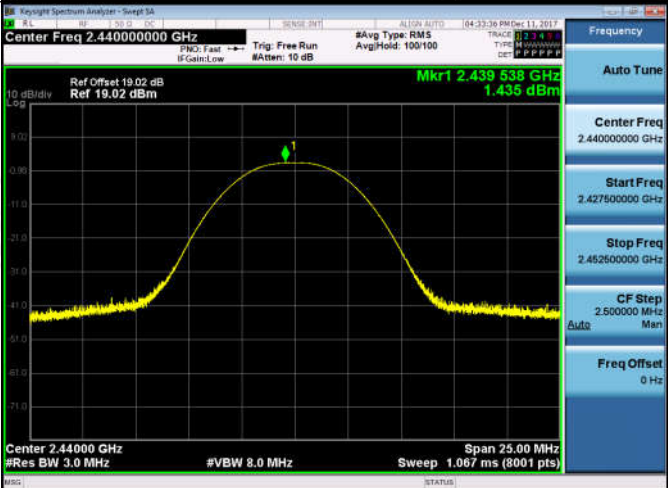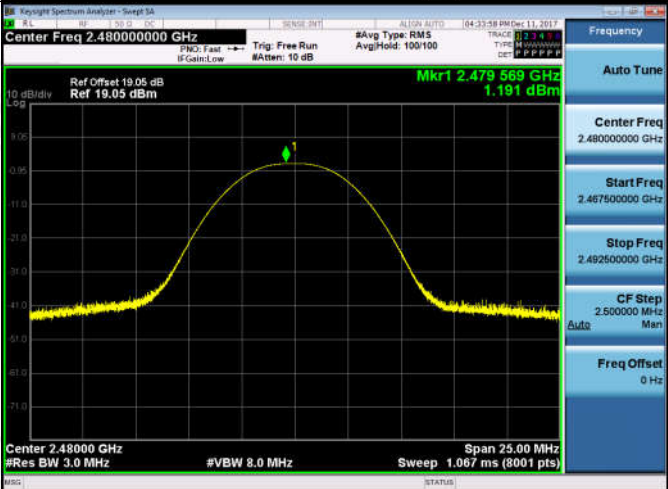
Graphs	
LCH	
MCH	
HCH	

Appendix C): Band-edge for RF Conducted Emissions

Result Table

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
Zigbee	LCH	-3.889	-58.958	-23.89	PASS
Zigbee	HCH	-3.296	-52.904	-23.3	PASS

Test Graphs

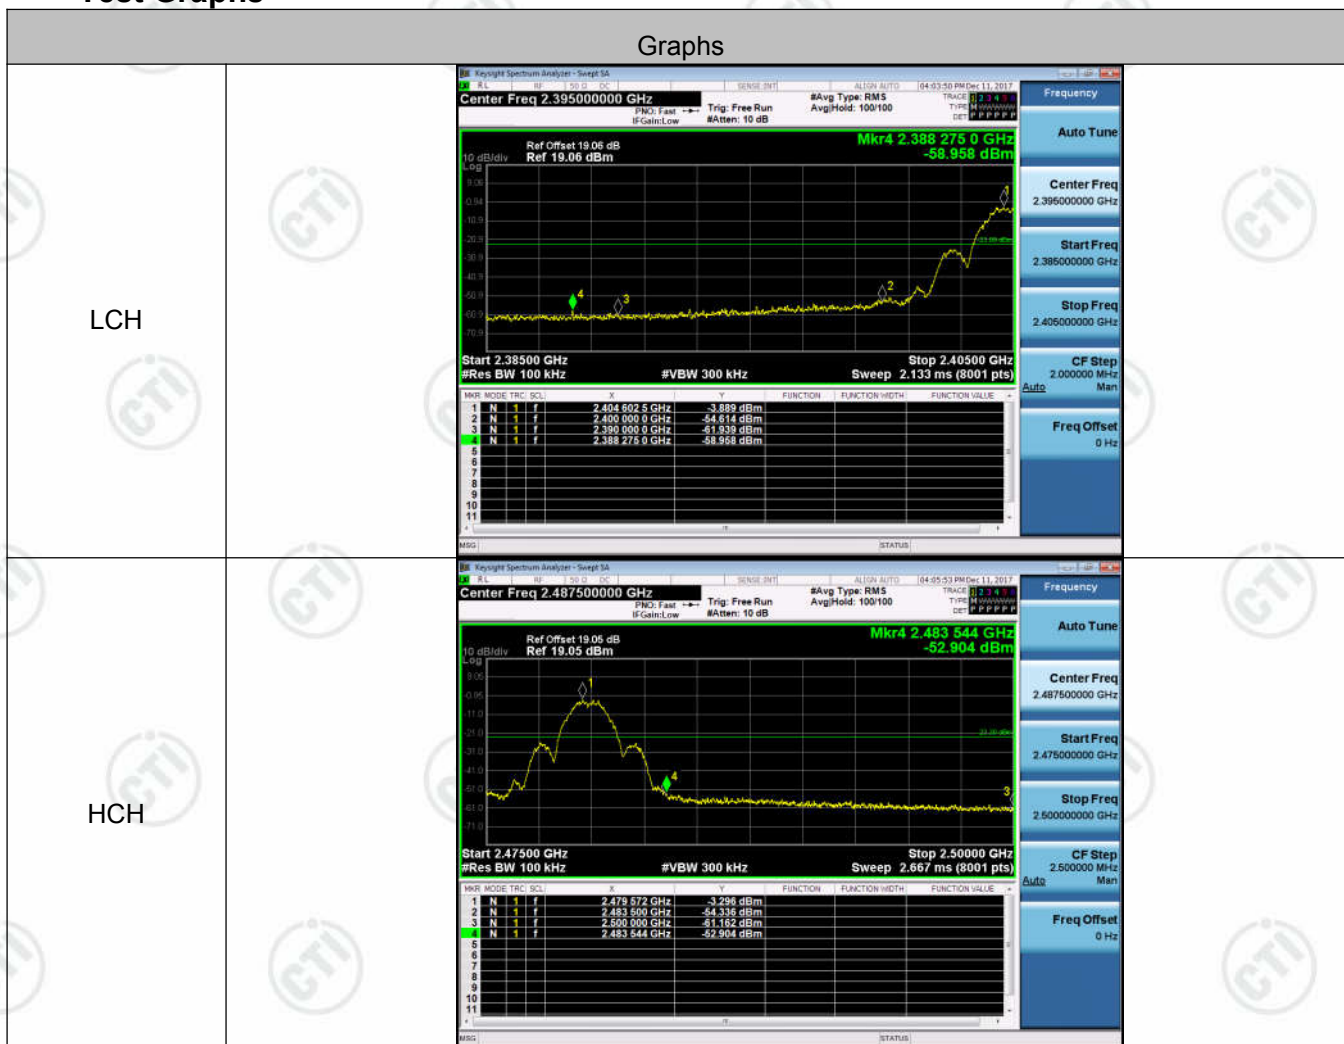



Appendix D): RF Conducted Spurious Emissions


Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
Zigbee	LCH	-3.729	<Limit	PASS
Zigbee	MCH	-3.907	<Limit	PASS
Zigbee	HCH	-3.711	<Limit	PASS

Test Graphs

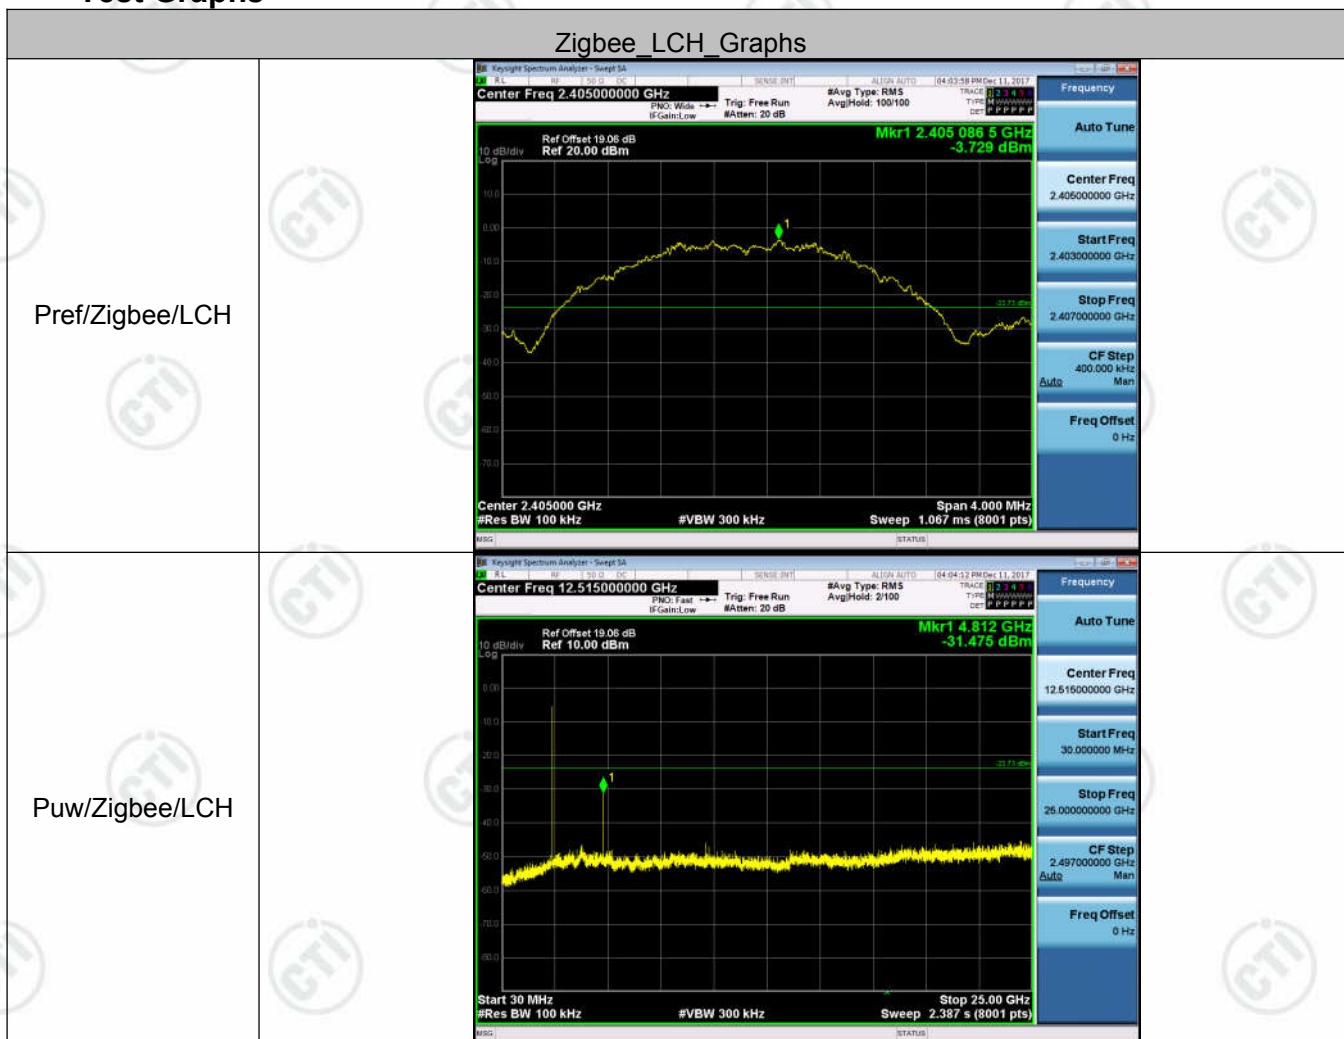

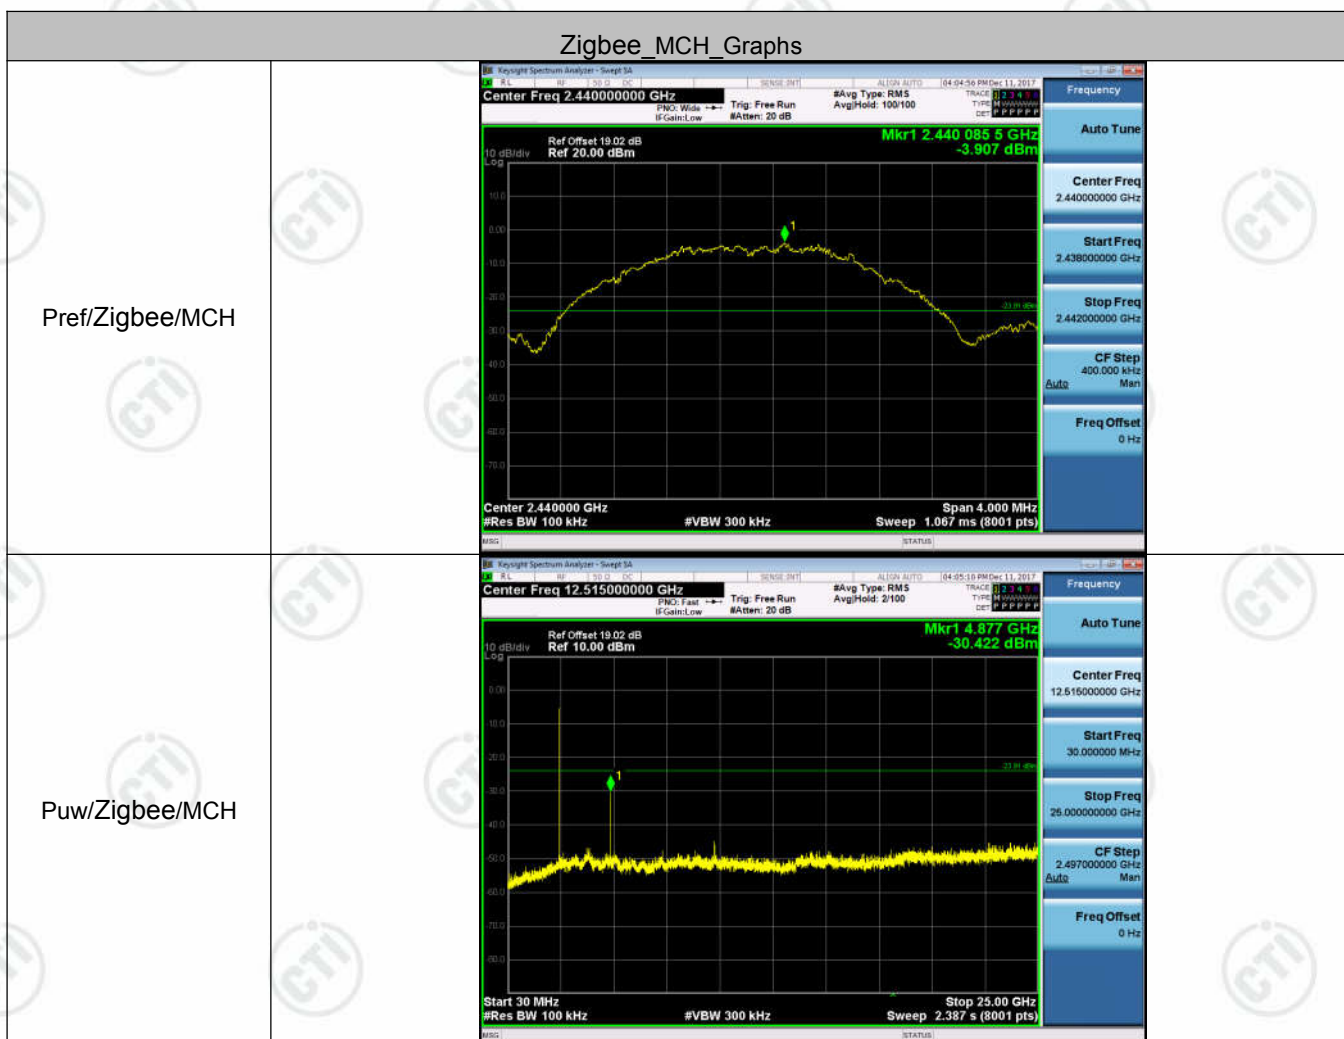



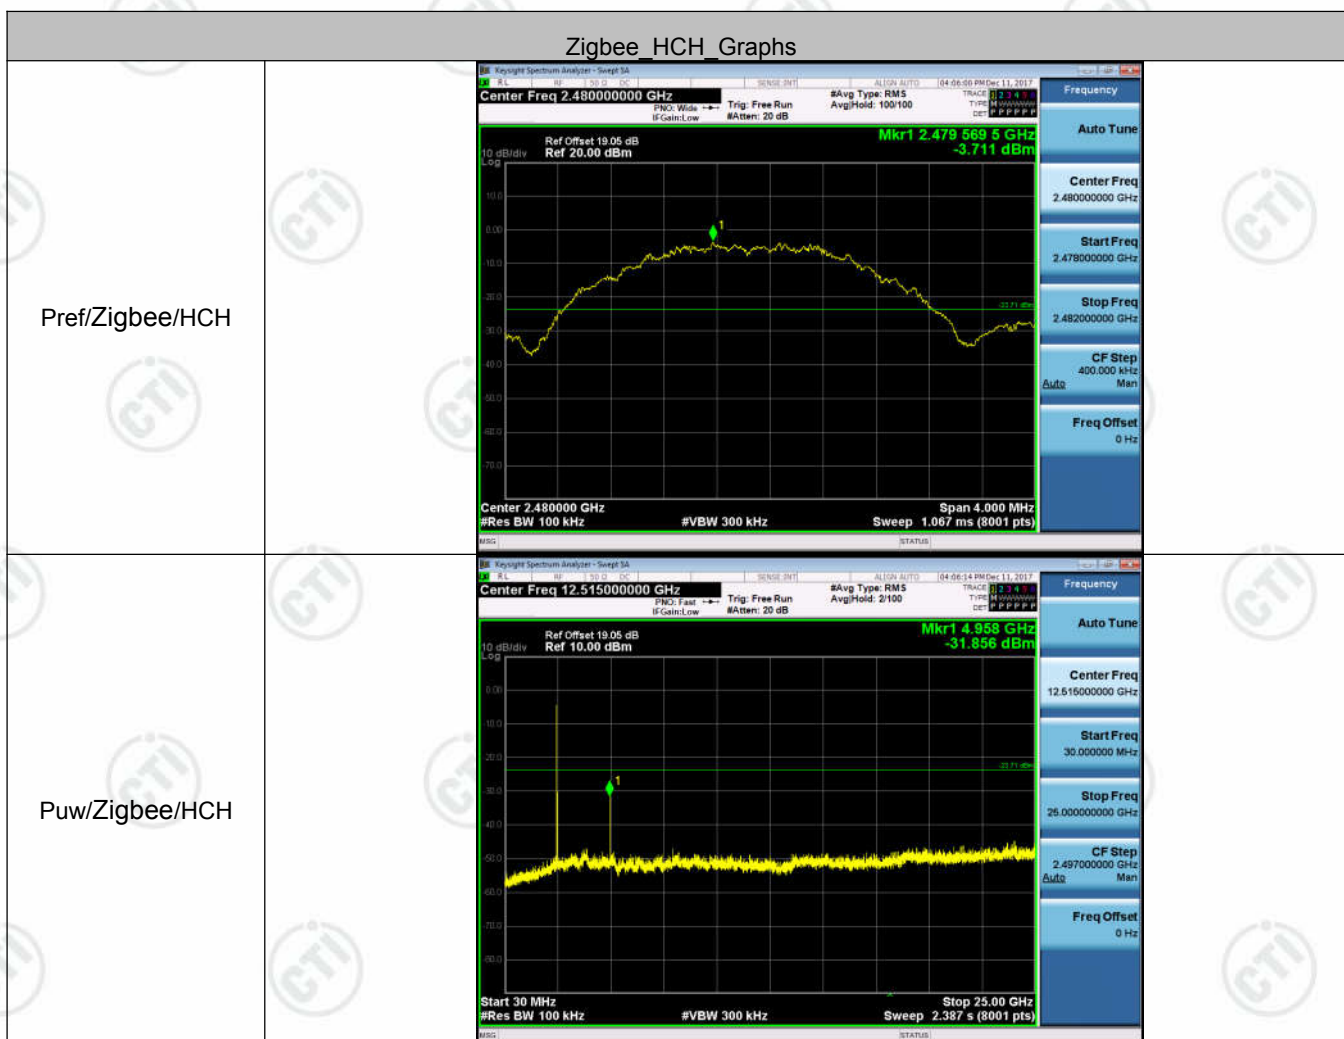


Appendix E): Power Spectral Density

Result Table

Mode	Channel	PSD [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
Zigbee	LCH	-15.856	8	PASS
Zigbee	MCH	-14.764	8	PASS
Zigbee	HCH	-15.921	8	PASS

Test Graphs

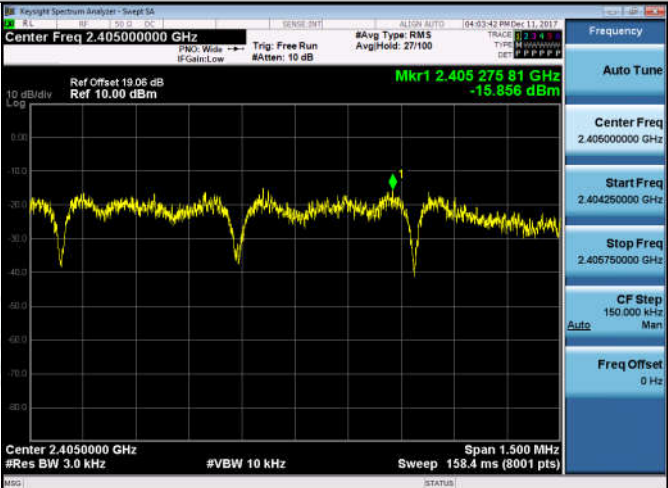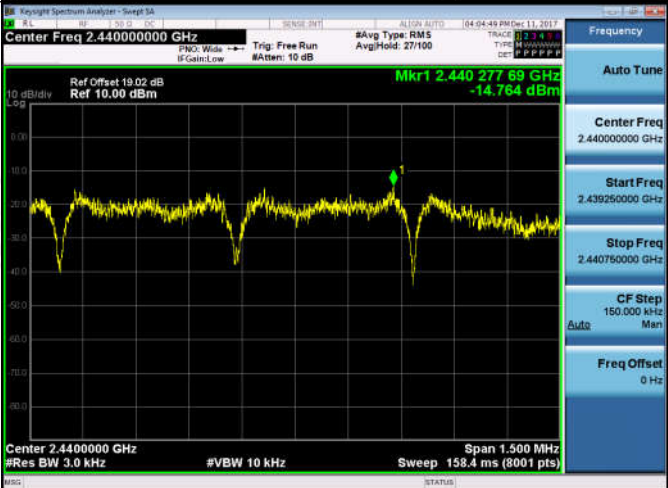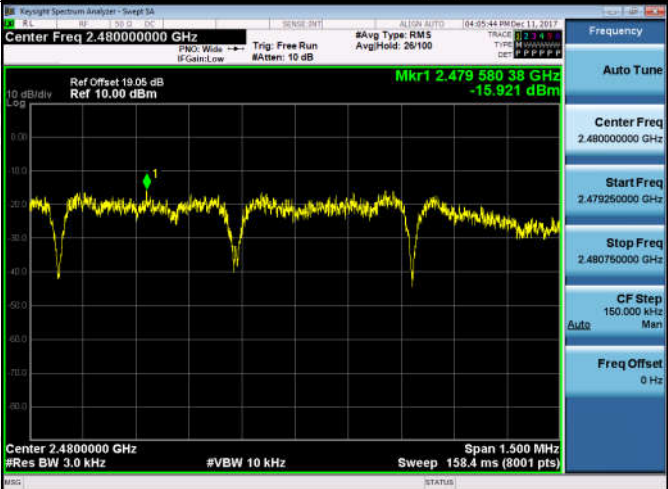Graphs	
LCH	 Keygraph Spectrum Analyzer - Sweep SA Center Freq 2.405000000 GHz Ref Offset 19.06 dB Ref 10.00 dBm Mkr1 2.405 275 81 GHz -15.856 dBm Center 2.40500000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 158.4 ms (8001 pts) Span 1.500 MHz
MCH	 Keygraph Spectrum Analyzer - Sweep SA Center Freq 2.440000000 GHz Ref Offset 19.02 dB Ref 10.00 dBm Mkr1 2.440 277 89 GHz -14.764 dBm Center 2.44000000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 158.4 ms (8001 pts) Span 1.500 MHz
HCH	 Keygraph Spectrum Analyzer - Sweep SA Center Freq 2.479000000 GHz Ref Offset 19.05 dB Ref 10.00 dBm Mkr1 2.479 580 38 GHz -15.921 dBm Center 2.48000000 GHz #Res BW 3.0 kHz #VBW 10 kHz Sweep 158.4 ms (8001 pts) Span 1.500 MHz

Appendix F): Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is modular antenna and no consideration of replacement. The best case gain of the antenna is 3dBi.

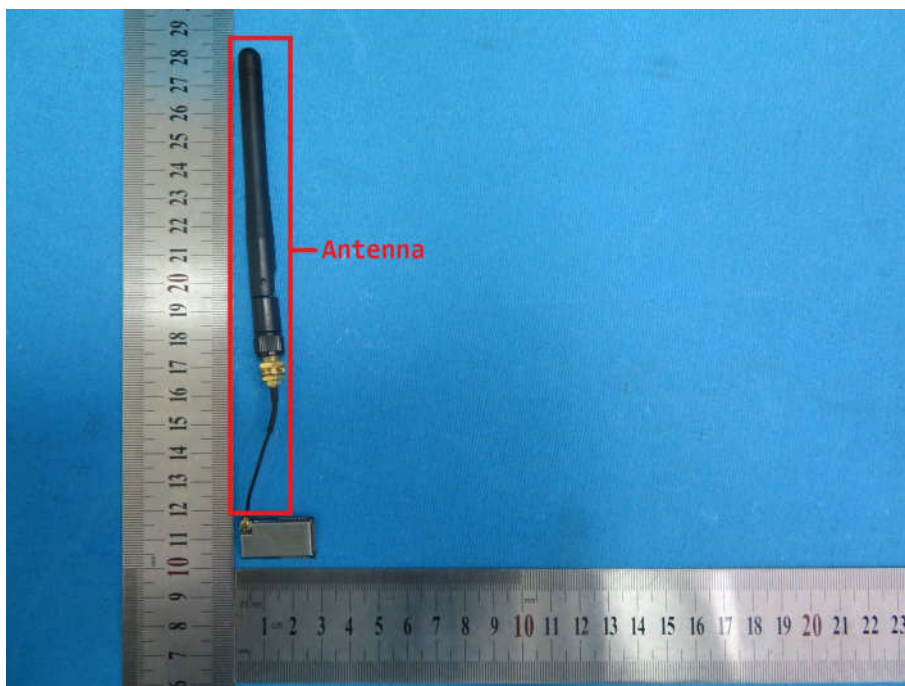

Appendix G): AC Power Line Conducted Emission

Test Procedure:	Test frequency range :150KHz-30MHz 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.														
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> * The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:


80.0 dBuV

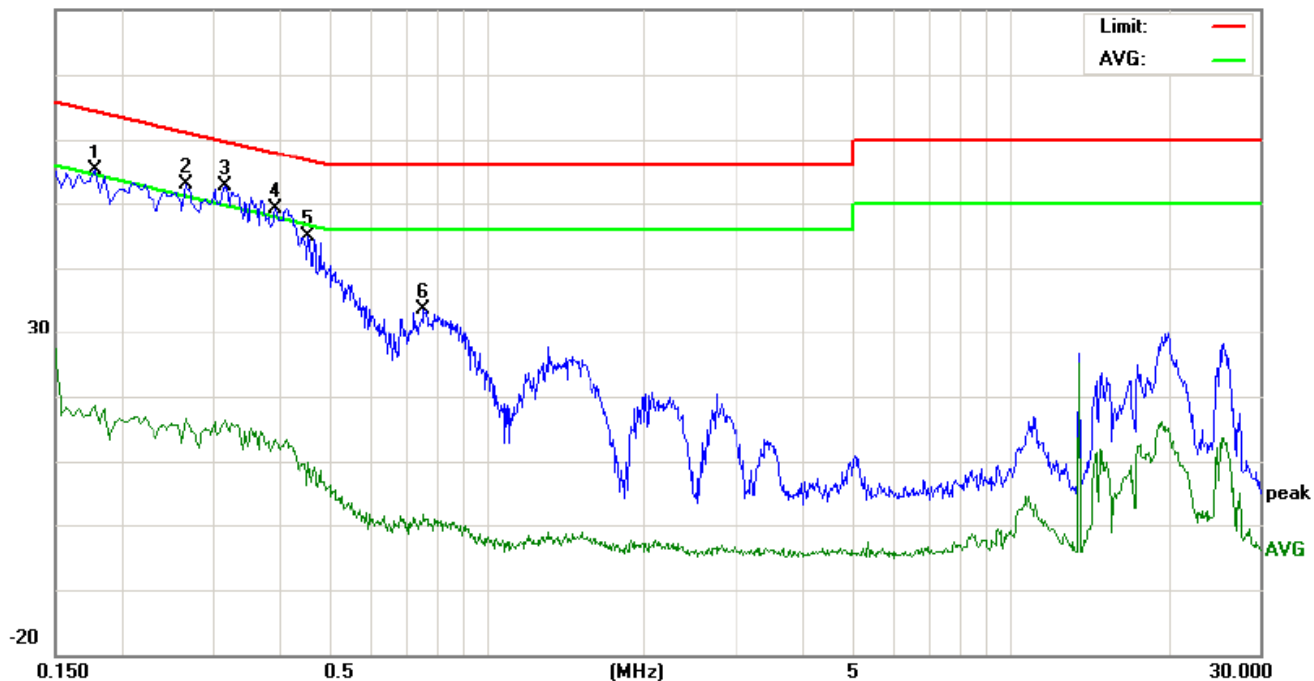

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)			P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG	P/F		
1	0.1780	45.46	38.10	6.75	9.73	55.19	47.83	16.48	64.57	54.57	-16.74	-38.09	P		
2	0.2660	43.20	35.97	4.89	9.76	52.96	45.73	14.65	61.24	51.24	-15.51	-36.59	P		
3	0.3180	42.78	35.20	4.30	9.77	52.55	44.97	14.07	59.76	49.76	-14.79	-35.69	P		
4	0.3940	45.24	33.26	2.37	9.75	54.99	43.01	12.12	57.98	47.98	-14.97	-35.86	P		
5	0.4580	35.21	28.41	-1.67	9.73	44.94	38.14	8.06	56.73	46.73	-18.59	-38.67	P		
6	0.7580	23.94	17.04	-9.21	9.74	33.68	26.78	0.53	56.00	46.00	-29.22	-45.47	P		

Neutral line:

80.0 dBuV

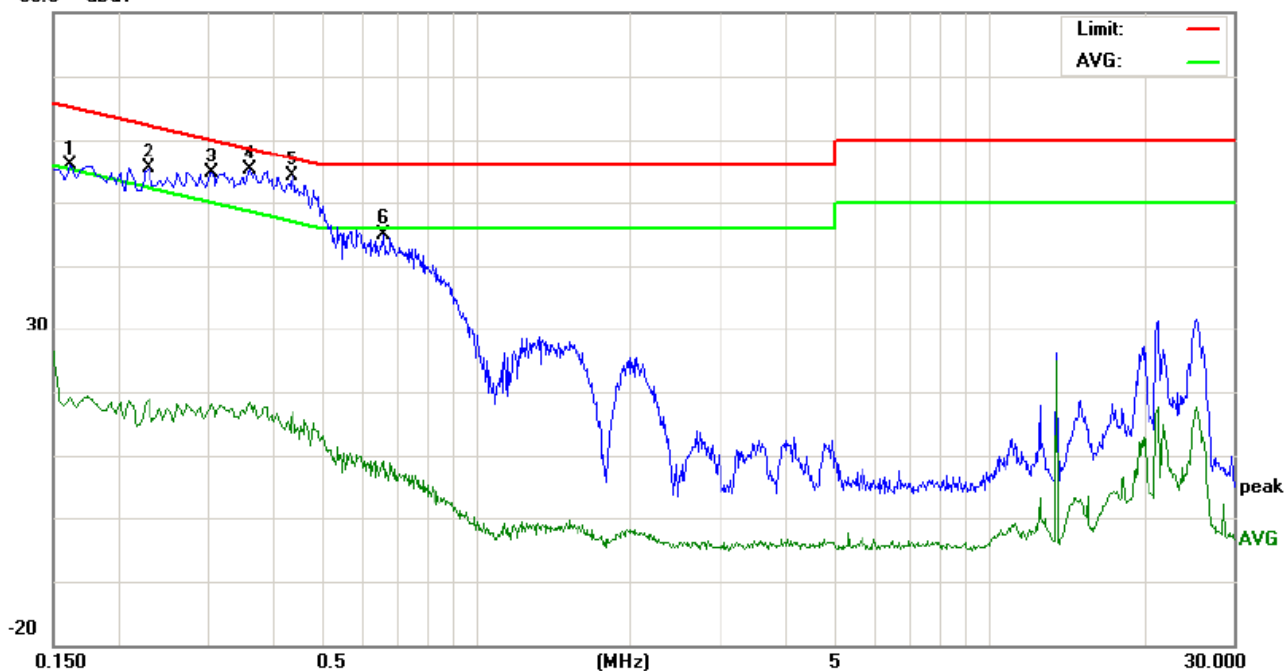

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1620	46.11	37.36	6.29	9.75	55.86	47.11	16.04	65.36	55.36	-18.25	-39.32	P	
2	0.2300	45.74	37.26	6.12	9.73	55.47	46.99	15.85	62.45	52.45	-15.46	-36.60	P	
3	0.3060	44.97	37.08	5.72	9.78	54.75	46.86	15.50	60.08	50.08	-13.22	-34.58	P	
4	0.3620	45.24	36.87	5.64	9.76	55.00	46.63	15.40	58.68	48.68	-12.05	-33.28	P	
5	0.4380	45.35	35.15	3.77	9.73	55.08	44.88	13.50	57.10	47.10	-12.22	-33.60	P	
6	0.6580	35.05		-0.58	9.75	44.80		9.17	56.00	46.00	-11.20	-36.83	P	

Notes:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

Appendix H): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	Below 1GHz test procedure as below: - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). . Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.				
Limit:	Frequency	Limit (dBμV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	


Test plot as follows:

Worse case mode:	QPSK		
Frequency: 2405MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

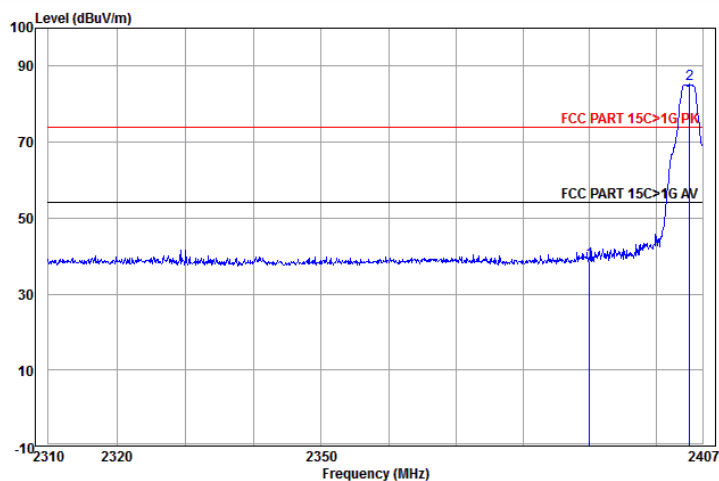


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.07	44.03	47.08	38.65	74.00	-35.35	Horizontal Peak
2 pp	2405.021	32.56	3.08	44.05	93.63	85.22	74.00	11.22	Horizontal Peak

Worse case mode:	QPSK		
Frequency: 2405MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

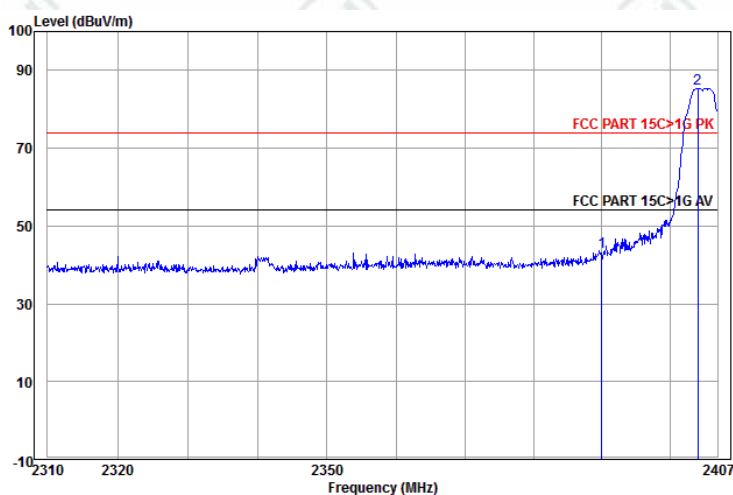


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.07	44.03	51.78	43.35	74.00	-30.65	Vertical Peak
2 pp	2404.130	32.56	3.08	44.04	93.80	85.40	74.00	11.40	Vertical Peak

Worse case mode:	QPSK		
Frequency: 2480MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

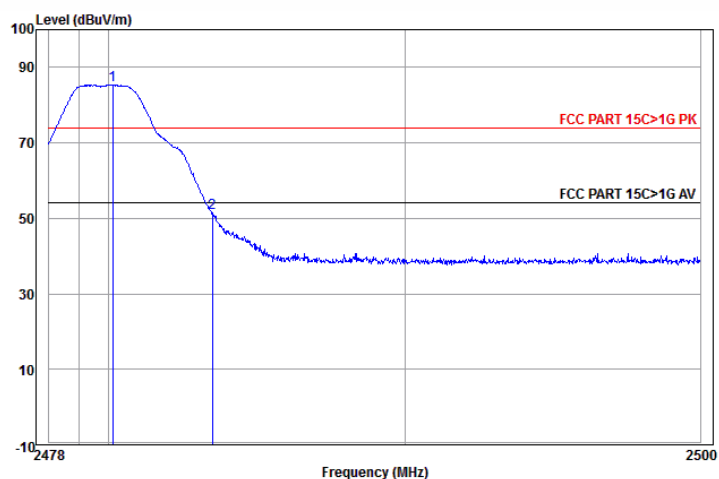


	Ant Freq	Factor	Cable Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2480.147	32.71	3.12	44.14	93.64	85.33	74.00	11.33	Horizontal	Peak
2	2483.500	32.71	3.12	44.14	59.79	51.48	74.00	-22.52	Horizontal	Peak

Worse case mode:	QPSK		
Frequency: 2480MHz	Test channel: Highest	Polarization: Horizontal	Remark: Average

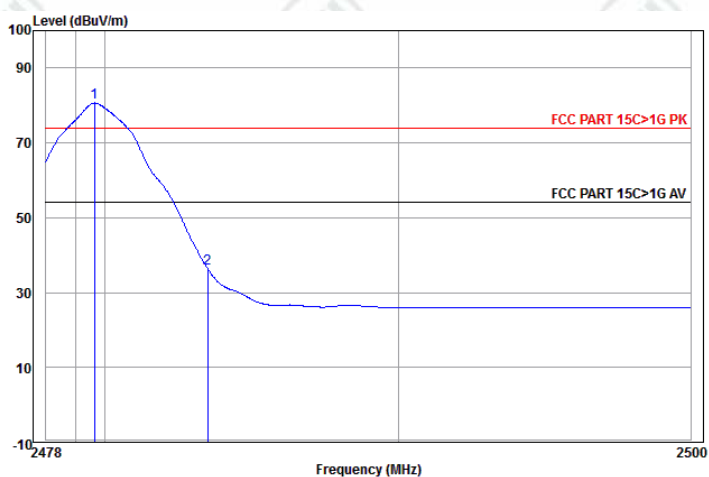


	Ant Freq	Factor	Cable Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2479.643	32.71	3.12	44.14	88.98	80.67	54.00	26.67	Horizontal	Average
2	2483.500	32.71	3.12	44.14	44.65	36.34	54.00	-17.66	Horizontal	Average

Worse case mode:	QPSK		
Frequency: 2480MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

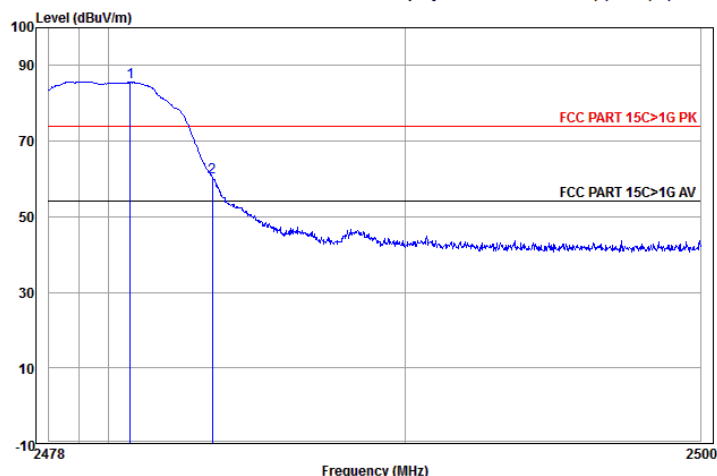

	Ant Freq	Factor	Cable Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2480.739	32.71	3.12	44.14	93.96	85.65	74.00	11.65	Vertical	Peak
2	2483.500	32.71	3.12	44.14	68.82	60.51	74.00	-13.49	Vertical	Peak

Worse case mode:	QPSK		
Frequency: 2480MHz	Test channel: Highest	Polarization: Vertical	Remark: Average

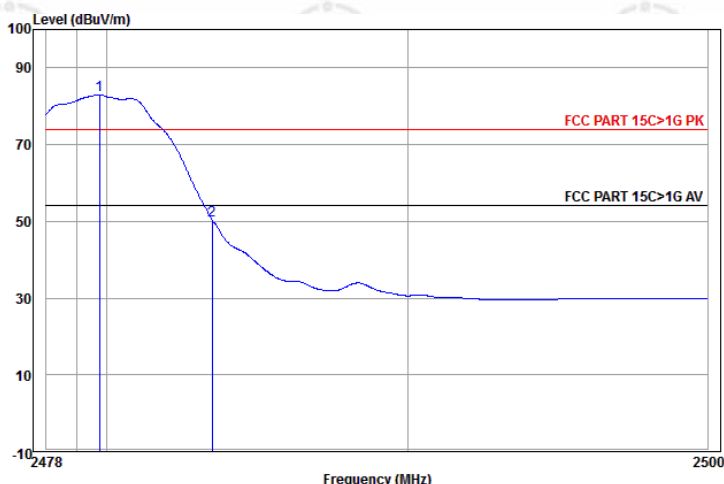

	Ant Freq	Factor	Cable Loss	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2479.753	32.71	3.12	44.14	91.24	82.93	54.00	28.93	Vertical	Average
2	2483.500	32.71	3.12	44.14	58.54	50.23	54.00	-3.77	Vertical	Average

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Pre-amplifier Factor - Antenna Factor - Cable Factor


Appendix I): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
Below 1GHz test procedure as below:					
a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Above 1GHz test procedure as below:					
g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBµV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Radiated Spurious Emissions test Data: **Radiated Emission below 1GHz**


30MHz~1GHz (QP)

Test mode:	Transmitting	Vertical
------------	--------------	----------

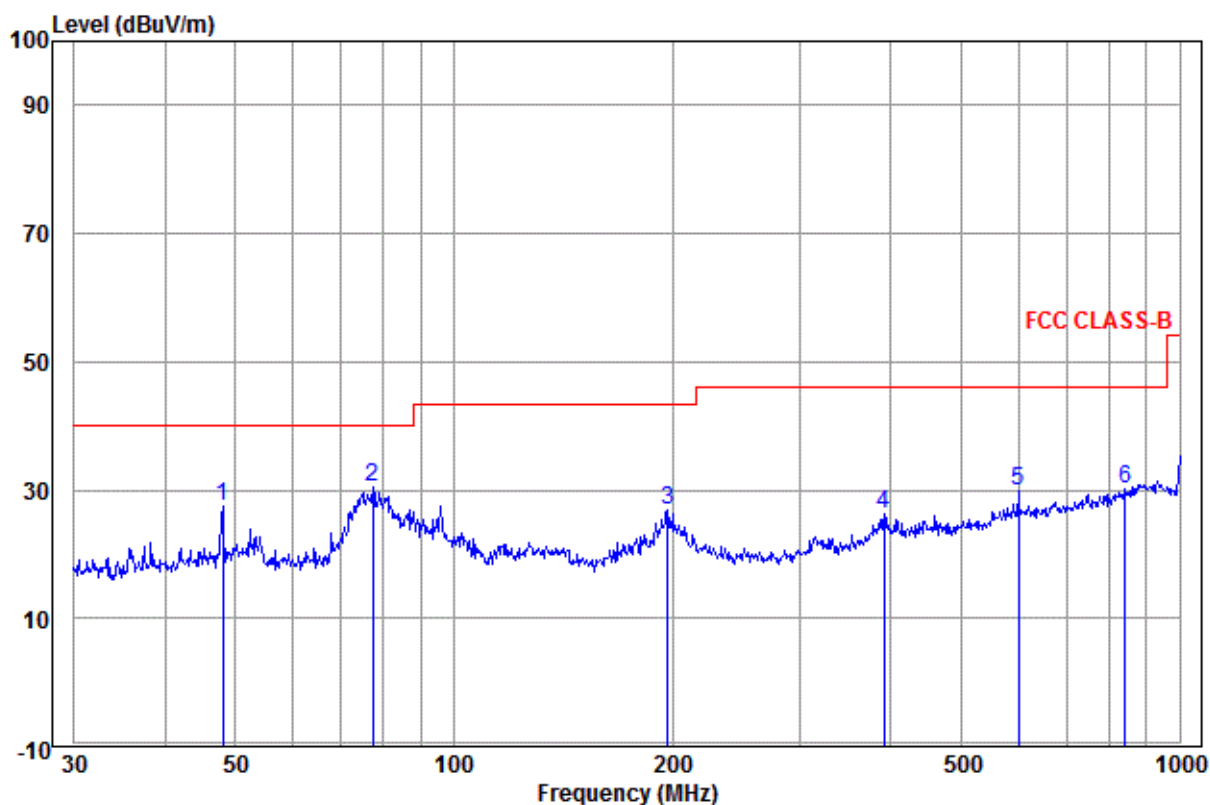

	Ant Freq	Factor	Cable Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	47.994	14.45	0.10	12.96	27.51	40.00	-12.49	Vertical QP
2 pp	77.321	9.06	0.38	20.90	30.34	40.00	-9.66	Vertical QP
3	197.200	11.37	1.08	14.51	26.96	43.50	-16.54	Vertical QP
4	392.095	15.08	1.32	9.99	26.39	46.00	-19.61	Vertical QP
5	599.321	18.69	1.83	9.29	29.81	46.00	-16.19	Vertical QP
6	842.130	21.07	2.45	6.71	30.23	46.00	-15.77	Vertical QP

Test mode:	Transmitting	Horizontal
------------	--------------	------------

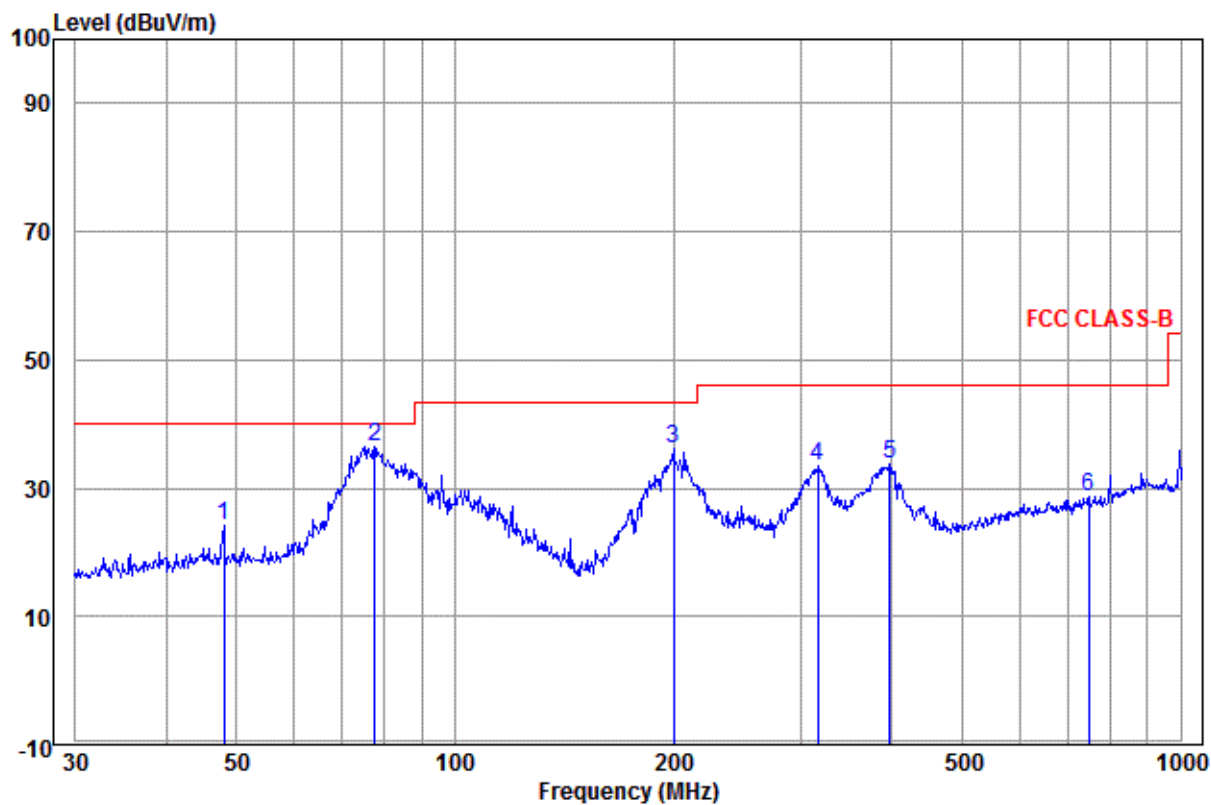

	Ant Freq	Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	47.994	14.45	0.10	9.73	24.28	40.00	-15.72	Horizontal	QP
2 pp	77.593	9.01	0.38	27.11	36.50	40.00	-3.50	Horizontal	QP
3	199.986	11.50	1.10	23.53	36.13	43.50	-7.37	Horizontal	QP
4	316.589	13.75	1.16	18.61	33.52	46.00	-12.48	Horizontal	QP
5	397.633	15.16	1.32	17.23	33.71	46.00	-12.29	Horizontal	QP
6	747.483	19.48	2.49	6.62	28.59	46.00	-17.41	Horizontal	QP

Transmitter Emission above 1GHz

Worse case mode:		QPSK		Test channel:		Lowest	Remark: Lowest		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1319.777	30.50	2.04	44.22	46.60	34.92	74.00	-39.08	Pass	H
1741.812	31.30	2.57	43.74	45.87	36.00	74.00	-38.00	Pass	H
3786.010	32.95	4.03	44.62	46.46	38.82	74.00	-35.18	Pass	H
4810.000	34.70	5.99	44.60	44.18	40.27	74.00	-33.73	Pass	H
7215.000	36.42	6.96	44.78	43.25	41.85	74.00	-32.15	Pass	H
9620.000	37.90	6.99	45.57	45.69	45.01	74.00	-28.99	Pass	H
1336.682	30.54	2.07	44.20	47.77	36.18	74.00	-37.82	Pass	V
1706.700	31.24	2.54	43.77	46.20	36.21	74.00	-37.79	Pass	V
3747.656	32.98	4.00	44.62	47.26	39.62	74.00	-34.38	Pass	V
4810.000	34.70	5.99	44.60	50.57	46.66	74.00	-27.34	Pass	V
7215.000	36.42	6.96	44.78	48.92	47.52	74.00	-26.48	Pass	V
9620.000	37.90	6.99	45.57	47.23	46.55	74.00	-27.45	Pass	V

Worse case mode:		QPSK		Test channel:		Middle	Remark: Middle		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1364.182	30.60	2.11	44.16	46.60	35.15	74.00	-38.85	Pass	H
1837.456	31.46	2.68	43.65	47.23	37.72	74.00	-36.28	Pass	H
3738.129	32.99	3.99	44.62	46.87	39.23	74.00	-34.77	Pass	H
4880.000	34.85	6.13	44.60	43.36	39.74	74.00	-34.26	Pass	H
7320.000	36.43	6.85	44.87	45.34	43.75	74.00	-30.25	Pass	H
9760.000	38.05	7.12	45.55	43.23	42.85	74.00	-31.15	Pass	H
1319.777	30.50	2.04	44.22	47.00	35.32	74.00	-38.68	Pass	V
3747.656	32.98	4.00	44.62	46.66	39.02	74.00	-34.98	Pass	V
4880.000	34.85	6.13	44.60	48.81	45.19	74.00	-28.81	Pass	V
5821.207	35.77	7.26	44.52	45.80	44.31	74.00	-29.69	Pass	V
7320.000	36.43	6.85	44.87	50.19	48.60	74.00	-25.40	Pass	V
9760.000	38.05	7.12	45.55	46.24	45.86	74.00	-28.14	Pass	V

Worse case mode:		QPSK		Test channel:		Highest	Remark: Highest		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1374.639	30.62	2.12	44.15	45.40	33.99	74.00	-40.01	Pass	H
1750.702	31.32	2.58	43.73	45.93	36.10	74.00	-37.90	Pass	H
4107.316	33.07	4.45	44.60	46.35	39.27	74.00	-34.73	Pass	H
4960.000	35.02	6.29	44.60	44.44	41.15	74.00	-32.85	Pass	H
7440.000	36.45	6.73	44.97	42.71	40.92	74.00	-33.08	Pass	H
9920.000	38.22	7.26	45.52	43.10	43.06	74.00	-30.94	Pass	H
1326.513	30.52	2.05	44.21	47.72	36.08	74.00	-37.92	Pass	V
1593.340	31.04	2.40	43.89	46.66	36.21	74.00	-37.79	Pass	V
4960.000	35.02	6.29	44.60	49.68	46.39	74.00	-27.61	Pass	V
6203.700	36.01	7.39	44.52	44.53	43.41	74.00	-30.59	Pass	V
7440.000	36.45	6.73	44.97	47.07	45.28	74.00	-28.72	Pass	V
9920.000	38.22	7.26	45.52	43.97	43.93	74.00	-30.07	Pass	V

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor


2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

PHOTOGRAPHS OF TEST SETUP


Test model No.: T30PA127F2.4G




Radiated spurious emission Test Setup-1(9KHz-30MHz)

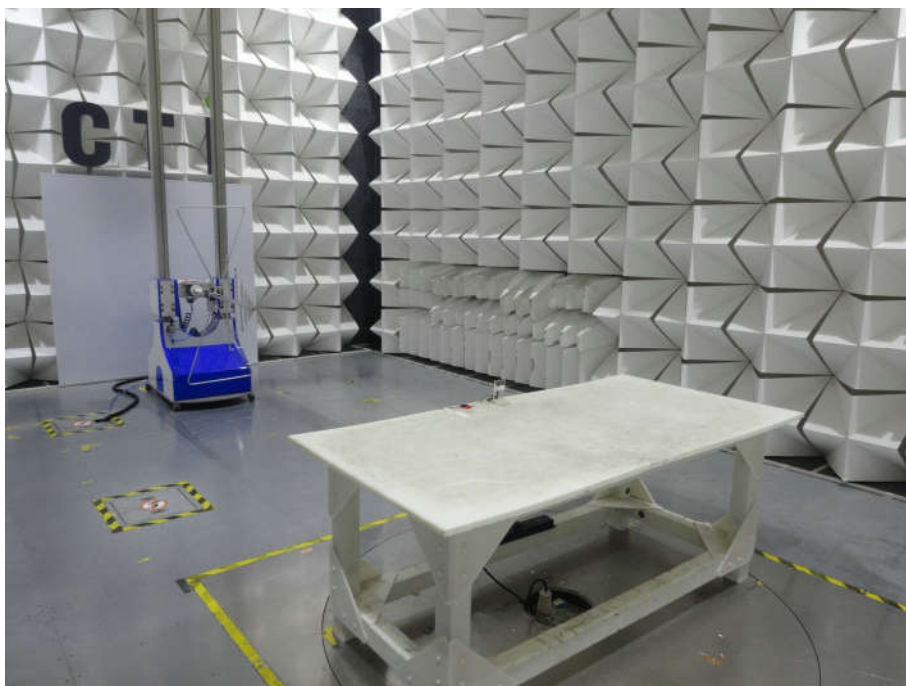

Radiated spurious emission Test Setup-2(Below 1GHz)

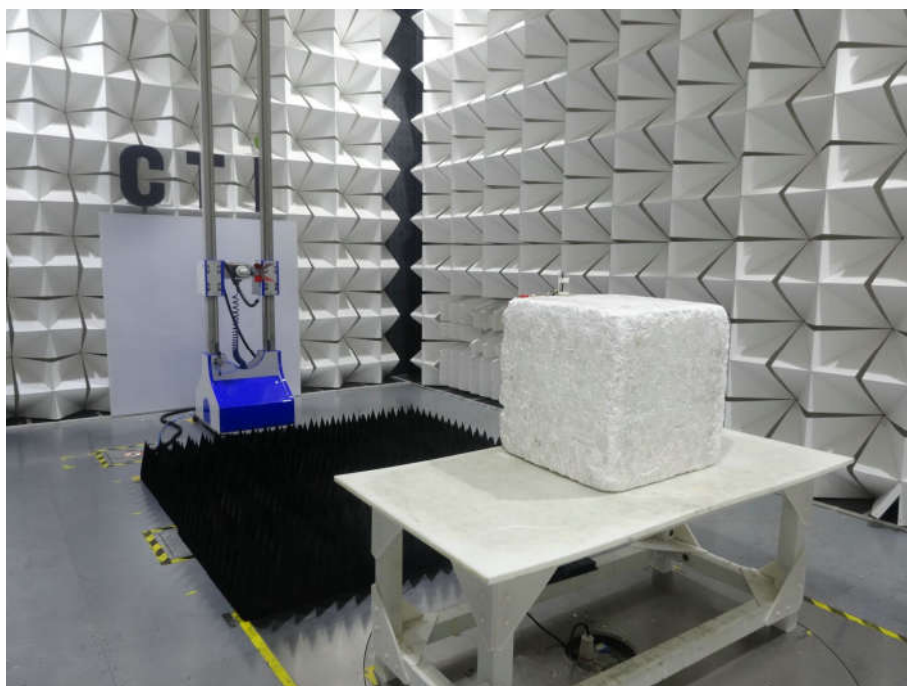

Radiated spurious emission Test Setup-3(Above 1GHz)

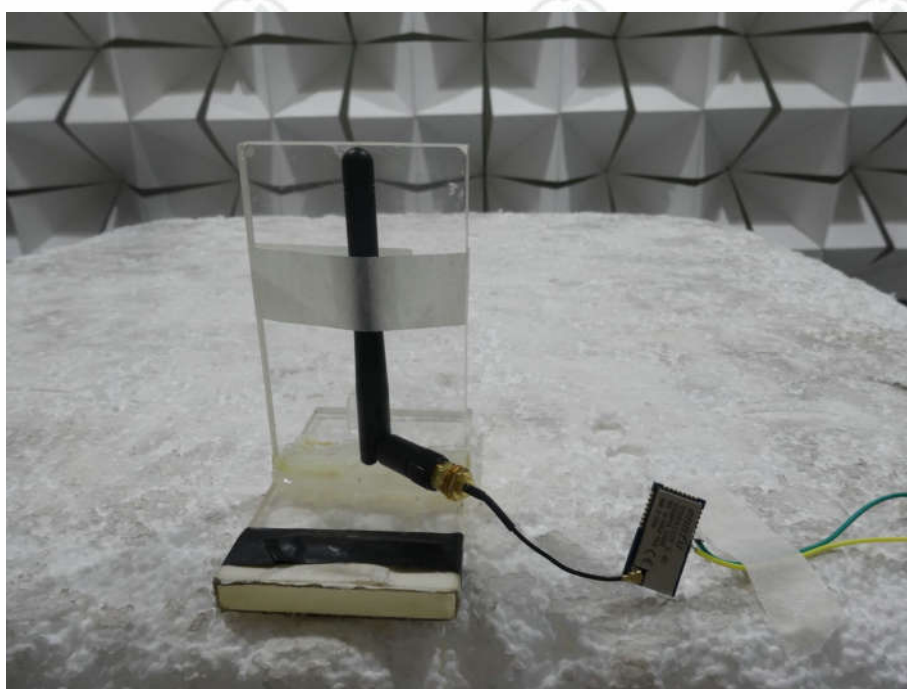

Test Setup (close-up)




Conducted Emission Test Setup




Test Setup (close-up)

PHOTOGRAPHS OF EUT Constructional Details


Test model No.: T30PA127F2.4G

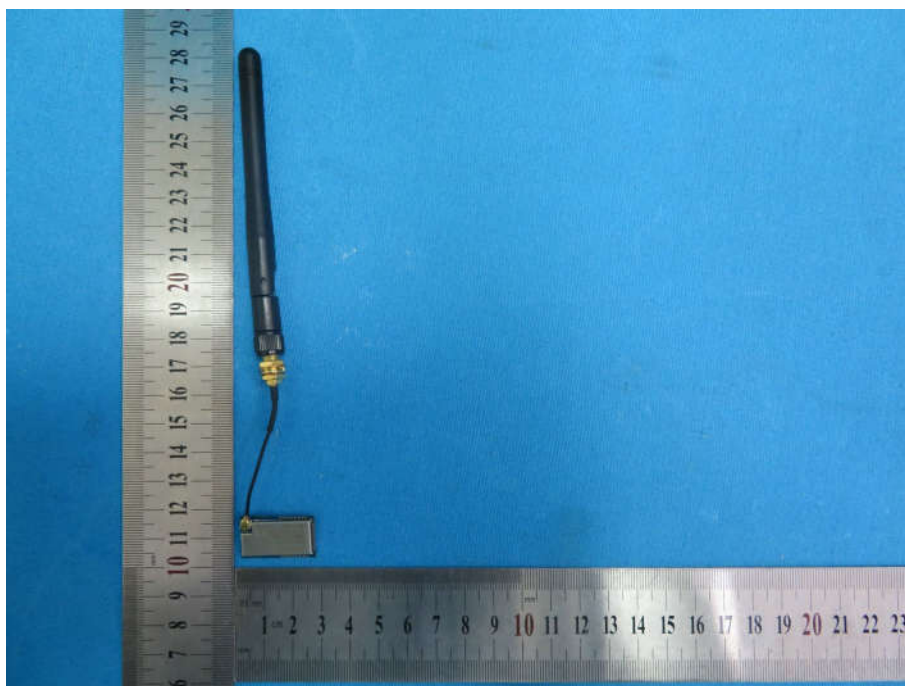


View of Product-1

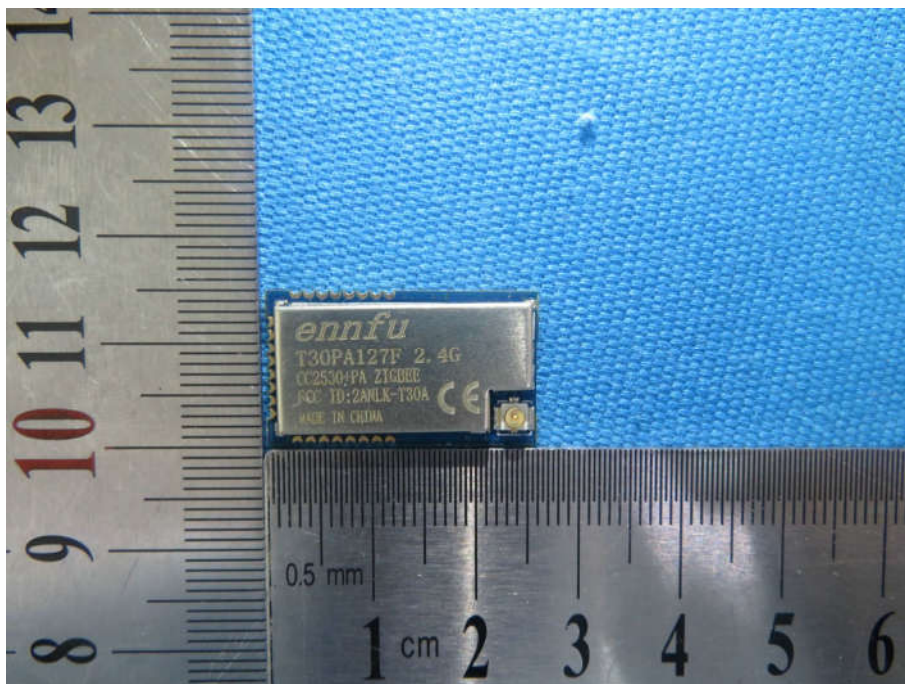


View of Product-2

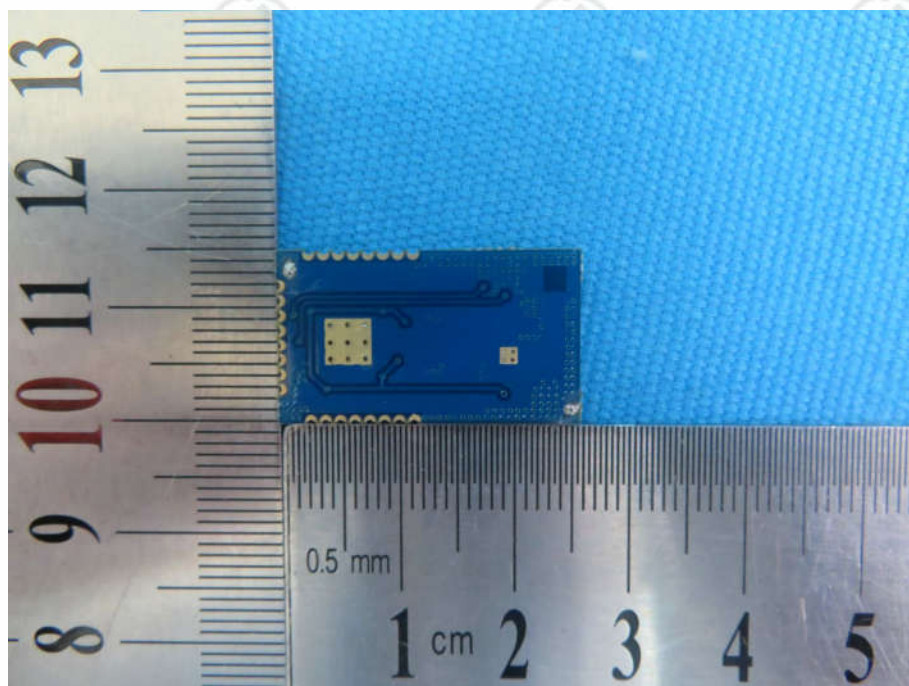


View of Product-3

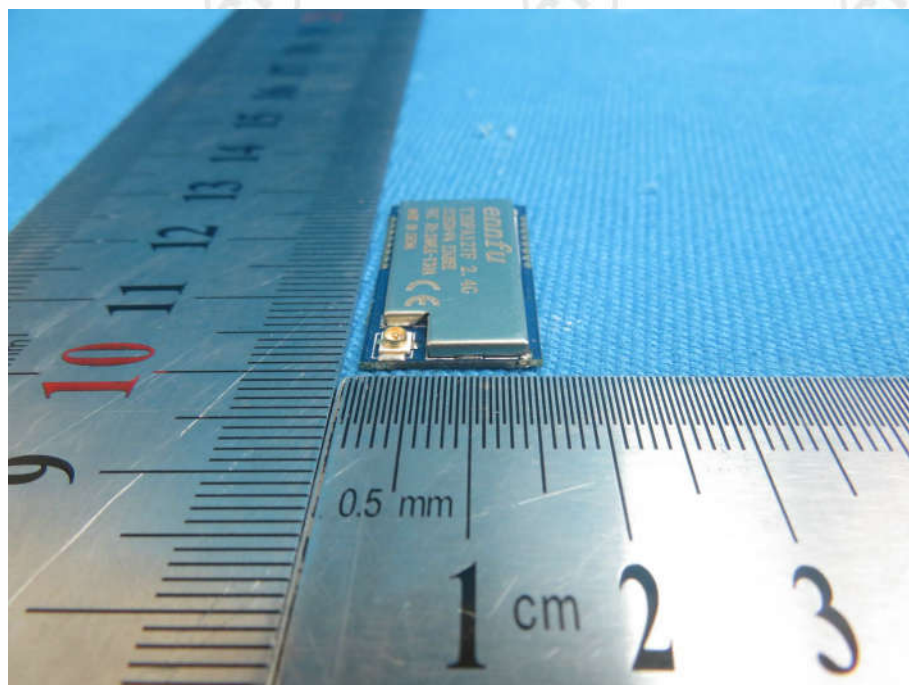


View of Product-4

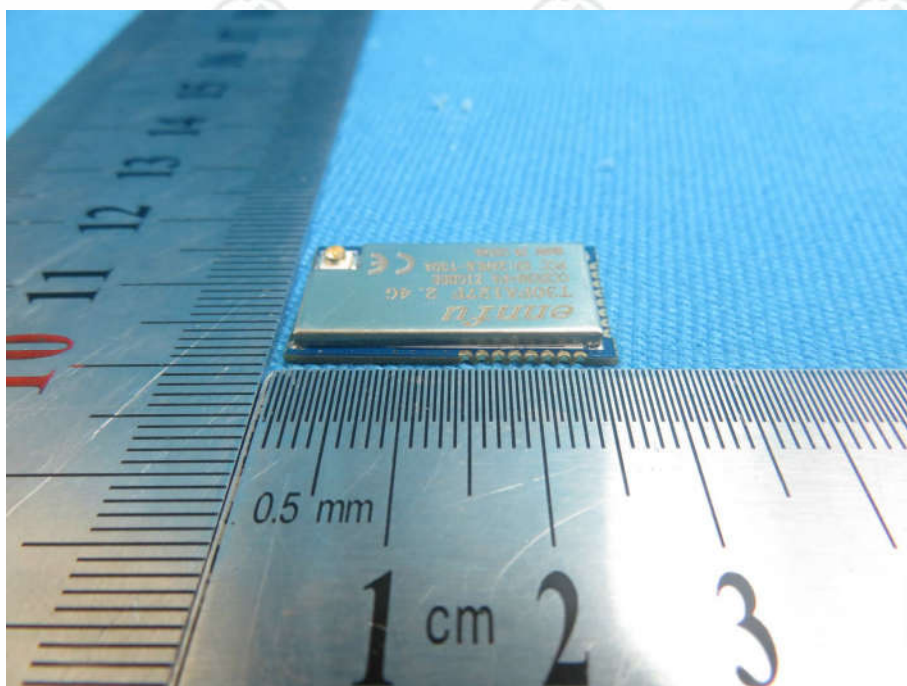


View of Product-5

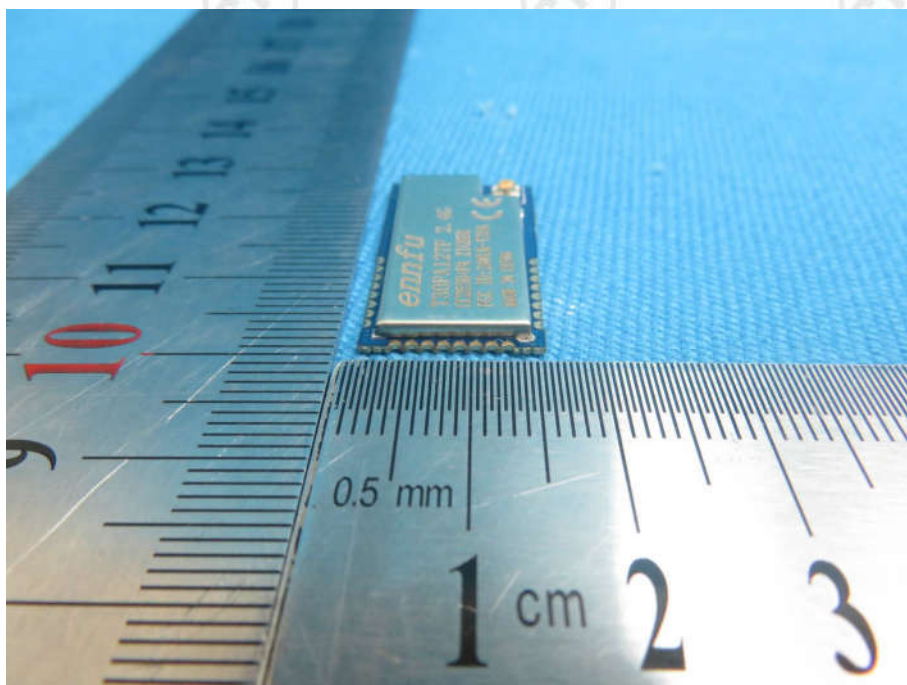


View of Product-6

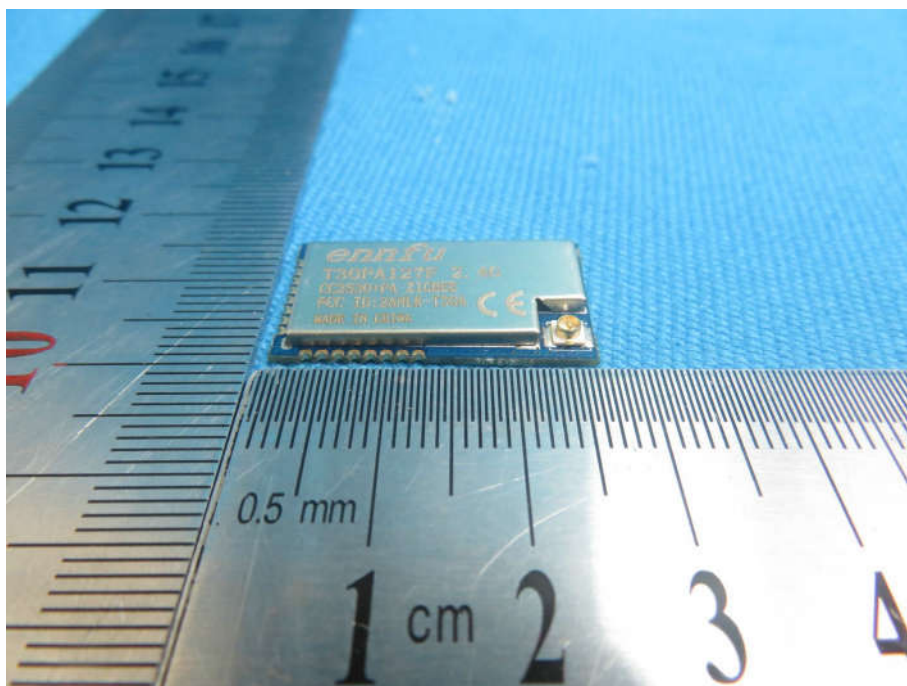

View of Product-7

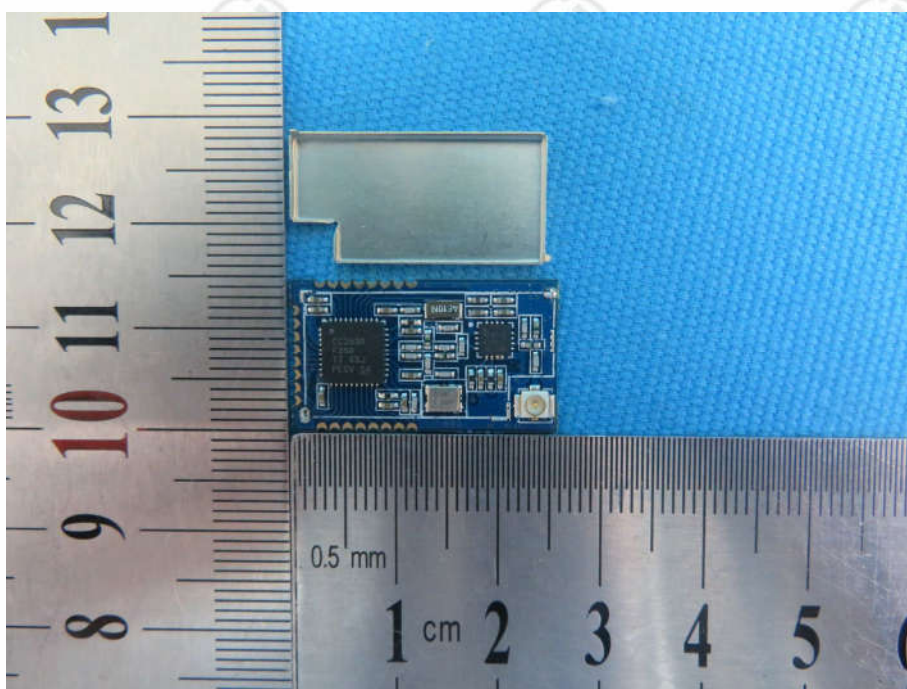

View of Product-8

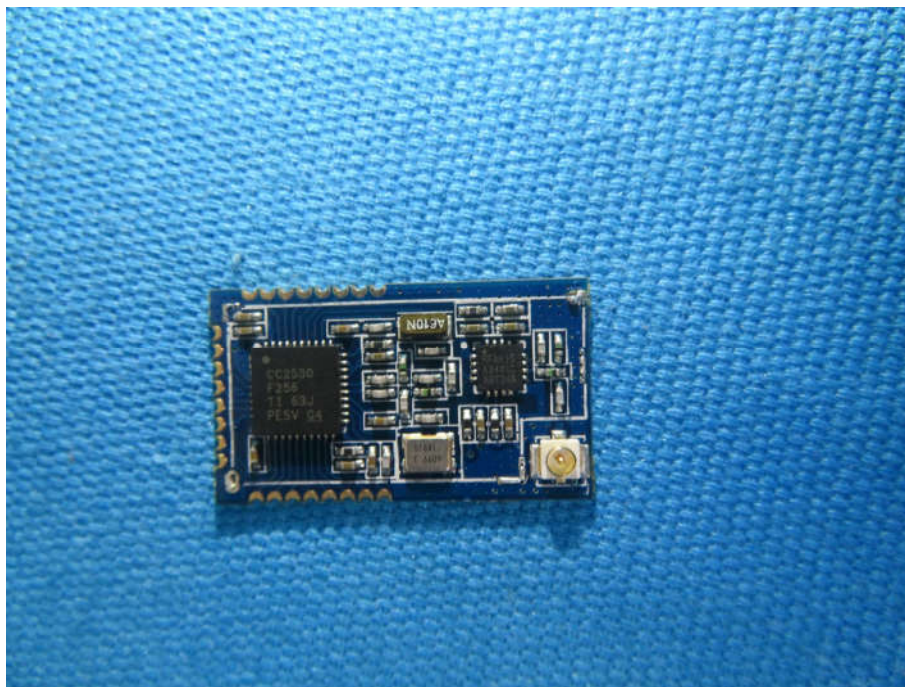

View of Product-9

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.