

FCC PART 15.247 TEST REPORT

For

AEC Lighting Solutions Co., Ltd.

No.2548, Baoan Road, Jiading District, Shanghai, China

FCC ID: 2ANLP-AUD202H

Report Type: Original Report	Product Type: 2000lm rechargeable & corded LED audio light
Test Engineer: Stone Zhang	<i>Stone Zhang</i>
Report Number: RSHA180706002-00A	
Report Date: 2018-07-31	
Reviewed By: Oscar Ye RF Leader	<i>Oscar Ye</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliant Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	11
APPLICABLE STANDARD	11
CALCULATED FORMULARY:.....	11
CALCULATED DATA:.....	11
FCC §15.203 – ANTENNA REQUIREMENT	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
CORRECTED FACTOR & MARGIN CALCULATION	14
TEST RESULTS SUMMARY	14
TEST DATA	14
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST RESULTS SUMMARY	18
TEST DATA	19
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	30

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST DATA	36
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST DATA	42
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST DATA	45
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	61
APPLICABLE STANDARD	61
TEST PROCEDURE	61
TEST DATA	61
FCC §15.247(d) - BAND EDGES TESTING	67
APPLICABLE STANDARD	67
TEST PROCEDURE	67
TEST DATA	67

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	AEC Lighting Solutions Co., Ltd.
Tested Model:	AUD202H
Product Type:	2000lm rechargeable & corded LED audio light
Dimension:	254.3 mm(L)* 131.8 mm(W)*63.0 mm(H)
Power Supply:	DC 7.2V from battery

**All measurement and test data in this report was gathered from production sample serial number: 20180706002.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2018-07-06)*

Objective

This test report is prepared on behalf of AEC Lighting Solutions Co., Ltd. in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel list for Bluetooth:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	...	...
...	...	...	...
...	...	78	2480
39	2441	/	/

EUT was tested with Channel 0, 39 and 78.

EUT Exercise Software

RF test tool: Blue Test 3

GFSK Power level: 50

$\pi/4$ -DQPSK Power level: 50

8DPSK Power level: 50

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter (Notebook)	LA65NS0-00	DF263
/	Adapter	ZPP300800000 (Input: AC100-240V 50/60Hz 0.6A Output: 8.4V, 2.4A)	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Power Cable	1.2	EUT	Adapter
USB-SPI Cable	1.2	EUT	Notebook
Power Cable	1.2	Notebook	Adapter (Notebook)

Block Diagram of Test Setup


For Conducted Emissions:

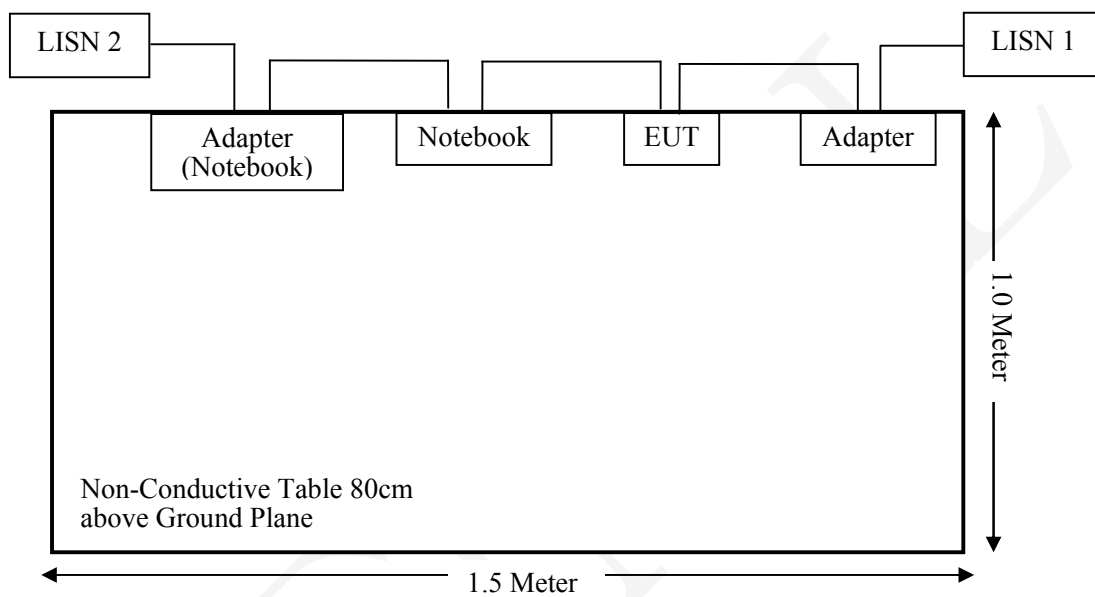

For Radiated Emissions(Below 1GHz):

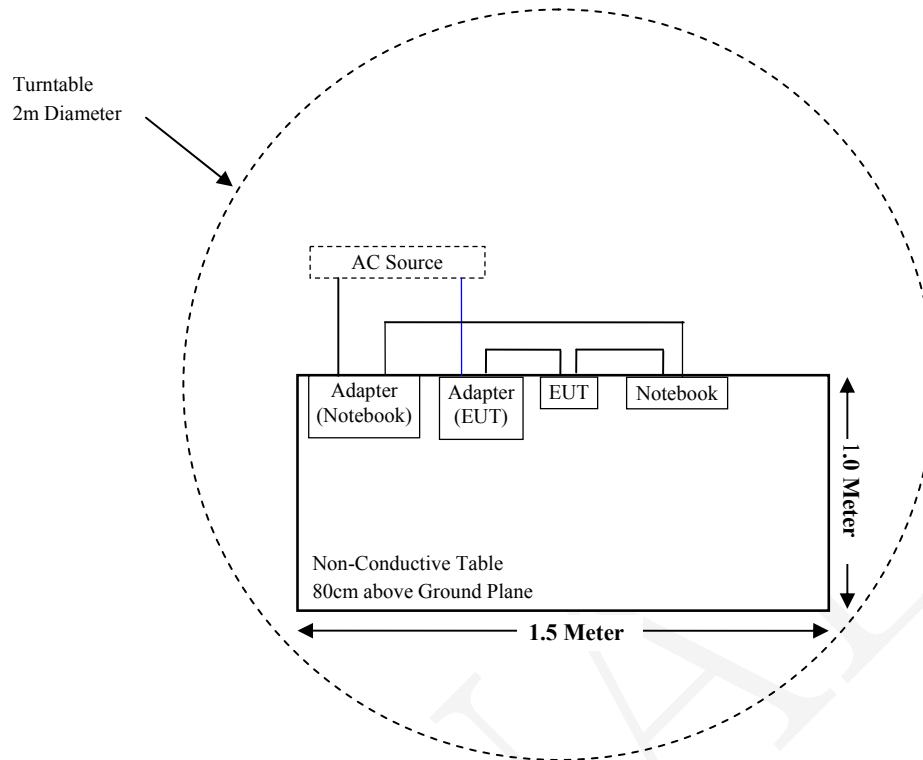

For Radiated Emissions(Above 1GHz):

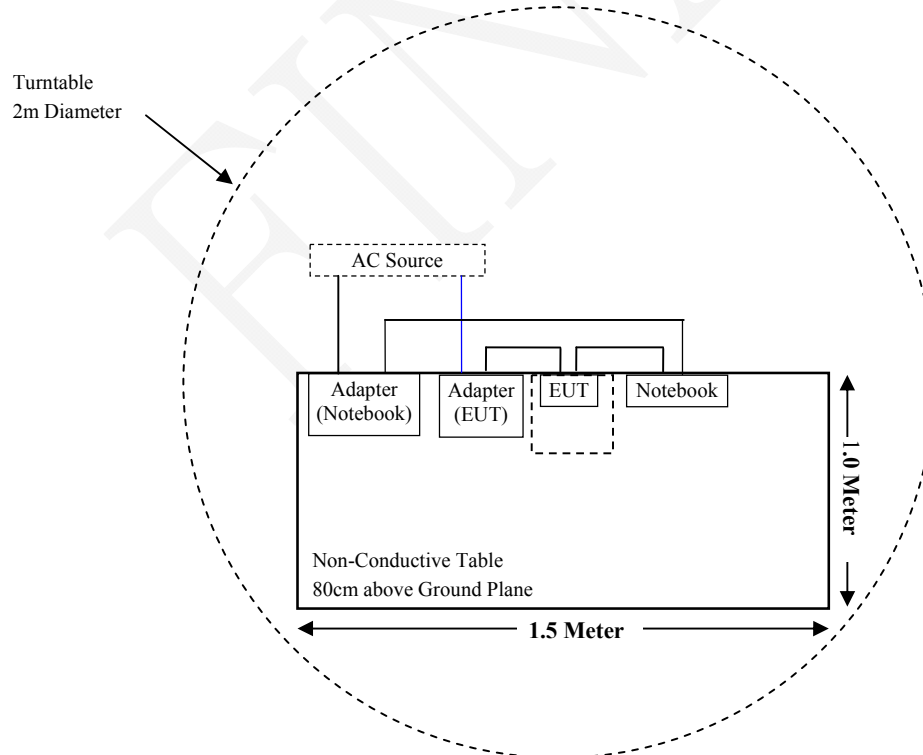

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (I), §1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions & Restricted Bands Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-12	2018-11-11
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2017-08-15	2018-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2017-08-15	2018-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2017-08-27	2018-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Mini-Circuits	Amplifier	ZVA-183W-S+	220701818	2018-05-20	2019-05-19
EM Electronics Corporation	Amplifier	EM18G40G	060726	2018-03-22	2019-03-21
MICRO-TRONICS	Notch filter	BRM50702	/	2017-08-05	2018-08-04
Narda	Attenuator/10dB	10dB	/	2017-08-15	2018-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2017-08-15	2018-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2017-09-21	2018-09-20
Narda	Attenuator/10dB	10dB	/	2017-08-15	2018-08-14
AEC Lighting Solutions	RF Cable	/	/	Each	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2017-11-12	2018-11-11
Rohde & Schwarz	LISN	ENV216	3560655016	2017-11-15	2018-11-14
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2017-10-10	2018-10-09
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2017-01-10	2018-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2017-08-15	2018-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)**Applicable Standard**

According to subpart 15.247 (i) and subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4 \pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
BT3.0	2402-2480	3.00	2.00	5.00	3.16	20	0.0013	1.0

Result: The device meet FCC MPE at 20 cm distance.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a PIFA antenna for Bluetooth, which the antenna gain is 3.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

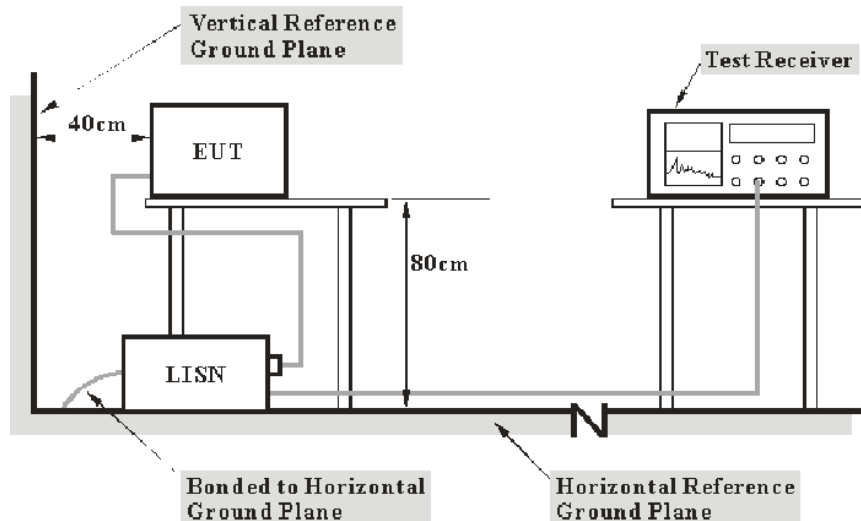

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Corrected Amplitude (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	23.4 °C
Relative Humidity:	49 %
ATM Pressure:	101.1 kPa

The testing was performed by Stone Zhang on 2018-07-26.


EUT operation mode: Transmitting in low channel of GFSK mode (Worst case)

AC 120V/60 Hz, Line

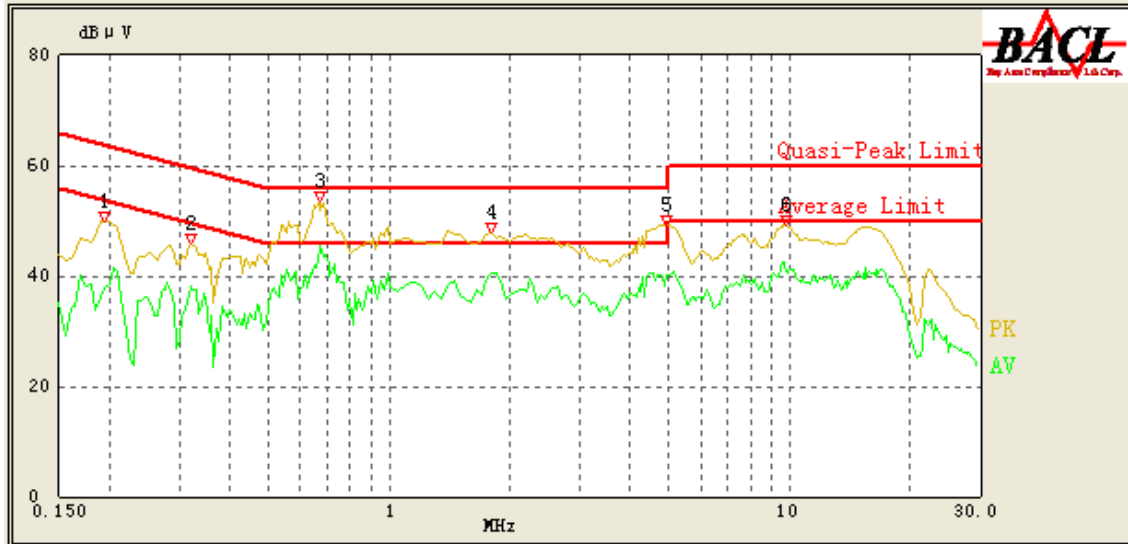

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.195	49.97	QP	9.000	L1	16.01	64.71	14.74	Compliance
0.195	37.92	AV	9.000	L1	16.01	54.71	16.79	Compliance
0.320	45.80	QP	9.000	L1	16.04	61.14	15.34	Compliance
0.320	38.27	AV	9.000	L1	16.04	51.14	12.87	Compliance
0.670	53.34	QP	9.000	L1	15.97	56.00	2.66	Compliance
0.670	44.68	AV	9.000	L1	15.97	46.00	1.32	Compliance
1.800	47.95	QP	9.000	L1	15.86	56.00	8.05	Compliance
1.800	40.44	AV	9.000	L1	15.86	46.00	5.56	Compliance
4.950	49.30	QP	9.000	L1	15.85	56.00	6.70	Compliance
4.950	40.09	AV	9.000	L1	15.85	46.00	5.91	Compliance
9.800	49.22	QP	9.000	L1	16.05	60.00	10.78	Compliance
9.800	41.45	AV	9.000	L1	16.05	50.00	8.55	Compliance

AC 120V/60 Hz, Neutral

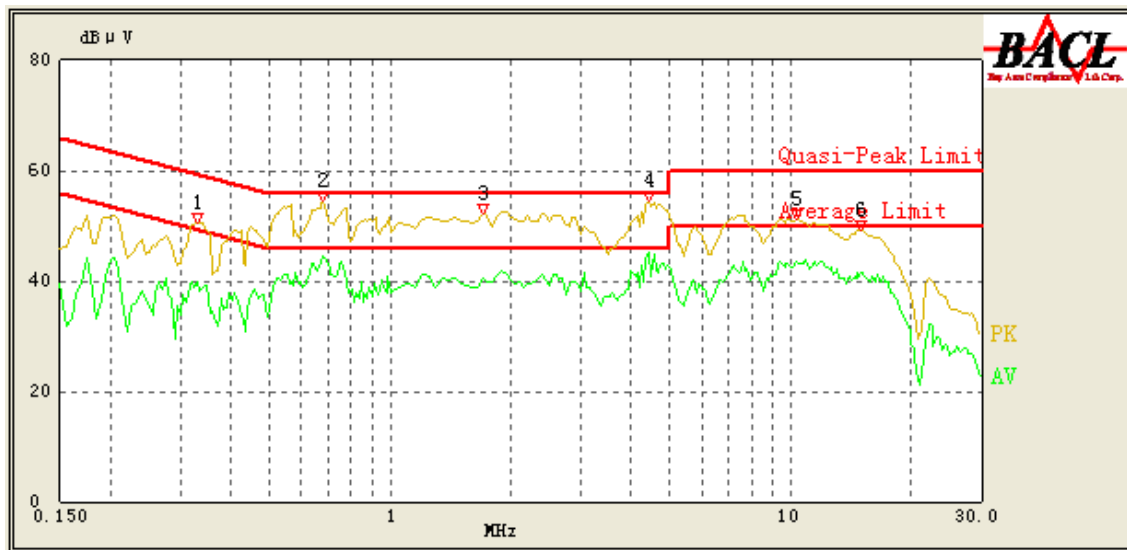

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.330	50.61	QP	9.000	N	16.08	60.86	10.25	Compliance
0.330	39.67	AV	9.000	N	16.08	50.86	11.19	Compliance
0.680	54.39	QP	9.000	N	16.00	56.00	1.61	Compliance
0.680	44.51	AV	9.000	N	16.00	46.00	1.49	Compliance
1.700	52.11	QP	9.000	N	15.92	56.00	3.89	Compliance
1.700	40.43	AV	9.000	N	15.92	46.00	5.57	Compliance
4.450	54.34	QP	9.000	N	15.88	56.00	1.66	Compliance
4.450	45.10	AV	9.000	N	15.88	46.00	0.90	Compliance
10.350	51.19	QP	9.000	N	15.99	60.00	8.81	Compliance
10.350	43.43	AV	9.000	N	15.99	50.00	6.57	Compliance
14.950	49.32	QP	9.000	N	16.01	60.00	10.68	Compliance
14.950	41.35	AV	9.000	N	16.01	50.00	8.65	Compliance



Note:

1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Margin (dB) = Limit (dBμV) – Corrected Amplitude (dBμV)

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

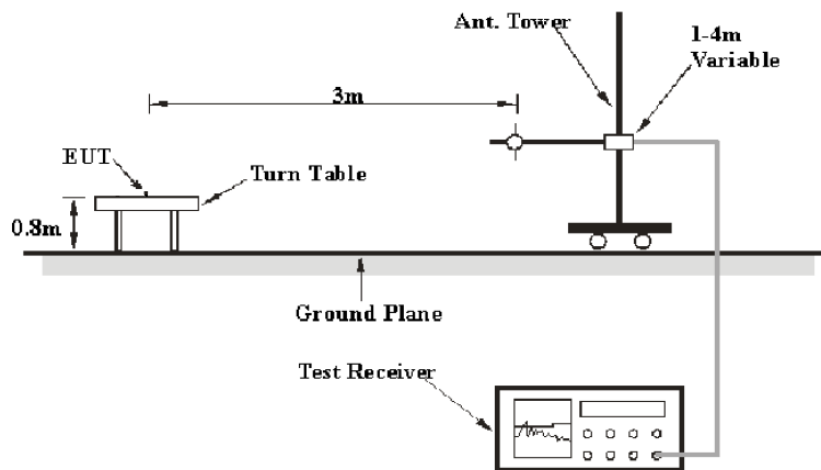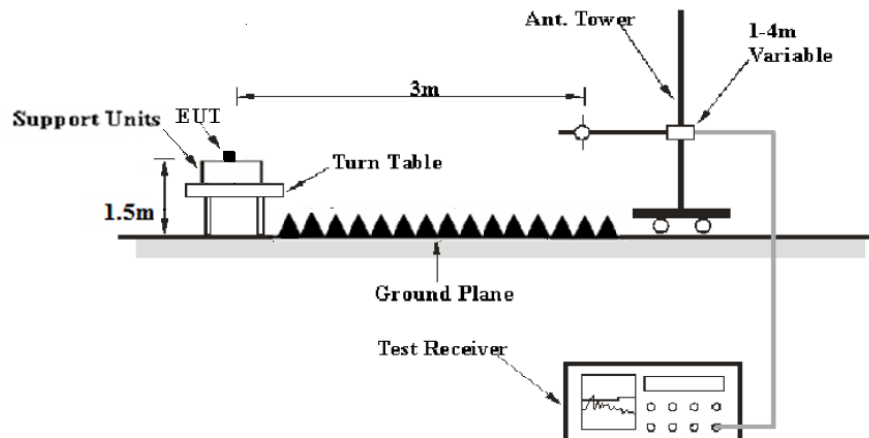EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V /m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V /m)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**


Temperature:	23.4 °C
Relative Humidity:	49 %
ATM Pressure:	101.1 kPa

The testing was performed by Stone Zhang on 2018-07-21 & 2018-07-23.

EUT operation mode: Transmitting

Spurious Emission Test:**30MHz-1GHz:**

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case **GFSK Mode in X-axis of orientation** was recorded

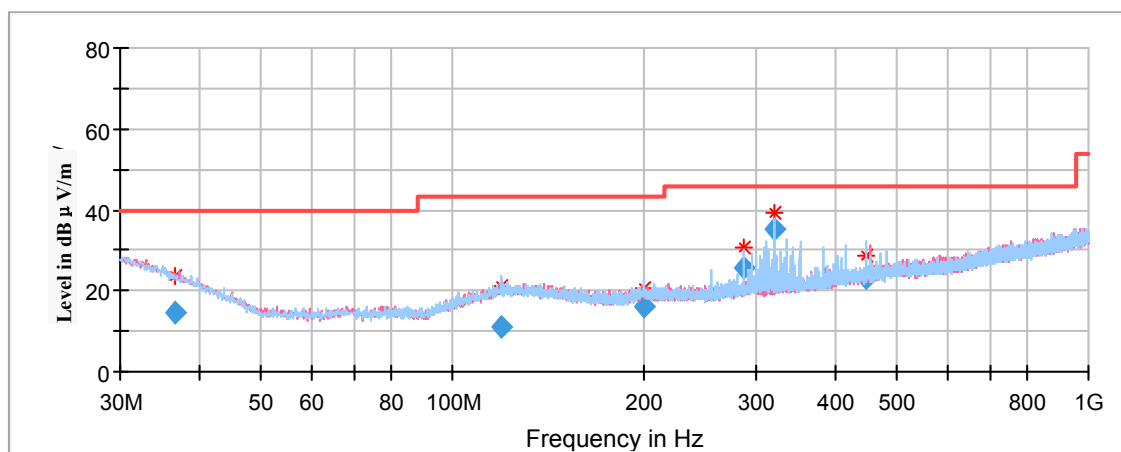

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
36.586500	14.52	101.0	V	269.0	-8.9	40.00	25.48
118.998350	11.03	199.0	H	147.0	-11.8	43.50	32.47
199.968550	16.29	101.0	H	156.0	-12.8	43.50	27.21
288.044250	25.63	101.0	H	339.0	-11.4	46.00	20.37
319.964600	35.34	101.0	H	130.0	-10.5	46.00	10.66
447.902000	23.12	199.0	H	10.0	-7.4	46.00	22.88

1GHz-18GHz:


Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation,, the worst case GFSK Mode in X-axis of orientation was recorded

Note:

1. This test was performed with the 2.4-2.5 GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 2402MHz


Full Spectrum

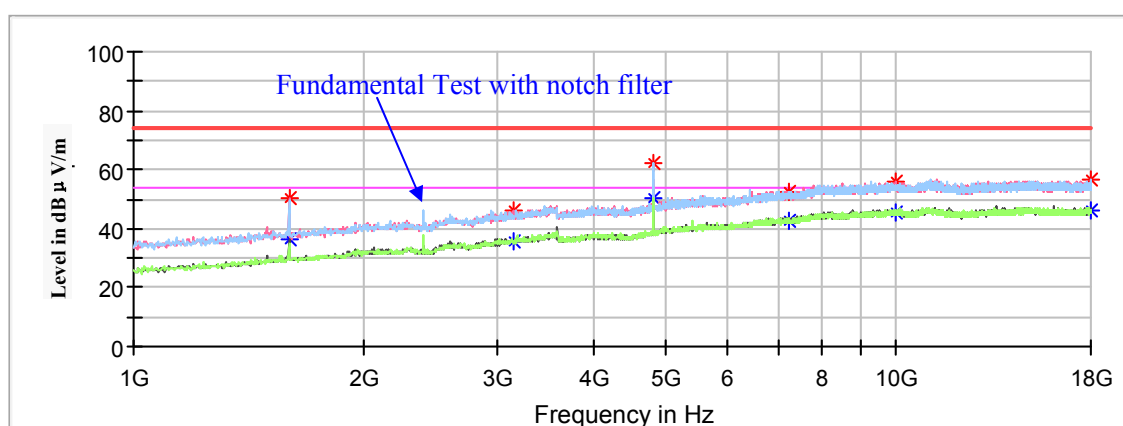

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1598.400000	---	36.45	100.0	V	46.0	-0.6	54.00	17.55
1598.400000	50.30	---	100.0	V	46.0	-0.6	74.00	23.70
3142.000000	---	35.38	200.0	V	309.0	6.4	54.00	18.62
3142.000000	45.89	---	200.0	V	309.0	6.4	74.00	28.11
4804.000000	---	50.48	150.0	V	0.0	10.7	54.00	3.52
4804.000000	61.93	---	150.0	V	0.0	10.7	74.00	12.07
7206.000000	---	42.57	150.0	V	162.0	15.2	54.00	11.43
7206.000000	52.28	---	150.0	V	162.0	15.2	74.00	21.72
9962.400000	---	45.23	200.0	V	151.0	18.3	54.00	8.77
9962.400000	56.01	---	200.0	V	151.0	18.3	74.00	17.99
17955.800000	---	45.81	100.0	H	24.0	19.1	54.00	8.19
17955.800000	56.70	---	100.0	H	24.0	19.1	74.00	17.30

Middle Channel: 2441MHz


Full Spectrum

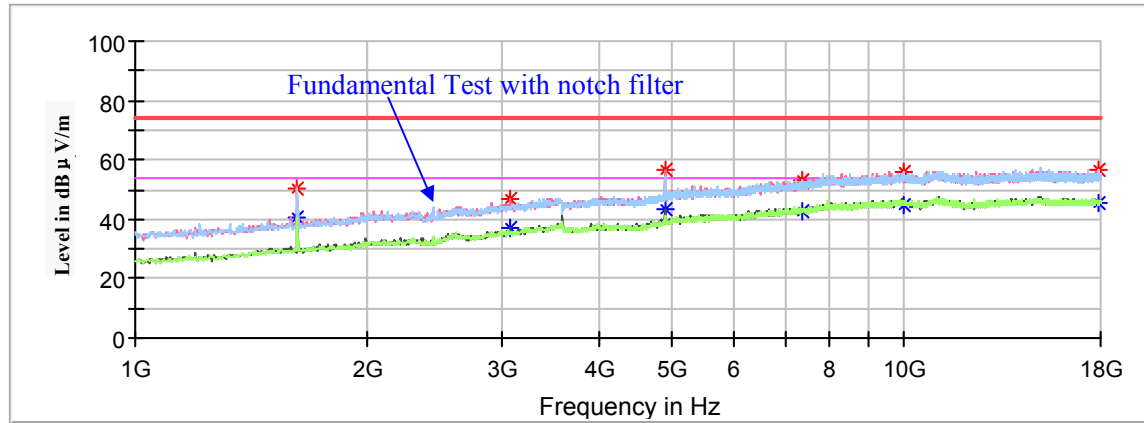

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1625.600000	50.30	---	200.0	H	99.0	-0.4	74.00	23.70
1625.600000	---	40.61	200.0	H	99.0	-0.4	54.00	13.39
3070.600000	46.55	---	150.0	V	359.0	6.2	74.00	27.45
3070.600000	---	37.20	150.0	V	359.0	6.2	54.00	16.80
4882.000000	56.59	---	200.0	V	330.0	11.1	74.00	17.41
4882.000000	---	43.08	200.0	V	330.0	11.1	54.00	10.92
7323.000000	53.16	---	200.0	V	319.0	15.5	74.00	20.84
7323.000000	---	42.36	200.0	V	319.0	15.5	54.00	11.64
9976.000000	55.81	---	150.0	H	116.0	18.3	74.00	18.19
9976.000000	---	44.77	150.0	H	116.0	18.3	54.00	9.23
17860.600000	56.38	---	200.0	H	216.0	19.0	74.00	17.62
17860.600000	---	45.49	200.0	H	216.0	19.0	54.00	8.51

High Channel: 2480MHz


Full Spectrum

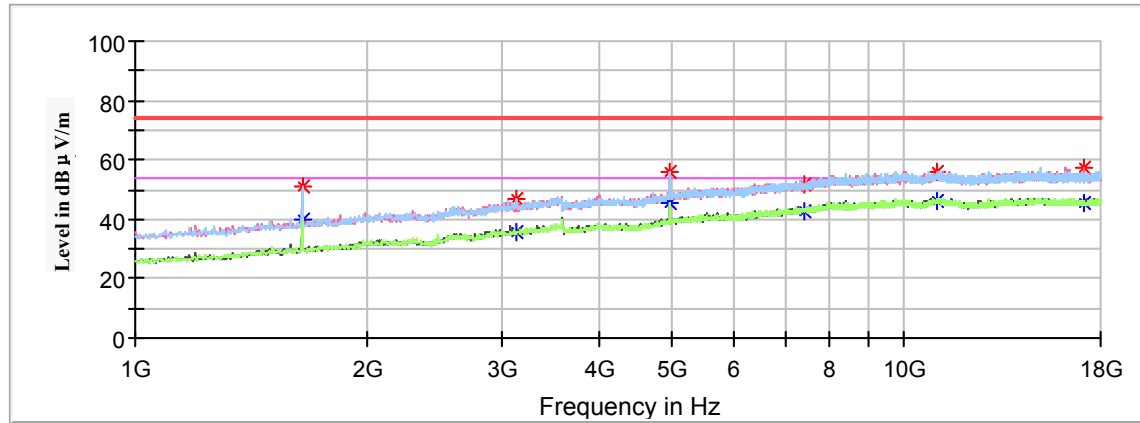


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1649.400000	---	39.77	100.0	H	78.0	-0.2	54.00	14.23
1649.400000	51.01	---	100.0	H	78.0	-0.2	74.00	22.99
3128.400000	---	35.36	200.0	H	255.0	6.3	54.00	18.64
3128.400000	46.62	---	200.0	H	255.0	6.3	74.00	27.38
4960.000000	---	45.36	100.0	V	2.0	11.5	54.00	8.64
4960.000000	55.88	---	100.0	V	2.0	11.5	74.00	18.12
7440.000000	---	42.88	200.0	V	7.0	15.6	54.00	11.12
7440.000000	51.78	---	200.0	V	7.0	15.6	74.00	22.22
11036.800000	---	46.06	150.0	V	234.0	19.0	54.00	7.94
11036.800000	56.15	---	150.0	V	234.0	19.0	74.00	17.85
17092.200000	---	45.35	200.0	V	5.0	18.2	54.00	8.65
17092.200000	57.00	---	200.0	V	5.0	18.2	74.00	17.00

18GHz-25GHz:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation,, the worst case GFSK Mode in X-axis of orientation was recorded

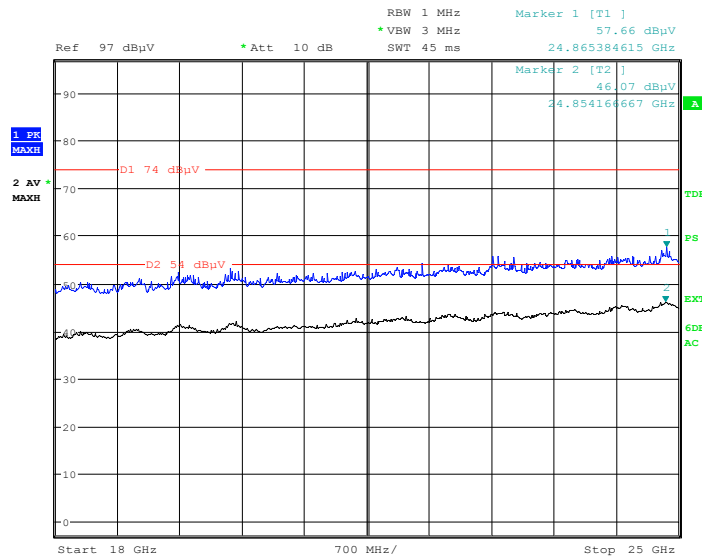Horizontal

Date: 23.JUL.2018 18:41:35

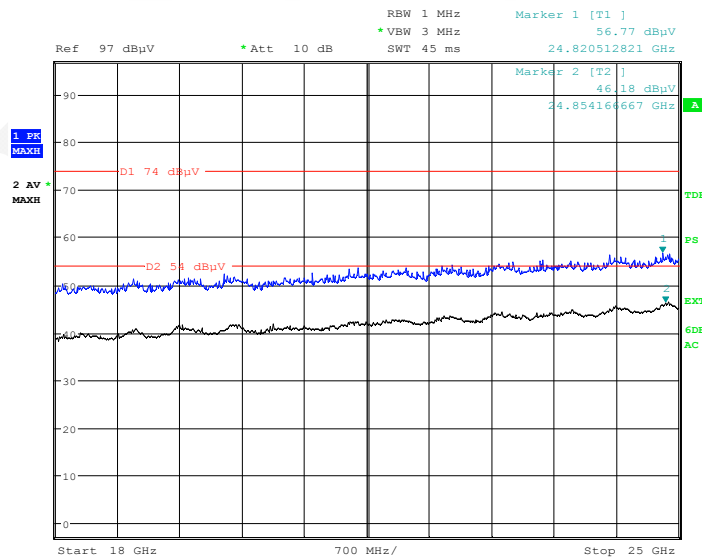Vertical

Date: 23.JUL.2018 18:51:08

Fundamental Test & Restricted Bands Emissions:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation,, the worst case GFSK Mode in X-axis of orientation was recorded

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)


Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)

Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2402.000000	102.08	---	200.0	V	89.0	2.8	/	/
2402.000000	---	91.53	200.0	V	89.0	2.8	/	/
2402.000000	99.16	---	150.0	H	153.0	2.8	/	/
2402.000000	---	88.46	150.0	H	153.0	2.8	/	/
2389.118000	43.19	---	250.0	V	194.0	2.8	74.00	30.81
2389.118000	---	33.14	250.0	V	194.0	2.8	54.00	20.86
Middle Channel: 2441MHz								
2441.000000	100.24	---	250.0	V	94.0	2.9	/	/
2441.000000	---	88.36	250.0	V	94.0	2.9	/	/
2441.000000	97.15	---	200.0	H	153.0	2.9	/	/
2441.000000	---	85.14	200.0	H	153.0	2.9	/	/
High Channel: 2480MHz								
2480.000000	100.56	---	100.0	V	79.0	3.0	/	/
2480.000000	---	88.21	100.0	V	79.0	3.0	/	/
2480.000000	97.37	---	150.0	H	176.0	3.0	/	/
2480.000000	---	85.06	150.0	H	176.0	3.0	/	/
2483.680000	42.75	---	200.0	V	222.0	3.0	74.00	31.25
2483.680000	---	32.29	200.0	V	222.0	3.0	54.00	21.71

Conducted Spurious Emissions at Antenna Port


BDR (GFSK): Low Channel

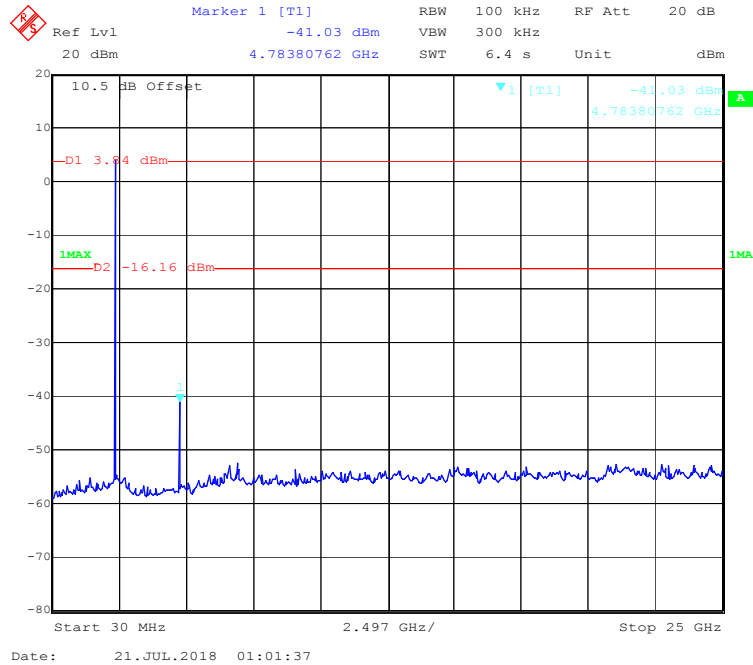


BDR (GFSK): Middle Channel

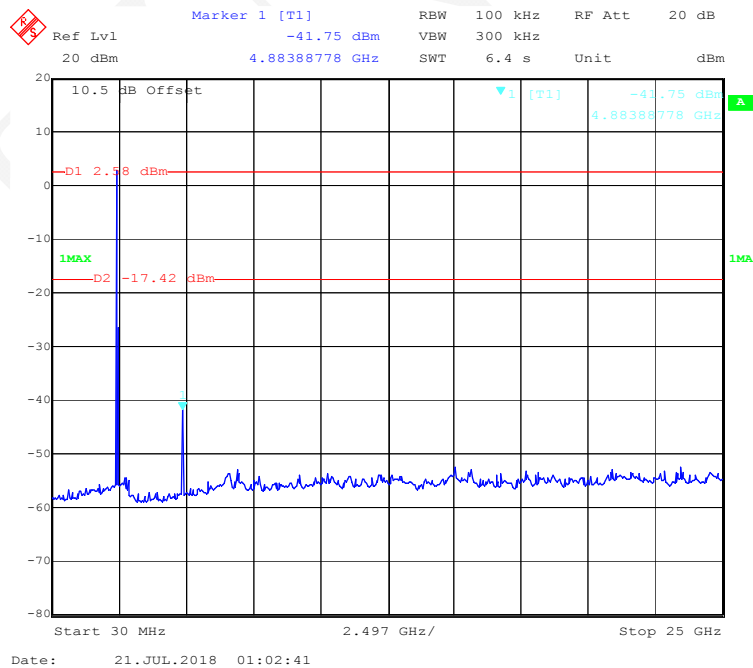


BDR (GFSK): High Channel

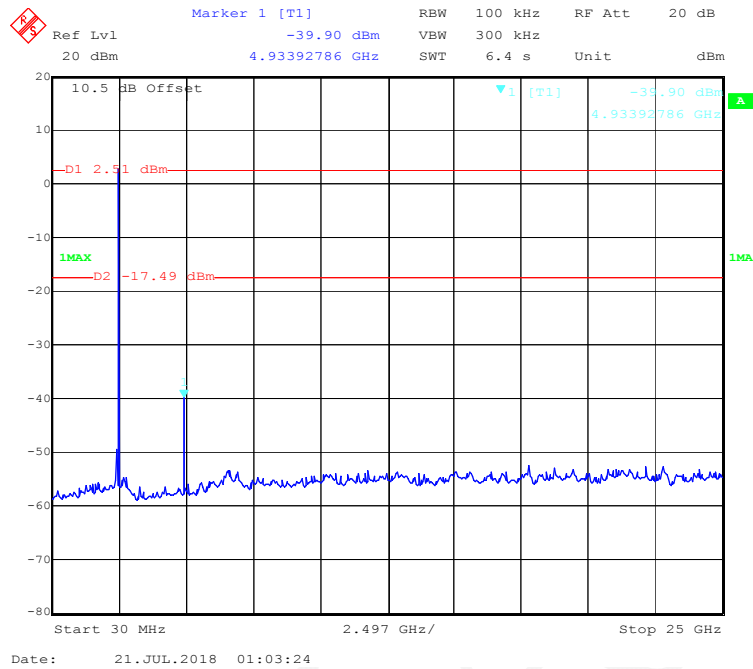


EDR ($\pi/4$ -DQPSK): Low Channel

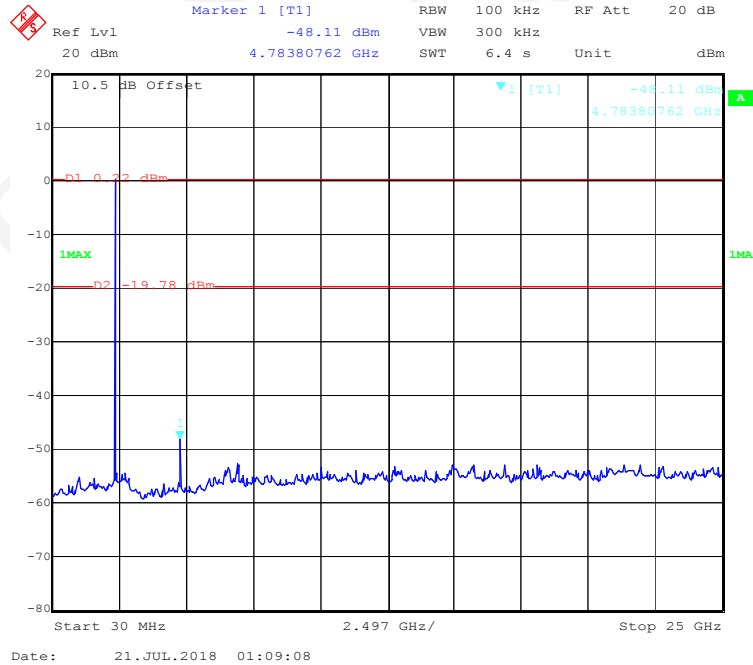


EDR ($\pi/4$ -DQPSK): Middle Channel

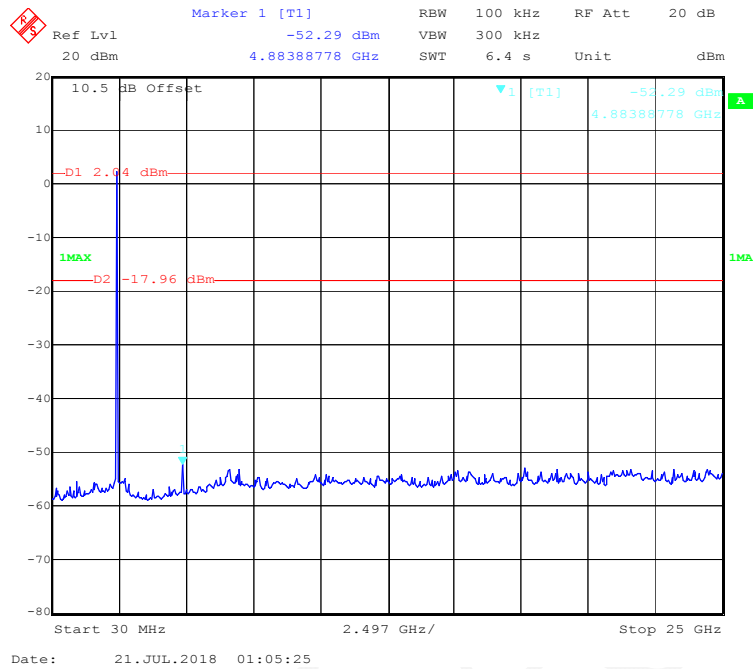


EDR ($\pi/4$ -DQPSK): High Channel

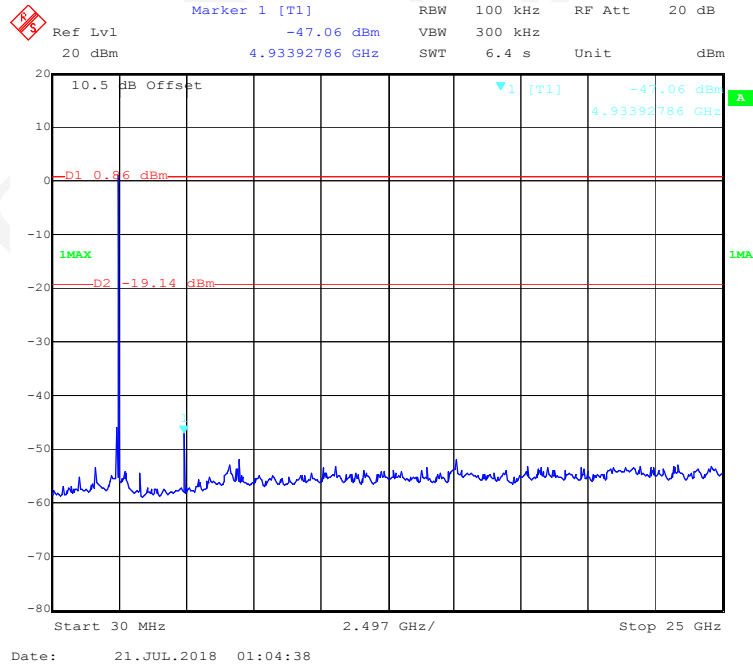


EDR (8DPSK): Low Channel

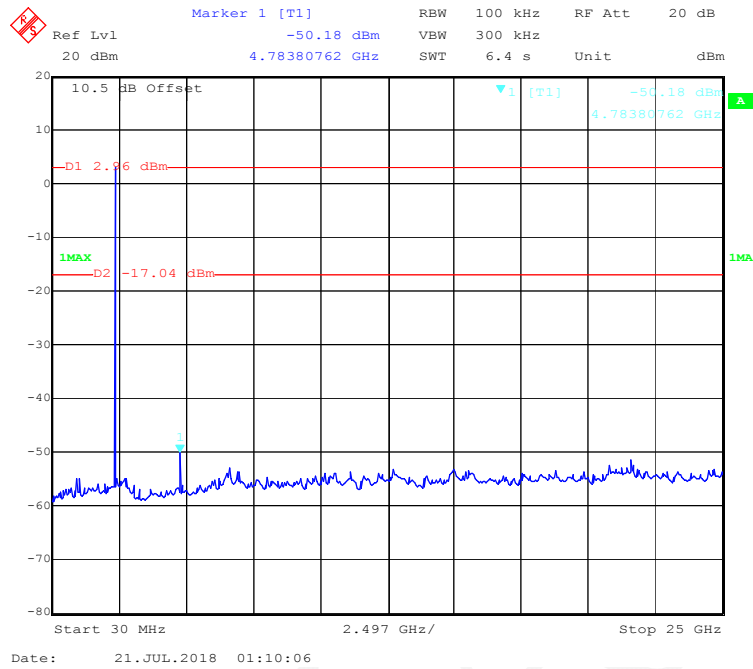

EDR (8DPSK): Middle Channel

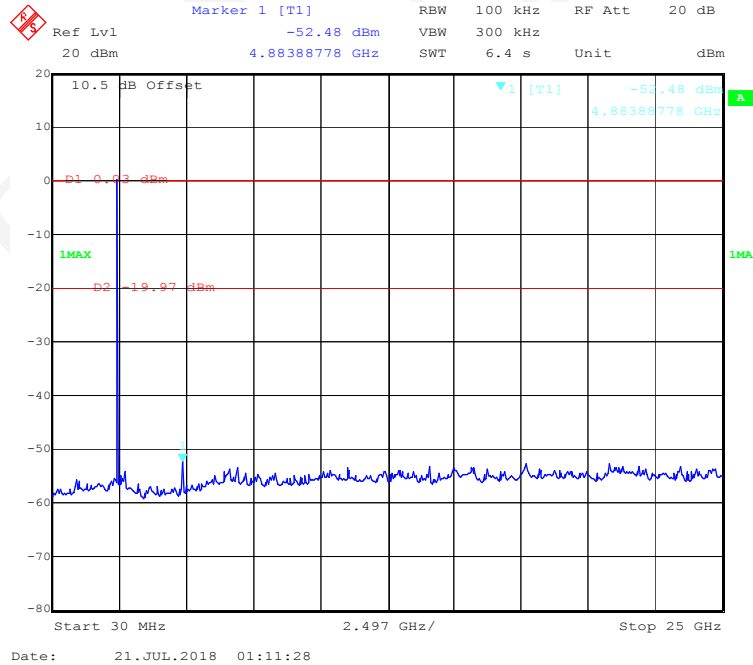

EDR (8DPSK): High Channel

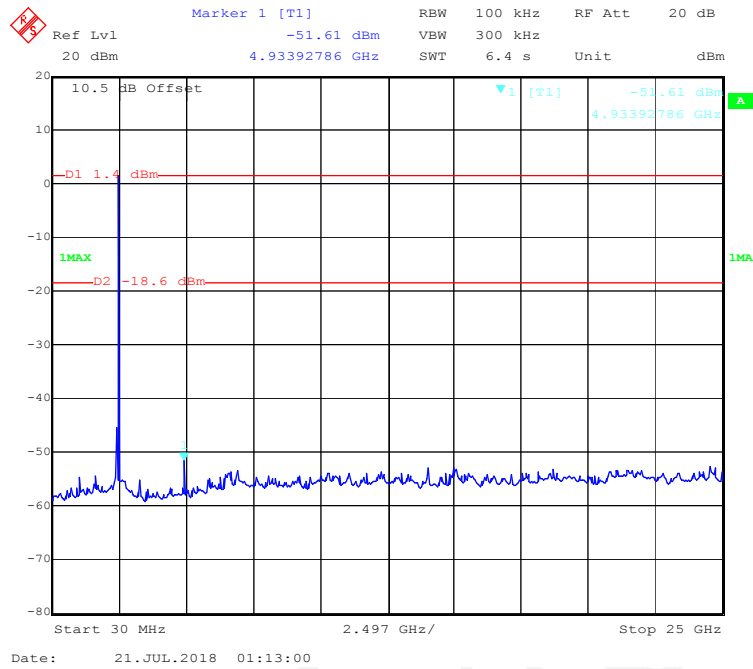

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400 - 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- Span: Wide enough to capture the peaks of two adjacent channels.
- RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video (or average) bandwidth (VBW) $\geq$ RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Test Data

Environmental Conditions

Temperature:	23.4 °C
Relative Humidity:	49 %
ATM Pressure:	101.1 kPa

The testing was performed by Stone Zhang on 2018-07-21 to 2018-07-31.


EUT operation mode: Transmitting

Test Result: Compliance.

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR (GFSK)	Low	2402	0.998	≥ 0.932	Pass
	Adjacent	2403			
	Middle	2441	0.992	≥ 0.932	Pass
	Adjacent	2442			
	High	2480	1.016	≥ 0.932	Pass
	Adjacent	2479			
EDR ($\pi/4$-DQPSK)	Low	2402	1.004	≥ 0.842	Pass
	Adjacent	2403			
	Middle	2441	0.998	≥ 0.825	Pass
	Adjacent	2442			
	High	2480	0.998	≥ 0.829	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	0.992	≥ 0.858	Pass
	Adjacent	2403			
	Middle	2441	0.998	≥ 0.846	Pass
	Adjacent	2442			
	High	2480	1.022	≥ 0.854	Pass
	Adjacent	2479			

Note: For BDR mode, Limit = 20 dB bandwidth; For EDR mode, Limit = 20 dB bandwidth*2/3

BDR (GFSK): Low Channel

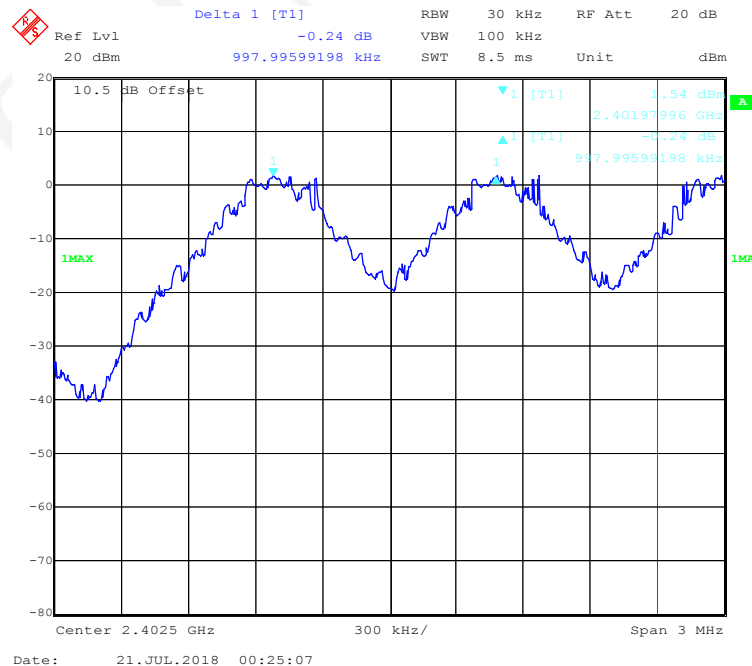

Delta 1 [T1] -0.62 dB RBW 30 kHz RF Att 20 dB
 Ref Lvl 20 dBm VBW 100 kHz Unit dBm
 20 dBm 991.98396794 kHz SWT 8.5 ms

10.5 dB Offset

1.37 dBm 2.44091996 GHz
 -0.62 dB 991.98396794 kHz

1MAX

Center 2.4415 GHz 300 kHz/ Span 3 MHz

Date: 21.JUL.2018 00:21:21

Delta 1 [T1] 0.75 dB RBW 30 kHz RF Att 20 dB

Ref Lvl 20 dBm 1.01603206 MHz SWT 8.5 ms Unit dBm

10.5 dB Offset

Center 2.4795 GHz 300 kHz/ Span 3 MHz


2.478597 GHz 1.86 dBm

2.478597 GHz 0.75 dB


1.01603206 MHz

1MAX


EDR ($\pi/4$ -DQPSK): Low Channel

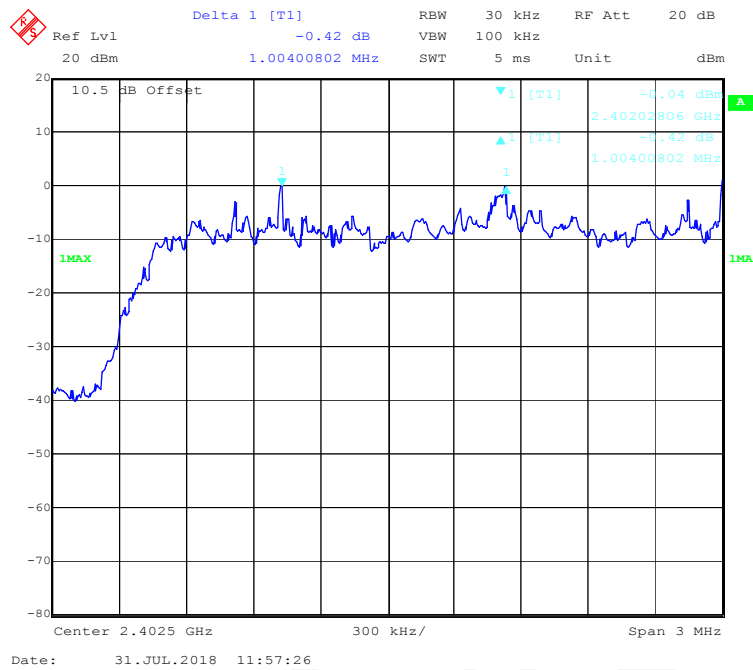


EDR ($\pi/4$ -DQPSK): Middle Channel

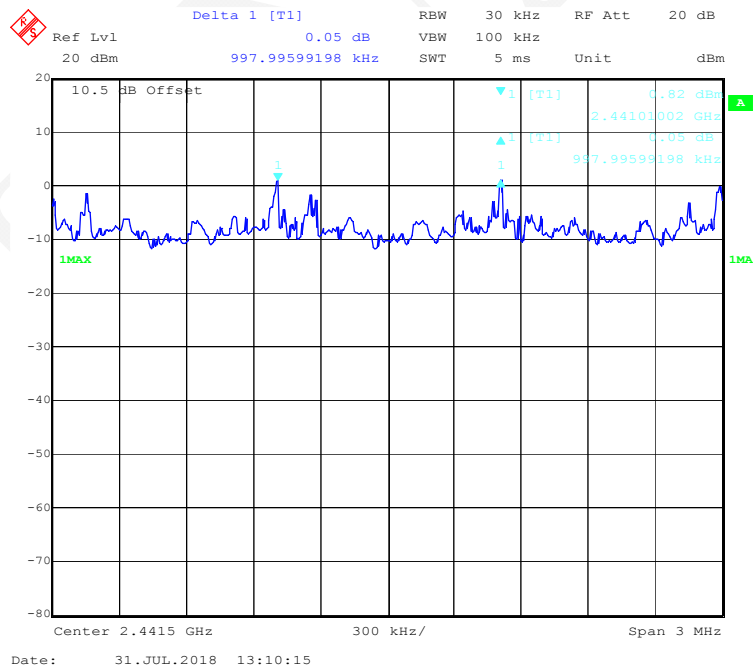


EDR ($\pi/4$ -DQPSK): High Channel

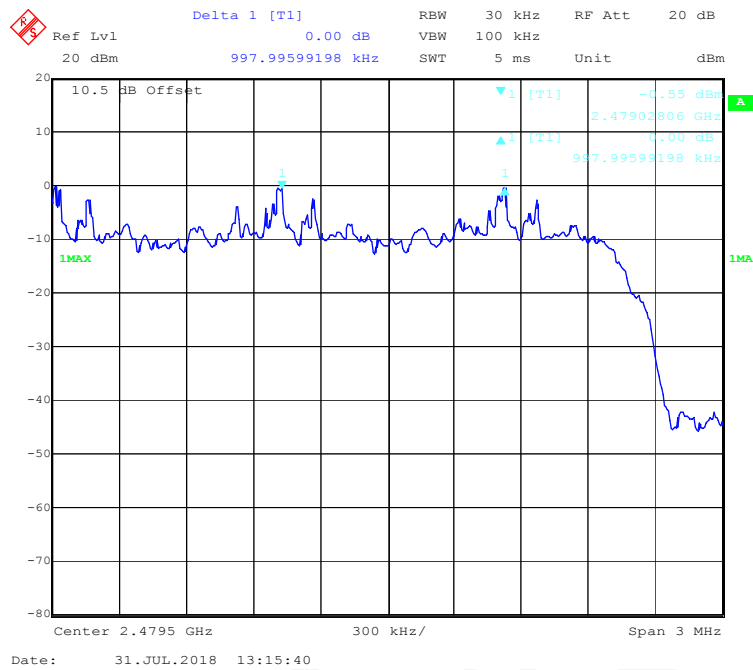


EDR (8DPSK): Low Channel

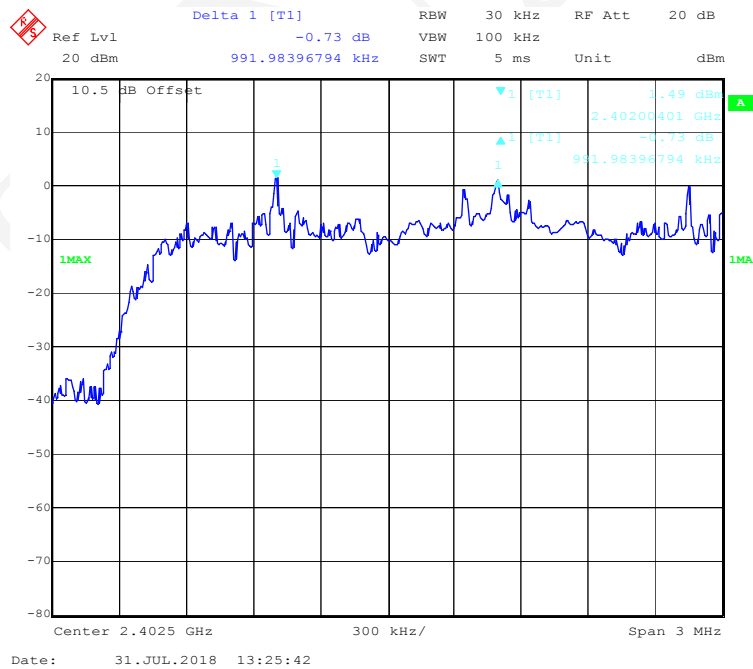

EDR (8DPSK): Middle Channel

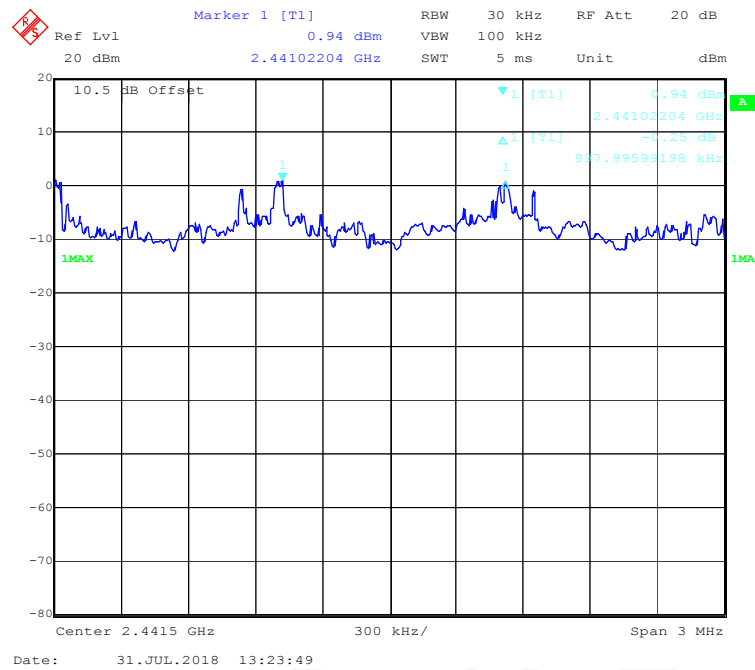

EDR (8DPSK): High Channel

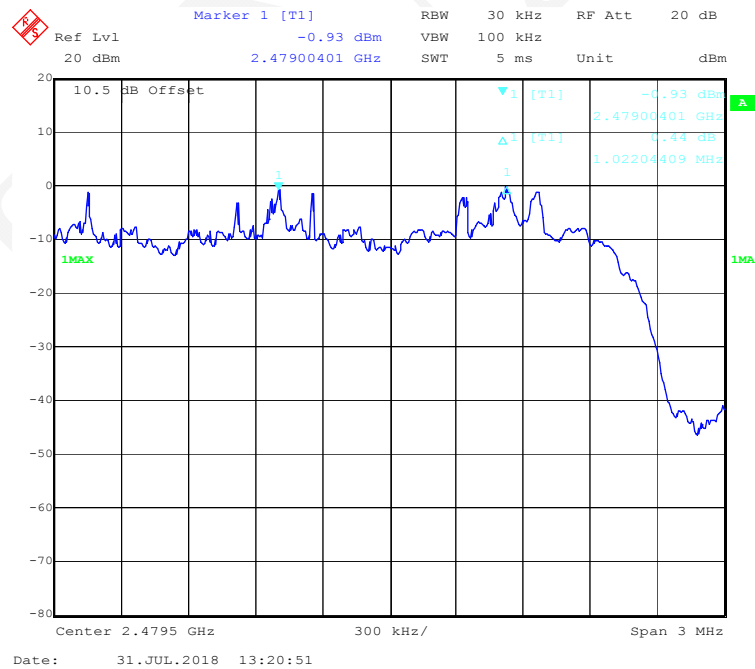

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**


Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Stone Zhang on 2018-07-21.

EUT operation mode: Transmitting

Test Result: Compliance.

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.932
	Middle	2441	0.932
	High	2480	0.932
EDR ($\pi/4$-DQPSK)	Low	2402	1.263
	Middle	2441	1.238
	High	2480	1.244
EDR (8DPSK)	Low	2402	1.287
	Middle	2441	1.269
	High	2480	1.281

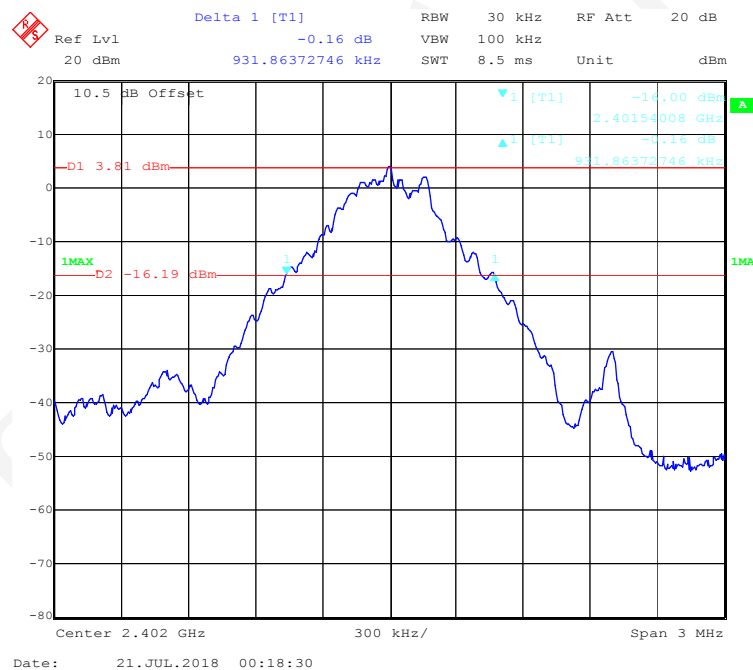BDR (GFSK): Low Channel

Delta 1 [T1] RBW 30 kHz RF Att 20 dB
 Ref Lvl -0.51 dB VBW 100 kHz
 20 dBm 931.86372746 kHz SWT 8.5 ms Unit dBm

10.5 dB Offset

▼1 [T1] -16.15 dBm
 ▲1 [T1] 2.44054008 GHz
 931.86372746 kHz

D1 3.53 dBm

1MAX -16.47 dBm

Center 2.441 GHz 300 kHz/ Span 3 MHz

Date: 21.JUL.2018 00:17:30

Delta 1 [T1] RBW 30 kHz RF Att 20 dB
 Ref Lvl -0.45 dB VBW 100 kHz
 20 dBm 931.86372746 kHz SWT 8.5 ms Unit dBm

10.5 dB Offset
 D1 2.77 dBm
 1MAX
 D2 -17.23 dBm
 1
 -12.87 dBm
 2.47954008 GHz
 -0.45 dB
 931.86372746 kHz
 1MA

Center 2.48 GHz 300 kHz/ Span 3 MHz

Date: 21.JUL.2018 00:13:31

Delta 1 [T1] -0.26 dB RBW 30 kHz RF Att 20 dB
 Ref Lvl 20 dBm 1.26252505 MHz SWT 8.5 ms Unit dBm
 10.5 dB Offset
 -D1 2.31 dBm
 1MAX
 -D2 -17.69 dBm
 1MAX
 Center 2.402 GHz 300 kHz/ Span 3 MHz
 Date: 21.JUL.2018 00:09:14

Delta 1 [T1] 0.22 dB RBW 30 kHz RF Att 20 dB

Ref Lvl 20 dBm 2.23847695 MHz VSW 100 kHz Unit dBm

10.5 dB Offset



-D1 1.68 dBm

1MAX

-D2 -18.32 dBm

Center 2.441 GHz 300 kHz/ Span 3 MHz

Date: 21.JUL.2018 00:10:48

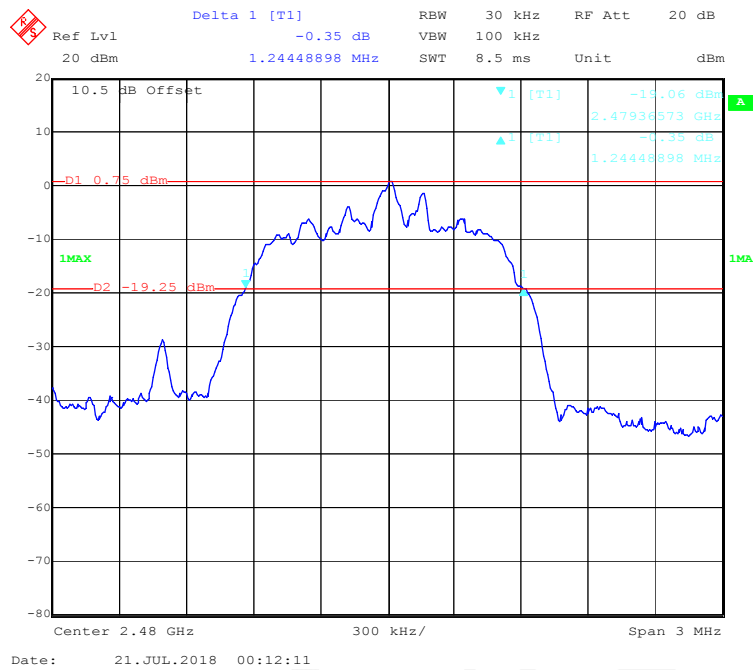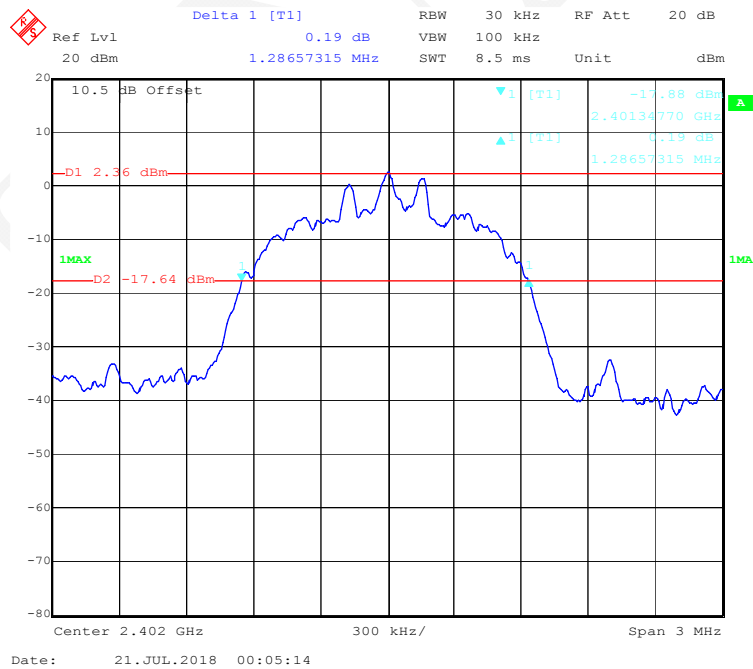EDR ($\pi/4$ -DQPSK): High Channel**EDR (8DPSK): Low Channel**

Delta 1 [T1] -0.29 dB
 RBW 30 kHz RF Att 20 dB
 Ref Lvl 20 dBm 1.26853707 MHz
 Unit dBm
 10.5 dB Offset
 -17.76 dBm
 2.44034770 GHz
 -0.29 dB
 1.26853707 MHz
 -18.31 dBm
 1 MHz
 Center 2.441 GHz 300 kHz/
 Span 3 MHz
 Date: 21.JUL.2018 00:03:36

Delta 1 [T1] 0.06 dB RBW 30 kHz RF Att 20 dB

Ref Lvl 20 dBm 20 dBm Unit dBm

10.5 dB Offset

▼1 [T1] -19.47 dBm 2.47934168 GHz

▲1 [T1] 0.06 dB 1.28056112 MHz

D1 0.71 dBm

1MAX -19.29 dBm

Center 2.48 GHz 300 kHz/ Span 3 MHz

Date: 21.JUL.2018 00:02:27

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c. VBW $\geq$ RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies.

Test Data**Environmental Conditions**

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa


The testing was performed by Stone Zhang on 2018-07-21.



EUT operation mode: Hopping

Test Result: Compliance.

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400 - 2483.5	79	≥ 15
EDR ($\pi/4$ -DQPSK)	2400 - 2483.5	79	≥ 15
EDR (8DPSK)	2400 - 2483.5	79	≥ 15

BDR (GFSK): Number of Hopping Channels

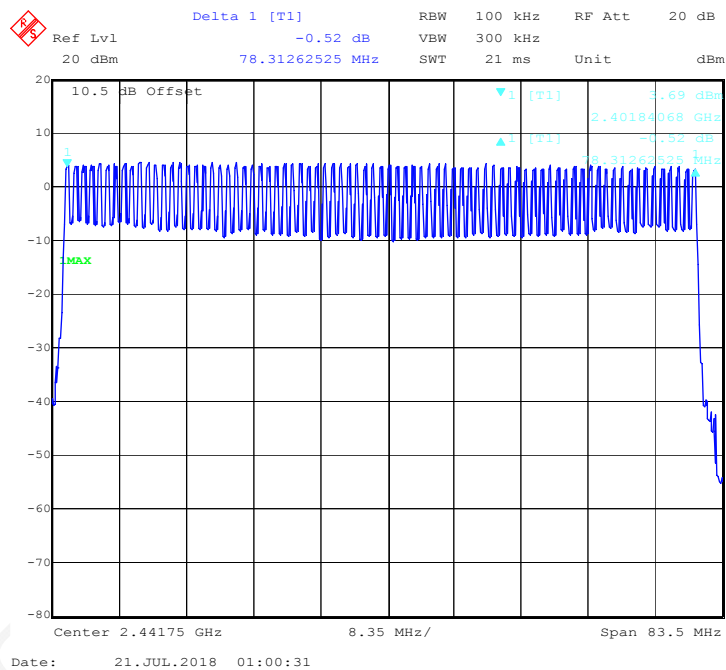

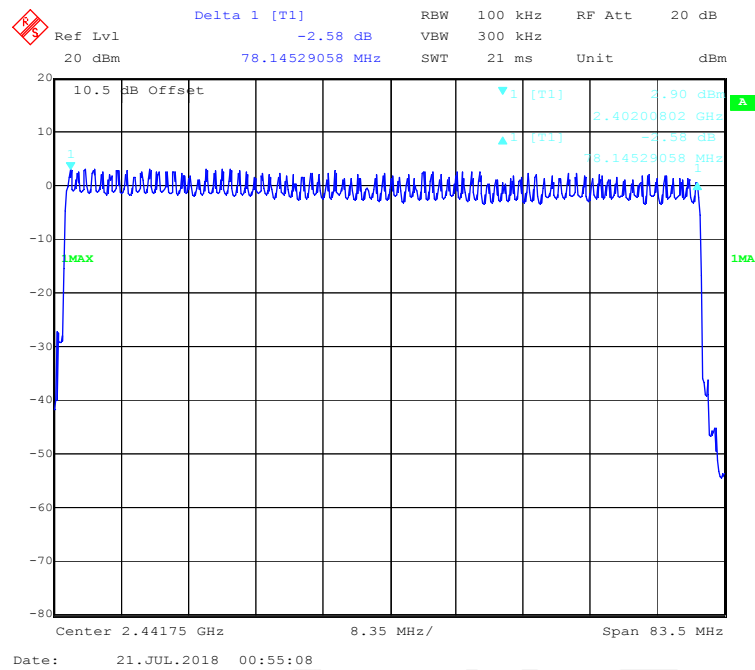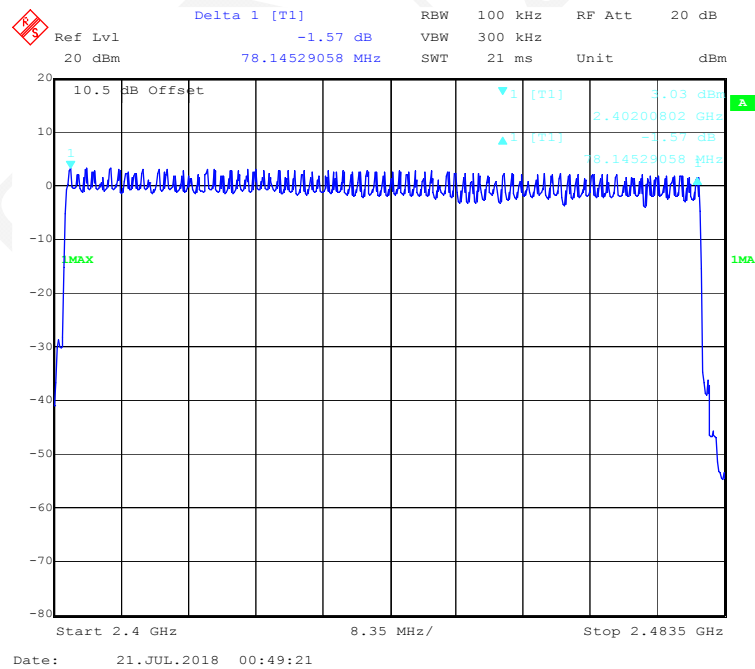EDR ($\pi/4$ -DQPSK): Number of Hopping Channels**EDR (8DPSK): Number of Hopping Channels**

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a Span: Zero span, centered on a hopping channel.
- b RBW shall be $\leq$ channel spacing and where possible RBW should be set $\geq 1 / T$, where T is the expected dwell time per channel.
- c Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d Detector function: Peak.
- e Trace: Max hold.

Test Data**Environmental Conditions**


Temperature:	23.4 °C
Relative Humidity:	51 %
ATM Pressure:	101.2 kPa

The testing was performed by Stone Zhang on 2018-07-21.


EUT operation mode: Hopping

Mode		Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR (GFSK)	DH1	Low	0.527	0.169	≤ 0.4	Pass
		Middle	0.523	0.167	≤ 0.4	Pass
		High	0.525	0.168	≤ 0.4	Pass
		Note: DH1: Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH3	Low	1.794	0.287	≤ 0.4	Pass
		Middle	1.788	0.286	≤ 0.4	Pass
		High	1.812	0.290	≤ 0.4	Pass
		Note: DH3: Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH5	Low	3.052	0.326	≤ 0.4	Pass
		Middle	3.042	0.324	≤ 0.4	Pass
		High	3.082	0.329	≤ 0.4	Pass
		Note: DH5: Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	2DH1	Low	0.541	0.173	≤ 0.4	Pass
		Middle	0.543	0.174	≤ 0.4	Pass
		High	0.539	0.172	≤ 0.4	Pass
		Note: 2DH1: Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH3	Low	1.806	0.289	≤ 0.4	Pass
		Middle	1.806	0.289	≤ 0.4	Pass
		High	1.854	0.297	≤ 0.4	Pass
		Note: 2DH3: Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH5	Low	3.082	0.329	≤ 0.4	Pass
		Middle	3.082	0.329	≤ 0.4	Pass
		High	3.092	0.330	≤ 0.4	Pass
		Note: 2DH5: Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH1	Low	0.543	0.174	≤ 0.4	Pass
		Middle	0.543	0.174	≤ 0.4	Pass
		High	0.553	0.177	≤ 0.4	Pass
		Note: 3 DH1: Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH3	Low	1.800	0.288	≤ 0.4	Pass
		Middle	1.800	0.288	≤ 0.4	Pass
		High	1.830	0.293	≤ 0.4	Pass
		Note: 3DH3: Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH5	Low	3.072	0.328	≤ 0.4	Pass
		Middle	3.102	0.331	≤ 0.4	Pass
		High	3.092	0.330	≤ 0.4	Pass
		Note: 3DH5: Dwell time = Pulse time*(1600/6/79)*31.6S				


BDR (GFSK): Pulse time, Low Channel, DH1

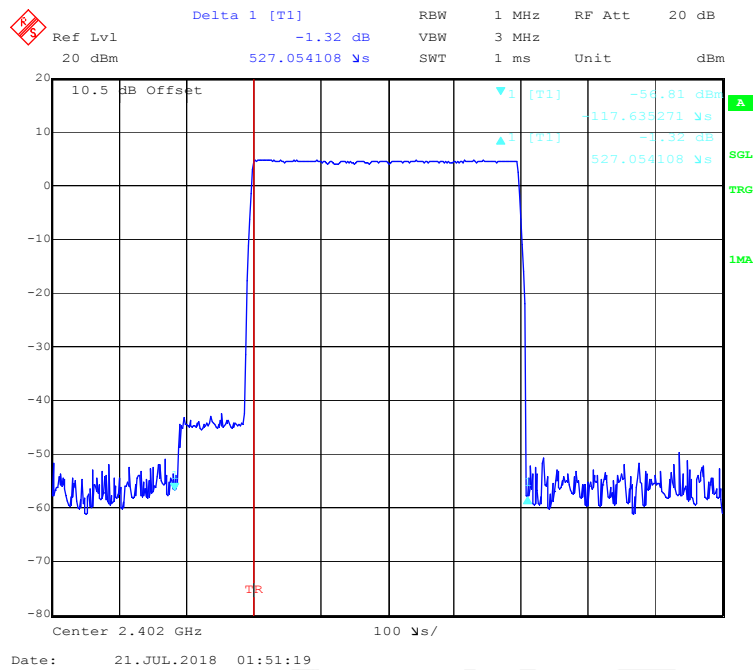


BDR (GFSK): Pulse time, Middle Channel, DH1

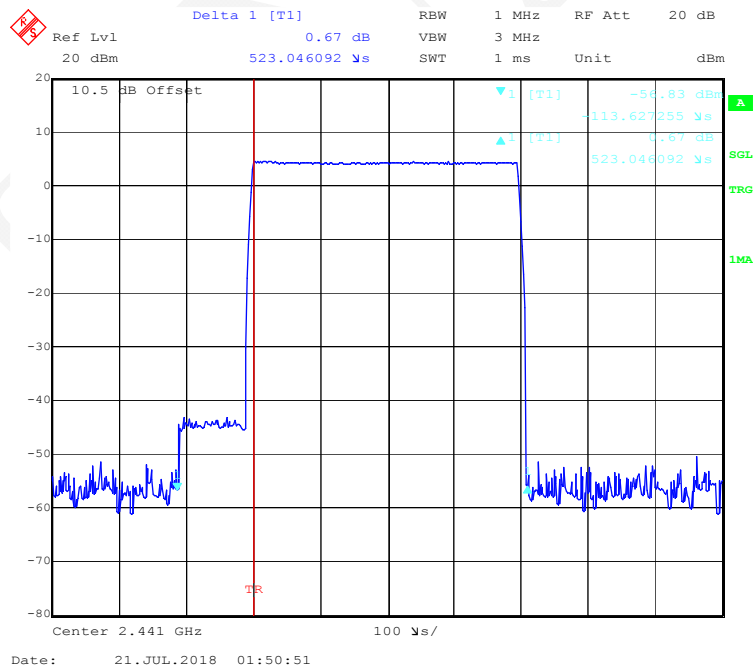


BDR (GFSK): Pulse time, High Channel, DH1

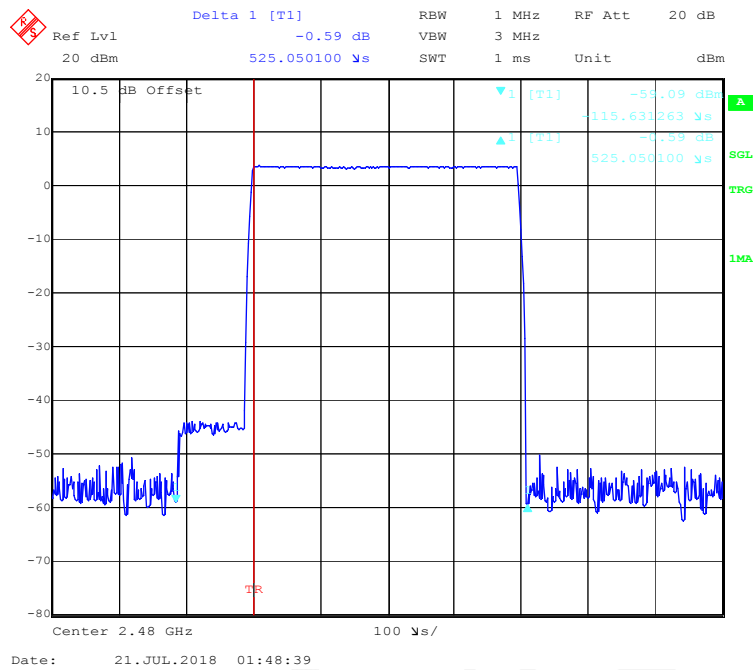


BDR (GFSK): Pulse time, Low Channel, DH3

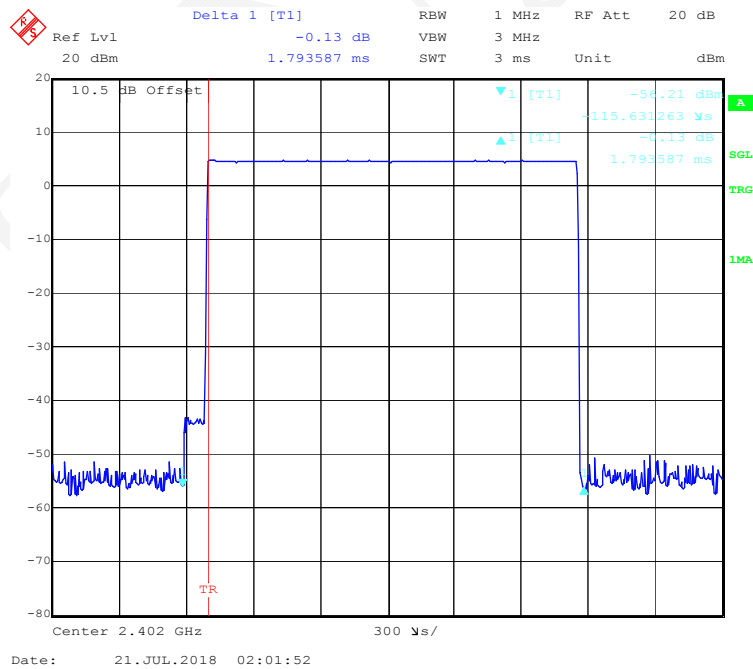


BDR (GFSK): Pulse time, Middle Channel, DH3

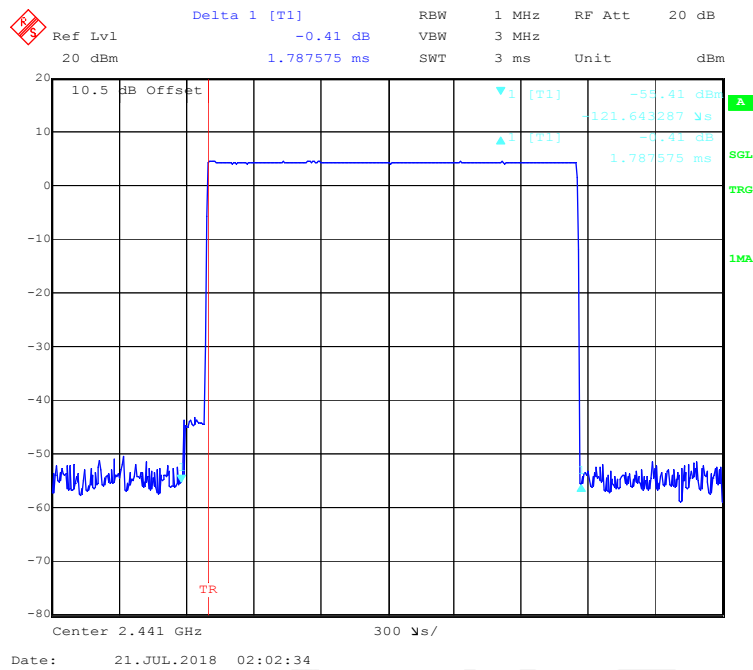


BDR (GFSK): Pulse time, High Channel, DH3


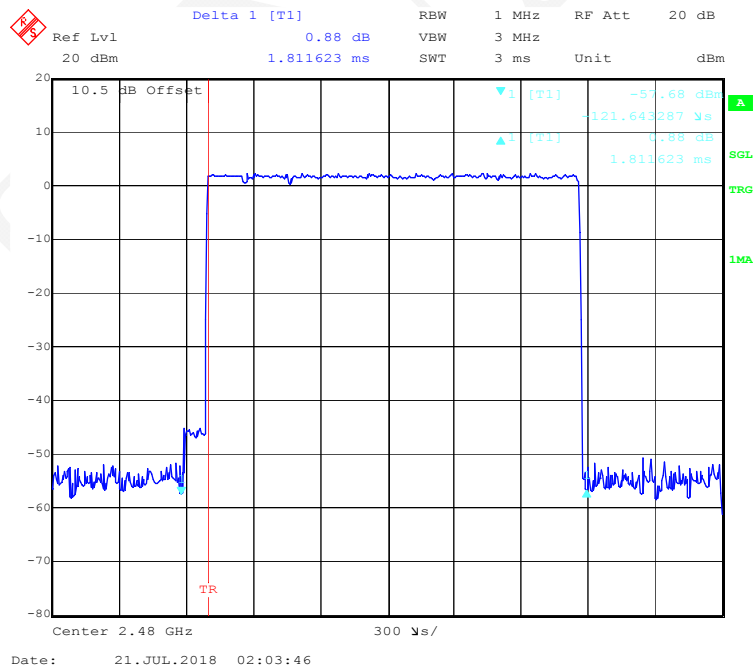


BDR (GFSK): Pulse time, Low Channel, DH5

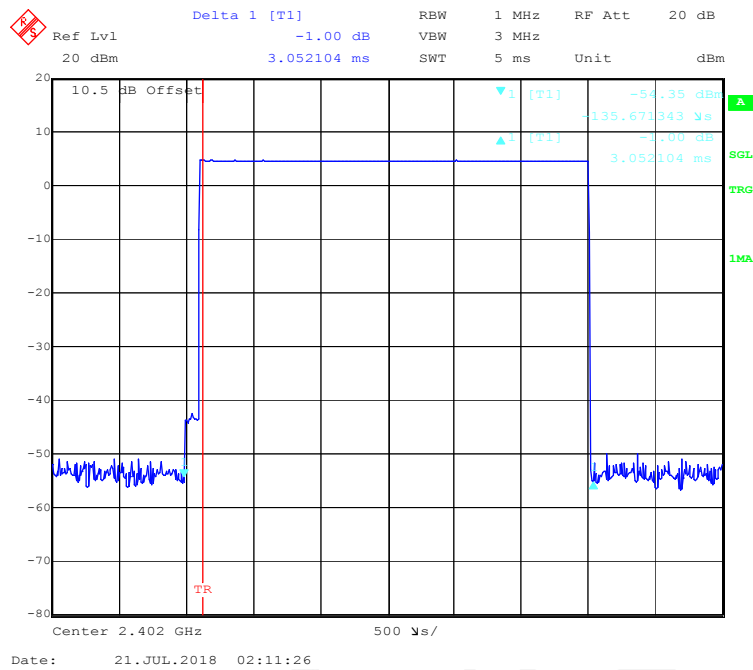


BDR (GFSK): Pulse time, Middle Channel, DH5

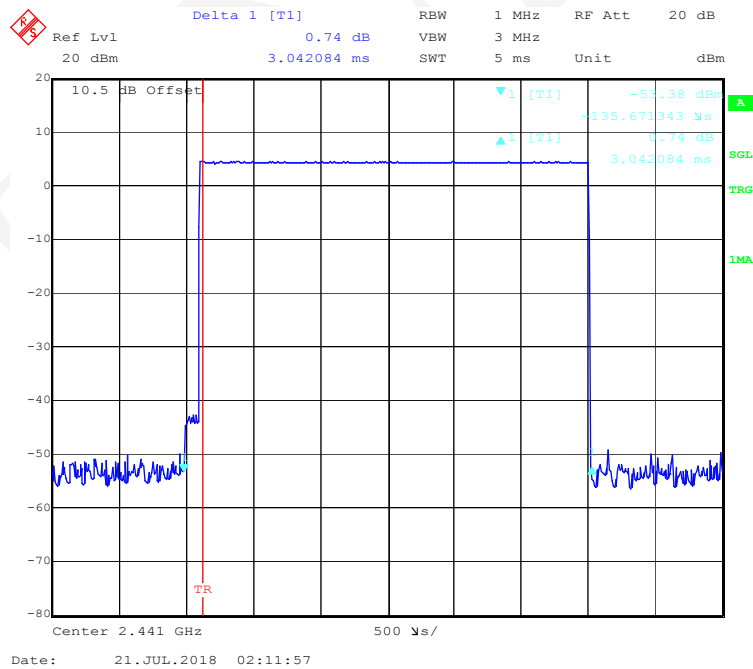


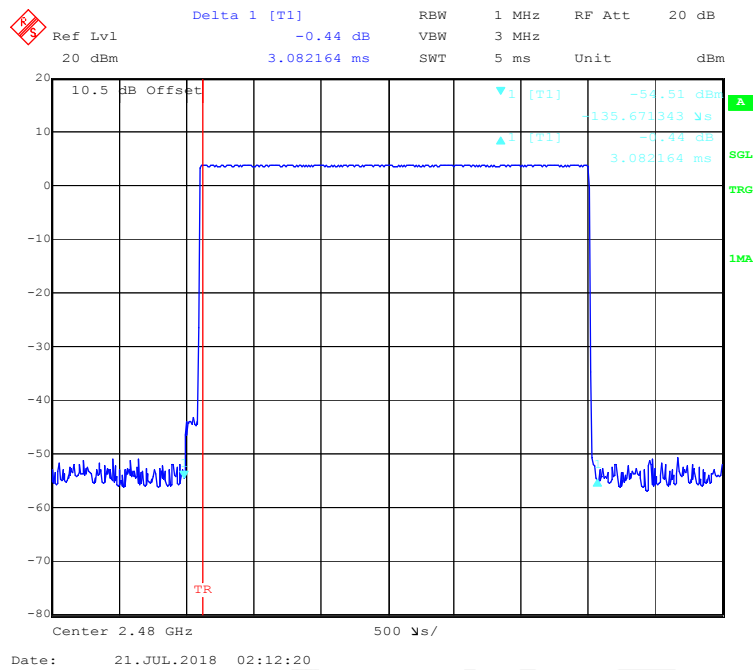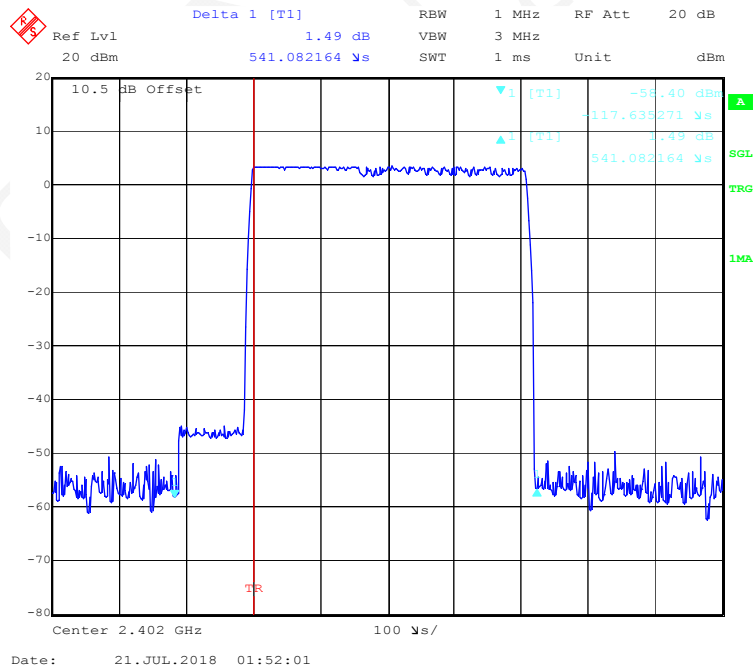BDR (GFSK): Pulse time, High Channel, DH5**EDR ($\pi/4$ -DQPSK): Pulse time, Low Channel, 2DH1**


EDR ($\pi/4$ -DQPSK): Pulse time, Middle Channel, 2DH1

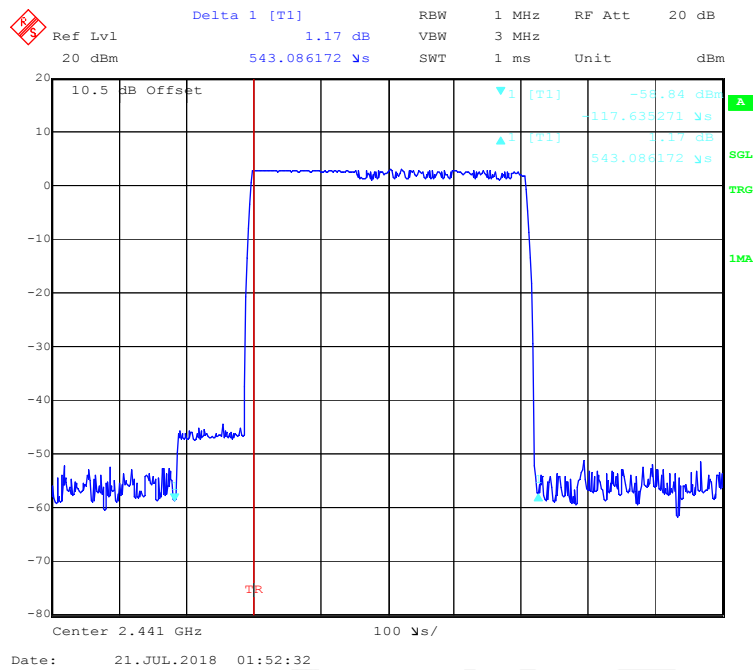


EDR ($\pi/4$ -DQPSK): Pulse time, High Channel, 2DH1

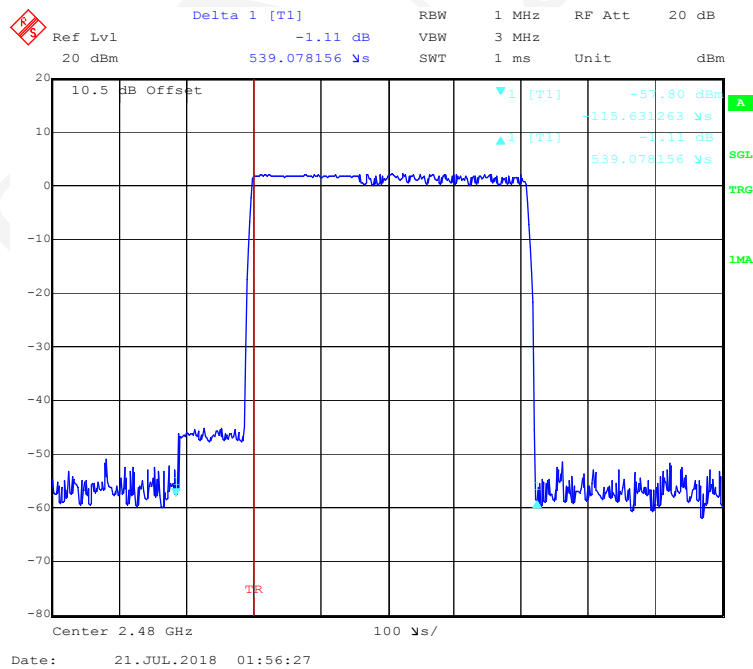

EDR ($\pi/4$ -DQPSK): Pulse time, Low Channel, 2DH3

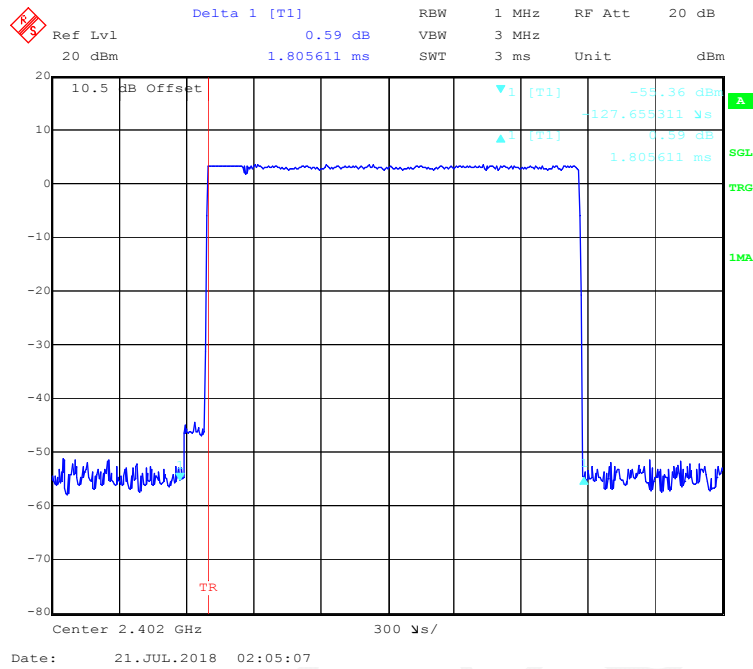

EDR ($\pi/4$ -DQPSK): Pulse time, Middle Channel, 2DH3

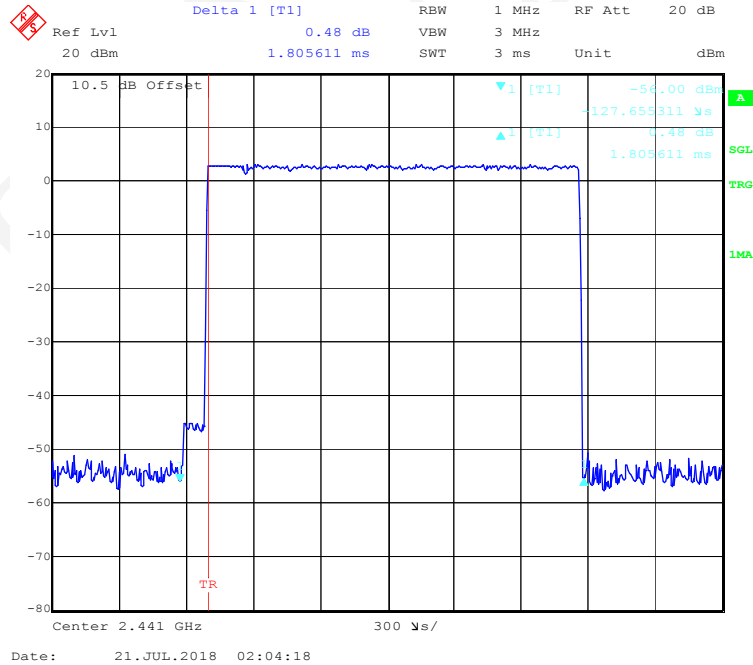

Delta 1 [T1] 0.78 dB

RBW 1 MHz RF Att 20 dB

Ref Lvl 20 dBm

VBW 3 MHz

SWT 3 ms Unit dBm

10.5 dB Offset

TR

▼1 [T1] -55.67 dBm

▲1 [T1] -339.679359 dBm

0.78 dB

1.853707 ms

Center 2.48 GHz 300 kHz/

Date: 21.JUL.2018 02:05:44

Delta 1 [T1] 0.01 dB RBW 1 MHz RF Att 20 dB

Ref Lvl 20 dBm 3.082164 ms SWT 3 MHz Unit dBm

10.5 dB Offset

▼1 [T1] -54.01 dBm

▲1 [T1] -155.711423 μs



0.01 dB

3.082164 ms

TR

Center 2.402 GHz 500 ns/

Date: 21.JUL.2018 02:13:43

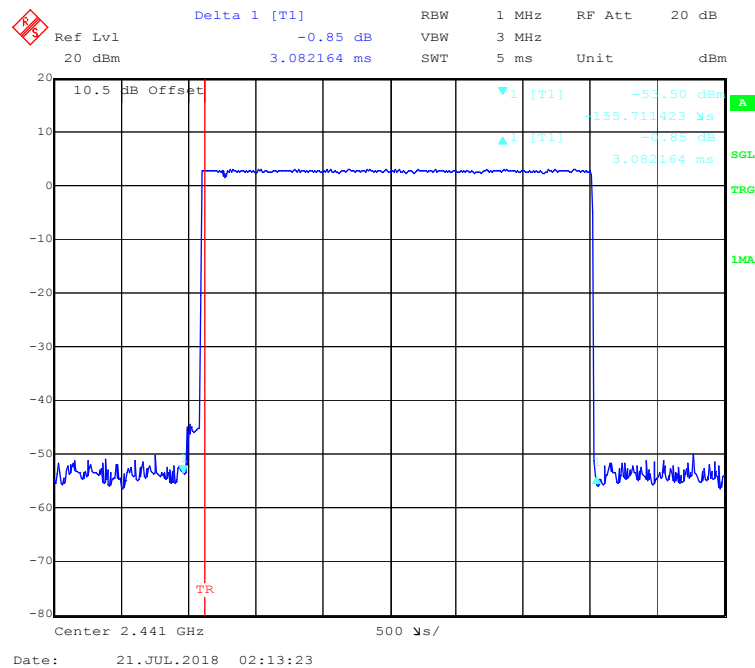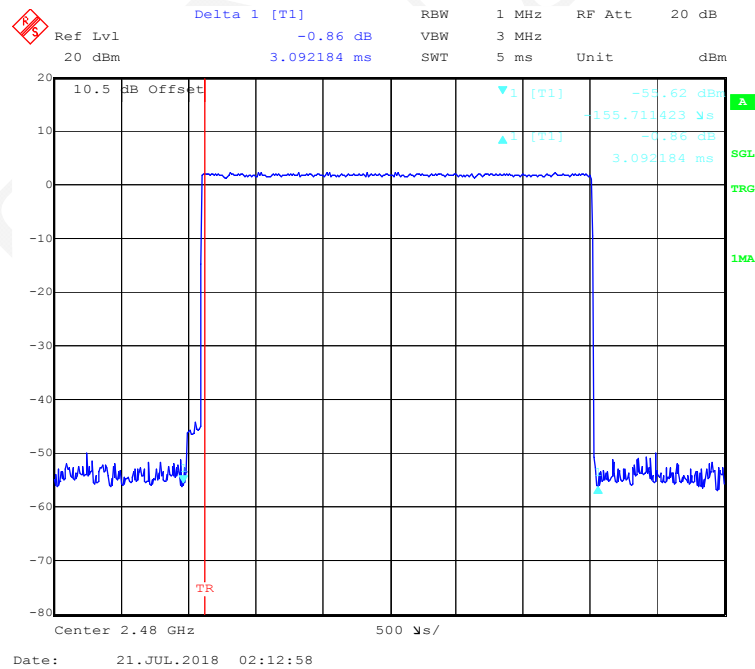EDR ($\pi/4$ -DQPSK): Pulse time, Middle Channel, 2DH5**EDR ($\pi/4$ -DQPSK): Pulse time, High Channel, 2DH5**

Delta 1 [T1] 0.57 dB

Ref Lvl 20 dBm

RBW 1 MHz

VBW 3 MHz

SWT 1 ms

Unit dBm

20 dB Offset

Center 2.402 GHz

100 μ s/

10.5 dB Offset

Delta 1 [T1] -57.02 dBm

Delta 1 [T1] -115.631263 μ s

Delta 1 [T1] 0.57 dB

Delta 1 [T1] 543.086172 μ s

TR

Delta 1 [T1] 0.41 dB RBW 1 MHz RF Att 20 dB
 Ref Lvl 20 dBm 543.086172 μ s VBW 3 MHz Unit dBm
 20 dBm 543.086172 μ s SWT 1 ms

10.5 dB Offset


▼1 [T1] -54.47 dBm
 ~115.631263 μ s
 ▲1 [T1] 0.41 dB
 543.086172 μ s

TR


Center 2.441 GHz 100 μ s/

Date: 21.JUL.2018 01:57:52


EDR (8DPSK): Pulse time, High Channel, 3DH1

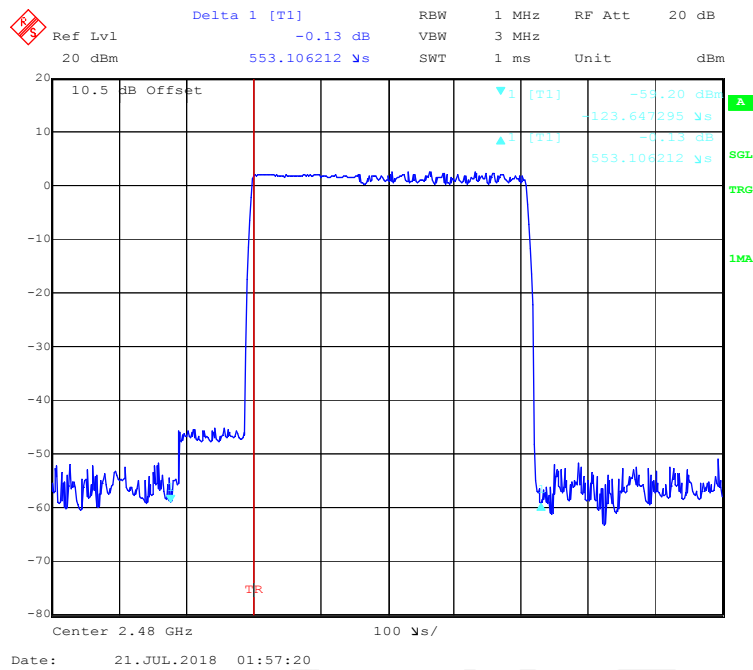


EDR (8DPSK): Pulse time, Low Channel, 3DH3

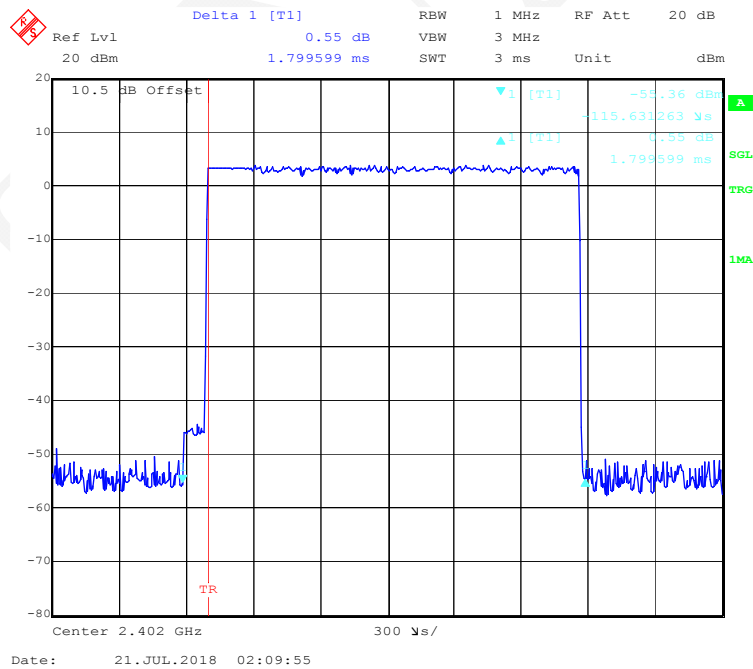


EDR (8DPSK): Pulse time, Middle Channel, 3DH3

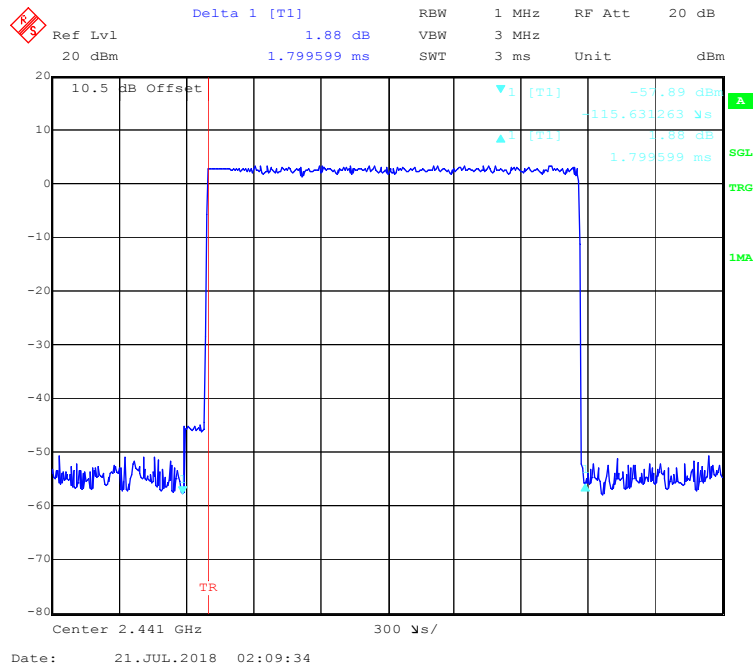


EDR (8DPSK): Pulse time, High Channel, 3DH3

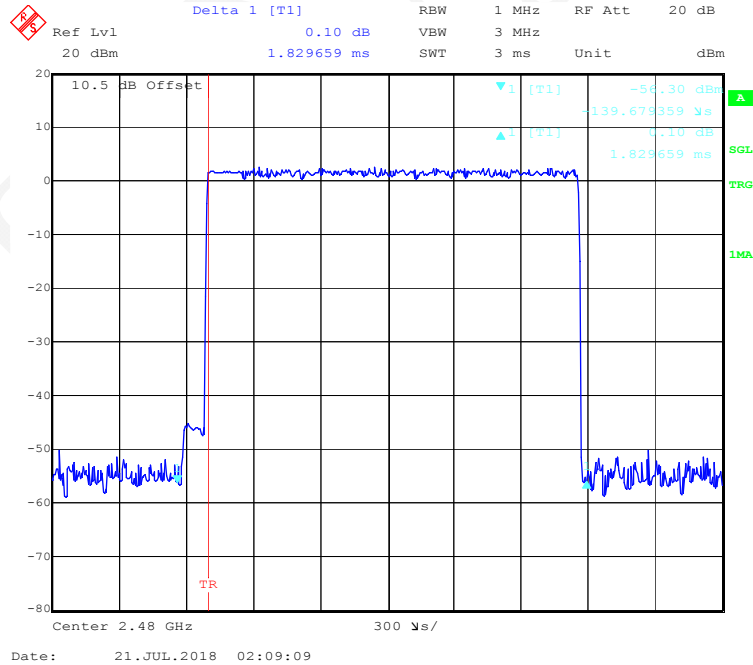


EDR (8DPSK): Pulse time, Low Channel, 3DH5

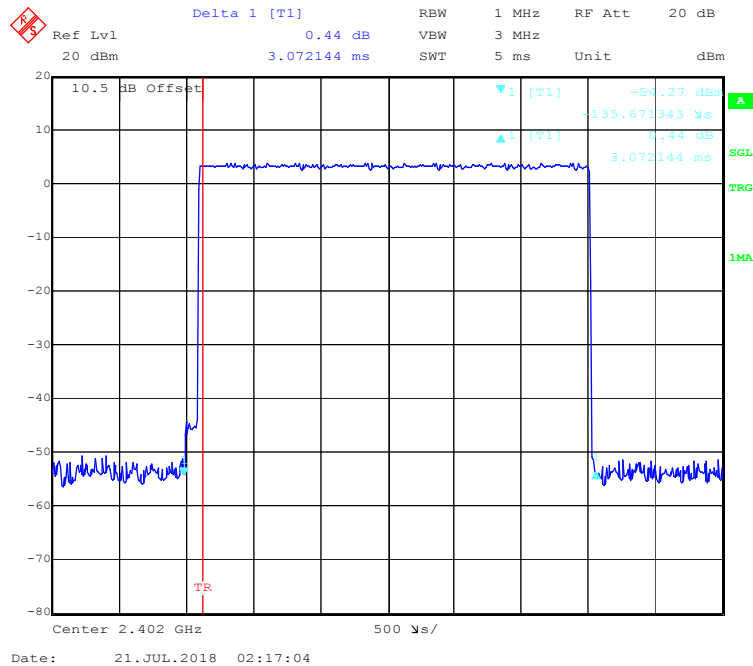

EDR (8DPSK): Pulse time, Middle Channel, 3DH5

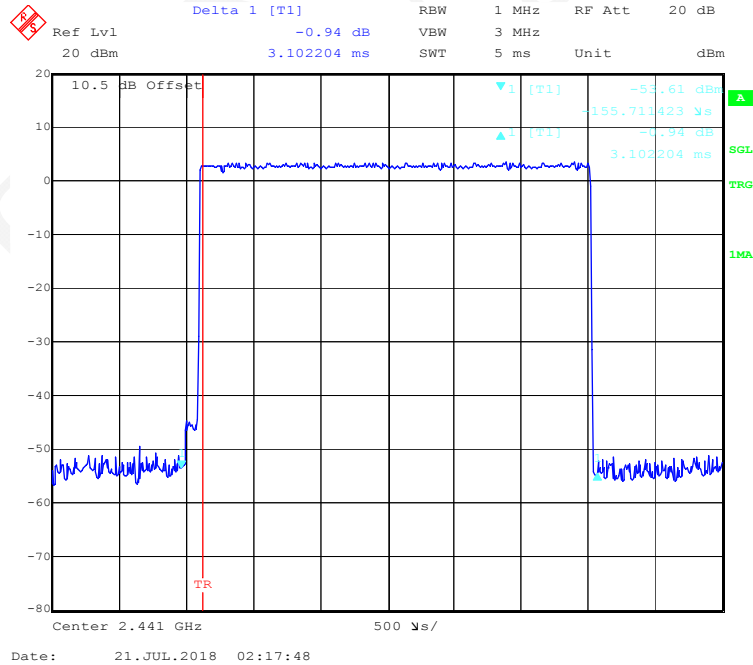

EDR (8DPSK): Pulse time, High Channel, 3DH5

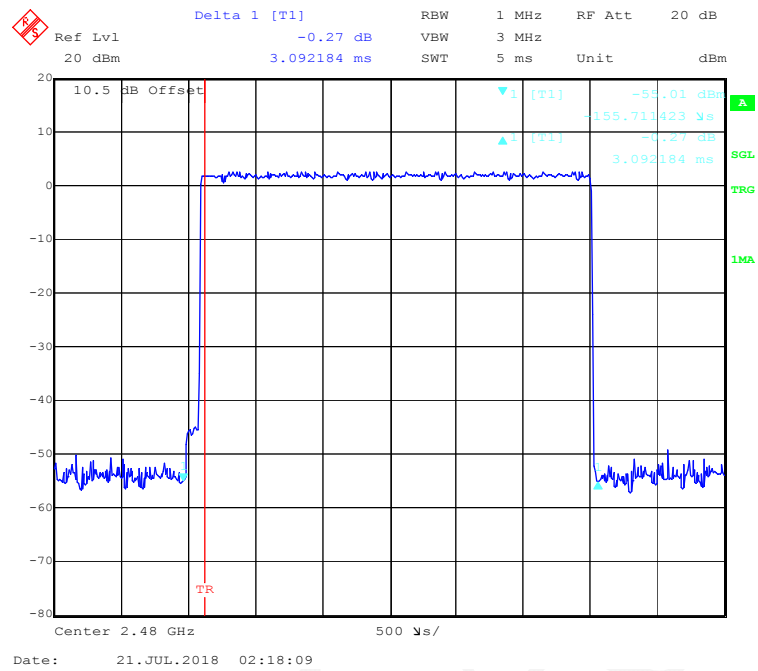

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

- a. Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW $\geq$ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b. Allow trace to stabilize.
- c. Use the marker-to-peak function to set the marker to the peak of the emission.
- d. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e. A plot of the test results and setup description shall be included in the test report.

Test Data

Environmental Conditions


Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.2 kPa

The testing was performed by Stone Zhang on 2018-07-20 to 2018-07-21.


EUT operation mode: Transmitting

Test Result: Compliance.


Mode	Frequency (MHz)	Output Power		Limit (mW)
		(dBm)	(mW)	
BDR (GFSK)	2402	4.53	2.84	≤ 1000
	2441	4.24	2.65	≤ 1000
	2480	3.67	2.33	≤ 1000
EDR ($\pi/4$-DQPSK)	2402	3.87	2.44	≤ 125
	2441	3.24	2.11	≤ 125
	2480	2.50	1.78	≤ 125
EDR (8DPSK)	2402	4.00	2.51	≤ 125
	2441	3.49	2.23	≤ 125
	2480	2.75	1.88	≤ 125

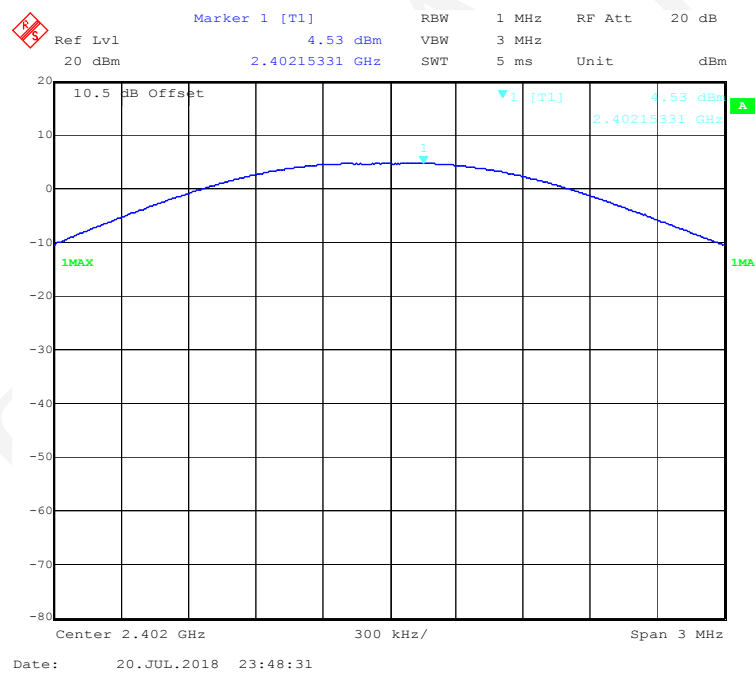BDR (GFSK): 2402MHz


BDR (GFSK): 2441MHz

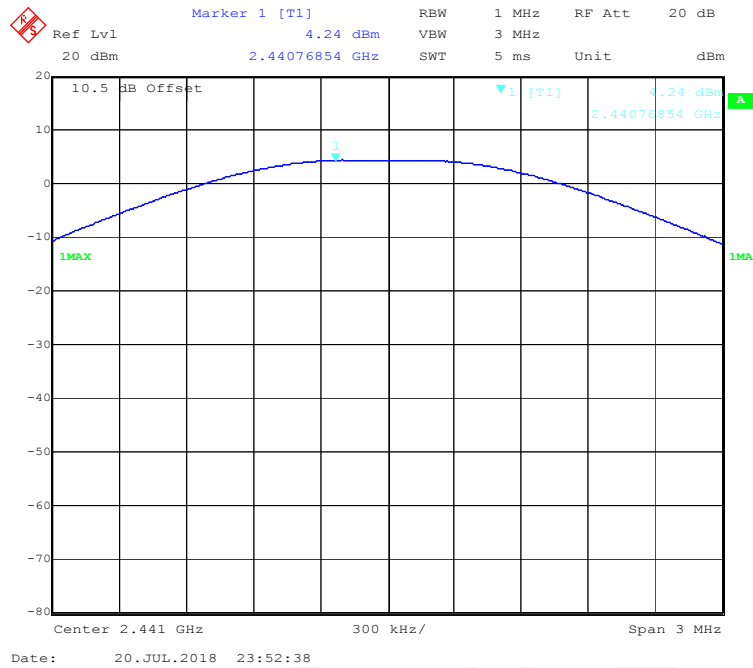


BDR (GFSK): 2480MHz

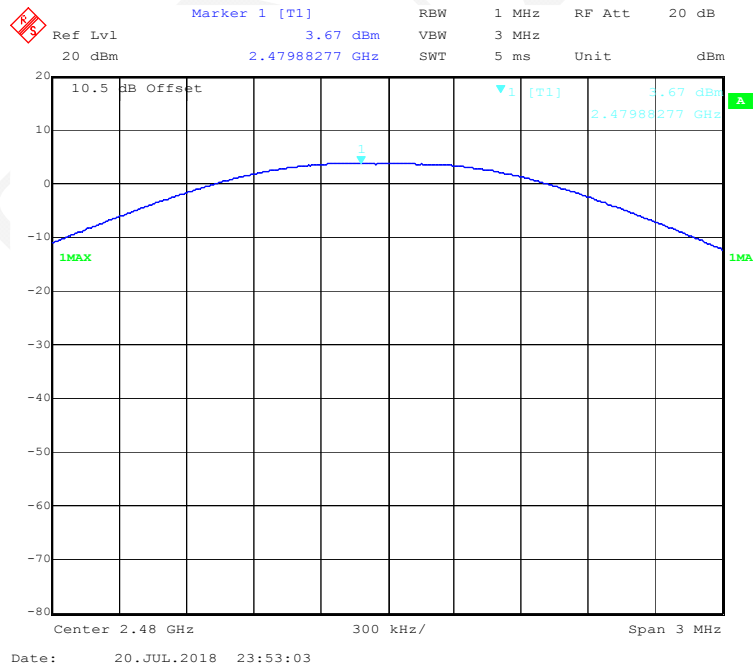


EDR($\pi/4$ -DQPSK): 2402MHz

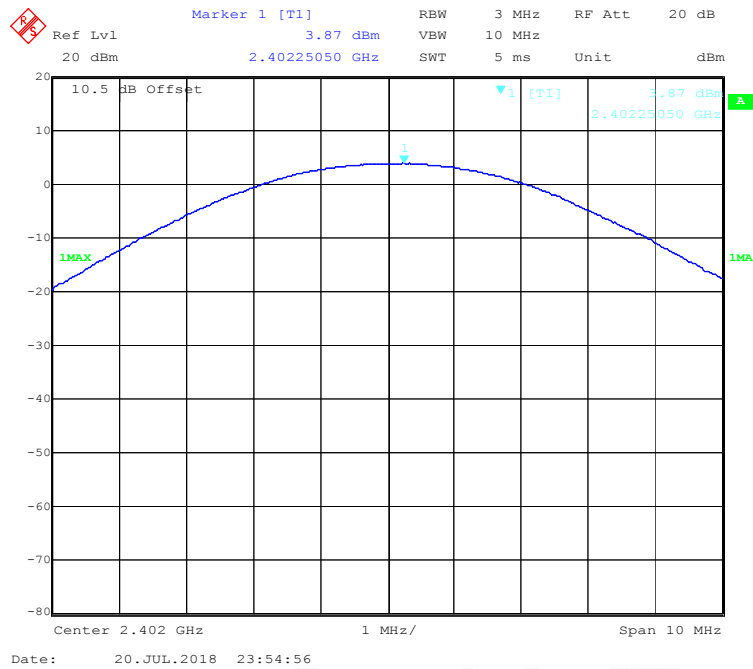


EDR($\pi/4$ -DQPSK): 2441MHz

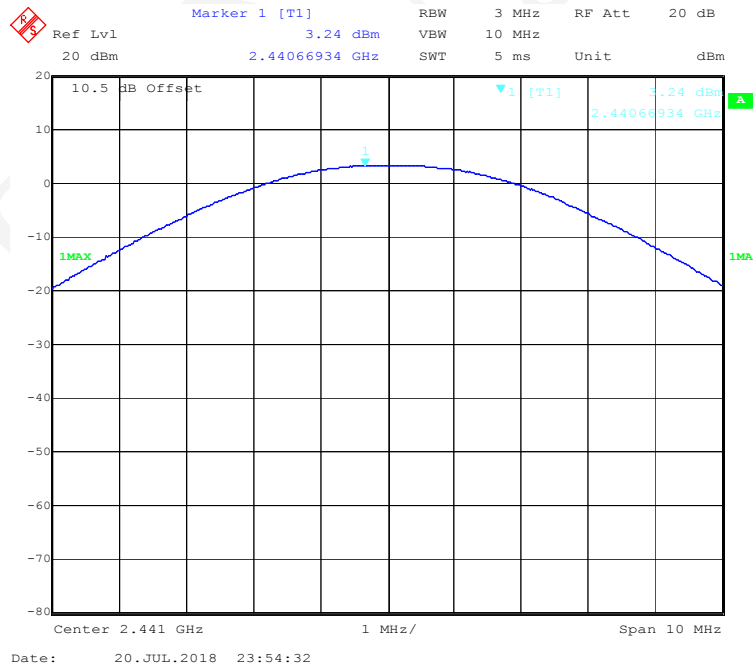


EDR($\pi/4$ -DQPSK): 2480MHz

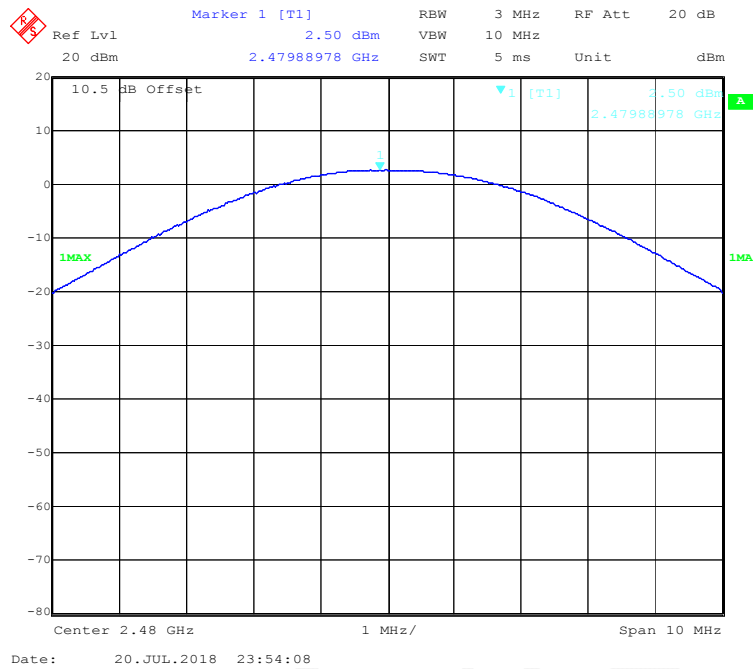


EDR(8DPSK): 2402MHz

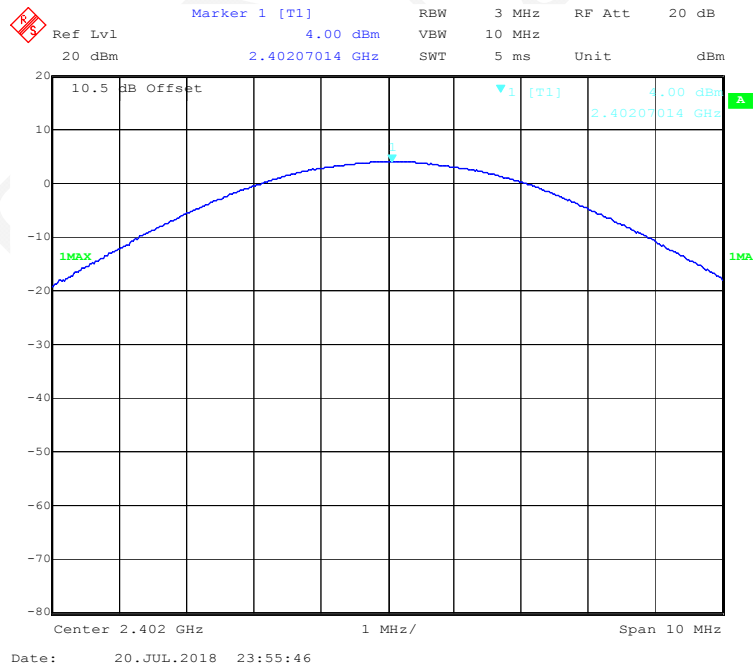

EDR(8DPSK): 2441MHz

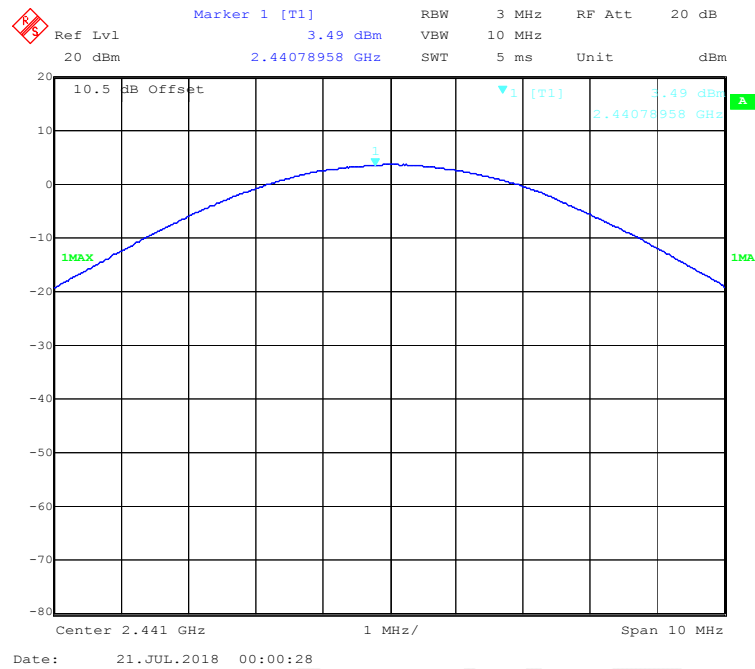

EDR(8DPSK): 2480MHz

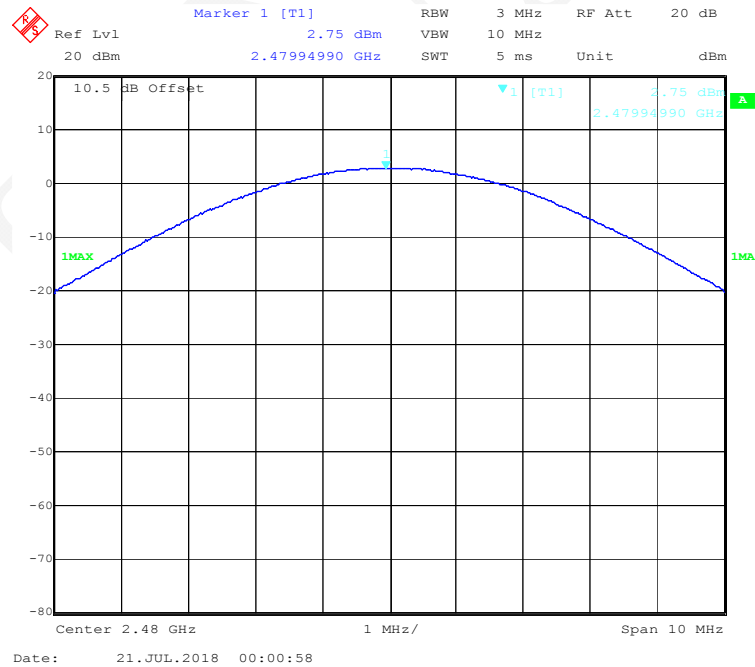

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa


The testing was performed by Stone Zhang on 2018-07-21.

EUT operation mode: Transmitting & Hopping


Test Result: Compliance.



Band Edge

BDR (GFSK): Left Side

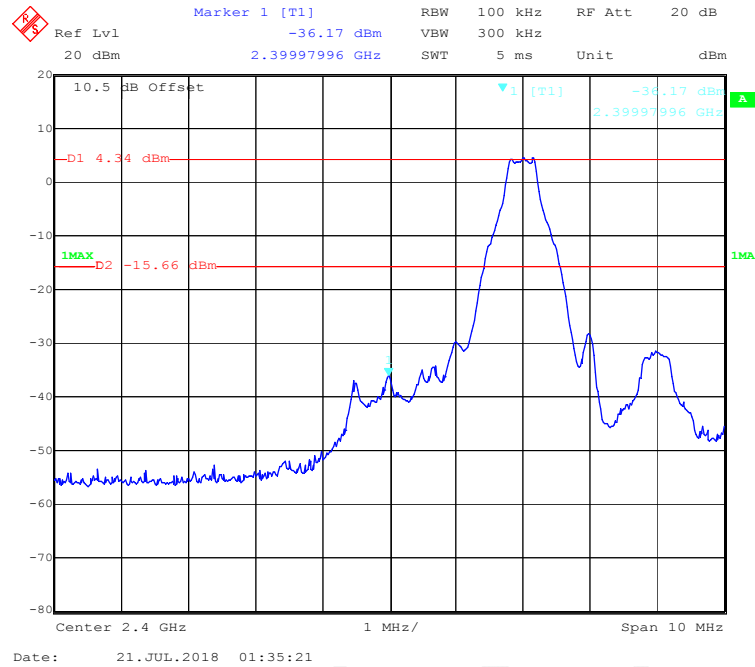


BDR (GFSK): Right Side

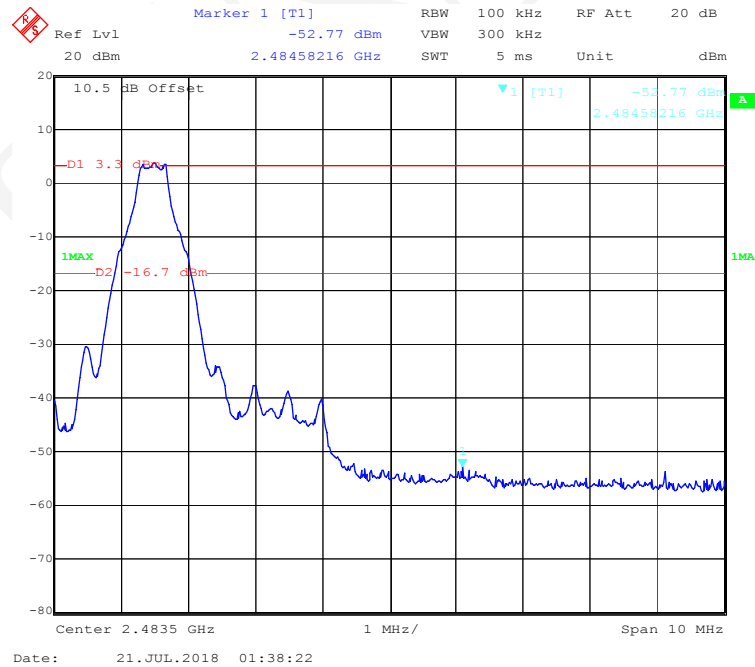


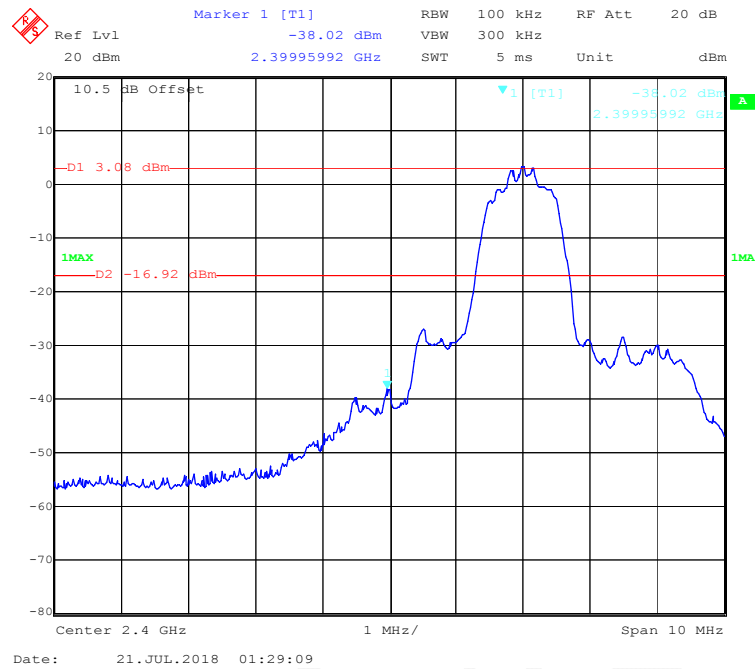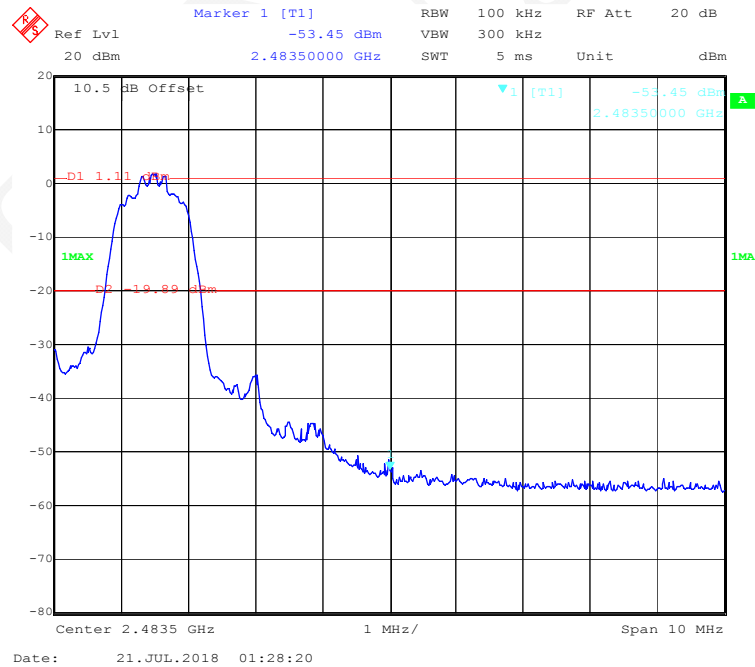EDR ($\pi/4$ -DQPSK): Left Side**EDR ($\pi/4$ -DQPSK): Right Side**


EDR (8DPSK): Left Side

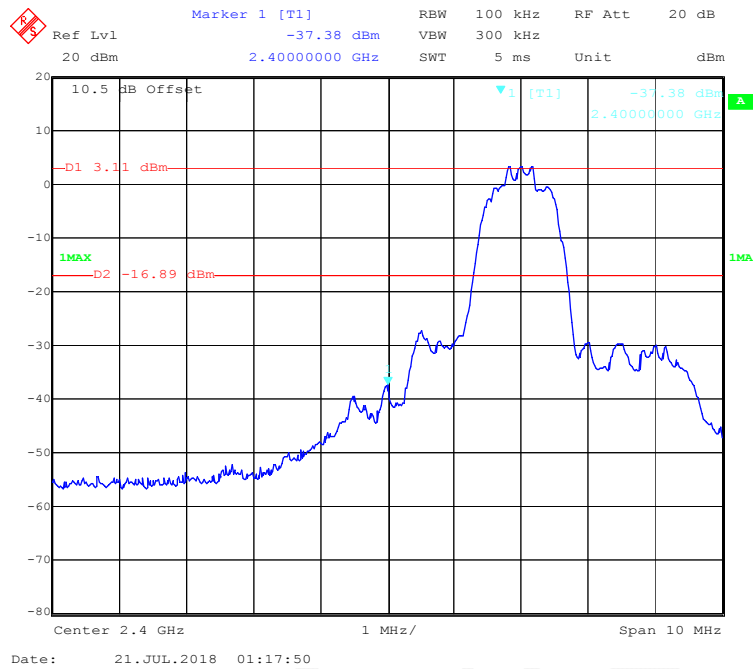


EDR (8DPSK): Right Side

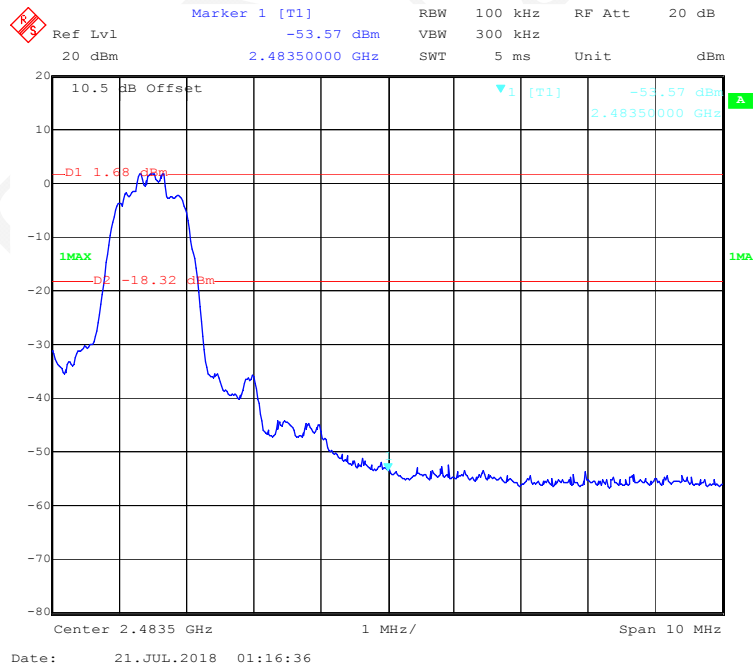


BDR (GFSK): Left Side - Hopping

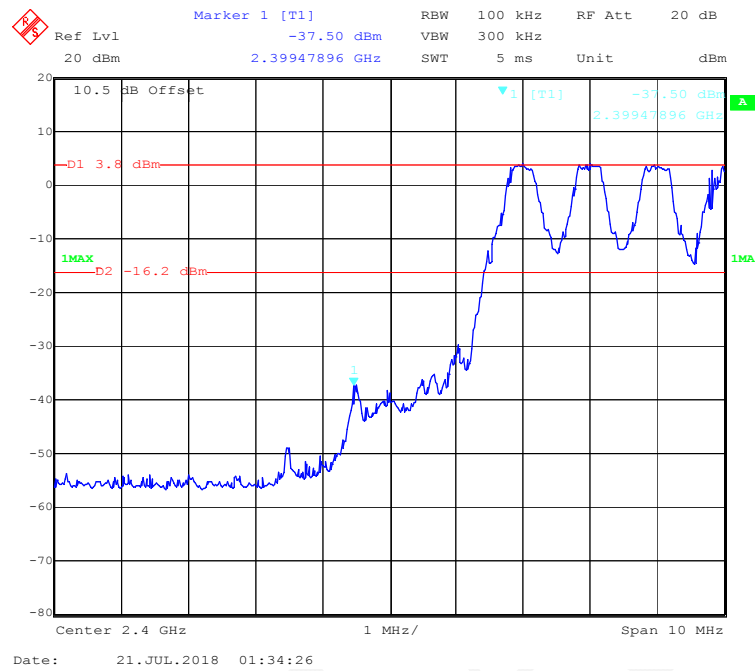


BDR (GFSK): Right Side - Hopping

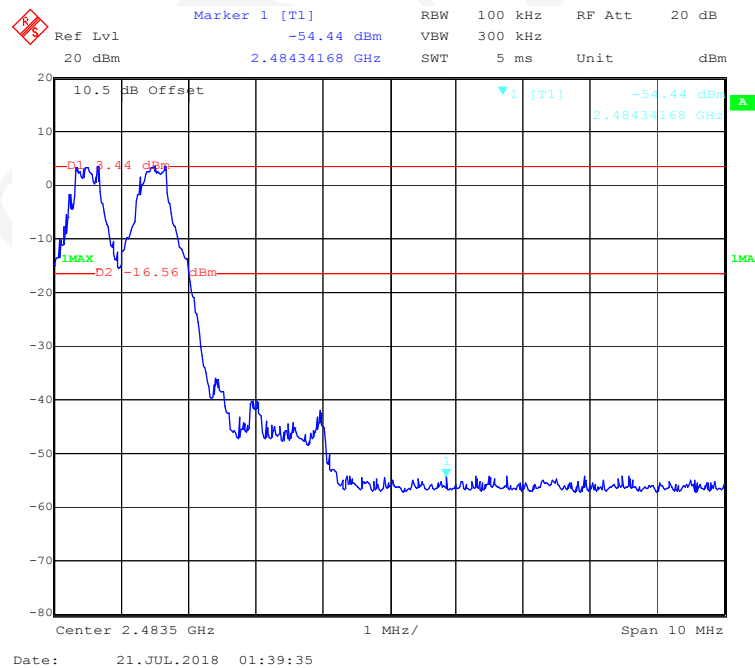


EDR ($\pi/4$ -DQPSK): Left Side - Hopping

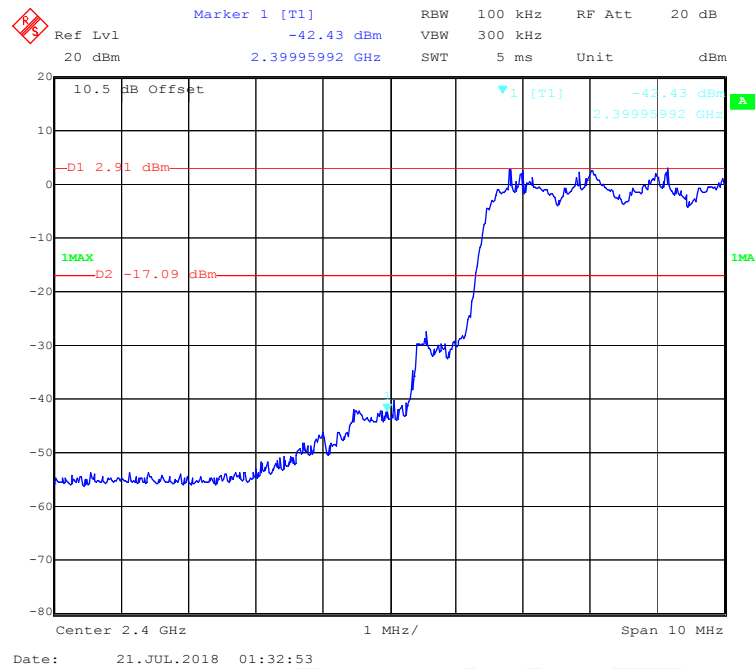


EDR ($\pi/4$ -DQPSK): Right Side - Hopping

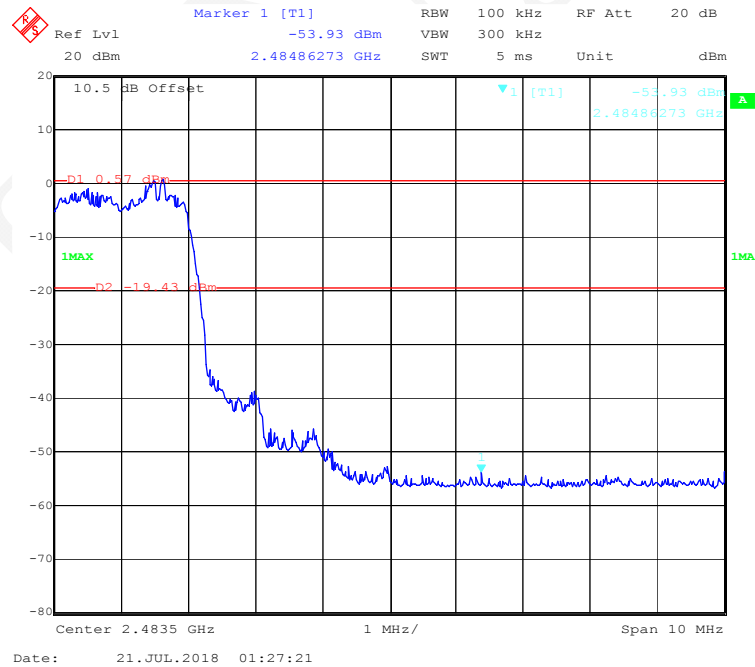

EDR (8DPSK): Left Side - Hopping

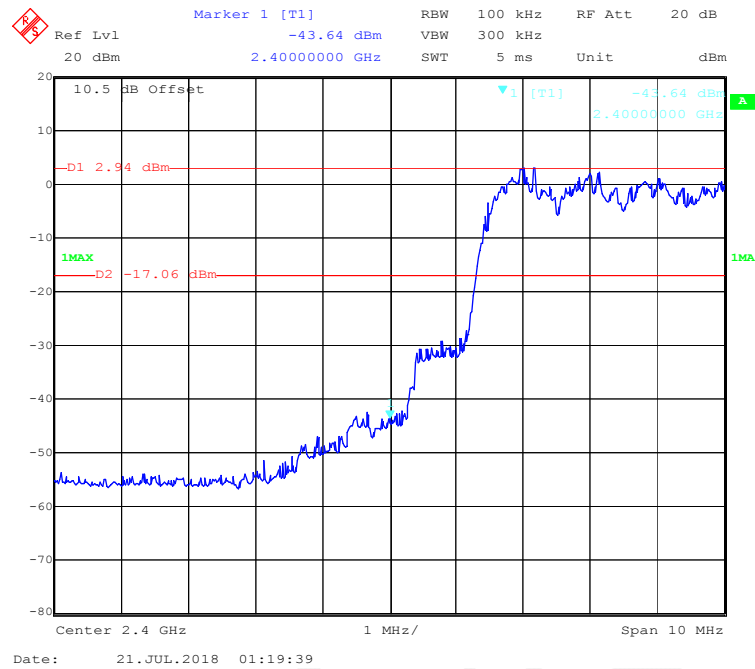

EDR (8DPSK): Right Side - Hopping

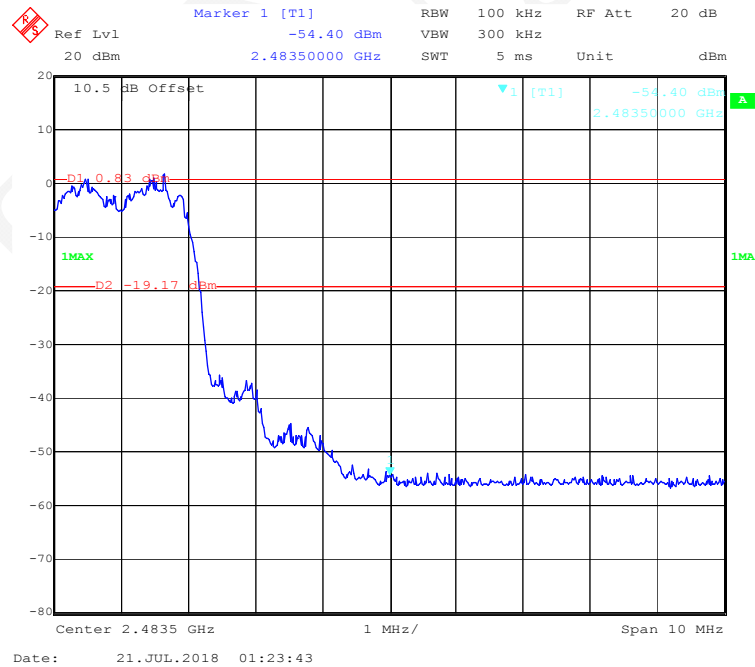

***** END OF REPORT *****