

Shenzhen Chuangwei-RGB
Electronics Co., Ltd.

TEST REPORT

SCOPE OF WORK

FCC TESTING-NTUD-U8

REPORT NUMBER

190510033SZN-003

ISSUE DATE

29 May 2019

[REVISED DATE]

[-----]

PAGES

160

DOCUMENT CONTROL NUMBER

FCC ID 247_b

© 2017 INTERTEK



Intertek Report No.: 190510033SZN-003

Shenzhen Chuangwei-RGB Electronics Co., Ltd.Application
For
Certification**FCC ID: 2ANM3NTUDU8****WIFI Module****Model: NTUD-U8****Brand Name: Skyworth****2.4GHz Transceiver**

Report No.: 190510033SZN-003

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-17]

Prepared and Checked by:**Approved by:****Ryan Chen**
Engineer

Kidd Yang
Technical Supervisor
Date: 29 May 2019

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen.

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

LIST OF EXHIBITS

INTRODUCTION

<i>EXHIBIT 1:</i>	Summary of Tests
<i>EXHIBIT 2:</i>	General Description
<i>EXHIBIT 3:</i>	System Test Configuration
<i>EXHIBIT 4:</i>	Measurement Results
<i>EXHIBIT 5:</i>	Equipment Photographs
<i>EXHIBIT 6:</i>	Product Labeling
<i>EXHIBIT 7:</i>	Technical Specifications
<i>EXHIBIT 8:</i>	Instruction Manual
<i>EXHIBIT 9:</i>	Confidentiality Request
<i>EXHIBIT 10:</i>	Miscellaneous Information
<i>EXHIBIT 11:</i>	Test Equipment List

MEASUREMENT/TECHNICAL REPORT

Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Model: NTUD-U8

FCC ID: 2ANM3NTUDU8

This report concerns (check one) Original Grant ☒ Class II Change ☐

Equipment Type: DTS - Part 15 Digital Transmission Systems (Wi-Fi transmitter portion)

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes ☐ No ☒

If yes, defer until :
date

Company Name agrees to notify the Commission by:
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes ☐ No ☒

If no, assumed Part 15, Subpart C for intentional radiator - the new 47 CFR [10-1-17] Edition] provision.

Report prepared by:

Ryan Chen
Intertek Testing Services Shenzhen Ltd. Longhua Branch
101, 201, Building B, No. 308 Wuhe Avenue,
Zhangkengjing Community, GuanHu Subdistrict,
LongHua District, ShenZhen.
Tel: (86 755) 8614 0682 Fax: (86 755) 8601 6751

Table of Contents

1.0	<u>Summary of Test results</u>	7
2.0	<u>General Description</u>	9
2.1	Product Description	9
2.2	Related Submittal(s) Grants	9
2.3	Test Methodology	10
2.4	Test Facility	10
3.0	<u>System Test Configuration</u>	12
3.1	Justification	12
3.2	EUT Exercising Software	12
3.3	Special Accessories	13
3.4	Measurement Uncertainty	13
3.5	Equipment Modification	13
3.6	Support Equipment List and Description	13
4.0	<u>Measurement Results</u>	15
4.1	Maximum Conducted Output Power at Antenna Terminals	15
4.2	Minimum 6 dB RF Bandwidth	18
4.3	Maximum Power Density Reading	36
4.4	Out of Band Conducted Emissions	57
4.5	Out of Band Radiated Emissions	124
4.6	Transmitter Radiated Emissions in Restricted Bands	125
4.7	Field Strength Calculation	127
4.8	Radiated Spurious Emission	128
4.9	Conducted Emission at Mains Terminals	142
4.10	Radiated Emissions from Digital Section of Transceiver	145
4.11	Transmitter Duty Cycle Calculation and Measurements	146
5.0	<u>Equipment Photographs</u>	148
6.0	<u>Product Labelling</u>	150
7.0	<u>Technical Specifications</u>	152
8.0	<u>Instruction Manual</u>	154
9.0	<u>Confidentiality Request</u>	156
10.0	<u>Discussion of Pulse Desensitization</u>	158
11.0	<u>Test Equipment List</u>	160

List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

EXHIBIT 1

SUMMARY OF TEST RESULTS

1.0 Summary of Test results

WIFI Module

Model: NTUD-U8

FCC ID: 2ANM3NTUDU8

TEST ITEM	REFERENCE	RESULTS
Max. Output power	15.247(b)(3)	Pass
6 dB Bandwidth	15.247(a)(2)	Pass
Max. Power Density	15.247(e)	Pass
Out of Band Antenna Conducted Emission	15.247(d)	Pass
Radiated Emission in Restricted Bands	15.247(d)	Pass
AC Conducted Emission	15.207	Pass
Antenna Requirement	15.203	Pass (See Notes)

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

EXHIBIT 2

GENERAL DESCRIPTION

2.0 General Description

2.1 Product Description

The Equipment Under Test (EUT) is a WIFI Module with 2 Antennas operating at 2412-2462MHz for 802.11b/g/n-HT20, 11 channels with 5MHz channel spacing and 2422-2452MHz for 802.11n-HT40, 7 channels with 5MHz channel spacing. The EUT can be powered by DC 3.3V. For more detailed features description, please refer to the user's manual.

Antenna Type: Integral antenna

Type of Modulation: BPSK, QPSK, 16QAM, 64QAM, CCK, DQPSK, DBPSK, DSSS, OFDM.

Antenna Gain: 3.1 dBi Max for 2.4G WIFI

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

2.2 Related Submittal(s) Grants

This is an application for certification of DTS- Part 15 Digital Transmission Systems (2.4GHz Wi-Fi transmitter portion).

For the Bluetooth EDR mode was tested and demonstrated in report 190510033SZN-001.

For the Bluetooth BLE mode was tested and demonstrated in report 190510033SZN-002.

For other digital function was tested and demonstrated in report 190416023SZN-004.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10: 2013 and KDB 558074 D01 v05r02. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).

EXHIBIT 3

SYSTEM TEST CONFIGURATION

3.0 System Test Configuration

3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables were manipulated to produce worst case emissions. The EUT was powered by USB port through laptop with 120V/60Hz input during the test, only the worst data was reported in this report.

For maximizing emissions, the EUT was rotated through 360°, the EUT was placed on the styrene turntable with 0.8m up to 1GHz and 1.5 m above 1GHz. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

The rear of unit was flushed with the rear of the table.

Radiated emission measurement were performed the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The worst case configuration is used in all specified testing.

The parameters of test software setting:

During the test, Channel and power controlling software provided by the applicant was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the application and is going to be fixed on the firmware of the end product.

3.3 Special Accessories

N/A.

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance – Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

3.5 Equipment Modification

Any modifications installed previous to testing by Shenzhen Chuangwei-RGB Electronics Co., Ltd. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Longhua Branch.

3.6 Support Equipment List and Description

This product was tested in the following configuration:

Refer List:

Description	Manufacturer	Model No.
Laptop (Provided by Intertek)	DELL	Latitude 3480
Serial Cable (Provided by Chuangwei)	N/A	Unshielded, Length 15cm
USB Cable (Provided by Intertek)	N/A	Unshielded, Length 1.3m
RJ45 Cable (Provided by Intertek)	N/A	Unshielded, Length 4.5m
Hard Disk (Provided by Intertek)	Smart.drive	HD-003
USB Serial Driver (Provided by Chuangwei)	N/A	N/A

EXHIBIT 4

MEASUREMENT RESULTS

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 18 May 2019

Model: NTUD-U8

4.0 Measurement Results

4.1 Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(3):

The antenna power of the EUT was connected to the input of a broadband peak RF power meter. The power meter has a video bandwidth that is greater than DTS bandwidth and utilize a fast-responding diode detector. Power was read directly at the EUT antenna terminals with cable loss added.

For antennas with gains of 6dBi or less, So maximum allowed Transmitter output is 30dBm (1000mW). The 2.4G band Ant gain is: 3.1 dBi. In MIMO (2Tx), Ant1 + Ant2 Directional gain = $G_{ANT} + 10\log(N)$ dBi = $3.1 + 10\log(2) = 6.1\text{dBi} > 6\text{dBi}$, so the Power limit is 30.0dBm (1W) for SISO mode, and 29.9dBm for MIMO mode.

SISO Mode Ant 1:

IEEE 802.11b (Antenna Gain = 3.1dBi) (CCK, 1Mbps)		
Frequency (MHz)	Output in dBm (Peak reading)	Output in mWatt
Low Channel: 2412	14.60	28.8
Middle Channel: 2437	14.65	29.2
High Channel: 2462	14.56	28.6

IEEE 802.11g (Antenna Gain = 3.1dBi) (16QAM, 6Mbps)		
Frequency (MHz)	Output in dBm (Peak reading)	Output in mWatt
Low Channel: 2412	17.58	57.3
Middle Channel: 2437	17.71	59.0
High Channel: 2462	17.72	59.2

IEEE 802.11HT20 (Antenna Gain = 3.1dBi) (16QAM, 6.5Mbps)		
Frequency (MHz)	Output in dBm (Peak reading)	Output in mWatt
Low Channel: 2412	17.45	55.6
Middle Channel: 2437	17.50	56.2
High Channel: 2462	17.49	56.1

IEEE 802.11HT40 (Antenna Gain = 3.1dBi) (64QAM, 13.5Mbps)		
Frequency (MHz)	Output in dBm (Peak reading)	Output in mWatt
Low Channel: 2422	17.26	53.2
Middle Channel: 2437	17.35	54.3
High Channel: 2452	17.39	54.8

SISO Mode Ant 2:

IEEE 802.11b (Antenna Gain = 3.1dBi) (CCK, 1Mbps)		
Frequency (MHz)	Output in dBm (Peak reading)	Output in mWatt
Low Channel: 2412	16.38	43.5
Middle Channel: 2437	16.35	43.2
High Channel: 2462	16.38	43.5

IEEE 802.11g (Antenna Gain = 3.1dBi) (16QAM, 6Mbps)		
Frequency (MHz)	Output in dBm (Peak reading)	Output in mWatt
Low Channel: 2412	18.95	78.5
Middle Channel: 2437	19.19	83.0
High Channel: 2462	19.29	84.9

IEEE 802.11HT20 (Antenna Gain = 3.1dBi) (16QAM, 6.5Mbps)		
Frequency (MHz)	Output in dBm (Peak reading)	Output in mWatt
Low Channel: 2412	18.73	74.6
Middle Channel: 2437	18.95	78.5
High Channel: 2462	19.16	82.4

IEEE 802.11HT40 (Antenna Gain = 3.1dBi) (64QAM, 13.5Mbps)		
Frequency (MHz)	Output in dBm (Peak reading)	Output in mWatt
Low Channel: 2422	18.68	73.8
Middle Channel: 2437	18.86	76.9
High Channel: 2452	18.95	78.5

MIMO Mode

IEEE 802.11n-HT20 (MIMO, Antenna Gain = 6.1dBi) (16QAM, 6.5Mbps)				
Frequency (MHz)	Output in dBm (Peak reading)			Worst Total Output in mWatt
	Ant 1	Ant 2	Total	
Low Channel: 2412	17.29	18.69	21.05	127.5
Middle Channel: 2437	17.30	18.85	21.15	130.4
High Channel: 2462	17.38	19.02	21.29	134.5

IEEE 802.11n-HT40 (MIMO, Antenna Gain = 6.1dBi) (64QAM, 13.5Mbps)				
Frequency (MHz)	Output in dBm (Peak reading)			Worst Total Output in mWatt
	Ant 1	Ant 2	Total	
Low Channel: 2422	17.18	18.68	21.00	126.0
Middle Channel: 2437	17.24	18.79	21.09	128.5
High Channel: 2452	17.20	18.81	21.09	128.5

Cable loss: 0.5 dB External Attenuation: 0 dB

Cable loss, external attenuation has been included in OFFSET function

EUT max. output level = 21.29dBm

EUT max. radiated output level = 21.29dBm + 6.1dBi = 27.39dBm

For RF Exposure, the information is saved with filename: RF exposure.pdf.


Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.
Date of Test: 18 May 2019

Model: NTUD-U8

4.2 Minimum 6 dB RF Bandwidth, FCC Rule 15.247(a) (2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 KHz according to FCC KDB 558074 D01 v05r02. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

Block Diagram:

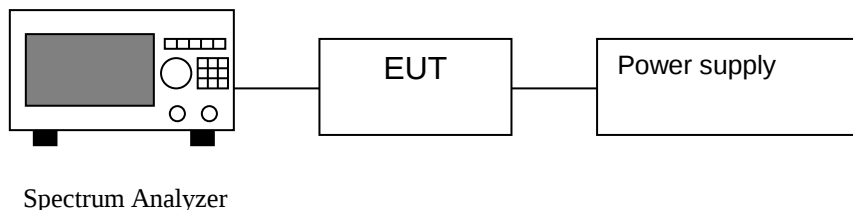

Limit: The 6 dB Bandwidth is at least 500 kHz.

SISO Mode, Ant1:

IEEE 802.11b (CCK, 1Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	9.12
2437	9.12
2462	9.55

IEEE 802.11g (16QAM, 6Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	15.11
2437	15.11
2462	15.11

IEEE 802.11n-HT20 (16QAM, 6.5Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	15.46
2437	15.46
2462	15.46

IEEE 802.11n-HT40 (64QAM, 13.5Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2422	35.17
2437	35.17
2452	35.25

SISO Mode, Ant2:

IEEE 802.11b (CCK, 1Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	9.03
2437	9.07
2462	9.07

IEEE 802.11g (16QAM, 6Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	15.33
2437	15.11
2462	15.11

IEEE 802.11n-HT20 (16QAM, 6.5Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	15.11
2437	15.11
2462	15.11

IEEE 802.11n-HT40 (64QAM, 13.5Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2422	35.17
2437	35.25
2452	35.17



MIMO Mode:


IEEE 802.11n-HT20 (16QAM, 6.5Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	15.11
2437	15.11
2462	15.11

IEEE 802.11n-HT40 (64QAM, 13.5Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2422	35.25
2437	35.25
2452	35.25


The test plots are attached as below.



SISO Mode, Ant1:
802.11b

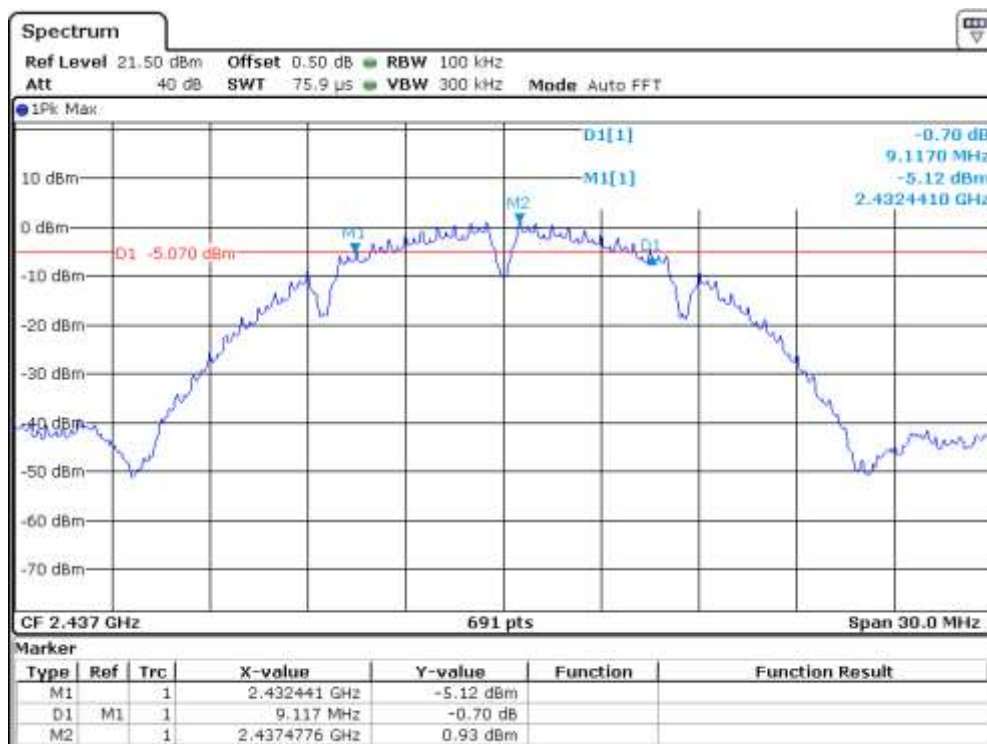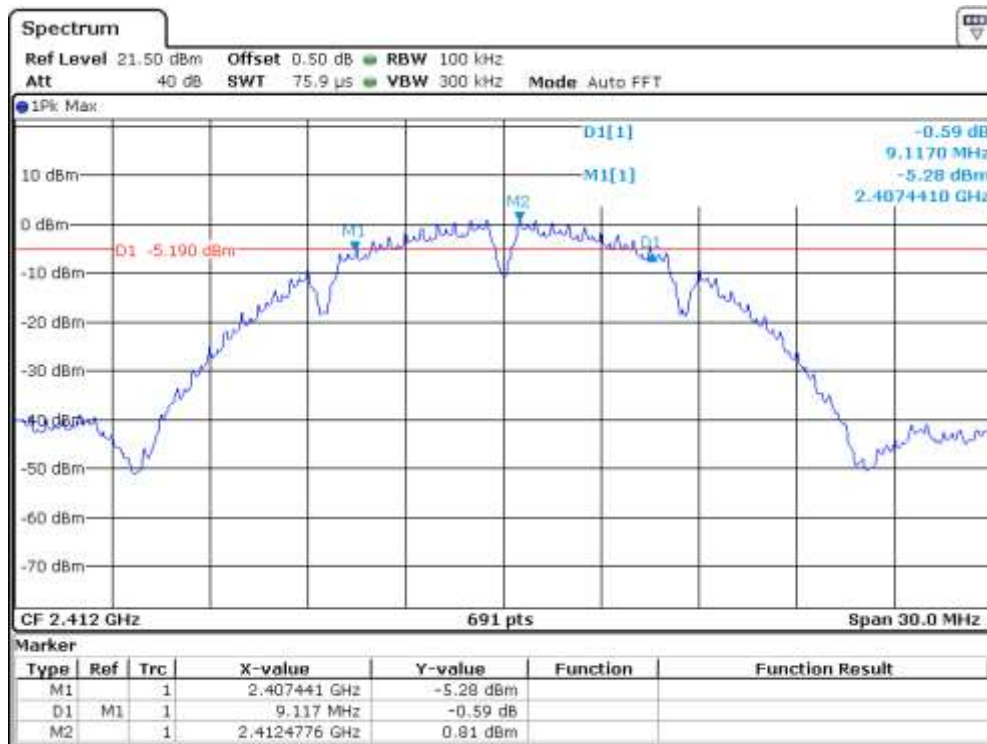


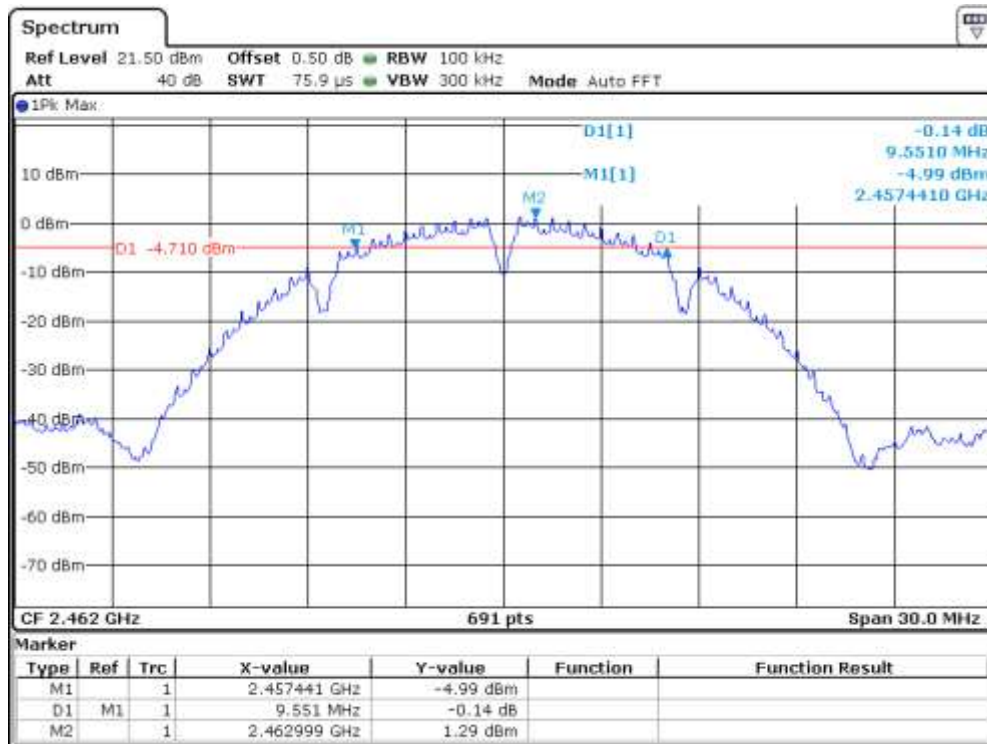



802.11g

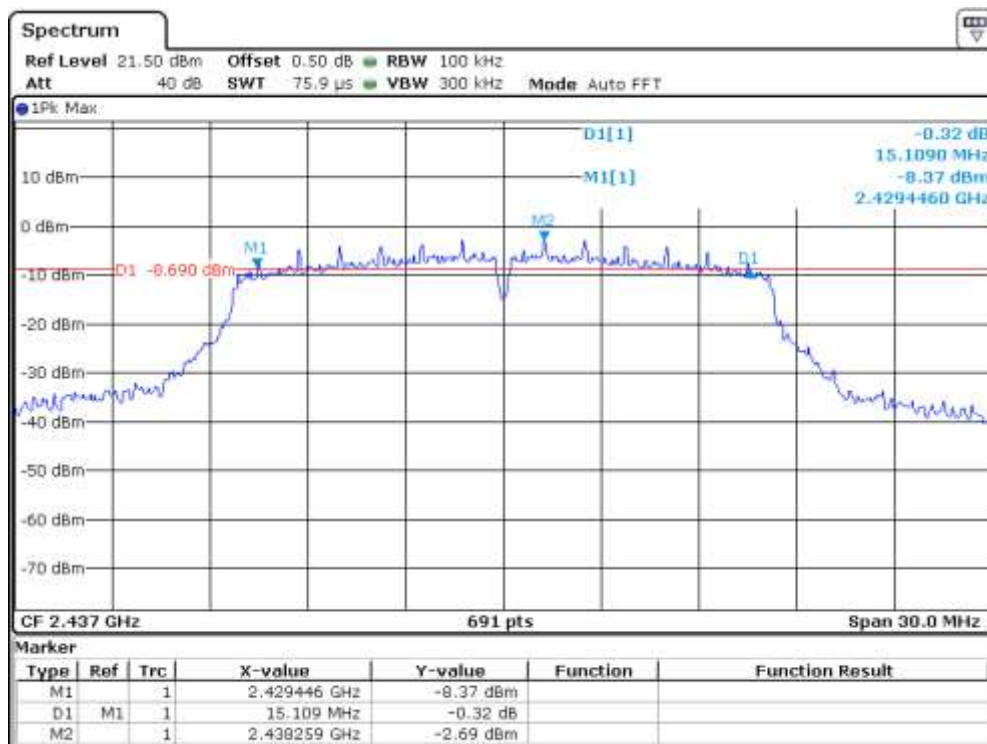

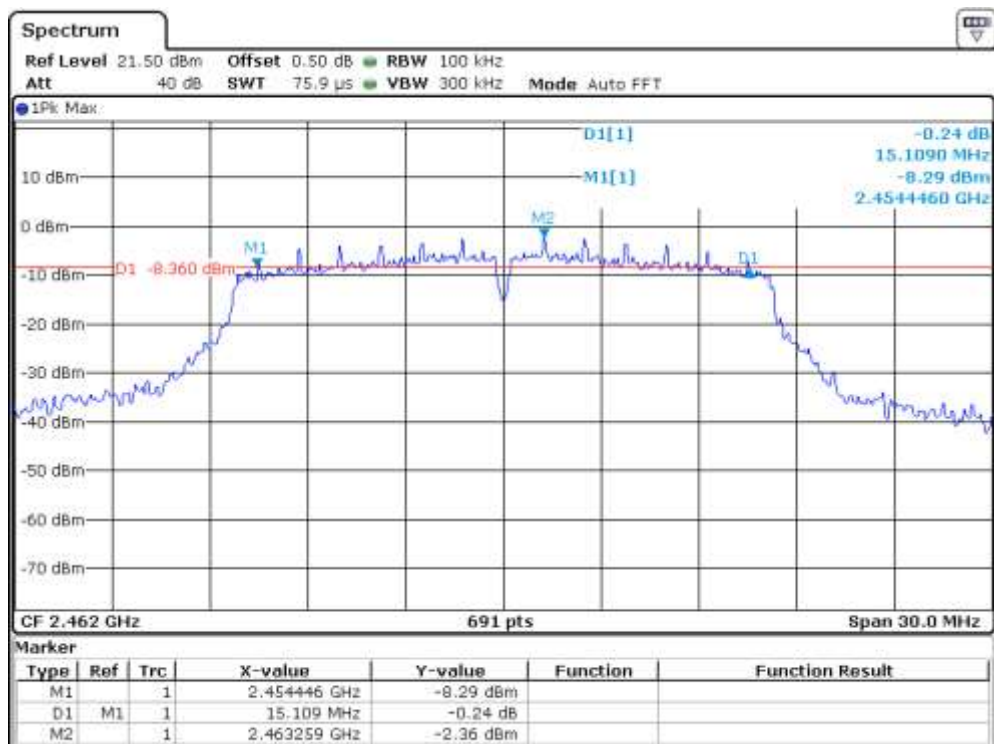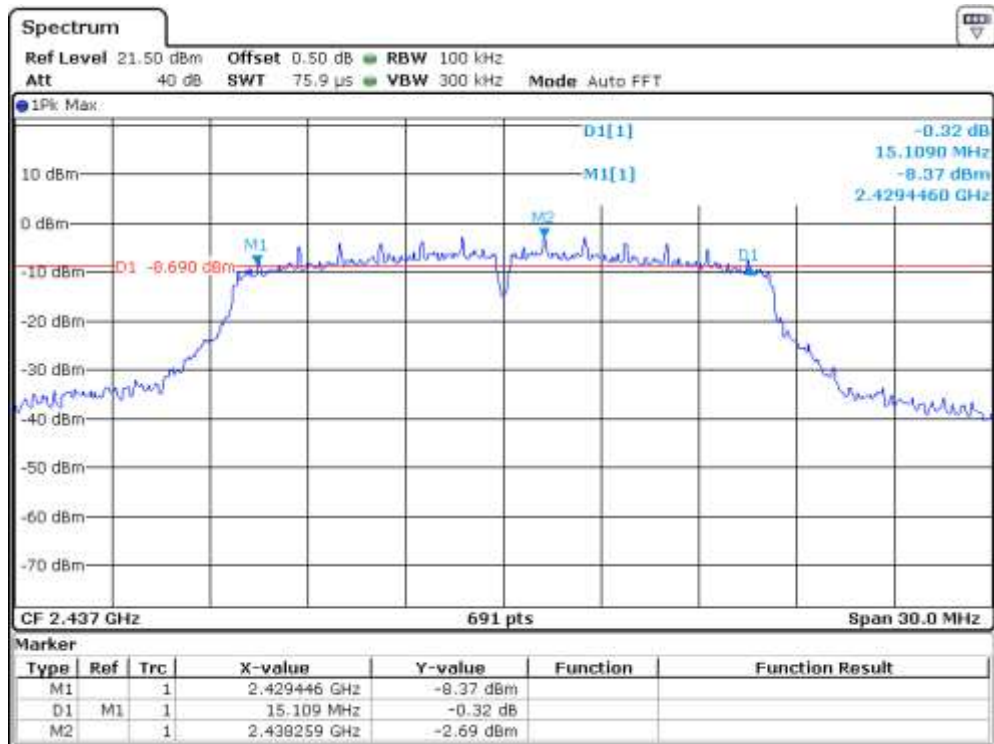




802.11n20

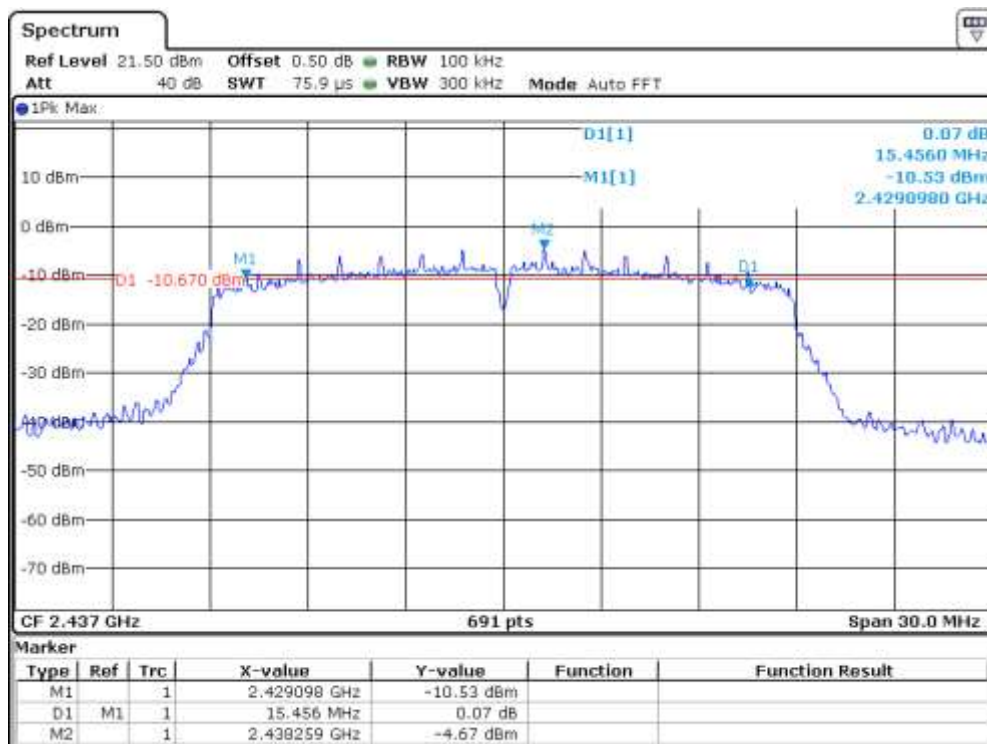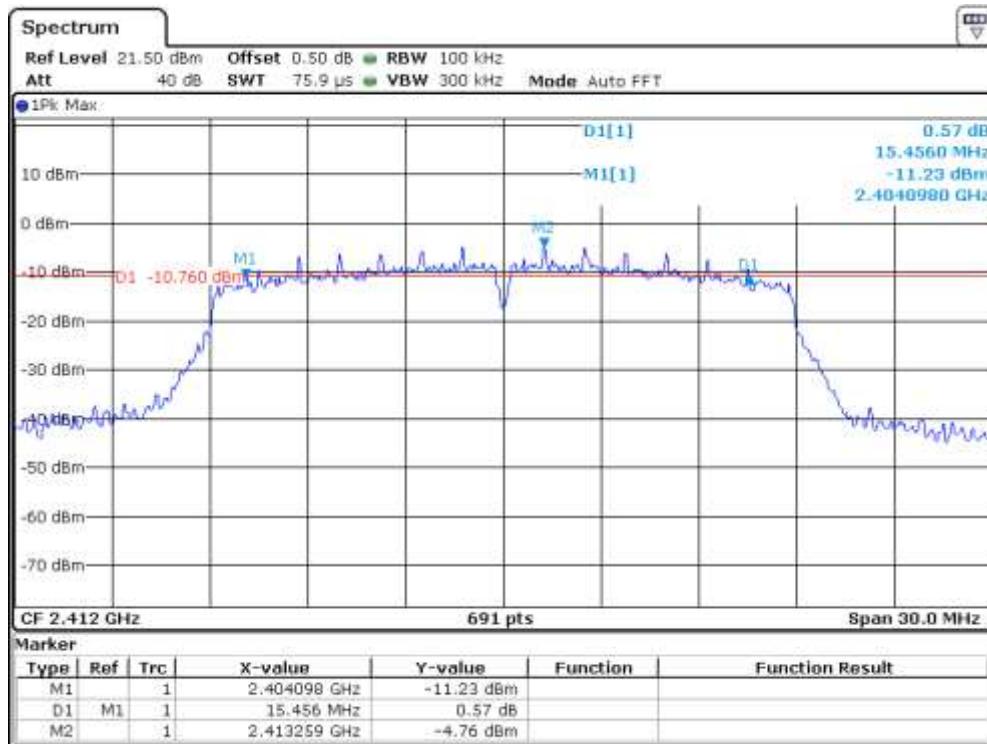


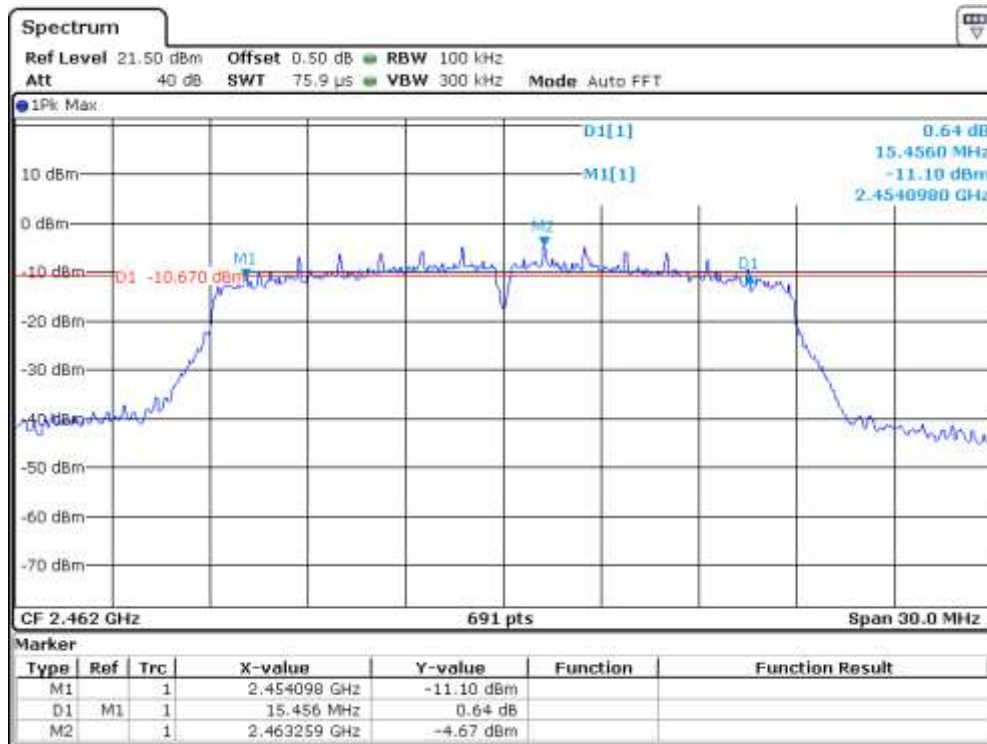



802.11 n40

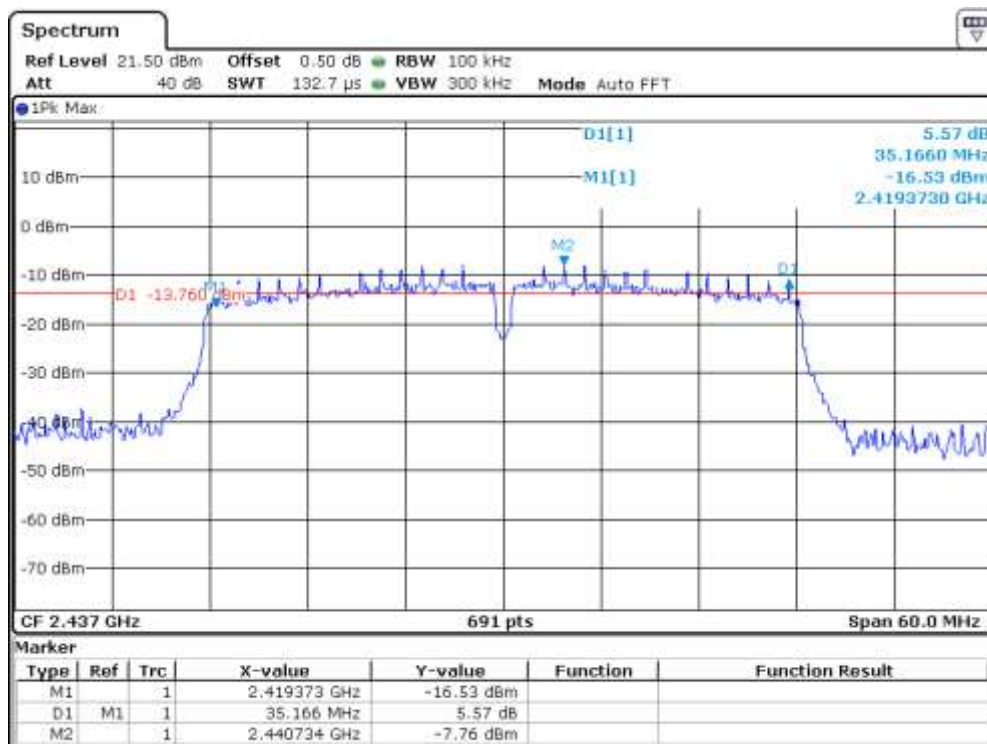

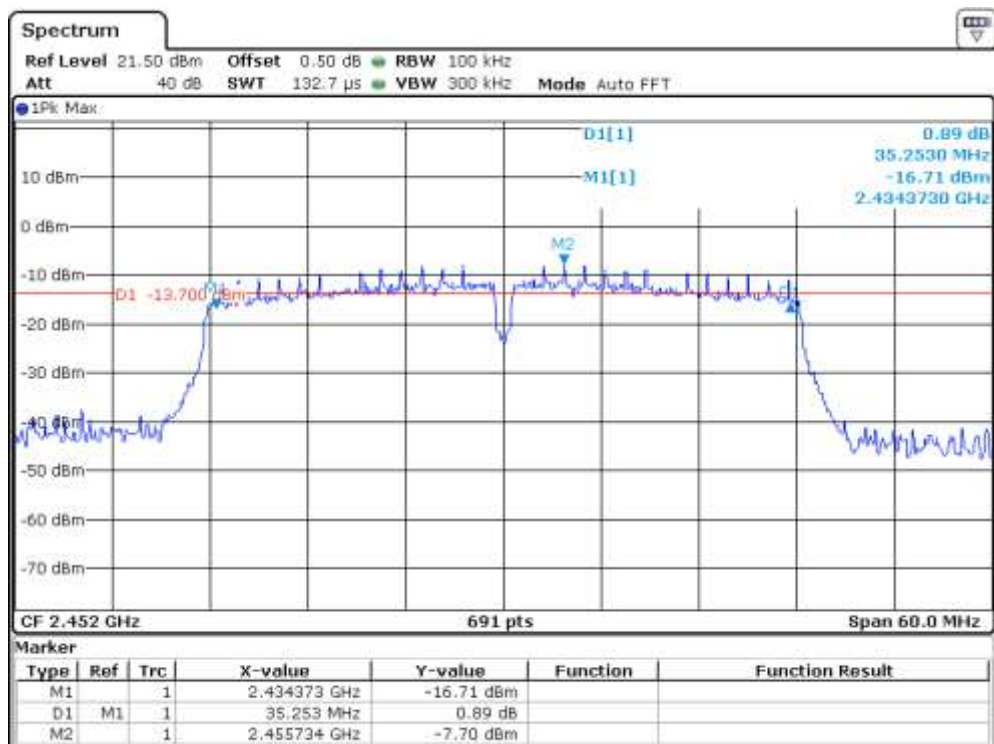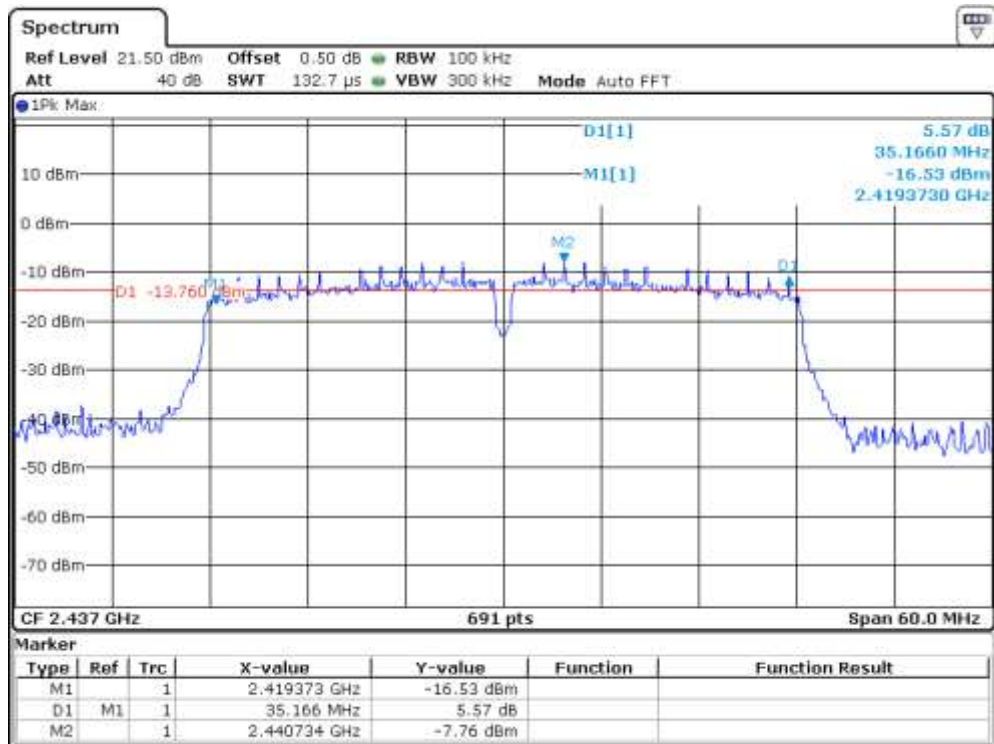




SISO Mode, Ant2:
802.11b

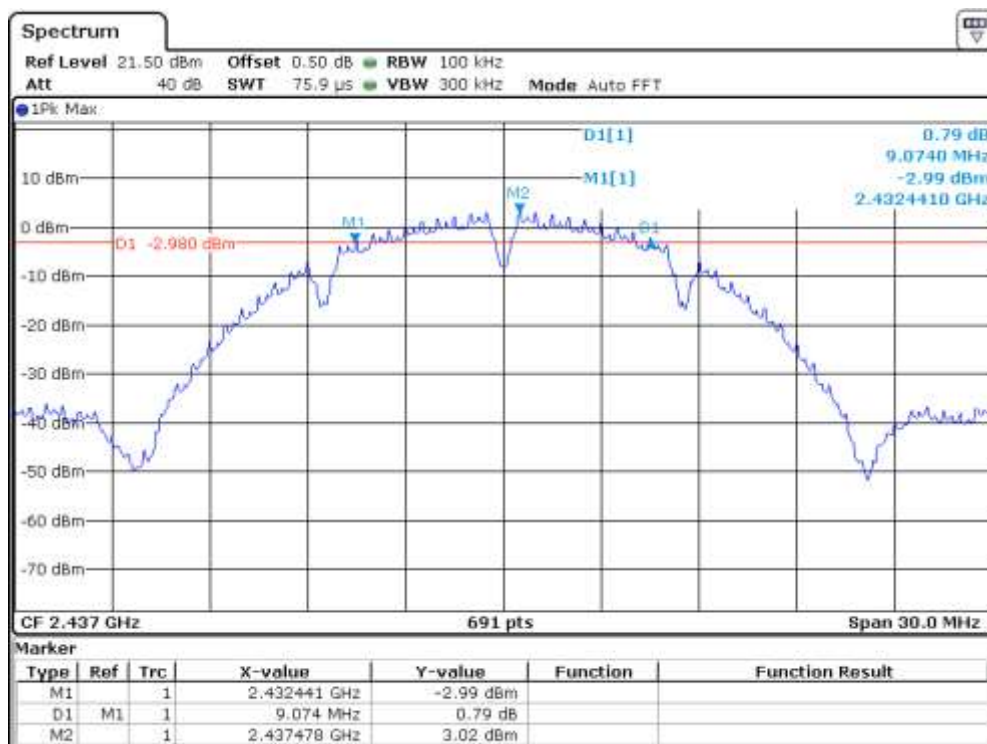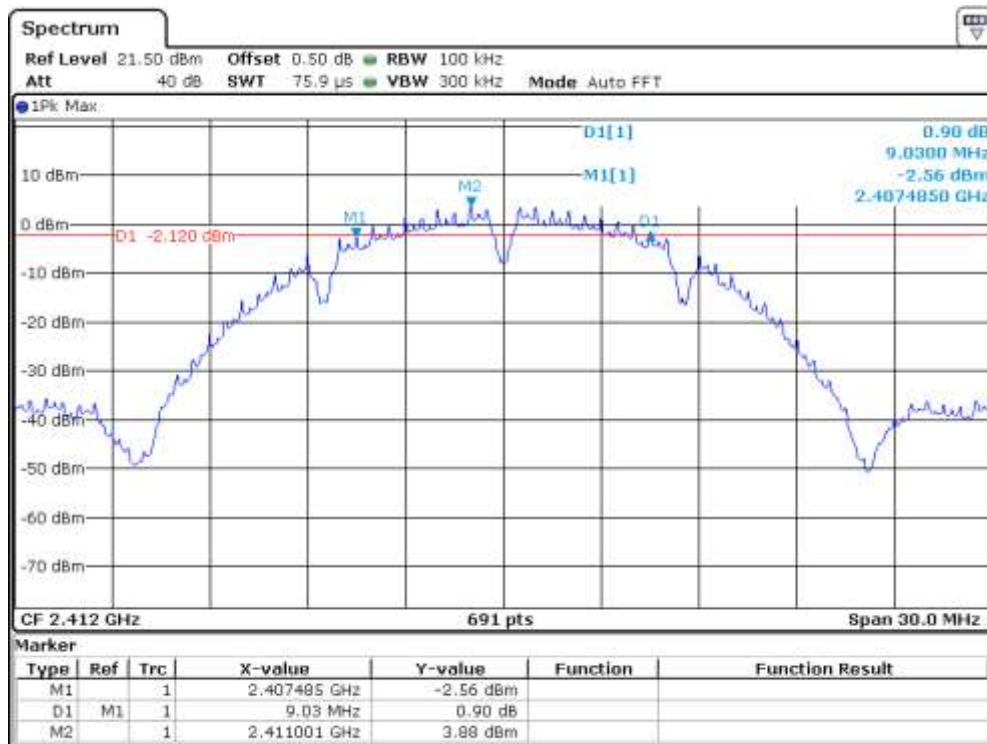


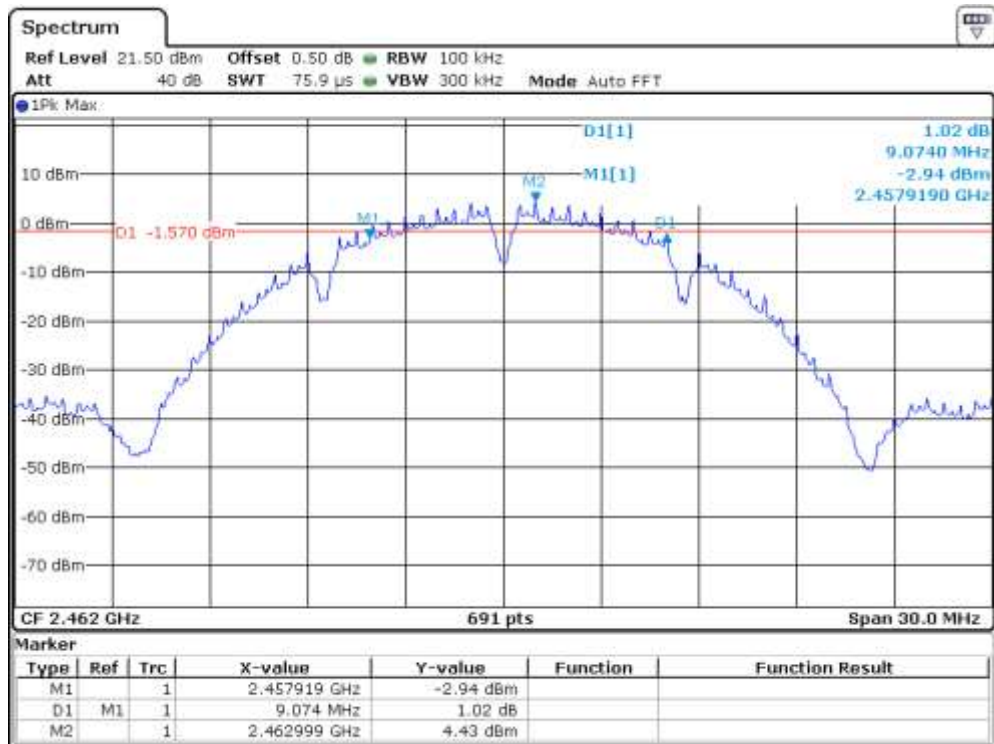



80.11g

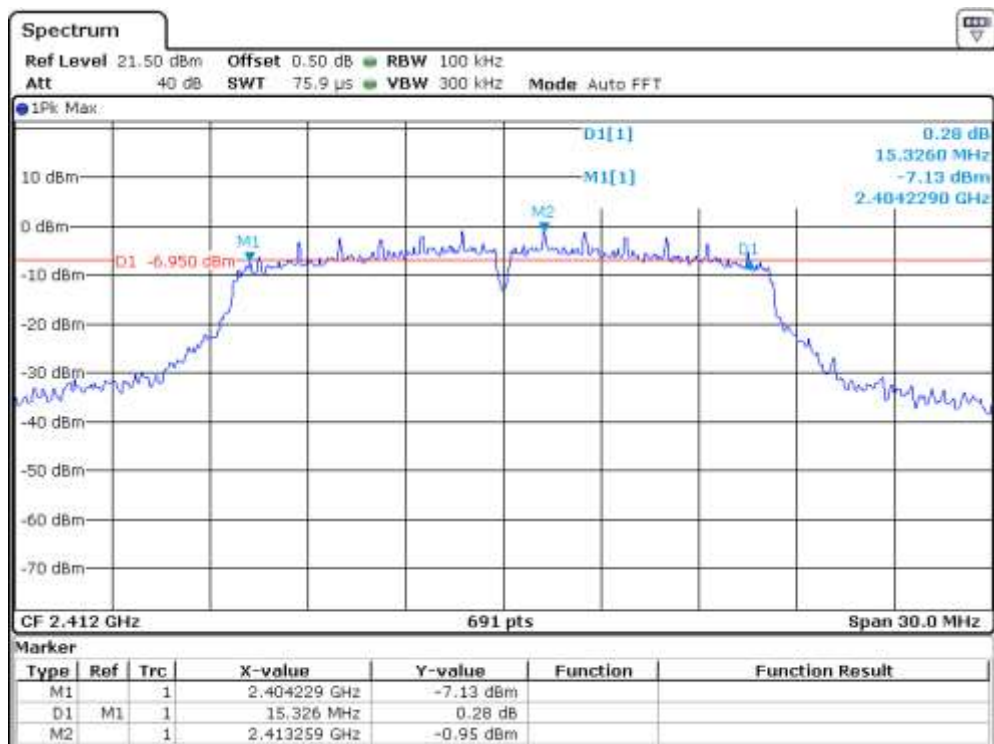

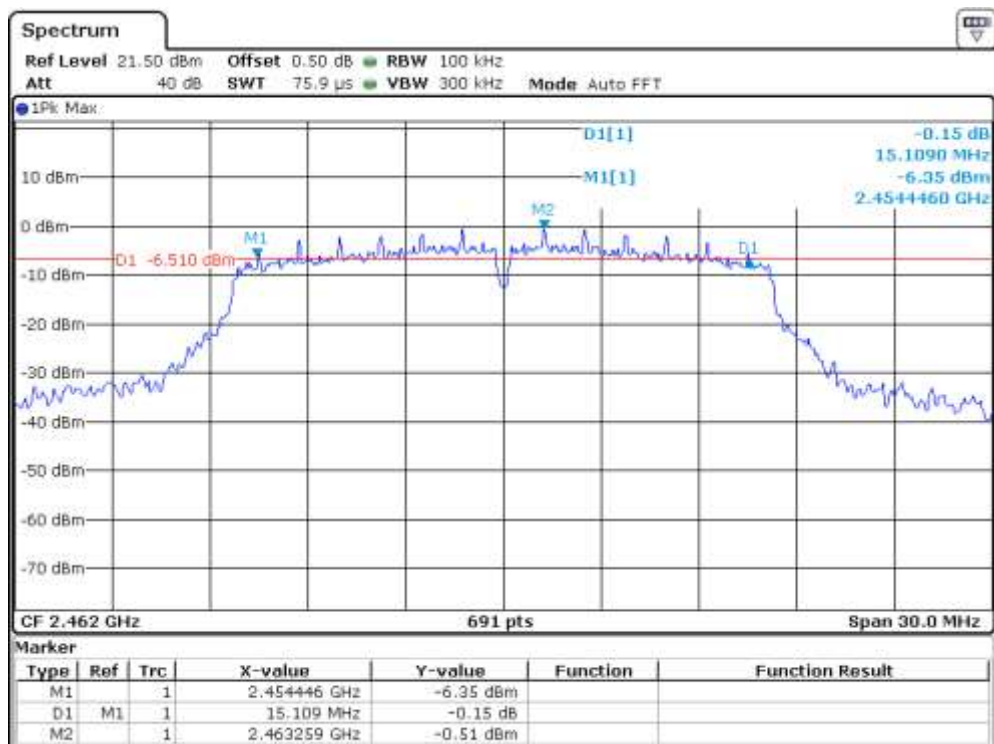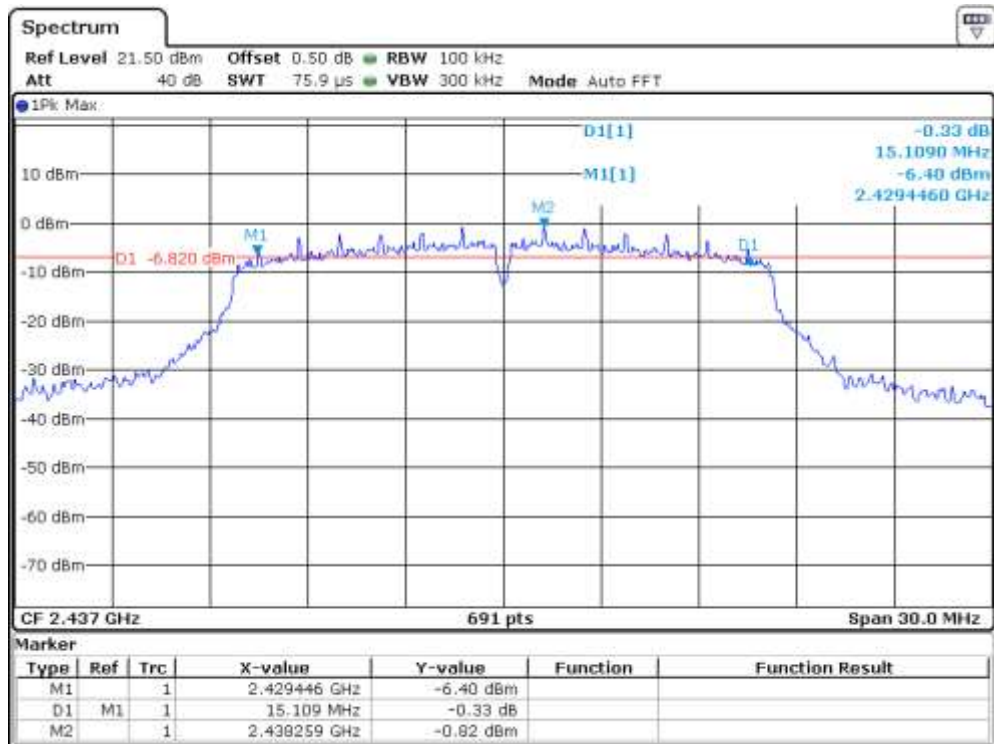




802.11 n20

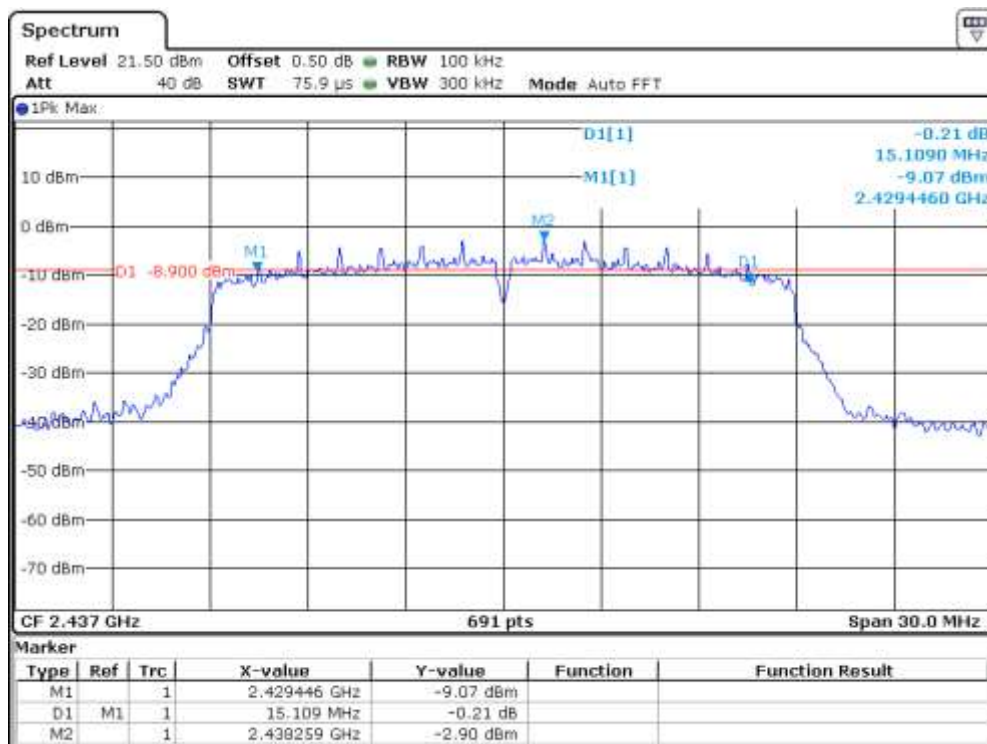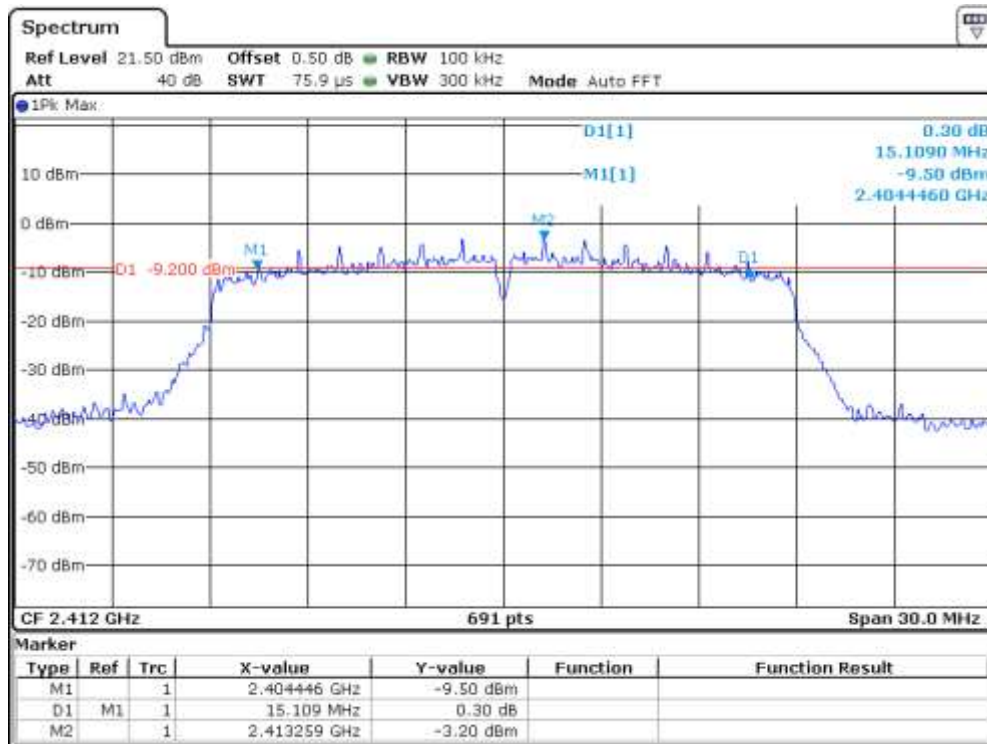


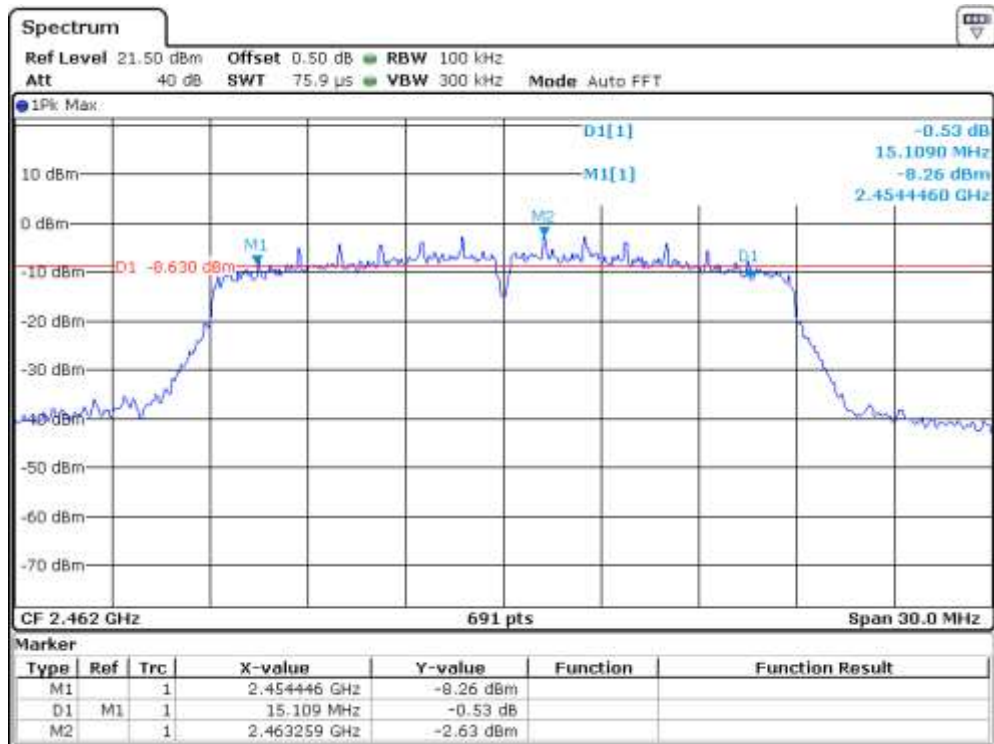



802.11 n40

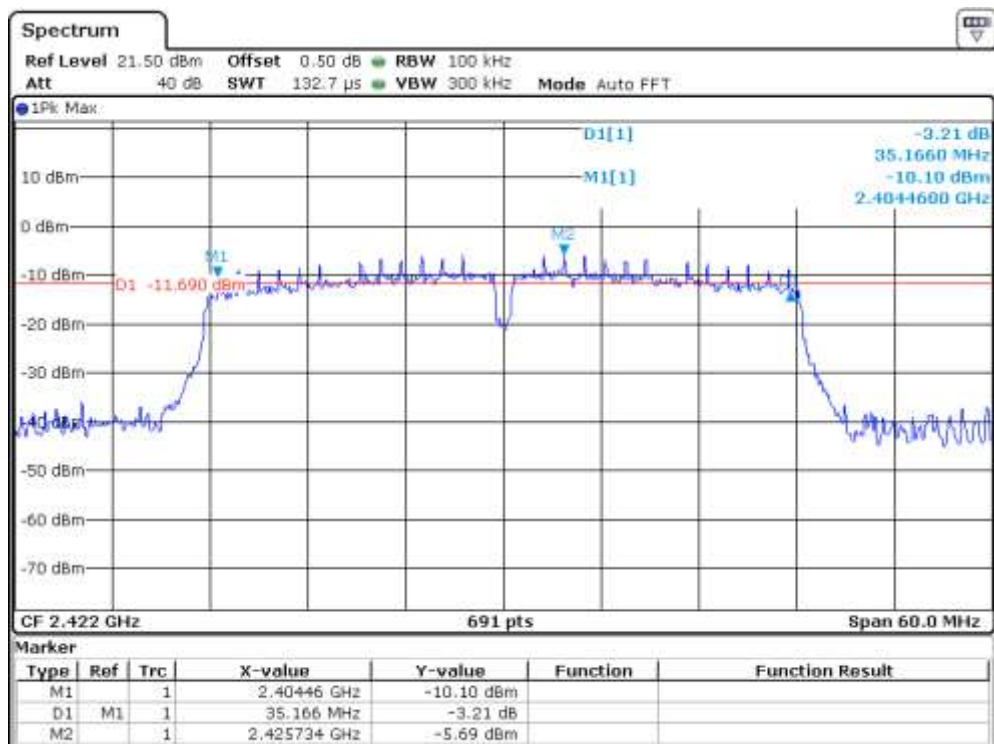

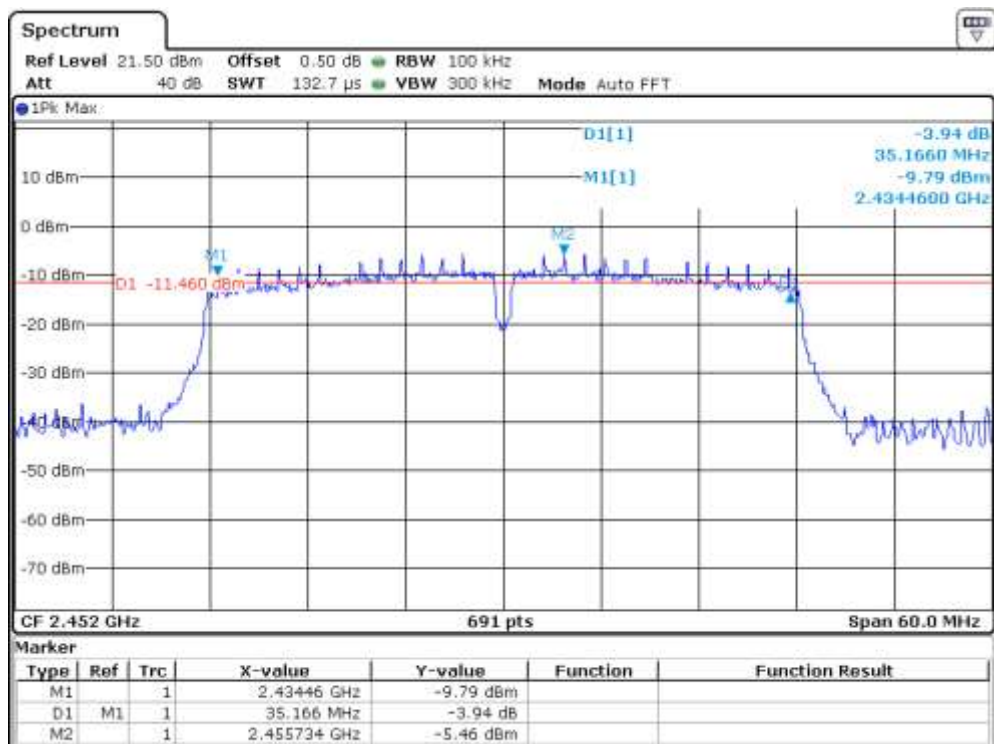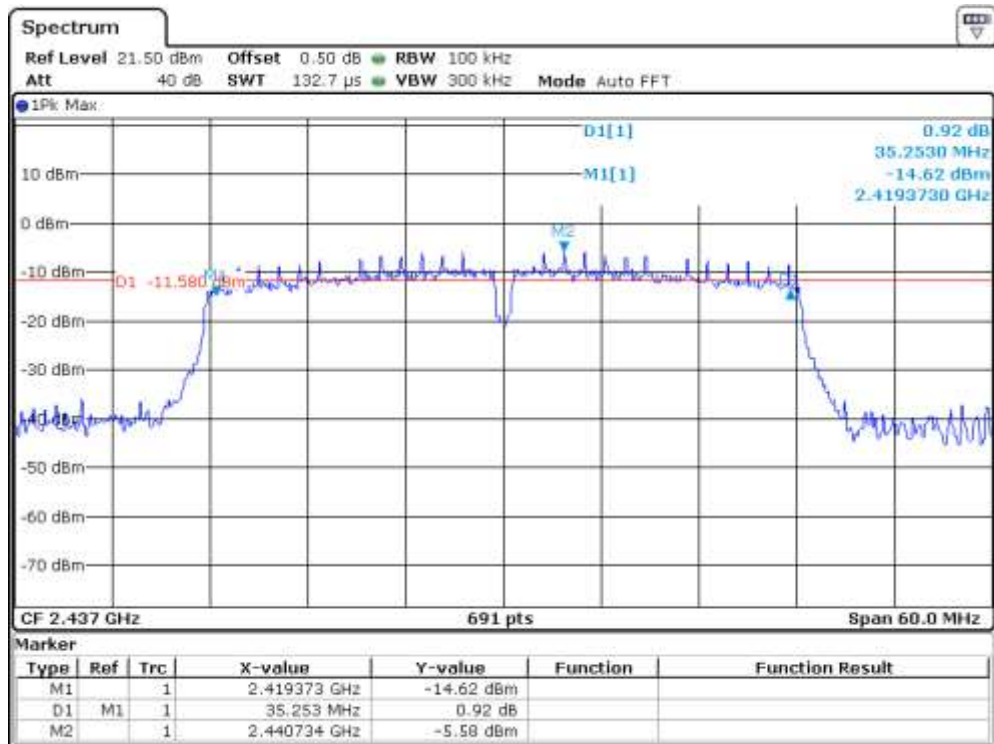




MIMO Mode:
802.11n20

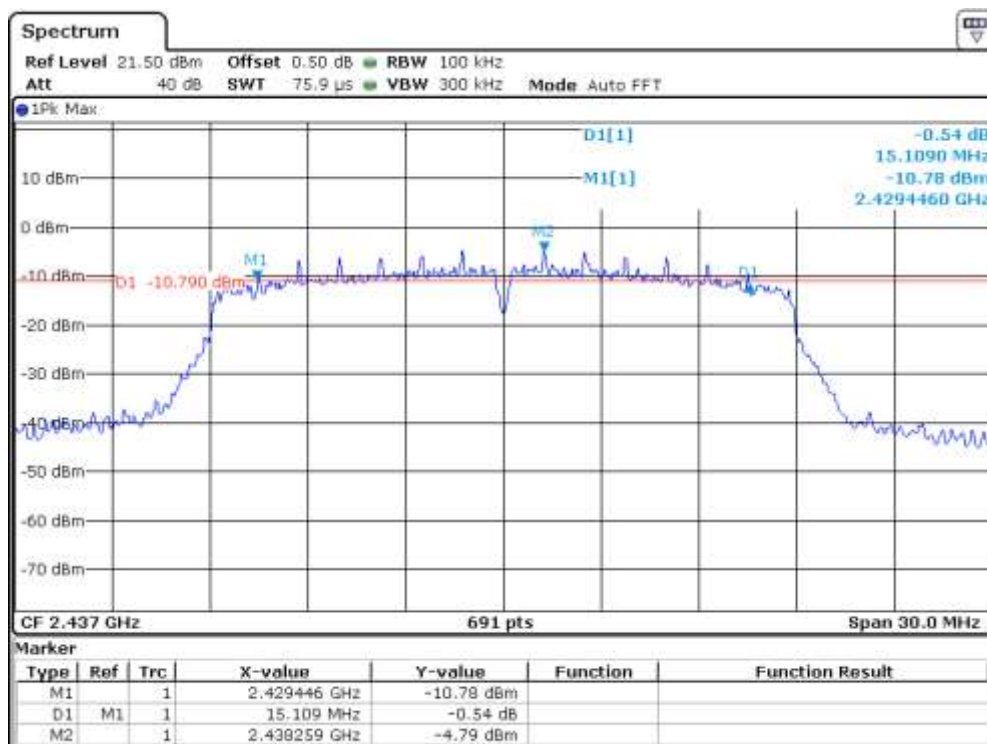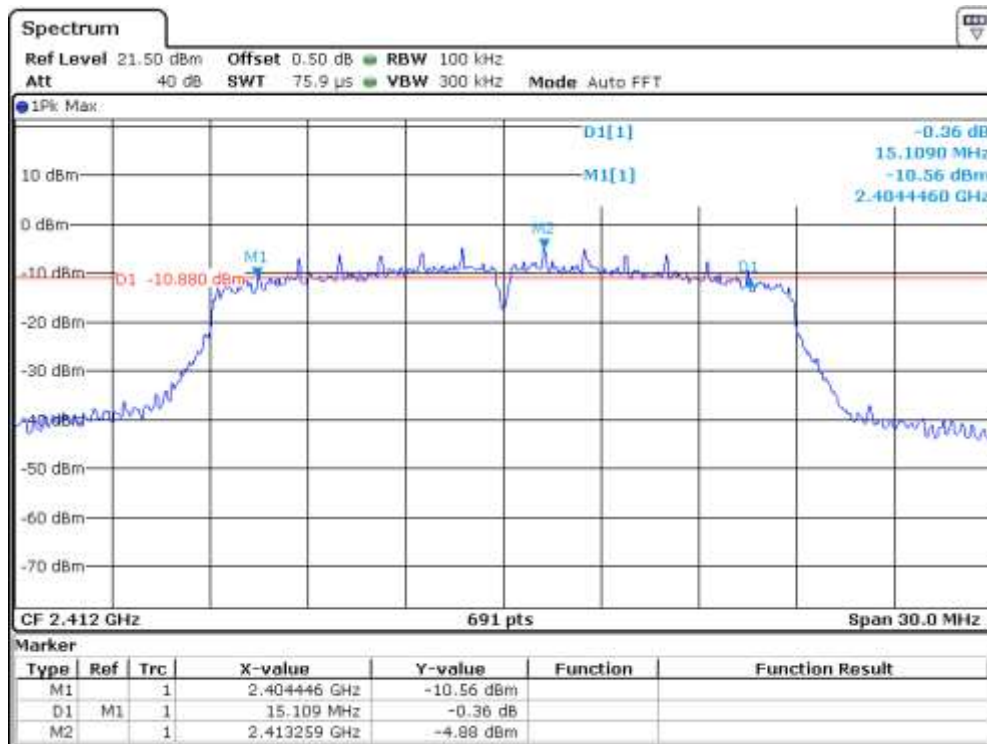

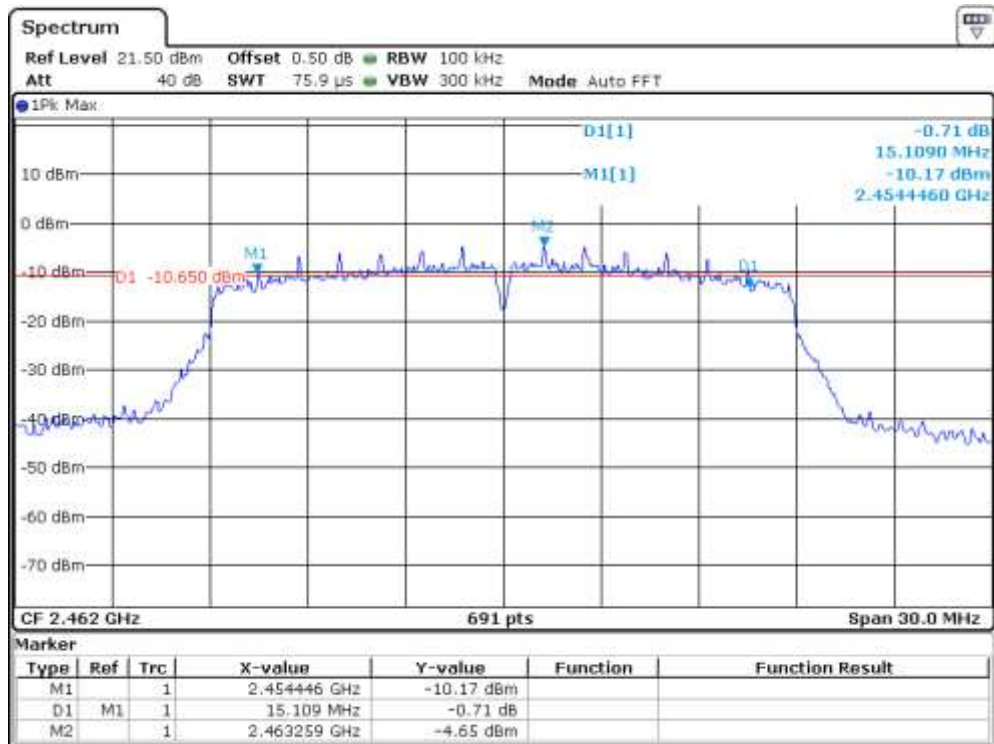

802.11n40

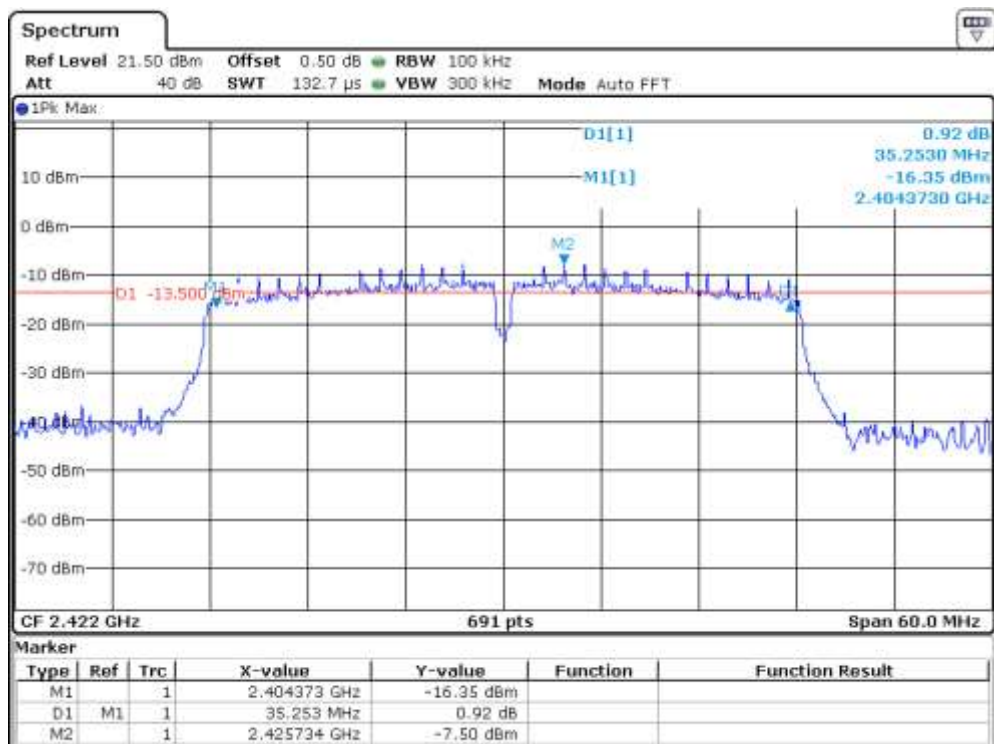

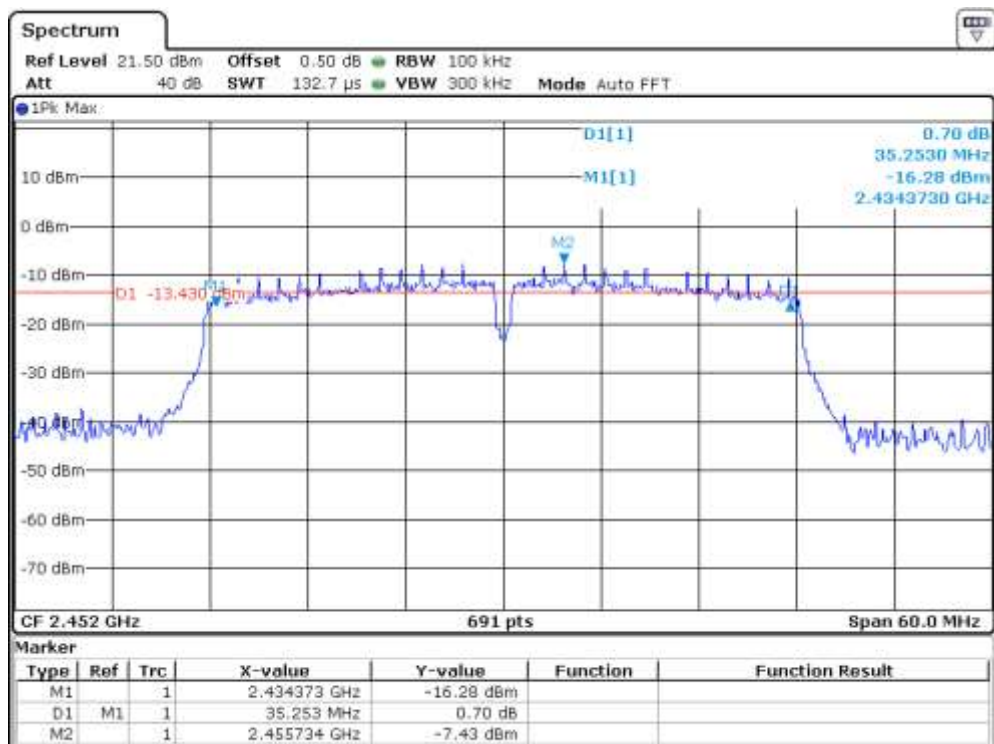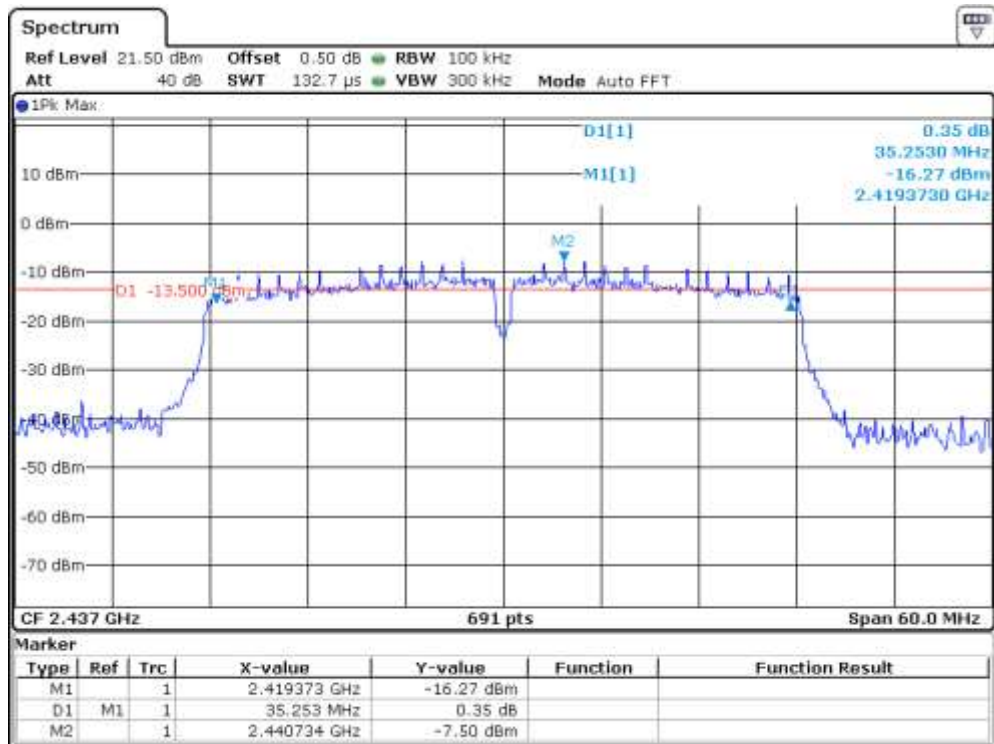

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 18 May 2019


Model: NTUD-U8

4.3 Maximum Power Density Reading, FCC Rule 15.247(e):

The Measurement Procedure PK PSD was set according to the FCC KDB 558074 D01 v05r02.

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

Block Diagram:



Spectrum Analyzer

The limit of Power Density is 8dBm/3 kHz.

SISO Mode, Ant1:

IEEE 802.11b (CCK, 1Mbps)	
Frequency (MHz)	Power Density with RBW 3KHz
2412	-0.20
2437	-0.07
2462	0.17

IEEE 802.11g (16QAM, 6Mbps)	
Frequency (MHz)	Power Density with RBW 3KHz
2412	-16.47
2437	-16.44
2462	-16.66

IEEE 802.11n-HT20 (16QAM, 6.5Mbps)	
Frequency (MHz)	Power Density with RBW 3KHz
2412	-18.64
2437	-18.15
2462	-17.76

IEEE 802.11n-HT40 (64QAM, 13.5Mbps)	
Frequency (MHz)	Power Density with RBW 3KHz
2422	-22.50
2437	-22.69
2452	-22.76

SISO Mode, Ant2:

IEEE 802.11b (CCK, 1Mbps)	
Frequency (MHz)	Power Density with RBW 3KHz
2412	1.98
2437	2.01
2462	2.30

IEEE 802.11g (16QAM, 6Mbps)	
Frequency (MHz)	Power Density with RBW 3KHz
2412	-15.84
2437	-14.84
2462	-14.72

IEEE 802.11n-HT20 (16QAM, 6.5Mbps)	
Frequency (MHz)	Power Density with RBW 3KHz
2412	-17.24
2437	-17.77
2462	-16.23

IEEE 802.11n-HT40 (64QAM, 13.5Mbps)	
Frequency (MHz)	Power Density with RBW 3KHz
2422	-20.92
2437	-20.77
2452	-21.26



MIMO Mode:


IEEE 802.11n-HT20 (16QAM, 6.5Mbps)			
Frequency (MHz)	Power Density with RBW 3KHz		Power Density with RBW 3KHz
	Ant1	Ant2	Total
2412	-18.36	-16.32	-14.21
2437	-19.70	-16.52	-14.81
2462	-18.55	-15.32	-13.63

IEEE 802.11n-HT40 (64QAM, 13.5Mbps)			
Frequency (MHz)	Power Density with RBW 3KHz		Power Density with RBW 3KHz
	Ant1	Ant2	Total
2422	-22.62	-20.51	-18.43
2437	-22.91	-20.72	-18.67
2452	-22.24	-20.43	-18.23


The test plots are attached as below.



SISO Mode, Ant1:
802.11b

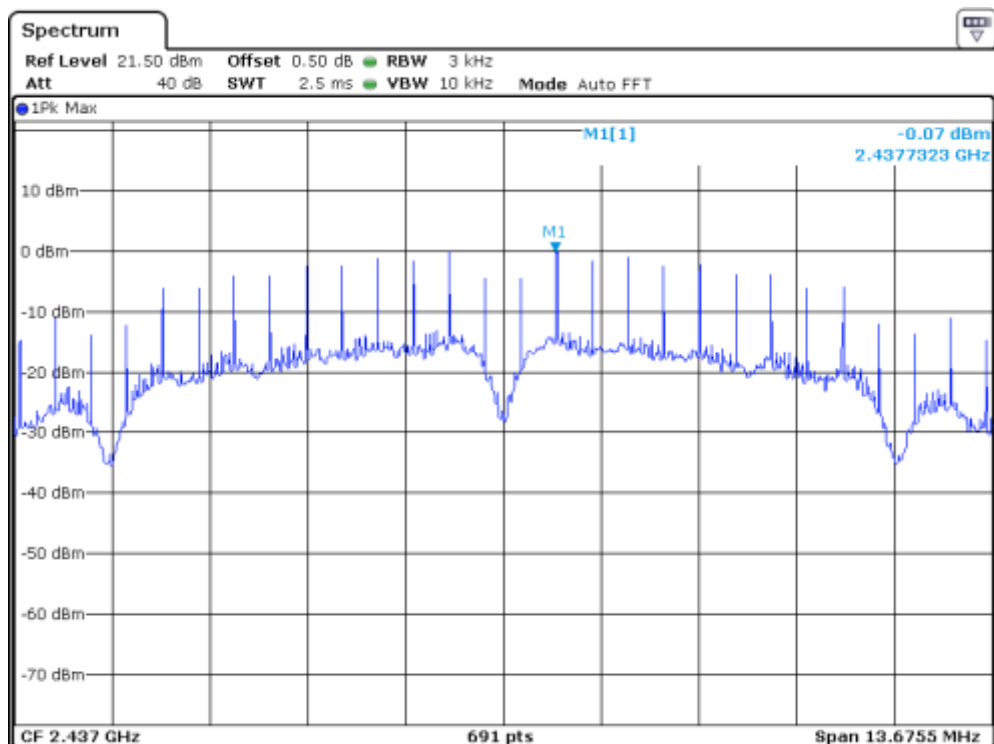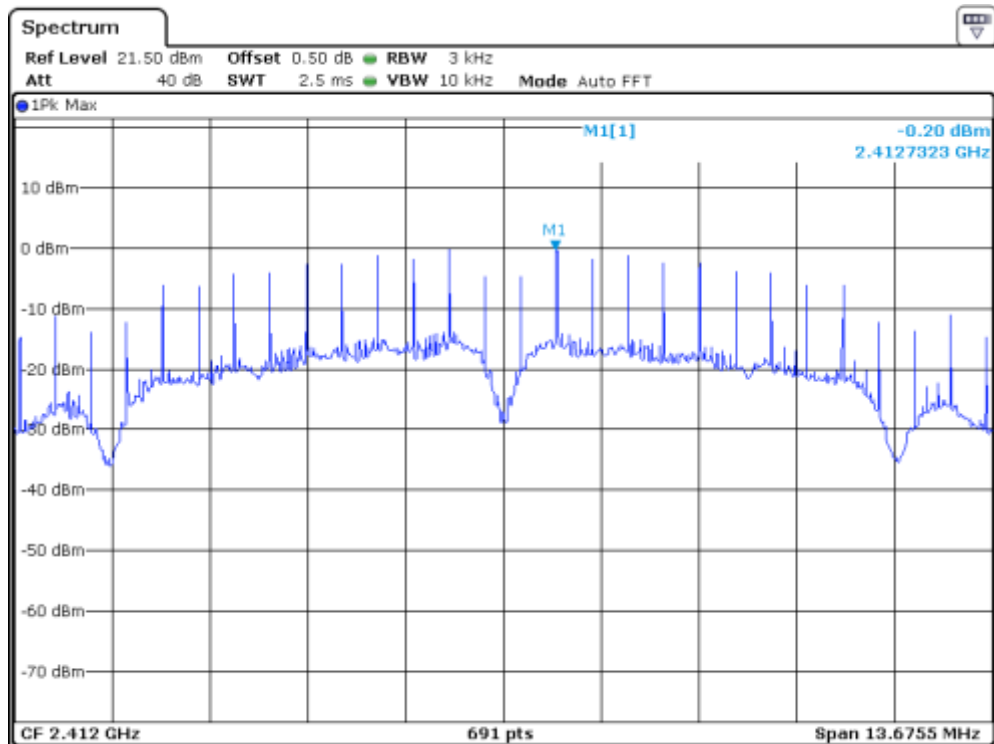


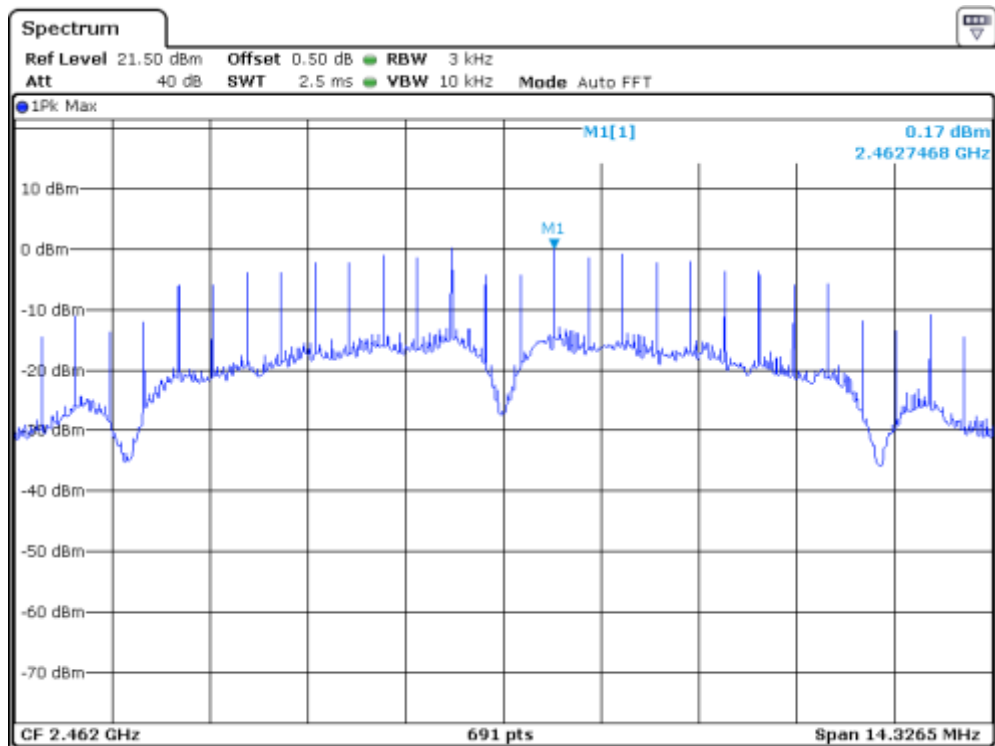



802.11g

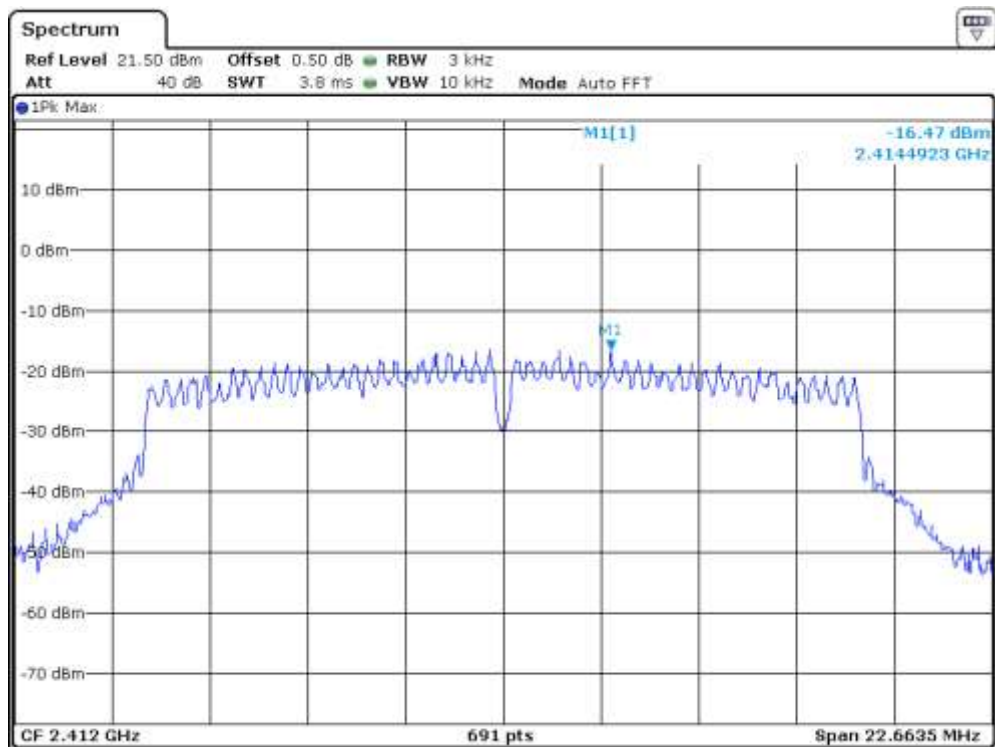

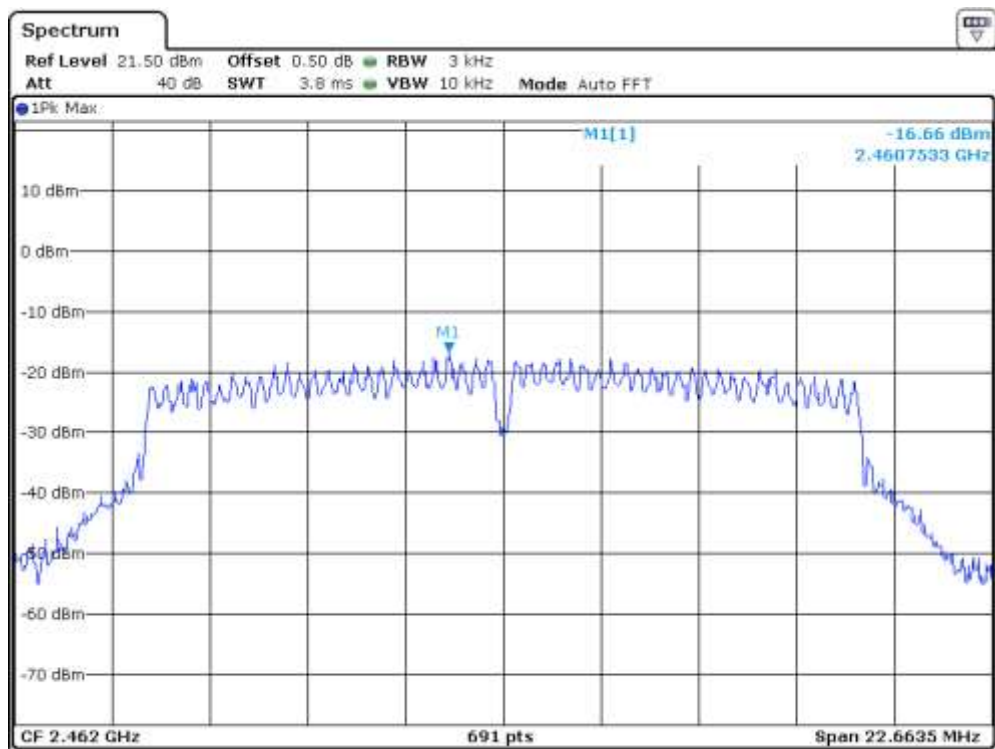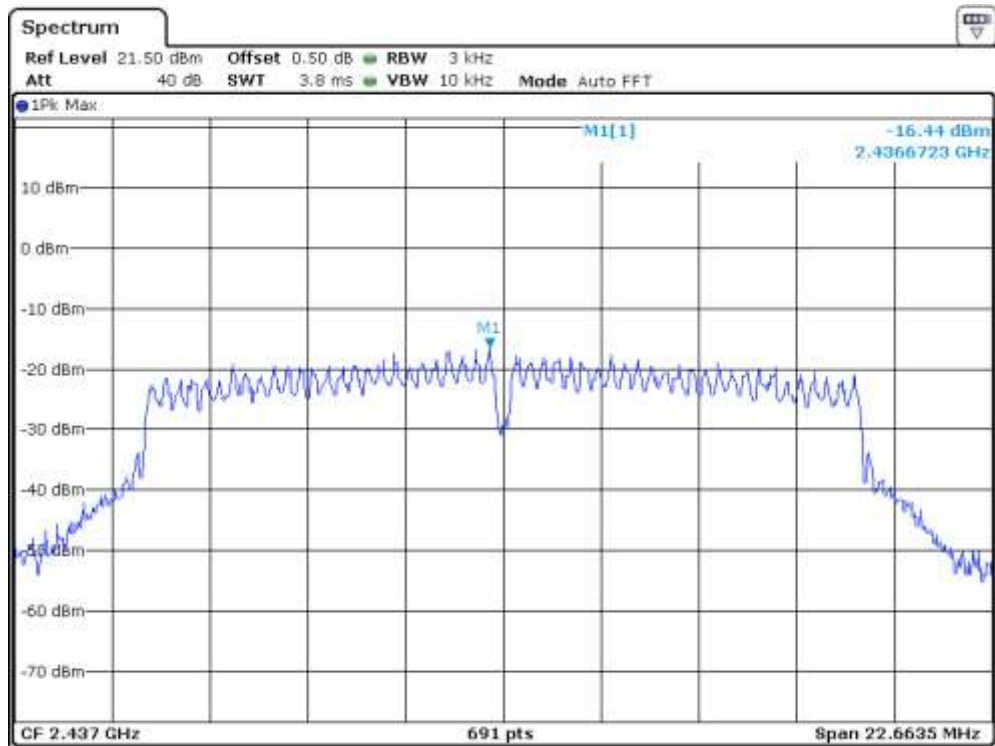




802.11 n20

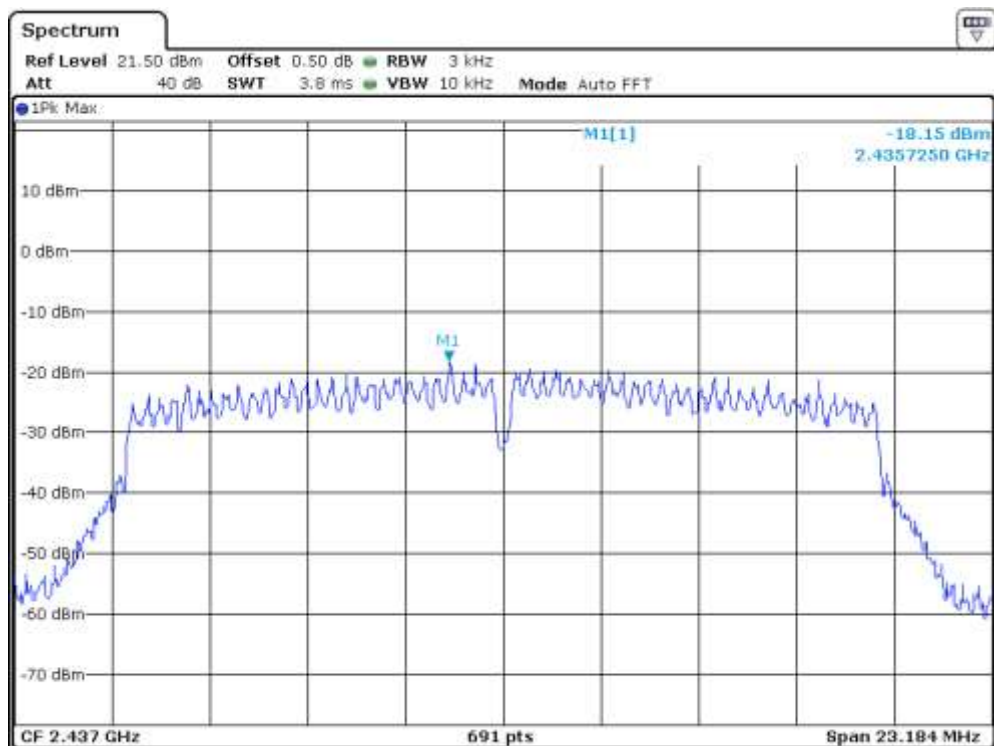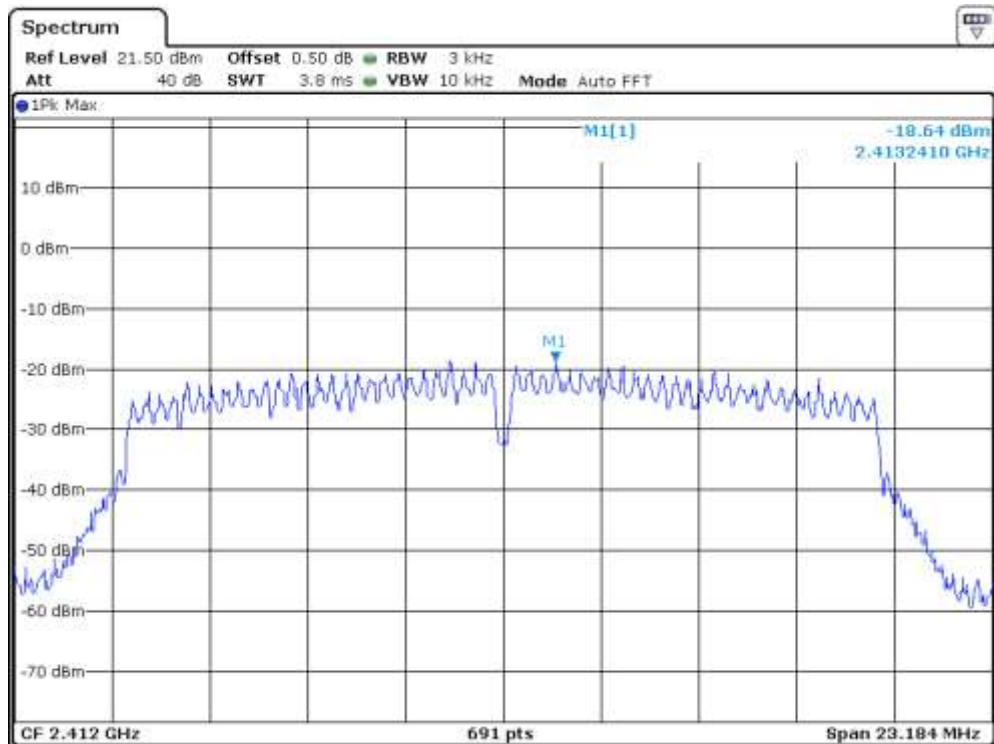


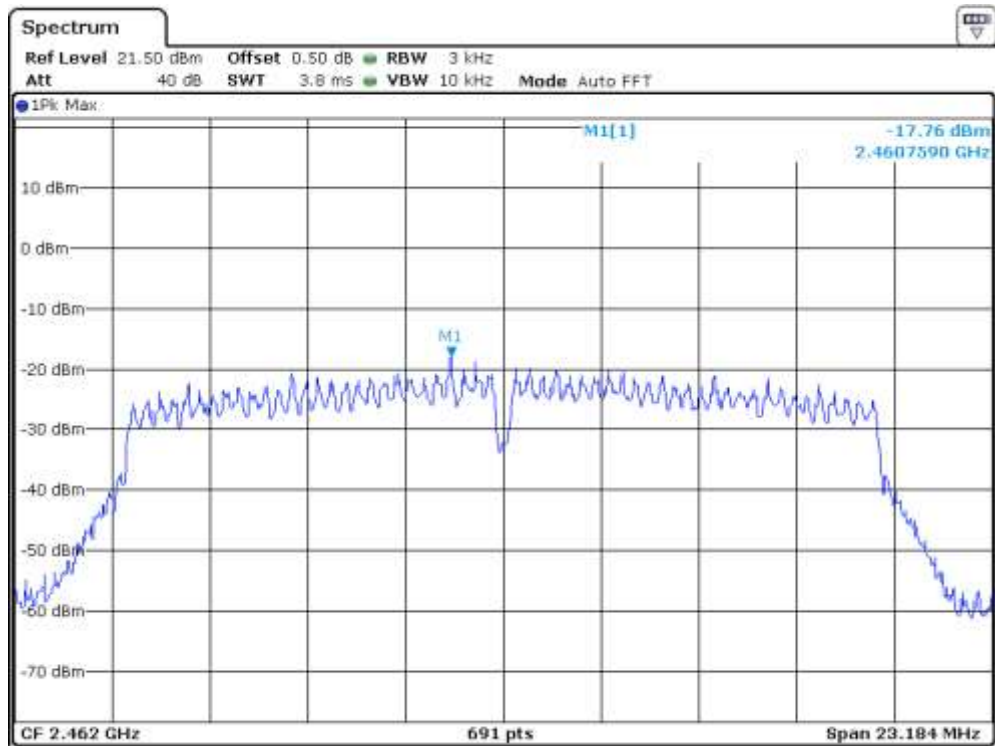



802.11 n40

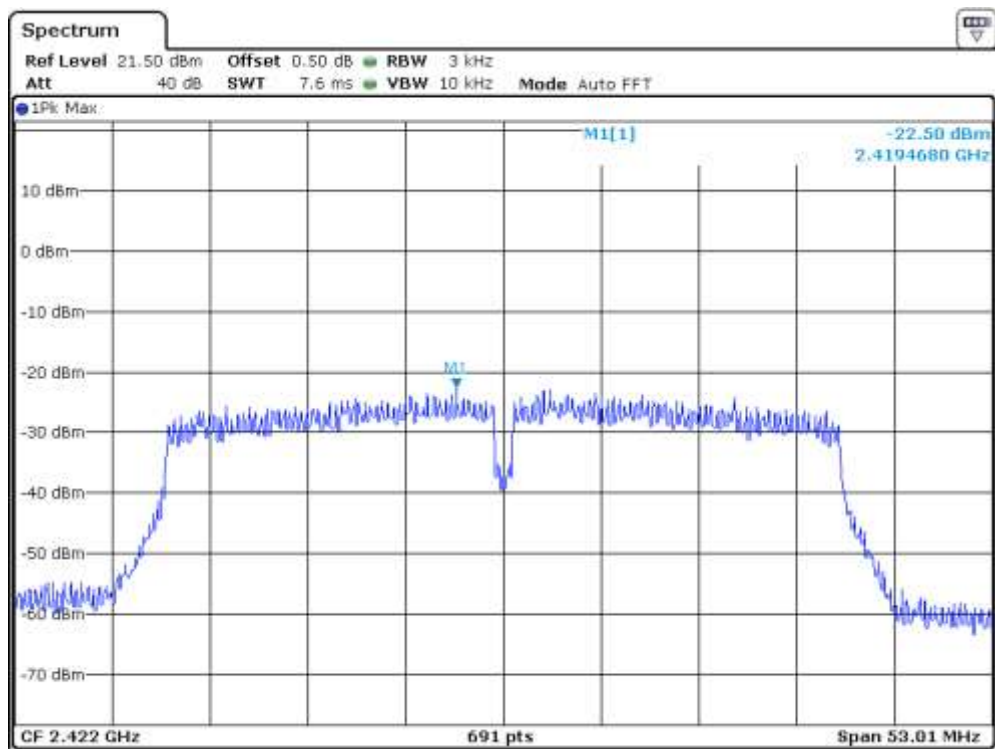

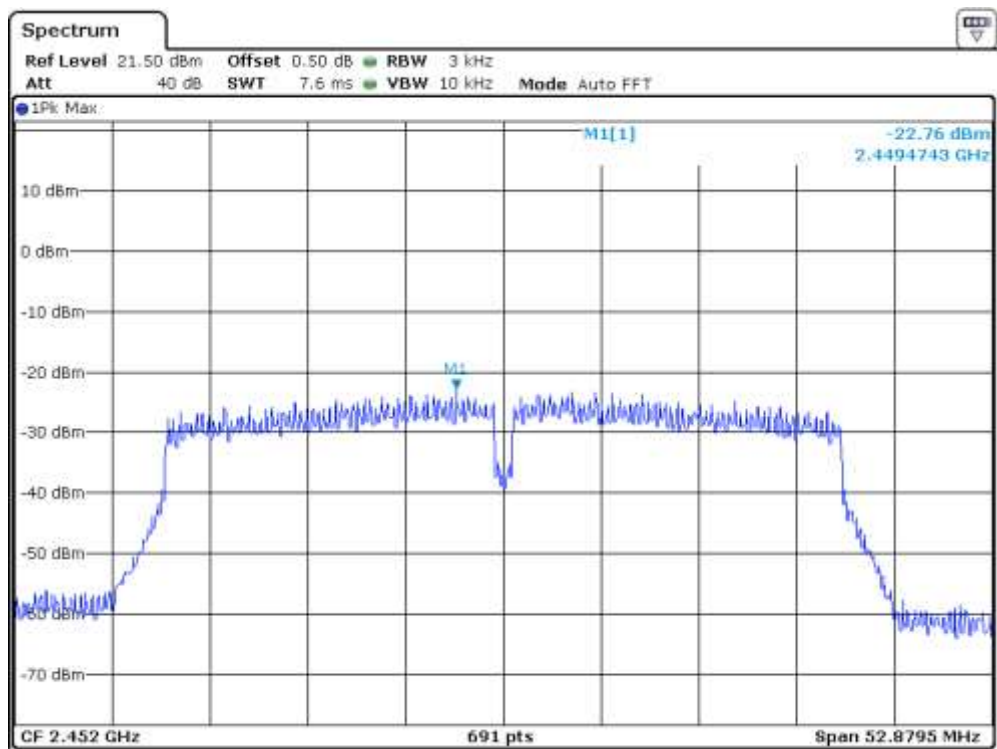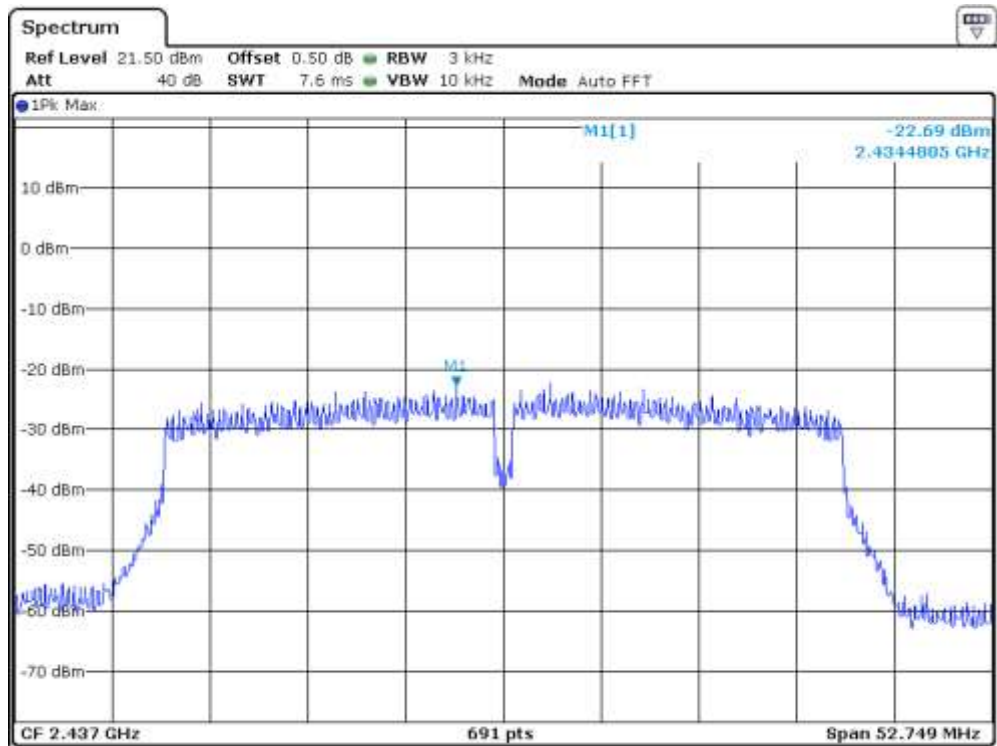




SISO Mode, Ant2:
802.11b

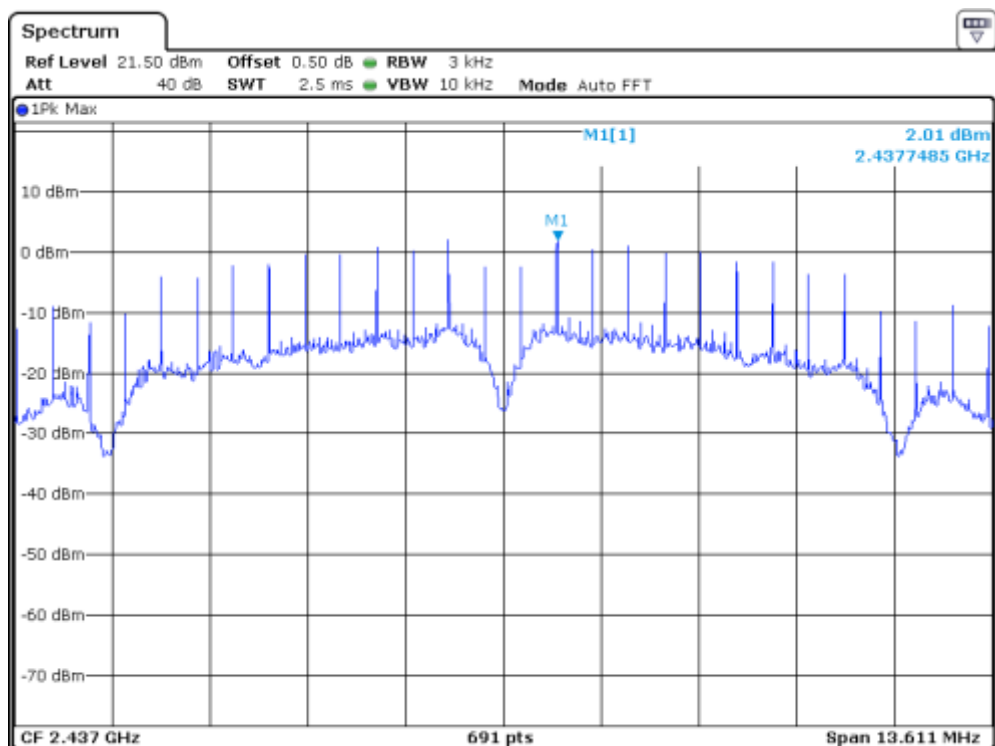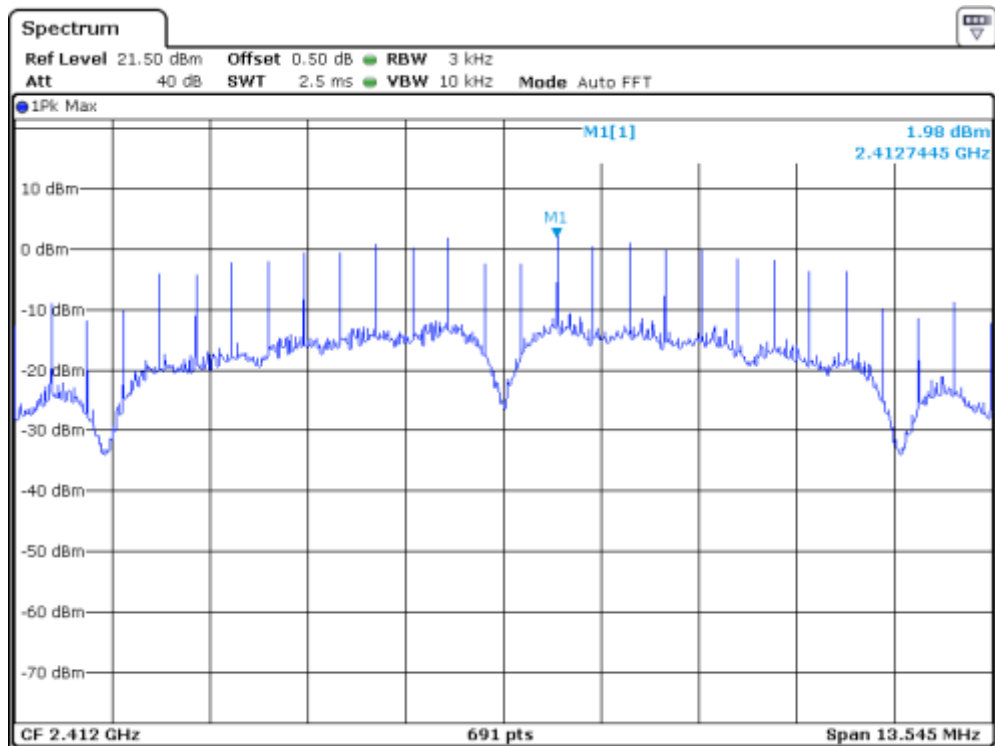


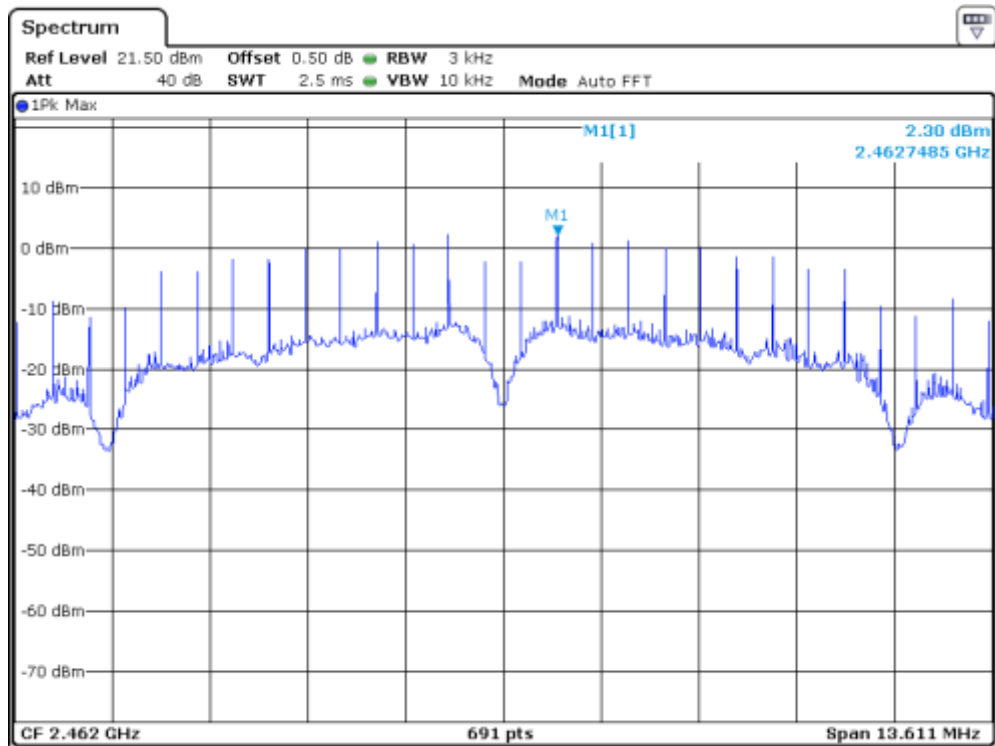



802.11g

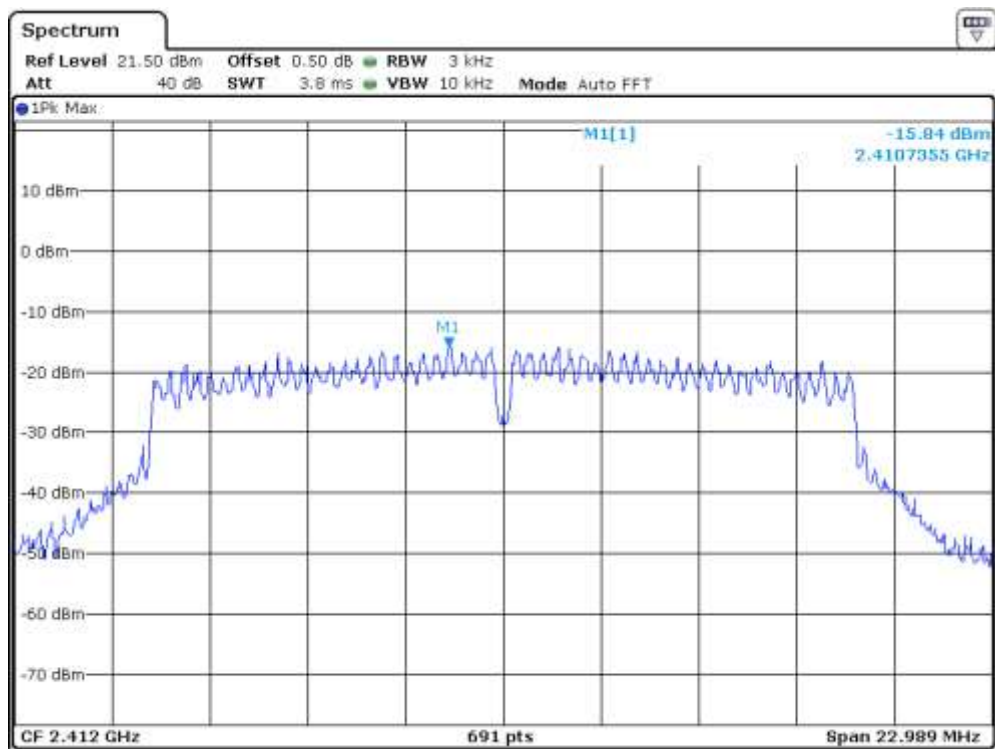

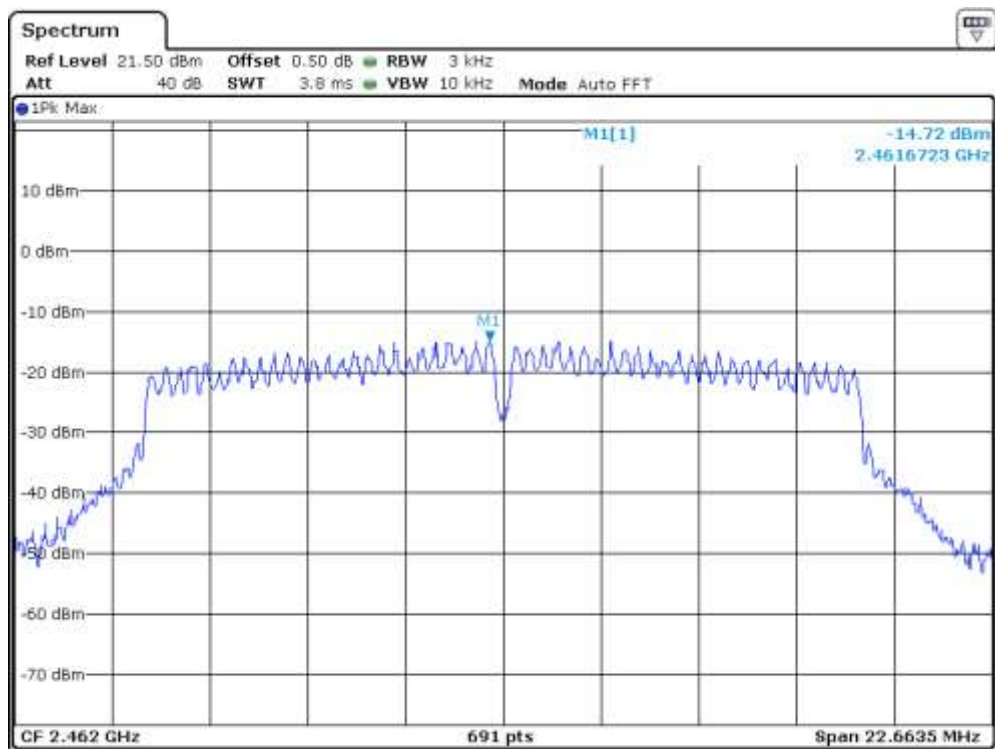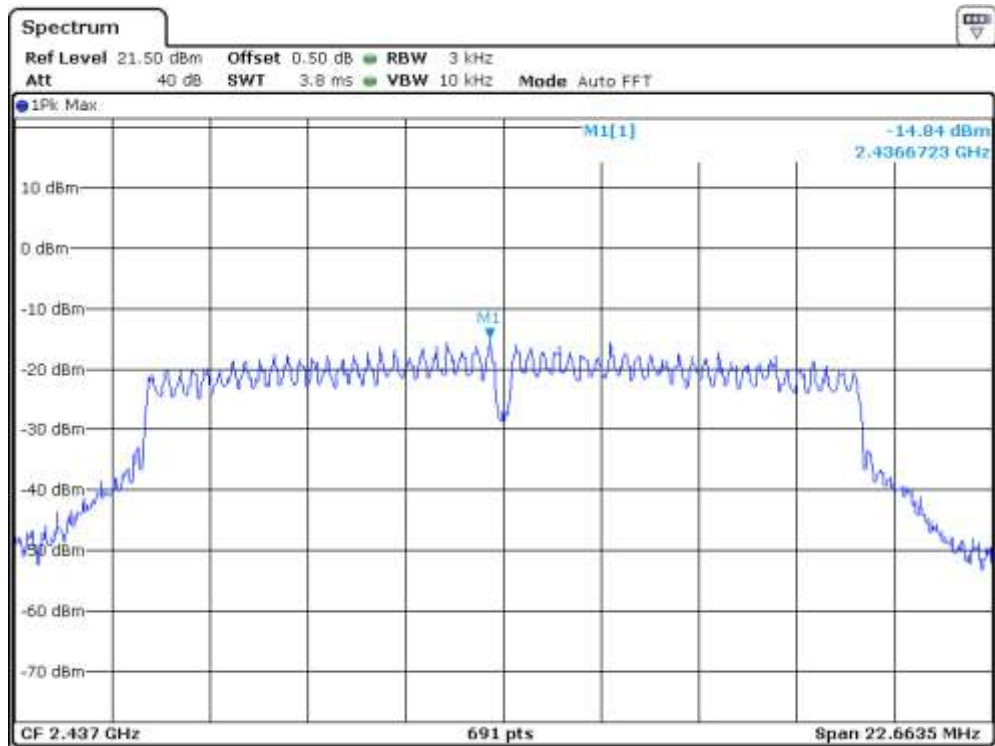




802.11 n20

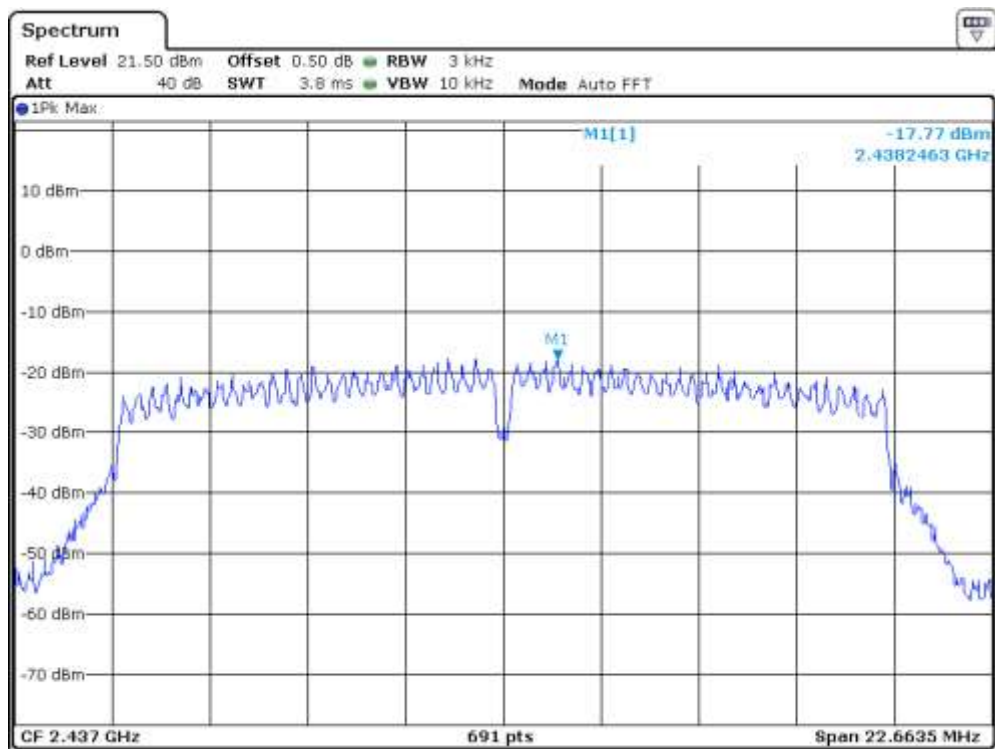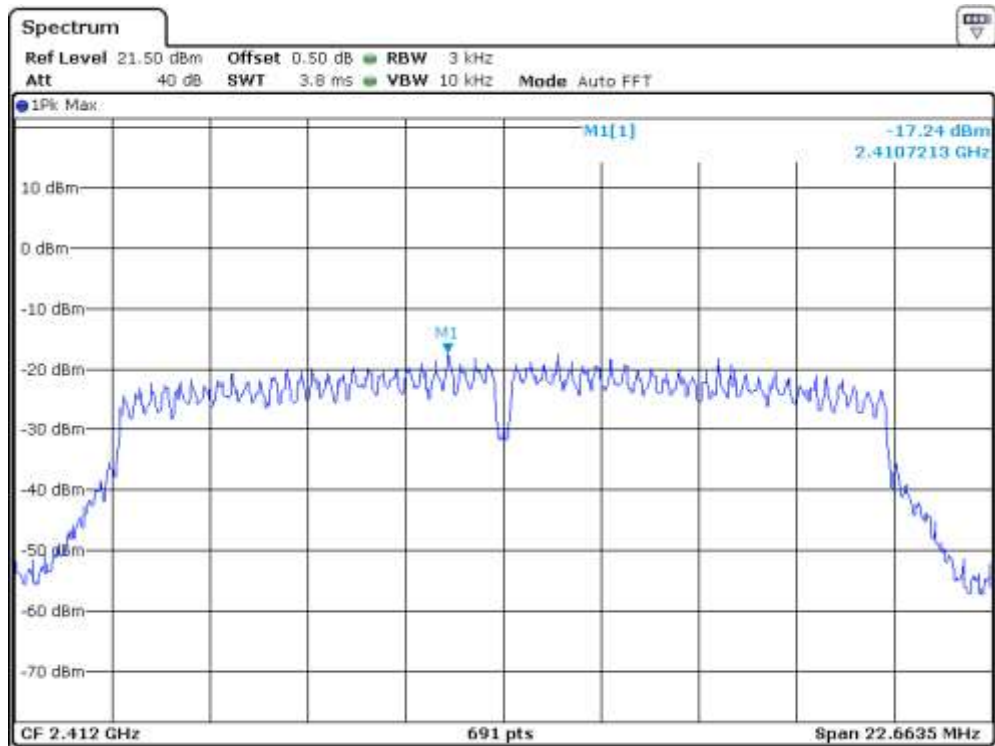


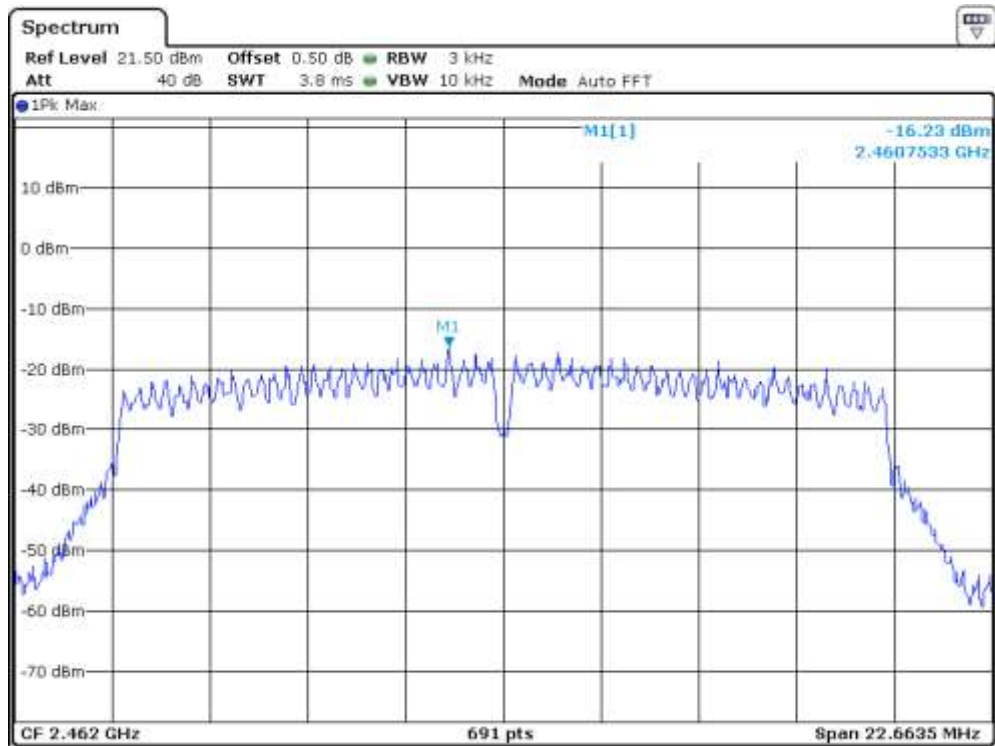



802.11 n40

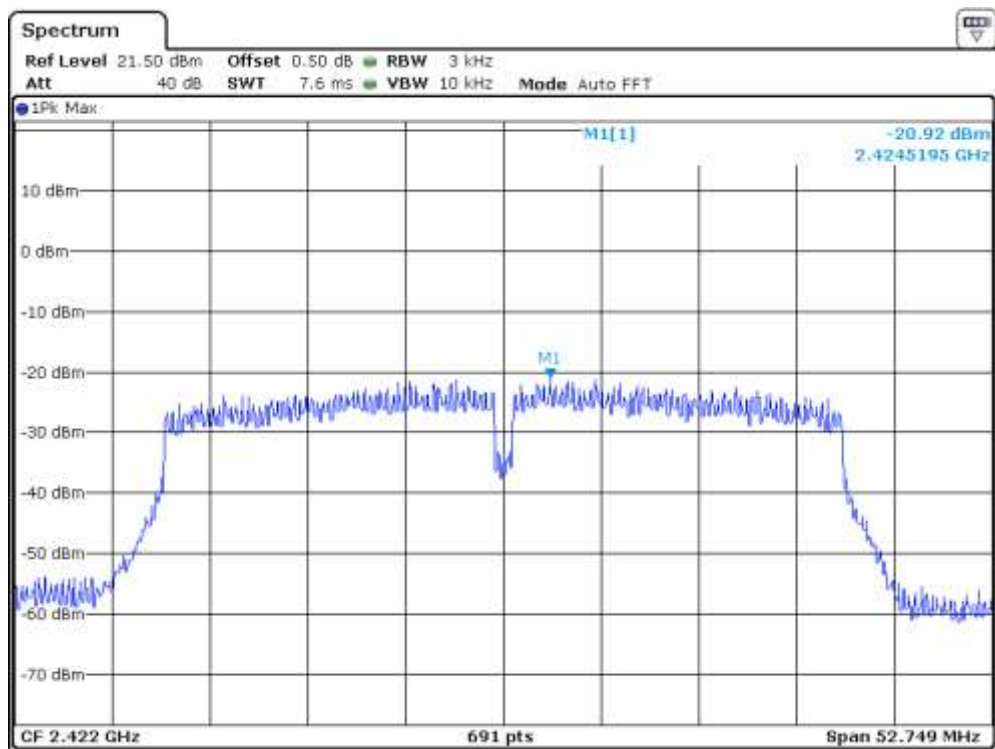

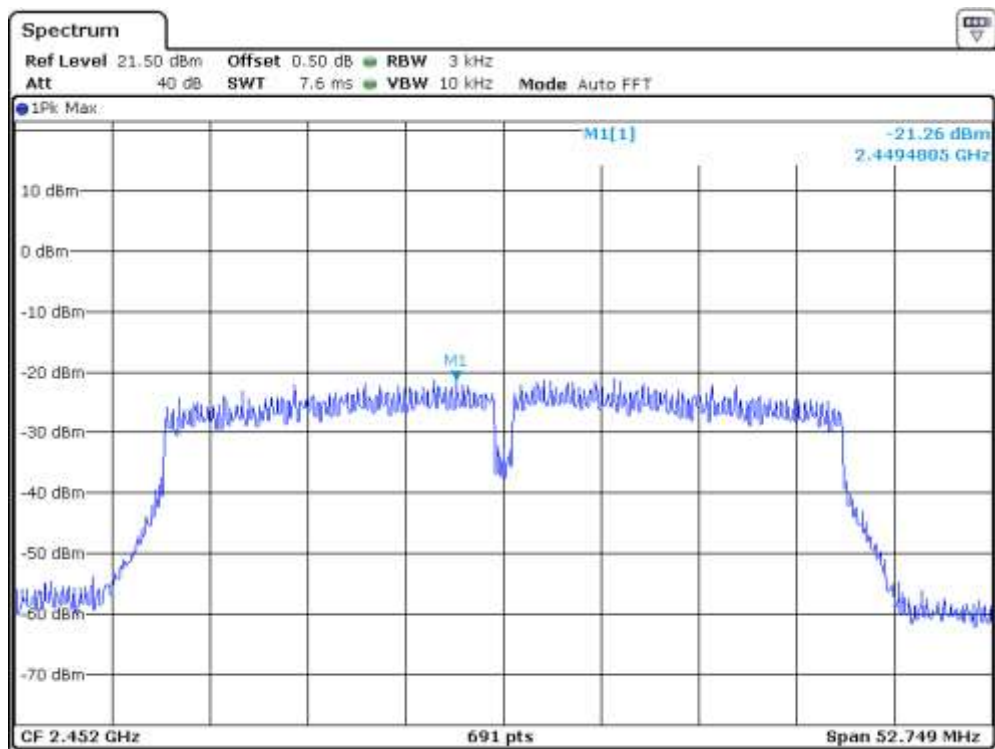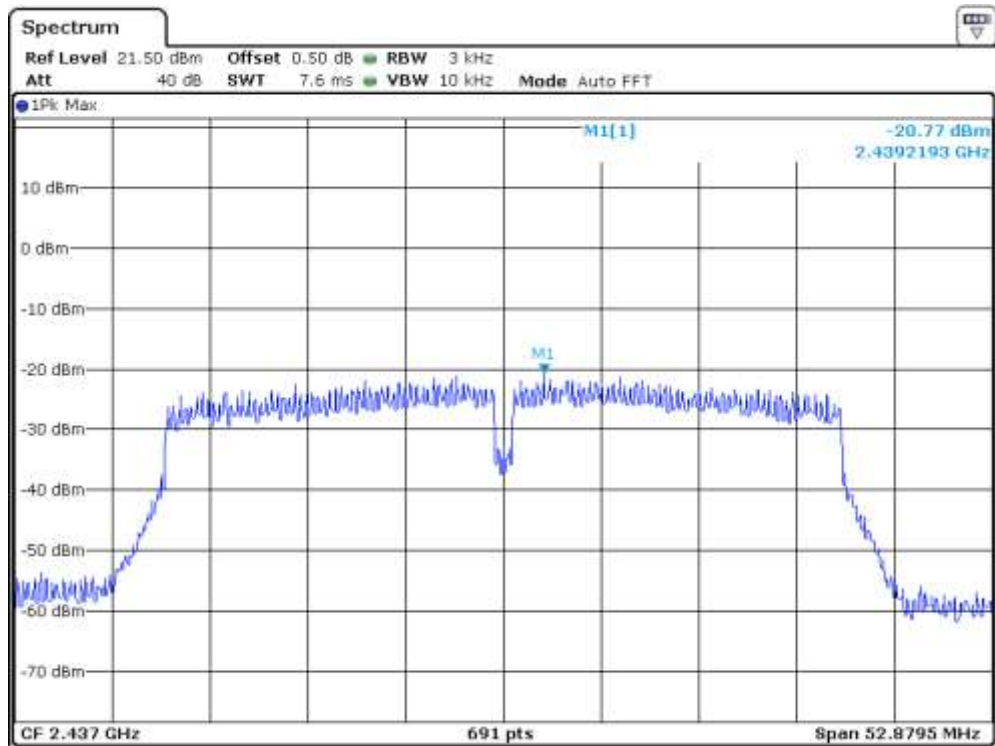




MIMO Mode ANT 1:
802.11 n20

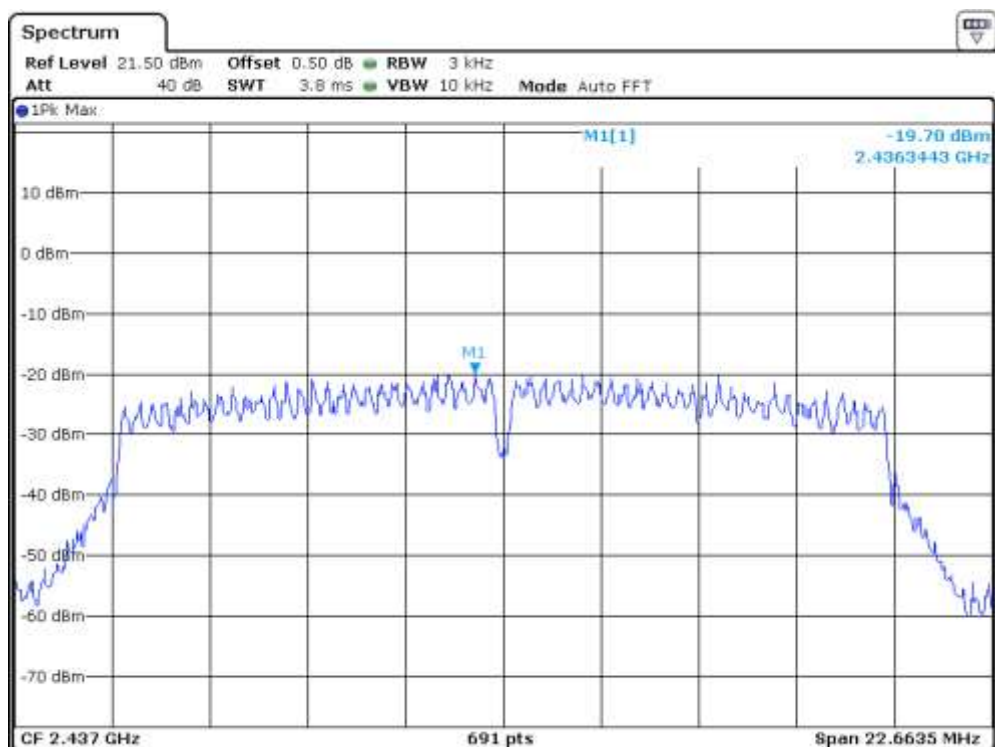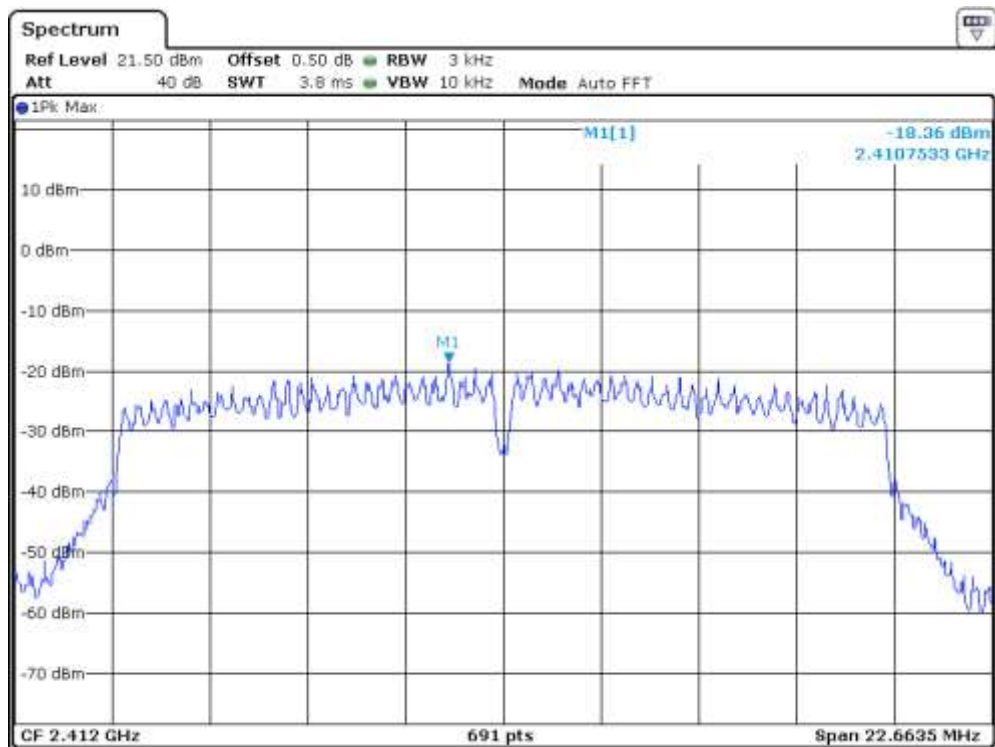


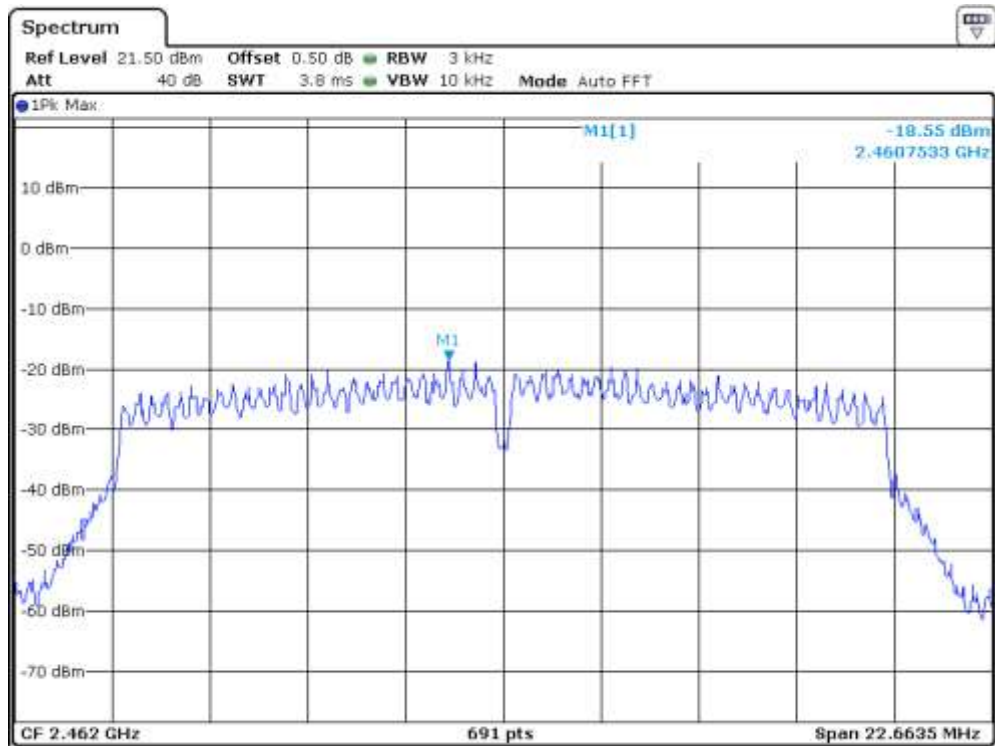



802.11 n40

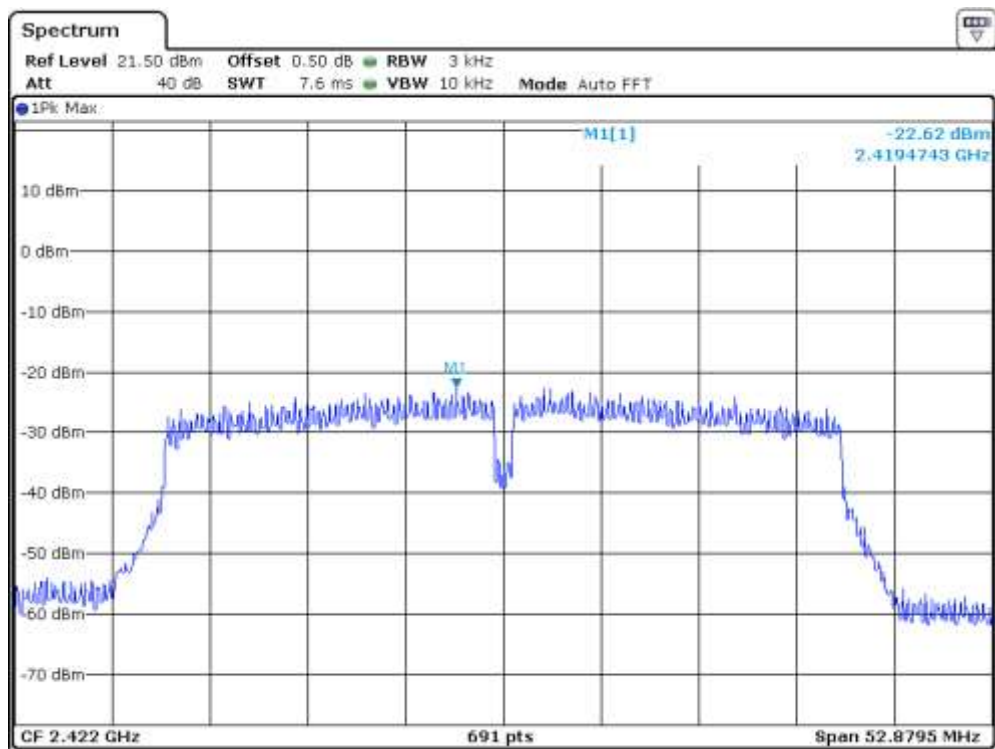

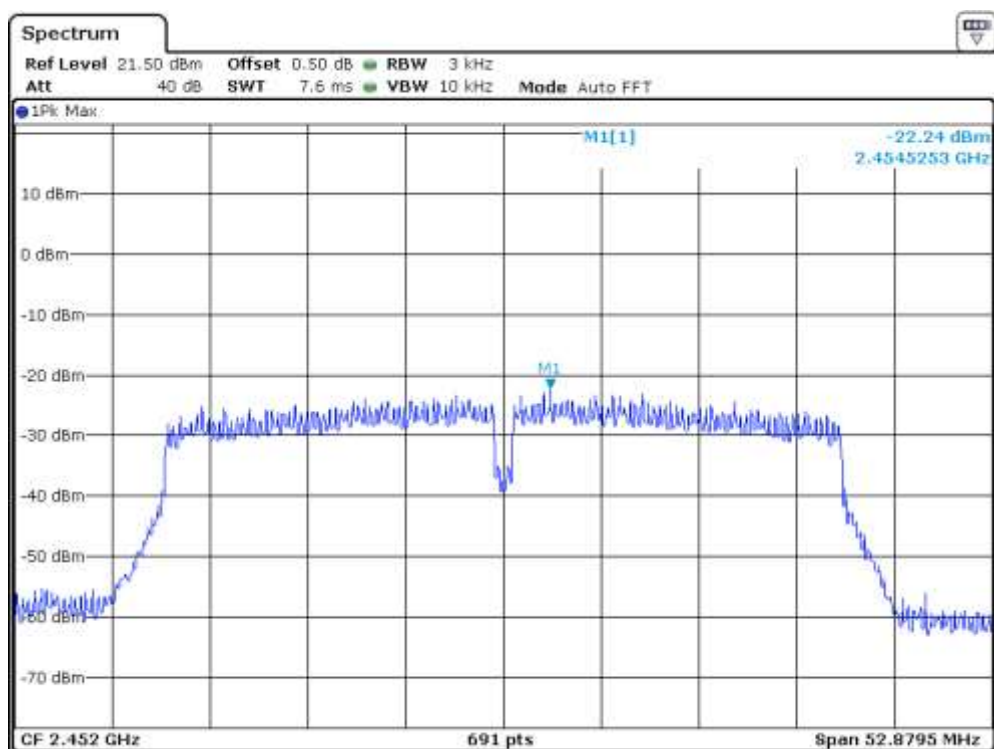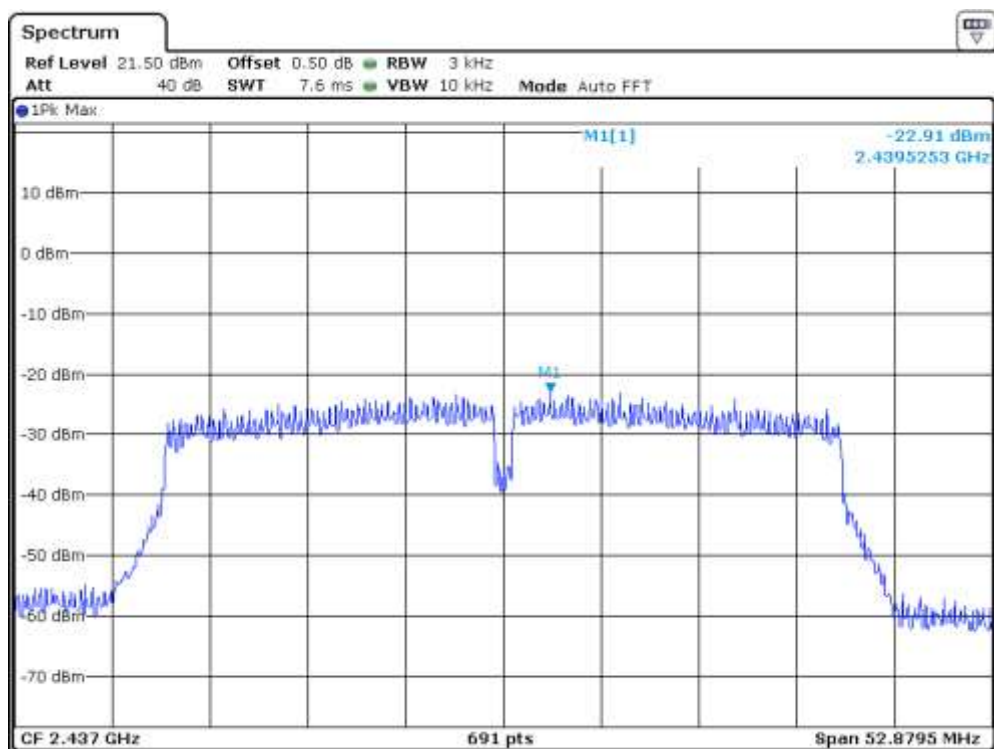




MIMO Mode ANT 2:
802.11 n20

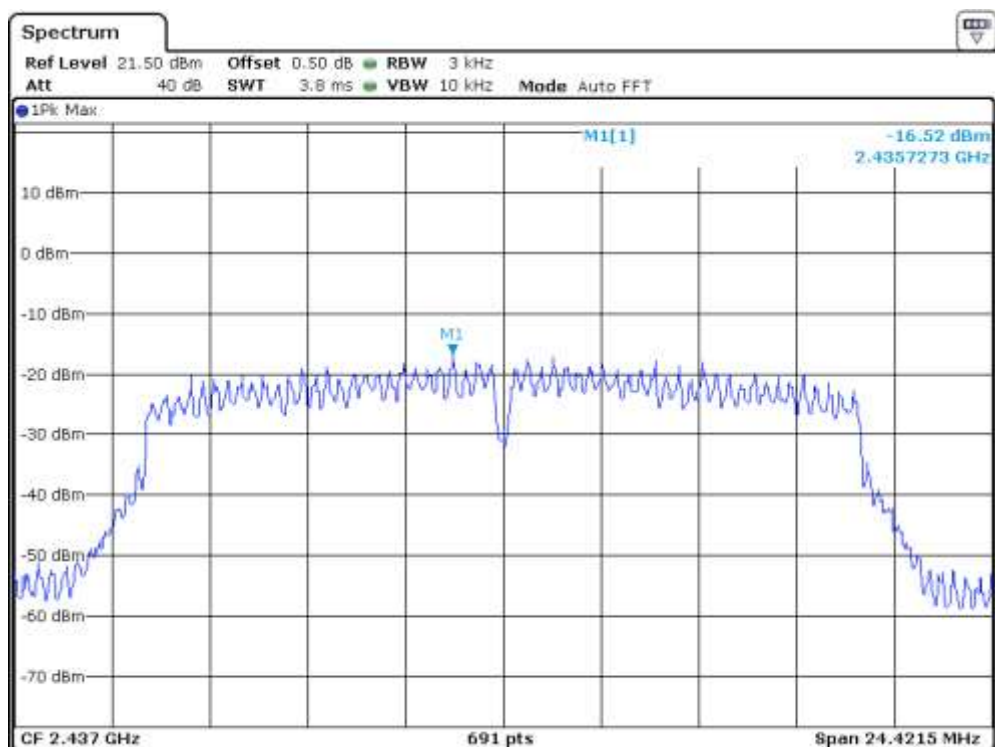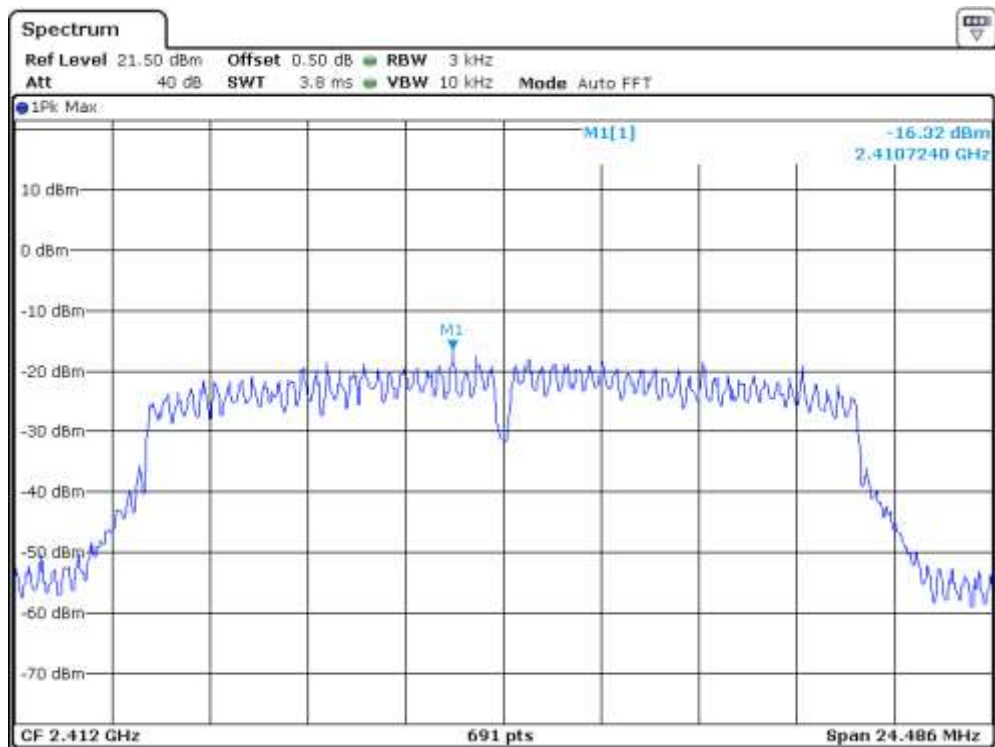

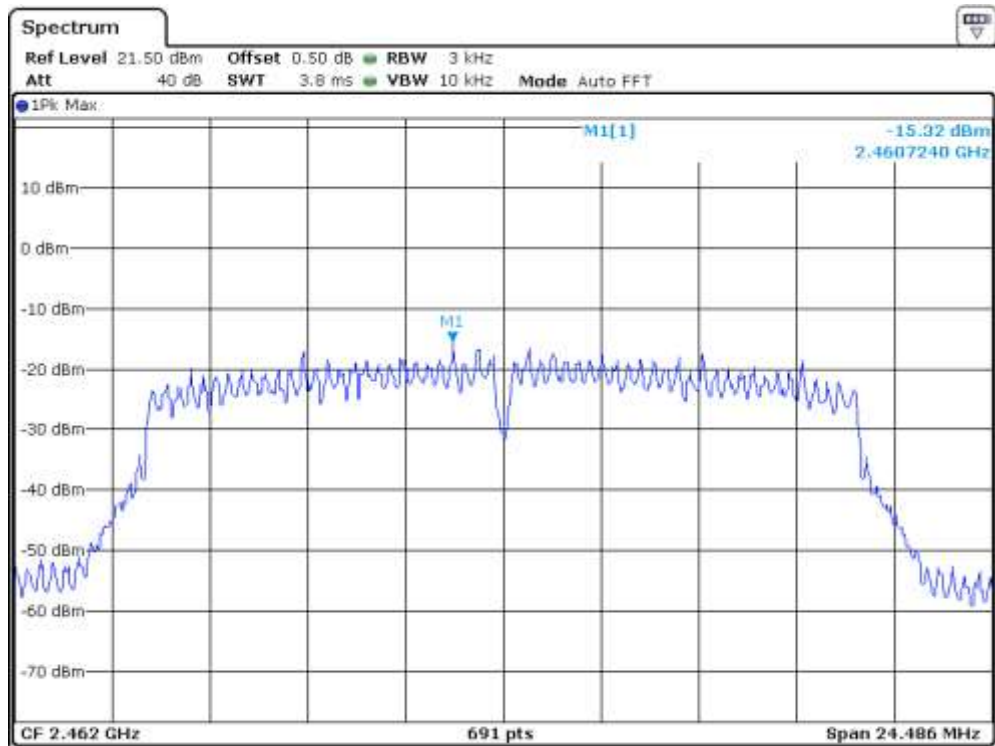

802.11 n40

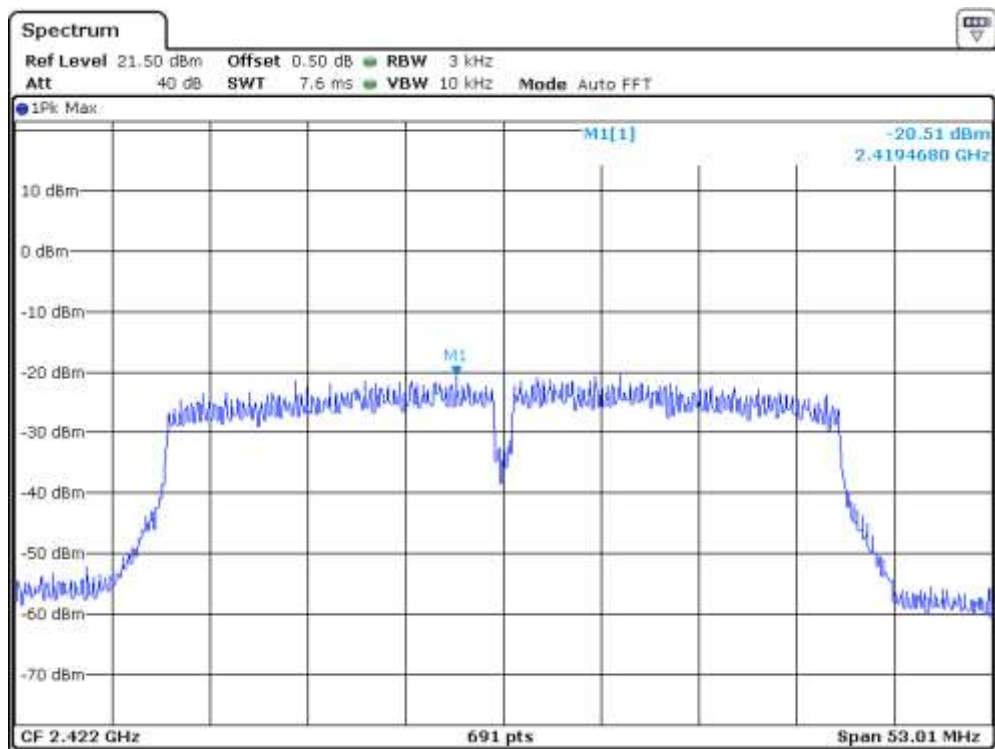

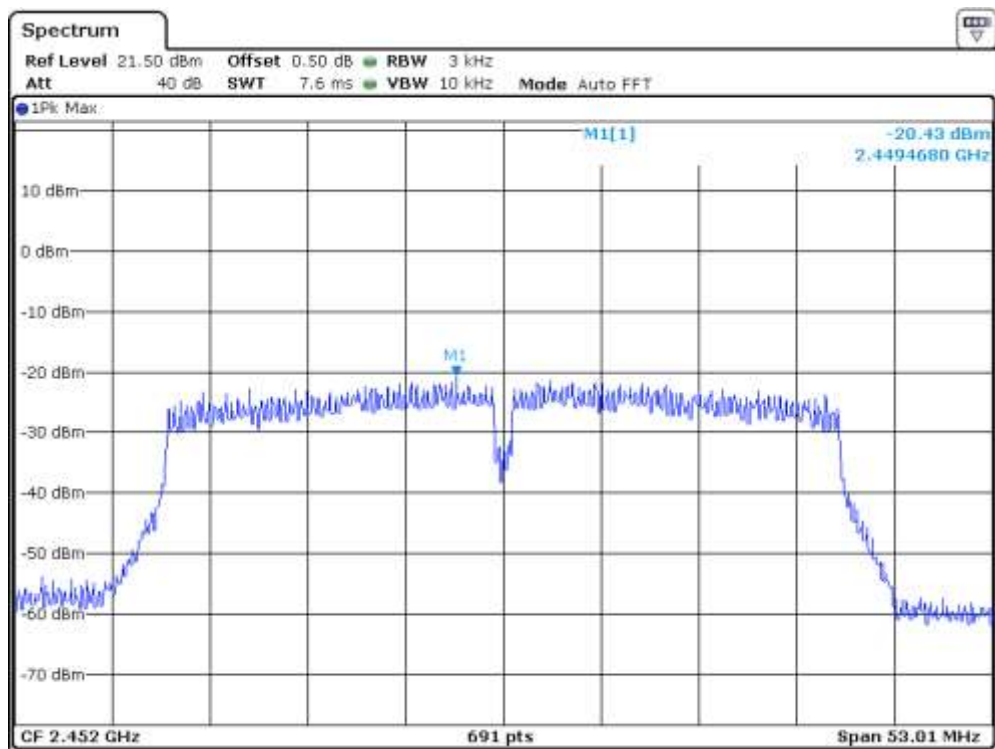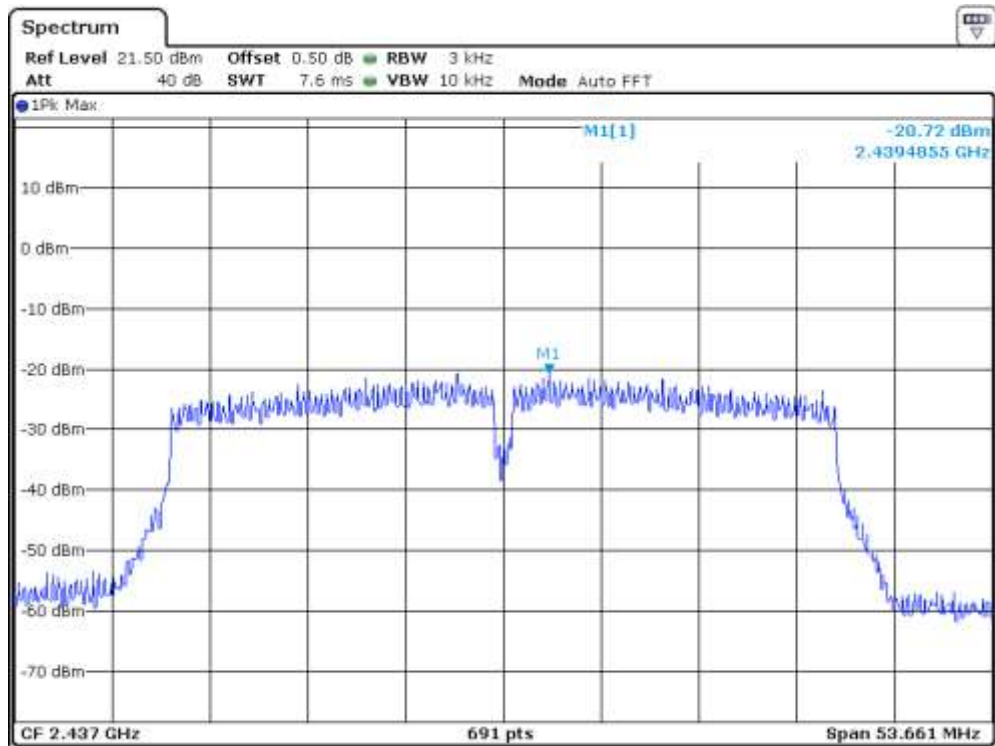

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 18 May 2019

Model: NTUD-U8

4.4 Out of Band Conducted Emissions, FCC Rule 15.247(d)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. The Measurement Procedure was set according to the FCC KDB 558074 D01 v05r02.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the passband.

Refer to the attached test plots for out of band conducted emissions data with rate of 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n-HT20 and 13.5Mbps for 802.11n-HT40.

The test plots showed all spurious emission up to the tenth harmonic were measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

Block Diagram:

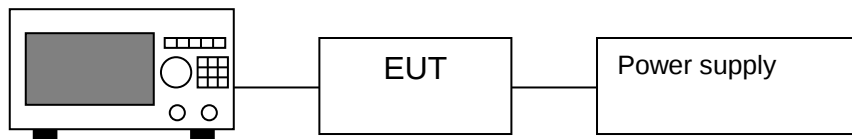



Spectrum Analyzer



The test plots are attached as below.

SISO Mode, Ant 1:



802.11b


Channel 01 (2412MHz) Reference Level: 1.74dBm

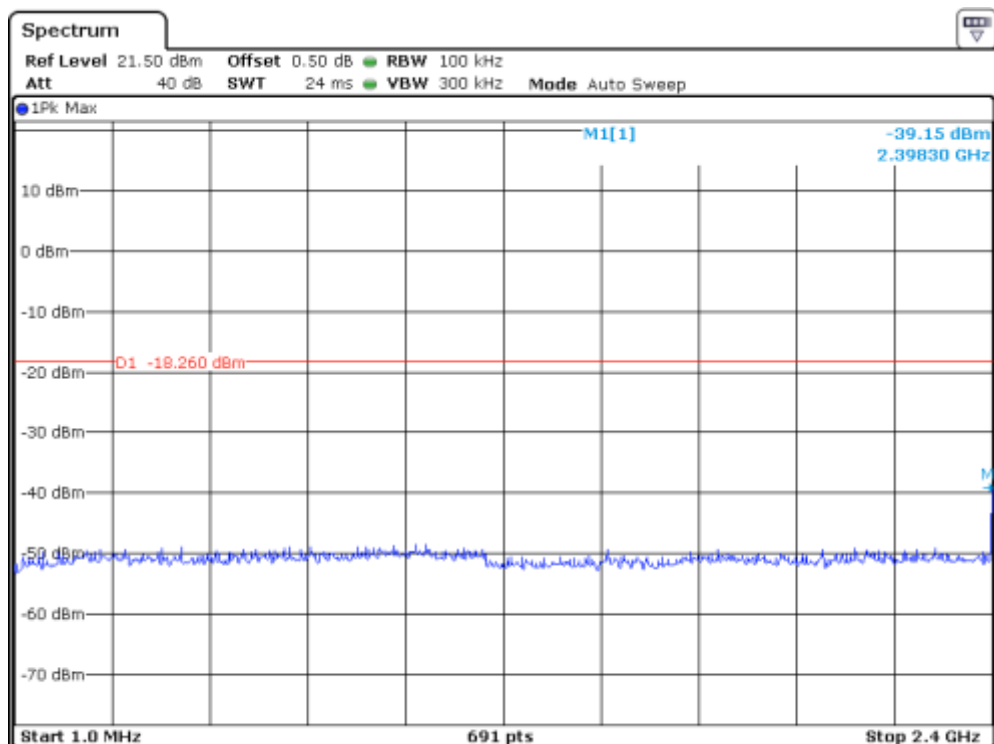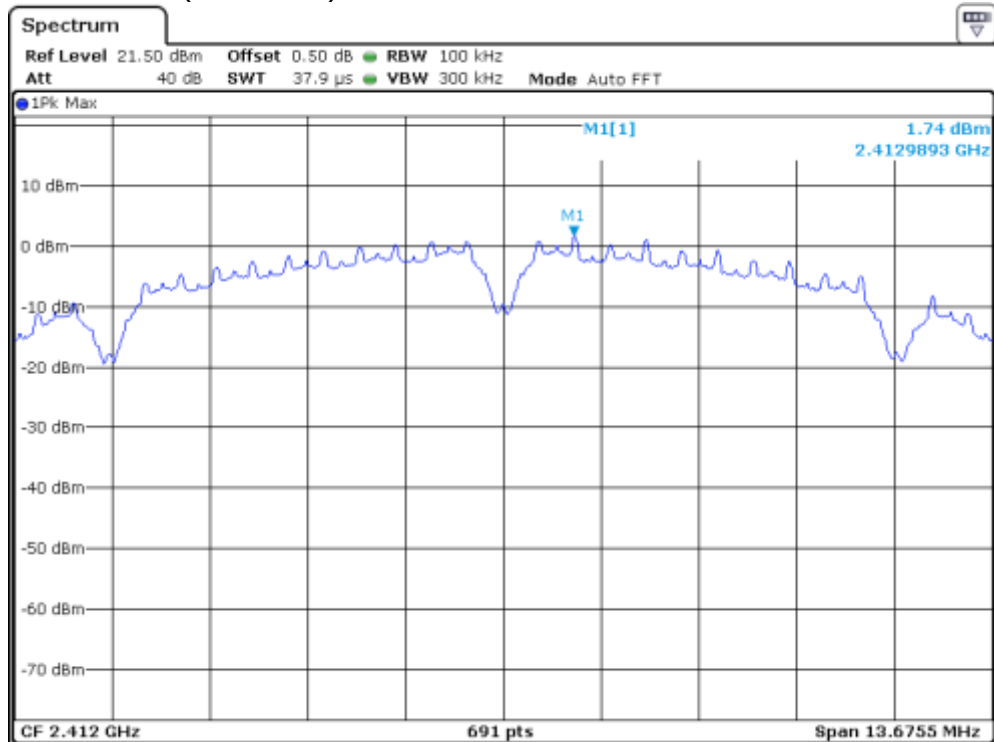

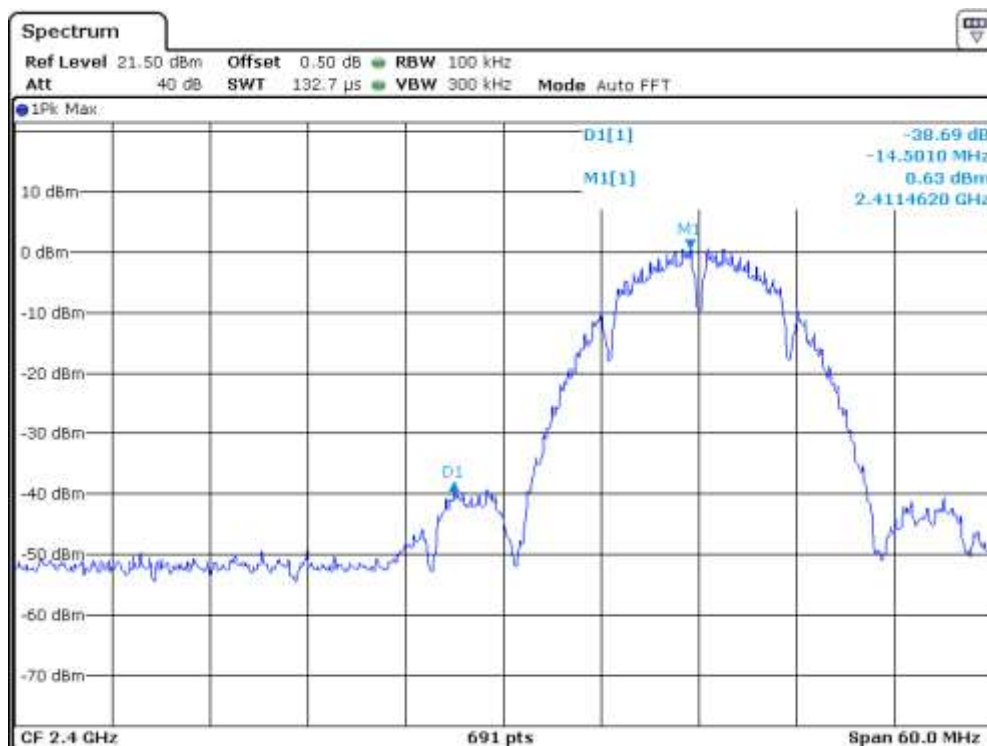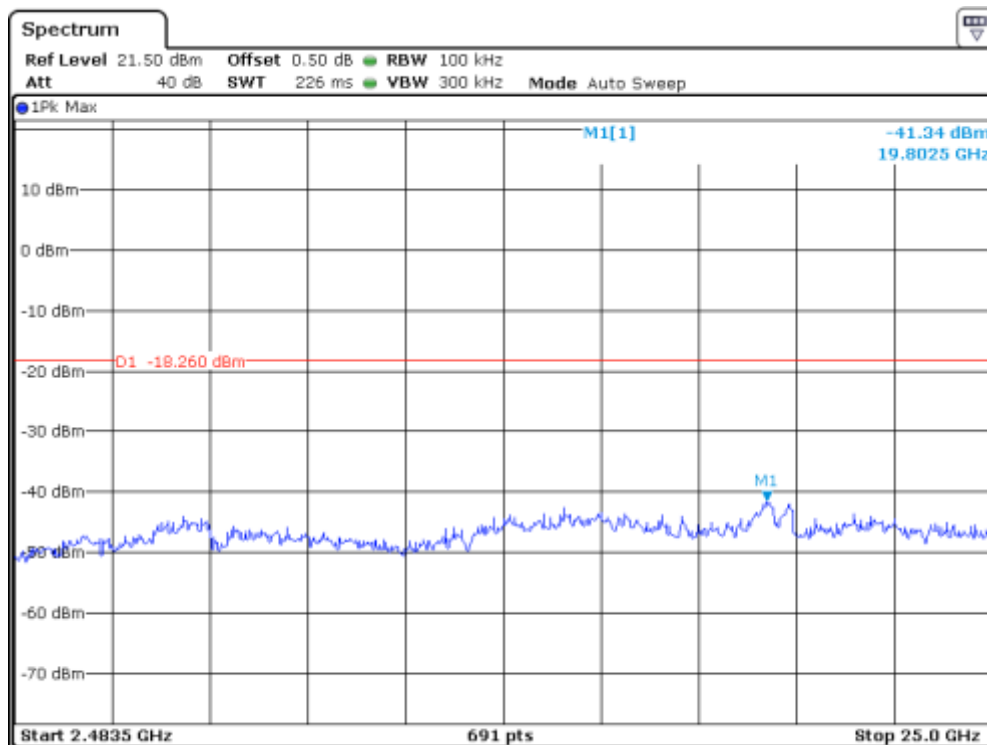




Channel 06 (2437MHz) Reference Level: 0.88dBm

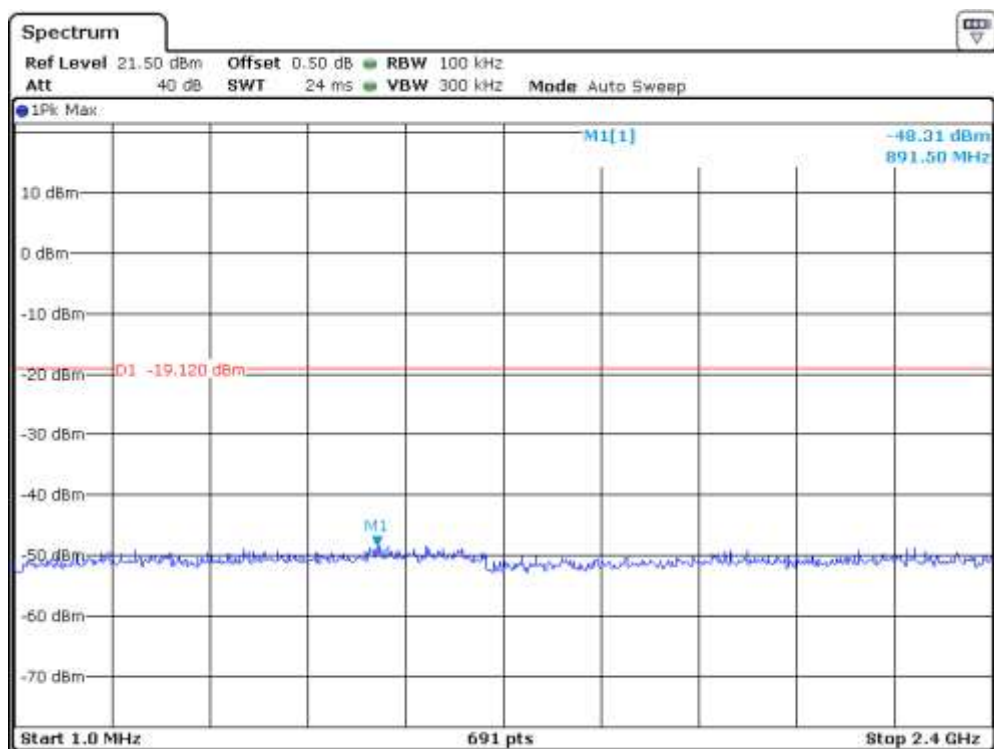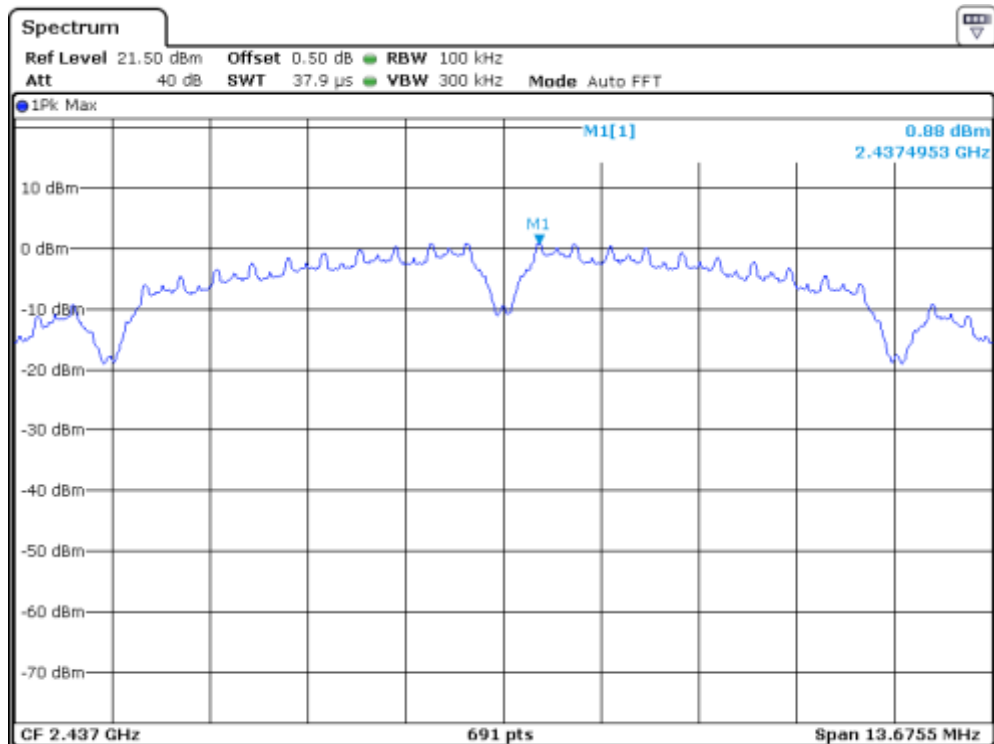


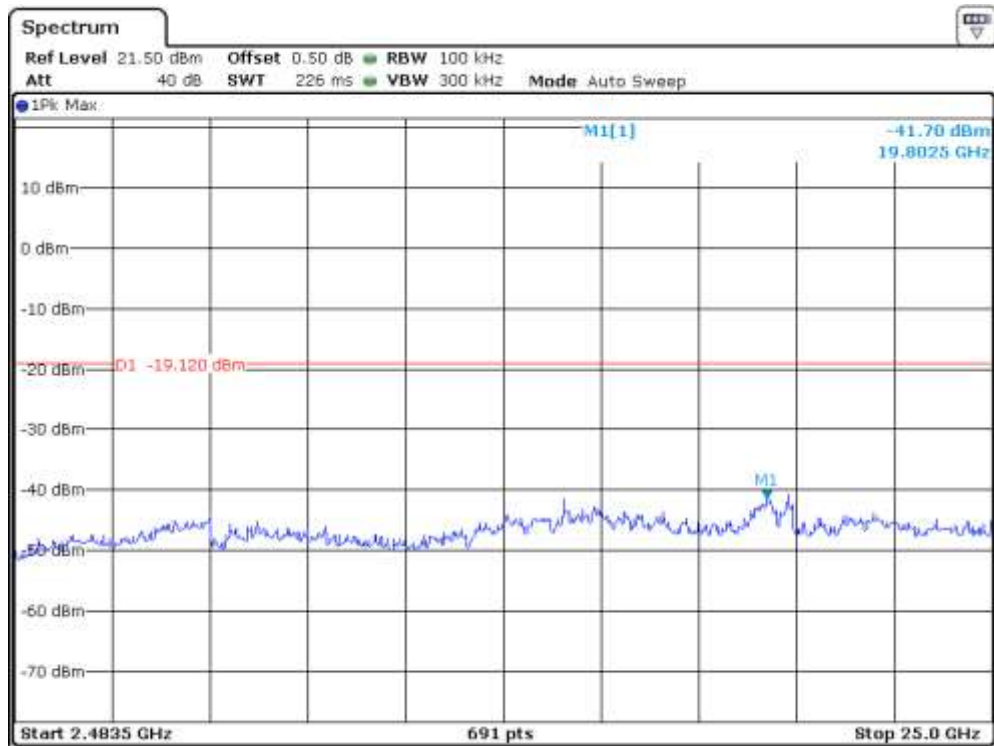

Channel 11 (2462MHz) Reference Level: 1.14dBm

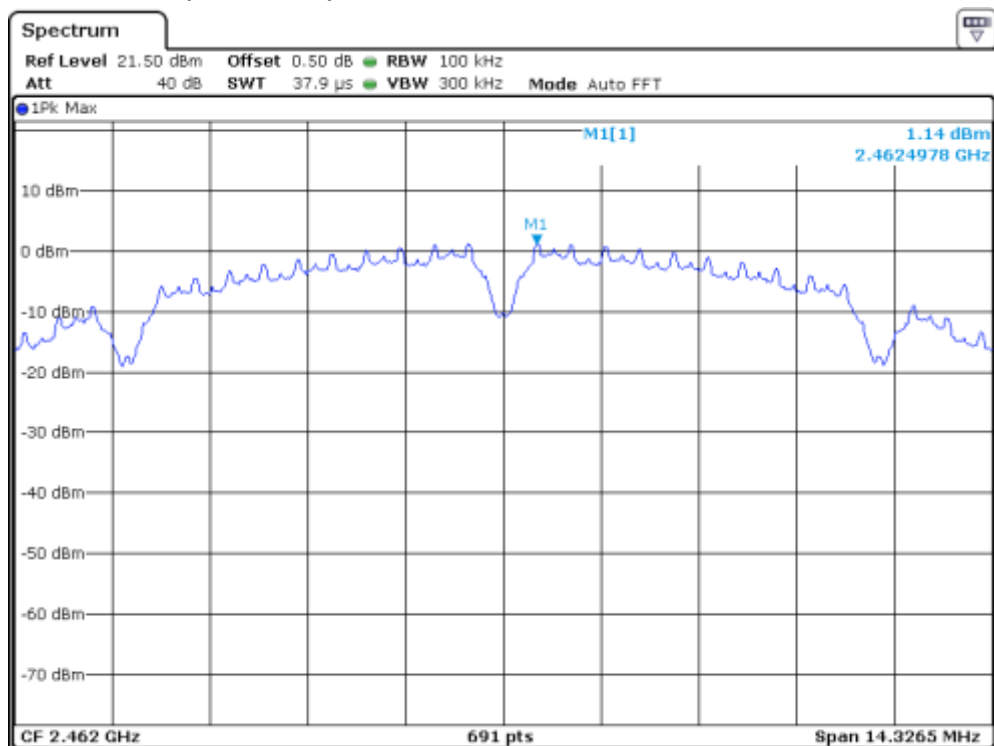


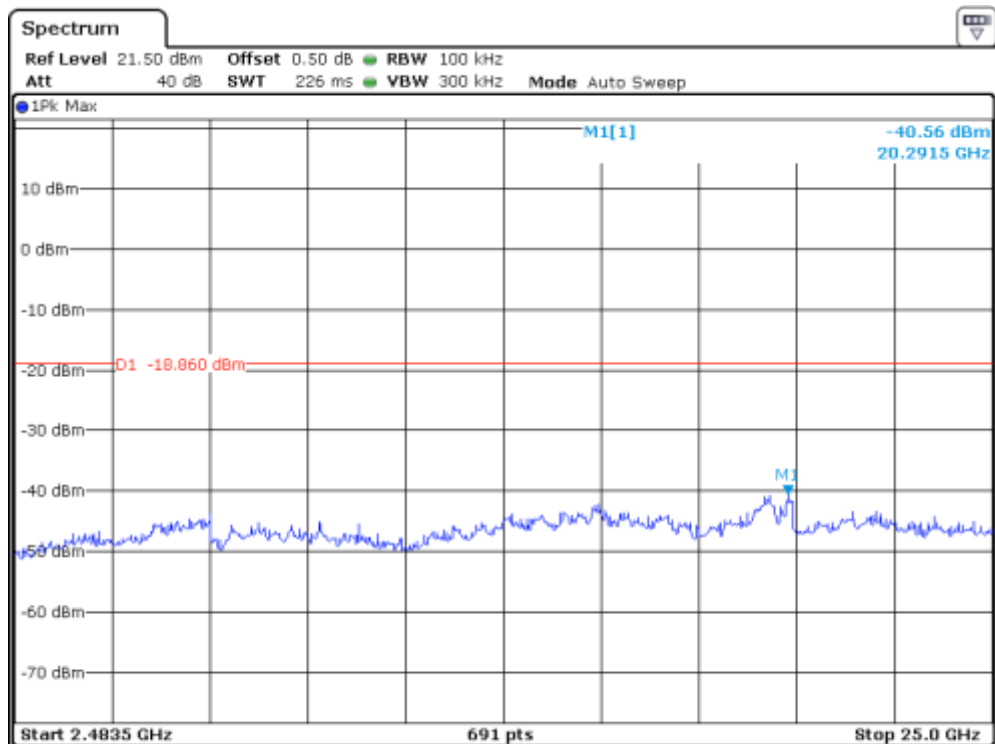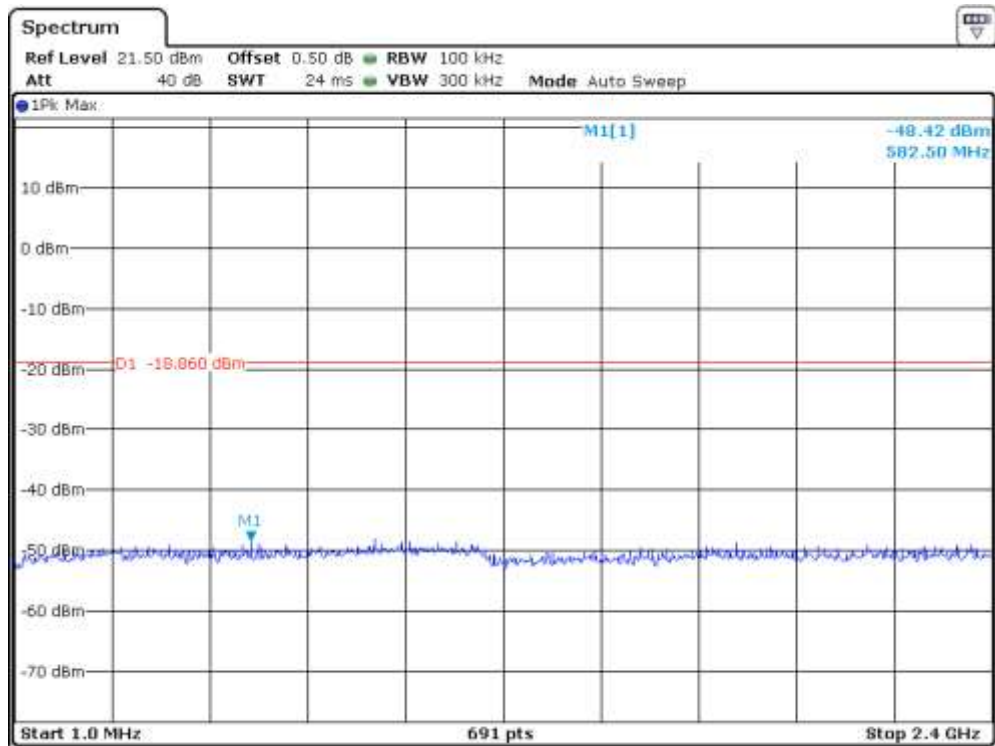


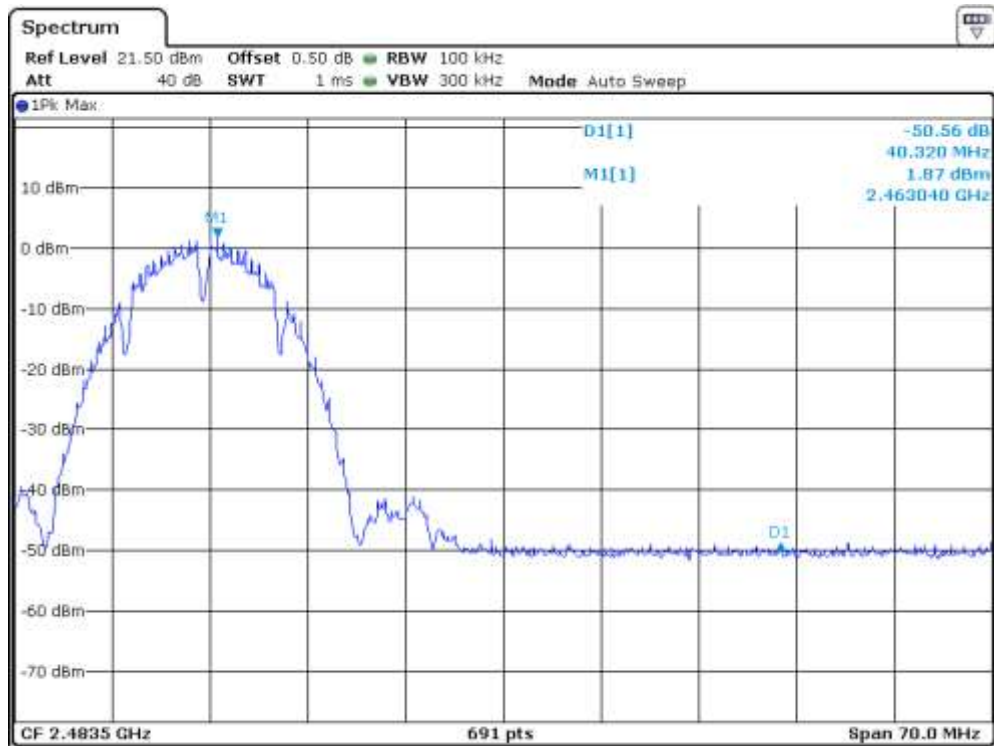


802.11g


Channel 01 (2412MHz) Reference Level: -3.18dBm

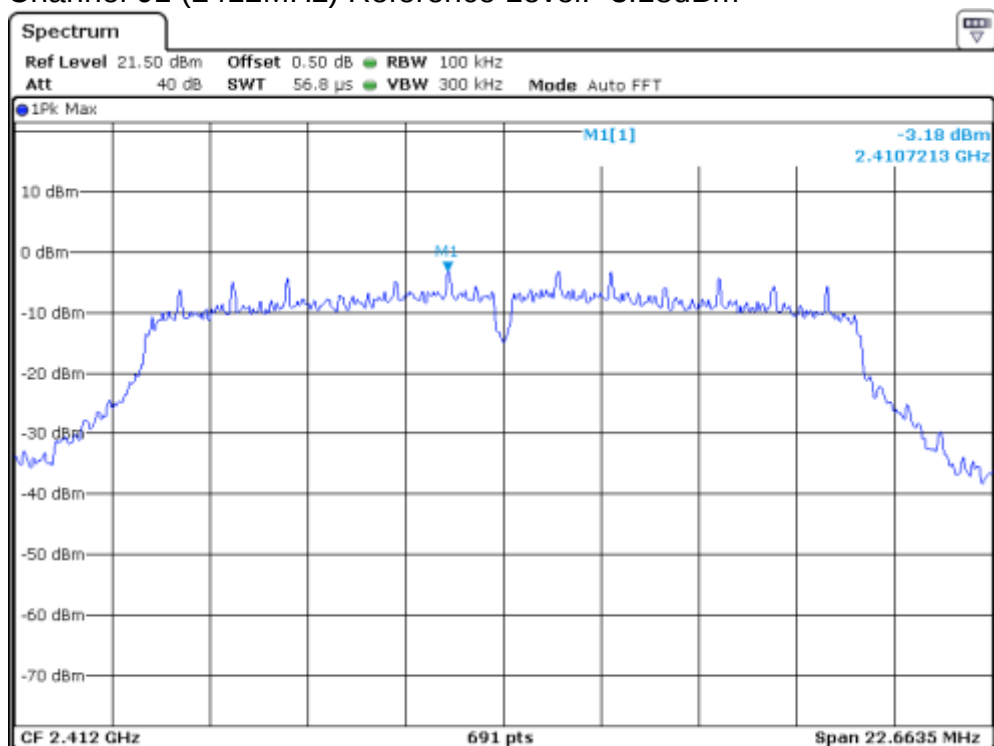


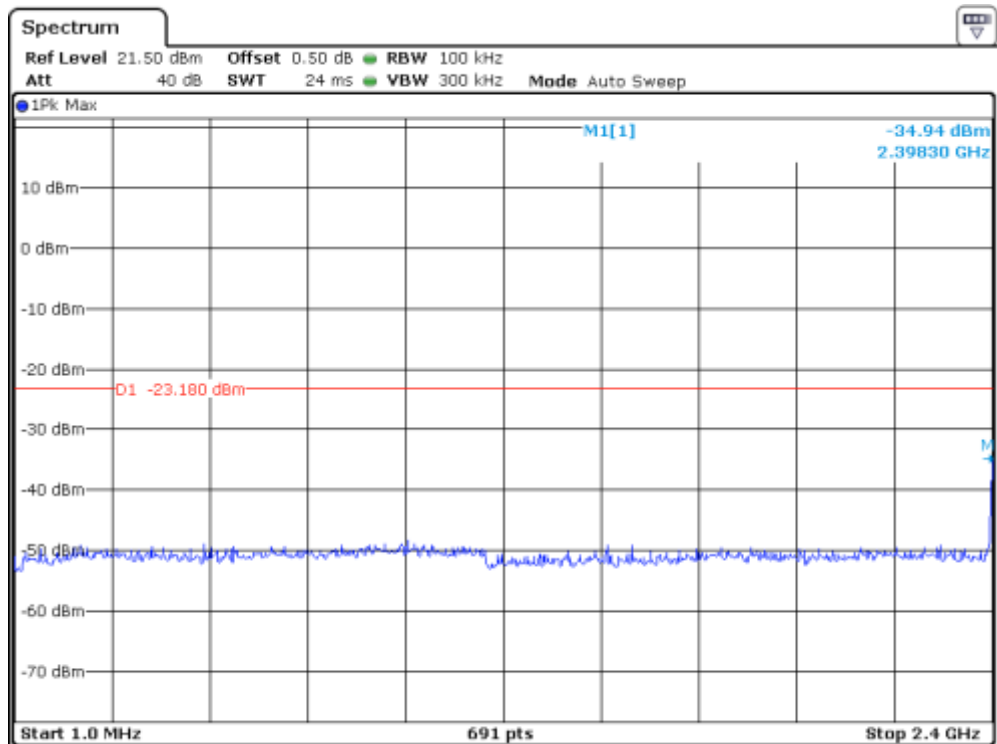


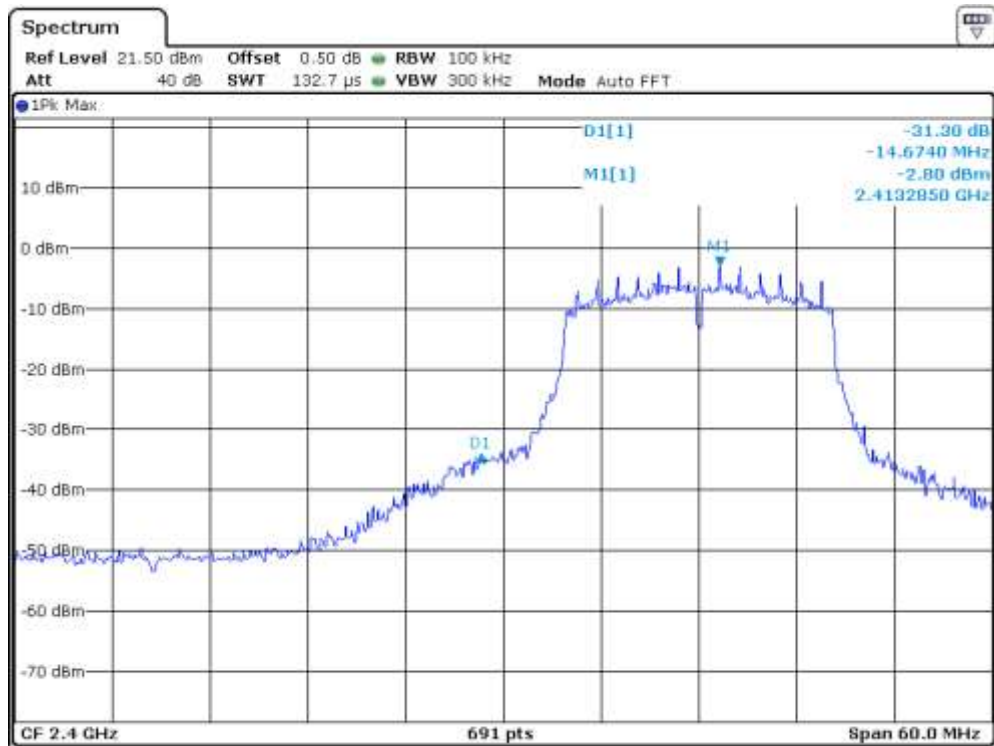




Channel 06 (2437MHz) Reference Level: -2.75dBm

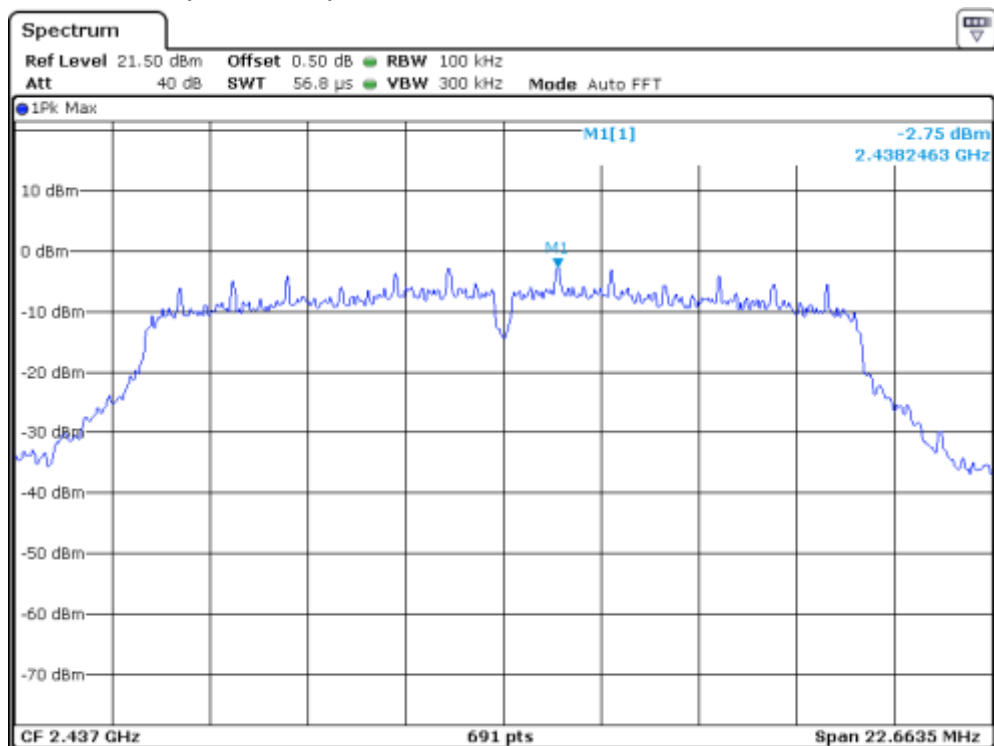

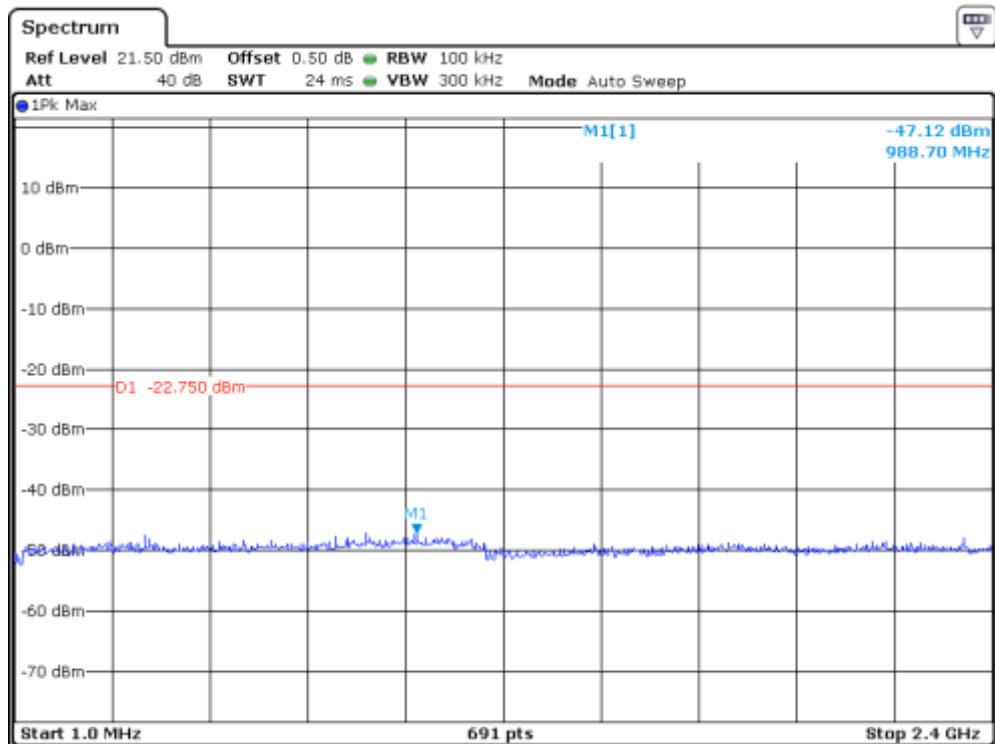



Channel 11 (2462MHz) Reference Level: -2.47dBm

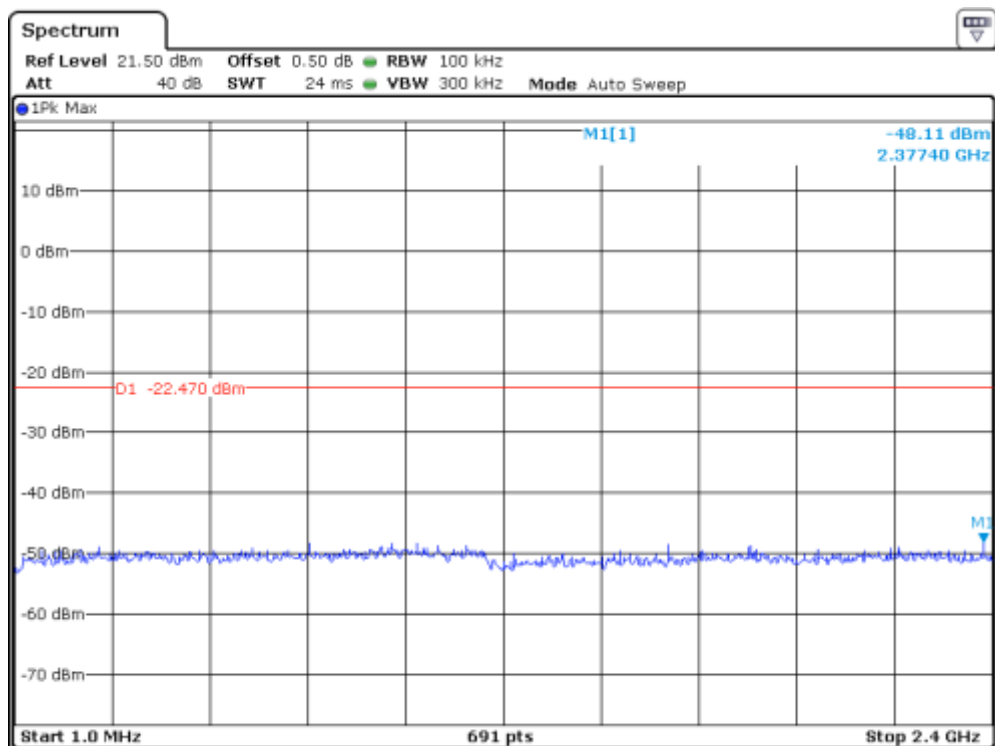
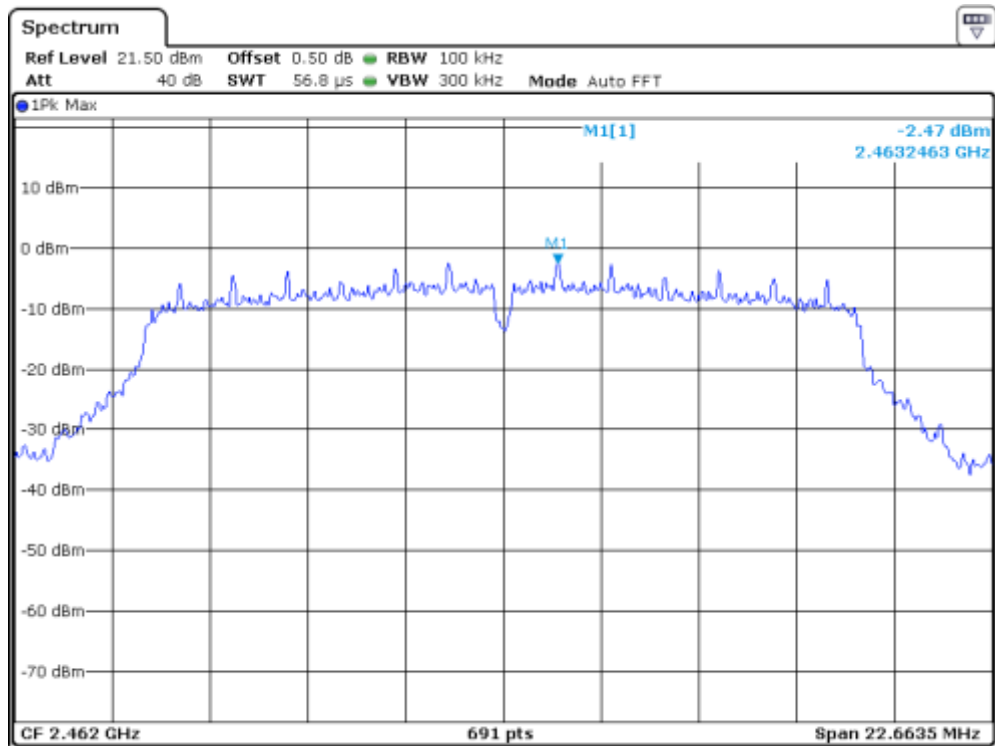


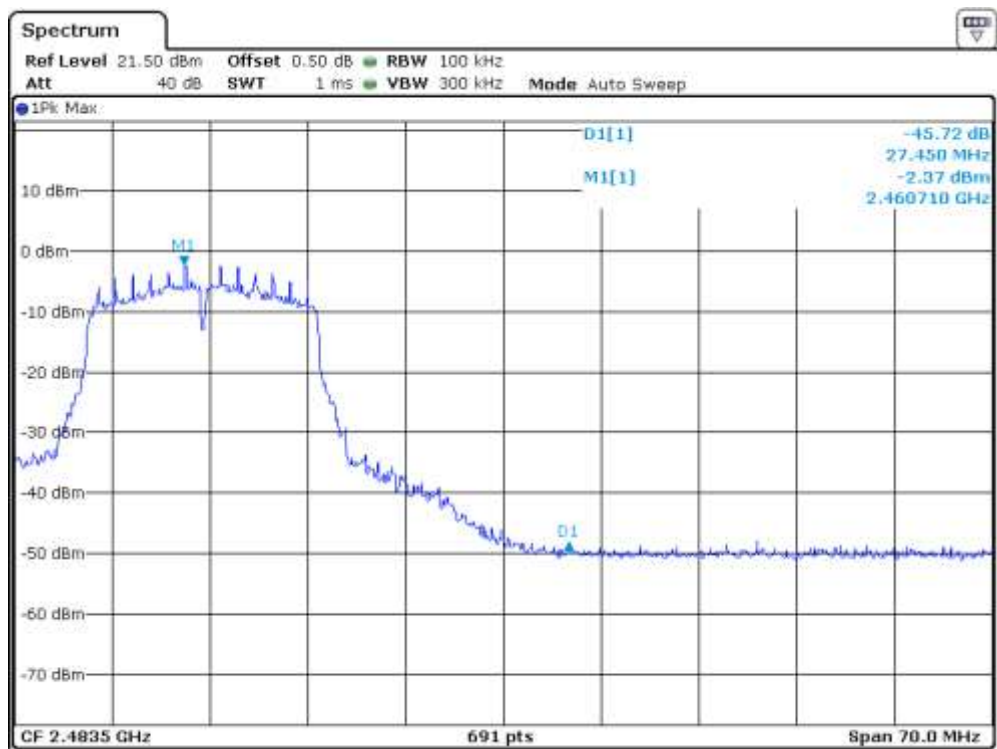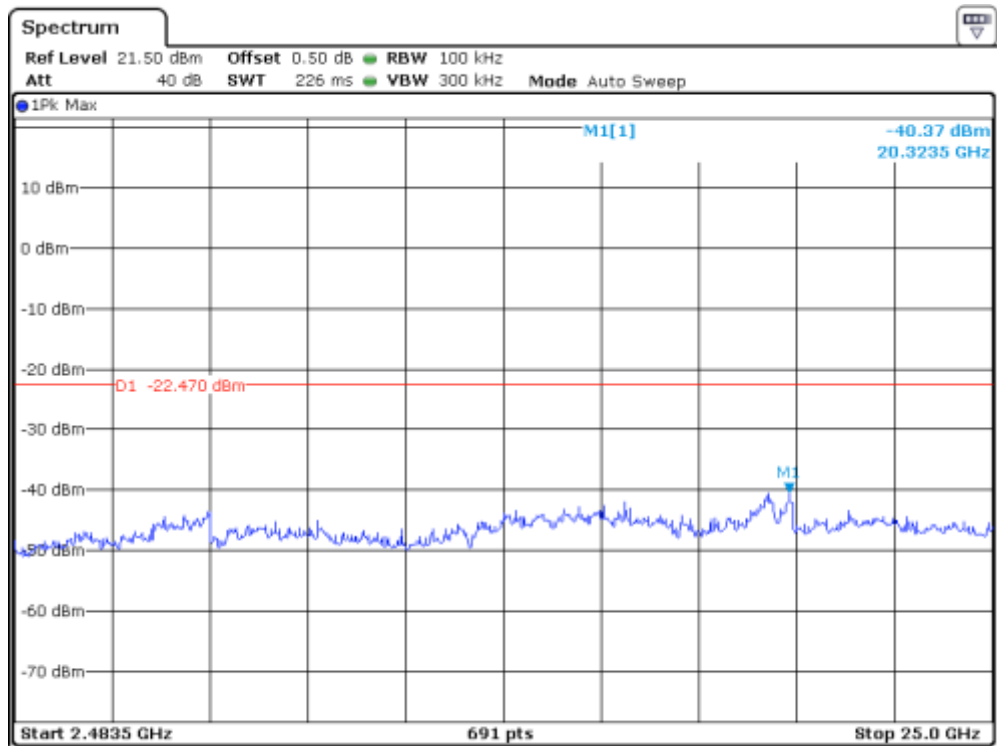



802.11n-HT20


Channel 01 (2412MHz) Reference Level: -4.67dBm

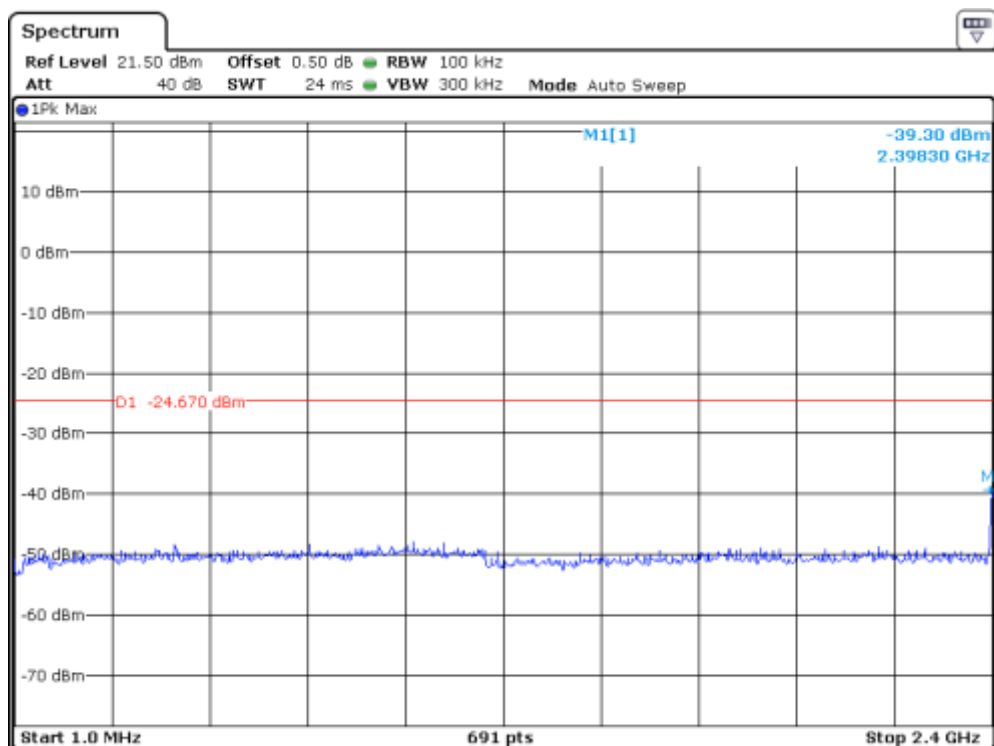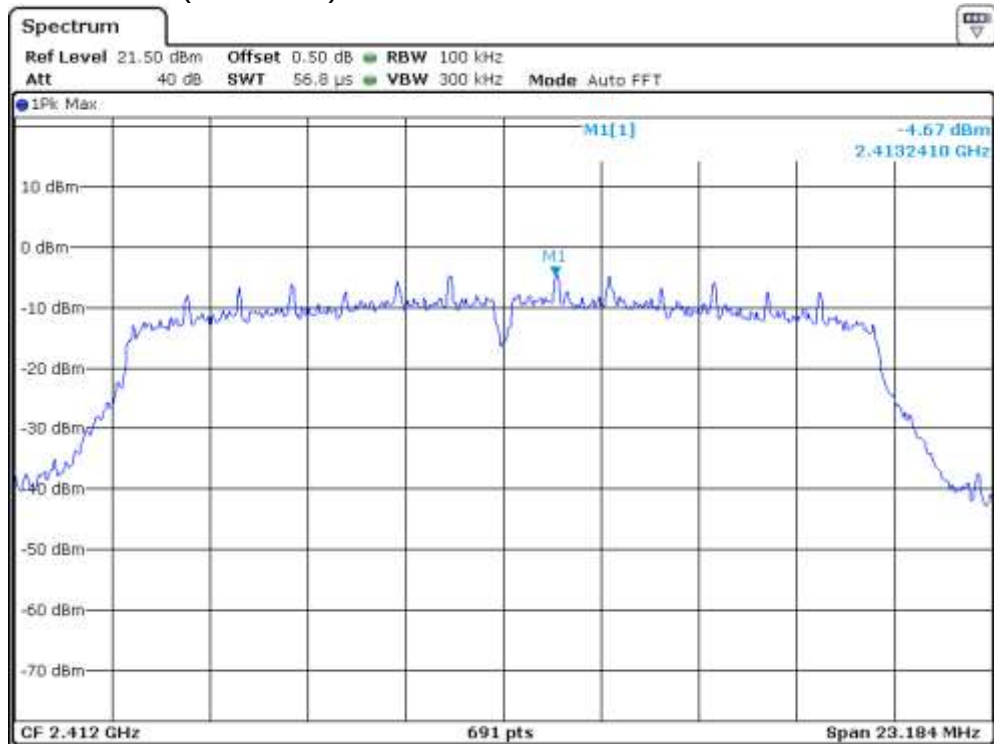

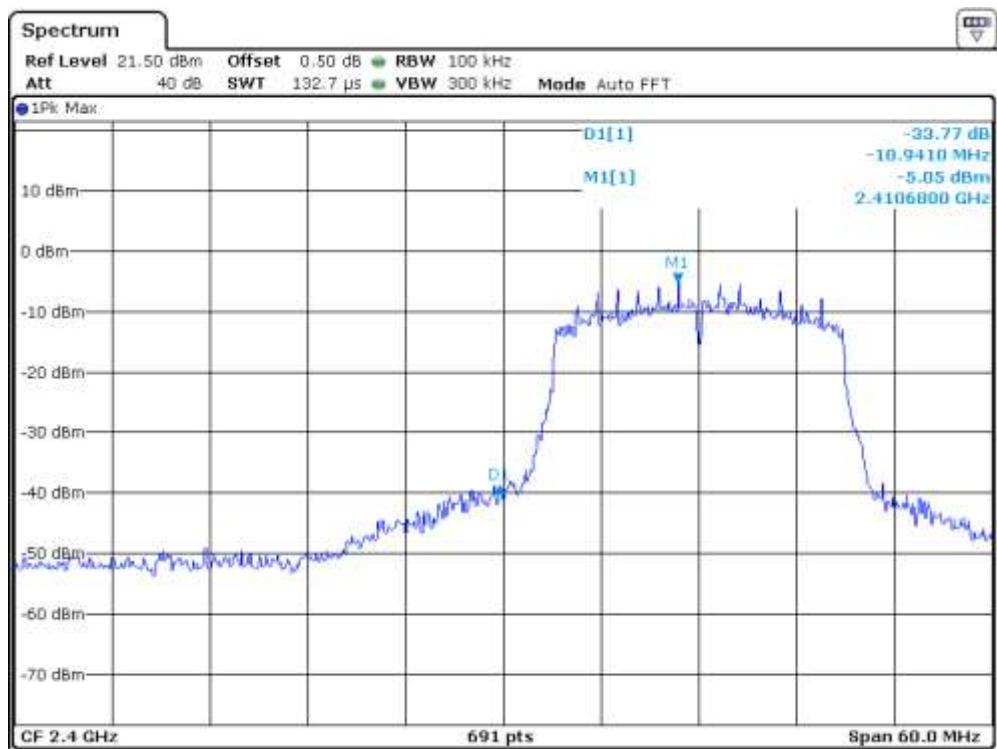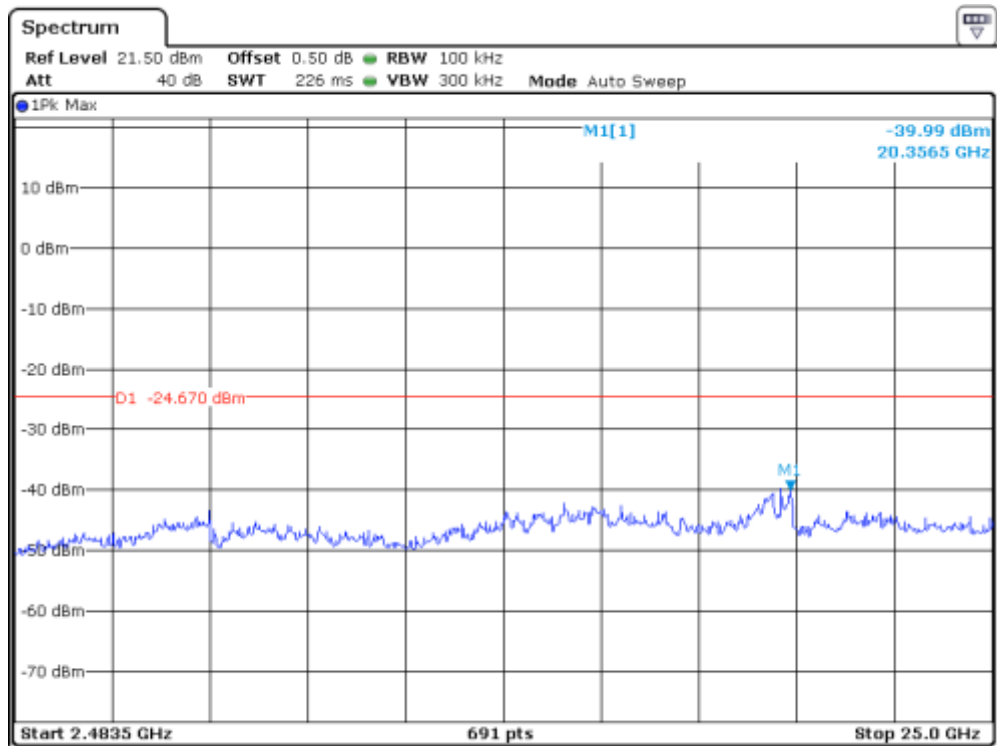



Channel 06 (2437MHz) Reference Level: -4.83dBm

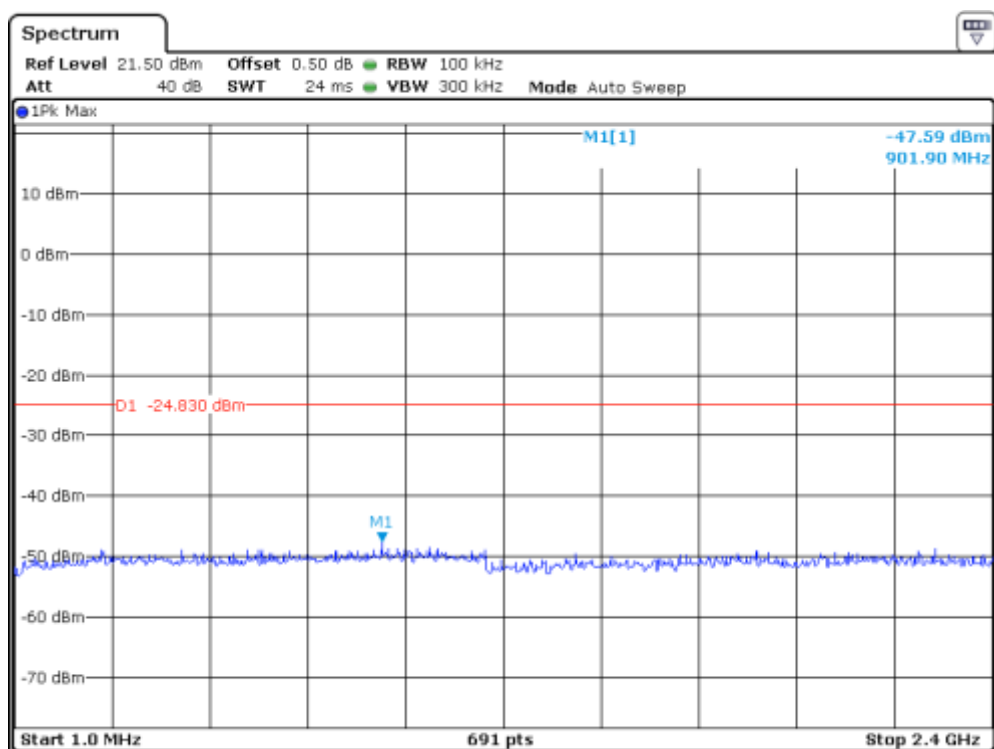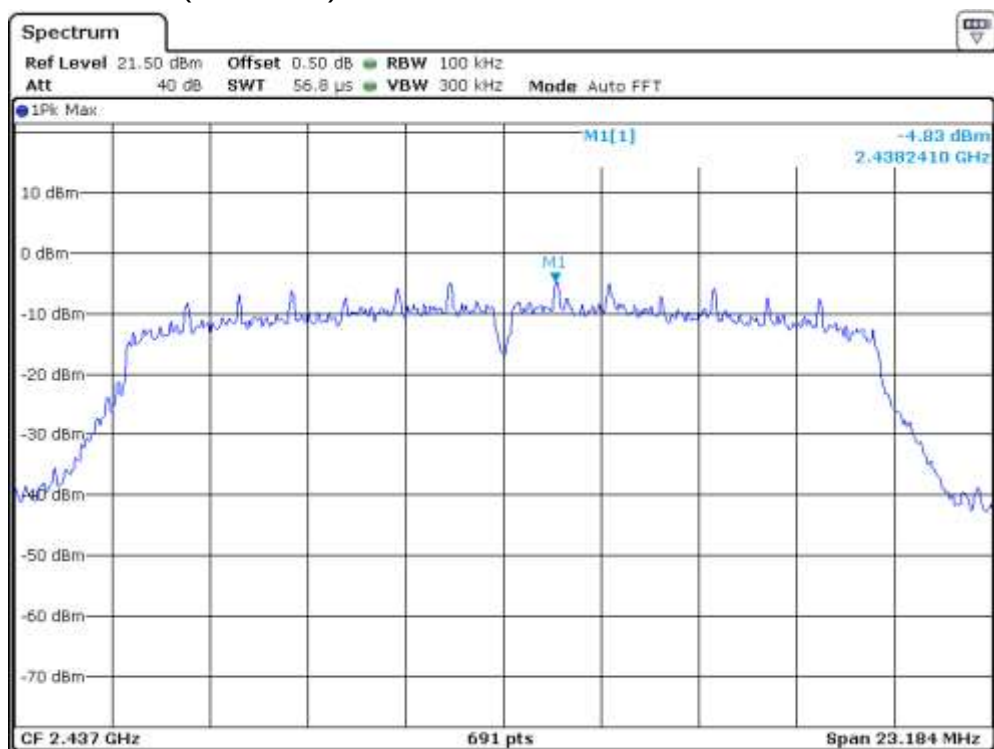


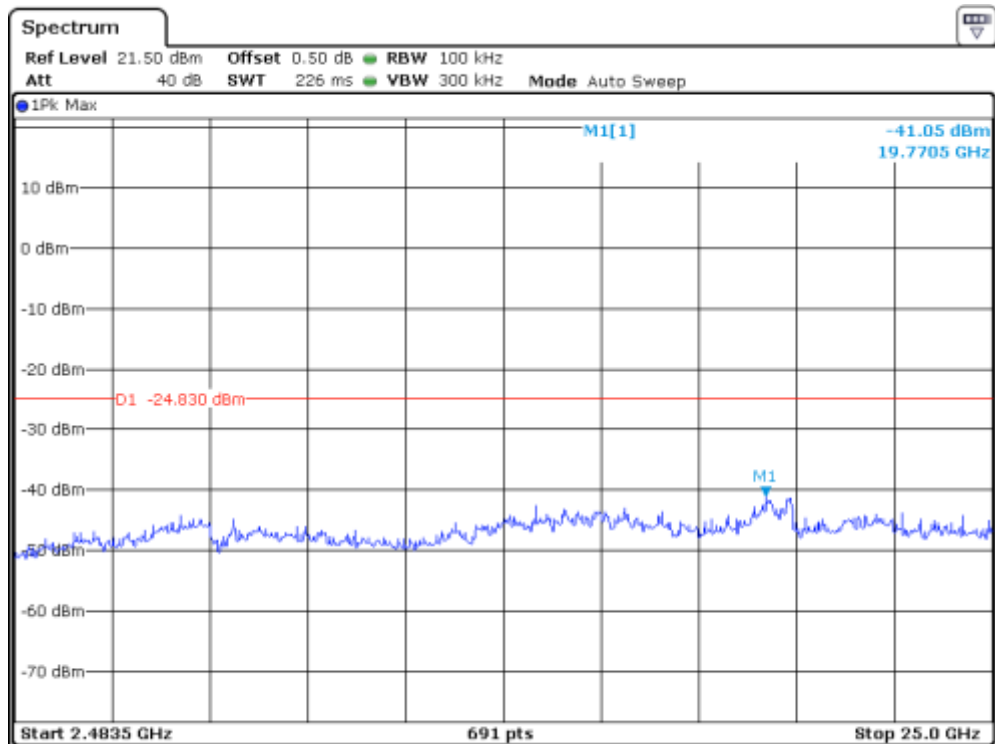

Channel 11 (2462MHz) Reference Level: -4.80dBm

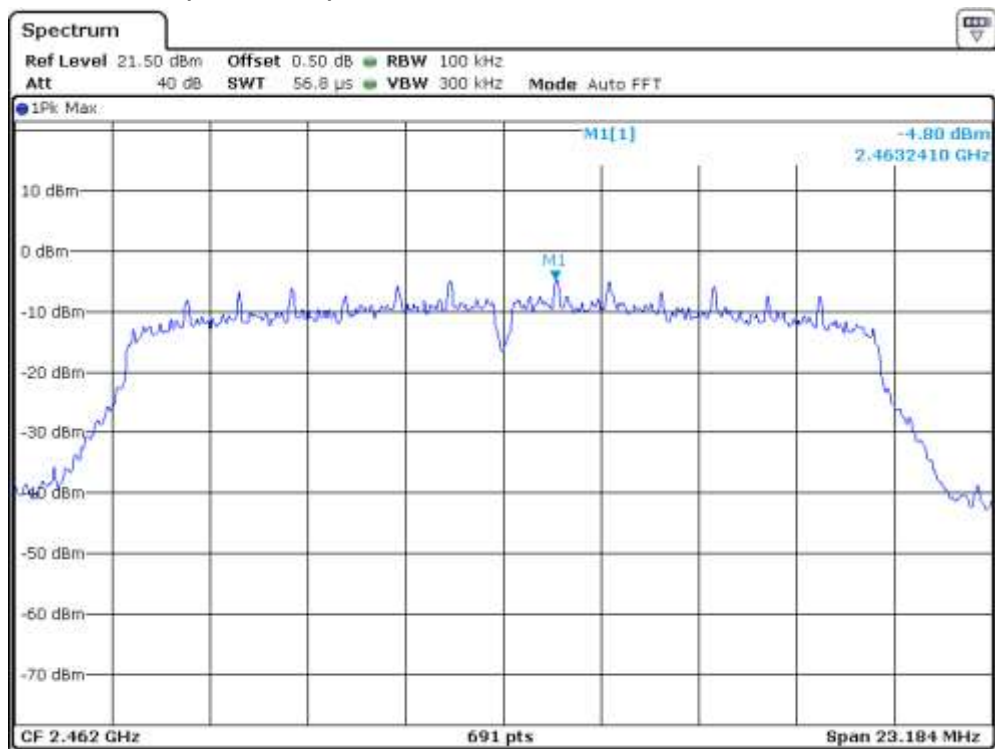



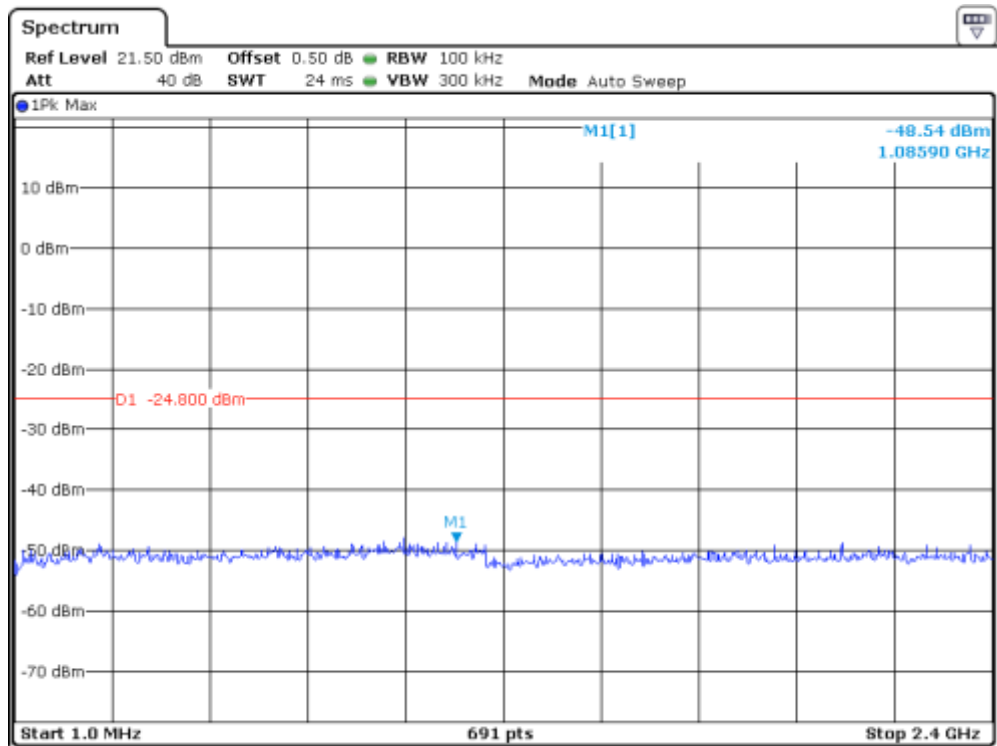


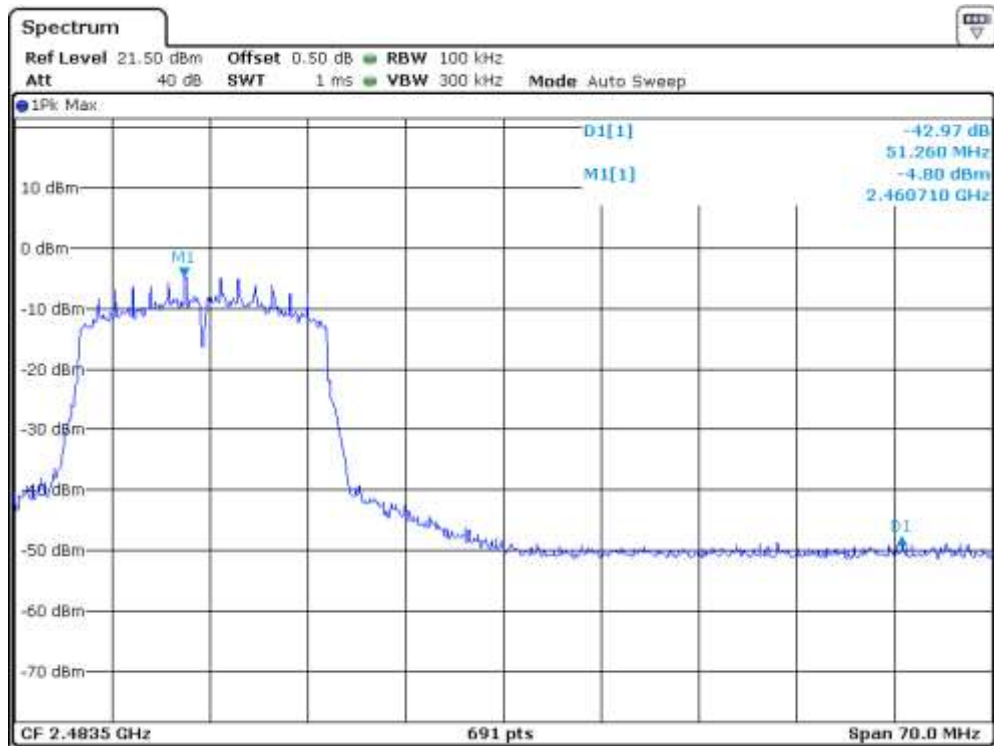


802.11n-HT40


Channel 03 (2422MHz) Reference Level: -7.86dBm


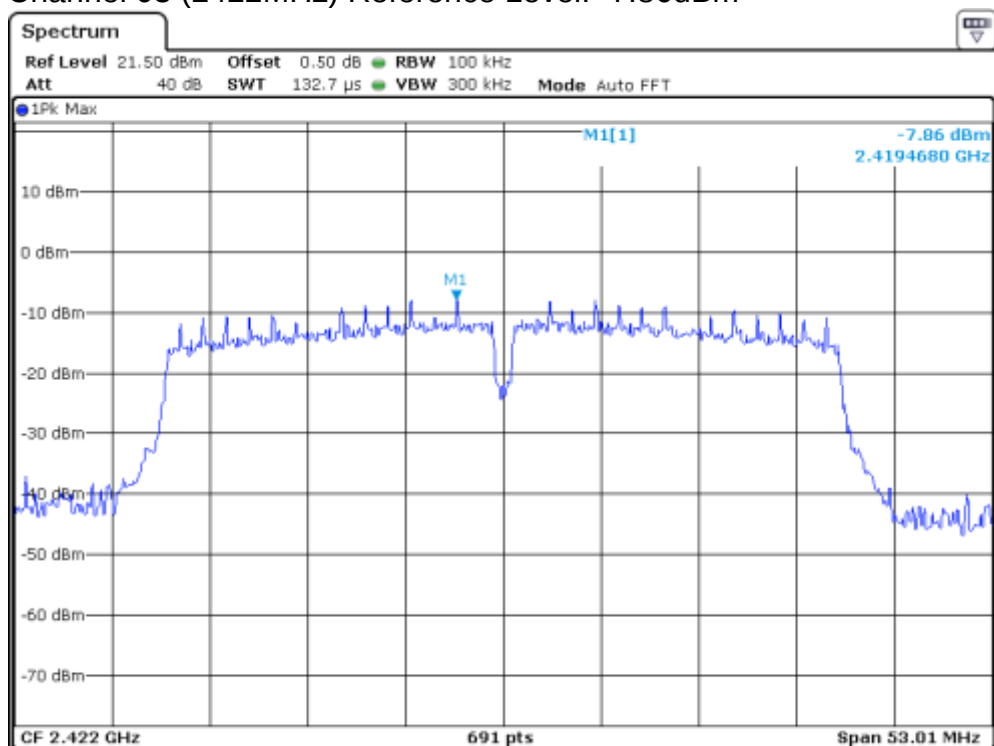


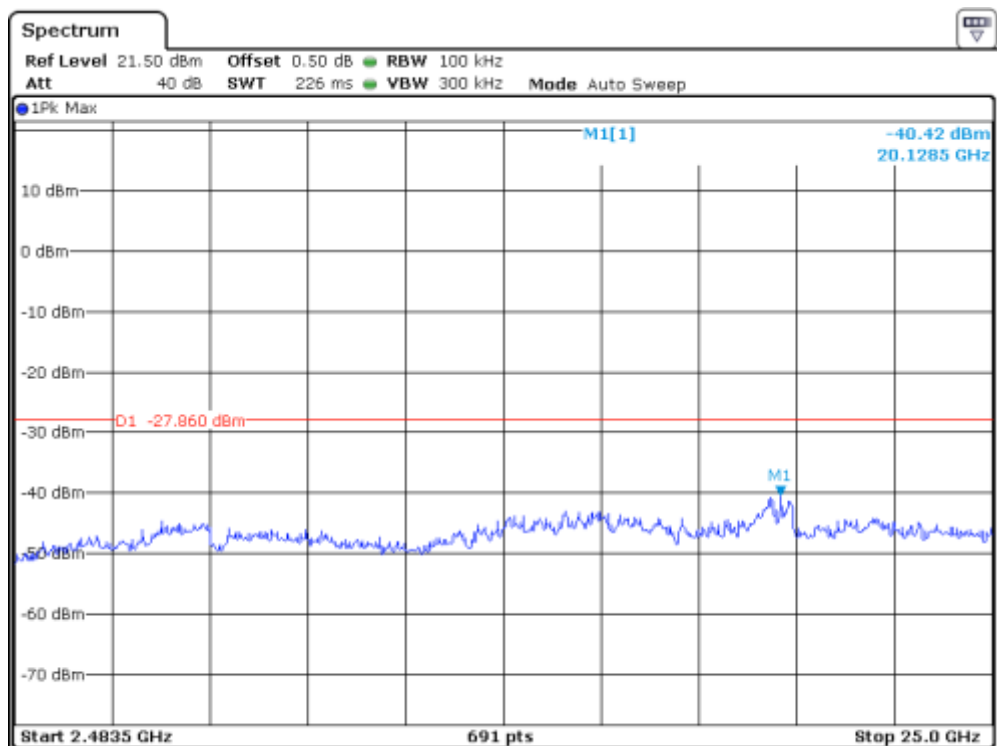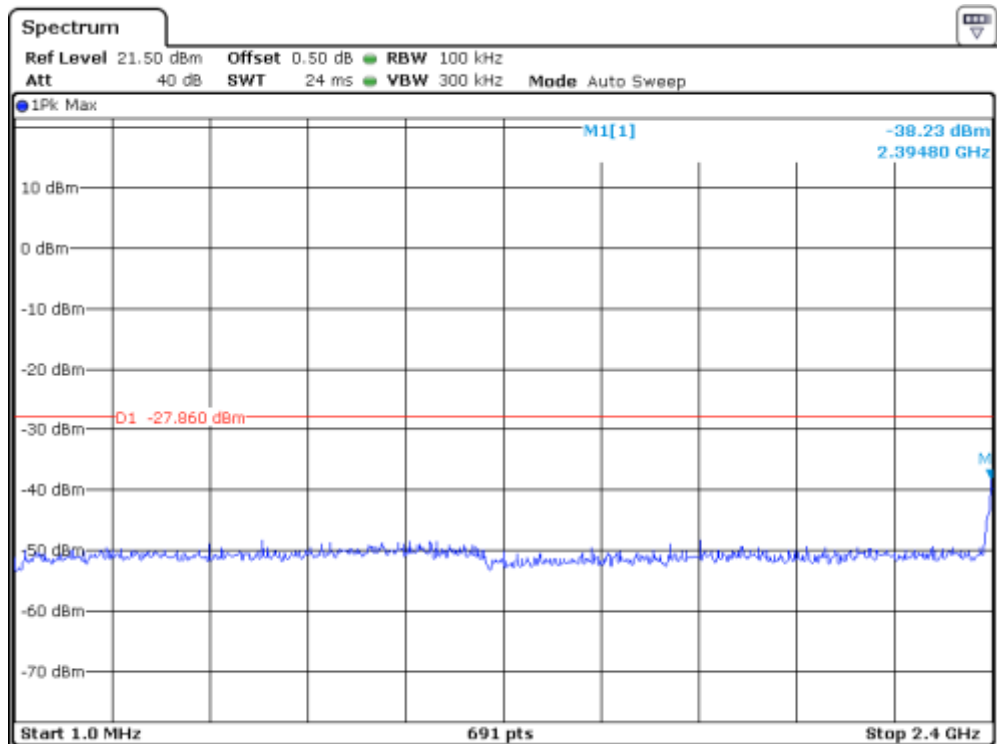


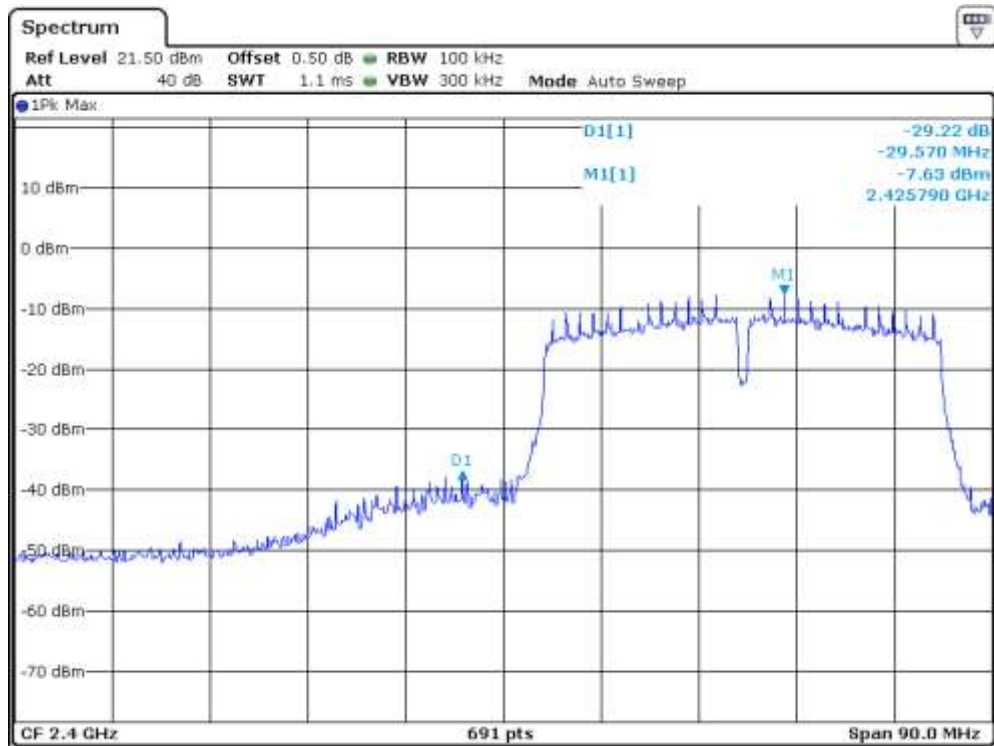




Channel 06 (2437MHz) Reference Level: -7.83dBm

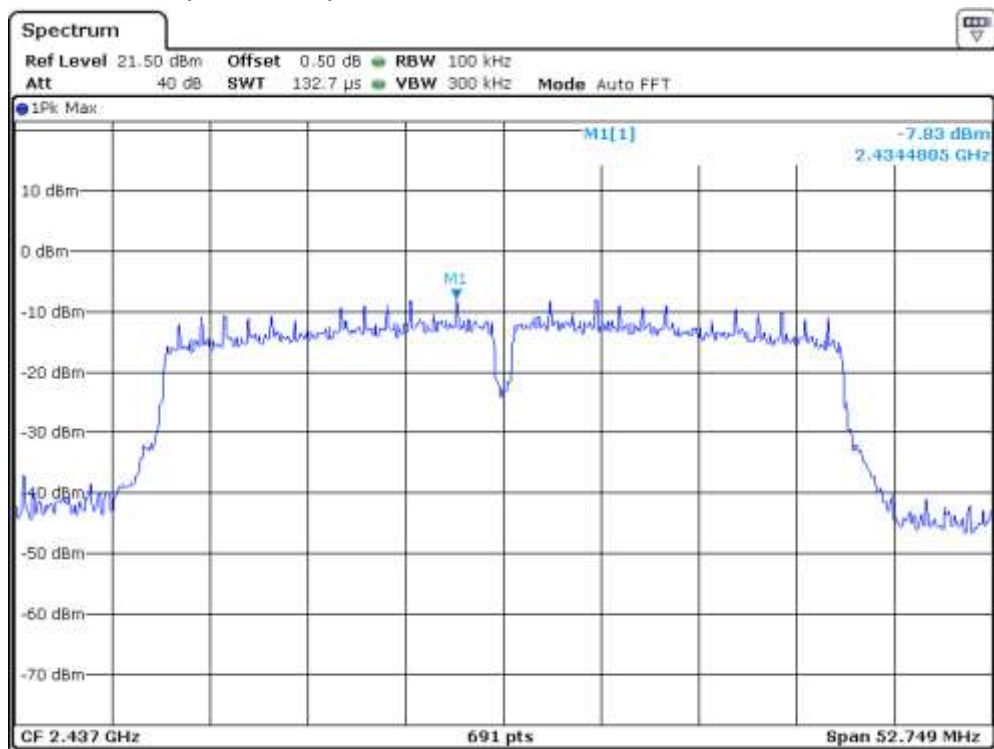

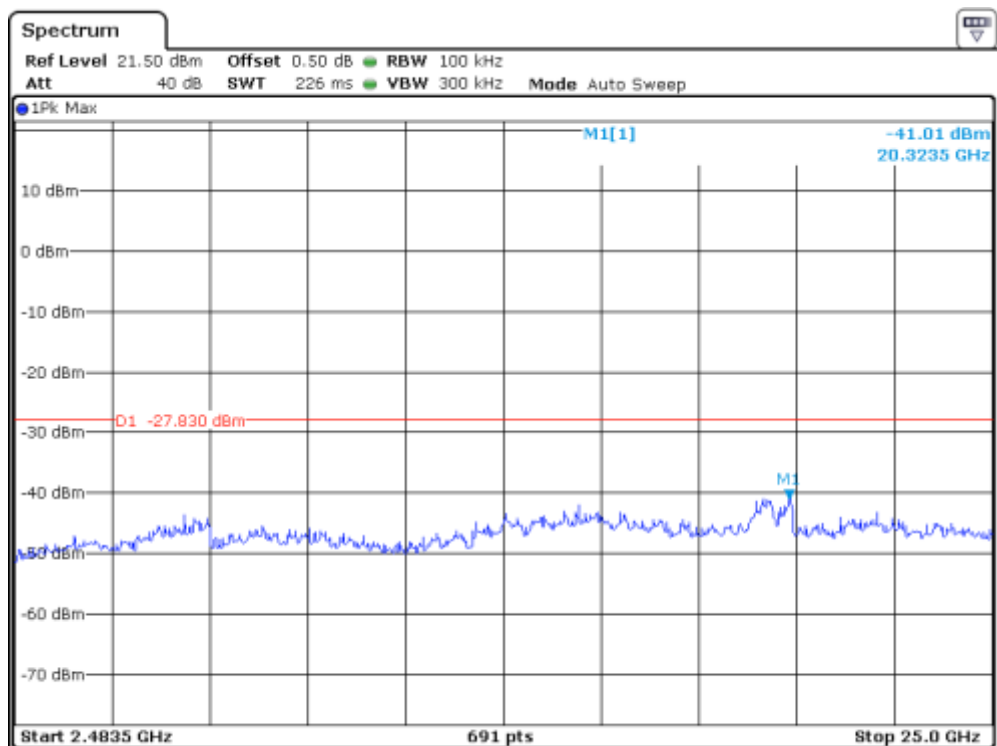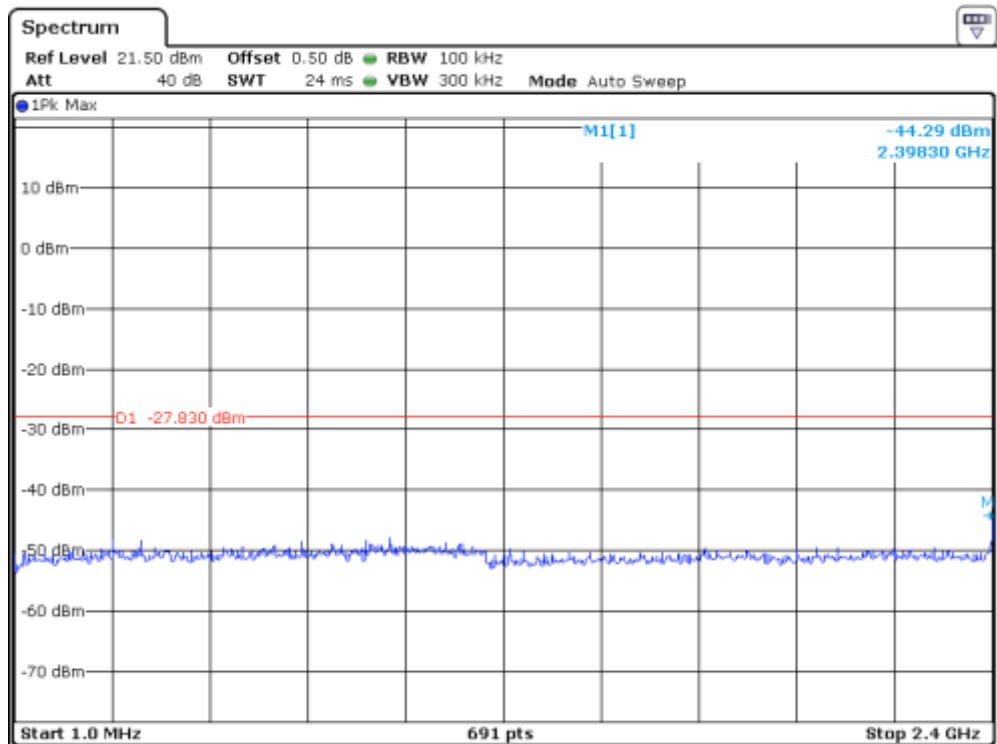

Channel 9 (2452MHz) Reference Level: -7.58dBm

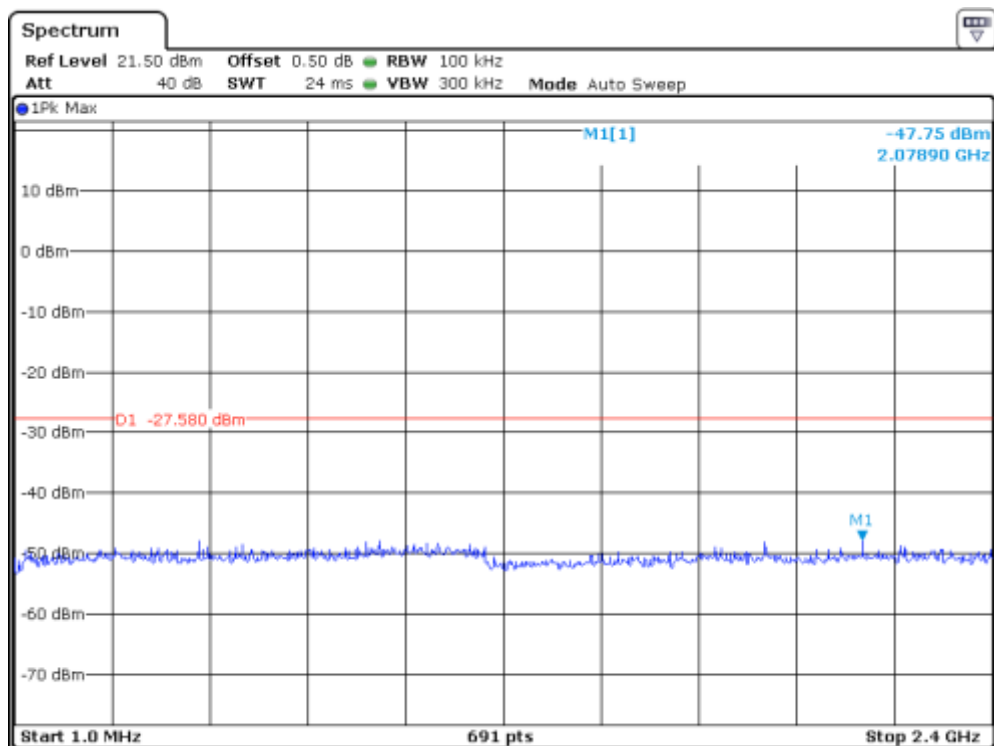
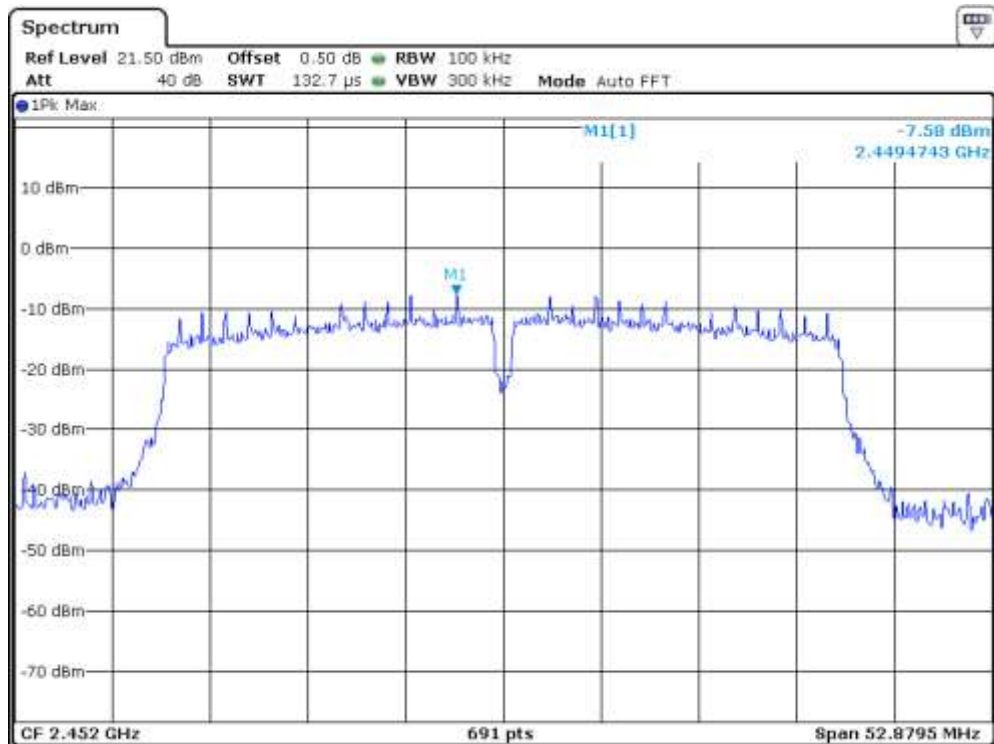


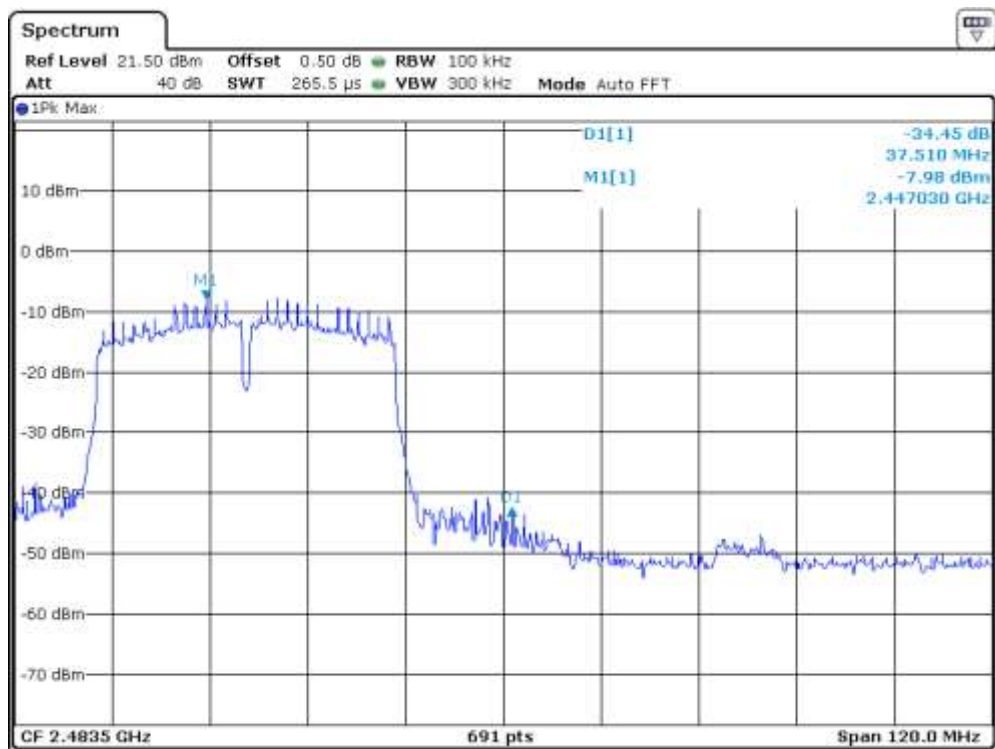
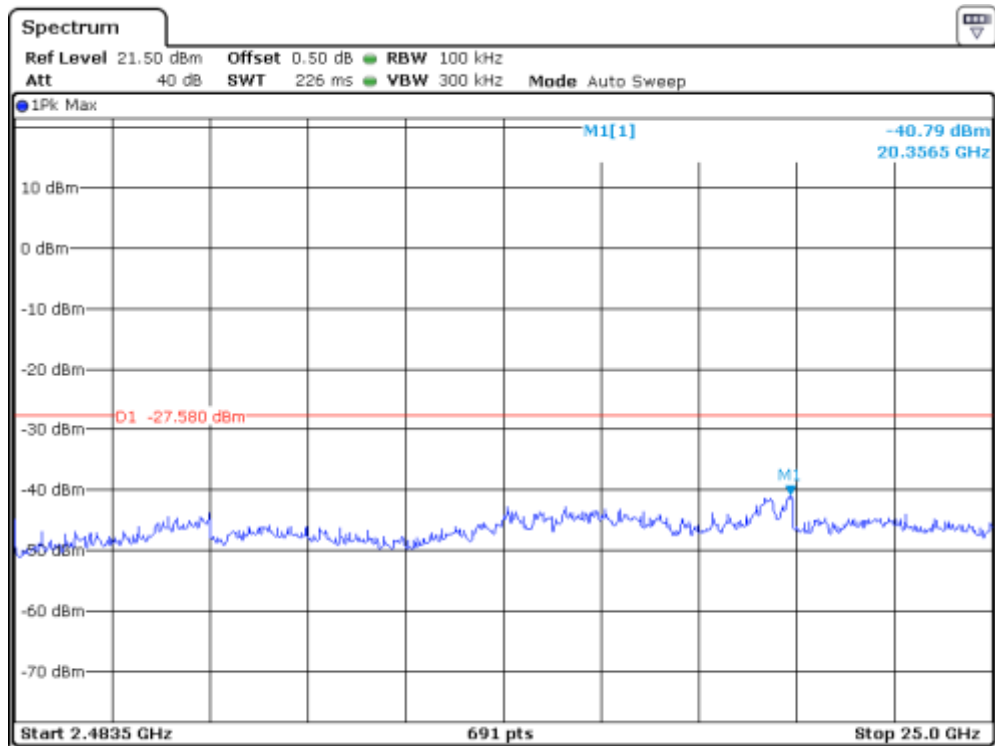


SISO Mode, Ant 2:



802.11b

Channel 01 (2412MHz) Reference Level: 2.94dBm

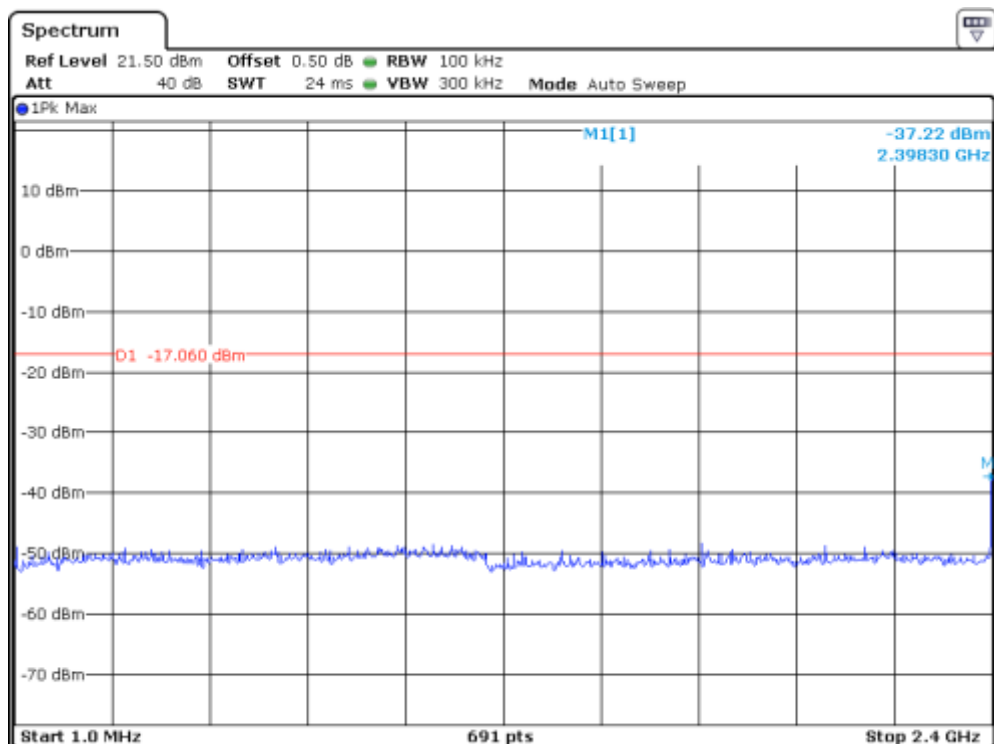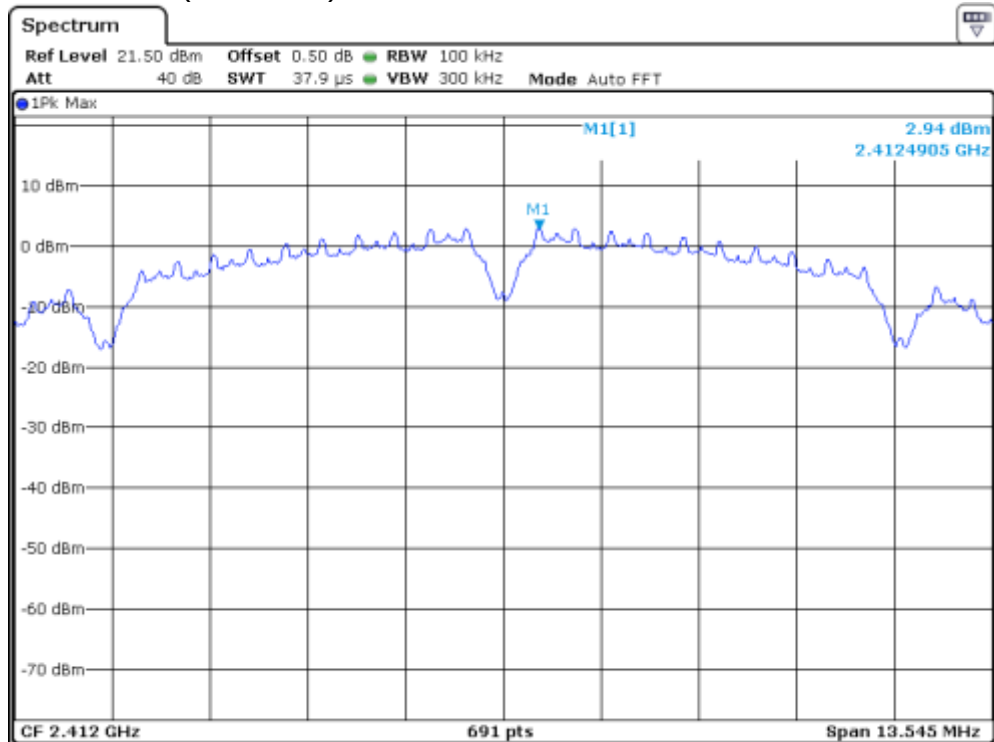

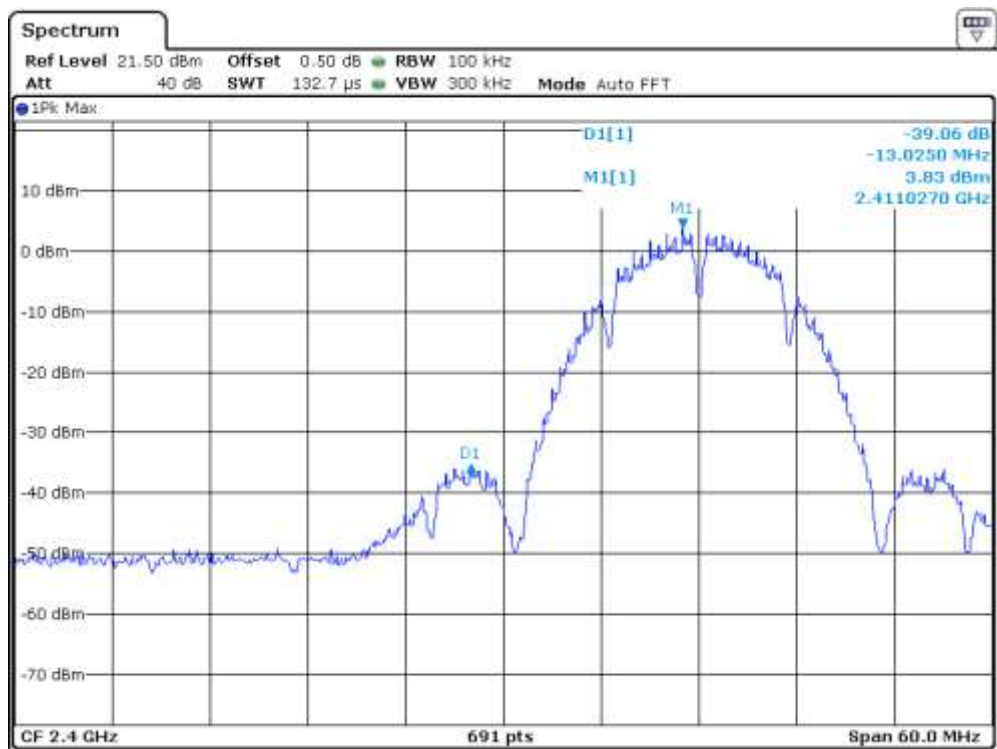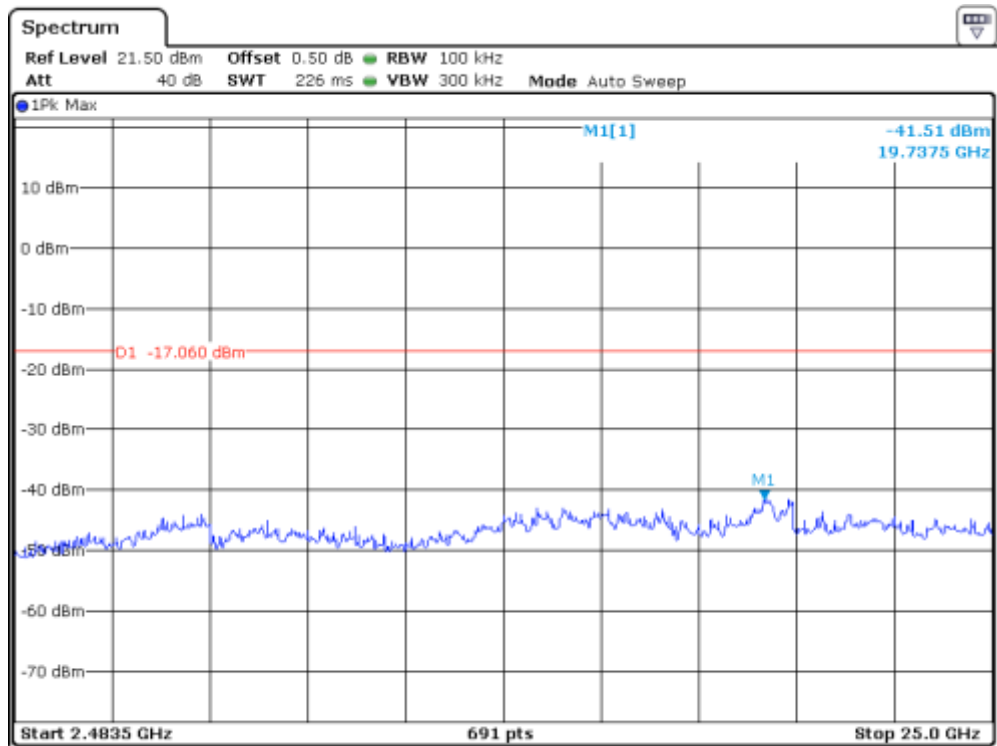




Channel 06 (2437MHz) Reference Level: 2.99dBm

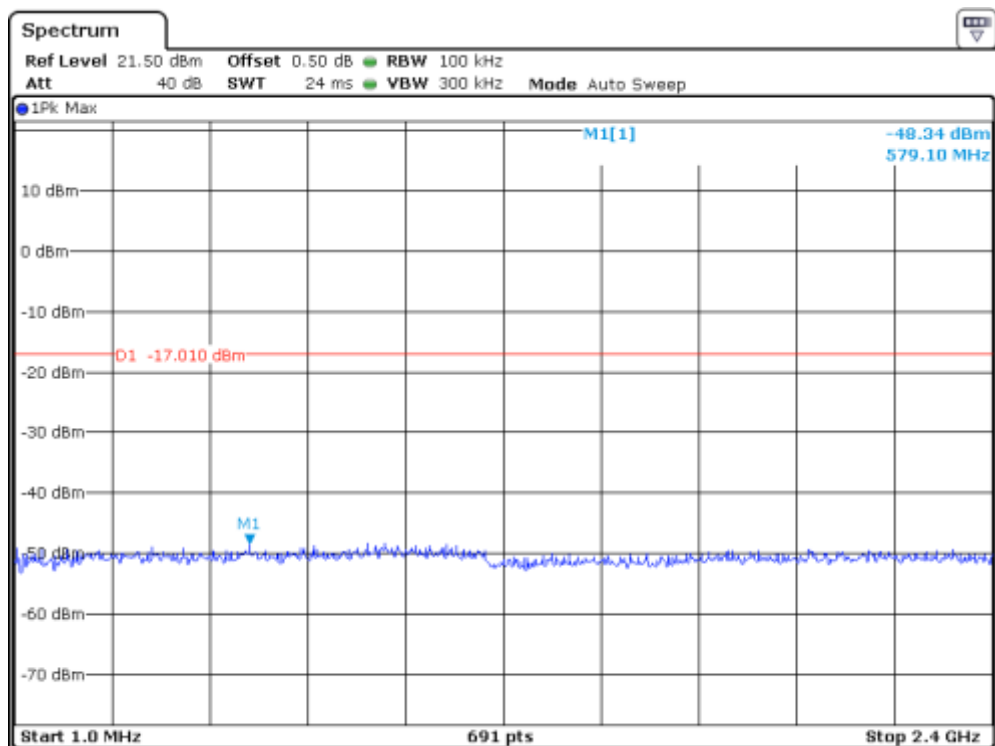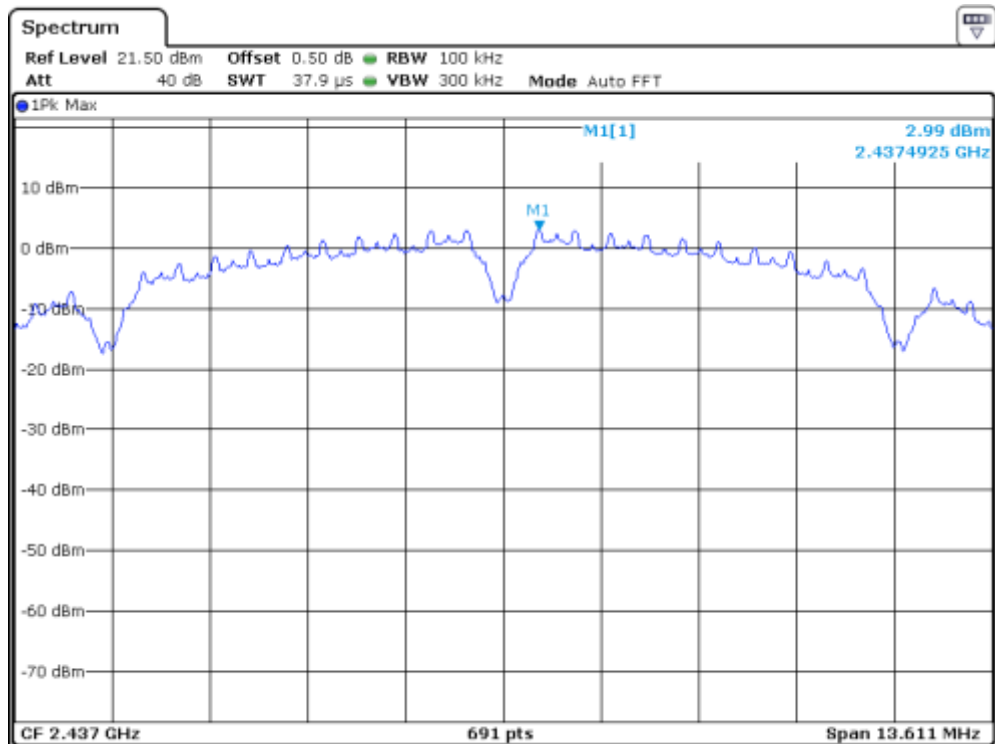




Channel 11 (2462MHz) Reference Level: 3.53dBm

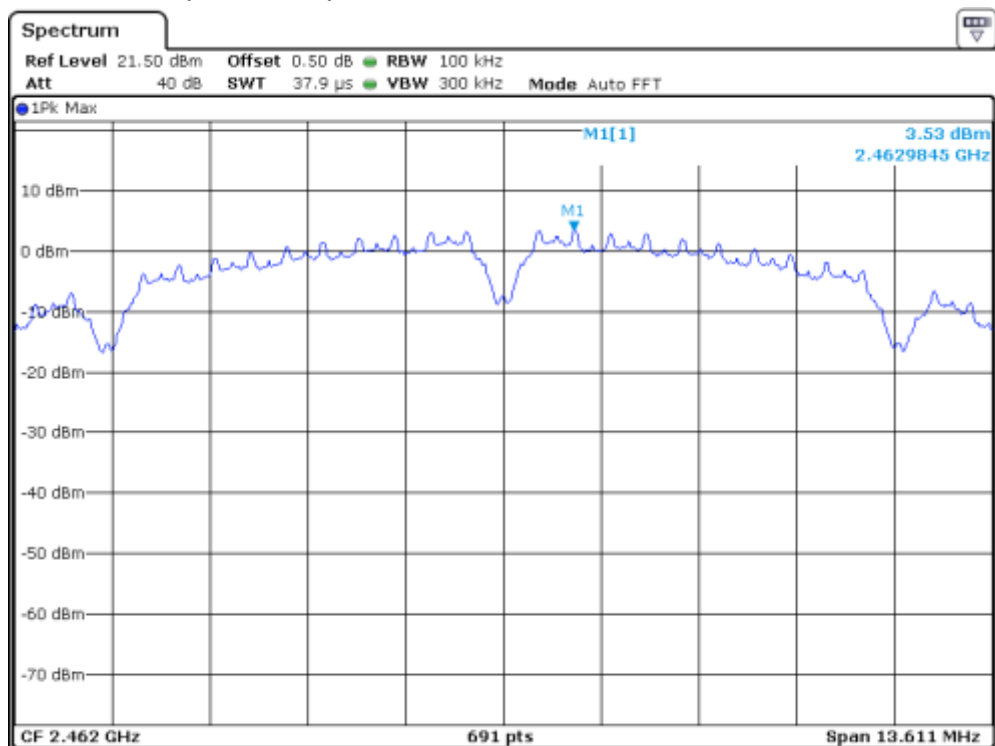


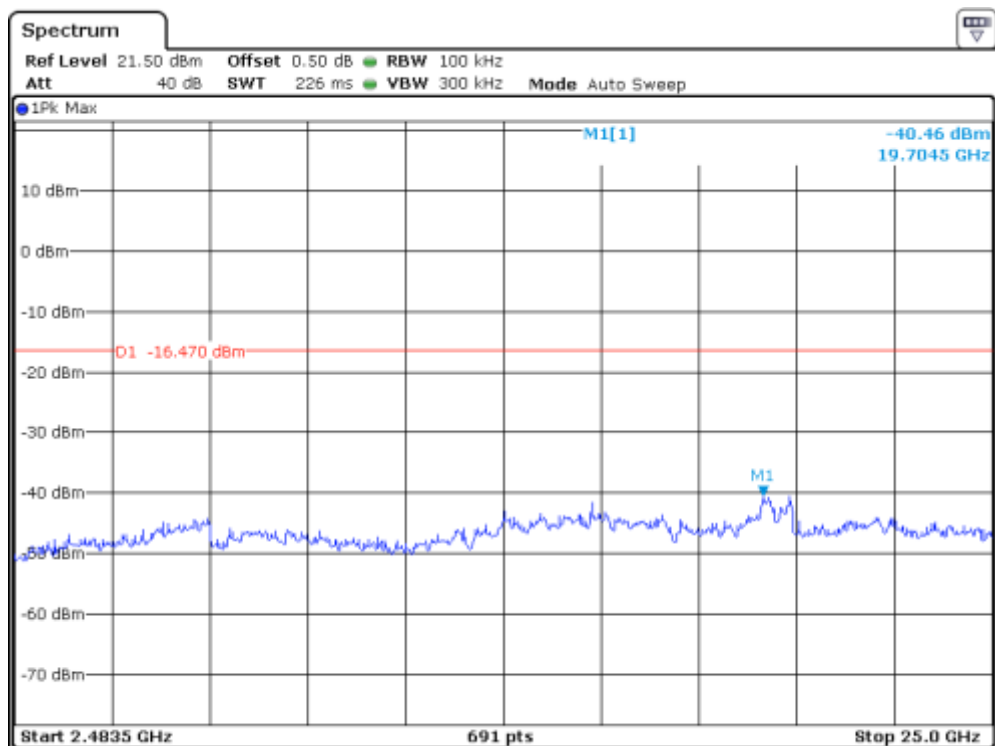
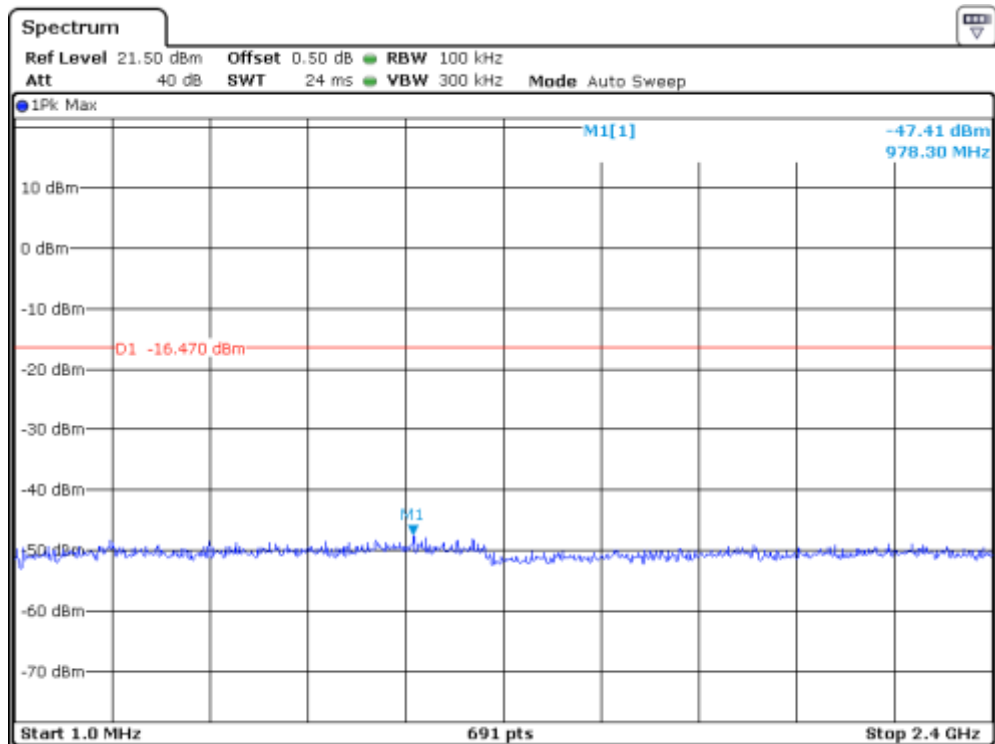


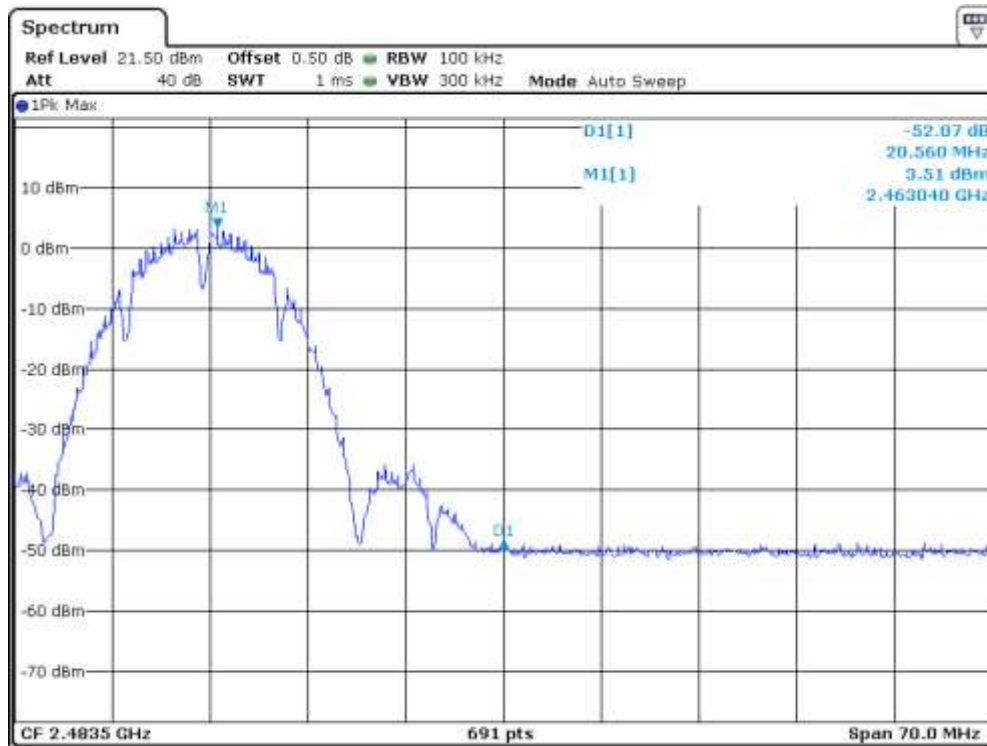


802.11g


Channel 01 (2412MHz) Reference Level: -0.98dBm


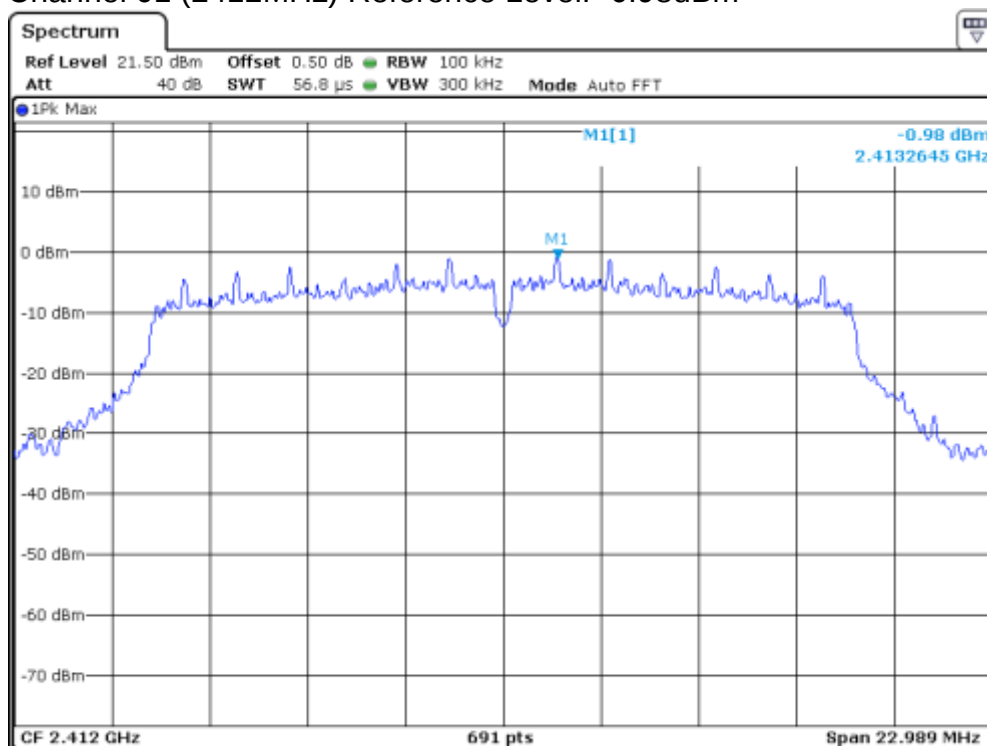


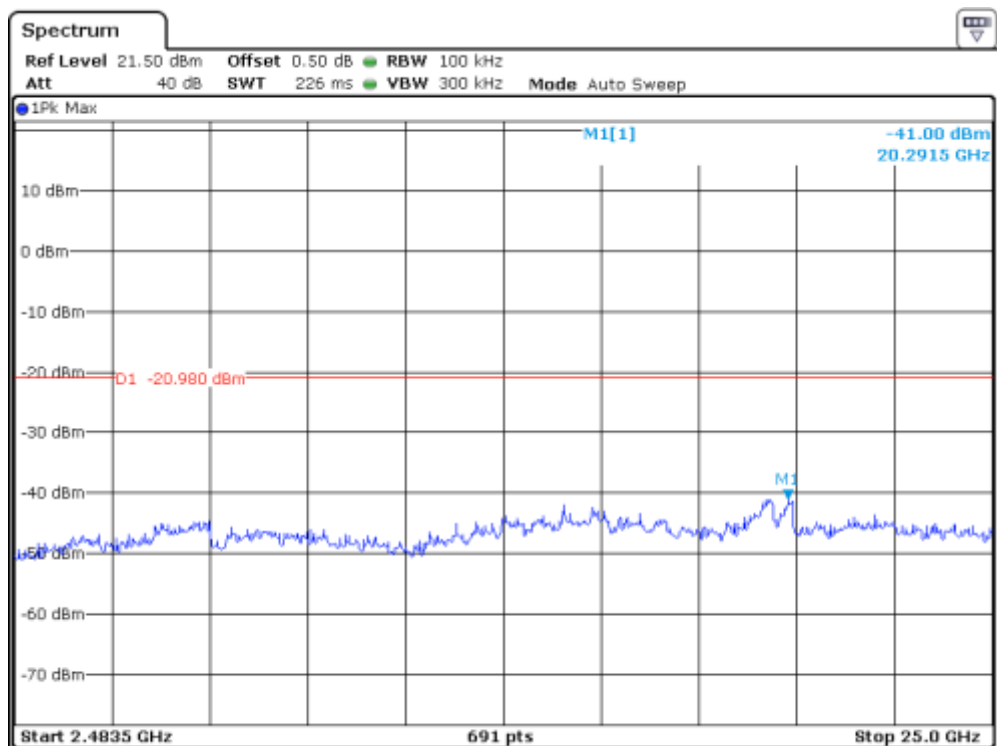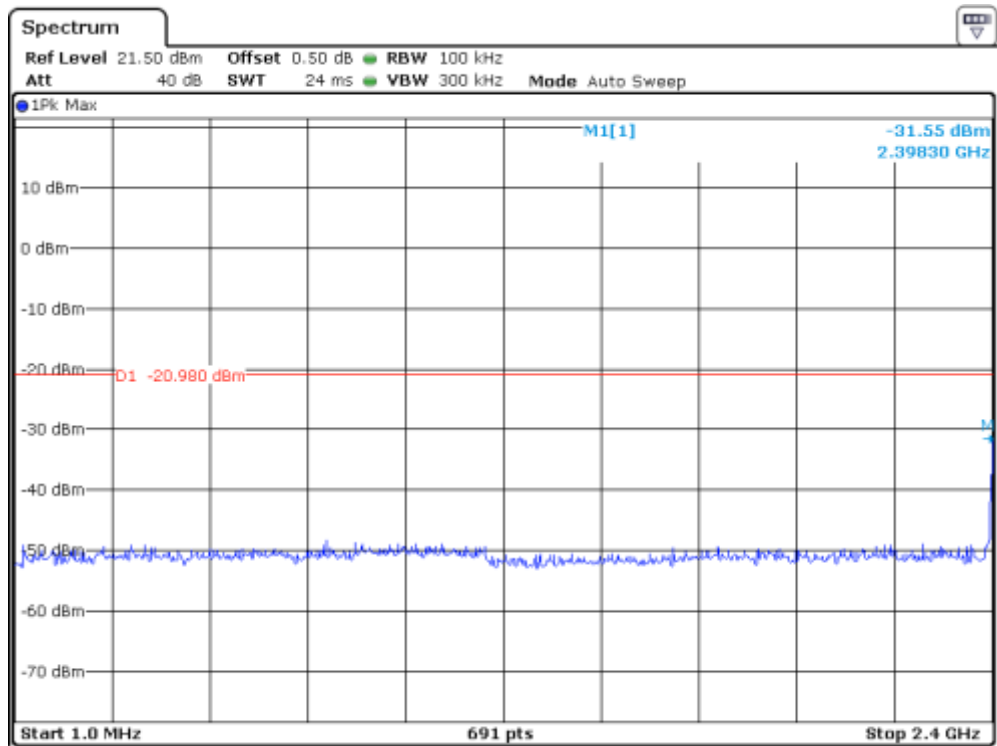


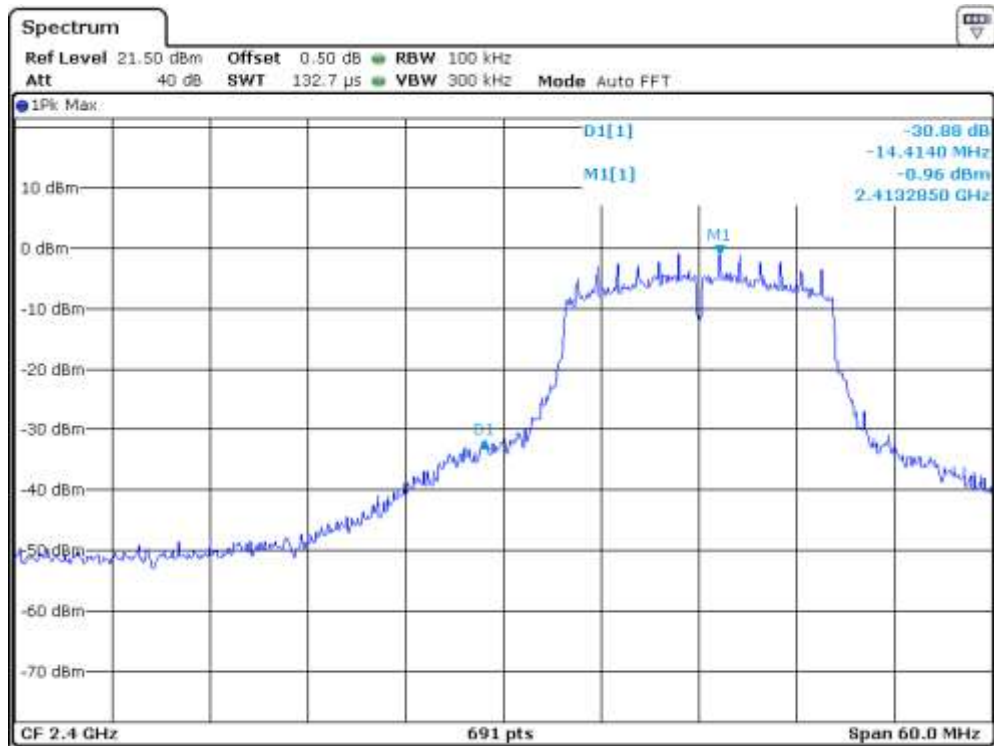




Channel 06 (2437MHz) Reference Level: -0.86dBm

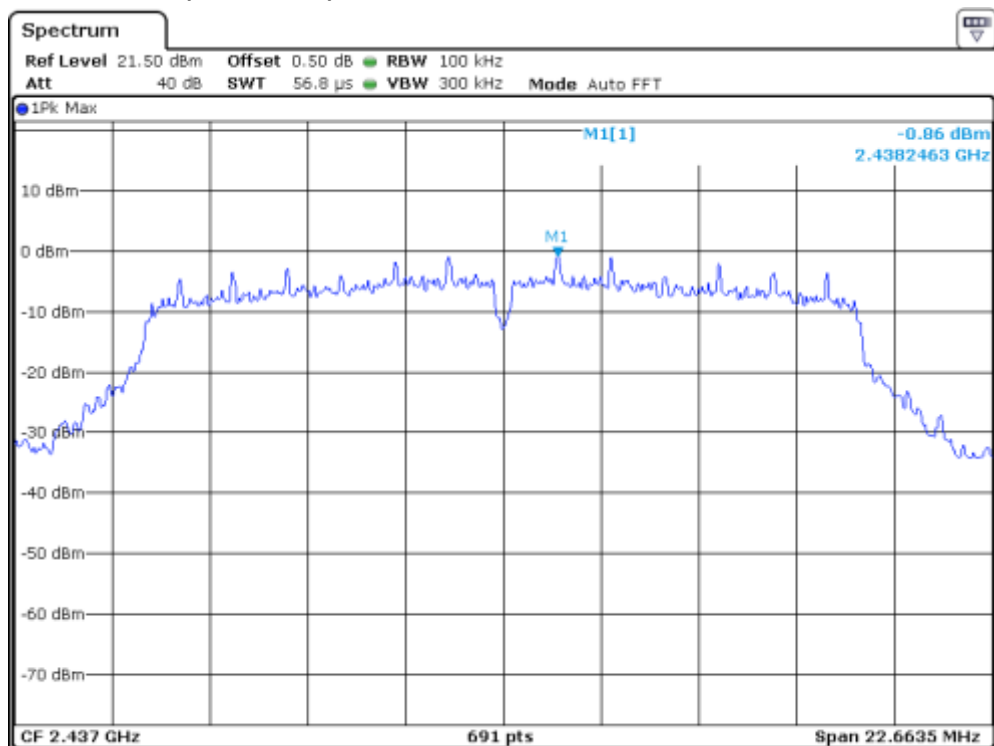

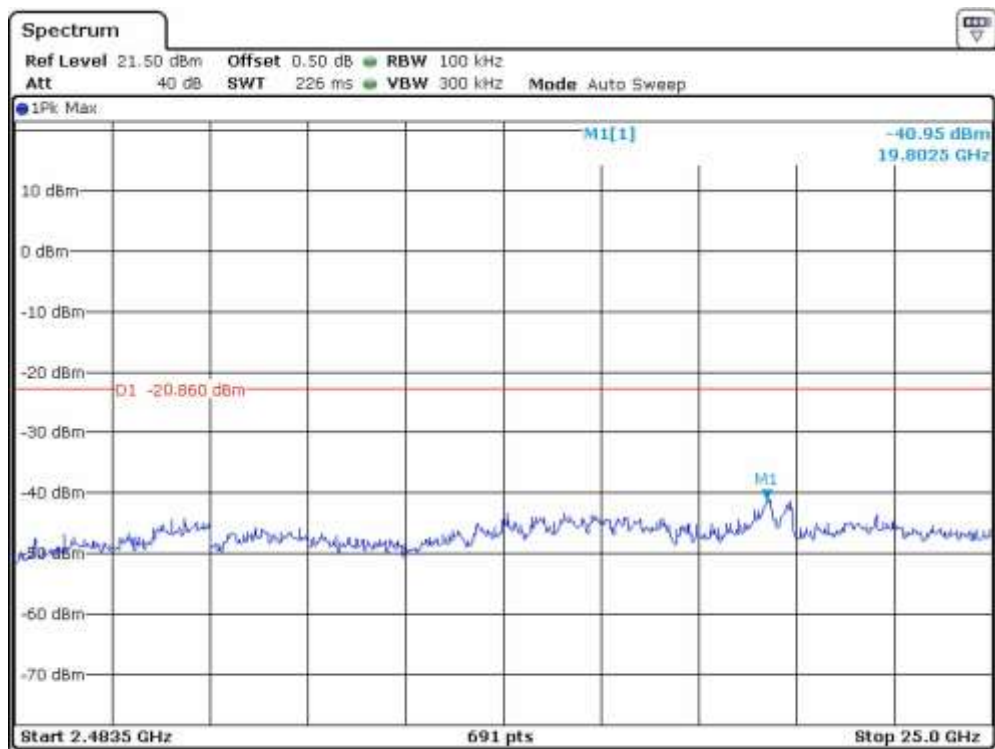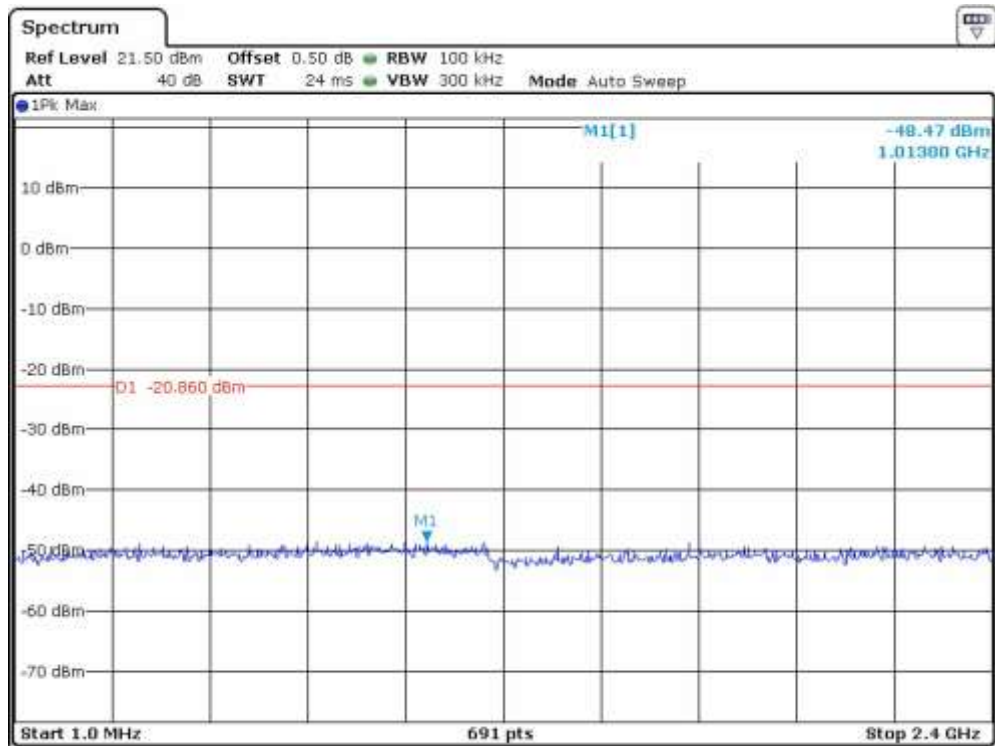



Channel 11 (2462MHz) Reference Level: -0.63dBm

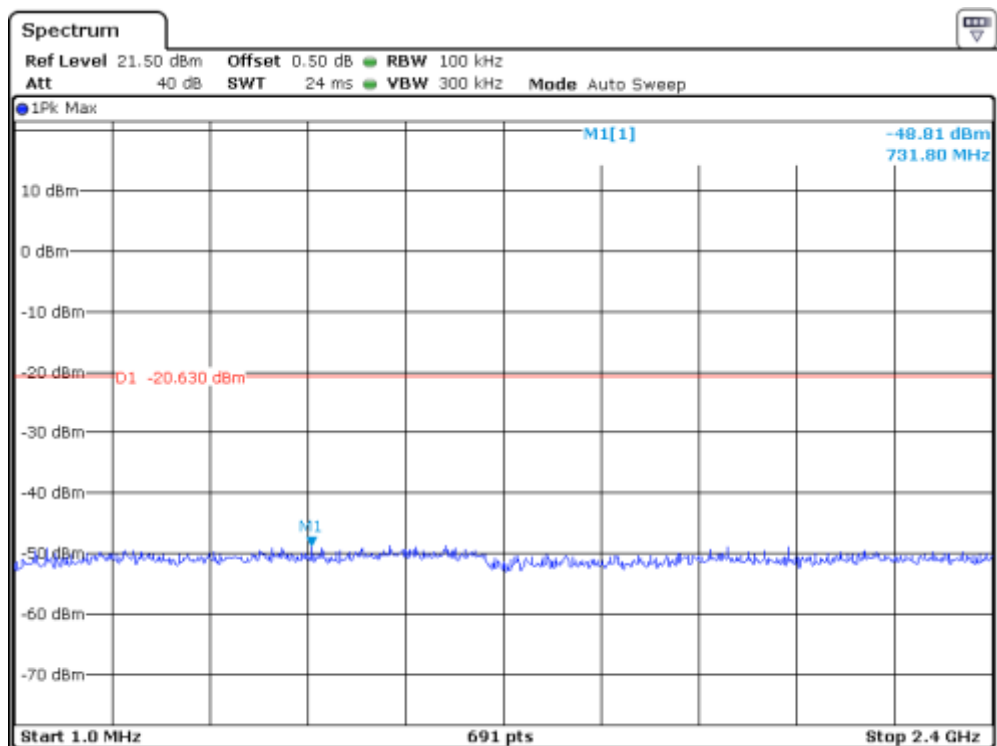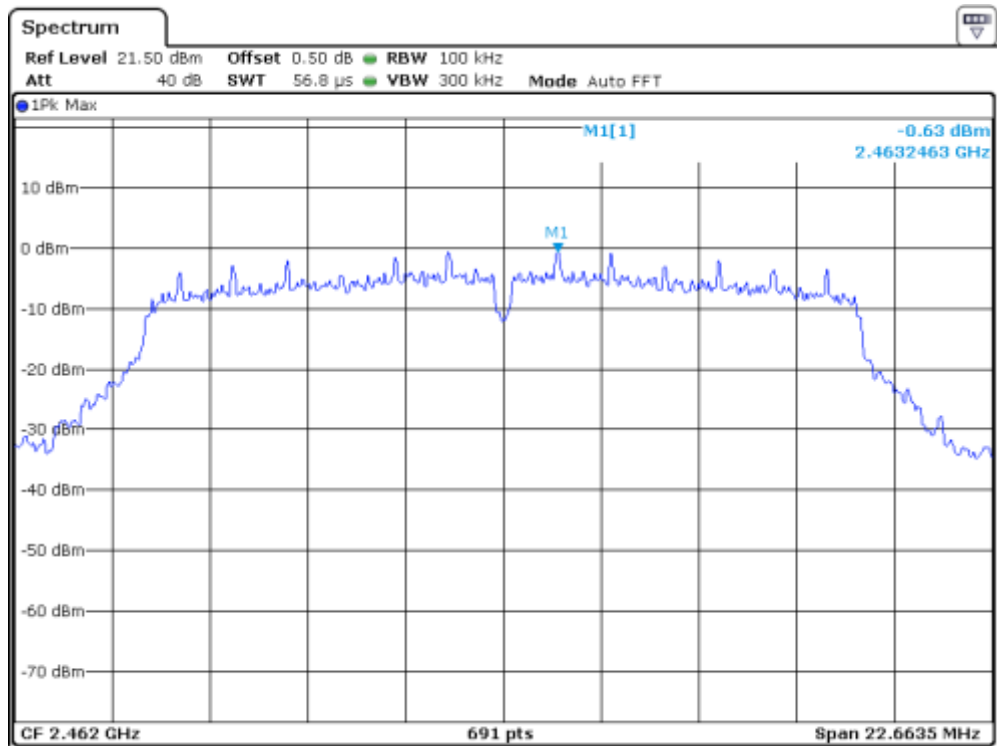


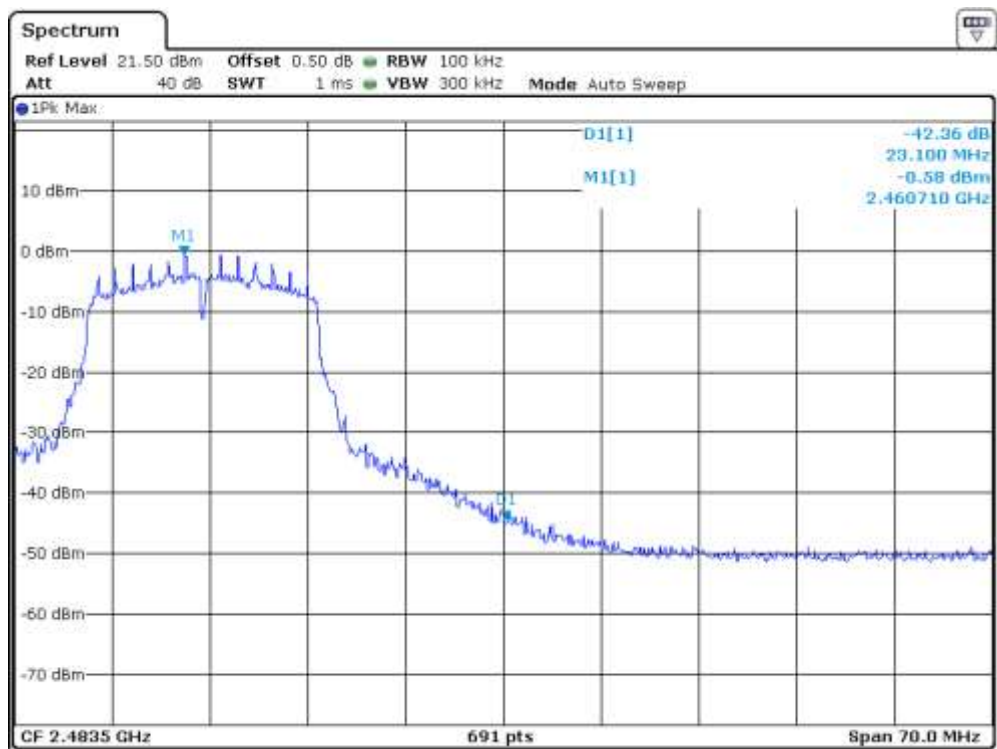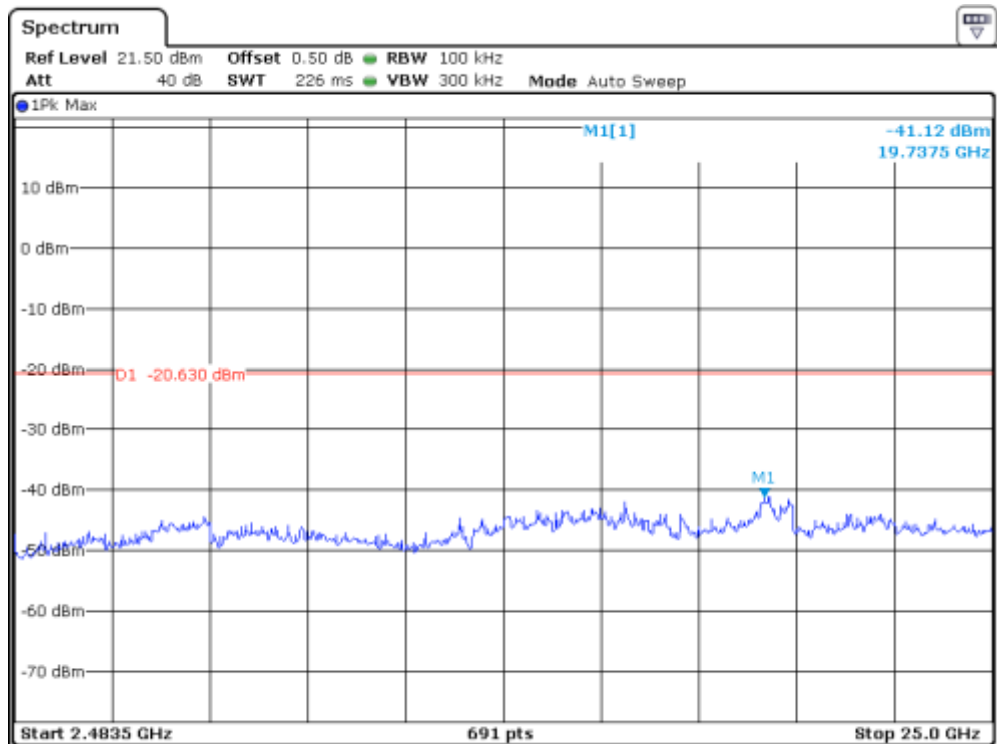



802.11n-HT20


Channel 01 (2412MHz) Reference Level: -3.28dBm

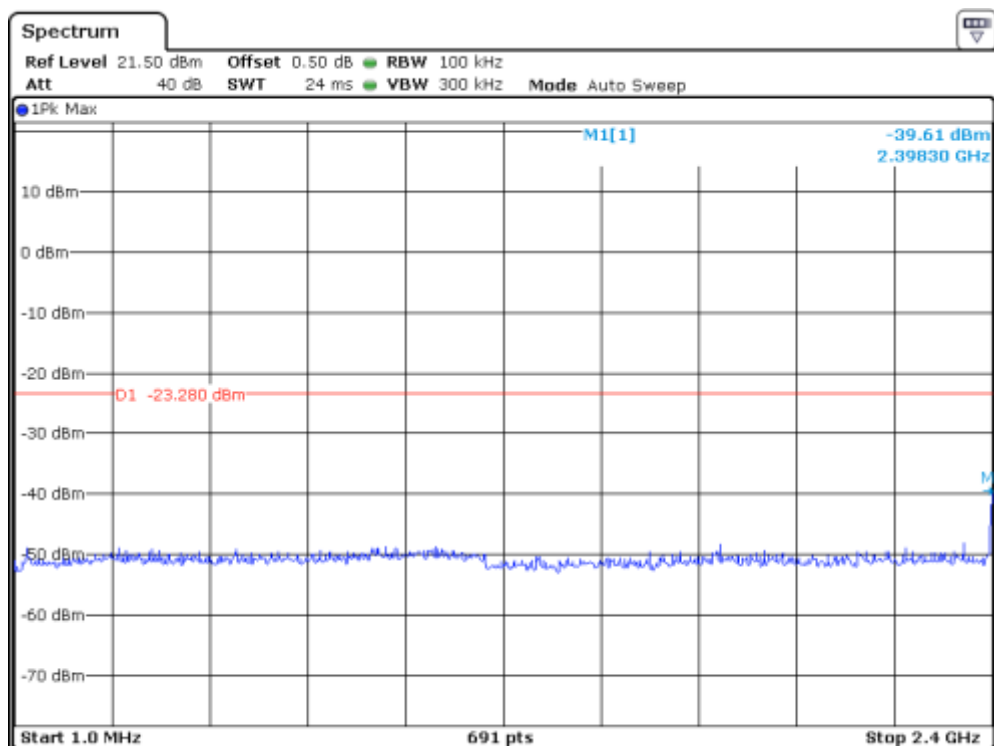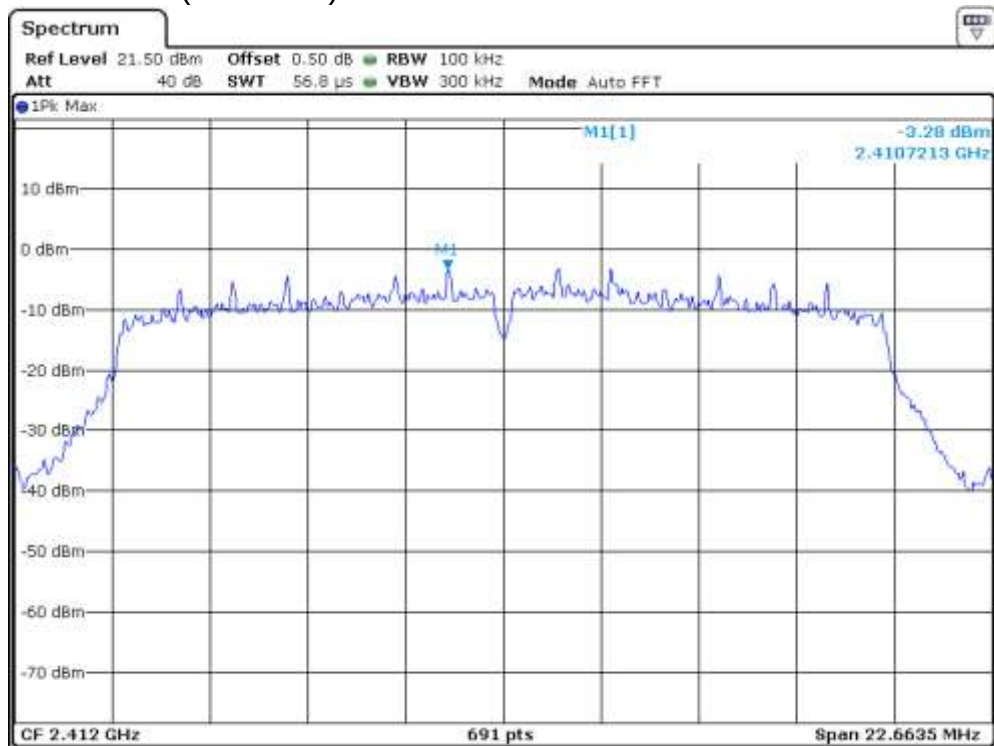

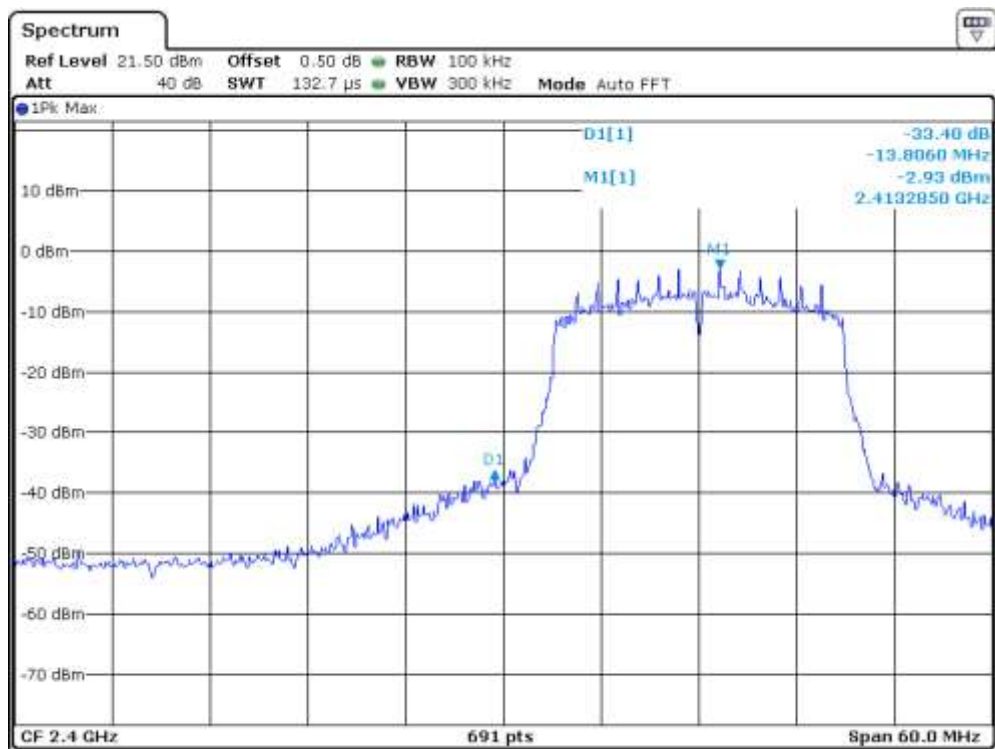




Channel 06 (2437MHz) Reference Level: -2.93dBm

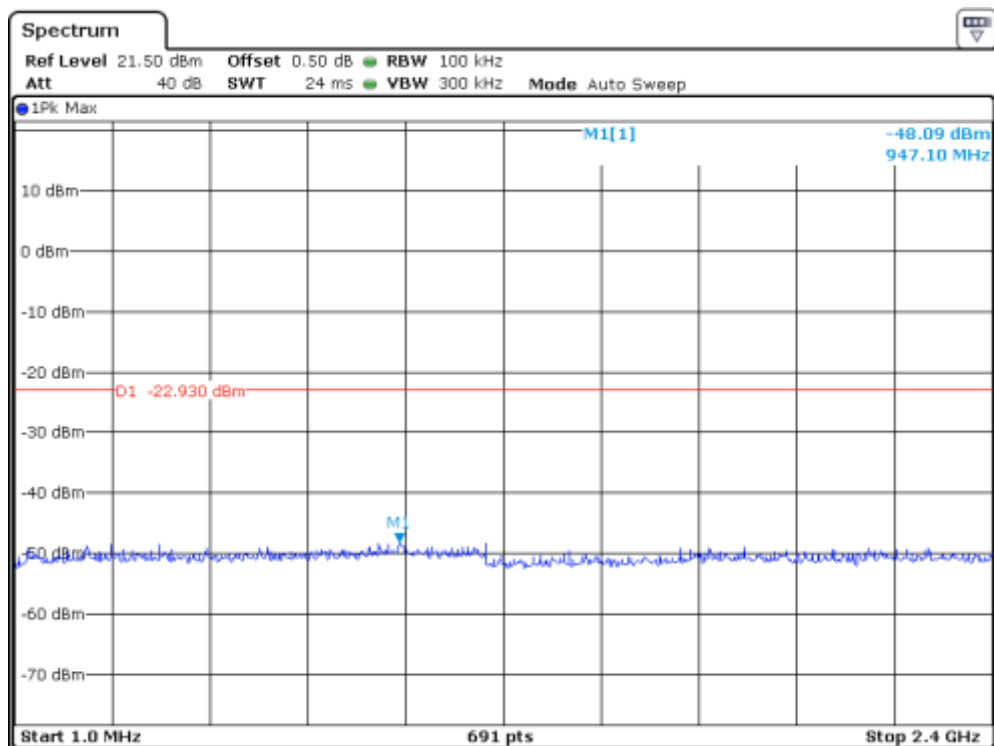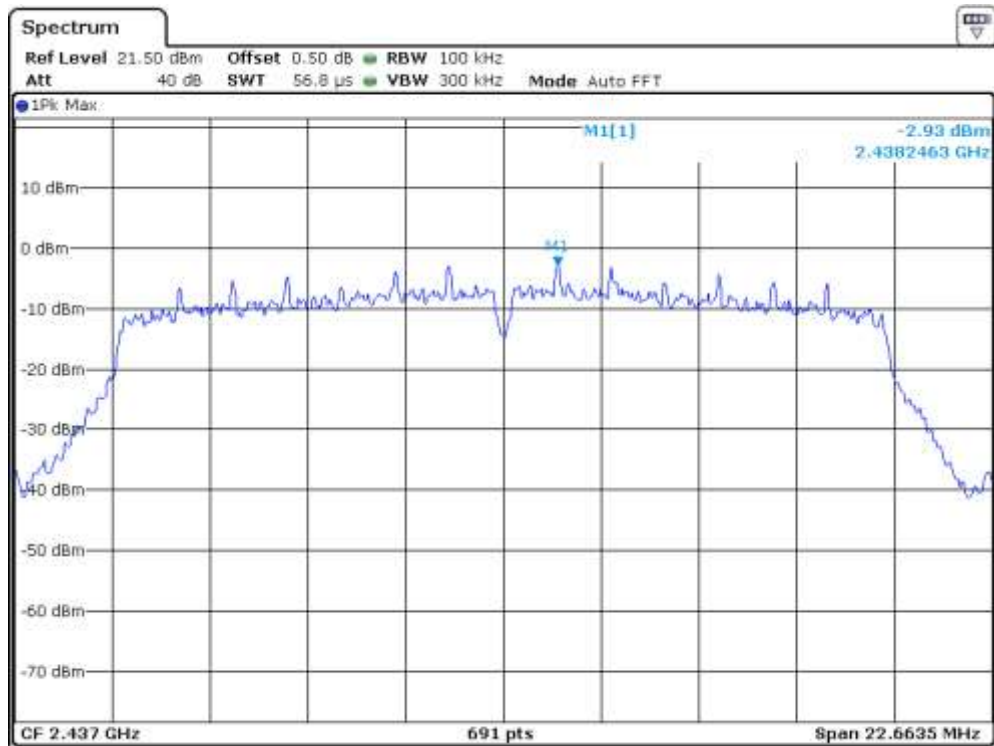


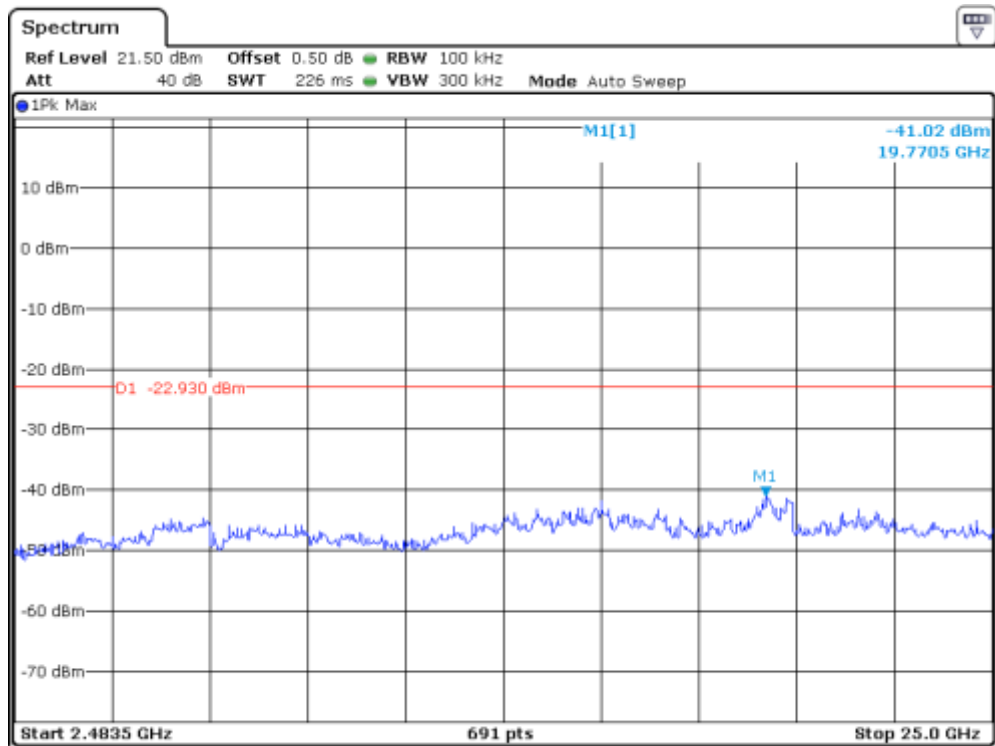

Channel 11 (2462MHz) Reference Level: -2.76dBm

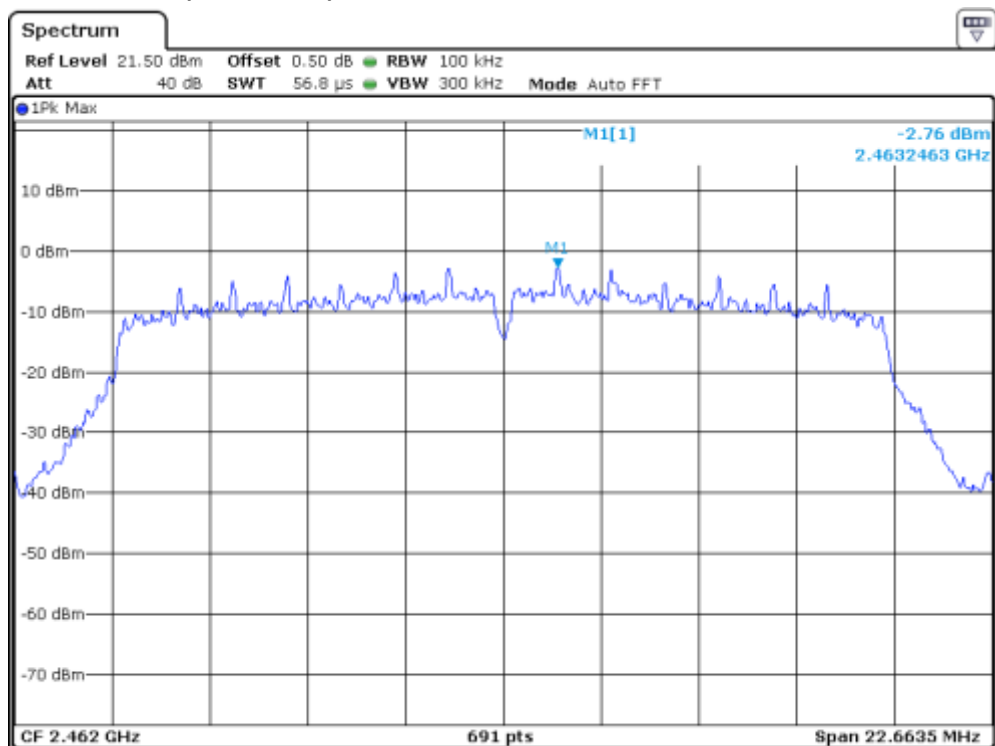


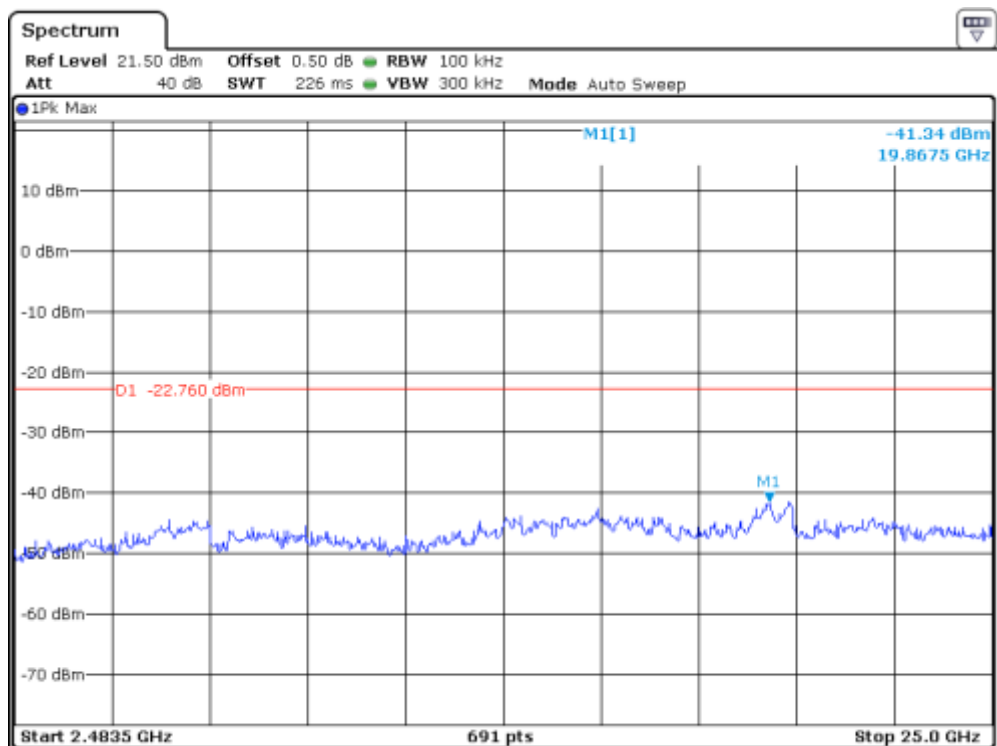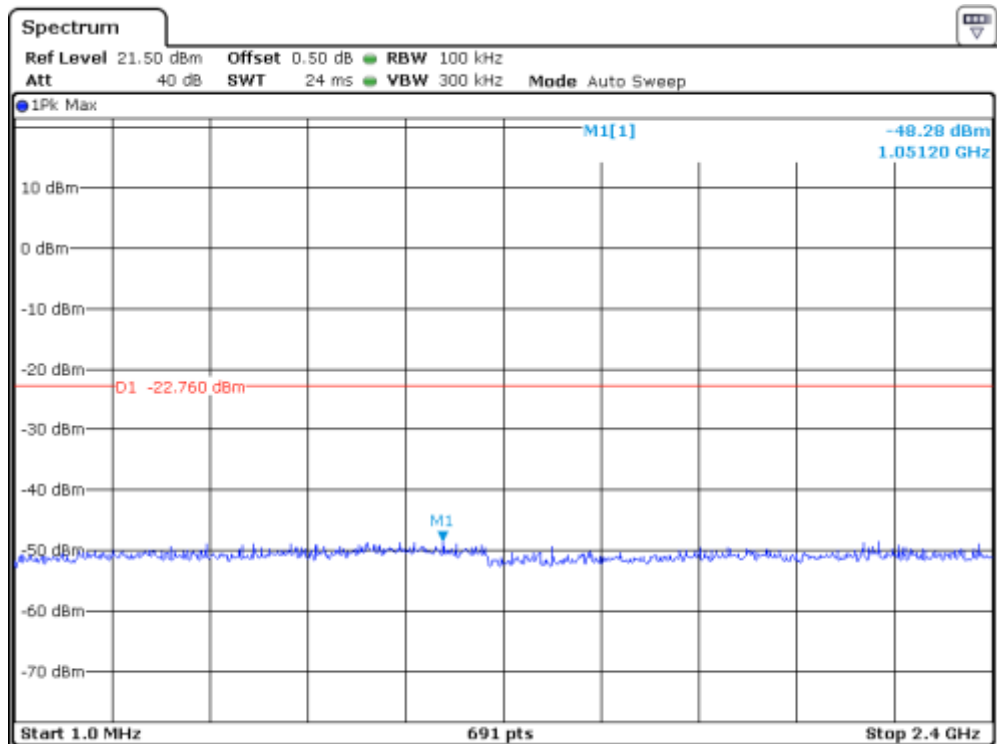


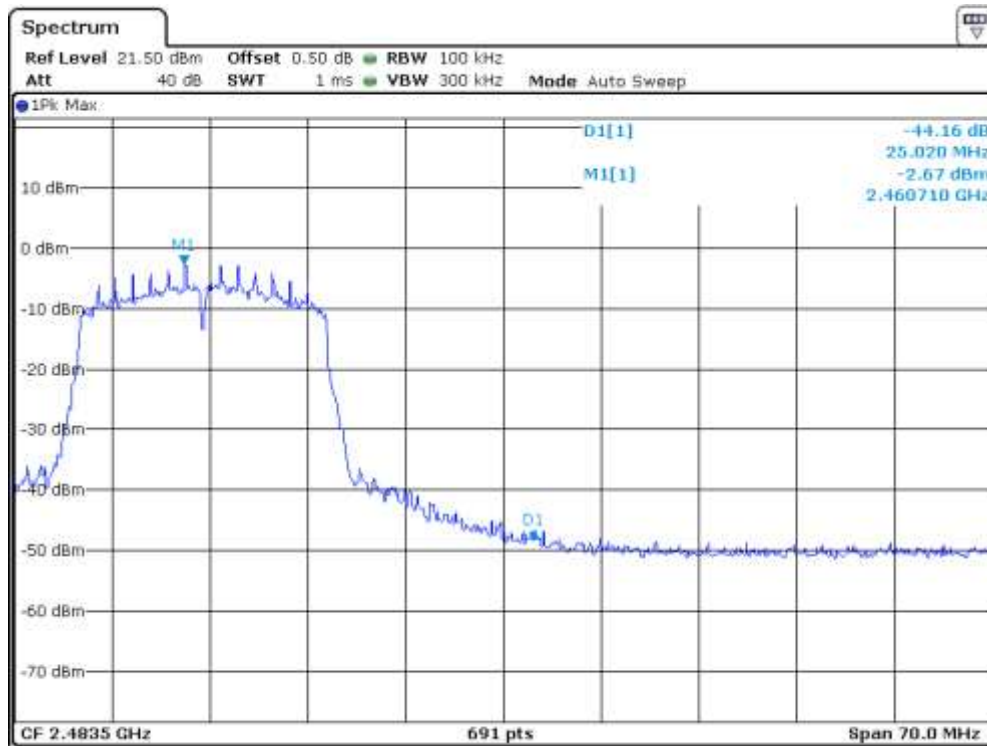


802.11n-HT40


Channel 03 (2422MHz) Reference Level: -5.84dBm

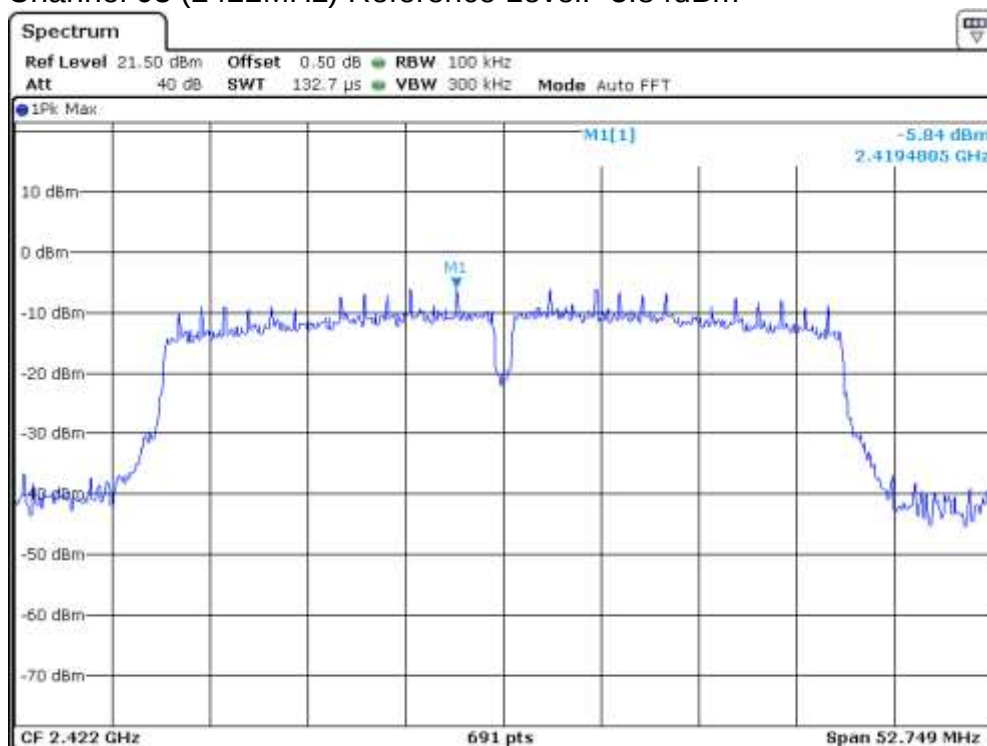


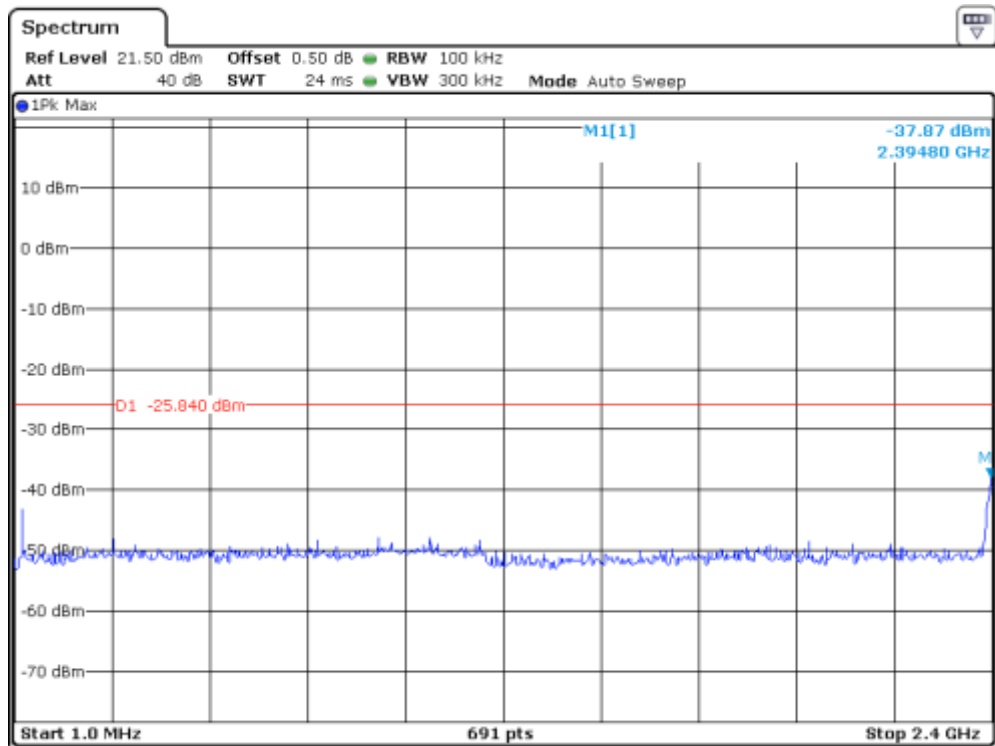


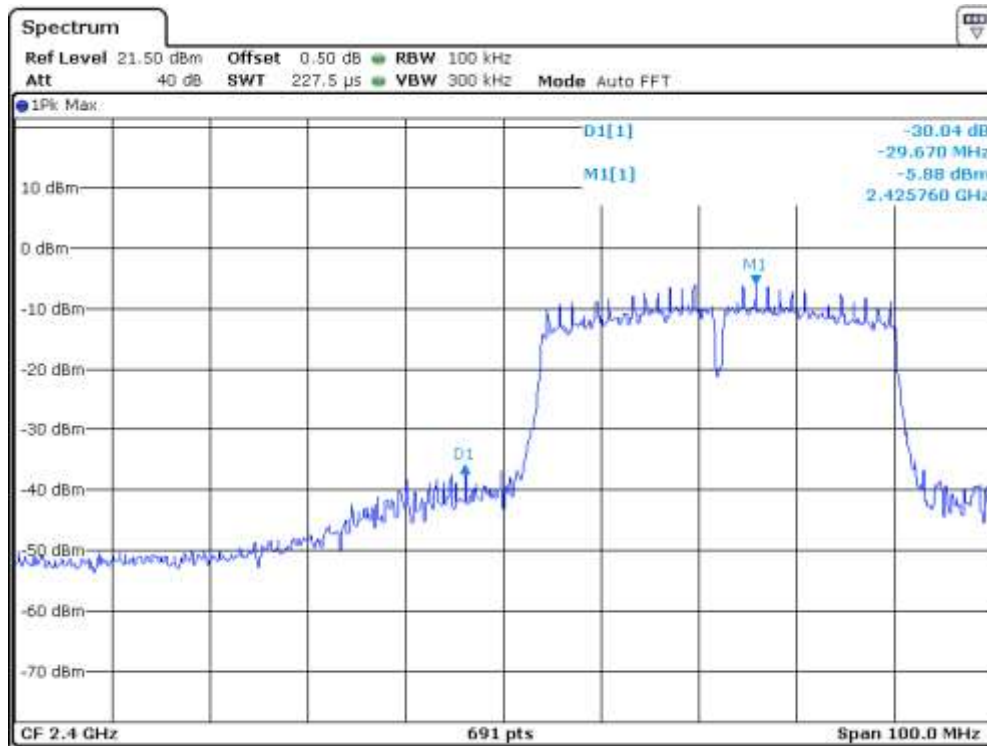



Channel 06 (2437MHz) Reference Level: -5.71dBm

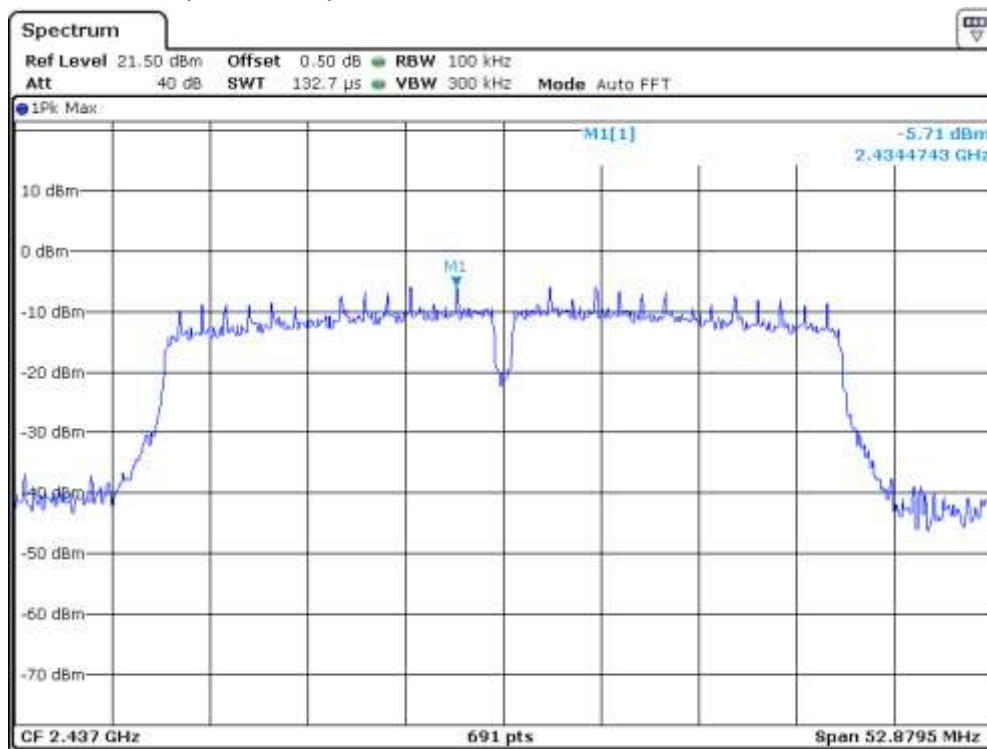

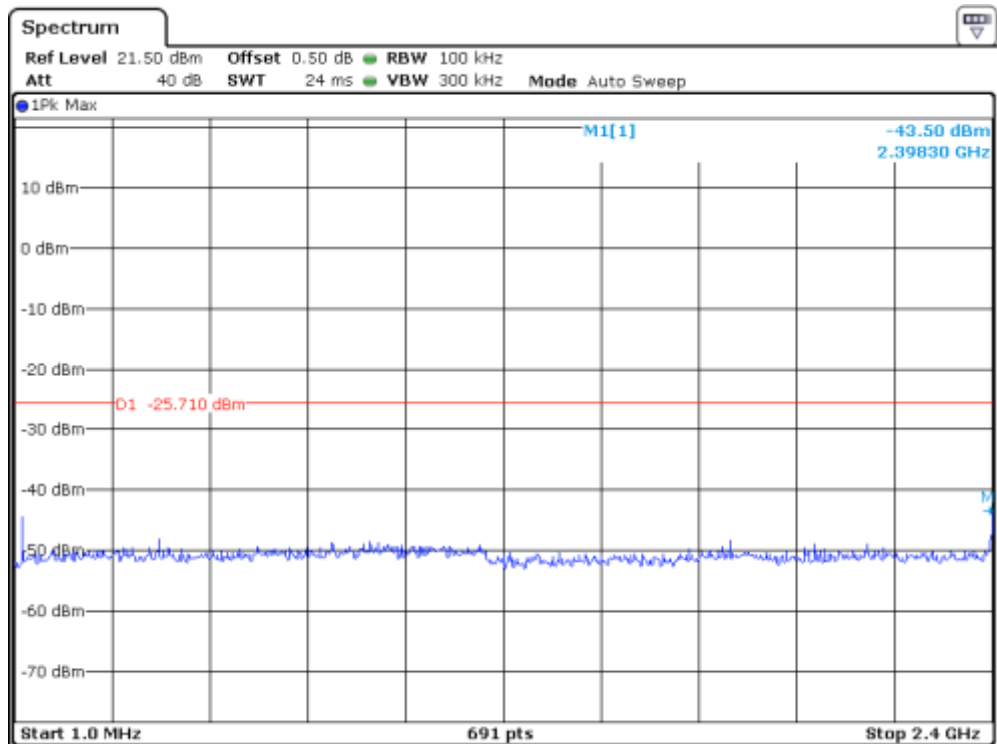

Channel 09 (2452MHz) Reference Level: -5.61dBm

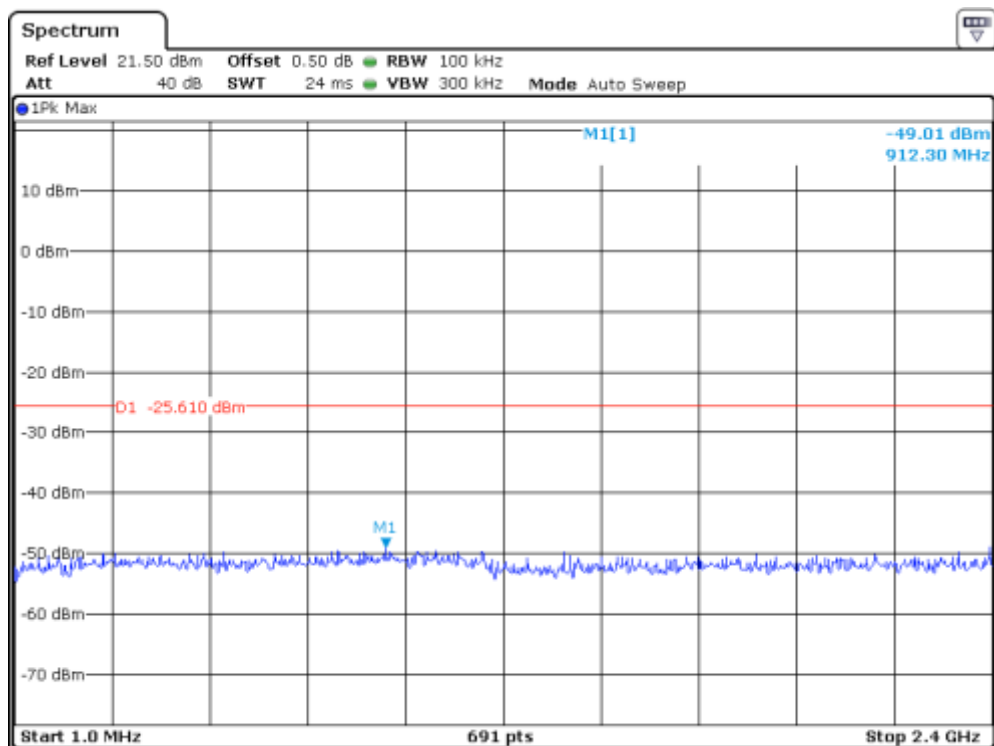
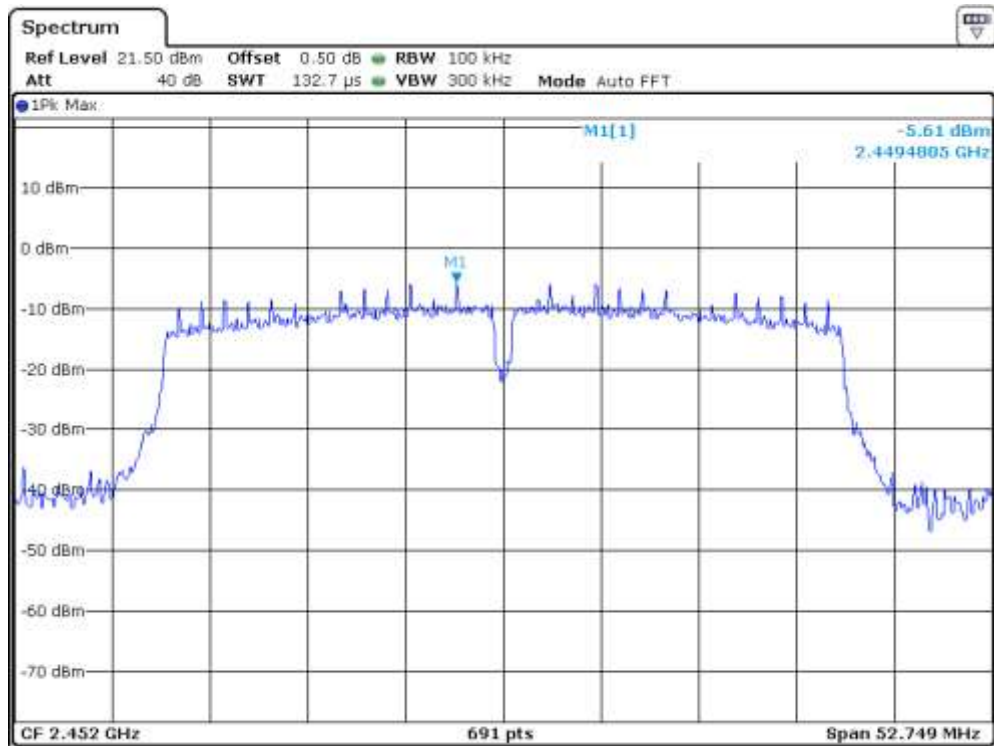


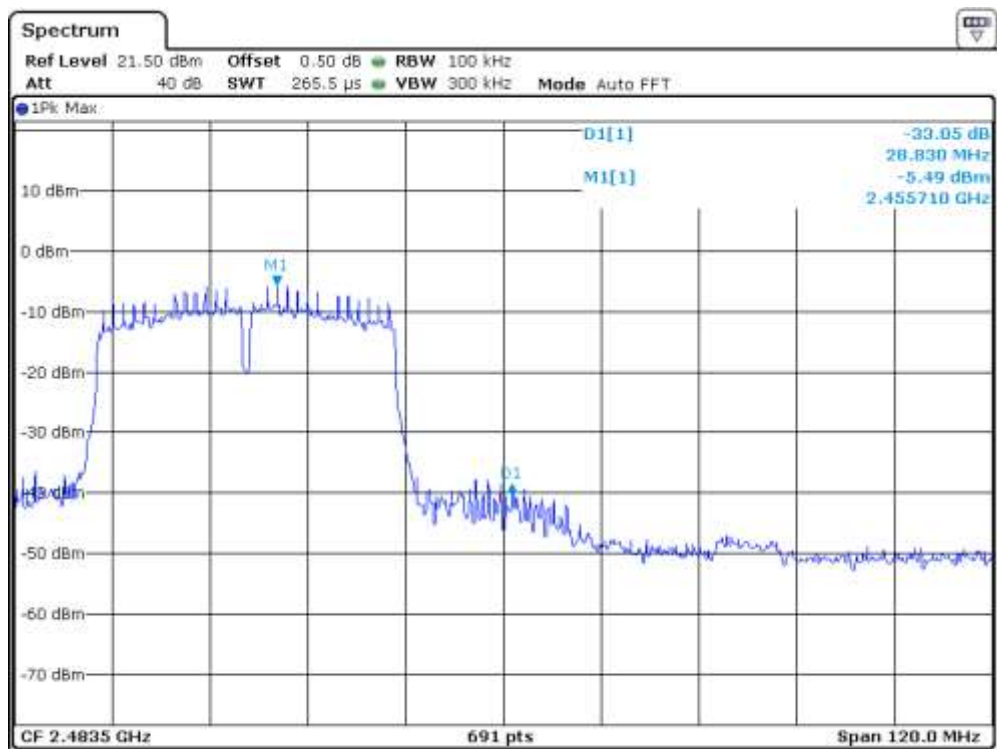


MIMO Mode, Ant1:



802.11n-HT20


Channel 01 (2412MHz) Reference Level: -4.92dBm

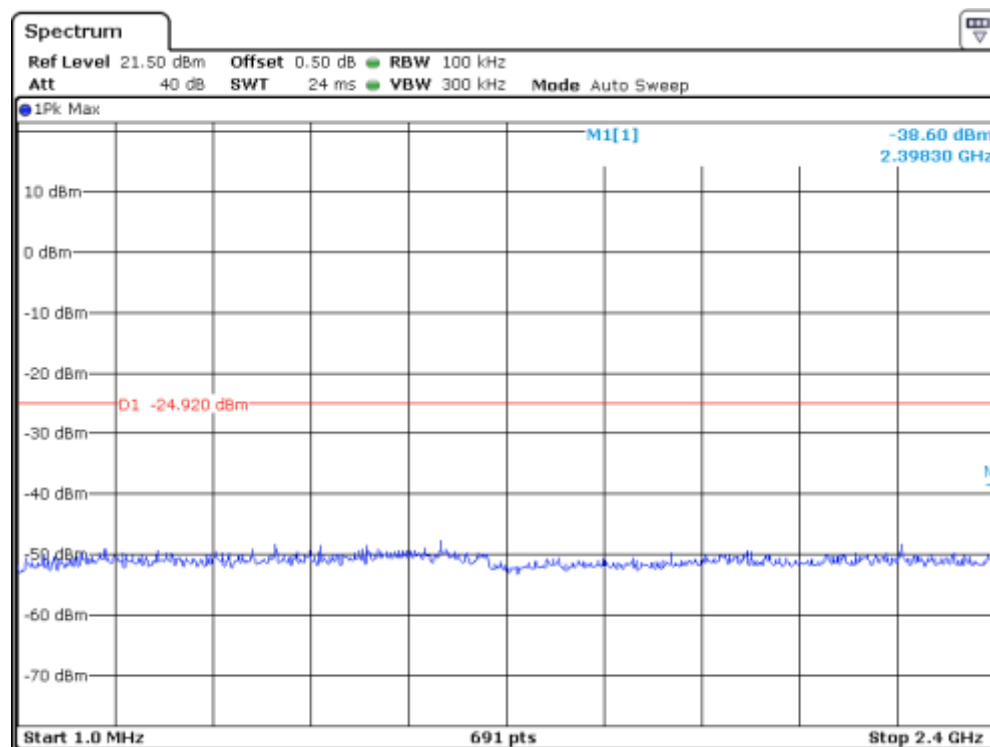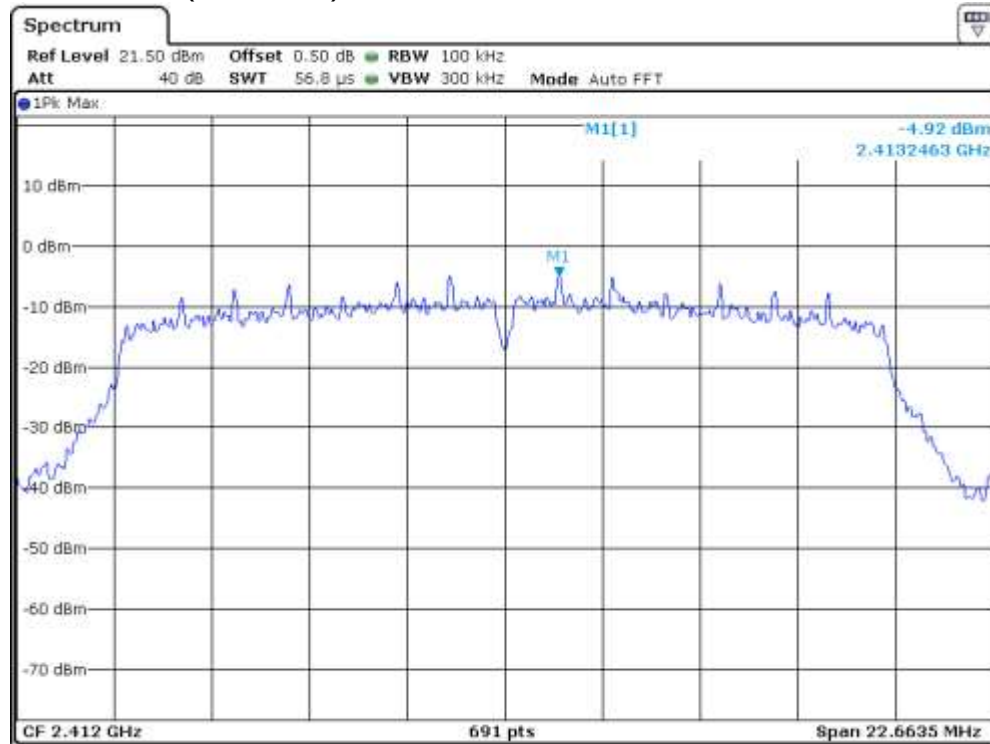

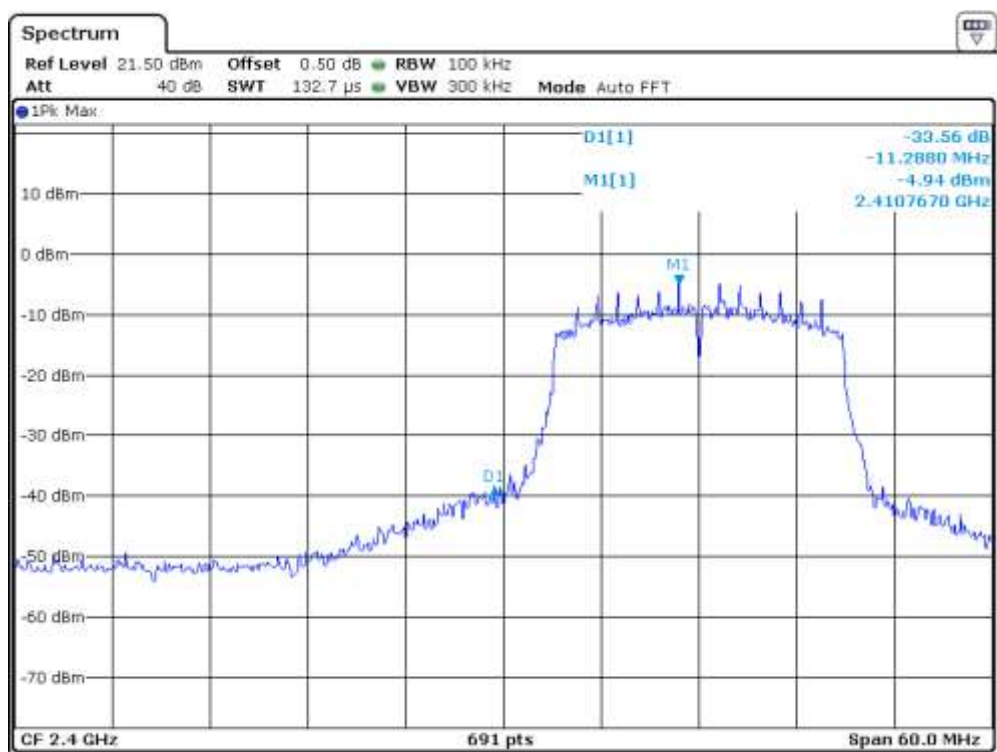




Channel 06 (2437MHz) Reference Level: -4.82dBm

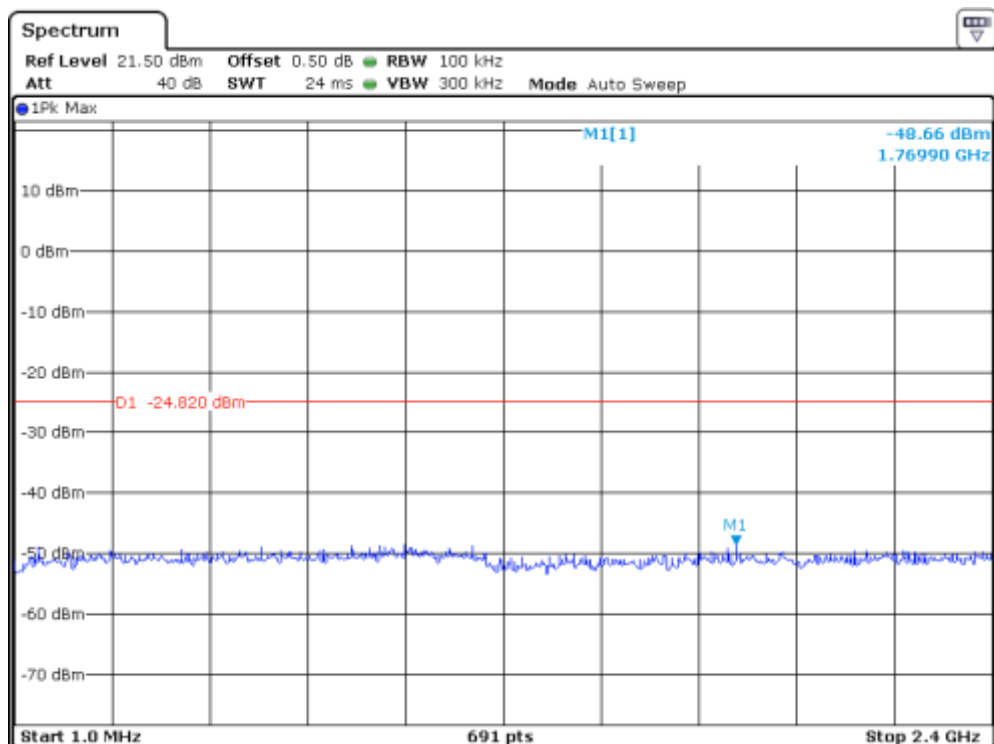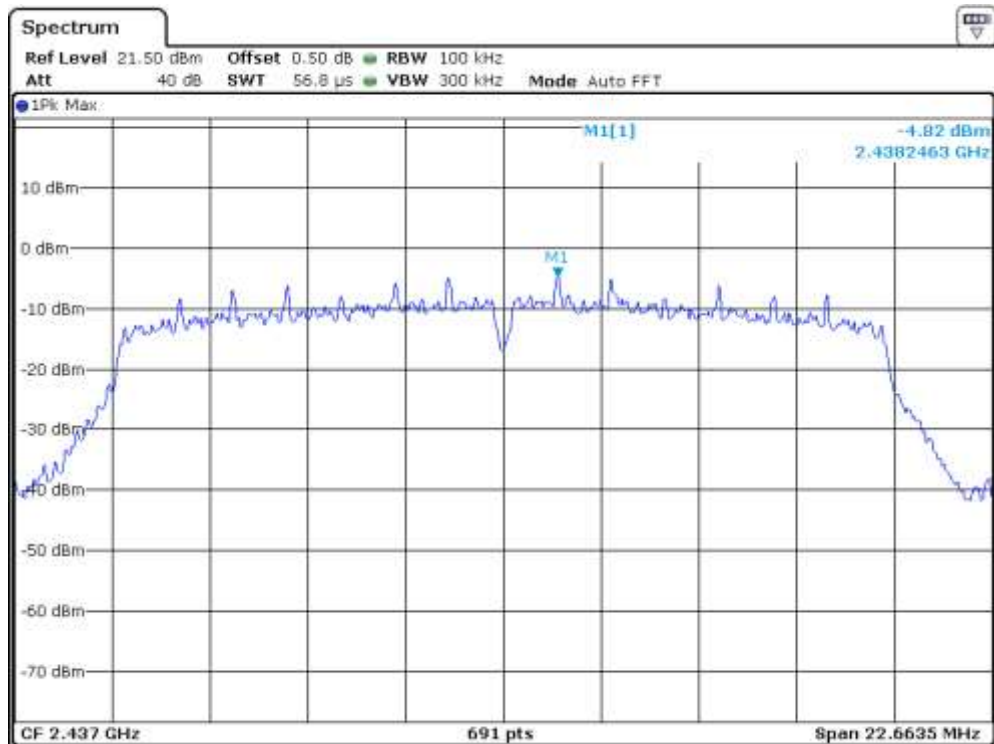


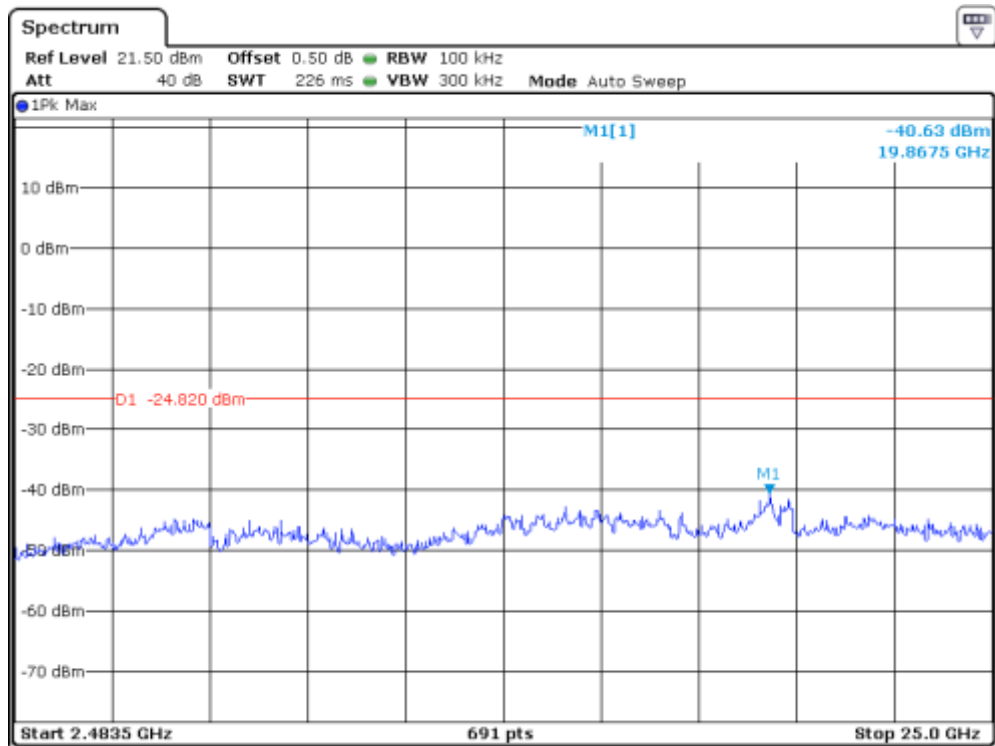

Channel 11 (2462MHz) Reference Level: -4.82dBm

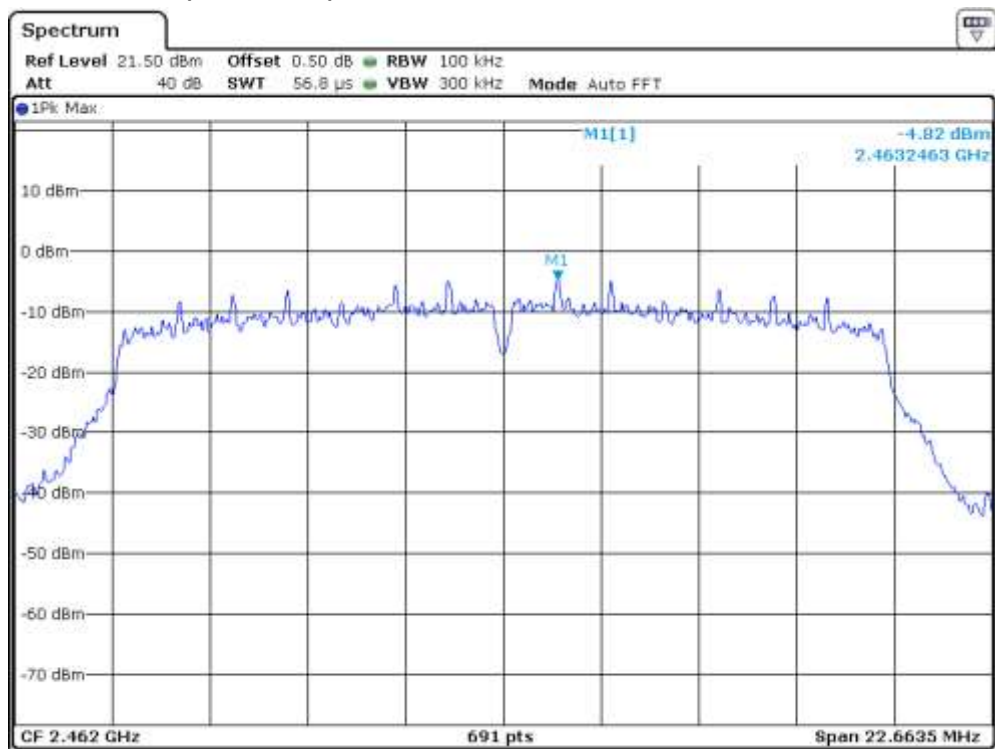


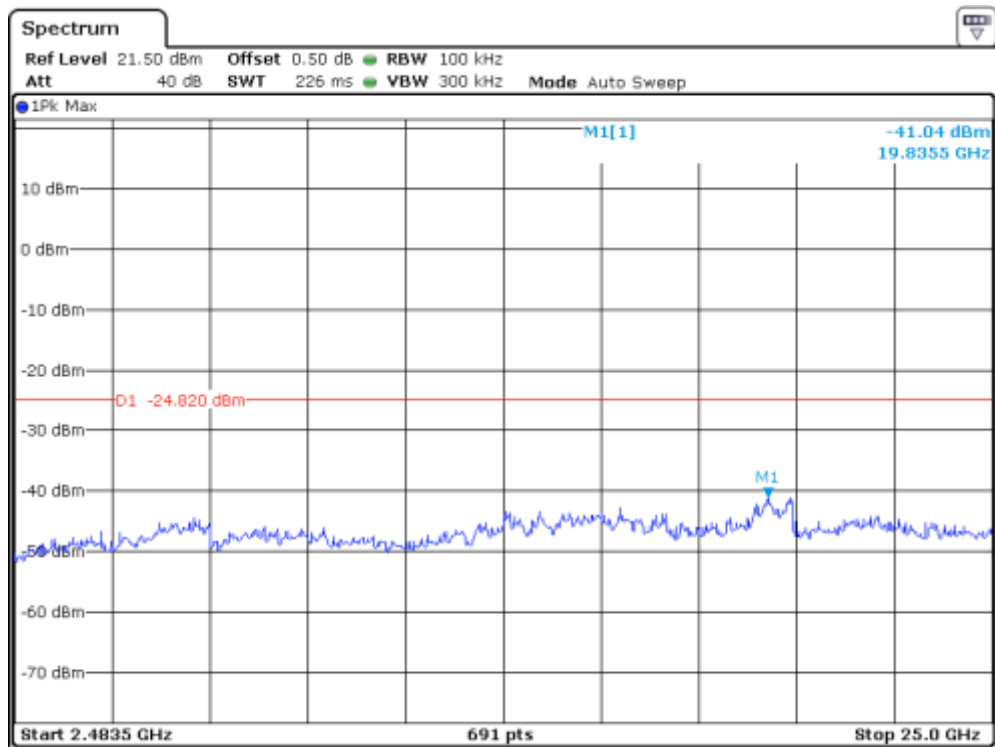
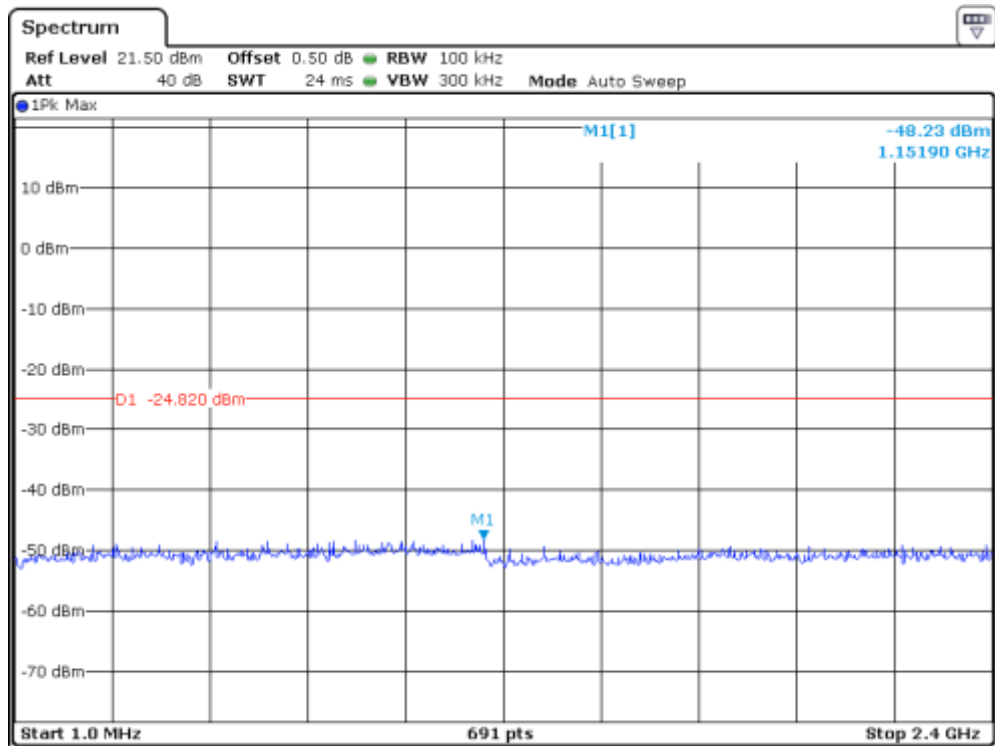


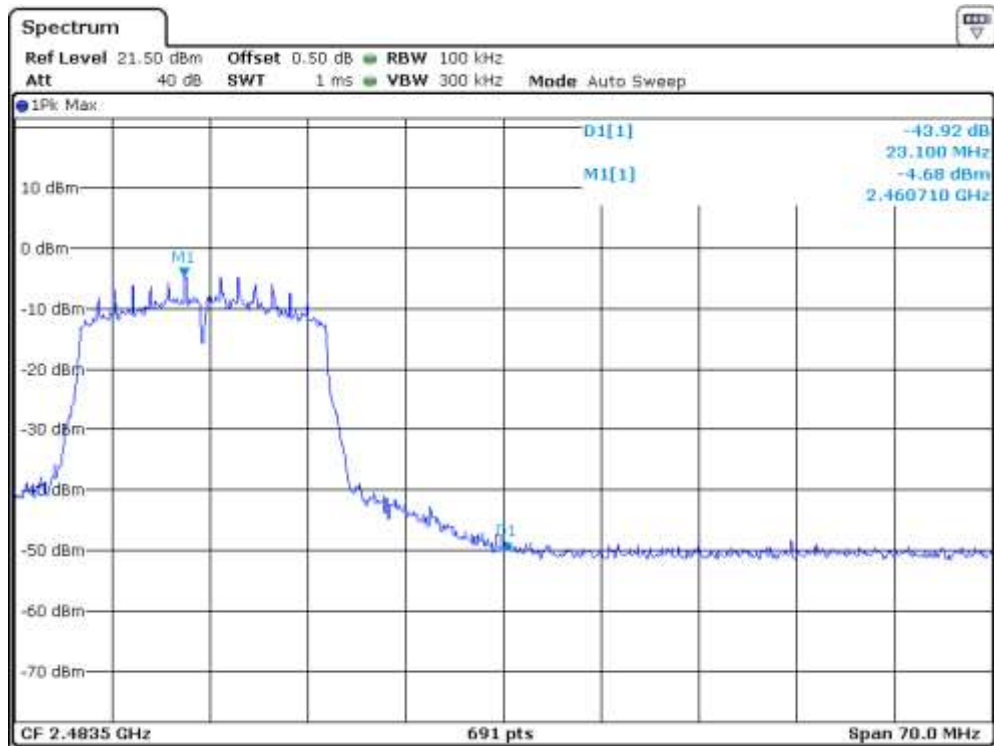


802.11n-HT40


Channel 03 (2422MHz) Reference Level: -7.63dBm

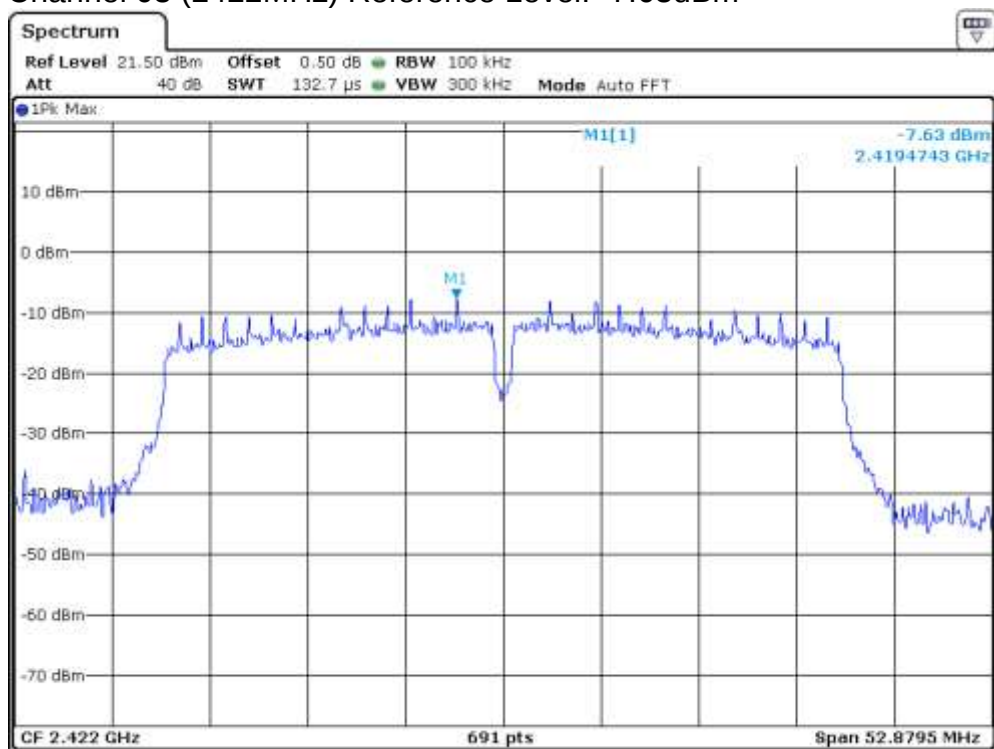


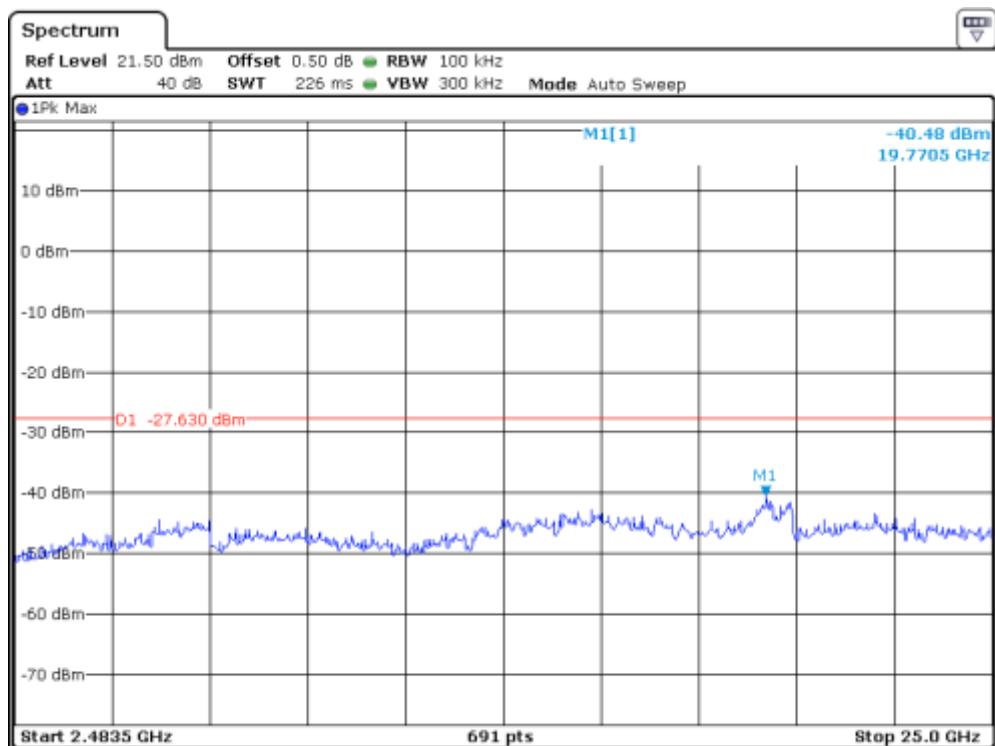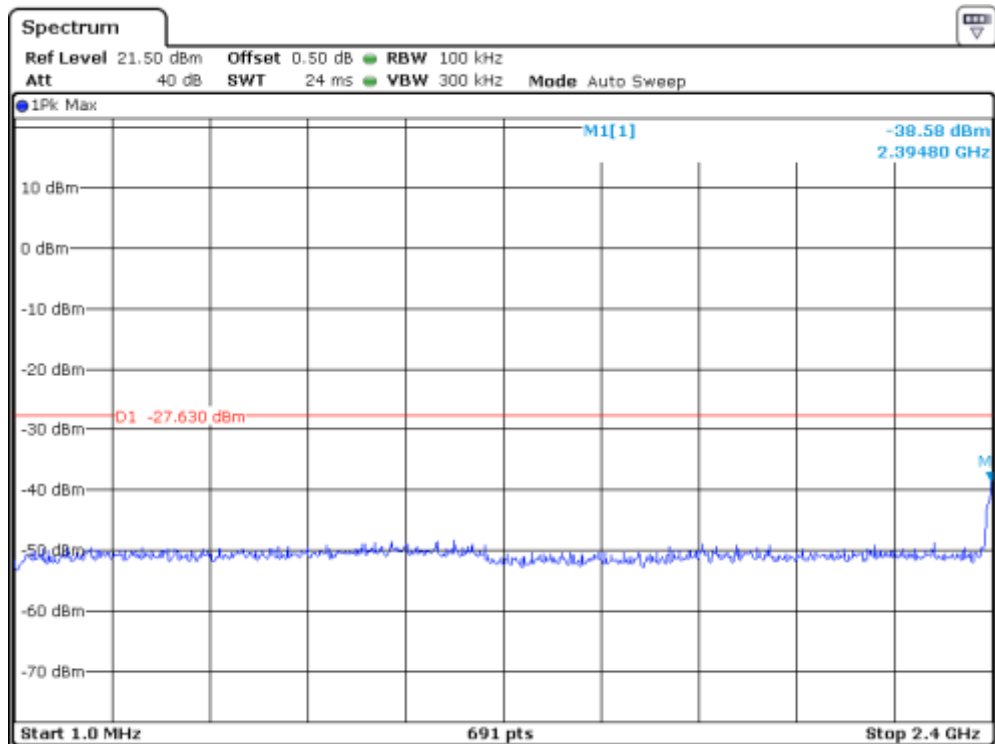


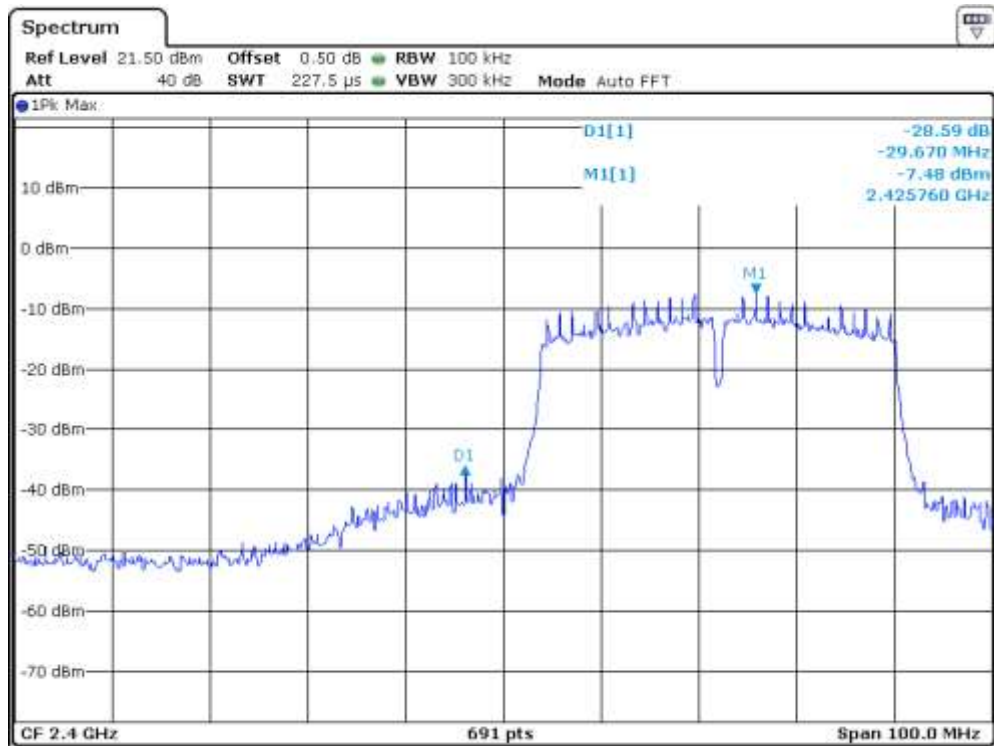




Channel 06 (2437MHz) Reference Level: -7.59dBm

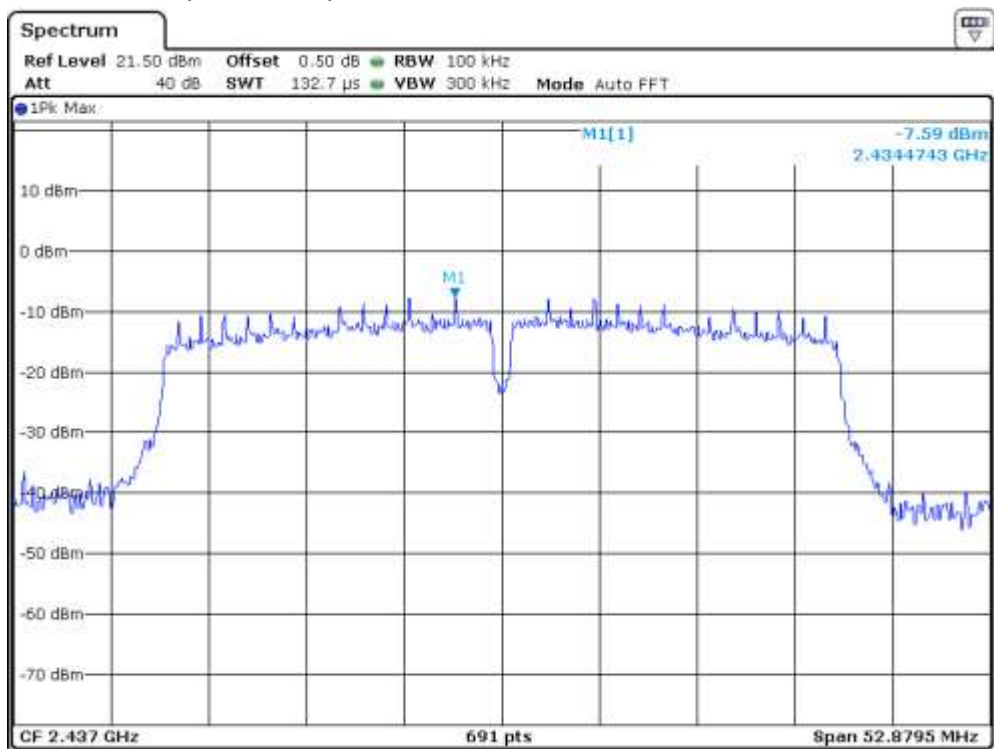

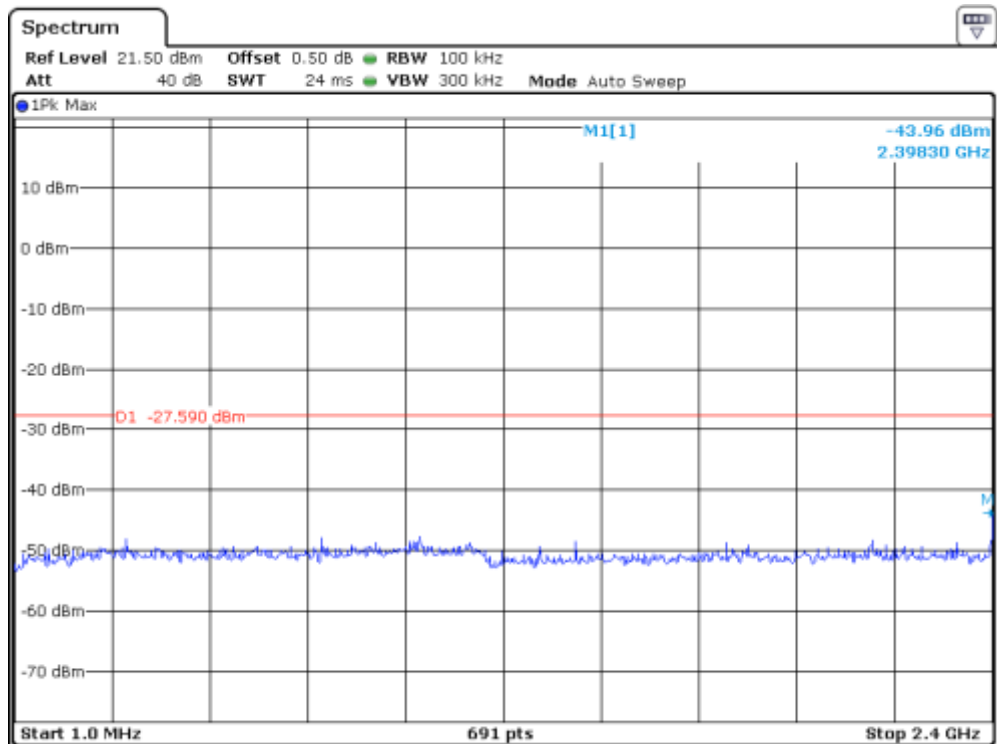

Channel 09 (2452MHz) Reference Level: -7.58dBm

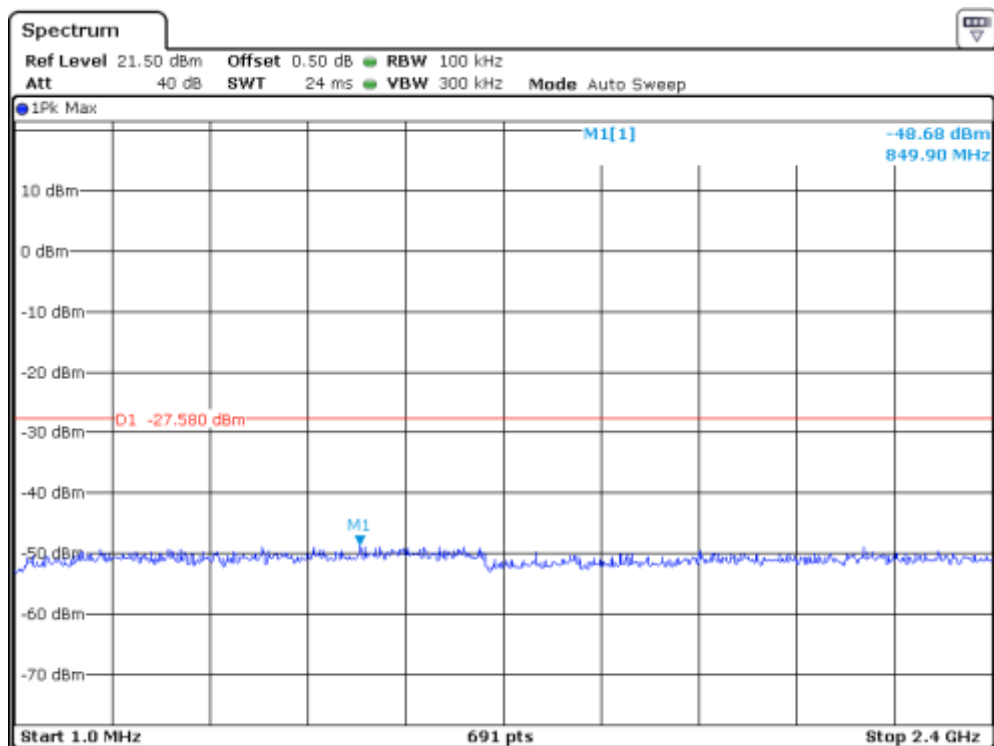
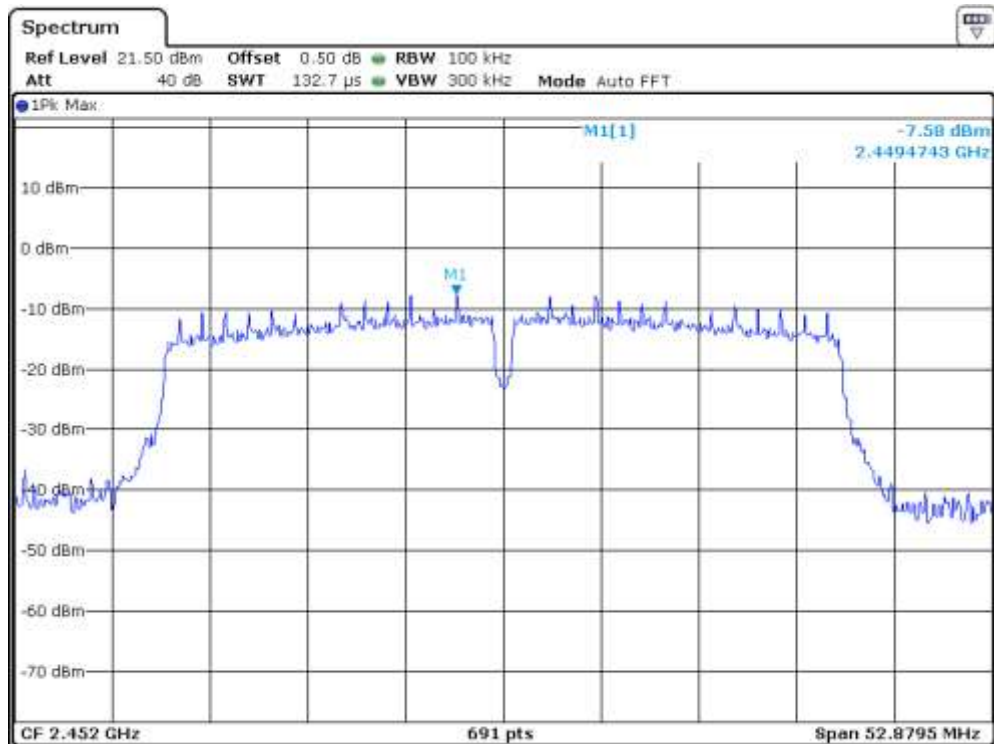


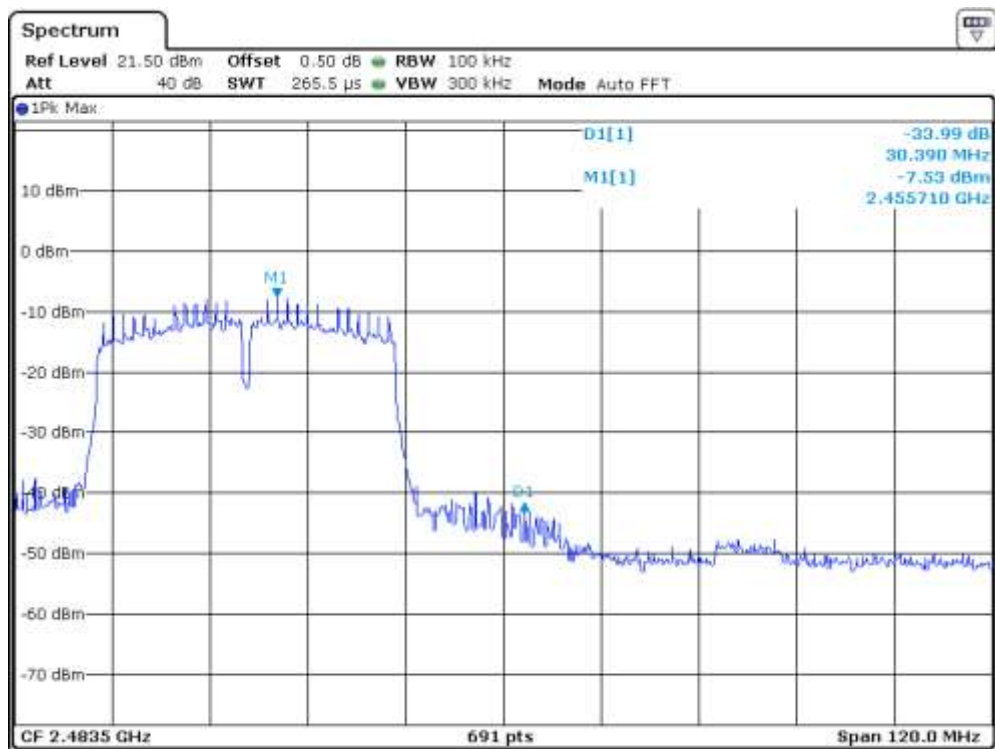
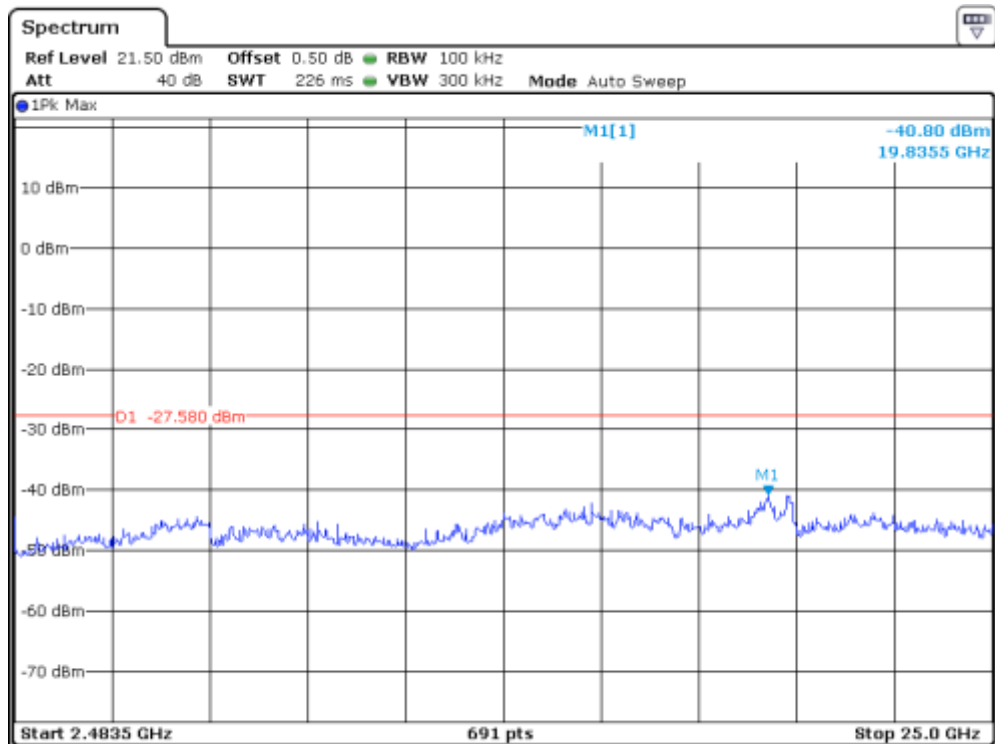


MIMO Mode, Ant2:



802.11n-HT20


Channel 01 (2412MHz) Reference Level: -3.24dBm

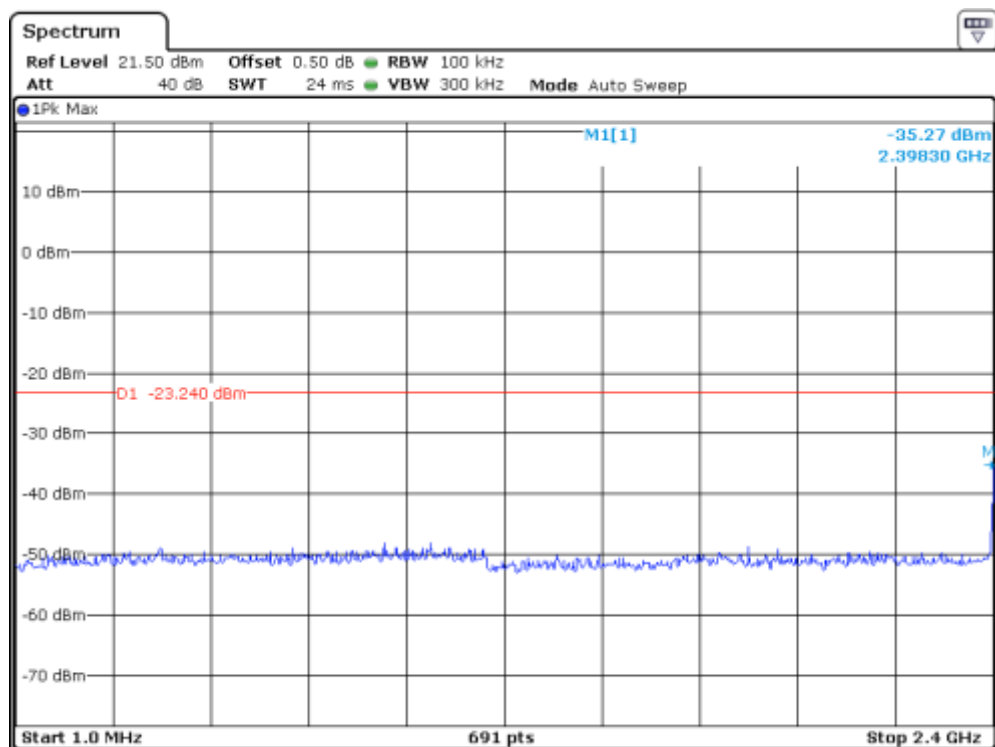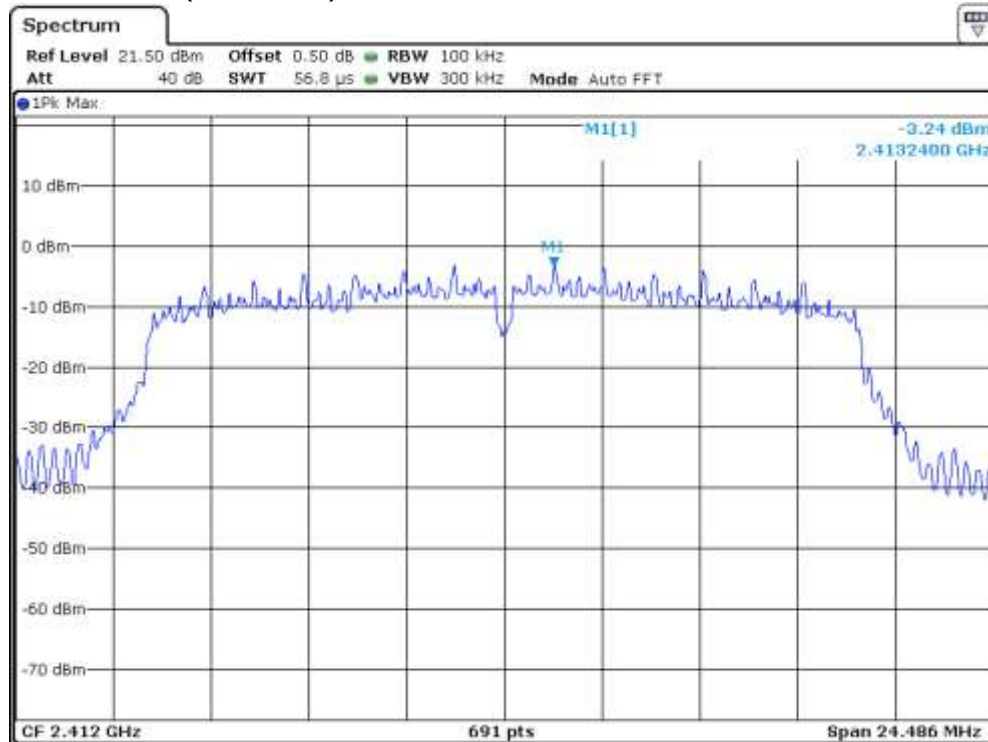

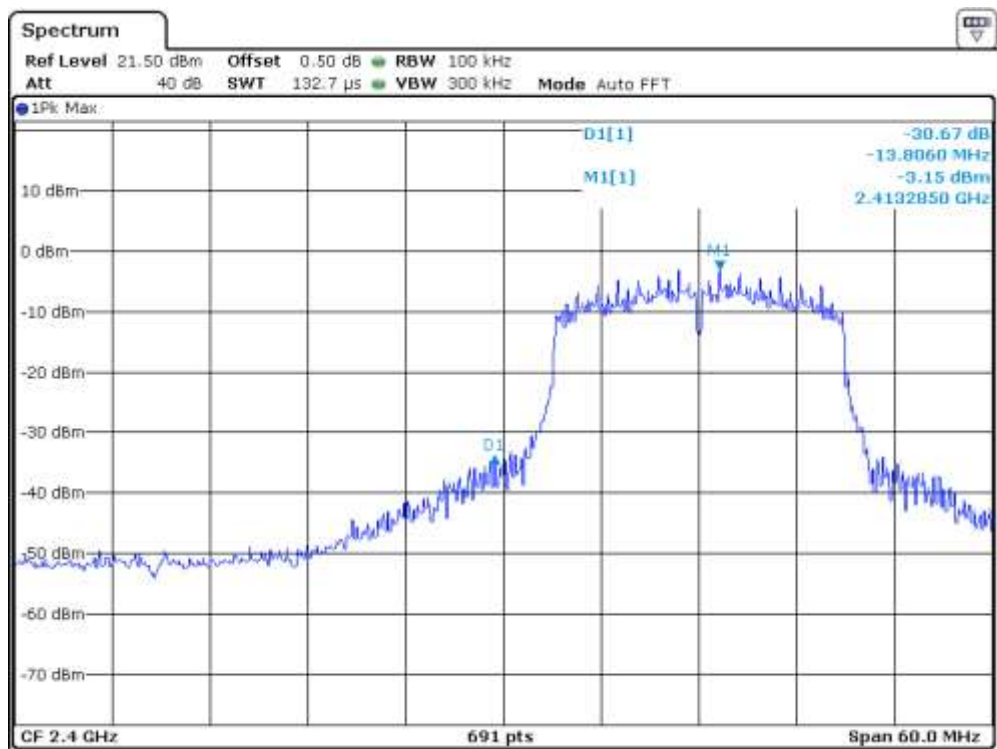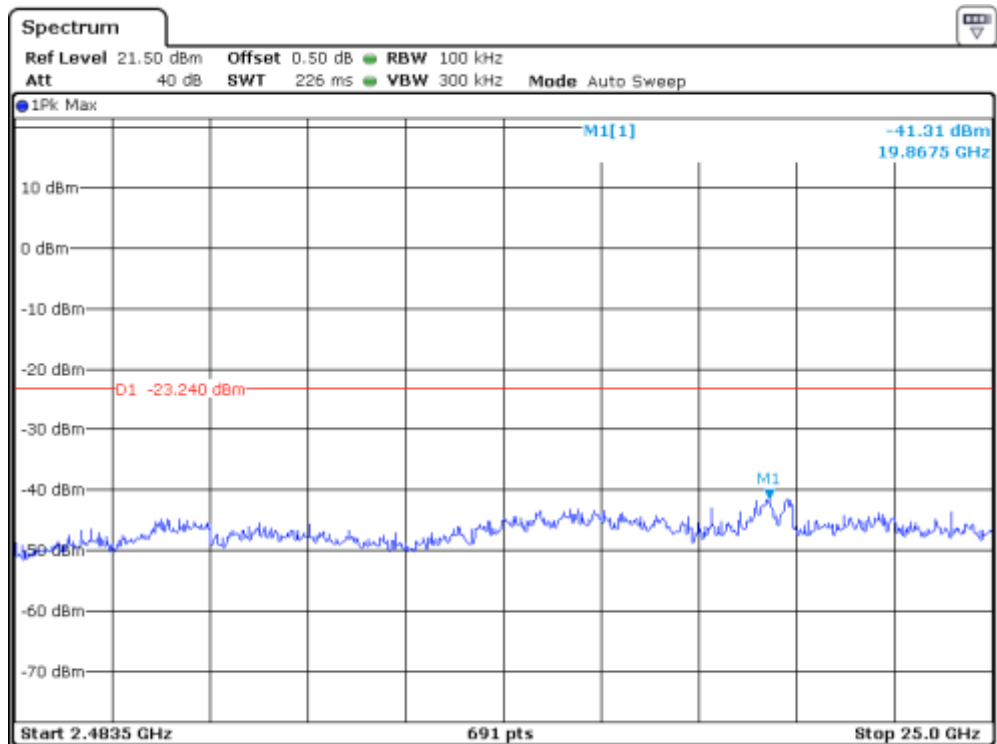



Channel 06 (2437MHz) Reference Level: -2.92dBm

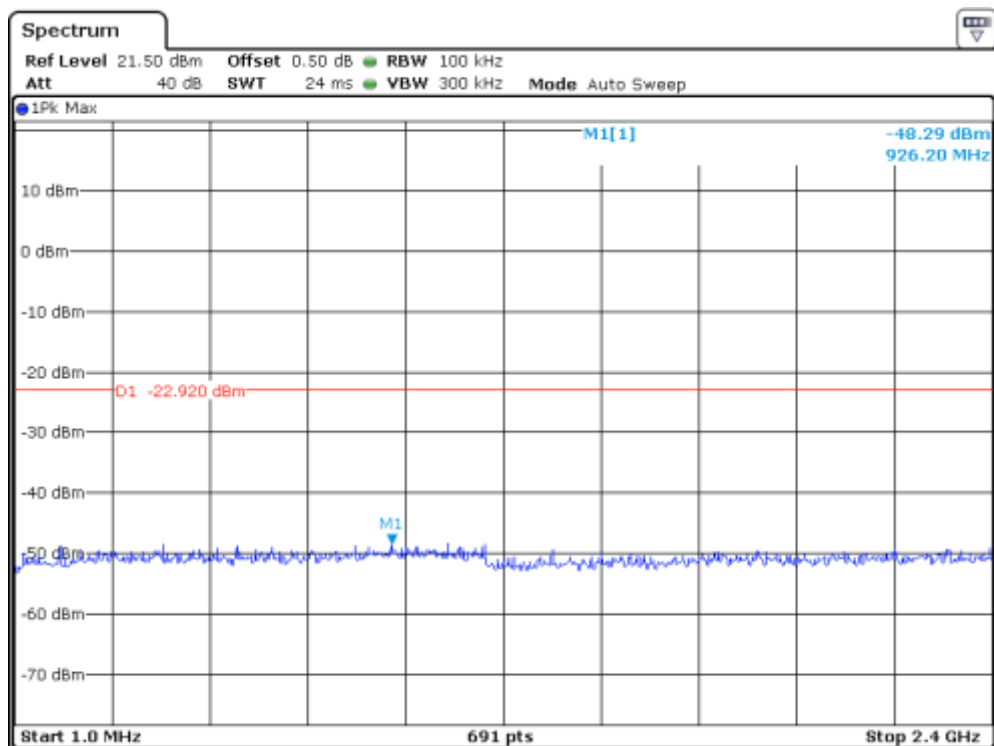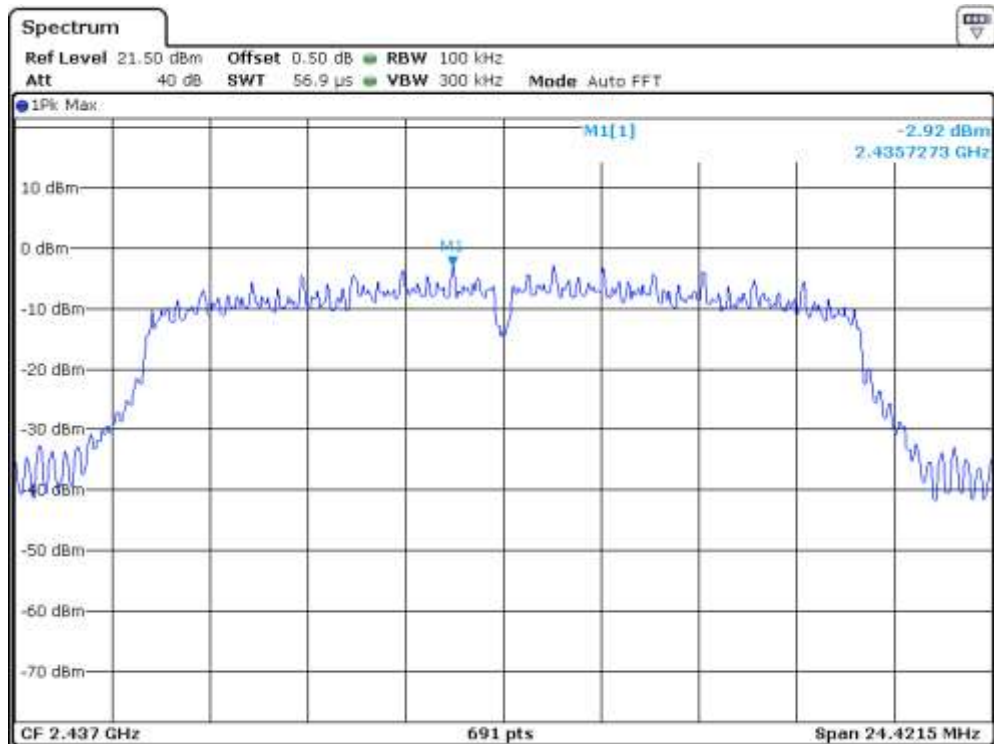


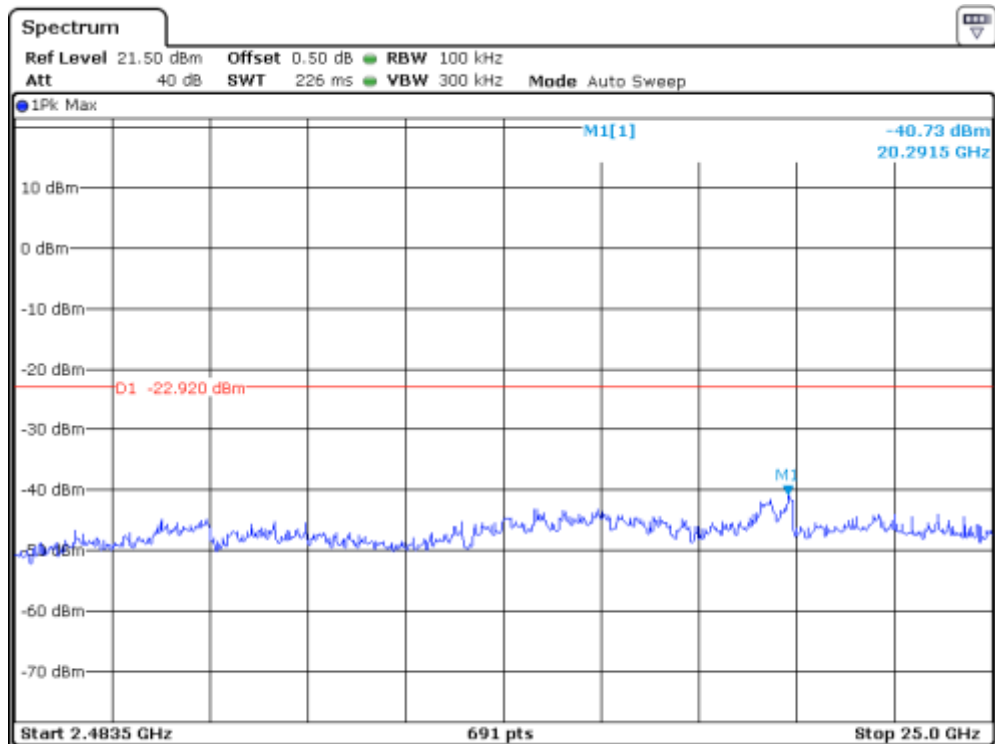

Channel 11 (2462MHz) Reference Level: -2.83dBm

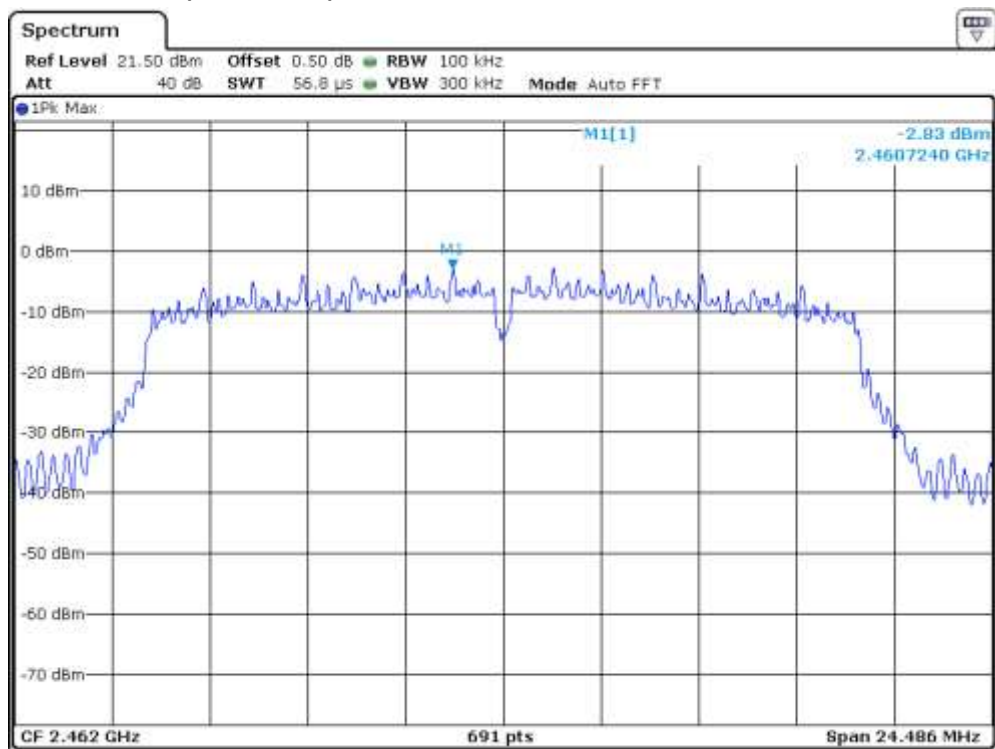


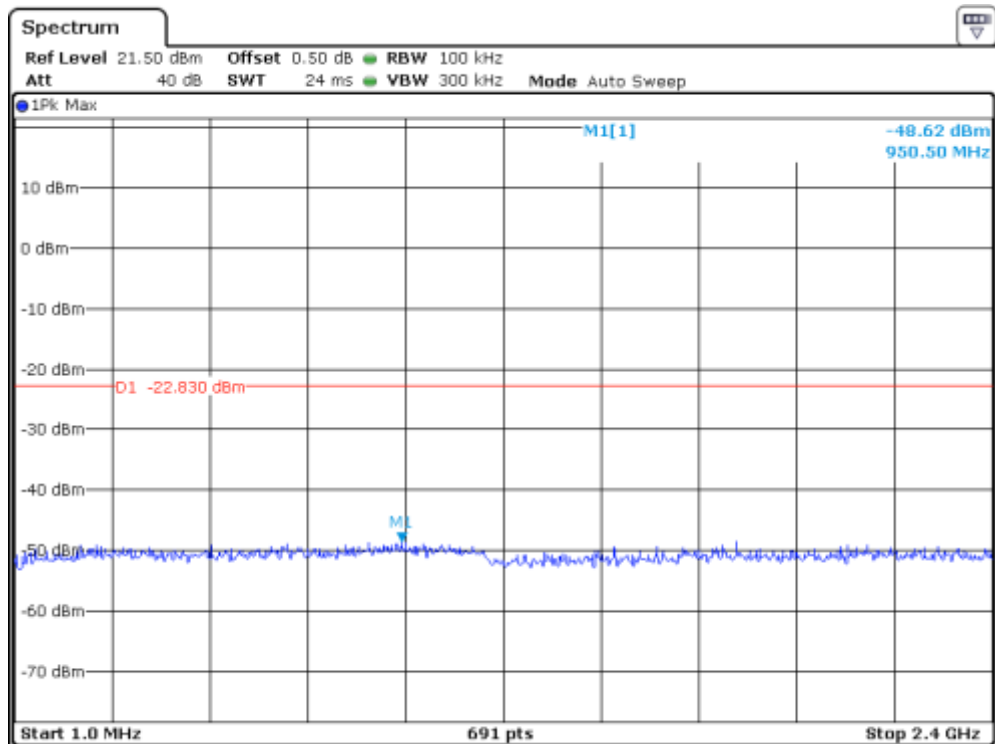


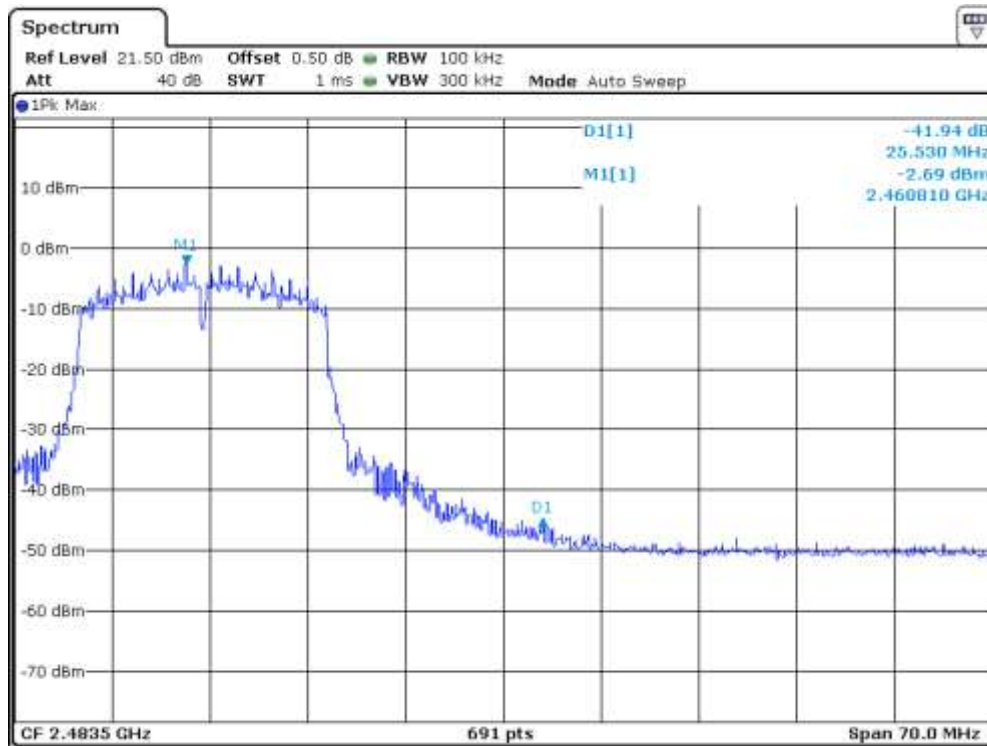


802.11n-HT40


Channel 03 (2422MHz) Reference Level: -5.67dBm


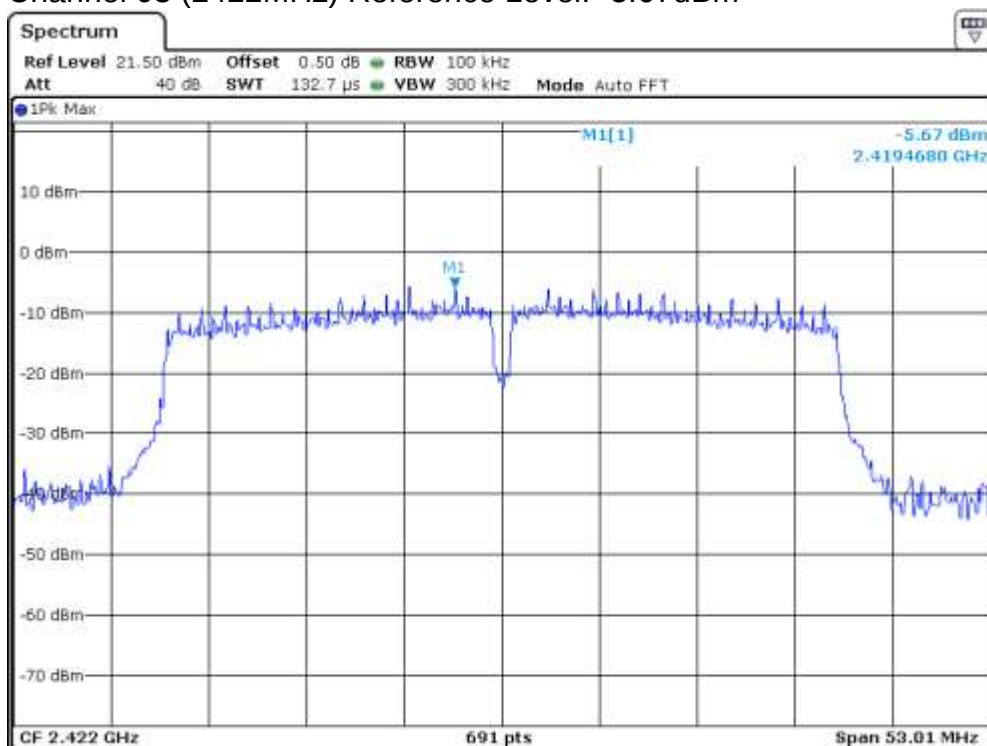


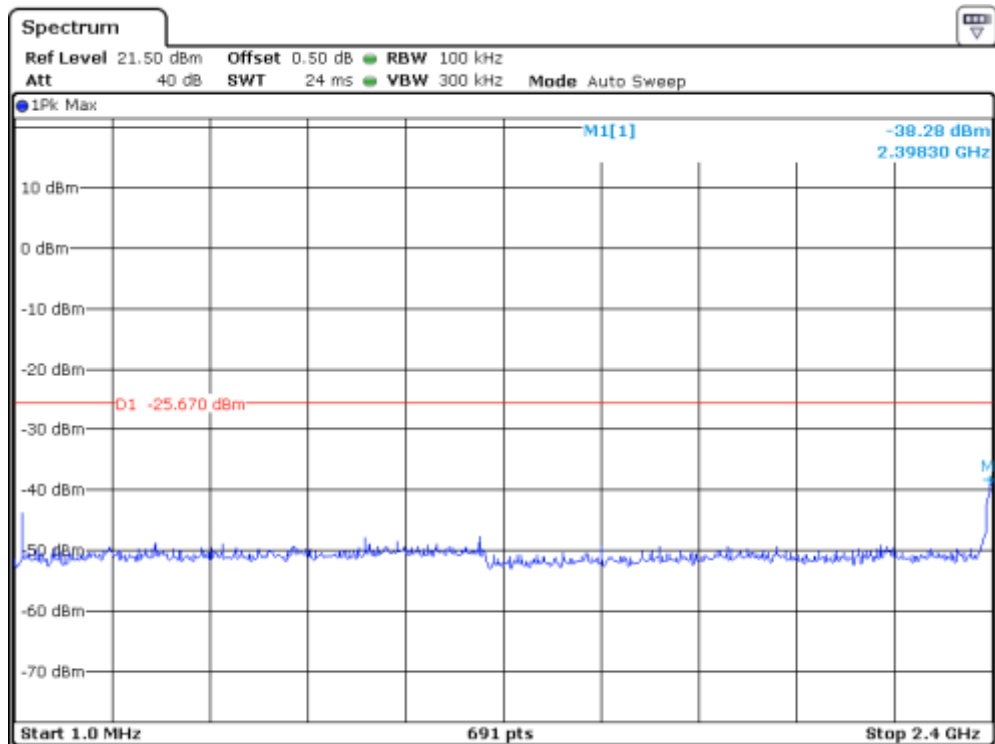


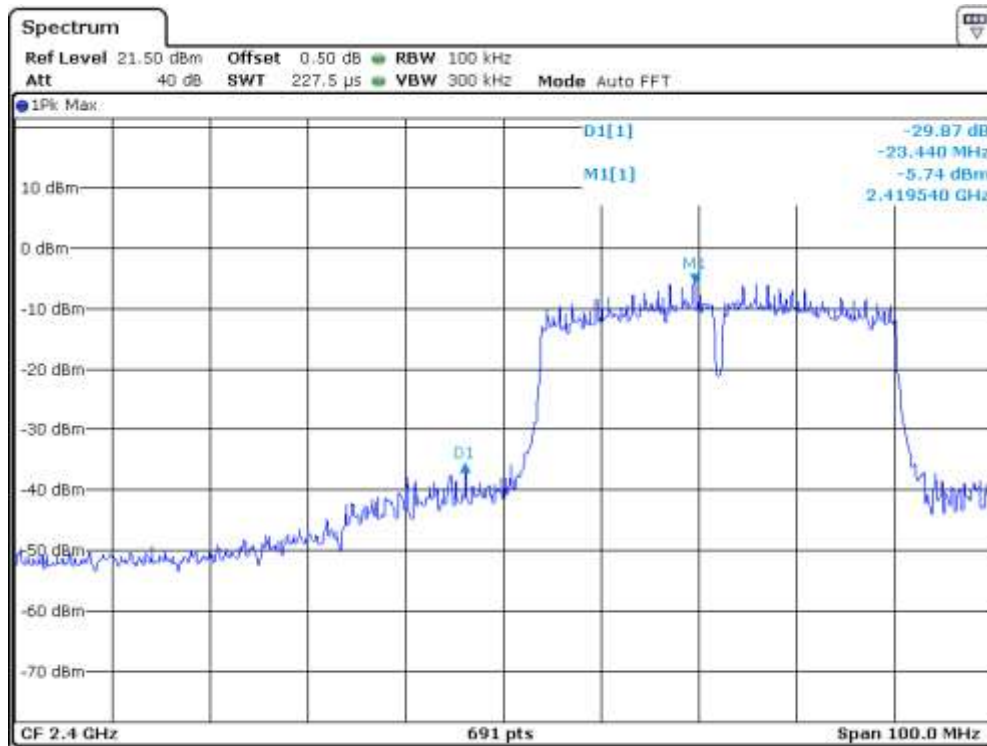




Channel 06 (2437MHz) Reference Level: -5.62dBm

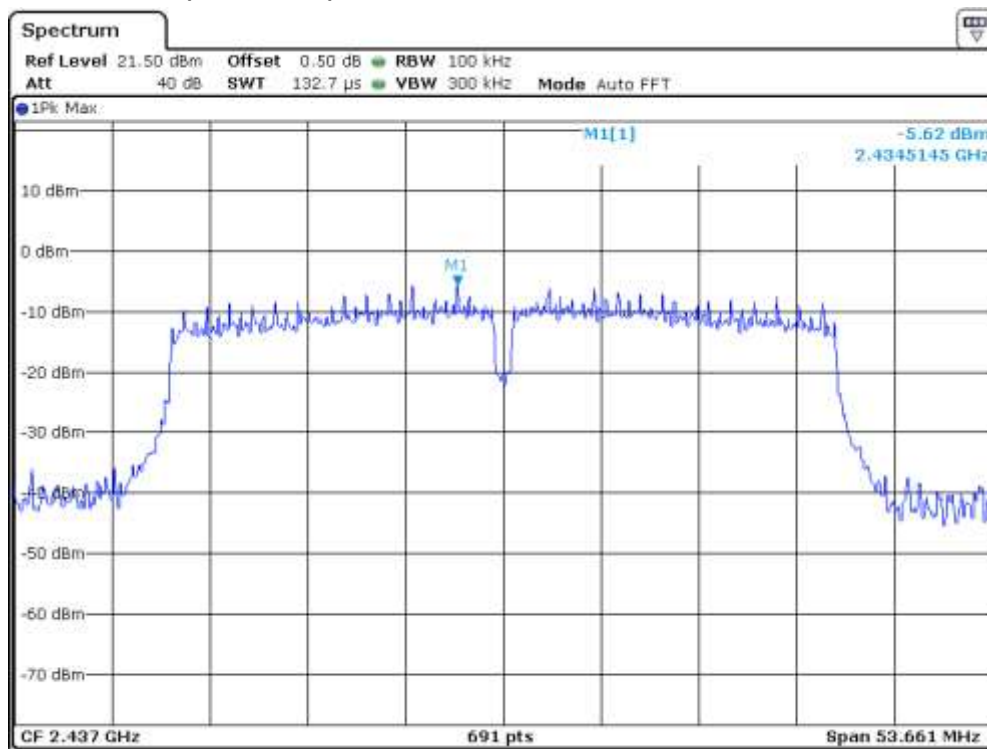

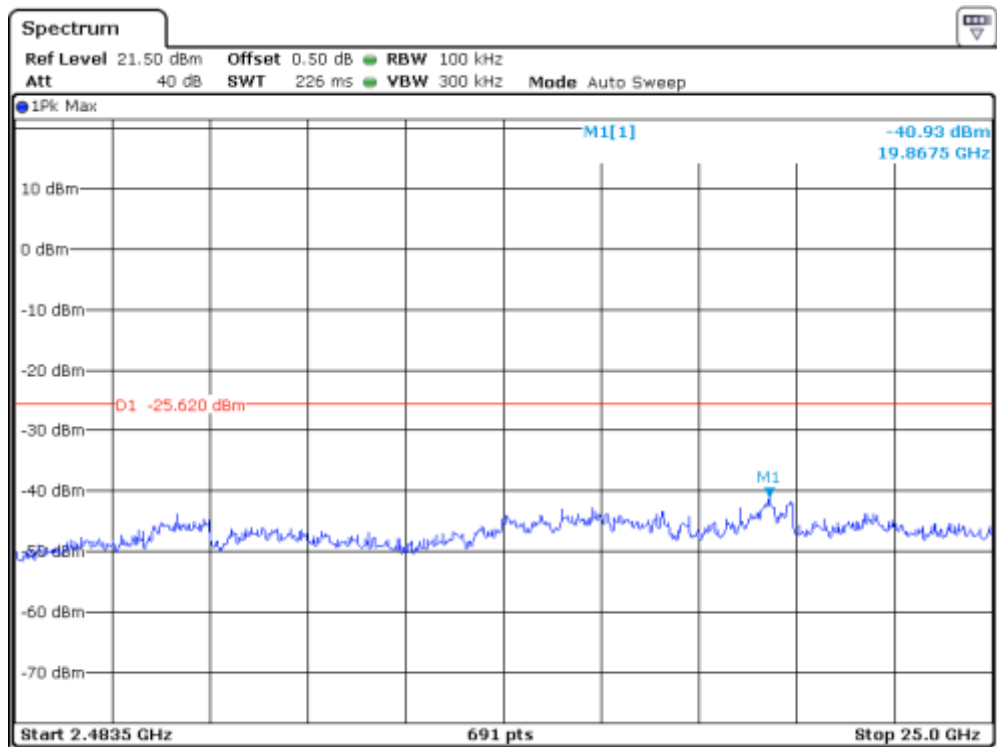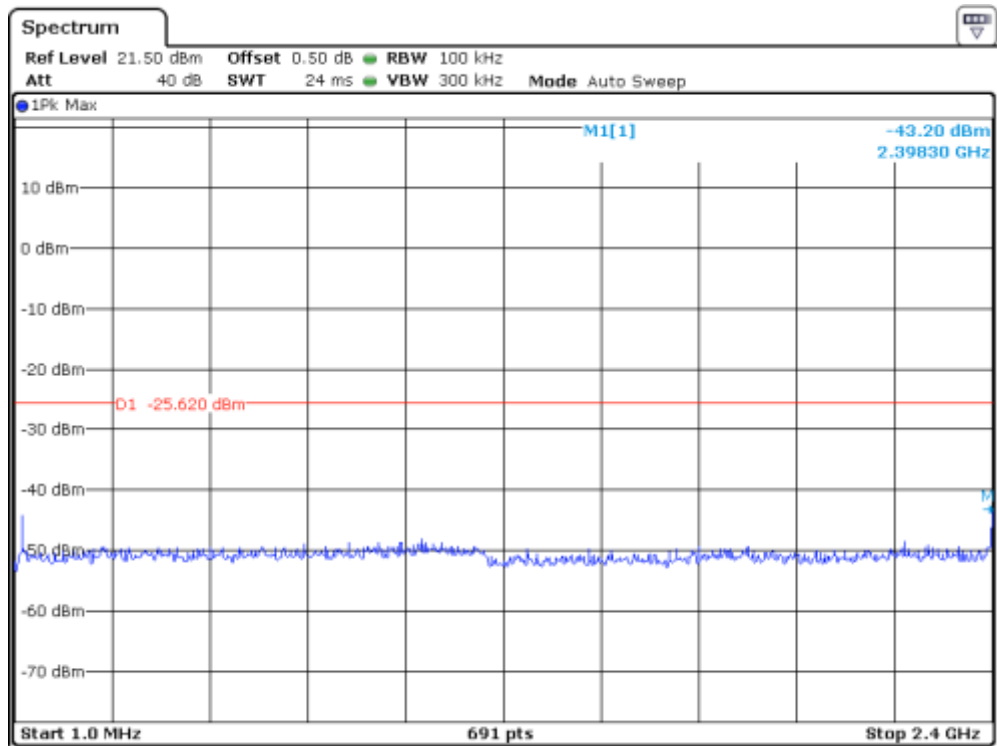

Channel 09 (2452MHz) Reference Level: -5.48dBm

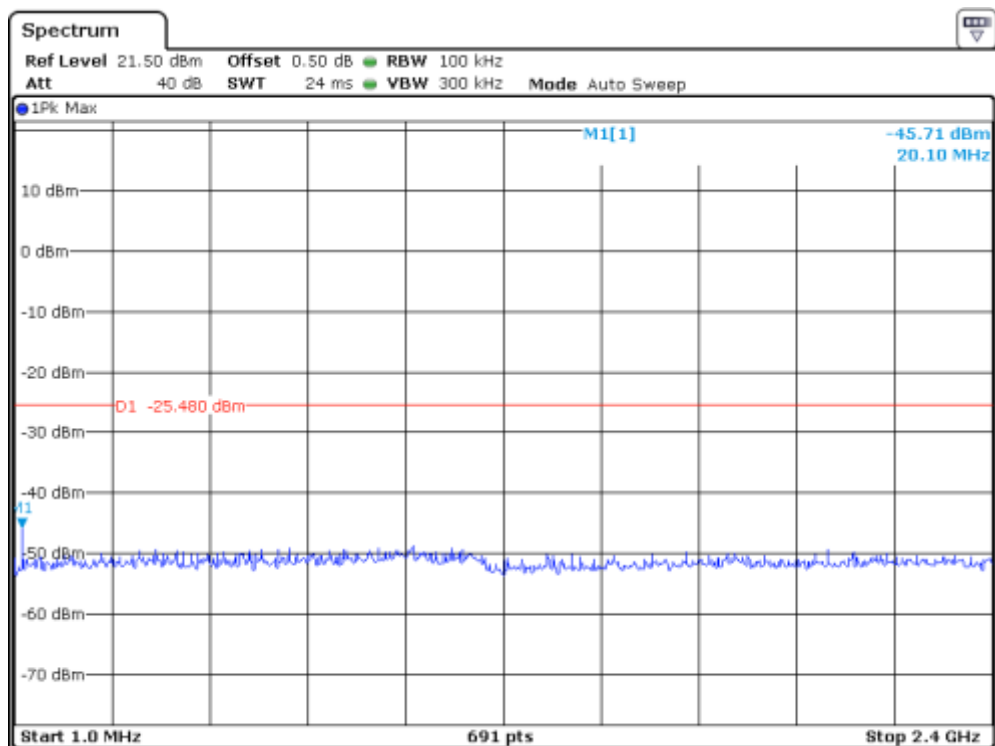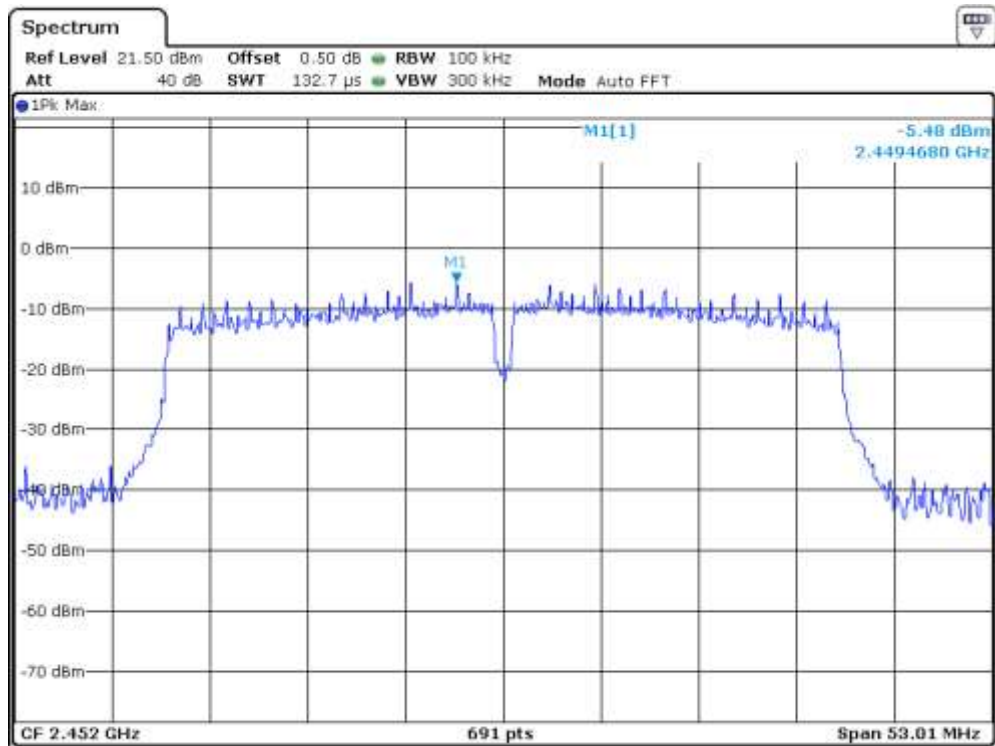

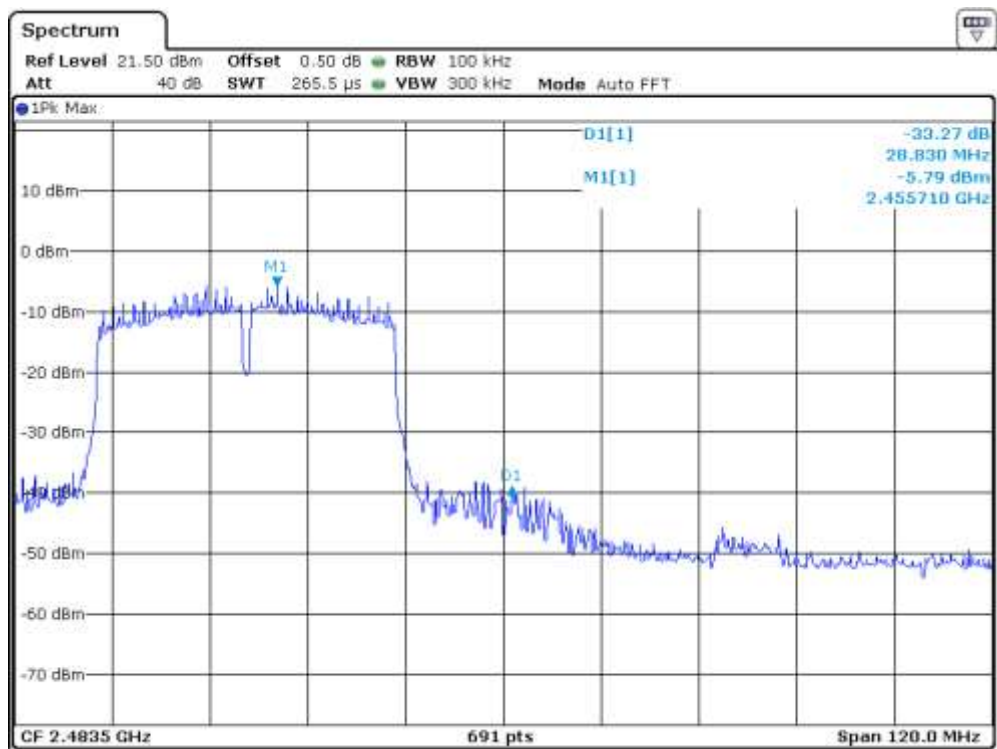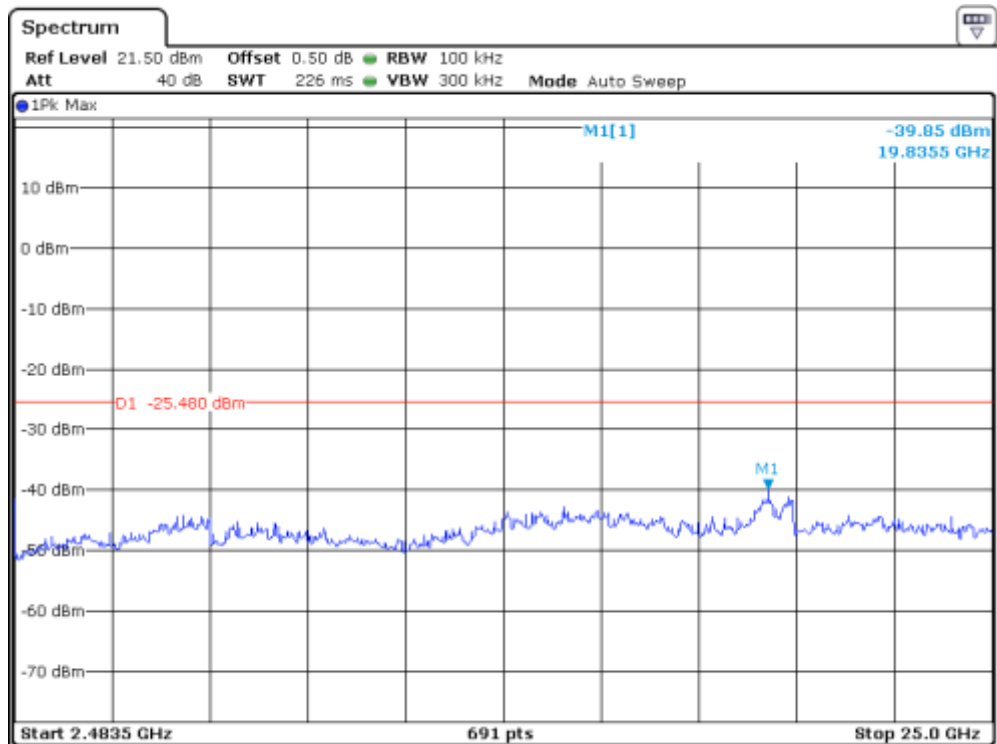

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 18 May 2019

Model: NTUD-U8

4.5 Out of Band Radiated Emissions (for emissions in 4.4 above that are less than 20dB below carrier), FCC Rule 15.247(d):

For out of band emissions that are close to or that exceed the 20dB attenuation requirement described in the specification, radiated measurements were performed at a 3m separation distance to determine whether these emissions complied with the general radiated emission requirement.

☒ Not required, since all emissions are more than 20dB below fundamental

☐ See attached data sheet

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 24 May 2019


Model: NTUD-U8

4.6 Transmitter Radiated Emissions in Restricted Bands, FCC Rule 15.35(b) (c):


Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified. Simultaneous transmission was considered during the test.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

The Diagram below shows the test setup, which is utilized to make these measurements.

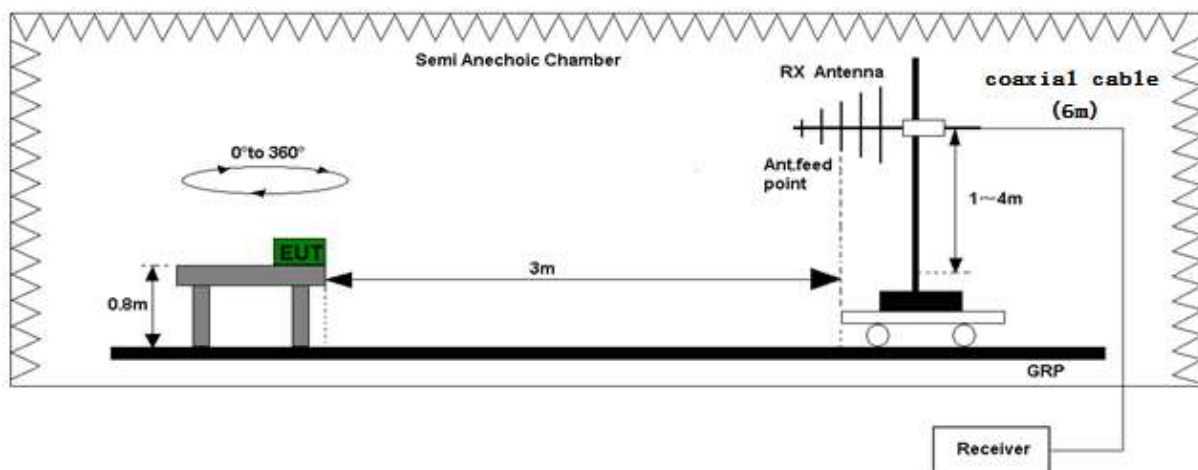

Test set-up of radiated disturbance (Up to 1GHz)

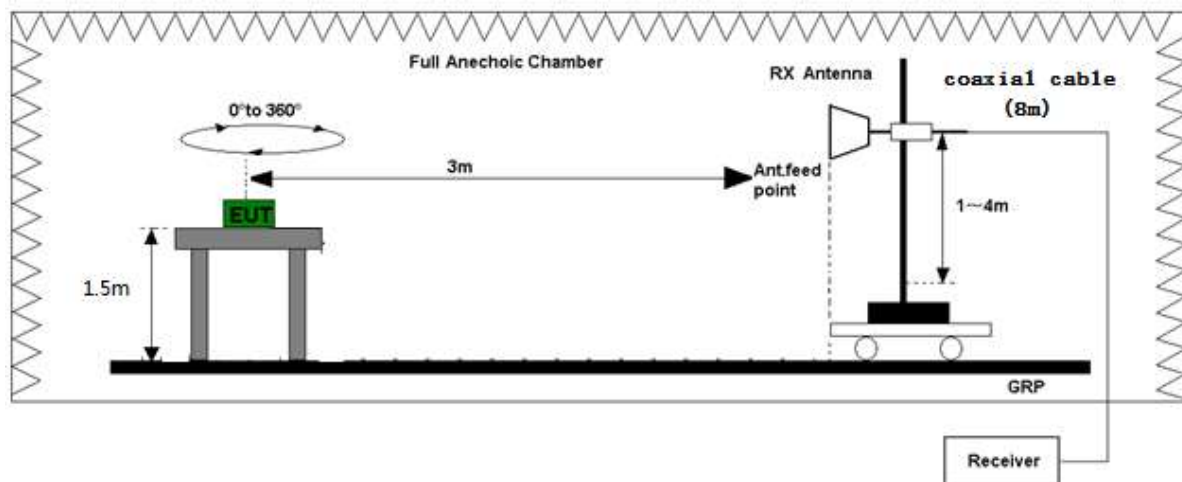

Test set-up of radiated disturbance (Above 1GHz)

Radiated emission measurements were performed from 9KHz to tenth harmonic or 40GHz. The EUT for testing is arranged on a styrene turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 24 May 2019

Model: NTUD-U8

4.7 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD$$

Where FS = Field Strength in dB μ V/m
 RA = Receiver Amplitude (including preamplifier) in dB μ V
 CF = Cable Attenuation Factor in dB
 AF = Antenna Factor in dB
 AG = Amplifier Gain in dB
 PD = Pulse Desensitization in dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB. The net field strength for comparison to the appropriate emission limit is 42 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$\begin{aligned} RA &= 62.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB} \\ CF &= 1.6 \text{ dB} \\ AG &= 29.0 \text{ dB} \\ PD &= 0 \text{ dB} \\ FS &= 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in mV/m} = \text{Common Antilogarithm} [(42 \text{ dB}\mu\text{V/m})/20] = 125.9 \mu\text{V/m}$$

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 24 May 2019

Model: NTUD-U8

4.8 Radiated Spurious Emission

Worst Case Radiated Spurious Emission (802.11N40 MIMO-2422MHz)
at 2316.160 MHz
is passed by 9.2 dB margin.

For the electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 24 May 2019

Model: NTUD-U8

Worst Case Operating Mode:

WIFI Link

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	238.065	36.0	20.0	11.4	27.4	46.0	-18.6
Horizontal	257.465	34.7	20.0	12.8	27.5	46.0	-18.5
Horizontal	638.190	31.5	20.0	22.0	33.5	46.0	-12.5
Vertical	30.970	27.2	20.0	17.4	24.6	40.0	-15.4
Vertical	52.795	27.5	20.0	8.2	15.7	40.0	-24.3
Vertical	400.055	29.9	20.0	17.3	27.2	46.0	-18.8

- NOTES:
1. Quasi-Peak detector is used for frequency below 1GHz.
 2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. All emissions are below the QP limit.

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 24 May 2019

Model: NTUD-U8

Worst Case Operating Mode:

Transmitting (11b ANT2-2412MHz)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	53.3	36.3	33.5	50.5	74.0	-23.5
Horizontal	*2318.480	66.1	36.4	27.3	57.0	74.0	-17.0

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	40.1	36.3	33.5	37.3	54.0	-16.7
Horizontal	*2318.480	53.6	36.4	27.3	44.5	54.0	-9.5

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 24 May 2019

Model: NTUD-U8

Worst Case Operating Mode:

Transmitting (11b ANT2-2437MHz)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	53.1	36.3	33.6	50.4	74.0	-23.6
Horizontal	*7311.000	55.3	36.3	37.8	56.8	74.0	-17.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	39.9	36.3	33.6	37.2	54.0	-16.8
Horizontal	*7311.000	41.1	36.3	37.8	42.6	54.0	-11.4

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 24 May 2019

Model: NTUD-U8

Worst Case Operating Mode:

Transmitting (11b ANT2-2462MHz)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	53.3	36.3	33.6	50.6	74.0	-23.4
Horizontal	*7386.000	55.2	36.3	37.8	56.7	74.0	-17.3
Horizontal	*2487.064	65.5	36.4	27.5	56.6	74.0	-17.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	39.9	36.3	33.6	37.2	54.0	-16.8
Horizontal	*7386.000	41.0	36.3	37.8	42.5	54.0	-11.5
Horizontal	*2487.064	52.7	36.4	27.5	43.8	54.0	-10.2

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 24 May 2019

Model: NTUD-U8

Worst Case Operating Mode:

Transmitting (11g ANT2-2412MHz)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	53.0	36.3	33.5	50.2	74.0	-23.8
Horizontal	*2319.120	65.9	36.4	27.3	56.8	74.0	-17.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	39.9	36.3	33.5	37.1	54.0	-16.9
Horizontal	*2319.120	53.8	36.4	27.3	44.7	54.0	-9.3

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 24 May 2019

Model: NTUD-U8

Worst Case Operating Mode:

Transmitting (11g ANT2-2437MHz)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	53.0	36.3	33.6	50.3	74.0	-23.7
Horizontal	*7311.000	52.7	36.3	37.8	54.2	74.0	-19.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	39.7	36.3	33.6	37.0	54.0	-17.0
Horizontal	*7311.000	38.9	36.3	37.8	40.4	54.0	-13.6

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 24 May 2019

Model: NTUD-U8

Worst Case Operating Mode:

Transmitting (11g ANT2-2462MHz)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	53.1	36.3	33.6	50.4	74.0	-23.6
Horizontal	*7386.000	52.9	36.3	37.8	54.4	74.0	-19.6
Horizontal	*2484.639	65.0	36.4	27.5	56.1	74.0	-17.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	39.9	36.3	33.6	37.2	54.0	-16.8
Horizontal	*7386.000	38.8	36.3	37.8	40.3	54.0	-13.7
Horizontal	*2484.639	52.8	36.4	27.5	43.9	54.0	-10.1

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 24 May 2019

Model: NTUD-U8

Worst Case Operating Mode:

Transmitting (11n20 MIMO-2412MHz)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	53.8	36.3	33.5	51.0	74.0	-23.0
Horizontal	2343.200	66.7	36.4	27.3	57.6	74.0	-16.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4824.000	39.9	36.3	33.5	37.1	54.0	-16.9
Horizontal	*2343.200	53.7	36.4	27.3	44.6	54.0	-9.4

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 24 May 2019

Model: NTUD-U8

Worst Case Operating Mode:

Transmitting (11n20 MIMO-2437MHz)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	53.5	36.3	33.6	50.8	74.0	-23.2
Horizontal	*7311.000	53.1	36.3	37.8	54.6	74.0	-19.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	39.7	36.3	33.6	37.0	54.0	-17.0
Horizontal	*7311.000	39.5	36.3	37.8	41.0	54.0	-13.0

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 24 May 2019

Model: NTUD-U8

Worst Case Operating Mode:

Transmitting (11n20 MIMO-2462MHz)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	53.3	36.3	33.6	50.6	74.0	-23.4
Horizontal	*7386.000	52.9	36.3	37.8	54.4	74.0	-19.6
Horizontal	*2488.434	64.8	36.4	27.5	55.9	74.0	-18.1

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4924.000	39.8	36.3	33.6	37.1	54.0	-16.9
Horizontal	*7386.000	39.7	36.3	37.8	41.2	54.0	-12.8
Horizontal	*2488.434	52.7	36.4	27.5	43.8	54.0	-10.2

NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 24 May 2019

Model: NTUD-U8

Worst Case Operating Mode:

Transmitting (11n40 MIMO-2422MHz)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4844.000	53.3	36.3	33.5	50.5	74.0	-23.5
Horizontal	*2316.160	66.4	36.4	27.3	57.3	74.0	-16.7

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4844.000	40.0	36.3	33.5	37.2	54.0	-16.8
Horizontal	*2316.160	53.9	36.4	27.3	44.8	54.0	-9.2

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz/VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 24 May 2019

Model: NTUD-U8

Worst Case Operating Mode:

Transmitting (11n40 MIMO-2437MHz)

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	52.8	36.3	33.6	50.1	74.0	-23.9
Horizontal	*7311.000	52.8	36.3	37.8	54.3	74.0	-19.7

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4874.000	39.7	36.3	33.6	37.0	54.0	-17.0
Horizontal	*7311.000	39.0	36.3	37.8	40.5	54.0	-13.5

NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 24 May 2019

Model: NTUD-U8

Worst Case Operating Mode:

Transmitting (11n40 MIMO-2452MHz)

Radiated Emissions


Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4904.000	53.0	36.3	33.6	50.3	74.0	-23.7
Horizontal	*7356.000	53.1	36.3	37.8	54.6	74.0	-19.4
Horizontal	*2485.546	66.0	36.4	27.5	57.1	74.0	-16.9

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Horizontal	*4904.000	39.8	36.3	33.6	37.1	54.0	-16.9
Horizontal	*7356.000	38.7	36.3	37.8	40.2	54.0	-13.8
Horizontal	*2485.546	53.2	36.4	27.5	44.3	54.0	-9.7

- NOTES: 1. Peak detector is used, RBW=1MHz/VBW=3MHz for peak value and RBW=1MHz / VBW=10Hz for average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

4.9 Conducted Emission at Mains Terminal

Block Diagram:

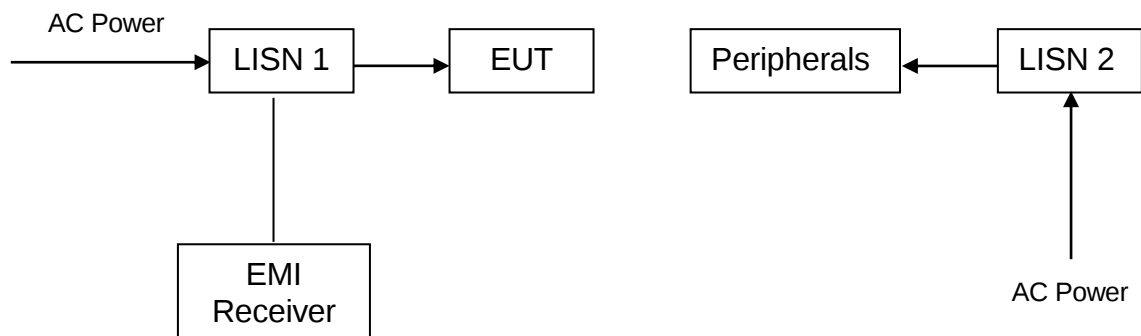

4.9.1 Conducted Emissions Configuration Photograph

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

4.9.2 Conducted Emissions

Worst Case Live-Conducted Configuration
At

0.190 MHz

Judgement: Passed by 16.0 dB margin

TEST PERSONNEL:

Sign on file

Ryan Chen, Engineer
Typed/Printed Name

17 May 2019
Date

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.


Date of Test: 17 May 2019

Model: NTUD-U8

Worst Case Operating Mode:

WIFI Link

Conducted Emission Test - FCC

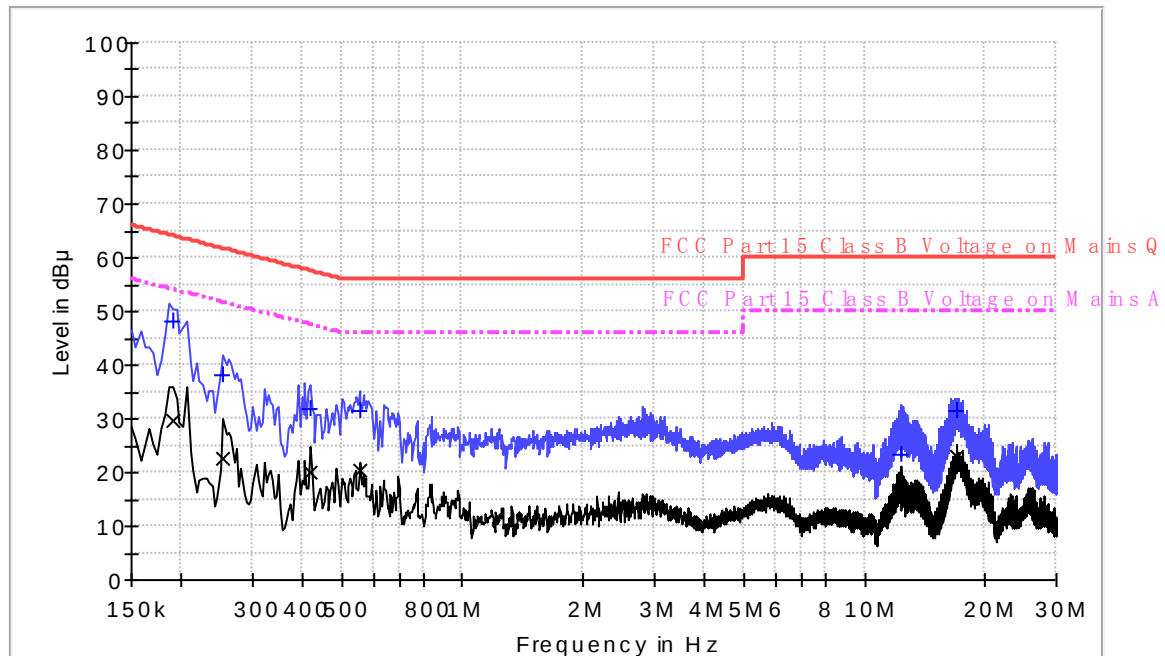

Result Table QP

Frequency (MHz)	QuasiPeak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.190000	48.0	L	9.6	16.0	64.0
0.254000	38.3	L	9.5	23.3	61.6
0.418000	32.0	L	9.4	25.5	57.5
0.558000	31.5	L	9.4	24.5	56.0
12.386000	23.2	L	9.7	36.8	60.0
17.030000	31.6	L	10.0	28.4	60.0

Result Table AV

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.190000	29.6	L	9.6	26.8	56.4
0.254000	22.6	L	9.5	30.7	53.3
0.418000	19.9	L	9.4	28.0	47.9
0.558000	20.3	L	9.4	25.7	46.0
12.386000	15.2	L	9.7	34.8	50.0
17.030000	23.1	L	10.0	26.9	50.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBμV) – Level (dBμV)

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.


Date of Test: 17 May 2019

Worst Case Operating Mode:

Model: NTUD-U8

WIFI Link

Conducted Emission Test - FCC

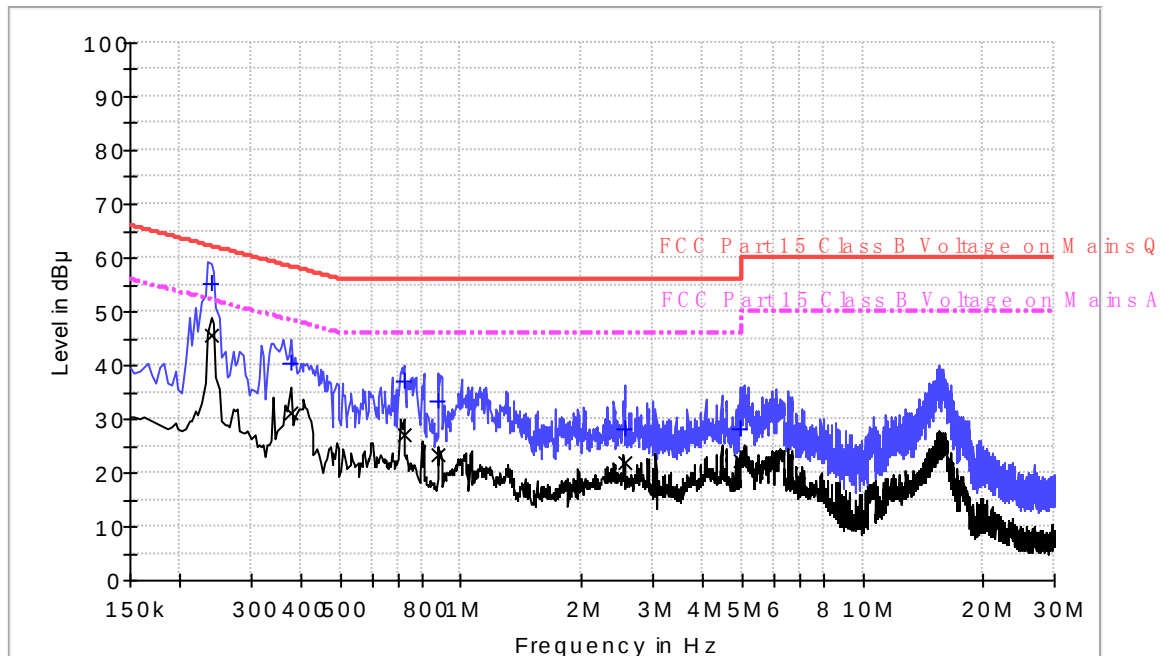

Result Table QP

Frequency (MHz)	QuasiPeak (dB μV)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.202000	45.5	N	9.5	18.0	63.5
0.258000	37.1	N	9.5	24.4	61.5
0.482000	32.7	N	9.4	23.6	56.3
0.550000	32.2	N	9.4	23.8	56.0
12.178000	25.9	N	9.6	34.1	60.0
16.546000	25.3	N	9.9	34.7	60.0

Result Table AV

Frequency (MHz)	Average (dB μV)	Line	Corr. (dB)	Margin (dB)	Limit (dB μV)
0.202000	30.2	N	9.5	23.3	53.5
0.258000	21.5	N	9.5	30.0	51.5
0.482000	20.6	N	9.4	25.7	46.3
0.550000	20.0	N	9.4	26.0	46.0
12.178000	20.1	N	9.6	29.9	50.0
16.546000	17.0	N	9.9	33.0	50.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBμV) – Level (dBμV)

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Model: NTUD-U8

4.10 Radiated Emissions from Digital Section of Transceiver, FCC Ref: 15.109

☐ Not required - No digital part

☐ Test results are attached

☒ Included in the separated report.

Applicant: Shenzhen Chuangwei-RGB Electronics Co., Ltd.

Date of Test: 25 April 2019

Model: NTUD-U8

4.11 Transmitter Duty Cycle Calculation and Measurements, FCC Rule 15.35(b), (c)

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEP function on the analyzer was set to ZERO SPAN. The Transmitter ON time was determined from the resultant time-amplitude display:

	See attached spectrum analyzer chart (s) for Transmitter timing
	See Transmitter timing diagram provided by manufacturer
x	Not applicable, duty cycle was not used.

EXHIBIT 5

EQUIPMENT PHOTOGRAPHS

5.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.pdf & internal photos.pdf.

EXHIBIT 6

PRODUCT LABELLING

6.0 Product Labeling

For electronic filing, the FCC ID label artwork and location is saved with filename: label.pdf.

EXHIBIT 7

TECHNICAL SPECIFICATIONS

7.0 Technical Specifications

For electronic filing, the block diagram and circuit diagram are saved with filename: block.pdf and circuit.pdf respectively.

EXHIBIT 8

INSTRUCTION MANUAL

8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

EXHIBIT 9

CONFIDENTIALITY REQUEST

9.0 Confidentiality Request

For electronic filing, the confidentiality request of the tested EUT is saved with filename: request.pdf.

EXHIBIT 10

MISCELLANEOUS INFORMATION

10.0 Discussion of Pulse Desensitization

The determination of pulse desensitivity was made in accordance with Hewlett Packard Application Note 150-2, *Spectrum Analysis ... Pulsed RF*.

Pulse desensitivity is not applicable for this device since the transmitter transmits the RF signal continuously.

EXHIBIT 11

TEST EQUIPMENT LIST

11.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ182-02	RF Power Meter	Anritsu	ML2496A	1302005	05-Jun-2018	05-Jun-2019
SZ182-02-01	Power Sensor	Anritsu	MA2411B	1207429	05-Jun-2018	05-Jun-2019
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	--	05-Jun-2018	05-Jun-2019
SZ061-03	Biconilog Antenna	ETS	3142C	00078828	16-Oct-2018	16-Oct-2019
SZ061-08	Horn Antenna	ETS	3115	00092346	14-Sep-2018	14-Sep-2019
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	24-May-2019	24-May-2019
SZ061-07	Pyramidal Horn Antenna	ETS	3160-09	00083067	25-Oct-2018	25-Oct-2019
SZ056-03	Spectrum Analyzer	R&S	FSP30	101148	05-Jun-2018	05-Jun-2019
SZ185-01	EMI Receiver	R&S	ESCI	100547	04-Jan-2019	04-Jan-2020
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	15-Jan-2019	15-Jan-2020
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	15-Dec-2018	15-Dec-2020
SZ062-02	RF Cable	RADIAL	RG 213U	--	25-Dec-2018	25-Jun-2019
SZ062-05	RF Cable	RADIAL	0.04-26.5GHz	--	23-Feb-2019	23-Aug-2019
SZ062-12	RF Cable	RADIAL	0.04-26.5GHz	--	23-Feb-2019	23-Aug-2019
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	26-Oct-2018	26-Oct-2019
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	26-Oct-2018	26-Oct-2019
SZ188-03	Shielding Room	ETS	RFD-100	4100	16-Jan-2017	16-Jan-2020
SZ062-16	RF Cable	HUBER+SUHNER	CBL2-BN-1m	110127-2231000	29-Oct-2018	29-Oct-2019

***** End of Report *****