

TEST REPORT

Reference No...... : WTS18S11128310-3W
FCC ID : 2ANMU-C12
Applicant..... : SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
Address..... : A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU
INDUSTRIAL ZONE, GUANLAN, LONGHUA, Shenzhen, China
Manufacturer : The same as above
Address..... : The same as above
Product..... : Smart Phone
Model(s) : C12
Brand Name : OUKITEL
Standards..... : FCC CFR47 Part 15.247:2017
Date of Receipt sample : 2018-11-06
Date of Test : 2018-11-07 to 2018-11-19
Date of Issue..... : 2018-11-20
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

**Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District,
Shenzhen, Guangdong, China**

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Ford Wang

Ford Wang / Project Engineer

Approved by:



Philo Zhong

Philo Zhong / Manager

2 Laboratories Introduction

Waltek Services (Shenzhen) Co., Ltd is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation, the certification number is 4243.01) of USA, CNAS (China National Accreditation Service for Conformity Assessment, the registration number is L3110) of China. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC (The Federal Communications Commission), CEC (California energy efficiency), ISED (Innovation, Science and Economic Development Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek (ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.



Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. Electro Magnetic Compatibility (EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

Test Facility:**A. Accreditations for Conformity Assessment (International)**

Country/Region	Scope Covered By	Scope	Note
USA	ISO/IEC 17025	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India		WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note:			
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.			
2. ISED Canada Registration No.: 7760A			

B. TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

3 Contents

	Page
1 COVER PAGE.....	1
2 LABORATORIES INTRODUCTION.....	2
3 CONTENTS	4
4 REVISION HISTORY	6
5 GENERAL INFORMATION.....	7
5.1 GENERAL DESCRIPTION OF E.U.T.	7
5.2 DETAILS OF E.U.T.	7
5.3 CHANNEL LIST.....	8
5.4 TEST MODE	9
6 TEST SUMMARY	10
7 EQUIPMENT USED DURING TEST	11
7.1 EQUIPMENTS LIST	11
7.2 DESCRIPTION OF SUPPORT UNITS	12
7.3 MEASUREMENT UNCERTAINTY	12
7.4 TEST EQUIPMENT CALIBRATION	12
8 CONDUCTED EMISSION	13
8.1 E.U.T. OPERATION	13
8.2 EUT SETUP.....	13
8.3 MEASUREMENT DESCRIPTION	13
8.4 CONDUCTED EMISSION TEST RESULT	14
9 RADIATED EMISSIONS.....	18
9.1 EUT OPERATION.....	18
9.2 TEST SETUP	19
9.3 SPECTRUM ANALYZER SETUP	20
9.4 TEST PROCEDURE	21
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	21
9.6 SUMMARY OF TEST RESULTS	22
10 CONDUCTED SPURIOUS EMISSIONS.....	38
10.1 TEST PROCEDURE.....	38
10.2 TEST RESULT	39
11 BAND EDGE MEASUREMENT	55
11.1 TEST PRODUCE	55
11.2 TEST RESULT	56
12 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT	61
12.1 TEST PROCEDURE:.....	61
12.2 TEST RESULT:	61
13 MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	70
13.1 TEST PROCEDURE:.....	70
13.2 TEST RESULT:	71
14 DUTY CYCLE.....	80
15 POWER SPECTRAL DENSITY	81
15.1 TEST PROCEDURE:.....	81
15.2 TEST RESULT:	81
16 ANTENNA REQUIREMENT	90
17 RF EXPOSURE.....	91

18	PHOTOGRAPHS OF TEST SETUP AND EUT.....	92
-----------	---	-----------

4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS18S11128 310-3W	2018-11-06	2018-11-07 to 2018-11-19	2018-11-20	original	-	Valid

5 General Information

5.1 General Description of E.U.T.

Product:	Smart Phone
Model(s):	C12
Model Description:	N/A
GSM Band(s):	GSM 850/900/1800/1900MHz
GPRS/EGPRS Class:	12
WCDMA Band(s):	FDD Band I/II/IV/V/VIII
LTE Band(s):	N/A
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40
Bluetooth Version:	Bluetooth v4.1 with BLE
GPS:	Support
NFC:	N/A
Hardware Version:	C710_MB_PCB_V1.3_20180328
Software Version:	OUKITELE_C12_V1.0_2018
Highest frequency (Exclude Radio):	1.25GHz
Storage Location:	Internal Storage
Note:	N/A

5.2 Details of E.U.T.

Operation Frequency:	WiFi: 802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz BLE:2402-2480MHz
Max. RF output power:	WiFi(2.4G): 9.48dBm BLE: 4.94dBm
Type of Modulation:	WiFi: CCK, OFDM BLE:GFSK
Antenna installation:	WiFi/BLE: internal permanent antenna
Antenna Gain:	WiFi(2.4G): -2.0dBi BLE: -2.0dBi
Ratings:	Battery DC 3.85V 3300mAh DC 5V, 1000mA, charging from adapter (Adapter Input: 100-240V~50/60Hz, 0.3A)
Adapter:	Manufacturer: SHENZHEN EAST SUN ELECTRONIC CO., LTD Model No.: DCS10-0501000F

5.3 Channel List

WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

BT BLE

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

5.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Power Spectral Density	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
6dB Bandwidth	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Band Edge	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX

Table 2 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	0/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	0/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	0/19/39	TX
Band Edge	BT BLE	1 Mbps	0/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	0/19/39	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

6 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

7 Equipment Used during Test

7.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2018-09-12	2019-09-11
2.	LISN	R&S	ENV216	101215	2018-09-12	2019-09-11
3.	Cable	Top	TYPE16(3.5M)	-	2018-09-12	2019-09-11
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2018-09-12	2019-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2018-09-12	2019-09-11
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2018-09-12	2019-09-11
4.	Cable	LARGE	RF300	-	2018-09-12	2019-09-11
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2018-04-29	2019-04-28
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2018-04-09	2019-04-08
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2018-04-09	2019-04-08
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2018-09-12	2019-09-11
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2018-04-09	2019-04-08
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2018-04-09	2019-04-08
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2018-04-13	2019-04-12
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2018-04-13	2019-04-12
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2018-04-13	2019-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2018-04-09	2019-04-08
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2018-04-13	2019-04-12
4	Cable	HUBER+SUHNER	CBL2	525178	2018-04-13	2019-04-12

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2018-09-12	2019-09-11
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2018-09-12	2019-09-11
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2018-09-12	2019-09-11

7.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

7.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64 dB(AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 ⁻⁷ Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

7.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

8 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Class/Severity: Class B

Limit:

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

8.1 E.U.T. Operation

Operating Environment :

Temperature: 21.5 °C

Humidity: 51.9 % RH


Atmospheric Pressure: 101.2kPa

EUT Operation :

The test was performed in TX transmitting mode, the worst data were shown in the report.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

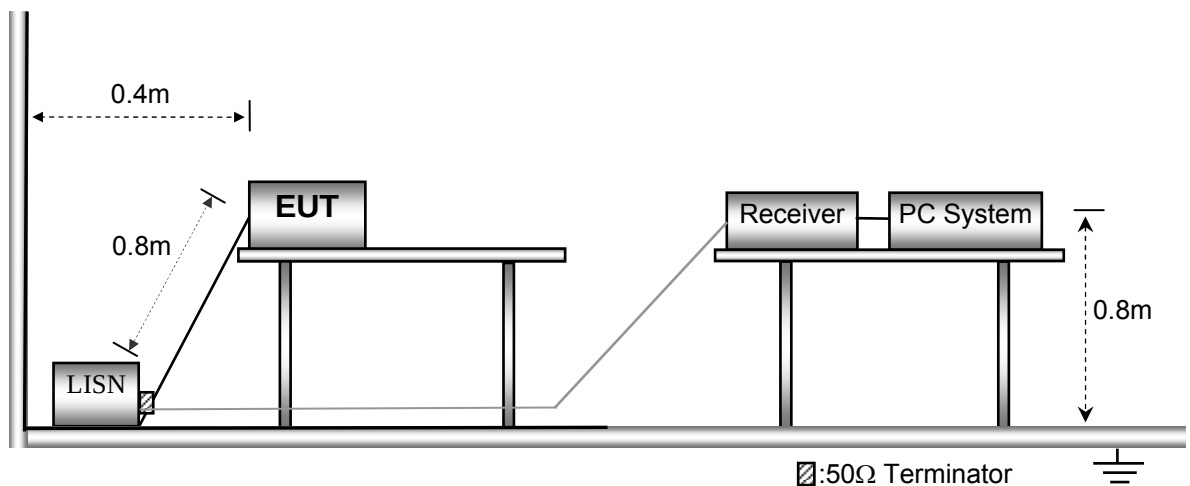

8.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

8.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Worst Mode: WIFI mode (802.11b mode low channel)

Live line:

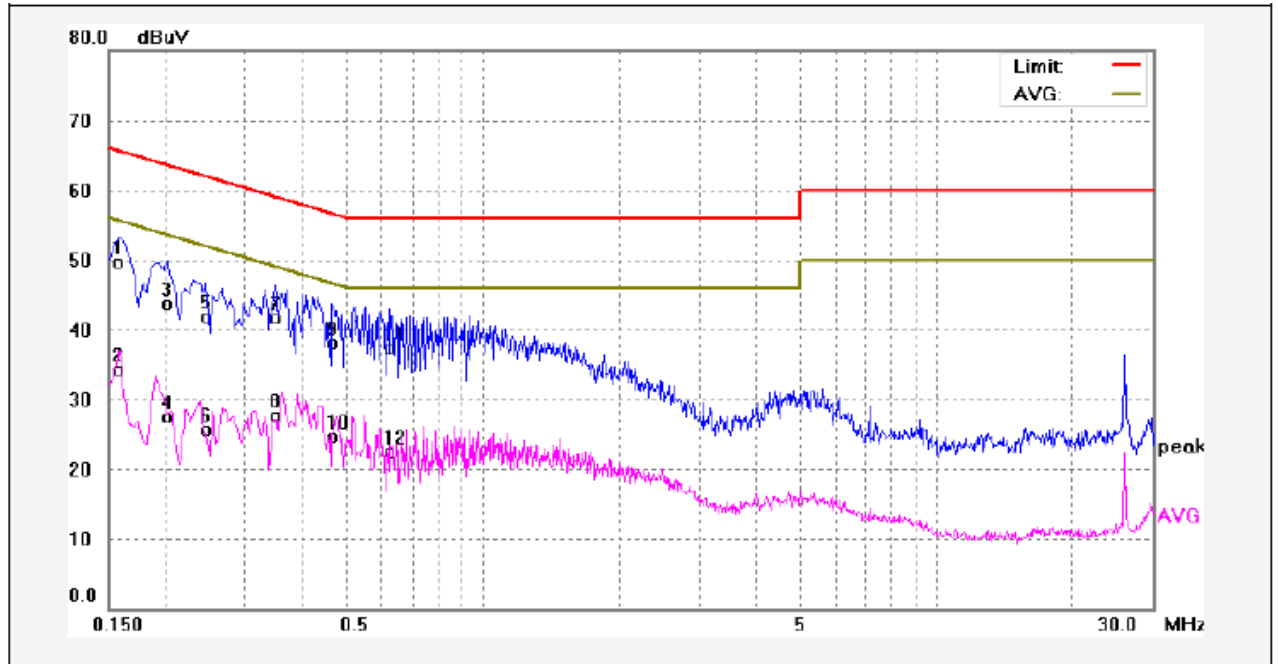

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	40.05	9.75	49.80	65.56	-15.76	QP	
2	0.1580	24.57	9.75	34.32	55.56	-21.24	AVG	
3	0.2020	33.98	9.76	43.74	63.52	-19.78	QP	
4	0.2020	17.76	9.76	27.52	53.52	-26.00	AVG	
5	0.2460	32.26	9.74	42.00	61.89	-19.89	QP	
6	0.2460	15.99	9.74	25.73	51.89	-26.16	AVG	
7	0.3500	32.02	9.75	41.77	58.96	-17.19	QP	
8	0.3500	18.05	9.75	27.80	48.96	-21.16	AVG	
9	0.4660	28.36	9.76	38.12	56.58	-18.46	QP	
10	0.4660	14.86	9.76	24.62	46.58	-21.96	AVG	
11	0.6260	27.56	9.76	37.32	56.00	-18.68	QP	
12	0.6260	12.80	9.76	22.56	46.00	-23.44	AVG	


Neutral line:

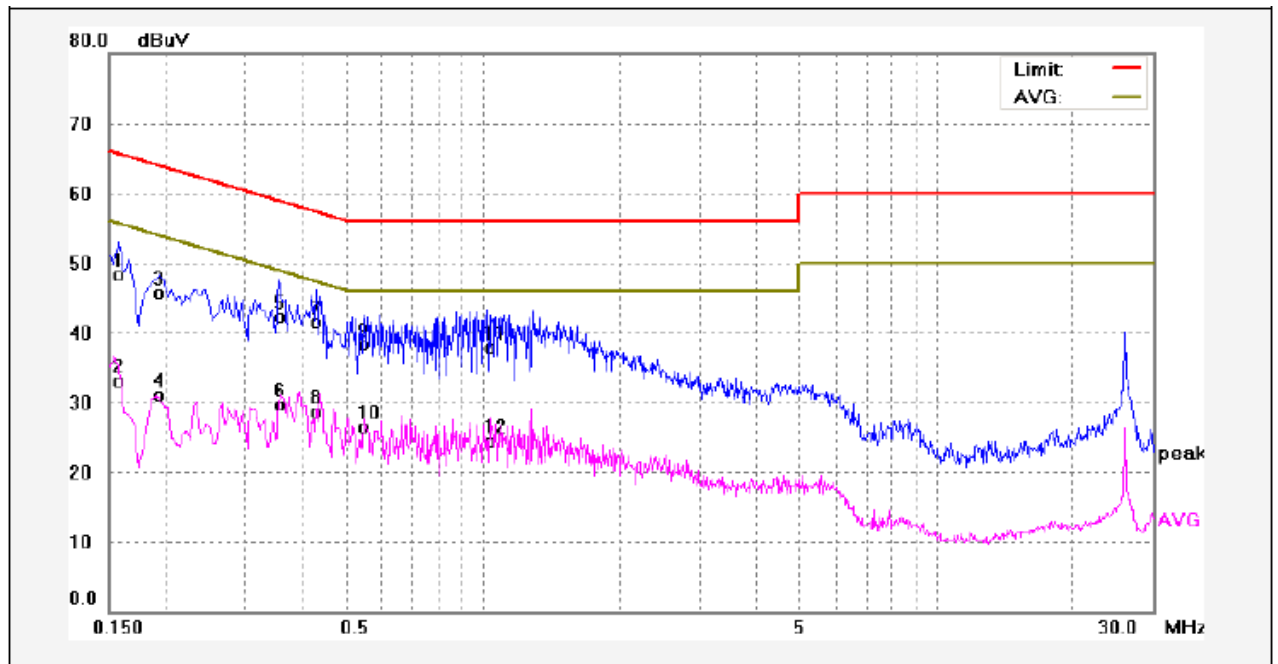

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	38.63	9.75	48.38	65.56	-17.18	QP	
2	0.1580	23.40	9.75	33.15	55.56	-22.41	AVG	
3	0.1940	35.93	9.76	45.69	63.86	-18.17	QP	
4	0.1940	21.38	9.76	31.14	53.86	-22.72	AVG	
5	0.3540	32.64	9.75	42.39	58.87	-16.48	QP	
6	0.3540	19.89	9.75	29.64	48.87	-19.23	AVG	
7	0.4300	31.72	9.75	41.47	57.25	-15.78	QP	
8	0.4300	18.98	9.75	28.73	47.25	-18.52	AVG	
9	0.5460	28.59	9.76	38.35	56.00	-17.65	QP	
10	0.5460	16.79	9.76	26.55	46.00	-19.45	AVG	
11	1.0260	28.11	9.81	37.92	56.00	-18.08	QP	
12	1.0260	14.69	9.81	24.50	46.00	-21.50	AVG	


Worst Mode: BLE mode (low channel)

Live line:

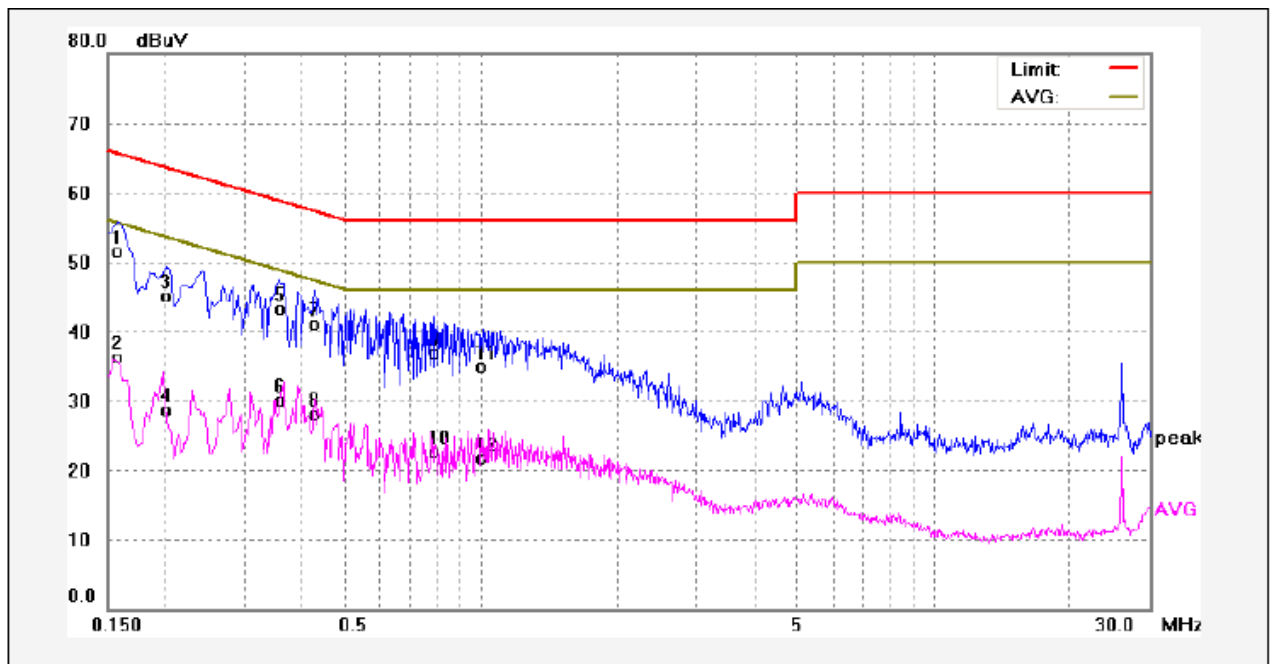

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	41.84	9.75	51.59	65.56	-13.97	QP	
2	0.1580	26.59	9.75	36.34	55.56	-19.22	AVG	
3	0.2020	35.28	9.76	45.04	63.52	-18.48	QP	
4	0.2020	18.99	9.76	28.75	53.52	-24.77	AVG	
5	0.3580	33.54	9.75	43.29	58.77	-15.48	QP	
6	0.3580	20.26	9.75	30.01	48.77	-18.76	AVG	
7	0.4300	31.30	9.75	41.05	57.25	-16.20	QP	
8	0.4300	18.43	9.75	28.18	47.25	-19.07	AVG	
9	0.7900	27.21	9.79	37.00	56.00	-19.00	QP	
10	0.7900	12.97	9.79	22.76	46.00	-23.24	AVG	
11	1.0060	25.08	9.81	34.89	56.00	-21.11	QP	
12	1.0060	11.96	9.81	21.77	46.00	-24.23	AVG	

Neutral line:

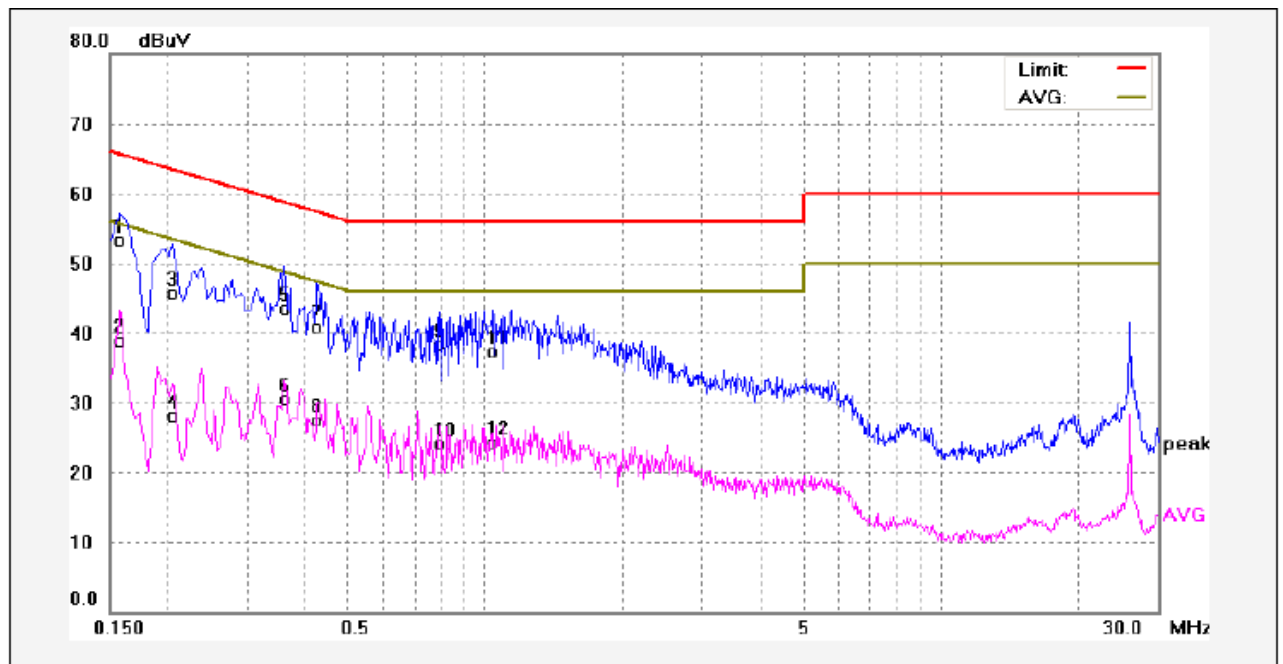

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	43.55	9.75	53.30	65.56	-12.26	QP	
2	0.1580	29.13	9.75	38.88	55.56	-16.68	AVG	
3	0.2060	35.97	9.76	45.73	63.36	-17.63	QP	
4	0.2060	18.29	9.76	28.05	53.36	-25.31	AVG	
5	0.3620	33.83	9.75	43.58	58.68	-15.10	QP	
6	0.3620	20.74	9.75	30.49	48.68	-18.19	AVG	
7	0.4260	31.22	9.75	40.97	57.33	-16.36	QP	
8	0.4260	17.76	9.75	27.51	47.33	-19.82	AVG	
9	0.7940	28.45	9.79	38.24	56.00	-17.76	QP	
10	0.7940	14.25	9.79	24.04	46.00	-21.96	AVG	
11	1.0420	27.45	9.81	37.26	56.00	-18.74	QP	
12	1.0420	14.43	9.81	24.24	46.00	-21.76	AVG	

9 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

9.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in TX transmitting mode, the test data were shown in the report.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

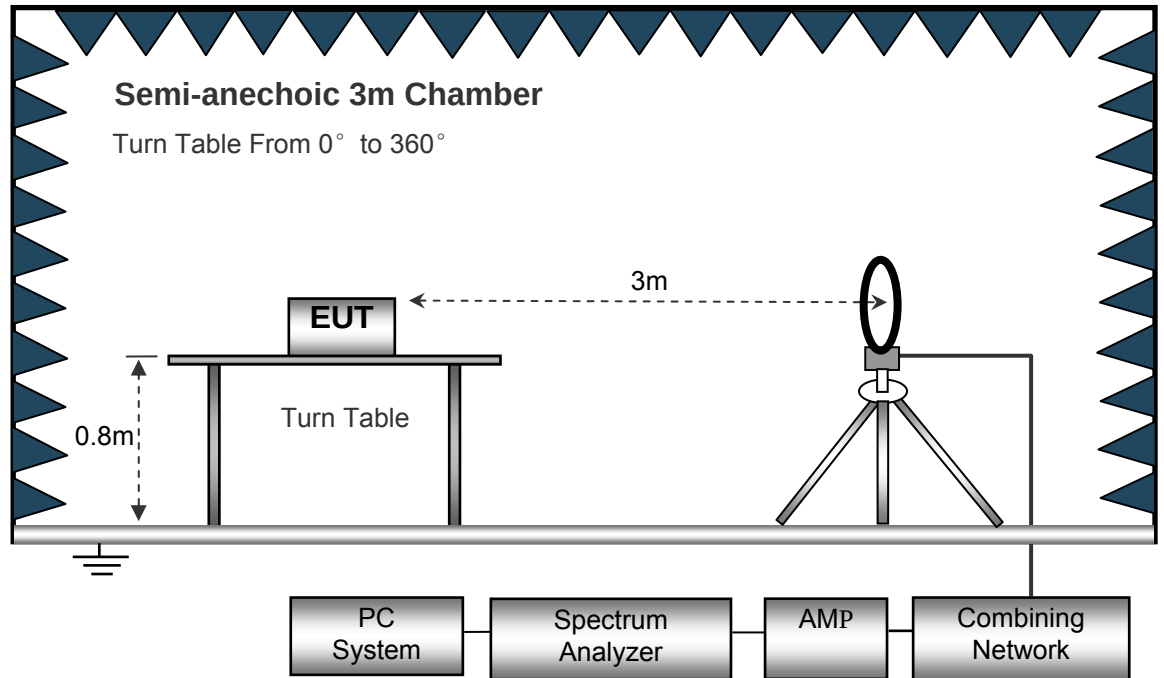

The test setup for emission measurement from 30 MHz to 1 GHz.

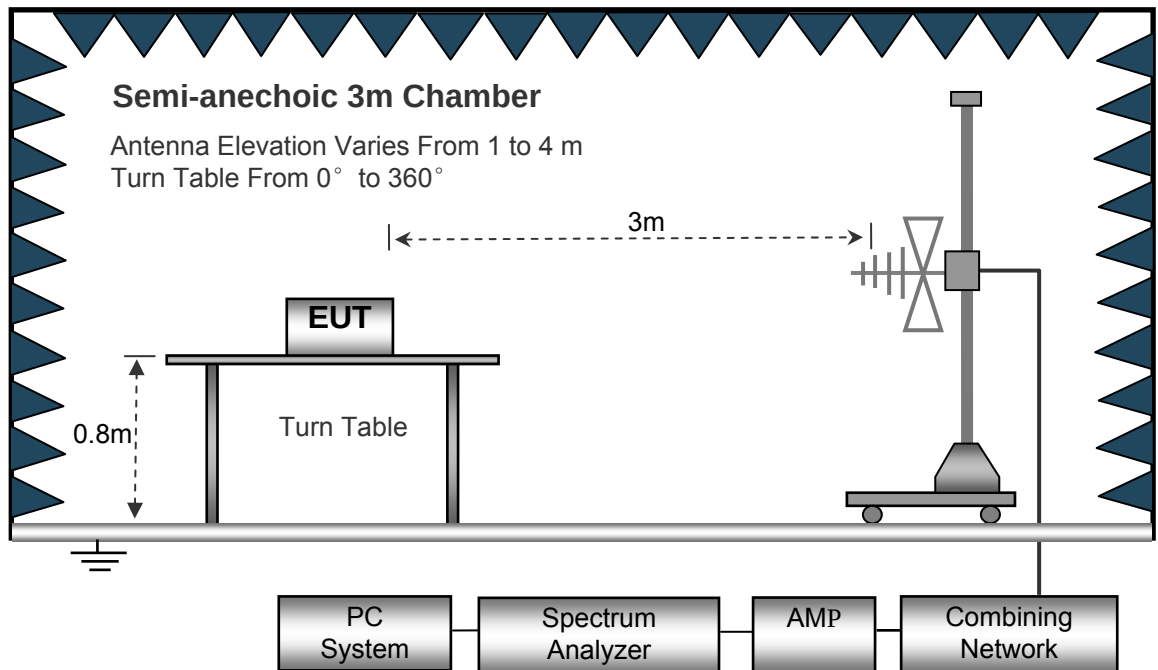

The test setup for emission measurement above 1 GHz.

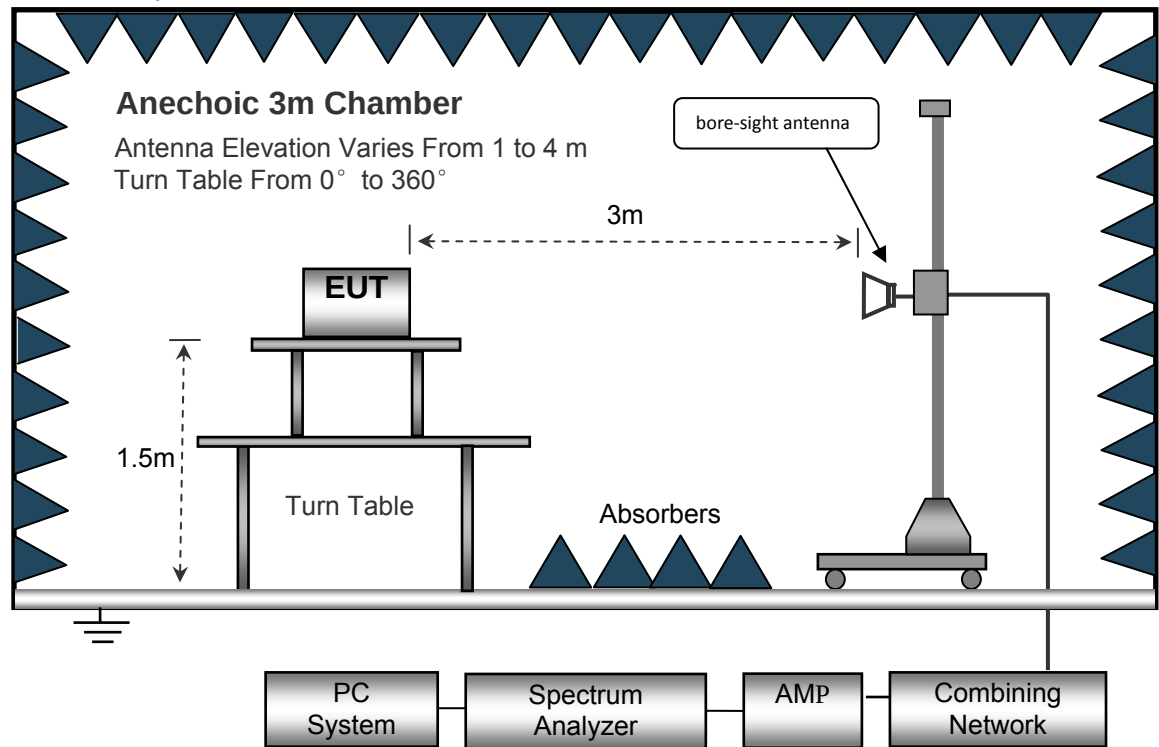

9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth.....10kHz
Video Bandwidth.....10kHz
Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....100kHz
Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....1MHz
Video Bandwidth.....3MHz
DetectorAve.
Resolution Bandwidth.....1MHz
Video Bandwidth.....10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

9.6 Summary of Test Results

Wifi:

Test Frequency: 9KHz~30MHz

Remark: only the worst data (802.11b/g/n Low channel mode) were recorded.

Frequency	Measurement results dBμV @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dBμV/m @30m	Limits dBμV/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
802.11b							
6.021	25.31	QP	21.84	40.00	7.15	29.54	-22.39
15.730	24.56	QP	21.35	40.00	5.91	29.54	-23.63
25.680	25.10	QP	20.67	40.00	5.77	29.54	-23.77
802.11g							
6.021	25.09	QP	21.84	40.00	6.93	29.54	-22.61
15.730	24.55	QP	21.35	40.00	5.90	29.54	-23.64
25.680	25.13	QP	20.67	40.00	5.80	29.54	-23.74
802.11n(HT20)							
6.021	25.04	QP	21.84	40.00	6.88	29.54	-22.66
15.730	24.58	QP	21.35	40.00	5.93	29.54	-23.61
25.680	25.16	QP	20.67	40.00	5.83	29.54	-23.71
802.11n(HT40)							
6.021	25.40	QP	21.84	40.00	7.24	29.54	-22.30
15.730	24.86	QP	21.35	40.00	6.21	29.54	-23.33
25.680	25.11	QP	20.67	40.00	5.78	29.54	-23.76

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Low Channel 2412MHz									
223.45	40.65	QP	27	1.4	H	-11.62	29.03	46.00	-16.97
223.45	34.71	QP	95	1.1	V	-11.62	23.09	46.00	-22.91
4824.00	51.40	PK	285	1.3	V	-1.06	50.34	74.00	-23.66
4824.00	46.18	Ave	285	1.3	V	-1.06	45.12	54.00	-8.88
7236.00	41.25	PK	202	2.0	H	1.33	42.58	74.00	-31.42
7236.00	43.03	Ave	202	2.0	H	1.33	44.36	54.00	-9.64
2347.19	46.40	PK	310	1.7	V	-13.19	33.21	74.00	-40.79
2347.19	38.92	Ave	310	1.7	V	-13.19	25.73	54.00	-28.27
2354.37	44.21	PK	17	1.6	H	-13.14	31.07	74.00	-42.93
2354.37	38.14	Ave	17	1.6	H	-13.14	25.00	54.00	-29.00
2492.99	42.23	PK	326	1.0	V	-13.08	29.15	74.00	-44.85
2492.99	38.01	Ave	326	1.0	V	-13.08	24.93	54.00	-29.07

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Middle Channel 2437MHz									
223.45	40.64	QP	119	2.0	H	-11.62	29.02	46.00	-16.98
223.45	33.37	QP	79	1.3	V	-11.62	21.75	46.00	-24.25
4874.00	52.00	PK	133	1.8	V	-0.62	51.38	74.00	-22.62
4874.00	47.35	Ave	133	1.8	V	-0.62	46.73	54.00	-7.27
7311.00	40.94	PK	197	1.3	H	2.21	43.15	74.00	-30.85
7311.00	41.87	Ave	197	1.3	H	2.21	44.08	54.00	-9.92
2340.93	46.62	PK	277	1.7	V	-13.19	33.43	74.00	-40.57
2340.93	37.58	Ave	277	1.7	V	-13.19	24.39	54.00	-29.61
2358.02	43.90	PK	216	1.0	H	-13.14	30.76	74.00	-43.24
2358.02	36.90	Ave	216	1.0	H	-13.14	23.76	54.00	-30.24
2498.41	44.71	PK	119	1.5	V	-13.08	31.63	74.00	-42.37
2498.41	36.64	Ave	119	1.5	V	-13.08	23.56	54.00	-30.44

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: High Channel 2462MHz									
223.45	40.42	QP	279	1.5	H	-11.62	28.80	46.00	-17.20
223.45	33.26	QP	340	1.7	V	-11.62	21.64	46.00	-24.36
4924.00	51.28	PK	328	1.1	V	-0.24	51.04	74.00	-22.96
4924.00	48.04	Ave	328	1.1	V	-0.24	47.80	54.00	-6.20
7386.00	39.47	PK	294	1.1	H	2.84	42.31	74.00	-31.69
7386.00	40.81	Ave	294	1.1	H	2.84	43.65	54.00	-10.35
2337.19	46.14	PK	231	1.5	V	-13.19	32.95	74.00	-41.05
2337.19	37.00	Ave	231	1.5	V	-13.19	23.81	54.00	-30.19
2370.64	43.62	PK	286	1.2	H	-13.14	30.48	74.00	-43.52
2370.64	38.53	Ave	286	1.2	H	-13.14	25.39	54.00	-28.61
2496.95	42.55	PK	23	1.9	V	-13.08	29.47	74.00	-44.53
2496.95	36.34	Ave	23	1.9	V	-13.08	23.26	54.00	-30.74

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Low Channel 2412MHz									
223.45	39.57	QP	26	1.4	H	-11.62	27.95	46.00	-18.05
223.45	34.34	QP	258	1.3	V	-11.62	22.72	46.00	-23.28
4824.00	52.25	PK	195	1.7	V	-1.06	51.19	74.00	-22.81
4824.00	48.80	Ave	195	1.7	V	-1.06	47.74	54.00	-6.26
7236.00	40.35	PK	106	1.2	H	1.33	41.68	74.00	-32.32
7236.00	41.39	Ave	106	1.2	H	1.33	42.72	54.00	-11.28
2347.75	45.07	PK	313	2.0	V	-13.19	31.88	74.00	-42.12
2347.75	39.42	Ave	313	2.0	V	-13.19	26.23	54.00	-27.77
2350.64	44.36	PK	128	1.9	H	-13.14	31.22	74.00	-42.78
2350.64	38.27	Ave	128	1.9	H	-13.14	25.13	54.00	-28.87
2492.74	43.17	PK	222	1.6	V	-13.08	30.09	74.00	-43.91
2492.74	38.68	Ave	222	1.6	V	-13.08	25.60	54.00	-28.40

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Middle Channel 2437MHz									
223.45	39.32	QP	180	2.0	H	-11.62	27.70	46.00	-18.30
223.45	35.11	QP	325	1.6	V	-11.62	23.49	46.00	-22.51
4874.00	52.89	PK	56	1.2	V	-0.62	52.27	74.00	-21.73
4874.00	50.29	Ave	56	1.2	V	-0.62	49.67	54.00	-4.33
7311.00	41.18	PK	295	1.6	H	2.21	43.39	74.00	-30.61
7311.00	41.37	Ave	295	1.6	H	2.21	43.58	54.00	-10.42
2343.93	45.26	PK	287	1.4	V	-13.19	32.07	74.00	-41.93
2343.93	38.91	Ave	287	1.4	V	-13.19	25.72	54.00	-28.28
2358.90	43.60	PK	137	1.4	H	-13.14	30.46	74.00	-43.54
2358.90	37.00	Ave	137	1.4	H	-13.14	23.86	54.00	-30.14
2490.21	42.93	PK	161	1.7	V	-13.08	29.85	74.00	-44.15
2490.21	36.79	Ave	161	1.7	V	-13.08	23.71	54.00	-30.29

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: High Channel 2462MHz									
223.45	40.48	QP	259	1.6	H	-11.62	28.86	46.00	-17.14
223.45	36.22	QP	144	1.1	V	-11.62	24.60	46.00	-21.40
4924.00	52.55	PK	20	1.8	V	-0.24	52.31	74.00	-21.69
4924.00	49.15	Ave	20	1.8	V	-0.24	48.91	54.00	-5.09
7386.00	40.95	PK	206	1.0	H	2.84	43.79	74.00	-30.21
7386.00	42.29	Ave	206	1.0	H	2.84	45.13	54.00	-8.87
2338.87	46.81	PK	76	1.9	V	-13.19	33.62	74.00	-40.38
2338.87	39.88	Ave	76	1.9	V	-13.19	26.69	54.00	-27.31
2384.02	42.37	PK	156	1.1	H	-13.14	29.23	74.00	-44.77
2384.02	36.03	Ave	156	1.1	H	-13.14	22.89	54.00	-31.11
2498.52	44.20	PK	306	1.5	V	-13.08	31.12	74.00	-42.88
2498.52	38.29	Ave	306	1.5	V	-13.08	25.21	54.00	-28.79

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n20: Low Channel 2412MHz									
223.45	41.28	QP	27	1.5	H	-11.62	29.66	46.00	-16.34
223.45	35.88	QP	249	1.0	V	-11.62	24.26	46.00	-21.74
4824.00	51.15	PK	104	1.4	V	-1.06	50.09	74.00	-23.91
4824.00	48.75	Ave	104	1.4	V	-1.06	47.69	54.00	-6.31
7236.00	41.46	PK	218	1.2	H	1.33	42.79	74.00	-31.21
7236.00	42.11	Ave	218	1.2	H	1.33	43.44	54.00	-10.56
2328.15	45.50	PK	350	1.9	V	-13.19	32.31	74.00	-41.69
2328.15	37.02	Ave	350	1.9	V	-13.19	23.83	54.00	-30.17
2367.71	43.84	PK	76	1.1	H	-13.14	30.70	74.00	-43.30
2367.71	37.12	Ave	76	1.1	H	-13.14	23.98	54.00	-30.02
2498.02	43.81	PK	285	1.3	V	-13.08	30.73	74.00	-43.27
2498.02	38.74	Ave	285	1.3	V	-13.08	25.66	54.00	-28.34

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n20: Middle Channel 2437MHz									
223.45	42.33	QP	290	1.3	H	-11.62	30.71	46.00	-15.29
223.45	36.05	QP	75	1.8	V	-11.62	24.43	46.00	-21.57
4874.00	50.80	PK	356	1.9	V	-0.62	50.18	74.00	-23.82
4874.00	49.63	Ave	356	1.9	V	-0.62	49.01	54.00	-4.99
7311.00	40.54	PK	342	1.4	H	2.21	42.75	74.00	-31.25
7311.00	40.94	Ave	342	1.4	H	2.21	43.15	54.00	-10.85
2310.65	46.23	PK	248	1.6	V	-13.19	33.04	74.00	-40.96
2310.65	37.67	Ave	248	1.6	V	-13.19	24.48	54.00	-29.52
2381.18	44.68	PK	17	1.9	H	-13.14	31.54	74.00	-42.46
2381.18	37.42	Ave	17	1.9	H	-13.14	24.28	54.00	-29.72
2498.66	43.97	PK	201	1.4	V	-13.08	30.89	74.00	-43.11
2498.66	37.32	Ave	201	1.4	V	-13.08	24.24	54.00	-29.76

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n20: High Channel 2462MHz									
223.45	41.06	QP	99	1.6	H	-11.62	29.44	46.00	-16.56
223.45	35.96	QP	72	1.2	V	-11.62	24.34	46.00	-21.66
4924.00	52.20	PK	21	1.8	V	-0.24	51.96	74.00	-22.04
4924.00	48.84	Ave	21	1.8	V	-0.24	48.60	54.00	-5.40
7386.00	40.11	PK	4	1.3	H	2.84	42.95	74.00	-31.05
7386.00	41.01	Ave	4	1.3	H	2.84	43.85	54.00	-10.15
2317.15	46.10	PK	51	1.7	V	-13.19	32.91	74.00	-41.09
2317.15	39.69	Ave	51	1.7	V	-13.19	26.50	54.00	-27.50
2363.11	43.92	PK	102	1.7	H	-13.14	30.78	74.00	-43.22
2363.11	36.59	Ave	102	1.7	H	-13.14	23.45	54.00	-30.55
2489.30	44.51	PK	31	1.1	V	-13.08	31.43	74.00	-42.57
2489.30	38.90	Ave	31	1.1	V	-13.08	25.82	54.00	-28.18

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n40: Low Channel 2422MHz									
223.45	40.10	QP	338	1.4	H	-11.62	28.48	46.00	-17.52
223.45	34.68	QP	287	1.2	V	-11.62	23.06	46.00	-22.94
4844.00	50.88	PK	242	1.8	V	-1.06	49.82	74.00	-24.18
4844.00	47.63	Ave	242	1.8	V	-1.06	46.57	54.00	-7.43
7266.00	38.99	PK	300	1.6	H	1.33	40.32	74.00	-33.68
7266.00	39.98	Ave	300	1.6	H	1.33	41.31	54.00	-12.69
2338.24	45.48	PK	116	1.1	V	-13.19	32.29	74.00	-41.71
2338.24	39.51	Ave	116	1.1	V	-13.19	26.32	54.00	-27.68
2350.24	43.60	PK	143	1.1	H	-13.14	30.46	74.00	-43.54
2350.24	37.57	Ave	143	1.1	H	-13.14	24.43	54.00	-29.57
2484.41	42.15	PK	253	1.1	V	-13.08	29.07	74.00	-44.93
2484.41	38.73	Ave	253	1.1	V	-13.08	25.65	54.00	-28.35

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n40: Middle Channel 2437MHz									
223.45	40.86	QP	46	1.1	H	-11.62	29.24	46.00	-16.76
223.45	34.76	QP	9	1.6	V	-11.62	23.14	46.00	-22.86
4874.00	51.08	PK	324	1.0	V	-0.62	50.46	74.00	-23.54
4874.00	46.97	Ave	324	1.0	V	-0.62	46.35	54.00	-7.65
7311.00	38.68	PK	177	1.0	H	2.21	40.89	74.00	-33.11
7311.00	40.90	Ave	177	1.0	H	2.21	43.11	54.00	-10.89
2328.30	45.70	PK	68	1.8	V	-13.19	32.51	74.00	-41.49
2328.30	38.41	Ave	68	1.8	V	-13.19	25.22	54.00	-28.78
2387.88	42.11	PK	65	1.1	H	-13.14	28.97	74.00	-45.03
2387.88	38.43	Ave	65	1.1	H	-13.14	25.29	54.00	-28.71
2484.39	43.67	PK	74	1.6	V	-13.08	30.59	74.00	-43.41
2484.39	38.01	Ave	74	1.6	V	-13.08	24.93	54.00	-29.07

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n40: High Channel 2452MHz									
223.45	40.65	QP	177	1.3	H	-11.62	29.03	46.00	-16.97
223.45	33.97	QP	315	1.7	V	-11.62	22.35	46.00	-23.65
4904.00	51.39	PK	66	1.9	V	-0.24	51.15	74.00	-22.85
4904.00	47.20	Ave	66	1.9	V	-0.24	46.96	54.00	-7.04
7356.00	38.64	PK	35	1.0	H	2.84	41.48	74.00	-32.52
7356.00	41.67	Ave	35	1.0	H	2.84	44.51	54.00	-9.49
2340.12	45.24	PK	30	1.6	V	-13.19	32.05	74.00	-41.95
2340.12	39.23	Ave	30	1.6	V	-13.19	26.04	54.00	-27.96
2370.71	43.64	PK	106	2.0	H	-13.14	30.50	74.00	-43.50
2370.71	37.41	Ave	106	2.0	H	-13.14	24.27	54.00	-29.73
2492.88	44.99	PK	67	1.5	V	-13.08	31.91	74.00	-42.09
2492.88	37.72	Ave	67	1.5	V	-13.08	24.64	54.00	-29.36

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

BT BLE:**Test Frequency: 9KHz~26MHz**

Remark: only the worst data (GFSK modulation Low channel mode) were recorded.

Frequency	Measurement results dBμV @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dBμV/m @30m	Limits dBμV/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
6.021	25.17	QP	21.84	40.00	7.01	29.54	-22.53
15.730	24.55	QP	21.35	40.00	5.90	29.54	-23.64
25.680	25.23	QP	20.67	40.00	5.90	29.54	-23.64

Test Frequency : 26MHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Low Channel 2402MHz									
269.33	34.39	QP	291	1.9	H	-13.35	21.04	46.00	-24.96
269.33	40.72	QP	10	1.0	V	-13.35	27.37	46.00	-18.63
4804.00	45.16	PK	230	2.0	V	-1.06	44.10	74.00	-29.90
4804.00	42.28	Ave	230	2.0	V	-1.06	41.22	54.00	-12.78
7206.00	45.73	PK	221	1.3	H	1.33	47.06	74.00	-26.94
7206.00	36.44	Ave	221	1.3	H	1.33	37.77	54.00	-16.23
2348.58	46.25	PK	38	1.0	V	-13.19	33.06	74.00	-40.94
2348.58	37.64	Ave	38	1.0	V	-13.19	24.45	54.00	-29.55
2380.05	42.58	PK	0	1.2	H	-13.14	29.44	74.00	-44.56
2380.05	37.45	Ave	0	1.2	H	-13.14	24.31	54.00	-29.69
2498.85	42.69	PK	288	1.5	V	-13.08	29.61	74.00	-44.39
2498.85	37.90	Ave	288	1.5	V	-13.08	24.82	54.00	-29.18

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Middle Channel 2440MHz									
269.33	33.86	QP	312	1.2	H	-13.35	20.51	46.00	-25.49
269.33	41.70	QP	70	1.1	V	-13.35	28.35	46.00	-17.65
4880.00	43.46	PK	191	1.7	V	-0.62	42.84	74.00	-31.16
4880.00	42.76	Ave	191	1.7	V	-0.62	42.14	54.00	-11.86
7320.00	46.43	PK	230	1.6	H	2.21	48.64	74.00	-25.36
7320.00	37.21	Ave	230	1.6	H	2.21	39.42	54.00	-14.58
2341.42	46.94	PK	302	1.1	V	-13.19	33.75	74.00	-40.25
2341.42	37.85	Ave	302	1.1	V	-13.19	24.66	54.00	-29.34
2360.84	42.32	PK	110	1.8	H	-13.14	29.18	74.00	-44.82
2360.84	37.30	Ave	110	1.8	H	-13.14	24.16	54.00	-29.84
2493.22	42.80	PK	117	1.1	V	-13.08	29.72	74.00	-44.28
2493.22	36.66	Ave	117	1.1	V	-13.08	23.58	54.00	-30.42

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK High Channel 2480MHz									
269.33	33.29	QP	288	1.2	H	-13.35	19.94	46.00	-26.06
269.33	38.46	QP	138	1.5	V	-13.35	25.11	46.00	-20.89
4960.00	42.47	PK	347	1.3	V	-0.24	42.23	74.00	-31.77
4960.00	44.15	Ave	347	1.3	V	-0.24	43.91	54.00	-10.09
7440.00	45.80	PK	277	1.9	H	2.84	48.64	74.00	-25.36
7440.00	36.29	Ave	277	1.9	H	2.84	39.13	54.00	-14.87
2312.71	46.54	PK	277	1.6	V	-13.19	33.35	74.00	-40.65
2312.71	38.18	Ave	277	1.6	V	-13.19	24.99	54.00	-29.01
2368.19	42.23	PK	63	1.0	H	-13.14	29.09	74.00	-44.91
2368.19	38.89	Ave	63	1.0	H	-13.14	25.75	54.00	-28.25
2499.67	44.20	PK	315	1.4	V	-13.08	31.12	74.00	-42.88
2499.67	36.40	Ave	315	1.4	V	-13.08	23.32	54.00	-30.68

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to _ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW _ $[3 \times \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.


Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

10.2 Test Result


9KHz – 30MHz



802.11b



Low Channel

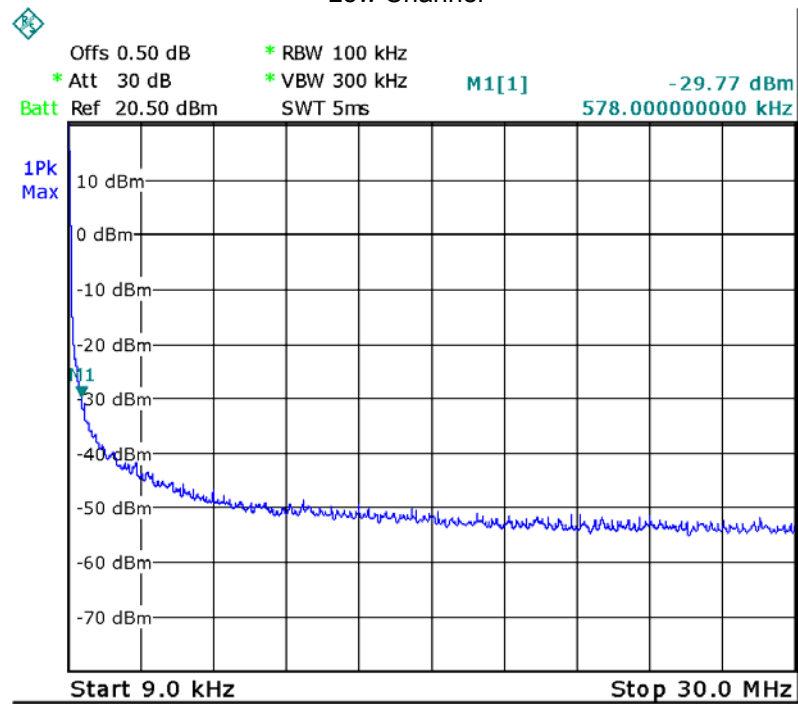

Middle Channel

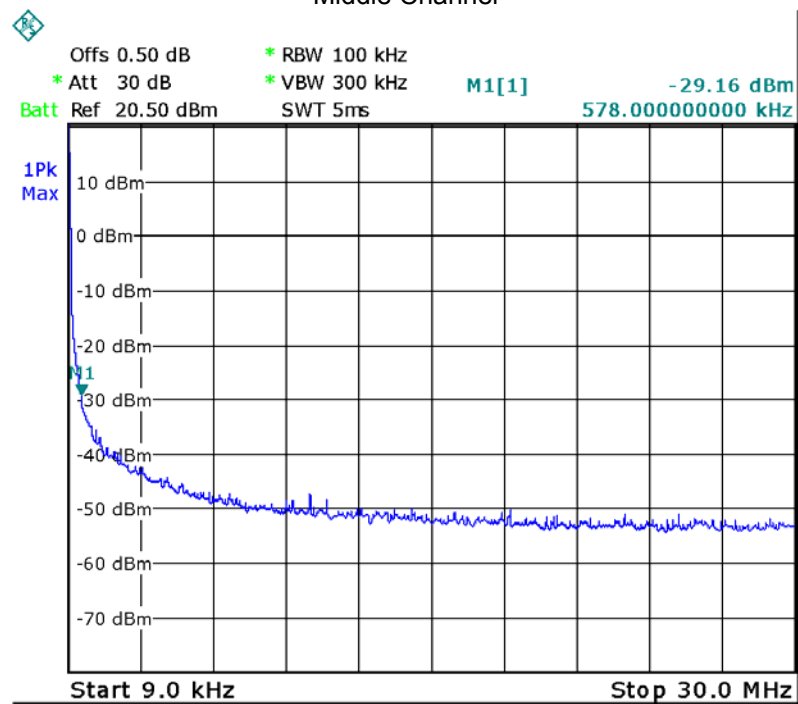


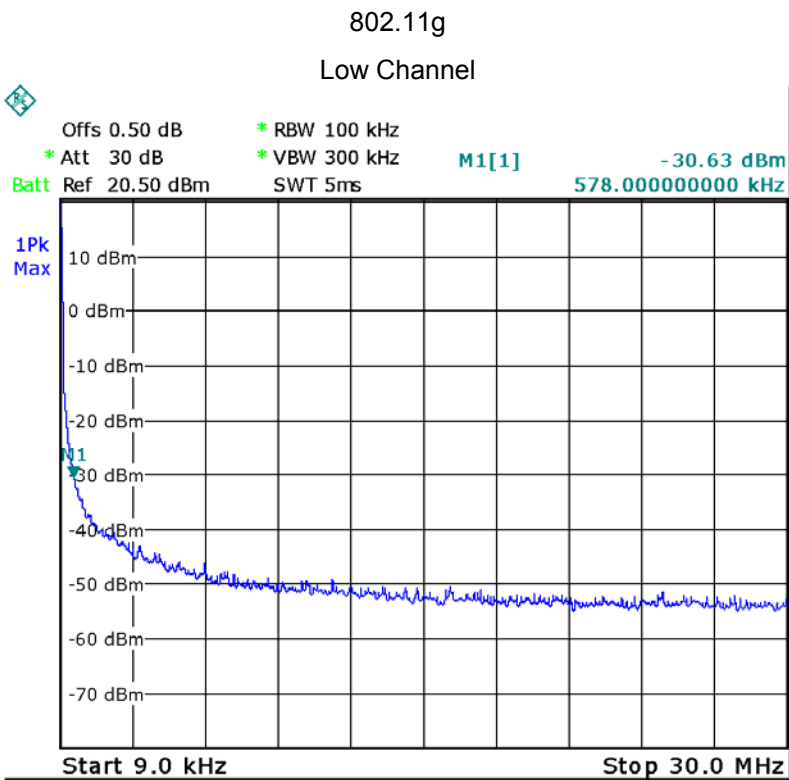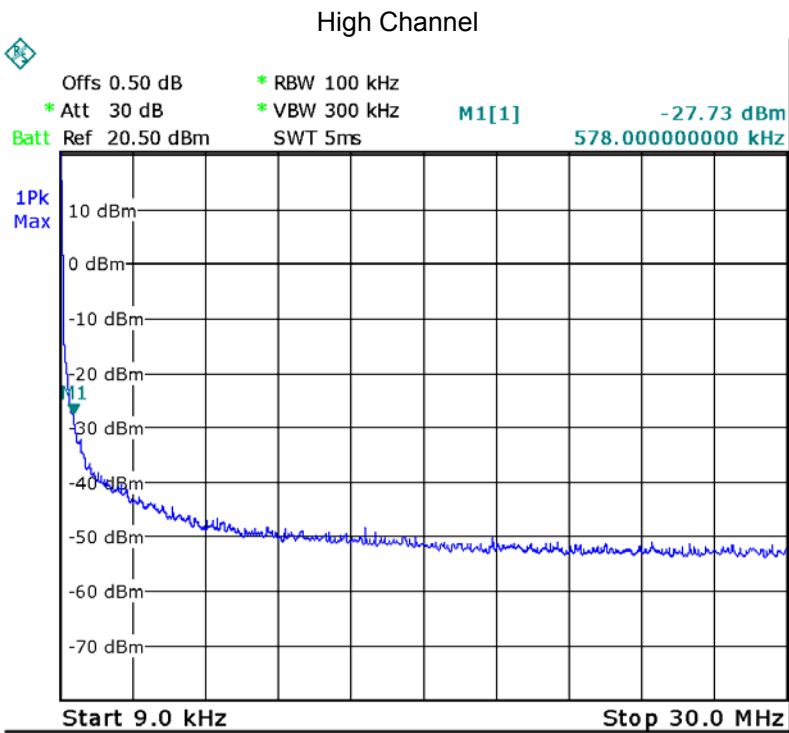

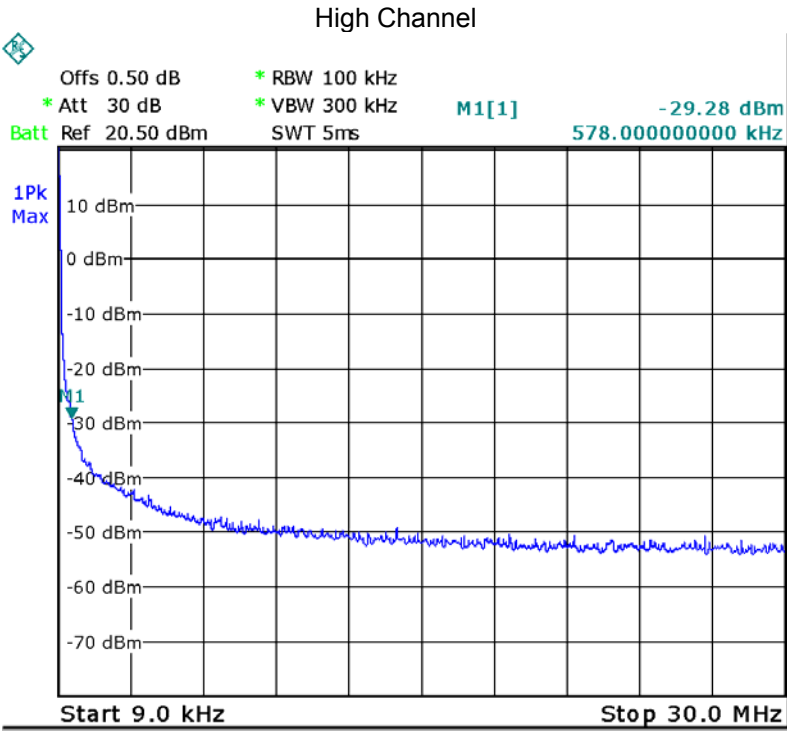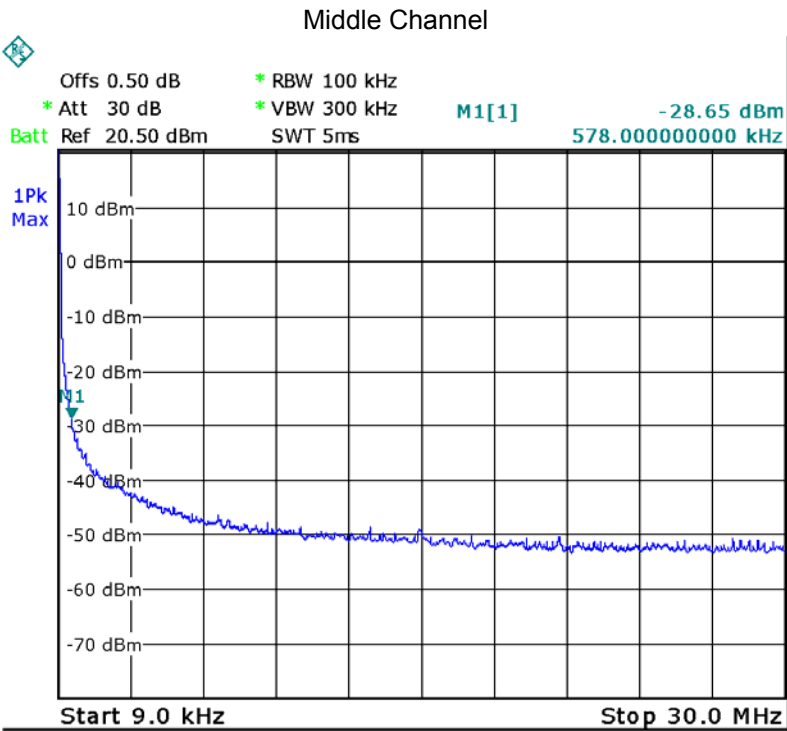




802.11n HT20



Low Channel

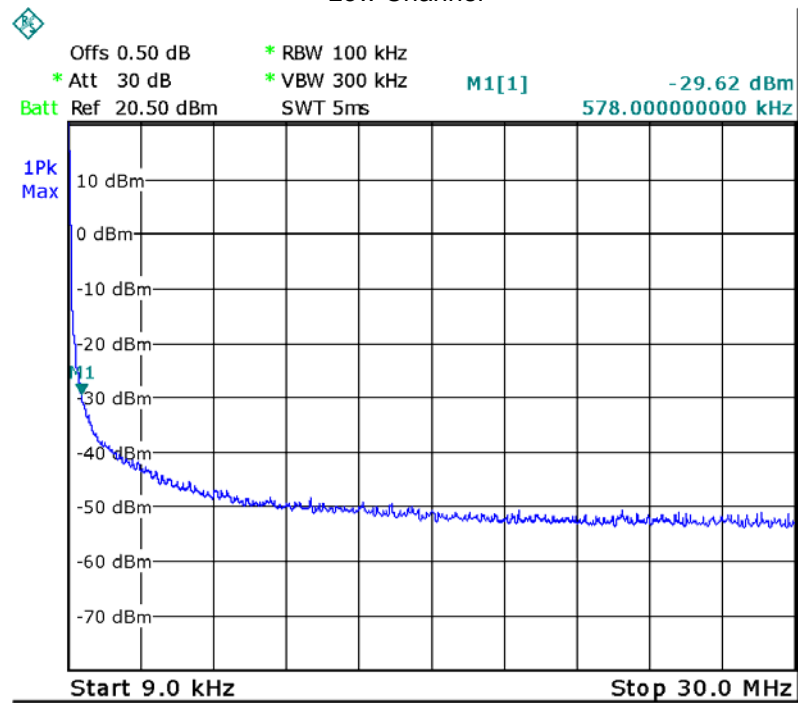

Middle Channel

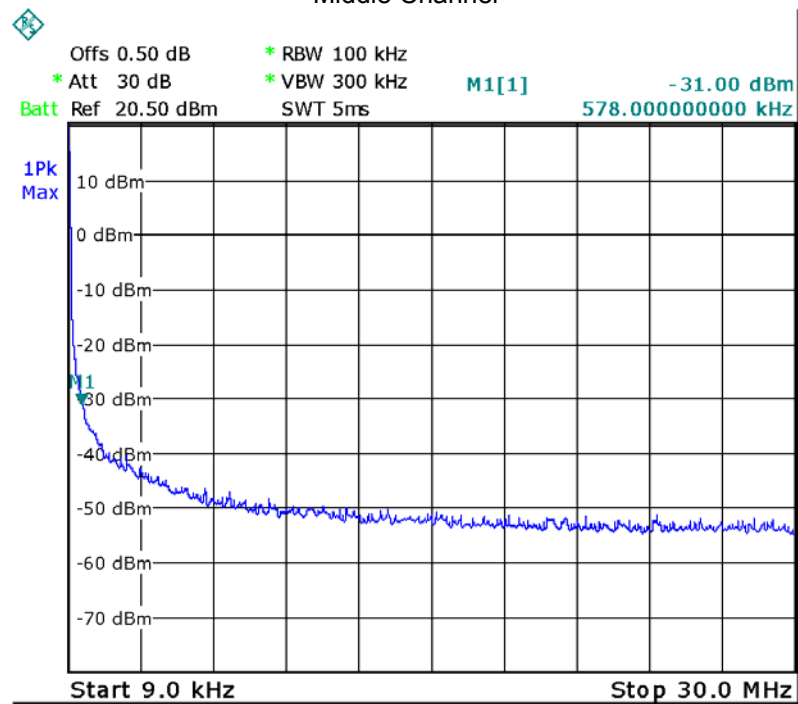


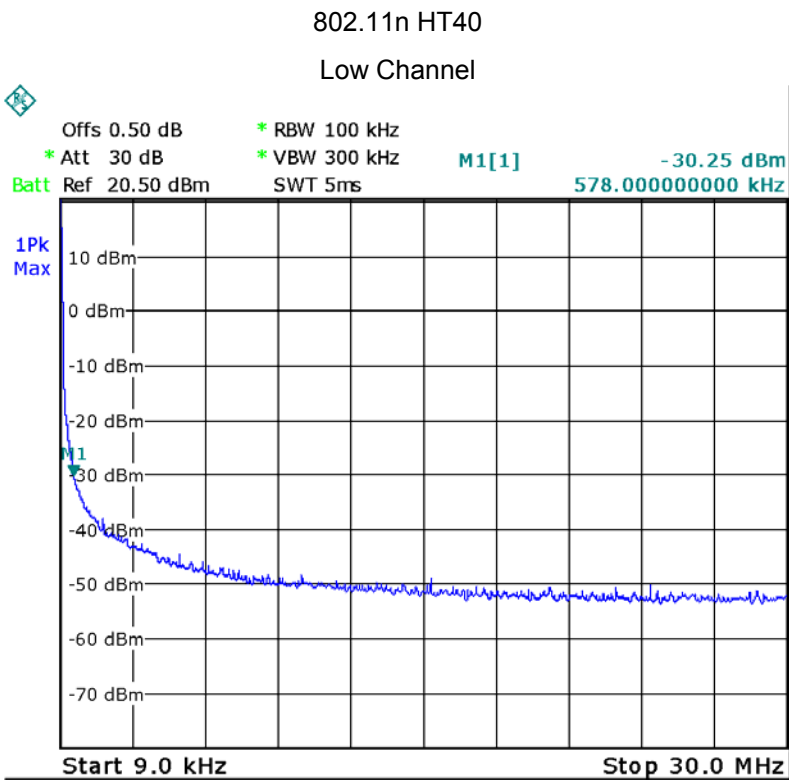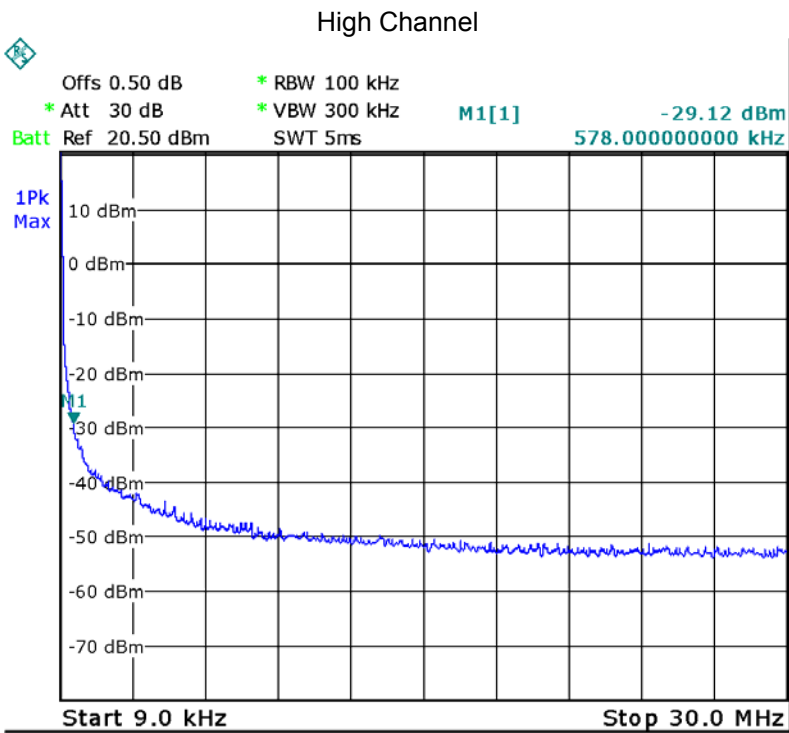

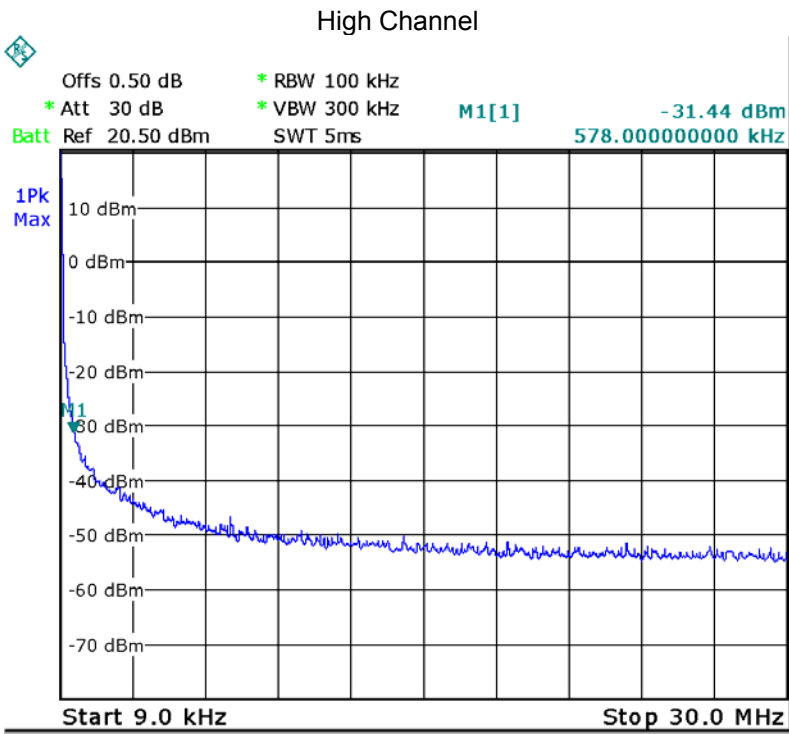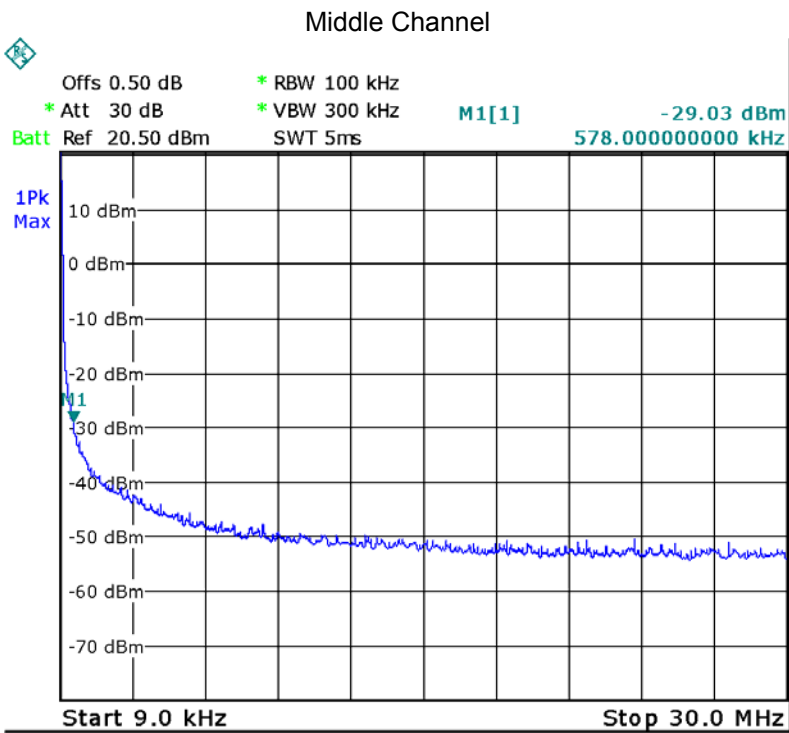



BLE

Low Channel

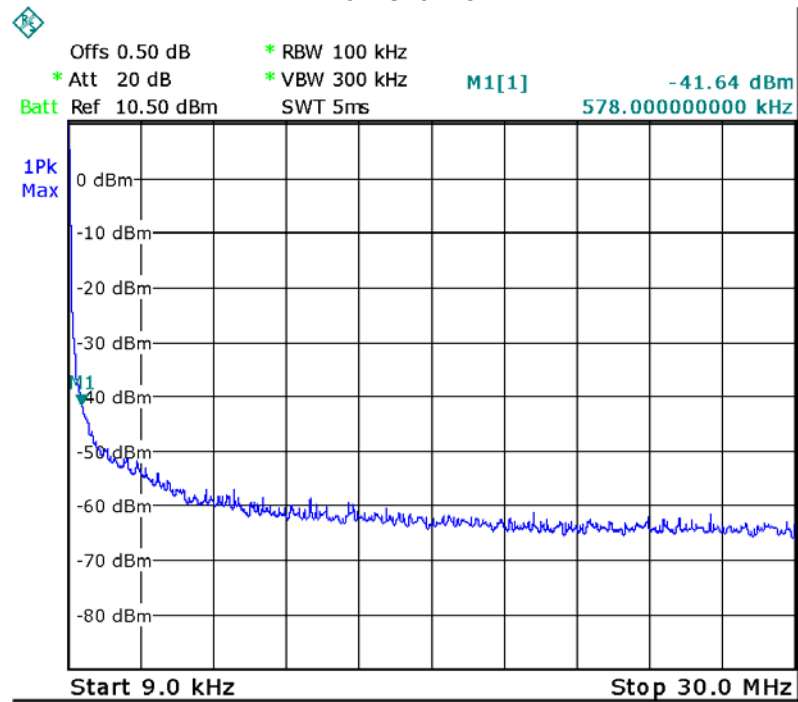

Middle Channel

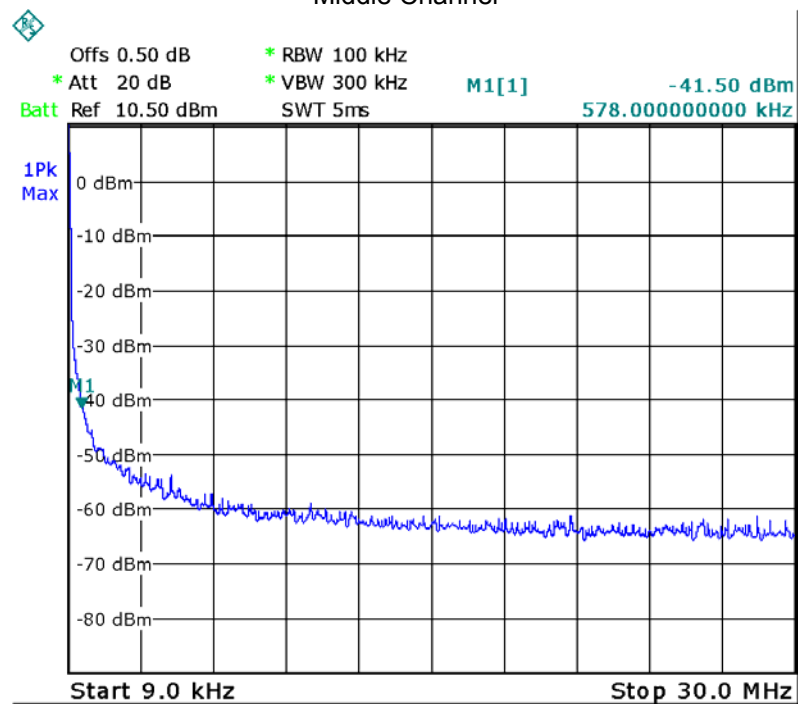

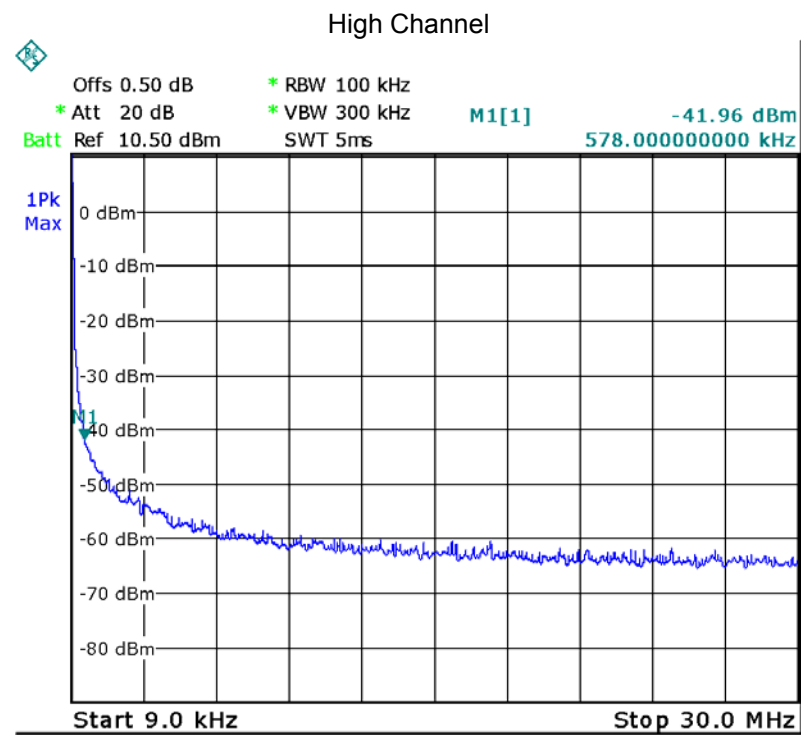


Above 30MHz

802.11b


Low Channel

Fundamental

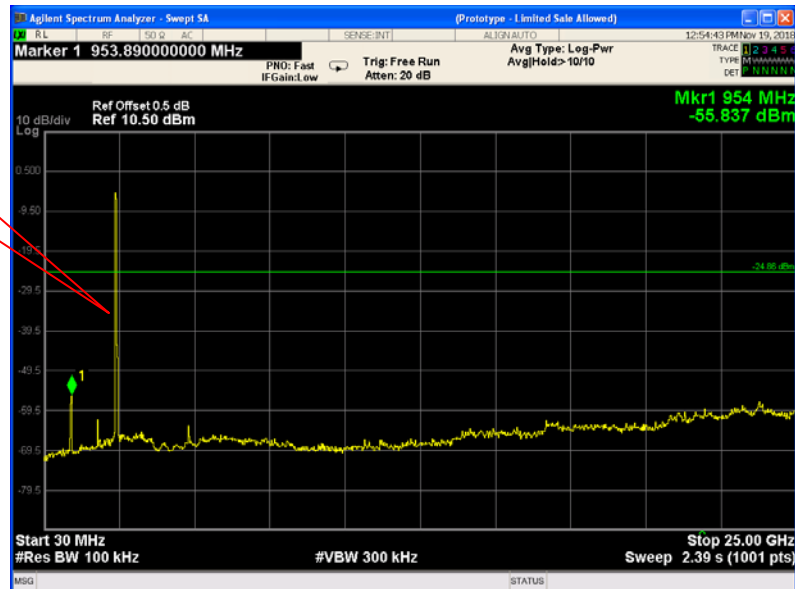

Middle Channel

Fundamental

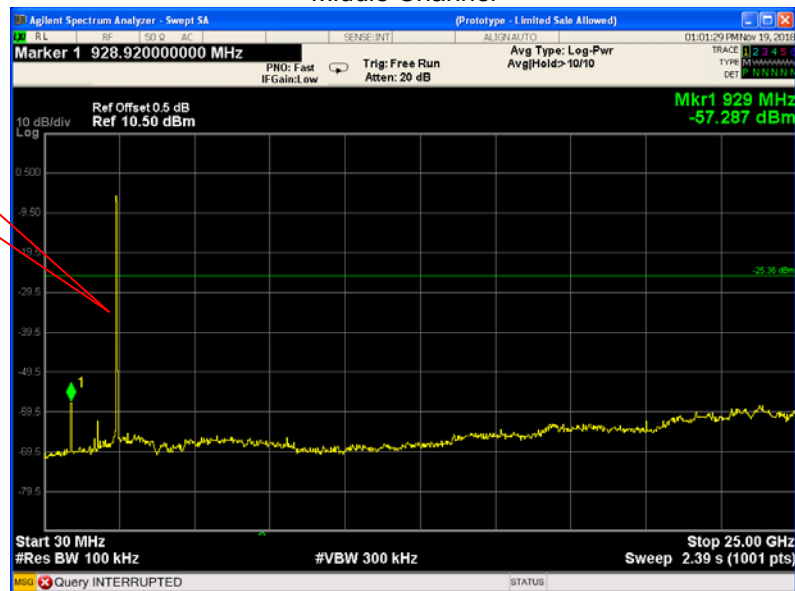

High Channel

Fundamental



802.11g


Low Channel

Fundamental




Middle Channel

Fundamental

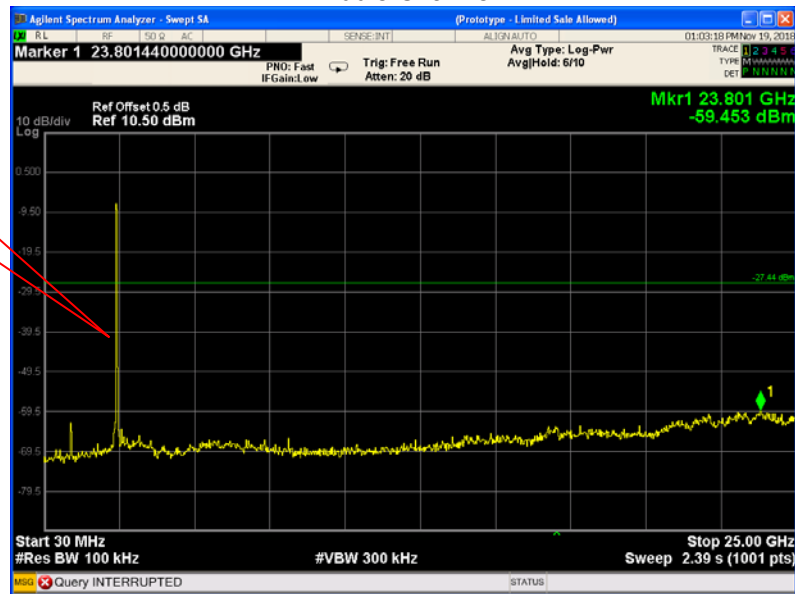

High Channel


Fundamental

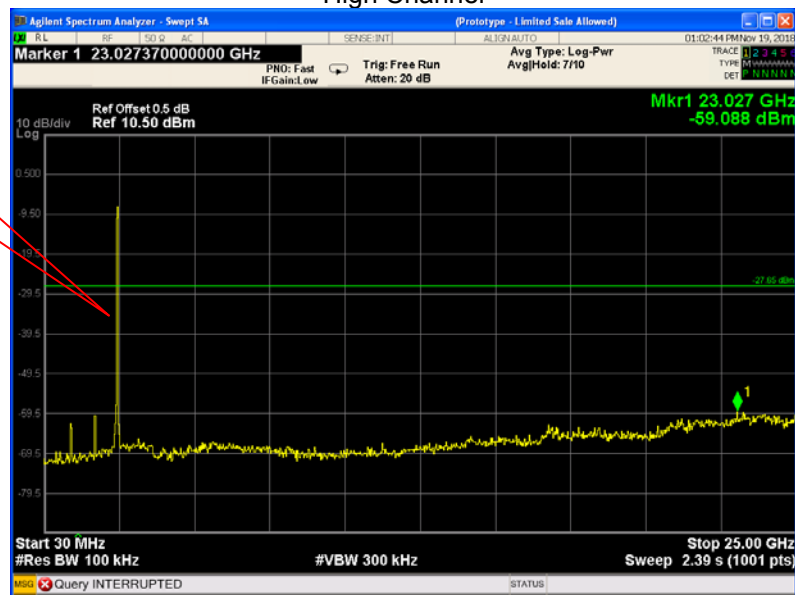

802.11n HT20

Low Channel

Fundamental

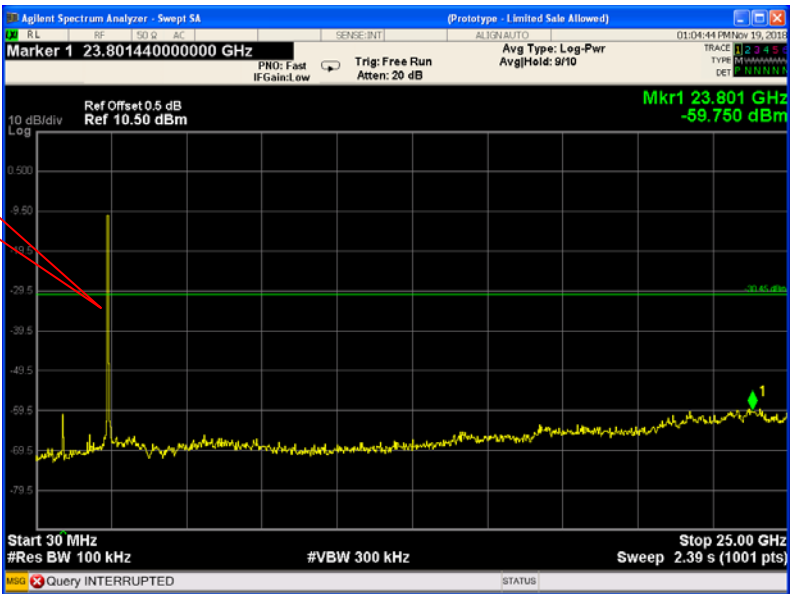

Middle Channel

Fundamental



High Channel


Fundamental



802.11n HT40

Low Channel

Fundamental

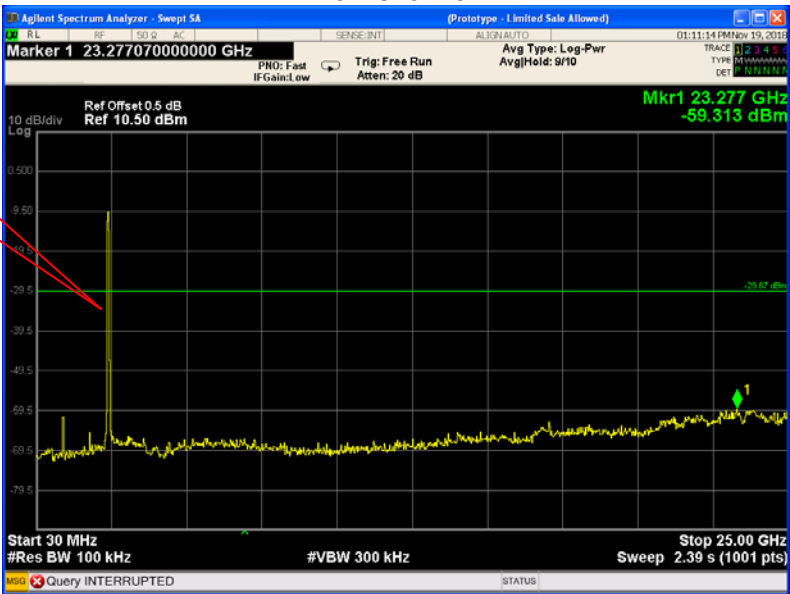

Middle Channel

Fundamental



High Channel


Fundamental



BLE


Low Channel

Fundamental

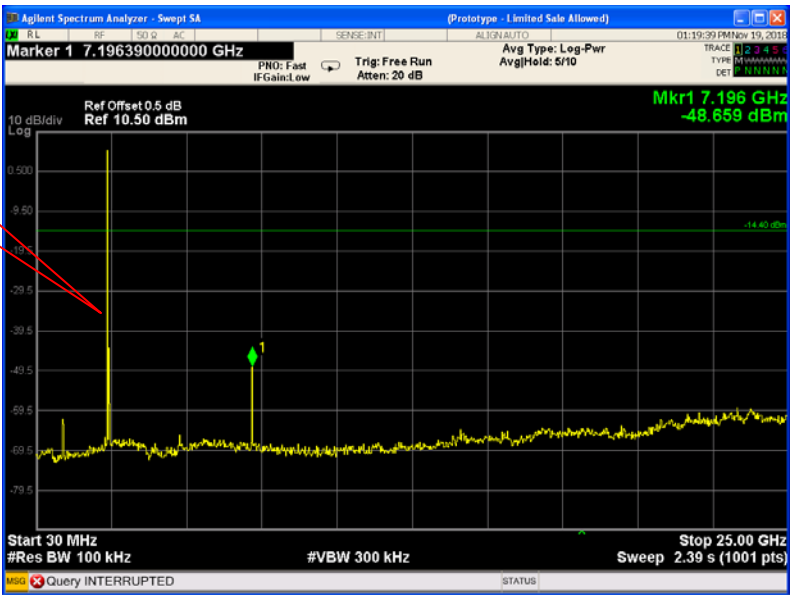

Middle Channel

Fundamental

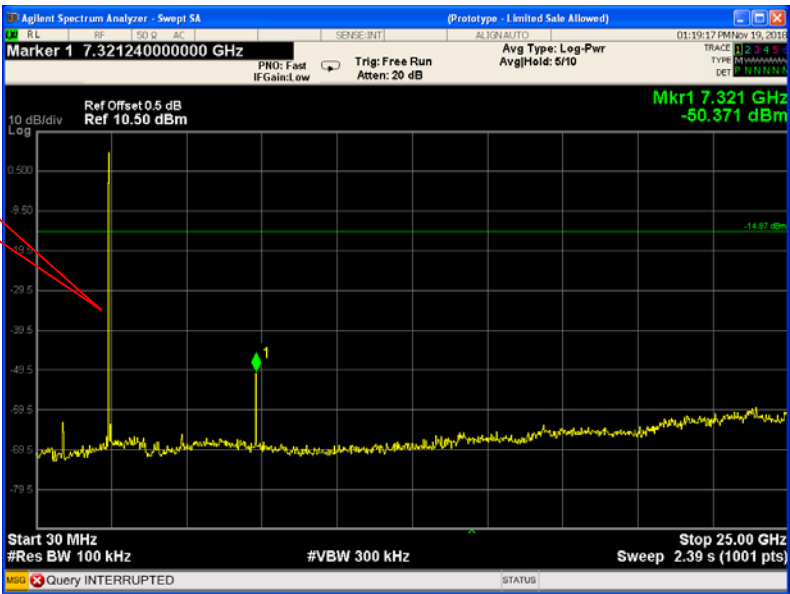

High Channel

Fundamental



11 Band Edge Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

Test Limit: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


Test Mode: Transmitting

11.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.2 Test Result

Test result plots shown as follows:

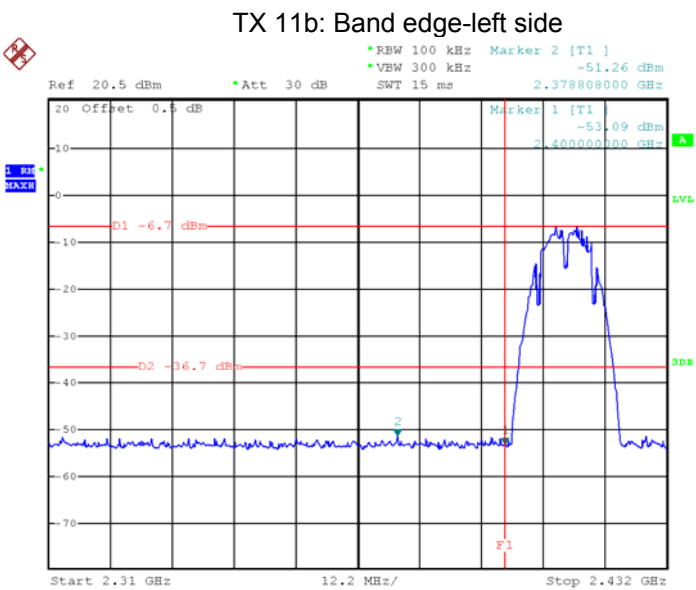


Date: 15.NOV.2018 21:34:36

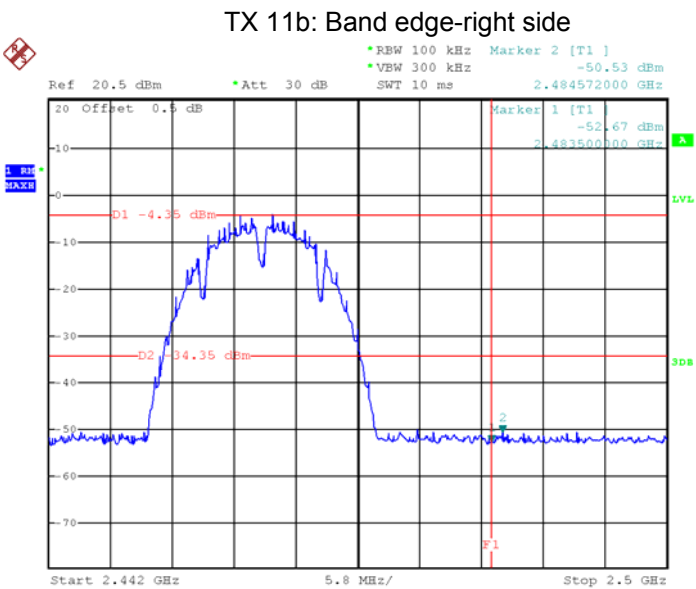


Date: 15.NOV.2018 21:36:24

TX 11g: Band edge-left side

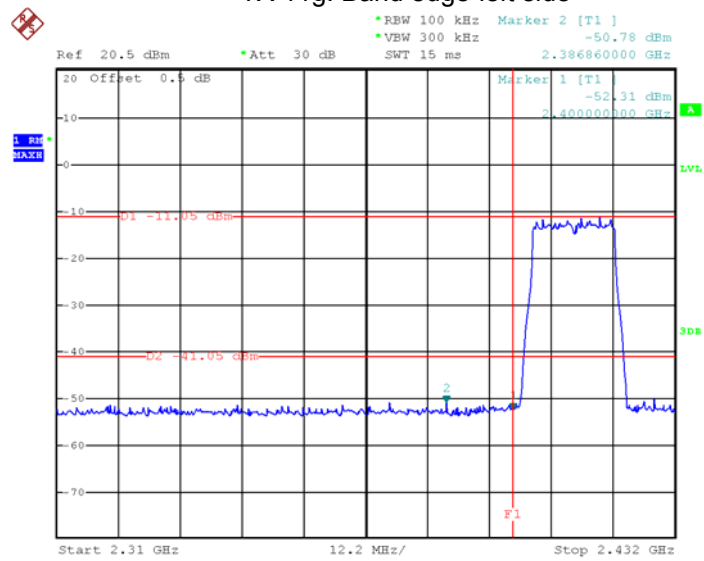


Date: 16.NOV.2018 19:48:41

TX 11g: Band edge-right side

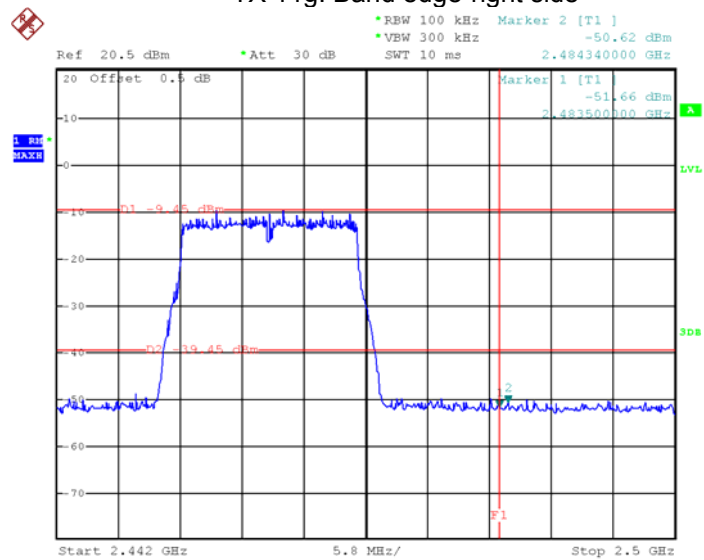


Date: 16.NOV.2018 19:46:20

TX 11n HT20: Band edge-left side

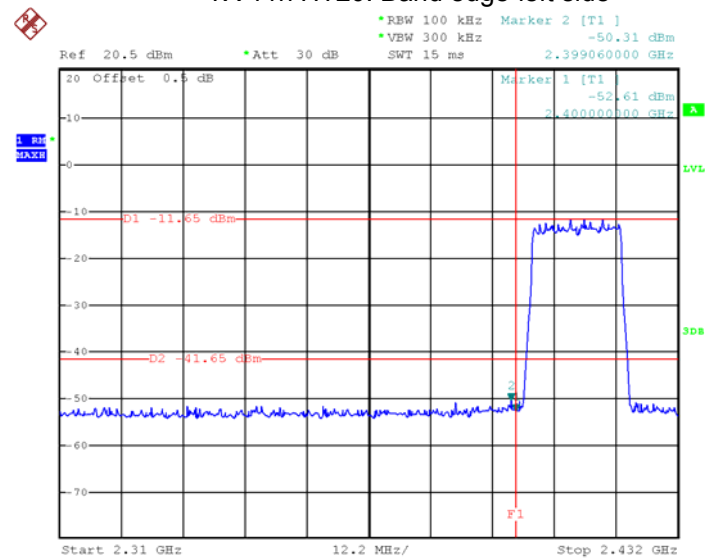


Date: 16.NOV.2018 20:02:35

TX 11n HT20: Band edge-right side

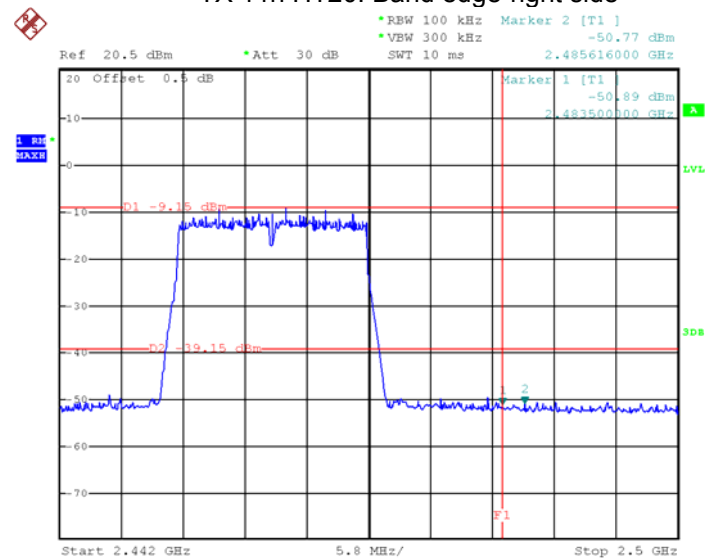


Date: 16.NOV.2018 20:01:16

TX 11n HT40: Band edge-left side

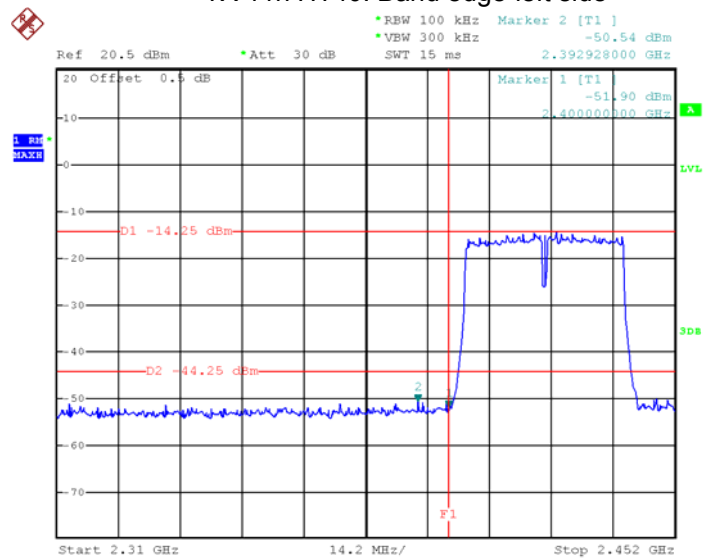


Date: 16.NOV.2018 20:08:02

TX 11n HT40: Band edge-right side

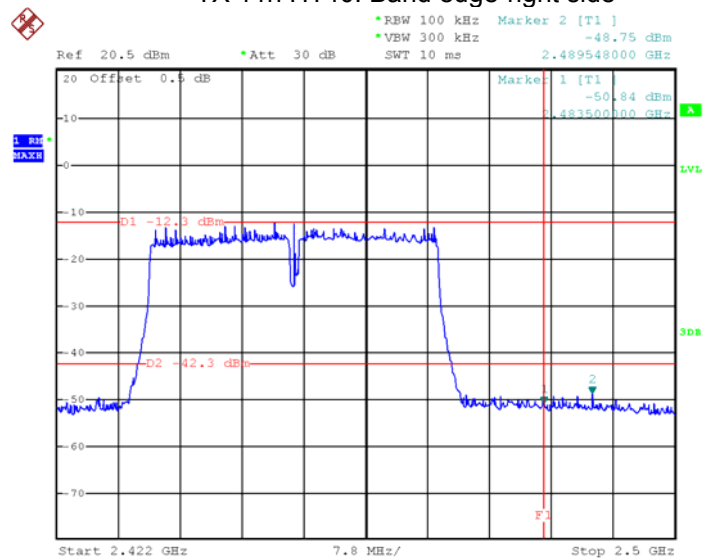


Date: 16.NOV.2018 20:20:04

BLE: Band edge-left side

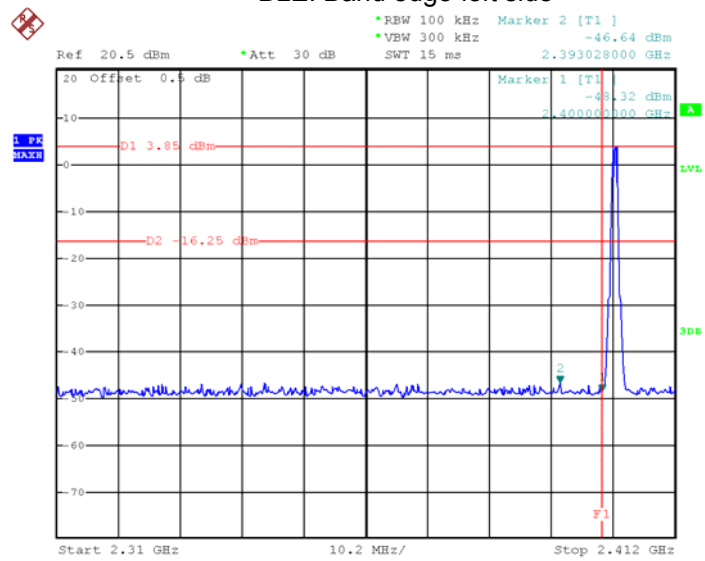

Date: 15.NOV.2018 20:46:53

BLE: Band edge-right side

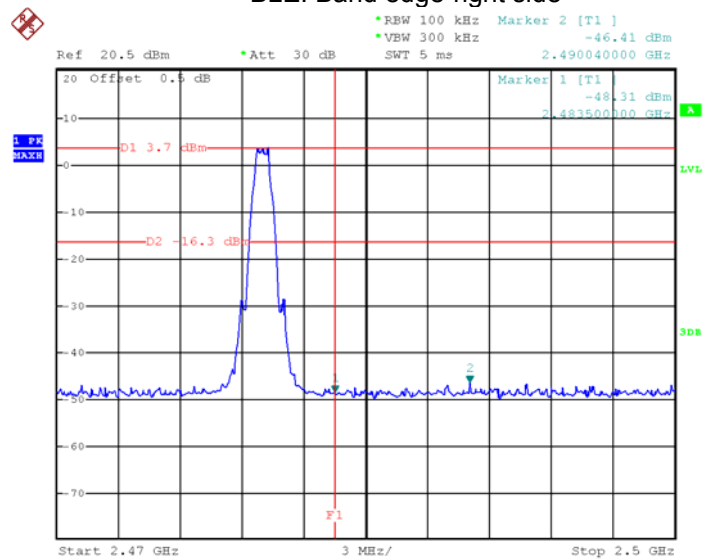

Date: 15.NOV.2018 20:45:55

12 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;

ANSI C63.10:2013


12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


12.2 Test Result:

Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	10.112	14.016
	Channel 6	10.112	14.016
	Channel 11	10.112	13.984
TX 11g	Channel 1	16.500	16.550
	Channel 6	16.500	16.550
	Channel 11	16.500	16.500
TX 11n HT20	Channel 1	17.712	17.712
	Channel 6	17.712	17.712
	Channel 11	17.712	17.712
TX 11n HT40	Channel 3	36.080	36.080
	Channel 6	36.080	36.080
	Channel 9	36.080	36.080
BLE	Channel 0	0.720	1.092
	Channel 19	0.720	1.092
	Channel 39	0.720	1.092


Test result plot:

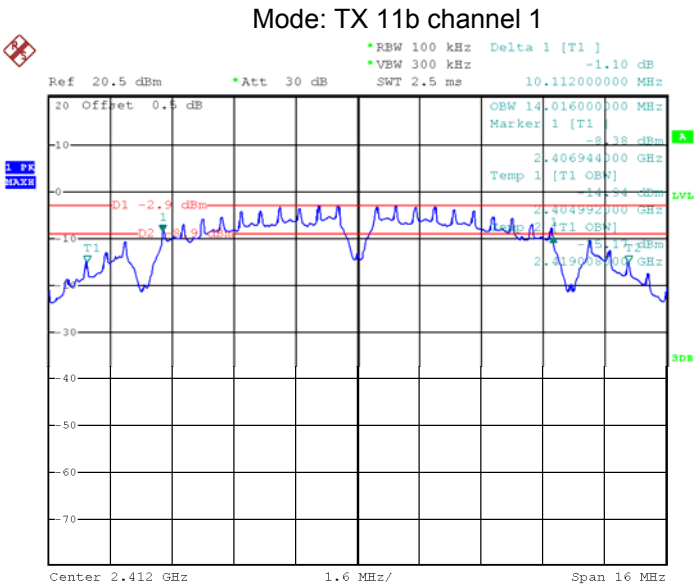


Date: 15.NOV.2018 21:32:27

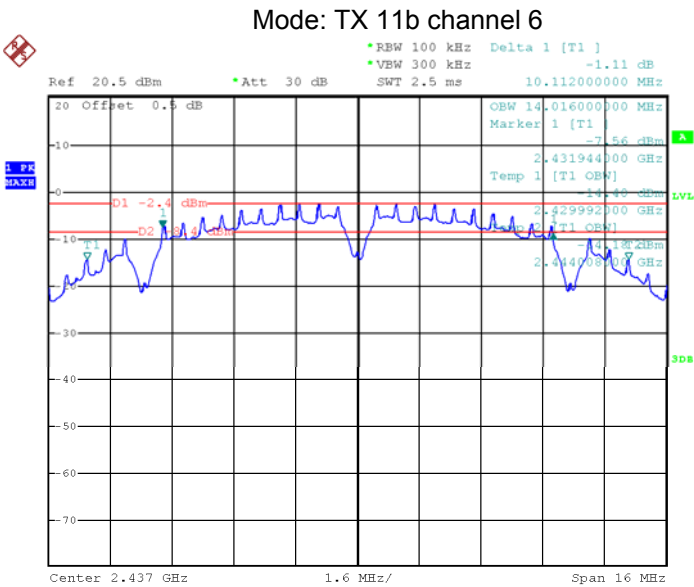


Date: 15.NOV.2018 21:17:56

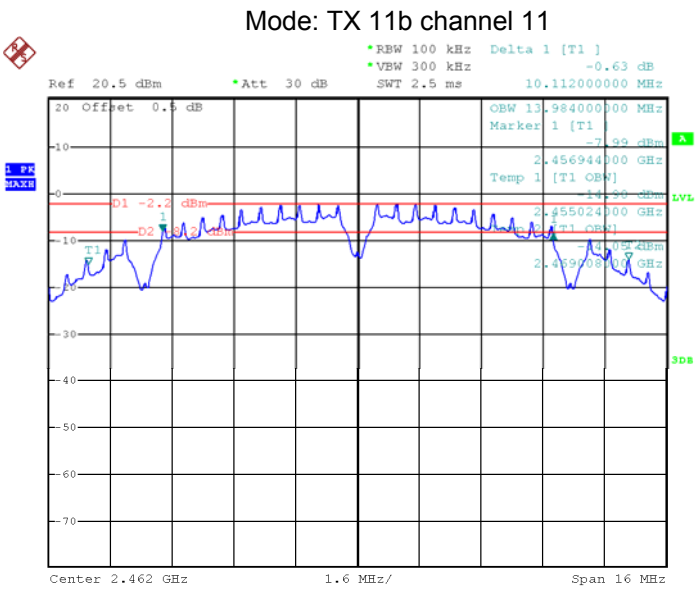


Date: 15.NOV.2018 21:26:06

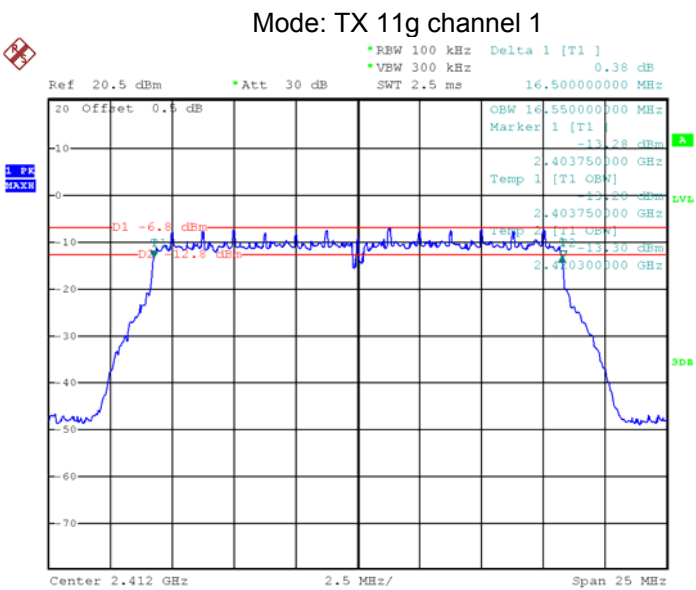


Date: 16.NOV.2018 19:35:17

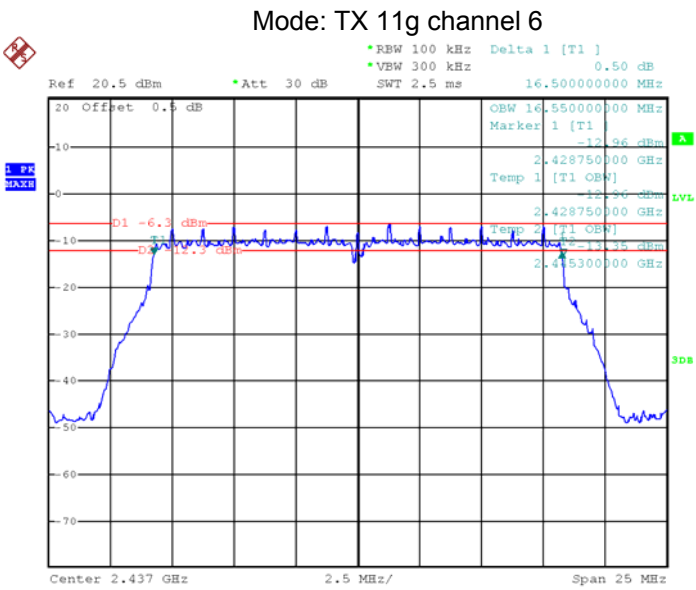


Date: 16.NOV.2018 19:37:55

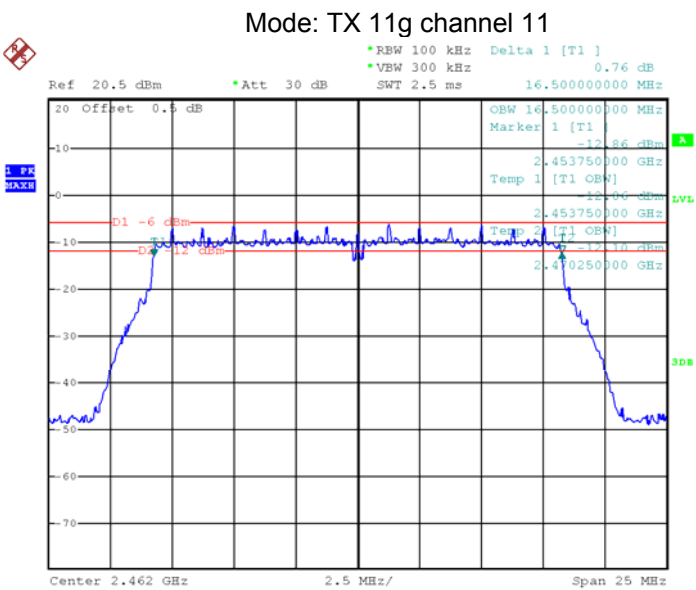


Date: 16.NOV.2018 19:40:37

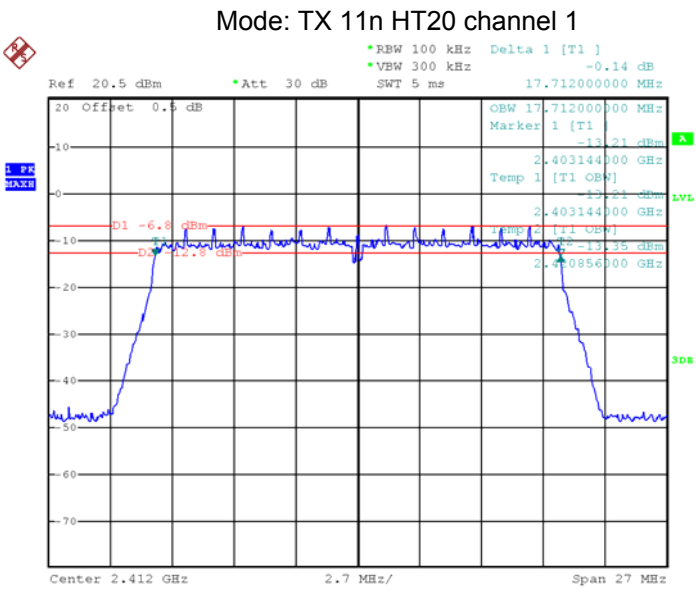


Date: 16.NOV.2018 19:54:22

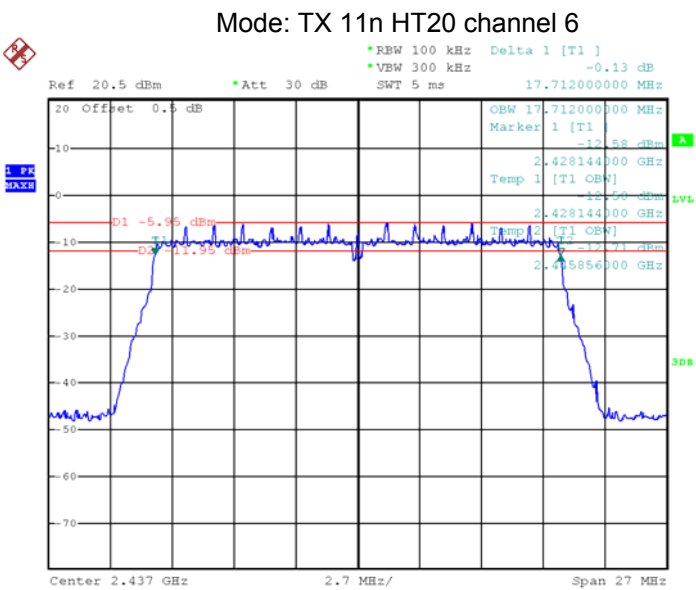

Date: 16.NOV.2018 19:56:23

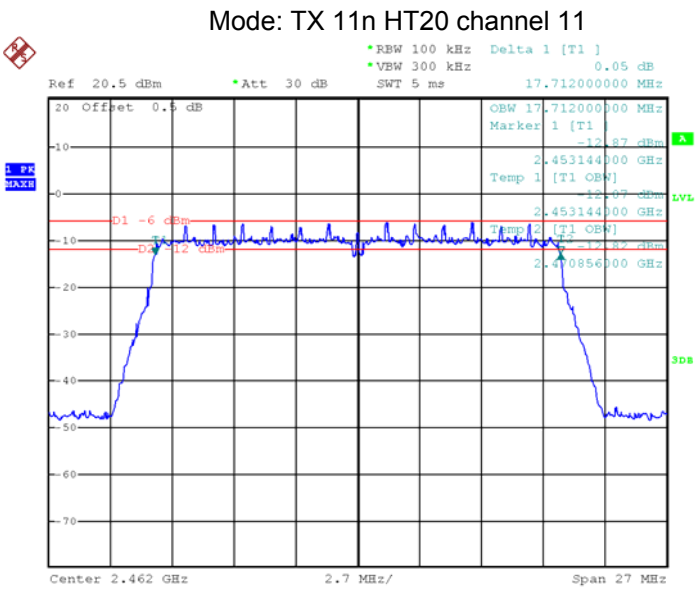

Date: 16.NOV.2018 19:59:16

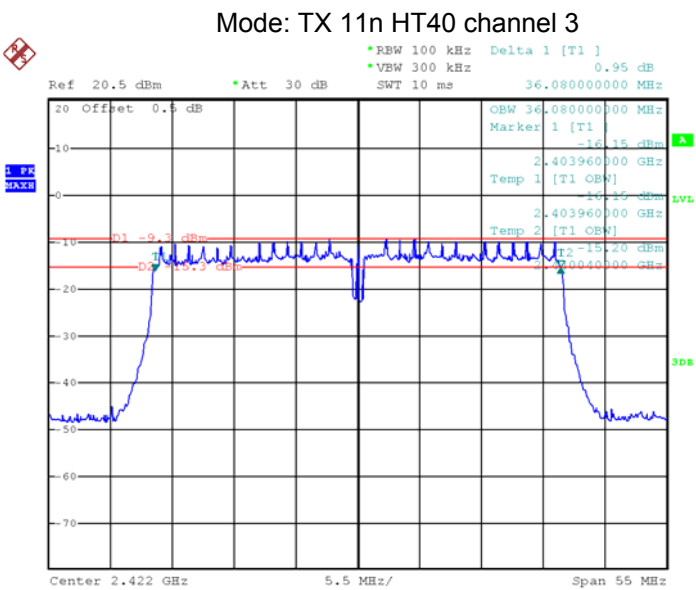

Date: 16.NOV.2018 20:09:07

•REW 100 kHz Delta 1 [T1]
 •VEW 300 kHz 0.30 dB
 •SWT 10 ms 36.080000000 MHz

Ref 20.5 dBm *Att 30 dB

20 Offset 0.5 dB
 Marker 1 [T1] -14.64 dBm
 2.418960000 GHz
 Temp 1 [T1 OEN]
 -14.64 dBm
 2.418960000 GHz
 Temp 2 [T1 OEN]
 -14.64 dBm
 2.418960000 GHz

D1 -8.65 dBm
 D2 -14.65 dBm

Center 2.437 GHz 5.5 MHz/ Span 55 MHz

Ref 20.5 dBm *Att 30 dB

•REW 100 kHz Delta 1 [T1] 0.47 dB
•VEW 300 kHz
SWT 10 ms 36.080000000 MHz


20 Offset 0.5 dB

Marker 1 [T1] -15.69 dBm
2.433960000 GHz
Temp 1 [T1 OBN] -15.69 dBm
2.433960000 GHz
Temp 2 [T1 OBN] -15.22 dBm
2.433960000 GHz


D1 -8.95 dBm
D2 -14.95 dBm

Center 2.452 GHz 5.5 MHz/ Span 55 MHz


Waltek Services (Shenzhen) Co.,Ltd.
http://www.waltek.com.cn

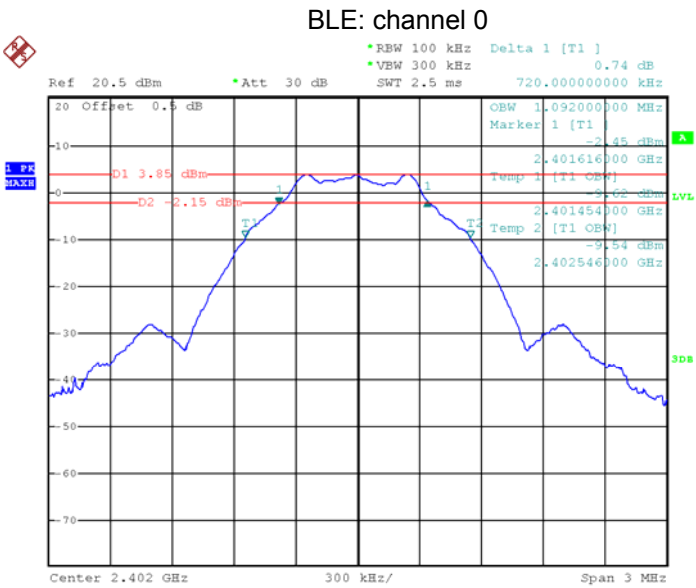

Date: 15.NOV.2018 20:42:40

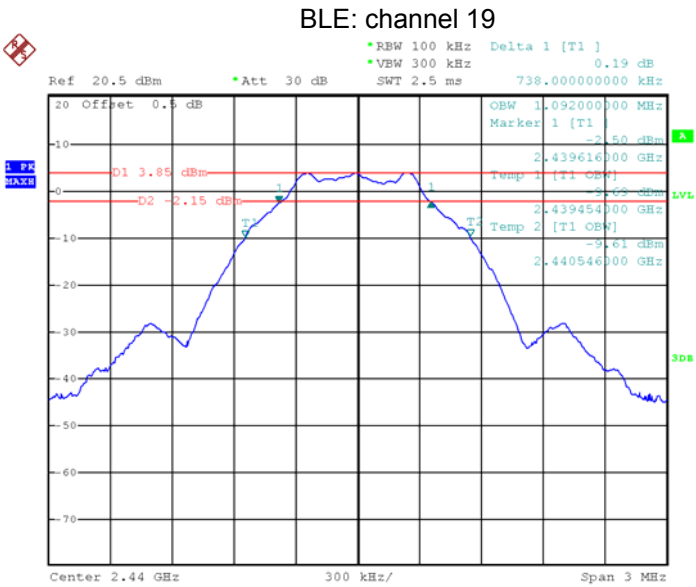

Date: 15.NOV.2018 20:43:22

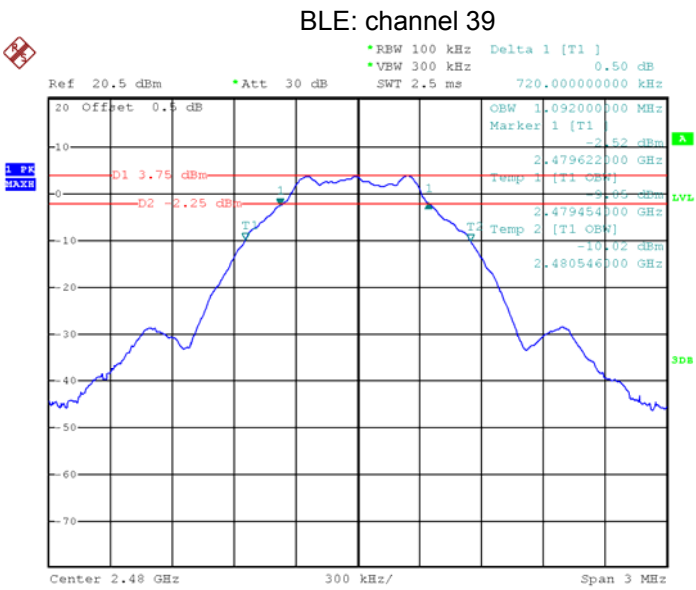

Date: 15.NOV.2018 20:44:09

13 Maximum Peak conducted Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

13.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018

section 8.3.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the $RBW \geq DTS$ bandwidth.
- b) Set $VBW \geq 3 \times RBW$.
- c) Set span $\geq 3 \times RBW$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 8.3.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.


- a) Set the $RBW = 1\%$ to 5% of the OBW, not to exceed 1 MHz..
- b) Set the $VBW \geq 3 \times RBW$
- c) Set the span $\geq 1.5 \times OBW$.
- d) Detector = RMS.
- e) Sweep time = auto couple.
- f) trigger = free run..
- g) Number of points in sweep $\geq [2 \times \text{span} / RBW]$. (This gives bin-to-bin spacing $\geq RBW / 2$, so that narrowband signals are not lost between frequency bins.)
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum..

13.2 Test Result:

Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)	Limit
TX 11b	Low-2412	9.14	1W/30dBm
	Middle-2437	9.40	1W/30dBm
	High-2462	9.40	1W/30dBm
TX 11g	Low-2412	9.32	1W/30dBm
	Middle-2437	9.30	1W/30dBm
	High-2462	9.43	1W/30dBm
TX 11n HT20	Low-2412	9.10	1W/30dBm
	Middle-2437	9.40	1W/30dBm
	High-2462	9.39	1W/30dBm
TX 11n HT40	Low-2422	9.34	1W/30dBm
	Middle-2437	9.32	1W/30dBm
	High-2452	9.48	1W/30dBm
BLE	Low-2402	4.94	1W/30dBm
	Middle-2440	4.92	1W/30dBm
	High-2480	4.76	1W/30dBm


Test Plot

Mode: TX 11b channel 1

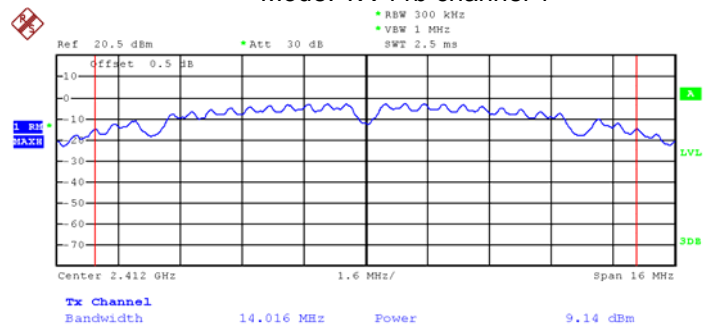


Date: 15.NOV.2018 21:28:24


Mode: TX 11b channel 6

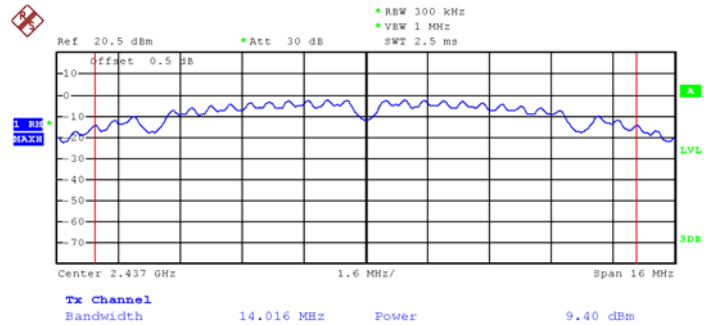


Date: 15.NOV.2018 21:28:02

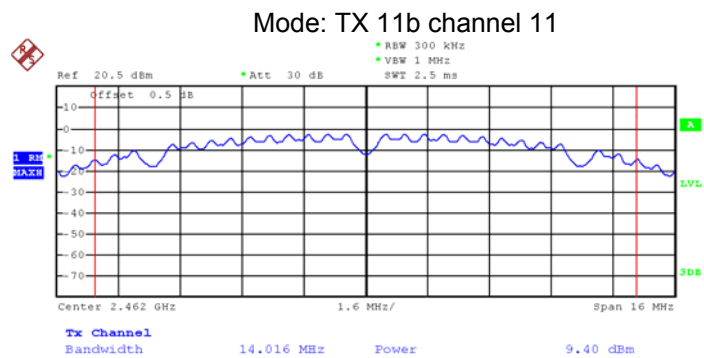


Date: 15.NOV.2018 21:27:37

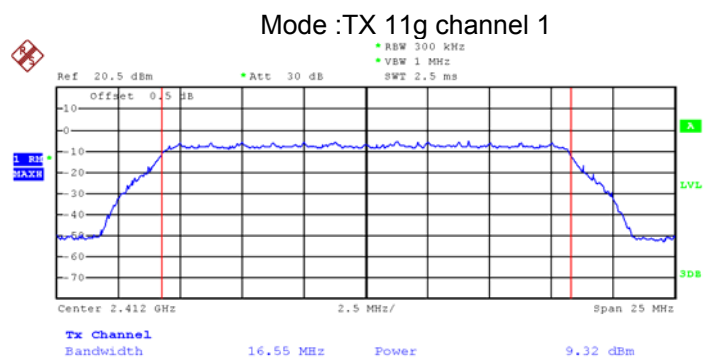


Date: 16.NOV.2018 19:33:58

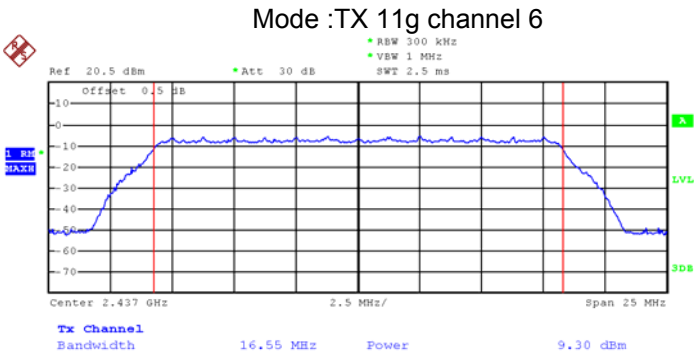


Date: 16.NOV.2018 19:38:41

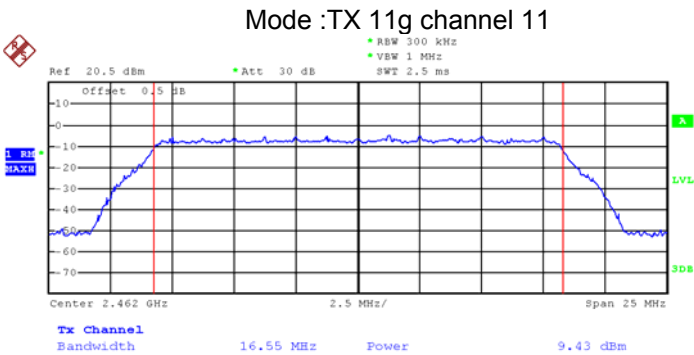


Date: 16.NOV.2018 19:39:25

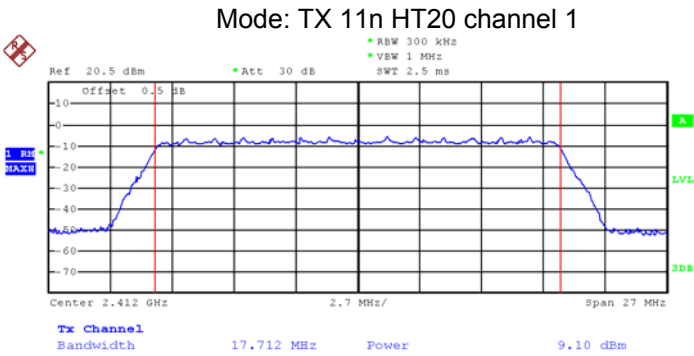


Date: 16.NOV.2018 19:53:14

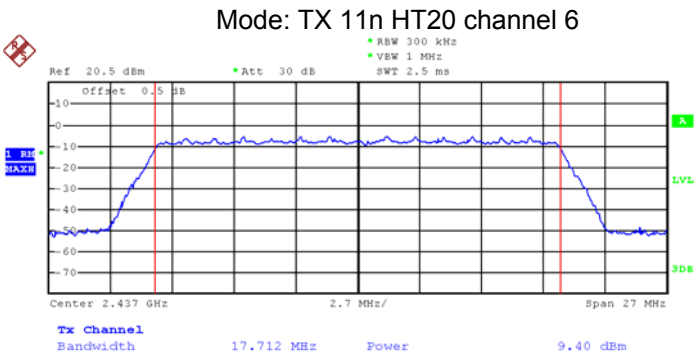


Date: 16.NOV.2018 19:57:12

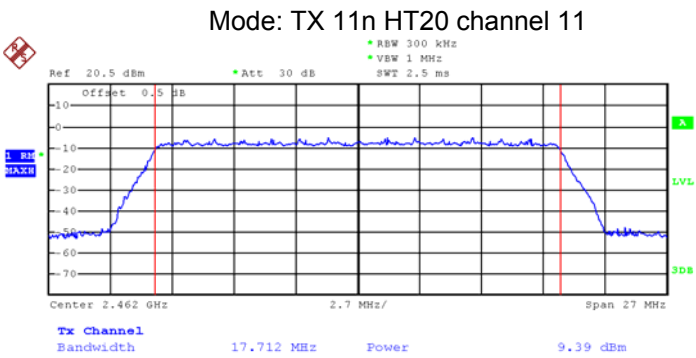


Date: 16.NOV.2018 19:58:03

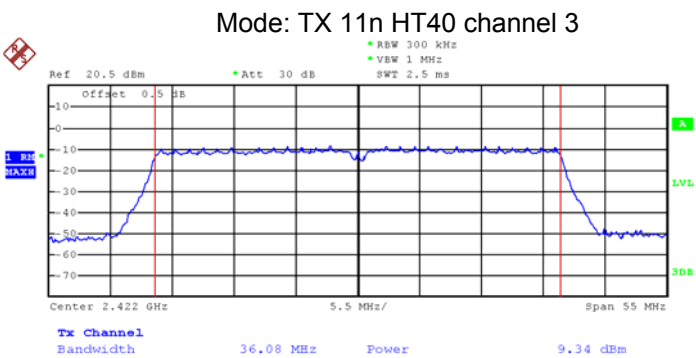


Date: 16.NOV.2018 20:06:24

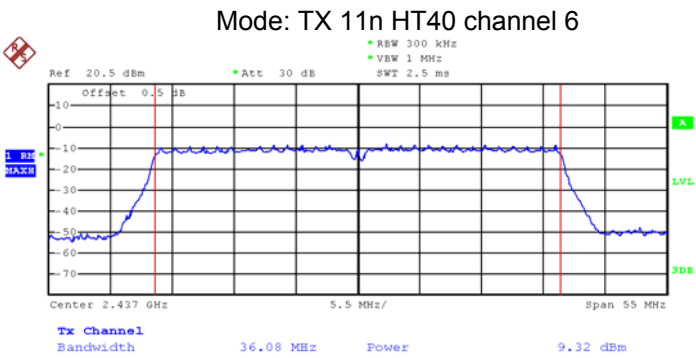


Date: 16.NOV.2018 20:16:14

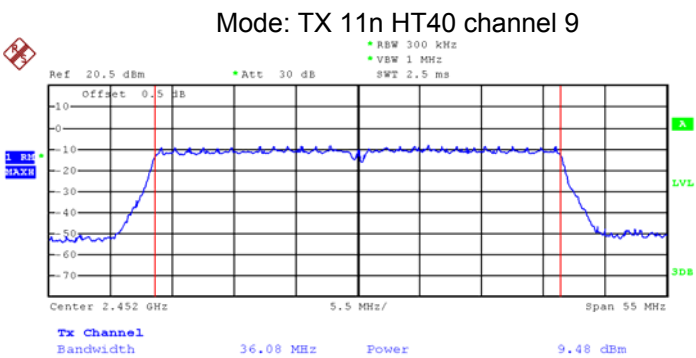


Date: 16.NOV.2018 20:16:45

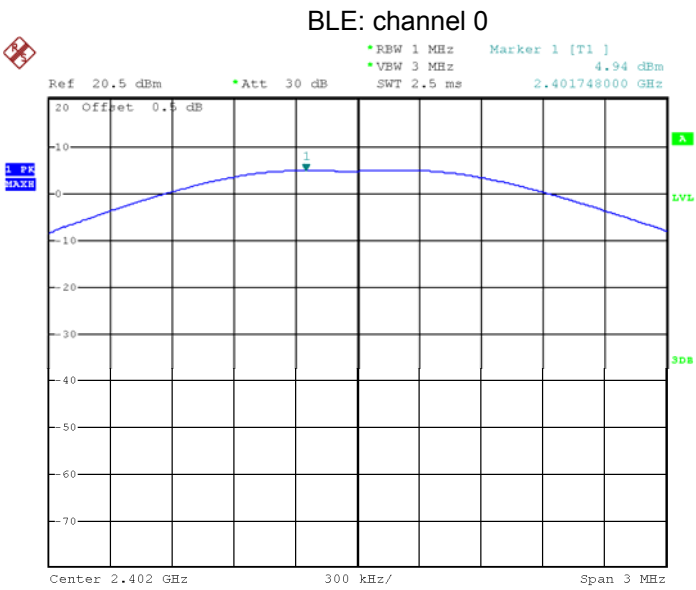

Date: 15.NOV.2018 20:39:32

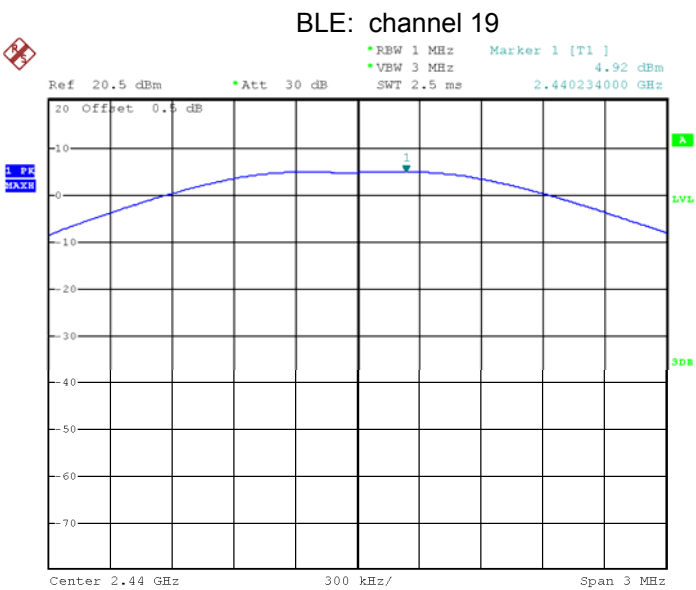

Date: 15.NOV.2018 20:39:58

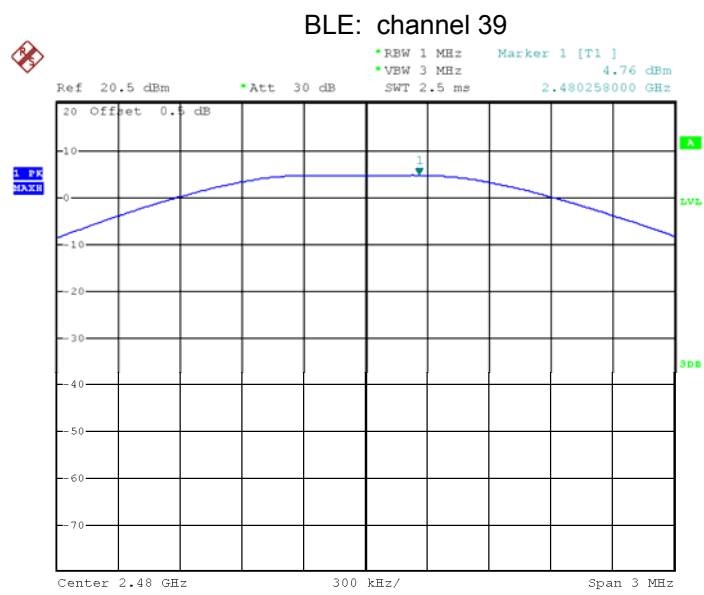

Date: 15.NOV.2018 20:40:18

14 Duty cycle

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	N/A
Test Result:	PASS
Remark:	EUT transmitting continuously

15 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013


15.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018 section 10.2


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

15.2 Test Result:


Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
TX 11b	Low-2412	-16.33	8dBm per 3kHz
	Middle-2437	-16.47	8dBm per 3kHz
	High-2462	-16.57	8dBm per 3kHz
TX 11g	Low-2412	-12.34	8dBm per 3kHz
	Middle-2437	-12.05	8dBm per 3kHz
	High-2462	-11.47	8dBm per 3kHz
TX 11n HT20	Low-2412	-12.33	8dBm per 3kHz
	Middle-2437	-12.37	8dBm per 3kHz
	High-2462	-11.77	8dBm per 3kHz
TX 11n HT40	Low-2422	-12.37	8dBm per 3kHz
	Middle-2437	-12.33	8dBm per 3kHz
	High-2452	-11.80	8dBm per 3kHz
BLE	Low-2402	-10.52	8dBm per 3kHz
	Middle-2440	-10.55	8dBm per 3kHz
	High-2480	-10.64	8dBm per 3kHz

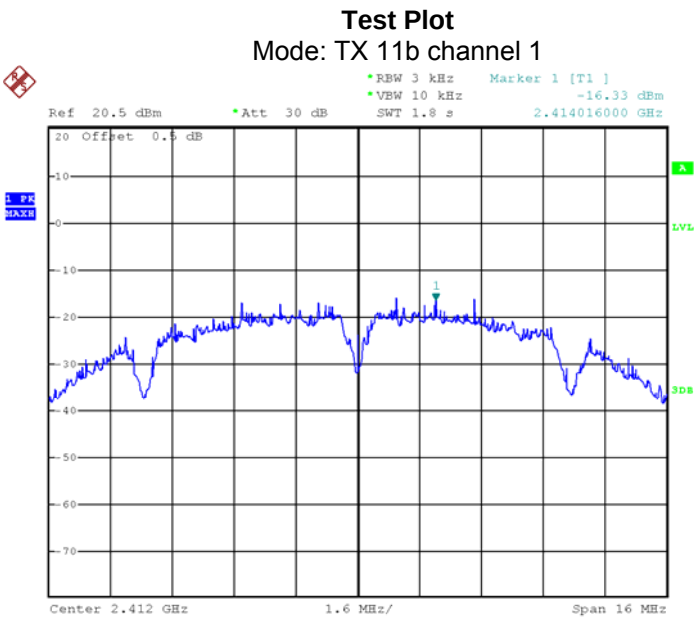


Date: 15.NOV.2018 21:33:00

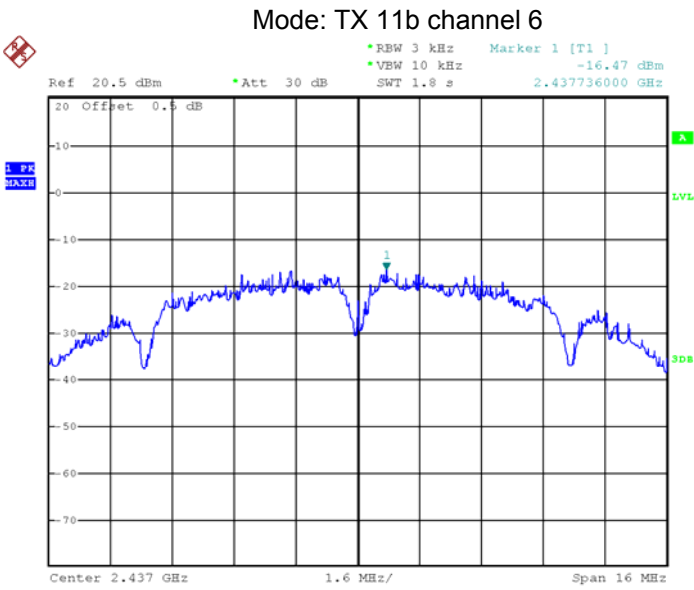


Date: 15.NOV.2018 21:18:26

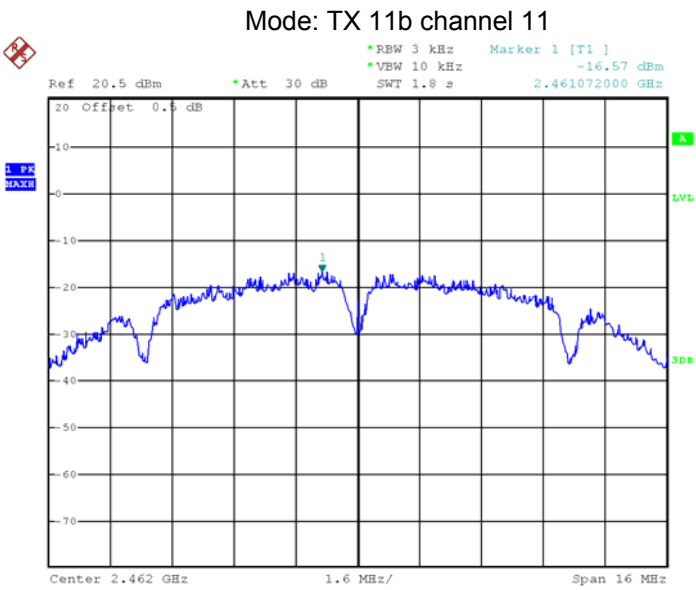


Date: 15.NOV.2018 21:26:52

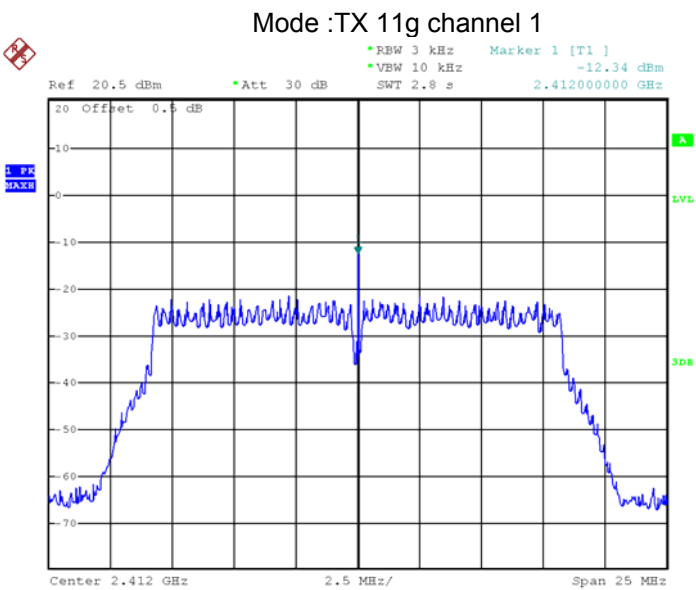


Date: 16.NOV.2018 19:36:20

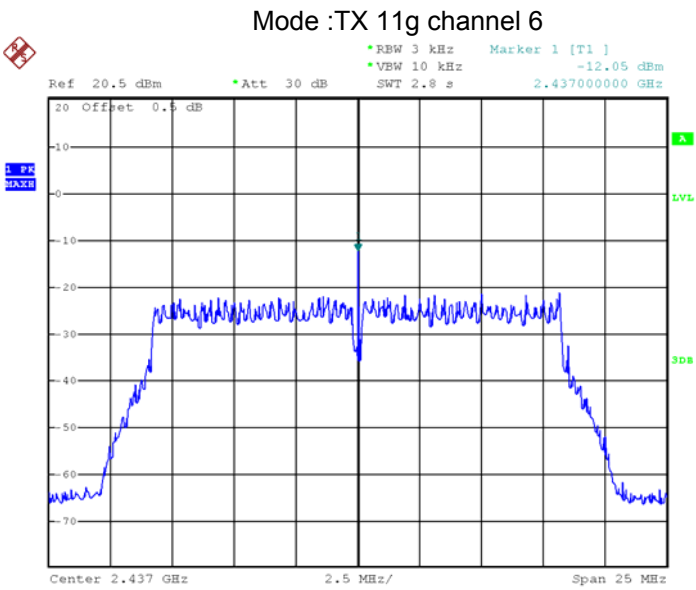


Date: 16.NOV.2018 19:36:57

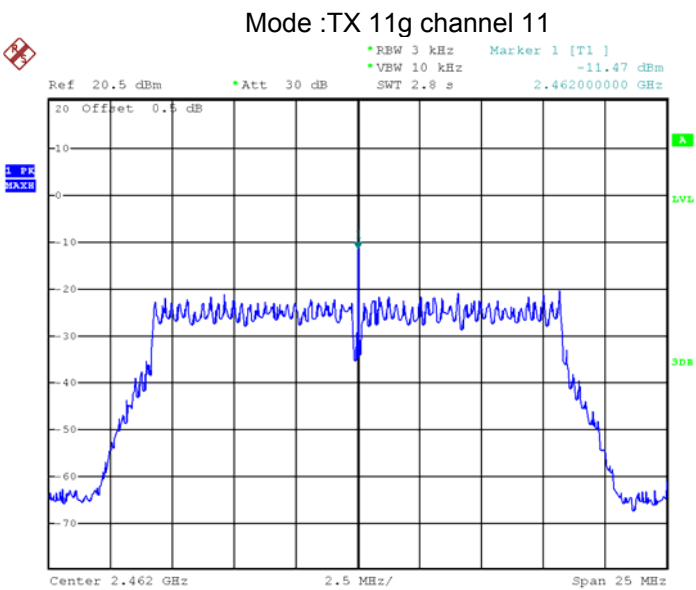


Date: 16.NOV.2018 19:41:01

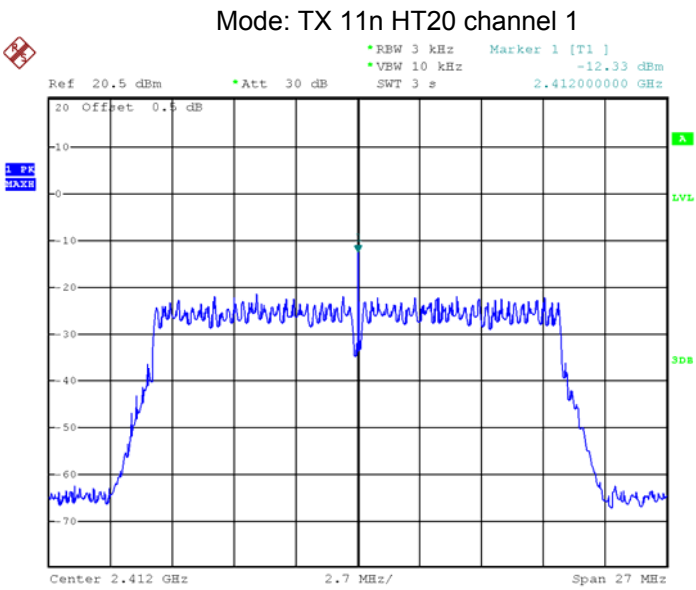


Date: 16.NOV.2018 19:54:47

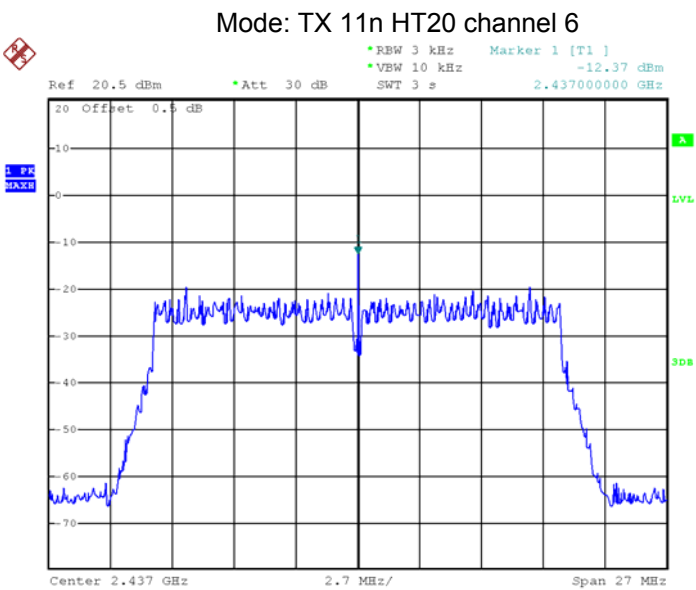

Date: 16.NOV.2018 19:55:17

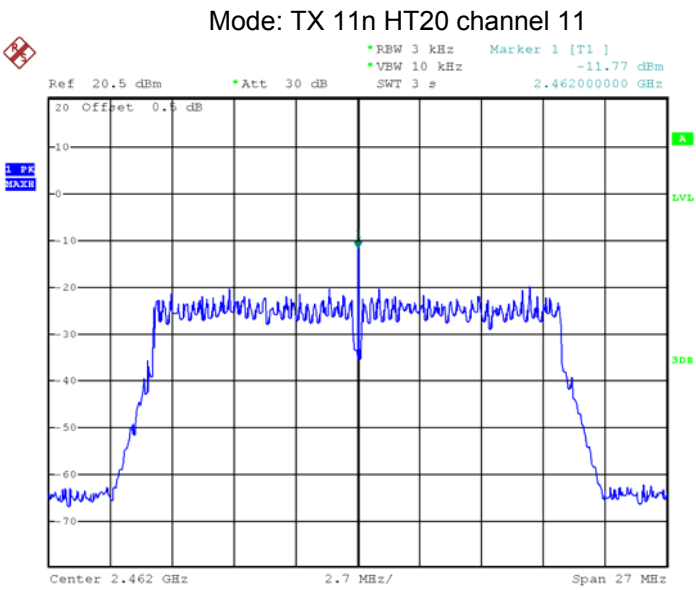


Date: 16.NOV.2018 19:59:45

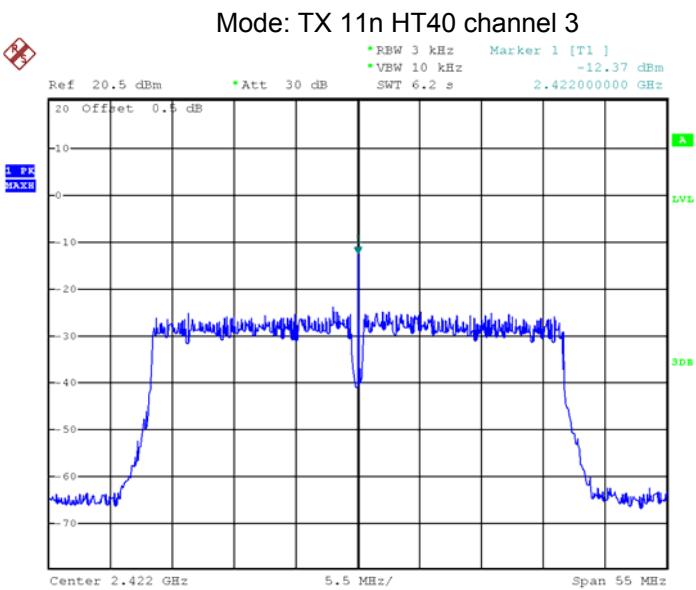


Date: 16.NOV.2018 20:09:32

Mode: TX 11n HT40 channel 6

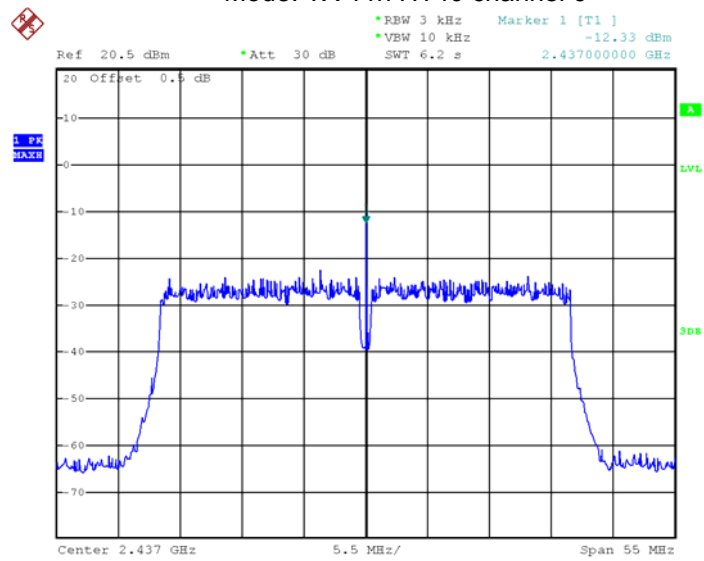


Date: 16.NOV.2018 20:10:17


Mode: TX 11n HT40 channel 9

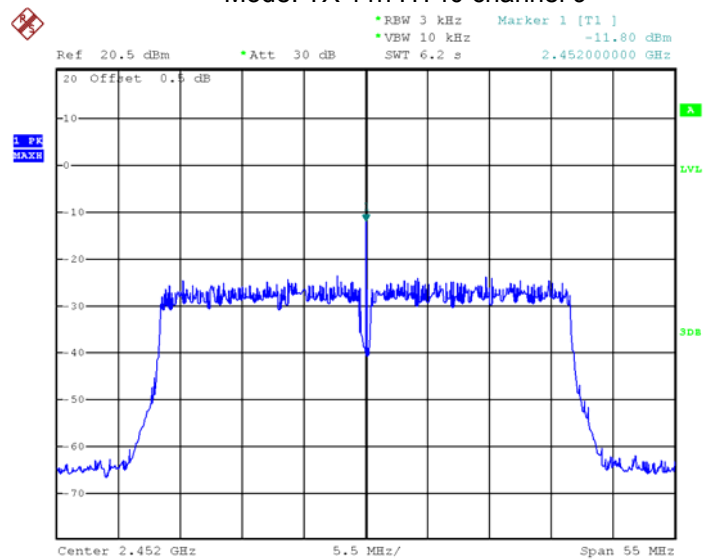


Date: 16.NOV.2018 20:18:18

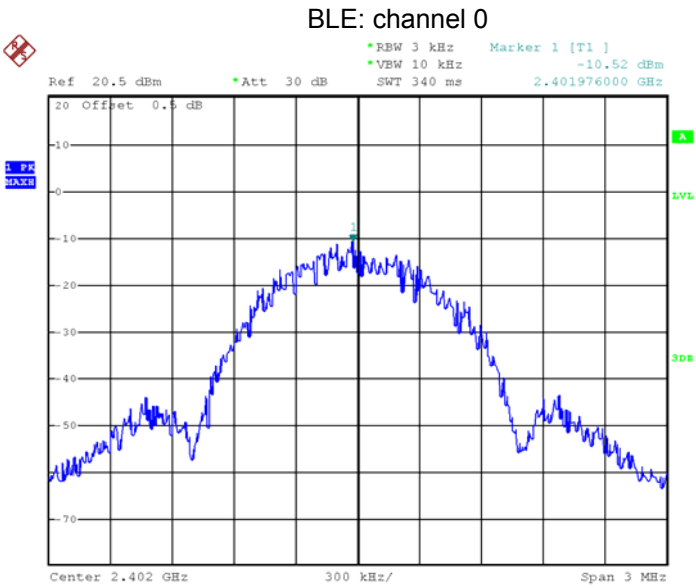

Date: 15.NOV.2018 20:41:44

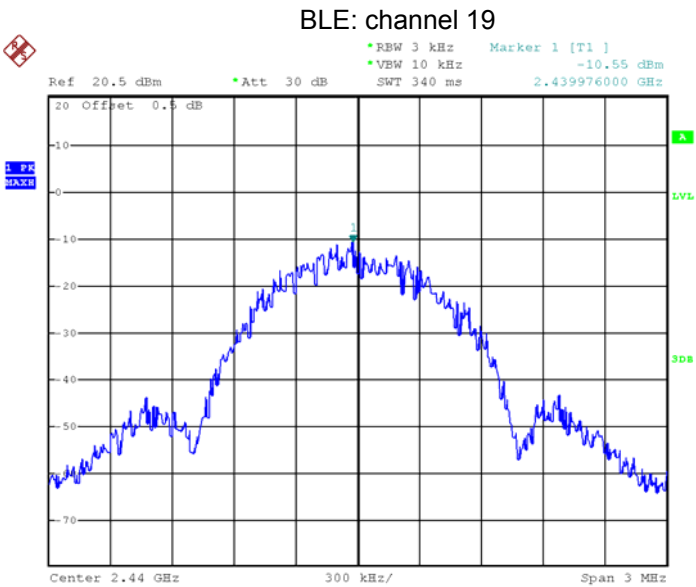

Date: 15.NOV.2018 20:41:27

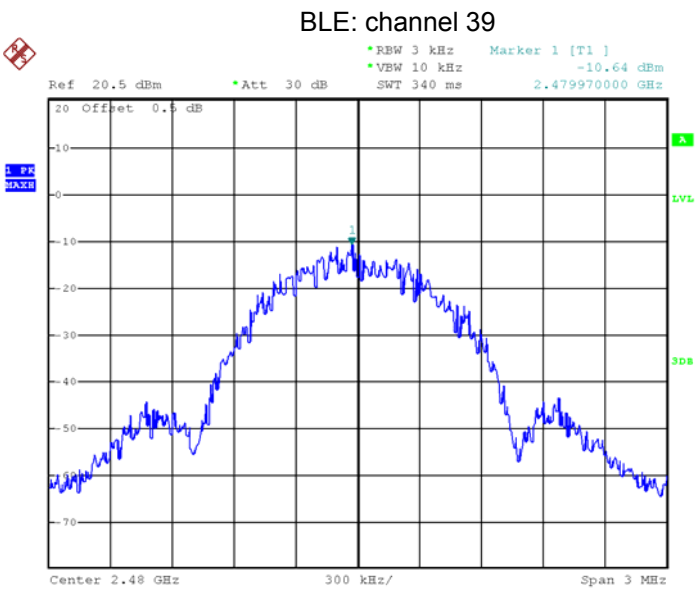

Date: 15.NOV.2018 20:41:01

16 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

17 RF Exposure

Remark: refer to SAR test report: WTS18S11128310-1W.

18 Photographs of test setup and EUT.

Note: Please refer to appendix: WTS18S11128310W_Photo.

=====End of Report=====