

# **FCC RADIO TEST REPORT**

## **FCC ID: 2ANMU-WP20PRO**

**Product:** Smart Phone

**Trade Mark:** OUKITEL

**Model No.:** WP20 Pro

**Family Model:** N/A

**Report No.:** S22081703702004

**Issue Date:** Aug 31, 2022

### **Prepared for**

SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD  
A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU  
INDUSTRIAL ZONE, GUANLAN, LONGHUA SHENZHEN,  
518XXX China

### **Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.  
1/F, Building E, Fenda Science Park, Sanwei Community,  
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China  
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090  
Website: <http://www.ntek.org.cn>

## TEST RESULT CERTIFICATION

**Applicant's name** ..... : SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTDAddress ..... : A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU INDUSTRIAL  
ZONE, GUANLAN, LONGHUA SHENZHEN, 518XXX China**Manufacturer's Name** ..... : SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTDAddress ..... : A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU INDUSTRIAL  
ZONE, GUANLAN, LONGHUA SHENZHEN, 518XXX China**Product description**

Product name ..... : Smart Phone

Model and/or type reference ..... : WP20 Pro

Family Model ..... : N/A

Sample number : S220817037002

**Standards** ..... : FCC Part15.407Test procedure ..... ANSI C63.10-2013 and KDB 789033 D02 General UNII Test Procedures  
New Rules v02r01  
FCC KDB 662911 D01 Multiple Transmitter Output v02r01  
KDB 905462 D03 Client Without DFS New Rules v01r02  
KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

**Date of Test** .....

Date (s) of performance of tests ..... Aug 17, 2022 ~ Aug 30, 2022

Date of Issue ..... Aug 31, 2022

Test Result ..... **Pass**

Testing Engineer

:



(Allen Liu)

Authorized Signatory

:



(Alex Li)

**Table of Contents**

|                                                             | <b>Page</b> |
|-------------------------------------------------------------|-------------|
| <b>1. SUMMARY OF TEST RESULTS</b>                           | <b>6</b>    |
| 1.1 FACILITIES AND ACCREDITATIONS                           | 7           |
| 1.2 MEASUREMENT UNCERTAINTY                                 | 7           |
| <b>1 . GENERAL INFORMATION</b>                              | <b>8</b>    |
| 1.1 GENERAL DESCRIPTION OF EUT                              | 8           |
| 1.2 DESCRIPTION OF TEST MODES                               | 10          |
| 1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 11          |
| 1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)            | 12          |
| 1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS                      | 13          |
| <b>2 . EMC EMISSION TEST</b>                                | <b>15</b>   |
| 2.1 CONDUCTED EMISSION MEASUREMENT                          | 15          |
| 2.1.1 APPLICABLE STANDARD                                   | 15          |
| 2.1.2 CONFORMANCE LIMIT                                     | 15          |
| 2.1.3 TEST CONFIGURATION                                    | 15          |
| 2.1.4 TEST PROCEDURE                                        | 15          |
| 2.2 RADIATED EMISSION MEASUREMENT                           | 22          |
| 2.2.1 APPLICABLE STANDARD                                   | 22          |
| 2.2.2 CONFORMANCE LIMIT                                     | 22          |
| 2.2.3 MEASURING INSTRUMENTS                                 | 22          |
| 2.2.4 TEST CONFIGURATION                                    | 23          |
| 2.2.5 TEST PROCEDURE                                        | 24          |
| 2.2.6 TEST RESULTS (9KHZ – 30 MHZ)                          | 25          |
| 2.2.7 TEST RESULTS (30MHZ – 1GHZ)                           | 26          |
| 2.2.8 TEST RESULTS (1GHZ-18GHZ)                             | 32          |
| 2.2.10 TEST RESULTS (18GHZ-40GHZ)                           | 38          |
| <b>3 . POWER SPECTRAL DENSITY TEST</b>                      | <b>47</b>   |
| 3.1 APPLIED PROCEDURES / LIMIT                              | 47          |
| 3.2 TEST PROCEDURE                                          | 48          |
| 3.3 DEVIATION FROM STANDARD                                 | 48          |
| 3.4 TEST SETUP                                              | 48          |
| 3.5 EUT OPERATION CONDITIONS                                | 48          |
| 3.6 TEST RESULTS                                            | 49          |
| <b>4 . 26DB &amp; 99% EMISSION BANDWIDTH</b>                | <b>50</b>   |
| 4.1 APPLIED PROCEDURES / LIMIT                              | 50          |
| 4.2 TEST PROCEDURE                                          | 50          |
| 4.3 EUT OPERATION CONDITIONS                                | 51          |
| 4.4 TEST RESULTS                                            | 51          |

**Table of Contents**

|                                           | <b>Page</b> |
|-------------------------------------------|-------------|
| <b>5 . MINIMUM 6 DB BANDWIDTH</b>         | <b>52</b>   |
| 5.1 APPLIED PROCEDURES / LIMIT            | 52          |
| 5.2 TEST PROCEDURE                        | 52          |
| 5.3 DEVIATION FROM STANDARD               | 52          |
| 5.4 TEST SETUP                            | 52          |
| 5.5 EUT OPERATION CONDITIONS              | 52          |
| 5.6 TEST RESULTS                          | 53          |
| <b>6 . MAXIMUM CONDUCTED OUTPUT POWER</b> | <b>54</b>   |
| 6.1 PPLIED PROCEDURES / LIMIT             | 54          |
| 6.2 TEST RESULTS                          | 56          |
| <b>7 . OUT OF BAND EMISSIONS</b>          | <b>57</b>   |
| 7.1 APPLICABLE STANDARD                   | 57          |
| 7.2 TEST PROCEDURE                        | 57          |
| 7.3 DEVIATION FROM STANDARD               | 58          |
| 7.4 TEST SETUP                            | 58          |
| 7.5 EUT OPERATION CONDITIONS              | 58          |
| 7.6 TEST RESULTS                          | 59          |
| <b>8. FREQUENCY STABILITY MEASUREMENT</b> | <b>60</b>   |
| 8.1 LIMIT                                 | 60          |
| 8.2 TEST PROCEDURES                       | 60          |
| 8.3 TEST SETUP LAYOUT                     | 60          |
| 8.4 EUT OPERATION DURING TEST             | 60          |
| 8.5 TEST RESULTS                          | 61          |
| <b>9. ANTENNA REQUIREMENT</b>             | <b>70</b>   |
| 9.1 STANDARD REQUIREMENT                  | 70          |
| 9.2 EUT ANTENNA                           | 70          |

## Revision History

| Report No.      | Version | Description             | Issued Date  |
|-----------------|---------|-------------------------|--------------|
| S22081703702004 | Rev.01  | Initial issue of report | Aug 31, 2022 |
|                 |         |                         |              |
|                 |         |                         |              |
|                 |         |                         |              |
|                 |         |                         |              |
|                 |         |                         |              |
|                 |         |                         |              |
|                 |         |                         |              |
|                 |         |                         |              |
|                 |         |                         |              |
|                 |         |                         |              |
|                 |         |                         |              |
|                 |         |                         |              |
|                 |         |                         |              |
|                 |         |                         |              |
|                 |         |                         |              |

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part15 (15.407) , Subpart E                                                                   |                                         |          |          |
|---------------------------------------------------------------------------------------------------|-----------------------------------------|----------|----------|
| Standard Section                                                                                  | Test Item                               | Judgment | Remark   |
| 15.207                                                                                            | AC Power Line Conducted Emissions       | PASS     |          |
| 15.209(a),<br>15.407 (b)(1)<br>15.407 (b)(2)<br>15.407 (b)(3)<br>15.407 (b)(4)<br>15.407(b)(8)(9) | Spurious Radiated Emissions             | PASS     |          |
| 15.407 (a)                                                                                        | 26 dB and 99% Emission Bandwidth        | PASS     |          |
| 15.407(e)                                                                                         | Minimum 6 dB bandwidth                  | PASS     |          |
| 15.407 (a)                                                                                        | Maximum Conducted Output Power          | PASS     |          |
| 15.407 (b)(1)<br>15.407 (b)(2)<br>15.407 (b)(3)<br>15.407 (b)(4)                                  | Band Edge                               | PASS     |          |
| 15.407 (a)                                                                                        | Power Spectral Density                  | PASS     |          |
| 15.407(b)                                                                                         | Spurious Emissions at Antenna Terminals | PASS     |          |
| 15.407(g)                                                                                         | Frequency Stability Measurement         | PASS     |          |
| 15.407(h)                                                                                         | Dynamic Frequency Selection(DFS)        | PASS     |          |
| 15.203                                                                                            | Antenna Requirement                     | PASS     |          |
| 15.407(c)                                                                                         | Automatically discontinue transmission  | PASS     | (Note 3) |

### NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

(2) This device operates with a duty cycle greater than 99%

(3) The product is a client device, and the data transmission is limited by the AP.  
When the information to be sent is missing or the operation fails,  
the device will automatically stop sending and directly connect to the AP correctly again.

**1.1 FACILITIES AND ACCREDITATIONS****FACILITIES**

All measurement facilities used to collect the measurement data are located at  
1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District  
Shenzhen, Guangdong, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

**LABORATORY ACCREDITATIONS AND LISTINGS****Site Description**

CNAS-Lab. : The Certificate Registration Number is L5516.

IC-Registration : The Certificate Registration Number is 9270A.  
CAB identifier: CN0074

FCC- Accredited : Test Firm Registration Number: 463705.  
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District  
Shenzhen, Guangdong, China

**1.2 MEASUREMENT UNCERTAINTY**

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                                | Uncertainty               |
|-----|-------------------------------------|---------------------------|
| 1   | Conducted Emission Test             | $\pm 2.80\text{dB}$       |
| 2   | RF power, conducted                 | $\pm 0.16\text{dB}$       |
| 3   | Spurious emissions, conducted       | $\pm 0.21\text{dB}$       |
| 4   | All emissions, radiated(30MHz~1GHz) | $\pm 2.64\text{dB}$       |
| 5   | All emissions, radiated(1GHz~6GHz)  | $\pm 2.40\text{dB}$       |
| 6   | All emissions, radiated(> 6GHz)     | $\pm 2.52\text{dB}$       |
| 7   | Temperature                         | $\pm 0.5^{\circ}\text{C}$ |
| 8   | Humidity                            | $\pm 2\%$                 |

**1. GENERAL INFORMATION****1.1 GENERAL DESCRIPTION OF EUT**

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------------------------|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|------------------------------------------------------------------------|--------------|--------------|--------------|---------|
| Equipment                 | Smart Phone                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| Trade Mark                | OUKITEL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| Model Name                | WP20 Pro                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| Family Model              | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| Model Difference          | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| FCC ID                    | 2ANMU-WP20PRO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| Product Description       | <table border="1"> <tr> <td>Mode Supported</td> <td> <input checked="" type="checkbox"/> 802.11a<br/> <input checked="" type="checkbox"/> 802.11n(HT20)<br/> <input checked="" type="checkbox"/> 802.11n(HT40)<br/> <input checked="" type="checkbox"/> 802.11ac(HT20)<br/> <input checked="" type="checkbox"/> 802.11ac(HT40)<br/> <input checked="" type="checkbox"/> 802.11ac(HT80) </td> </tr> <tr> <td>Data Rate</td> <td>           802.11a: 6,9,12,18,24,36,48,54Mbps;<br/>           802.11n(HT20/HT40):MCS0-MCS15;<br/>           802.11ac(VHT20): NSS1, MCS0-MCS8<br/>           802.11ac(VHT40/VHT80):NSS1, MCS0-MCS9 </td> </tr> <tr> <td>Modulation</td> <td>OFDM with BPSK/QPSK/16QAM/64QAM</td> </tr> <tr> <td>Operating Frequency Range</td> <td> <input checked="" type="checkbox"/> U-NII-1: 5150 MHz ~5250MHz<br/> <input checked="" type="checkbox"/> U-NII-2A: 5250MHz~5350MHz<br/> <input checked="" type="checkbox"/> U-NII-2C: 5470MHz~5725MHz </td> </tr> <tr> <td>Function:</td> <td> <input type="checkbox"/> Outdoor AP   <input type="checkbox"/> Indoor AP   <input type="checkbox"/> Fixed P2P<br/> <input checked="" type="checkbox"/> Client </td> </tr> <tr> <td>DFS type:</td> <td> <input type="checkbox"/> master devices<br/> <input type="checkbox"/> Slave devices with radar detection<br/> <input checked="" type="checkbox"/> Slave devices without radar detection </td> </tr> <tr> <td>Support TPC</td> <td> <input type="checkbox"/> YES<br/> <input checked="" type="checkbox"/> NO </td> </tr> <tr> <td>Antenna Type</td> <td>PIFA antenna</td> </tr> <tr> <td>Antenna Gain</td> <td>0.25dBi</td> </tr> </table> <p>Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.</p> | Mode Supported | <input checked="" type="checkbox"/> 802.11a<br><input checked="" type="checkbox"/> 802.11n(HT20)<br><input checked="" type="checkbox"/> 802.11n(HT40)<br><input checked="" type="checkbox"/> 802.11ac(HT20)<br><input checked="" type="checkbox"/> 802.11ac(HT40)<br><input checked="" type="checkbox"/> 802.11ac(HT80) | Data Rate | 802.11a: 6,9,12,18,24,36,48,54Mbps;<br>802.11n(HT20/HT40):MCS0-MCS15;<br>802.11ac(VHT20): NSS1, MCS0-MCS8<br>802.11ac(VHT40/VHT80):NSS1, MCS0-MCS9 | Modulation | OFDM with BPSK/QPSK/16QAM/64QAM | Operating Frequency Range | <input checked="" type="checkbox"/> U-NII-1: 5150 MHz ~5250MHz<br><input checked="" type="checkbox"/> U-NII-2A: 5250MHz~5350MHz<br><input checked="" type="checkbox"/> U-NII-2C: 5470MHz~5725MHz | Function: | <input type="checkbox"/> Outdoor AP <input type="checkbox"/> Indoor AP <input type="checkbox"/> Fixed P2P<br><input checked="" type="checkbox"/> Client | DFS type: | <input type="checkbox"/> master devices<br><input type="checkbox"/> Slave devices with radar detection<br><input checked="" type="checkbox"/> Slave devices without radar detection | Support TPC | <input type="checkbox"/> YES<br><input checked="" type="checkbox"/> NO | Antenna Type | PIFA antenna | Antenna Gain | 0.25dBi |
| Mode Supported            | <input checked="" type="checkbox"/> 802.11a<br><input checked="" type="checkbox"/> 802.11n(HT20)<br><input checked="" type="checkbox"/> 802.11n(HT40)<br><input checked="" type="checkbox"/> 802.11ac(HT20)<br><input checked="" type="checkbox"/> 802.11ac(HT40)<br><input checked="" type="checkbox"/> 802.11ac(HT80)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| Data Rate                 | 802.11a: 6,9,12,18,24,36,48,54Mbps;<br>802.11n(HT20/HT40):MCS0-MCS15;<br>802.11ac(VHT20): NSS1, MCS0-MCS8<br>802.11ac(VHT40/VHT80):NSS1, MCS0-MCS9                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| Modulation                | OFDM with BPSK/QPSK/16QAM/64QAM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| Operating Frequency Range | <input checked="" type="checkbox"/> U-NII-1: 5150 MHz ~5250MHz<br><input checked="" type="checkbox"/> U-NII-2A: 5250MHz~5350MHz<br><input checked="" type="checkbox"/> U-NII-2C: 5470MHz~5725MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| Function:                 | <input type="checkbox"/> Outdoor AP <input type="checkbox"/> Indoor AP <input type="checkbox"/> Fixed P2P<br><input checked="" type="checkbox"/> Client                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| DFS type:                 | <input type="checkbox"/> master devices<br><input type="checkbox"/> Slave devices with radar detection<br><input checked="" type="checkbox"/> Slave devices without radar detection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| Support TPC               | <input type="checkbox"/> YES<br><input checked="" type="checkbox"/> NO                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| Antenna Type              | PIFA antenna                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| Antenna Gain              | 0.25dBi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| Ratings                   | DC 3.87V from battery or DC 5V from Adapter.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| Adapter                   | Model:PS10UA050K2000UU<br>Input: 100-240V~50/60Hz 0.35A Max<br>Output: 5.0V---2.0A 10.0W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| Battery                   | DC 3.87V/6300mAh                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| Connecting I/O Port(s)    | Please refer to the User's Manual                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| HW Version                | TE656_MAIN_PCB_V1.1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |
| SW Version                | OUKITEL_WP20Pro_EEA_V03                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                |                                                                                                                                                                                                                                                                                                                         |           |                                                                                                                                                    |            |                                 |                           |                                                                                                                                                                                                  |           |                                                                                                                                                         |           |                                                                                                                                                                                     |             |                                                                        |              |              |              |         |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list:

| Band     | 20MHz   |           | 40MHz   |           | 80MHz   |           |
|----------|---------|-----------|---------|-----------|---------|-----------|
|          | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| U-NII-1  | 36      | 5180 MHz  | 38      | 5190 MHz  | 42      | 5210 MHz  |
|          | 40      | 5200 MHz  | 46      | 5230 MHz  | -       | -         |
|          | 44      | 5220 MHz  |         |           |         |           |
|          | 48      | 5240 MHz  |         |           |         |           |
| U-NII-2A | 52      | 5260 MHz  | 54      | 5270 MHz  | 58      | 5290 MHz  |
|          | 56      | 5280 MHz  | 62      | 5310 MHz  |         |           |
|          | 60      | 5300 MHz  |         |           |         |           |
|          | 64      | 5320 MHz  |         |           |         |           |
| U-NII-2C | 100     | 5500 MHz  | 102     | 5510 MHz  | 106     | 5530 MHz  |
|          | 104     | 5520 MHz  | 110     | 5550 MHz  | 122     | 5610 MHz  |
|          | 108     | 5540 MHz  | 118     | 5590 MHz  |         |           |
|          | 112     | 5560 MHz  | 126     | 5630 MHz  |         |           |
|          | 116     | 5580 MHz  | 134     | 5670 MHz  |         |           |
|          | 120     | 5600 MHz  |         |           |         |           |
|          | 124     | 5620 MHz  |         |           |         |           |
|          | 128     | 5640 MHz  |         |           |         |           |
|          | 132     | 5660 MHz  |         |           |         |           |
|          | 136     | 5680 MHz  |         |           |         |           |
|          | 140     | 5700 MHz  |         |           |         |           |

## 1.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| For Radiated Emission |                                                                         |
|-----------------------|-------------------------------------------------------------------------|
| Final Test Mode       | Description                                                             |
| Mode 1                | Normal Link Mode                                                        |
| Mode 2                | 802.11a / n/ ac 20 CH36/ CH40/<br>CH48/CH52/CH56/CH64/CH100/CH120/CH140 |
| Mode 3                | 802.11n40/ac40<br>CH38/CH46/CH54/CH62/CH102/CH118/CH134                 |
| Mode 4                | 802.11ac80 CH42/CH58/CH106/CH122                                        |


| For Conducted Emission |                                                                         |
|------------------------|-------------------------------------------------------------------------|
| Final Test Mode        | Description                                                             |
| Mode 1                 | Normal Link Mode                                                        |
| Mode 2                 | 802.11a / n/ ac 20 CH36/ CH40/<br>CH48/CH52/CH56/CH64/CH100/CH120/CH140 |
| Mode 3                 | 802.11n40/ac40<br>CH38/CH46/CH54/CH62/CH102/CH118/CH134                 |
| Mode 4                 | 802.11ac80 CH42/CH58/CH106/CH122                                        |

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

### 1.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode

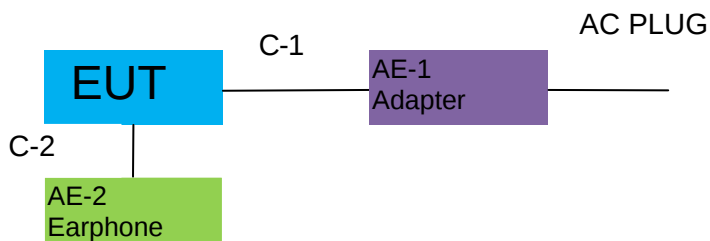

For Radiated Test Cases



For Conducted Test Cases



Note: 1. The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

**1.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Model/Type No.   | Series No. | Note        |
|------|-----------|------------------|------------|-------------|
| AE-1 | Adapter   | PS10UA050K2000UU | N/A        | Peripherals |
| AE-2 | Earphone  | N/A              | N/A        | Peripherals |
|      |           |                  |            |             |
|      |           |                  |            |             |

| Item | Cable Type     | Shielded Type | Ferrite Core | Length | Note |
|------|----------------|---------------|--------------|--------|------|
| C-1  | USB Cable      | NO            | NO           | 1.0m   |      |
| C-2  | Earphone Cable | NO            | NO           | 1.2m   |      |
| C-3  | RF Cable       | YES           | NO           | 0.1m   |      |
|      |                |               |              |        |      |
|      |                |               |              |        |      |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) During the battery power test, the battery is fully charged.

## 1.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation& Conducted Test equipment

| Item | Kind of Equipment                  | Manufacturer | Type No.    | Serial No.    | Last calibration | Calibrated until | Calibration period |
|------|------------------------------------|--------------|-------------|---------------|------------------|------------------|--------------------|
| 1    | Spectrum Analyzer                  | Agilent      | E4407B      | MY45108040    | 2022.04.06       | 2023.04.05       | 1 year             |
| 2    | Spectrum Analyzer                  | Agilent      | N9020A      | MY49100060    | 2022.04.06       | 2023.04.05       | 1 year             |
| 3    | Spectrum Analyzer                  | R&S          | FSV40       | 101417        | 2022.04.06       | 2023.04.05       | 1 year             |
| 4    | Test Receiver                      | R&S          | ESPI7       | 101318        | 2022.04.06       | 2023.04.05       | 1 year             |
| 5    | Bilog Antenna                      | TESEQ        | CBL6111D    | 31216         | 2022.03.30       | 2023.03.29       | 1 year             |
| 6    | 50Ω Coaxial Switch                 | Anritsu      | MP59B       | 6200983705    | 2020.05.11       | 2023.05.10       | 3 year             |
| 7    | Horn Antenna                       | EM           | EM-AH-10180 | 2011071402    | 2022.03.31       | 2023.03.30       | 1 year             |
| 8    | Broadband Horn Antenna             | SCHWARZBECK  | BBHA 9170   | 803           | 2021.11.07       | 2022.11.06       | 1 year             |
| 9    | Amplifier                          | EMC          | EMC051835SE | 980246        | 2022.06.17       | 2023.06.16       | 1 year             |
| 10   | Active Loop Antenna                | SCHWARZBECK  | FMZB 1519B  | 055           | 2021.11.07       | 2022.11.06       | 1 year             |
| 11   | Power Meter                        | DARE         | RPR3006W    | 15100041SN084 | 2021.11.07       | 2022.11.06       | 1 year             |
| 12   | Test Cable (9KHz-30MHz)            | N/A          | R-01        | N/A           | 2020.05.11       | 2023.05.10       | 3 year             |
| 13   | Test Cable (30MHz-1GHz)            | N/A          | R-02        | N/A           | 2020.05.11       | 2023.05.10       | 3 year             |
| 14   | High Test Cable(1G-40GHz)          | N/A          | R-03        | N/A           | 2022.06.17       | 2025.06.16       | 3 year             |
| 15   | Filter                             | TRILTHIC     | 2400MHz     | 29            | 2021.11.07       | 2022.11.06       | 1 year             |
| 16   | temporary antenna connector (Note) | NTS          | R001        | N/A           | N/A              | N/A              | N/A                |

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test  
And this temporary antenna connector is listed within the instrument list

## AC Conduction Test equipment

| Item | Kind of Equipment       | Manufacturer | Type No.  | Serial No. | Last calibration | Calibrated until | Calibration period |
|------|-------------------------|--------------|-----------|------------|------------------|------------------|--------------------|
| 1    | Test Receiver           | R&S          | ESCI      | 101160     | 2022.04.06       | 2023.04.05       | 1 year             |
| 2    | LISN                    | R&S          | ENV216    | 101313     | 2022.04.06       | 2023.04.05       | 1 year             |
| 3    | LISN                    | SCHWARZBECK  | NNLK 8129 | 8129245    | 2022.04.06       | 2023.04.05       | 1 year             |
| 4    | 50Ω Coaxial Switch      | ANRITSU CORP | MP59B     | 6200983704 | 2020.05.11       | 2023.05.10       | 3 year             |
| 5    | Test Cable (9KHz-30MHz) | N/A          | C01       | N/A        | 2020.05.11       | 2023.05.10       | 3 year             |
| 6    | Test Cable (9KHz-30MHz) | N/A          | C02       | N/A        | 2020.05.11       | 2023.05.10       | 3 year             |
| 7    | Test Cable (9KHz-30MHz) | N/A          | C03       | N/A        | 2020.05.11       | 2023.05.10       | 3 year             |

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& Aux Equipment which is scheduled for calibration every 3 years.

## 2. EMC EMISSION TEST

### 2.1 CONDUCTED EMISSION MEASUREMENT

#### 2.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a)

#### 2.1.2 CONFORMANCE LIMIT

| Frequency(MHz) | Conducted Emission Limit |         |
|----------------|--------------------------|---------|
|                | Quasi-peak               | Average |
| 0.15-0.5       | 66-56*                   | 56-46*  |
| 0.5-5.0        | 56                       | 46      |
| 5.0-30.0       | 60                       | 50      |

Note: 1. \*Decreases with the logarithm of the frequency  
2. The lower limit shall apply at the transition frequencies  
3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 2.1.3 TEST CONFIGURATION

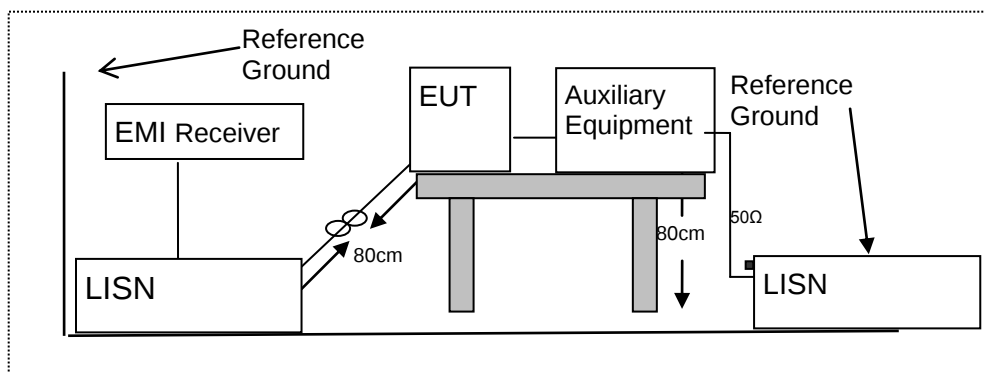

#### 2.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

|                |                                 |                     |              |
|----------------|---------------------------------|---------------------|--------------|
| EUT :          | Smart Phone                     | Model Name. :       | WP20 Pro     |
| Temperature :  | 26 °C                           | Relative Humidity : | 56%          |
| Pressure :     | 1010hPa                         | Phase :             | L            |
| Test Voltage : | DC 5V from Adapter AC 120V/60Hz | Test Mode :         | Mode 1(5.2G) |

| Frequency<br>(MHz) | Reading Level<br>(dBμV) | Correct Factor<br>(dB) | Measure-ment<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark |
|--------------------|-------------------------|------------------------|------------------------|------------------|----------------|--------|
| 0.1539             | 49.74                   | 9.60                   | 59.34                  | 65.78            | -6.44          | QP     |
| 0.1539             | 39.73                   | 9.60                   | 49.33                  | 55.78            | -6.45          | AVG    |
| 0.1940             | 48.65                   | 9.61                   | 58.26                  | 63.86            | -5.60          | QP     |
| 0.1940             | 38.64                   | 9.61                   | 48.25                  | 53.86            | -5.61          | AVG    |
| 0.4299             | 40.01                   | 9.66                   | 49.67                  | 57.25            | -7.58          | QP     |
| 0.4299             | 29.70                   | 9.66                   | 39.36                  | 47.25            | -7.89          | AVG    |
| 0.5299             | 38.38                   | 9.66                   | 48.04                  | 56.00            | -7.96          | QP     |
| 0.5299             | 28.59                   | 9.66                   | 38.25                  | 46.00            | -7.75          | AVG    |
| 2.4060             | 35.45                   | 9.70                   | 45.15                  | 56.00            | -10.85         | QP     |
| 2.4060             | 25.63                   | 9.70                   | 35.33                  | 46.00            | -10.67         | AVG    |
| 3.6979             | 34.62                   | 9.74                   | 44.36                  | 56.00            | -11.64         | QP     |
| 3.6979             | 24.28                   | 9.74                   | 34.02                  | 46.00            | -11.98         | AVG    |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

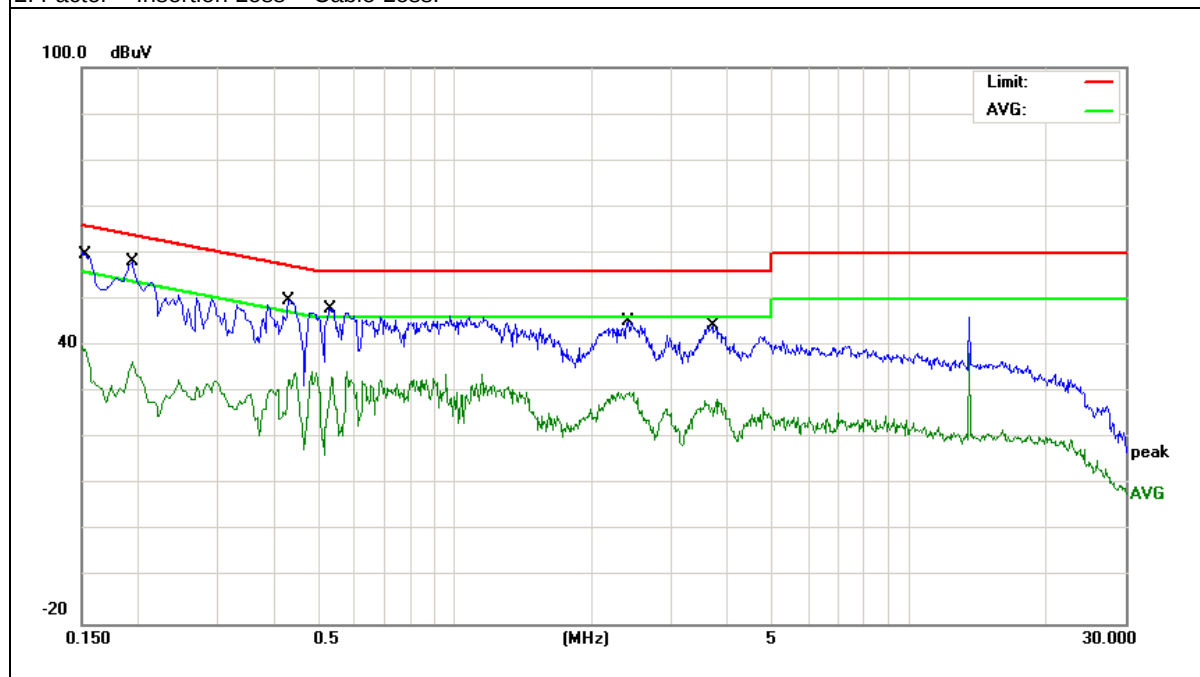


|                |                                 |                     |              |
|----------------|---------------------------------|---------------------|--------------|
| EUT :          | Smart Phone                     | Model Name. :       | WP20 Pro     |
| Temperature :  | 26 °C                           | Relative Humidity : | 56%          |
| Pressure :     | 1010hPa                         | Phase :             | N            |
| Test Voltage : | DC 5V from Adapter AC 120V/60Hz | Test Mode :         | Mode 1(5.2G) |

| Frequency<br>(MHz) | Reading Level<br>(dBμV) | Correct Factor<br>(dB) | Measure-ment<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark |
|--------------------|-------------------------|------------------------|------------------------|------------------|----------------|--------|
| 0.1539             | 48.40                   | 9.65                   | 58.05                  | 65.78            | -7.73          | QP     |
| 0.1539             | 38.57                   | 9.65                   | 48.22                  | 55.78            | -7.56          | AVG    |
| 0.1980             | 44.40                   | 9.62                   | 54.02                  | 63.69            | -9.67          | QP     |
| 0.1980             | 34.40                   | 9.62                   | 44.02                  | 53.69            | -9.67          | AVG    |
| 0.2898             | 40.60                   | 9.64                   | 50.24                  | 60.53            | -10.29         | QP     |
| 0.2898             | 30.72                   | 9.64                   | 40.36                  | 50.53            | -10.17         | AVG    |
| 1.0220             | 36.36                   | 9.69                   | 46.05                  | 56.00            | -9.95          | QP     |
| 1.0220             | 26.91                   | 9.69                   | 36.60                  | 46.00            | -9.40          | AVG    |
| 2.4820             | 36.79                   | 9.68                   | 46.47                  | 56.00            | -9.53          | QP     |
| 2.4820             | 26.34                   | 9.68                   | 36.02                  | 46.00            | -9.98          | AVG    |
| 3.5899             | 36.39                   | 9.71                   | 46.10                  | 56.00            | -9.90          | QP     |
| 3.5899             | 26.87                   | 9.71                   | 36.58                  | 46.00            | -9.42          | AVG    |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

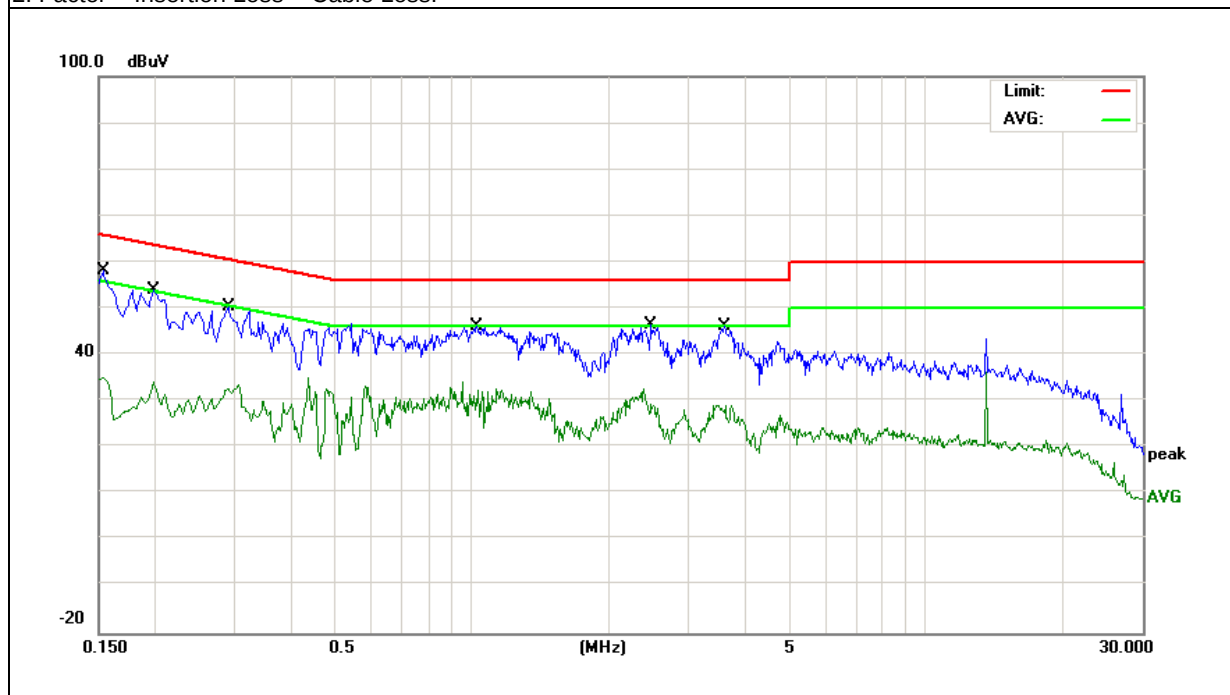


|                |                                 |                     |              |
|----------------|---------------------------------|---------------------|--------------|
| EUT :          | Smart Phone                     | Model Name. :       | WP20 Pro     |
| Temperature :  | 26 °C                           | Relative Humidity : | 56%          |
| Pressure :     | 1010hPa                         | Phase :             | L            |
| Test Voltage : | DC 5V from Adapter AC 120V/60Hz | Test Mode :         | Mode 1(5.3G) |

| Frequency<br>(MHz) | Reading Level<br>(dBμV) | Correct Factor<br>(dB) | Measure-ment<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark |
|--------------------|-------------------------|------------------------|------------------------|------------------|----------------|--------|
| 0.1859             | 41.82                   | 9.61                   | 51.43                  | 64.21            | -12.78         | QP     |
| 0.1859             | 31.41                   | 9.61                   | 41.02                  | 54.21            | -13.19         | AVG    |
| 0.2379             | 40.52                   | 9.63                   | 50.15                  | 62.17            | -12.02         | QP     |
| 0.2379             | 30.69                   | 9.63                   | 40.32                  | 52.17            | -11.85         | AVG    |
| 0.4778             | 37.34                   | 9.66                   | 47.00                  | 56.38            | -9.38          | QP     |
| 0.4778             | 27.69                   | 9.66                   | 37.35                  | 46.38            | -9.03          | AVG    |
| 1.1378             | 36.56                   | 9.68                   | 46.24                  | 56.00            | -9.76          | QP     |
| 1.1378             | 26.68                   | 9.68                   | 36.36                  | 46.00            | -9.64          | AVG    |
| 2.1819             | 35.36                   | 9.69                   | 45.05                  | 56.00            | -10.95         | QP     |
| 2.1819             | 25.76                   | 9.69                   | 35.45                  | 46.00            | -10.55         | AVG    |
| 3.5859             | 35.35                   | 9.74                   | 45.09                  | 56.00            | -10.91         | QP     |
| 3.5859             | 25.59                   | 9.74                   | 35.33                  | 46.00            | -10.67         | AVG    |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

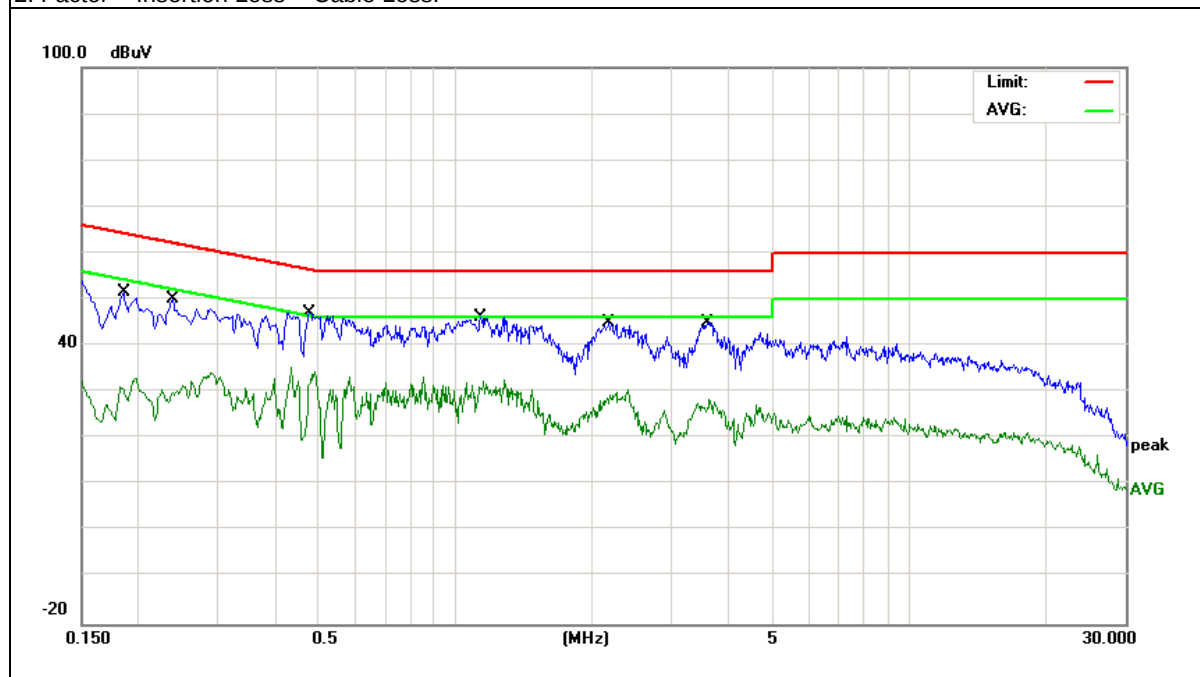


|                |                                 |                     |              |
|----------------|---------------------------------|---------------------|--------------|
| EUT :          | Smart Phone                     | Model Name. :       | WP20 Pro     |
| Temperature :  | 26 °C                           | Relative Humidity : | 56%          |
| Pressure :     | 1010hPa                         | Phase :             | N            |
| Test Voltage : | DC 5V from Adapter AC 120V/60Hz | Test Mode :         | Mode 1(5.3G) |

| Frequency | Reading Level | Correct Factor | Measure-ment | Limits | Margin | Remark |
|-----------|---------------|----------------|--------------|--------|--------|--------|
| (MHz)     | (dBμV)        | (dB)           | (dBμV)       | (dBμV) | (dB)   |        |
| 0.1980    | 42.36         | 9.62           | 51.98        | 63.69  | -11.71 | QP     |
| 0.1980    | 31.71         | 9.62           | 41.33        | 53.69  | -12.36 | AVG    |
| 0.2898    | 41.02         | 9.64           | 50.66        | 60.53  | -9.87  | QP     |
| 0.2898    | 30.61         | 9.64           | 40.25        | 50.53  | -10.28 | AVG    |
| 0.4299    | 37.76         | 9.67           | 47.43        | 57.25  | -9.82  | QP     |
| 0.4299    | 27.66         | 9.67           | 37.33        | 47.25  | -9.92  | AVG    |
| 1.1737    | 35.83         | 9.67           | 45.50        | 56.00  | -10.50 | QP     |
| 1.1737    | 25.69         | 9.67           | 35.36        | 46.00  | -10.64 | AVG    |
| 2.4739    | 35.43         | 9.68           | 45.11        | 56.00  | -10.89 | QP     |
| 2.4739    | 25.47         | 9.68           | 35.15        | 46.00  | -10.85 | AVG    |
| 3.6659    | 35.67         | 9.71           | 45.38        | 56.00  | -10.62 | QP     |
| 3.6659    | 25.62         | 9.71           | 35.33        | 46.00  | -10.67 | AVG    |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

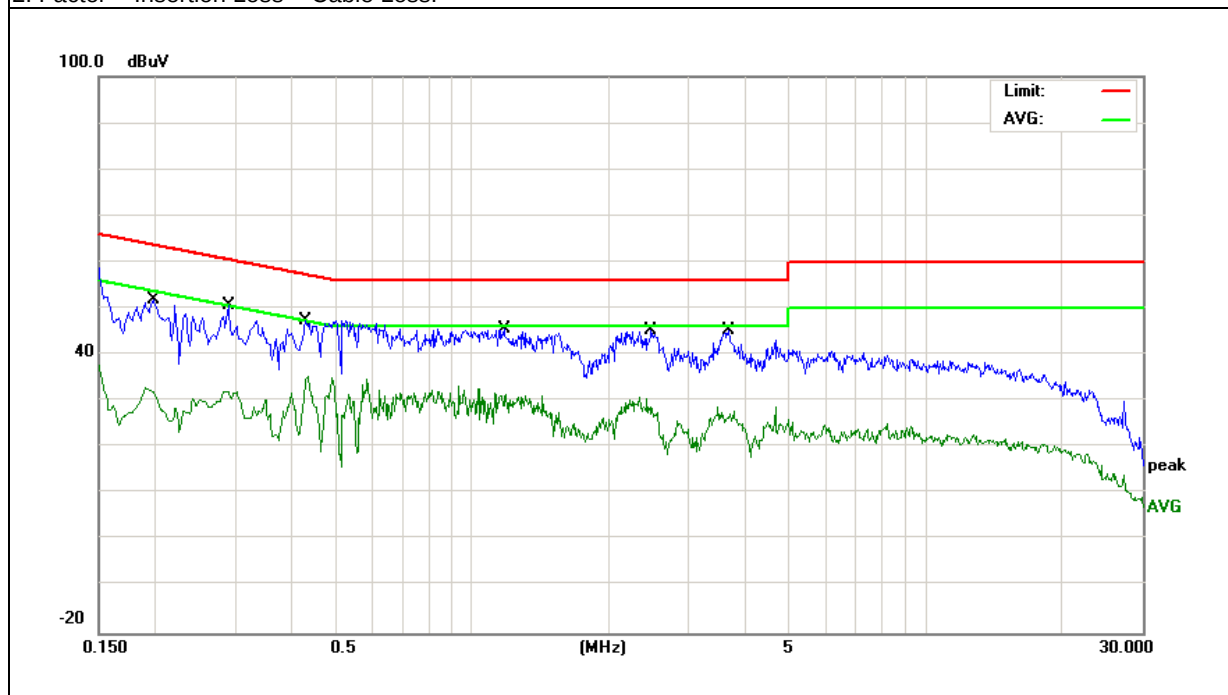


|                |                                 |                     |              |
|----------------|---------------------------------|---------------------|--------------|
| EUT :          | Smart Phone                     | Model Name. :       | WP20 Pro     |
| Temperature :  | 26 °C                           | Relative Humidity : | 56%          |
| Pressure :     | 1010hPa                         | Phase :             | L            |
| Test Voltage : | DC 5V from Adapter AC 120V/60Hz | Test Mode :         | Mode 1(5.6G) |

| Frequency<br>(MHz) | Reading Level<br>(dBμV) | Correct Factor<br>(dB) | Measure-ment<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark |
|--------------------|-------------------------|------------------------|------------------------|------------------|----------------|--------|
| 0.4858             | 40.45                   | 9.66                   | 50.11                  | 56.24            | -6.13          | QP     |
| 0.4858             | 30.36                   | 9.66                   | 40.02                  | 46.24            | -6.22          | AVG    |
| 0.5898             | 39.05                   | 9.67                   | 48.72                  | 56.00            | -7.28          | QP     |
| 0.5898             | 28.66                   | 9.67                   | 38.33                  | 46.00            | -7.67          | AVG    |
| 1.3300             | 38.77                   | 9.68                   | 48.45                  | 56.00            | -7.55          | QP     |
| 1.3300             | 28.77                   | 9.68                   | 38.45                  | 46.00            | -7.55          | AVG    |
| 2.4100             | 37.88                   | 9.70                   | 47.58                  | 56.00            | -8.42          | QP     |
| 2.4100             | 27.35                   | 9.70                   | 37.05                  | 46.00            | -8.95          | AVG    |
| 3.6619             | 37.16                   | 9.74                   | 46.90                  | 56.00            | -9.10          | QP     |
| 3.6619             | 26.59                   | 9.74                   | 36.33                  | 46.00            | -9.67          | AVG    |
| 26.0018            | 40.47                   | 10.31                  | 50.78                  | 60.00            | -9.22          | QP     |
| 26.0018            | 29.94                   | 10.31                  | 40.25                  | 50.00            | -9.75          | AVG    |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

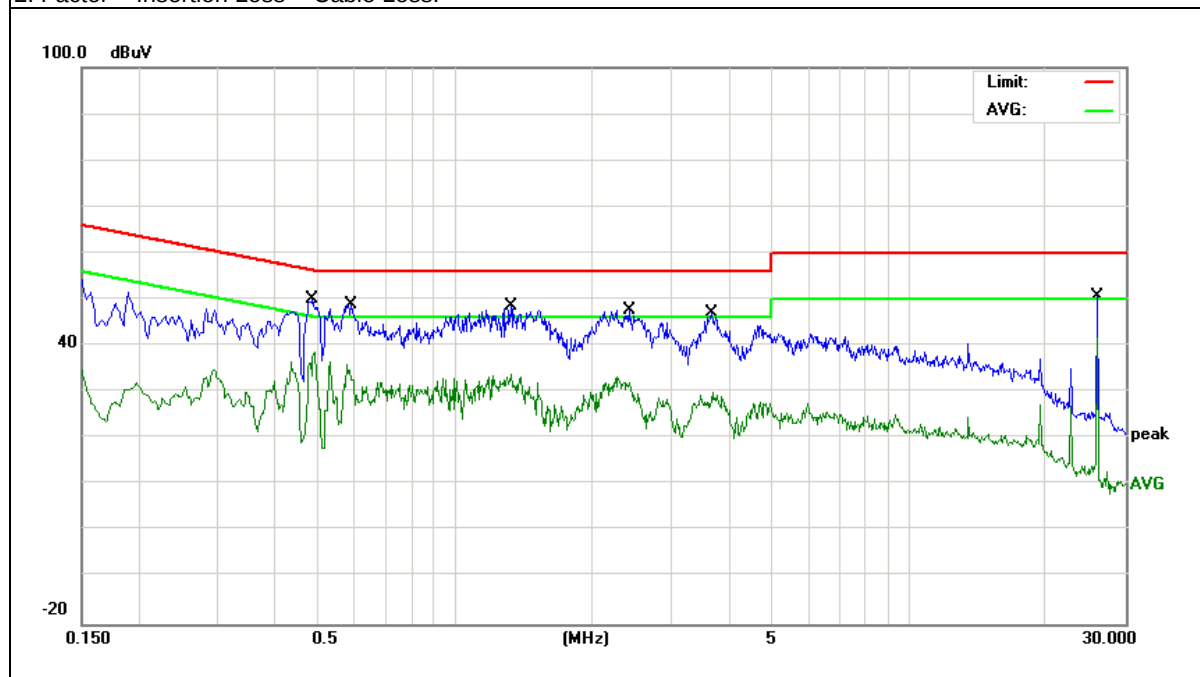


|                |                                 |                     |              |
|----------------|---------------------------------|---------------------|--------------|
| EUT :          | Smart Phone                     | Model Name. :       | WP20 Pro     |
| Temperature :  | 26 °C                           | Relative Humidity : | 56%          |
| Pressure :     | 1010hPa                         | Phase :             | N            |
| Test Voltage : | DC 5V from Adapter AC 120V/60Hz | Test Mode :         | Mode 1(5.6G) |

| Frequency<br>(MHz) | Reading Level<br>(dBμV) | Correct Factor<br>(dB) | Measure-ment<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Remark |
|--------------------|-------------------------|------------------------|------------------------|------------------|----------------|--------|
| 0.1980             | 40.04                   | 9.62                   | 49.66                  | 63.69            | -14.03         | QP     |
| 0.1980             | 29.75                   | 9.62                   | 39.37                  | 53.69            | -14.32         | AVG    |
| 0.4858             | 37.10                   | 9.66                   | 46.76                  | 56.24            | -9.48          | QP     |
| 0.4858             | 26.66                   | 9.66                   | 36.32                  | 46.24            | -9.92          | AVG    |
| 1.0260             | 35.95                   | 9.69                   | 45.64                  | 56.00            | -10.36         | QP     |
| 1.0260             | 25.56                   | 9.69                   | 35.25                  | 46.00            | -10.75         | AVG    |
| 2.3860             | 35.57                   | 9.68                   | 45.25                  | 56.00            | -10.75         | QP     |
| 2.3860             | 25.47                   | 9.68                   | 35.15                  | 46.00            | -10.85         | AVG    |
| 3.5219             | 34.48                   | 9.71                   | 44.19                  | 56.00            | -11.81         | QP     |
| 3.5219             | 24.31                   | 9.71                   | 34.02                  | 46.00            | -11.98         | AVG    |
| 26.0018            | 38.86                   | 10.22                  | 49.08                  | 60.00            | -10.92         | QP     |
| 26.0018            | 29.11                   | 10.22                  | 39.33                  | 50.00            | -10.67         | AVG    |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

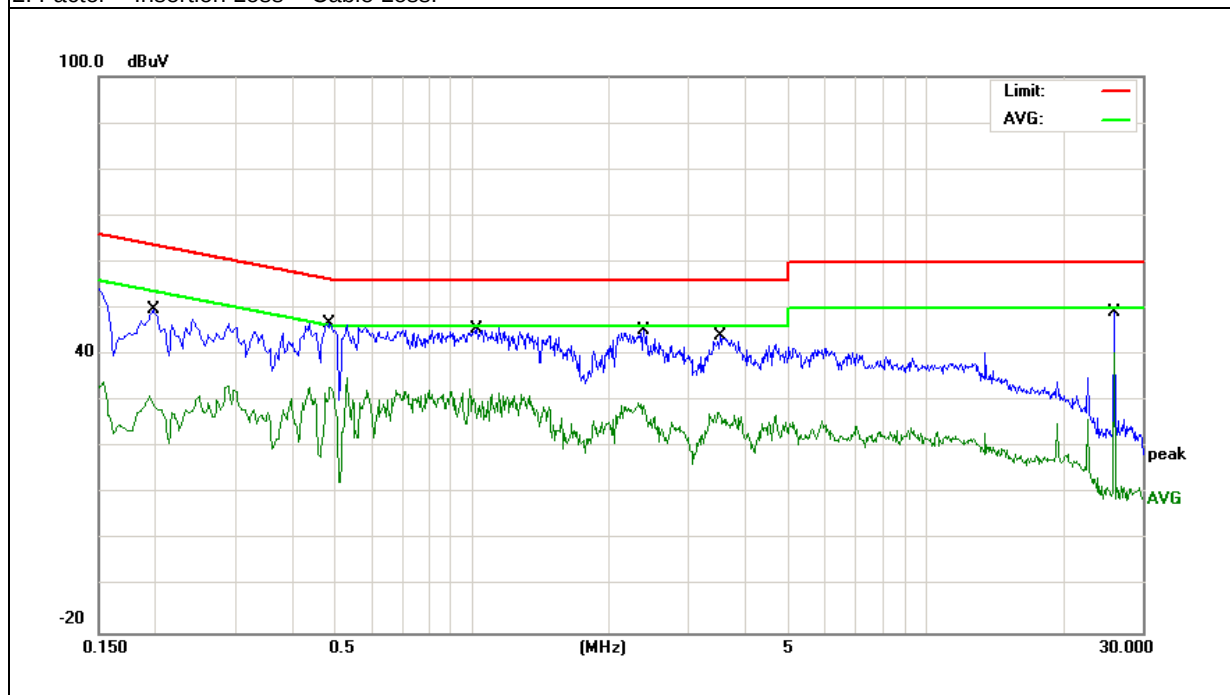

## 2.2 RADIATED EMISSION MEASUREMENT

### 2.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

### 2.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| 0.495-0.505       | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (2)         |
| 13.36-13.41       |                     |               |             |

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Restricted Frequency(MHz) | Field Strength (μV/m) | Field Strength (dBμV/m) | Measurement Distance |
|---------------------------|-----------------------|-------------------------|----------------------|
| 0.009-0.490               | 2400/F(KHz)           | 20 log (uV/m)           | 300                  |
| 0.490-1.705               | 24000/F(KHz)          | 20 log (uV/m)           | 30                   |
| 1.705-30.0                | 30                    | 29.5                    | 30                   |
| 30-88                     | 100                   | 40                      | 3                    |
| 88-216                    | 150                   | 43.5                    | 3                    |
| 216-960                   | 200                   | 46                      | 3                    |
| Above 960                 | 500                   | 54                      | 3                    |

Limits of Radiated Emission Measurement(Above 1000MHz)

| Frequency(MHz) | Class B (dBuV/m) (at 3M) |         |
|----------------|--------------------------|---------|
|                | PEAK                     | AVERAGE |
| Above 1000     | 74                       | 54      |

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. For Frequency 9kHz~30MHz:

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

For Frequency above 30MHz:

Distance extrapolation factor =20log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

### 2.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

## 2.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

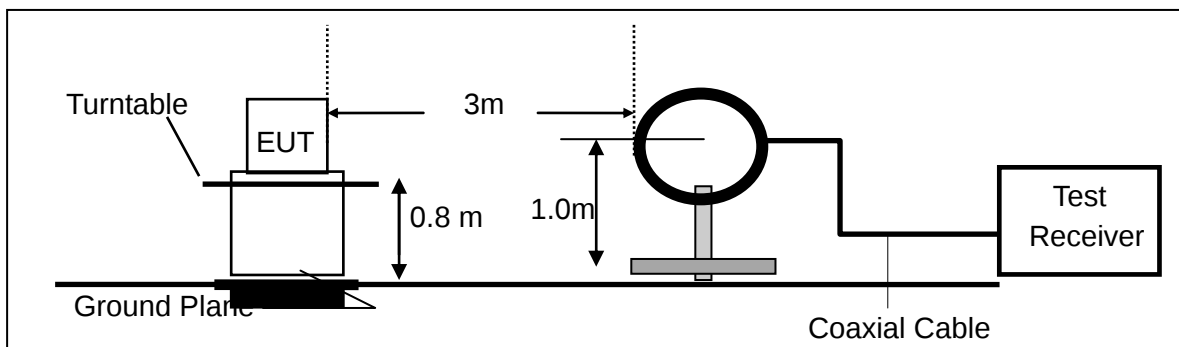

(b) For radiated emissions from 30MHz to 1000MHz

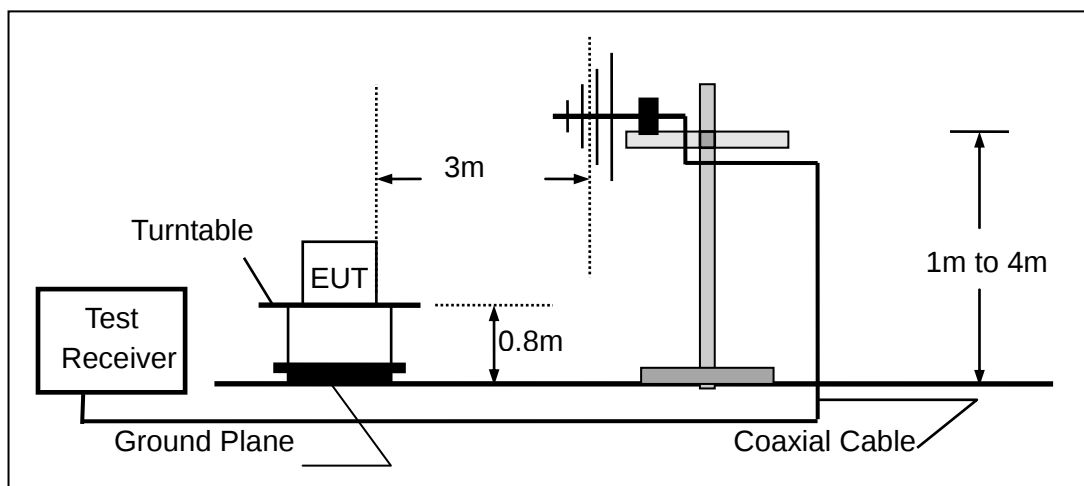

(c) For radiated emissions above 1000MHz

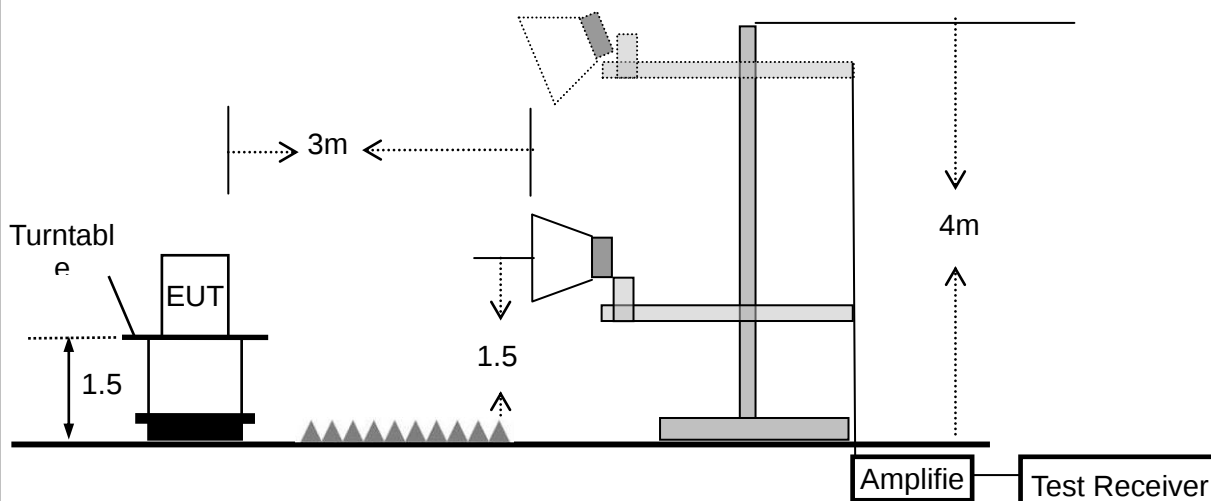

## 2.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 1000 MHz                                         |
| Stop Frequency                        | 10th carrier harmonic                            |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

| Frequency Band (MHz) | Function | Resolution bandwidth | Video Bandwidth |
|----------------------|----------|----------------------|-----------------|
| 30 to 1000           | QP       | 120 kHz              | 300 kHz         |
| Above 1000           | Peak     | 1 MHz                | 1 MHz           |
|                      | Average  | 1 MHz                | 10 Hz           |

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

## 2.2.6 TEST RESULTS (9KHZ – 30 MHZ)

|               |             |                     |          |
|---------------|-------------|---------------------|----------|
| EUT :         | Smart Phone | Model Name :        | WP20 Pro |
| Temperature : | 26 °C       | Relative Humidity : | 54%      |
| Pressure:     | 1010 hPa    | Test Voltage :      | DC 3.87V |
| Test Mode :   | TX          | Polarization :      | --       |

| Freq. | Reading  | Limit    | Margin | State |
|-------|----------|----------|--------|-------|
| (MHz) | (dBuV/m) | (dBuV/m) | (dB)   | P/F   |
| --    | --       | --       | --     | N/A   |
| --    | --       | --       | --     | N/A   |

### NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


## 2.2.7 TEST RESULTS (30MHZ – 1GHZ)

|               |                               |                     |          |
|---------------|-------------------------------|---------------------|----------|
| EUT :         | Smart Phone                   | Model Name :        | WP20 Pro |
| Temperature : | 26 °C                         | Relative Humidity : | 54%      |
| Pressure :    | 1010 hPa                      | Test Voltage :      | DC 3.87V |
| Test Mode :   | TX(5.2G)- 802.11ac40 (Low CH) |                     |          |

| Polar (H/V) | Frequency (MHz) | Meter Reading (dBuV) | Factor (dB) | Emission Level (dBuV/m) | Limits (dBuV/m) | Margin (dB) | Remark |
|-------------|-----------------|----------------------|-------------|-------------------------|-----------------|-------------|--------|
| V           | 41.2765         | 12.04                | 13.94       | 25.98                   | 40.00           | -14.02      | QP     |
| V           | 54.2610         | 15.42                | 7.03        | 22.45                   | 40.00           | -17.55      | QP     |
| V           | 87.7248         | 14.81                | 10.29       | 25.10                   | 40.00           | -14.90      | QP     |
| V           | 123.6985        | 9.18                 | 12.96       | 22.14                   | 43.50           | -21.36      | QP     |
| V           | 186.4409        | 14.33                | 10.67       | 25.00                   | 43.50           | -18.50      | QP     |
| V           | 724.2611        | 12.63                | 22.47       | 35.10                   | 46.00           | -10.90      | QP     |

## Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

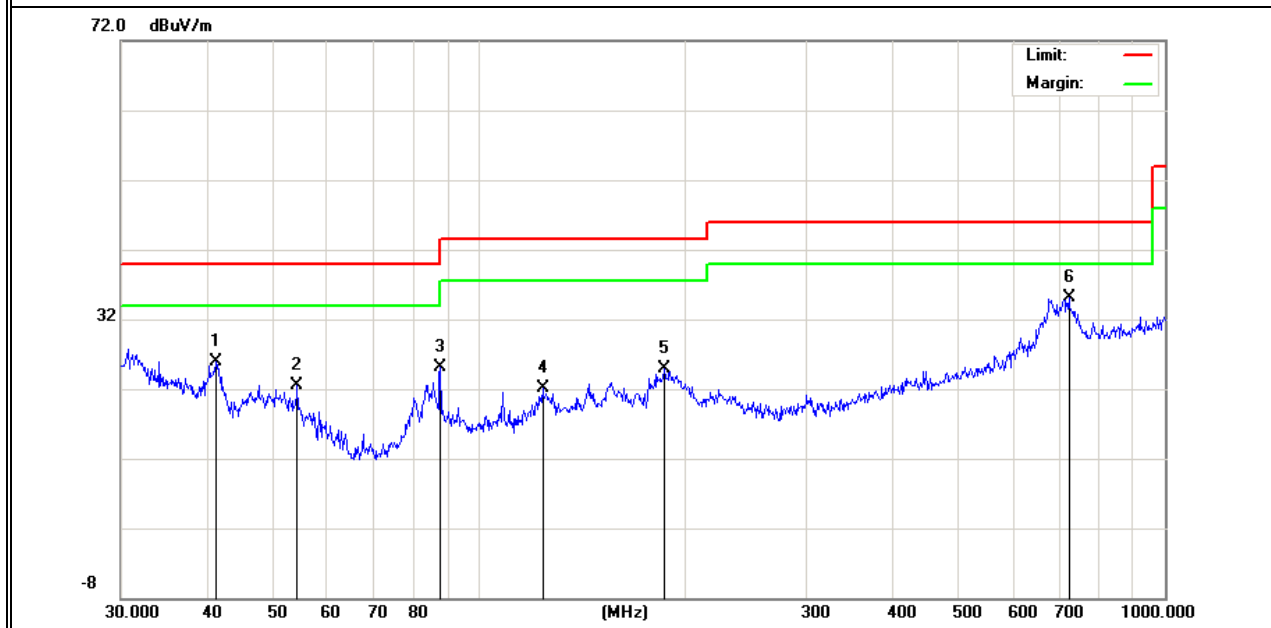

| Polar<br>(H/V) | Frequency | Meter<br>Reading | Factor | Emission<br>Level | Limits   | Margin | Remark |
|----------------|-----------|------------------|--------|-------------------|----------|--------|--------|
|                | (MHz)     | (dBuV)           | (dB)   | (dBuV/m)          | (dBuV/m) | (dB)   |        |
| H              | 54.0711   | 9.83             | 7.03   | 16.86             | 40.00    | -23.14 | QP     |
| H              | 136.9391  | 5.85             | 13.00  | 18.85             | 43.50    | -24.65 | QP     |
| H              | 189.7384  | 10.40            | 10.28  | 20.68             | 43.50    | -22.82 | QP     |
| H              | 244.2321  | 10.21            | 12.65  | 22.86             | 46.00    | -23.14 | QP     |
| H              | 407.5144  | 8.82             | 17.50  | 26.32             | 46.00    | -19.68 | QP     |
| H              | 716.6820  | 10.17            | 22.07  | 32.24             | 46.00    | -13.76 | QP     |

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

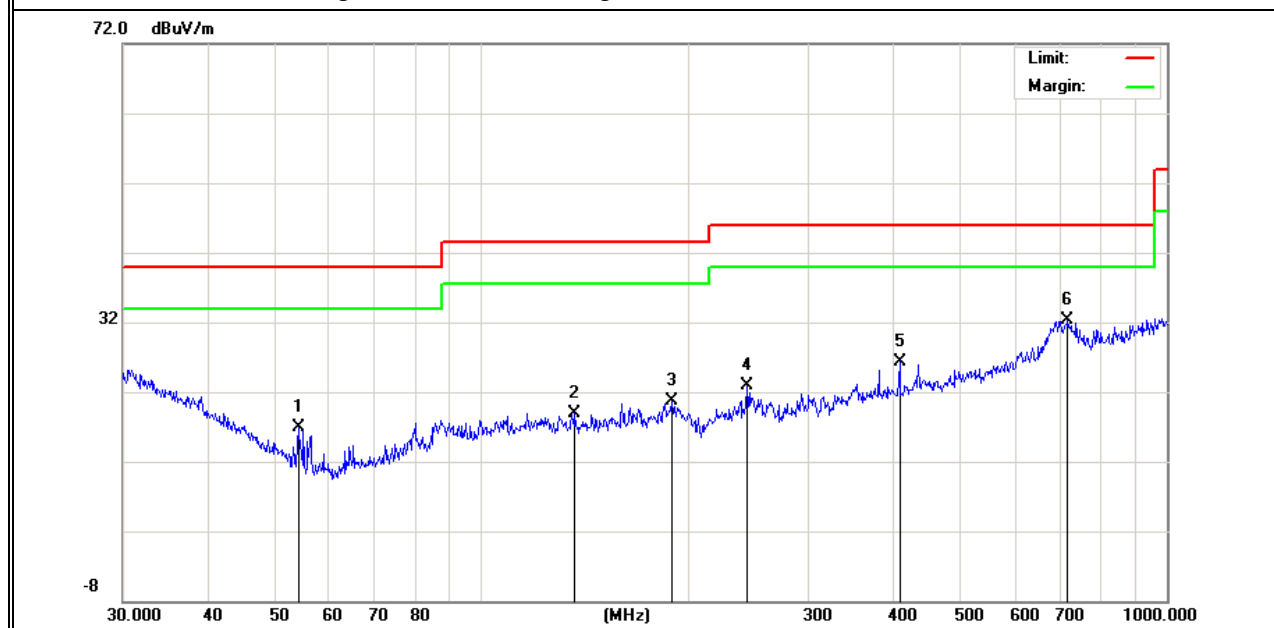


|               |                                 |                     |          |
|---------------|---------------------------------|---------------------|----------|
| EUT :         | Smart Phone                     | Model Name :        | WP20 Pro |
| Temperature : | 26 °C                           | Relative Humidity : | 54%      |
| Pressure :    | 1010 hPa                        | Test Voltage :      | DC 3.87V |
| Test Mode :   | TX(5.3G)- 802.11n40 (Middle CH) |                     |          |

| Polar<br>(H/V) | Frequency | Meter<br>Reading | Factor | Emission<br>Level | Limits   | Margin | Remark |
|----------------|-----------|------------------|--------|-------------------|----------|--------|--------|
|                | (MHz)     | (dBuV)           | (dB)   | (dBuV/m)          | (dBuV/m) | (dB)   |        |
| V              | 30.5305   | 7.70             | 19.99  | 27.69             | 40.00    | -12.31 | QP     |
| V              | 40.7014   | 10.97            | 14.27  | 25.24             | 40.00    | -14.76 | QP     |
| V              | 50.9420   | 14.84            | 8.84   | 23.68             | 40.00    | -16.32 | QP     |
| V              | 85.5977   | 12.99            | 10.25  | 23.24             | 40.00    | -16.76 | QP     |
| V              | 191.7450  | 14.47            | 10.21  | 24.68             | 43.50    | -18.82 | QP     |
| V              | 729.3582  | 12.63            | 22.26  | 34.89             | 46.00    | -11.11 | QP     |

**Remark:**


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

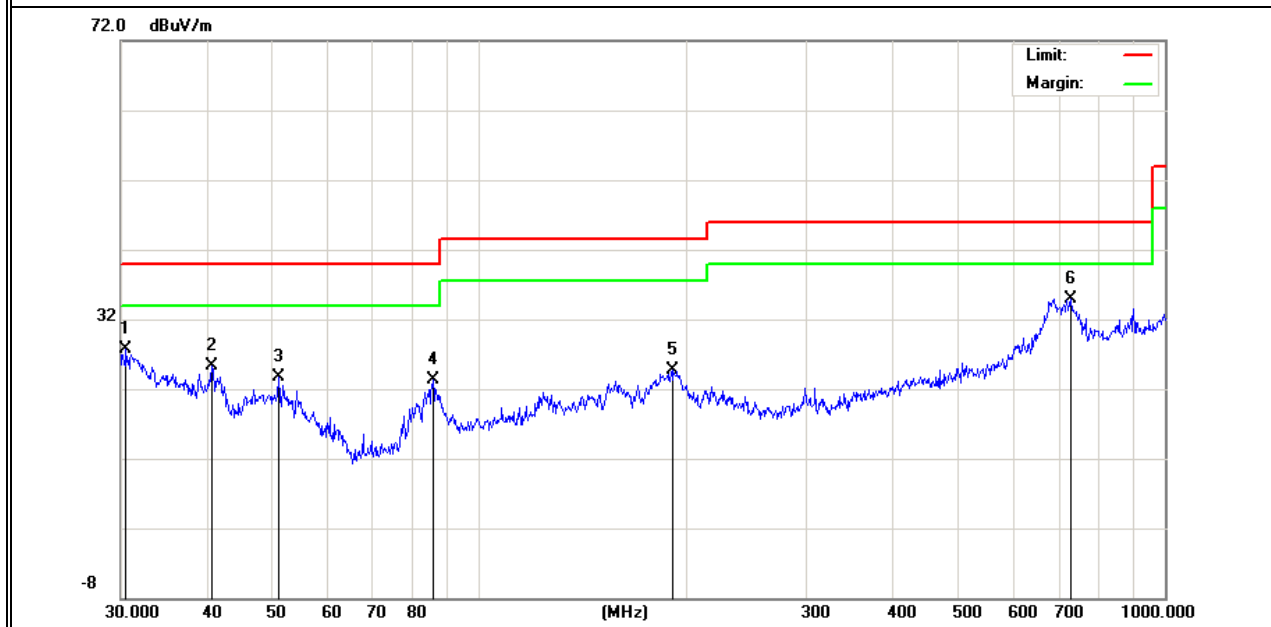

| Polar<br>(H/V) | Frequency | Meter<br>Reading | Factor | Emission<br>Level | Limits   | Margin | Remark |
|----------------|-----------|------------------|--------|-------------------|----------|--------|--------|
|                | (MHz)     | (dBuV)           | (dB)   | (dBuV/m)          | (dBuV/m) | (dB)   |        |
| H              | 30.6377   | 5.37             | 19.99  | 25.36             | 40.00    | -14.64 | QP     |
| H              | 53.6931   | 12.15            | 7.11   | 19.26             | 40.00    | -20.74 | QP     |
| H              | 84.7018   | 9.28             | 10.49  | 19.77             | 40.00    | -20.23 | QP     |
| H              | 183.8438  | 10.46            | 10.71  | 21.17             | 43.50    | -22.33 | QP     |
| H              | 407.5144  | 8.82             | 17.50  | 26.32             | 46.00    | -19.68 | QP     |
| H              | 716.6820  | 10.17            | 22.07  | 32.24             | 46.00    | -13.76 | QP     |

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

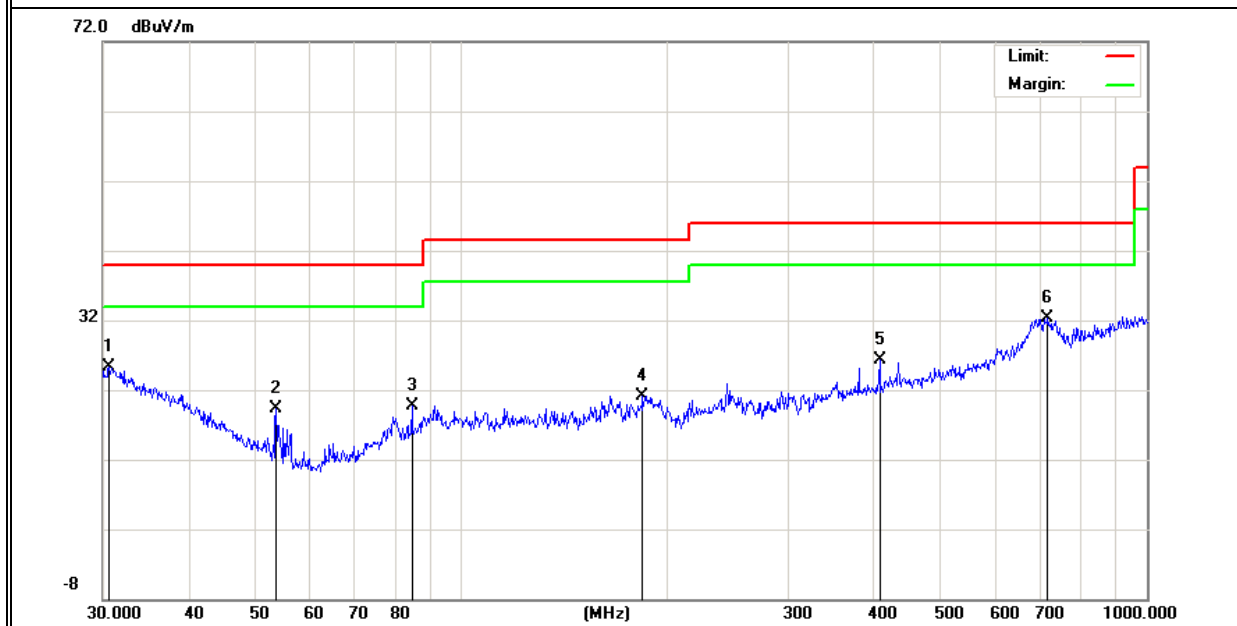


|               |                              |                     |          |
|---------------|------------------------------|---------------------|----------|
| EUT :         | Smart Phone                  | Model Name :        | WP20 Pro |
| Temperature : | 26 °C                        | Relative Humidity : | 54%      |
| Pressure :    | 1010 hPa                     | Test Voltage :      | DC 3.87V |
| Test Mode :   | TX(5.6G)- 802.11n20 (Low CH) |                     |          |

| Polar<br>(H/V) | Frequency | Meter<br>Reading | Factor | Emission<br>Level | Limits   | Margin | Remark |
|----------------|-----------|------------------|--------|-------------------|----------|--------|--------|
|                | (MHz)     | (dBuV)           | (dB)   | (dBuV/m)          | (dBuV/m) | (dB)   |        |
| V              | 32.6340   | 7.71             | 18.68  | 26.39             | 40.00    | -13.61 | QP     |
| V              | 50.9420   | 14.84            | 8.84   | 23.68             | 40.00    | -16.32 | QP     |
| V              | 85.5977   | 12.99            | 10.25  | 23.24             | 40.00    | -16.76 | QP     |
| V              | 191.7450  | 14.47            | 10.21  | 24.68             | 43.50    | -18.82 | QP     |
| V              | 308.9126  | 7.84             | 14.24  | 22.08             | 46.00    | -23.92 | QP     |
| V              | 696.8567  | 12.91            | 22.04  | 34.95             | 46.00    | -11.05 | QP     |

**Remark:**


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

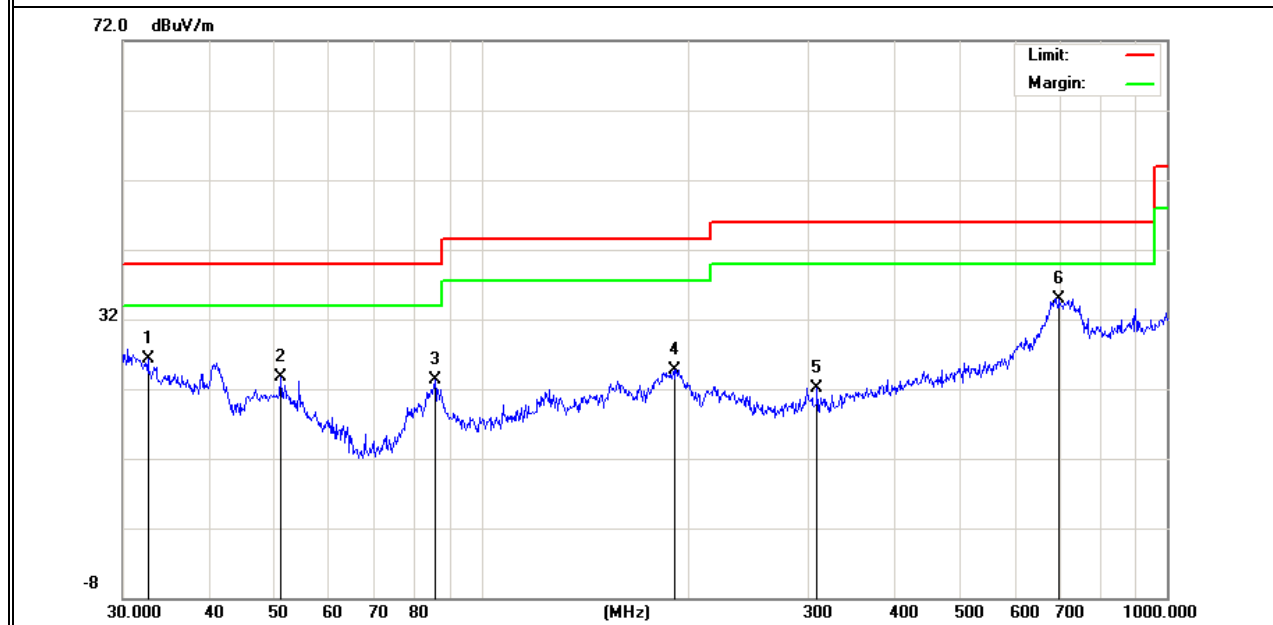

| Polar<br>(H/V) | Frequency | Meter<br>Reading | Factor | Emission<br>Level | Limits   | Margin | Remark |
|----------------|-----------|------------------|--------|-------------------|----------|--------|--------|
|                | (MHz)     | (dBuV)           | (dB)   | (dBuV/m)          | (dBuV/m) | (dB)   |        |
| H              | 30.7455   | 6.05             | 19.99  | 26.04             | 40.00    | -13.96 | QP     |
| H              | 83.8156   | 5.84             | 10.26  | 16.10             | 40.00    | -23.90 | QP     |
| H              | 194.4534  | 10.22            | 10.57  | 20.79             | 43.50    | -22.71 | QP     |
| H              | 262.8955  | 8.88             | 13.61  | 22.49             | 46.00    | -23.51 | QP     |
| H              | 434.0651  | 9.11             | 18.06  | 27.17             | 46.00    | -18.83 | QP     |
| H              | 704.2261  | 9.92             | 22.07  | 31.99             | 46.00    | -14.01 | QP     |

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

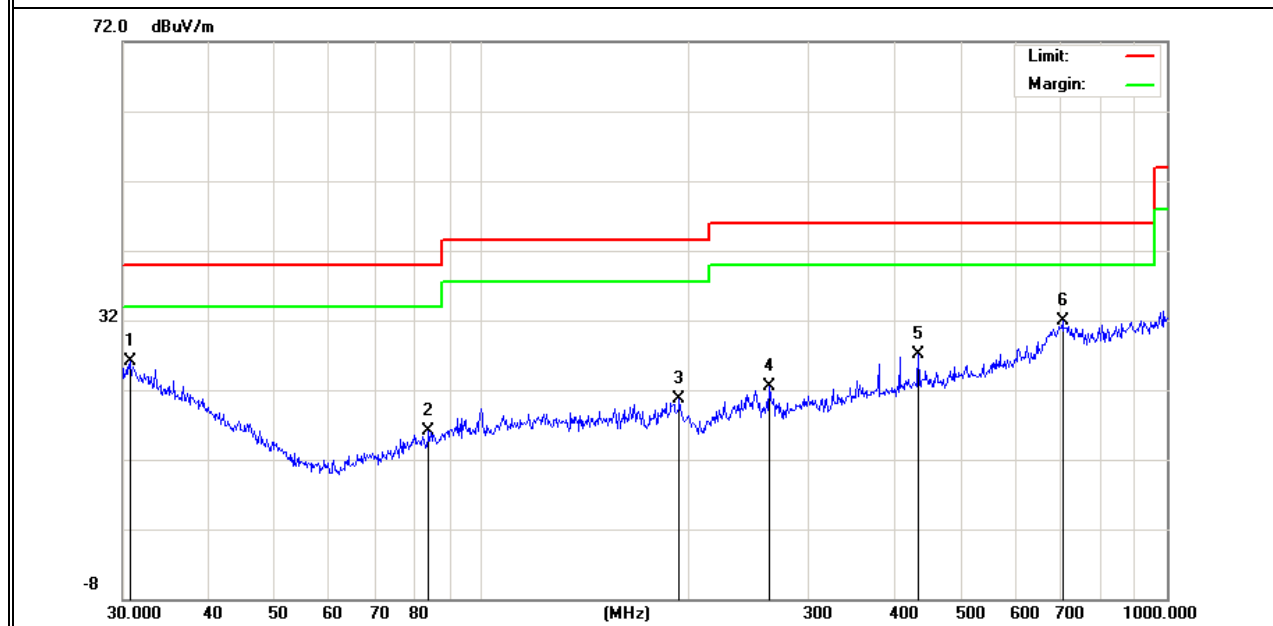

Note: All modes have been tested, just the the worst mode has been recorded in the report.

## 2.2.8 TEST RESULTS (1GHz-18GHz)

|               |                                     |                     |          |
|---------------|-------------------------------------|---------------------|----------|
| EUT :         | Smart Phone                         | Model Name. :       | WP20 Pro |
| Temperature : | 20 °C                               | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                            | Test Voltage :      | DC 3.87V |
| Test Mode :   | TX(5.2G) - 802.11ac20 _5190~5230MHz |                     |          |

| Polar                              | Frequency | Meter Reading | Cable loss | Antenna Factor | Preamp Factor | Emission Level | Limits   | Margin | Detector Type |
|------------------------------------|-----------|---------------|------------|----------------|---------------|----------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV)        | (dB)       | dB/m           | (dB)          | (dBuV/m)       | (dBuV/m) | (dB)   |               |
| Low Channel (5180 MHz)-Above 1G    |           |               |            |                |               |                |          |        |               |
| Vertical                           | 3694.10   | 59.14         | 5.94       | 35.40          | 44.00         | 56.48          | 74.00    | -17.52 | Pk            |
| Vertical                           | 3694.10   | 40.59         | 5.94       | 35.40          | 44.00         | 37.93          | 54.00    | -16.07 | AV            |
| Vertical                           | 10360.15  | 59.79         | 8.46       | 39.75          | 44.50         | 63.50          | 68.20    | -4.70  | Pk            |
| Vertical                           | 15540.22  | 60.04         | 10.12      | 38.80          | 44.10         | 64.86          | 74.00    | -9.14  | Pk            |
| Vertical                           | 15540.22  | 39.28         | 10.12      | 38.80          | 42.70         | 45.50          | 54.00    | -8.50  | AV            |
| Horizontal                         | 3713.00   | 59.77         | 5.94       | 35.18          | 44.00         | 56.89          | 74.00    | -17.11 | Pk            |
| Horizontal                         | 3713.00   | 40.70         | 5.94       | 35.18          | 44.00         | 37.82          | 54.00    | -16.18 | AV            |
| Horizontal                         | 10360.47  | 60.93         | 8.46       | 38.71          | 44.50         | 63.60          | 68.20    | -4.60  | Pk            |
| Horizontal                         | 15540.38  | 60.57         | 10.12      | 38.38          | 44.10         | 64.97          | 74.00    | -9.03  | Pk            |
| Horizontal                         | 15540.38  | 39.43         | 10.12      | 38.38          | 44.10         | 43.83          | 54.00    | -10.17 | AV            |
| middle Channel (5200 MHz)-Above 1G |           |               |            |                |               |                |          |        |               |
| Vertical                           | 3624.13   | 59.01         | 6.48       | 36.35          | 44.05         | 57.79          | 74.00    | -16.21 | Pk            |
| Vertical                           | 3624.13   | 39.22         | 6.48       | 36.35          | 44.05         | 38.00          | 54.00    | -16.00 | AV            |
| Vertical                           | 10400.09  | 60.72         | 8.47       | 37.88          | 44.51         | 62.56          | 68.20    | -5.64  | Pk            |
| Vertical                           | 15600.15  | 60.87         | 10.12      | 38.80          | 44.10         | 65.69          | 74.00    | -8.31  | Pk            |
| Vertical                           | 15600.15  | 40.92         | 10.12      | 38.80          | 42.70         | 47.14          | 54.00    | -6.86  | AV            |
| Horizontal                         | 4202.14   | 59.12         | 6.48       | 36.37          | 44.05         | 57.92          | 74.00    | -16.08 | Pk            |
| Horizontal                         | 4202.14   | 40.34         | 6.48       | 36.37          | 44.05         | 39.14          | 54.00    | -14.86 | AV            |
| Horizontal                         | 10400.14  | 59.95         | 8.47       | 38.64          | 44.50         | 62.56          | 68.20    | -5.64  | Pk            |
| Horizontal                         | 15600.51  | 59.74         | 10.12      | 38.38          | 44.10         | 64.14          | 74.00    | -9.86  | Pk            |
| Horizontal                         | 15600.51  | 39.13         | 10.12      | 38.38          | 44.10         | 43.53          | 54.00    | -10.47 | AV            |

| High Channel (5240 MHz)-Above 1G |          |       |       |       |       |       |       |        |    |
|----------------------------------|----------|-------|-------|-------|-------|-------|-------|--------|----|
| Vertical                         | 4597.70  | 60.86 | 7.10  | 37.24 | 43.50 | 61.70 | 74.00 | -12.30 | Pk |
| Vertical                         | 4597.70  | 39.05 | 7.10  | 37.24 | 43.50 | 39.89 | 54.00 | -14.11 | AV |
| Vertical                         | 10480.23 | 59.35 | 8.46  | 37.68 | 44.50 | 60.99 | 68.20 | -7.21  | Pk |
| Vertical                         | 15720.15 | 59.80 | 10.12 | 38.80 | 44.10 | 64.62 | 74.00 | -9.38  | Pk |
| Vertical                         | 15720.15 | 40.36 | 10.12 | 38.80 | 42.70 | 46.58 | 54.00 | -7.42  | AV |
| Horizontal                       | 4589.26  | 60.00 | 7.10  | 37.24 | 43.50 | 60.84 | 74.00 | -13.16 | Pk |
| Horizontal                       | 4589.26  | 39.85 | 7.10  | 37.24 | 43.50 | 40.69 | 54.00 | -13.31 | AV |
| Horizontal                       | 10480.59 | 60.90 | 8.46  | 38.57 | 44.50 | 63.43 | 68.20 | -4.77  | Pk |
| Horizontal                       | 15720.18 | 60.59 | 10.12 | 38.38 | 44.10 | 64.99 | 74.00 | -9.01  | Pk |
| Horizontal                       | 15720.18 | 40.75 | 10.12 | 38.38 | 44.10 | 45.15 | 54.00 | -8.85  | AV |

Note:"802.11ac20(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value  
has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

|               |                                     |                     |          |
|---------------|-------------------------------------|---------------------|----------|
| EUT :         | Smart Phone                         | Model Name. :       | WP20 Pro |
| Temperature : | 20 °C                               | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                            | Test Voltage :      | DC 3.87V |
| Test Mode :   | TX(5.3G) - 802.11ac20 _5260~5320MHz |                     |          |

| Polar                              | Frequency | Meter Reading | Cable loss | Antenna Factor | Preamplifier Factor | Emission Level | Limits   | Margin | Detector Type |
|------------------------------------|-----------|---------------|------------|----------------|---------------------|----------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV)        | (dB)       | dB/m           | (dB)                | (dBuV/m)       | (dBuV/m) | (dB)   |               |
| Low Channel (5260 MHz)-Above 1G    |           |               |            |                |                     |                |          |        |               |
| Vertical                           | 4633.25   | 59.74         | 5.44       | 35.40          | 44.00               | 56.58          | 74.00    | -17.42 | Pk            |
| Vertical                           | 4633.25   | 40.31         | 5.74       | 35.40          | 44.00               | 37.46          | 54.00    | -16.54 | AV            |
| Vertical                           | 10520.12  | 60.91         | 8.26       | 39.75          | 44.50               | 64.42          | 68.20    | -3.78  | Pk            |
| Vertical                           | 15780.34  | 60.91         | 10.12      | 38.80          | 44.10               | 65.72          | 74.00    | -8.28  | Pk            |
| Vertical                           | 15780.34  | 40.28         | 9.62       | 38.80          | 42.70               | 46.00          | 54.00    | -8.00  | AV            |
| Horizontal                         | 4366.15   | 60.37         | 5.57       | 35.18          | 44.00               | 57.11          | 74.00    | -16.89 | Pk            |
| Horizontal                         | 4366.15   | 39.62         | 5.74       | 35.18          | 44.00               | 36.54          | 54.00    | -17.46 | AV            |
| Horizontal                         | 10520.26  | 59.79         | 8.38       | 38.71          | 44.50               | 62.38          | 68.20    | -5.82  | Pk            |
| Horizontal                         | 15780.34  | 59.16         | 9.88       | 38.38          | 44.10               | 63.32          | 74.00    | -10.68 | Pk            |
| Horizontal                         | 15780.34  | 39.68         | 9.94       | 38.38          | 44.10               | 43.90          | 54.00    | -10.10 | AV            |
| middle Channel (5280 MHz)-Above 1G |           |               |            |                |                     |                |          |        |               |
| Vertical                           | 4122.34   | 60.20         | 6.08       | 36.35          | 44.05               | 58.58          | 74.00    | -15.42 | Pk            |
| Vertical                           | 4122.34   | 39.51         | 6.39       | 36.35          | 44.05               | 38.20          | 54.00    | -15.80 | AV            |
| Vertical                           | 10560.19  | 60.49         | 8.28       | 37.88          | 44.51               | 62.14          | 68.20    | -6.06  | Pk            |
| Vertical                           | 15840.36  | 59.58         | 9.79       | 38.8           | 44.10               | 64.06          | 74.00    | -9.94  | Pk            |
| Vertical                           | 15840.36  | 39.11         | 9.70       | 38.8           | 42.70               | 44.91          | 54.00    | -9.09  | AV            |
| Horizontal                         | 3869.48   | 60.61         | 6.11       | 36.37          | 44.05               | 59.04          | 74.00    | -14.96 | Pk            |
| Horizontal                         | 3869.48   | 39.47         | 6.27       | 36.37          | 44.05               | 38.06          | 54.00    | -15.94 | AV            |
| Horizontal                         | 10560.74  | 60.32         | 8.33       | 38.64          | 44.50               | 62.79          | 68.20    | -5.41  | Pk            |
| Horizontal                         | 15840.37  | 59.50         | 9.99       | 38.38          | 44.10               | 63.77          | 74.00    | -10.23 | Pk            |
| Horizontal                         | 15840.37  | 40.67         | 9.81       | 38.38          | 44.10               | 44.76          | 54.00    | -9.24  | AV            |

| High Channel (5320 MHz)-Above 1G |          |       |       |       |       |       |       |        |    |
|----------------------------------|----------|-------|-------|-------|-------|-------|-------|--------|----|
| Vertical                         | 5366.52  | 60.08 | 6.96  | 37.24 | 43.50 | 60.78 | 74.00 | -13.22 | Pk |
| Vertical                         | 5366.52  | 40.58 | 7.07  | 37.24 | 43.50 | 41.39 | 54.00 | -12.61 | AV |
| Vertical                         | 10640.58 | 60.69 | 8.14  | 37.68 | 44.50 | 62.01 | 74.00 | -11.99 | Pk |
| Vertical                         | 10640.58 | 40.06 | 8.35  | 37.68 | 44.50 | 41.59 | 54.00 | -12.41 | AV |
| Vertical                         | 15960.41 | 39.44 | 10.11 | 38.8  | 44.10 | 44.25 | 74.00 | -29.75 | Pk |
| Vertical                         | 15960.41 | 40.37 | 9.64  | 38.8  | 42.70 | 46.11 | 54.00 | -7.89  | AV |
| Horizontal                       | 5436.59  | 60.33 | 7.05  | 37.24 | 43.50 | 61.12 | 74.00 | -12.88 | Pk |
| Horizontal                       | 5436.59  | 40.23 | 7.05  | 37.24 | 43.50 | 41.02 | 54.00 | -12.98 | AV |
| Horizontal                       | 10640.24 | 60.33 | 8.20  | 38.57 | 44.50 | 62.60 | 74.00 | -11.40 | Pk |
| Horizontal                       | 10640.24 | 40.73 | 8.03  | 38.57 | 44.50 | 42.83 | 54.00 | -11.17 | AV |
| Horizontal                       | 15960.88 | 50.25 | 9.81  | 38.38 | 44.10 | 54.35 | 74.00 | -19.65 | Pk |
| Horizontal                       | 15960.88 | 40.90 | 9.96  | 38.38 | 44.10 | 45.14 | 54.00 | -8.86  | AV |

Note: ANT 1 802.11ac20(5G) mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

|               |                                     |                     |          |
|---------------|-------------------------------------|---------------------|----------|
| EUT :         | Smart Phone                         | Model Name. :       | WP20 Pro |
| Temperature : | 20 °C                               | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                            | Test Voltage :      | DC 3.87V |
| Test Mode :   | TX(5.6G) - 802.11ac20 _5500~5700MHz |                     |          |

| Polar                              | Frequency | Meter Reading | Cable loss | Antenna Factor | Preamplifier Factor | Emission Level | Limits   | Margin | Detector Type |
|------------------------------------|-----------|---------------|------------|----------------|---------------------|----------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV)        | (dB)       | dB/m           | (dB)                | (dBuV/m)       | (dBuV/m) | (dB)   |               |
| Low Channel (5500 MHz)-Above 1G    |           |               |            |                |                     |                |          |        |               |
| Vertical                           | 5433.02   | 60.23         | 5.61       | 35.40          | 44.00               | 57.25          | 74.00    | -16.75 | Pk            |
| Vertical                           | 5433.02   | 50.40         | 5.76       | 35.40          | 44.00               | 47.56          | 54.00    | -6.44  | AV            |
| Vertical                           | 11000.25  | 60.18         | 8.24       | 39.75          | 44.50               | 63.68          | 74.00    | -10.32 | Pk            |
| Vertical                           | 11000.25  | 39.26         | 8.35       | 39.75          | 44.50               | 42.87          | 54.00    | -11.13 | AV            |
| Vertical                           | 16500.41  | 60.42         | 10.05      | 38.80          | 44.10               | 65.17          | 68.20    | -3.03  | Pk            |
| Horizontal                         | 5126.47   | 60.03         | 5.78       | 35.18          | 44.00               | 56.99          | 74.00    | -17.01 | Pk            |
| Horizontal                         | 5126.47   | 49.05         | 5.66       | 35.18          | 44.00               | 45.89          | 54.00    | -8.11  | AV            |
| Horizontal                         | 11000.32  | 60.55         | 8.22       | 38.71          | 44.50               | 62.99          | 74.00    | -11.01 | Pk            |
| Horizontal                         | 11000.32  | 40.12         | 8.14       | 38.71          | 44.50               | 42.47          | 54.00    | -11.53 | AV            |
| Horizontal                         | 16500.47  | 56.92         | 10.04      | 38.38          | 44.10               | 61.24          | 68.20    | -6.96  | Pk            |
| Middle Channel (5600 MHz)-Above 1G |           |               |            |                |                     |                |          |        |               |
| Vertical                           | 4933.25   | 59.02         | 6.29       | 36.35          | 44.05               | 57.60          | 74.00    | -16.40 | Pk            |
| Vertical                           | 4933.25   | 50.87         | 6.24       | 36.35          | 44.05               | 49.41          | 54.00    | -4.59  | AV            |
| Vertical                           | 11200.58  | 60.10         | 8.24       | 37.88          | 44.51               | 61.71          | 74.00    | -12.29 | Pk            |
| Vertical                           | 11200.58  | 40.35         | 8.13       | 37.88          | 44.51               | 41.84          | 54.00    | -12.16 | AV            |
| Vertical                           | 16800.45  | 60.28         | 9.71       | 38.80          | 44.10               | 64.68          | 68.20    | -3.52  | Pk            |
| Horizontal                         | 4766.32   | 59.27         | 6.44       | 36.37          | 44.05               | 58.03          | 74.00    | -15.97 | Pk            |
| Horizontal                         | 4766.32   | 49.27         | 6.13       | 36.37          | 44.05               | 47.73          | 54.00    | -6.27  | AV            |
| Horizontal                         | 11200.45  | 60.22         | 8.31       | 38.64          | 44.50               | 62.67          | 74.00    | -11.33 | Pk            |
| Horizontal                         | 11200.45  | 40.78         | 8.04       | 38.64          | 44.50               | 42.96          | 54.00    | -11.04 | AV            |
| Horizontal                         | 16800.33  | 56.34         | 10.09      | 38.38          | 44.10               | 60.71          | 68.20    | -7.49  | Pk            |

| High Channel (5700 MHz)-Above 1G |          |       |      |       |       |       |       |        |    |
|----------------------------------|----------|-------|------|-------|-------|-------|-------|--------|----|
| Vertical                         | 5647.33  | 60.95 | 6.79 | 37.24 | 43.50 | 61.48 | 68.20 | -6.72  | Pk |
| Vertical                         | 11400.29 | 60.22 | 8.10 | 37.68 | 44.50 | 61.50 | 74.00 | -12.50 | Pk |
| Vertical                         | 11400.29 | 39.02 | 8.23 | 37.68 | 44.50 | 40.43 | 54.00 | -13.57 | AV |
| Vertical                         | 17100.54 | 49.21 | 9.70 | 38.80 | 44.10 | 53.62 | 68.20 | -14.58 | Pk |
| Horizontal                       | 5433.26  | 59.76 | 6.74 | 37.24 | 43.50 | 60.24 | 74.00 | -13.76 | Pk |
| Horizontal                       | 5433.26  | 39.75 | 6.74 | 37.24 | 43.50 | 40.23 | 54.00 | -13.77 | AV |
| Horizontal                       | 11400.43 | 49.15 | 8.25 | 38.57 | 44.50 | 51.48 | 74.00 | -22.52 | Pk |
| Horizontal                       | 11400.43 | 39.93 | 8.35 | 38.57 | 44.50 | 42.36 | 54.00 | -11.64 | AV |
| Horizontal                       | 17100.58 | 40.62 | 9.70 | 38.38 | 44.10 | 44.60 | 68.20 | -23.60 | Pk |

Note:"802.11ac20(5G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


## 2.2.10 TEST RESULTS (18GHz-40GHz)

|               |                                                                                                                       |                     |          |
|---------------|-----------------------------------------------------------------------------------------------------------------------|---------------------|----------|
| EUT :         | Smart Phone                                                                                                           | Model Name. :       | WP20 Pro |
| Temperature : | 20 °C                                                                                                                 | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                                                                                                              | Test Voltage :      | DC 3.87V |
| Test Mode :   | TX (5.2G)-802.11ac40 5190MHz~5230MHz;<br>TX (5.3G)-802.11n40 5270MHz~5310MHz;<br>TX (5.6G)-802.11n20 5500MHz~5700MHz; |                     |          |

All the modulation modes have been tested, and the worst result was report as below:


Low Channel (5190 MHz)-Above 1G

Horizontal

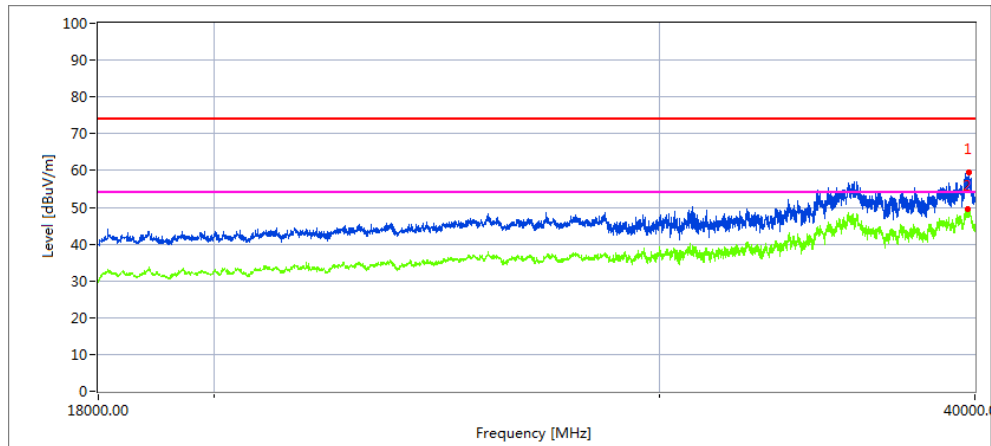

| Frequency | Meter Reading | Cable loss | Antenna Factor | Preamp Factor | Emission Level | Limits | Margin | Remark |
|-----------|---------------|------------|----------------|---------------|----------------|--------|--------|--------|
| 39769.27  | 41.54         | 20.09      | 44.07          | 43.48         | 62.22          | 68.2   | 5.98   | Peak   |
| 39767.19  | 28.22         | 20.09      | 44.04          | 43.48         | 48.87          | 54     | 5.13   | AVG    |


Vertical

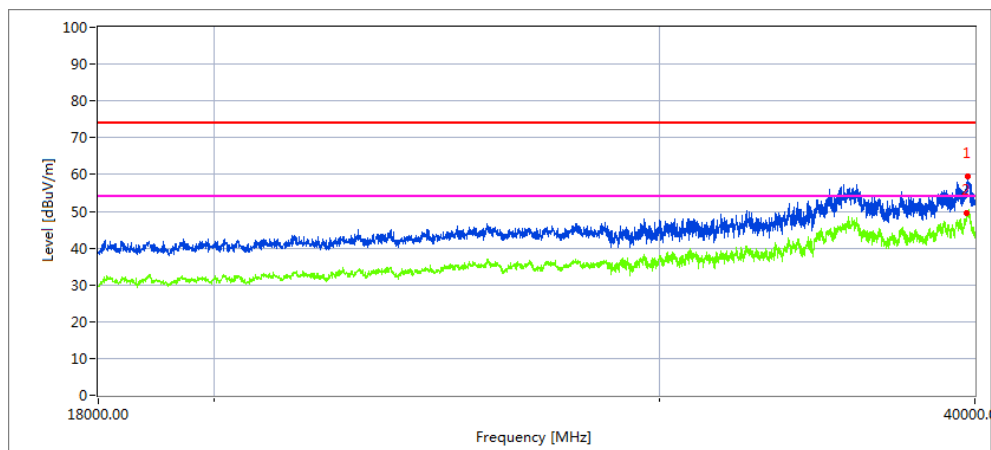

| Frequency | Meter Reading | Cable loss | Antenna Factor | Preamp Factor | Emission Level | Limits | Margin | Remark |
|-----------|---------------|------------|----------------|---------------|----------------|--------|--------|--------|
| 39769.546 | 43.85         | 20.09      | 44.07          | 43.48         | 64.53          | 68.2   | 3.67   | Peak   |
| 39769.365 | 28.54         | 20.09      | 44.04          | 43.48         | 49.19          | 54     | 4.81   | AVG    |


# High Channel (5230 MHz)-Above 1G

Horizontal

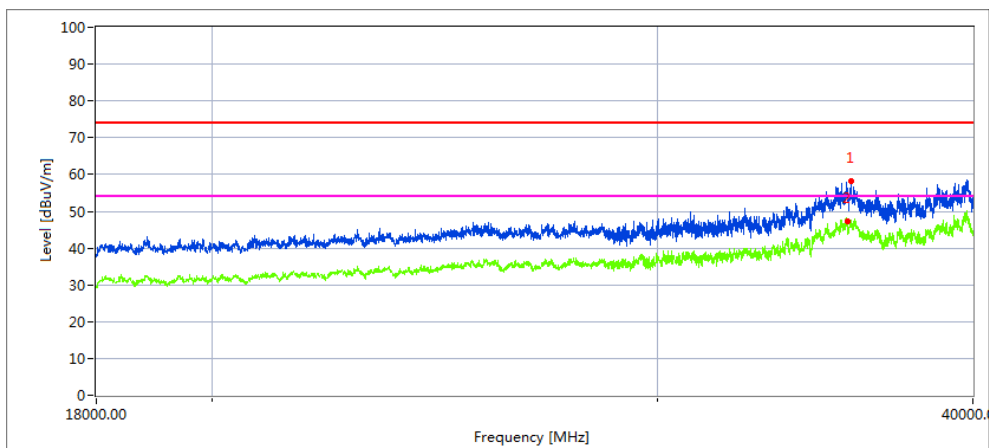

| Frequency | Meter Reading | Cable loss | Antenna Factor | Preamplifier Factor | Emission Level | Limits | Margin | Remark |
|-----------|---------------|------------|----------------|---------------------|----------------|--------|--------|--------|
| 35628.37  | 44.46         | 19.11      | 42.73          | 44.61               | 61.69          | 68.2   | 6.51   | Peak   |
| 35596.986 | 30.48         | 19.11      | 42.73          | 44.61               | 47.71          | 54     | 6.29   | AVG    |

Vertical

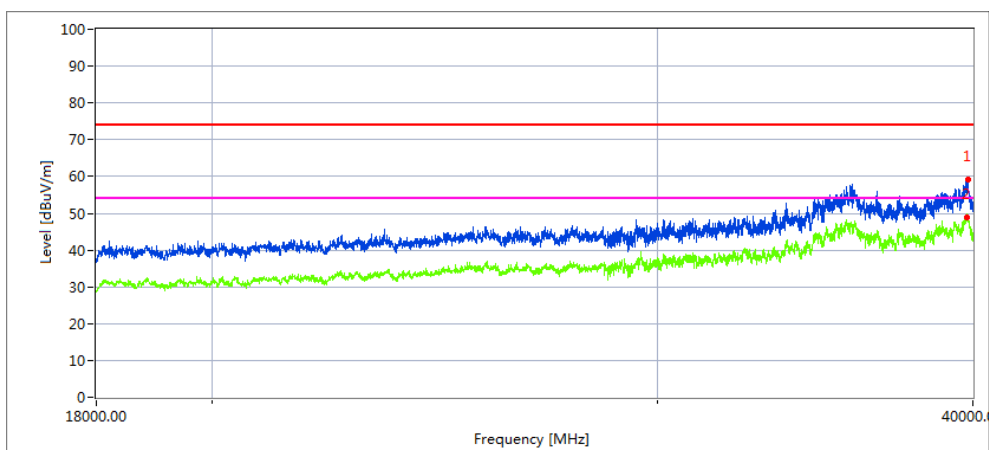


| Frequency | Meter Reading | Cable loss | Antenna Factor | Preamplifier Factor | Emission Level | Limits | Margin | Remark |
|-----------|---------------|------------|----------------|---------------------|----------------|--------|--------|--------|
| 39769.476 | 43.54         | 20.09      | 44.07          | 43.48               | 64.22          | 68.2   | 3.98   | Peak   |
| 39769.476 | 28.67         | 20.09      | 44.04          | 43.48               | 49.32          | 54     | 4.68   | AVG    |

Note: 802.11ac20 mode is the worst mode.


# Low Channel (5270 MHz)-Above 1G

Horizontal

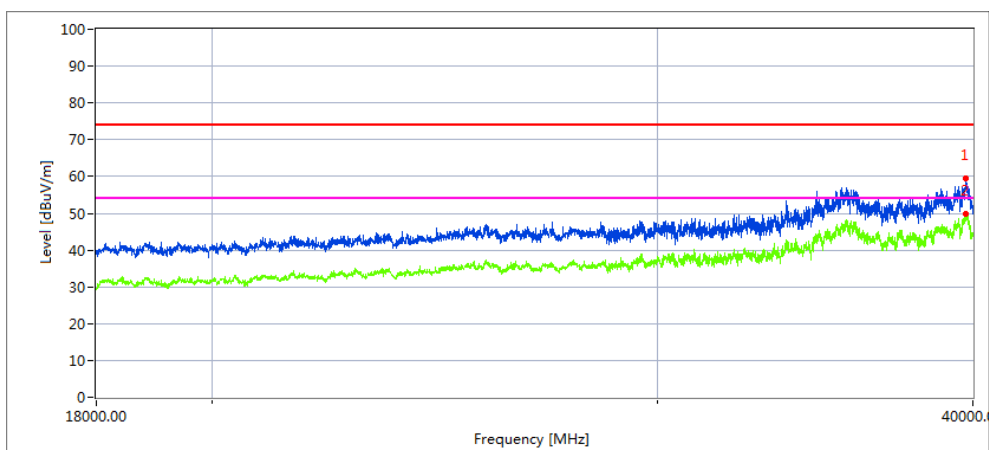

| Frequency | Meter Reading | Cable loss | Antenna Factor | Preamplifier Factor | Emission Level | Limits | Margin | Remark |
|-----------|---------------|------------|----------------|---------------------|----------------|--------|--------|--------|
| 39176.23  | 43.59         | 19.98      | 43.84          | 44.62               | 62.79          | 68.2   | 5.41   | Peak   |
| 39176.23  | 28.09         | 19.98      | 43.84          | 44.62               | 47.29          | 54     | 6.71   | AVG    |


Vertical

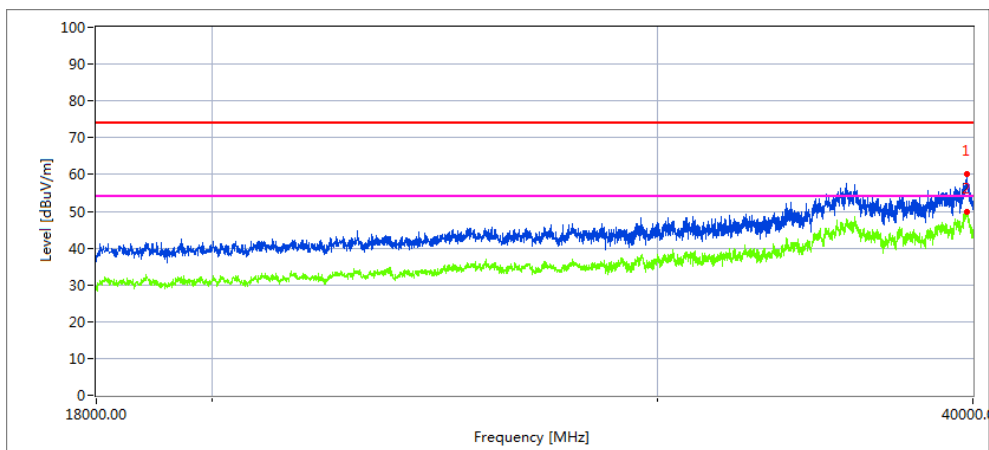

| Frequency | Meter Reading | Cable loss | Antenna Factor | Preamplifier Factor | Emission Level | Limits | Margin | Remark |
|-----------|---------------|------------|----------------|---------------------|----------------|--------|--------|--------|
| 39385.84  | 40.18         | 20.01      | 44.06          | 42.69               | 61.56          | 68.2   | 6.64   | Peak   |
| 39385.84  | 26.83         | 20.01      | 44.06          | 42.69               | 48.21          | 54     | 5.79   | AVG    |


# High Channel (5310 MHz)-Above 1G

Horizontal

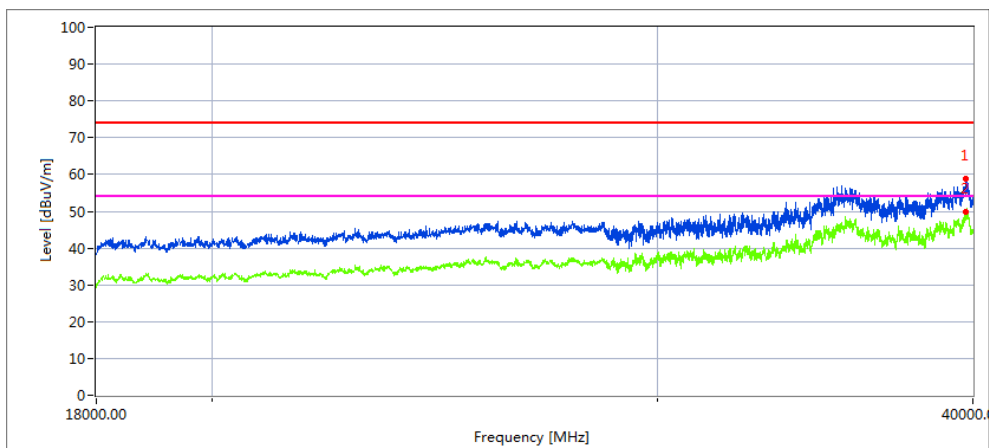

| Frequency | Meter Reading | Cable loss | Antenna Factor | Preamplifier Factor | Emission Level | Limits | Margin | Remark |
|-----------|---------------|------------|----------------|---------------------|----------------|--------|--------|--------|
| 39176.94  | 43.41         | 19.98      | 43.84          | 44.62               | 62.61          | 68.2   | 5.59   | Peak   |
| 39176.94  | 28.72         | 19.98      | 43.84          | 44.62               | 47.92          | 54     | 6.08   | AVG    |

Vertical

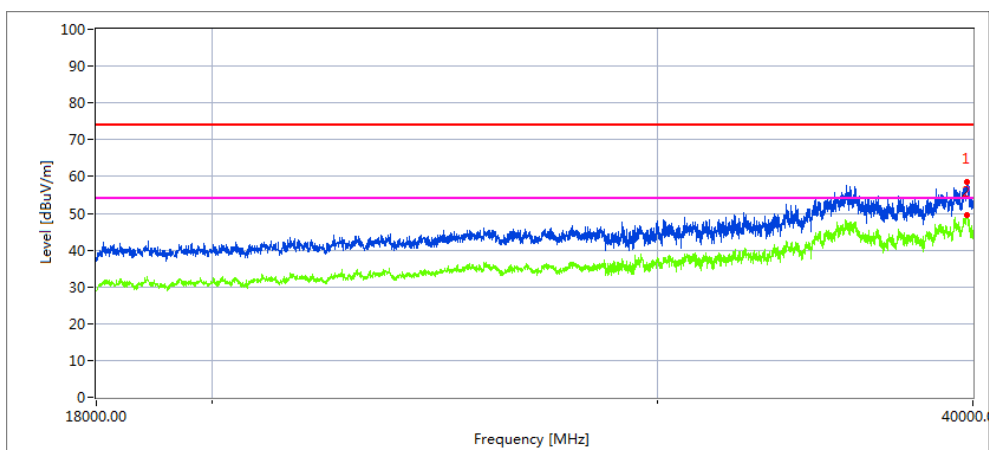


| Frequency | Meter Reading | Cable loss | Antenna Factor | Preamplifier Factor | Emission Level | Limits | Margin | Remark |
|-----------|---------------|------------|----------------|---------------------|----------------|--------|--------|--------|
| 39369.174 | 40.39         | 20.01      | 44.06          | 42.69               | 61.77          | 68.2   | 6.43   | Peak   |
| 39369.174 | 26.31         | 20.01      | 44.06          | 42.69               | 47.69          | 54     | 6.31   | AVG    |

Note:802.11ac20 mode is the worst mode.


# Low Channel (5500 MHz)-Above 1G

Horizontal

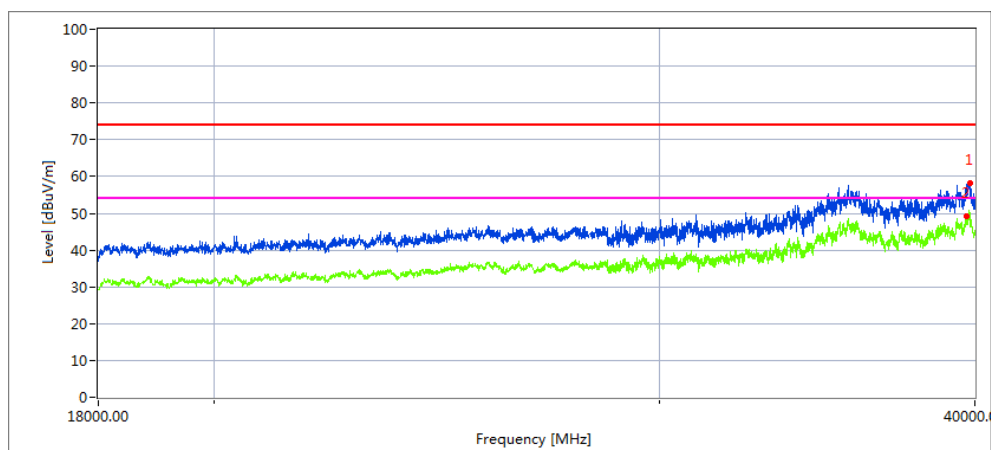

| Frequency | Meter Reading | Cable loss | Antenna Factor | Preamplifier Factor | Emission Level | Limits | Margin | Remark |
|-----------|---------------|------------|----------------|---------------------|----------------|--------|--------|--------|
| 39696.437 | 43.07         | 20.09      | 44.07          | 43.48               | 63.75          | 68.2   | 4.45   | Peak   |
| 39653.181 | 28.20         | 20.07      | 44.06          | 43.48               | 48.85          | 54     | 5.15   | AVG    |


Vertical

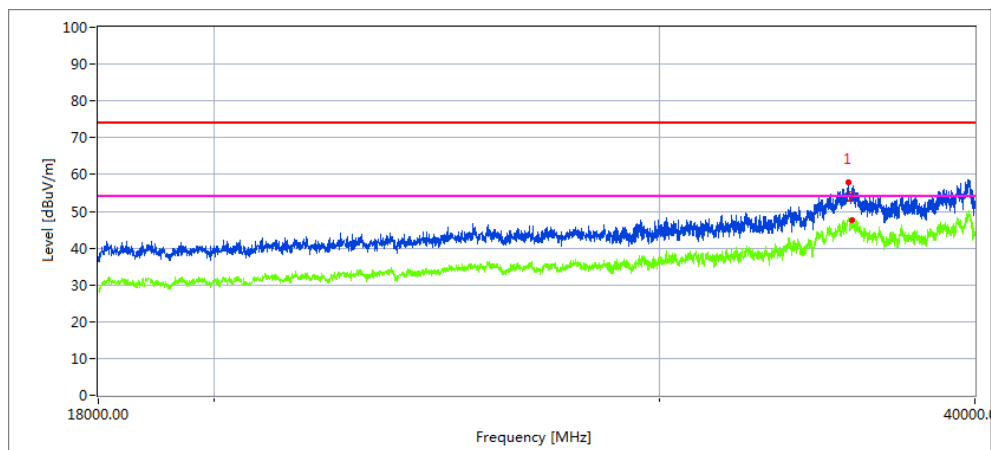

| Frequency | Meter Reading | Cable loss | Antenna Factor | Preamplifier Factor | Emission Level | Limits | Margin | Remark |
|-----------|---------------|------------|----------------|---------------------|----------------|--------|--------|--------|
| 36575.641 | 43.07         | 19.16      | 42.61          | 41.56               | 63.28          | 68.2   | 4.92   | Peak   |
| 36575.641 | 28.25         | 19.16      | 42.61          | 41.56               | 48.46          | 54     | 5.54   | AVG    |


# High Channel (5700 MHz)-Above 1G

Horizontal

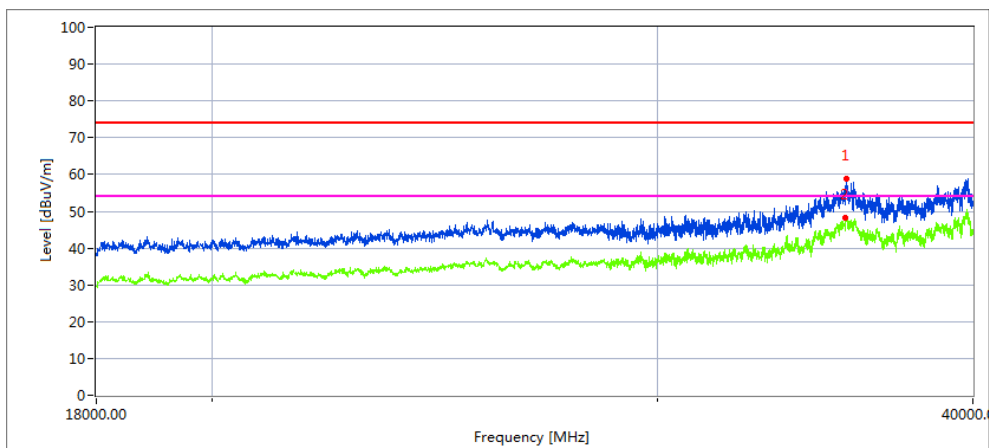

| Frequency | Meter Reading | Cable loss | Antenna Factor | Preamplifier Factor | Emission Level | Limits | Margin | Remark |
|-----------|---------------|------------|----------------|---------------------|----------------|--------|--------|--------|
| 35794.5   | 43.69         | 19.17      | 42.63          | 42.74               | 62.75          | 68.2   | 5.45   | Peak   |
| 35763.418 | 28.34         | 19.14      | 42.61          | 42.71               | 47.38          | 54     | 6.62   | AVG    |

Vertical

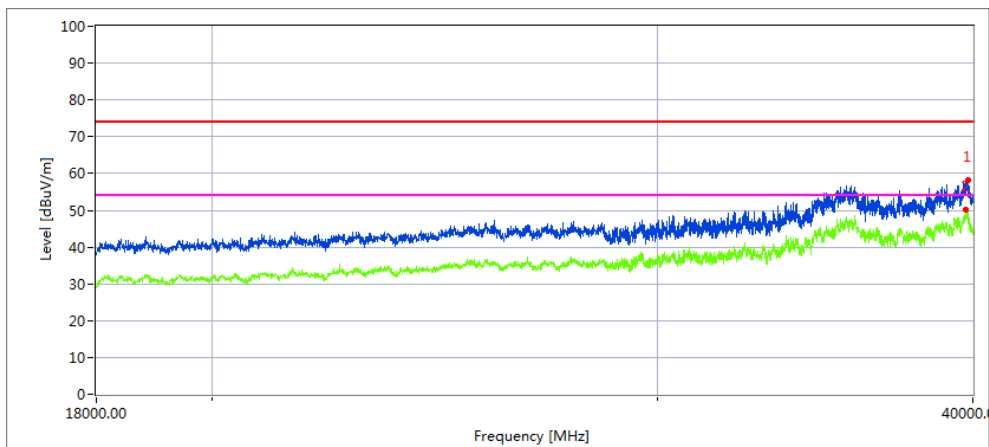

| Frequency | Meter Reading | Cable loss | Antenna Factor | Preamplifier Factor | Emission Level | Limits | Margin | Remark |
|-----------|---------------|------------|----------------|---------------------|----------------|--------|--------|--------|
| 39816.733 | 43.69         | 20.09      | 42.63          | 43.48               | 62.93          | 68.2   | 5.27   | Peak   |
| 39804.018 | 28.72         | 20.09      | 42.61          | 43.48               | 47.94          | 54     | 6.06   | AVG    |

Note: 802.11ac20 mode is the worst mode.

## 2.2.10 Spurious Emission in Restricted Band 4.5GHz~5.150 GHz&amp; 5.350GHz~5460GHz

|               |                                       |                     |          |
|---------------|---------------------------------------|---------------------|----------|
| EUT :         | Smart Phone                           | Model Name. :       | WP20 Pro |
| Temperature : | 20 °C                                 | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                              | Test Voltage :      | DC 3.87V |
| Test Mode :   | TX (5.2G)-802.11ac20 5150MHz~5250MHz, |                     |          |

All the modulation modes have been tested, The report just record the worst data mode.

| Frequency              | Meter Reading | Cable Loss | Antenna Factor | Preamp Factor | Emission Level | Limits   | Margin | Detector | Comment    |
|------------------------|---------------|------------|----------------|---------------|----------------|----------|--------|----------|------------|
| (MHz)                  | (dBμV)        | (dB)       | dB/m           | (dB)          | (dBμV/m)       | (dBμV/m) | (dB)   | Type     |            |
| 5.2G WIFI-802.11a Mode |               |            |                |               |                |          |        |          |            |
| 4500                   | 63.93         | 5.2        | 35.6           | 44.2          | 60.53          | 74       | -13.47 | Pk       | Horizontal |
| 4500                   | 36.85         | 5.2        | 35.6           | 44.2          | 33.45          | 54       | -20.55 | AV       | Horizontal |
| 4500                   | 63.57         | 5.2        | 35.6           | 44.2          | 60.17          | 74       | -13.83 | Pk       | Horizontal |
| 4500                   | 33.21         | 5.2        | 35.6           | 44.2          | 29.81          | 54       | -24.19 | AV       | Horizontal |
| 5150                   | 63.35         | 5.36       | 35.66          | 44.22         | 60.15          | 74       | -13.85 | Pk       | Horizontal |
| 5150                   | 33.67         | 5.36       | 35.66          | 44.22         | 30.47          | 54       | -23.53 | AV       | Horizontal |
| 5150                   | 62.45         | 5.36       | 35.66          | 44.22         | 59.25          | 74       | -14.75 | Pk       | Vertical   |
| 5150                   | 42.79         | 5.36       | 35.66          | 44.22         | 39.59          | 54       | -14.41 | AV       | Vertical   |
| 5350                   | 63.56         | 5.68       | 35.68          | 44.22         | 60.70          | 74       | -13.30 | Pk       | Vertical   |
| 5350                   | 33.99         | 5.68       | 35.68          | 44.22         | 31.13          | 54       | -22.87 | AV       | Vertical   |
| 5350                   | 63.96         | 5.68       | 35.68          | 44.22         | 61.10          | 74       | -12.90 | Pk       | Horizontal |
| 5350                   | 37.26         | 5.68       | 35.68          | 44.22         | 34.40          | 54       | -19.60 | AV       | Horizontal |

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11ac20 " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

|               |                                       |                     |          |
|---------------|---------------------------------------|---------------------|----------|
| EUT :         | Smart Phone                           | Model Name. :       | WP20 Pro |
| Temperature : | 20 °C                                 | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                              | Test Voltage :      | DC 3.87V |
| Test Mode :   | TX (5.3G)-802.11ac20 5250MHz~5350MHz, |                     |          |

All the modulation modes have been tested, The report just record the worst data mode.

| Polar                            | Frequency | Meter Reading | Cable loss | Antenna Factor | Preamp Factor | Emission Level | Limits   | Margin | Detector Type |
|----------------------------------|-----------|---------------|------------|----------------|---------------|----------------|----------|--------|---------------|
| (H/V)                            | (MHz)     | (dBuV)        | (dB)       | dB/m           | (dB)          | (dBuV/m)       | (dBuV/m) | (dB)   |               |
| High Channel (5320 MHz)-Above 1G |           |               |            |                |               |                |          |        |               |
| Vertical                         | 5350.00   | 67.75         | 6.96       | 37.24          | 43.50         | 68.45          | 74.00    | -5.55  | Pk            |
| Vertical                         | 5350.00   | 46.20         | 7.07       | 37.24          | 43.50         | 47.01          | 54.00    | -6.99  | AV            |
| Horizontal                       | 5350.00   | 66.14         | 7.05       | 37.24          | 43.50         | 66.93          | 74.00    | -7.07  | Pk            |
| Horizontal                       | 5350.00   | 42.56         | 7.05       | 37.24          | 43.50         | 43.35          | 54.00    | -10.65 | AV            |

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11ac20 " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

|               |                                       |                     |          |
|---------------|---------------------------------------|---------------------|----------|
| EUT :         | Smart Phone                           | Model Name. :       | WP20 Pro |
| Temperature : | 20 °C                                 | Relative Humidity : | 48%      |
| Pressure :    | 1010 hPa                              | Test Voltage :      | DC 3.87V |
| Test Mode :   | TX (5.6G)-802.11ac20 5470MHz~5725MHz, |                     |          |

All the modulation modes have been tested, The report just record the worst data mode.

| Polar                           | Frequency | Meter Reading | Cable loss | Antenna Factor | Preamp Factor | Emission Level | Limits   | Margin | Detector Type |
|---------------------------------|-----------|---------------|------------|----------------|---------------|----------------|----------|--------|---------------|
| (H/V)                           | (MHz)     | (dBuV)        | (dB)       | dB/m           | (dB)          | (dBuV/m)       | (dBuV/m) | (dB)   |               |
| Low Channel (5500 MHz)-Above 1G |           |               |            |                |               |                |          |        |               |
| Vertical                        | 5460.00   | 66.37         | 5.61       | 35.40          | 44.00         | 63.38          | 74.00    | -10.62 | Pk            |
| Vertical                        | 5460.00   | 47.65         | 5.76       | 35.40          | 44.00         | 44.81          | 54.00    | -9.19  | AV            |
| Horizontal                      | 5460.00   | 66.95         | 5.78       | 35.18          | 44.00         | 63.91          | 74.00    | -10.09 | Pk            |
| Horizontal                      | 5460.00   | 42.47         | 5.66       | 35.18          | 44.00         | 39.31          | 54.00    | -14.69 | AV            |

Note: (1) Emission Level= Antenna Factor + Cable Loss + Read Level - Preamp Factor

(2) "802.11ac20 " mode is the worst mode. When PK value is lower than the Average value limit, average don't record.

### 3. POWER SPECTRAL DENSITY TEST

#### 3.1 APPLIED PROCEDURES / LIMIT

##### According to FCC §15.407(a)

For the band 5.15-5.25 GHz,

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

- (3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:


- a) Set  $RBW \geq 1/T$ , where T is defined in section II.B.I.a).
- b) Set  $VBW \geq 3 RBW$ .
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/RBW)$  to the measured result, whereas  $RBW (< 500 \text{ KHz})$  is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/RBW)$  to the measured result, whereas  $RBW (< 1 \text{ MHz})$  is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since  $RBW=100 \text{ KHz}$  is available on nearly all spectrum analyzers.

### 3.3 DEVIATION FROM STANDARD

No deviation.

### 3.4 TEST SETUP

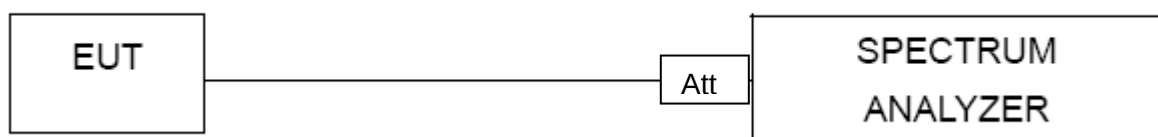

### 3.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

### 3.6 TEST RESULTS

|               |                                                                                    |                     |          |
|---------------|------------------------------------------------------------------------------------|---------------------|----------|
| EUT :         | Smart Phone                                                                        | Model Name :        | WP20 Pro |
| Temperature : | 26 °C                                                                              | Relative Humidity : | 54%      |
| Pressure :    | 1015 hPa                                                                           | Test Voltage :      | DC 3.87V |
| Test Mode :   | TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C (5470-5725MHz) |                     |          |

Test data reference attachment.

## 4. 26DB & 99% EMISSION BANDWIDTH

### 4.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

### 4.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW  $\geq 3 \cdot$  RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

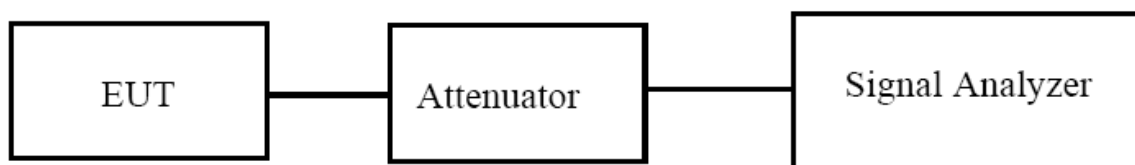

#### 4.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.4 TEST RESULTS

|               |                                                                                   |                     |          |
|---------------|-----------------------------------------------------------------------------------|---------------------|----------|
| EUT :         | Smart Phone                                                                       | Model Name :        | WP20 Pro |
| Temperature : | 26 °C                                                                             | Relative Humidity : | 54%      |
| Pressure :    | 1012 hPa                                                                          | Test Voltage :      | DC 3.87V |
| Test Mode :   | TX Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz), Band 2C(5470-5725MHz) |                     |          |

Test data reference attachment.

## 5. MINIMUM 6 DB BANDWIDTH

### 5.1 APPLIED PROCEDURES / LIMIT

#### According to FCC §15.407(e)

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### 5.2 TEST PROCEDURE


Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.3 DEVIATION FROM STANDARD

No deviation.

### 5.4 TEST SETUP

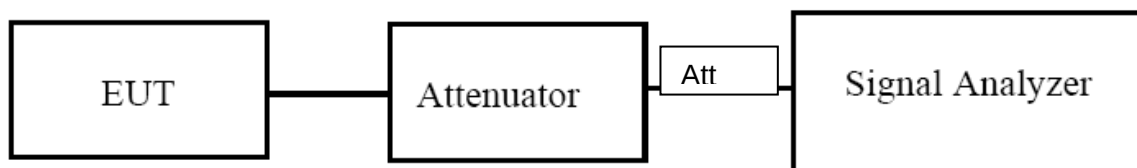

### 5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.6 TEST RESULTS**

|               |             |                     |          |
|---------------|-------------|---------------------|----------|
| EUT :         | Smart Phone | Model Name :        | WP20 Pro |
| Temperature : | 26 °C       | Relative Humidity : | 54%      |
| Pressure :    | 1012 hPa    | Test Voltage :      | N/A      |
| Test Mode :   | N/A         |                     |          |

Note: Not Applicable

## 6. MAXIMUM CONDUCTED OUTPUT POWER

### 6.1 PPLIED PROCEDURES / LIMIT

#### According to FCC §15.407

The maximum conducted output power should not exceed:

| Frequency Band(MHz) | Limit                                                                                                     |
|---------------------|-----------------------------------------------------------------------------------------------------------|
| 5150~5250           | 250mW                                                                                                     |
| 5250~5350           | 250 mW or 11 dBm + 10 log B<br>Note: The limit is the smaller of the two, "B" represents -26dB bandwidth. |
| 5470~5725           | 250 mW or 11 dBm + 10 log B<br>Note: The limit is the smaller of the two, "B" represents -26dB bandwidth. |
| 5725~5850           | 1W                                                                                                        |


### 6.2 TEST PROCEDURE

- Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:
  - a) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
    - 1) The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
    - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
    - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
  - b) If the transmitter does not transmit continuously, measure the duty cycle D of the transmitter output signal as described in 12.2.
  - c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
  - d) Adjust the measurement in dBm by adding  $[10 \log (1 / D)]$ , where D is the duty cycle {e.g.,  $[10 \log (1 / 0.25)]$ , if the duty cycle is 25%}.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP

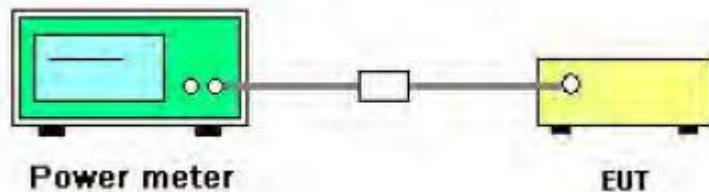

### 6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.2 TEST RESULTS**

|               |                                                                                                 |                     |          |
|---------------|-------------------------------------------------------------------------------------------------|---------------------|----------|
| EUT :         | Smart Phone                                                                                     | Model Name :        | WP20 Pro |
| Temperature : | 26 °C                                                                                           | Relative Humidity : | 54%      |
| Pressure :    | 1012 hPa                                                                                        | Test Voltage :      | DC 3.87V |
| Test Mode :   | TX (5G) Mode Frequency Band 1 (5150-5250MHz), Band 2A (5250-5350MHz)<br>Band 2C, (5470-5725MHz) |                     |          |

Test data reference attachment.

## 7. OUT OF BAND EMISSIONS

### 7.1 APPLICABLE STANDARD

#### According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
  - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
  - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

### 7.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot


the graph with marking the highest point and edge frequency.

5. Repeat above procedures until all measured frequencies were complete.

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP

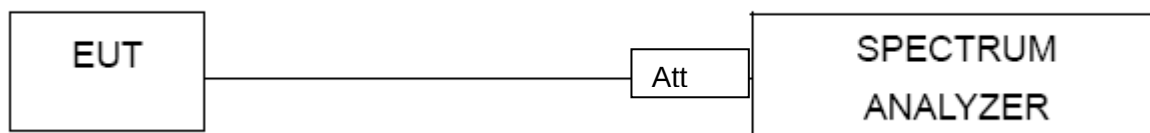

### 7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 7.6 TEST RESULTS

|               |             |                     |          |
|---------------|-------------|---------------------|----------|
| EUT :         | Smart Phone | Model Name :        | WP20 Pro |
| Temperature : | 26 °C       | Relative Humidity : | 54%      |
| Pressure :    | 1012 hPa    | Test Voltage :      | DC 3.87V |

Test data reference attachment.

## 8. Frequency Stability Measurement


### 8.1 LIMIT

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### 8.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f)/f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11 specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is  $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$ .

### 8.3 TEST SETUP LAYOUT

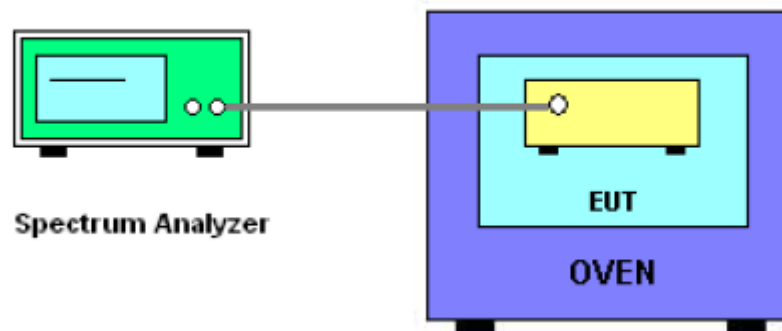

### 8.4 EUT OPERATION DURING TEST

1. The EUT was programmed to be in continuously un-modulation transmitting mode.
2. The module has two antennas, and the worst data is Antenna 1, only shown Antenna 1 Plot.

### 8.5 TEST RESULTS

|               |                                    |                     |          |
|---------------|------------------------------------|---------------------|----------|
| EUT :         | Smart Phone                        | Model Name. :       | WP20 Pro |
| Temperature : | 25 °C                              | Relative Humidity : | 56%      |
| Pressure :    | 1012 hPa                           | Test Voltage :      | DC 3.87V |
| Test Mode :   | TX Frequency Band I (5150-5250MHz) |                     |          |

#### Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |      | Reference Frequency: 5180MHz |      |                            |                            |
|-----------------|----|-----------|------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |      | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 3.87 | 5180.0047                    | 5180 | 0.0047                     | -0.9004                    |
|                 |    | V max (V) | 4.2  | 5180.0089                    | 5180 | 0.0089                     | -1.7187                    |
|                 |    | V min (V) | 3.4  | 5180.0071                    | 5180 | 0.0071                     | -1.3769                    |
| Limits          |    |           |      | Within 5150-5250MHz          |      |                            |                            |
| Result          |    |           |      | Complies                     |      |                            |                            |

#### Temperature vs. Frequency Stability

| TEST CONDITIONS |      |        |     | Reference Frequency: 5180MHz |      |                            |                            |
|-----------------|------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |      |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 3.87 | T (°C) | -20 | 5180.0026                    | 5180 | 0.0026                     | -0.4965                    |
|                 |      | T (°C) | -10 | 5180.0004                    | 5180 | 0.0004                     | -0.0801                    |
|                 |      | T (°C) | 0   | 5180.0041                    | 5180 | 0.0041                     | -0.7956                    |
|                 |      | T (°C) | 10  | 5180.0009                    | 5180 | 0.0009                     | -0.1832                    |
|                 |      | T (°C) | 20  | 5180.0085                    | 5180 | 0.0085                     | -1.6392                    |
|                 |      | T (°C) | 30  | 5180.0007                    | 5180 | 0.0007                     | -0.1270                    |
|                 |      | T (°C) | 40  | 5180.0049                    | 5180 | 0.0049                     | -0.9405                    |
|                 |      | T (°C) | 50  | 5180.0083                    | 5180 | 0.0083                     | -1.6026                    |
|                 |      | T (°C) | 60  | 5180.0025                    | 5180 | 0.0025                     | -0.4916                    |
|                 |      | T (°C) | 70  | 5180.0043                    | 5180 | 0.0043                     | -0.8237                    |
| Limits          |      |        |     | Within 5150-5250MHz          |      |                            |                            |
| Result          |      |        |     | Complies                     |      |                            |                            |

### Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |      | Reference Frequency: 5200MHz |      |                            |                            |
|-----------------|----|-----------|------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |      | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 3.87 | 5200.0080                    | 5200 | 0.0080                     | -1.5300                    |
|                 |    | V max (V) | 4.2  | 5200.0090                    | 5200 | 0.0090                     | -1.7401                    |
|                 |    | V min (V) | 3.4  | 5200.0015                    | 5200 | 0.0015                     | -0.2965                    |
| Limits          |    |           |      | Within 5150-5250MHz          |      |                            |                            |
| Result          |    |           |      | Complies                     |      |                            |                            |

### Temperature vs. Frequency Stability

| TEST CONDITIONS |      |        |     | Reference Frequency: 5200MHz |      |                            |                            |
|-----------------|------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |      |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 3.87 | T (°C) | -20 | 5200.0070                    | 5200 | 0.0070                     | -1.3368                    |
|                 |      | T (°C) | -10 | 5200.0040                    | 5200 | 0.0040                     | -0.7637                    |
|                 |      | T (°C) | 0   | 5200.0015                    | 5200 | 0.0015                     | -0.2871                    |
|                 |      | T (°C) | 10  | 5200.0063                    | 5200 | 0.0063                     | -1.2150                    |
|                 |      | T (°C) | 20  | 5200.0082                    | 5200 | 0.0082                     | -1.5766                    |
|                 |      | T (°C) | 30  | 5200.0100                    | 5200 | 0.0100                     | -1.9140                    |
|                 |      | T (°C) | 40  | 5200.0032                    | 5200 | 0.0032                     | -0.6078                    |
|                 |      | T (°C) | 50  | 5200.0016                    | 5200 | 0.0016                     | -0.3054                    |
|                 |      | T (°C) | 60  | 5200.0002                    | 5200 | 0.0002                     | -0.0306                    |
|                 |      | T (°C) | 70  | 5200.0099                    | 5200 | 0.0099                     | -1.9035                    |
| Limits          |      |        |     | Within 5150-5250MHz          |      |                            |                            |
| Result          |      |        |     | Complies                     |      |                            |                            |

## Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |      | Reference Frequency: 5240MHz |      |                            |                            |
|-----------------|----|-----------|------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |      | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 3.87 | 5240.0087                    | 5240 | 0.0087                     | -1.6686                    |
|                 |    | V max (V) | 4.2  | 5240.0025                    | 5240 | 0.0025                     | -0.4771                    |
|                 |    | V min (V) | 3.4  | 5240.0046                    | 5240 | 0.0046                     | -0.8822                    |
| Limits          |    |           |      | Within 5150-5250MHz          |      |                            |                            |
| Result          |    |           |      | Complies                     |      |                            |                            |

## Temperature vs. Frequency Stability

| TEST CONDITIONS |      |        |     | Reference Frequency: 5240MHz |      |                            |                            |
|-----------------|------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |      |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 3.87 | T (°C) | -20 | 5240.0077                    | 5240 | 0.0077                     | -1.4716                    |
|                 |      | T (°C) | -10 | 5240.0070                    | 5240 | 0.0070                     | -1.3366                    |
|                 |      | T (°C) | 0   | 5240.0000                    | 5240 | 0.0000                     | -0.0070                    |
|                 |      | T (°C) | 10  | 5240.0001                    | 5240 | 0.0001                     | -0.0236                    |
|                 |      | T (°C) | 20  | 5240.0046                    | 5240 | 0.0046                     | -0.8844                    |
|                 |      | T (°C) | 30  | 5240.0051                    | 5240 | 0.0051                     | -0.9786                    |
|                 |      | T (°C) | 40  | 5240.0094                    | 5240 | 0.0094                     | -1.7878                    |
|                 |      | T (°C) | 50  | 5240.0068                    | 5240 | 0.0068                     | -1.3069                    |
|                 |      | T (°C) | 60  | 5240.0024                    | 5240 | 0.0024                     | -0.4498                    |
|                 |      | T (°C) | 70  | 5240.0027                    | 5240 | 0.0027                     | -0.5072                    |
| Limits          |      |        |     | Within 5150-5250MHz          |      |                            |                            |
| Result          |      |        |     | Complies                     |      |                            |                            |

|               |                                     |                     |          |
|---------------|-------------------------------------|---------------------|----------|
| EUT :         | Smart Phone                         | Model Name. :       | WP20 Pro |
| Temperature : | 25 °C                               | Relative Humidity : | 56%      |
| Pressure :    | 1012 hPa                            | Test Voltage :      | DC 3.87V |
| Test Mode :   | TX Frequency Band 2A (5250-5350MHz) |                     |          |

#### Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |      | Reference Frequency: 5260MHz |      |                            |                            |
|-----------------|----|-----------|------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |      | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 3.87 | 5260.0023                    | 5260 | 0.00233                    | -0.4427                    |
|                 |    | V max (V) | 4.2  | 5260.0044                    | 5260 | 0.00442                    | -0.8402                    |
|                 |    | V min (V) | 3.4  | 5260.0091                    | 5260 | 0.00913                    | -1.7362                    |
| Limits          |    |           |      | Within 5250-5350MHz          |      |                            |                            |
| Result          |    |           |      | Complies                     |      |                            |                            |

#### Temperature vs. Frequency Stability

| TEST CONDITIONS |      |        |     | Reference Frequency: 5260MHz |      |                            |                            |
|-----------------|------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |      |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 3.87 | T (°C) | -20 | 5260.0039                    | 5260 | 0.00393                    | -0.7475                    |
|                 |      | T (°C) | -10 | 5260.0093                    | 5260 | 0.00934                    | -1.7763                    |
|                 |      | T (°C) | 0   | 5260.0062                    | 5260 | 0.00616                    | -1.1717                    |
|                 |      | T (°C) | 10  | 5260.0034                    | 5260 | 0.00336                    | -0.6384                    |
|                 |      | T (°C) | 20  | 5260.0074                    | 5260 | 0.00740                    | -1.4071                    |
|                 |      | T (°C) | 30  | 5260.0061                    | 5260 | 0.00610                    | -1.1596                    |
|                 |      | T (°C) | 40  | 5260.0043                    | 5260 | 0.00434                    | -0.8245                    |
|                 |      | T (°C) | 50  | 5260.0013                    | 5260 | 0.00127                    | -0.2407                    |
|                 |      | T (°C) | 60  | 5260.0060                    | 5260 | 0.00598                    | -1.1370                    |
|                 |      | T (°C) | 70  | 5260.0090                    | 5260 | 0.00897                    | -1.7058                    |
| Limits          |      |        |     | Within 5250-5350MHz          |      |                            |                            |
| Result          |      |        |     | Complies                     |      |                            |                            |

## Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |      | Reference Frequency: 5280MHz |      |                            |                            |
|-----------------|----|-----------|------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |      | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 3.87 | 5280.0020                    | 5280 | 0.00197                    | -0.3732                    |
|                 |    | V max (V) | 4.2  | 5280.0047                    | 5280 | 0.00471                    | -0.8928                    |
|                 |    | V min (V) | 3.4  | 5280.0017                    | 5280 | 0.00166                    | -0.3138                    |
| Limits          |    |           |      | Within 5250-5350MHz          |      |                            |                            |
| Result          |    |           |      | Complies                     |      |                            |                            |

## Temperature vs. Frequency Stability

| TEST CONDITIONS |      |        |     | Reference Frequency: 5280MHz |      |                            |                            |
|-----------------|------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |      |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 3.87 | T (°C) | -20 | 5280.0074                    | 5280 | 0.00735                    | -1.3923                    |
|                 |      | T (°C) | -10 | 5280.0083                    | 5280 | 0.00828                    | -1.5684                    |
|                 |      | T (°C) | 0   | 5280.0061                    | 5280 | 0.00608                    | -1.1507                    |
|                 |      | T (°C) | 10  | 5280.0022                    | 5280 | 0.00222                    | -0.4200                    |
|                 |      | T (°C) | 20  | 5280.0028                    | 5280 | 0.00277                    | -0.5240                    |
|                 |      | T (°C) | 30  | 5280.0061                    | 5280 | 0.00607                    | -1.1504                    |
|                 |      | T (°C) | 40  | 5280.0023                    | 5280 | 0.00234                    | -0.4440                    |
|                 |      | T (°C) | 50  | 5280.0053                    | 5280 | 0.00528                    | -0.9993                    |
|                 |      | T (°C) | 60  | 5280.0087                    | 5280 | 0.00871                    | -1.6489                    |
|                 |      | T (°C) | 70  | 5280.0072                    | 5280 | 0.00715                    | -1.3550                    |
| Limits          |      |        |     | Within 5250-5350MHz          |      |                            |                            |
| Result          |      |        |     | Complies                     |      |                            |                            |

## Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |      | Reference Frequency: 5320MHz |      |                            |                            |
|-----------------|----|-----------|------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |      | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 3.87 | 5320.0036                    | 5320 | 0.00365                    | -0.6856                    |
|                 |    | V max (V) | 4.2  | 5320.0043                    | 5320 | 0.00430                    | -0.8087                    |
|                 |    | V min (V) | 3.4  | 5320.0054                    | 5320 | 0.00535                    | -1.0058                    |
| Limits          |    |           |      | Within 5250-5350MHz          |      |                            |                            |
| Result          |    |           |      | Complies                     |      |                            |                            |

## Temperature vs. Frequency Stability

| TEST CONDITIONS |      |        |     | Reference Frequency: 5320MHz |      |                            |                            |
|-----------------|------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |      |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 3.87 | T (°C) | -20 | 5320.0014                    | 5320 | 0.00139                    | -0.2618                    |
|                 |      | T (°C) | -10 | 5320.0099                    | 5320 | 0.00992                    | -1.8639                    |
|                 |      | T (°C) | 0   | 5320.0093                    | 5320 | 0.00931                    | -1.7495                    |
|                 |      | T (°C) | 10  | 5320.0034                    | 5320 | 0.00341                    | -0.6406                    |
|                 |      | T (°C) | 20  | 5320.0006                    | 5320 | 0.00059                    | -0.1105                    |
|                 |      | T (°C) | 30  | 5320.0074                    | 5320 | 0.00743                    | -1.3972                    |
|                 |      | T (°C) | 40  | 5320.0098                    | 5320 | 0.00979                    | -1.8408                    |
|                 |      | T (°C) | 50  | 5320.0065                    | 5320 | 0.00654                    | -1.2294                    |
|                 |      | T (°C) | 60  | 5320.0094                    | 5320 | 0.00935                    | -1.7580                    |
|                 |      | T (°C) | 70  | 5320.0003                    | 5320 | 0.00028                    | -0.0526                    |
| Limits          |      |        |     | Within 5250-5350MHz          |      |                            |                            |
| Result          |      |        |     | Complies                     |      |                            |                            |

|               |                                     |                     |          |
|---------------|-------------------------------------|---------------------|----------|
| EUT :         | Smart Phone                         | Model Name. :       | WP20 Pro |
| Temperature : | 25 °C                               | Relative Humidity : | 56%      |
| Pressure :    | 1012 hPa                            | Test Voltage :      | DC 3.87V |
| Test Mode :   | TX Frequency Band 2C (5470-5725MHz) |                     |          |

#### Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |      | Reference Frequency: 5500MHz |      |                            |                            |
|-----------------|----|-----------|------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |      | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 3.87 | 5500.0066                    | 5500 | 0.00663                    | -1.2057                    |
|                 |    | V max (V) | 4.2  | 5500.0010                    | 5500 | 0.00097                    | -0.1762                    |
|                 |    | V min (V) | 3.4  | 5500.0073                    | 5500 | 0.00728                    | -1.3242                    |
| Limits          |    |           |      | Within 5470-5725MHz          |      |                            |                            |
| Result          |    |           |      | Complies                     |      |                            |                            |

#### Temperature vs. Frequency Stability

| TEST CONDITIONS |      |        |     | Reference Frequency: 5500MHz |      |                            |                            |
|-----------------|------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |      |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 3.87 | T (°C) | -20 | 5500.0079                    | 5500 | 0.00786                    | -1.4293                    |
|                 |      | T (°C) | -10 | 5500.0004                    | 5500 | 0.00037                    | -0.0673                    |
|                 |      | T (°C) | 0   | 5500.0045                    | 5500 | 0.00450                    | -0.8174                    |
|                 |      | T (°C) | 10  | 5500.0067                    | 5500 | 0.00667                    | -1.2124                    |
|                 |      | T (°C) | 20  | 5500.0081                    | 5500 | 0.00812                    | -1.4761                    |
|                 |      | T (°C) | 30  | 5500.0040                    | 5500 | 0.00397                    | -0.7221                    |
|                 |      | T (°C) | 40  | 5500.0016                    | 5500 | 0.00158                    | -0.2881                    |
|                 |      | T (°C) | 50  | 5500.0020                    | 5500 | 0.00200                    | -0.3644                    |
|                 |      | T (°C) | 60  | 5500.0079                    | 5500 | 0.00794                    | -1.4433                    |
|                 |      | T (°C) | 70  | 5500.0055                    | 5500 | 0.00548                    | -0.9958                    |
| Limits          |      |        |     | Within 5470-5725MHz          |      |                            |                            |
| Result          |      |        |     | Complies                     |      |                            |                            |

### Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |      | Reference Frequency: 5600MHz |      |                            |                            |
|-----------------|----|-----------|------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |      | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 3.87 | 5600.0086                    | 5600 | 0.00863                    | -1.5412                    |
|                 |    | V max (V) | 4.2  | 5600.0049                    | 5600 | 0.00487                    | -0.8699                    |
|                 |    | V min (V) | 3.4  | 5600.0050                    | 5600 | 0.00502                    | -0.8961                    |
| Limits          |    |           |      | Within 5470-5725MHz          |      |                            |                            |
| Result          |    |           |      | Complies                     |      |                            |                            |

### Temperature vs. Frequency Stability

| TEST CONDITIONS |      |        |     | Reference Frequency: 5600MHz |      |                            |                            |
|-----------------|------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |      |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 3.87 | T (°C) | -20 | 5600.0025                    | 5600 | 0.00247                    | -0.4414                    |
|                 |      | T (°C) | -10 | 5600.0004                    | 5600 | 0.00036                    | -0.0637                    |
|                 |      | T (°C) | 0   | 5600.0025                    | 5600 | 0.00247                    | -0.4409                    |
|                 |      | T (°C) | 10  | 5600.0100                    | 5600 | 0.00996                    | -1.7787                    |
|                 |      | T (°C) | 20  | 5600.0000                    | 5600 | 0.00005                    | -0.0089                    |
|                 |      | T (°C) | 30  | 5600.0096                    | 5600 | 0.00960                    | -1.7149                    |
|                 |      | T (°C) | 40  | 5600.0090                    | 5600 | 0.00895                    | -1.5989                    |
|                 |      | T (°C) | 50  | 5600.0093                    | 5600 | 0.00926                    | -1.6538                    |
|                 |      | T (°C) | 60  | 5600.0050                    | 5600 | 0.00502                    | -0.8955                    |
|                 |      | T (°C) | 70  | 5600.0009                    | 5600 | 0.00085                    | -0.1524                    |
| Limits          |      |        |     | Within 5470-5725MHz          |      |                            |                            |
| Result          |      |        |     | Complies                     |      |                            |                            |

## Voltage vs. Frequency Stability

| TEST CONDITIONS |    |           |      | Reference Frequency: 5700MHz |      |                            |                            |
|-----------------|----|-----------|------|------------------------------|------|----------------------------|----------------------------|
|                 |    |           |      | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| T nom<br>(°C)   | 20 | V nom (V) | 3.87 | 5700.0006                    | 5700 | 0.00065                    | -0.1137                    |
|                 |    | V max (V) | 4.2  | 5700.0011                    | 5700 | 0.00109                    | -0.1906                    |
|                 |    | V min (V) | 3.4  | 5700.0019                    | 5700 | 0.00189                    | -0.3322                    |
| Limits          |    |           |      | Within 5470-5725MHz          |      |                            |                            |
| Result          |    |           |      | Complies                     |      |                            |                            |

## Temperature vs. Frequency Stability

| TEST CONDITIONS |      |        |     | Reference Frequency: 5700MHz |      |                            |                            |
|-----------------|------|--------|-----|------------------------------|------|----------------------------|----------------------------|
|                 |      |        |     | f                            | fc   | Max.<br>Deviation<br>(MHz) | Max.<br>Deviation<br>(ppm) |
| V nom (V)       | 3.87 | T (°C) | -20 | 5700.0096                    | 5700 | 0.00957                    | -1.6792                    |
|                 |      | T (°C) | -10 | 5700.0091                    | 5700 | 0.00906                    | -1.5901                    |
|                 |      | T (°C) | 0   | 5700.0059                    | 5700 | 0.00589                    | -1.0341                    |
|                 |      | T (°C) | 10  | 5700.0073                    | 5700 | 0.00735                    | -1.2888                    |
|                 |      | T (°C) | 20  | 5700.0057                    | 5700 | 0.00571                    | -1.0019                    |
|                 |      | T (°C) | 30  | 5700.0068                    | 5700 | 0.00677                    | -1.1885                    |
|                 |      | T (°C) | 40  | 5700.0039                    | 5700 | 0.00387                    | -0.6794                    |
|                 |      | T (°C) | 50  | 5700.0072                    | 5700 | 0.00720                    | -1.2638                    |
|                 |      | T (°C) | 60  | 5700.0060                    | 5700 | 0.00595                    | -1.0442                    |
|                 |      | T (°C) | 70  | 5700.0084                    | 5700 | 0.00845                    | -1.4818                    |
| Limits          |      |        |     | Within 5470-5725MHz          |      |                            |                            |
| Result          |      |        |     | Complies                     |      |                            |                            |

## 9. ANTENNA REQUIREMENT

### 9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 9.2 EUT ANTENNA

The EUT antenna is permanent attached PIFA antenna (antenna gain: 0.25dBi). It comply with the standard requirement.

END OF REPORT