

FCC SAR EVALUATION REPORT

**In accordance with the requirements of
FCC 47 CFR Part 2(2.1093), ANSI/IEEE C95.1-1992 and
IEEE Std 1528-2013**

Product Name : Smart Phone

Trademark : OUKITEL

Model Name : WP7

Family Model : N/A

Report No. : S19111903205001

FCC ID : 2ANMU-WP7

Prepared for

SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU INDUSTRIAL ZONE,
GUANLAN, LONGHUA,SHENZHEN,China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park Sanwei, Xixiang, Bao'an District,
Shenzhen, Guangdong, China
Tel.: +86-755-6115 6588 Fax.: +86-755-6115 6599
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name: SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
Address.....: A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU
INDUSTRIAL ZONE, GUANLAN, LONGHUA, SHENZHEN, China
Manufacturer's Name.....: SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
Address.....: A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU
INDUSTRIAL ZONE, GUANLAN, LONGHUA, SHENZHEN, China

Product description

Product name.....: Smart Phone
Trademark: OUKITEL
Model Name: WP7
Family Model.....: N/A


Standards: FCC 47 CFR Part 2(2.1093)
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests: Nov. 25, 2019 ~ Dec. 04, 2019
Date of Issue: Dec. 19, 2019
Test Result.....: **Pass**

Prepared By : 
(Test Engineer) :
(Cheng Jiawen)

Approved By : 
(Lab Manager) :
(Sam Chen)

※ ※ Revision History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Dec. 19, 2019	Cheng Jiawen

TABLE OF CONTENTS

1. General Information	6
1.1. RF exposure limits	6
1.2. Statement of Compliance.....	7
1.3. EUT Description	7
1.4. Test specification(s)	10
1.5. Ambient Condition	10
2. SAR Measurement System	11
2.1. SATIMO SAR Measurement Set-up Diagram	11
2.2. Robot	12
2.3. E-Field Probe	13
2.3.1. E-Field Probe Calibration.....	13
2.4. SAM phantoms	14
2.4.1. Technical Data	15
2.5. Device Holder	16
2.6. Test Equipment List	17
3. SAR Measurement Procedures	19
3.1. Power Reference.....	19
3.2. Area scan & Zoom scan	19
3.3. Description of interpolation/extrapolation scheme	21
3.4. Volumetric Scan	21
3.5. Power Drift	21
4. System Verification Procedure.....	22
4.1. Tissue Verification.....	22
4.1.1. Tissue Dielectric Parameter Check Results	23
4.2. System Verification Procedure	24
4.2.1. System Verification Results	25
5. SAR Measurement variability and uncertainty	26
5.1. SAR measurement variability	26
5.2. SAR measurement uncertainty.....	26
6. RF Exposure Positions	27
6.1. Ear and handset reference point.....	27
6.2. Definition of the cheek position	27
6.3. Definition of the tilt position.....	29
6.4. Body Worn Accessory	29
6.5. Wireless Router Devices.....	30
7. RF Output Power	31
7.1. GSM Conducted Power	31
7.2. WCDMA Conducted Power.....	31
7.3. LTE Conducted Power.....	33

7.4. WLAN & Bluetooth Output Power	46
7.4.1. Output Power Results Of WLAN	46
7.4.2. Output Power Results Of Bluetooth	47
8. Antenna Location.....	48
9. Stand-alone SAR test exclusion	49
10. SAR Results	50
10.1. SAR measurement results	50
10.1.1. SAR measurement Result of GSM850.....	50
10.1.2. SAR measurement Result of GSM1900.....	50
10.1.3. SAR measurement Result of WCDMA Band 2.....	51
10.1.4. SAR measurement Result of WCDMA Band 4.....	52
10.1.5. SAR measurement Result of WCDMA Band 5.....	53
10.1.6. SAR measurement Result of LTE Band 2	53
10.1.7. SAR measurement Result of LTE Band 4	55
10.1.8. SAR measurement Result of LTE Band 5	57
10.1.9. SAR measurement Result of LTE Band 7	58
10.1.10. SAR measurement Result of LTE Band 12	60
10.1.11. SAR measurement Result of LTE Band 17	61
10.1.12. SAR measurement Result of LTE Band 19	63
10.1.13. SAR measurement Result of WLAN 2.4G.....	64
10.2. SAR Summation Scenario	65
11. Appendix A. Photo documentation.....	75
12. Appendix B. System Check Plots	76
13. Appendix C. Plots of High SAR Measurement	101
14. Appendix D. Calibration Certificate.....	154

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE
 HEAD AND TRUNK LIMIT
 1.6 W/kg
 APPLIED TO THIS EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for WP7 are as follows.

Band	Max Reported SAR Value(W/kg)			
	1-g Head	1-g Body-Worn (Separation distance of 10mm)	1-g Hotspot (Separation distance of 10mm)	Max Simultaneous Tx
GSM 850	0.194	0.411	0.411	1.584
GSM 1900	0.252	0.404	0.404	
WCDMA Band 2	0.286	0.783	0.783	
WCDMA Band 4	0.519	1.270	1.270	
WCDMA Band 5	0.122	0.235	0.235	
LTE Band 2	0.306	0.843	0.843	
LTE Band 4	0.550	1.326	1.326	
LTE Band 5	0.132	0.252	0.252	
LTE Band 7	0.915	1.380	1.380	
LTE Band 12	0.198	0.487	0.487	
LTE Band 17	0.218	0.473	0.473	
LTE Band 19	0.138	0.338	0.338	
WLAN 2.4G	0.668	0.163	0.163	

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

1.3. EUT Description

Device Information	
Product Name	Smart Phone
Trade Name	OUKITEL
Model Name	WP7
Family Model	N/A
FCC ID	2ANMU-WP7
Device Phase	Identical Prototype
Exposure Category	General population / Uncontrolled environment
Antenna	FPC Antenna
Battery Information	DC 3.85V, 7800mAh, 30.03Wh
Device Operating Configurations	
Supporting Mode(s)	GSM 850/1900, WCDMA Band 2/4/5, LTE Band

	2/4/5/7/12/17/19, WLAN 2.4G, Bluetooth, NFC		
Test Modulation	GSM(GMSK/8PSK), WCDMA(QPSK), LTE(QPSK/16QAM), WLAN(DSSS/OFDM), Bluetooth(GFSK, $\pi/4$ -DQPSK, 8DPSK), NFC(ASK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824-849	869-894
	GSM 1900	1850-1910	1930-1990
	WCDMA Band 2	1850-1910	1930-1990
	WCDMA Band 4	1710-1755	2110-2155
	WCDMA Band 5	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894
	LTE Band 7	2500-2570	2620-2690
	LTE Band 12	699-716	729-746
	LTE Band 17	704-716	734-746
	LTE Band 19	830-845	875-890
	WLAN 2.4G	2412-2462	
	Bluetooth	2402-2480	
	NFC	13.56	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
EDGE Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
Power Class	4, tested with power level 5(GSM 850)		
	1, tested with power level 0(GSM 1900)		
	3, tested with power control "all 1"(WCDMA Band 2)		
	3, tested with power control "all 1"(WCDMA Band 4)		
	3, tested with power control "all 1"(WCDMA Band 5)		
	3, tested with power control all Max.(LTE Band 2)		
	3, tested with power control all Max.(LTE Band 4)		
	3, tested with power control all Max.(LTE Band 5)		
	3, tested with power control all Max.(LTE Band 7)		
	3, tested with power control all Max.(LTE Band 12)		
	3, tested with power control all Max.(LTE Band 17)		
	3, tested with power control all Max.(LTE Band 19)		
Test Channels (low-mid-high)	128-189-251(GSM 850)		

512-661-810(GSM 1900)
9262-9400-9538(WCDMA Band 2)
1312-1413-1513(WCDMA Band 4)
4132-4182-4233(WCDMA Band 5)
18607-18900-19193(LTE Band 2 BW=1.4MHz)
18615-18900-19185(LTE Band 2 BW=3MHz)
18625-18900-19175(LTE Band 2 BW=5MHz)
18650-18900-19150(LTE Band 2 BW=10MHz)
18675-18900-19125(LTE Band 2 BW=15MHz)
18700-18900-19100(LTE Band 2 BW=20MHz)
19957-20175-20393(LTE Band 4 BW=1.4MHz)
19965-20175-20385(LTE Band 4 BW=3MHz)
19975-20175-20375(LTE Band 4 BW=5MHz)
20000-20175-20350(LTE Band 4 BW=10MHz)
20025-20175-20325(LTE Band 4 BW=15MHz)
20050-20175-20300(LTE Band 4 BW=20MHz)
20407-20525-20643(LTE Band 5 BW=1.4MHz)
20415-20525-20635(LTE Band 5 BW=3MHz)
20425-20525-20625(LTE Band 5 BW=5MHz)
20450-20525-20600(LTE Band 5 BW=10MHz)
20775-21100-21425(LTE Band 7 BW=5MHz)
20800-21100-21400(LTE Band 7 BW=10MHz)
20825-21100-21375(LTE Band 7 BW=15MHz)
20850-21100-21350(LTE Band 7 BW=20MHz)
23017-23095-23173 (LTE Band 12 BW=1.4MHz)
23025-23095-23165 (LTE Band 12 BW=3MHz)
23035-23095-23155 (LTE Band 12 BW=5MHz)
23060-23095-23130 (LTE Band 12 BW=10MHz)
23755-23790-23825(LTE Band 17 BW=5MHz)
23780-23790-23800(LTE Band 17 BW=10MHz)
24025-24075-24125(LTE Band 19 BW=5MHz)
24050-24075-24100(LTE Band 19 BW=10MHz)
24075 (LTE Band 19 BW=15MHz)
1-3-6-9-11(WLAN 2.4G)

1.4. Test specification(s)


FCC 47 CFR Part 2(2.1093)
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 248227 D01 802.11 Wi-Fi SAR
KDB 941225 D01 3G SAR Procedures
KDB 941225 D05 SAR for LTE Devices
KDB 941225 D06 Hotspot SAR
KDB 648474 D04 Handset SAR

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram

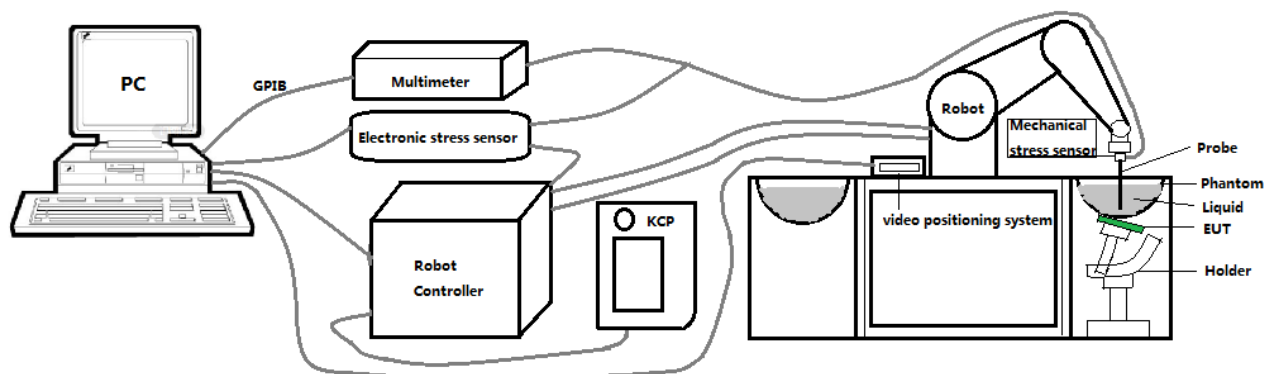

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe SN 41/18 EPGO330 with following specifications is used



- Dynamic range: 0.01-100 W/kg
 - Tip Diameter: 2.5 mm
 - Distance between probe tip and sensor center: 1 mm
 - Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than ± 1 mm).
 - Probe linearity: ± 0.10 dB
 - Axial isotropy: 0.06 dB
 - Hemispherical Isotropy: 0.09 dB
 - Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
 - Lower detection limit: 9mW/kg
- Angle between probe axis (evaluation axis) and surface normal line: less than 30° .

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

2.4. SAM phantoms


Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by mobile phones.

2.4.1. Technical Data

Serial Number	Shell thickness	Filling volume	Dimensions	Positionner Material	Permittivity	Loss Tangent
SN 16/15 SAM119	2 mm $\pm$ 0.2 mm	27 liters	Length:1000 mm Width:500 mm Height:200 mm	Gelcoat with fiberglass	3.4	0.02

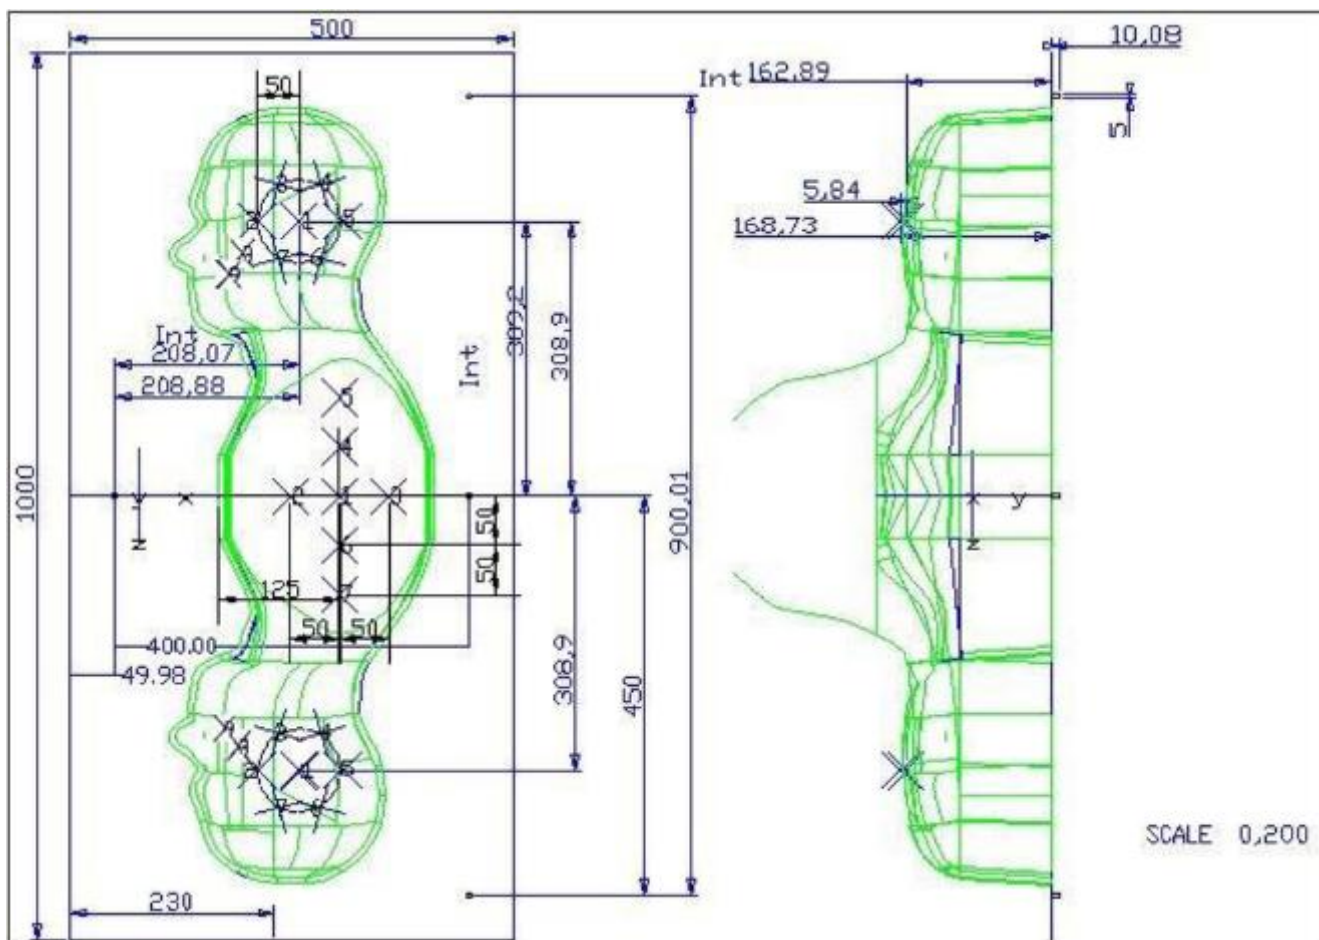


Serial Number	Left Head(mm)		Right Head(mm)		Flat Part(mm)	
SN 16/15 SAM119	2	2.02	2	2.08	1	2.09
	3	2.05	3	2.06	2	2.06
	4	2.07	4	2.07	3	2.08
	5	2.08	5	2.08	4	2.10
	6	2.05	6	2.07	5	2.10
	7	2.05	7	2.05	6	2.07
	8	2.07	8	2.06	7	2.07
	9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 μ m.

2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

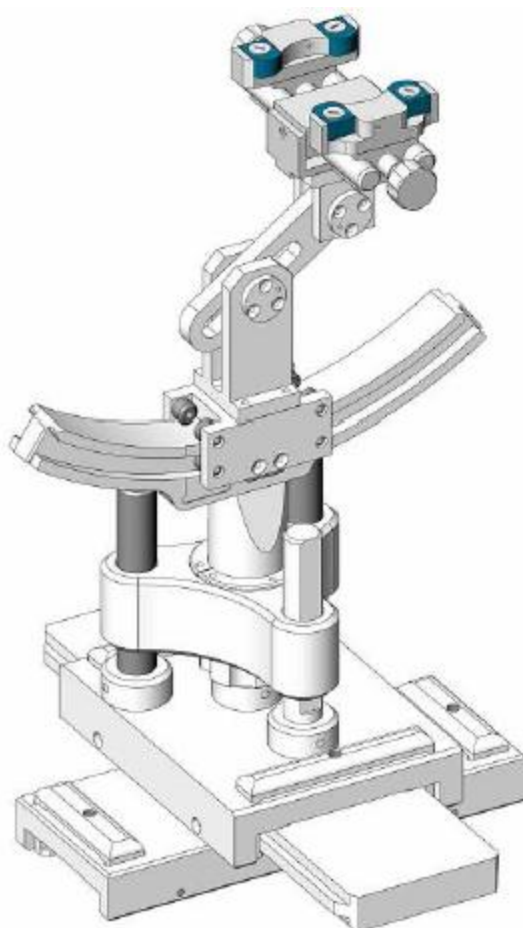

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked ☒

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
☒	MVG	E FIELD PROBE	SSE2	SN 41/18 EPG0330	May 21, 2019	May 20, 2020
☒	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Apr. 19, 2018	Apr. 18, 2021
☐	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Apr. 19, 2018	Apr. 18, 2021
☐	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Apr. 19, 2018	Apr. 18, 2021
☐	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
☒	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
☒	KEITHLEY	Millivoltmeter	2000	4072790	NCR	NCR
☒	R&S	Universal radio communication tester	CMU200	117858	Aug. 06, 2019	Aug. 05, 2020
☒	R&S	Wideband radio communication tester	CMW500	103917	Aug. 28, 2019	Aug. 27, 2020
☒	HP	Network Analyzer	8753D	3410J01136	Aug. 06, 2019	Aug. 05, 2020
☒	Agilent	PSG Analog Signal Generator	E8257D	MY51110112	Aug. 06, 2019	Aug. 05, 2020

☒	Agilent	Power meter	E4419B	MY45102538	Aug. 06, 2019	Aug. 05, 2020
☒	Agilent	Power sensor	E9301A	MY41495644	Aug. 06, 2019	Aug. 05, 2020
☒	Agilent	Power sensor	E9301A	US39212148	Aug. 06, 2019	Aug. 05, 2020
☒	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Aug. 06, 2019	Aug. 05, 2020

3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/Bluetooth power measurement, use engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/Bluetooth output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists to a full 3D scan over a specific area. This 3D scan is useful form multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scan to calculate the SAR value of the combined measurement as it is define in the standard IEEE1528 and IEC62209.

3.5. Power Drift

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.

4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23
Ingredients (% of weight)	Body Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	50.30	50.30	50.30	69.91	69.91	71.88	71.88	71.88	79.54	79.54
NaCl	0.60	0.60	0.60	0.13	0.13	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	49.10	49.10	49.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	9.99	9.99	19.97	19.97	19.97	11.24	11.24
DGBE	0.00	0.00	0.00	19.97	19.97	7.99	7.99	7.99	9.22	9.22

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

Photo of Liquid depth for Head Position	Photo of Liquid depth for Body Position
	

4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.


Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r ($\pm 5\%$)	σ (S/m) ($\pm 5\%$)	ϵ_r	σ (S/m)		
Head 750	750	41.96 (39.86~44.06)	0.89 (0.85~0.93)	41.23	0.91	21.5 °C	Dec. 04, 2019
Body 750	750	55.55 (52.77~58.33)	0.96 (0.91~1.01)	55.30	0.97	21.4 °C	Dec. 04, 2019
Head 850	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	40.44	0.94	21.1 °C	Nov. 25, 2019
Body 850	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	54.28	1.01	21.5 °C	Nov. 30, 2019
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.55	1.41	21.2 °C	Nov. 25, 2019
Body 1800	1800	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.24	1.56	21.2 °C	Nov. 30, 2019
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.96	1.46	21.5 °C	Dec. 04, 2019
Body 1900	1900	53.30 (50.64~55.97)	1.52 (1.44~1.60)	52.57	1.57	21.5 °C	Dec. 04, 2019
Head 2450	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	38.79	1.87	21.5 °C	Nov. 26, 2019
Body 2450	2450	52.70 (50.07~55.34)	1.95 (1.85~2.05)	52.09	2.03	21.8 °C	Nov. 30, 2019
Head 2600	2600	39.01 (37.06~40.96)	1.96 (1.86~2.06)	38.47	2.02	21.4 °C	Nov. 26, 2019
Body 2600	2600	52.51 (49.88~55.14)	2.16 (2.05~2.27)	52.67	2.20	21.4 °C	Nov. 30, 2019

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

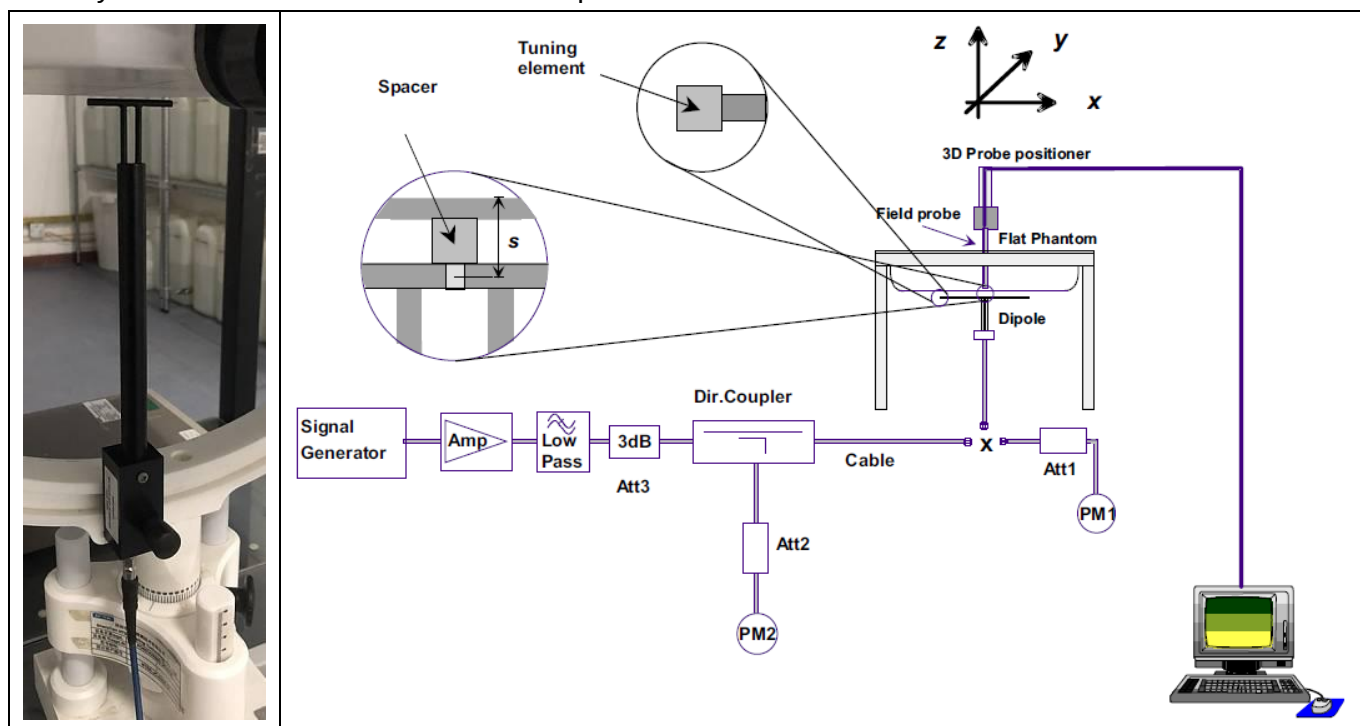

4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of $\pm 10\%$. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W) ($\pm 10\%$)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)		
750MHz Head	8.56 (7.70~9.42)	5.55 (5.00~6.11)	8.53	5.51	21.5 °C	Dec. 04, 2019
750MHz Body	8.85 (7.97~9.74)	5.91 (5.32~6.50)	8.86	5.89	21.4 °C	Dec. 04, 2019
835MHz Head	9.55 (8.60~10.51)	6.10 (5.49~6.71)	9.66	6.23	21.1 °C	Nov. 25, 2019
835MHz Body	9.83 (8.85~10.81)	6.45 (5.81~7.10)	9.80	6.43	21.5 °C	Nov. 30, 2019
1800MHz Head	38.11 (34.30~41.92)	20.05 (18.05~22.06)	38.10	19.96	21.2 °C	Nov. 25, 2019
1800MHz Body	38.13 (34.32~41.94)	20.65 (18.59~22.72)	38.12	20.63	21.2 °C	Nov. 30, 2019
1900MHz Head	38.92 (35.03~42.81)	20.09 (18.08~22.10)	38.90	20.07	21.5 °C	Dec. 04, 2019
1900MHz Body	39.02 (35.12~42.92)	20.57 (18.51~22.63)	39.10	20.59	21.5 °C	Dec. 04, 2019
2450MHz Head	53.76 (48.38~59.14)	24.12 (21.71~26.53)	53.63	24.55	21.5 °C	Nov. 26, 2019
2450MHz Body	52.90 (47.61~58.19)	24.09 (21.68~26.50)	52.88	24.01	21.8 °C	Nov. 30, 2019
2600MHz Head	55.60 (50.04~61.16)	24.60 (22.14~27.06)	55.98	24.81	21.4 °C	Nov. 26, 2019
2600MHz Body	52.49 (47.24~57.74)	23.74 (21.37~26.11)	52.40	23.54	21.4 °C	Nov. 30, 2019

5. SAR Measurement variability and uncertainty

5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6. RF Exposure Positions

6.1. Ear and handset reference point

Figure 6.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE”.



Fig 6.1.1 Front, back, and side views of SAM phantom

6.2. Definition of the cheek position

1. Define two imaginary lines on the handset, the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 6.2.1 and Figure 6.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 6.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 6.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
2. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
3. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP
4. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
5. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.

6. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 6.2.3. The actual rotation angles should be documented in the test report.

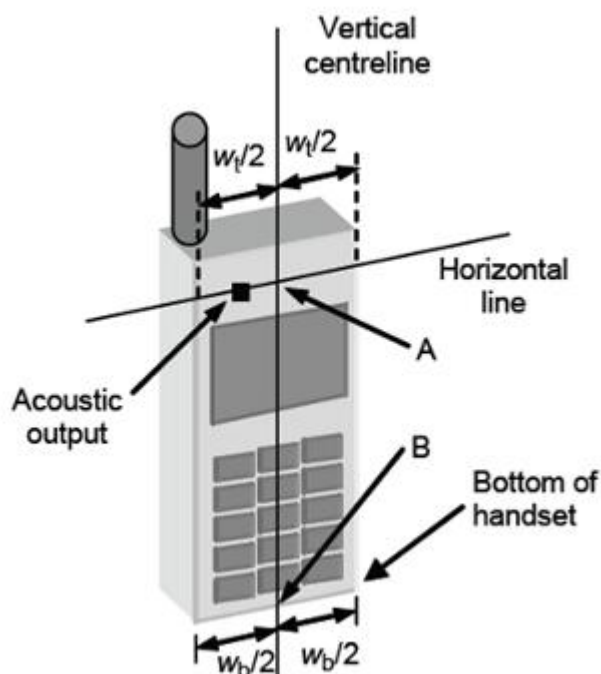


Fig 6.2.1 Handset vertical and horizontal reference lines—"fixed case"

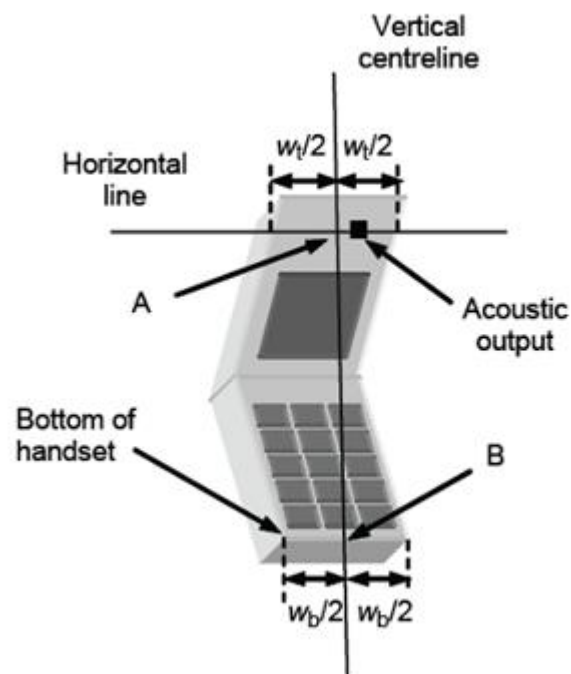


Fig 6.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

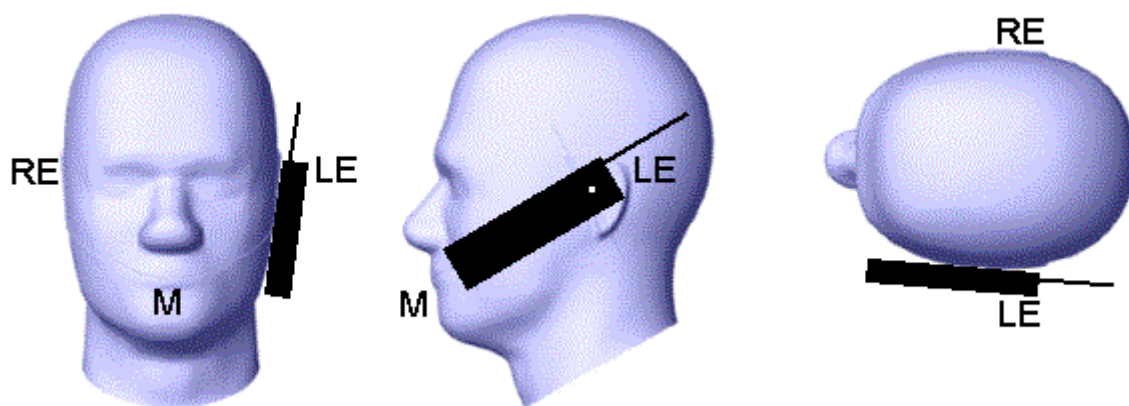


Fig 6.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

6.3. Definition of the tilt position

1. While maintaining the orientation of the handset, retract the handset parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15 degree.
2. Rotate the Handset around the horizontal line by 15 degree (see Figure 6.3.1).
3. While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g., the antenna with the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is in contact with the phantom, e.g., the antenna with the back of the head.

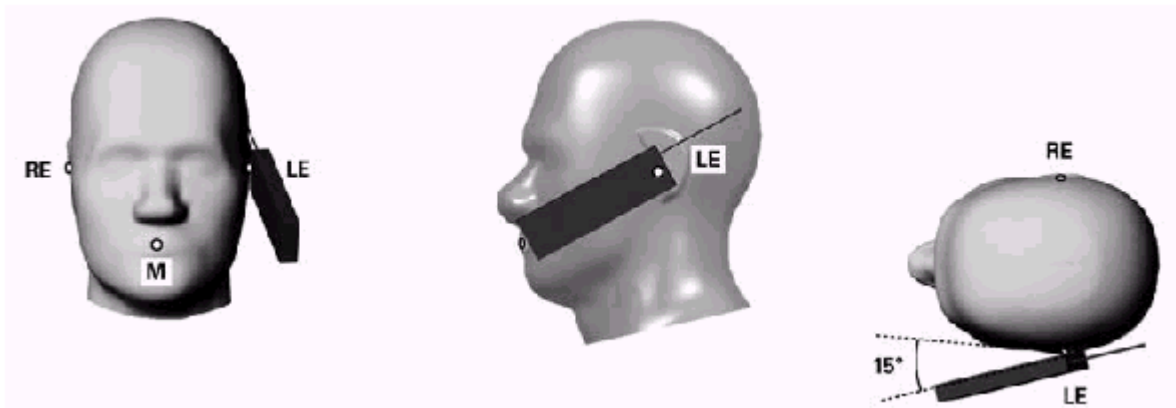


Figure 6.3.1 – Tilt position of the wireless device on the left side of SAM

6.4. Body Worn Accessory

1. Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4.1). Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.
2. Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest

spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

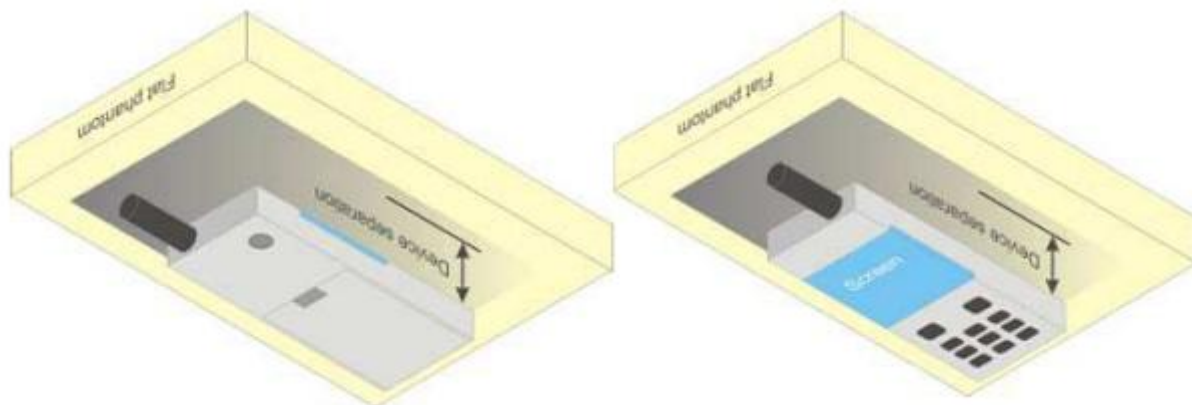


Figure 6.4.1 – Test positions for body-worn devices

6.5. Wireless Router Devices

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WLAN simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WLAN transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WLAN transmitter according to FCC KDB Publication 447498 D01 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

7. RF Output Power

7.1. GSM Conducted Power

Band GSM850	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	128	189	251	Tune-up	128	189	251
Frequency (MHz)	(dBm)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8
GSM (GMSK)	33.00	32.65	32.69	32.66	23.97	23.62	23.66	23.63
GPRS(GMSK, 1 TS)	33.00	32.72	32.77	32.75	23.97	23.69	23.74	23.72
GPRS(GMSK, 2 TS)	32.00	31.76	31.79	31.80	25.98	25.74	25.77	25.78
GPRS(GMSK, 3 TS)	30.00	29.73	29.77	29.79	25.74	25.47	25.51	25.53
GPRS(GMSK, 4 TS)	29.00	28.56	28.63	28.69	25.99	25.55	25.62	25.68
EDGE(8PSK, 1 TS)	27.00	26.71	26.49	26.46	17.97	17.68	17.46	17.43
EDGE(8PSK, 2 TS)	26.00	25.86	25.59	25.62	19.98	19.84	19.57	19.60
EDGE(8PSK, 3 TS)	24.00	23.83	23.55	23.60	19.74	19.57	19.29	19.34
EDGE(8PSK, 4 TS)	23.00	22.84	22.61	22.54	19.99	19.83	19.60	19.53
Band GSM1900	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	512	661	810	Tune-up	512	661	810
Frequency (MHz)	(dBm)	1850.2	1880.0	1909.8	(dBm)	1850.2	1880.0	1909.8
GSM (GMSK)	30.00	29.37	29.62	29.83	20.97	20.34	20.59	20.80
GPRS(GMSK, 1 TS)	30.00	29.40	29.65	29.85	20.97	20.37	20.62	20.82
GPRS(GMSK, 2 TS)	29.00	28.41	28.71	28.99	22.98	22.39	22.69	22.97
GPRS(GMSK, 3 TS)	28.00	26.31	26.65	27.07	23.74	22.05	22.39	22.81
GPRS(GMSK, 4 TS)	27.00	25.20	25.57	26.01	23.99	22.19	22.56	23.00
EDGE(8PSK, 1 TS)	27.00	26.21	25.97	25.86	17.97	17.18	16.94	16.83
EDGE(8PSK, 2 TS)	26.00	25.36	24.93	24.73	19.98	19.34	18.91	18.71
EDGE(8PSK, 3 TS)	24.00	23.29	22.80	22.49	19.74	19.03	18.54	18.23
EDGE(8PSK, 4 TS)	22.00	21.67	21.44	21.31	18.99	18.66	18.43	18.30

Note: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 TS) - 9.03 dB

Frame-averaged power = Maximum burst averaged power (2 TS) - 6.02 dB

Frame-averaged power = Maximum burst averaged power (3 TS) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 TS) - 3.01 dB

7.2. WCDMA Conducted Power

Band	WCDMA Band 2			
Tx Channel	Tune-up	9262	9400	9538
Frequency (MHz)		1852.4	1880	1907.6

RMC 12.2Kbps	24.00	23.91	23.97	23.91
HSDPA Subtest-1	24.00	23.11	23.14	23.04
HSDPA Subtest-2	23.00	22.72	22.57	22.58
HSDPA Subtest-3	22.00	21.70	21.66	21.61
HSDPA Subtest-4	22.00	21.43	21.54	21.40
HSUPA Subtest-1	23.00	22.91	22.90	22.82
HSUPA Subtest-2	24.00	23.01	23.04	22.94
HSUPA Subtest-3	22.00	21.85	21.94	21.75
HSUPA Subtest-4	24.00	23.12	23.13	23.05
HSUPA Subtest-5	23.00	22.51	22.41	22.26
Band	WCDMA Band 4			
Tx Channel	Tune-up	1312	1413	1513
Frequency (MHz)		1712.4	1732.6	1752.6
RMC 12.2Kbps	24.00	23.92	23.86	23.83
HSDPA Subtest-1	24.00	23.06	22.99	22.95
HSDPA Subtest-2	23.00	22.63	22.54	22.68
HSDPA Subtest-3	22.00	21.28	21.33	21.23
HSDPA Subtest-4	22.00	21.35	21.57	21.63
HSUPA Subtest-1	23.00	22.84	22.79	22.75
HSUPA Subtest-2	23.00	22.94	22.90	22.85
HSUPA Subtest-3	22.00	21.75	21.62	21.91
HSUPA Subtest-4	24.00	23.06	22.99	22.93
HSUPA Subtest-5	23.00	22.33	22.34	22.34
Band	WCDMA Band 5			
Tx Channel	Tune-up	4132	4182	4233
Frequency (MHz)		826.4	836.4	846.6
RMC 12.2Kbps	24.00	23.85	23.89	23.73
HSDPA Subtest-1	23.00	22.92	22.93	22.79
HSDPA Subtest-2	23.00	22.35	22.61	22.22
HSDPA Subtest-3	22.00	21.44	21.14	20.82
HSDPA Subtest-4	22.00	21.78	21.51	21.21
HSUPA Subtest-1	23.00	22.43	22.51	22.19
HSUPA Subtest-2	23.00	22.86	22.80	22.67
HSUPA Subtest-3	22.00	21.73	21.76	21.59
HSUPA Subtest-4	23.00	22.92	22.91	22.77
HSUPA Subtest-5	23.00	22.29	22.12	21.96

7.3. LTE Conducted Power

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18607/1850.7	18900/1880	19193/1909.3
LTE Band 2	1.4MHz	QPSK	1	0	24.00	23.31	23.38	23.39
			1	2	24.00	23.37	23.47	23.43
			1	5	24.00	23.30	23.42	23.39
			3	0	24.00	23.39	23.45	23.42
			3	1	24.00	23.41	23.47	23.45
			3	2	24.00	23.37	23.45	23.41
			6	0	23.00	22.38	22.59	22.54
		16QAM	1	0	23.00	22.33	22.45	22.14
			1	2	23.00	22.39	22.53	22.20
			1	5	23.00	22.35	22.43	22.14
			3	0	23.00	22.47	22.54	22.51
			3	1	23.00	22.50	22.60	22.52
			3	2	23.00	22.47	22.52	22.55
			6	0	22.00	21.58	21.65	21.66
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18615/1851.5	18900/1880	19185/1908.5
LTE Band 2	3MHz	QPSK	1	0	24.00	23.17	23.32	23.35
			1	7	24.00	23.22	23.39	23.41
			1	14	24.00	23.15	23.33	23.31
			8	0	23.00	22.32	22.48	22.49
			8	4	23.00	22.38	22.55	22.49
			8	7	23.00	22.39	22.49	22.41
			15	0	23.00	22.34	22.45	22.41
		16QAM	1	0	23.00	22.51	22.36	22.03
			1	7	23.00	22.56	22.42	22.09
			1	14	23.00	22.47	22.36	22.00
			8	0	22.00	21.34	21.42	21.37
			8	4	22.00	21.40	21.50	21.44
			8	7	22.00	21.36	21.37	21.37
			15	0	22.00	21.40	21.36	21.47
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		

			RB Size	RB Offset		18625/1852.5	18900/1880	19175/1907.5
LTE Band 2	5MHz	QPSK	1	0	24.00	23.35	23.57	23.55
			1	12	24.00	23.39	23.61	23.61
			1	24	24.00	23.34	23.55	23.51
			12	0	23.00	22.41	22.53	22.59
			12	6	23.00	22.50	22.52	22.56
			12	11	23.00	22.42	22.45	22.46
			25	0	23.00	22.45	22.50	22.52
		16QAM	1	0	23.00	22.68	22.86	22.68
			1	12	23.00	22.71	22.91	22.74
			1	24	23.00	22.72	22.87	22.72
			12	0	22.00	21.52	21.49	21.47
			12	6	22.00	21.56	21.51	21.46
			12	11	22.00	21.46	21.42	21.41
			25	0	22.00	21.46	21.44	21.53
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18650/1855	18900/1880	19150/1905
LTE Band 2	10MHz	QPSK	1	0	24.00	23.49	23.65	23.63
			1	24	24.00	23.56	23.64	23.70
			1	49	24.00	23.61	23.62	23.61
			25	0	23.00	22.46	22.53	22.53
			25	12	23.00	22.56	22.60	22.59
			25	24	23.00	22.51	22.46	22.41
			50	0	23.00	22.58	22.49	22.54
		16QAM	1	0	23.00	22.34	22.88	22.73
			1	24	23.00	22.39	22.88	22.67
			1	49	23.00	22.42	22.84	22.64
			25	0	22.00	21.59	21.51	21.56
			25	12	22.00	21.57	21.58	21.55
			25	24	22.00	21.55	21.46	21.37
			50	0	22.00	21.55	21.48	21.51
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18675/1857.5	18900/1880	19125/1902.5
LTE Band	15MHz	QPSK	1	0	24.00	23.56	23.65	23.60
			1	37	24.00	23.55	23.60	23.63

2			1	74	24.00	23.58	23.51	23.53
			36	0	23.00	22.57	22.74	22.58
			36	18	23.00	22.58	22.74	22.72
			36	37	23.00	22.60	22.60	22.59
			75	0	23.00	22.63	22.68	22.61
		16QAM	1	0	23.00	22.64	22.66	22.95
			1	37	23.00	22.71	22.65	22.89
			1	74	23.00	22.70	22.57	22.78
			36	0	22.00	21.66	21.57	21.59
			36	18	22.00	21.64	21.59	21.65
			36	37	22.00	21.66	21.48	21.53
			75	0	22.00	21.61	21.59	21.57
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18700/1860	18900/1880	19100/1900
LTE Band 2	20MHz	QPSK	1	0	24.00	23.46	23.65	23.51
			1	49	24.00	23.62	23.73	23.68
			1	99	24.00	23.57	23.52	23.57
			50	0	23.00	22.55	22.59	22.60
			50	24	23.00	22.61	22.61	22.68
			50	49	23.00	22.70	22.47	22.50
			100	0	23.00	22.63	22.58	22.50
		16QAM	1	0	23.00	22.62	22.86	22.75
			1	49	23.00	22.80	22.86	22.86
			1	99	23.00	22.74	22.82	22.63
			50	0	22.00	21.67	21.60	21.57
			50	24	22.00	21.78	21.62	21.64
			50	49	22.00	21.79	21.51	21.45
			100	0	22.00	21.72	21.51	21.54

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19957/1710.7	20175/1732.5	20393/1754.3
LTE Band 4	1.4MHz	QPSK	1	0	24.00	23.24	23.37	23.27
			1	2	24.00	23.34	23.42	23.30
			1	5	24.00	23.28	23.32	23.26
			3	0	24.00	23.36	23.41	23.44
			3	1	24.00	23.37	23.45	23.47

			3	2	24.00	23.32	23.42	23.43
			6	0	23.00	22.42	22.39	22.41
		16QAM	1	0	23.00	21.98	22.33	22.47
			1	2	23.00	22.12	22.38	22.51
			1	5	23.00	22.04	22.34	22.53
			3	0	23.00	22.41	22.50	22.60
			3	1	23.00	22.48	22.52	22.67
			3	2	23.00	22.45	22.48	22.61
			6	0	22.00	21.55	21.58	21.60
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19965/1711.5	20175/1732.5	20385/1753.5
LTE Band 4	3MHz	QPSK	1	0	24.00	23.19	23.14	23.19
			1	7	24.00	23.23	23.23	23.26
			1	14	24.00	23.10	23.15	23.22
			8	0	23.00	22.33	22.35	22.37
			8	4	23.00	22.39	22.40	22.43
			8	7	23.00	22.34	22.35	22.37
			15	0	23.00	22.38	22.38	22.39
		16QAM	1	0	23.00	22.45	22.35	22.12
			1	7	23.00	22.54	22.38	22.13
			1	14	23.00	22.47	22.29	22.07
			8	0	22.00	21.34	21.35	21.36
			8	4	22.00	21.43	21.39	21.41
			8	7	22.00	21.37	21.34	21.38
			15	0	22.00	21.40	21.32	21.47
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19975/1712.5	20175/1732.5	20375/1752.5
LTE Band 4	5MHz	QPSK	1	0	24.00	23.40	23.38	23.41
			1	12	24.00	23.45	23.46	23.52
			1	24	24.00	23.41	23.35	23.42
			12	0	23.00	22.39	22.45	22.45
			12	6	23.00	22.45	22.47	22.50
			12	11	23.00	22.44	22.39	22.51
			25	0	23.00	22.44	22.42	22.45
		16QAM	1	0	24.00	22.60	22.64	22.92
			1	12	24.00	22.72	22.66	23.01

			1	24	24.00	22.74	22.62	22.91
			12	0	22.00	21.41	21.49	21.53
			12	6	22.00	21.49	21.52	21.54
			12	11	22.00	21.50	21.42	21.54
			25	0	22.00	21.54	21.44	21.51
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20000/1715	20175/1732.5	20350/1750
LTE Band 4	10MHz	QPSK	1	0	24.00	23.43	23.47	23.48
			1	24	24.00	23.47	23.50	23.55
			1	49	24.00	23.47	23.46	23.52
			25	0	23.00	22.35	22.47	22.41
			25	12	23.00	22.49	22.46	22.54
			25	24	23.00	22.57	22.38	22.54
			50	0	23.00	22.49	22.46	22.54
		16QAM	1	0	23.00	22.70	22.60	22.38
			1	24	23.00	22.87	22.64	22.41
			1	49	23.00	22.88	22.62	22.37
			25	0	22.00	21.45	21.51	21.45
			25	12	22.00	21.60	21.51	21.61
			25	24	22.00	21.66	21.43	21.60
			50	0	22.00	21.57	21.51	21.56
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20025/1717.5	20175/1732.5	20325/1747.5
LTE Band 4	15MHz	QPSK	1	0	24.00	23.37	23.48	23.39
			1	37	24.00	23.45	23.50	23.41
			1	74	24.00	23.45	23.43	23.38
			36	0	23.00	22.43	22.53	22.49
			36	18	23.00	22.53	22.55	22.51
			36	37	23.00	22.55	22.48	22.58
			75	0	23.00	22.57	22.57	22.59
		16QAM	1	0	23.00	22.69	22.61	22.53
			1	37	23.00	22.87	22.59	22.66
			1	74	23.00	22.81	22.57	22.61
			36	0	22.00	21.46	21.55	21.49
			36	18	22.00	21.57	21.60	21.51
			36	37	22.00	21.56	21.46	21.54

			75	0	22.00	21.55	21.47	21.61
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20050/1720	20175/1732.5	20300/1745
LTE Band 4	20MHz	QPSK	1	0	24.00	23.36	23.47	23.40
			1	49	24.00	23.52	23.60	23.55
			1	99	24.00	23.42	23.46	23.47
			50	0	23.00	22.36	22.57	22.54
			50	24	23.00	22.54	22.53	22.62
			50	49	23.00	22.51	22.44	22.69
			100	0	23.00	22.44	22.47	22.63
		16QAM	1	0	23.00	22.49	22.64	22.69
			1	49	23.00	22.77	22.69	22.89
			1	99	23.00	22.64	22.64	22.78
			50	0	22.00	21.35	21.62	21.66
			50	24	22.00	21.56	21.57	21.71
			50	49	22.00	21.51	21.50	21.79
			100	0	22.00	21.47	21.52	21.70

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20407/824.7	20525/836.5	20643/848.3
LTE Band 5	1.4MHz	QPSK	1	0	24.00	23.45	23.38	23.31
			1	2	24.00	23.53	23.45	23.38
			1	5	24.00	23.45	23.39	23.34
			3	0	24.00	23.56	23.61	23.45
			3	1	24.00	23.57	23.62	23.46
			3	2	24.00	23.58	23.58	23.39
			6	0	23.00	22.54	22.58	22.54
		16QAM	1	0	23.00	22.55	22.62	22.20
			1	2	23.00	22.58	22.70	22.27
			1	5	23.00	22.55	22.66	22.22
			3	0	23.00	22.69	22.87	22.62
			3	1	23.00	22.74	22.95	22.67
			3	2	23.00	22.69	22.86	22.59
			6	0	22.00	21.79	21.84	21.73
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		

			RB Size	RB Offset		20415/825.5	20525/836.5	20635/847.5
LTE Band 5	3MHz	QPSK	1	0	24.00	23.27	23.26	23.29
			1	7	24.00	23.34	23.39	23.33
			1	14	24.00	23.26	23.27	23.26
			8	0	23.00	22.44	22.59	22.48
			8	4	23.00	22.61	22.62	22.55
			8	7	23.00	22.58	22.56	22.42
			15	0	23.00	22.55	22.64	22.47
		16QAM	1	0	23.00	22.73	22.53	22.10
			1	7	23.00	22.78	22.65	22.21
			1	14	23.00	22.72	22.53	22.04
			8	0	22.00	21.59	21.61	21.52
			8	4	22.00	21.66	21.69	21.57
			8	7	22.00	21.58	21.63	21.49
			15	0	22.00	21.60	21.59	21.55
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20425/826.5	20525/836.5	20625/846.5
LTE Band 5	5MHz	QPSK	1	0	24.00	23.49	23.51	23.54
			1	12	24.00	23.63	23.62	23.57
			1	24	24.00	23.62	23.58	23.48
			12	0	23.00	22.57	22.64	22.60
			12	6	23.00	22.70	22.71	22.67
			12	11	23.00	22.66	22.66	22.46
			25	0	23.00	22.60	22.66	22.53
		16QAM	1	0	24.00	22.90	22.95	22.99
			1	12	24.00	22.99	23.01	23.10
			1	24	24.00	22.93	22.92	22.98
			12	0	22.00	21.56	21.67	21.60
			12	6	22.00	21.70	21.82	21.70
			12	11	22.00	21.63	21.76	21.49
			25	0	22.00	21.68	21.71	21.52
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20450/829	20525/836.5	20600/844
LTE Band	10MHz	QPSK	1	0	24.00	23.60	23.61	23.69
			1	24	24.00	23.72	23.70	23.68

5			1	49	24.00	23.60	23.60	23.58
			25	0	23.00	22.53	22.65	22.54
			25	12	23.00	22.69	22.76	22.63
			25	24	23.00	22.65	22.63	22.49
			50	0	23.00	22.61	22.68	22.59
		16QAM	1	0	24.00	23.04	22.84	22.57
			1	24	24.00	23.08	22.92	22.49
			1	49	24.00	23.03	22.85	22.42
			25	0	22.00	21.63	21.71	21.59
			25	12	22.00	21.78	21.81	21.69
			25	24	22.00	21.73	21.72	21.56
			50	0	22.00	21.68	21.77	21.52

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20775/2502.5	21100/2535	21425/2567.5
LTE Band 7	5MHz	QPSK	1	0	24.00	23.75	23.89	23.78
			1	12	24.00	23.80	23.95	23.88
			1	24	24.00	23.76	23.94	23.86
			12	0	23.00	22.73	22.84	22.73
			12	6	23.00	22.76	22.83	22.74
			12	11	23.00	22.74	22.80	22.57
			25	0	23.00	22.72	22.78	22.65
		16QAM	1	0	24.00	23.05	22.92	22.51
			1	12	24.00	23.13	22.96	22.65
			1	24	24.00	23.13	22.88	22.49
			12	0	22.00	21.68	21.65	21.29
			12	6	22.00	21.78	21.70	21.39
			12	11	22.00	21.73	21.63	21.32
			25	0	22.00	21.72	21.69	21.27
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20800/2505	21100/2535	21400/2565
LTE Band 7	10MHz	QPSK	1	0	24.00	23.89	23.72	23.42
			1	24	24.00	23.91	23.72	23.44
			1	49	24.00	23.87	23.52	23.54
			25	0	23.00	22.79	22.45	22.31
			25	12	23.00	22.88	22.45	22.35

			25	24	23.00	22.85	22.38	22.30
			50	0	23.00	22.90	22.39	22.33
		16QAM	1	0	23.00	22.83	22.47	22.16
			1	24	23.00	22.98	22.46	22.16
			1	49	23.00	22.94	22.52	22.13
			25	0	22.00	21.58	21.31	21.40
			25	12	22.00	21.63	21.58	21.42
			25	24	22.00	21.73	21.46	21.32
			50	0	22.00	21.66	21.50	21.36
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20825/2507.5	21100/2535	21375/2562.5
LTE Band 7	15MHz	QPSK	1	0	24.00	23.85	23.43	23.38
			1	37	24.00	23.83	23.45	23.35
			1	74	24.00	23.80	23.44	23.47
			36	0	23.00	22.94	22.52	22.32
			36	18	23.00	22.73	22.59	22.43
			36	37	23.00	22.63	22.52	22.49
			75	0	23.00	22.60	22.55	22.47
		16QAM	1	0	23.00	22.45	22.63	22.43
			1	37	23.00	22.46	22.57	22.46
			1	74	23.00	22.48	22.57	22.36
			36	0	22.00	21.37	21.41	21.34
			36	18	22.00	21.42	21.42	21.46
			36	37	22.00	21.43	21.36	21.47
			75	0	22.00	21.57	21.49	21.39
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20850/2510	21100/2535	21350/2560
LTE Band 7	20MHz	QPSK	1	0	24.00	23.86	23.36	23.24
			1	49	24.00	23.94	23.58	23.41
			1	99	24.00	23.81	23.38	23.51
			50	0	23.00	22.65	22.34	22.32
			50	24	23.00	22.54	22.38	22.43
			50	49	23.00	22.56	22.28	22.38
			100	0	23.00	22.40	22.30	22.37
		16QAM	1	0	23.00	22.51	22.43	22.36
			1	49	23.00	22.73	22.46	22.57

			1	99	23.00	22.64	22.37	22.41
			50	0	22.00	21.44	21.31	21.45
			50	24	22.00	21.57	21.31	21.54
			50	49	22.00	21.58	21.24	21.48
			100	0	22.00	21.48	21.26	21.40

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23017/699.7	23095/707.5	23173/715.3
LTE Band 12	1.4MHz	QPSK	1	0	25.00	24.04	23.93	23.95
			1	2	25.00	24.14	24.00	24.03
			1	5	25.00	24.07	23.88	23.99
			3	0	25.00	24.20	24.09	24.10
			3	1	25.00	24.28	24.13	24.15
			3	2	25.00	24.22	24.07	24.07
			6	0	24.00	23.16	23.06	23.17
		16QAM	1	0	24.00	23.20	23.15	22.76
			1	2	24.00	23.26	23.20	22.89
			1	5	24.00	23.15	23.10	22.77
			3	0	24.00	23.34	23.27	23.21
			3	1	24.00	23.40	23.34	23.23
			3	2	24.00	23.32	23.28	23.20
			6	0	23.00	22.42	22.26	22.34
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23025/700.5	23095/707.5	23165/714.5
LTE Band 12	3MHz	QPSK	1	0	25.00	23.91	23.82	23.75
			1	7	25.00	24.01	23.87	23.87
			1	14	25.00	23.94	23.80	23.82
			8	0	24.00	23.11	23.04	22.96
			8	4	24.00	23.16	23.08	23.07
			8	7	24.00	23.21	23.08	23.07
			15	0	24.00	23.14	23.09	23.01
		16QAM	1	0	24.00	22.79	23.24	22.98
			1	7	24.00	22.87	23.33	23.08
			1	14	24.00	22.69	23.20	23.00
			8	0	23.00	22.16	22.13	22.03
			8	4	23.00	22.19	22.15	22.12

			8	7	23.00	22.15	22.12	22.04
			15	0	23.00	22.19	22.06	22.02
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23035/701.5	23095/707.5	23155/713.5
LTE Band 12	5MHz	QPSK	1	0	25.00	24.10	24.12	24.05
			1	12	25.00	24.20	24.20	24.14
			1	24	25.00	23.99	24.09	24.10
			12	0	24.00	23.10	23.09	23.17
			12	6	24.00	23.29	23.19	23.20
			12	11	24.00	23.21	23.16	23.17
			25	0	24.00	23.20	23.14	23.13
		16QAM	1	0	24.00	23.45	23.63	23.34
			1	12	24.00	23.54	23.68	23.47
			1	24	24.00	23.47	23.57	23.42
			12	0	23.00	22.20	22.16	22.07
			12	6	23.00	22.31	22.21	22.13
			12	11	23.00	22.22	22.20	22.10
			25	0	23.00	22.20	22.16	22.18
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23060/704	23095/707.5	23130/711
LTE Band 12	10MHz	QPSK	1	0	25.00	24.23	24.18	24.23
			1	24	25.00	24.22	24.18	24.18
			1	49	25.00	24.15	24.11	24.23
			25	0	24.00	23.13	23.11	23.15
			25	12	24.00	23.20	23.19	23.19
			25	24	24.00	23.15	23.18	23.14
			50	0	24.00	23.14	23.13	23.16
		16QAM	1	0	24.00	23.60	23.41	23.05
			1	24	24.00	23.61	23.36	23.03
			1	49	24.00	23.53	23.35	23.07
			25	0	23.00	22.21	22.18	22.13
			25	12	23.00	22.33	22.25	22.21
			25	24	23.00	22.15	22.13	22.19
			50	0	23.00	22.17	22.18	22.14

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23755/706.5	23790/710	23825/713.5
LTE Band 17	5MHz	QPSK	1	0	25.00	23.97	23.97	23.99
			1	12	25.00	24.14	24.04	24.08
			1	24	25.00	24.04	23.96	23.97
			12	0	24.00	23.08	23.00	23.15
			12	6	24.00	23.16	23.12	23.09
			12	11	24.00	23.19	22.97	23.01
			25	0	24.00	23.16	22.98	23.02
		16QAM	1	0	24.00	23.35	23.36	23.48
			1	12	24.00	23.45	23.33	23.53
			1	24	24.00	23.36	23.25	23.43
			12	0	23.00	22.02	22.04	22.12
			12	6	23.00	22.12	22.17	22.06
			12	11	23.00	22.12	22.06	22.02
			25	0	23.00	22.15	21.95	21.98
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		23780/709	23790/710	23800/711
LTE Band 17	10MHz	QPSK	1	0	25.00	24.04	24.17	24.18
			1	24	25.00	24.07	24.08	24.10
			1	49	25.00	24.02	24.05	24.09
			25	0	24.00	22.99	22.92	22.87
			25	12	24.00	23.06	23.06	23.04
			25	24	24.00	22.96	22.93	22.93
			50	0	23.00	23.00	22.97	22.93
		16QAM	1	0	24.00	23.26	22.95	23.50
			1	24	24.00	23.32	22.89	23.48
			1	49	24.00	23.18	22.87	23.40
			25	0	23.00	22.03	21.93	21.91
			25	12	23.00	22.14	22.07	22.13
			25	24	23.00	22.05	21.92	21.95
			50	0	23.00	22.06	21.94	21.93

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		24025/832.5	24075/837.5	24125/842.5
LTE Band 19	5MHz	QPSK	1	0	24.00	23.54	23.56	23.52
			1	12	24.00	23.61	23.63	23.55
			1	24	24.00	23.55	23.51	23.45
			12	0	23.00	22.62	22.65	22.52
			12	6	23.00	22.69	22.67	22.70
			12	11	23.00	22.65	22.60	22.62
			25	0	23.00	22.62	22.62	22.61
		16QAM	1	0	24.00	23.08	22.94	22.91
			1	12	24.00	23.17	23.05	22.94
			1	24	24.00	23.11	22.95	22.79
			12	0	22.00	21.65	21.66	21.64
			12	6	22.00	21.70	21.70	21.72
			12	11	22.00	21.70	21.58	21.72
			25	0	22.00	21.66	21.72	21.66
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		24050/835	24075/837.5	24100/840
LTE Band 19	10MHz	QPSK	1	0	24.00	23.64	23.59	23.65
			1	24	24.00	23.73	23.68	23.65
			1	49	24.00	23.59	23.58	23.60
			25	0	23.00	22.66	22.69	22.70
			25	12	23.00	22.70	22.73	22.67
			25	24	23.00	22.61	22.60	22.70
			50	0	23.00	22.68	22.70	22.71
		16QAM	1	0	24.00	22.51	23.05	22.92
			1	24	24.00	22.60	23.11	22.89
			1	49	24.00	22.56	23.05	22.79
			25	0	22.00	21.73	21.79	21.75
			25	12	22.00	21.78	21.83	21.77
			25	24	22.00	21.68	21.69	21.68
			50	0	22.00	21.71	21.73	21.80
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB	RB		24075/837.5		

			Size	Offset		
LTE Band 19	15MHz	QPSK	1	0	24.00	23.48
			1	37	24.00	23.57
			1	74	24.00	23.43
			36	0	23.00	22.66
			36	18	23.00	22.70
			36	37	23.00	22.64
			75	0	23.00	22.73
		16QAM	1	0	23.00	22.71
			1	37	23.00	22.82
			1	74	23.00	22.67
			36	0	22.00	21.65
			36	18	22.00	21.65
			36	37	22.00	21.64
			75	0	22.00	21.76

7.4. WLAN & Bluetooth Output Power

7.4.1. Output Power Results Of WLAN

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11b	1	2412	14.00	13.48
	6	2437	14.00	13.61
	11	2462	14.00	13.98
802.11g	1	2412	14.00	13.88
	6	2437	14.00	13.57
	11	2462	14.00	13.50
802.11n HT20	1	2412	14.00	13.67
	6	2437	14.00	13.43
	11	2462	14.00	13.44
802.11n HT40	3	2422	14.00	13.77
	6	2437	14.00	13.58
	9	2452	14.00	13.53


NOTE: Power measurement results of WLAN 2.4G.

7.4.2. Output Power Results Of Bluetooth

BR+EDR	Output Power (dBm)				
	Channel	Tune-up	Data Rates		
			1M	2M	3M
	0CH	7.000	6.493	6.177	6.261
	39CH	7.000	6.566	6.174	6.273
	78CH	7.000	6.150	5.739	5.811

BLE	Channel	Tune-up	Output Power (dBm)
	0CH	2.000	1.383
	19CH	2.000	1.519
	39CH	2.000	1.199

8. Antenna Location

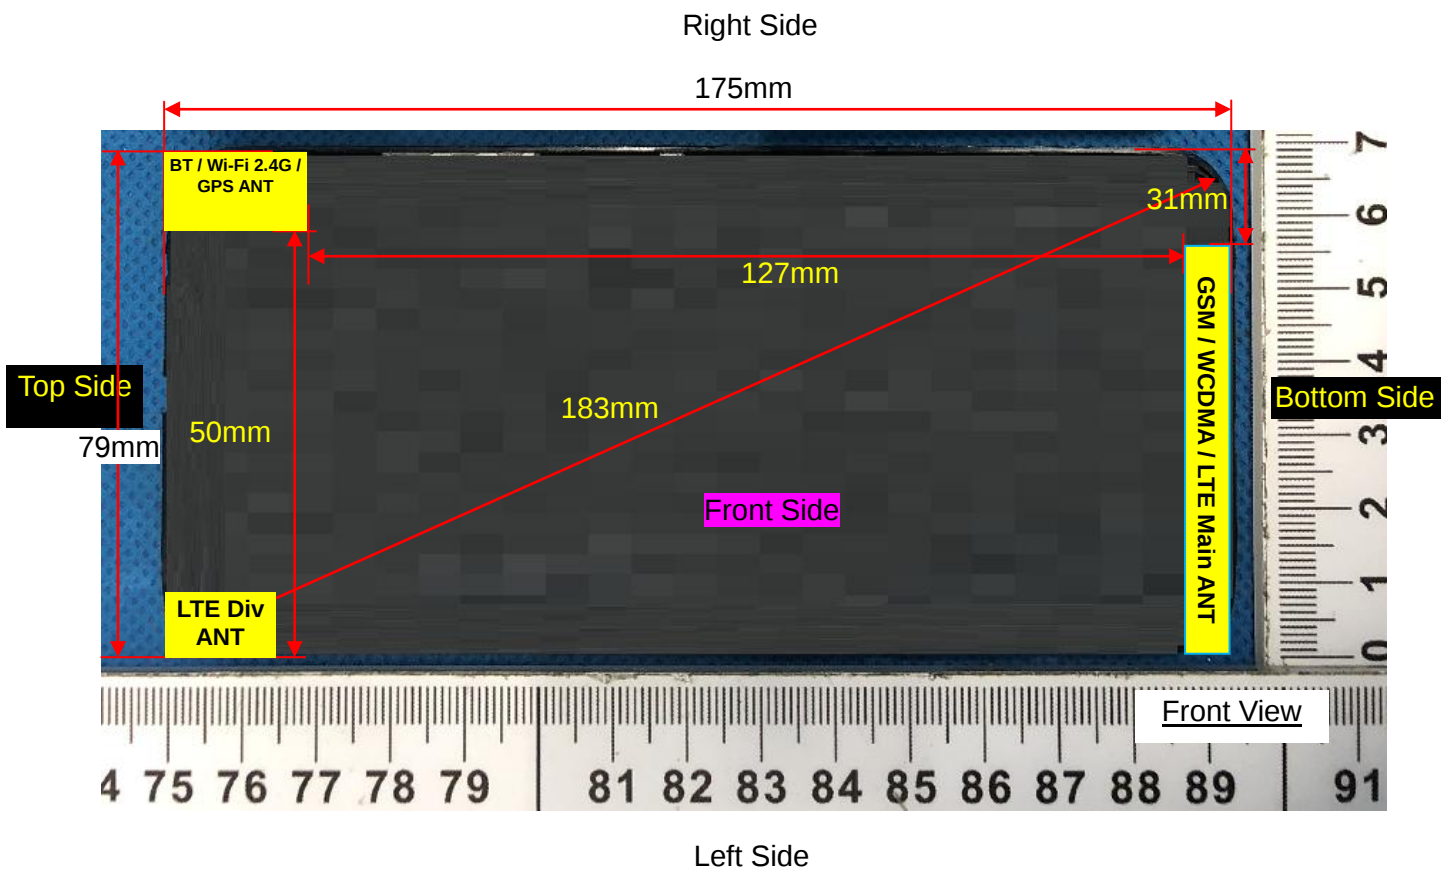

Distance of the Antenna to the EUT surface/edge						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm
WLAN & Bluetooth	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	>25mm
Positions for SAR tests						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main	Yes	Yes	Yes	NO	NO	Yes
WLAN & Bluetooth	Yes	Yes	NO	Yes	Yes	NO

9. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
Bluetooth	7.000	5.012	5	2.48	1.6	3.0	Yes

NOTE: Standalone SAR test exclusion for Bluetooth

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}}/x] \text{ W/kg}$ for test separation distances $\leq 50\text{mm}$, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/Kg)
Bluetooth	Head	7.000	5.012	5	2.48	7.5	0.210
Bluetooth	Body	7.000	5.012	10	2.48	7.5	0.105
Bluetooth	Hotspot	7.000	5.012	10	2.48	7.5	0.105

NOTE: Estimated SAR calculation for Bluetooth

10. SAR Results

10.1. SAR measurement results

10.1.1. SAR measurement Result of GSM850

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	189/836.4	GPRS(GMSK 2TS)	0.185	0.149	-1.90	31.79	32.00	0.194
Left Tilt 15 Degree	189/836.4	GPRS(GMSK 2TS)	0.095	0.074	1.37	31.79	32.00	0.100
Right Cheek	189/836.4	GPRS(GMSK 2TS)	0.159	0.130	3.45	31.79	32.00	0.167
Right Tilt 15 Degree	189/836.4	GPRS(GMSK 2TS)	0.072	0.055	4.98	31.79	32.00	0.076

NOTE: Head SAR test results of GSM850.

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	189/836.4	GPRS(GMSK 2TS)	0.327	0.183	-3.11	31.79	32.00	0.343
Back Side	189/836.4	GPRS(GMSK 2TS)	0.392	0.224	-1.31	31.79	32.00	0.411

NOTE: Body-Worn SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	189/836.4	GPRS(GMSK 2TS)	0.327	0.183	-3.11	31.79	32.00	0.343
Back Side	189/836.4	GPRS(GMSK 2TS)	0.392	0.224	-1.31	31.79	32.00	0.411
Left Side	189/836.4	GPRS(GMSK 2TS)	0.299	0.172	2.07	31.79	32.00	0.314
Bottom Side	189/836.4	GPRS(GMSK 2TS)	0.142	0.078	3.72	31.79	32.00	0.149

NOTE: Hotspot SAR test results of GSM850

10.1.2. SAR measurement Result of GSM1900

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	661/1880	GPRS(GMSK 4TS)	0.181	0.102	2.17	25.57	27.00	0.252
Left Tilt 15 Degree	661/1880	GPRS(GMSK 4TS)	0.107	0.060	3.87	25.57	27.00	0.149

Right Cheek	661/1880	GPRS(GMSK 4TS)	0.164	0.090	-1.56	25.57	27.00	0.228
Right Tilt 15 Degree	661/1880	GPRS(GMSK 4TS)	0.088	0.051	-0.19	25.57	27.00	0.122

NOTE: Head SAR test results of GSM1900

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	661/1880	GPRS(GMSK 4TS)	0.245	0.127	-4.67	25.57	27.00	0.341
Back Side	661/1880	GPRS(GMSK 4TS)	0.291	0.147	-3.10	25.57	27.00	0.404

NOTE: Body-Worn SAR test results of GSM1900

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	661/1880	GPRS(GMSK 4TS)	0.245	0.127	-4.67	25.57	27.00	0.341
Back Side	661/1880	GPRS(GMSK 4TS)	0.291	0.147	-3.10	25.57	27.00	0.404
Left Side	661/1880	GPRS(GMSK 4TS)	0.221	0.116	3.16	25.57	27.00	0.307
Bottom Side	661/1880	GPRS(GMSK 4TS)	0.108	0.055	1.71	25.57	27.00	0.150

NOTE: Hotspot SAR test results of GSM1900

10.1.3. SAR measurement Result of WCDMA Band 2

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	9400/1880	RMC12.2K	0.284	0.153	-0.16	23.97	24.00	0.286
Left Tilt 15 Degree	9400/1880	RMC12.2K	0.145	0.077	2.25	23.97	24.00	0.146
Right Cheek	9400/1880	RMC12.2K	0.246	0.132	-1.77	23.97	24.00	0.248
Right Tilt 15 Degree	9400/1880	RMC12.2K	0.134	0.071	3.56	23.97	24.00	0.135

NOTE: Head SAR test results of WCDMA Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	9400/1880	RMC12.2K	0.659	0.364	2.14	23.97	24.00	0.664
Back Side	9400/1880	RMC12.2K	0.778	0.429	-0.26	23.97	24.00	0.783

NOTE: Body-Worn SAR test results of WCDMA Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	9400/1880	RMC12.2K	0.659	0.364	2.14	23.97	24.00	0.664
Back Side	9400/1880	RMC12.2K	0.778	0.429	-0.26	23.97	24.00	0.783
Left Side	9400/1880	RMC12.2K	0.617	0.342	-2.27	23.97	24.00	0.621
Bottom Side	9400/1880	RMC12.2K	0.270	0.146	-1.26	23.97	24.00	0.272

NOTE: Hotspot SAR test results of WCDMA Band 2

10.1.4. SAR measurement Result of WCDMA Band 4

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	1413/1732.6	RMC12.2K	0.503	0.292	-0.43	23.86	24.00	0.519
Left Tilt 15 Degree	1413/1732.6	RMC12.2K	0.263	0.149	-3.13	23.86	24.00	0.272
Right Cheek	1413/1732.6	RMC12.2K	0.440	0.259	1.66	23.86	24.00	0.454
Right Tilt 15 Degree	1413/1732.6	RMC12.2K	0.239	0.137	2.37	23.86	24.00	0.247

NOTE: Head SAR test results of WCDMA Band 4

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	1413/1732.6	RMC12.2K	0.911	0.504	-2.83	23.86	24.00	0.941
Back Side	1413/1732.6	RMC12.2K	1.171	0.652	-0.49	23.86	24.00	1.209
Front Side	1312/1712.4	RMC12.2K	1.033	0.591	0.11	23.92	24.00	1.052
Front Side	1513/1752.6	RMC12.2K	1.117	0.623	0.04	23.83	24.00	1.162
Back Side	1312/1712.4	RMC12.2K	1.123	0.619	-0.28	23.92	24.00	1.144
Back Side	1513/1752.6	RMC12.2K	1.221	0.682	-0.56	23.83	24.00	1.270
Back Side Repeated	1513/1752.6	RMC12.2K	1.209	0.675	0.03	23.83	24.00	1.257

NOTE: Body-Worn SAR test results of WCDMA Band 4

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	1413/1732.6	RMC12.2K	0.911	0.504	-2.83	23.86	24.00	0.941
Back Side	1413/1732.6	RMC12.2K	1.171	0.652	-0.49	23.86	24.00	1.209
Left Side	1413/1732.6	RMC12.2K	0.694	0.394	-4.38	23.86	24.00	0.717
Bottom Side	1413/1732.6	RMC12.2K	0.456	0.249	-2.75	23.86	24.00	0.471

Front Side	1312/1712.4	RMC12.2K	1.033	0.591	0.11	23.92	24.00	1.052
Front Side	1513/1752.6	RMC12.2K	1.117	0.623	0.04	23.83	24.00	1.162
Back Side	1312/1712.4	RMC12.2K	1.123	0.619	-0.28	23.92	24.00	1.144
Back Side	1513/1752.6	RMC12.2K	1.221	0.682	-0.56	23.83	24.00	1.270
Back Side Repeated	1513/1752.6	RMC12.2K	1.209	0.675	0.03	23.83	24.00	1.257

NOTE: Hotspot SAR test results of WCDMA Band 4

10.1.5. SAR measurement Result of WCDMA Band 5

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	4182/836.4	RMC12.2K	0.119	0.096	0.65	23.89	24.00	0.122
Left Tilt 15 Degree	4182/836.4	RMC12.2K	0.061	0.052	2.43	23.89	24.00	0.063
Right Cheek	4182/836.4	RMC12.2K	0.103	0.086	-4.41	23.89	24.00	0.106
Right Tilt 15 Degree	4182/836.4	RMC12.2K	0.054	0.048	3.80	23.89	24.00	0.055

NOTE: Head SAR test results of WCDMA Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	4182/836.4	RMC12.2K	0.181	0.106	-3.18	23.89	24.00	0.186
Back Side	4182/836.4	RMC12.2K	0.229	0.137	-0.01	23.89	24.00	0.235

NOTE: Body-Worn SAR test results of WCDMA Band 5

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	4182/836.4	RMC12.2K	0.181	0.106	-3.18	23.89	24.00	0.186
Back Side	4182/836.4	RMC12.2K	0.229	0.137	-0.01	23.89	24.00	0.235
Left Side	4182/836.4	RMC12.2K	0.176	0.104	3.81	23.89	24.00	0.181
Bottom Side	4182/836.4	RMC12.2K	0.083	0.049	2.83	23.89	24.00	0.085

NOTE: Hotspot SAR test results of WCDMA Band 5

10.1.6. SAR measurement Result of LTE Band 2

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				

1RB								
Left Cheek	18900/1880	20M QPSK(1,49)	0.288	0.158	0.62	23.73	24.00	0.306
Left Tilt 15 Degree	18900/1880	20M QPSK(1,49)	0.169	0.097	2.34	23.73	24.00	0.180
Right Cheek	18900/1880	20M QPSK(1,49)	0.259	0.138	0.59	23.73	24.00	0.276
Right Tilt 15 Degree	18900/1880	20M QPSK(1,49)	0.134	0.071	-2.58	23.73	24.00	0.143
3RB								
Left Cheek	18900/1880	1.4M QPSK(3,1)	0.257	0.136	3.38	23.47	24.00	0.290
Left Tilt 15 Degree	18900/1880	1.4M QPSK(3,1)	0.153	0.091	-3.97	23.47	24.00	0.173
Right Cheek	18900/1880	1.4M QPSK(3,1)	0.240	0.122	-3.15	23.47	24.00	0.271
Right Tilt 15 Degree	18900/1880	1.4M QPSK(3,1)	0.116	0.066	-2.57	23.47	24.00	0.131

NOTE: Head SAR test results of LTE Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	18900/1880	20M QPSK(1,49)	0.618	0.350	-1.16	23.73	24.00	0.658
Back Side	18900/1880	20M QPSK(1,49)	0.783	0.438	-2.49	23.73	24.00	0.833
Back Side	18700/1860	20M QPSK(1,49)	0.772	0.429	-0.20	23.62	24.00	0.843
Back Side	19100/1900	20M QPSK(1,49)	0.761	0.432	-0.12	23.68	24.00	0.819
50%RB								
Front Side	18900/1880	1.4M QPSK(3,1)	0.684	0.373	-1.86	23.47	24.00	0.773
Back Side	18900/1880	1.4M QPSK(3,1)	0.697	0.402	-4.25	23.47	24.00	0.787
100%RB								
Back Side	18900/1880	20M QPSK(100,0)	0.579	0.302	0.02	22.58	23.00	0.638

NOTE: Body-Worn SAR test results of LTE Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	18900/1880	20M QPSK(1,49)	0.618	0.350	-1.16	23.73	24.00	0.658
Back Side	18900/1880	20M QPSK(1,49)	0.783	0.438	-2.49	23.73	24.00	0.833

Left Side	18900/1880	20M QPSK(1,49)	0.557	0.312	1.85	23.73	24.00	0.593
Bottom Side	18900/1880	20M QPSK(1,49)	0.268	0.146	3.16	23.73	24.00	0.285
Back Side	18700/1860	20M QPSK(1,49)	0.772	0.429	-0.20	23.62	24.00	0.843
Back Side	19100/1900	20M QPSK(1,49)	0.761	0.432	-0.12	23.68	24.00	0.819
50%RB								
Front Side	18900/1880	1.4M QPSK(3,1)	0.684	0.373	-1.86	23.47	24.00	0.773
Back Side	18900/1880	1.4M QPSK(3,1)	0.697	0.402	-4.25	23.47	24.00	0.787
Left Side	18900/1880	1.4M QPSK(3,1)	0.516	0.278	-0.05	23.47	24.00	0.583
Right Side	18900/1880	1.4M QPSK(3,1)	0.237	0.129	-2.64	23.47	24.00	0.268
100%RB								
Back Side	18900/1880	20M QPSK(100,0)	0.579	0.302	0.02	22.58	23.00	0.638

NOTE: Hotspot SAR test results of LTE Band 2

10.1.7. SAR measurement Result of LTE Band 4

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	20175/1732.5	20M QPSK(1,49)	0.502	0.300	0.34	23.60	24.00	0.550
Left Tilt 15 Degree	20175/1732.5	20M QPSK(1,49)	0.284	0.166	-0.60	23.60	24.00	0.311
Right Cheek	20175/1732.5	20M QPSK(1,49)	0.446	0.266	1.76	23.60	24.00	0.489
Right Tilt 15 Degree	20175/1732.5	20M QPSK(1,49)	0.208	0.126	-3.85	23.60	24.00	0.228
50%RB								
Left Cheek	20175/1732.5	1.4M QPSK(3,1)	0.475	0.279	1.57	23.45	24.00	0.539
Left Tilt 15 Degree	20175/1732.5	1.4M QPSK(3,1)	0.247	0.154	-1.79	23.45	24.00	0.280
Right Cheek	20175/1732.5	1.4M QPSK(3,1)	0.395	0.226	-2.19	23.45	24.00	0.448
Right Tilt 15 Degree	20175/1732.5	1.4M QPSK(3,1)	0.187	0.116	-0.18	23.45	24.00	0.212

NOTE: Head SAR test results of LTE Band 4

Test Position of	Test channel /Freq.	Test Mode	SAR Value (W/kg)	Power Drift	Conducted	Tune-up	Scaled SAR 1g
------------------	---------------------	-----------	------------------	-------------	-----------	---------	---------------

Body-Worn with 10mm			1g	10g	(±5%)	power (dBm)	power (dBm)	(W/Kg)
1RB								
Front Side	20175/1732.5	20M QPSK(1,49)	0.671	0.338	2.95	23.60	24.00	0.736
Back Side	20175/1732.5	20M QPSK(1,49)	1.182	0.653	-0.70	23.60	24.00	1.296
Back Side	20050/1720	20M QPSK(1,49)	1.187	0.663	-0.61	23.52	24.00	1.326
Back Side Repeated	20050/1720	20M QPSK(1,49)	1.173	0.647	0.13	23.52	24.00	1.310
Back Side	20300/1745	20M QPSK(1,49)	1.139	0.634	-0.25	23.55	24.00	1.263
50%RB								
Front Side	20175/1732.5	1.4M QPSK(3,1)	0.635	0.597	4.04	23.45	24.00	0.721
Back Side	20175/1732.5	1.4M QPSK(3,1)	0.688	0.532	0.78	23.45	24.00	0.781
100%RB								
Back Side	20175/1732.5	20M QPSK(100,0)	0.433	0.375	-3.33	22.47	23.00	0.489

NOTE: Body-Worn SAR test results of LTE Band 4

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conduc ted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	20175/1732.5	20M QPSK(1,49)	0.671	0.338	2.95	23.60	24.00	0.736
Back Side	20175/1732.5	20M QPSK(1,49)	1.182	0.653	-0.70	23.60	24.00	1.296
Left Side	20175/1732.5	20M QPSK(1,49)	0.558	0.278	4.50	23.60	24.00	0.612
Bottom Side	20175/1732.5	20M QPSK(1,49)	0.432	0.243	-2.90	23.60	24.00	0.474
Back Side	20050/1720	20M QPSK(1,49)	1.187	0.663	-0.61	23.52	24.00	1.326
Back Side Repeated	20050/1720	20M QPSK(1,49)	1.173	0.647	0.13	23.52	24.00	1.310
Back Side	20300/1745	20M QPSK(1,49)	1.139	0.634	-0.25	23.55	24.00	1.263
50%RB								
Front Side	20175/1732.5	1.4M QPSK(3,1)	0.635	0.597	4.04	23.45	24.00	0.721
Back Side	20175/1732.5	1.4M QPSK(3,1)	0.688	0.532	0.78	23.45	24.00	0.781
Left Side	20175/1732.5	1.4M QPSK(3,1)	0.519	0.245	-3.84	23.45	24.00	0.589
Bottom	20175/1732.5	1.4M QPSK(3,1)	0.388	0.211	-0.59	23.45	24.00	0.440

Side								
100%RB								
Back Side	20175/1732.5	20M QPSK(100,0)	0.433	0.375	-3.33	22.47	23.00	0.489

NOTE: Hotspot SAR test results of LTE Band 4

10.1.8. SAR measurement Result of LTE Band 5

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	20525/836.5	10M QPSK(1,24)	0.123	0.099	0.07	23.70	24.00	0.132
Left Tilt 15 Degree	20525/836.5	10M QPSK(1,24)	0.071	0.052	-0.01	23.70	24.00	0.076
Right Cheek	20525/836.5	10M QPSK(1,24)	0.114	0.091	2.91	23.70	24.00	0.122
Right Tilt 15 Degree	20525/836.5	10M QPSK(1,24)	0.055	0.046	4.07	23.70	24.00	0.059
50%RB								
Left Cheek	20525/836.5	1.4M QPSK(3,1)	0.105	0.089	1.21	23.62	24.00	0.115
Left Tilt 15 Degree	20525/836.5	1.4M QPSK(3,1)	0.067	0.049	3.76	23.62	24.00	0.073
Right Cheek	20525/836.5	1.4M QPSK(3,1)	0.098	0.085	2.91	23.62	24.00	0.107
Right Tilt 15 Degree	20525/836.5	1.4M QPSK(3,1)	0.048	0.042	-3.03	23.62	24.00	0.052

NOTE: Head SAR test results of LTE Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	20525/836.5	10M QPSK(1,24)	0.184	0.144	3.24	23.70	24.00	0.197
Back Side	20525/836.5	10M QPSK(1,24)	0.235	0.180	-0.30	23.70	24.00	0.252
50%RB								
Front Side	20525/836.5	1.4M QPSK(3,1)	0.161	0.134	-0.45	23.62	24.00	0.176
Back Side	20525/836.5	1.4M QPSK(3,1)	0.205	0.157	-1.30	23.62	24.00	0.224

NOTE: Body-Worn SAR test results of LTE Band 5

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	20525/836.5	10M QPSK(1,24)	0.184	0.144	3.24	23.70	24.00	0.197
Back Side	20525/836.5	10M QPSK(1,24)	0.235	0.180	-0.30	23.70	24.00	0.252
Left Side	20525/836.5	10M QPSK(1,24)	0.187	0.139	3.40	23.70	24.00	0.200
Bottom Side	20525/836.5	10M QPSK(1,24)	0.086	0.063	3.27	23.70	24.00	0.092
50%RB								
Front Side	20525/836.5	1.4M QPSK(3,1)	0.161	0.134	-0.45	23.62	24.00	0.176
Back Side	20525/836.5	1.4M QPSK(3,1)	0.205	0.157	-1.30	23.62	24.00	0.224
Left Side	20525/836.5	1.4M QPSK(3,1)	0.162	0.124	-1.44	23.62	24.00	0.177
Bottom Side	20525/836.5	1.4M QPSK(3,1)	0.081	0.055	-4.84	23.62	24.00	0.088

NOTE: Hotspot SAR test results of LTE Band 5

10.1.9. SAR measurement Result of LTE Band 7

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	21100/2535	20M QPSK(1,49)	0.831	0.442	-1.36	23.58	24.00	0.915
Left Tilt 15 Degree	21100/2535	20M QPSK(1,49)	0.518	0.244	-2.29	23.58	24.00	0.571
Right Cheek	21100/2535	20M QPSK(1,49)	0.712	0.384	2.43	23.58	24.00	0.784
Right Tilt 15 Degree	21100/2535	20M QPSK(1,49)	0.398	0.191	-3.90	23.58	24.00	0.438
Left Cheek	20850/2510	20M QPSK(1,49)	0.806	0.401	-4.32	23.94	24.00	0.817
Left Cheek	21350/2560	20M QPSK(1,49)	0.799	0.421	0.33	23.41	24.00	0.915
50%RB								
Left Cheek	21100/2535	20M QPSK(50,0)	0.484	0.258	-4.70	22.34	23.00	0.563

Left Tilt 15 Degree	21100/2535	20M QPSK(50,0)	0.308	0.139	-1.91	22.34	23.00	0.359
Right Cheek	21100/2535	20M QPSK(50,0)	0.453	0.217	-1.51	22.34	23.00	0.527
Right Tilt 15 Degree	21100/2535	20M QPSK(50,0)	0.203	0.109	0.52	22.34	23.00	0.236

NOTE: Head SAR test results of LTE Band 7

Test Position of Body-Wor n with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conduc ted power (dBm)	Tune-u p power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	21100/2535	20M QPSK(1,49)	0.665	0.402	-0.08	23.58	24.00	0.733
Back Side	21100/2535	20M QPSK(1,49)	1.253	0.705	-1.73	23.58	24.00	1.380
Back Side Repeated	21100/2535	20M QPSK(1,49)	1.237	0.695	0.02	23.58	24.00	1.363
Back Side	20850/2510	20M QPSK(1,49)	1.230	0.685	-3.34	23.94	24.00	1.247
Back Side	21350/2560	20M QPSK(1,49)	1.146	0.700	-1.09	23.41	24.00	1.313
50%RB								
Front Side	21100/2535	20M QPSK(50,0)	0.425	0.206	3.23	22.34	23.00	0.495
Back Side	21100/2535	20M QPSK(50,0)	0.680	0.391	3.10	22.34	23.00	0.792
100%RB								
Back Side	21100/2535	20M OPSK(100,0)	0.543	0.326	0.32	22.30	23.00	0.638

NOTE: Body-Worn SAR test results of LTE Band 7

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conduc ted power (dBm)	Tune-u p power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	21100/2535	20M QPSK(1,49)	0.665	0.402	-0.08	23.58	24.00	0.733
Back Side	21100/2535	20M QPSK(1,49)	1.253	0.705	-1.73	23.58	24.00	1.380
Back Side Repeated	21100/2535	20M QPSK(1,49)	1.237	0.695	0.02	23.58	24.00	1.363
Left Side	21100/2535	20M QPSK(1,49)	0.660	0.347	-3.75	23.58	24.00	0.727
Bottom Side	21100/2535	20M QPSK(1,49)	0.514	0.267	-0.95	23.58	24.00	0.566
Back Side	20850/2510	20M QPSK(1,49)	1.230	0.685	-3.34	23.94	24.00	1.247
Back Side	21350/2560	20M QPSK(1,49)	1.146	0.700	-1.09	23.41	24.00	1.313

50%RB								
Front Side	21100/2535	20M QPSK(50,0)	0.425	0.206	3.23	22.34	23.00	0.495
Back Side	21100/2535	20M QPSK(50,0)	0.680	0.391	3.10	22.34	23.00	0.792
Left Side	21100/2535	20M QPSK(50,0)	0.347	0.195	-3.24	22.34	23.00	0.404
Bottom Side	21100/2535	20M QPSK(50,0)	0.282	0.160	3.35	22.34	23.00	0.328
100%RB								
Back Side	21100/2535	20M QPSK(100,0)	0.543	0.326	0.32	22.30	23.00	0.638

NOTE: Hotspot SAR test results of LTE Band 7

10.1.10. SAR measurement Result of LTE Band 12

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	23095/707.5	10M QPSK(1,0)	0.164	0.135	-0.48	24.18	25.00	0.198
Left Tilt 15 Degree	23095/707.5	10M QPSK(1,0)	0.088	0.071	-3.01	24.18	25.00	0.106
Right Cheek	23095/707.5	10M QPSK(1,0)	0.156	0.130	2.41	24.18	25.00	0.188
Right Tilt 15 Degree	23095/707.5	10M QPSK(1,0)	0.076	0.058	-3.53	24.18	25.00	0.092
50%RB								
Left Cheek	23095/707.5	1.4M QPSK(3,1)	0.148	0.117	3.17	24.13	25.00	0.181
Left Tilt 15 Degree	23095/707.5	1.4M QPSK(3,1)	0.076	0.067	-1.42	24.13	25.00	0.093
Right Cheek	23095/707.5	1.4M QPSK(3,1)	0.141	0.115	-0.33	24.13	25.00	0.172
Right Tilt 15 Degree	23095/707.5	1.4M QPSK(3,1)	0.070	0.054	4.45	24.13	25.00	0.086

NOTE: Head SAR test results of LTE Band 12

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	23095/707.5	10M QPSK(1,0)	0.303	0.193	1.89	24.18	25.00	0.366

Back Side	23095/707.5	10M QPSK(1,0)	0.403	0.256	-0.95	24.18	25.00	0.487
50%RB								
Front Side	23095/707.5	1.4M QPSK(3,1)	0.272	0.181	-3.90	24.13	25.00	0.332
Back Side	23095/707.5	1.4M QPSK(3,1)	0.347	0.223	4.71	24.13	25.00	0.424

NOTE: Body-Worn SAR test results of LTE Band 12

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	23095/707.5	10M QPSK(1,0)	0.303	0.193	1.89	24.18	25.00	0.366
Back Side	23095/707.5	10M QPSK(1,0)	0.403	0.256	-0.95	24.18	25.00	0.487
Left Side	23095/707.5	10M QPSK(1,0)	0.321	0.200	-0.93	24.18	25.00	0.388
Bottom Side	23095/707.5	10M QPSK(1,0)	0.158	0.104	2.28	24.18	25.00	0.191
50%RB								
Front Side	23095/707.5	1.4M QPSK(3,1)	0.272	0.181	-3.90	24.13	25.00	0.332
Back Side	23095/707.5	1.4M QPSK(3,1)	0.347	0.223	4.71	24.13	25.00	0.424
Left Side	23095/707.5	1.4M QPSK(3,1)	0.274	0.180	1.66	24.13	25.00	0.335
Bottom Side	23095/707.5	1.4M QPSK(3,1)	0.141	0.092	-4.23	24.13	25.00	0.172

NOTE: Hotspot SAR test results of LTE Band 12

10.1.11. SAR measurement Result of LTE Band 17

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	23790/710	10M QPSK(1,0)	0.180	0.146	-2.17	24.17	25.00	0.218
Left Tilt 15 Degree	23790/710	10M QPSK(1,0)	0.090	0.077	-1.11	24.17	25.00	0.109
Right Cheek	23790/710	10M QPSK(1,0)	0.160	0.131	3.06	24.17	25.00	0.194
Right Tilt 15 Degree	23790/710	10M QPSK(1,0)	0.074	0.055	2.23	24.17	25.00	0.090

50%RB								
Left Cheek	23790/710	10M QPSK(25,12)	0.104	0.080	3.69	23.06	24.00	0.129
Left Tilt 15 Degree	23790/710	10M QPSK(25,12)	0.049	0.042	-1.06	23.06	24.00	0.061
Right Cheek	23790/710	10M QPSK(25,12)	0.088	0.073	1.06	23.06	24.00	0.109
Right Tilt 15 Degree	23790/710	10M QPSK(25,12)	0.044	0.028	-4.42	23.06	24.00	0.055

NOTE: Head SAR test results of LTE Band 17

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	23790/710	10M QPSK(1,0)	0.294	0.245	1.50	24.17	25.00	0.356
Back Side	23790/710	10M QPSK(1,0)	0.391	0.327	0.18	24.17	25.00	0.473
50%RB								
Front Side	23790/710	10M QPSK(25,12)	0.173	0.136	0.11	23.06	24.00	0.215
Back Side	23790/710	10M OPSK(25,12)	0.230	0.184	1.55	23.06	24.00	0.286

NOTE: Body-Worn SAR test results of LTE Band 17

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	23790/710	10M QPSK(1,0)	0.294	0.245	1.50	24.17	25.00	0.356
Back Side	23790/710	10M QPSK(1,0)	0.391	0.327	0.18	24.17	25.00	0.473
Left Side	23790/710	10M QPSK(1,0)	0.276	0.231	3.05	24.17	25.00	0.334
Bottom Side	23790/710	10M QPSK(1,0)	0.148	0.119	2.01	24.17	25.00	0.179
50%RB								
Front Side	23790/710	10M QPSK(25,12)	0.173	0.136	0.11	23.06	24.00	0.215
Back Side	23790/710	10M QPSK(25,12)	0.230	0.184	1.55	23.06	24.00	0.286
Left Side	23790/710	10M QPSK(25,12)	0.144	0.133	4.58	23.06	24.00	0.179
Bottom	23790/710	10M	0.075	0.070	2.59	23.06	24.00	0.093

Side		QPSK(25,12)						
------	--	-------------	--	--	--	--	--	--

NOTE: Hotspot SAR test results of LTE Band 17

10.1.12. SAR measurement Result of LTE Band 19

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	24075/837.5	15M QPSK(1,37)	0.125	0.101	1.35	23.57	24.00	0.138
Left Tilt 15 Degree	24075/837.5	15M QPSK(1,37)	0.073	0.062	-2.77	23.57	24.00	0.081
Right Cheek	24075/837.5	15M QPSK(1,37)	0.118	0.098	-0.26	23.57	24.00	0.130
Right Tilt 15 Degree	24075/837.5	15M QPSK(1,37)	0.056	0.049	-3.57	23.57	24.00	0.062
50%RB								
Left Cheek	24075/837.5	15M QPSK(36,18)	0.072	0.060	-1.20	22.70	23.00	0.077
Left Tilt 15 Degree	24075/837.5	15M QPSK(36,18)	0.037	0.034	0.12	22.70	23.00	0.040
Right Cheek	24075/837.5	15M QPSK(36,18)	0.070	0.055	3.89	22.70	23.00	0.075
Right Tilt 15 Degree	24075/837.5	15M QPSK(36,18)	0.033	0.025	2.40	22.70	23.00	0.035

NOTE: Head SAR test results of LTE Band 19

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	24075/837.5	15M QPSK(1,37)	0.259	0.154	4.96	23.57	24.00	0.286
Back Side	24075/837.5	15M QPSK(1,37)	0.306	0.177	0.02	23.57	24.00	0.338
50%RB								
Front Side	24075/837.5	15M QPSK(36,18)	0.155	0.082	4.43	22.70	23.00	0.166
Back Side	24075/837.5	15M OPSK(36,18)	0.181	0.093	-1.78	22.70	23.00	0.194

NOTE: Body-Worn SAR test results of LTE Band 19

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	24075/837.5	15M QPSK(1,37)	0.259	0.154	4.96	23.57	24.00	0.286
Back Side	24075/837.5	15M QPSK(1,37)	0.306	0.177	0.02	23.57	24.00	0.338
Left Side	24075/837.5	15M QPSK(1,37)	0.221	0.129	4.96	23.57	24.00	0.244
Bottom Side	24075/837.5	15M QPSK(1,37)	0.112	0.067	3.05	23.57	24.00	0.124
50%RB								
Front Side	24075/837.5	15M QPSK(36,18)	0.155	0.082	4.43	22.70	23.00	0.166
Back Side	24075/837.5	15M QPSK(36,18)	0.181	0.093	-1.78	22.70	23.00	0.194
Left Side	24075/837.5	15M QPSK(36,18)	0.126	0.077	1.16	22.70	23.00	0.135
Bottom Side	24075/837.5	15M QPSK(36,18)	0.066	0.035	4.19	22.70	23.00	0.071

NOTE: Hotspot SAR test results of LTE Band 19

10.1.13. SAR measurement Result of WLAN 2.4G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	6/2437	802.11 b	0.611	0.314	-2.54	13.61	14.00	0.668
Left Tilt 15 Degree	6/2437	802.11 b	0.357	0.163	-0.48	13.61	14.00	0.391
Right Cheek	6/2437	802.11 b	0.580	0.272	-3.66	13.61	14.00	0.634
Right Tilt 15 Degree	6/2437	802.11 b	0.291	0.132	-0.67	13.61	14.00	0.318

NOTE: Head SAR test results of WLAN 2.4G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	6/2437	802.11 b	0.119	0.076	-0.72	13.61	14.00	0.130
Back Side	6/2437	802.11 b	0.149	0.091	-1.00	13.61	14.00	0.163

NOTE: Body-Worn SAR test results of WLAN 2.4G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	6/2437	802.11 b	0.119	0.076	-0.72	13.61	14.00	0.130
Back Side	6/2437	802.11 b	0.149	0.091	-1.00	13.61	14.00	0.163
Right Side	6/2437	802.11 b	0.128	0.070	0.54	13.61	14.00	0.140
Top Side	6/2437	802.11 b	0.137	0.088	-2.36	13.61	14.00	0.150

NOTE: Hotspot SAR test results of WLAN 2.4G

10.2. SAR Summation Scenario

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- 1) Scalar SAR summation $< 1.6\text{W/kg}$.
- 2) $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	WLAN 2.4G			
Head	Left Cheek	0.194	0.668	0.863	N/A	N/A
	Left Tilt 15 Degree	0.100	0.391	0.490	N/A	N/A
	Right Cheek	0.167	0.634	0.801	N/A	N/A
	Right Tilt 15 Degree	0.076	0.318	0.394	N/A	N/A
Body-Worn	Front Side	0.343	0.130	0.473	N/A	N/A
	Back Side	0.411	0.163	0.574	N/A	N/A
Hotspot	Front Side	0.343	0.130	0.473	N/A	N/A
	Back Side	0.411	0.163	0.574	N/A	N/A
	Left Side	0.314	N/A	0.314	N/A	N/A
	Right Side	N/A	0.140	0.140	N/A	N/A
	Top Side	N/A	0.150	0.150	N/A	N/A
	Bottom Side	0.149	N/A	0.149	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM850 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 1900	WLAN 2.4G			
Head	Left Cheek	0.252	0.668	0.920	N/A	N/A
	Left Tilt 15 Degree	0.149	0.391	0.539	N/A	N/A

	Right Cheek	0.228	0.634	0.862	N/A	N/A
	Right Tilt 15 Degree	0.122	0.318	0.441	N/A	N/A
Body-Worn	Front Side	0.341	0.130	0.471	N/A	N/A
	Back Side	0.404	0.163	0.567	N/A	N/A
Hotspot	Front Side	0.341	0.130	0.471	N/A	N/A
	Back Side	0.404	0.163	0.567	N/A	N/A
	Left Side	0.307	N/A	0.307	N/A	N/A
	Right Side	N/A	0.140	0.140	N/A	N/A
	Top Side	N/A	0.150	0.150	N/A	N/A
	Bottom Side	0.150	N/A	0.150	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM1900 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 2	WLAN 2.4G			
Head	Left Cheek	0.286	0.668	0.954	N/A	N/A
	Left Tilt 15 Degree	0.146	0.391	0.537	N/A	N/A
	Right Cheek	0.248	0.634	0.882	N/A	N/A
	Right Tilt 15 Degree	0.135	0.318	0.453	N/A	N/A
Body-Worn	Front Side	0.664	0.130	0.794	N/A	N/A
	Back Side	0.783	0.163	0.946	N/A	N/A
Hotspot	Front Side	0.664	0.130	0.794	N/A	N/A
	Back Side	0.783	0.163	0.946	N/A	N/A
	Left Side	0.621	N/A	0.621	N/A	N/A
	Right Side	N/A	0.140	0.140	N/A	N/A
	Top Side	N/A	0.150	0.150	N/A	N/A
	Bottom Side	0.272	N/A	0.272	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 2 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 4	WLAN 2.4G			
Head	Left Cheek	0.519	0.668	1.188	N/A	N/A
	Left Tilt 15 Degree	0.272	0.391	0.662	N/A	N/A
	Right Cheek	0.454	0.634	1.089	N/A	N/A
	Right Tilt 15 Degree	0.247	0.318	0.565	N/A	N/A
Body-Worn	Front Side	1.162	0.130	1.292	N/A	N/A
	Back Side	1.270	0.163	1.433	N/A	N/A
Hotspot	Front Side	1.162	0.130	1.292	N/A	N/A

	Back Side	1.270	0.163	1.433	N/A	N/A
	Left Side	0.717	N/A	0.717	N/A	N/A
	Right Side	N/A	0.140	0.140	N/A	N/A
	Top Side	N/A	0.150	0.150	N/A	N/A
	Bottom Side	0.471	N/A	0.471	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 4 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 5	WLAN 2.4G			
Head	Left Cheek	0.122	0.668	0.790	N/A	N/A
	Left Tilt 15 Degree	0.063	0.391	0.453	N/A	N/A
	Right Cheek	0.106	0.634	0.740	N/A	N/A
	Right Tilt 15 Degree	0.055	0.318	0.374	N/A	N/A
Body-Worn	Front Side	0.186	0.130	0.316	N/A	N/A
	Back Side	0.235	0.163	0.398	N/A	N/A
Hotspot	Front Side	0.186	0.130	0.316	N/A	N/A
	Back Side	0.235	0.163	0.398	N/A	N/A
	Left Side	0.181	N/A	0.181	N/A	N/A
	Right Side	N/A	0.140	0.140	N/A	N/A
	Top Side	N/A	0.150	0.150	N/A	N/A
	Bottom Side	0.085	N/A	0.085	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 5 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 2	WLAN 2.4G			
Head	Left Cheek	0.306	0.668	0.975	N/A	N/A
	Left Tilt 15 Degree	0.180	0.391	0.570	N/A	N/A
	Right Cheek	0.276	0.634	0.910	N/A	N/A
	Right Tilt 15 Degree	0.143	0.318	0.461	N/A	N/A
Body-Worn	Front Side	0.773	0.130	0.903	N/A	N/A
	Back Side	0.833	0.163	0.996	N/A	N/A
Hotspot	Front Side	0.773	0.130	0.903	N/A	N/A
	Back Side	0.833	0.163	0.996	N/A	N/A
	Left Side	0.593	N/A	0.593	N/A	N/A
	Right Side	N/A	0.140	0.140	N/A	N/A
	Top Side	N/A	0.150	0.150	N/A	N/A
	Bottom Side	0.285	N/A	0.285	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 2 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 4	WLAN 2.4G			
Head	Left Cheek	0.550	0.668	1.219	N/A	N/A
	Left Tilt 15 Degree	0.311	0.391	0.702	N/A	N/A
	Right Cheek	0.489	0.634	1.124	N/A	N/A
	Right Tilt 15 Degree	0.228	0.318	0.546	N/A	N/A
Body-Worn	Front Side	0.736	0.130	0.866	N/A	N/A
	Back Side	1.326	0.163	1.489	N/A	N/A
Hotspot	Front Side	0.736	0.130	0.866	N/A	N/A
	Back Side	1.326	0.163	1.489	N/A	N/A
	Left Side	0.612	N/A	0.612	N/A	N/A
	Right Side	N/A	0.140	0.140	N/A	N/A
	Top Side	N/A	0.150	0.150	N/A	N/A
	Bottom Side	0.474	N/A	0.474	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 4 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 5	WLAN 2.4G			
Head	Left Cheek	0.132	0.668	0.800	N/A	N/A
	Left Tilt 15 Degree	0.076	0.391	0.467	N/A	N/A
	Right Cheek	0.122	0.634	0.757	N/A	N/A
	Right Tilt 15 Degree	0.059	0.318	0.377	N/A	N/A
Body-Worn	Front Side	0.197	0.130	0.327	N/A	N/A
	Back Side	0.252	0.163	0.415	N/A	N/A
Hotspot	Front Side	0.197	0.130	0.327	N/A	N/A
	Back Side	0.252	0.163	0.415	N/A	N/A
	Left Side	0.200	N/A	0.200	N/A	N/A
	Right Side	N/A	0.140	0.140	N/A	N/A
	Top Side	N/A	0.150	0.150	N/A	N/A
	Bottom Side	0.092	N/A	0.092	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 5 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 7	WLAN 2.4G			
Head	Left Cheek	0.915	0.668	1.584	N/A	N/A
	Left Tilt 15 Degree	0.571	0.391	0.961	N/A	N/A
	Right Cheek	0.784	0.634	1.419	N/A	N/A
	Right Tilt 15 Degree	0.438	0.318	0.757	N/A	N/A

Body-Worn	Front Side	0.733	0.130	0.863	N/A	N/A
	Back Side	1.380	0.163	1.543	N/A	N/A
Hotspot	Front Side	0.733	0.130	0.863	N/A	N/A
	Back Side	1.380	0.163	1.543	N/A	N/A
	Left Side	0.727	N/A	0.727	N/A	N/A
	Right Side	N/A	0.140	0.140	N/A	N/A
	Top Side	N/A	0.150	0.150	N/A	N/A
	Bottom Side	0.566	N/A	0.566	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 7 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 12	WLAN 2.4G			
Head	Left Cheek	0.198	0.668	0.866	N/A	N/A
	Left Tilt 15 Degree	0.106	0.391	0.497	N/A	N/A
	Right Cheek	0.188	0.634	0.823	N/A	N/A
	Right Tilt 15 Degree	0.092	0.318	0.410	N/A	N/A
Body-Worn	Front Side	0.366	0.130	0.496	N/A	N/A
	Back Side	0.487	0.163	0.650	N/A	N/A
Hotspot	Front Side	0.366	0.130	0.496	N/A	N/A
	Back Side	0.487	0.163	0.650	N/A	N/A
	Left Side	0.388	N/A	0.388	N/A	N/A
	Right Side	N/A	0.140	0.140	N/A	N/A
	Top Side	N/A	0.150	0.150	N/A	N/A
	Bottom Side	0.191	N/A	0.191	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 12 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 17	WLAN 2.4G			
Head	Left Cheek	0.218	0.668	0.886	N/A	N/A
	Left Tilt 15 Degree	0.109	0.391	0.499	N/A	N/A
	Right Cheek	0.194	0.634	0.828	N/A	N/A
	Right Tilt 15 Degree	0.090	0.318	0.408	N/A	N/A
Body-Worn	Front Side	0.356	0.130	0.486	N/A	N/A
	Back Side	0.473	0.163	0.636	N/A	N/A
Hotspot	Front Side	0.356	0.130	0.486	N/A	N/A
	Back Side	0.473	0.163	0.636	N/A	N/A
	Left Side	0.334	N/A	0.334	N/A	N/A

	Right Side	N/A	0.140	0.140	N/A	N/A
	Top Side	N/A	0.150	0.150	N/A	N/A
	Bottom Side	0.179	N/A	0.179	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 17 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 19	WLAN 2.4G			
Head	Left Cheek	0.138	0.668	0.806	N/A	N/A
	Left Tilt 15 Degree	0.081	0.391	0.471	N/A	N/A
	Right Cheek	0.130	0.634	0.765	N/A	N/A
	Right Tilt 15 Degree	0.062	0.318	0.380	N/A	N/A
Body-Worn	Front Side	0.286	0.130	0.416	N/A	N/A
	Back Side	0.338	0.163	0.501	N/A	N/A
Hotspot	Front Side	0.286	0.130	0.416	N/A	N/A
	Back Side	0.338	0.163	0.501	N/A	N/A
	Left Side	0.244	N/A	0.244	N/A	N/A
	Right Side	N/A	0.140	0.140	N/A	N/A
	Top Side	N/A	0.150	0.150	N/A	N/A
	Bottom Side	0.124	N/A	0.124	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 19 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	Bluetooth			
Head	Left Cheek	0.194	0.210	0.405	N/A	N/A
	Left Tilt 15 Degree	0.100	0.210	0.310	N/A	N/A
	Right Cheek	0.167	0.210	0.377	N/A	N/A
	Right Tilt 15 Degree	0.076	0.210	0.286	N/A	N/A
Body-Worn	Front Side	0.343	0.105	0.448	N/A	N/A
	Back Side	0.411	0.105	0.517	N/A	N/A
Hotspot	Front Side	0.343	0.105	0.448	N/A	N/A
	Back Side	0.411	0.105	0.517	N/A	N/A
	Left Side	0.314	N/A	0.314	N/A	N/A
	Right Side	N/A	0.105	0.105	N/A	N/A
	Top Side	N/A	0.105	0.105	N/A	N/A
	Bottom Side	0.149	N/A	0.149	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM850 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 1900	Bluetooth			

Head	Left Cheek	0.252	0.210	0.462	N/A	N/A
	Left Tilt 15 Degree	0.149	0.210	0.359	N/A	N/A
	Right Cheek	0.228	0.210	0.438	N/A	N/A
	Right Tilt 15 Degree	0.122	0.210	0.333	N/A	N/A
Body-Worn	Front Side	0.341	0.105	0.446	N/A	N/A
	Back Side	0.404	0.105	0.510	N/A	N/A
Hotspot	Front Side	0.341	0.105	0.446	N/A	N/A
	Back Side	0.404	0.105	0.510	N/A	N/A
	Left Side	0.307	N/A	0.307	N/A	N/A
	Right Side	N/A	0.105	0.105	N/A	N/A
	Top Side	N/A	0.105	0.105	N/A	N/A
	Bottom Side	0.150	N/A	0.150	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM1900 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 2	Bluetooth			
Head	Left Cheek	0.286	0.210	0.496	N/A	N/A
	Left Tilt 15 Degree	0.146	0.210	0.356	N/A	N/A
	Right Cheek	0.248	0.210	0.458	N/A	N/A
	Right Tilt 15 Degree	0.135	0.210	0.345	N/A	N/A
Body-Worn	Front Side	0.664	0.105	0.769	N/A	N/A
	Back Side	0.783	0.105	0.889	N/A	N/A
Hotspot	Front Side	0.664	0.105	0.769	N/A	N/A
	Back Side	0.783	0.105	0.889	N/A	N/A
	Left Side	0.621	N/A	0.621	N/A	N/A
	Right Side	N/A	0.105	0.105	N/A	N/A
	Top Side	N/A	0.105	0.105	N/A	N/A
	Bottom Side	0.272	N/A	0.272	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 2 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 4	Bluetooth			
Head	Left Cheek	0.519	0.210	0.730	N/A	N/A
	Left Tilt 15 Degree	0.272	0.210	0.482	N/A	N/A
	Right Cheek	0.454	0.210	0.665	N/A	N/A
	Right Tilt 15 Degree	0.247	0.210	0.457	N/A	N/A
Body-Worn	Front Side	1.162	0.105	1.267	N/A	N/A

	Back Side	1.270	0.105	1.375	N/A	N/A
Hotspot	Front Side	1.162	0.105	1.267	N/A	N/A
	Back Side	1.270	0.105	1.375	N/A	N/A
	Left Side	0.717	N/A	0.717	N/A	N/A
	Right Side	N/A	0.105	0.105	N/A	N/A
	Top Side	N/A	0.105	0.105	N/A	N/A
	Bottom Side	0.471	N/A	0.471	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 4 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band 5	Bluetooth			
Head	Left Cheek	0.122	0.210	0.333	N/A	N/A
	Left Tilt 15 Degree	0.063	0.210	0.273	N/A	N/A
	Right Cheek	0.106	0.210	0.316	N/A	N/A
	Right Tilt 15 Degree	0.055	0.210	0.266	N/A	N/A
Body-Worn	Front Side	0.186	0.105	0.291	N/A	N/A
	Back Side	0.235	0.105	0.340	N/A	N/A
Hotspot	Front Side	0.186	0.105	0.291	N/A	N/A
	Back Side	0.235	0.105	0.340	N/A	N/A
	Left Side	0.181	N/A	0.181	N/A	N/A
	Right Side	N/A	0.105	0.105	N/A	N/A
	Top Side	N/A	0.105	0.105	N/A	N/A
	Bottom Side	0.085	N/A	0.085	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band 5 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 2	Bluetooth			
Head	Left Cheek	0.306	0.210	0.517	N/A	N/A
	Left Tilt 15 Degree	0.180	0.210	0.390	N/A	N/A
	Right Cheek	0.276	0.210	0.486	N/A	N/A
	Right Tilt 15 Degree	0.143	0.210	0.353	N/A	N/A
Body-Worn	Front Side	0.773	0.105	0.878	N/A	N/A
	Back Side	0.833	0.105	0.938	N/A	N/A
Hotspot	Front Side	0.773	0.105	0.878	N/A	N/A
	Back Side	0.833	0.105	0.938	N/A	N/A
	Left Side	0.593	N/A	0.593	N/A	N/A
	Right Side	N/A	0.105	0.105	N/A	N/A
	Top Side	N/A	0.105	0.105	N/A	N/A

	Bottom Side	0.285	N/A	0.285	N/A	N/A
--	-------------	-------	-----	-------	-----	-----

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 2 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 4	Bluetooth			
Head	Left Cheek	0.550	0.210	0.761	N/A	N/A
	Left Tilt 15 Degree	0.311	0.210	0.522	N/A	N/A
	Right Cheek	0.489	0.210	0.700	N/A	N/A
	Right Tilt 15 Degree	0.228	0.210	0.439	N/A	N/A
Body-Worn	Front Side	0.736	0.105	0.841	N/A	N/A
	Back Side	1.326	0.105	1.431	N/A	N/A
Hotspot	Front Side	0.736	0.105	0.841	N/A	N/A
	Back Side	1.326	0.105	1.431	N/A	N/A
	Left Side	0.612	N/A	0.612	N/A	N/A
	Right Side	N/A	0.105	0.105	N/A	N/A
	Top Side	N/A	0.105	0.105	N/A	N/A
	Bottom Side	0.474	N/A	0.474	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 4 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 5	Bluetooth			
Head	Left Cheek	0.132	0.210	0.342	N/A	N/A
	Left Tilt 15 Degree	0.076	0.210	0.287	N/A	N/A
	Right Cheek	0.122	0.210	0.333	N/A	N/A
	Right Tilt 15 Degree	0.059	0.210	0.269	N/A	N/A
Body-Worn	Front Side	0.197	0.105	0.302	N/A	N/A
	Back Side	0.252	0.105	0.357	N/A	N/A
Hotspot	Front Side	0.197	0.105	0.302	N/A	N/A
	Back Side	0.252	0.105	0.357	N/A	N/A
	Left Side	0.200	N/A	0.200	N/A	N/A
	Right Side	N/A	0.105	0.105	N/A	N/A
	Top Side	N/A	0.105	0.105	N/A	N/A
	Bottom Side	0.092	N/A	0.092	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 5 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 7	Bluetooth			
Head	Left Cheek	0.915	0.210	1.126	N/A	N/A

	Left Tilt 15 Degree	0.571	0.210	0.781	N/A	N/A
	Right Cheek	0.784	0.210	0.995	N/A	N/A
	Right Tilt 15 Degree	0.438	0.210	0.649	N/A	N/A
Body-Worn	Front Side	0.733	0.105	0.838	N/A	N/A
	Back Side	1.380	0.105	1.485	N/A	N/A
Hotspot	Front Side	0.733	0.105	0.838	N/A	N/A
	Back Side	1.380	0.105	1.485	N/A	N/A
	Left Side	0.727	N/A	0.727	N/A	N/A
	Right Side	N/A	0.105	0.105	N/A	N/A
	Top Side	N/A	0.105	0.105	N/A	N/A
	Bottom Side	0.566	N/A	0.566	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 7 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 12	Bluetooth			
Head	Left Cheek	0.198	0.210	0.409	N/A	N/A
	Left Tilt 15 Degree	0.106	0.210	0.317	N/A	N/A
	Right Cheek	0.188	0.210	0.399	N/A	N/A
	Right Tilt 15 Degree	0.092	0.210	0.302	N/A	N/A
Body-Worn	Front Side	0.366	0.105	0.471	N/A	N/A
	Back Side	0.487	0.105	0.592	N/A	N/A
Hotspot	Front Side	0.366	0.105	0.471	N/A	N/A
	Back Side	0.487	0.105	0.592	N/A	N/A
	Left Side	0.388	N/A	0.388	N/A	N/A
	Right Side	N/A	0.105	0.105	N/A	N/A
	Top Side	N/A	0.105	0.105	N/A	N/A
	Bottom Side	0.191	N/A	0.191	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 12 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 17	Bluetooth			
Head	Left Cheek	0.218	0.210	0.428	N/A	N/A
	Left Tilt 15 Degree	0.109	0.210	0.319	N/A	N/A
	Right Cheek	0.194	0.210	0.404	N/A	N/A
	Right Tilt 15 Degree	0.090	0.210	0.300	N/A	N/A
Body-Worn	Front Side	0.356	0.105	0.461	N/A	N/A

	Back Side	0.473	0.105	0.579	N/A	N/A
Hotspot	Front Side	0.356	0.105	0.461	N/A	N/A
	Back Side	0.473	0.105	0.579	N/A	N/A
	Left Side	0.334	N/A	0.334	N/A	N/A
	Right Side	N/A	0.105	0.105	N/A	N/A
	Top Side	N/A	0.105	0.105	N/A	N/A
	Bottom Side	0.179	N/A	0.179	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 17 and Bluetooth.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band 19	Bluetooth			
Head	Left Cheek	0.138	0.210	0.348	N/A	N/A
	Left Tilt 15 Degree	0.081	0.210	0.291	N/A	N/A
	Right Cheek	0.130	0.210	0.341	N/A	N/A
	Right Tilt 15 Degree	0.062	0.210	0.272	N/A	N/A
Body-Worn	Front Side	0.286	0.105	0.391	N/A	N/A
	Back Side	0.338	0.105	0.443	N/A	N/A
Hotspot	Front Side	0.286	0.105	0.391	N/A	N/A
	Back Side	0.338	0.105	0.443	N/A	N/A
	Left Side	0.244	N/A	0.244	N/A	N/A
	Right Side	N/A	0.105	0.105	N/A	N/A
	Top Side	N/A	0.105	0.105	N/A	N/A
	Bottom Side	0.124	N/A	0.124	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band 19 and Bluetooth.

11. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

12. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - SID750 - Head
MEASUREMENT 2 System Performance Check - SID750 - Body
MEASUREMENT 3 System Performance Check - SID835 - Head
MEASUREMENT 4 System Performance Check - SID835 - Body
MEASUREMENT 5 System Performance Check - SID1800 - Head
MEASUREMENT 6 System Performance Check - SID1800 - Body
MEASUREMENT 7 System Performance Check - SID1900 - Head
MEASUREMENT 8 System Performance Check - SID1900 - Body
MEASUREMENT 9 System Performance Check - SID2450 - Head
MEASUREMENT 10 System Performance Check - SID2450 - Body
MEASUREMENT 11 System Performance Check - SID2600 - Head
MEASUREMENT 12 System Performance Check - SID2600 - Body

MEASUREMENT 1


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW750</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative permittivity (real part)	41.233162
Relative permittivity (imaginary part)	21.911263
Conductivity (S/m)	0.912262
Variation (%)	-3.810000

SURFACE SAR

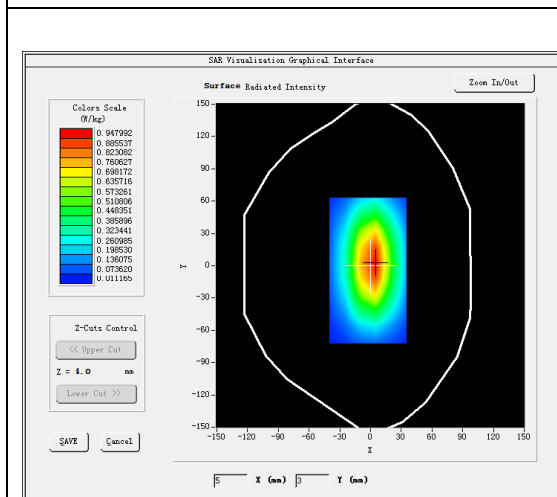



VOLUME SAR

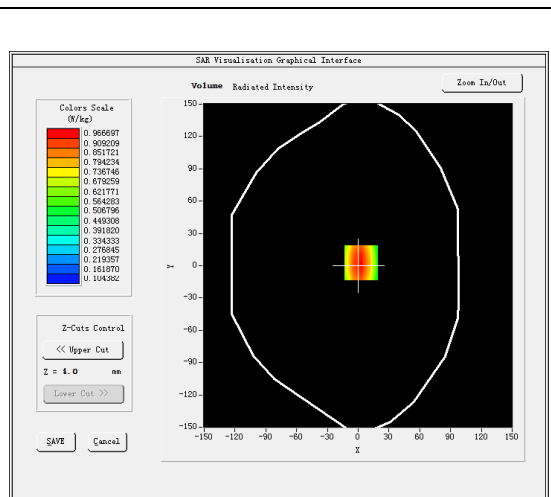

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.551218
SAR 1g (W/Kg)	0.853362

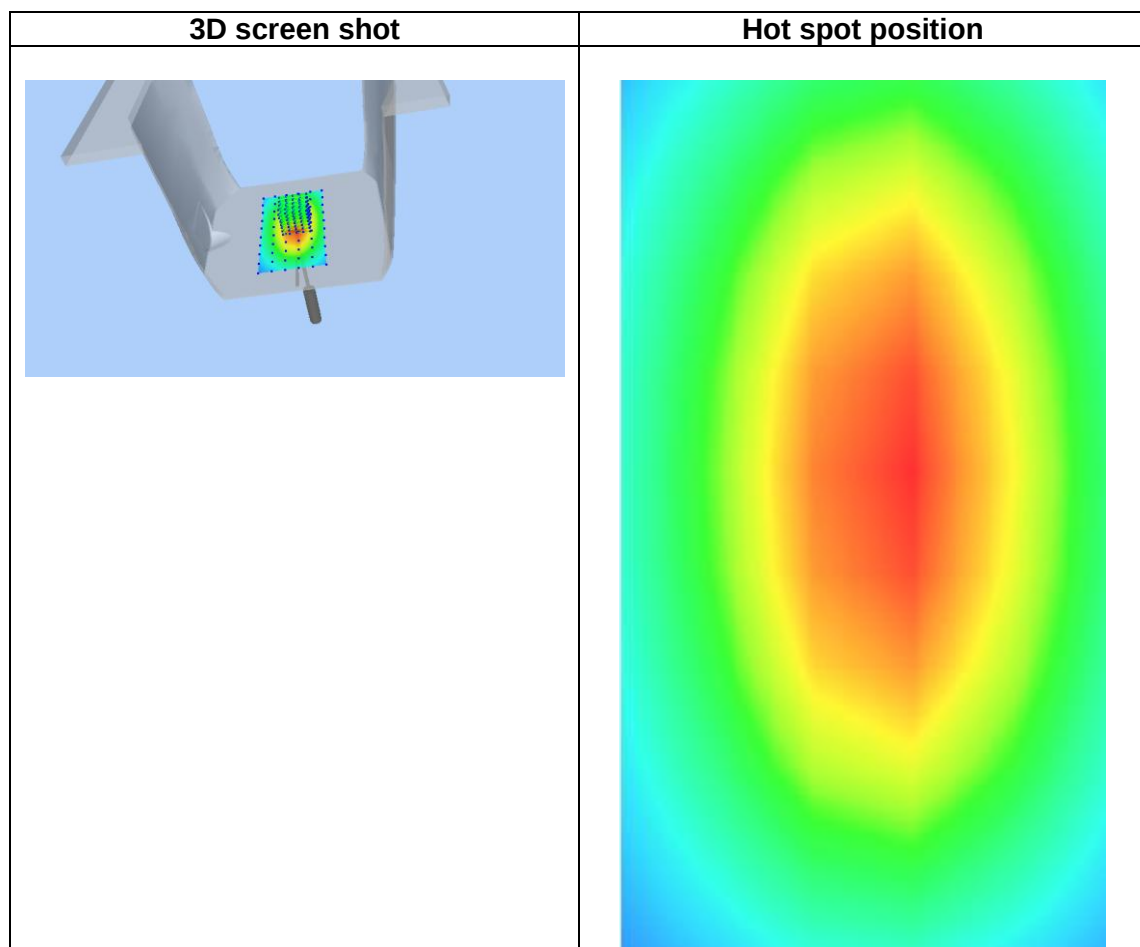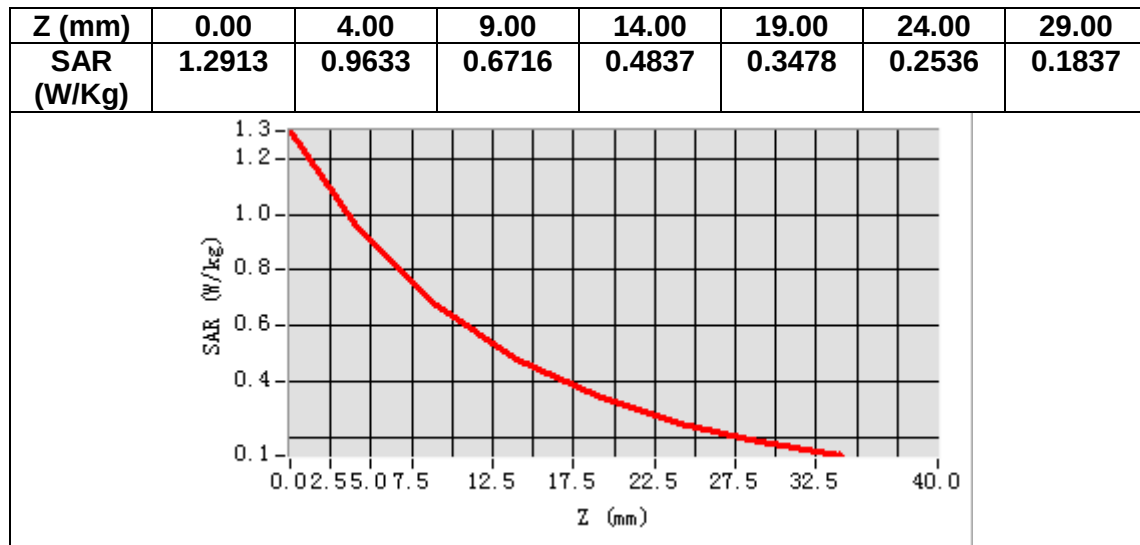

MEASUREMENT 2


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW750</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	750.000000
Relative permittivity (real part)	55.300248
Relative permittivity (imaginary part)	23.313842
Conductivity (S/m)	0.970318
Variation (%)	-1.490000

SURFACE SAR

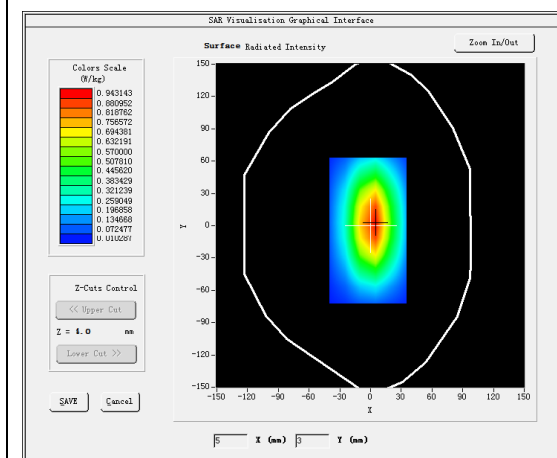



VOLUME SAR

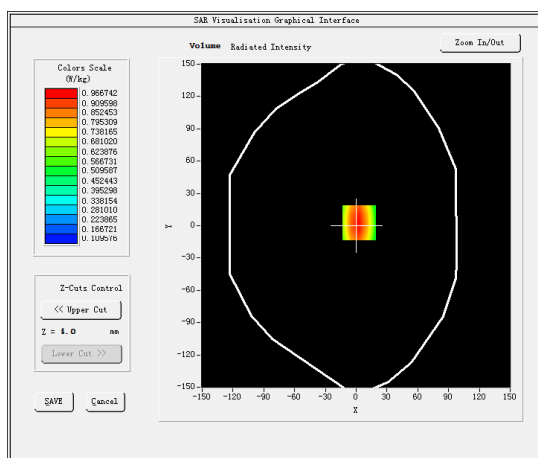

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.589281
SAR 1g (W/Kg)	0.886263

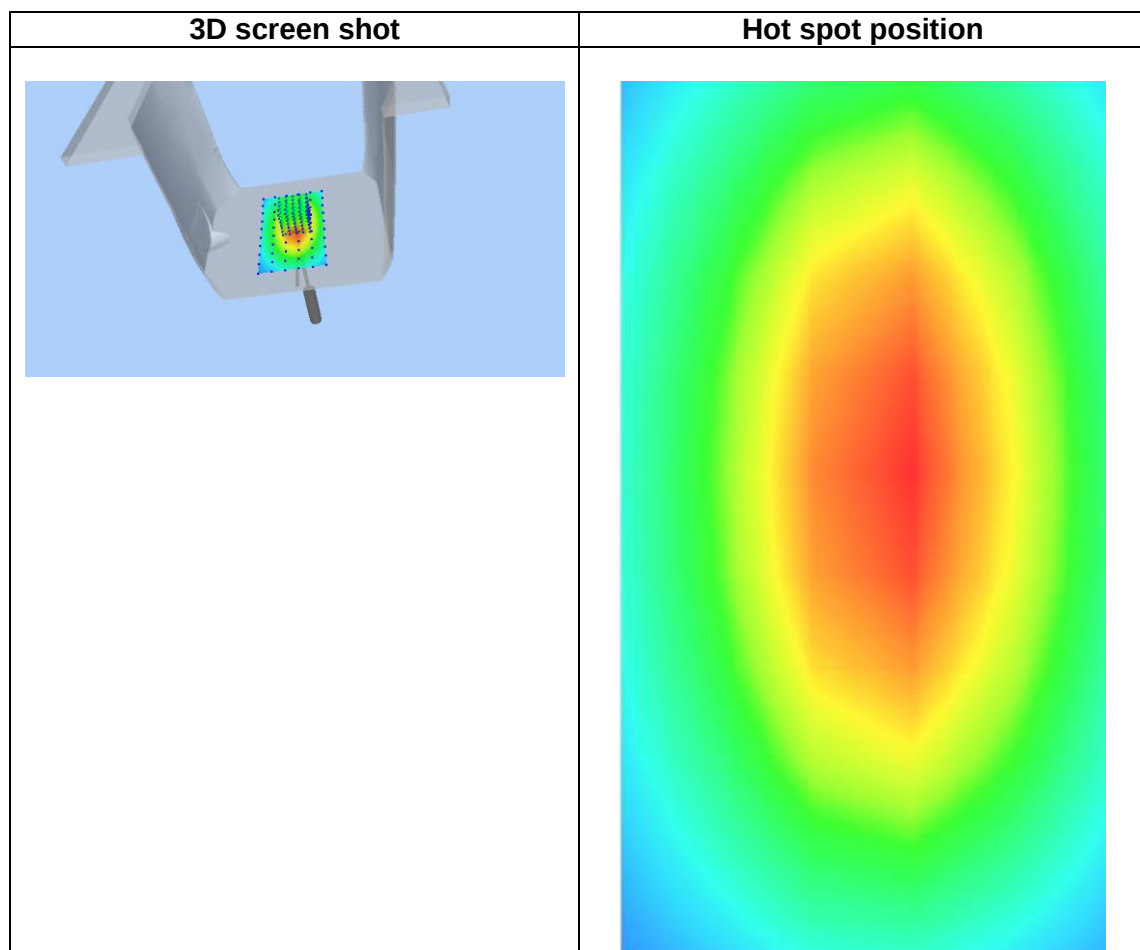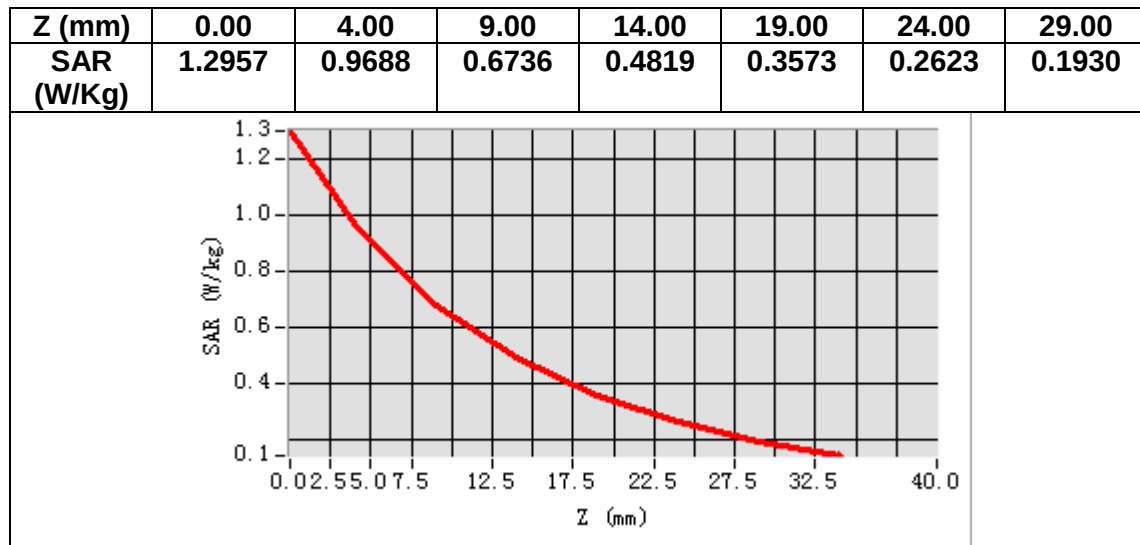

MEASUREMENT 3


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW835</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative permittivity (real part)	40.443541
Relative permittivity (imaginary part)	20.239613
Conductivity (S/m)	0.940542
Variation (%)	2.190000

SURFACE SAR

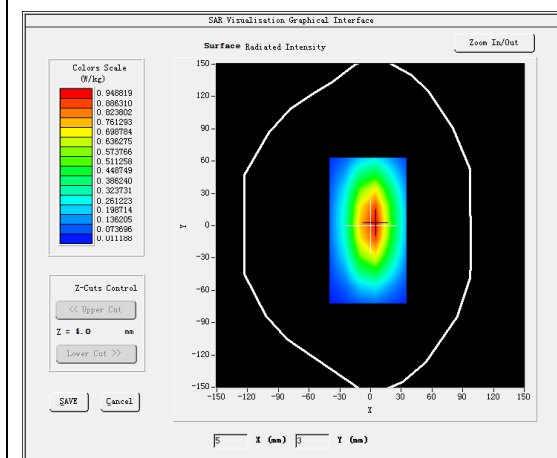



VOLUME SAR

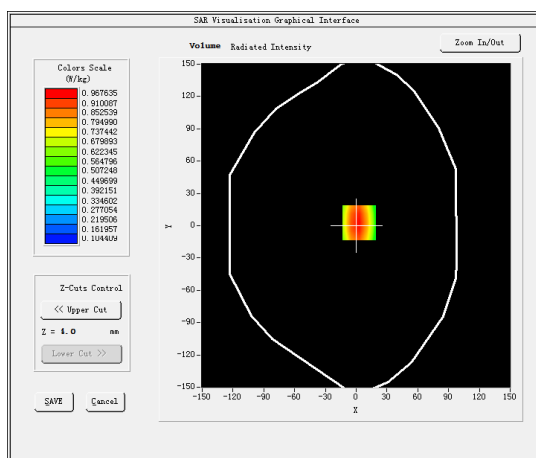

Maximum location: X=3.00, Y=3.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.622966
SAR 1g (W/Kg)	0.966035

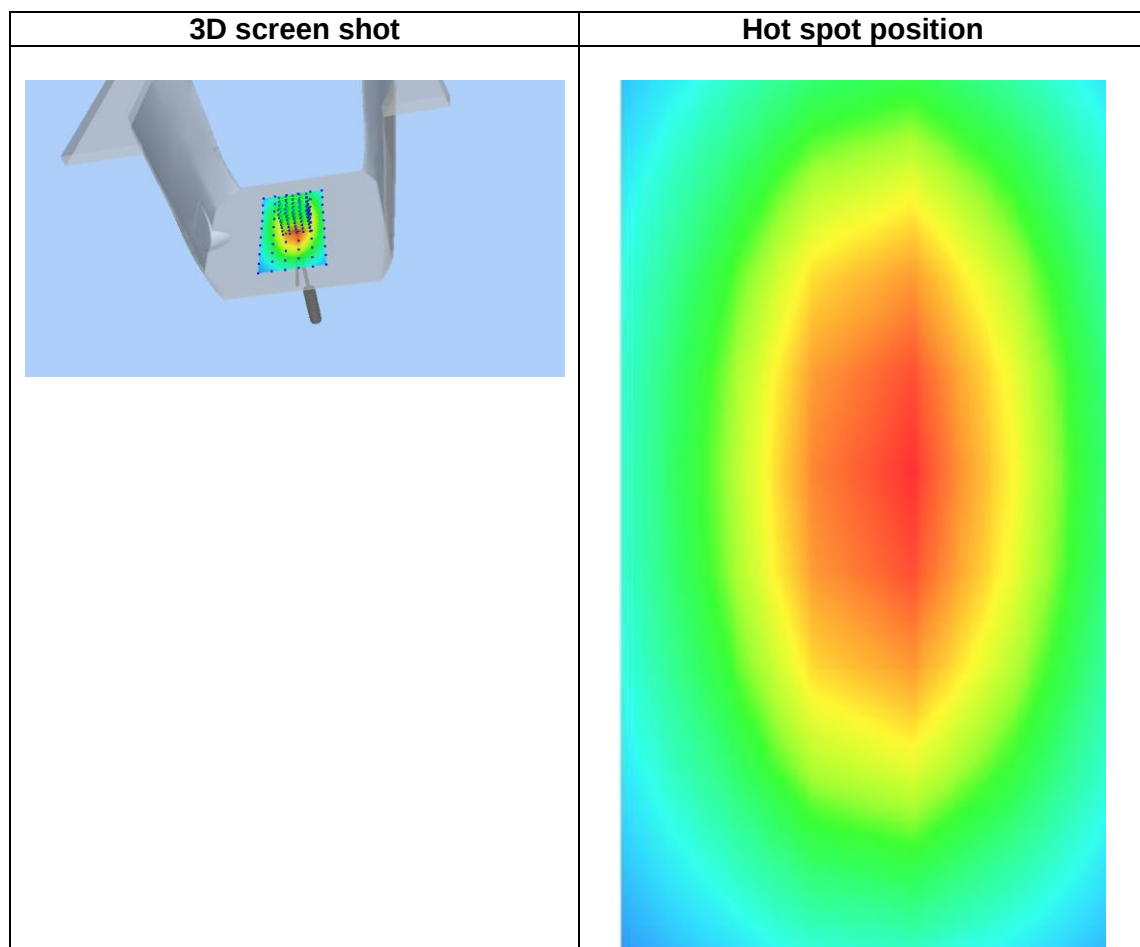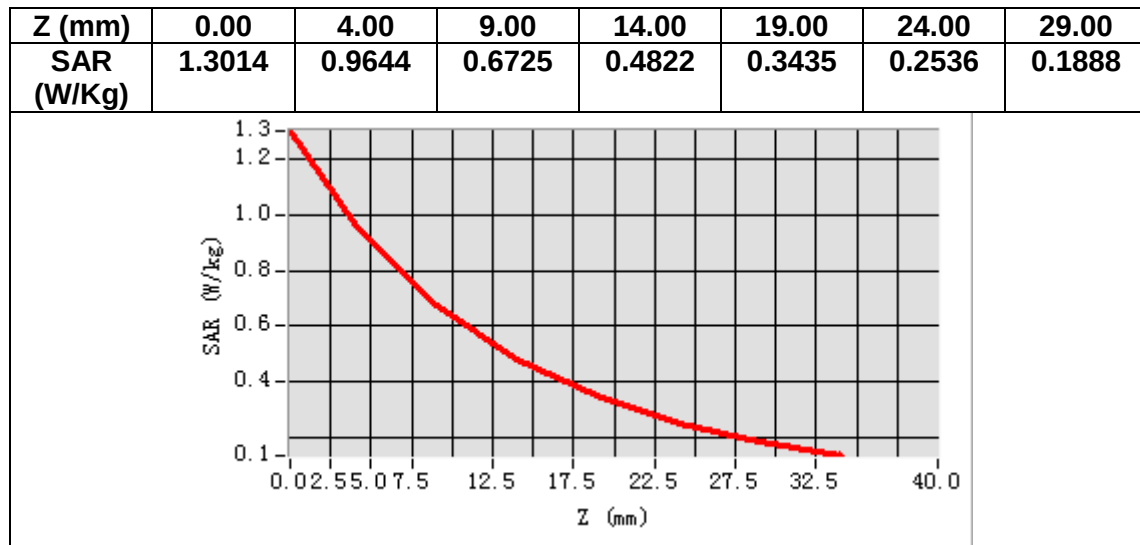

MEASUREMENT 4


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW835</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative permittivity (real part)	54.281111
Relative permittivity (imaginary part)	21.823359
Conductivity (S/m)	1.011236
Variation (%)	-3.330000

SURFACE SAR

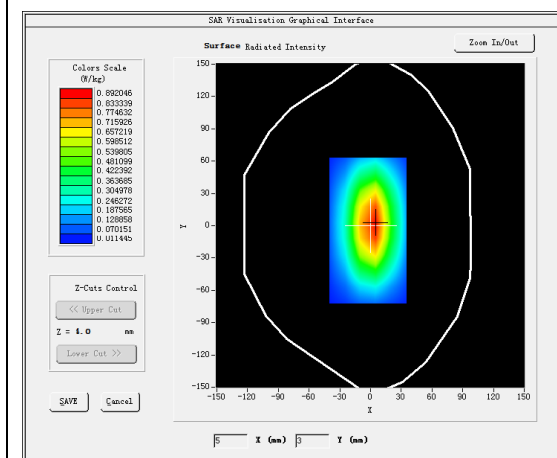



VOLUME SAR

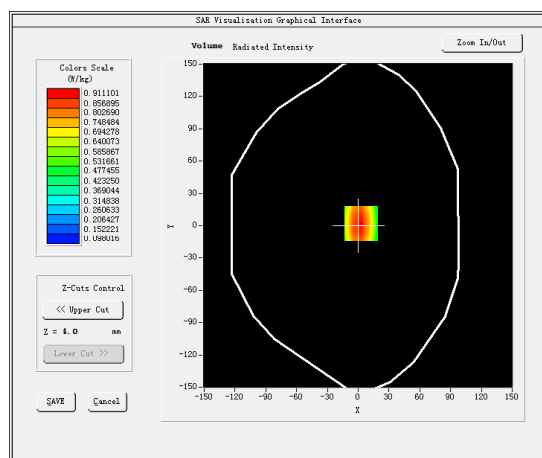

Maximum location: X=3.00, Y=2.00

SAR Peak: 1.23 W/kg

SAR 10g (W/Kg)	0.643123
SAR 1g (W/Kg)	0.980356

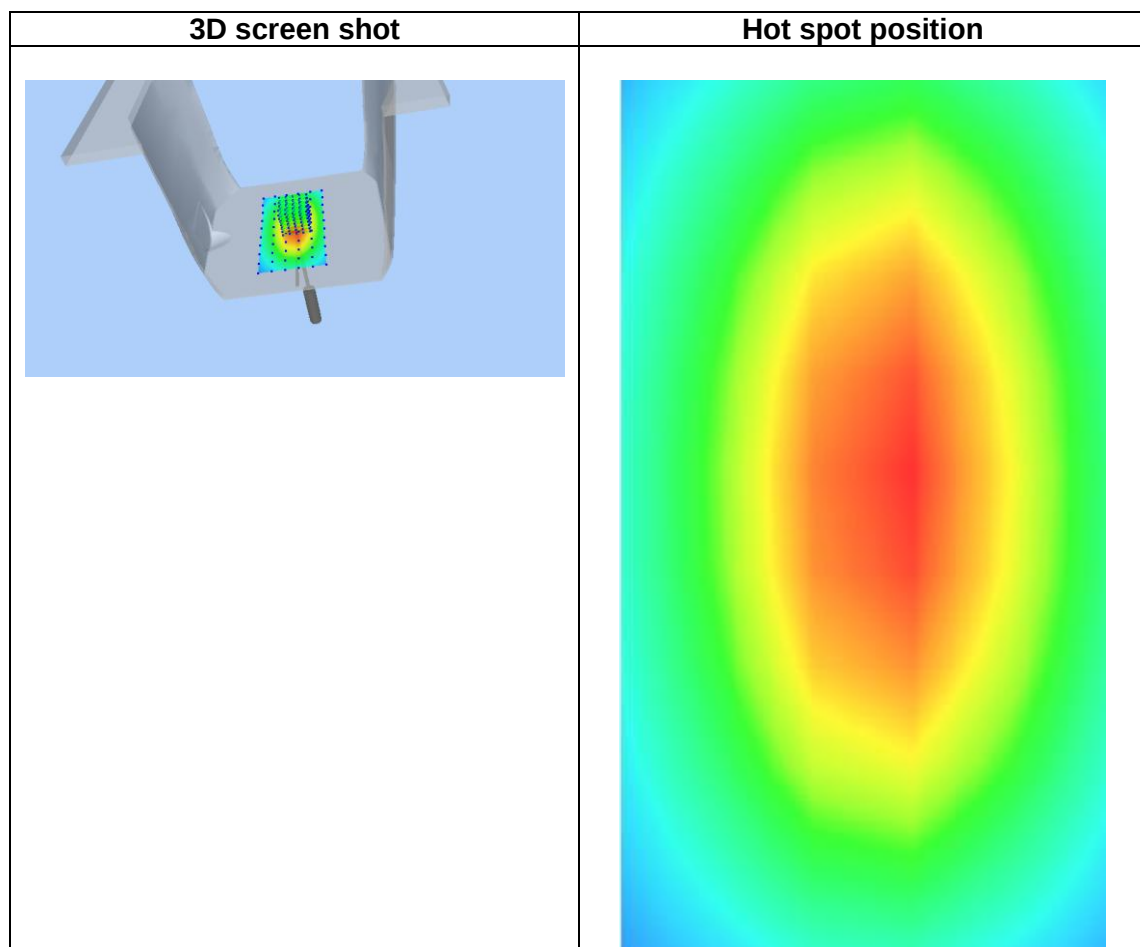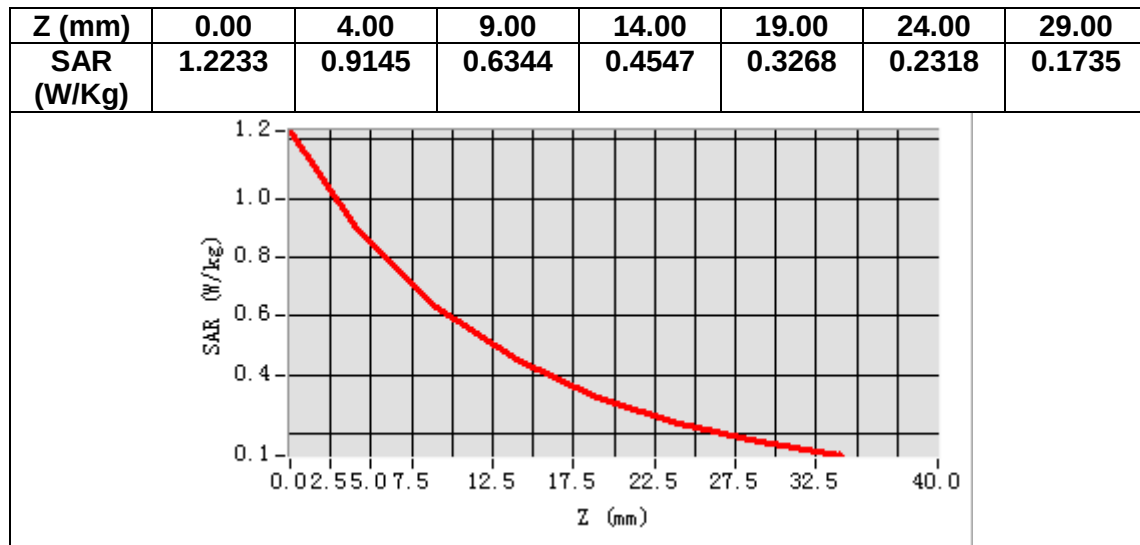

MEASUREMENT 5


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1800</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1800.000000
Relative permittivity (real part)	38.551237
Relative permittivity (imaginary part)	14.093229
Conductivity (S/m)	1.409367
Variation (%)	-3.11000

SURFACE SAR

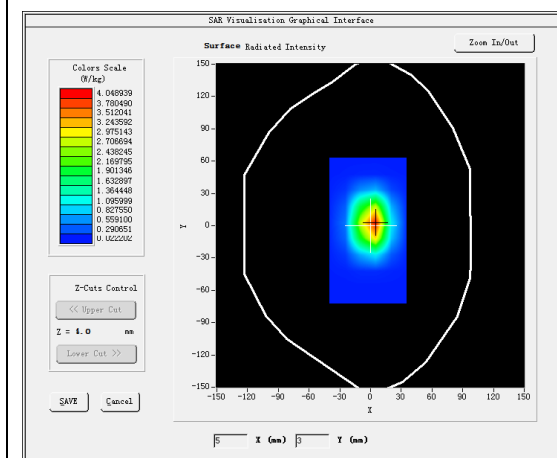



VOLUME SAR

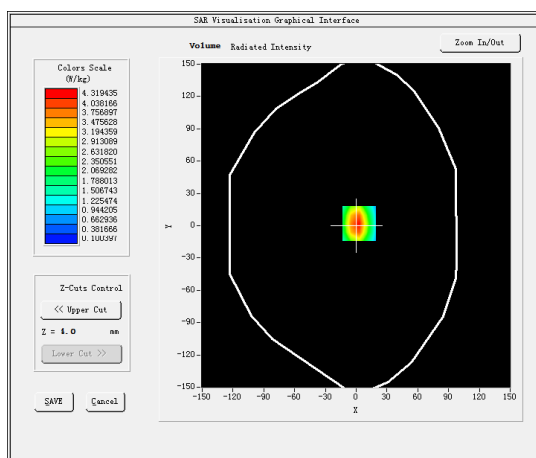

Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg

SAR 10g (W/Kg)	1.996397
SAR 1g (W/Kg)	3.810451

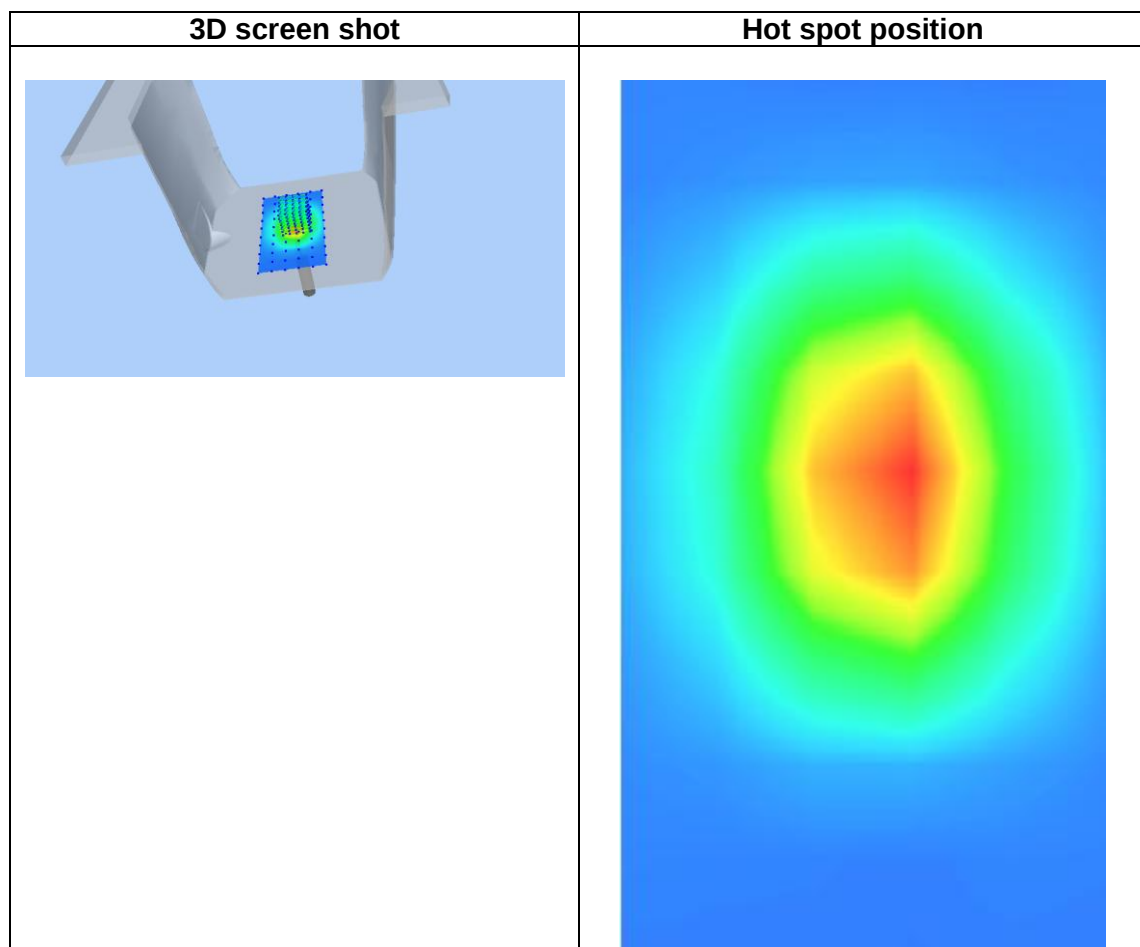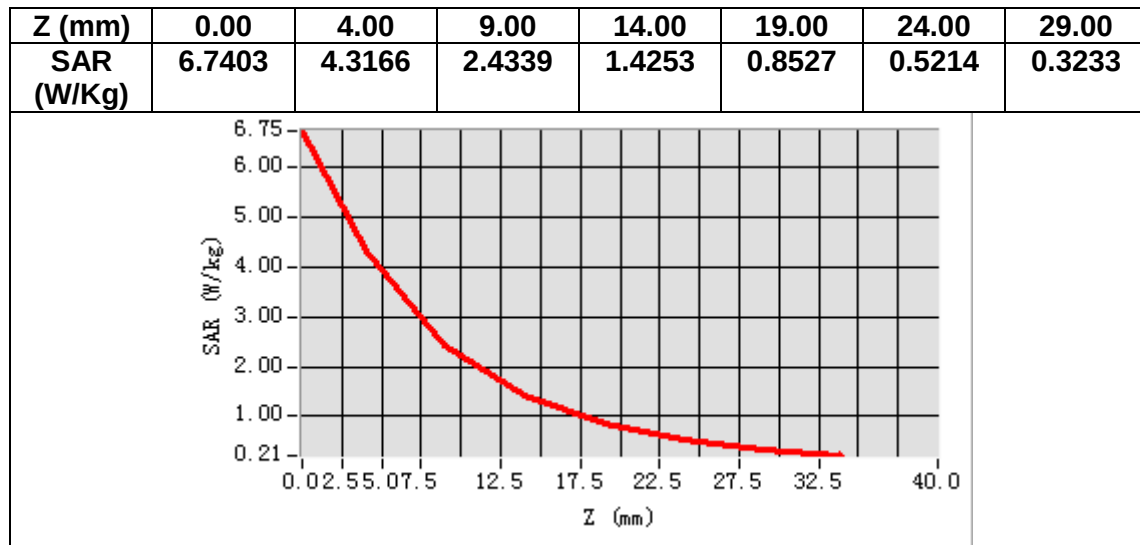

MEASUREMENT 6


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW1800</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1800.000000
Relative permittivity (real part)	53.243510
Relative permittivity (imaginary part)	15.634016
Conductivity (S/m)	1.563096
Variation (%)	2.020000

SURFACE SAR

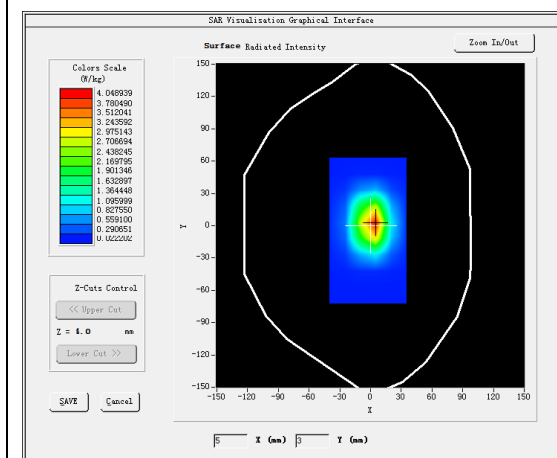



VOLUME SAR

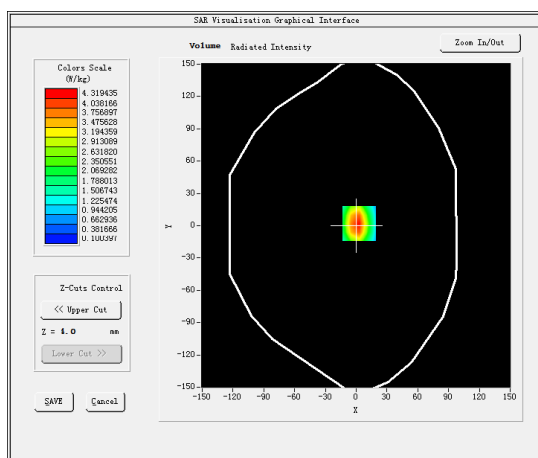

Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg

SAR 10g (W/Kg)	2.063379
SAR 1g (W/Kg)	3.812268

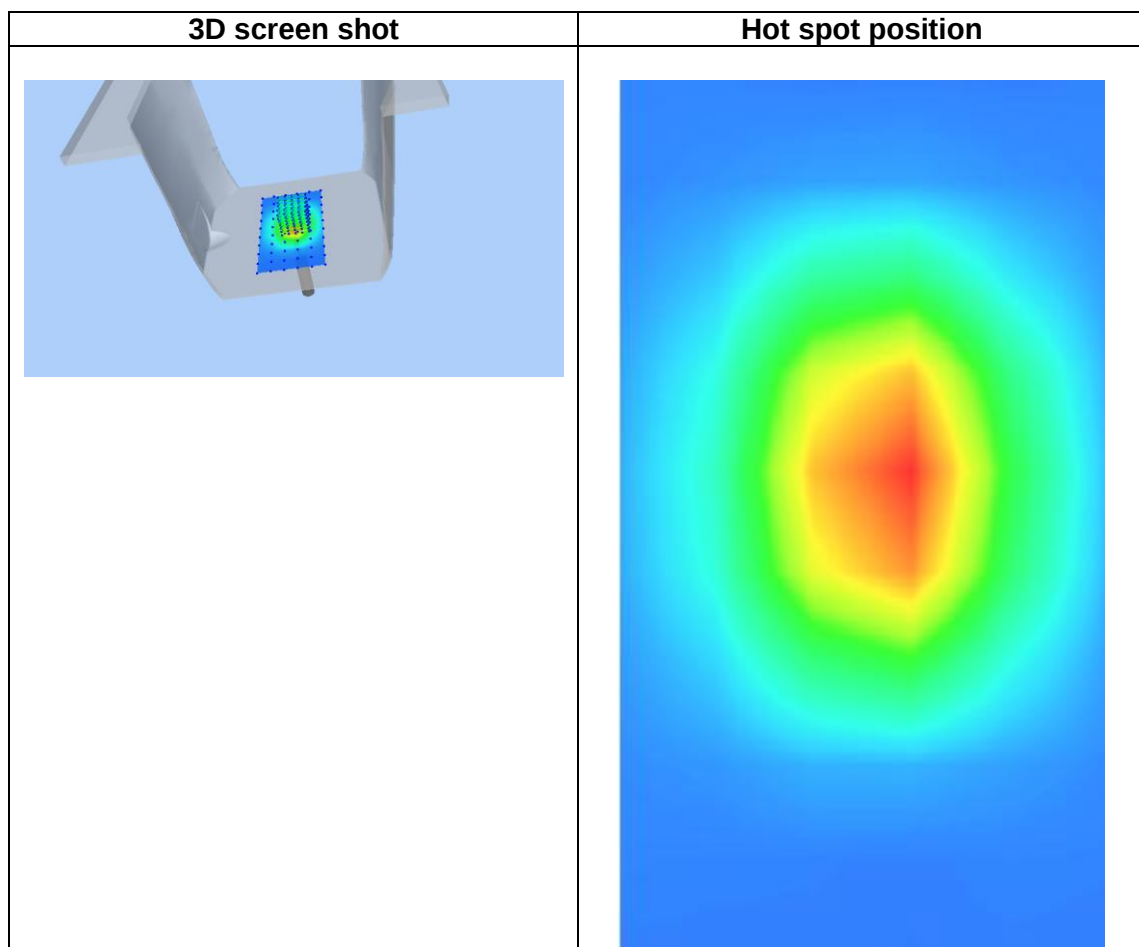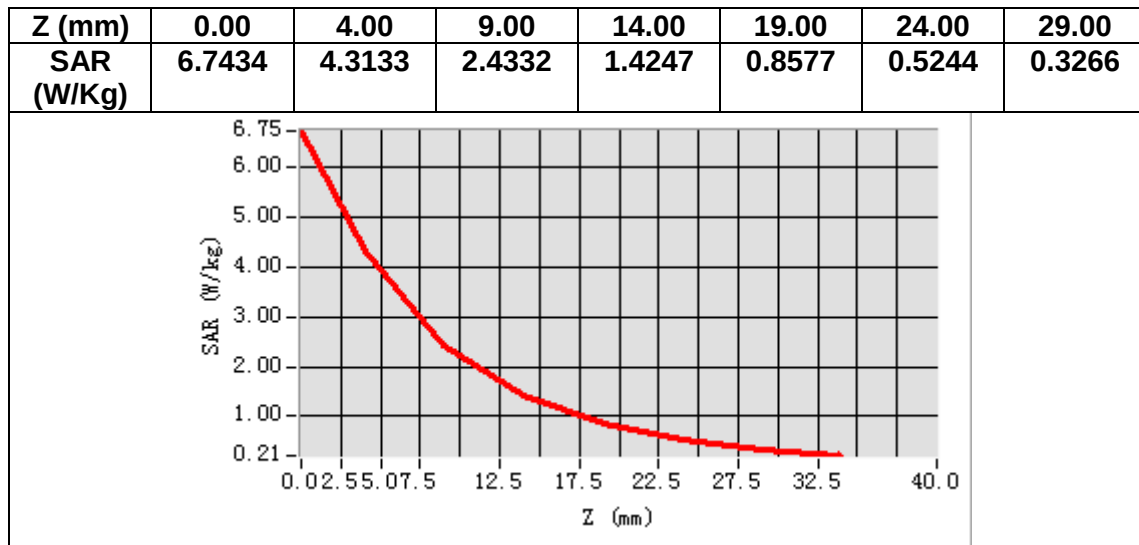

MEASUREMENT 7


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	40.961287
Relative permittivity (imaginary part)	13.843008
Conductivity (S/m)	1.460336
Variation (%)	-1.430000

SURFACE SAR

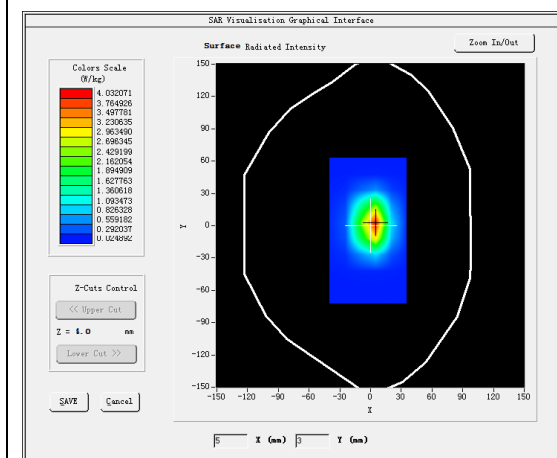



VOLUME SAR

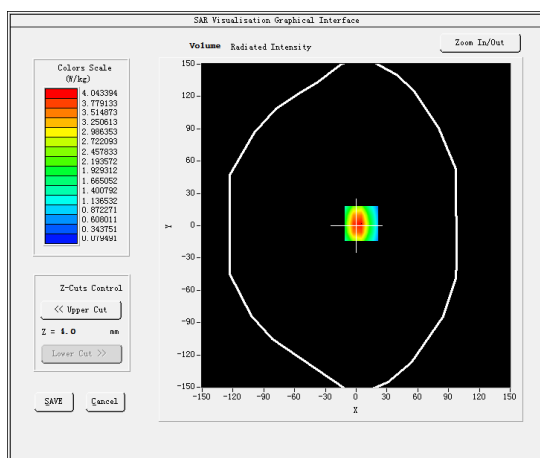

Maximum location: X=5.00, Y=2.00

SAR Peak: 6.70 W/kg

SAR 10g (W/Kg)	2.007456
SAR 1g (W/Kg)	3.890365

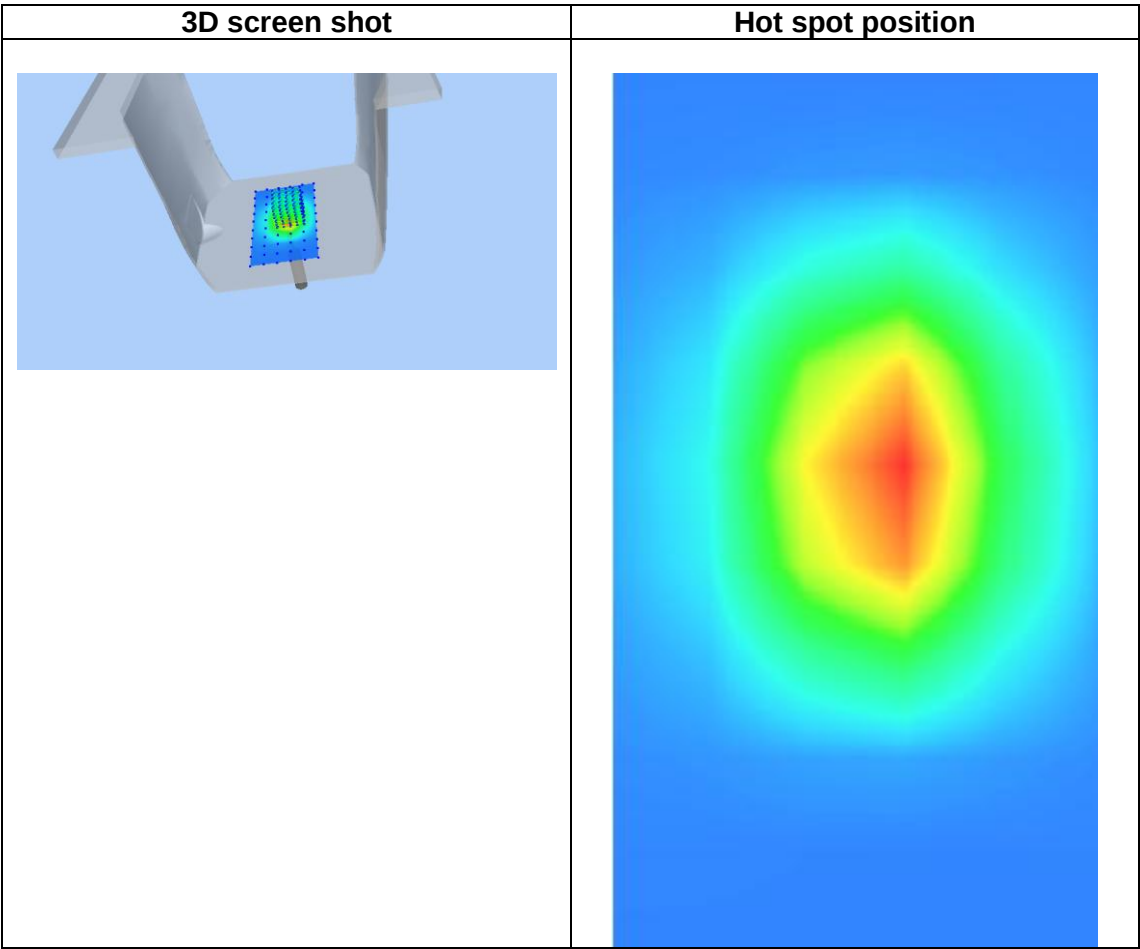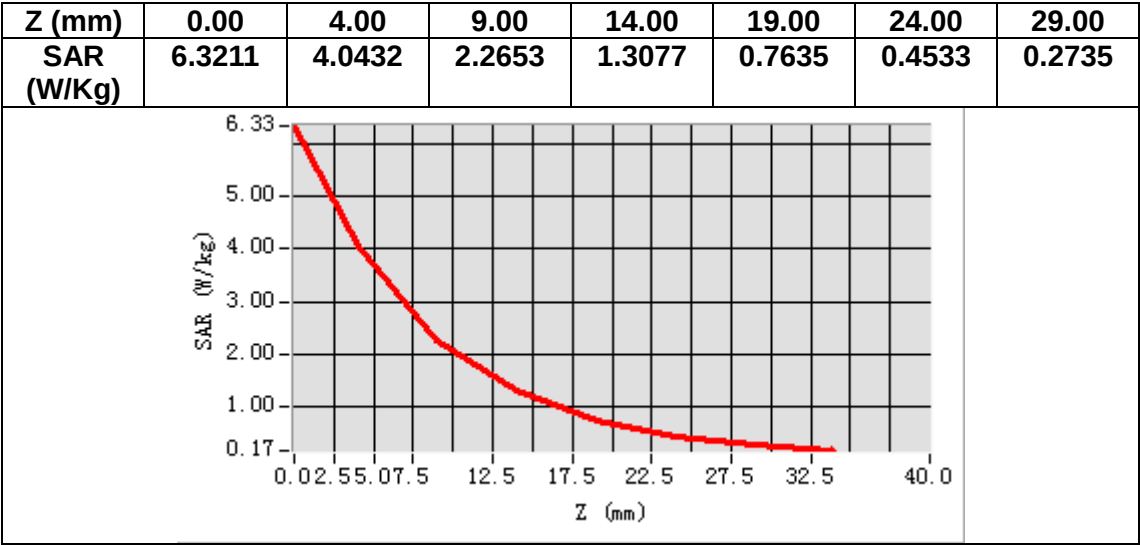

MEASUREMENT 8


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	52.573335
Relative permittivity (imaginary part)	14.903503
Conductivity (S/m)	1.569566
Variation (%)	3.460000

SURFACE SAR

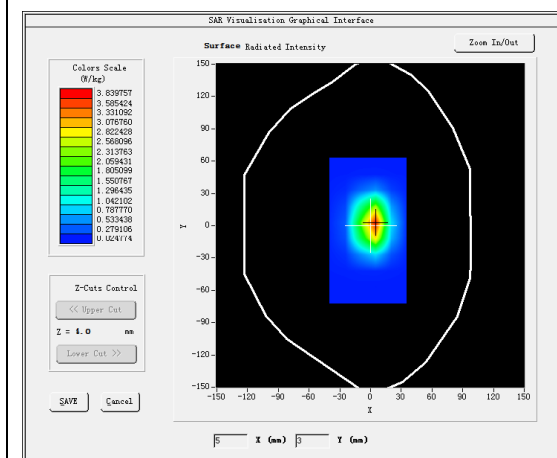



VOLUME SAR

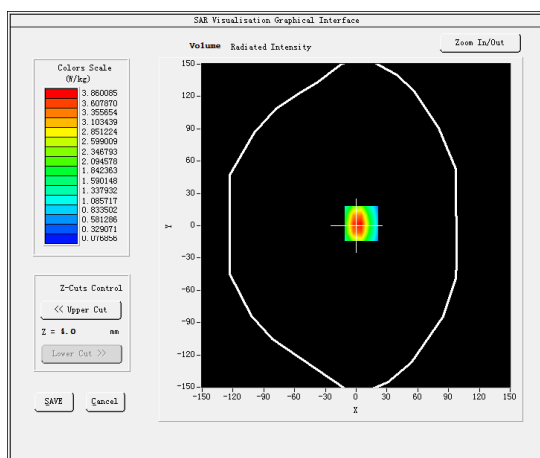

Maximum location: X=5.00, Y=2.00

SAR Peak: 6.39 W/kg

SAR 10g (W/Kg)	2.059329
SAR 1g (W/Kg)	3.910402

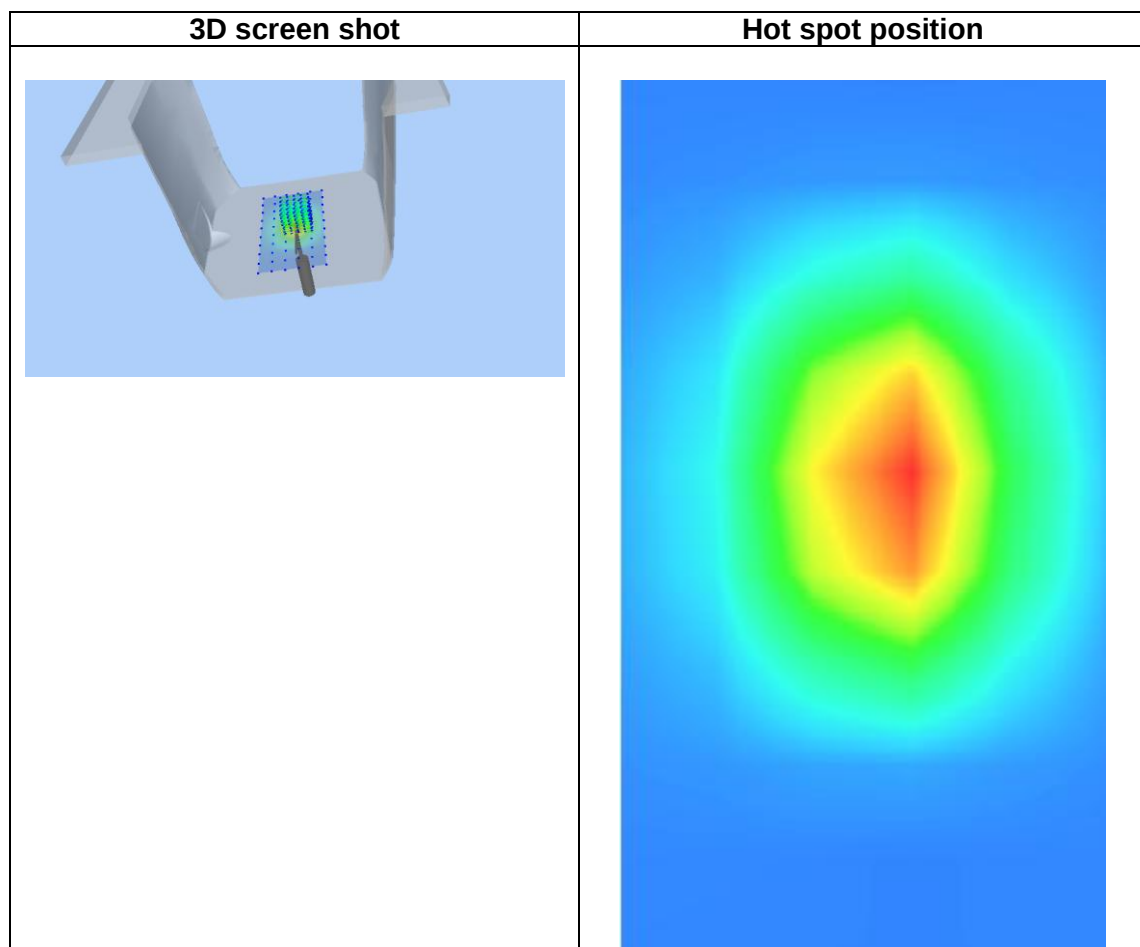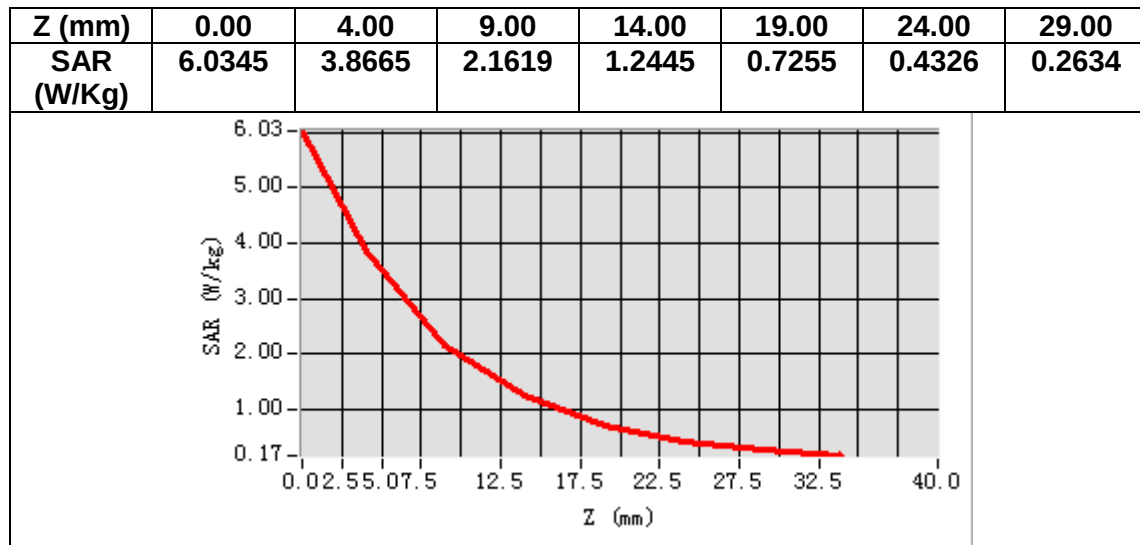

MEASUREMENT 9


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative permittivity (real part)	38.791421
Relative permittivity (imaginary part)	13.742631
Conductivity (S/m)	1.869663
Variation (%)	-3.350000

SURFACE SAR

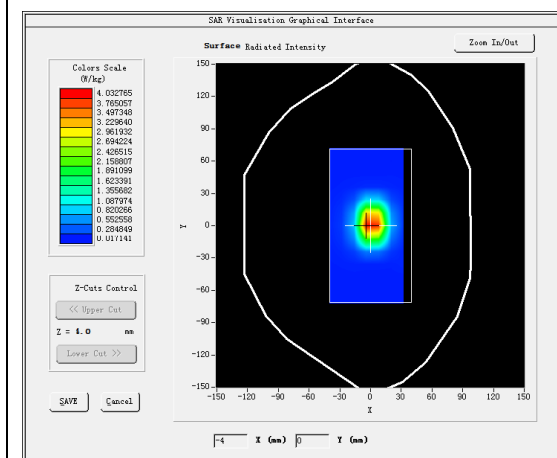



VOLUME SAR

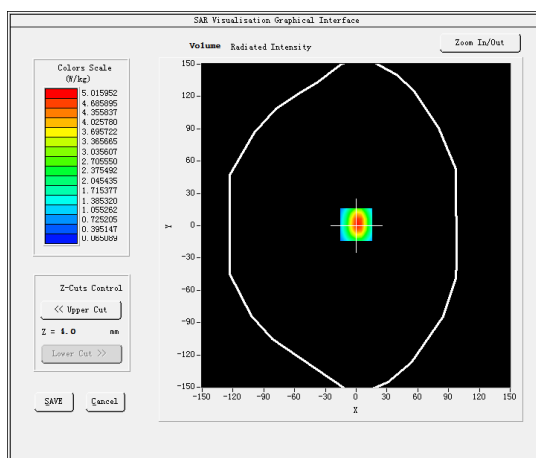

Maximum location: X=0.00, Y=1.00

SAR Peak: 8.14 W/kg

SAR 10g (W/Kg)	2.455375
SAR 1g (W/Kg)	5.363435

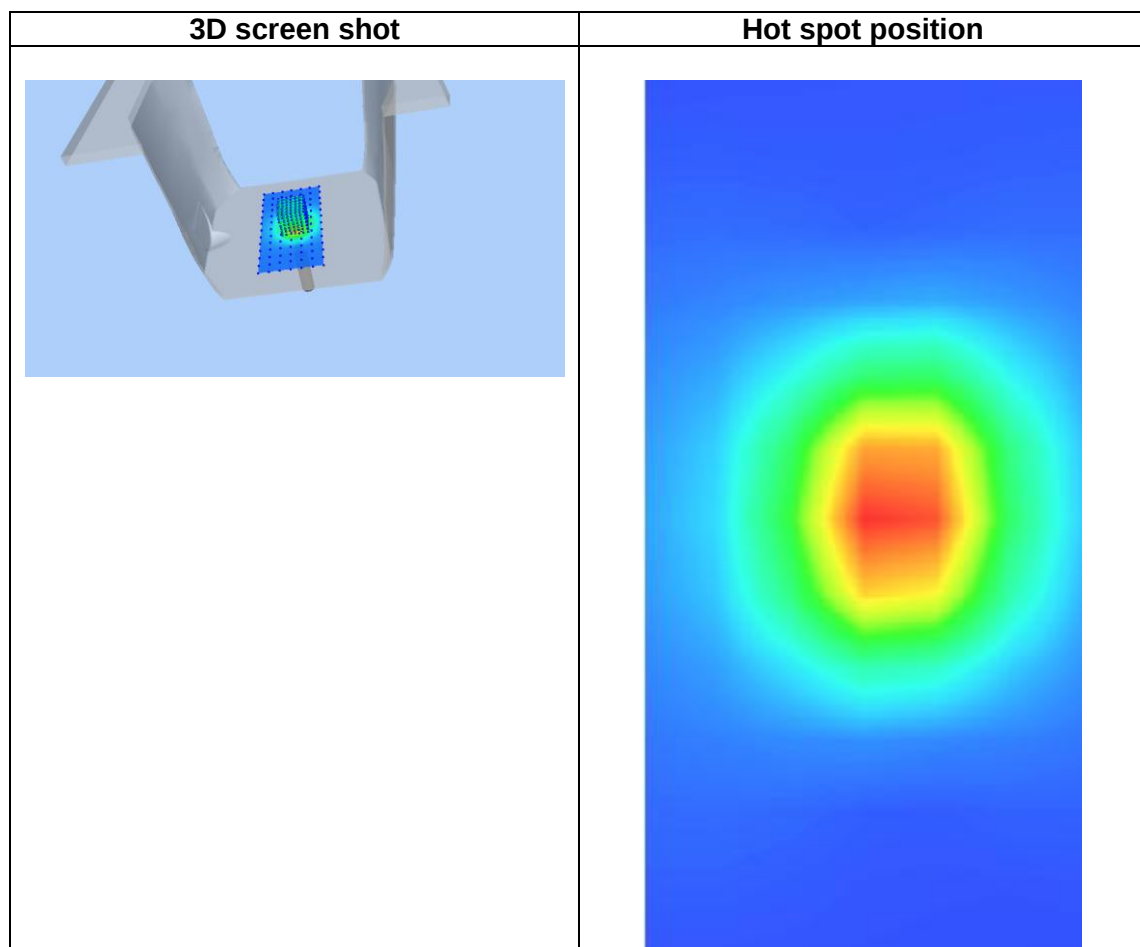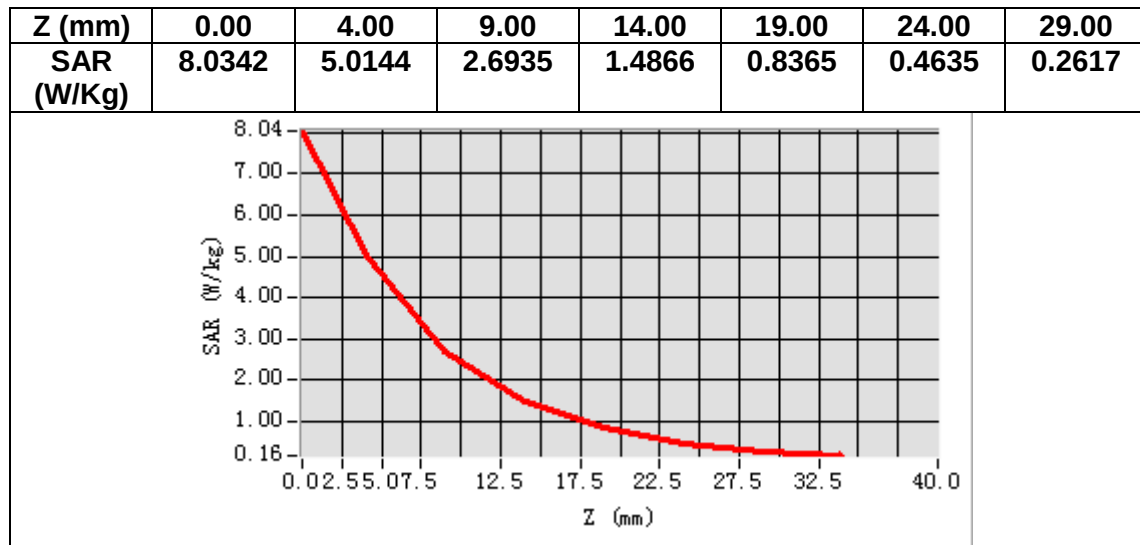

MEASUREMENT 10


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative permittivity (real part)	52.091497
Relative permittivity (imaginary part)	14.883566
Conductivity (S/m)	2.032816
Variation (%)	1.420000

SURFACE SAR

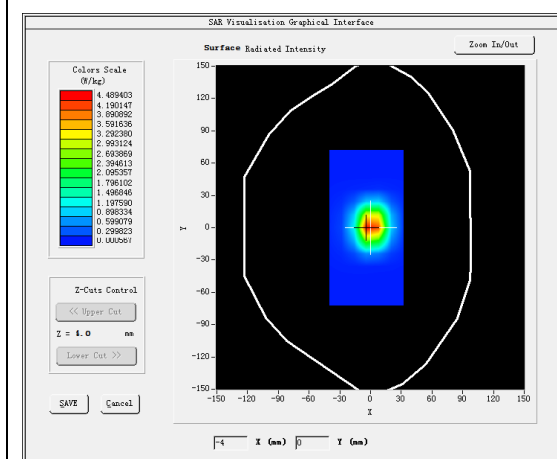



VOLUME SAR

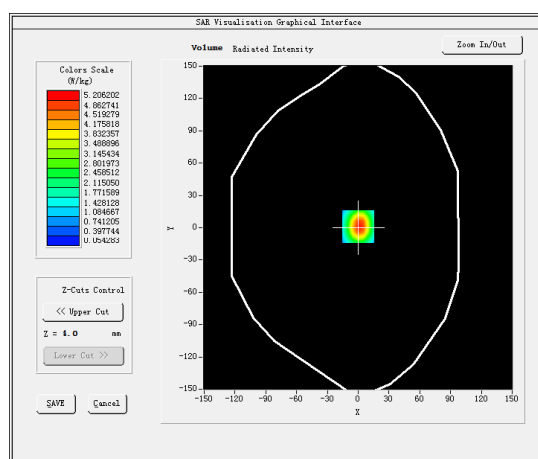

Maximum location: X=0.00, Y=1.00

SAR Peak: 8.46 W/kg

SAR 10g (W/Kg)	2.401285
SAR 1g (W/Kg)	5.288270

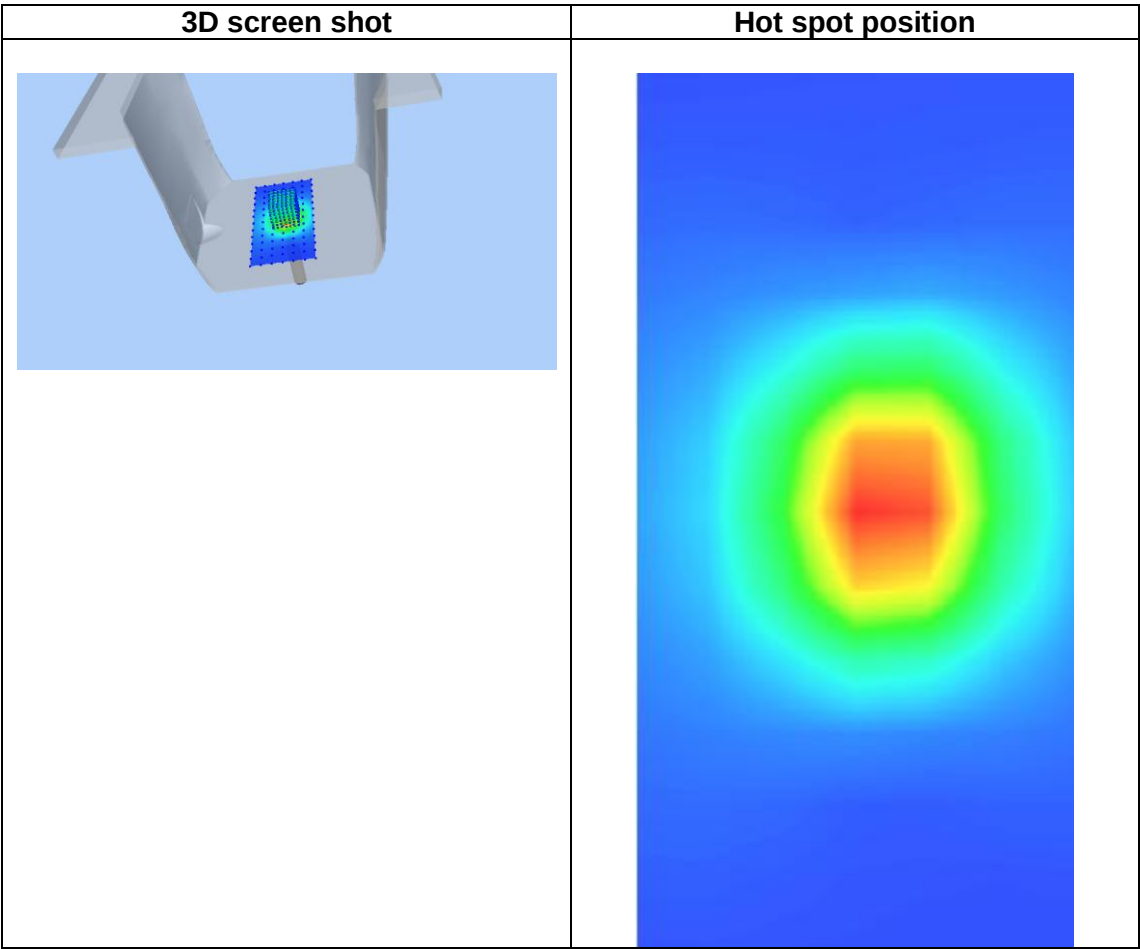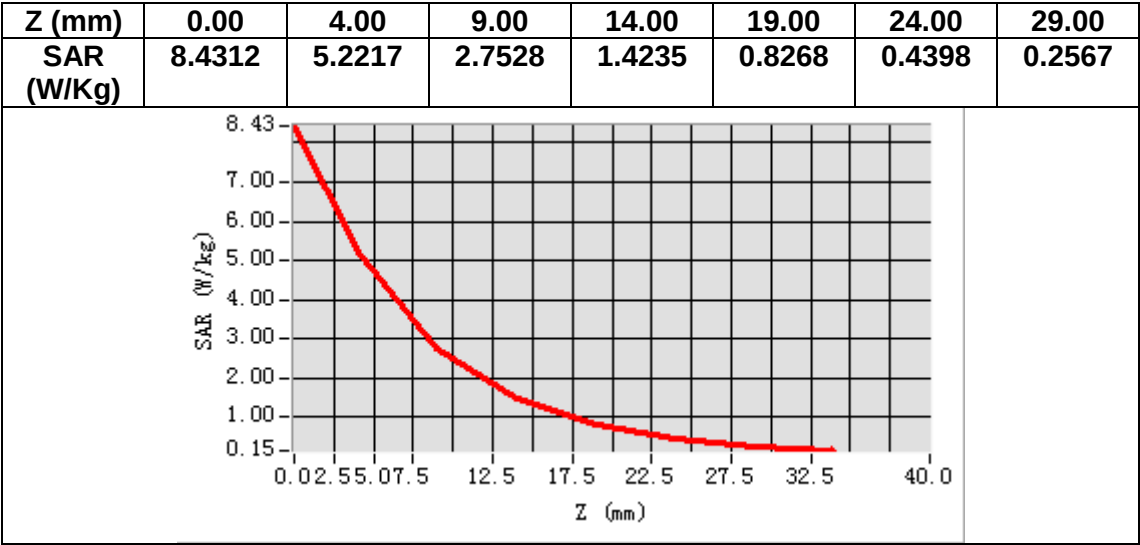

MEASUREMENT 11


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative permittivity (real part)	38.472638
Relative permittivity (imaginary part)	13.973997
Conductivity (S/m)	2.023631
Variation (%)	-1.040000

SURFACE SAR

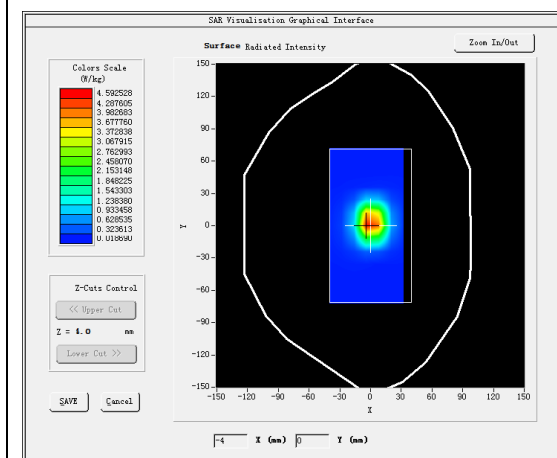



VOLUME SAR

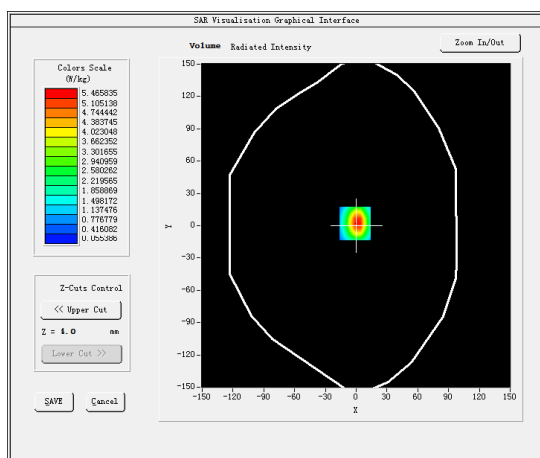

Maximum location: X=-1.00, Y=2.00

SAR Peak: 9.07 W/kg

SAR 10g (W/Kg)	2.481205
SAR 1g (W/Kg)	5.598267

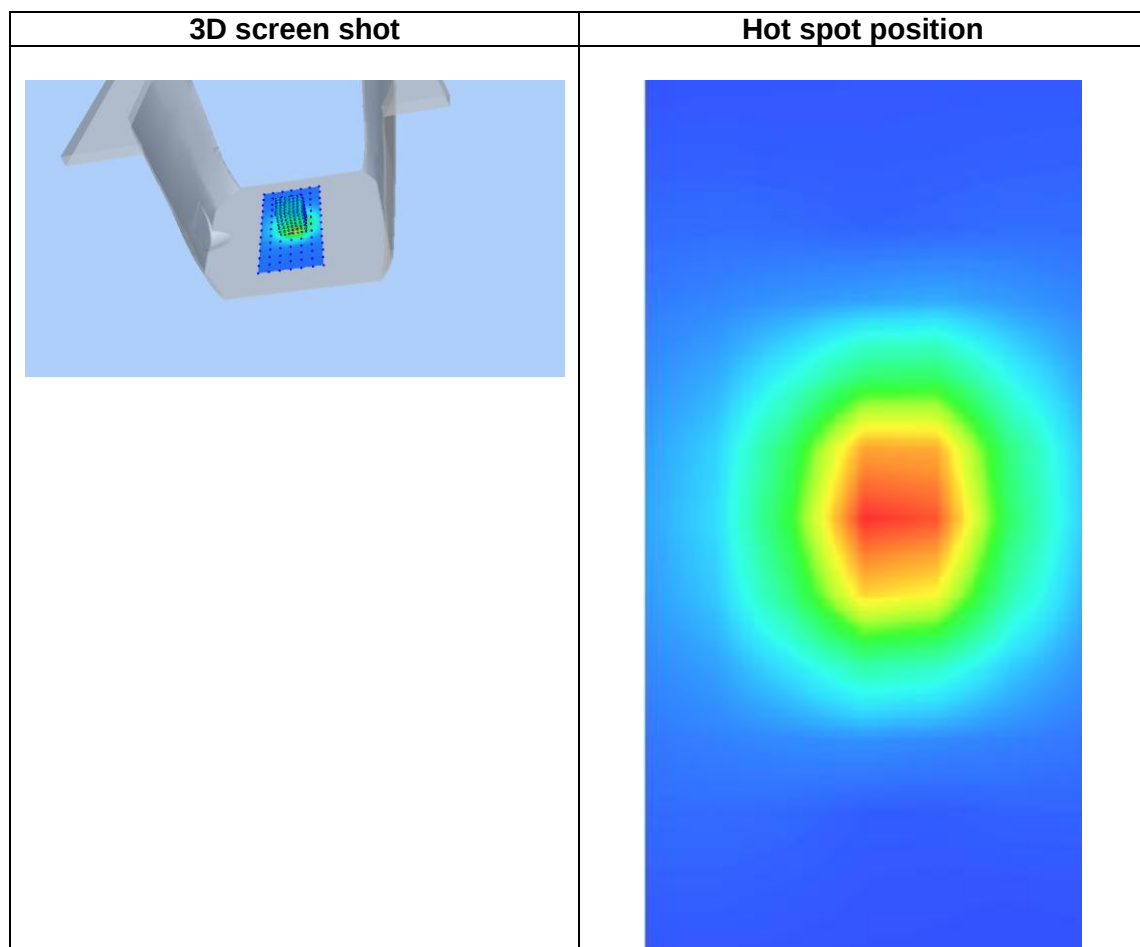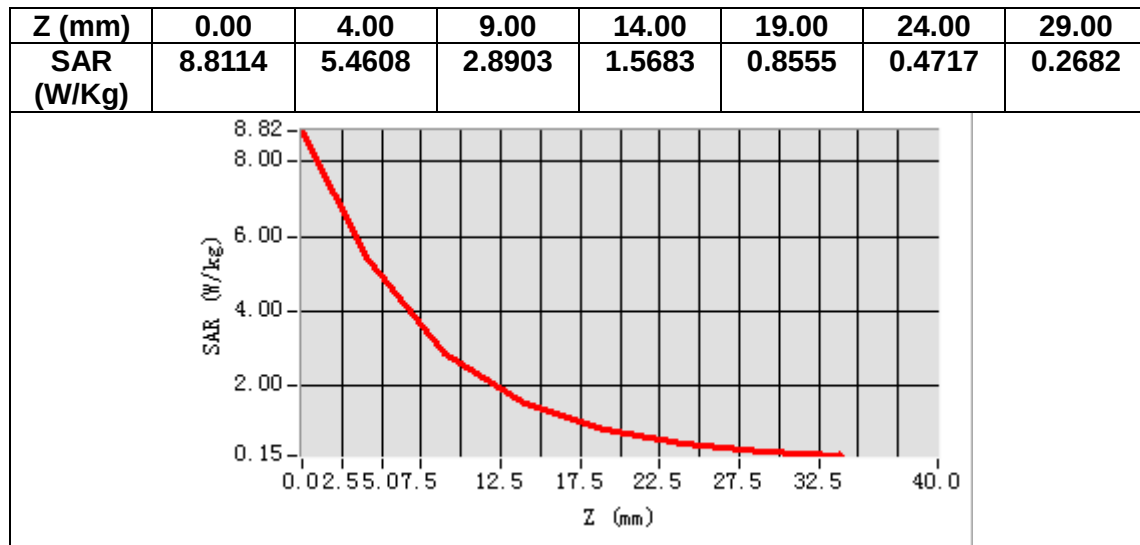

MEASUREMENT 12


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative permittivity (real part)	52.672866
Relative permittivity (imaginary part)	15.230101
Conductivity (S/m)	2.203465
Variation (%)	-1.220000

SURFACE SAR

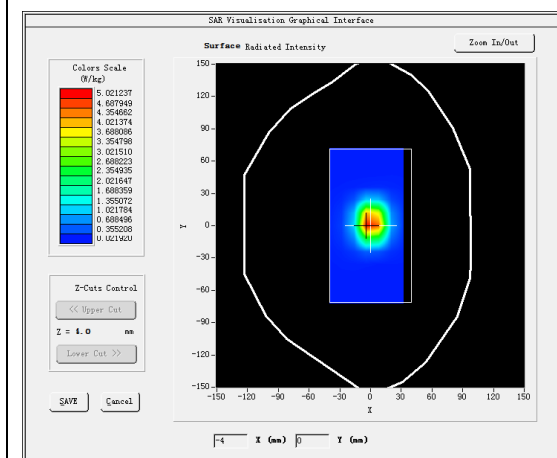



VOLUME SAR

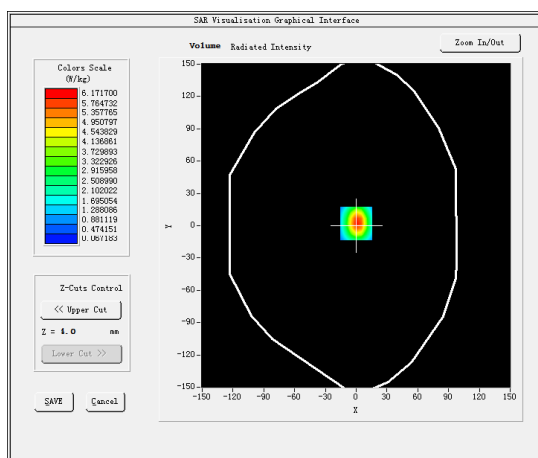

Maximum location: X=0.00, Y=2.00

SAR Peak: 9.99 W/kg

SAR 10g (W/Kg)	2.354324
SAR 1g (W/Kg)	5.240188

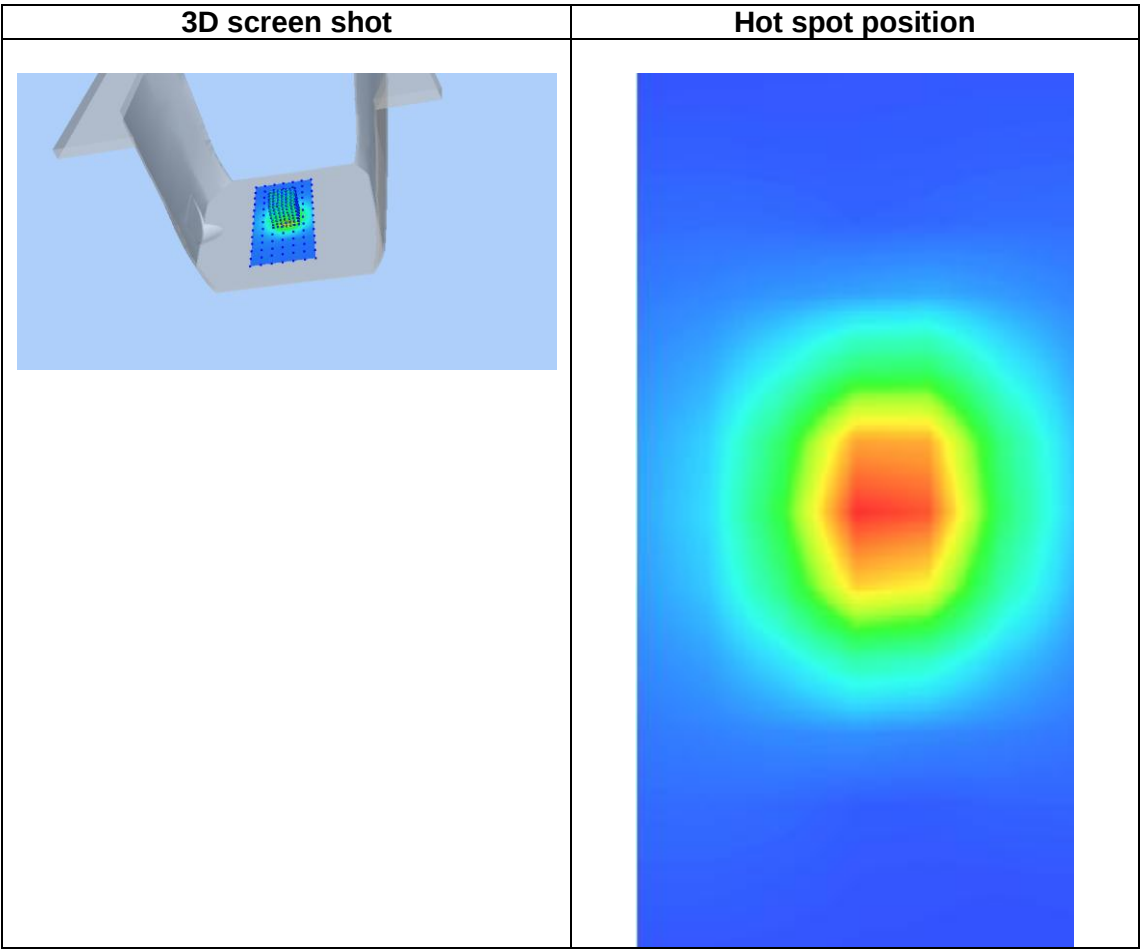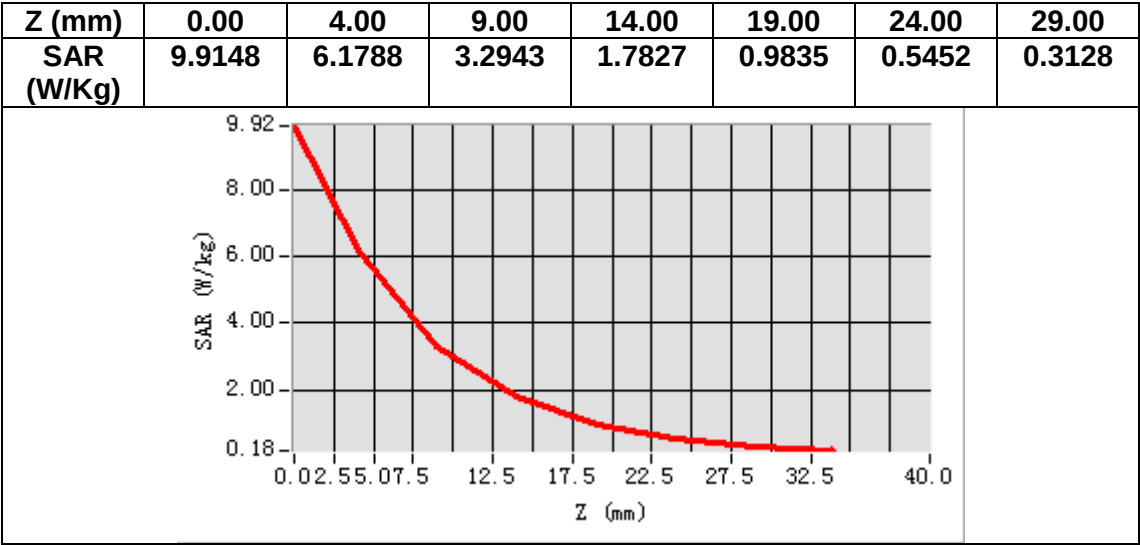

13. Appendix C. Plots of High SAR Measurement

Table of contents
MEASUREMENT 1 GSM 850 Head
MEASUREMENT 2 GSM 850 Body
MEASUREMENT 3 GSM 1900 Head
MEASUREMENT 4 GSM 1900 Body
MEASUREMENT 5 WCDMA Band 2 Head
MEASUREMENT 6 WCDMA Band 2 Body
MEASUREMENT 7 WCDMA Band 4 Head
MEASUREMENT 8 WCDMA Band 4 Body
MEASUREMENT 9 WCDMA Band 5 Head
MEASUREMENT 10 WCDMA Band 5 Body
MEASUREMENT 11 WLAN 2.4G Head
MEASUREMENT 12 WLAN 2.4G Body
MEASUREMENT 13 LTE Band 2 Head
MEASUREMENT 14 LTE Band 2 Body
MEASUREMENT 15 LTE Band 4 Head
MEASUREMENT 16 LTE Band 4 Body
MEASUREMENT 17 LTE Band 5 Head
MEASUREMENT 18 LTE Band 5 Body
MEASUREMENT 19 LTE Band 7 Head
MEASUREMENT 20 LTE Band 7 Body
MEASUREMENT 21 LTE Band 12 Head
MEASUREMENT 22 LTE Band 12 Body
MEASUREMENT 23 LTE Band 17 Head
MEASUREMENT 24 LTE Band 17 Body
MEASUREMENT 25 LTE Band 19 Head
MEASUREMENT 26 LTE Band 19 Body

MEASUREMENT 1


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	40.350960
Relative permittivity (imaginary part)	20.261539
Conductivity (S/m)	0.941486
Variation (%)	-1.900000

SURFACE SAR

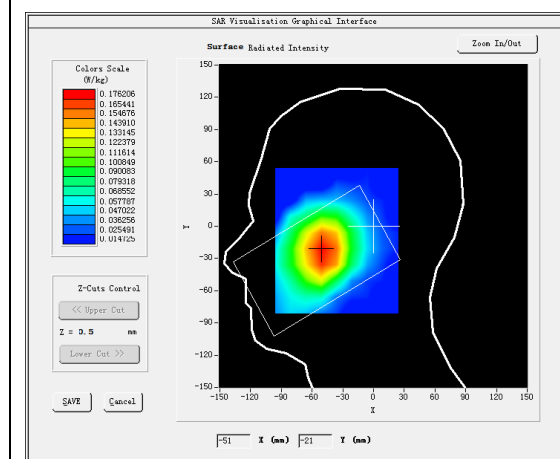



VOLUME SAR

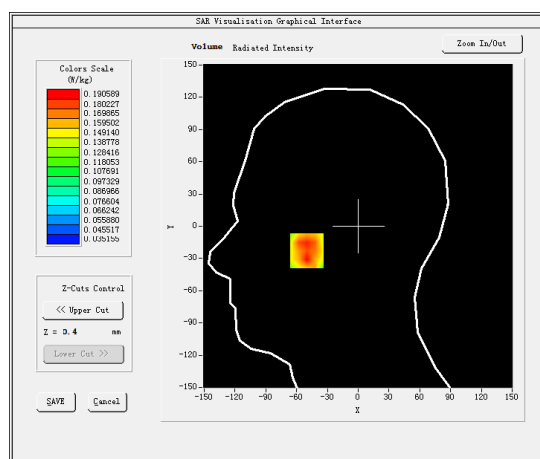

Maximum location: X=-50.00, Y=-23.00

SAR Peak: 0.23 W/kg

SAR 10g (W/Kg)	0.148521
SAR 1g (W/Kg)	0.184891

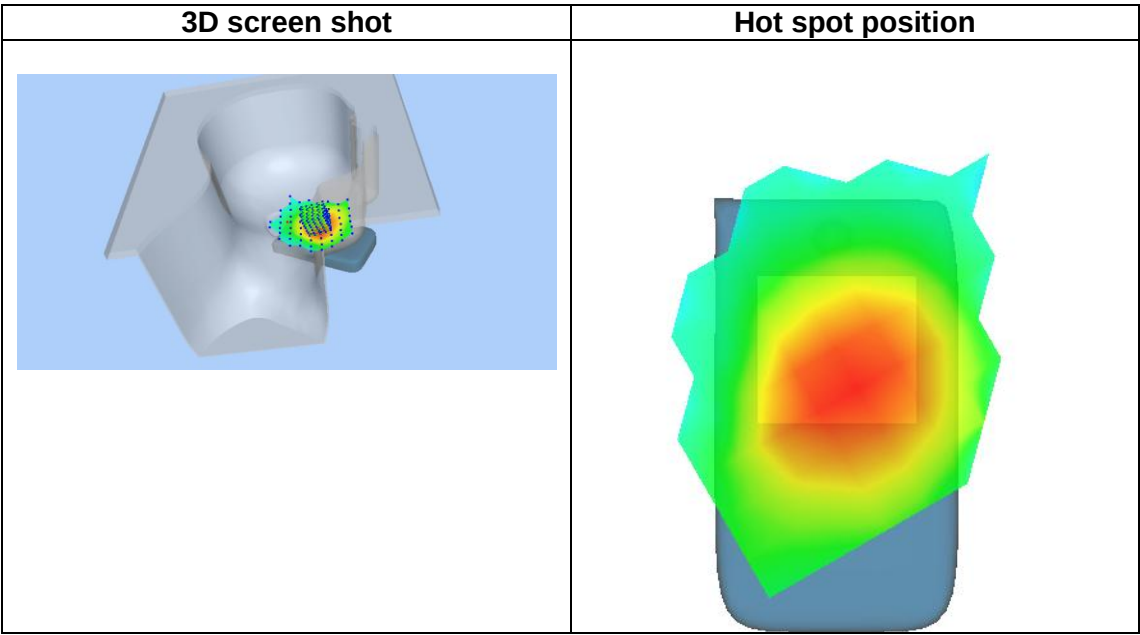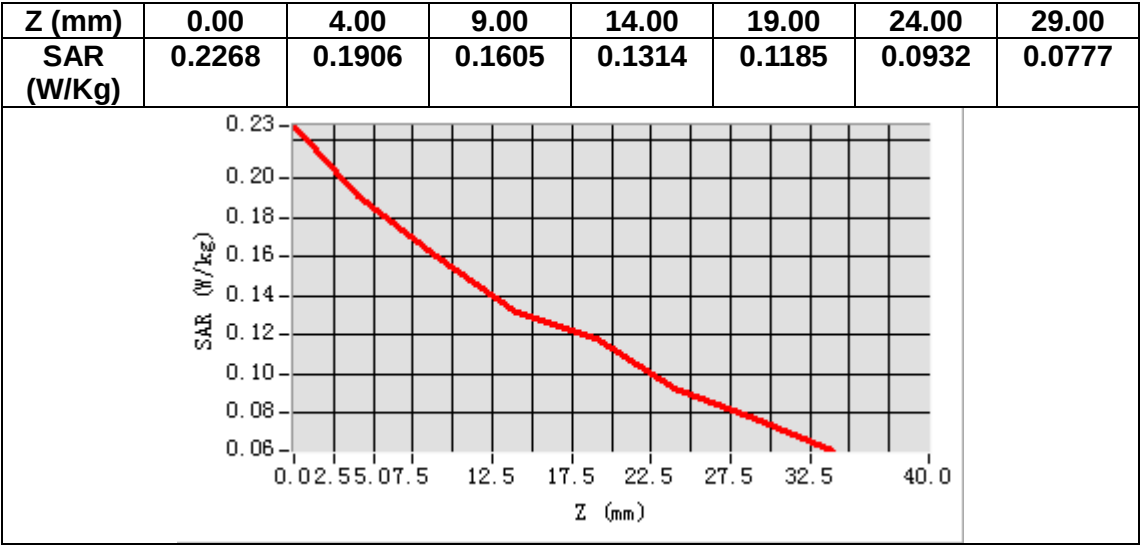

MEASUREMENT 2


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	54.289581
Relative permittivity (imaginary part)	21.802740
Conductivity (S/m)	1.013101
Variation (%)	-1.310000

SURFACE SAR

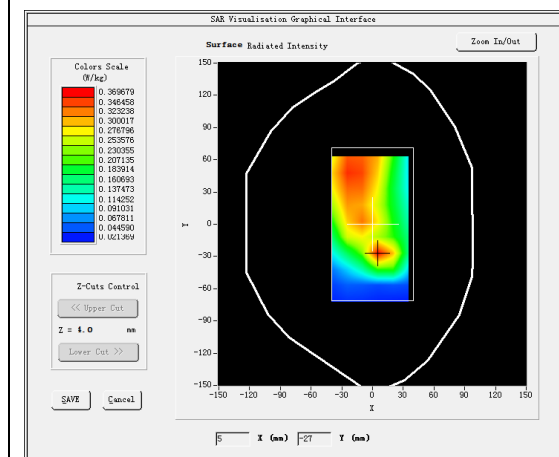



VOLUME SAR

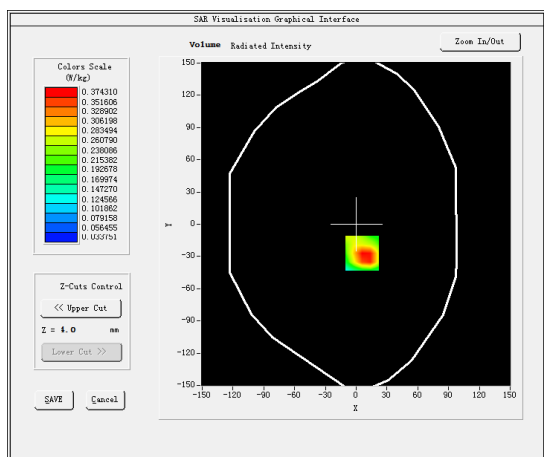

Maximum location: X=6.00, Y=-27.00

SAR Peak: 0.60 W/kg

SAR 10g (W/Kg)	0.223942
SAR 1g (W/Kg)	0.391795

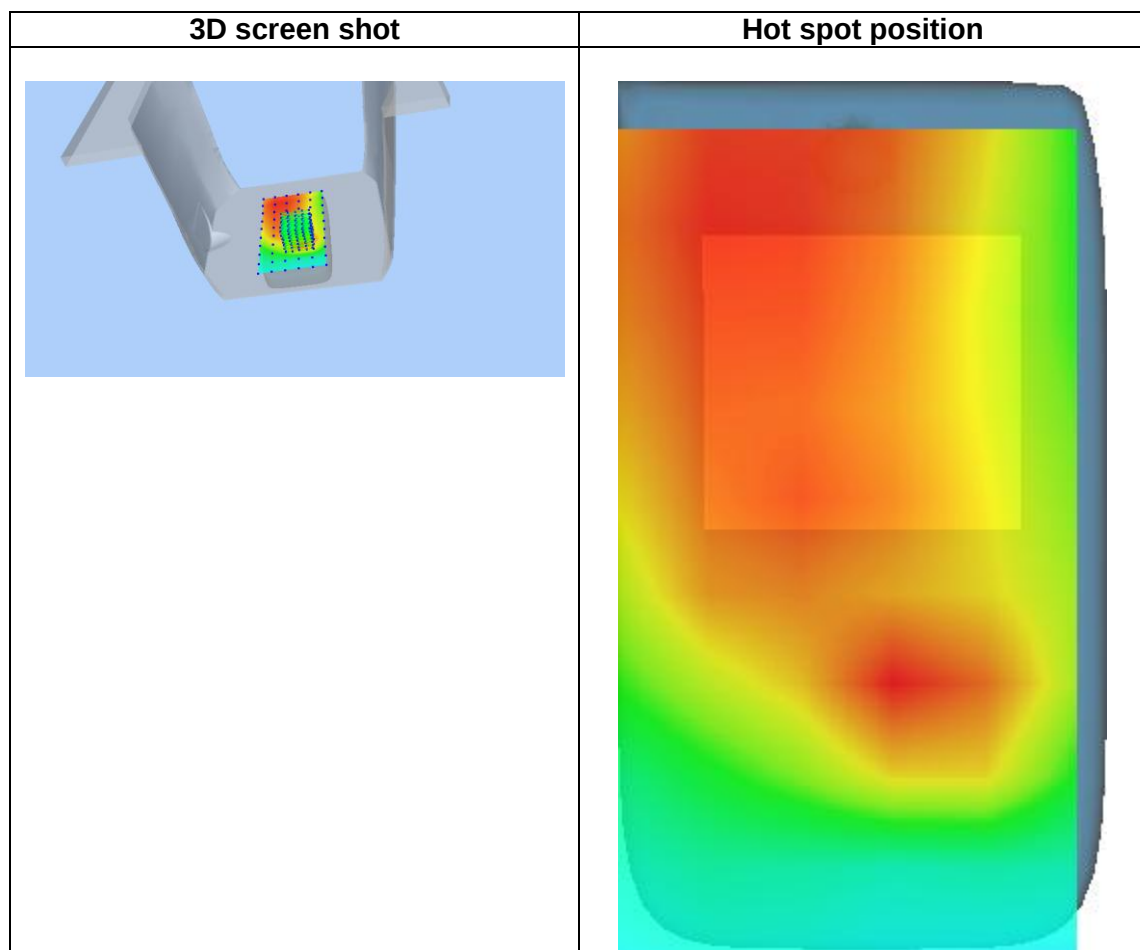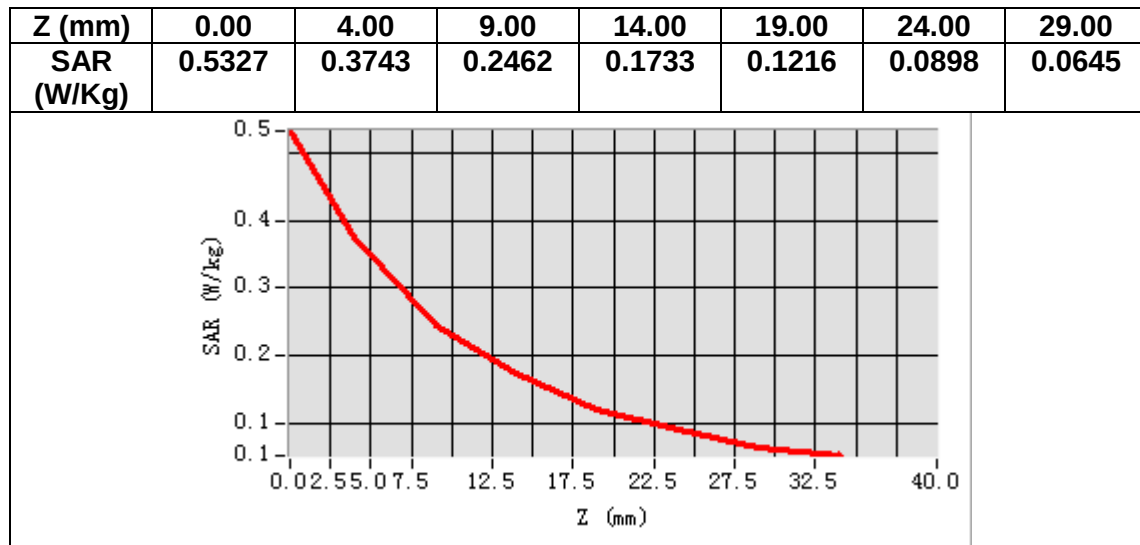

MEASUREMENT 3


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	41.018200
Relative permittivity (imaginary part)	13.744300
Conductivity (S/m)	1.435516
Variation (%)	2.170000

SURFACE SAR

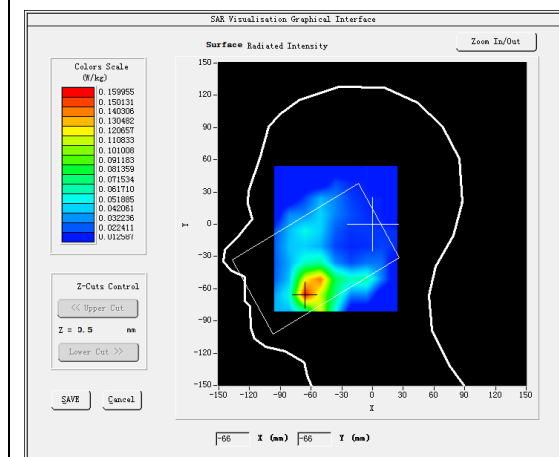



VOLUME SAR

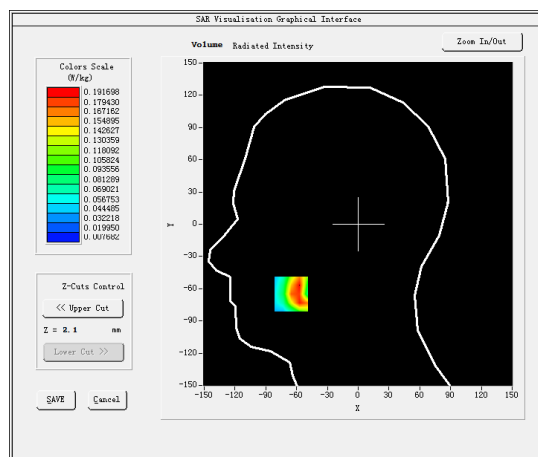

Maximum location: X=-65.00, Y=-65.00

SAR Peak: 0.29 W/kg

SAR 10g (W/Kg)	0.101657
SAR 1g (W/Kg)	0.180833

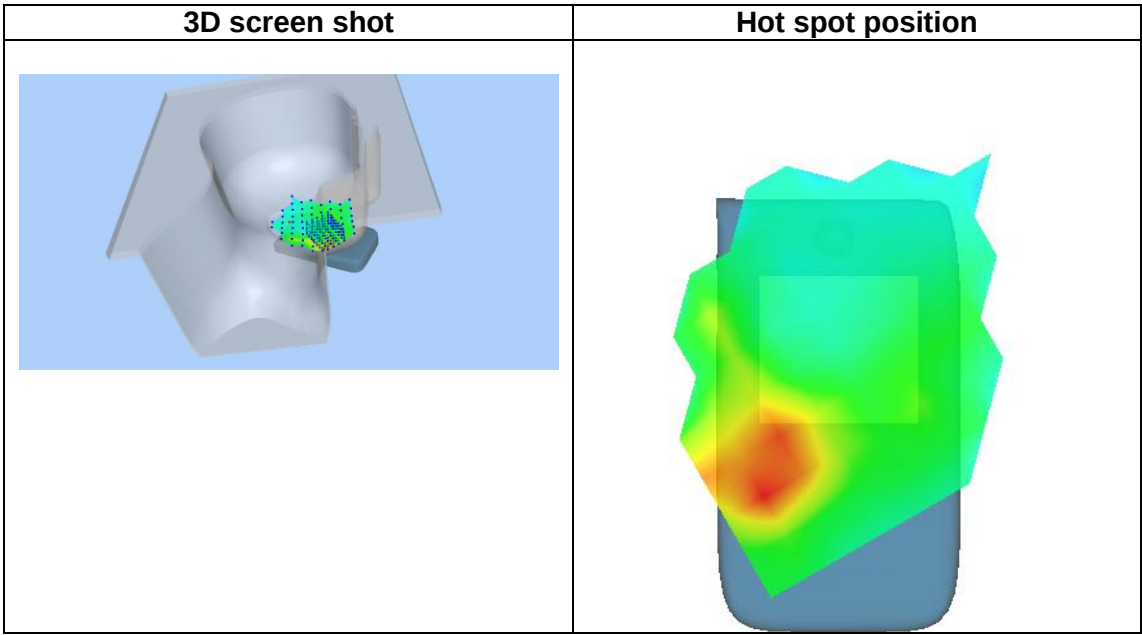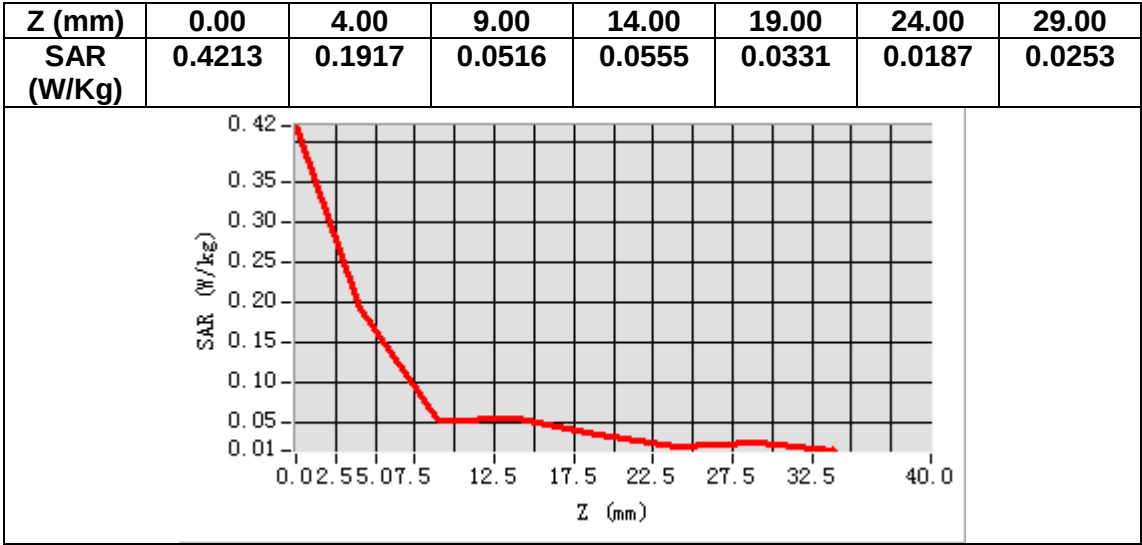

MEASUREMENT 4


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 4.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.648899
Relative permittivity (imaginary part)	14.987700
Conductivity (S/m)	1.565382
Variation (%)	-3.100000

SURFACE SAR

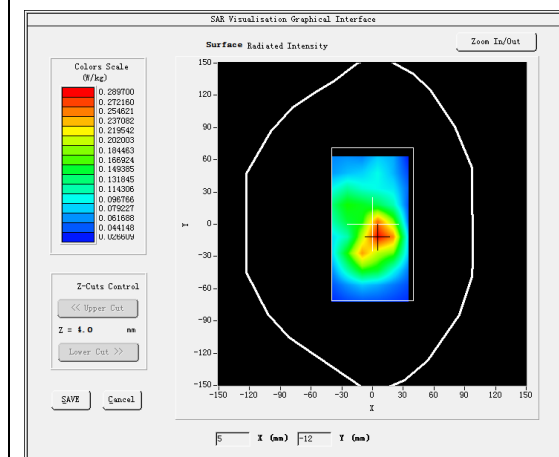



VOLUME SAR

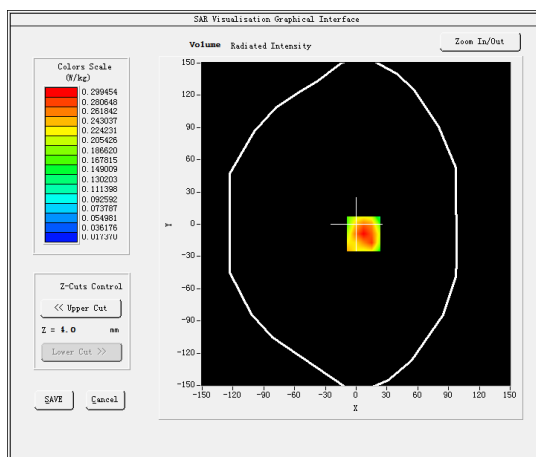

Maximum location: X=7.00, Y=-9.00

SAR Peak: 0.53 W/kg

SAR 10g (W/Kg)	0.146904
SAR 1g (W/Kg)	0.290968

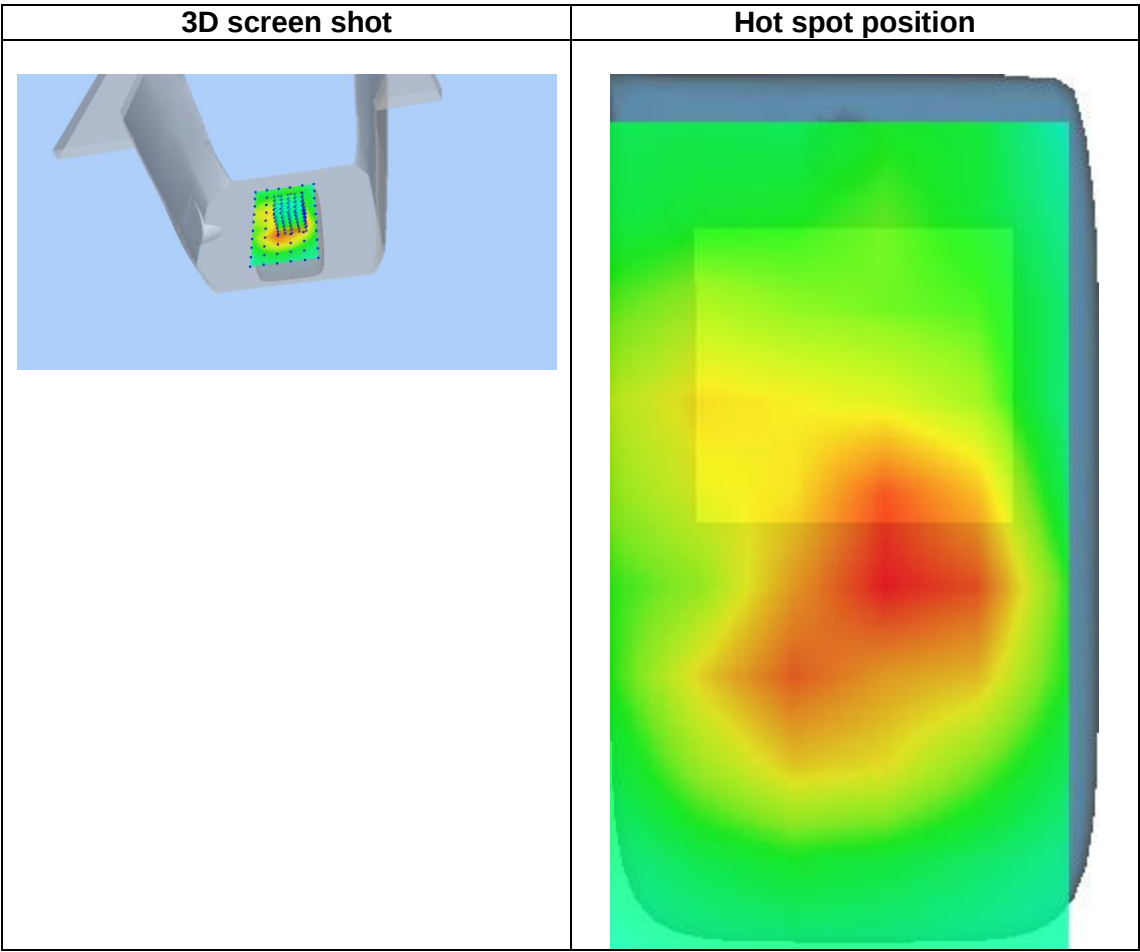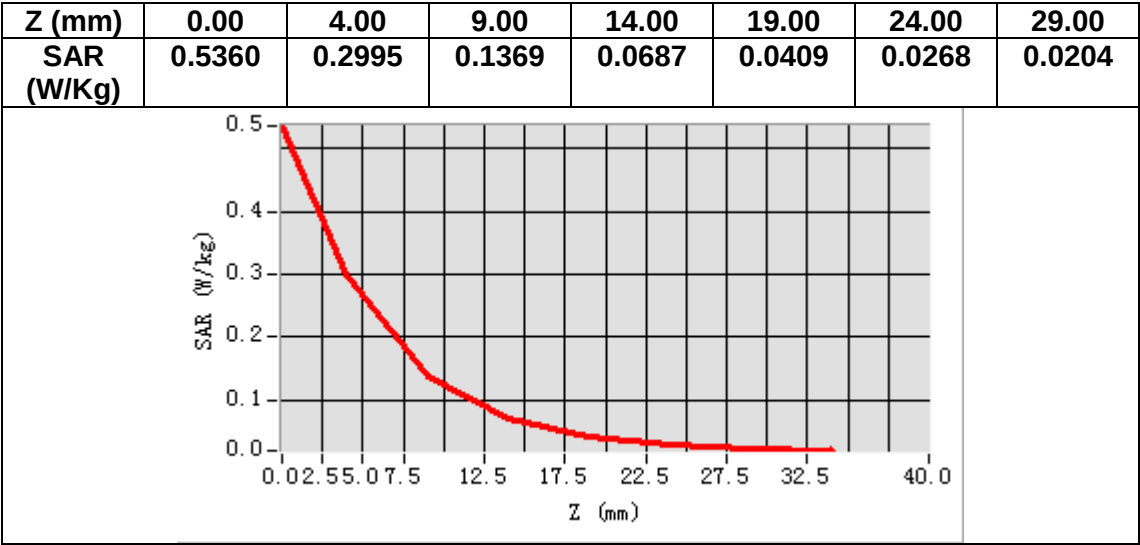

MEASUREMENT 5


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band2_WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	41.018200
Relative permittivity (imaginary part)	13.744300
Conductivity (S/m)	1.435516
Variation (%)	-0.160000

SURFACE SAR

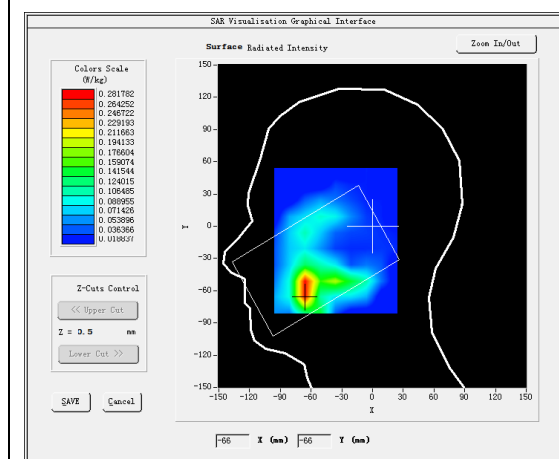



VOLUME SAR

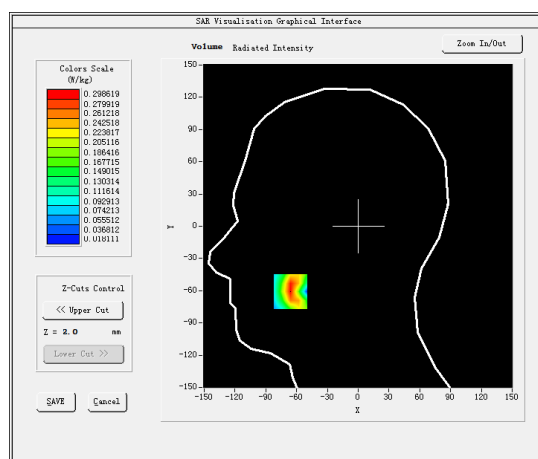

Maximum location: X=-66.00, Y=-61.00

SAR Peak: 0.48 W/kg

SAR 10g (W/Kg)	0.153305
SAR 1g (W/Kg)	0.283592

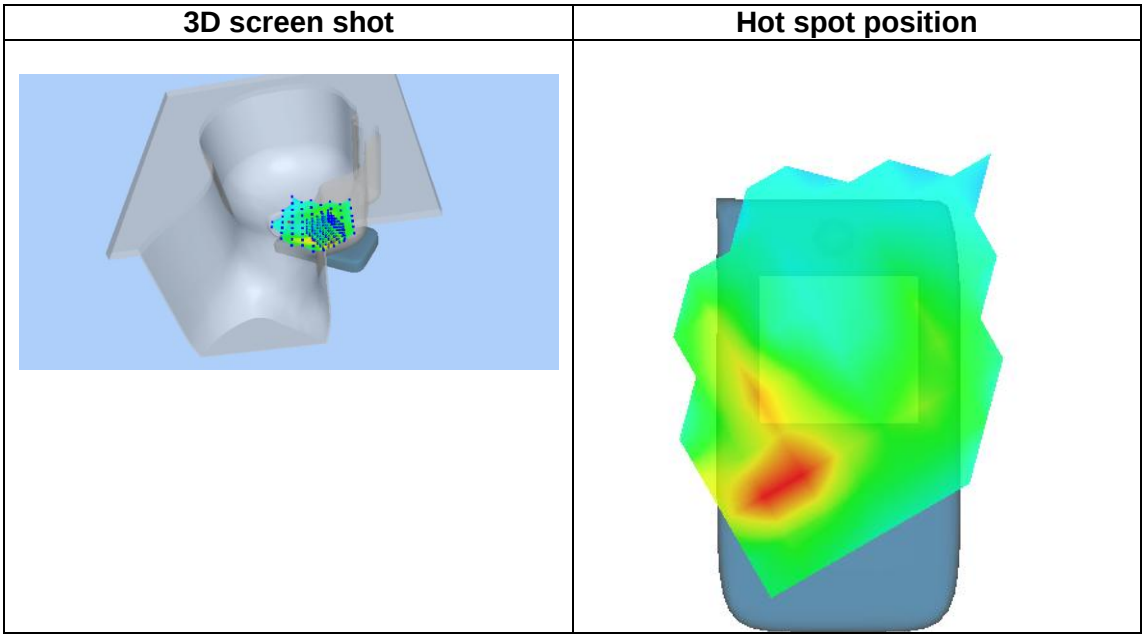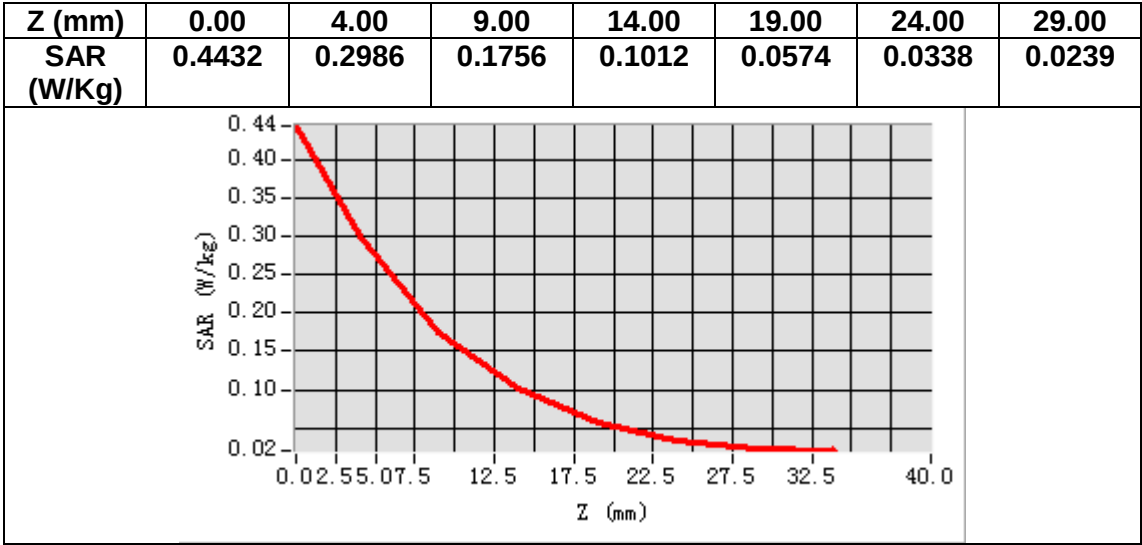

MEASUREMENT 6


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band2_WCDMA1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.648899
Relative permittivity (imaginary part)	14.987700
Conductivity (S/m)	1.565382
Variation (%)	-0.260000

SURFACE SAR

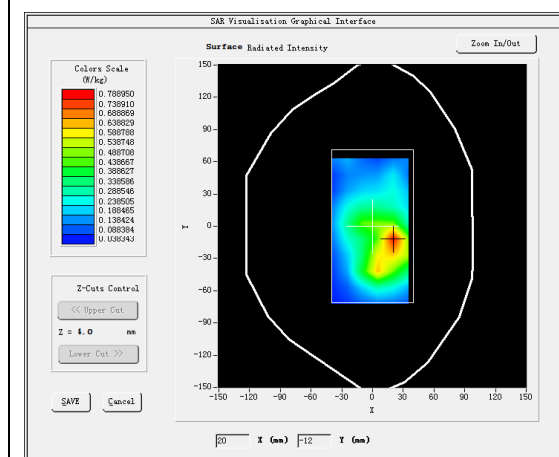



VOLUME SAR

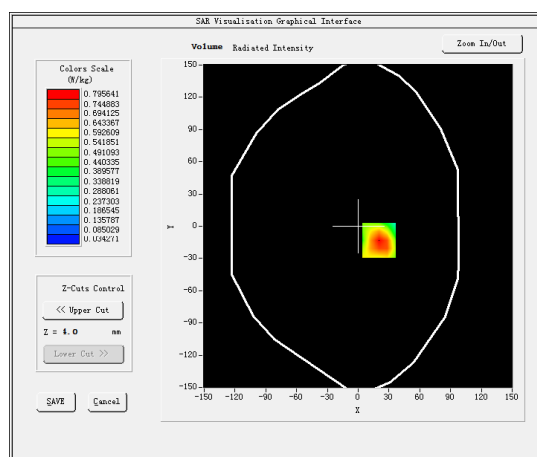

Maximum location: X=20.00, Y=-13.00

SAR Peak: 1.25 W/kg

SAR 10g (W/Kg)	0.429367
SAR 1g (W/Kg)	0.778211

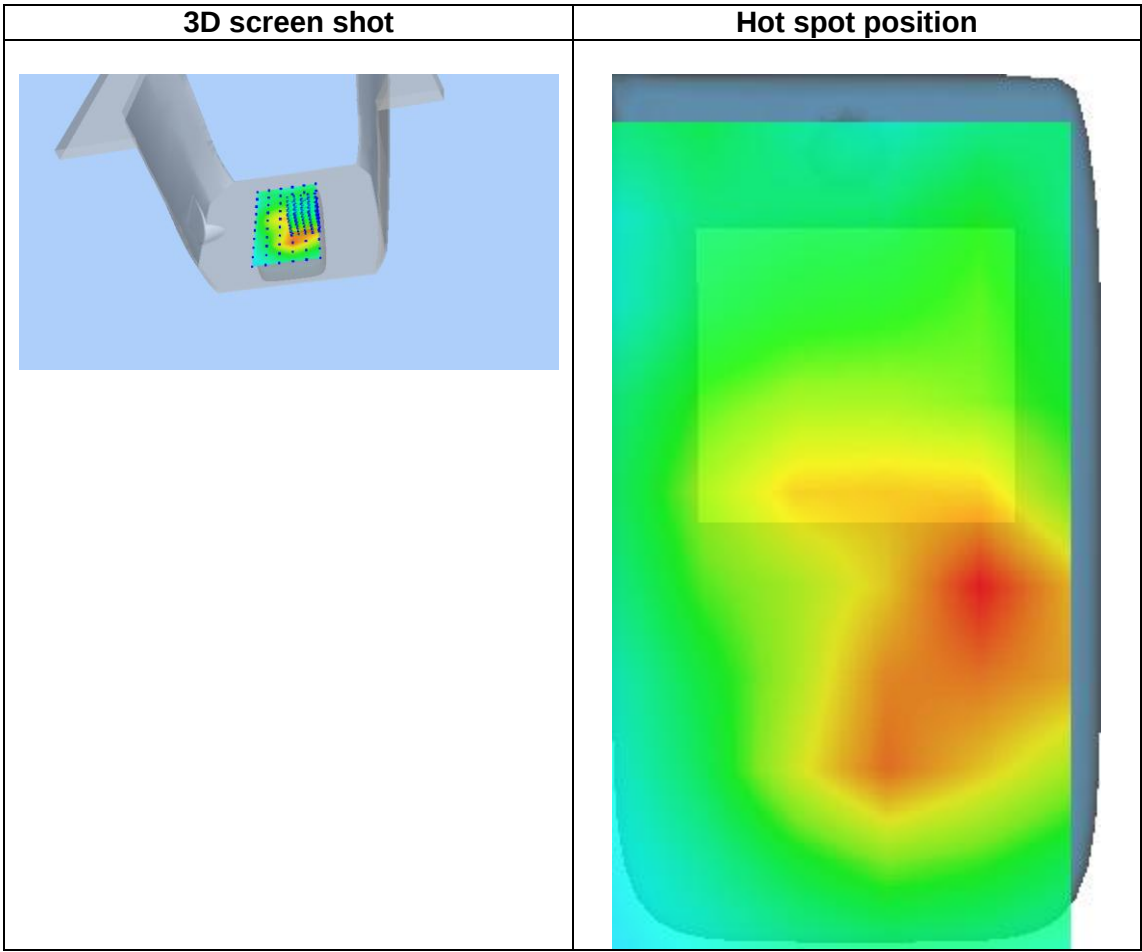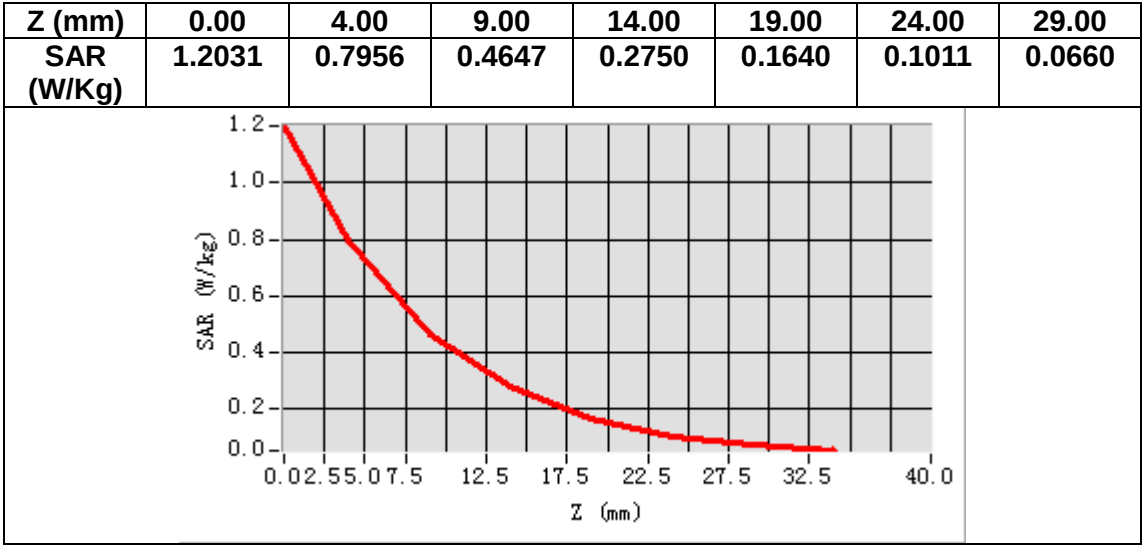

MEASUREMENT 7


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band4_WCDMA1700</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1732.600000
Relative permittivity (real part)	39.007389
Relative permittivity (imaginary part)	14.045742
Conductivity (S/m)	1.351513
Variation (%)	-0.430000

SURFACE SAR

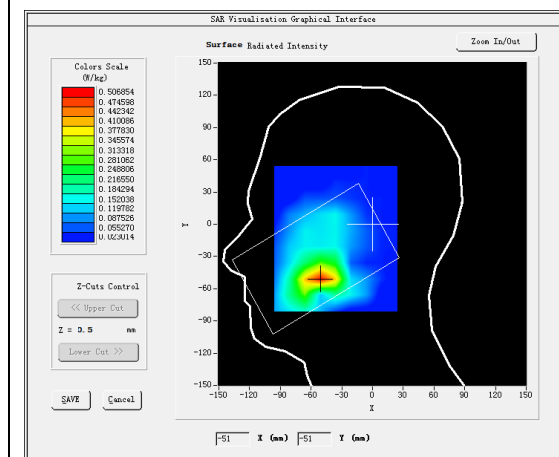



VOLUME SAR

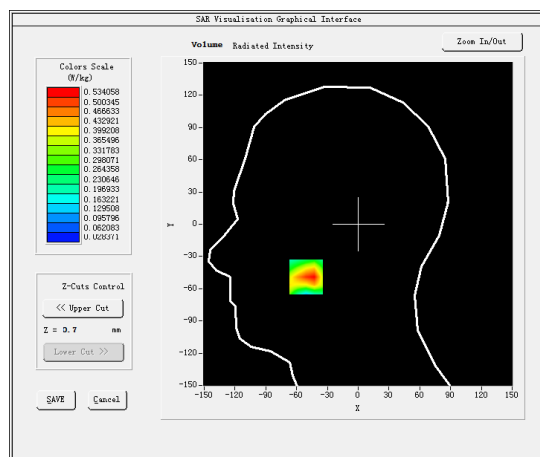

Maximum location: X=-51.00, Y=-49.00

SAR Peak: 0.75 W/kg

SAR 10g (W/Kg)	0.291965
SAR 1g (W/Kg)	0.502693

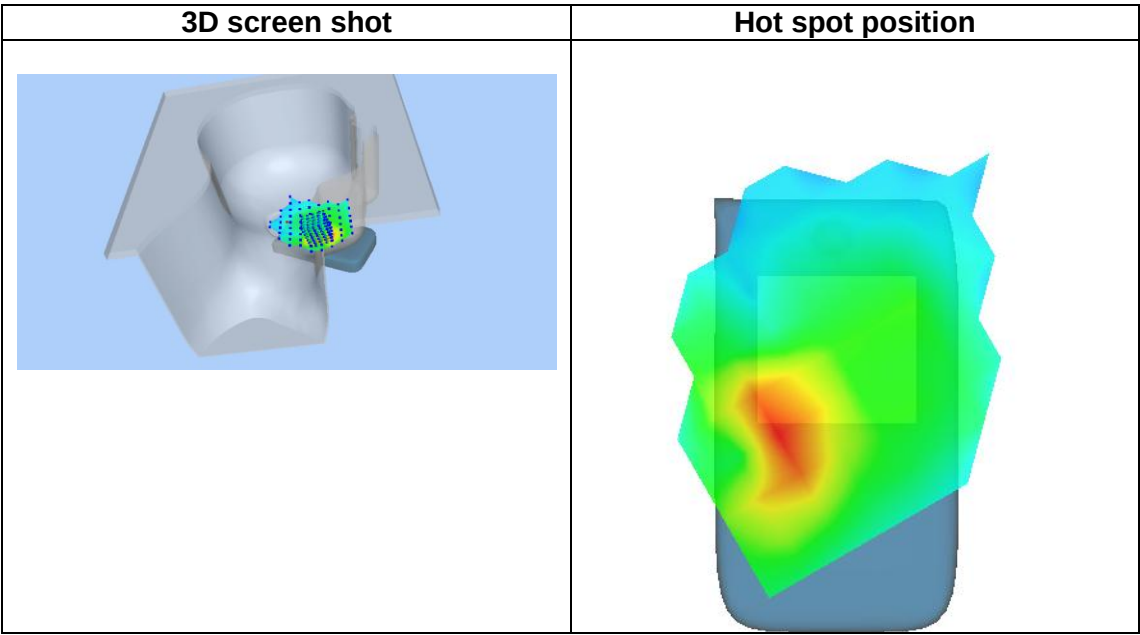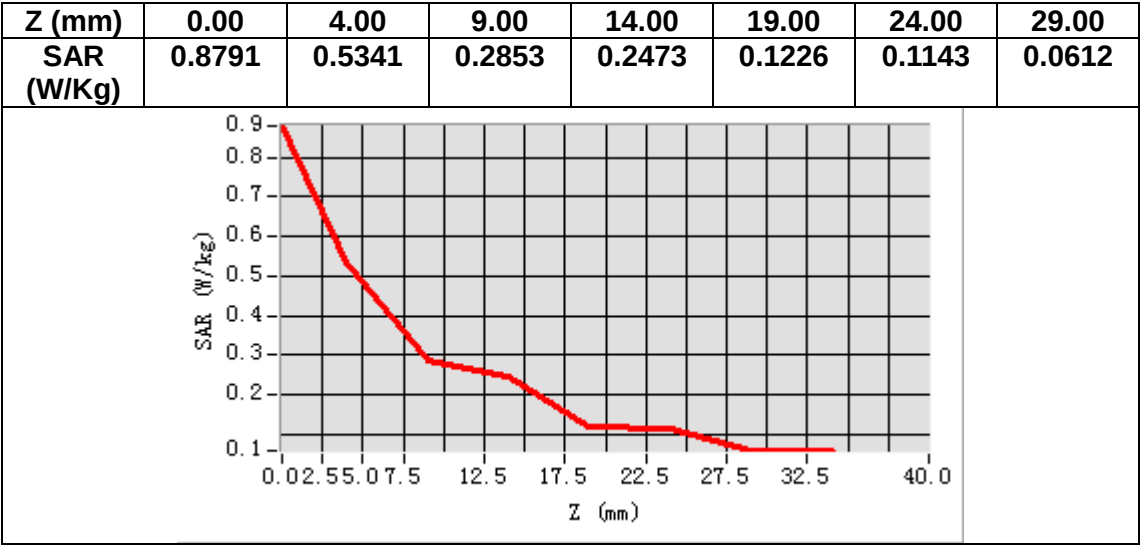

MEASUREMENT 8


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band4_WCDMA1700</u>
<u>Channels</u>	<u>High</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1752.600000
Relative permittivity (real part)	53.486366
Relative permittivity (imaginary part)	15.614170
Conductivity (S/m)	1.519779
Variation (%)	-0.560000

SURFACE SAR

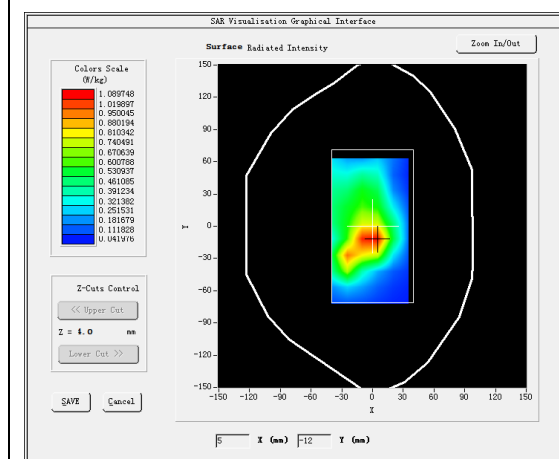



VOLUME SAR

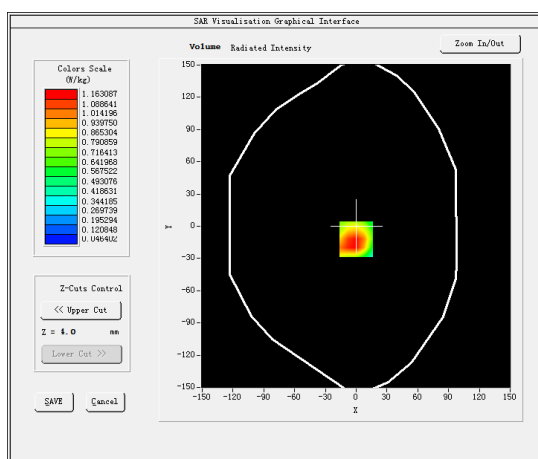

Maximum location: X=0.00, Y=-12.00

SAR Peak: 1.87 W/kg

SAR 10g (W/Kg)	0.682027
SAR 1g (W/Kg)	1.221305

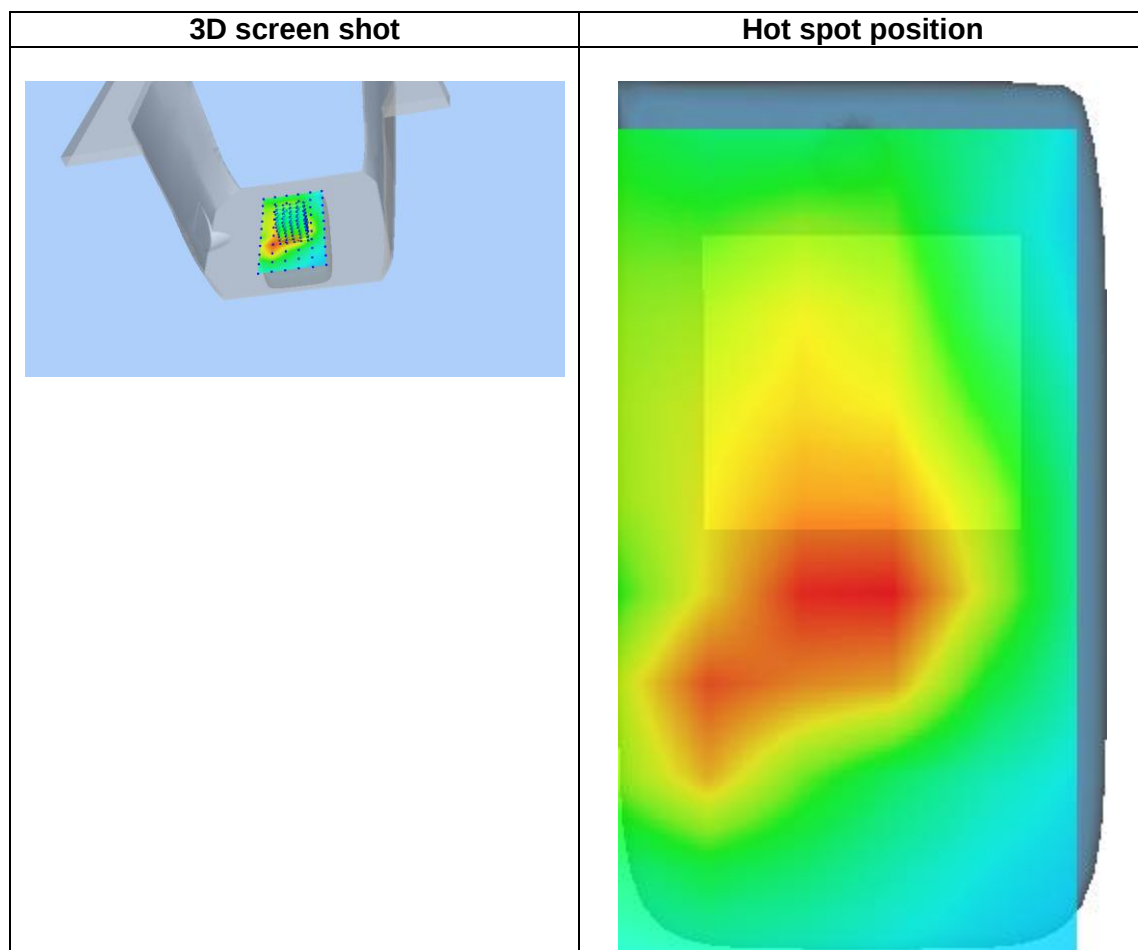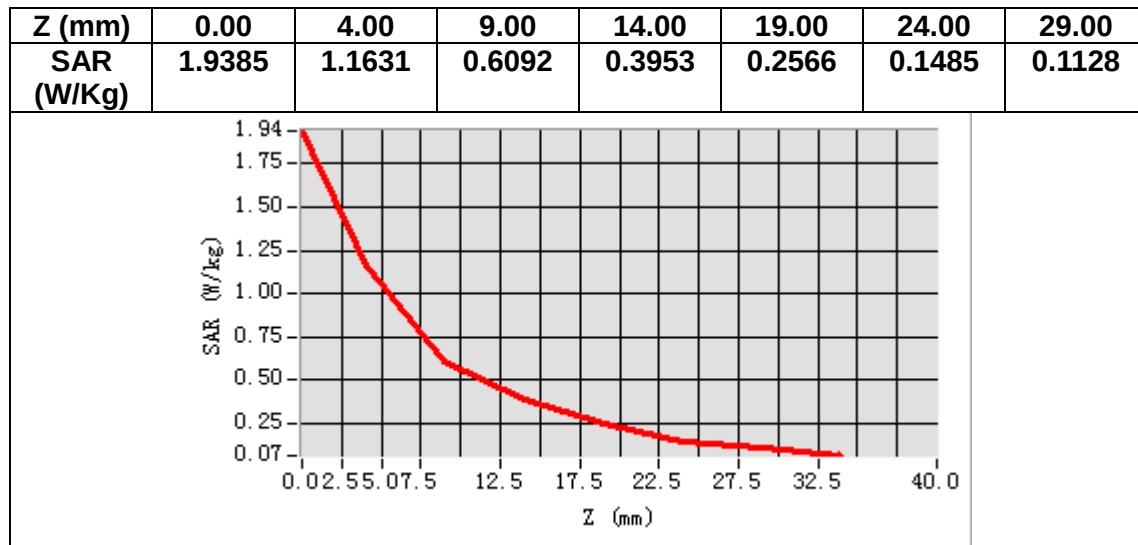

MEASUREMENT 9


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band5_WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	40.350960
Relative permittivity (imaginary part)	20.261539
Conductivity (S/m)	0.941486
Variation (%)	0.650000

SURFACE SAR

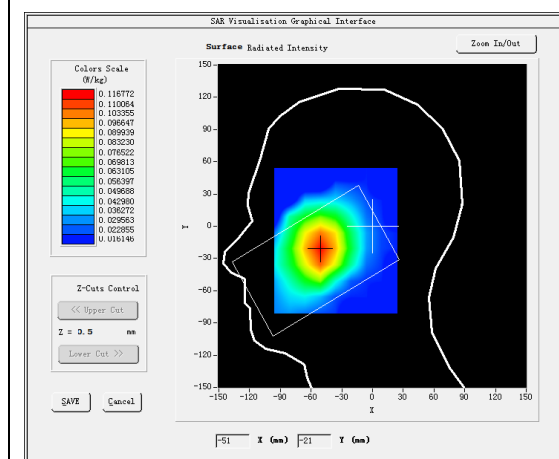



VOLUME SAR

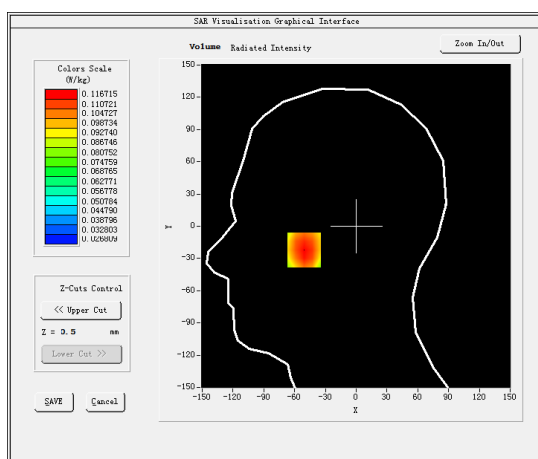

Maximum location: X=-51.00, Y=-22.00

SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.096416
SAR 1g (W/Kg)	0.119294

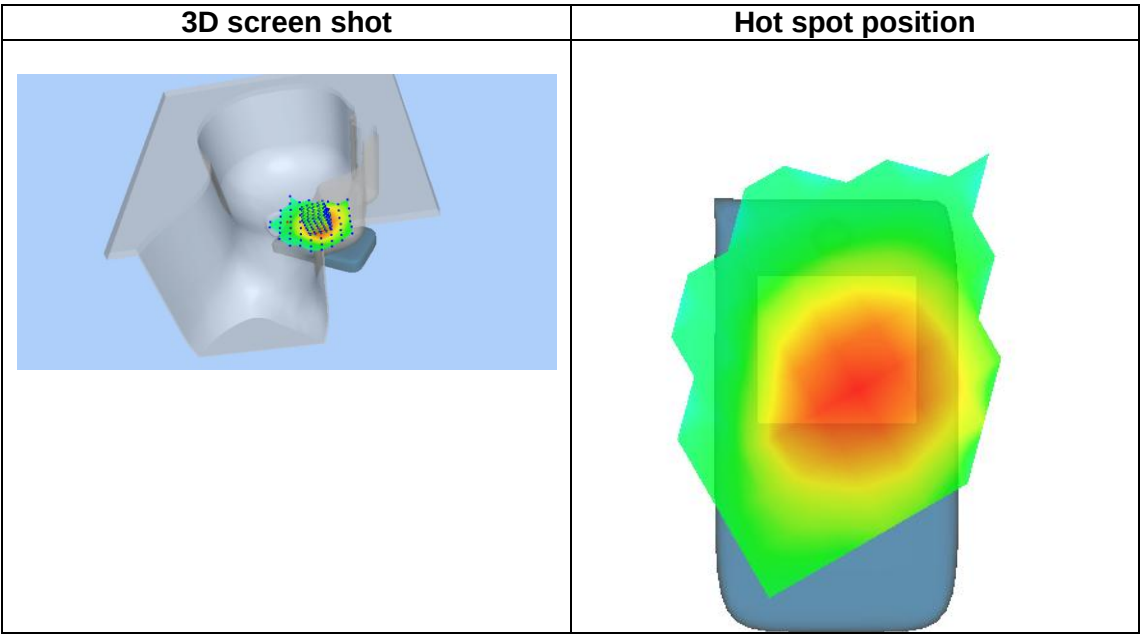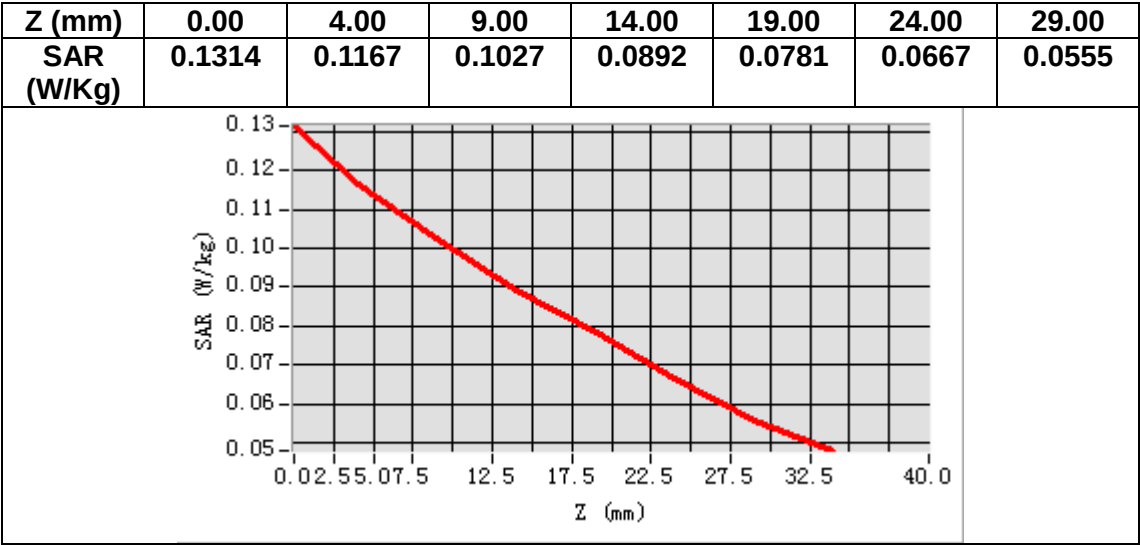

MEASUREMENT 10


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band5_WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	54.289581
Relative permittivity (imaginary part)	21.802740
Conductivity (S/m)	1.013101
Variation (%)	-0.010000

SURFACE SAR

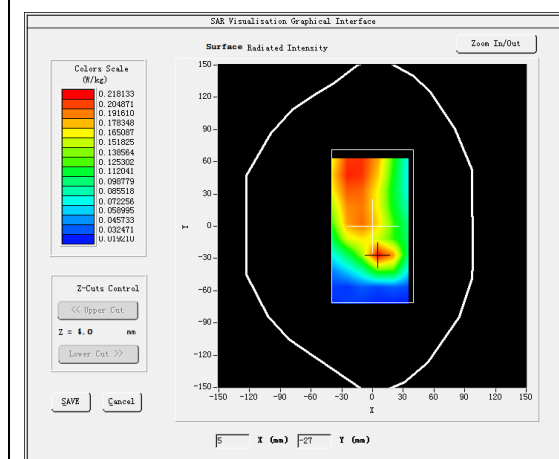



VOLUME SAR

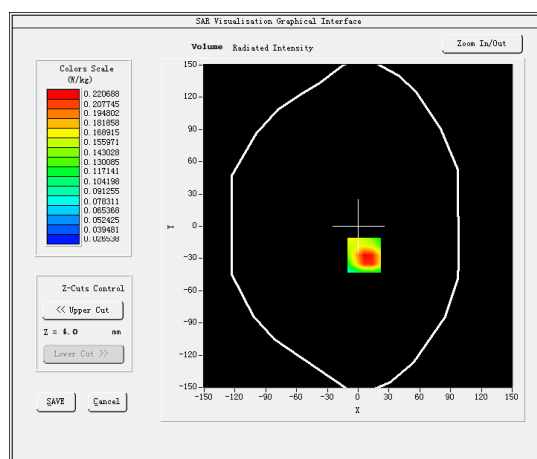

Maximum location: X=6.00, Y=-27.00

SAR Peak: 0.33 W/kg

SAR 10g (W/Kg)	0.137310
SAR 1g (W/Kg)	0.228990

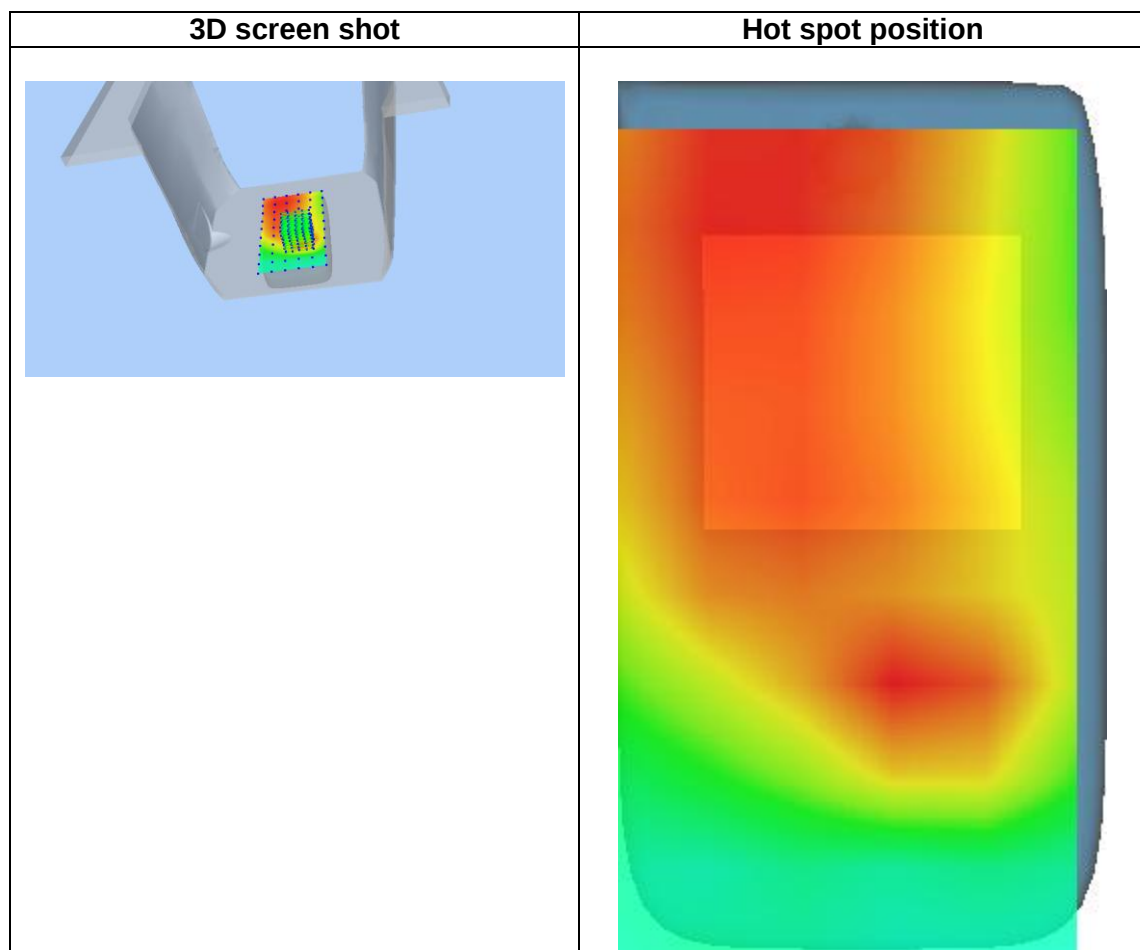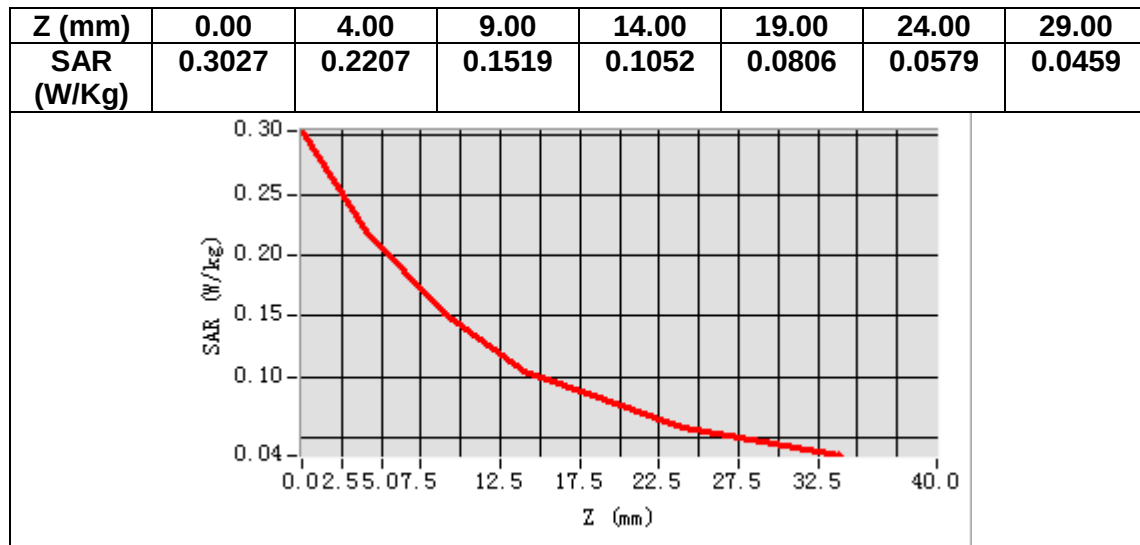

MEASUREMENT 11


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative permittivity (real part)	38.841000
Relative permittivity (imaginary part)	13.660300
Conductivity (S/m)	1.849453
Variation (%)	-2.540000

SURFACE SAR

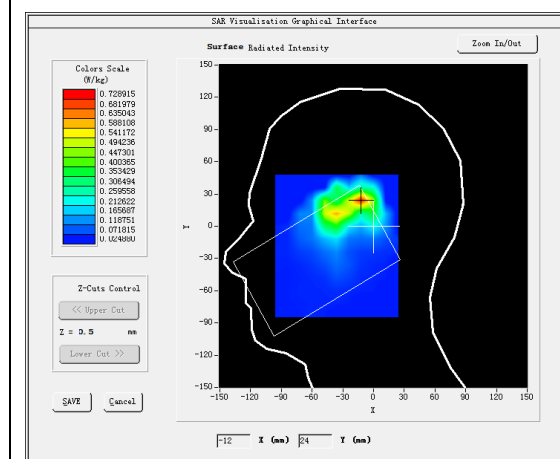



VOLUME SAR

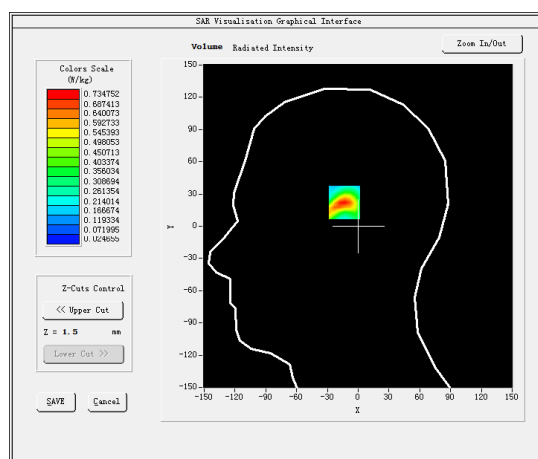

Maximum location: X=-12.00, Y=24.00

SAR Peak: 1.22 W/kg

SAR 10g (W/Kg)	0.313952
SAR 1g (W/Kg)	0.611187

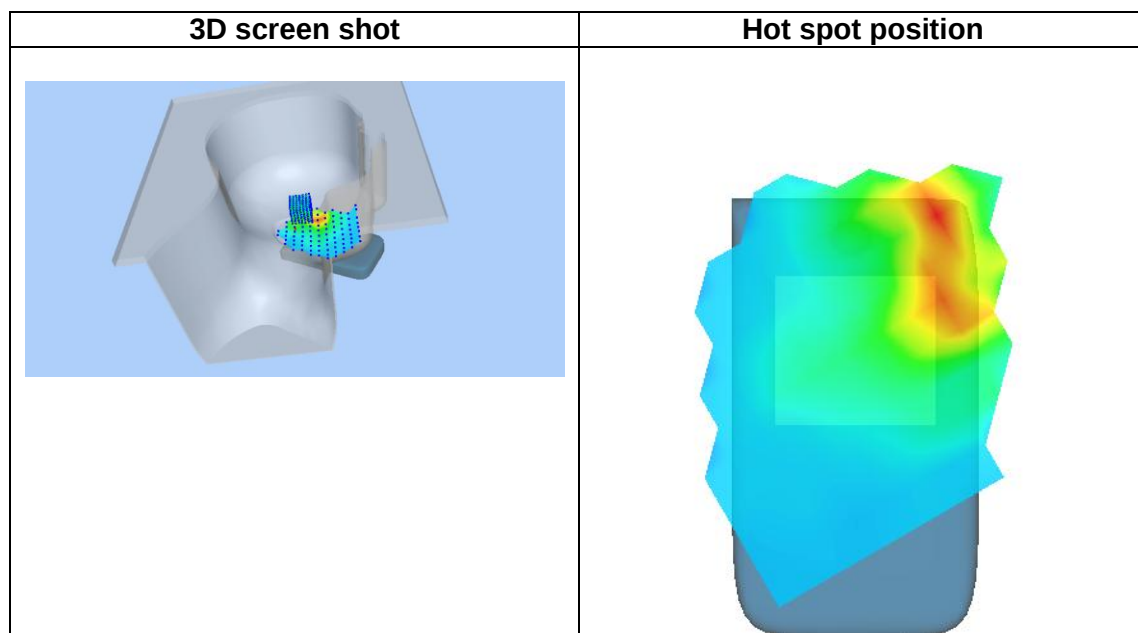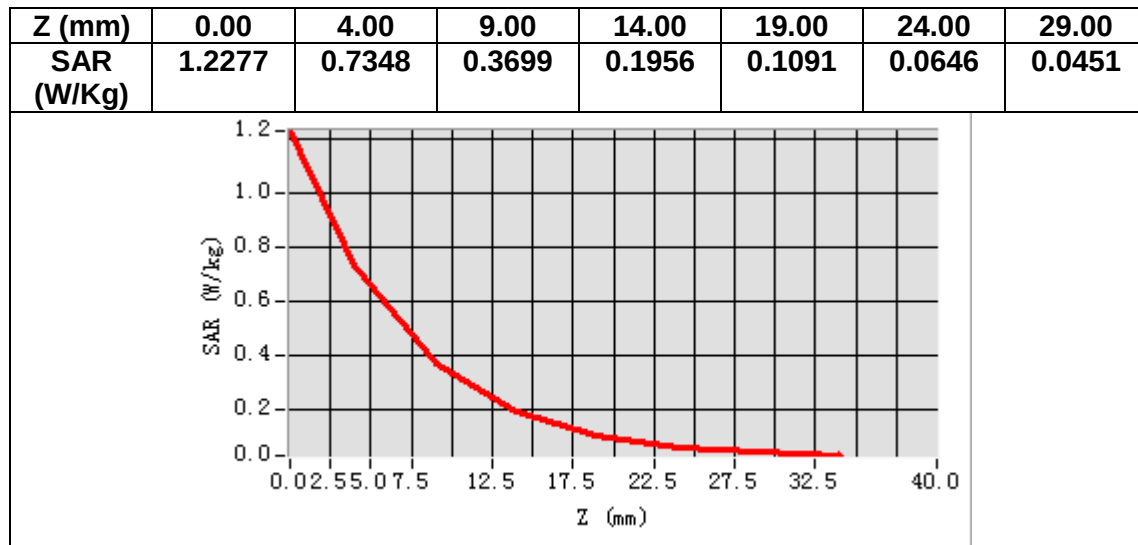

MEASUREMENT 12


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative permittivity (real part)	52.151600
Relative permittivity (imaginary part)	14.835620
Conductivity (S/m)	2.008578
Variation (%)	-1.000000

SURFACE SAR

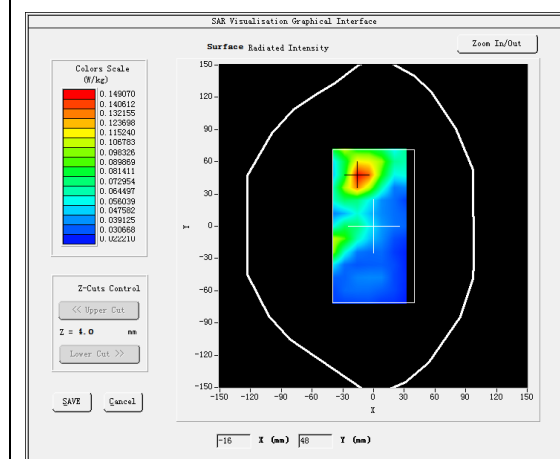



VOLUME SAR

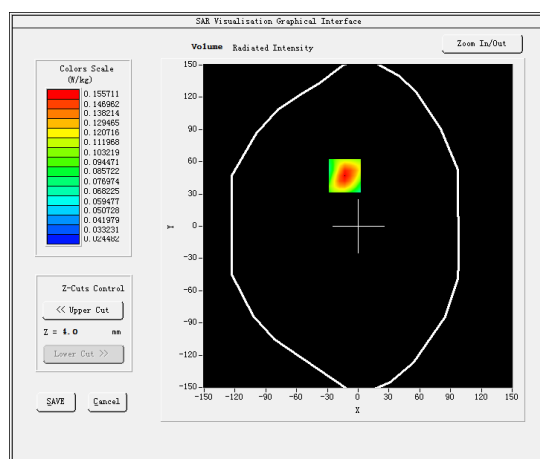

Maximum location: X=-13.00, Y=47.00

SAR Peak: 0.23 W/kg

SAR 10g (W/Kg)	0.091150
SAR 1g (W/Kg)	0.149025

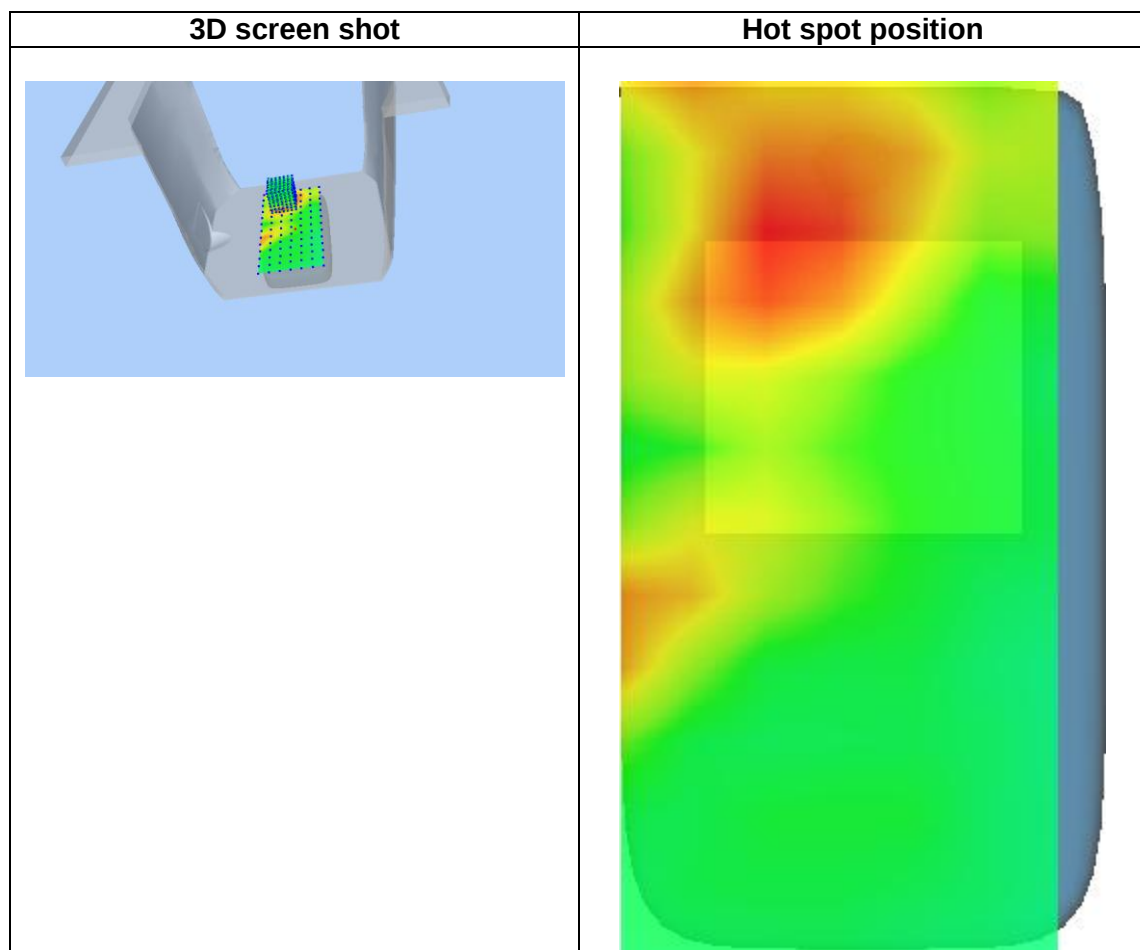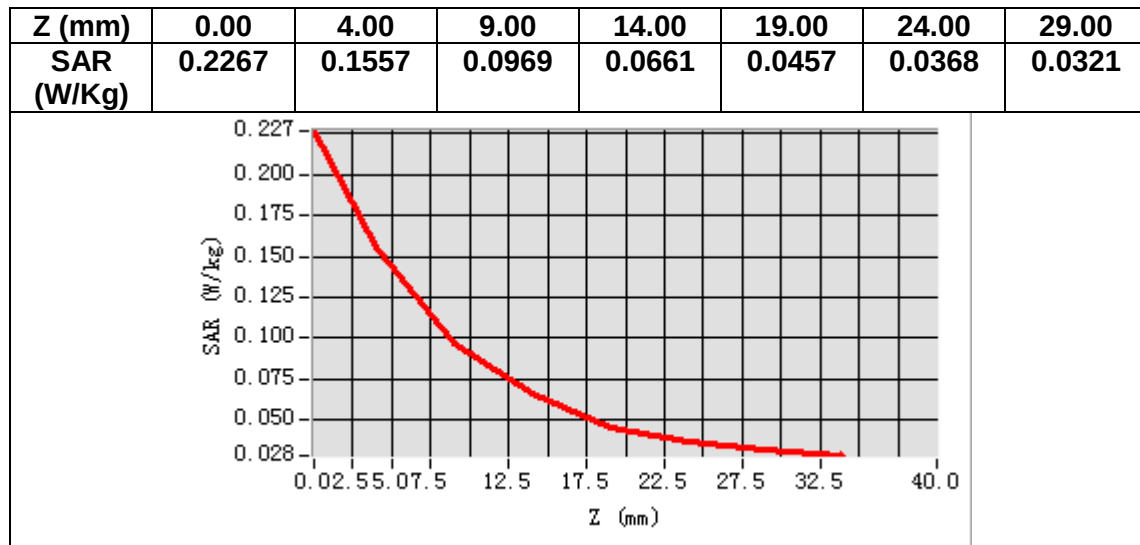

MEASUREMENT 13


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	41.063801
Relative permittivity (imaginary part)	13.738100
Conductivity (S/m)	1.434487
Variation (%)	0.620000

SURFACE SAR

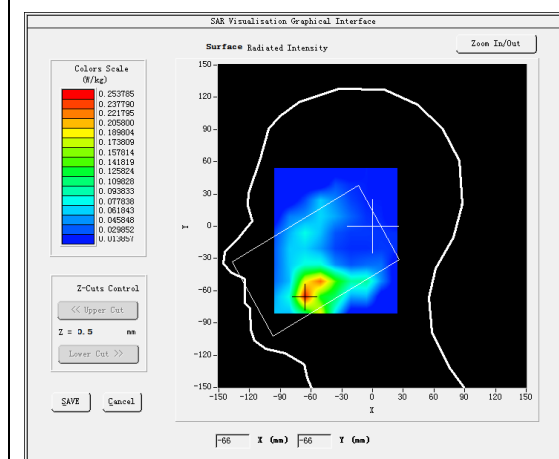



VOLUME SAR

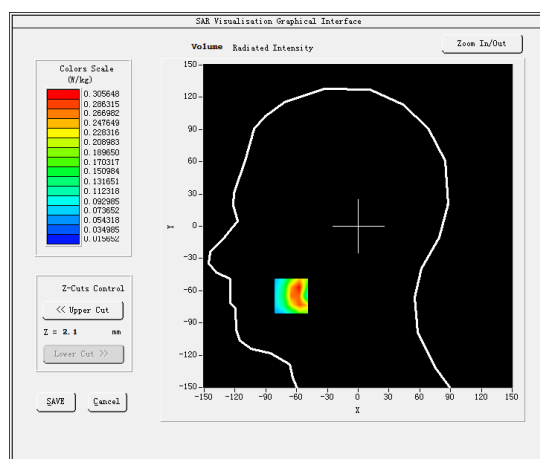

Maximum location: X=-65.00, Y=-65.00

SAR Peak: 0.48 W/kg

SAR 10g (W/Kg)	0.157793
SAR 1g (W/Kg)	0.287592

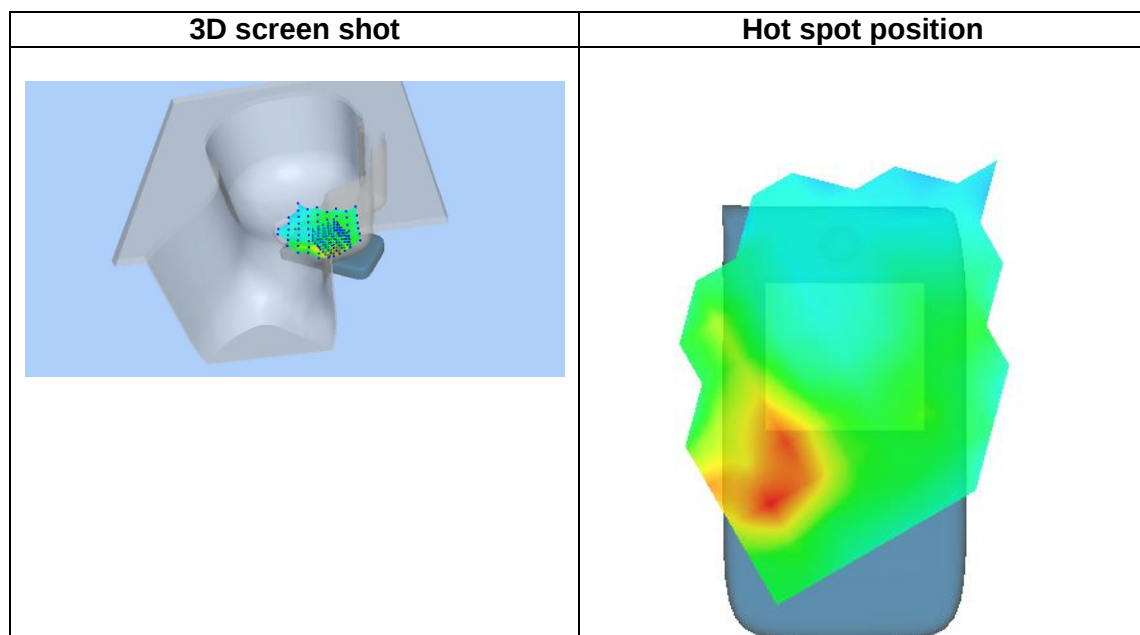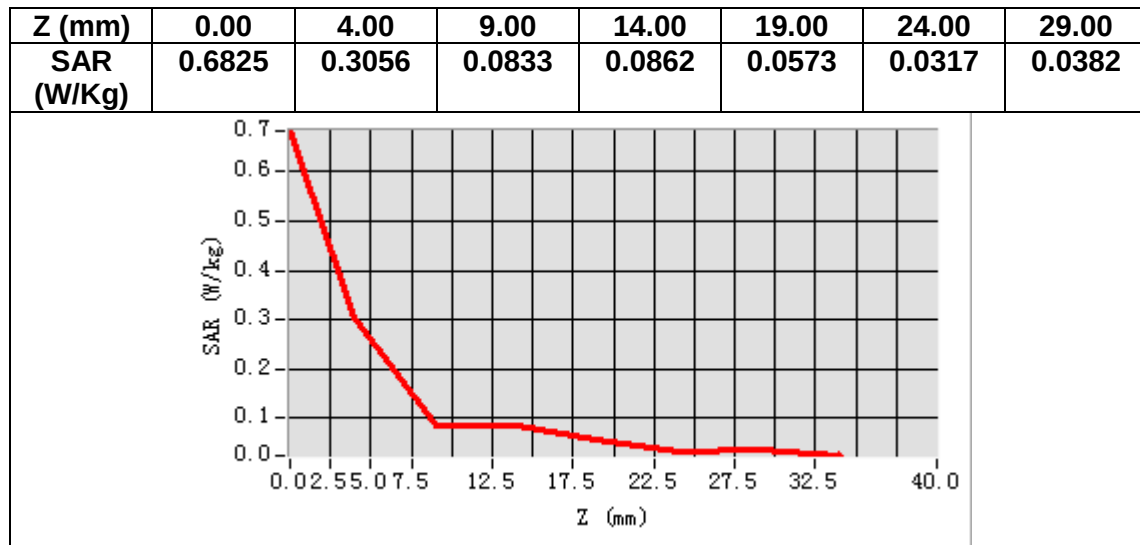

MEASUREMENT 14


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 2</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.655949
Relative permittivity (imaginary part)	14.996150
Conductivity (S/m)	1.565848
Variation (%)	-2.490000

SURFACE SAR

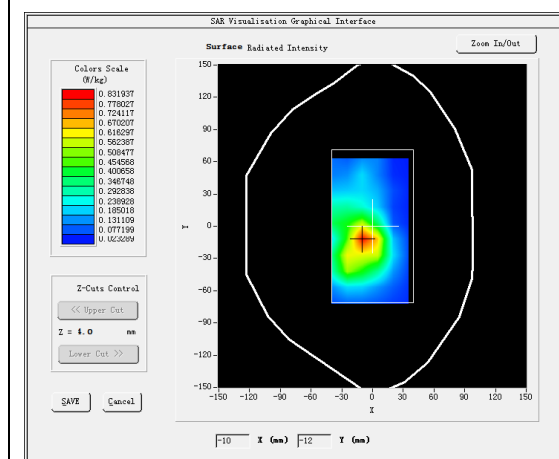



VOLUME SAR

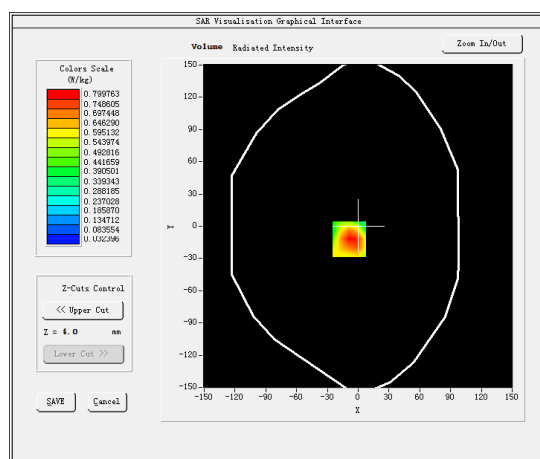

Maximum location: X=-9.00, Y=-12.00

SAR Peak: 1.23 W/kg

SAR 10g (W/Kg)	0.438342
SAR 1g (W/Kg)	0.782794

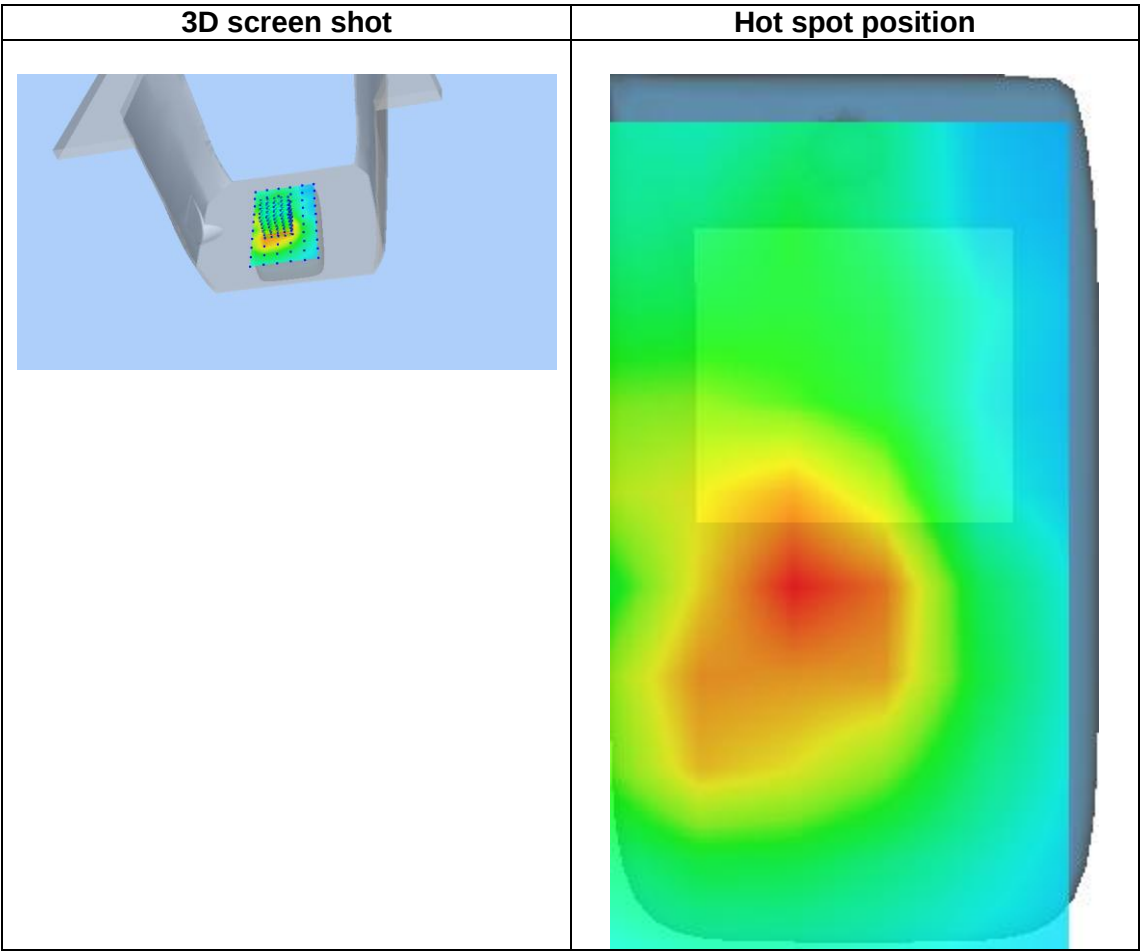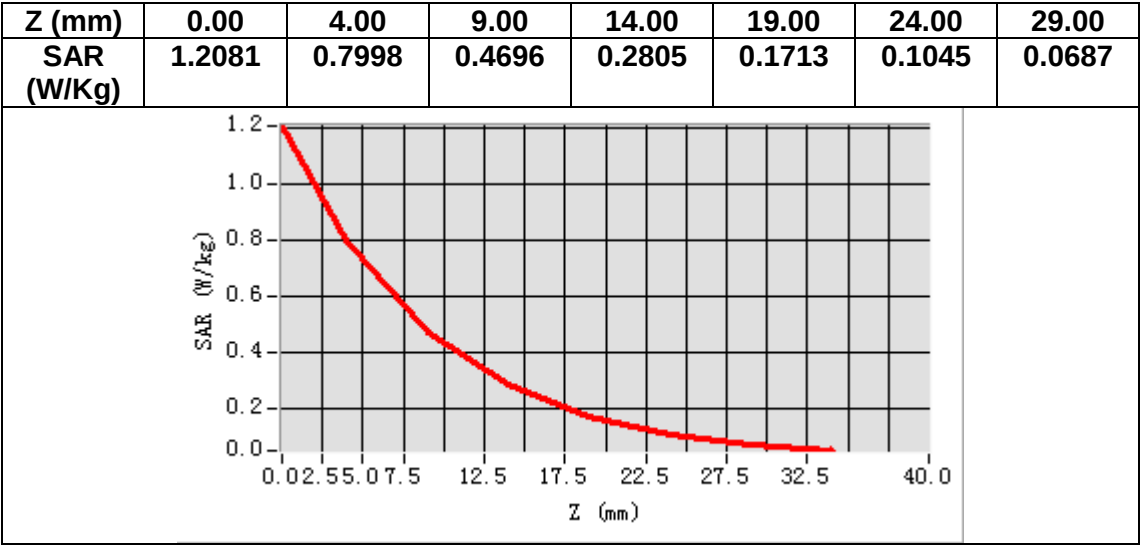

MEASUREMENT 15


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1732.500000
Relative permittivity (real part)	39.015289
Relative permittivity (imaginary part)	14.030592
Conductivity (S/m)	1.350444
Variation (%)	0.340000

SURFACE SAR

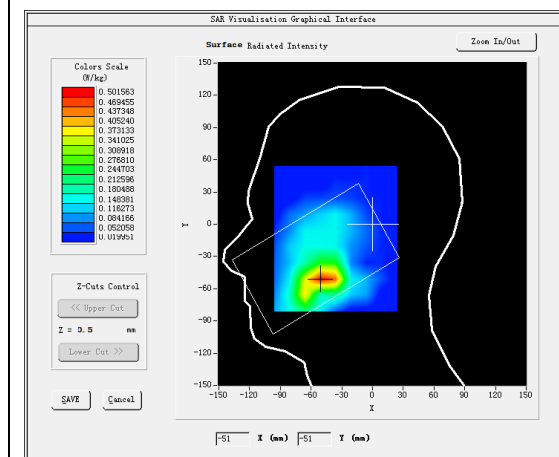



VOLUME SAR

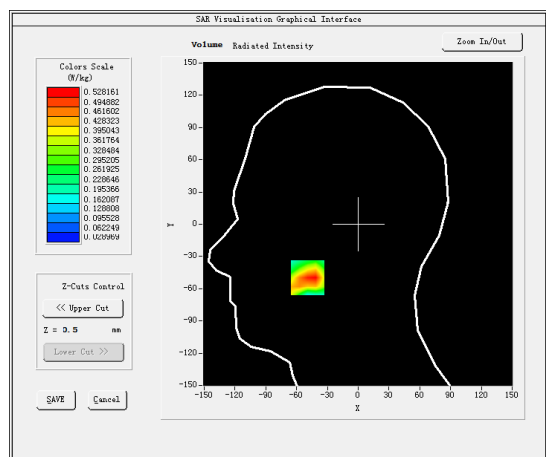

Maximum location: X=-49.00, Y=-50.00

SAR Peak: 0.73 W/kg

SAR 10g (W/Kg)	0.299675
SAR 1g (W/Kg)	0.501656

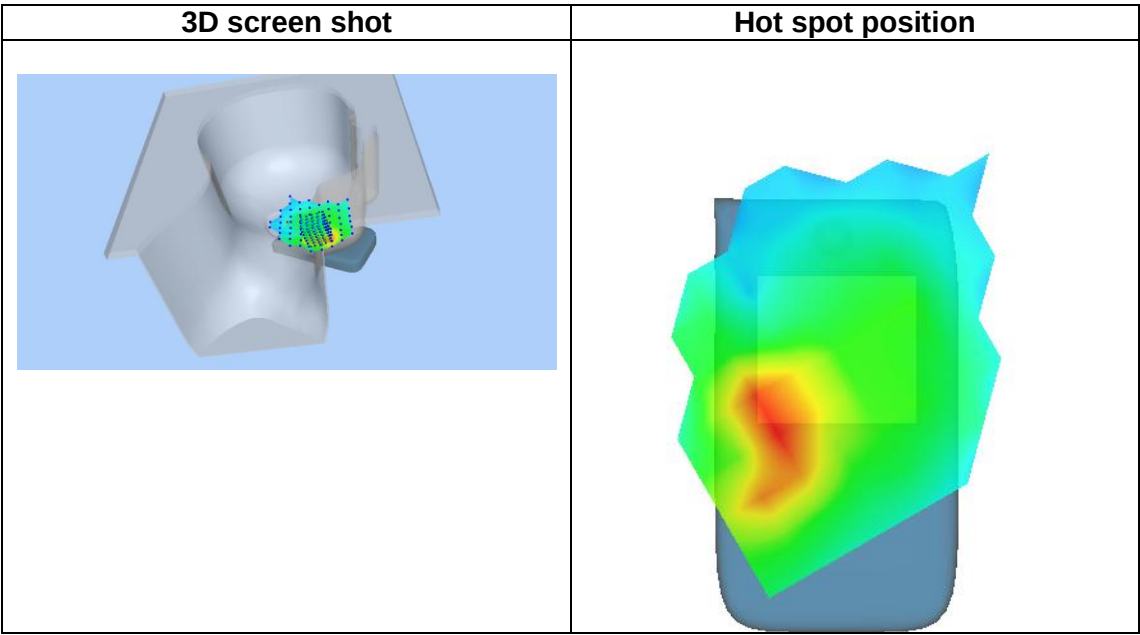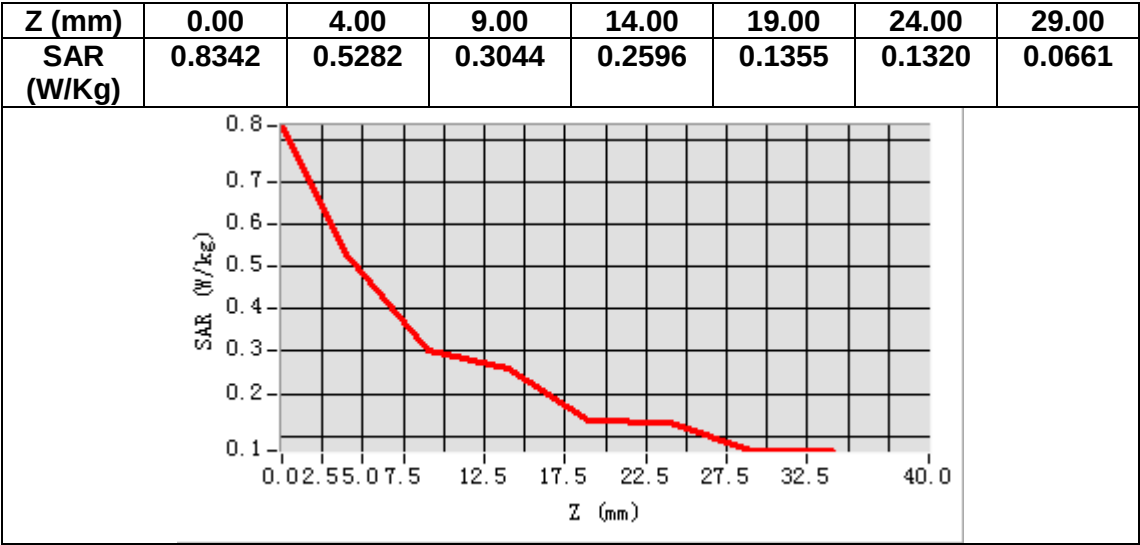

MEASUREMENT 16


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


C. SAR Measurement Results

Frequency (MHz)	1720.000000
Relative permittivity (real part)	53.736668
Relative permittivity (imaginary part)	15.647870
Conductivity (S/m)	1.494806
Variation (%)	-0.610000

SURFACE SAR

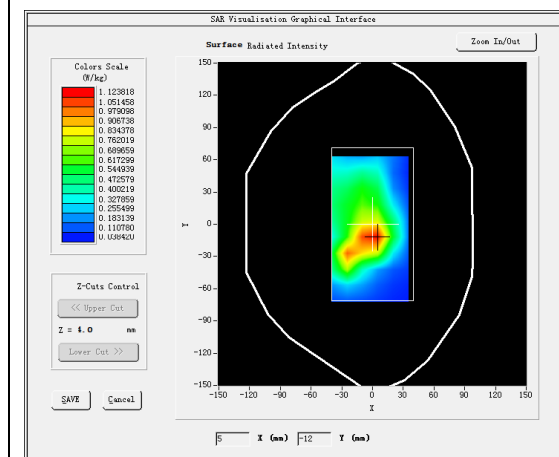



VOLUME SAR

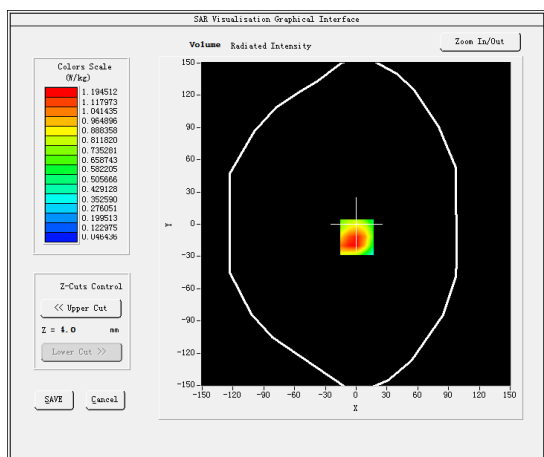

Maximum location: X=1.00, Y=-12.00

SAR Peak: 1.90 W/kg

SAR 10g (W/Kg)	0.663421
SAR 1g (W/Kg)	1.186919

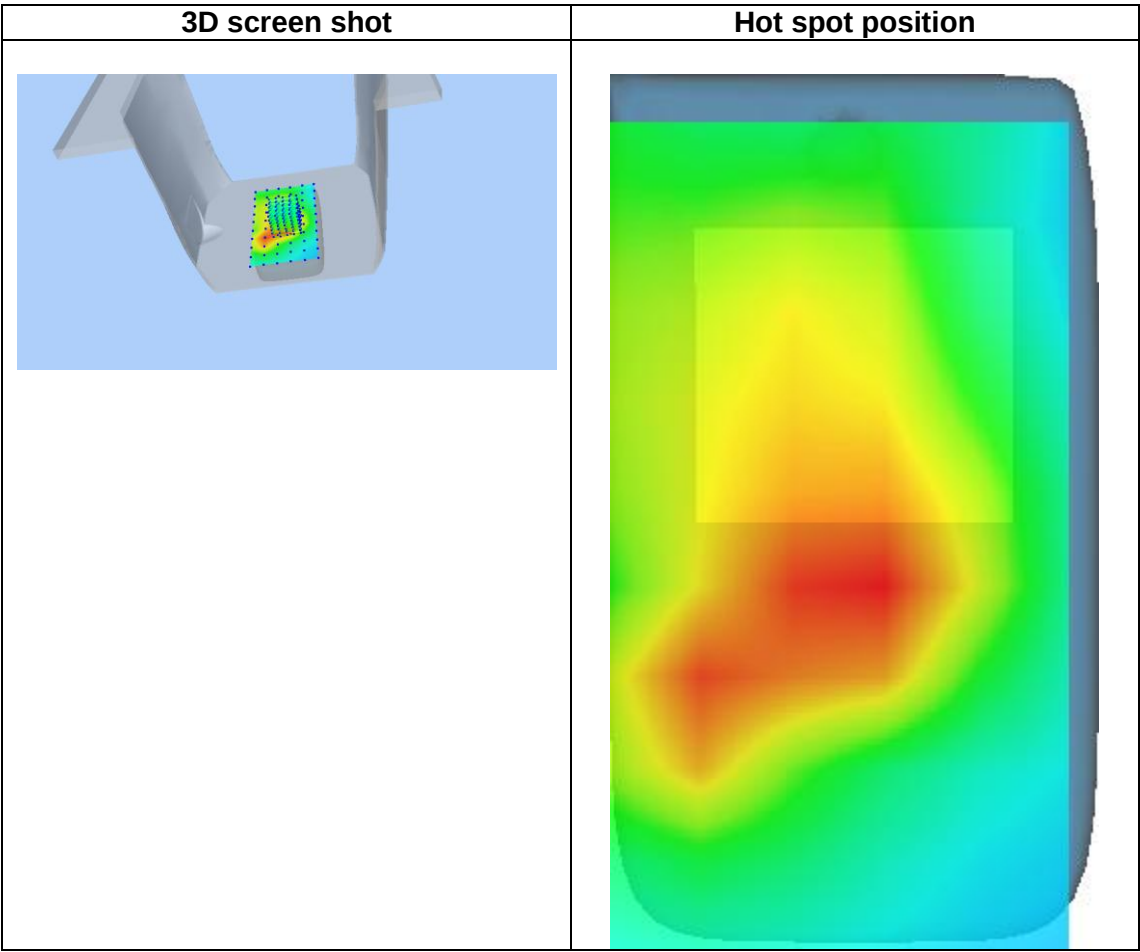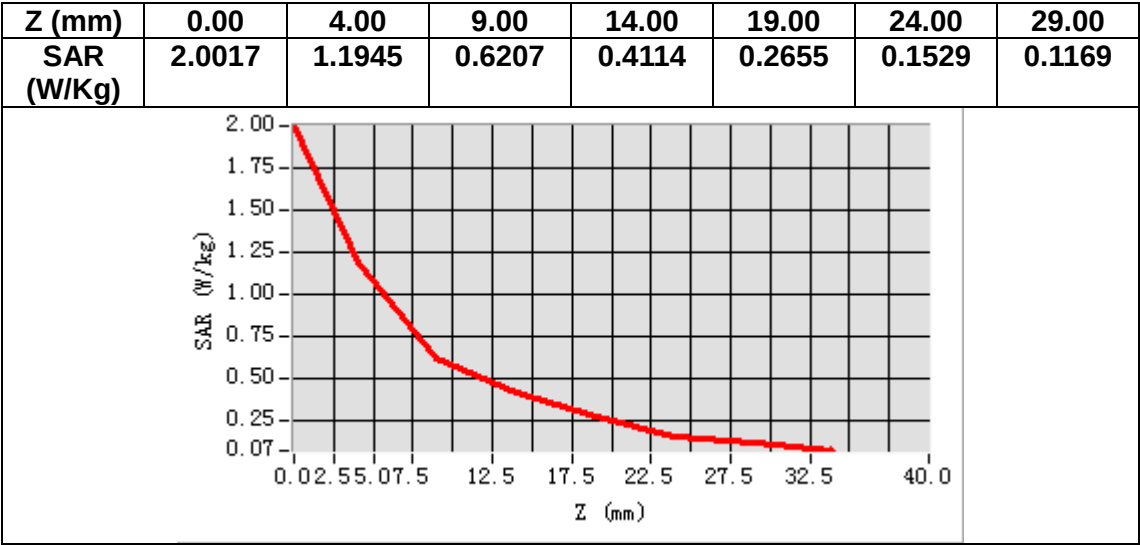

MEASUREMENT 17


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative permittivity (real part)	40.353550
Relative permittivity (imaginary part)	20.260201
Conductivity (S/m)	0.941537
Variation (%)	0.070000

SURFACE SAR

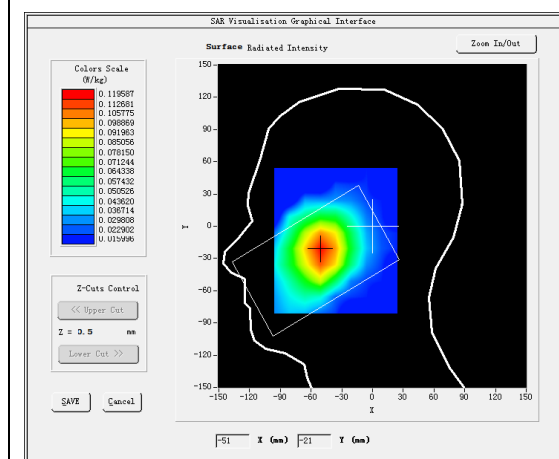



VOLUME SAR

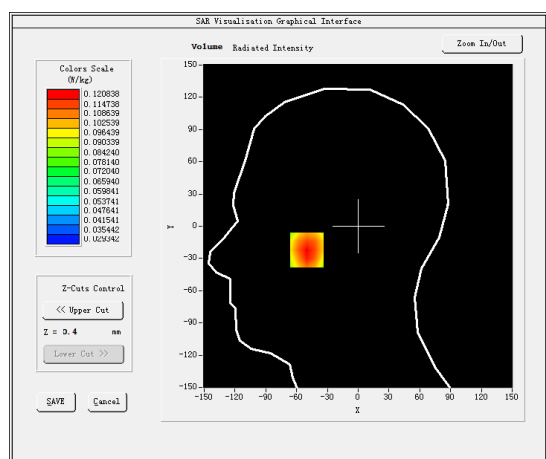

Maximum location: X=-50.00, Y=-22.00

SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.099000
SAR 1g (W/Kg)	0.122922

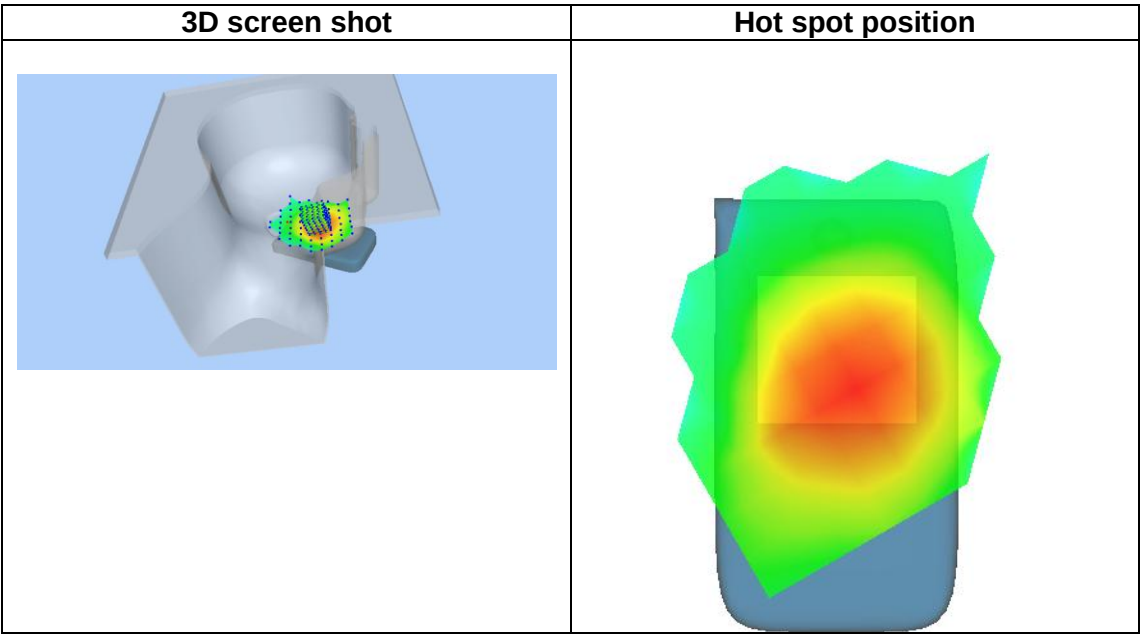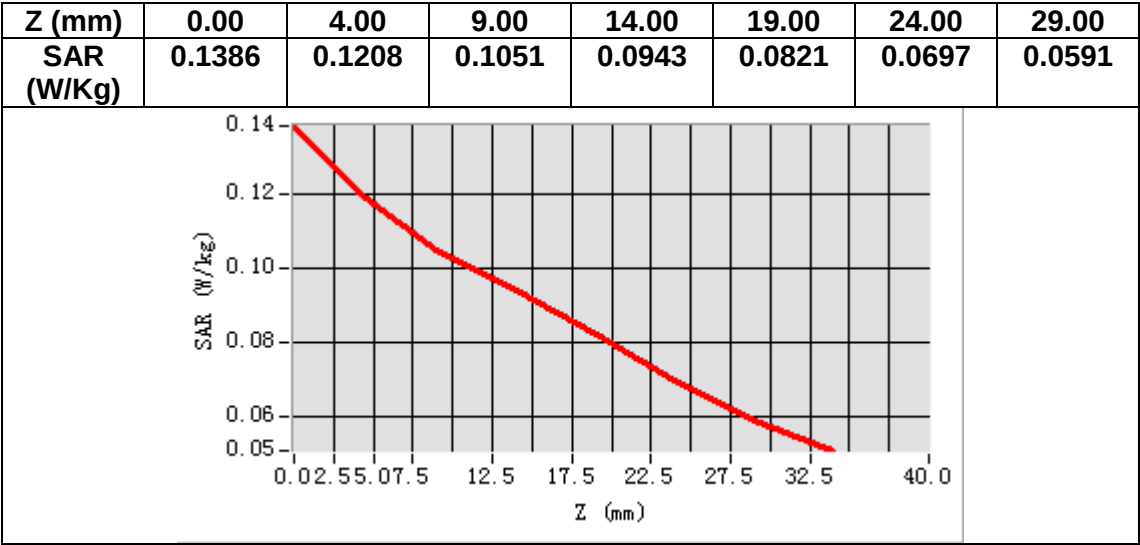

MEASUREMENT 18


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative permittivity (real part)	54.293499
Relative permittivity (imaginary part)	21.797001
Conductivity (S/m)	1.012955
Variation (%)	-0.300000

SURFACE SAR

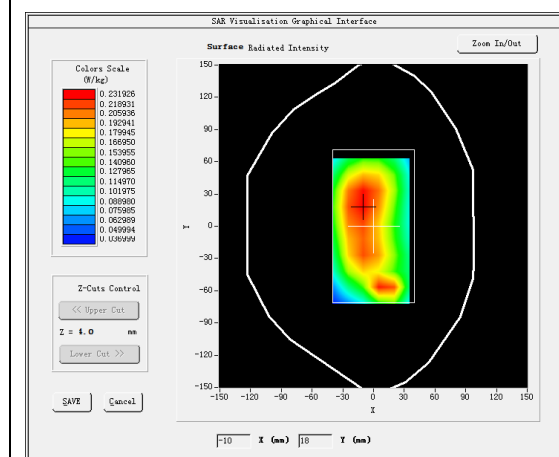



VOLUME SAR

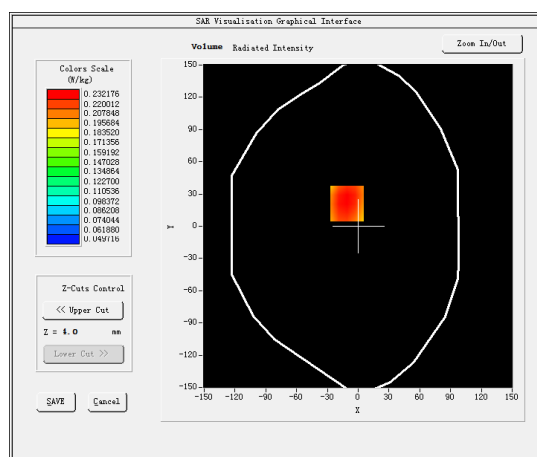

Maximum location: X=-11.00, Y=21.00

SAR Peak: 0.28 W/kg

SAR 10g (W/Kg)	0.180381
SAR 1g (W/Kg)	0.234804

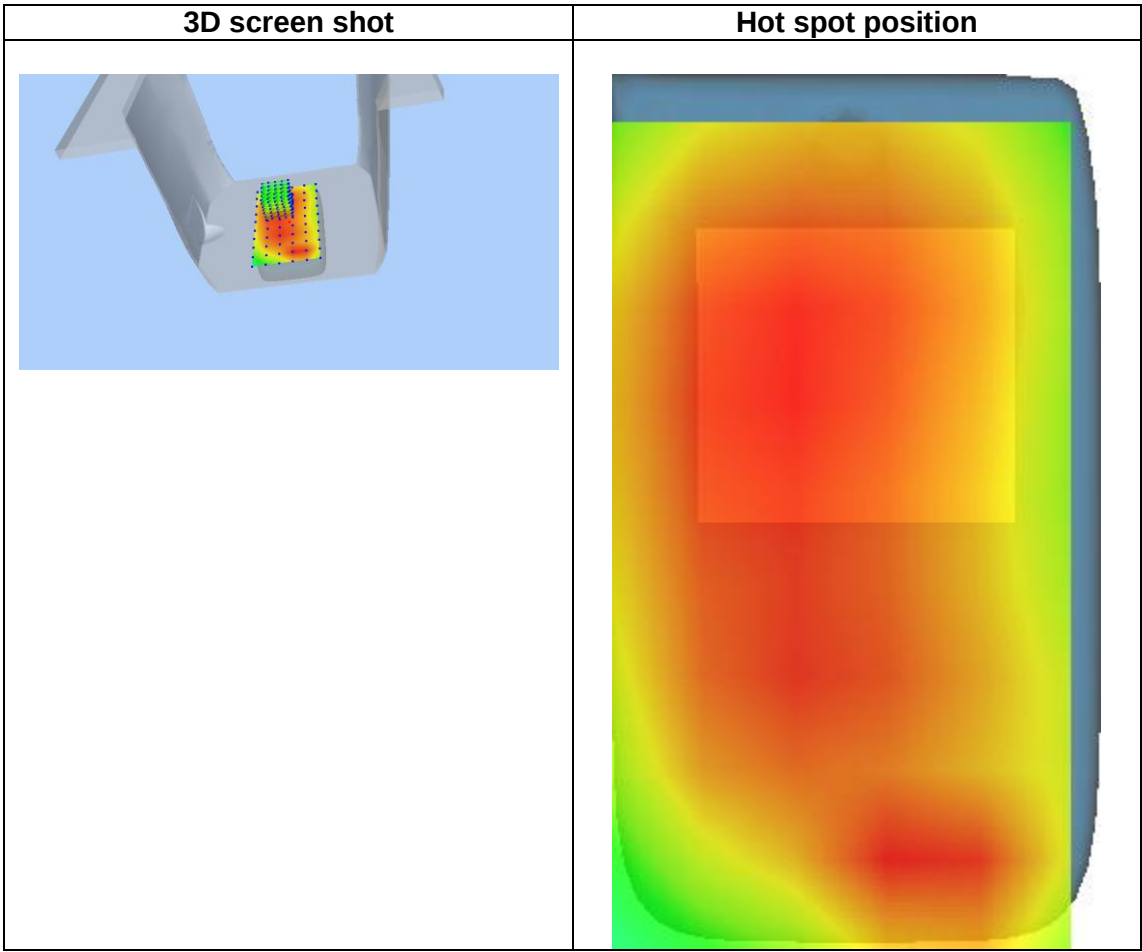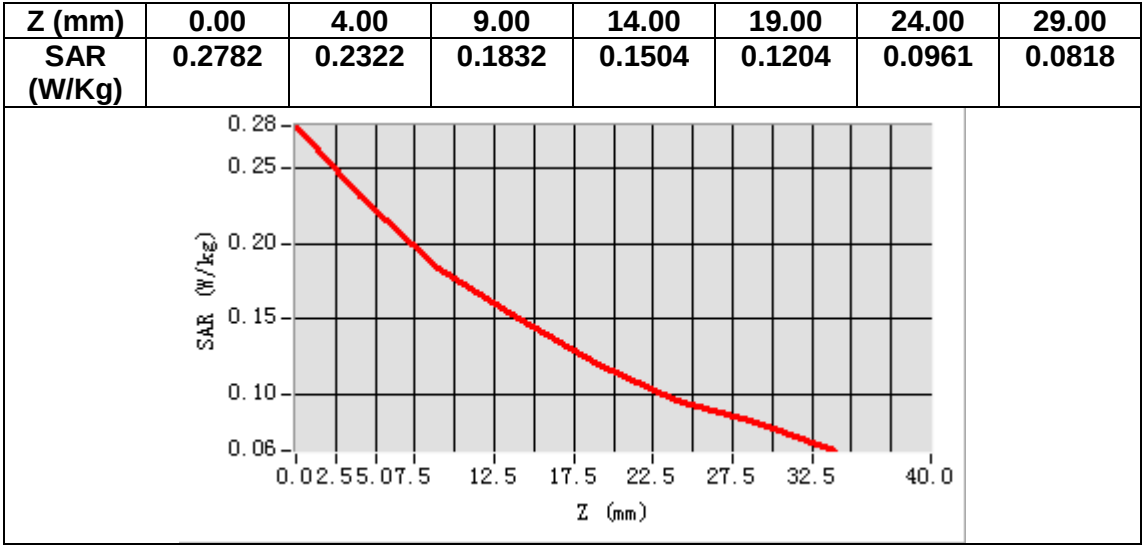

MEASUREMENT 19


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative permittivity (real part)	38.805485
Relative permittivity (imaginary part)	13.841160
Conductivity (S/m)	1.949297
Variation (%)	-1.360000

SURFACE SAR

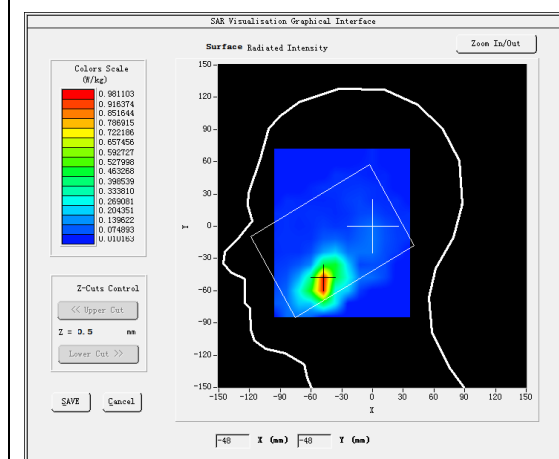



VOLUME SAR

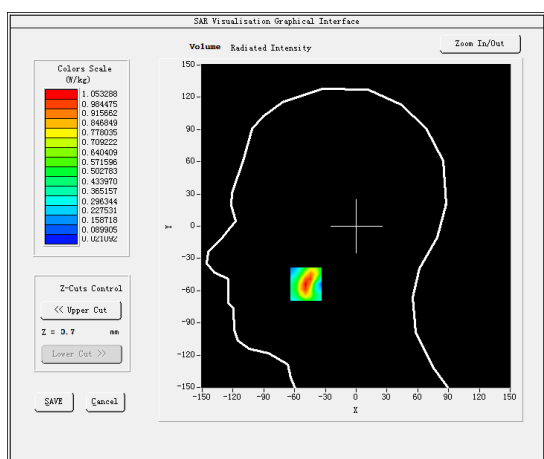

Maximum location: X=-49.00, Y=-54.00

SAR Peak: 1.68 W/kg

SAR 10g (W/Kg)	0.441677
SAR 1g (W/Kg)	0.831428

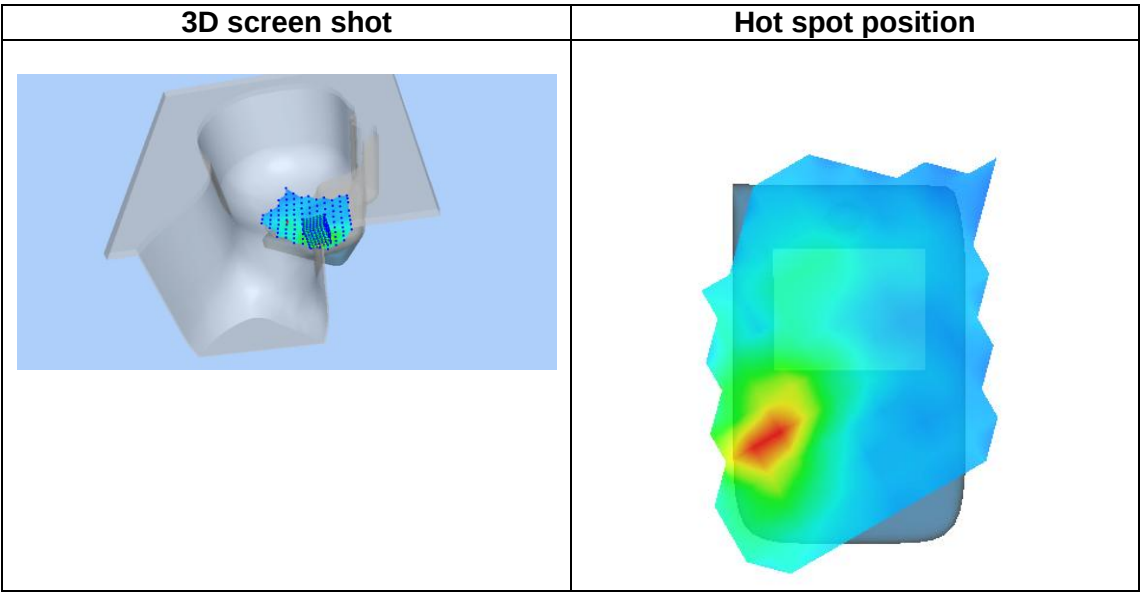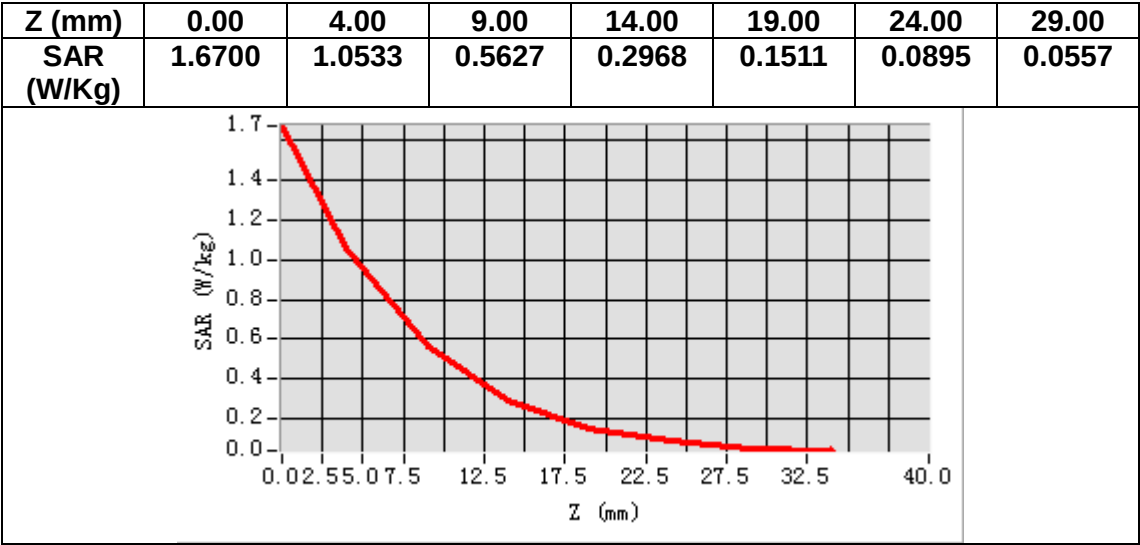

MEASUREMENT 20


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative permittivity (real part)	53.006947
Relative permittivity (imaginary part)	15.097840
Conductivity (S/m)	2.126279
Variation (%)	-1.730000

SURFACE SAR

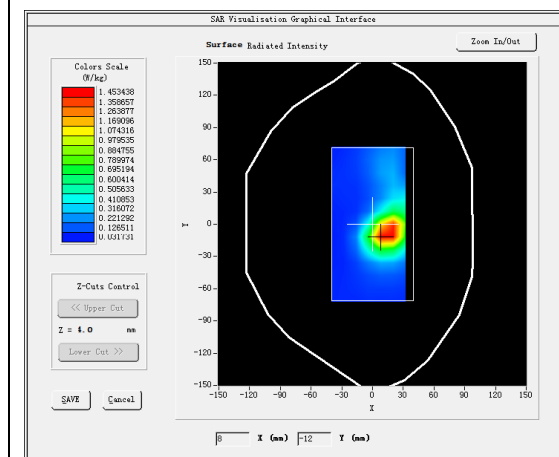



VOLUME SAR

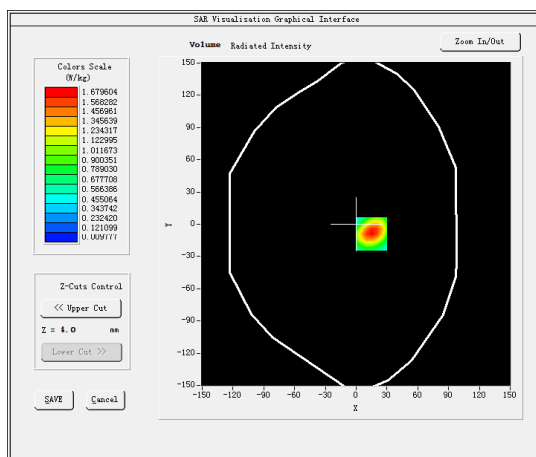

Maximum location: X=15.00, Y=-9.00

SAR Peak: 2.72 W/kg

SAR 10g (W/Kg)	0.705471
SAR 1g (W/Kg)	1.253366

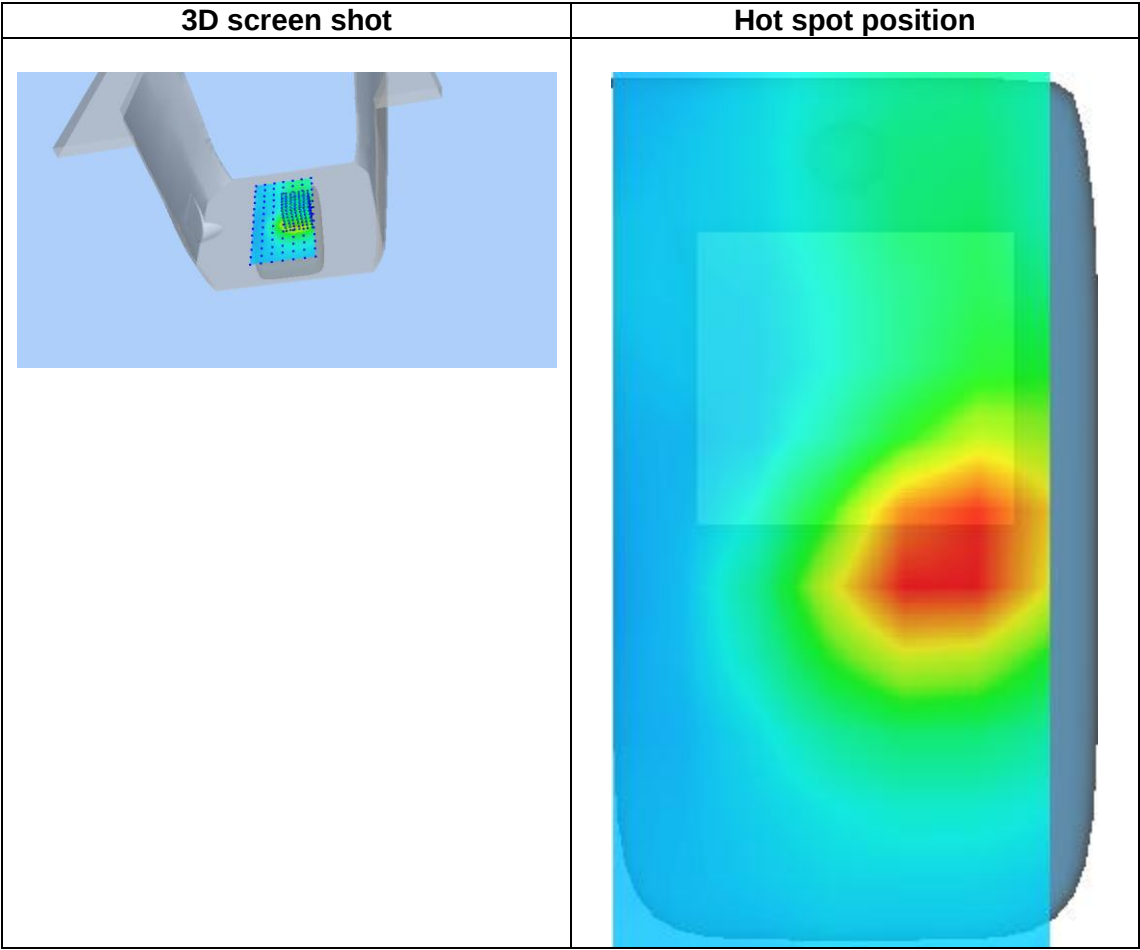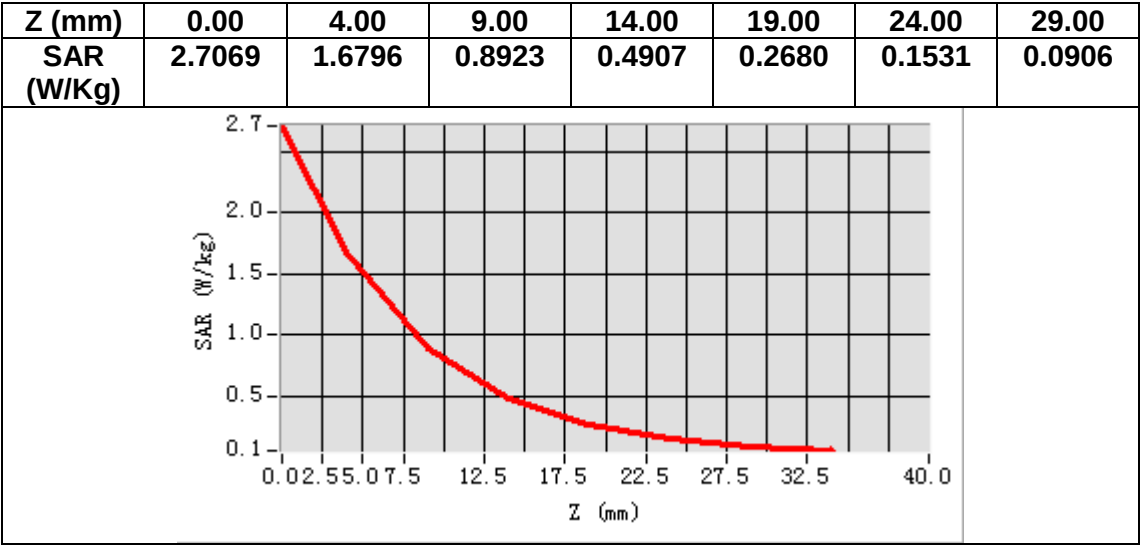

MEASUREMENT 21


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	707.500000
Relative permittivity (real part)	41.765511
Relative permittivity (imaginary part)	21.737028
Conductivity (S/m)	0.854386
Variation (%)	-0.480000

SURFACE SAR

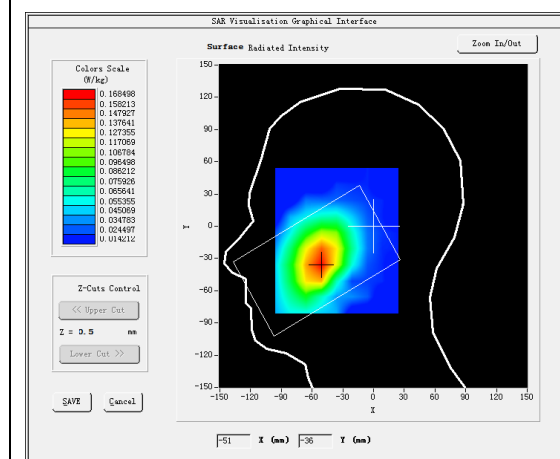



VOLUME SAR

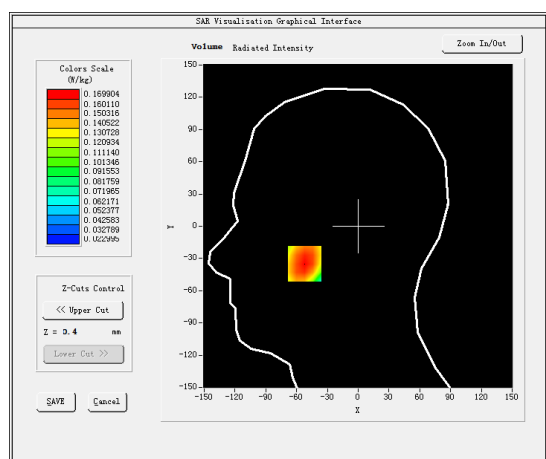

Maximum location: X=-52.00, Y=-35.00

SAR Peak: 0.19 W/kg

SAR 10g (W/Kg)	0.135337
SAR 1g (W/Kg)	0.164356

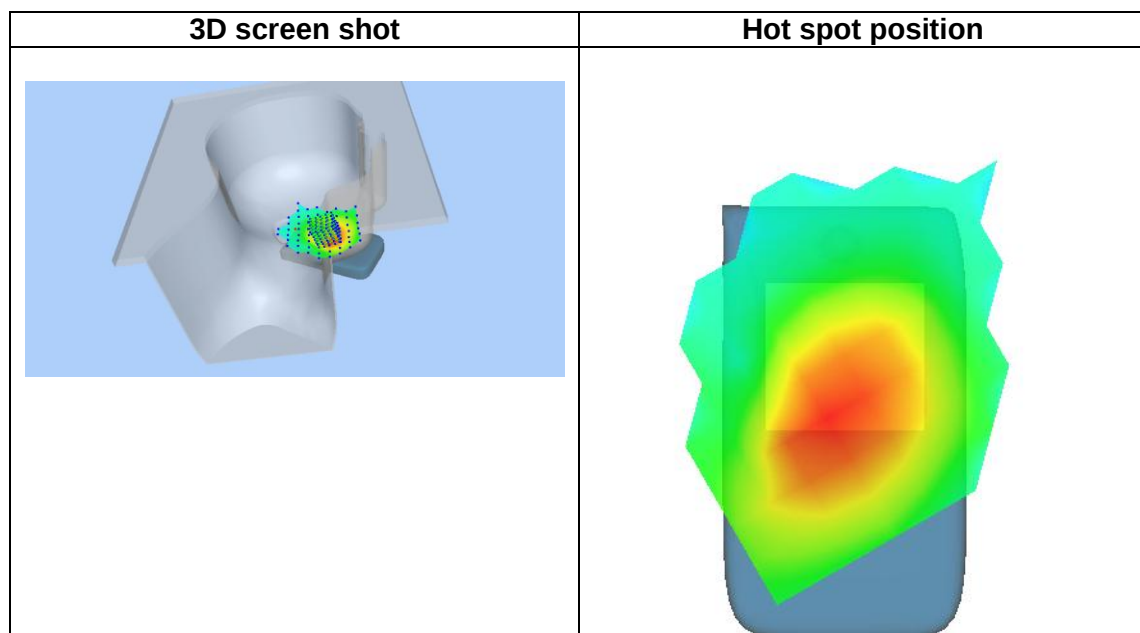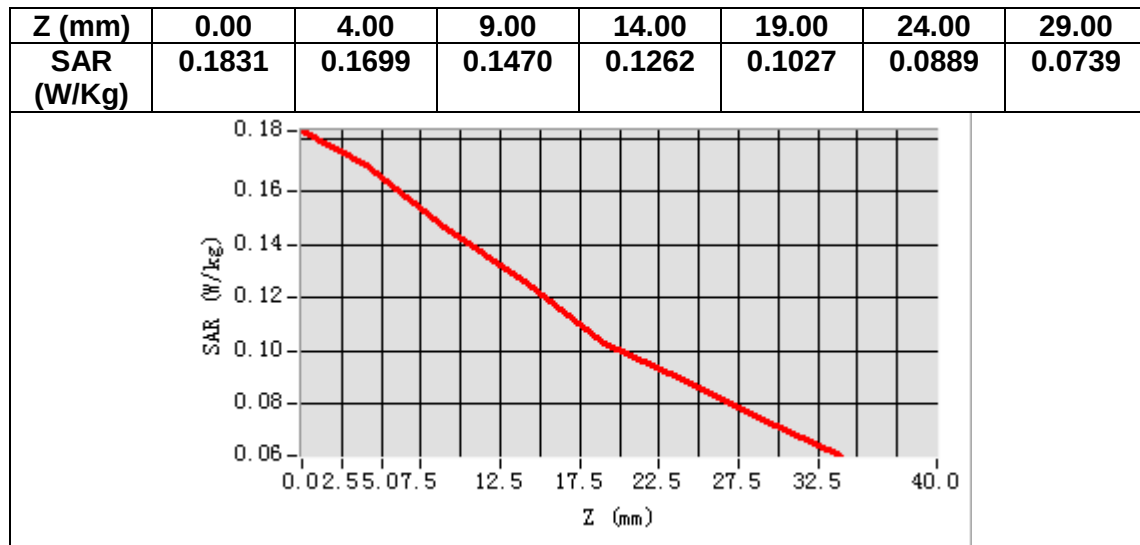

MEASUREMENT 22


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 12</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	707.500000
Relative permittivity (real part)	55.807961
Relative permittivity (imaginary part)	23.671301
Conductivity (S/m)	0.930414
Variation (%)	-0.950000

SURFACE SAR

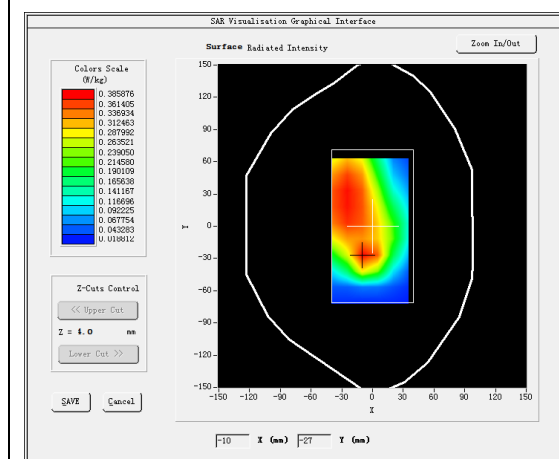



VOLUME SAR

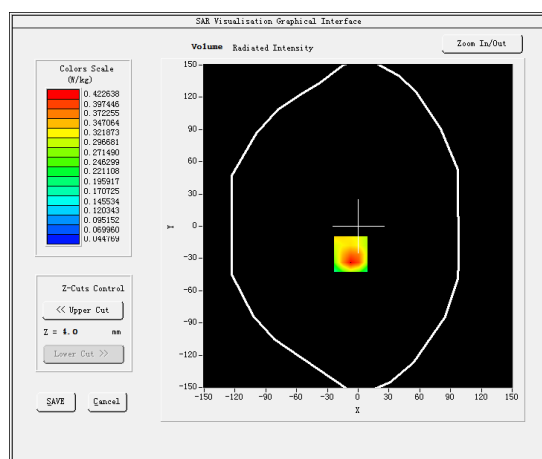

Maximum location: X=-7.00, Y=-26.00

SAR Peak: 0.61 W/kg

SAR 10g (W/Kg)	0.255937
SAR 1g (W/Kg)	0.402948

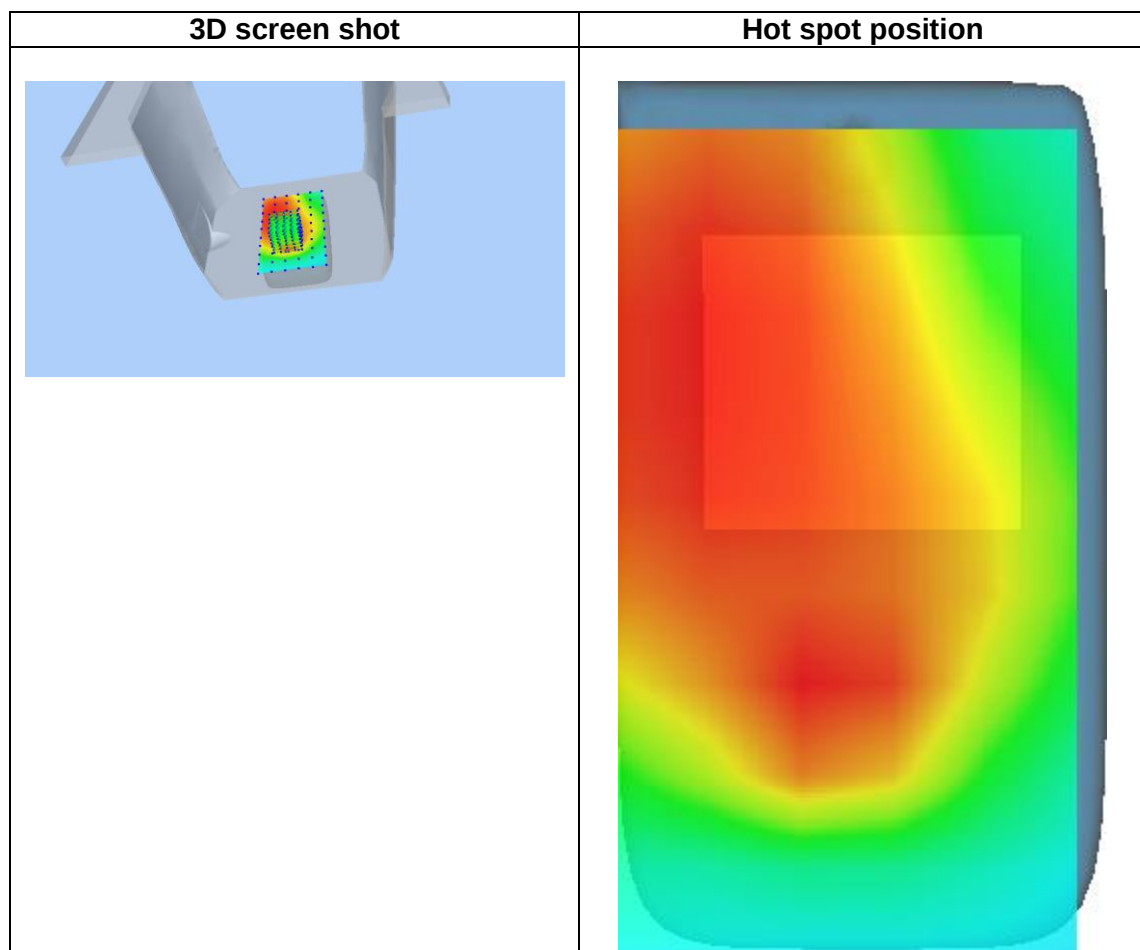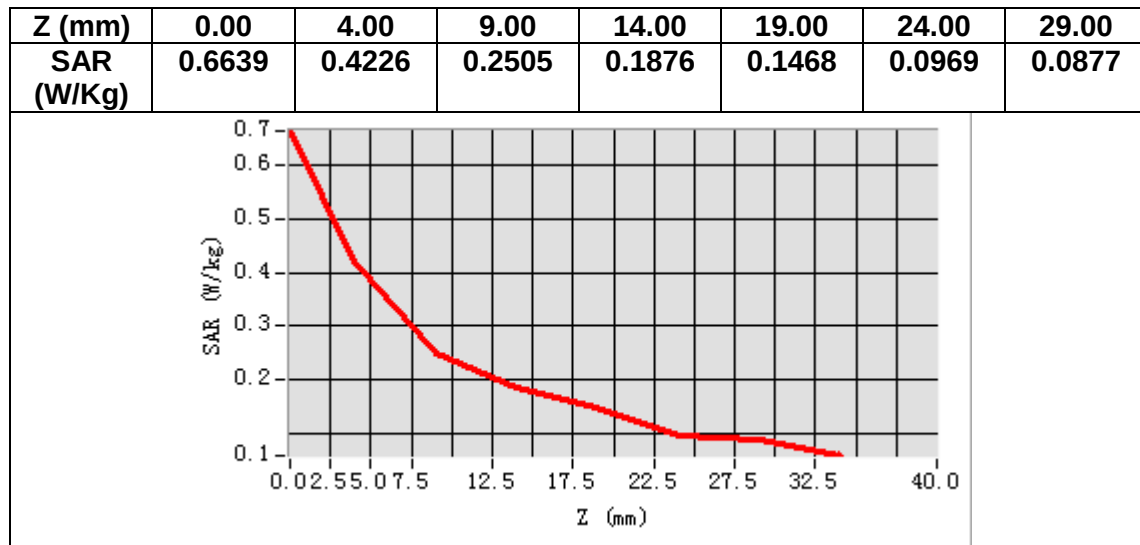

MEASUREMENT 23


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 17</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	710.000000
Relative permittivity (real part)	41.736309
Relative permittivity (imaginary part)	21.797379
Conductivity (S/m)	0.859786
Variation (%)	-2.170000

SURFACE SAR

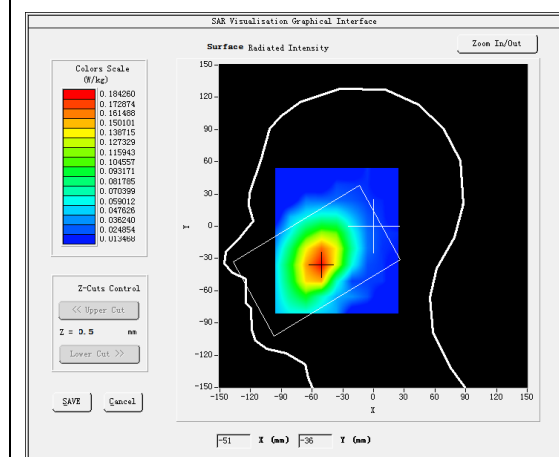



VOLUME SAR

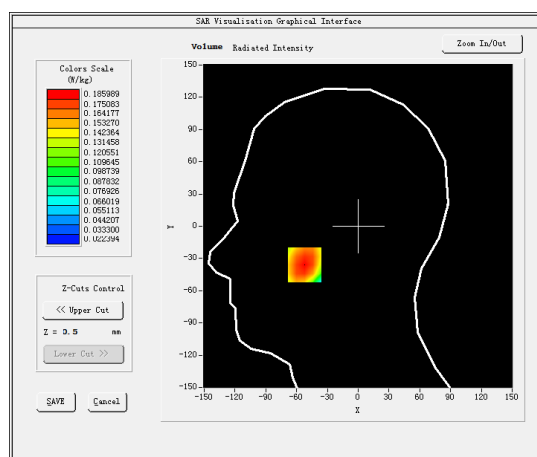

Maximum location: X=-52.00, Y=-36.00

SAR Peak: 0.22 W/kg

SAR 10g (W/Kg)	0.146280
SAR 1g (W/Kg)	0.180102

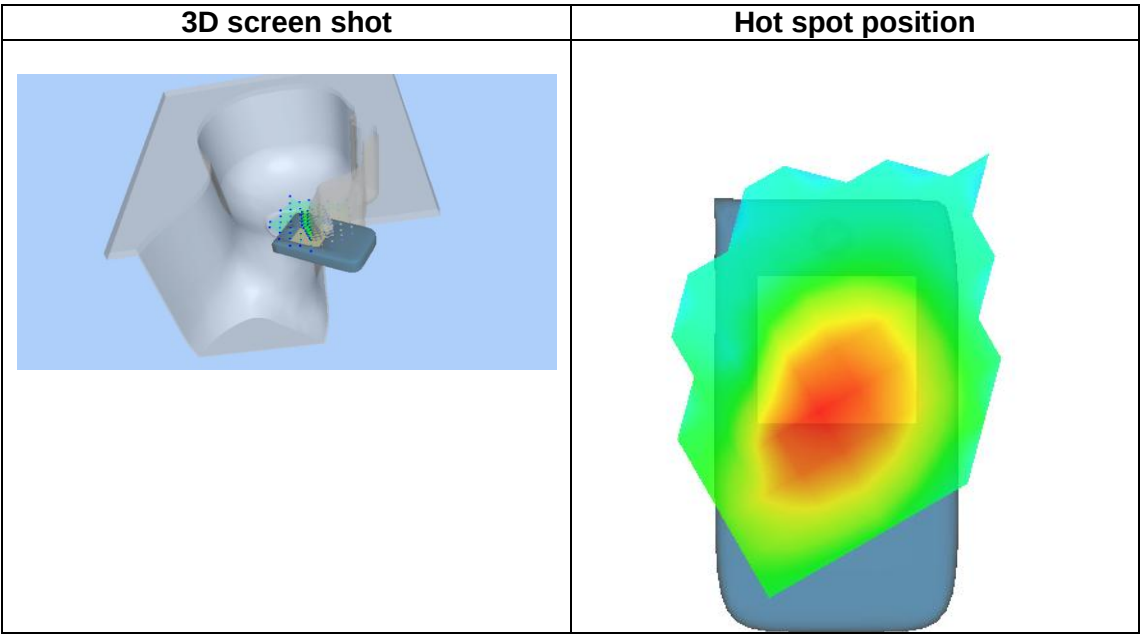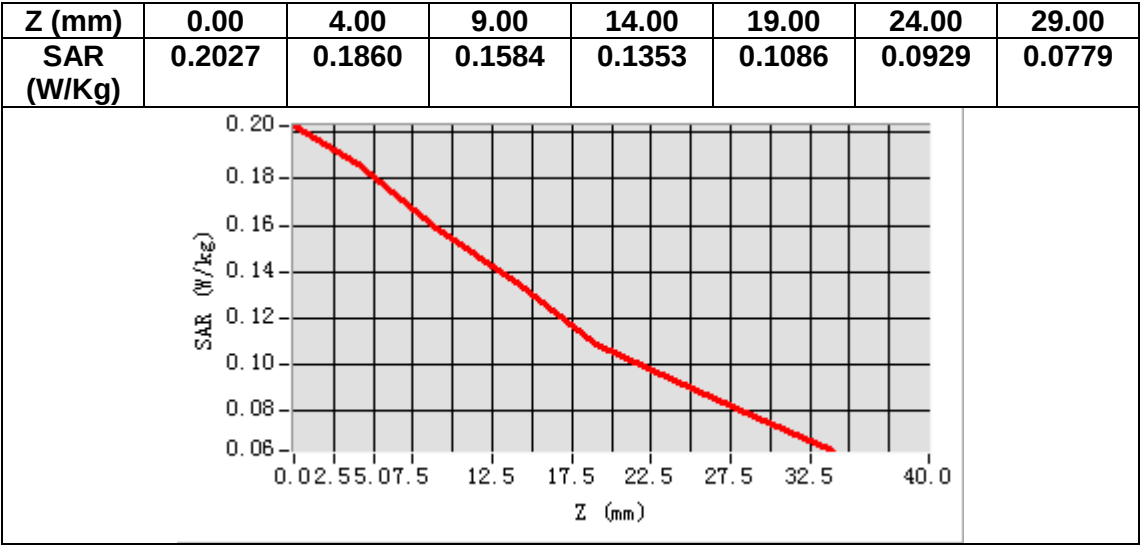

MEASUREMENT 24


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 17</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	710.000000
Relative permittivity (real part)	55.786709
Relative permittivity (imaginary part)	23.690500
Conductivity (S/m)	0.934459
Variation (%)	0.180000

SURFACE SAR

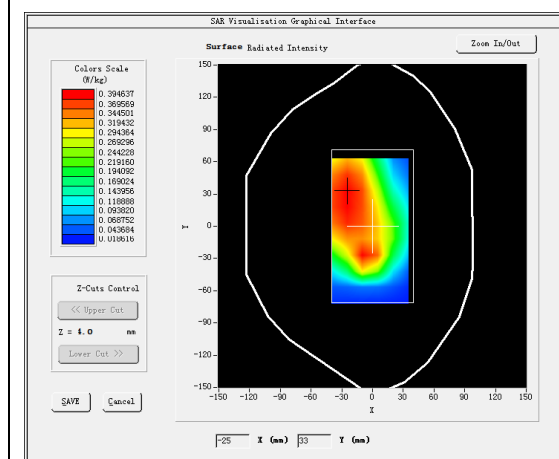



VOLUME SAR

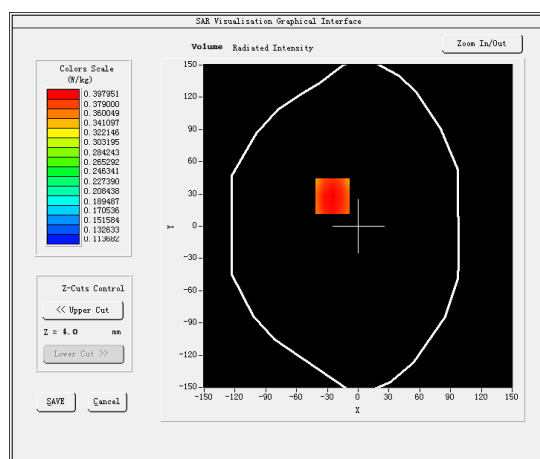

Maximum location: X=-25.00, Y=28.00

SAR Peak: 0.45 W/kg

SAR 10g (W/Kg)	0.326836
SAR 1g (W/Kg)	0.390850

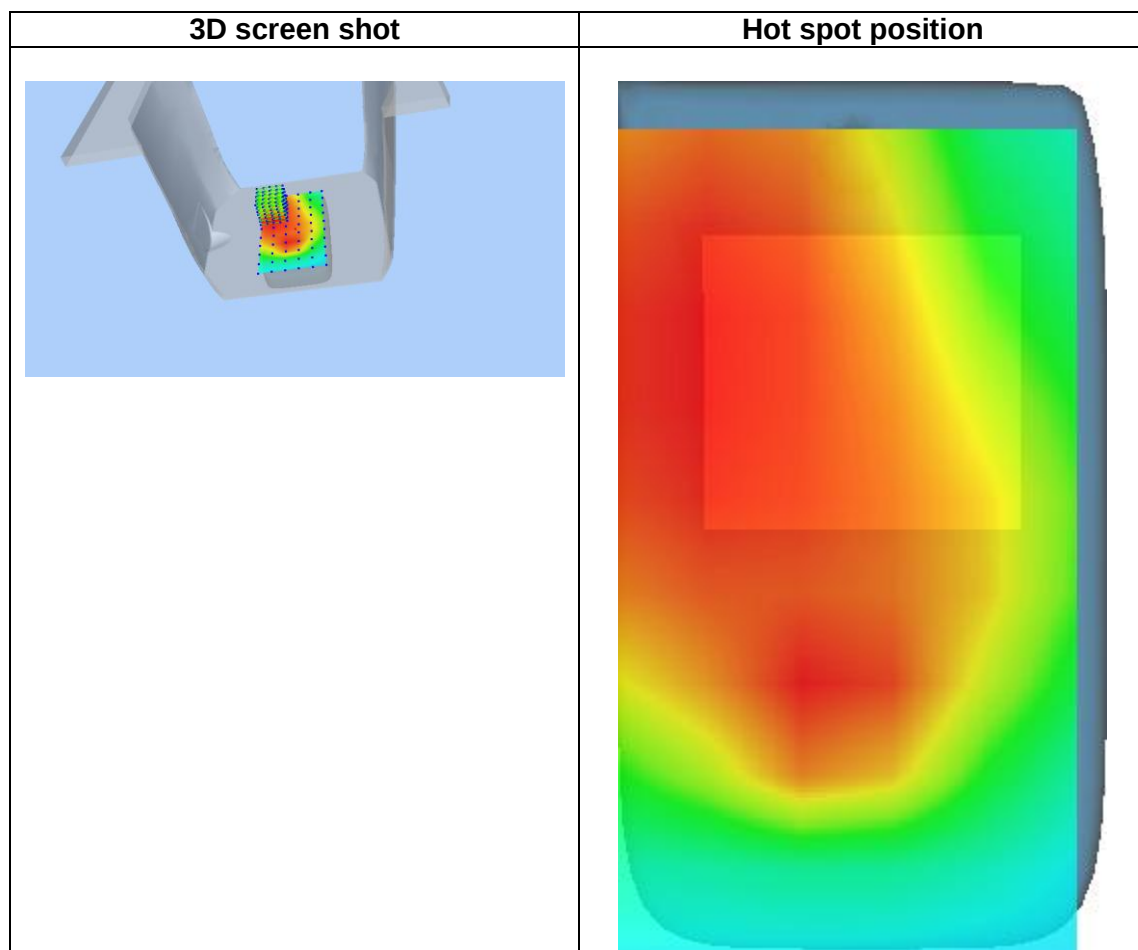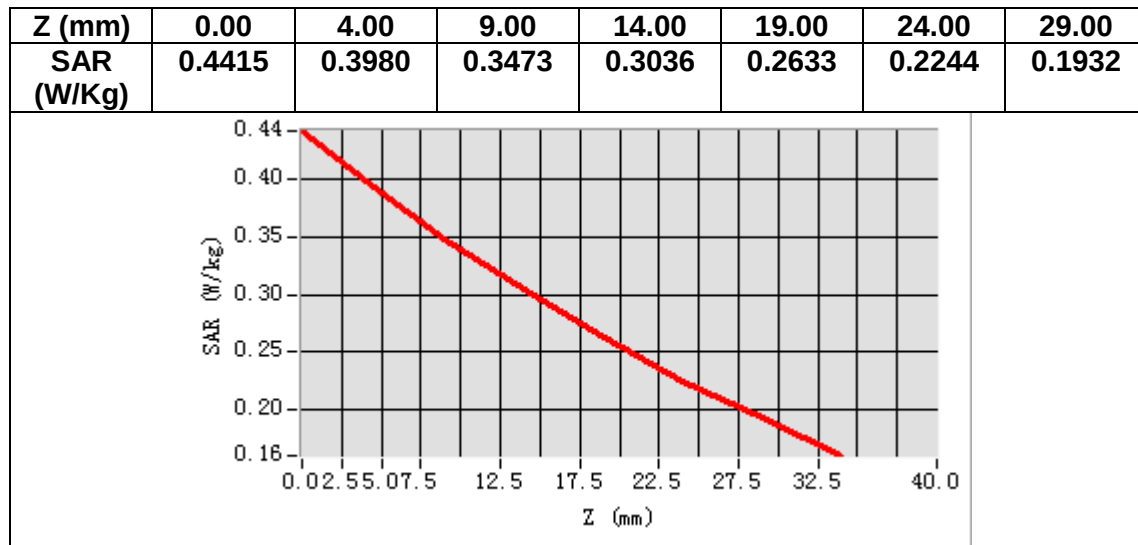

MEASUREMENT 25


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 19</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	40.357899
Relative permittivity (imaginary part)	20.241501
Conductivity (S/m)	0.941792
Variation (%)	1.350000

SURFACE SAR

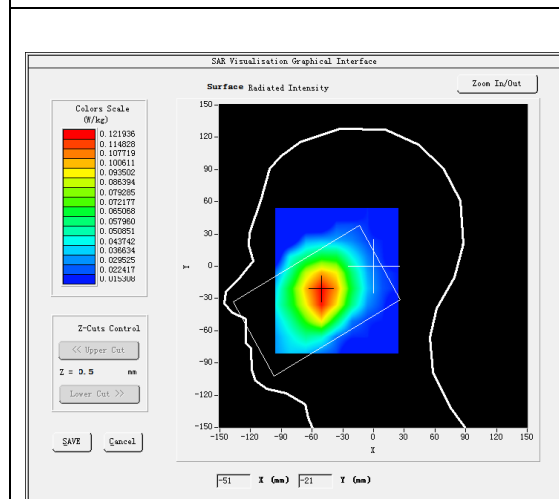



VOLUME SAR

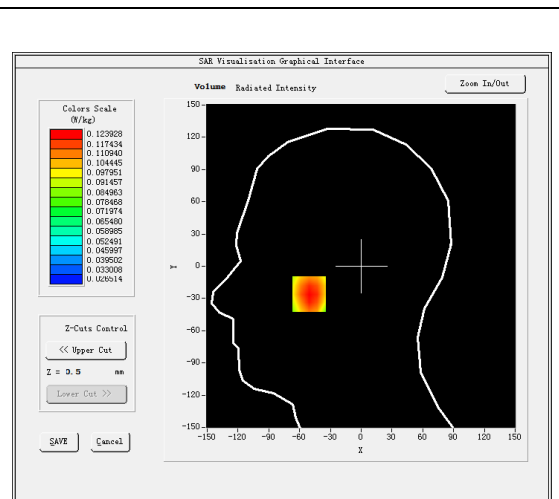

Maximum location: X=-51.00, Y=-26.00

SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.100888
SAR 1g (W/Kg)	0.125498

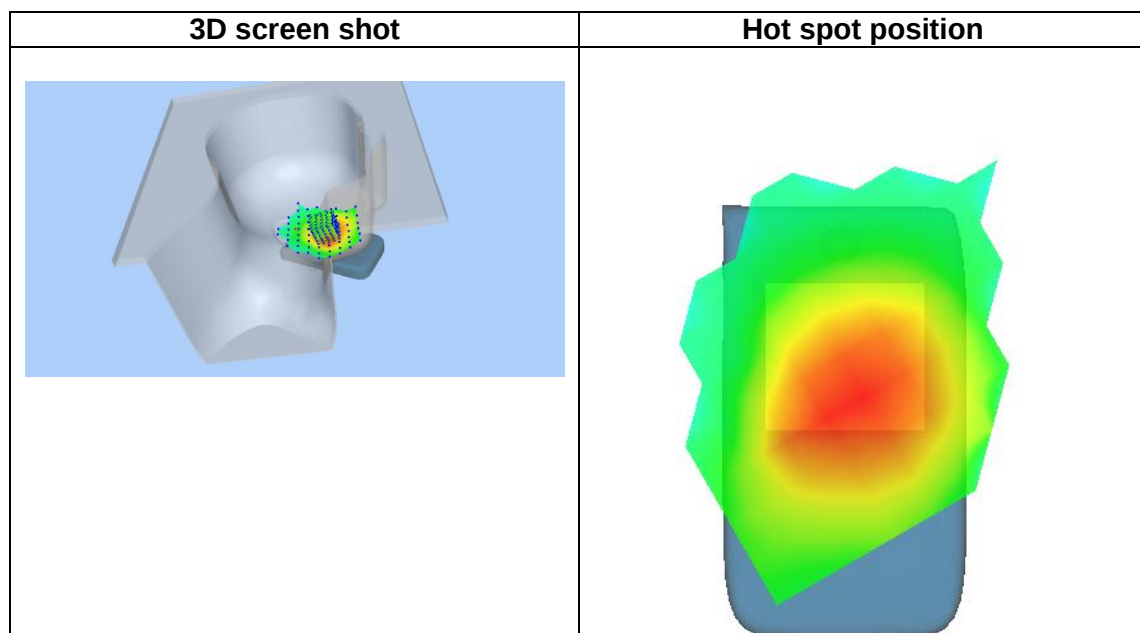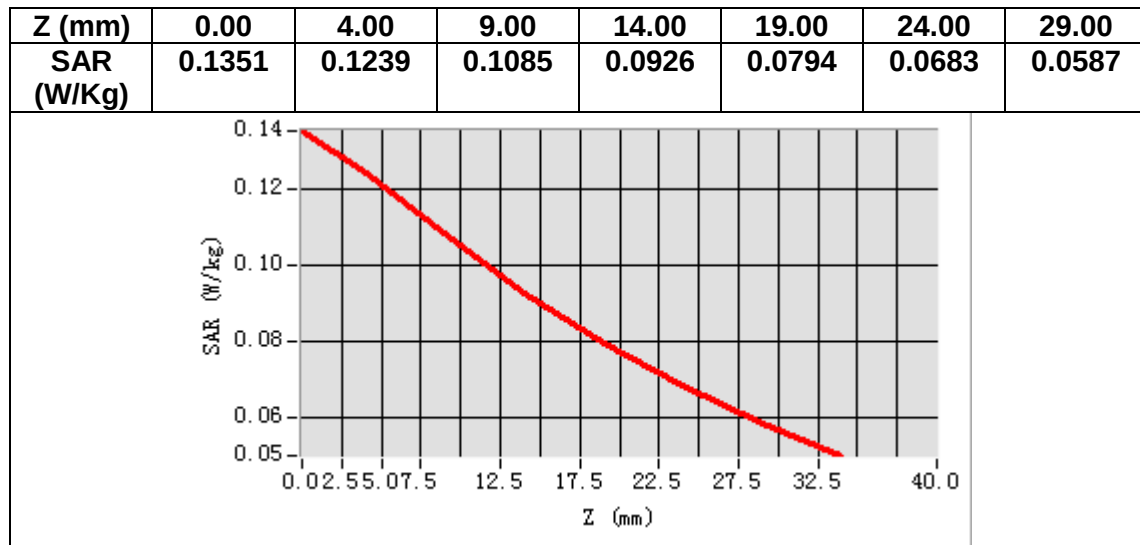

MEASUREMENT 26


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 19</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	54.282848
Relative permittivity (imaginary part)	21.803450
Conductivity (S/m)	1.014466
Variation (%)	0.020000

SURFACE SAR

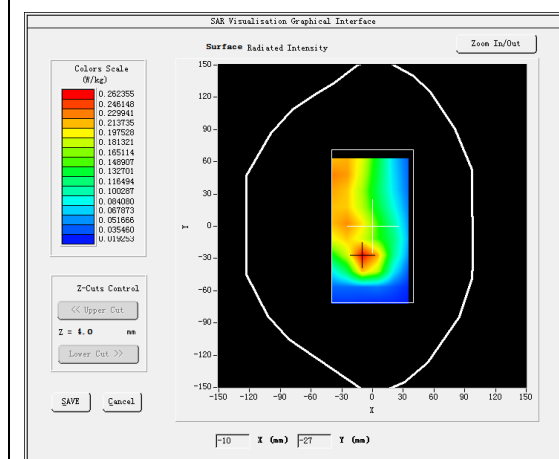



VOLUME SAR

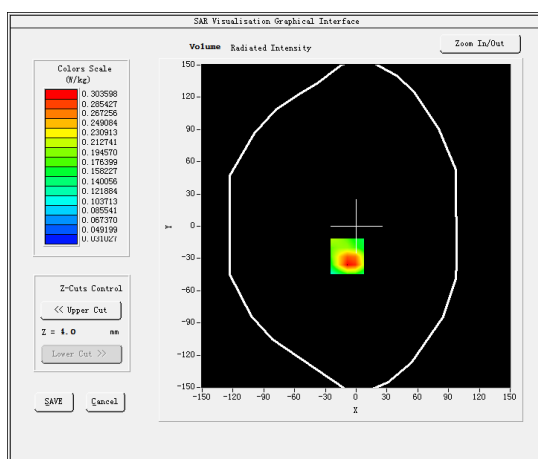

Maximum location: X=-9.00, Y=-28.00

SAR Peak: 0.46 W/kg

SAR 10g (W/Kg)	0.176504
SAR 1g (W/Kg)	0.305937

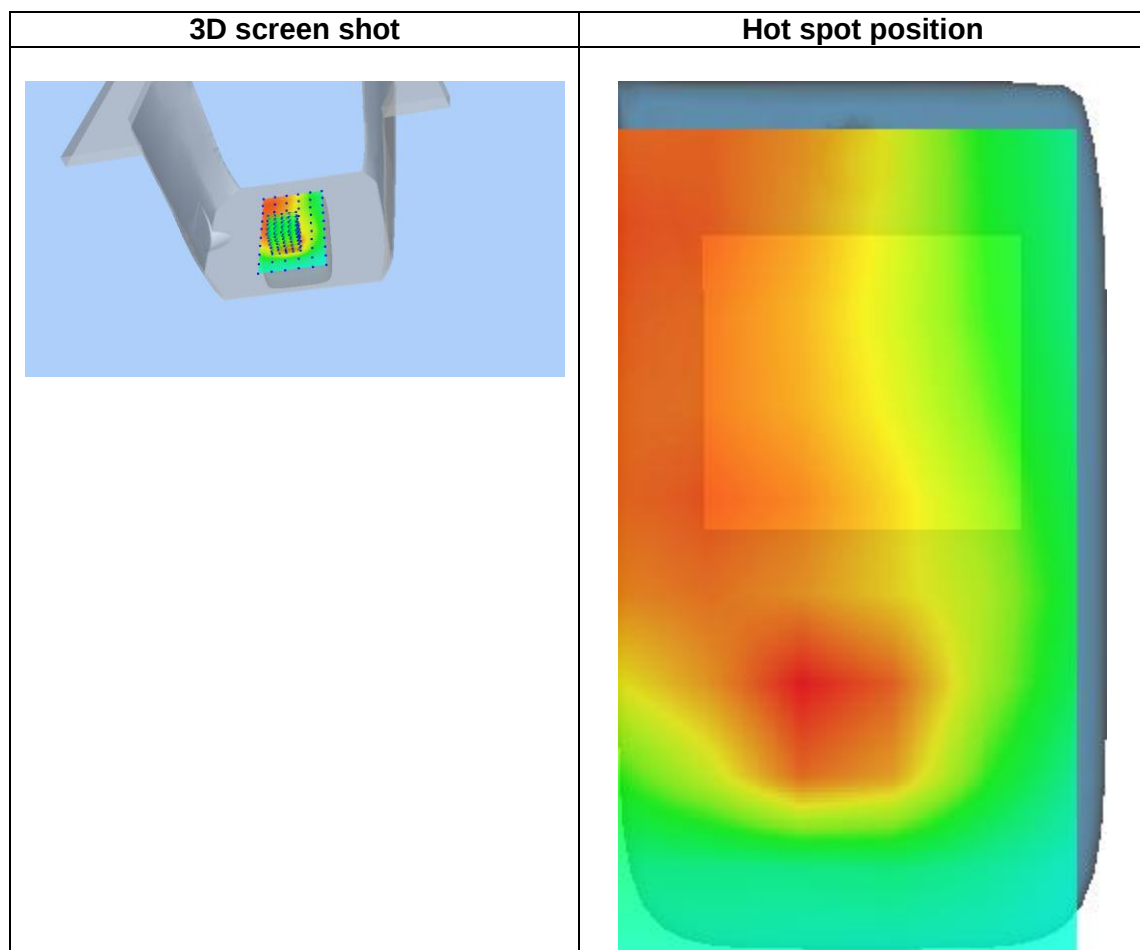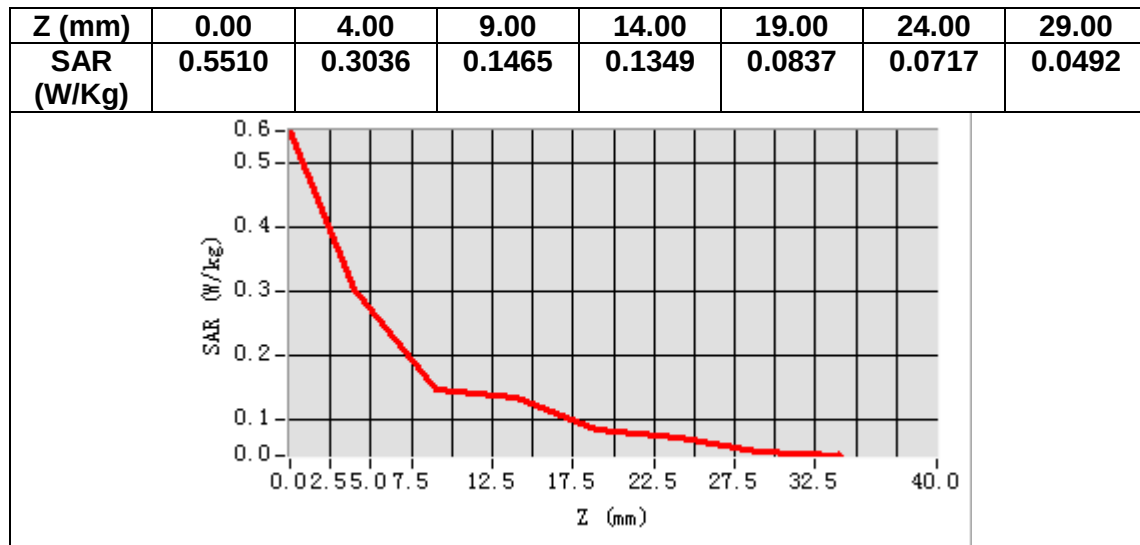

14. Appendix D. Calibration Certificate

Table of contents
E Field Probe - SN 41/18 EPGO330
750 MHz Dipole - SN 03/15 DIP 0G750-355
835 MHz Dipole - SN 03/15 DIP 0G835-347
1800 MHz Dipole - SN 03/15 DIP 1G800-349
1900 MHz Dipole - SN 03/15 DIP 1G900-350
2450 MHz Dipole - SN 03/15 DIP 2G450-352
2600 MHz Dipole - SN 03/15 DIP 2G600-356



COMOSAR E-Field Probe Calibration Report

Ref : ACR.142.2.19.SATU.B

SHENZHEN NTEK TESTING TECHNOLOGY CO., LTD.
BUILDING E, FENDA SCIENCE PARK, SANWEI
COMMUNITY, XIXIANG STREET,
BAO'AN DISTRICT, SHENZHEN GUANGDONG, CHINA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: SN 41/18 EPG0330

Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 05/21/19

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in MVG USA using the CALISAR / CALIBAIR test bench, for use with a COMOSAR system only. All calibration results are traceable to national metrology institutions.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.142.2.19.SATU.B

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Jérôme LUC	Product Manager	5/22/2019	
<i>Checked by :</i>	Jérôme LUC	Product Manager	5/22/2019	
<i>Approved by :</i>	Kim RUTKOWSKI	Quality Manager	5/22/2019	

	<i>Customer Name</i>
<i>Distribution :</i>	CCIC SOUTHERN TESTING CO., LTD

<i>Issue</i>	<i>Date</i>	<i>Modifications</i>
A	5/22/2019	Initial release
B	5/27/2019	Change customer name and address



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.142.2.19.SATU.B

TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Linearity	4
3.2	Sensitivity	5
3.3	Lower Detection Limit	5
3.4	Isotropy	5
3.5	Boundary Effect	5
4	Measurement Uncertainty	5
5	Calibration Measurement Results	6
5.1	Sensitivity in air	6
5.2	Linearity	7
5.3	Sensitivity in liquid	7
5.4	Isotropy	8
6	List of Equipment	10



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.142.2.19.SATU.B

1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 41/18 EPGO330
Product Condition (new / used)	New
Frequency Range of Probe	0.15 GHz-6GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.186 MΩ Dipole 2: R2=0.191 MΩ Dipole 3: R3=0.201 MΩ

A yearly calibration interval is recommended.

2 PRODUCT DESCRIPTION

2.1 GENERAL INFORMATION

MVG's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



Figure 1 – MVG COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.142.2.19.SATU.B

3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.5 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Incident or forward power	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Reflected power	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Liquid conductivity	5.00%	Rectangular	$\sqrt{3}$	1	2.887%
Liquid permittivity	4.00%	Rectangular	$\sqrt{3}$	1	2.309%
Field homogeneity	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Field probe positioning	5.00%	Rectangular	$\sqrt{3}$	1	2.887%



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.142.2.19.SATU.B

Field probe linearity	3.00%	Rectangular	$\sqrt{3}$	1	1.732%
Combined standard uncertainty					5.831%
Expanded uncertainty 95 % confidence level k = 2					12.0%

5 CALIBRATION MEASUREMENT RESULTS

Calibration Parameters	
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

5.1 SENSITIVITY IN AIR

Normx dipole 1 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normy dipole 2 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normz dipole 3 ($\mu\text{V}/(\text{V}/\text{m})^2$)
0.92	0.79	0.63

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
90	97	92

Calibration curves $e_i=f(V)$ ($i=1,2,3$) allow to obtain H-field value using the formula:

$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$

