



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640
Fax: +86-755-26648637
Website: www.cqa-cert.com

Report Template Version: V03
Report Template Revision Date: Mar.1st, 2017

Test Report

Report No. : CQASZ20210400504E-01

Applicant: ODYSSEY TOYS

Address of Applicant: 20855 NE 16 AVE, C-22, MIAMI, FL 33179, MIAMI Florida, United States

Equipment Under Test (EUT):

Product: DRONE

Model No.: ODY-1962

Brand Name: N/A

FCC ID: 2ANNN-ODY-1962

Standards: 47 CFR Part 15, Subpart C

Date of Test: 2021-04-20 to 2021-5-10

Date of Issue: 2021-5-10

Test Result : PASS*

Tested By: Lewis Zhou

(Lewis Zhou)

Jun Li

(Jun Li)

Reviewed By: Jun Li



Approved By: Sheek Luo

(Sheek Luo)

* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

2 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20210400504E-01	Rev.01	Initial report	2021-5-6

3 Test Summary

Test Item	FCC Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	N/A
Field Strength of the Fundamental Signal	47 CFR Part 15, Subpart C Section 15.249 (a)	ANSI C63.10 (2013)	PASS
Spurious Emissions	47 CFR Part 15, Subpart C Section	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency	47 CFR Part 15, Subpart C Section 15.249 (d), (e)/15.209	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.215 (c)	ANSI C63.10 (2013)	PASS

N/A: Not applicable, This EUT is battery power

4 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 TEST SUMMARY.....	3
4 CONTENTS.....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF EUT.....	5
5.3 TEST ENVIRONMENT AND MODE.....	7
5.4 DESCRIPTION OF SUPPORT UNITS.....	7
5.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	8
5.6 TEST LOCATION.....	9
5.7 TEST FACILITY.....	9
5.8 DEVIATION FROM STANDARDS.....	9
5.9 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
5.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
5.11 EQUIPMENT LIST.....	10
6 TEST RESULTS AND MEASUREMENT DATA.....	11
6.1 ANTENNA REQUIREMENT.....	11
6.2 RADIATED SPURIOUS EMISSION & FIELD STRENGTH OF FUNDAMENTAL.....	12
6.3 20dB BANDWIDTH.....	20
7 PHOTOGRAPHS.....	23
7.1 RADIATED EMISSION TEST SETUP.....	23
7.2 EUT CONSTRUCTIONAL DETAILS.....	25

5 General Information

5.1 Client Information

Applicant:	ODYSSEY TOYS
Address of Applicant:	20855 NE 16 AVE, C-22, MIAMI, FL 33179, MIAMI Florida, United States
Manufacturer:	ODYSSEY TOYS
Address of Manufacturer:	20855 NE 16 AVE, C-22, MIAMI, FL 33179, MIAMI Florida, United States
Factory:	Shantou Chenghai Zhangbo toys factory
Address of Factory:	Chenghai District, Shantou City, Guangdong Province, China

5.2 General Description of EUT

Name:	DRONE
Model No.:	ODY-1962
Trade Mark :	N/A
Hardware Version:	ver1.2
Software Version:	ver2.3
Frequency Range:	2408MHz ~ 2474MHz
Modulation Type:	FSK
Number of Channels:	34 (declared by the client)
Sample Type:	Portable product
Antenna Type:	PCB antenna
Antenna Gain:	0dBi
Power Supply:	EUT is powered by 3*AAA size batteries.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2408MHz	10	2426MHz	19	2444MHz	28	2462MHz
2	2410MHz	11	2428MHz	20	2446MHz	29	2464MHz
3	2412MHz	12	2430MHz	21	2448MHz	30	2466MHz
4	2414MHz	13	2432MHz	22	2450MHz	31	2468MHz
5	2416MHz	14	2434MHz	23	2452MHz	32	2470MHz
6	2418MHz	15	2436MHz	24	2454MHz	33	2472MHz
7	2420MHz	16	2438MHz	25	2456MHz	34	2474MHz
8	2422MHz	17	2440MHz	26	2458MHz	/	/
9	2424MHz	18	2442MHz	27	2460MHz	/	/

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel(CH1)	2408MHz
The Middle channel(CH17)	2440MHz
The Highest channel(CH34)	2474MHz

5.3 Test Environment and Mode

Operating Environment:	
Temperature:	25.5 °C
Humidity:	53 % RH
Atmospheric Pressure:	1001 mbar
Test Mode:	Use test software (RF test) to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
/	/	/	/	/

5.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for **CQA** laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8°C	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	time	0.6 %.	(1)
14	Frequency Error	5.5 Hz	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

5.7 Test Facility

- **ISED No.: 22984**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

5.8 Deviation from Standards

None.

5.9 Abnormalities from Standard Conditions

None.

5.10 Other Information Requested by the Customer

None.

5.11 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2020/9/26	2021/9/25
Spectrum analyzer	R&S	FSU26	CQA-038	2020/10/28	2021/10/27
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2020/9/26	2021/9/25
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2020/11/2	2021/11/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2019/10/28	2021/10/27
Bilog Antenna	R&S	HL562	CQA-011	2019/9/26	2021/9/25
Horn Antenna	R&S	HF906	CQA-012	2019/9/26	2021/9/25
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2019/9/26	2021/9/25
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2020/9/26	2021/9/25
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2020/9/26	2021/9/25
Antenna Connector	CQA	RFC-01	CQA-080	2020/9/26	2021/9/25
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2020/9/26	2021/9/25
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2020/9/26	2021/9/25

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.




6 Test results and Measurement Data

6.1 Antenna Requirement

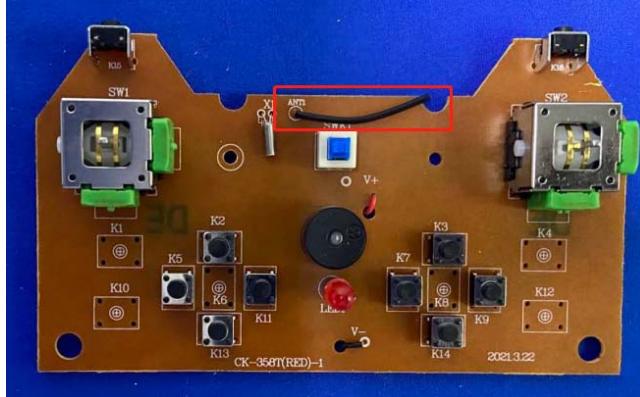Standard requirement:	47 CFR Part 15C Section 15.203
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
<p>EUT Antenna:</p> 	
	<p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.</p>

6.2 Radiated Spurious Emission & Field strength of fundamental

Test Requirement:	47 CFR Part 15C Section 15.249 and 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Note: For fundamental frequency, RBW=5MHz, VBW=5MHz, Peak detector is for PK value, RMS detector is for Average value.					
Limit: (Spurious Emissions and band edge)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
2) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.					
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.0		Average Value	
		114.0		Peak Value	

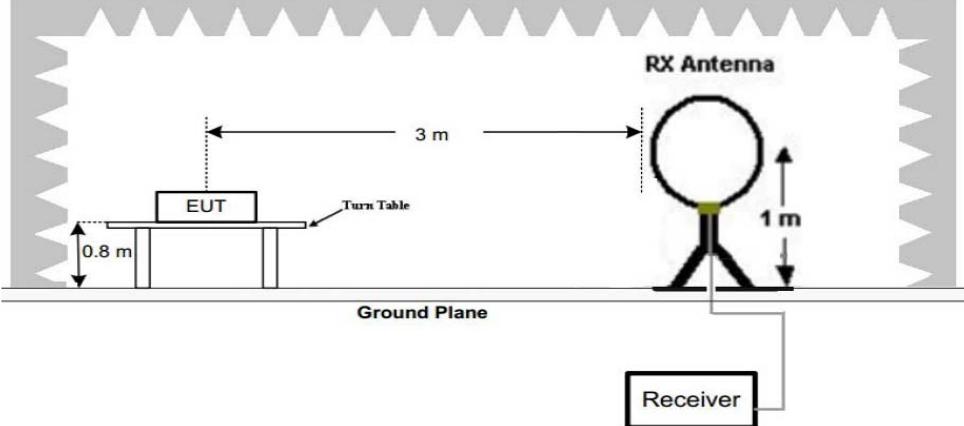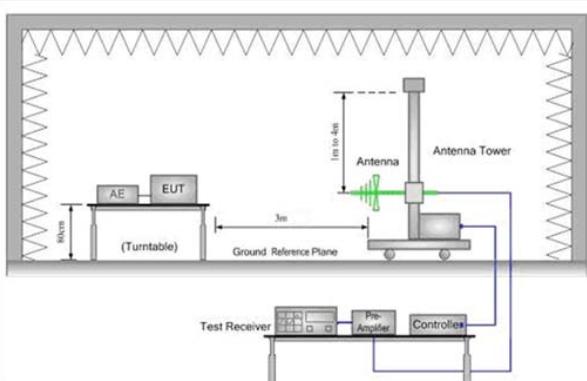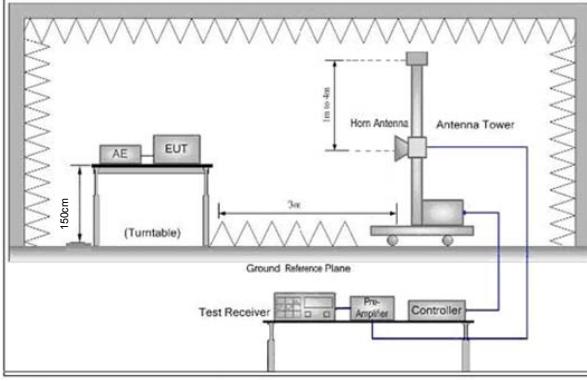Test Setup:	
	<p>Figure 1. Below 30MHz</p>  
Test Procedure:	<p>a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table</p>

	<p>was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <ul style="list-style-type: none">e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.g. Test the EUT in the lowest channel, the middle channel, the Highest channelh. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with FSK at lowest, middle and highest channel.
Final Test Mode:	Pretest the EUT at Transmitting mode, For below 1GHz part, through pre-scan, the worst case is the highest channel. Only the worst case is recorded in the report.
Test Voltage:	DC4.5V
Test Results:	Pass


Measurement Data
Field Strength Of The Fundamental Signal

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits	Over (dB)	Detector Type	Ant. Pol.
							H/V
2408	97.28	-9.33	87.95	114	-26.05	Peak	H
2408	96.30	-9.33	86.97	94	-7.03	AVG	H
2408	94.68	-9.33	85.35	114	-28.65	Peak	V
2408	91.91	-9.34	82.57	94	-11.43	AVG	V
2440	100.14	-9.37	90.77	114	-23.23	Peak	H
2440	96.41	-9.37	87.04	94	-6.96	AVG	H
2440	97.02	-9.36	87.66	114	-26.34	Peak	V
2440	95.34	-9.36	85.98	94	-8.02	AVG	V
2474	98.76	-9.23	89.53	114	-24.47	Peak	H
2474	97.28	-9.23	88.05	94	-5.95	AVG	H
2474	95.55	-9.23	86.32	114	-27.68	peak	V
2474	95.07	-9.23	85.84	94	-8.16	AVG	V

Spurious Emissions

30MHz~1GHz (the worst case)


Test mode:	Transmitting (Highest channel)	Vertical
------------	--------------------------------	----------

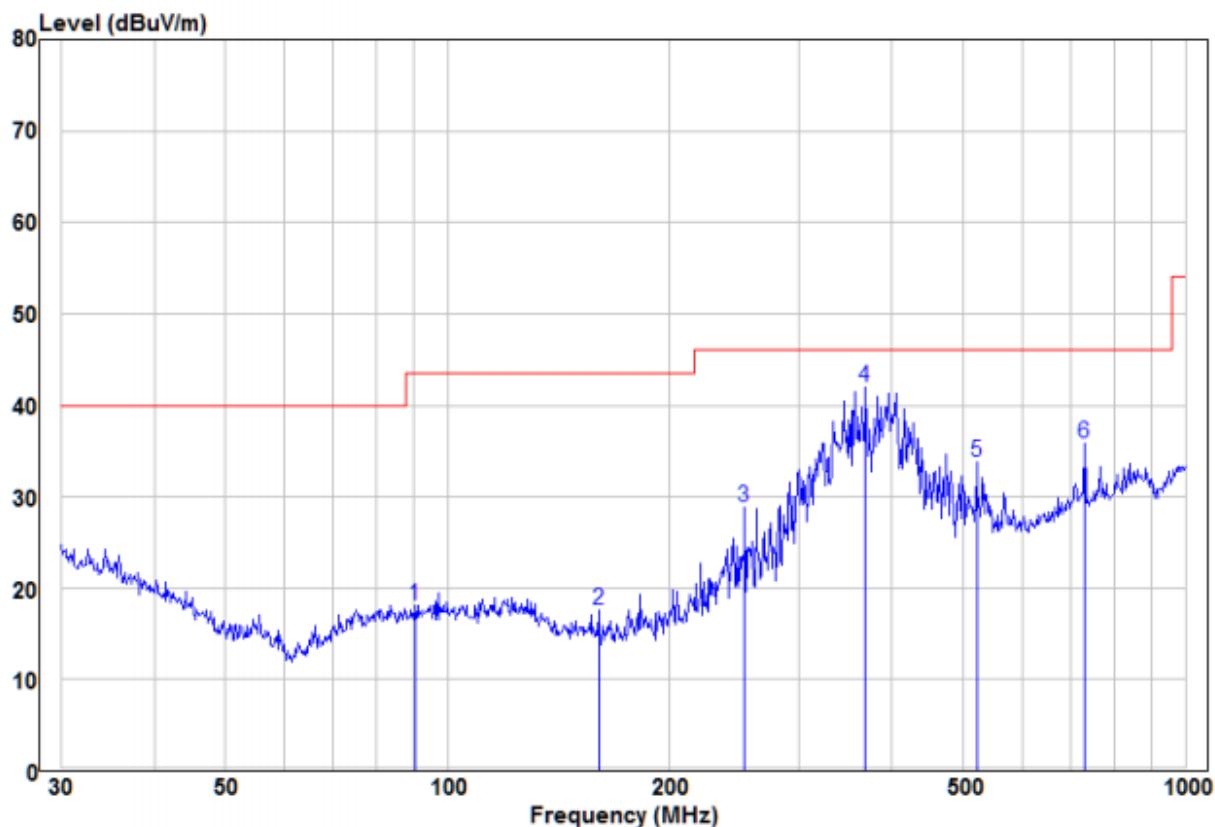

Freq	Read		Limit		Over Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m				
1	90.22	8.14	10.03	18.17	43.50	-25.33	Peak	VERTICAL
2	160.35	9.84	7.78	17.62	43.50	-25.88	Peak	VERTICAL
3	252.95	16.62	12.18	28.80	46.00	-17.20	Peak	VERTICAL
4 pp	368.11	26.55	15.39	41.94	46.00	-4.06	Peak	VERTICAL
5	520.89	15.28	18.50	33.78	46.00	-12.22	Peak	VERTICAL
6	729.36	14.53	21.29	35.82	46.00	-10.18	Peak	VERTICAL

30MHz~1GHz (the worst case)

Test mode:	Transmitting (Highest channel)	Horizontal
------------	--------------------------------	------------

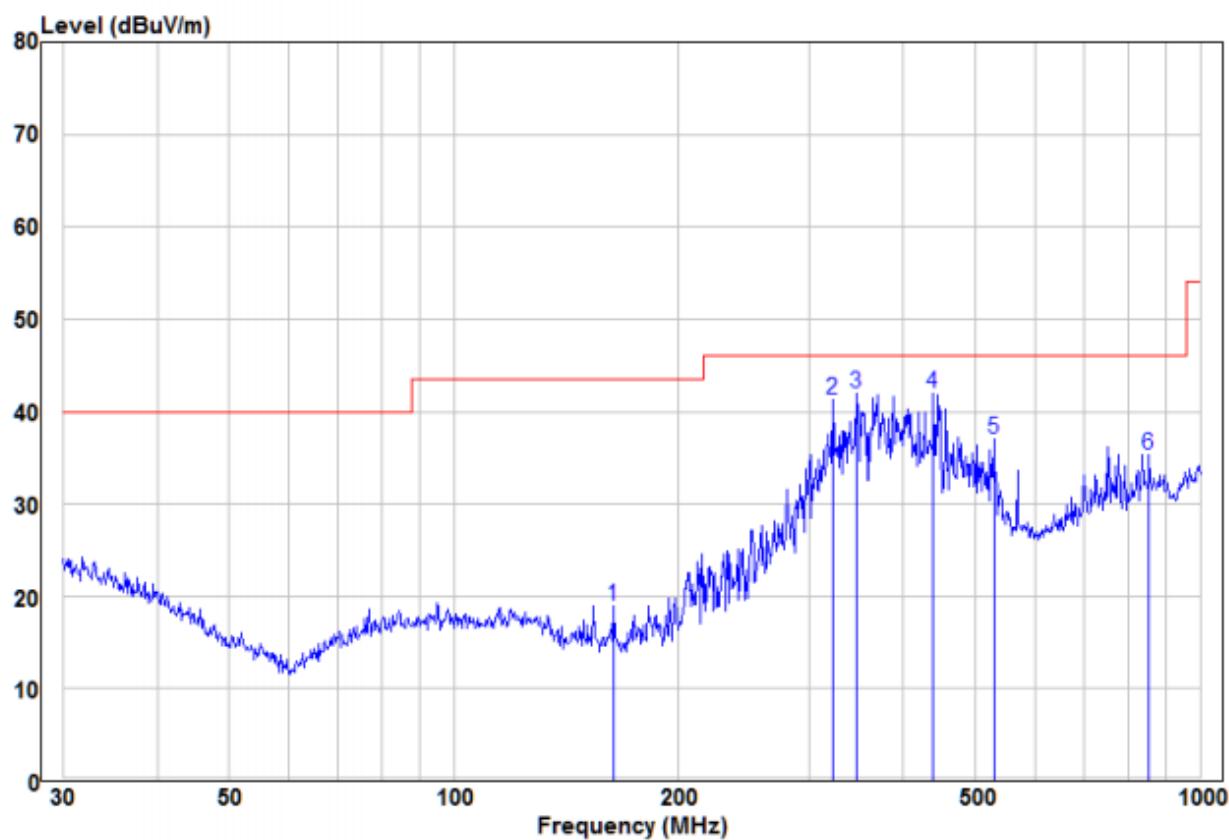


Freq	Read		Limit		Over		Pol/Phase	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	163.76	11.28	7.72	19.00	43.50	-24.50	Peak	HORIZONTAL
2	322.19	26.99	14.27	41.26	46.00	-4.74	Peak	HORIZONTAL
3	346.81	27.05	14.88	41.93	46.00	-4.07	Peak	HORIZONTAL
4 pp	438.66	25.58	16.37	41.95	46.00	-4.05	Peak	HORIZONTAL
5	528.25	18.37	18.57	36.94	46.00	-9.06	Peak	HORIZONTAL
6	854.02	11.27	24.04	35.31	46.00	-10.69	Peak	HORIZONTAL

Above 1GHz							
Test mode:		Transmitting		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
4816	56.26	-4.28	51.98	74	-22.02	Peak	H
4816	42.48	-4.28	38.20	54	-15.80	AVG	H
7224	52.57	1.13	53.70	74	-20.30	Peak	H
7224	38.33	1.13	39.46	54	-14.54	AVG	H
4816	55.05	-4.28	50.77	74	-23.23	peak	V
4816	42.83	-4.28	38.55	54	-15.45	AVG	V
7224	53.53	1.13	54.66	74	-19.34	peak	V
7224	36.97	1.13	38.10	54	-15.90	AVG	V
Test mode:		Transmitting		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
4880	56.57	-4.14	52.43	74	-21.57	peak	H
4880	43.62	-4.14	39.48	54	-14.52	AVG	H
7320	52.84	0.56	53.40	74	-20.60	peak	H
7320	37.16	0.56	37.72	54	-16.28	AVG	H
4880	54.88	-4.14	50.74	74	-23.26	peak	V
4880	42.78	-4.14	38.64	54	-15.36	AVG	V
7320	53.54	0.56	54.10	74	-19.90	peak	V
7320	36.44	0.56	37.00	54	-17.00	AVG	V
Test mode:		Transmitting		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)		H/V
4948	56.08	-4.03	52.05	74	-21.95	peak	H
4948	42.66	-4.03	38.63	54	-15.37	AVG	H
7422	52.95	1.68	54.63	74	-19.37	peak	H
7422	37.22	1.68	38.90	54	-15.10	AVG	H
4948	56.32	-4.03	52.29	74	-21.71	peak	V
4948	41.33	-4.03	37.30	54	-16.70	AVG	V
7422	51.39	1.68	53.07	74	-20.93	peak	V
7422	38.60	1.68	40.28	54	-13.72	AVG	V

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 8GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

6.3 20dB Bandwidth

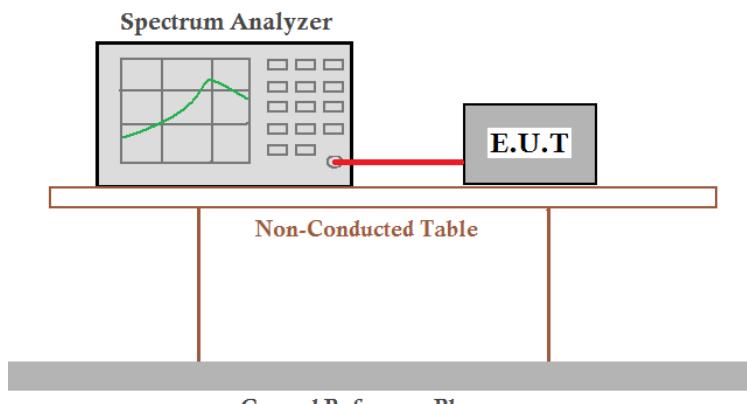
Test Requirement:	47 CFR Part 15C Section 15.215
Test Method:	ANSI C63.10:2013
Test Setup:	<p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
Test Mode:	Transmitting with FSK at lowest, middle and highest channel.
Limit:	N/A
Test Results:	Pass

Measurement Data

Test channel	20dB bandwidth (MHz)	Results
Lowest	1.37	Pass
Middle	1.23	Pass
Highest	1.24	Pass


Test plot as follows:

Test channel: Lowest

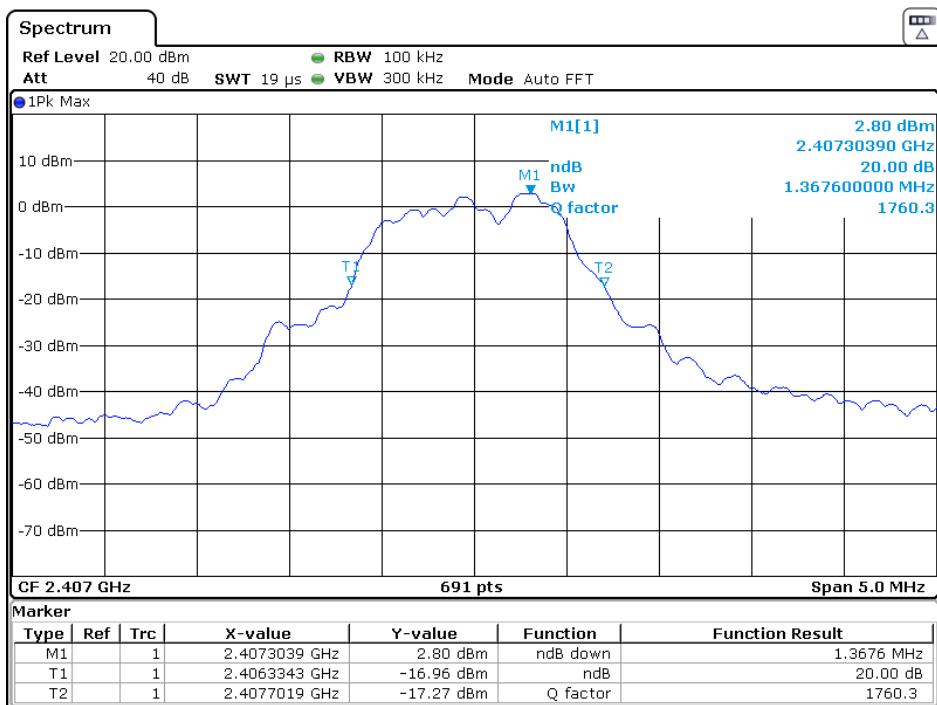


Date: 28 APR 2021 03:21:40

Test channel: Middle

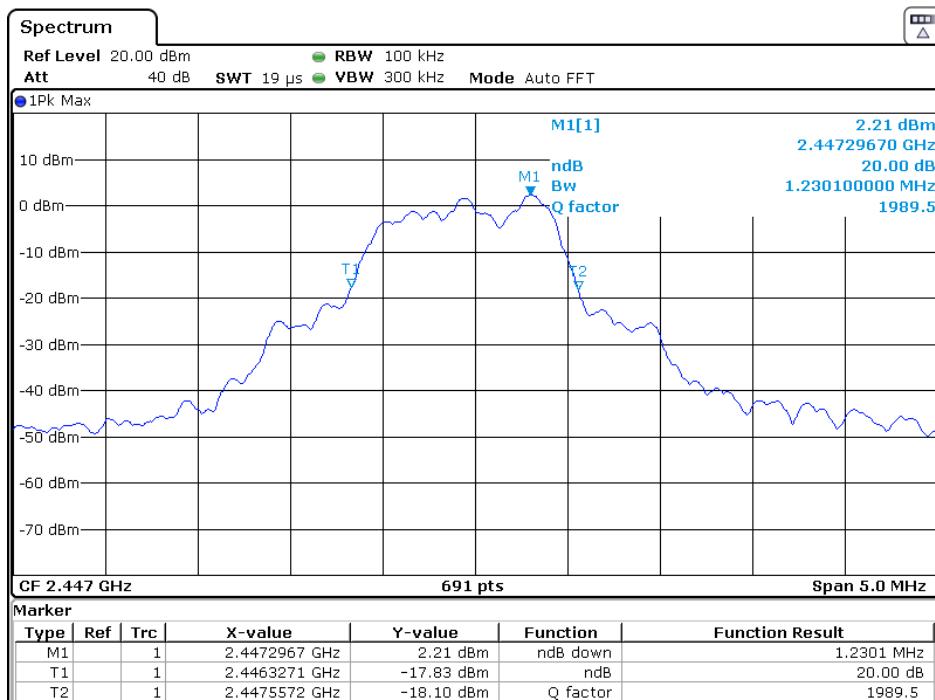

Date: 28 APR 2021 03:28:56

Test channel: Highest

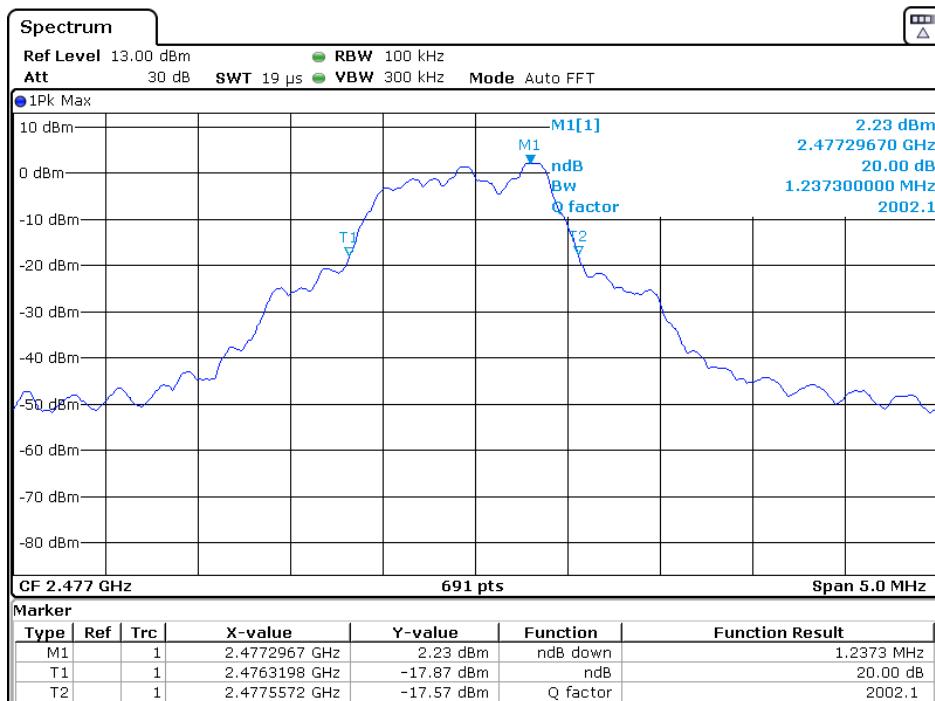

Date: 28 APR 2021 03:35:11

7 Photographs

7.1 Radiated Emission Test Setup


30MHz~1GHz:



Above 1GHz:



9kHz~30MHz

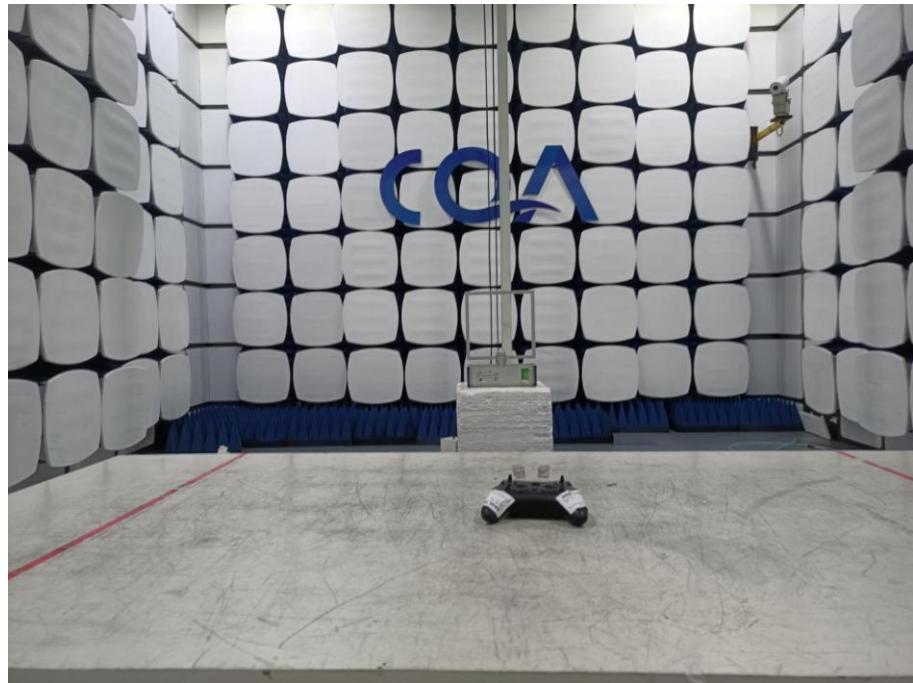



7.2 EUT Constructional Details







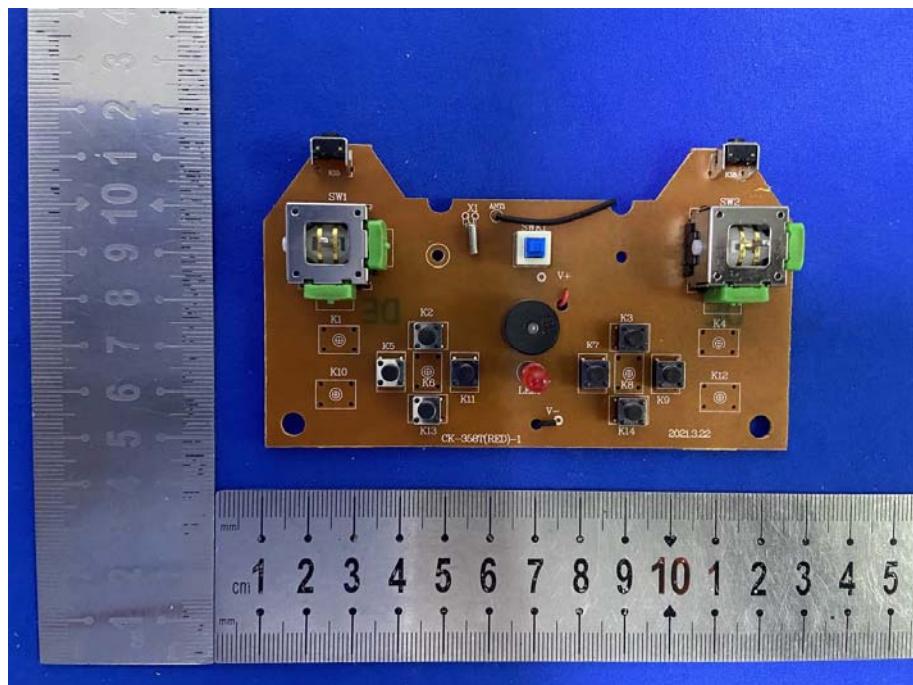

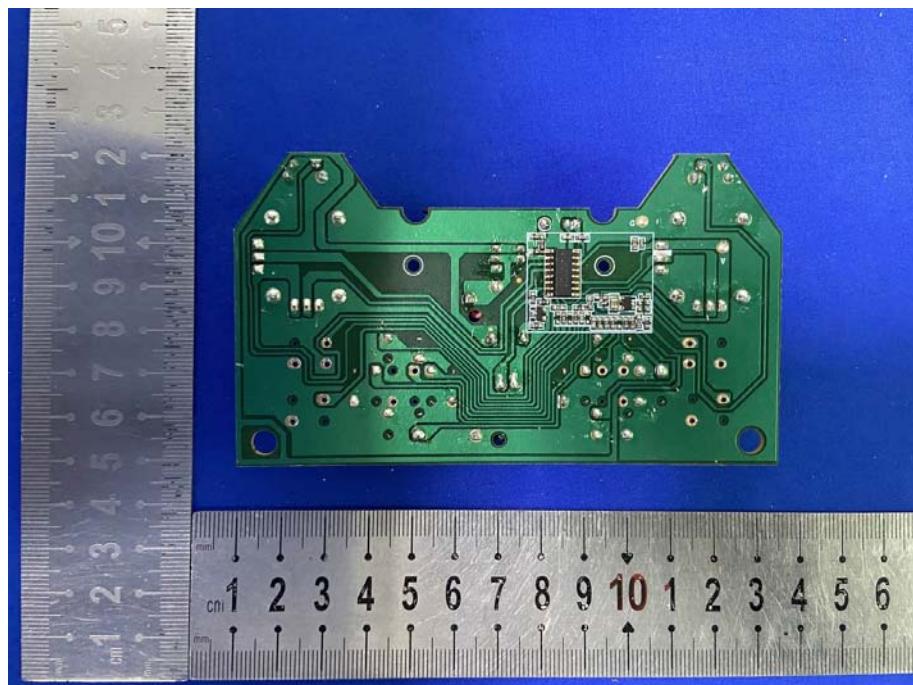

END OF THE REPORT