

EMC TEST REPORT



Report No.: 17070850-FCC-E

Supersede Report No: N/A

Applicant	Wheredouwannago.com LLC	
Product Name	Census Smart Counter	
Model No.	CSC1	
Serial No.	CSC2	
Test Standard	FCC Part 15 Subpart B Class B:2016, ANSI C63.4: 2014	
Test Date	September 14 to October 19, 2017	
Issue Date	October 20, 2017	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification ☒		
Equipment did not comply with the specification ☐		
<i>Evans He</i>	<i>David Huang</i>	
Evans He Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	17070850-FCC-E
Page	3 of 36

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 AC POWER LINE CONDUCTED EMISSIONS.....	9
6.2 RADIATED EMISSIONS.....	15
ANNEX A. TEST INSTRUMENT.....	20
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	21
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	32
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	35
ANNEX E. DECLARATION OF SIMILARITY	36

1. Report Revision History

Report No.	Report Version	Description	Issue Date
17070850-FCC-E	NONE	Original	October 20, 2017

2. Customer information

Applicant Name	Wheredouwannago.com LLC
Applicant Add	521 Garner Park Dr, Georgetown, TX 78628 USA
Manufacturer	Shenzhen ALMsound Technology Ltd
Manufacturer Add	C802 Yinxing Hi-Tech Building, Guanguang Rd, Guanlan St, Longhua Dist, Shenzhen China

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	535293
IC Test Site No.	4842E-1
Test Software of Radiated Emission	Radiated Emission Program-To Shenzhen v2.0
Test Software of Conducted Emission	EZ-EMC(ver.lcp-03A1)

4. Equipment under Test (EUT) Information

Description of EUT:	Census Smart Counter
Main Model:	CSC1
Serial Model:	CSC2
Antenna Gain:	GSM850: 0.5dBi PCS1900: 0.5dBi UMTS-FDD Band V: 0.5dBi UMTS-FDD Band II: 0.5dBi WIFI: 0dBi Bluetooth/BLE: 0dBi
Antenna Type:	PIFA Antenna
Input Power:	Adapter: Model: TBA0050500100VU-U Input: AC100-240V~50/60Hz,150mA Output: DC5V~1000mA Battery: Spec: 1800~1850mAh Charger Voltage: 4.35~5V
Equipment Category :	JBP
Type of Modulation:	GSM / GPRS: GMSK UMTS-FDD: QPSK 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, π /4DQPSK, 8DPSK BLE: GFSK

RF Operating Frequency (ies): GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;
RX: 1932.4 ~ 1987.6 MHz
WIFI: 802.11b/g/n(20M): 2412-2462 MHz
WIFI: 802.11n(40M): 2422-2452 MHz
Bluetooth& BLE: 2402-2480 MHz

Number of Channels: GSM 850: 124CH
PCS1900: 299CH
UMTS-FDD Band V: 102CH
UMTS-FDD Band II: 277CH
WIFI :802.11b/g/n(20M): 11CH
WIFI :802.11n(40M): 7CH
Bluetooth: 79CH
BLE: 40CH

Port: USB Port

Trade Name : N/A

FCC ID: 2ANOB001

Date EUT received: September 13, 2017

Test Date(s): September 14 to October 19, 2017

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

Measurement Uncertainty

Parameter	Uncertainty
AC Power Line Conducted Emissions (150kHz~30MHz)	±3.11dB
Radiated Emission(30MHz~1GHz)	±5.12dB
Radiated Emission(1GHz~6GHz)	±5.34dB


6. Measurements, Examination And Derived Results

6.1 AC Power Line Conducted Emissions

Temperature	26°C
Relative Humidity	57%
Atmospheric Pressure	1025mbar
Test date :	September 25, 2017
Tested By :	Evans He

Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.107	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.															
		<table><tr><th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBµV)</th></tr><tr><th>QP</th><th>Average</th></tr><tr><td>0.15 ~ 0.5</td><td>66 – 56</td><td>56 – 46</td></tr><tr><td>0.5 ~ 5</td><td>56</td><td>46</td></tr><tr><td>5 ~ 30</td><td>60</td><td>50</td></tr></table>		Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBµV)												
				QP	Average												
		0.15 ~ 0.5		66 – 56	56 – 46												
		0.5 ~ 5		56	46												
5 ~ 30	60	50															

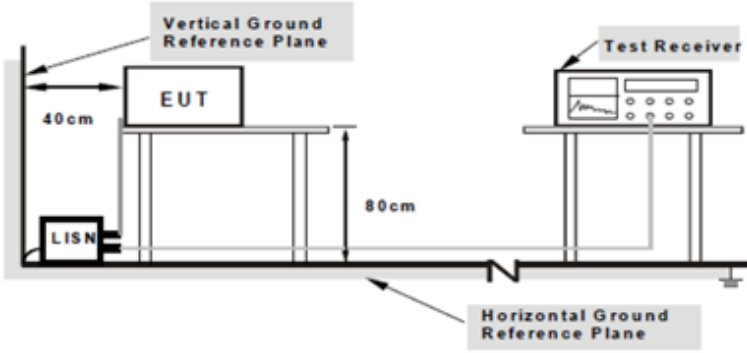Test Setup	 Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.
------------	---


Procedure	- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. - The power supply for the EUT was fed through a 50Ω /50mH EUT LISN, connected to filtered mains.
-----------	--

	3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Mode : USB Mode

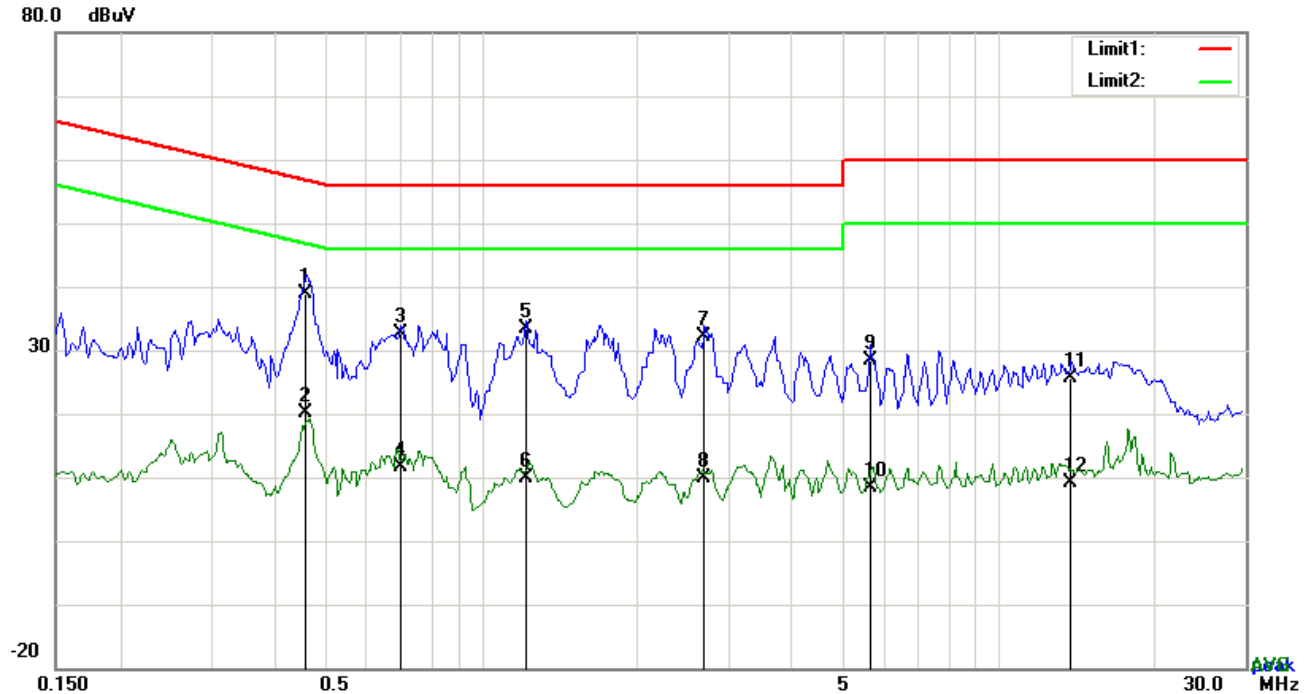


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.4581	28.81	QP	10.03	38.84	56.73	-17.89
2	L1	0.4581	10.00	AVG	10.03	20.03	46.73	-26.70
3	L1	0.6999	22.67	QP	10.03	32.70	56.00	-23.30
4	L1	0.6999	1.70	AVG	10.03	11.73	46.00	-34.27
5	L1	1.2186	23.24	QP	10.03	33.27	56.00	-22.73
6	L1	1.2186	-0.15	AVG	10.03	9.88	46.00	-36.12
7	L1	2.6928	22.14	QP	10.05	32.19	56.00	-23.81
8	L1	2.6928	-0.05	AVG	10.05	10.00	46.00	-36.00
9	L1	5.6403	18.41	QP	10.09	28.50	60.00	-31.50
10	L1	5.6403	-1.76	AVG	10.09	8.33	50.00	-41.67
11	L1	13.8225	15.44	QP	10.21	25.65	60.00	-34.35
12	L1	13.8225	-0.98	AVG	10.21	9.23	50.00	-40.77

Test Mode: USB Mode

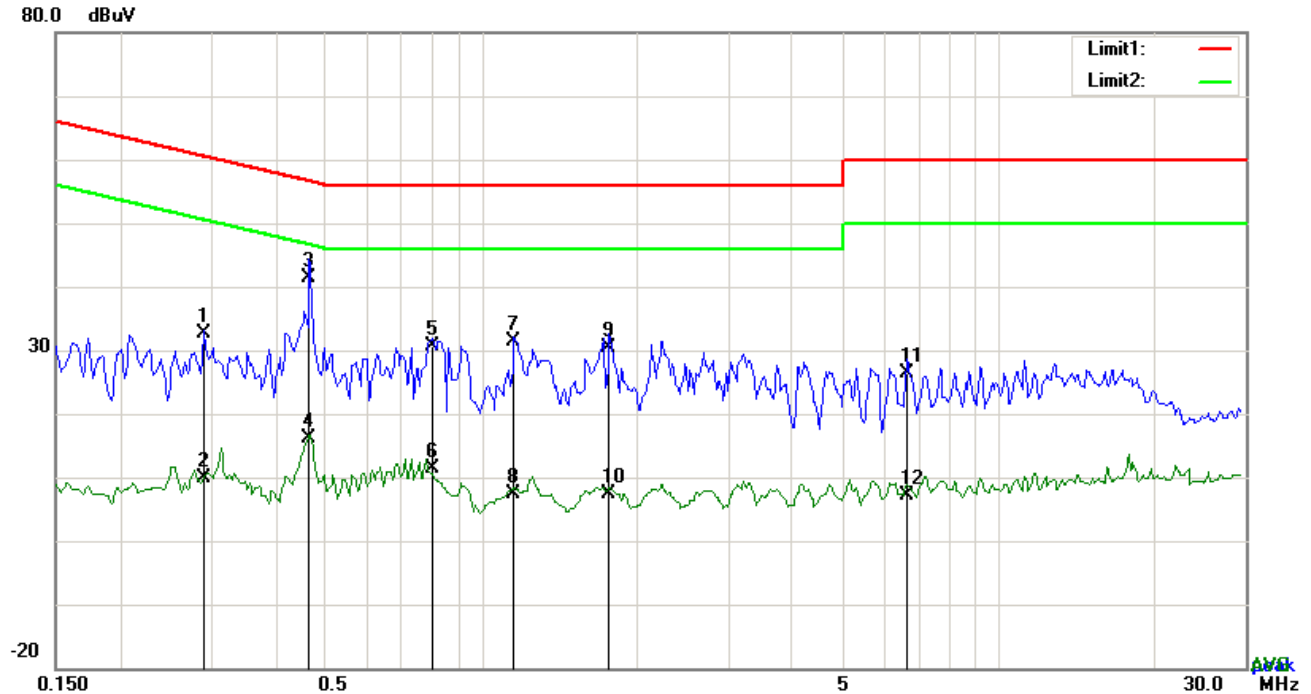


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.2904	22.49	QP	10.02	32.51	60.51	-28.00
2	N	0.2904	-0.03	AVG	10.02	9.99	50.51	-40.52
3	N	0.4659	31.33	QP	10.02	41.35	56.59	-15.24
4	N	0.4659	6.23	AVG	10.02	16.25	46.59	-30.34
5	N	0.8052	20.56	QP	10.03	30.59	56.00	-25.41
6	N	0.8052	1.36	AVG	10.03	11.39	46.00	-34.61
7	N	1.1562	21.29	QP	10.03	31.32	56.00	-24.68
8	N	1.1562	-2.73	AVG	10.03	7.30	46.00	-38.70
9	N	1.7685	20.31	QP	10.04	30.35	56.00	-25.65
10	N	1.7685	-2.73	AVG	10.04	7.31	46.00	-38.69
11	N	6.6387	16.34	QP	10.09	26.43	60.00	-33.57
12	N	6.6387	-2.89	AVG	10.09	7.20	50.00	-42.80

Test Mode : USB Mode

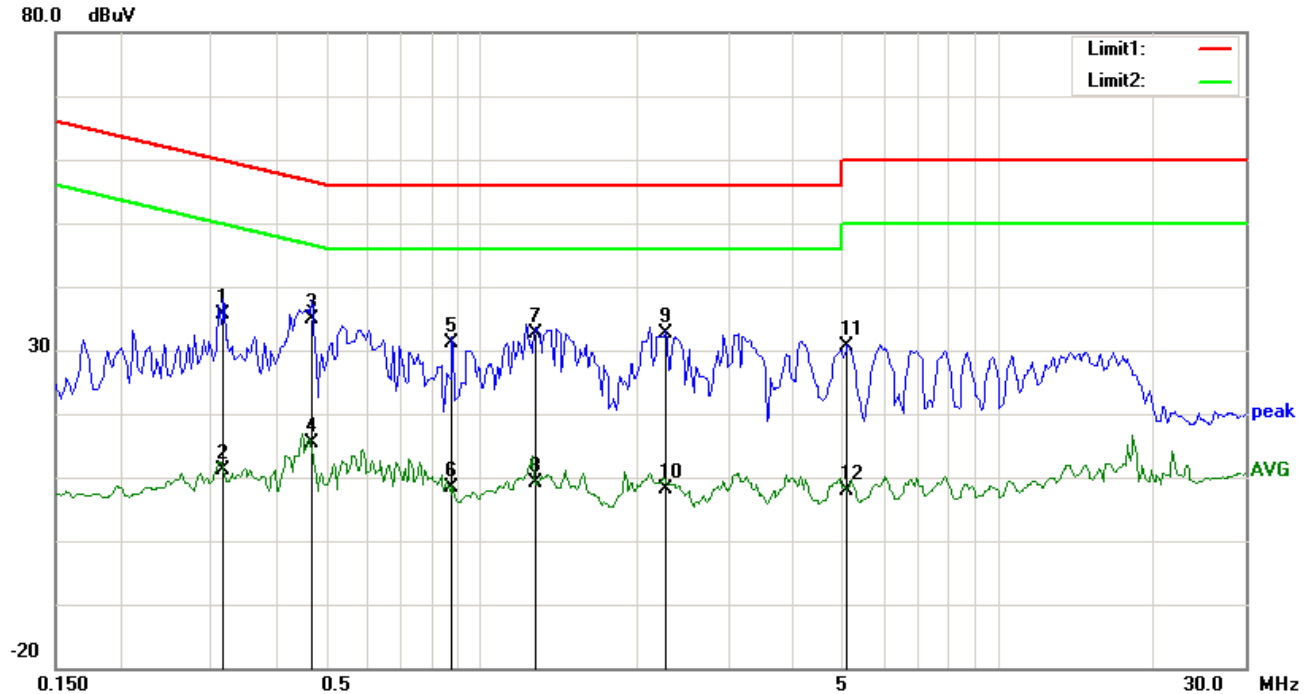


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	L1	0.3177	25.53	QP	10.03	35.56	59.77	-24.21
2	L1	0.3177	1.21	AVG	10.03	11.24	49.77	-38.53
3	L1	0.4698	24.94	QP	10.03	34.97	56.52	-21.55
4	L1	0.4698	5.32	AVG	10.03	15.35	46.52	-31.17
5	L1	0.8793	21.15	QP	10.03	31.18	56.00	-24.82
6	L1	0.8793	-1.61	AVG	10.03	8.42	46.00	-37.58
7	L1	1.2693	22.72	QP	10.03	32.75	56.00	-23.25
8	L1	1.2693	-0.97	AVG	10.03	9.06	46.00	-36.94
9	L1	2.2755	22.50	QP	10.05	32.55	56.00	-23.45
10	L1	2.2755	-1.90	AVG	10.05	8.15	46.00	-37.85
11	L1	5.0865	20.61	QP	10.08	30.69	60.00	-29.31
12	L1	5.0865	-2.13	AVG	10.08	7.95	50.00	-42.05

Test Mode : USB Mode

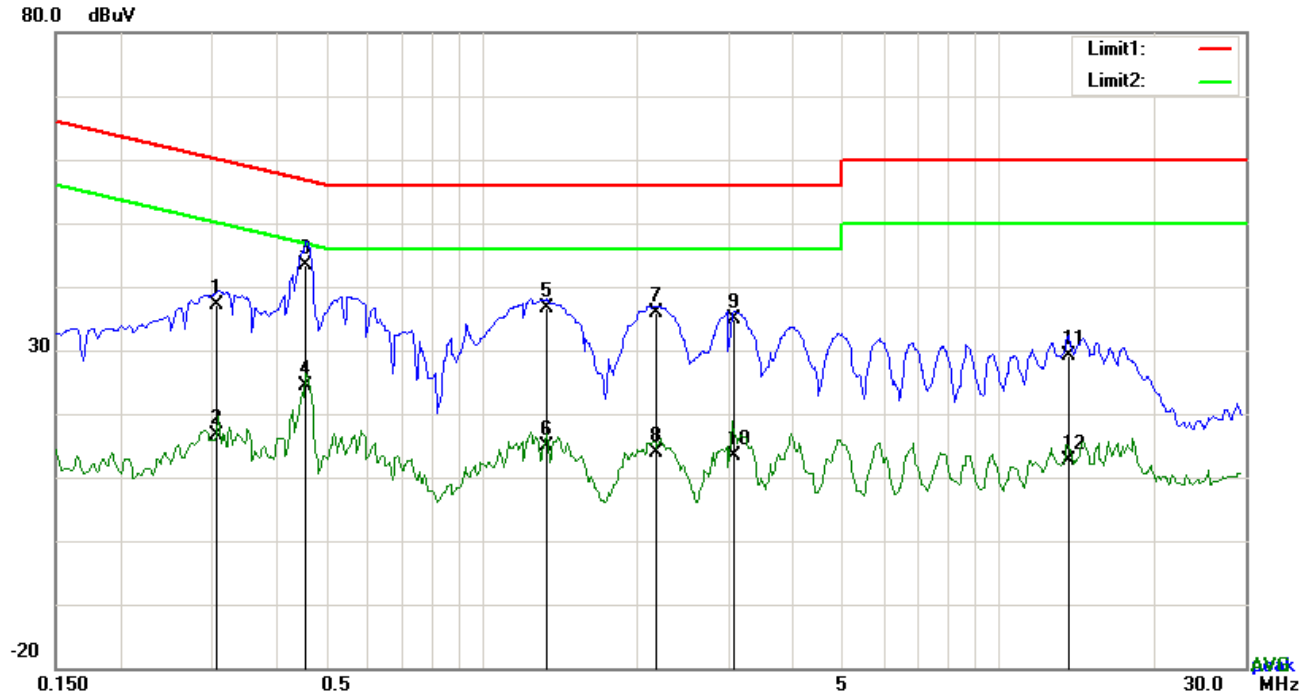

Test Data

Phase Neutral Plot at 240Vac, 60Hz


No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	N	0.3067	27.10	QP	10.02	37.12	60.06	-22.94
2	N	0.3067	6.53	AVG	10.02	16.55	50.06	-33.51
3	N	0.4581	33.44	QP	10.02	43.46	56.73	-13.27
4	N	0.4581	14.36	AVG	10.02	24.38	46.73	-22.35
5	N	1.3395	26.67	QP	10.03	36.70	56.00	-19.30
6	N	1.3395	4.76	AVG	10.03	14.79	46.00	-31.21
7	N	2.1819	25.92	QP	10.04	35.96	56.00	-20.04
8	N	2.1819	3.94	AVG	10.04	13.98	46.00	-32.02
9	N	3.0741	24.94	QP	10.05	34.99	56.00	-21.01
10	N	3.0741	3.29	AVG	10.05	13.34	46.00	-32.66
11	N	13.6314	18.88	QP	10.18	29.06	60.00	-30.94
12	N	13.6314	2.46	AVG	10.18	12.64	50.00	-37.36

6.2 Radiated Emissions

Temperature	26°C
Relative Humidity	57%
Atmospheric Pressure	1025mbar
Test date :	September 25, 2017
Tested By :	Evans He

Requirement(s):

Spec	Item	Requirement	Applicable	
47CFR§15.109(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges		
		Frequency range (MHz)		Field Strength (µV/m)
		30 – 88		100
		88 – 216		150
		216 - 960		200
		Above 960		500

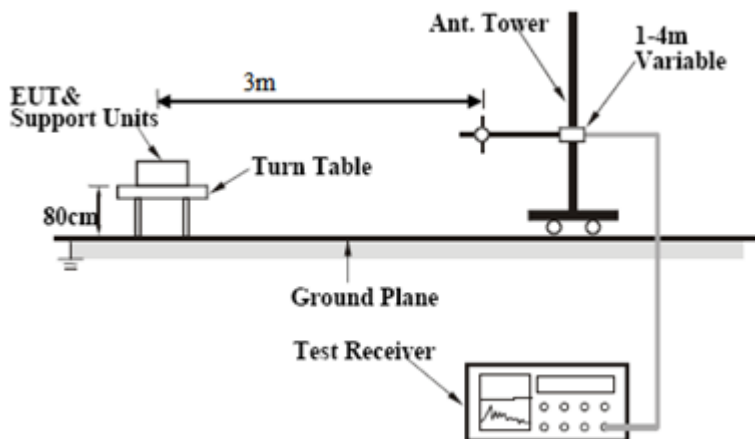Test Setup	
------------	--

Procedure	- The EUT was switched on and allowed to warm up to its normal operating condition. - The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: - Vertical or horizontal polarization (whichever gave the higher emission level
-----------	--

	over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz. 4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz. ■ 1 kHz (Duty cycle < 98%) □ 10 Hz (Duty cycle > 98%) 5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	
Result	☒ Pass ☐ Fail


Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Mode : USB Mode

Below 1GHz

80.0 dBuV/m

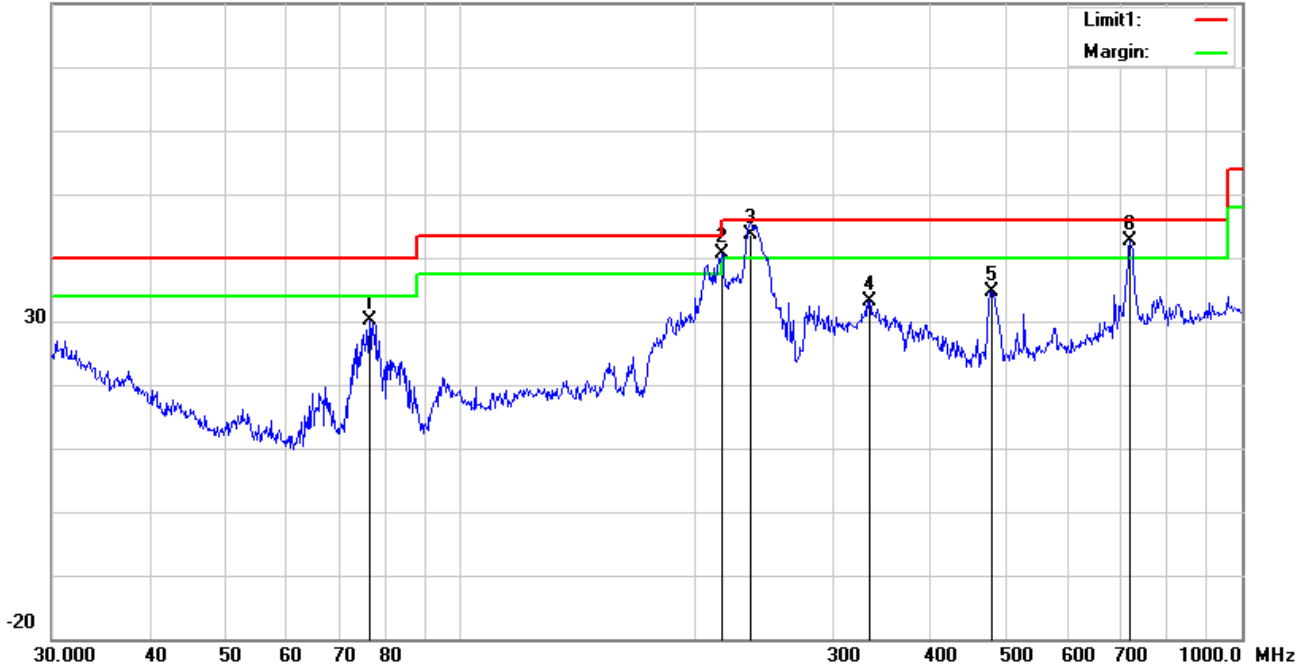


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	H	76.5121	43.78	peak	7.67	22.41	0.99	30.03	40.00	-9.97	100	11
2	H	216.0240	49.48	QP	11.88	22.35	1.59	40.60	46.00	-5.40	200	99
3	H	234.9909	52.57	QP	11.61	22.32	1.65	43.51	46.00	-2.49	100	218
4	H	333.6867	39.17	peak	14.31	22.20	1.96	33.24	46.00	-12.76	100	195
5	H	478.8456	36.84	peak	17.28	21.85	2.30	34.57	46.00	-11.43	100	93
6	H	719.1995	40.83	QP	20.43	21.32	2.67	42.61	46.00	-3.39	100	50

Below 1GHz

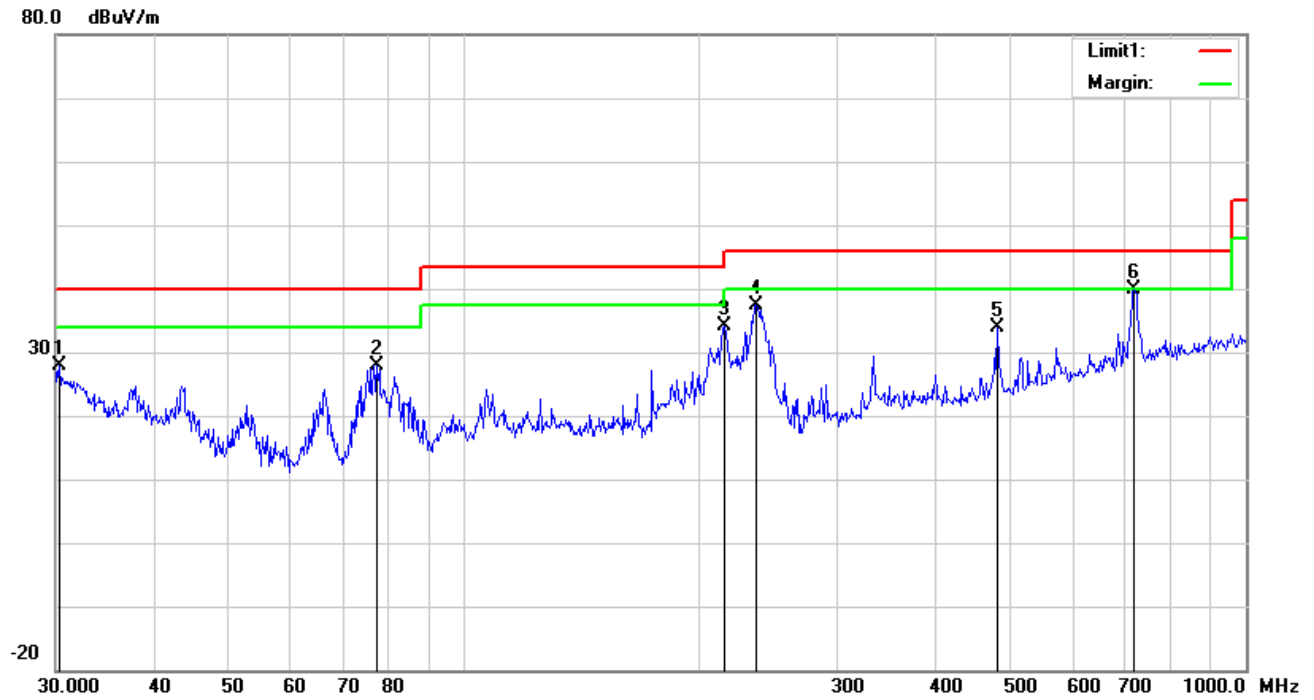

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	V	30.3173	28.29	peak	21.16	22.28	0.63	27.80	40.00	-12.20	200	319
2	V	77.3212	41.58	peak	7.65	22.41	1.00	27.82	40.00	-12.18	100	18
3	V	215.2678	42.91	peak	11.89	22.35	1.59	34.04	43.50	-9.46	100	50
4	V	236.6447	46.41	peak	11.59	22.31	1.66	37.35	46.00	-8.65	100	281
5	V	480.5276	36.17	peak	17.31	21.85	2.31	33.94	46.00	-12.06	100	20
6	V	719.1995	38.00	QP	20.43	21.32	2.67	39.78	46.00	-6.22	100	263

Above 1GHz

Frequency (MHz)	Read_level (dBμV/m)	Azimuth	Height (cm)	Polarity (H/V)	Level (dBμV/m)	Factors (dB)	Limit (dBμV/m)	Margin (dB)	Detector (PK/AV)
1456.2	65.09	201	100	V	-18.97	46.12	74	-27.88	PK
1689.7	62.88	164	100	V	-17.51	45.37	74	-28.63	PK
2218.4	62.44	113	100	V	-14.19	48.25	74	-25.75	PK
1546.8	61.71	197	100	H	-18.52	43.19	74	-30.81	PK
1833.9	58.73	205	100	H	-15.98	42.75	74	-31.25	PK
2465.1	54.03	114	100	H	-13.7	40.33	74	-33.67	PK

*Note1: The highest frequency of the EUT is 2480 MHz, so the testing has been conformed to 5*2480MHz=12,400MHz.*

Note2: The frequency that above 3GHz is mainly from the environment noise.

Note3: The AV measurement performed, more than 20dB below limit so AV test data was not presented.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted Emissions					
EMI test receiver	ESCS30	8471241027	09/15/2017	09/14/2018	☒
Line Impedance Stabilization Network	LI-125A	191106	09/23/2017	09/22/2018	☒
Line Impedance Stabilization Network	LI-125A	191107	09/23/2017	09/22/2018	☒
ISN	ISN T800	34373	09/23/2017	09/22/2018	☒
Transient Limiter	LIT-153	531118	08/30/2017	08/29/2018	☒
Radiated Emissions					
EMI test receiver	ESL6	100262	09/15/2017	09/14/2018	☒
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/30/2017	08/29/2018	☒
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	☒
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/19/2017	09/18/2018	☒
Double Ridge Horn Antenna	AH-118	71259	09/22/2017	09/21/2018	☒

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

Whole Package View



Adapter - Lable View



EUT - Front View



EUT - Rear View



EUT - Top View



EUT - Bottom View



EUT - Left View



EUT - Right View



Annex B.ii. Photograph: EUT Internal Photo


Cover Off - Top View 1




Cover Off - Top View 2




Battery - Front View

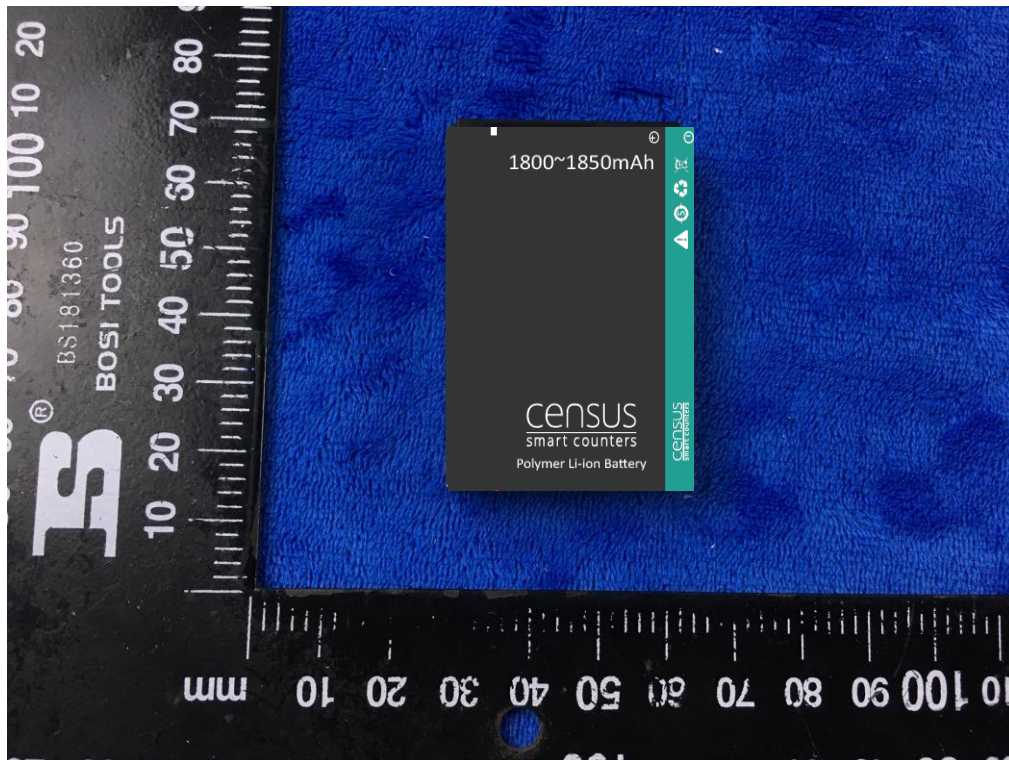


Battery - Rear View

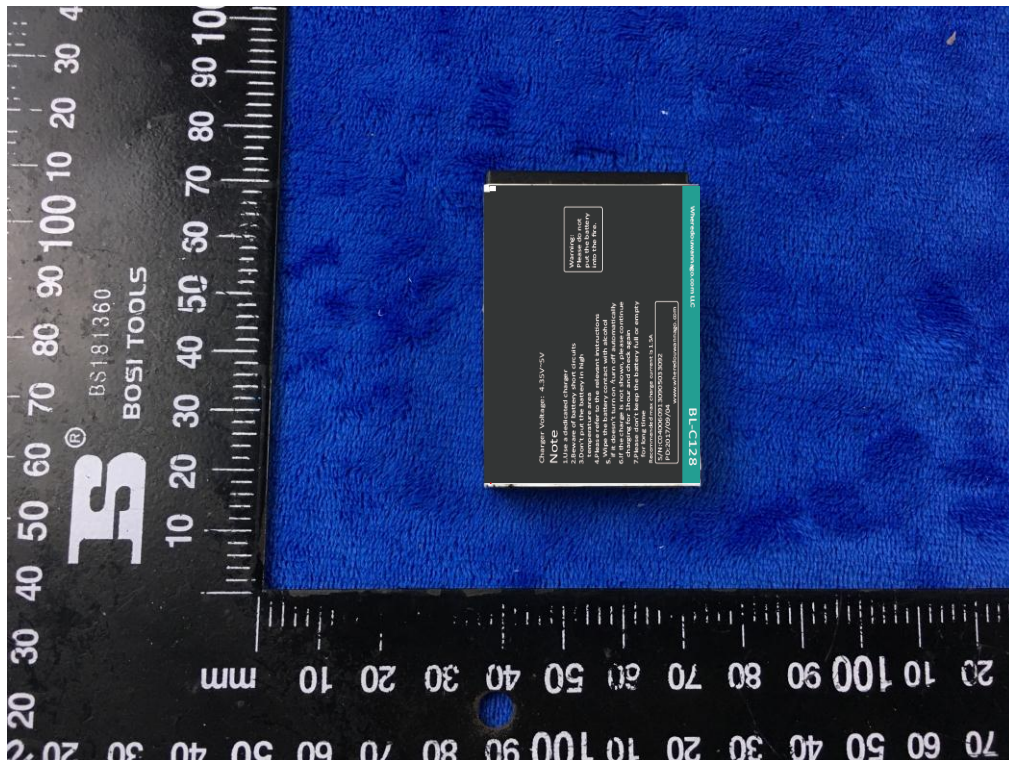


Mainboard with Shielding - Front View

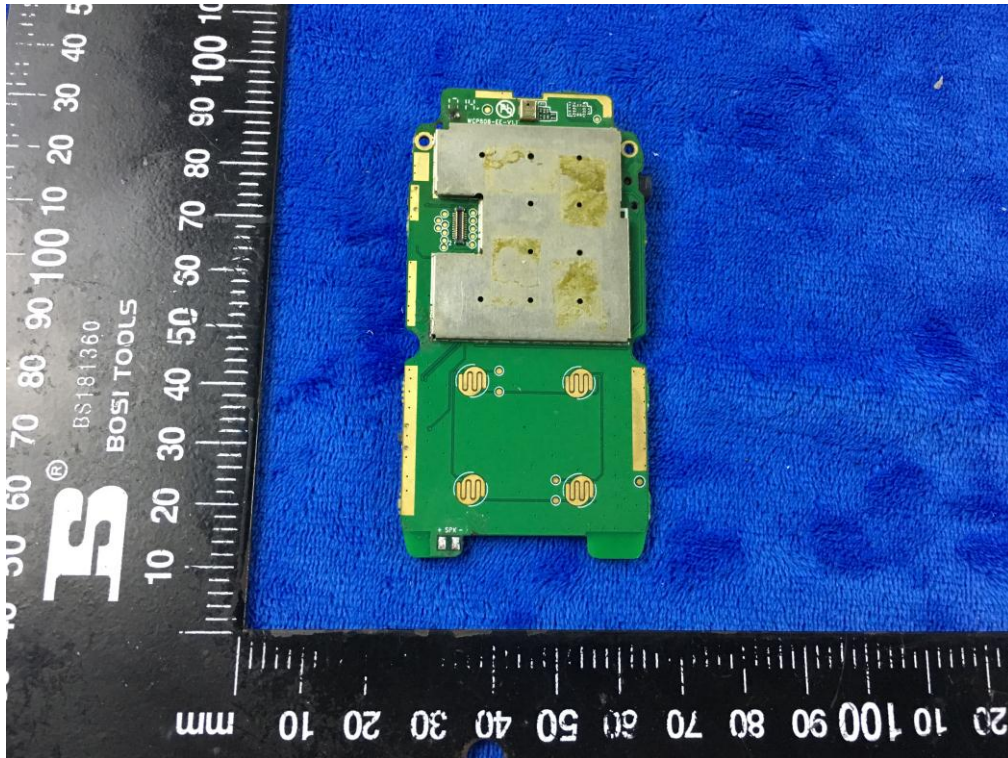


Mainboard without Shielding - Front View

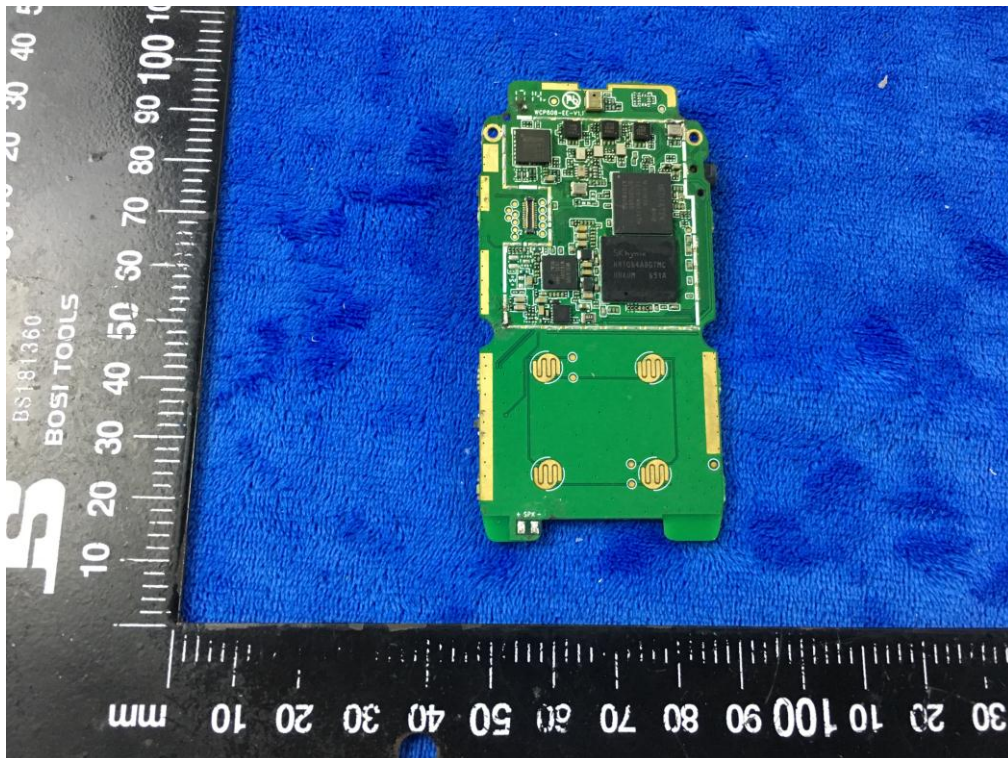


Mainboard – Rear View

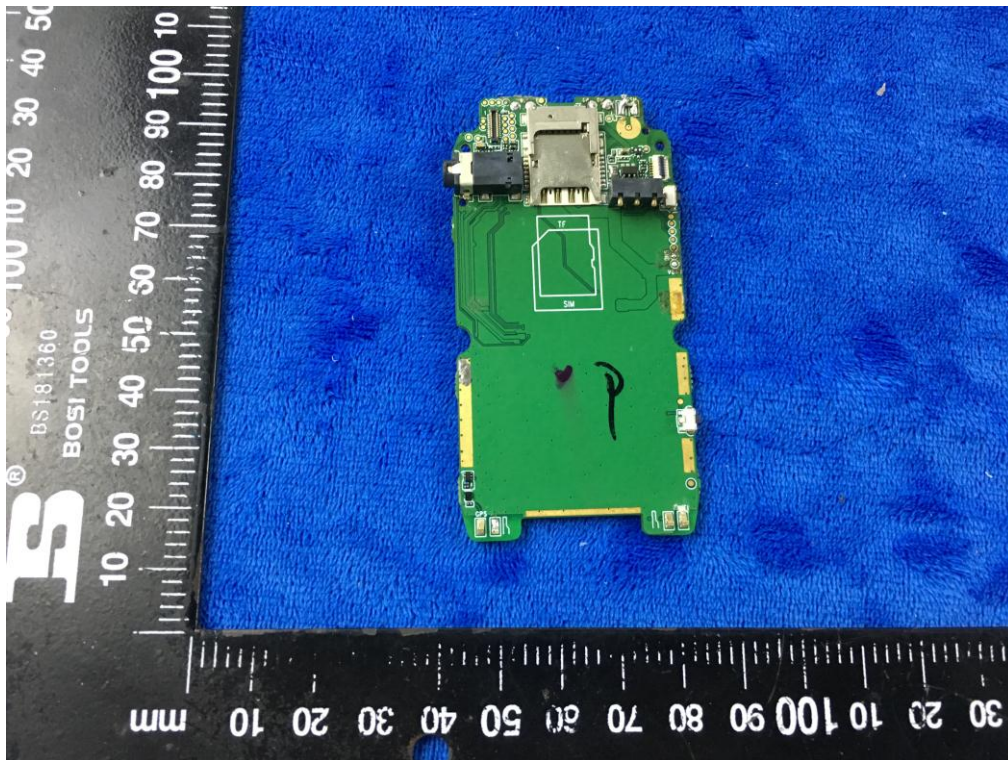


LCD – Front View

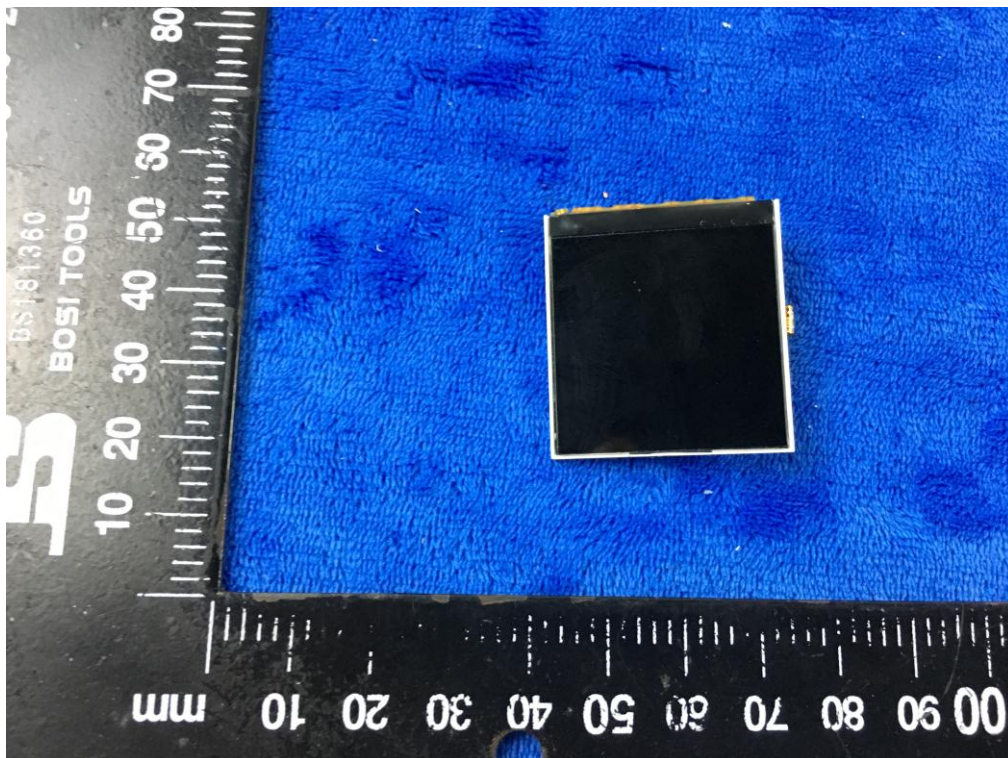

LCD – Rear View

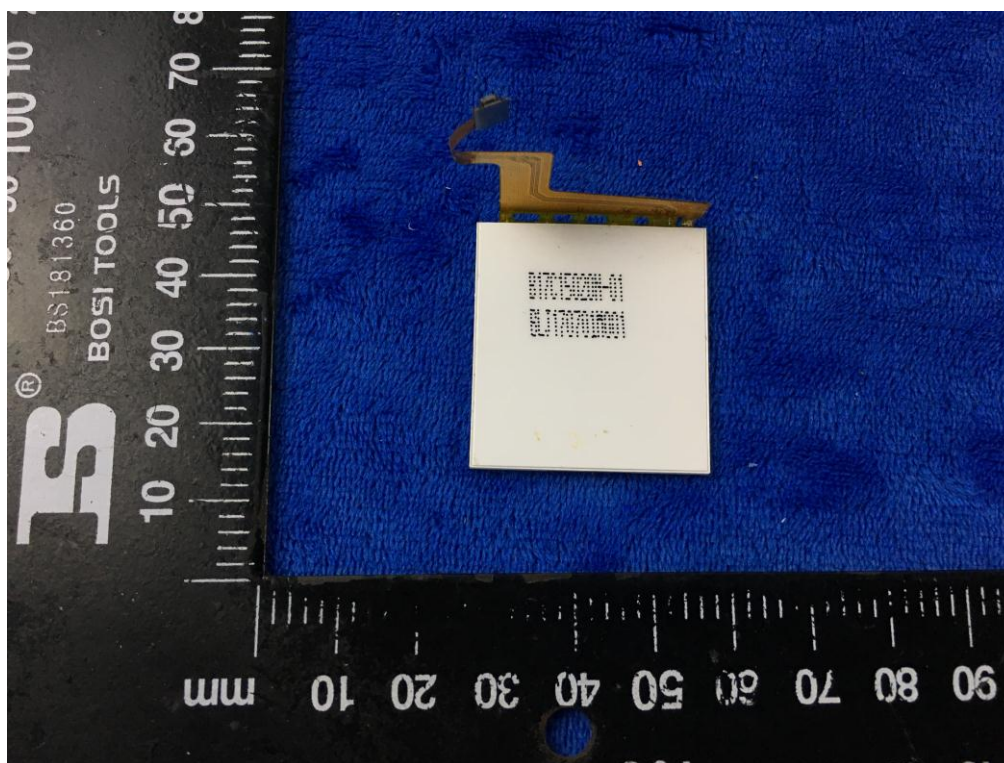

GSM/PCS/UMTS-FDD Antenna View

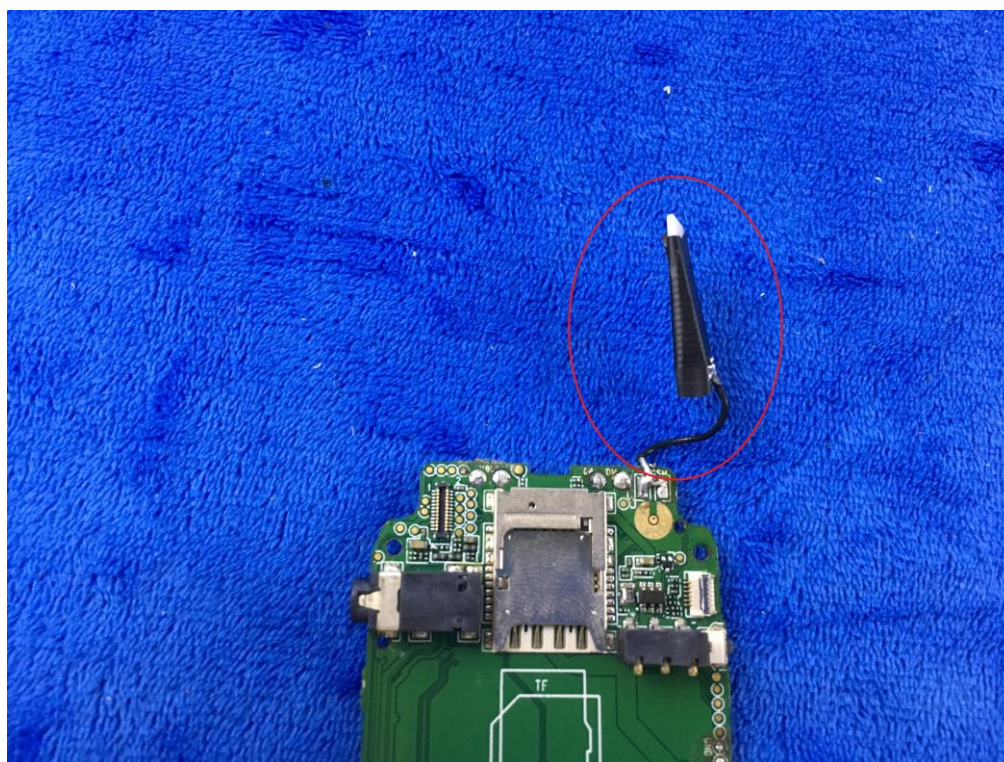


WIFI/BT/BLE - Antenna View




Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup – Front View

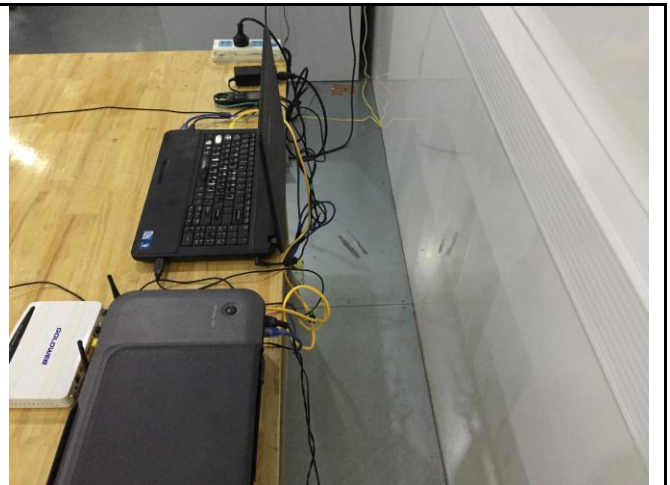

Conducted Emissions Test Setup – Side View

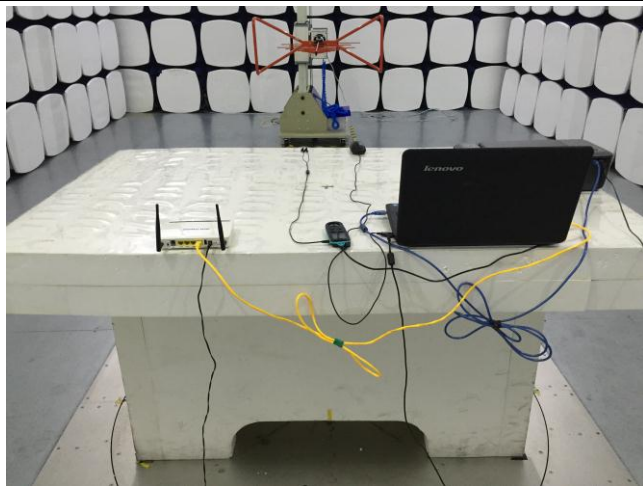

Radiated Emissions Test Setup Below 1GHz

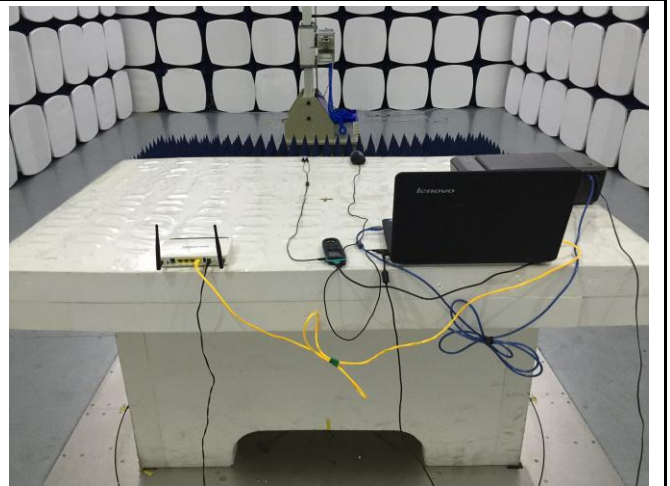


Radiated Emissions Test Setup Above 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Conducted Emissions

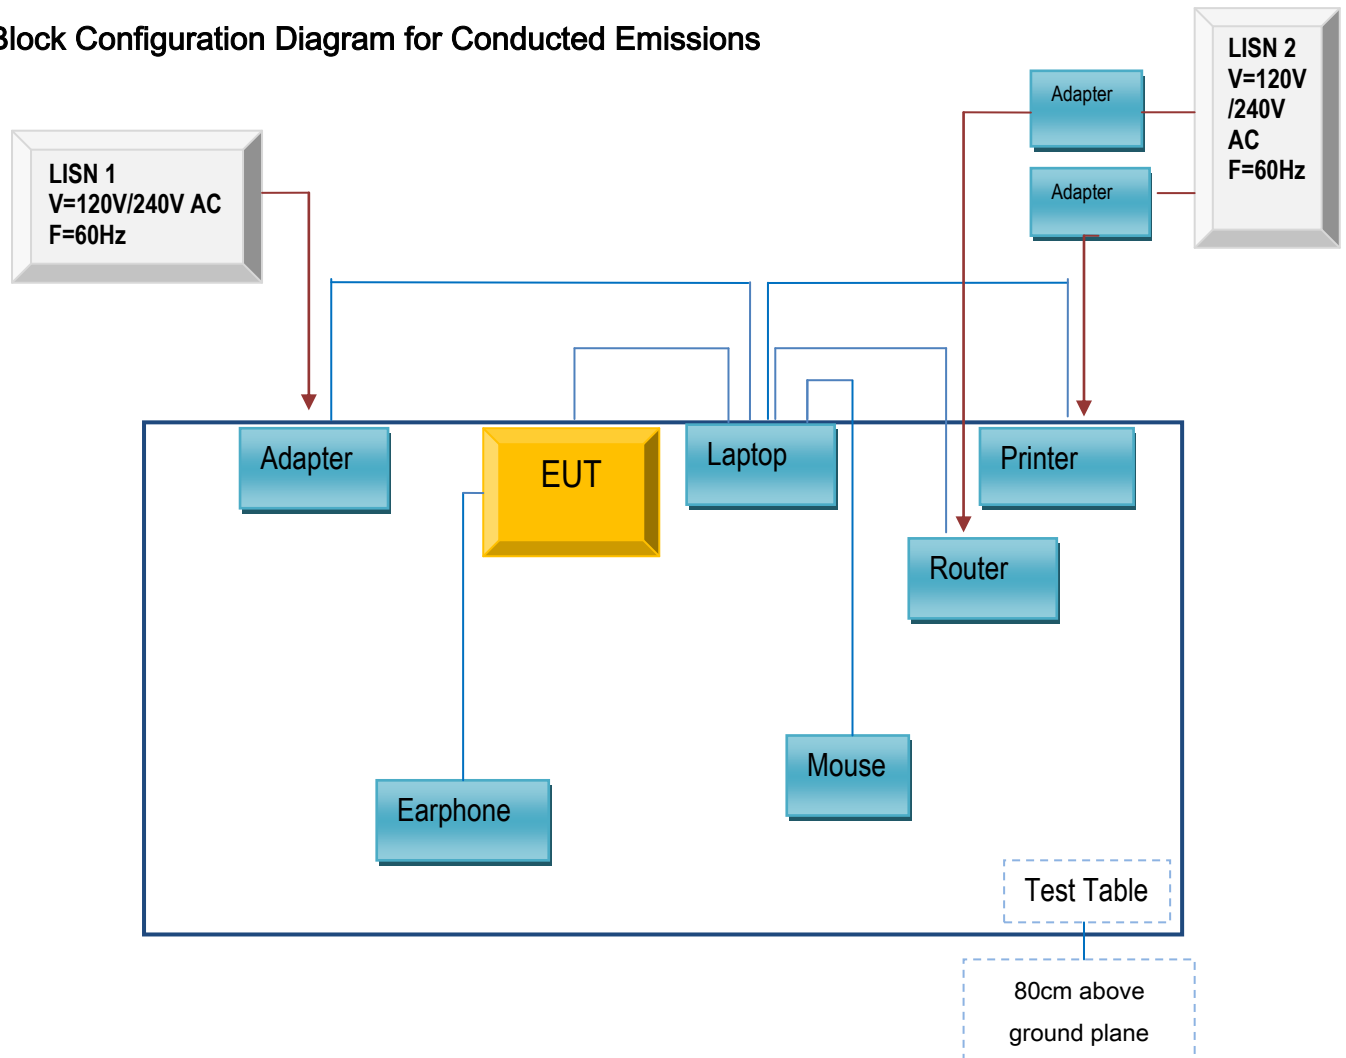

Block Configuration Diagram for Radiated Emissions

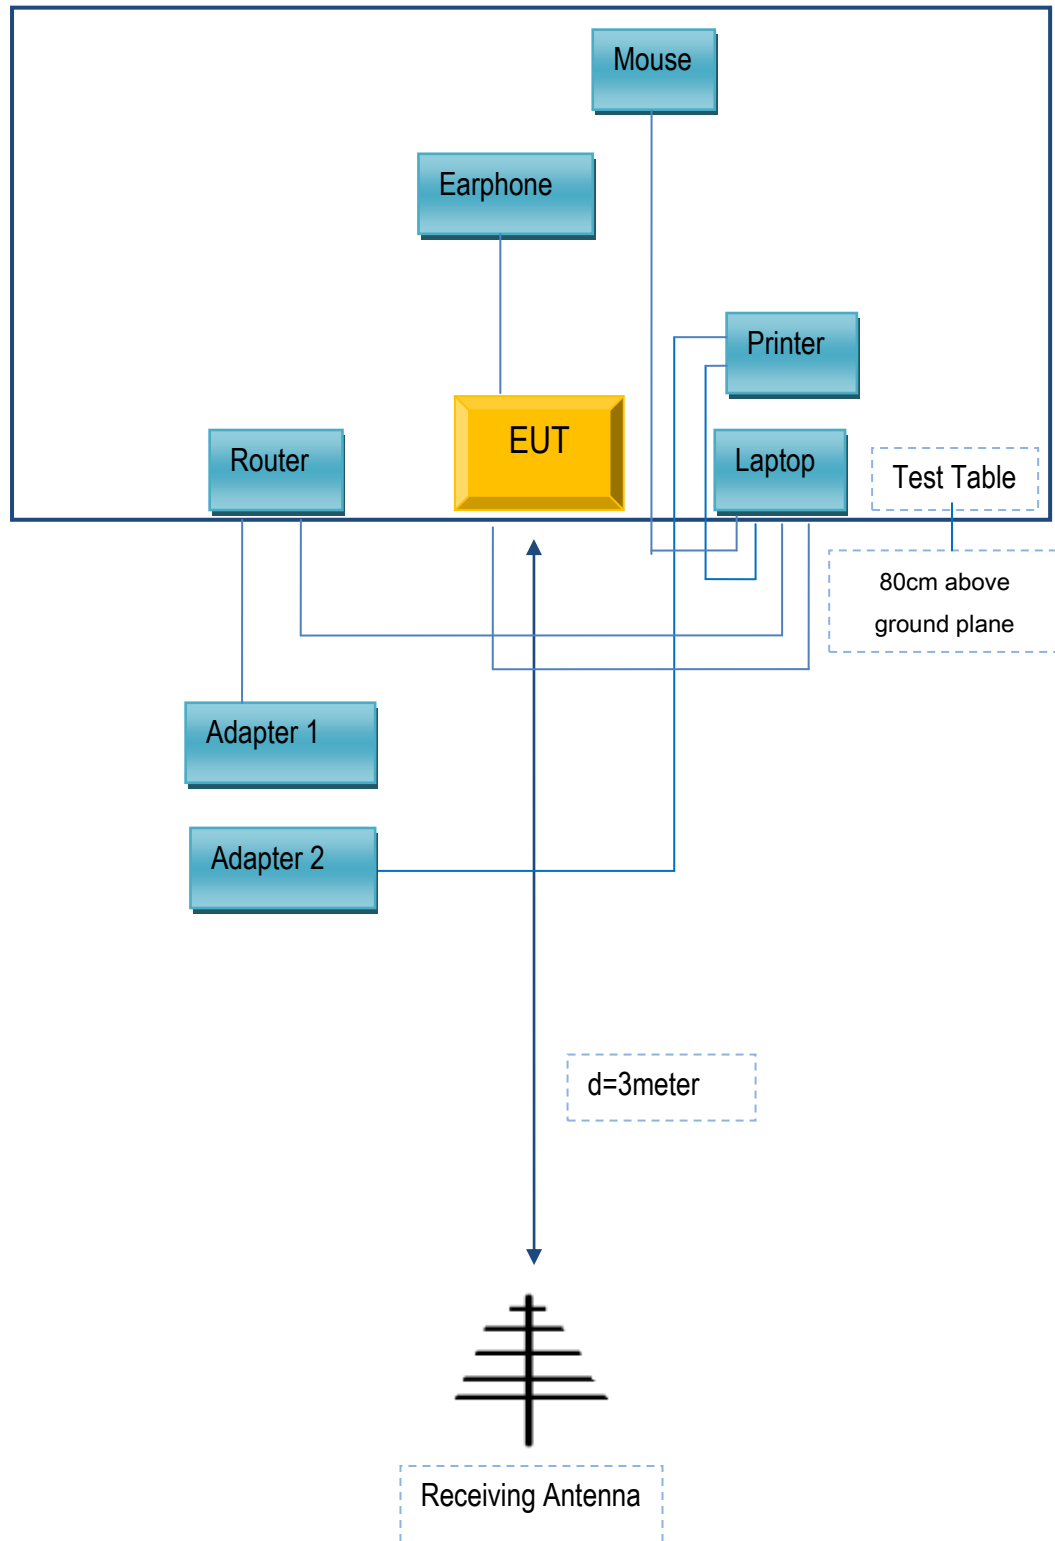

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Lenovo	Laptop	E40	LR-1EHRX
GOLDWEB	Router	R102	1202032094
Lenovo	AC Adapter	42T4416	21D9JU
HP	Printer	VCVRA-1003	CN36M19JWX
DELL	Mouse	E100	912NMTUT41481
BULL	Socket	GN-403	GN201203
SMT TELECOMM HK LIMITED	Earphone	X422A	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	2m	JX120051274
USB Cable	Un-shielding	No	2m	CBA3000AH0C1
RJ45 Cable	Un-shielding	No	2m	KX156327541
Router Power cable	Un-shielding	No	2m	13274630Z
Printer Power cable	Un-shielding	No	2m	127581031
Power Cable	Un-shielding	No	0.8m	GT211032

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Annex E. DECLARATION OF SIMILARITY

Wheredouwannago.com LLC

To: SIEMIC ,775 Montague Expressway, Milpitas, CA 95035,USA

Declaration Letter

Dear Sir,

For our business issue and marketing requirement, we would like to list 2 model numbers on the **FCC ID** certificates and reports, as following:

Model No.:

We declare that the difference of these is listed as below:

Main Model No	Serial Model No	Difference
CSC1	CSC2	Only color is not the same, Circuit schematic and PCB are the same

Thank you!

Signature:

Printed name/title: Manish Mohanty

Tel: +1(512)293-3708

Fax:

Address: 521 Garner Park Dr, Georgetown, TX 78628 USA