

FCC PART 15E TEST REPORT FOR CERTIFICATION
On Behalf of

Linkplay Technology Inc.

Wireless Smart Audio Module

Model Number: A128

FCC ID: 2ANOG-A128

Prepared for:	Linkplay Technology Inc.
	8F-8036, Qianren Building, No.7, Yingcui Road, Jiangning District,
	Nanjing, China
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R2105240
Date of Test:	Apr. 01~May. 20, 2021
Date of Report:	May. 25, 2021

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT)	5
1.2. The antenna information for EUT	7
2. SUMMARY OF TEST	8
2.1. Summary of test result.....	8
2.2. Test Facilities	9
2.3. Measurement uncertainty for EST Technology Co., Ltd.	10
2.4. Assistant equipment used for test.....	10
2.5. Block Diagram	10
2.6. Test Mode.....	11
2.7. Channel List	13
2.8. Power Setting of Test Software.....	14
2.9. Duty Cycle of Test Signal	16
2.10. Test Equipment List	21
3. 6dB BANDWIDTH & 26dB BANDWIDTH & 99% OCCUPIED BANDWIDTH.....	23
3.1. Limit	23
3.2. Test Setup	23
3.3. Spectrum Analyzer Setting.....	23
3.4. Test Procedure	24
3.5. Test Result	25
3.6. Test Result	28
4. MAXIMUM CONDUCTED OUTPUT POWER	64
4.1. Limit	64
4.2. Test Setup	64
4.3. Test Procedure	64
4.4. Test Result	65
5. POWER SPECTRAL DENSITY	69
5.1. Limit	69
5.2. Test Setup	69
5.3. Spectrum Analyzer Setting.....	69
5.4. Test Procedure	69
5.5. Test Result	70
6. UNWANTED EMISSIONS AND BAND EDGE	94
6.1. Limit	94
6.2. Test Setup	95
6.3. Spectrum Analyzer Setting.....	96
6.4. Test Procedure	97
6.5. Test Result	98
7. FREQUENCY STABILITY	172
7.1. Limit	172
7.2. Test Setup	172
7.3. Spectrum Analyzer Setting.....	172
7.4. Test Procedure	173

7.5. Test Result..... 174

8. AC POWER LINE CONDUCTED EMISSIONS182

8.1. Limit..... 182

8.2. Test Setup..... 182

8.3. Spectrum Analyzer Setting..... 182

8.4. Test Procedure..... 182

8.5. Test Result..... 183

9. ANTENNA REQUIREMENTS.....187




9.1. Limit..... 187

9.2. Test Result..... 187

10. TEST SETUP PHOTO.....188

11. EUT PHOTO.....190

EST Technology Co., Ltd.

Applicant:	Linkplay Technology Inc.		
Address:	8F-8036, Qianren Building, No.7, Yingcui Road, Jiangning District, Nanjing, China		
Manufacturer:	Linkplay Technology Inc.		
Address:	8F-8036, Qianren Building, No.7, Yingcui Road, Jiangning District, Nanjing, China		
Factory:	Shenzhen Compare Electronics Co., Ltd		
Address:	East floor 3, Building 4, Tianfu'an Industrial Park, Huangzao Community, Hangcheng Street, Bao'an District, Shenzhen		
E.U.T:	Wireless Smart Audio Module		
Model Number:	A128		
Power Supply:	DC 5V From Adapter Input AC 100-240V, 50/60Hz		
Trade Name:	Linkplay	Serial No.:	38e018f9
Date of Receipt:	Apr. 01, 2021	Date of Test:	Apr. 01~May. 20, 2021
Test Specification:	FCC Part 15 Subpart E 15.407 ANSI C63.10:2013 FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 FCC KDB 662911 D01 Multiple Transmitter Output v02r01		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart E requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
Prepared by:	Reviewed by:	Approved by:	
 Ring Yang / Assistant	 Seven Wang / Engineer	 Iceman Hu / Manager	
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	Wireless Smart Audio Module
Model Number	:	A128
Software Version	:	5.1.314634
Hardware Version	:	V02
Operation frequency	:	U-NII-1: 5150 MHz~5250 MHz U-NII-2A: 5250 MHz~5350 MHz U-NII-2C: 5470 MHz~5725 MHz U-NII-3: 5725 MHz~5850 MHz
Number of channel	:	U-NII-1: IEEE 802.11a / n HT20 / ac VHT20: 4 Channels; U-NII-2A: IEEE 802.11a / n HT20 / ac VHT20: 4 Channels; U-NII-2C: IEEE 802.11a / n HT20 / ac VHT20: 11 Channels; U-NII-3:IEEE 802.11a / n HT20 / ac VHT20: 5 Channels;
Modulation	:	OFDM(QPSK, BPSK, 16-QAM, 64-QAM,256-QAM)
Transmit Data Rate	:	IEEE 802.11a: 54, 48, 36, 24, 18, 12, 9, 6Mbps; IEEE 802.11n: up 300Mbps; IEEE 802.11ac: up to 866Mbps;
Channels Spacing	:	IEEE 802.11a: 20MHz; IEEE 802.11n HT20: 20MHz; IEEE 802.11ac VHT20: 20MHz;

Transmit Power ANT0+ANT1	:	U-NII-1	IEEE 802.11a: 12.333dBm IEEE 802.11n HT20: 13.36dBm IEEE 802.11ac VHT20: 12.52dBm
		U-NII-2A	IEEE 802.11a: 12.19dBm IEEE 802.11n HT20: 11.85dBm IEEE 802.11ac VHT20: 11.44dBm
		U-NII-2C	IEEE 802.11a: 11.47dBm IEEE 802.11n HT20: 11.49dBm IEEE 802.11ac VHT20: 11.50dBm
		U-NII-3	IEEE 802.11a: 15.73dBm IEEE 802.11n HT20: 18.34dBm IEEE 802.11ac VHT20: 18.32dBm
Transmit Power ANT2	:	U-NII-1	IEEE 802.11a: 12.06dBm IEEE 802.11n HT20: 12.89dBm IEEE 802.11ac VHT20: 12.72dBm
		U-NII-2A	IEEE 802.11a: 12.72dBm IEEE 802.11n HT20: 12.87dBm IEEE 802.11ac VHT20: 12.77dBm
		U-NII-2C	IEEE 802.11a: 13.28dBm IEEE 802.11n HT20: 13.17dBm IEEE 802.11ac VHT20: 13.02dBm
		U-NII-3	IEEE 802.11a: 15.37dBm IEEE 802.11n HT20: 15.82dBm IEEE 802.11ac VHT20: 15.86dBm
Sample Type	:	Prototype production	

Note: For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

1.2. The antenna information for EUT

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
0	N/A	N/A	Internal	N/A	4.70
1	N/A	N/A	Internal	N/A	4.60
2	N/A	N/A	Internal	N/A	5.45

Remark:

For Ant 0+1

- (1) The EUT can work as CDD mode in IEEE 802.11n and IEEE 802.11ac, and can operate with one spatial stream.

According to KDB 662911 F 2) f) (ii):

$$\text{Directional gain} = 10 \times \log[(104.7/20 + 104.6/20)2/2] = 7.66\text{dBi} > 6\text{dBi}$$

So, the output power limit and power spectral density should be reduced.

For output Power:

$$\text{U-NII-1 Limit is } 24\text{dBm} - (7.66\text{dBi} - 6\text{dBi}) = 22.34\text{dBm}$$

$$\text{U-NII-2A \& U-NII-2C Limit is } 24\text{dBm} - (7.66\text{dBi} - 6\text{dBi}) = 22.34\text{dBm}$$

$$\text{U-NII-3 Limit is } 30\text{dBm} - (7.66\text{dBi} - 6\text{dBi}) = 28.34\text{dBm}$$

For power spectral density:

$$\text{U-NII-1 Limit is } 11\text{dBm/MHz} - (7.66\text{dBi} - 6\text{dBi}) = 9.34\text{dBm/MHz}$$

$$\text{U-NII-2A \& U-NII-2C Limit is } 11\text{dBm/MHz} - (7.66\text{dBi} - 6\text{dBi}) = 9.34\text{dBm/MHz}$$

$$\text{U-NII-3 Limit is } 30\text{dBm/500KHz} - (7.66\text{dBi} - 6\text{dBi}) = 28.34\text{dBm/500KHz}$$

- (2) After pre-test all antenna configurations, the worst case configuration as list below.

For Ant 2

- (3) The EUT can work as CDD mode in IEEE 802.11n and IEEE 802.11ac, and can operate with one spatial stream.

According to KDB 662911 F 2) f) (i):

$$\text{Directional gain} = 5.45\text{dBi} < 6\text{dBi}$$

So, the output power limit and power spectral density no need to be reduced.

TX Mode \ ANT No.	SISO Configuration	MIMO Configuration
IEEE 802.11a	ANT 0, ANT 1, ANT 2	/
IEEE 802.11n HT20	ANT 2	ANT 0+ANT 1
IEEE 802.11ac VHT20	ANT 2	ANT 0+ANT 1

2. SUMMARY OF TEST

2.1. Summary of test result

Report Section	Description of Test Item	FCC Standard Section	Results
3	6dB Bandwidth & 26dB Bandwidth & 99% Occupied Bandwidth	15.407(a) 15.407(e)	PASS
4	Maximum Conducted Output Power	15.407(a)	PASS
5	Peak Power Spectral Density	15.407(a)	PASS
6	Unwanted Emissions and Band Edge	15.205 15.209 15.407(b)	PASS
7	Frequency Stability	15.407(g)	PASS
8	AC Power Line Conducted Emissions	15.207 15.407(b)(8)	PASS
9	Antenna Requirement	15.203	PASS

Note:

(1) "N/A" denotes test is not applicable in this test report

2.2. Test Facilities

EMC Lab

: Certificated by CNAS, CHINA
Registration No.: L5288
This Certificate is valid until: November 12, 2023

Certificated by FCC, USA
Designation Number: CN1215
This Certificate is valid until: January 31, 2022

Certificated by A2LA, USA
Registration No.: 4366.01
This Certificate is valid until: January 31, 2022

Certificated by Industry Canada
CAB identifier No.: CN0035
This Certificate is valid until: January 31, 2022

Certificated by VCCI, Japan
Registration No.: C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Certificate is valid until: Apr. 19, 2023

Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018

Certificated by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

Name of Firm : EST Technology Co., Ltd.

Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China

2.3. Measurement uncertainty for EST Technology Co., Ltd.

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.54dB
Uncertainty for Radiation Emission test (30MHz-1GHz)	3.62
Uncertainty for Radiation Emission test (1GHz to 18GHz)	4.86
Uncertainty for spurious emissions test (18GHz to 40GHz)	4.67
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	1.08dB
Uncertainty for Power density test	0.26dB
Temperature	$\pm 0.6^{\circ}\text{C}$
Humidity	$\pm 4.0\%$
Volatage DC	$\pm 1.0\%$
Volatage (AC, <10KHz)	$\pm 1.5\%$

Note:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
A	Adapter	-	CD143	-	-
B	PC	LENOVO	E485	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.0m	DC Cable
2	NO	NO	1.0m	DC Cable

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground.

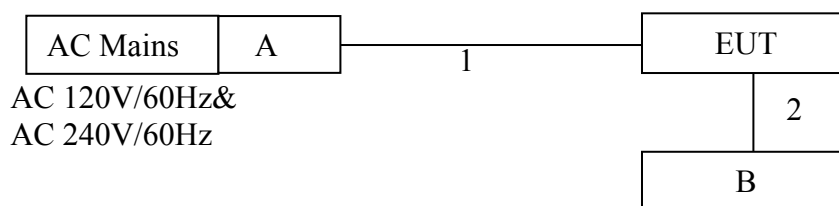

(EUT: Wireless Smart Audio Module)

2.6. Test Mode

Pre-scan has been combined all possible modulations and data rates to determine the worst case test mode, the worst case test mode was selected for the final test as listed below.

Test Item	Test Mode	Channel	Modulation	Data rate
6dB Bandwidth	IEEE 802.11a	149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT20	149/157/165	OFDM	MCS0
26dB Bandwidth	IEEE 802.11a	36/40/48/52/60/64/100/116/140	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140	OFDM	MCS0
99% Occupied Bandwidth	IEEE 802.11a	36/40/48/52/60/64/100/116/140/ 149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140/ 149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140/ 149/157/165	OFDM	MCS0
Maximum Conducted Output Power	IEEE 802.11a	36/40/48/52/60/64/100/116/140/ 149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140/ 149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140/ 149/157/165	OFDM	MCS0

Peak Power Spectral Density	IEEE 802.11a	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
Unwanted Emissions and Band Edge(Above 1GHz)	IEEE 802.11a	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	6Mbps
	IEEE 802.11n HT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
	IEEE 802.11ac VHT20	36/40/48/52/60/64/100/116/140/149/157/165	OFDM	MCS0
Unwanted Emissions Below 1GHz	IEEE 802.11a	100	OFDM	6Mbps
Frequency Stability	Unmodulation	36/64/100/149	N/A	N/A
AC Power Line Conducted Emissions	IEEE 802.11a	100	OFDM	6Mbps

Note:

1. In radiated measurement, the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

2.7. Channel List

Band	Mode	Channel	Frequency (MHz)
U-NII-1	IEEE 802.11a & n HT20 & ac VHT20	36	5180
		40	5200
		44	5220
		48	5240
U-NII-2A	IEEE 802.11a & n HT20 & ac VHT20	52	5260
		56	5280
		60	5300
		64	5320
U-NII-2C	IEEE 802.11a & n HT20 & ac VHT20	100	5500
		104	5520
		108	5540
		112	5560
		116	5580
		120	5600
		124	5620
		128	5640
		132	5660
		136	5680
		140	5700
		149	5745
U-NII-3	IEEE 802.11a & n HT20 & ac VHT20	153	5765
		157	5785
		161	5805
		165	5825

2.8. Power Setting of Test Software

Antenna	0+1		
Software Name	QRCT		
U-NII-1			
Frequency(MHz)	5180	5200	5240
IEEE 802.11a Setting	19,19	19,19	19,19
IEEE 802.11n HT20 Setting	18,18	18,18	18,18
IEEE 802.11ac VHT20 Setting	18,18	18,18	18,18
U-NII-2A			
Frequency(MHz)	5260	5300	5320
IEEE 802.11a Setting	19,19	19,19	19,19
IEEE 802.11n HT20 Setting	18,16	18,16	18,16
IEEE 802.11ac VHT20 Setting	18,16	18,16	18,16
U-NII-2C			
Frequency(MHz)	5500	5580	5700
IEEE 802.11a Setting	19,19	19,19	19,19
IEEE 802.11n HT20 Setting	18,16	18,16	18,16
IEEE 802.11ac VHT20 Setting	18,16	18,16	18,16
U-NII-3			
Frequency(MHz)	5745	5785	5825
IEEE 802.11a Setting	19,19	19,19	19,19
IEEE 802.11n HT20 Setting	19,19	19,19	19,19
IEEE 802.11ac VHT20 Setting	19,19	19,19	19,19

Antenna	2		
Software Name	QRCT		
U-NII-1			
Frequency(MHz)	5180	5200	5240
IEEE 802.11a Setting	17	17	17
IEEE 802.11n HT20 Setting	17	17	17
IEEE 802.11ac VHT20 Setting	17	17	17
U-NII-2A			
Frequency(MHz)	5260	5300	5320
IEEE 802.11a Setting	17	17	17
IEEE 802.11n HT20 Setting	17	17	17
IEEE 802.11ac VHT20 Setting	17	17	17
U-NII-2C			
Frequency(MHz)	5500	5580	5700
IEEE 802.11a Setting	17	17	17
IEEE 802.11n HT20 Setting	17	17	17
IEEE 802.11ac VHT20 Setting	17	17	17
U-NII-3			
Frequency(MHz)	5745	5785	5825
IEEE 802.11a Setting	17	17	17
IEEE 802.11n HT20 Setting	17	17	17
IEEE 802.11ac VHT20 Setting	17	17	17

2.9. Duty Cycle of Test Signal


Antenna	Ant 0+1						
Temperature	22.5℃	Relative Humidity		53%	Test Voltage		AC 120V/60Hz
Mode	Frequency (MHz)	On time (ms)	Total Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T (Hz)	VBW Setting (dB)
IEEE 802.11a	5180	2.04638	2.06957	98.88	0.00	10	10
IEEE 802.11n HT20	5180	1.90145	1.92464	98.80	0.00	10	10
IEEE 802.11ac VHT20	5190	1.91884	1.94203	98.81	0.00	10	10

Antenna	Ant 2						
Temperature	22.5℃	Relative Humidity		53%	Test Voltage		AC 120V/60Hz
Mode	Frequency (MHz)	On time (ms)	Total Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T (Hz)	VBW Setting (dB)
IEEE 802.11a	5180	2.06087	2.16522	95.18	0.21	485	485
IEEE 802.11n HT20	5180	1.91304	2.00000	95.65	0.19	523	523
IEEE 802.11ac VHT20	5190	1.92174	2.01739	95.26	0.21	520	520


Note:


1. Duty Cycle=On Time/Total Time×100%.
2. Duty Factor= $10 \times \log(1/\text{Duty Cycle})$.
3. If duty cycle <98 %, the conducted average output power and average power spectral density should be add duty factor.
4. If duty cycle ≥ 98 %,the EUT is consider to be transmitting continuously,the conducted average output power and average power spectral density no need to add duty factor.
5. The on-time time is transmission duration(T).
6. The VBW Setting is use for RMS measurement in unwanted emissions and band edge(Above 1GHz) test.

IEEE 802.11a 5180MHz Ant 0+1

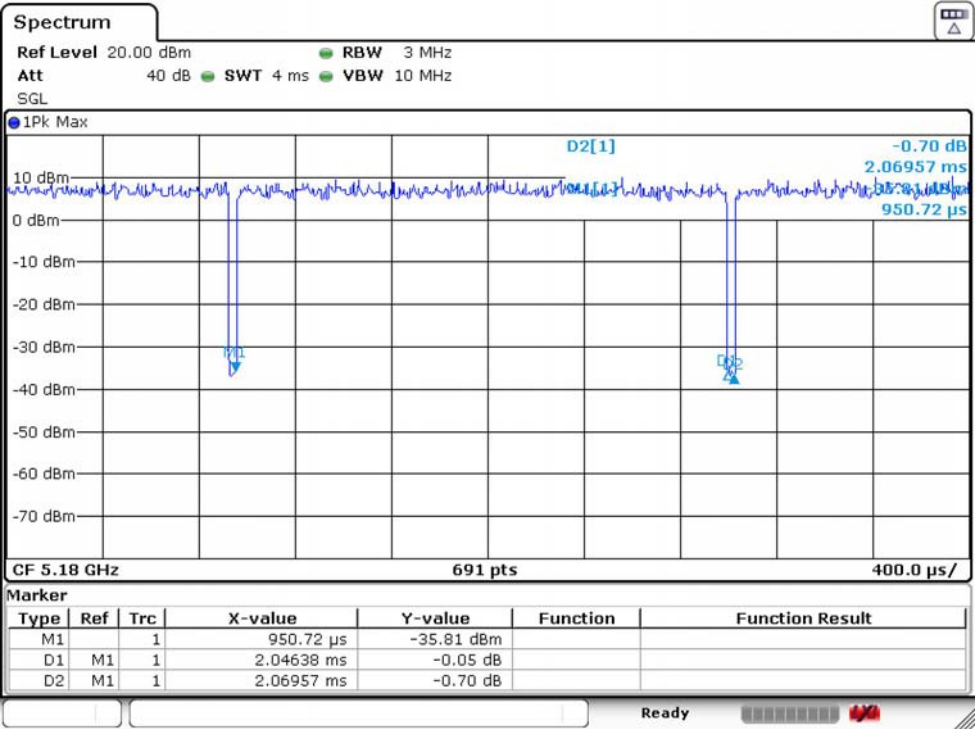


IEEE 802.11n HT20 5180MHz Ant 0+1

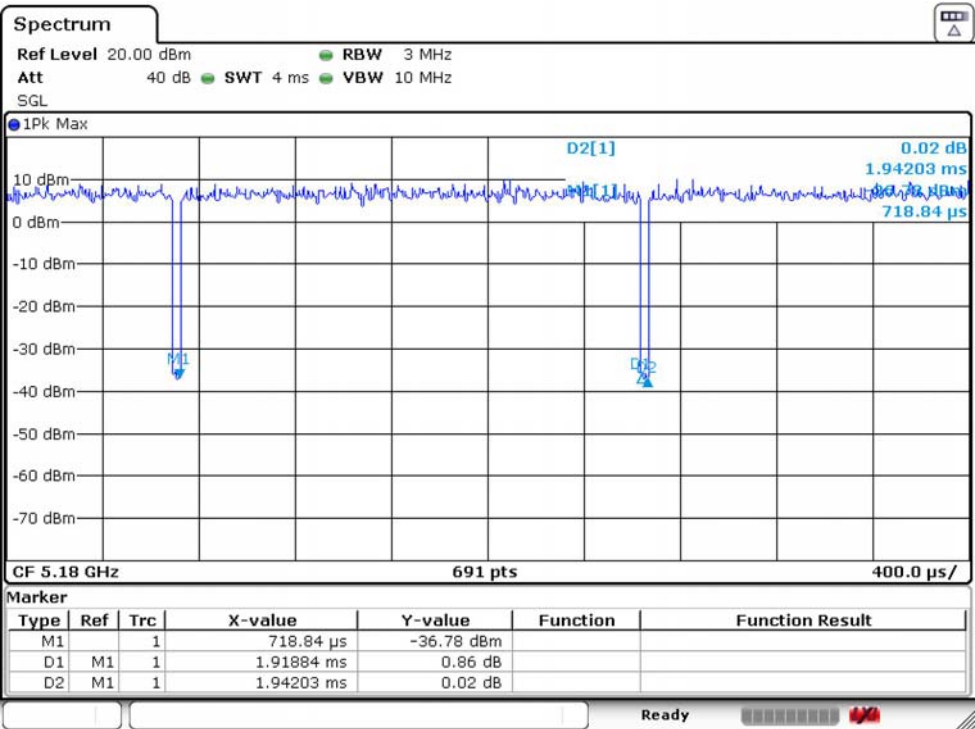


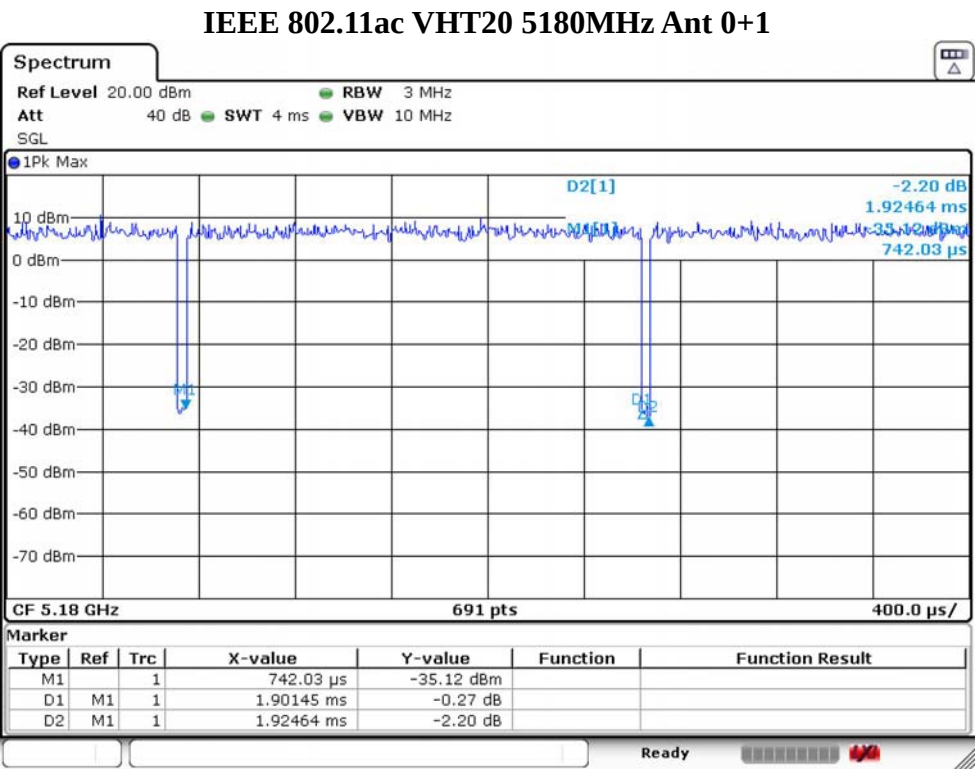


IEEE 802.11a 5180MHz Ant 2

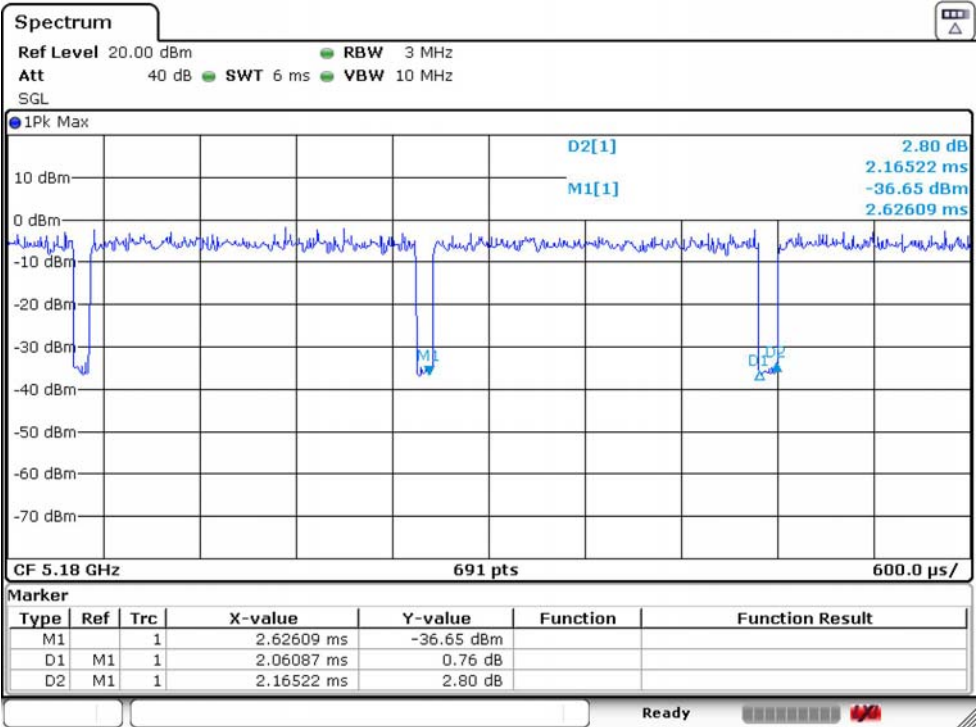

IEEE 802.11n HT20 5180MHz Ant 2

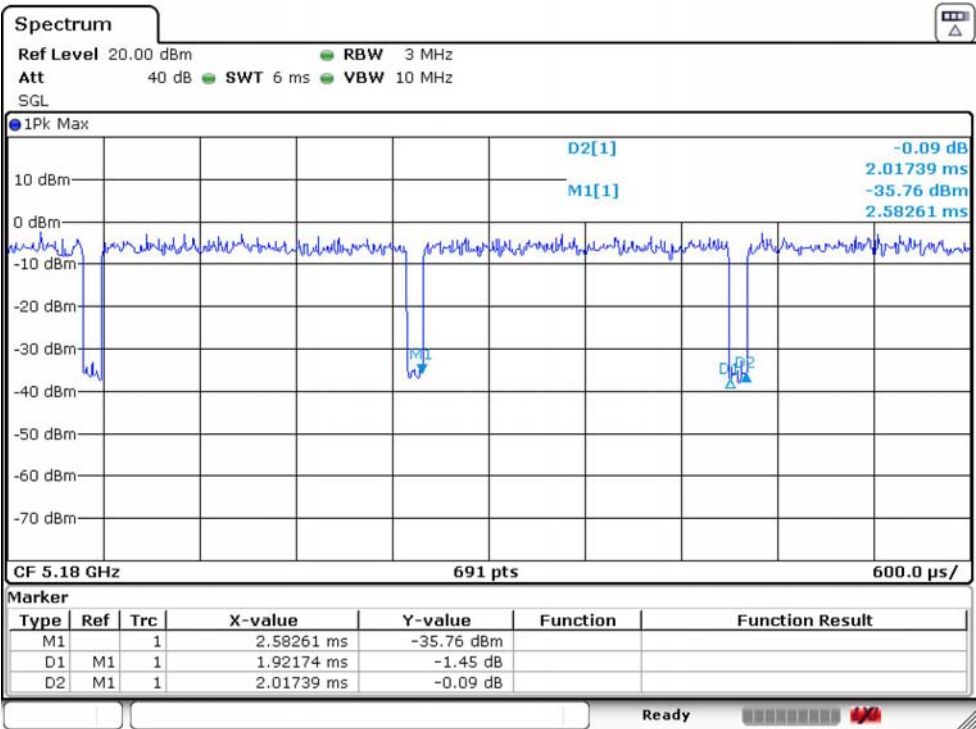

IEEE 802.11ac VHT20 5180MHz Ant 2

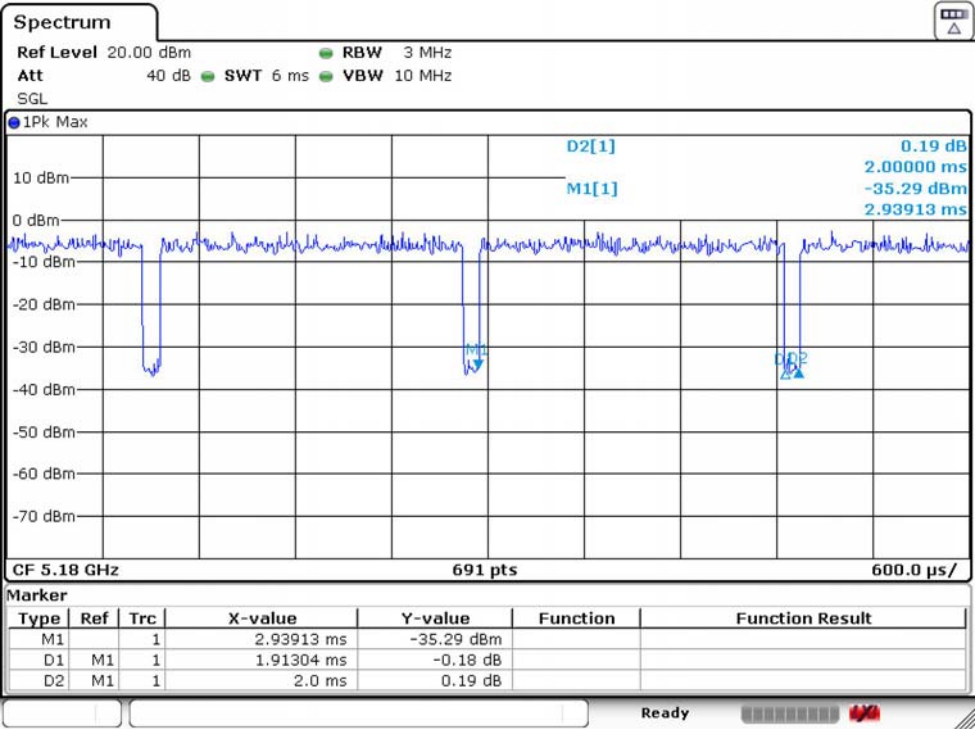

2.10. Test Equipment List

For AC power conducted emissions test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	EST-E001	LISAI	June 13,20	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 13,20	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For radiated emissions test(9KHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,20	1 Year
Active Loop Antenna	SCHWARZB ECK	FMZB 1519B	EST-E054	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For radiated emissions test(30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,20	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

For radiated emissions test(Above 1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	EST-E031	LISAI	June 13,20	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	EST-E032	LISAI	June 13,20	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	June 13,20	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A

For connect EUT antenna terminal test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
TS 8997	Rohde & Schwarz	/	/	/	/	/
Open Switch and Control Unit	Rohde & Schwarz	OSP-B157WB	EST-E036	LISAI	June 13,20	1 Year
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV	EST-E037	LISAI	June 13,20	1 Year
Signal Generator	Rohde & Schwarz	SMB100A	EST-E038	LISAI	June 13,20	1 Year
Vector Signal Generator	Rohde & Schwarz	SMBV100A	EST-E039	LISAI	June 13,20	1 Year
Test Software	Rohde & Schwarz	WMS32	V10.50.00	N/A	N/A	N/A
Temperature controller	Terchy	MHQ	EST-E101	LISAI	June 13,20	1 Year

3. 6dB BANDWIDTH & 26dB BANDWIDTH & 99% OCCUPIED BANDWIDTH

3.1. Limit

Band	Frequency (MHz)	Test Item	Limit
U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-2A	5250-5350	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-2C	5470-5725	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-3	5725-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth $\geq$ 500KHz

3.2. Test Setup



3.3. Spectrum Analyzer Setting

6dB Bandwidth	
Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	40MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

26dB Bandwidth	
Spectrum Parameters	Setting
RBW	approximately 1% of the emission bandwidth
VBW	>RBW
Span	40MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

99% Occupied Bandwidth	
Spectrum Parameters	Setting
RBW	1% to 5% of the OBW
VBW	approximately three times the RBW
Span	between 1.5 times and 5.0 times the OBW
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

3.4. Test Procedure

For 26dB Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

For 6dB Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

For 99% Occupied Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the 99% power bandwidth function to measure bandwidth.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

3.5. Test Result

Antenna	Ant 0+1							
Temperature	22.5℃	Relative Humidity			53%	Test Voltage	120V/60 Hz	
26dB Bandwidth&99% Occupied Bandwidth								
AND	Test Mode	Fre (MHz)	26dB Bandwidth (MHz)		99% Occupied Bandwidth (MHz)		Calculate Power Limit (W)	Calculate Power Limit (dBm)
			Ant 0	Ant 1	Ant 0	Ant 1		
U-NII-1	IEEE 802.11a	5180	23.676	23.56	16.845	16.787		
		5200	23.676	23.849	16.787	16.671		
		5240	24.139	22.75	16.729	16.671		
	IEEE 802.11n HT20	5180	25.065	24.891	17.945	17.771		
		5200	25.355	24.949	17.887	17.829		
		5240	24.891	25.181	17.945	17.887		
	IEEE 802.11ac VHT20	5180	25.181	25.007	17.887	17.945		
		5200	24.428	24.486	17.945	18.003		
		5240	25.123	25.065	17.945	17.887		
U-NII-2A	IEEE 802.11a	5260	24.139	23.676	16.787	16.614	0.2500	23.98
		5300	23.734	23.444	16.787	16.787	0.2500	23.98
		5320	24.486	23.444	16.729	16.845	0.2500	23.98
	IEEE 802.11n HT20	5260	25.644	25.065	17.945	17.945	0.2500	23.98
		5300	24.602	24.602	17.887	17.945	0.2500	23.98
		5320	24.891	25.239	18.003	17.945	0.2500	23.98
	IEEE 802.11ac VHT20	5260	25.355	24.718	17.945	18.003	0.2500	23.98
		5300	24.428	25.355	17.829	18.061	0.2500	23.98
		5320	24.66	24.718	17.829	17.945	0.2500	23.98

Antenna	Ant 0+1							
Temperature	22.5℃	Relative Humidity			53%	Test Voltage		120V/60 Hz
26dB Bandwidth&99% Occupied Bandwidth								
AND	Test Mode	Fre (MHz)	26dB Bandwidth (MHz)		99% Occupied Bandwidth (MHz)		Calculate Power Limit (W)	Calculate Power Limit (dBm)
			Ant 0	Ant 1	Ant 0	Ant 1		
U-NII-2C	IEEE 802.11a	5500	23.676	23.444	16.787	16.729	0.2500	23.98
		5580	23.271	23.792	16.903	16.787	0.2500	23.98
		5700	24.66	23.792	16.787	16.787	0.2500	23.98
	IEEE 802.11n HT20	5500	24.602	24.776	18.003	17.887	0.2500	23.98
		5580	25.123	25.412	17.945	17.887	0.2500	23.98
		5700	25.644	24.776	18.003	17.887	0.2500	23.98
	IEEE 802.11ac VHT20	5500	25.586	24.949	17.829	17.945	0.2500	23.98
		5580	25.123	25.065	17.945	17.887	0.2500	23.98
		5700	25.123	24.949	18.061	17.945	0.2500	23.98

Antenna	Ant 0+1							
Temperature	22.5℃	Relative Humidity		53%		Test Voltage		120V/60Hz
6dB Bandwidth&99% Occupied Bandwidth								
BAND	Test Mode	Fre (MHz)	6dB Bandwidth (MHz)		99% Occupied Bandwidth (MHz)		6dB BW Min Limit (MHz)	Result
			Ant 0	Ant 1	Ant 0	Ant 1		
U-NII-3	IEEE 802.11a	5745	15.977	16.276	16.845	16.787	0.5	PASS
		5785	15.919	16.308	16.845	16.671	0.5	PASS
		5825	15.803	16.292	16.903	16.729	0.5	PASS
	IEEE 802.11n HT20	5745	16.266	16.892	18.003	17.887	0.5	PASS
		5785	17.482	16.904	18.061	17.887	0.5	PASS
		5825	16.324	16.772	17.945	17.887	0.5	PASS
	IEEE 802.11ac VHT20	5745	16.382	16.52	18.061	17.945	0.5	PASS
		5785	16.556	16.64	18.061	17.887	0.5	PASS
		5825	16.556	16.528	17.945	17.887	0.5	PASS

Antenna		Ant 2				
Temperature	22.5℃	Relative Humidity		53%	Test Voltage	120V/60Hz
26dB Bandwidth&99% Occupied Bandwidth						
AND	Test Mode	Fre (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Calculate Power Limit (W)	Calculate Power Limit (dBm)
U-NII-1	IEEE 802.11a	5180	19.797	16.324		
		5200	19.855	16.324		
		5240	19.913	16.324		
	IEEE 802.11n HT20	5180	20.376	17.424		
		5200	20.318	17.424		
		5240	20.492	17.482		
	IEEE 802.11ac VHT20	5180	20.203	17.424		
		5200	20.55	17.424		
		5240	20.839	17.482		
U-NII-2A	IEEE 802.11a	5260	19.913	16.324	0.2500	23.98
		5300	19.797	16.324	0.2492	23.97
		5320	19.971	16.382	0.2500	23.98
	IEEE 802.11n HT20	5260	20.608	17.424	0.2500	23.98
		5300	20.781	17.424	0.2500	23.98
		5320	20.318	17.424	0.2500	23.98
	IEEE 802.11ac VHT20	5260	20.608	17.366	0.2500	23.98
		5300	20.666	17.482	0.2500	23.98
		5320	20.029	17.482	0.2500	23.98


Antenna		Ant 2				
Temperature	22.5℃	Relative Humidity		53%	Test Voltage	120V/60Hz
26dB Bandwidth&99% Occupied Bandwidth						
AND	Test Mode	Fre (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Calculate Power Limit (W)	Calculate Power Limit (dBm)
U-NII-2C	IEEE 802.11a	5500	19.74	16.324	0.2485	23.95
		5580	19.855	16.382	0.2500	23.98
		5700	20.608	16.324	0.2500	23.98
	IEEE 802.11n HT20	5500	20.26	17.424	0.2500	23.98
		5580	20.318	17.424	0.2500	23.98
		5700	20.781	17.424	0.2500	23.98
	IEEE 802.11ac VHT20	5500	20.666	17.424	0.2500	23.98
		5580	20.203	17.482	0.2500	23.98
		5700	20.55	17.424	0.2500	23.98

Antenna	Ant 2					
Temperature	22.5℃	Relative Humidity		53%	Test Voltage	120V/60Hz
6dB Bandwidth&99% Occupied Bandwidth						
BAND	Test Mode	Fre (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	6dB BW Min Limit (MHz)	Result
U-NII-3	IEEE 802.11a	5745	15.124	16.324	0.5	PASS
		5785	15.516	16.324	0.5	PASS
		5825	15.312	16.324	0.5	PASS
	IEEE 802.11n HT20	5745	15.492	17.482	0.5	PASS
		5785	15.136	17.366	0.5	PASS
		5825	15.128	17.366	0.5	PASS
	IEEE 802.11ac VHT20	5745	15.136	17.366	0.5	PASS
		5785	15.136	17.424	0.5	PASS
		5825	15.132	17.482	0.5	PASS

Note :


For Band U-NII-2A and U-NII-2C, the maximum conducted output power limit is 250mw or $11+10 \times \log B$, which is lesser, where B is the 26dB Bandwidth in MHz. So in this section, the maximum conducted output power limit can calculate with 26dB Bandwidth.

3.6. Test Result

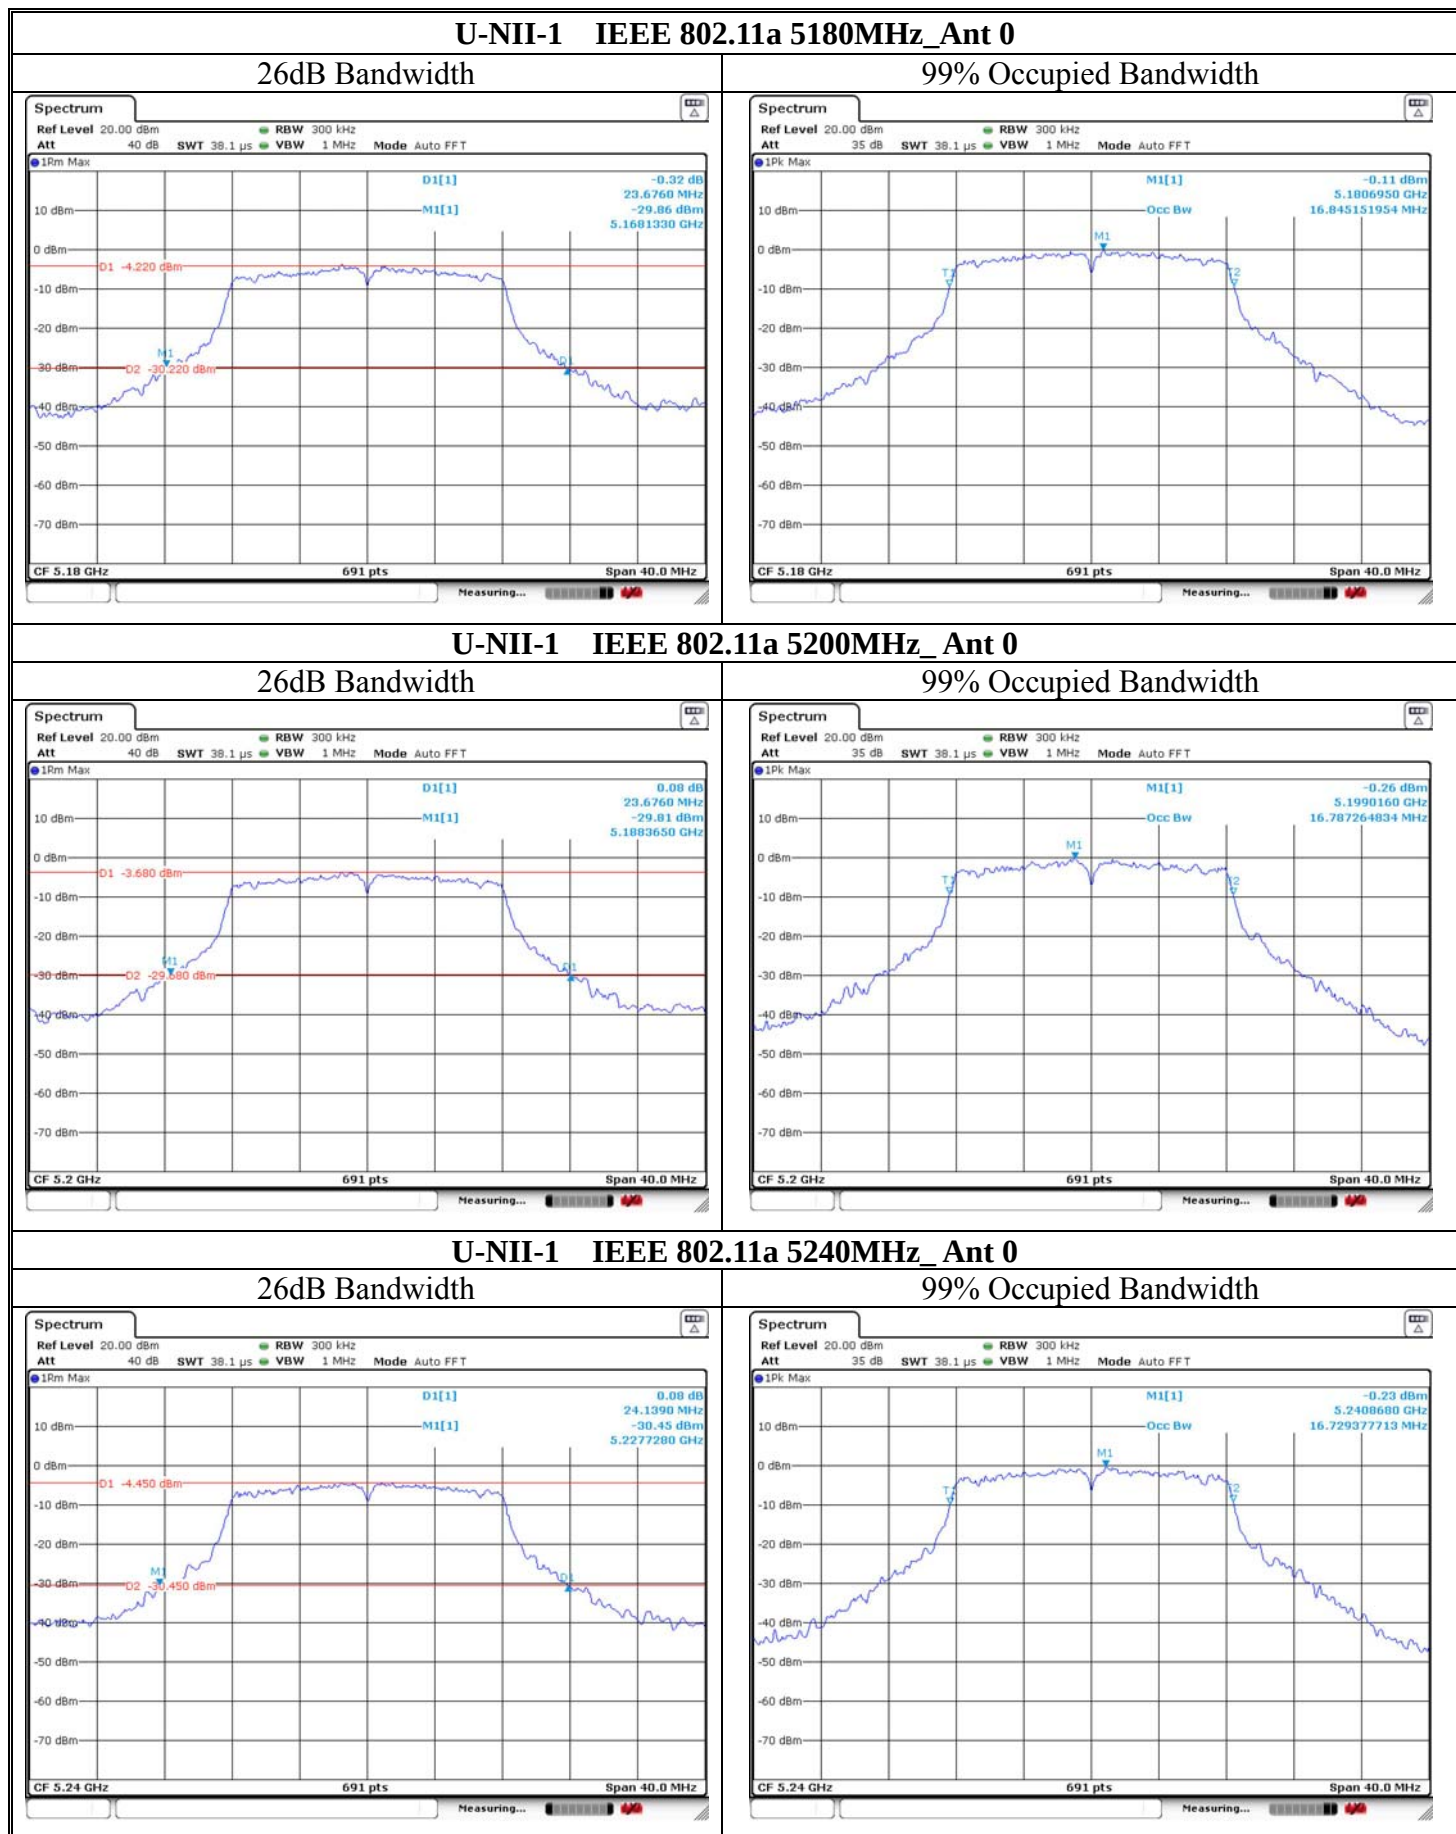


U-NII-1 IEEE 802.11a 5180MHz_Ant 1

26dB Bandwidth

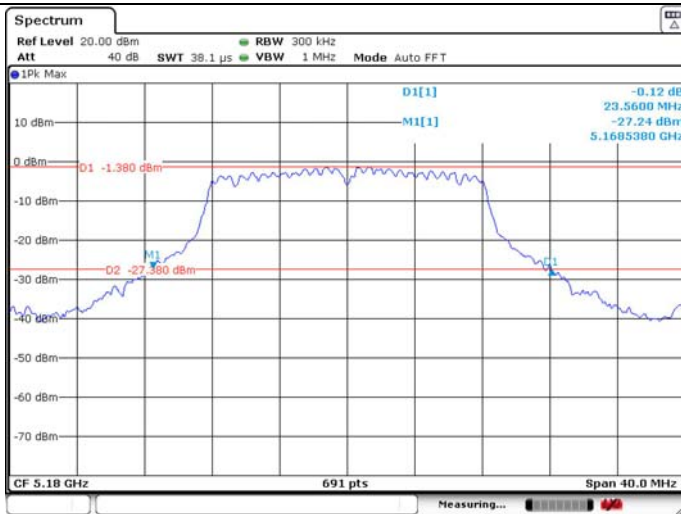


99% Occupied Bandwidth

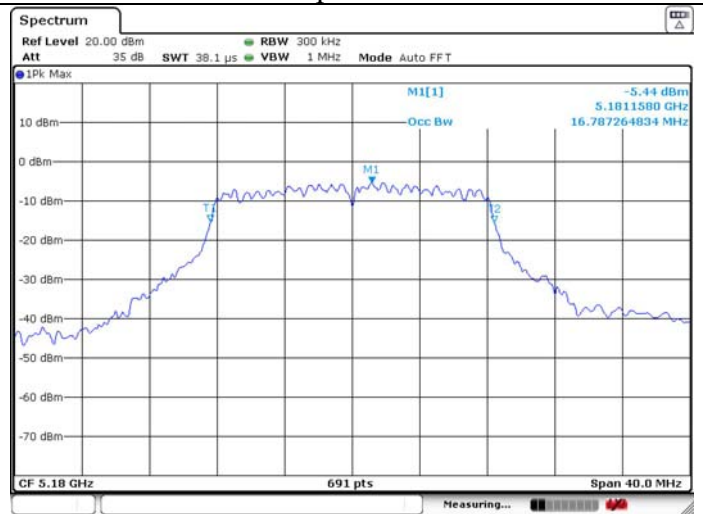

U-NII-1 IEEE 802.11a 5200MHz_Ant 1

26dB Bandwidth

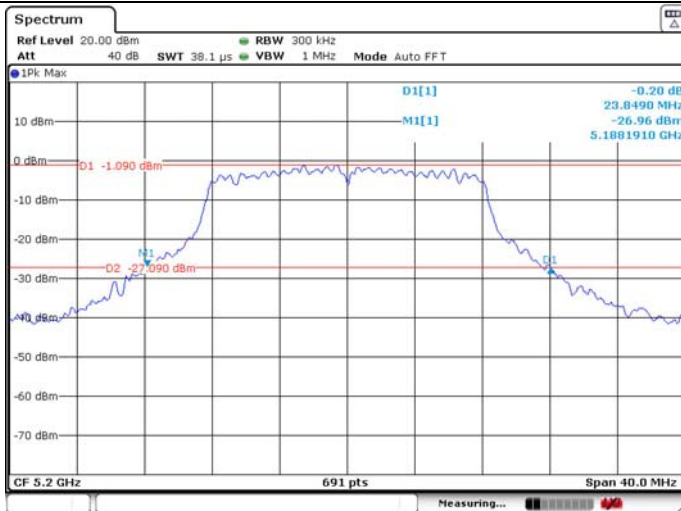

99% Occupied Bandwidth



U-NII-1 IEEE 802.11a 5240MHz_Ant 1

26dB Bandwidth




99% Occupied Bandwidth



U-NII-1 IEEE 802.11n HT20 5180MHz_Ant 0

26dB Bandwidth

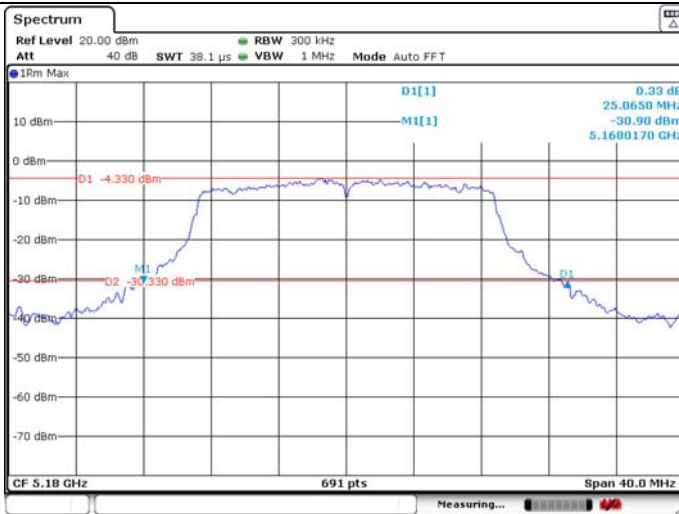


99% Occupied Bandwidth



U-NII-1 IEEE 802.11n HT20 5180MHz_Ant 1

26dB Bandwidth

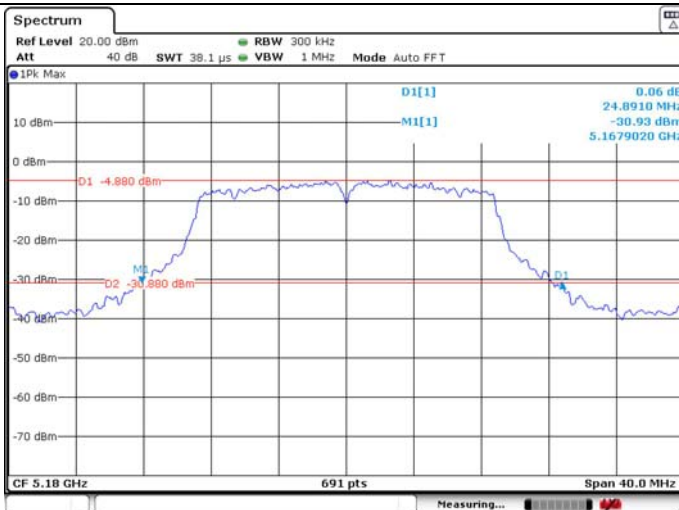


99% Occupied Bandwidth







U-NII-1 IEEE 802.11n HT20 5200MHz_Ant 0



26dB Bandwidth




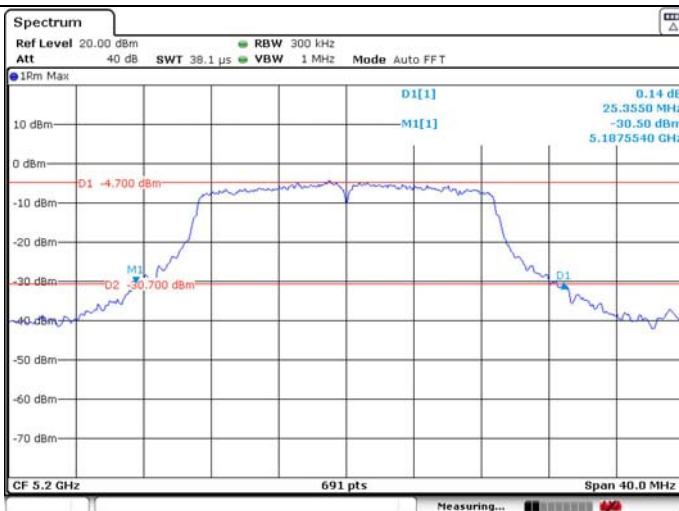


99% Occupied Bandwidth

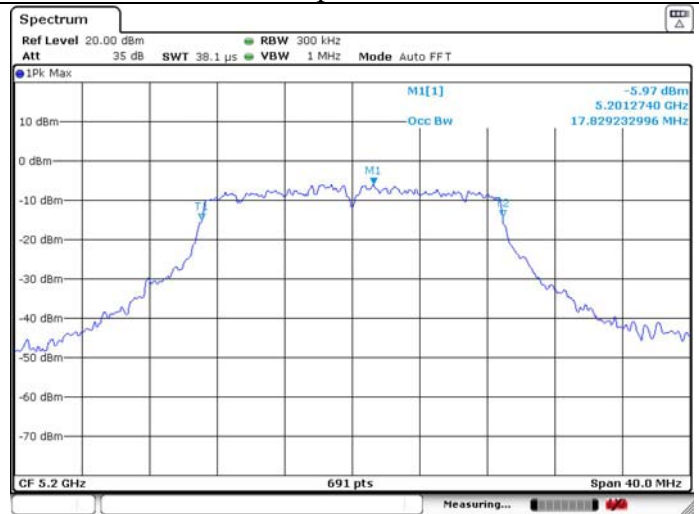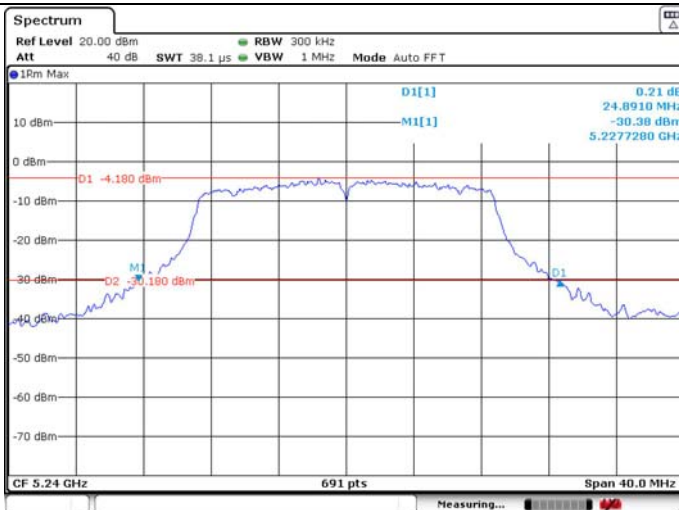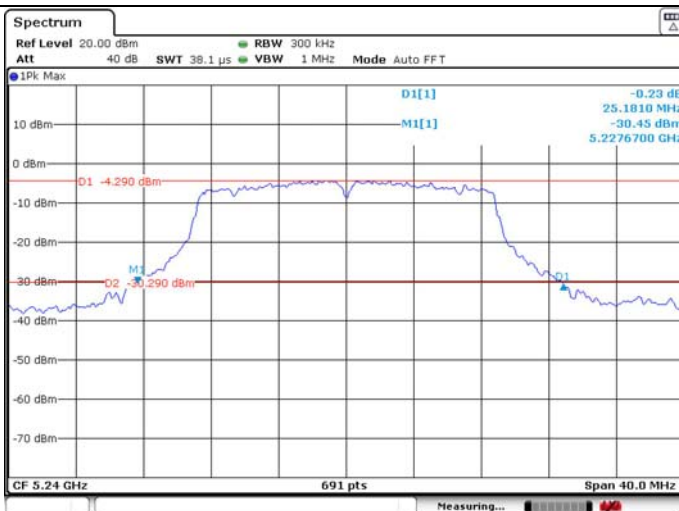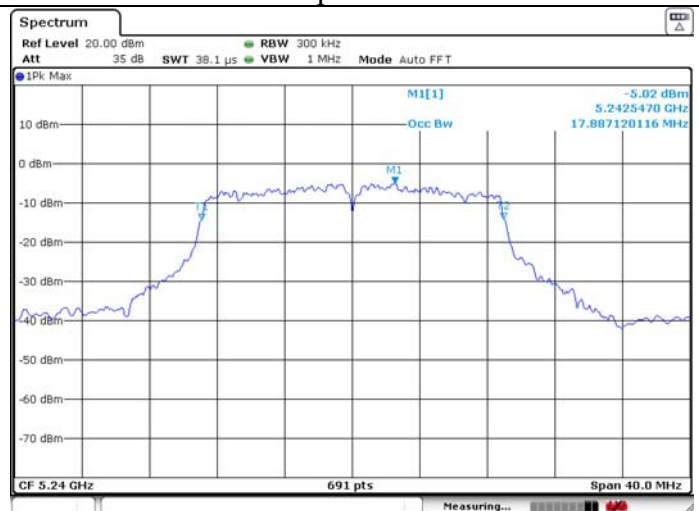


U-NII-1 IEEE 802.11n HT20 5200MHz_Ant 1**26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11n HT20 5240MHz_Ant 0****26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11n HT20 5240MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth**

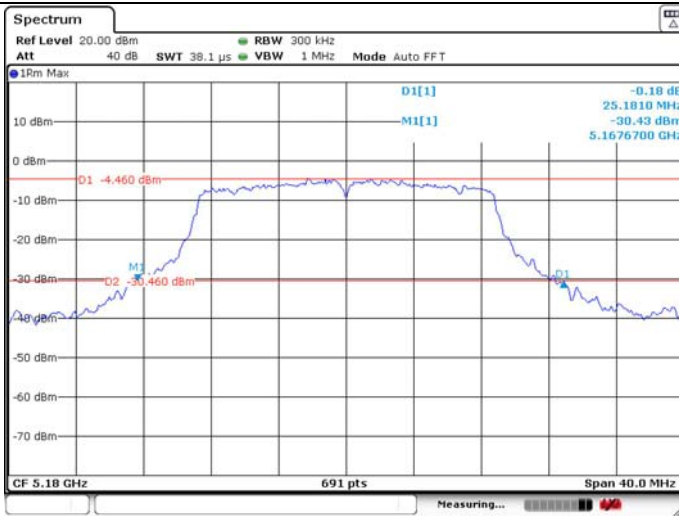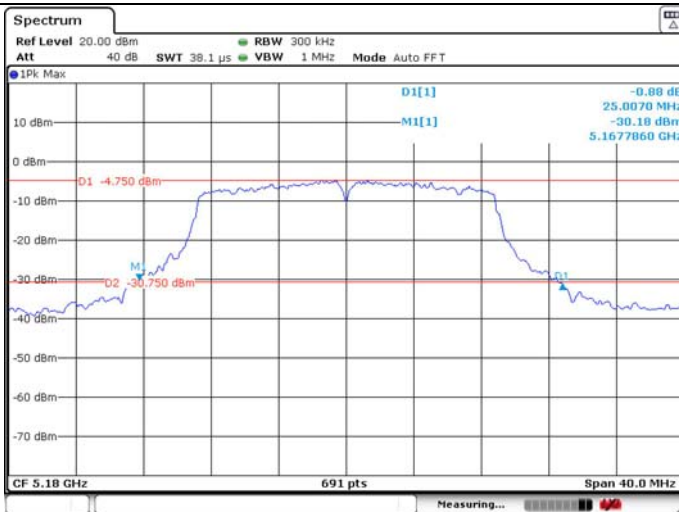U-NII-1 IEEE 802.11ac VHT20 5180MHz_Ant 0**26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11ac VHT20 5180MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11ac VHT20 5200MHz_Ant 0****26dB Bandwidth****99% Occupied Bandwidth**

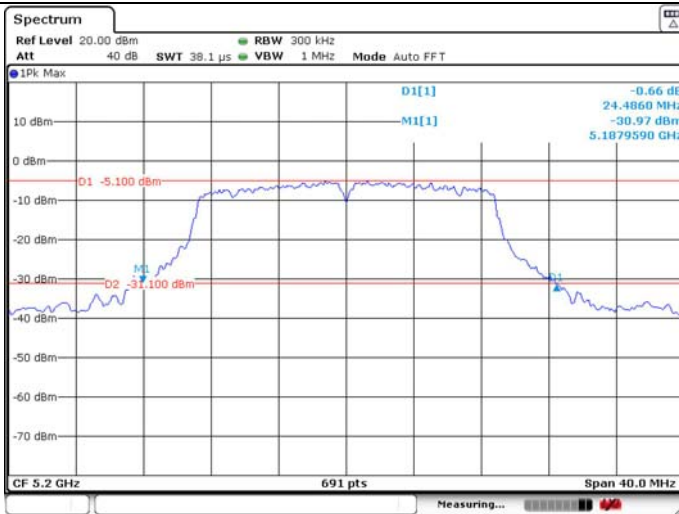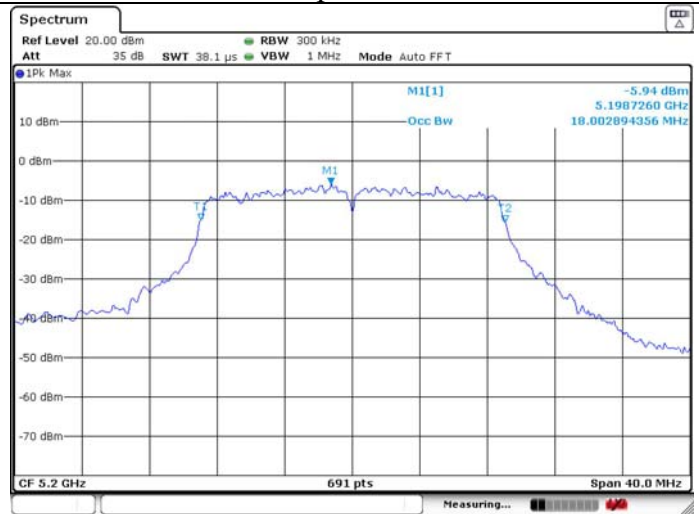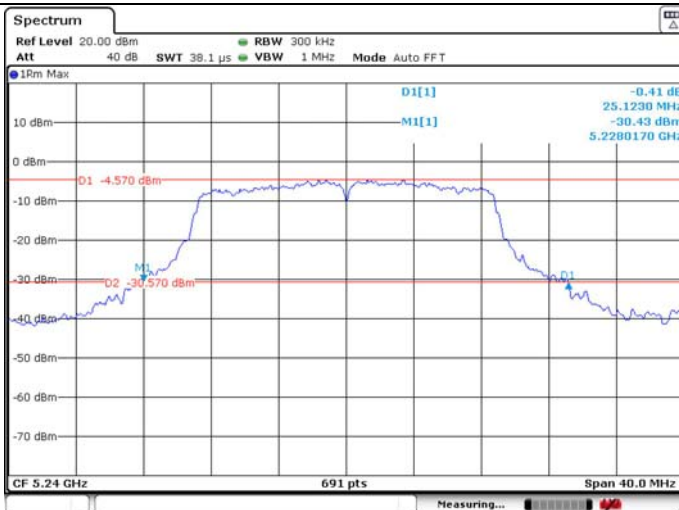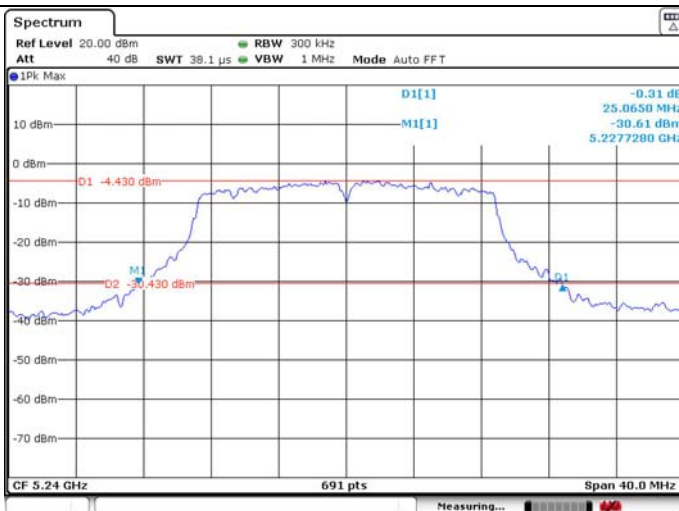U-NII-1 IEEE 802.11ac VHT20 5200MHz_Ant 1**26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11ac VHT20 5240MHz_Ant 0****26dB Bandwidth****99% Occupied Bandwidth****U-NII-1 IEEE 802.11ac VHT20 5240MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth**

U-NII-2A IEEE 802.11a 5260MHz_Ant 0

26dB Bandwidth

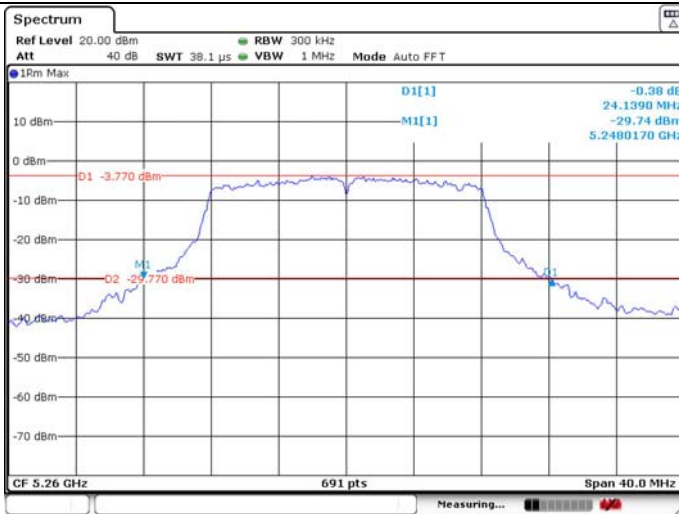


99% Occupied Bandwidth



U-NII-2A IEEE 802.11a 5300MHz_Ant 0

26dB Bandwidth

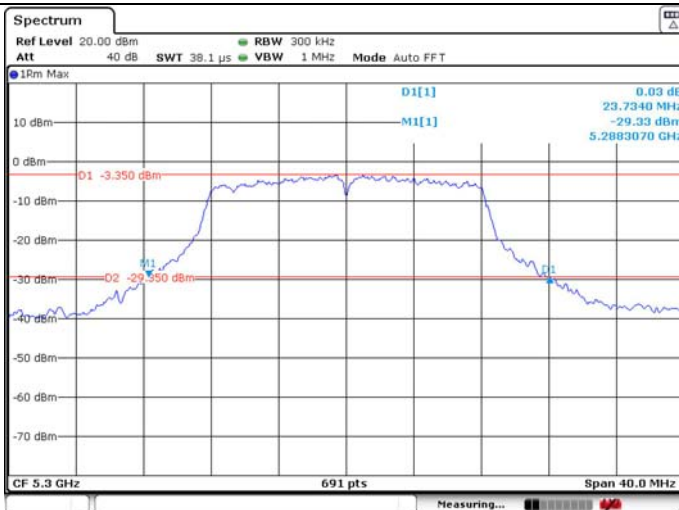


99% Occupied Bandwidth



U-NII-2A IEEE 802.11a 5320MHz_Ant 0

26dB Bandwidth

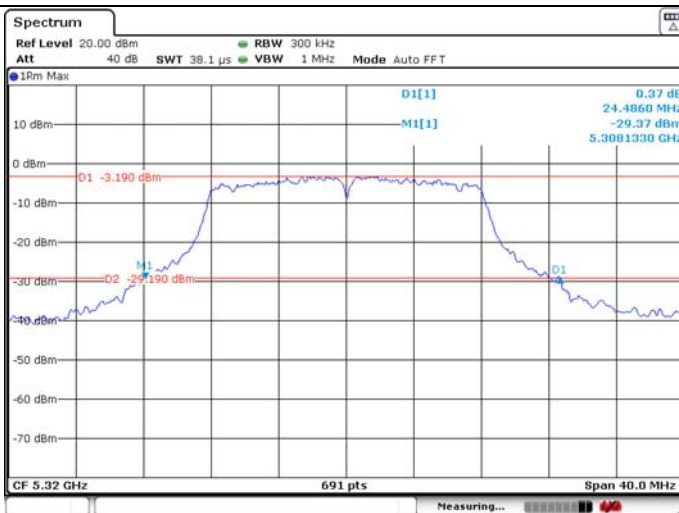


99% Occupied Bandwidth




U-NII-2A IEEE 802.11a 5260MHz_Ant 1

26dB Bandwidth

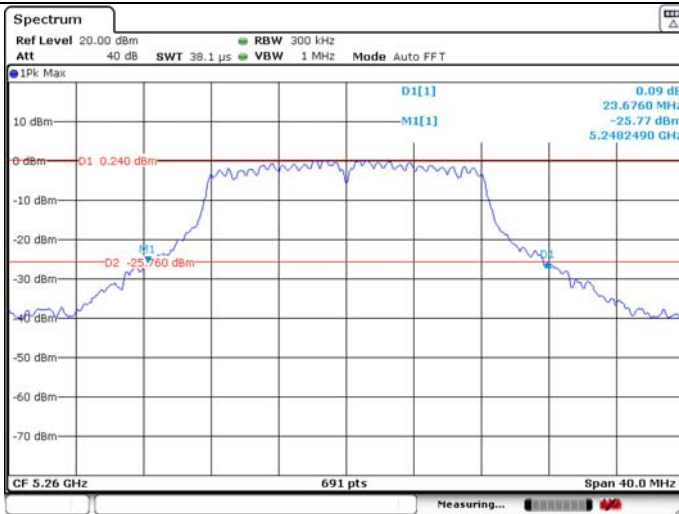


99% Occupied Bandwidth

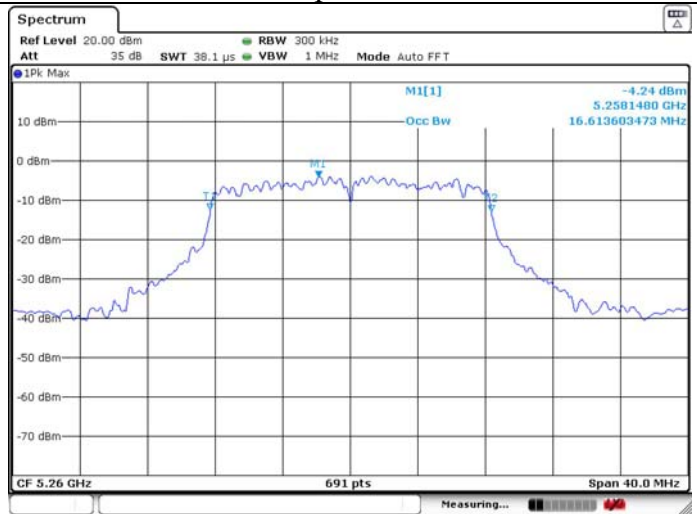

U-NII-2A IEEE 802.11a 5300MHz_Ant 1

26dB Bandwidth

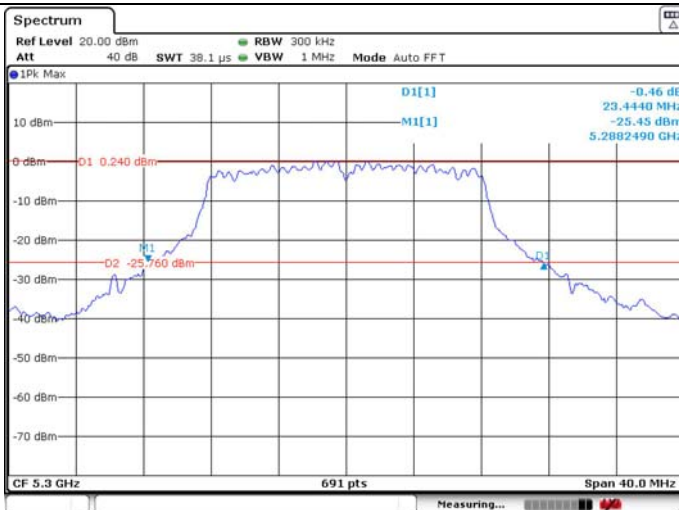


99% Occupied Bandwidth







U-NII-2A IEEE 802.11a 5320MHz_Ant 1




26dB Bandwidth


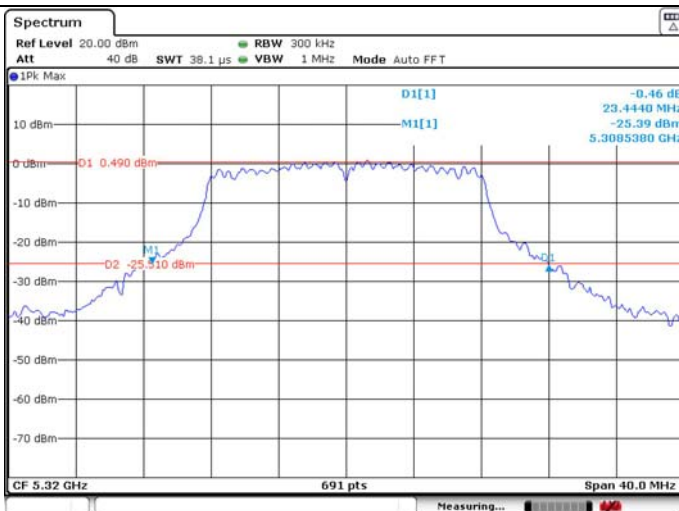




99% Occupied Bandwidth



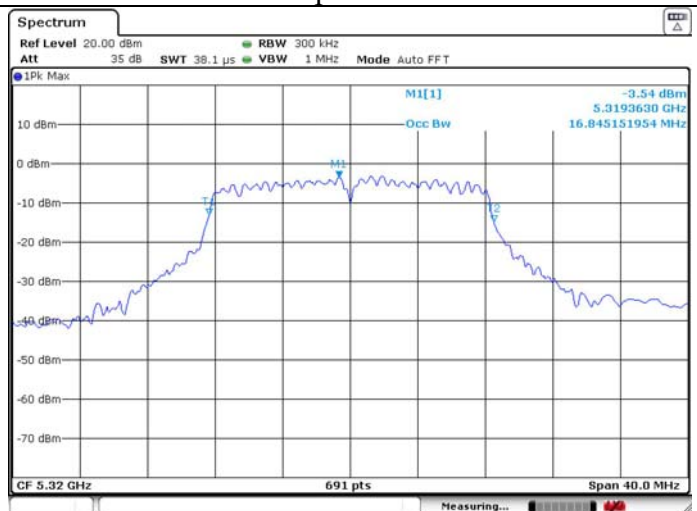


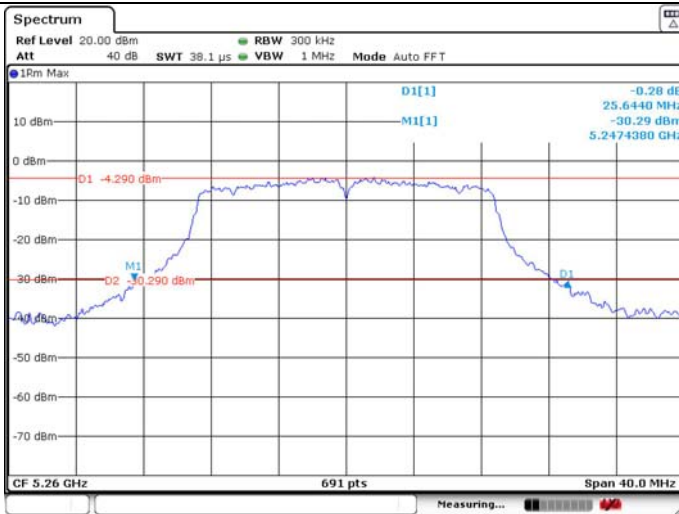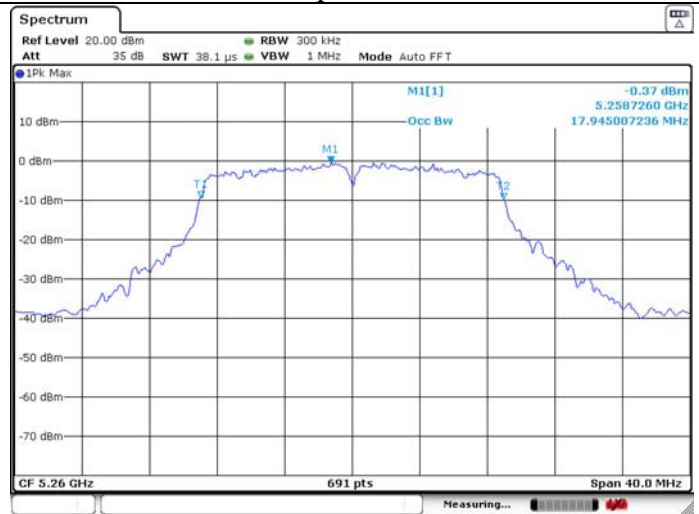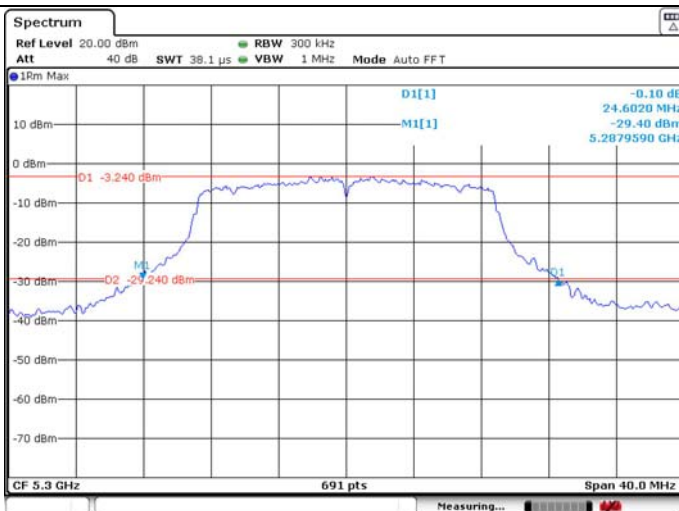U-NII-2A 802.11n HT20 5260MHz_Ant 0**26dB Bandwidth****99% Occupied Bandwidth****U-NII-2A 802.11n HT20 5260MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth****U-NII-2A 802.11n HT20 5300MHz_Ant 0****26dB Bandwidth****99% Occupied Bandwidth**

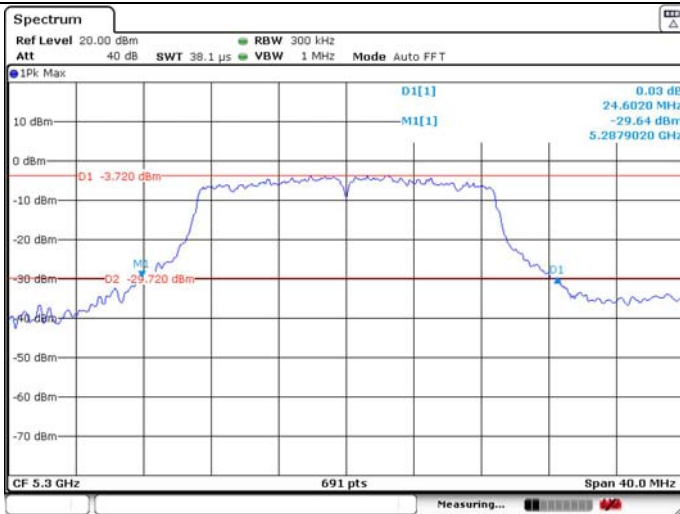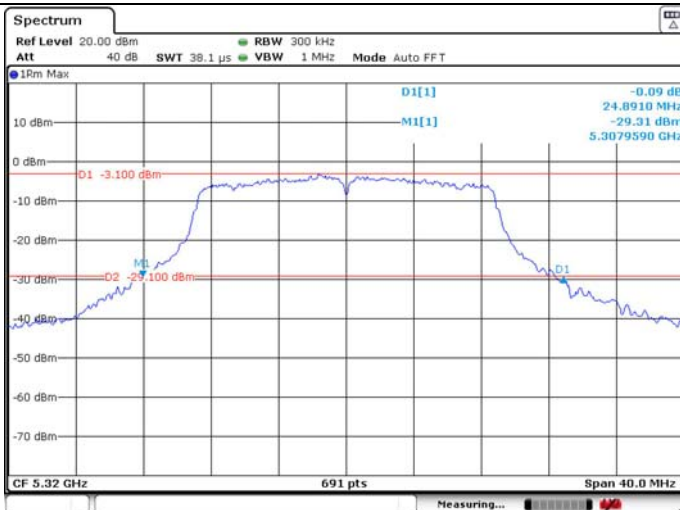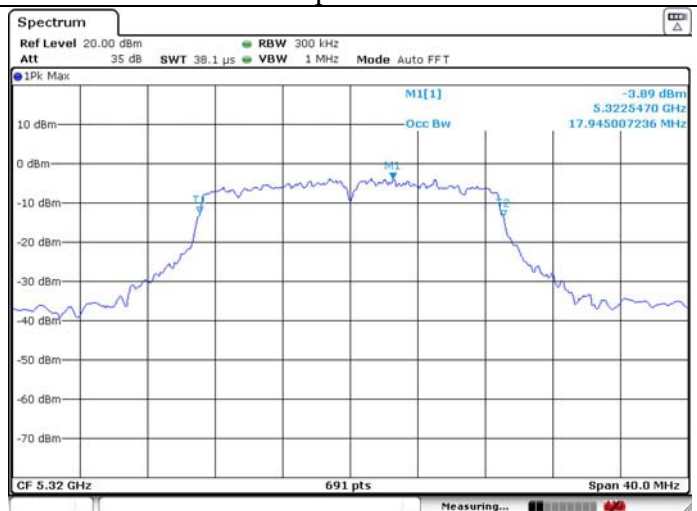U-NII-2A IEEE 802.11n HT20 5300MHz_Ant 1**26dB Bandwidth****99% Occupied Bandwidth****U-NII-2A IEEE 802.11n HT20 5320MHz_Ant 0****26dB Bandwidth****99% Occupied Bandwidth****U-NII-2A IEEE 802.11n HT20 5320MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth**

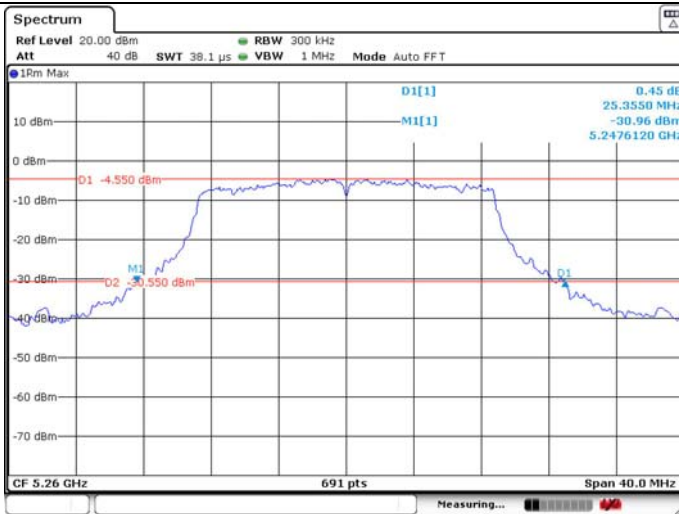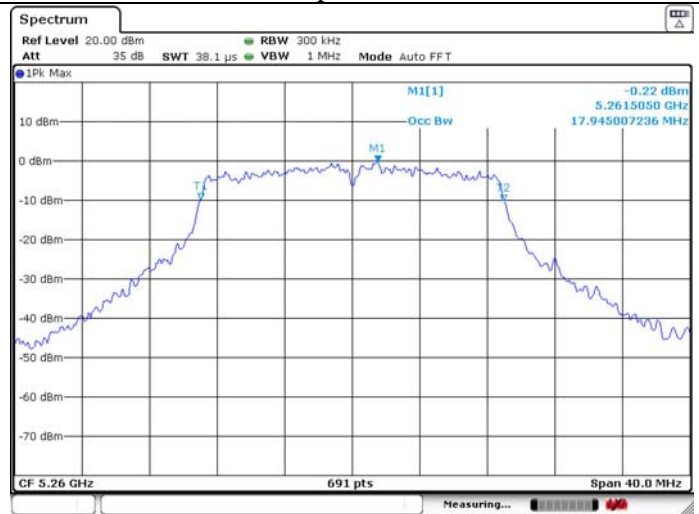
U-NII-2A IEEE 802.11ac VHT20 5260MHz_Ant 0**26dB Bandwidth****99% Occupied Bandwidth****U-NII-2A IEEE 802.11ac VHT20 5260MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth****U-NII-2A IEEE 802.11ac VHT20 5300MHz_Ant 0****26dB Bandwidth****99% Occupied Bandwidth**

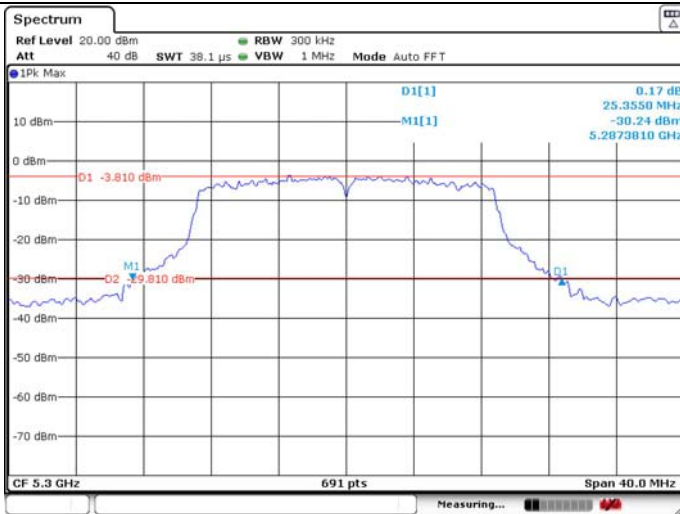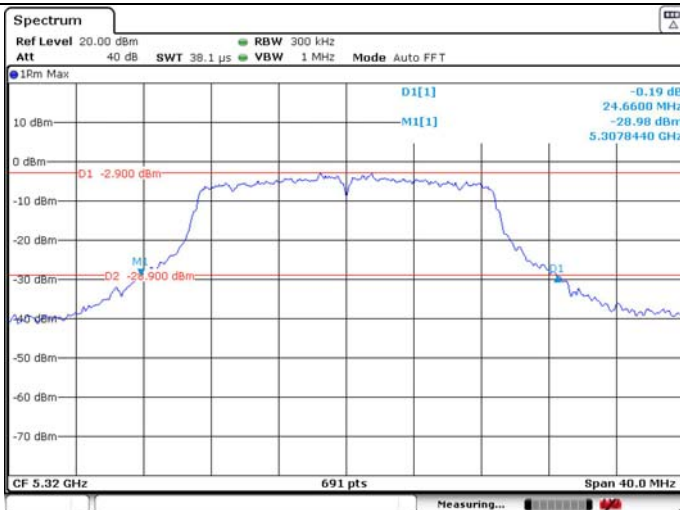U-NII-2A IEEE 802.11ac VHT20 5300MHz_Ant 1**26dB Bandwidth****99% Occupied Bandwidth****U-NII-2A IEEE 802.11ac VHT20 5320MHz_Ant 0****26dB Bandwidth****99% Occupied Bandwidth****U-NII-2A IEEE 802.11ac VHT20 5320MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth**

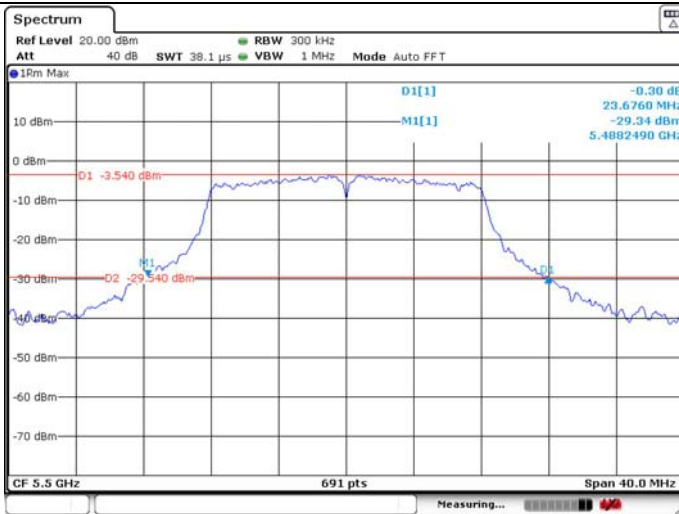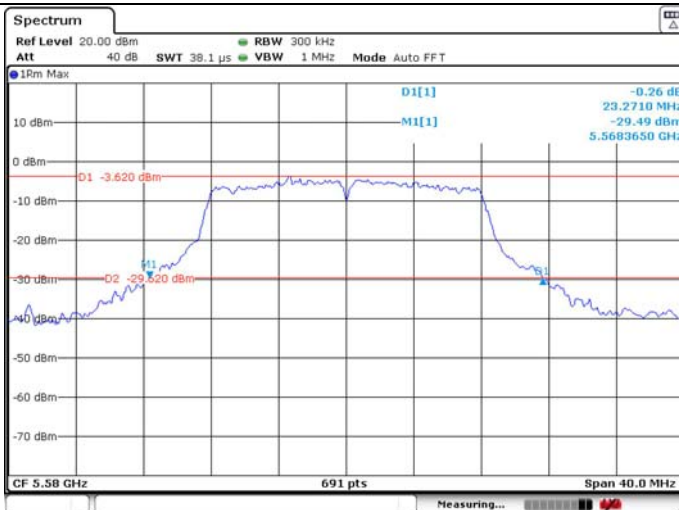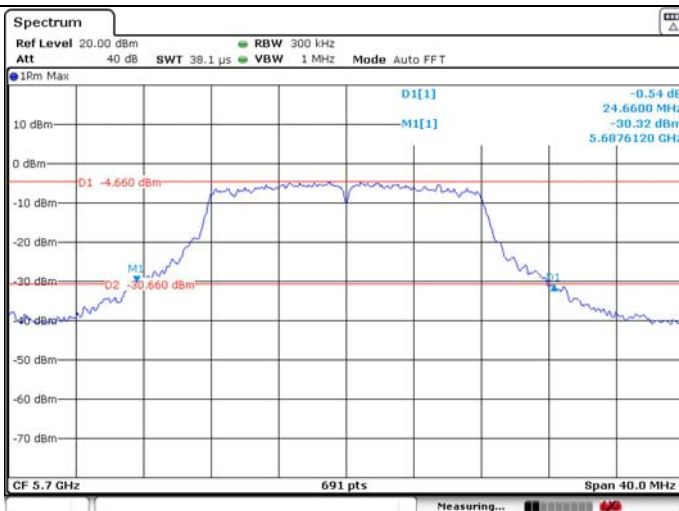U-NII-2C IEEE 802.11a 5500MHz_Ant 0**26dB Bandwidth****99% Occupied Bandwidth****U-NII-2C IEEE 802.11a 5580MHz_Ant 0****26dB Bandwidth****99% Occupied Bandwidth****U-NII-2C IEEE 802.11a 5700MHz_Ant 0****26dB Bandwidth****99% Occupied Bandwidth**

U-NII-2C IEEE 802.11a 5500MHz_Ant 1

26dB Bandwidth

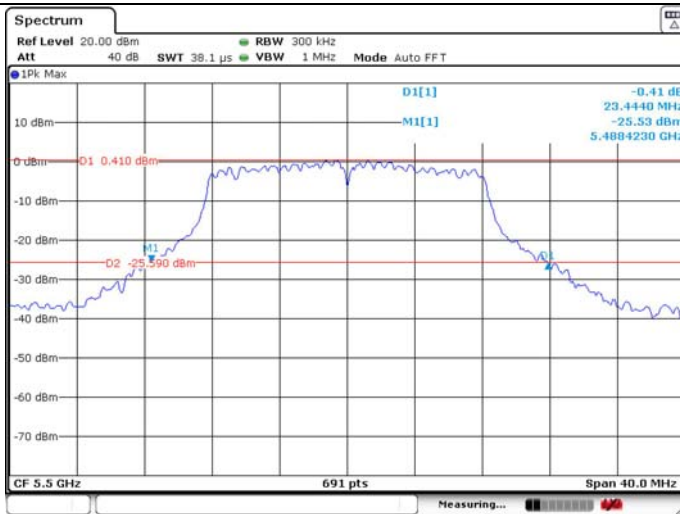


99% Occupied Bandwidth




U-NII-2C IEEE 802.11a 5580MHz_Ant 1

26dB Bandwidth

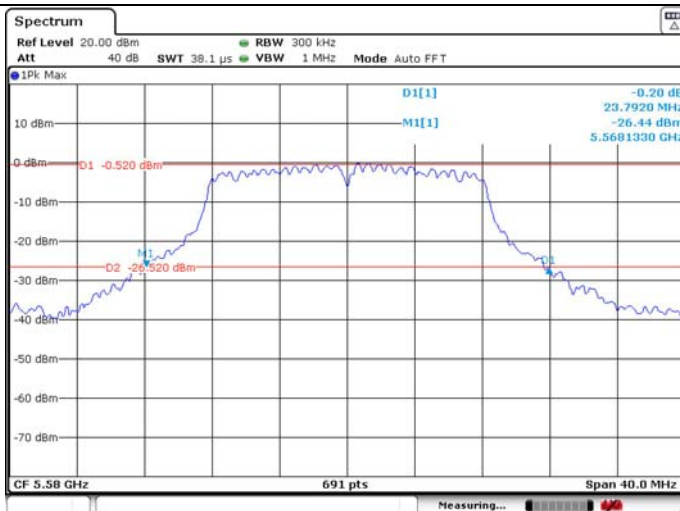

99% Occupied Bandwidth

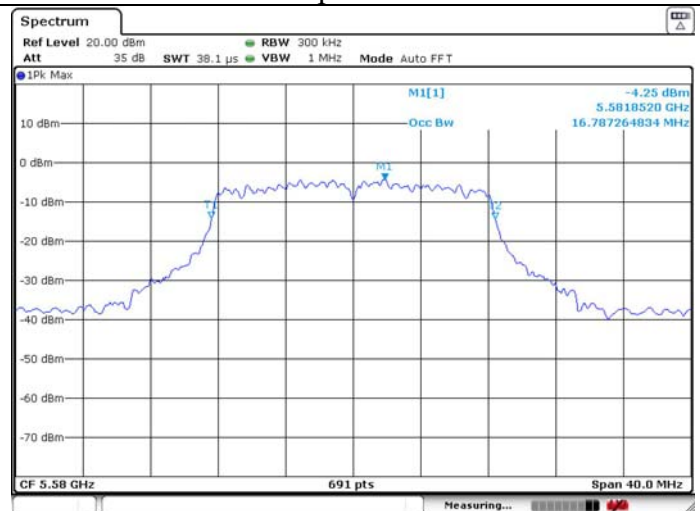



U-NII-2C IEEE 802.11a 5700MHz_Ant 1


26dB Bandwidth



99% Occupied Bandwidth

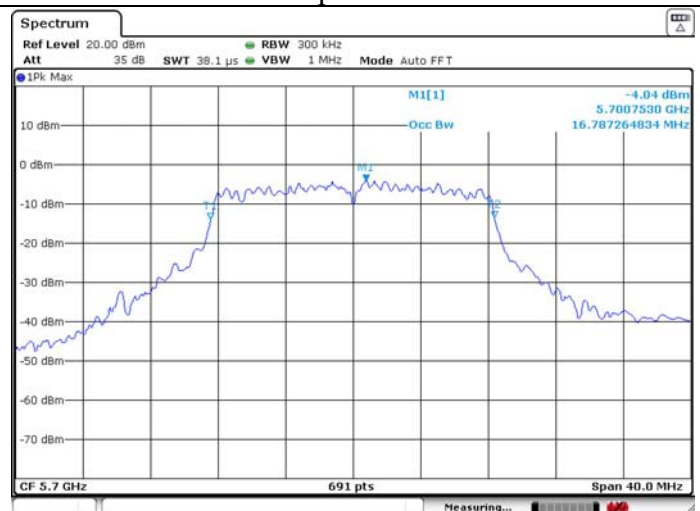


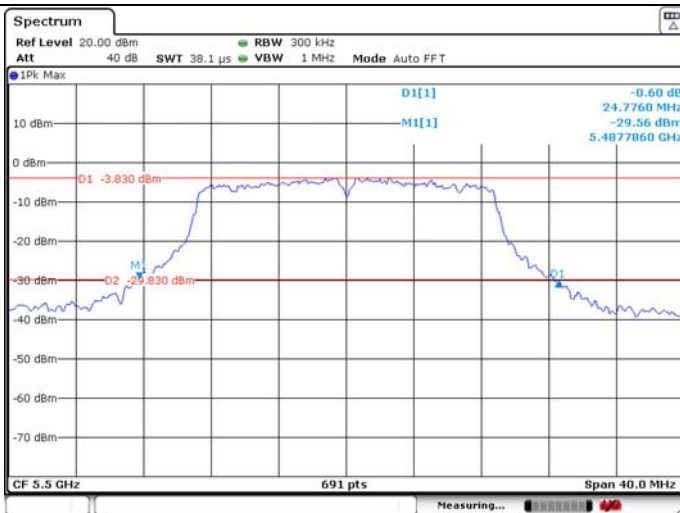U-NII-2C IEEE 802.11n HT20 5500MHz_Ant 0**26dB Bandwidth****99% Occupied Bandwidth****U-NII-2C IEEE 802.11n HT20 5500MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth****U-NII-2C IEEE 802.11n HT20 5580MHz_Ant 0****26dB Bandwidth****99% Occupied Bandwidth**

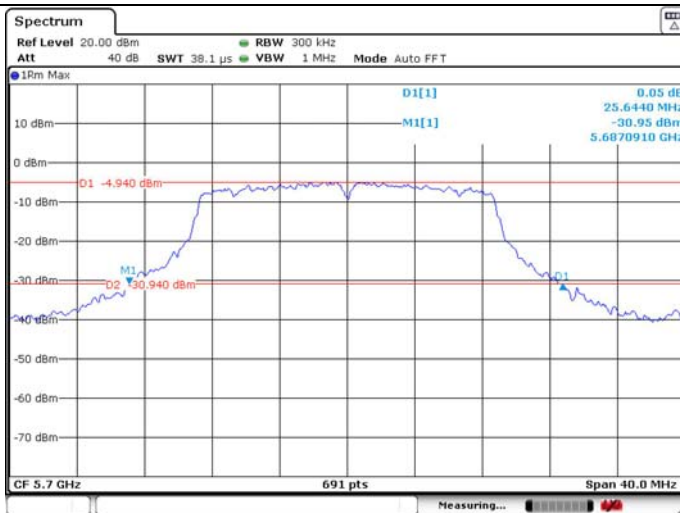U-NII-2C IEEE 802.11n HT20 5580MHz_Ant 1**26dB Bandwidth****99% Occupied Bandwidth****U-NII-2C IEEE 802.11n HT20 5700MHz_Ant 0****26dB Bandwidth****99% Occupied Bandwidth****U-NII-2C IEEE 802.11n HT20 5700MHz_Ant 1****26dB Bandwidth****99% Occupied Bandwidth**

U-NII-2C IEEE 802.11ac VHT20 5500MHz_Ant 0

26dB Bandwidth

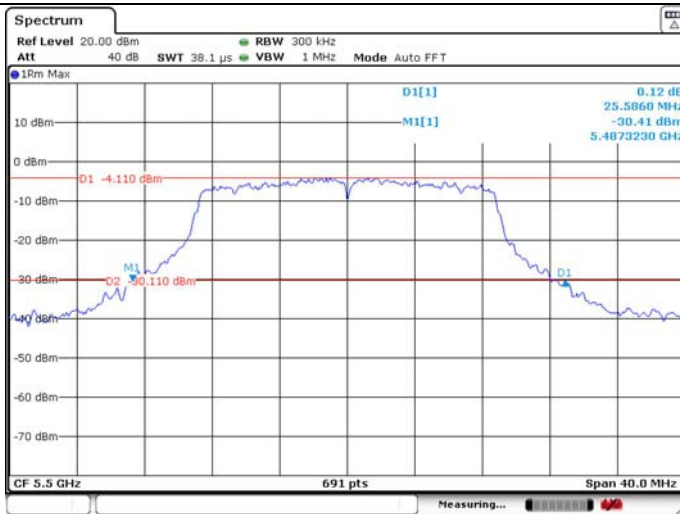


99% Occupied Bandwidth



U-NII-2C IEEE 802.11ac VHT20 5500MHz_Ant 1

26dB Bandwidth

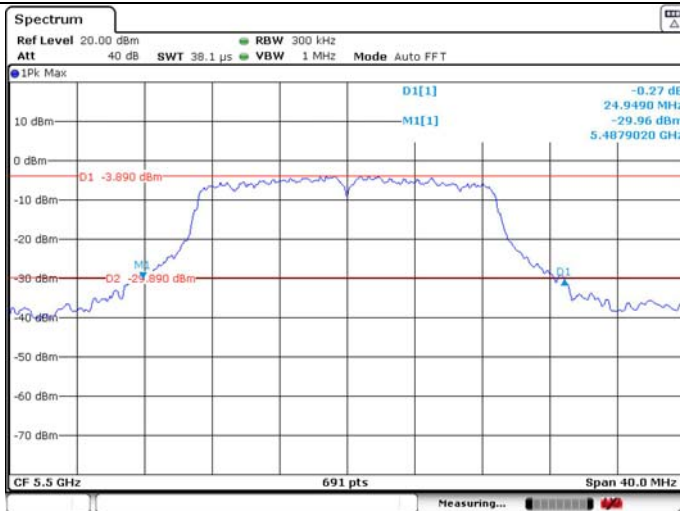


99% Occupied Bandwidth



U-NII-2C IEEE 802.11ac VHT20 5580MHz_Ant 0

26dB Bandwidth

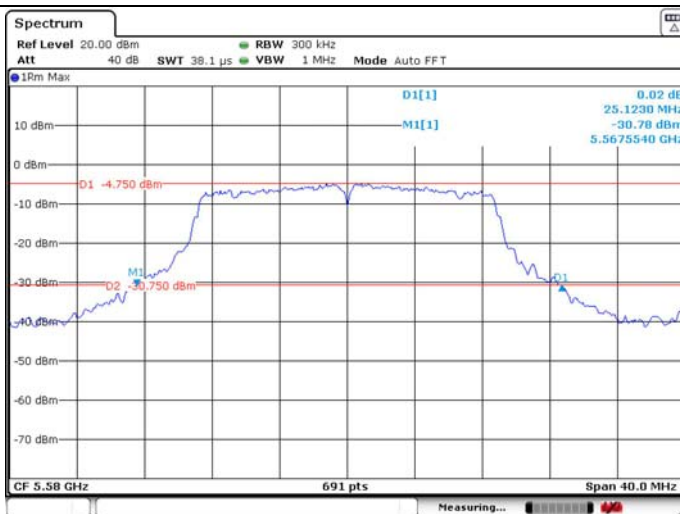


99% Occupied Bandwidth



U-NII-2C IEEE 802.11ac VHT20 5580MHz_Ant 1

26dB Bandwidth

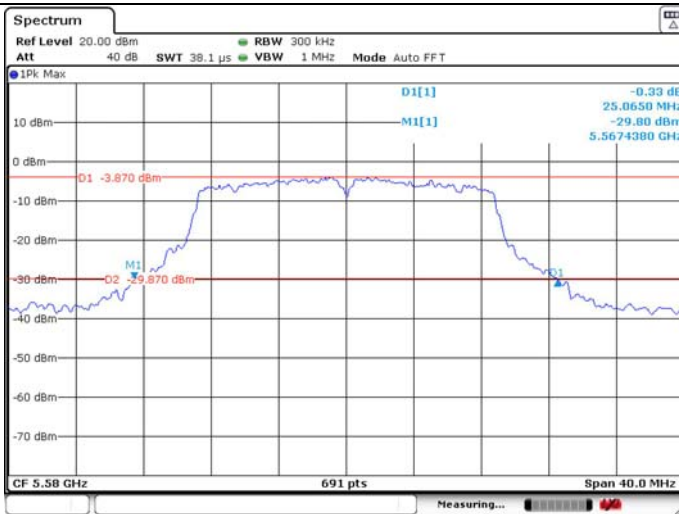

99% Occupied Bandwidth



U-NII-2C IEEE 802.11ac VHT20 5700MHz_Ant 0

26dB Bandwidth




99% Occupied Bandwidth







U-NII-2C IEEE 802.11ac VHT20 5700MHz_Ant 1

26dB Bandwidth

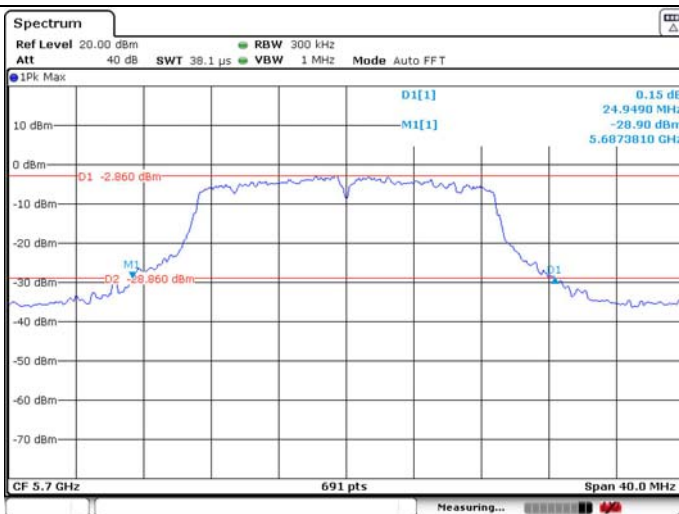


99% Occupied Bandwidth

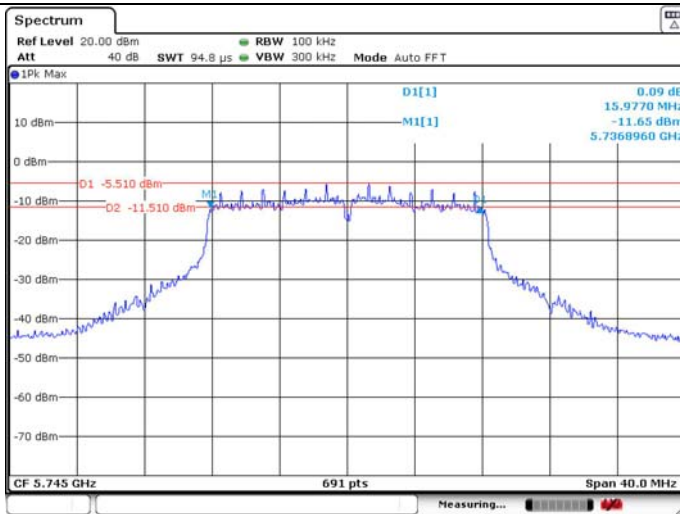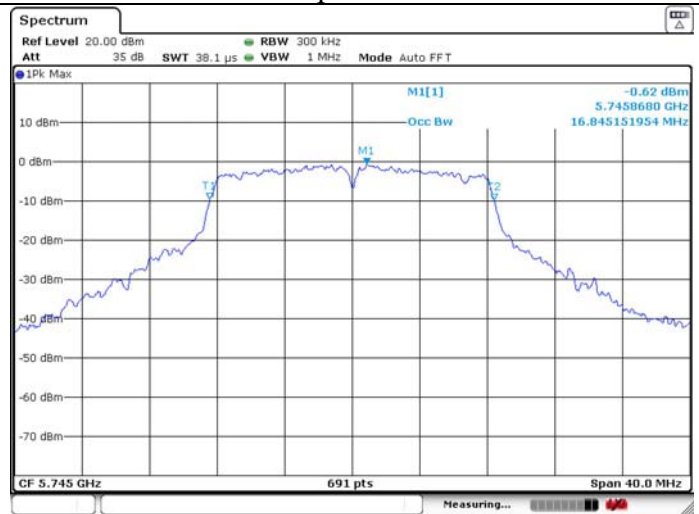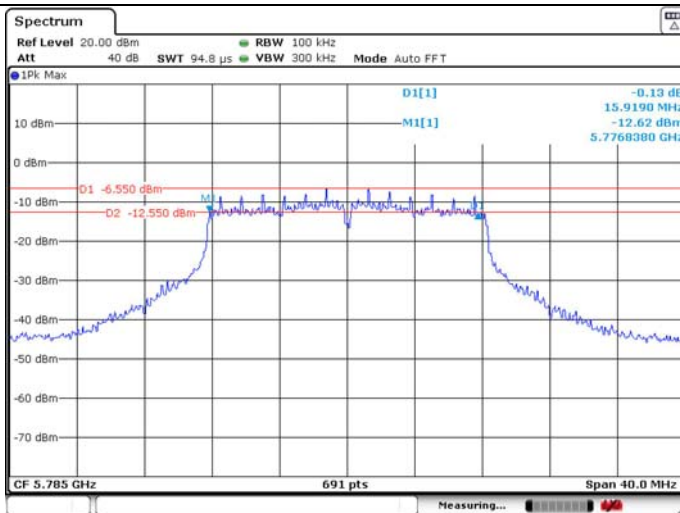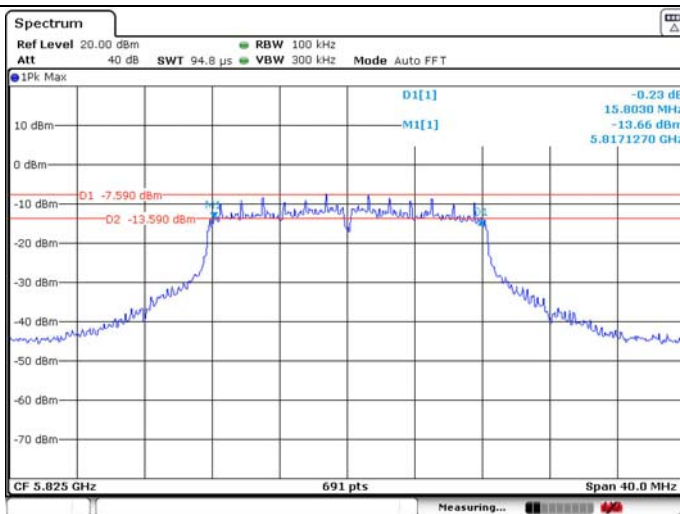


U-NII-3 IEEE 802.11a 5745MHz_Ant 0**6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11a 5785MHz_Ant 0****6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11a 5825MHz_Ant 0****6dB Bandwidth****99% Occupied Bandwidth**

U-NII-3 IEEE 802.11a 5745MHz_Ant 1

6dB Bandwidth

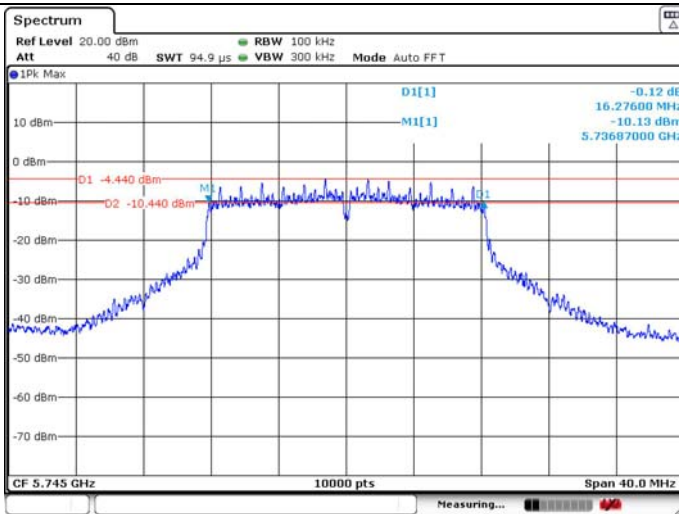


99% Occupied Bandwidth

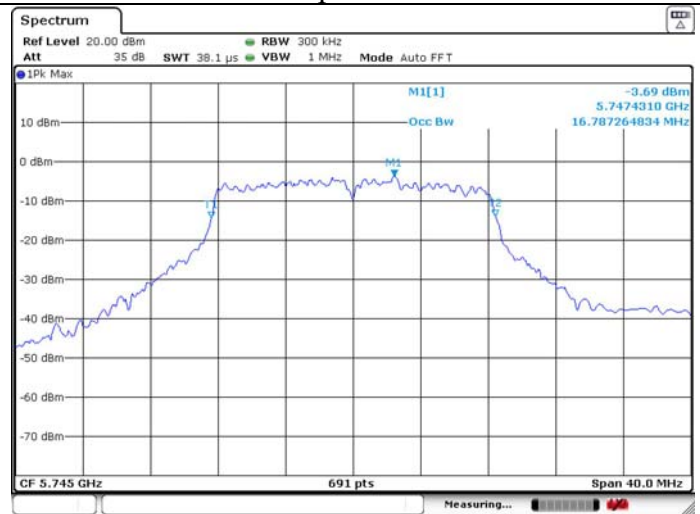

U-NII-3 IEEE 802.11a 5785MHz_Ant 1

6dB Bandwidth

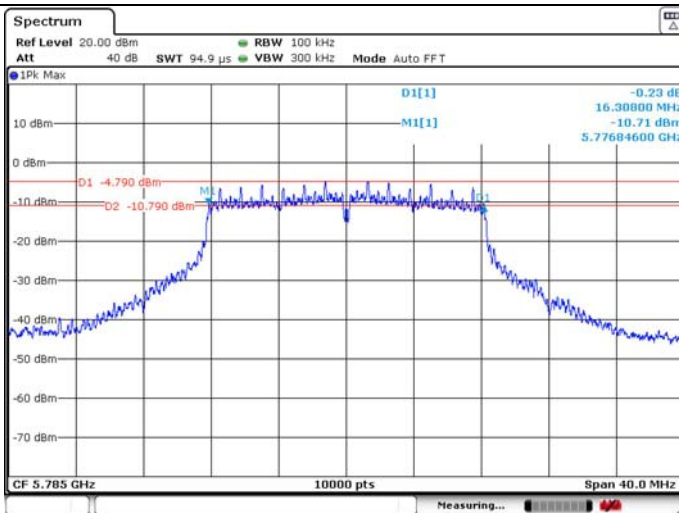


99% Occupied Bandwidth







U-NII-3 IEEE 802.11a 5825MHz_Ant 1






6dB Bandwidth



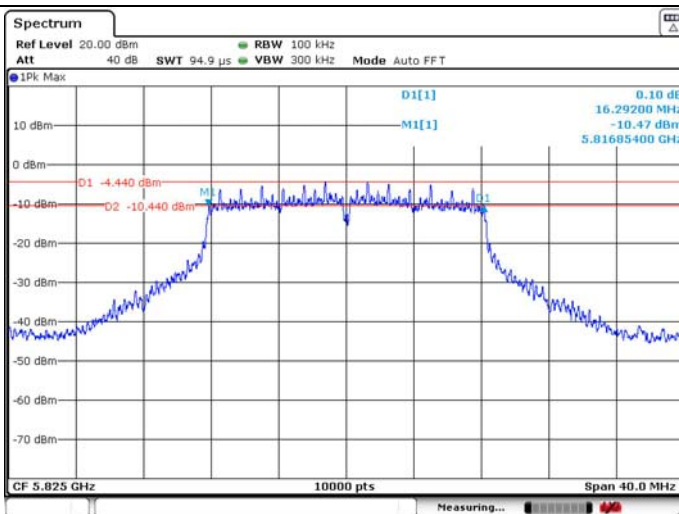


99% Occupied Bandwidth

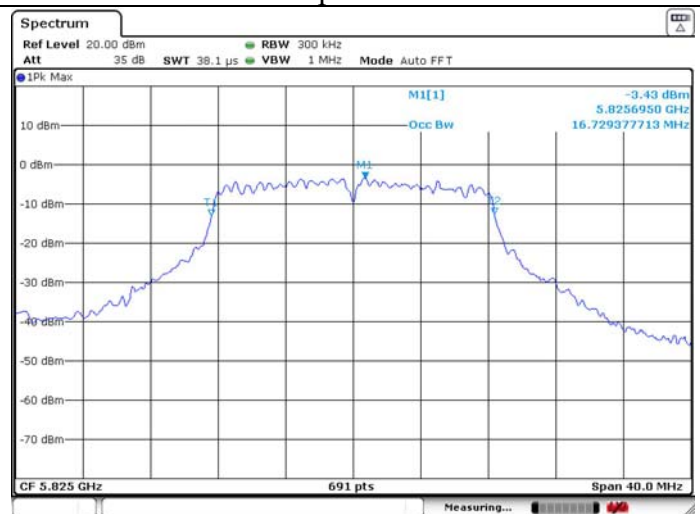

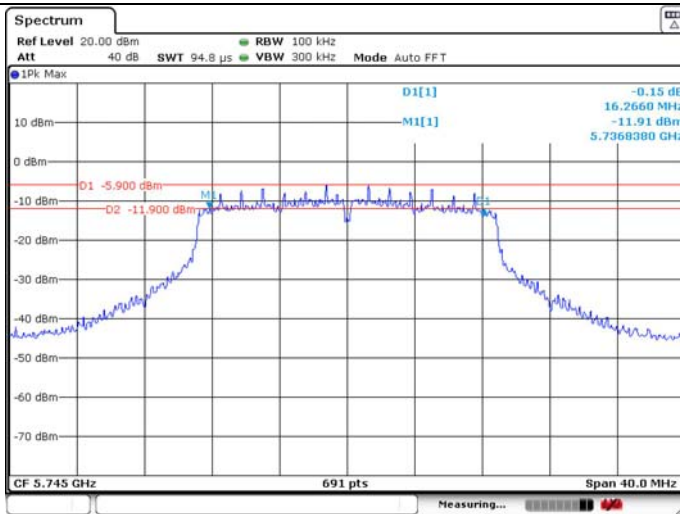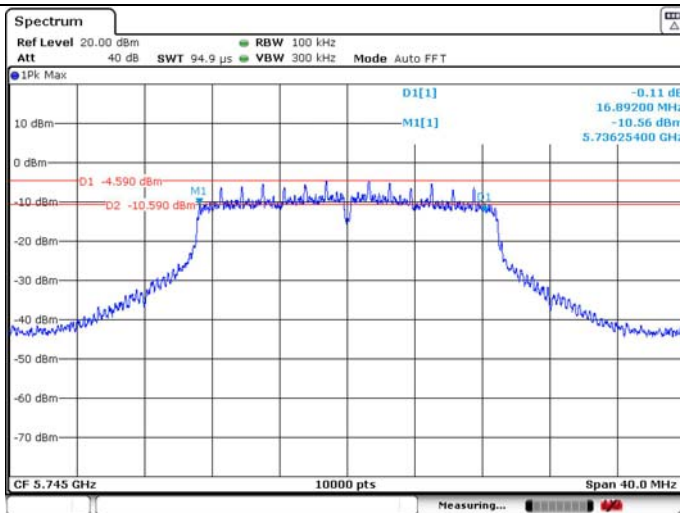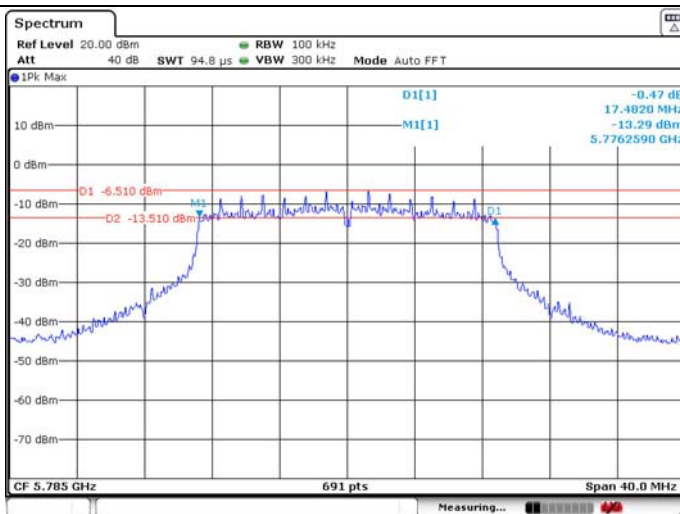U-NII-3 IEEE 802.11n HT20 5745MHz_Ant 0**6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11n HT20 5745MHz_Ant 1****6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11n HT20 5785MHz_Ant 0****6dB Bandwidth****99% Occupied Bandwidth**

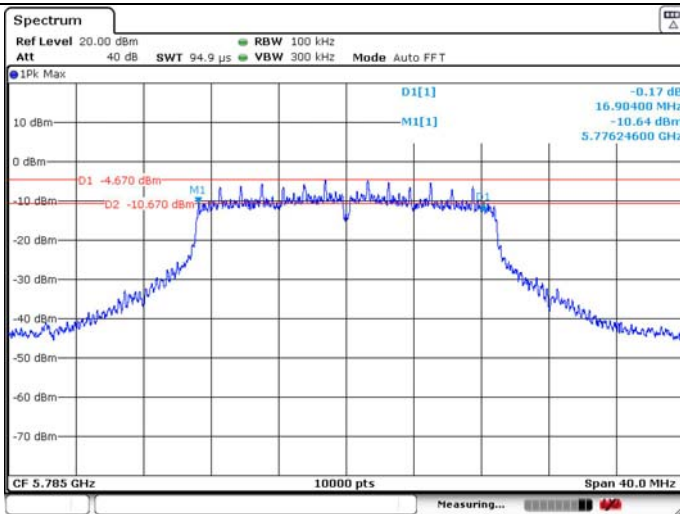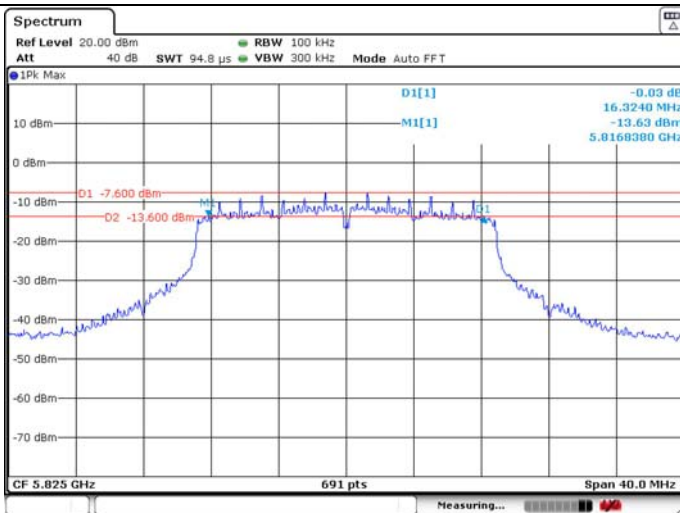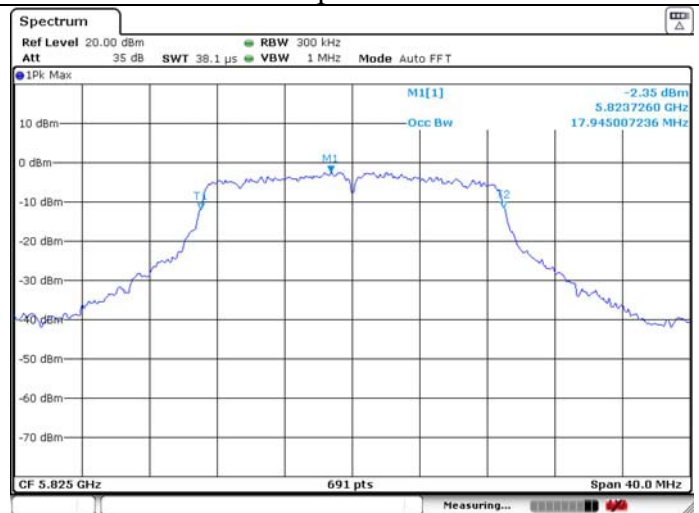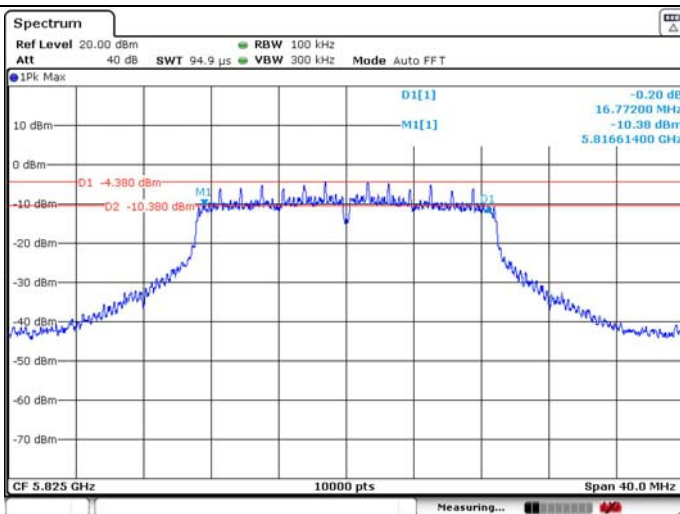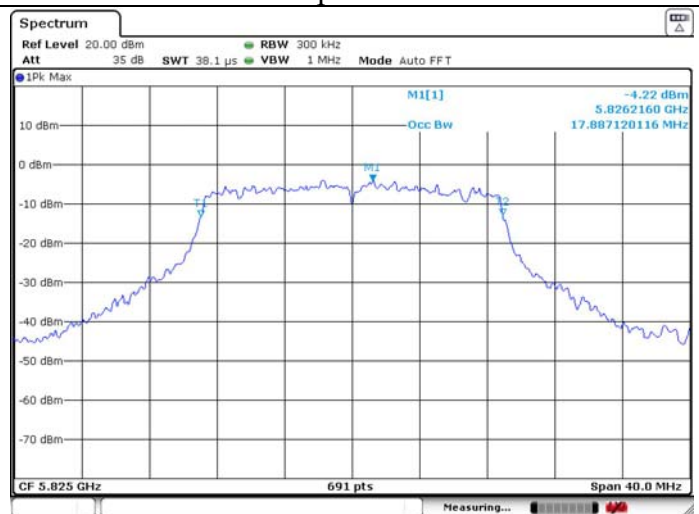U-NII-3 IEEE 802.11n HT20 5785MHz_Ant 1**6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11n HT20 5825MHz_Ant 0****6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11n HT20 5825MHz_Ant 1****6dB Bandwidth****99% Occupied Bandwidth**

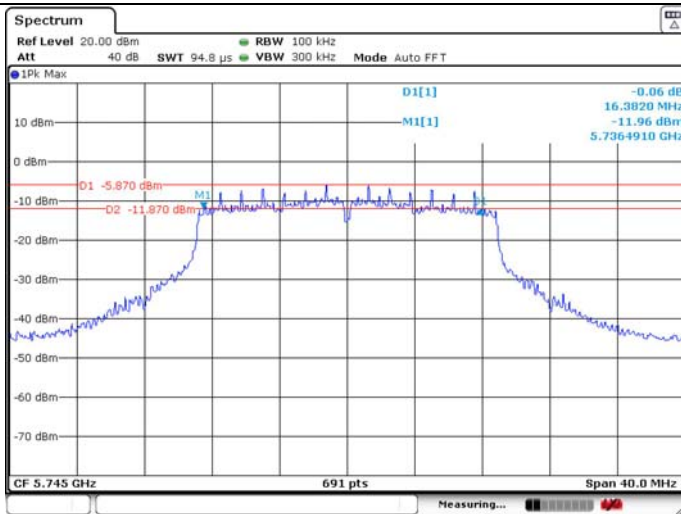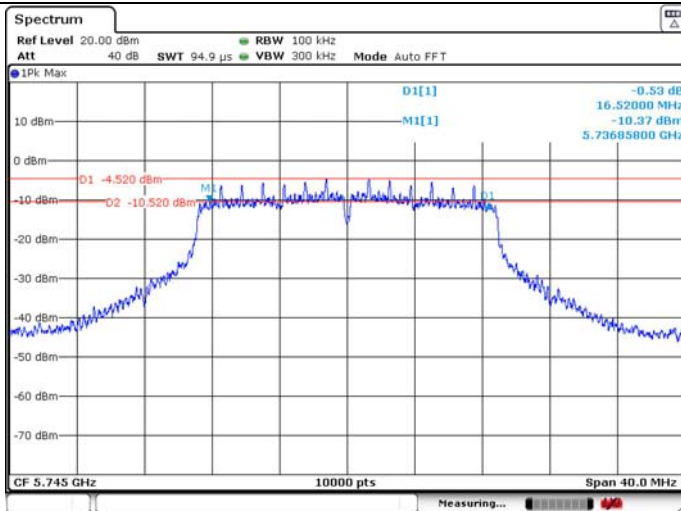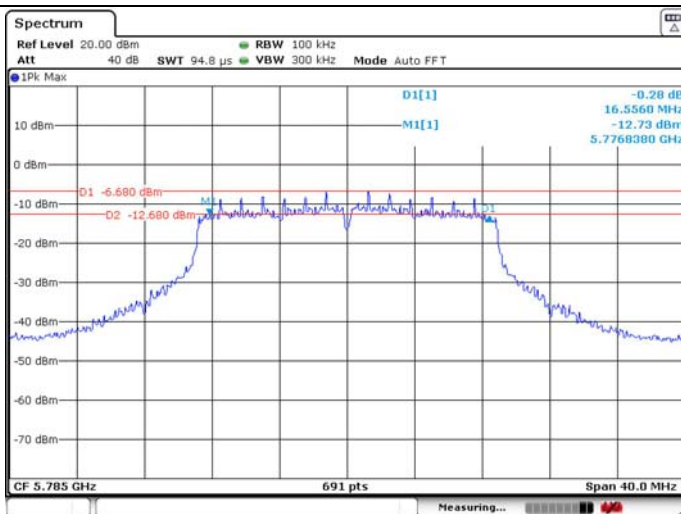U-NII-3 IEEE 802.11ac VHT20 5745MHz_Ant 0**6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11ac VHT20 5745MHz_Ant 1****6dB Bandwidth****99% Occupied Bandwidth****U-NII-3 IEEE 802.11ac VHT20 5785MHz_Ant 0****6dB Bandwidth****99% Occupied Bandwidth**