



802.11n-HT20 Out-of-Band Emissions

Channel 11 (2462MHz)

100kHz PSD Reference Level

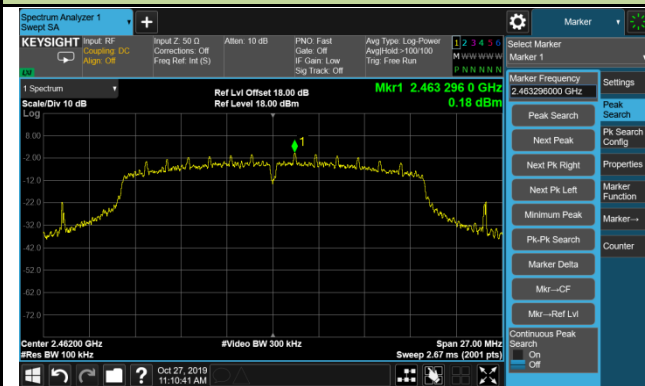

High Band Edge

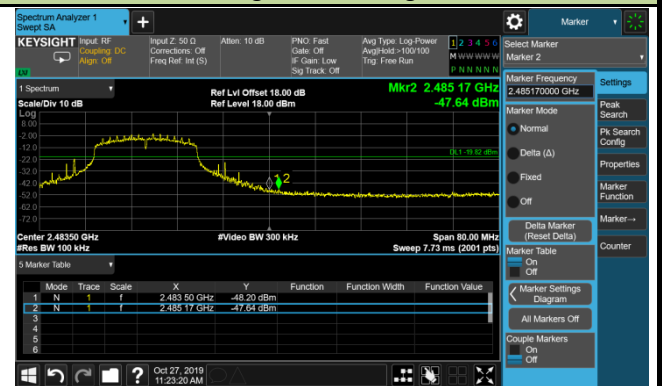

Spurious Emission



Note: The Value of the Display Line is -19.82dBm

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4.Test Setup

Below 1GHz Test Setup:

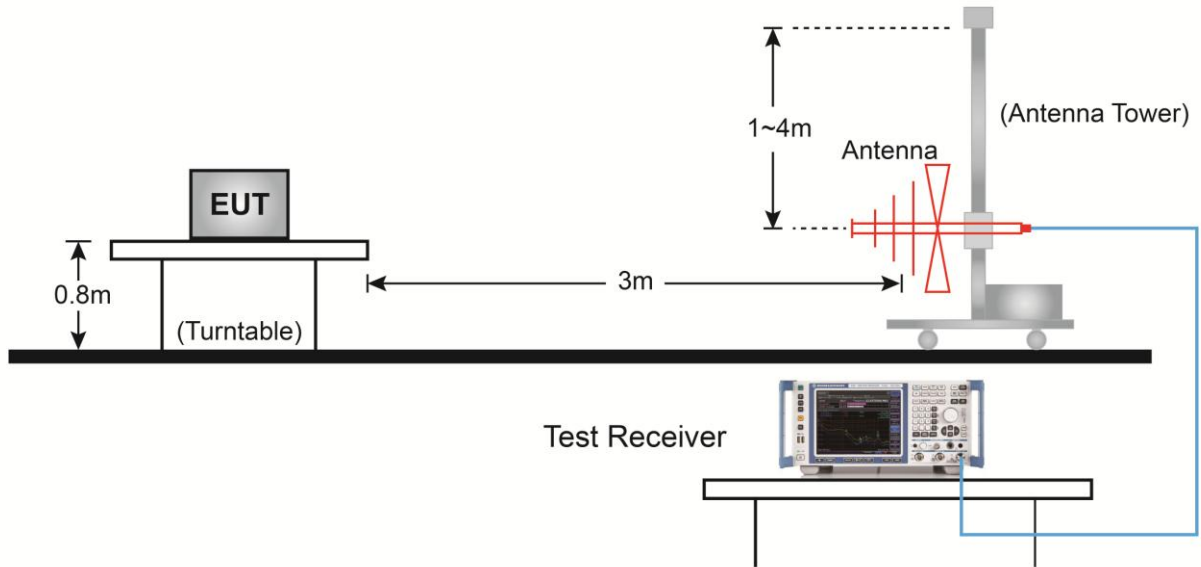

Above 1GHz Test Setup:

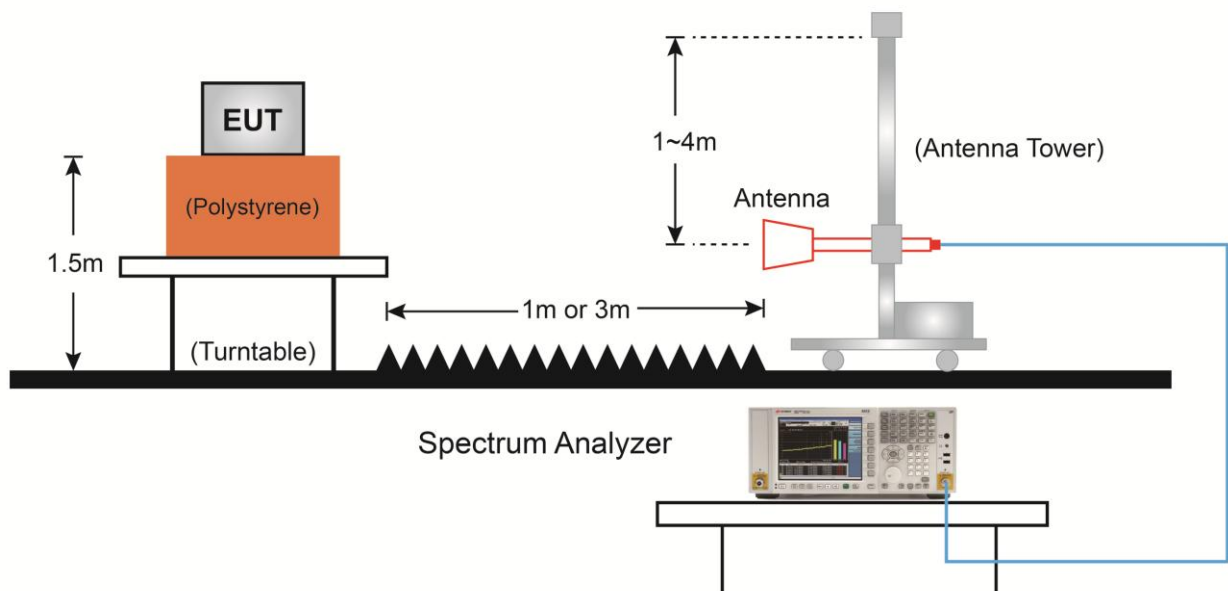

7.6.5. Test Result

Product	Wireless Network Control	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	AC1	Test Date	2019/10/25
Test Mode	802.11b	Test Channel	01
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4017.5	51.6	0.2	51.8	74.0	-22.2	Peak	Horizontal
	4910.0	39.4	3.4	42.8	74.0	-31.2	Peak	Horizontal
*	5845.0	37.9	5.2	43.1	88.8	-45.7	Peak	Horizontal
*	6729.0	37.3	9.0	46.3	88.8	-42.5	Peak	Horizontal
	4017.5	52.0	0.2	52.2	74.0	-21.8	Peak	Vertical
	4825.0	42.8	3.2	46.0	74.0	-28.0	Peak	Vertical
*	6431.5	42.5	7.4	49.9	88.8	-38.9	Peak	Vertical
*	6848.0	36.2	9.7	45.9	88.8	-42.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (108.8dBμV/m) or FCC 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wireless Network Control	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	AC1	Test Date	2019/10/25
Test Mode	802.11b	Test Channel	06
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4060.0	49.7	0.4	50.1	74.0	-23.9	Peak	Horizontal
	4876.0	43.6	3.3	46.9	74.0	-27.1	Peak	Horizontal
*	6499.5	38.8	7.7	46.5	89.4	-42.9	Peak	Horizontal
*	7086.0	36.8	10.8	47.6	89.4	-41.8	Peak	Horizontal
	4060.0	54.5	0.4	54.9	74.0	-19.1	Peak	Vertical
	4063.0	47.6	0.4	48.0	54.0	-6.0	Average	Vertical
	4876.0	45.8	3.3	49.1	74.0	-24.9	Peak	Vertical
*	5887.5	38.9	5.4	44.3	89.4	-45.1	Peak	Vertical
*	6499.5	43.3	7.7	51.0	89.4	-38.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (109.4dBμV/m) or FCC 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wireless Network Control	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	AC1	Test Date	2019/10/25
Test Mode	802.11b	Test Channel	11
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4102.5	47.6	0.6	48.2	74.0	-25.8	Peak	Horizontal
	4952.5	39.4	3.5	42.9	74.0	-31.1	Peak	Horizontal
*	6006.5	38.4	5.8	44.2	88.7	-44.5	Peak	Horizontal
*	6380.5	38.5	7.2	45.7	88.7	-43.0	Peak	Horizontal
	4102.5	50.5	0.6	51.1	74.0	-22.9	Peak	Vertical
	4927.0	40.9	3.4	44.3	74.0	-29.7	Peak	Vertical
*	5989.5	38.3	5.8	44.1	88.7	-44.6	Peak	Vertical
*	6567.5	42.1	8.1	50.2	88.7	-38.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (108.7dBμV/m) or FCC 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wireless Network Control	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	AC1	Test Date	2019/10/25
Test Mode	802.11g	Test Channel	01
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4017.5	46.4	0.2	46.6	74.0	-27.4	Peak	Horizontal
	4995.0	39.6	3.5	43.1	74.0	-30.9	Peak	Horizontal
*	5972.5	38.4	5.7	44.1	85.3	-41.2	Peak	Horizontal
*	6397.5	38.3	7.3	45.6	85.3	-39.7	Peak	Horizontal
	4017.5	50.3	0.2	50.5	74.0	-23.5	Peak	Vertical
	5131.0	40.4	3.6	44.0	74.0	-30.0	Peak	Vertical
*	6431.5	41.5	7.4	48.9	85.3	-36.4	Peak	Vertical
*	7103.0	36.3	10.8	47.1	85.3	-38.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (105.3dBμV/m) or FCC 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wireless Network Control	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	AC1	Test Date	2019/10/25
Test Mode	802.11g	Test Channel	06
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4060.0	49.3	0.4	49.7	74.0	-24.3	Peak	Horizontal
	4867.5	39.9	3.3	43.2	74.0	-30.8	Peak	Horizontal
*	6006.5	38.2	5.8	44.0	85.7	-41.7	Peak	Horizontal
*	6593.0	37.7	8.2	45.9	85.7	-39.8	Peak	Horizontal
	4060.0	53.4	0.4	53.8	74.0	-20.2	Peak	Vertical
	4060.3	44.8	0.4	45.2	54.0	-8.8	Average	Vertical
	4876.0	44.0	3.3	47.3	74.0	-26.7	Peak	Vertical
*	5683.5	40.9	4.6	45.5	85.7	-40.2	Peak	Vertical
*	6499.5	41.7	7.7	49.4	85.7	-36.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (105.7dBμV/m) or FCC 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wireless Network Control	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	AC1	Test Date	2019/10/25
Test Mode	802.11g	Test Channel	11
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4102.5	46.6	0.6	47.2	74.0	-26.8	Peak	Horizontal
	5063.0	40.5	3.6	44.1	74.0	-29.9	Peak	Horizontal
*	6397.5	38.3	7.3	45.6	86.2	-40.6	Peak	Horizontal
*	7060.5	36.5	10.7	47.2	86.2	-39.0	Peak	Horizontal
	4102.5	49.5	0.6	50.1	74.0	-23.9	Peak	Vertical
	4952.5	39.6	3.5	43.1	74.0	-30.9	Peak	Vertical
*	6567.5	41.0	8.1	49.1	86.2	-37.1	Peak	Vertical
*	7094.5	35.9	10.8	46.7	86.2	-39.5	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (106.2dBμV/m) or FCC 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wireless Network Control	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	AC1	Test Date	2019/10/25
Test Mode	802.11n-HT20	Test Channel	01
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4017.5	46.0	0.2	46.2	74.0	-27.8	Peak	Horizontal
	4986.5	40.1	3.5	43.6	74.0	-30.4	Peak	Horizontal
*	5683.5	39.0	4.6	43.6	85.0	-41.4	Peak	Horizontal
*	6482.5	37.5	7.6	45.1	85.0	-39.9	Peak	Horizontal
	4017.5	49.2	0.2	49.4	74.0	-24.6	Peak	Vertical
	4969.5	39.5	3.5	43.0	74.0	-31.0	Peak	Vertical
*	5862.0	38.9	5.3	44.2	85.0	-40.8	Peak	Vertical
*	6431.5	40.7	7.4	48.1	85.0	-36.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (105.0dBμV/m) or FCC 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wireless Network Control	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	AC1	Test Date	2019/10/25
Test Mode	802.11n-HT20	Test Channel	06
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4068.5	47.7	0.4	48.1	74.0	-25.9	Peak	Horizontal
	4876.0	39.9	3.3	43.2	74.0	-30.8	Peak	Horizontal
*	5930.0	37.8	5.5	43.3	85.4	-42.1	Peak	Horizontal
*	6499.5	38.1	7.7	45.8	85.4	-39.6	Peak	Horizontal
	4060.0	49.7	0.4	50.1	74.0	-23.9	Peak	Vertical
	4876.0	42.2	3.3	45.5	74.0	-28.5	Peak	Vertical
*	5913.0	38.3	5.5	43.8	85.4	-41.6	Peak	Vertical
*	6499.5	43.4	7.7	51.1	85.4	-34.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (105.4dBμV/m) or FCC 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wireless Network Control	Temperature	25°C
Test Engineer	Kevin Ker	Relative Humidity	54%
Test Site	AC1	Test Date	2019/10/25
Test Mode	802.11n-HT20	Test Channel	11
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4102.5	46.7	0.6	47.3	74.0	-26.7	Peak	Horizontal
	4978.0	40.1	3.5	43.6	74.0	-30.4	Peak	Horizontal
*	6465.5	38.5	7.6	46.1	85.7	-39.6	Peak	Horizontal
*	6933.0	36.3	10.2	46.5	85.7	-39.2	Peak	Horizontal
	4102.5	49.0	0.6	49.6	74.0	-24.4	Peak	Vertical
	5063.0	39.4	3.6	43.0	74.0	-31.0	Peak	Vertical
*	5930.0	37.9	5.5	43.4	85.7	-42.3	Peak	Vertical
*	6567.5	40.8	8.1	48.9	85.7	-36.8	Peak	Vertical


Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (105.7dBμV/m) or FCC 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Worst Case of Radiated Emission below 1GHz:

Site: AC1	Time: 2019/10/26 - 07:36
Limit: FCC_Part15.209_RSE(3m)	Engineer: Kevin Ker
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11b at Channel 2437MHz	

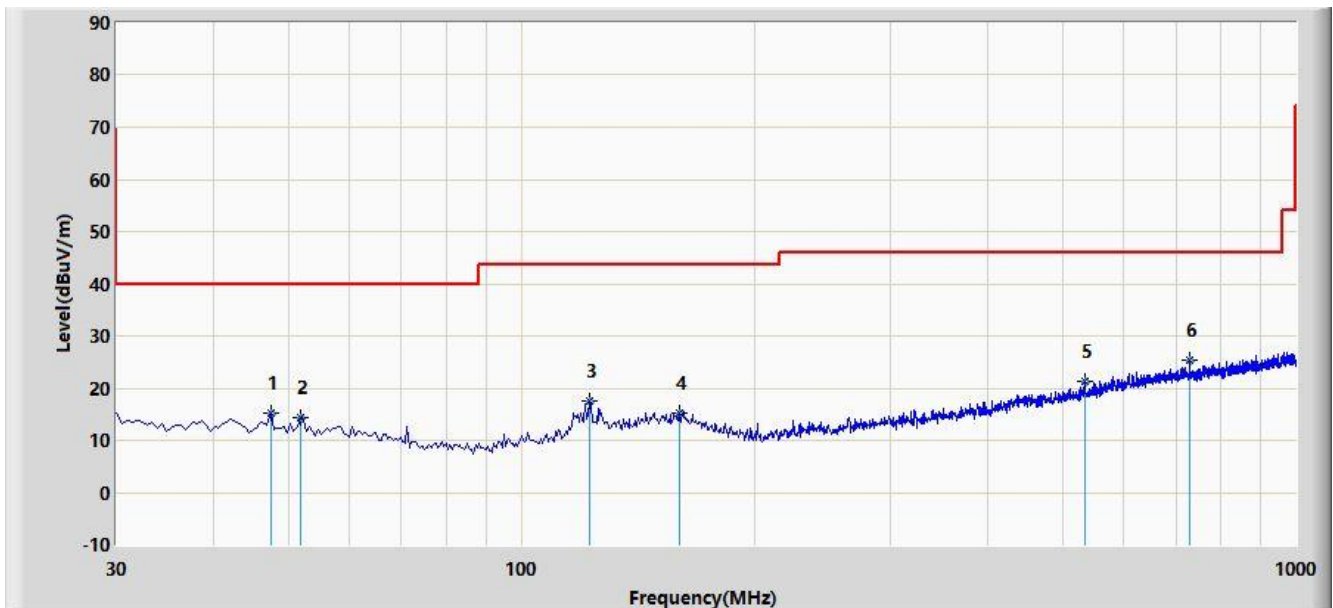


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			47.460	15.284	-6.235	-24.716	40.000	21.519	QP
2			51.825	14.487	-6.877	-25.513	40.000	21.364	QP
3			122.635	17.573	0.881	-25.927	43.500	16.691	QP
4			159.980	15.345	-0.771	-28.155	43.500	16.116	QP
5			533.430	21.436	-4.912	-24.564	46.000	26.348	QP
6		*	729.370	25.402	-4.165	-20.598	46.000	29.567	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC1	Time: 2019/10/26 - 07:38
Limit: FCC_Part15.209_RSE(3m)	Engineer: Kevin Ker
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11b at Channel 2437MHz	

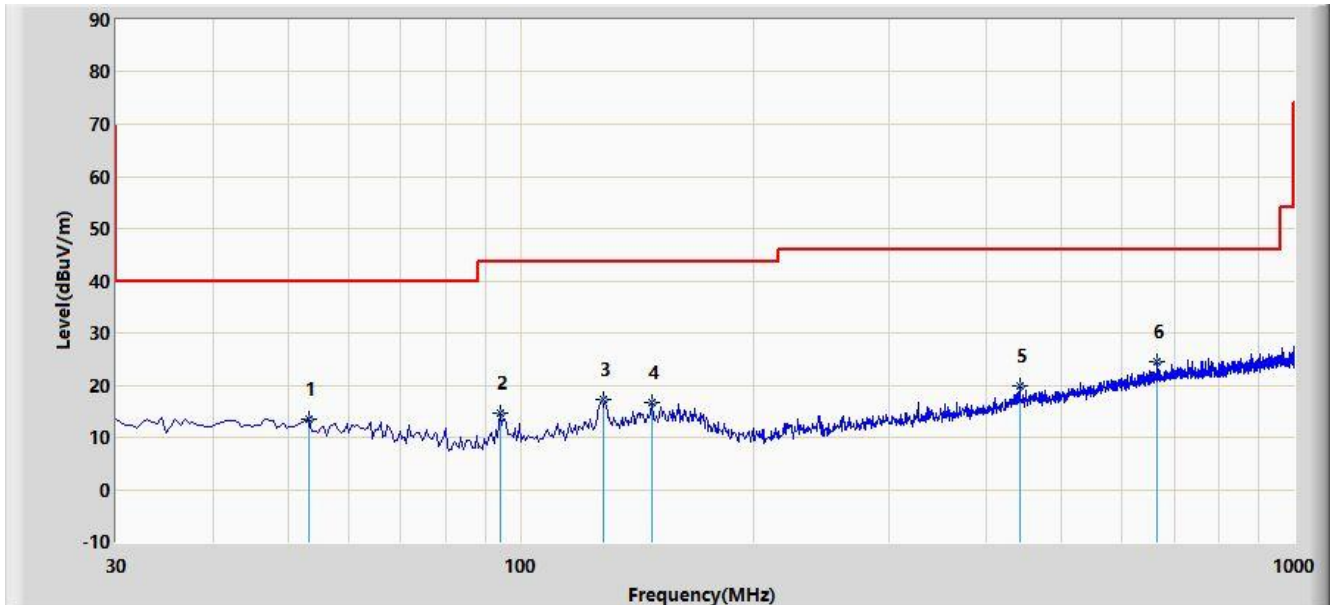

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			53.280	13.536	-7.607	-26.464	40.000	21.143	QP
2			94.020	14.731	-3.329	-28.769	43.500	18.060	QP
3			127.970	17.323	1.144	-26.177	43.500	16.179	QP
4			147.855	16.671	0.971	-26.829	43.500	15.701	QP
5			441.765	19.800	-4.969	-26.200	46.000	24.769	QP
6		*	664.380	24.508	-4.063	-21.492	46.000	28.571	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For RSS-Gen Section 8.10 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	--
8.37625 - 8.38675	1718.8 -1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 -2390	
12.51975 - 12.52025	2483.5 -2500	
12.57675 - 12.57725	2655 - 2900	
13.36 -13.41	3260 - 3267	
16.42 - 16.423	3332 -3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9			
Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Magnetic Field Strength (H-Field) ($\mu\text{A/m}$)	Measured Distance (m)
0.009 - 0.490	--	6.37/F (F in kHz)	300
0.490 - 1.705	--	6.37/F (F in kHz)	30
1.705 - 30	--	0.08	30
30 - 88	100	--	3
88 - 216	150	--	3
216 - 960	200	--	3
Above 960	500	--	3

7.7.2.Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.7.3.Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.7.4.Test Setup

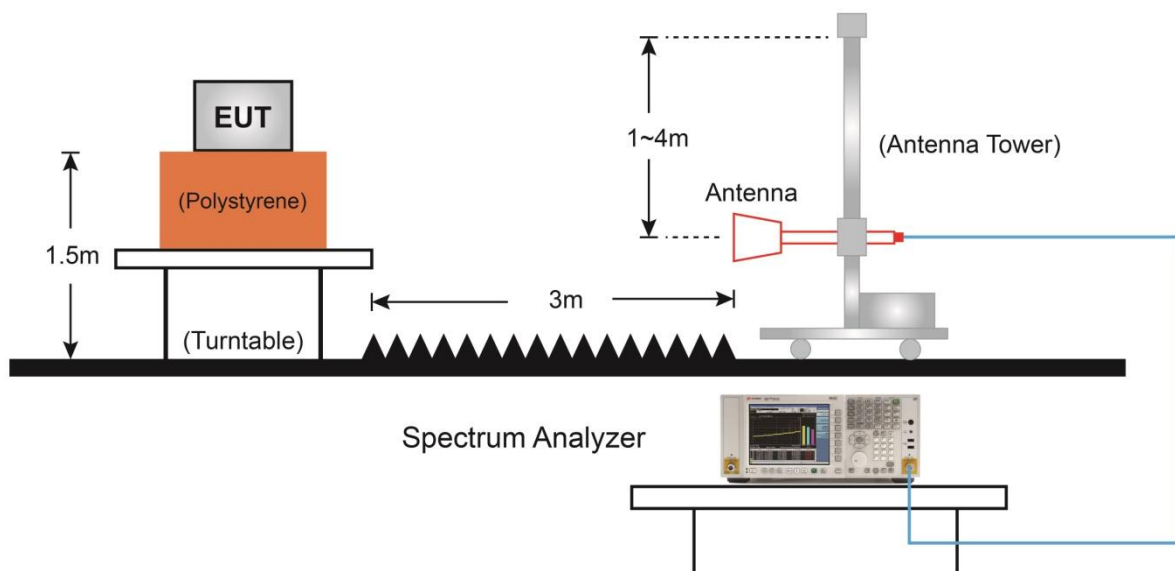

7.7.5.Test Result

Site: AC1	Time: 2019/10/22 - 17:49
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11b at channel 2412MHz	

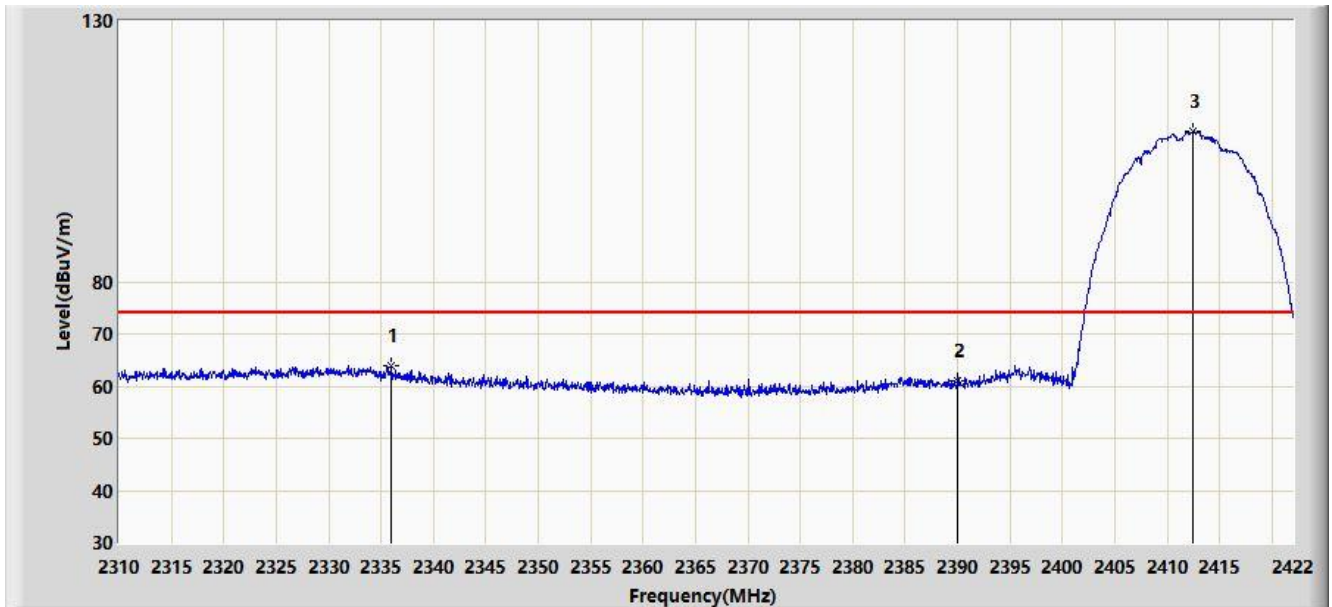


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2335.984	63.912	31.887	-10.088	74.000	32.025	PK
2			2390.000	60.954	28.680	-13.046	74.000	32.274	PK
3		*	2412.424	108.790	76.414	N/A	N/A	32.377	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 17:47
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11b at channel 2412MHz	

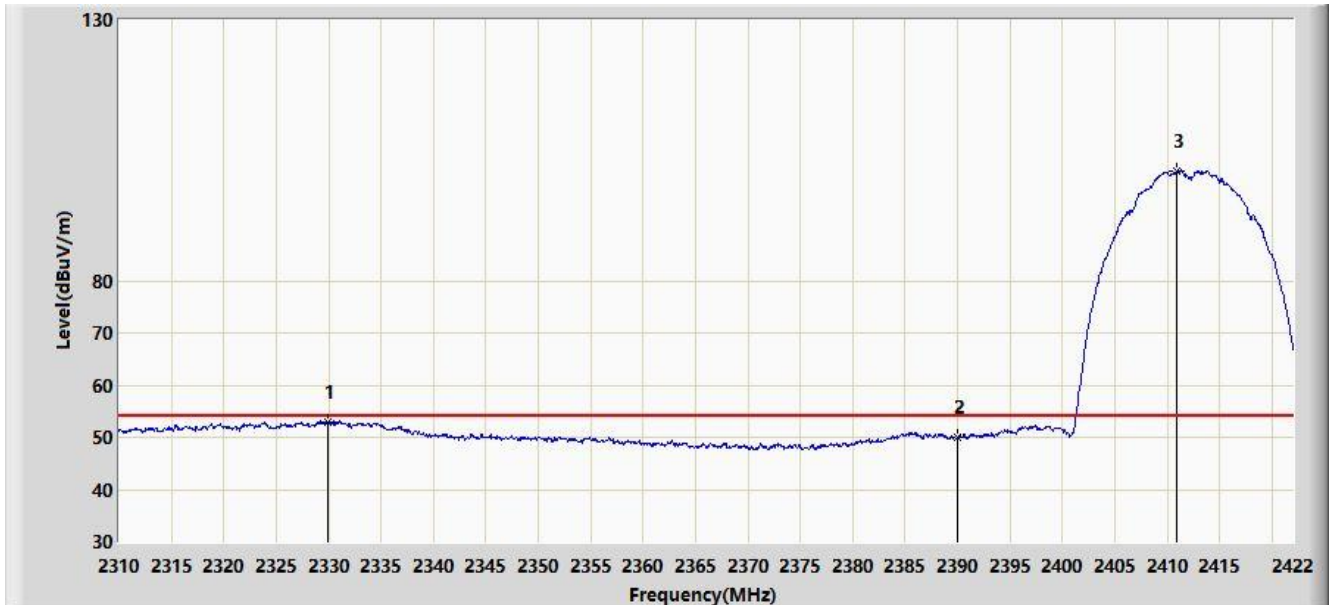


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2329.936	53.007	21.010	-0.993	54.000	31.997	AV
2			2390.000	49.873	17.599	-4.127	54.000	32.274	AV
3		*	2410.968	101.041	68.671	N/A	N/A	32.370	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 17:51
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11b at channel 2412MHz	

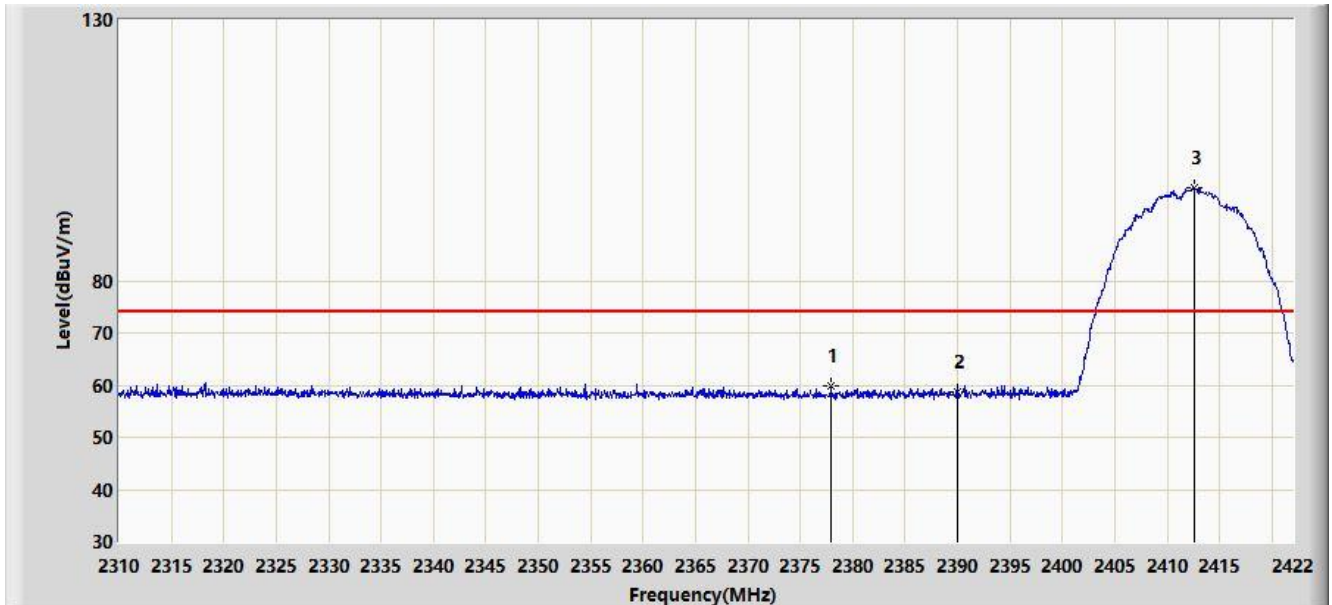


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2377.928	59.867	27.648	-14.133	74.000	32.218	PK
2			2390.000	58.767	26.493	-15.233	74.000	32.274	PK
3		*	2412.592	97.737	65.360	N/A	N/A	32.377	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 17:53
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11b at channel 2412MHz	

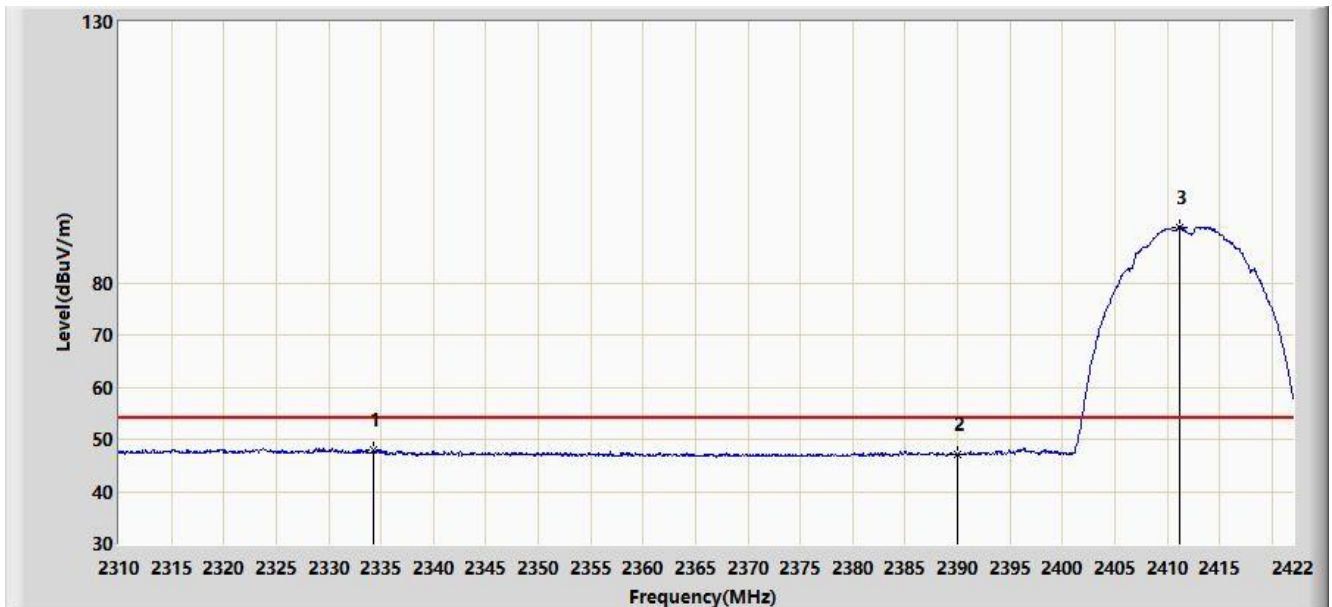


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2334.248	47.967	15.950	-6.033	54.000	32.017	AV
2			2390.000	47.176	14.902	-6.824	54.000	32.274	AV
3		*	2411.192	90.721	58.350	N/A	N/A	32.371	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:00
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11b at channel 2462MHz	

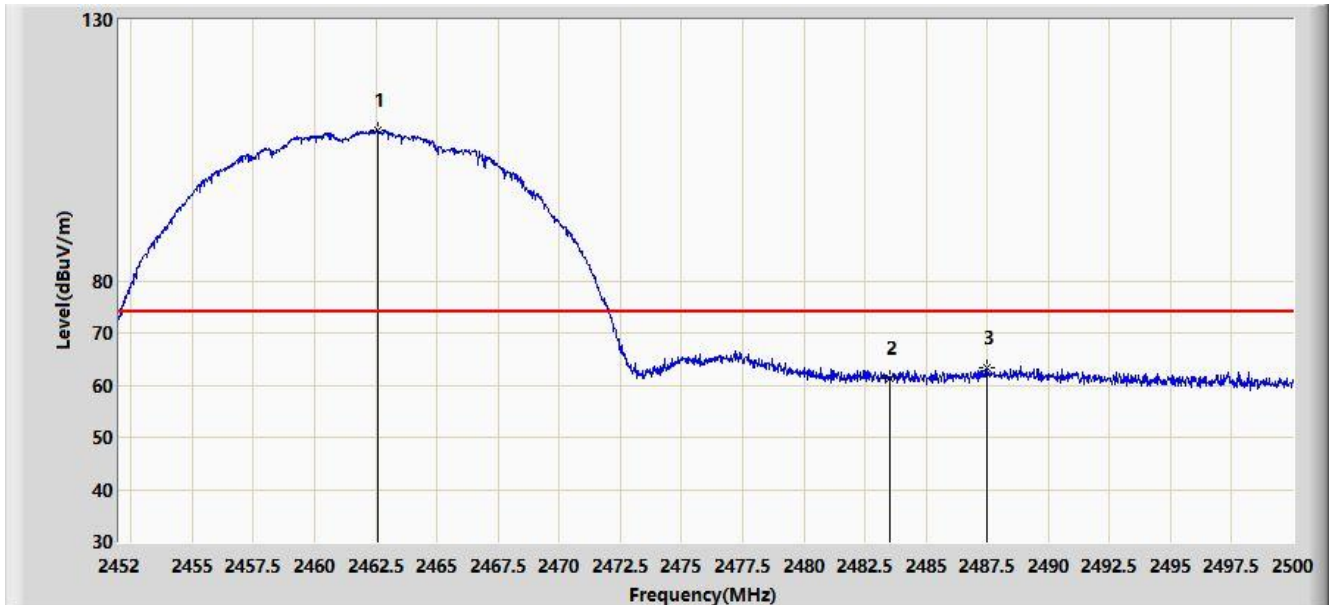


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.584	108.732	76.124	N/A	N/A	32.608	PK
2			2483.500	61.189	28.485	-12.811	74.000	32.704	PK
3			2487.496	63.462	30.739	-10.538	74.000	32.722	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 17:59
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11b at channel 2462MHz	

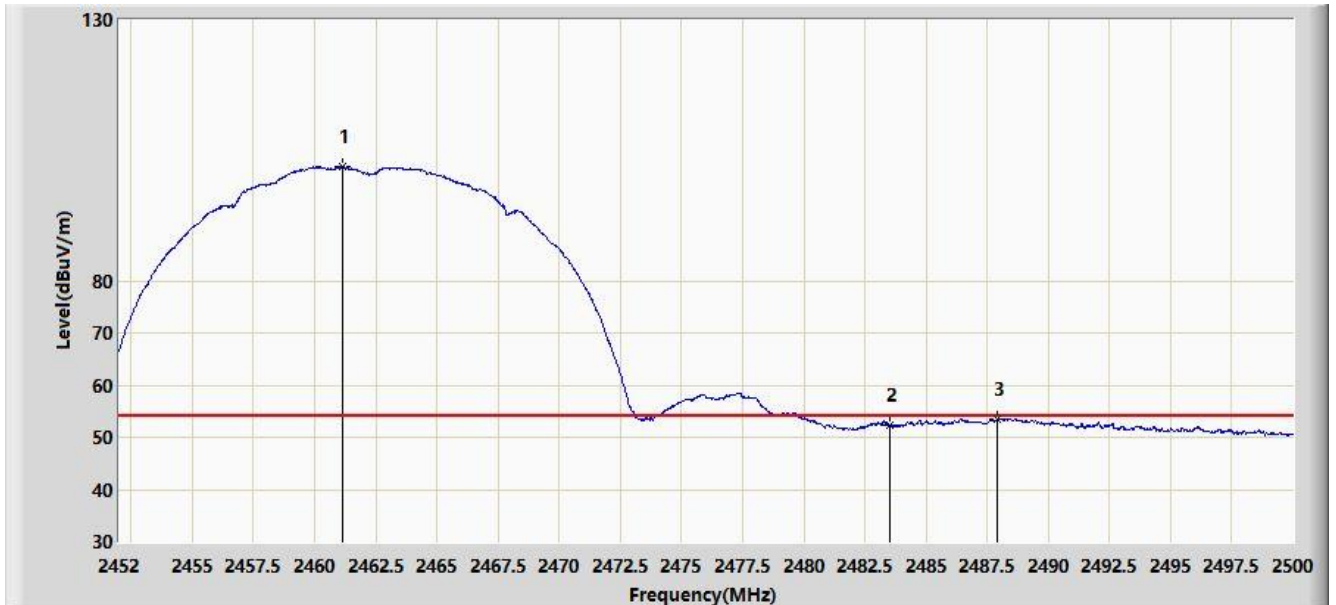


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.168	101.906	69.304	N/A	N/A	32.601	AV
2			2483.500	52.388	19.684	-1.612	54.000	32.704	AV
3			2487.928	53.621	20.896	-0.379	54.000	32.725	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:01
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11b at channel 2462MHz	

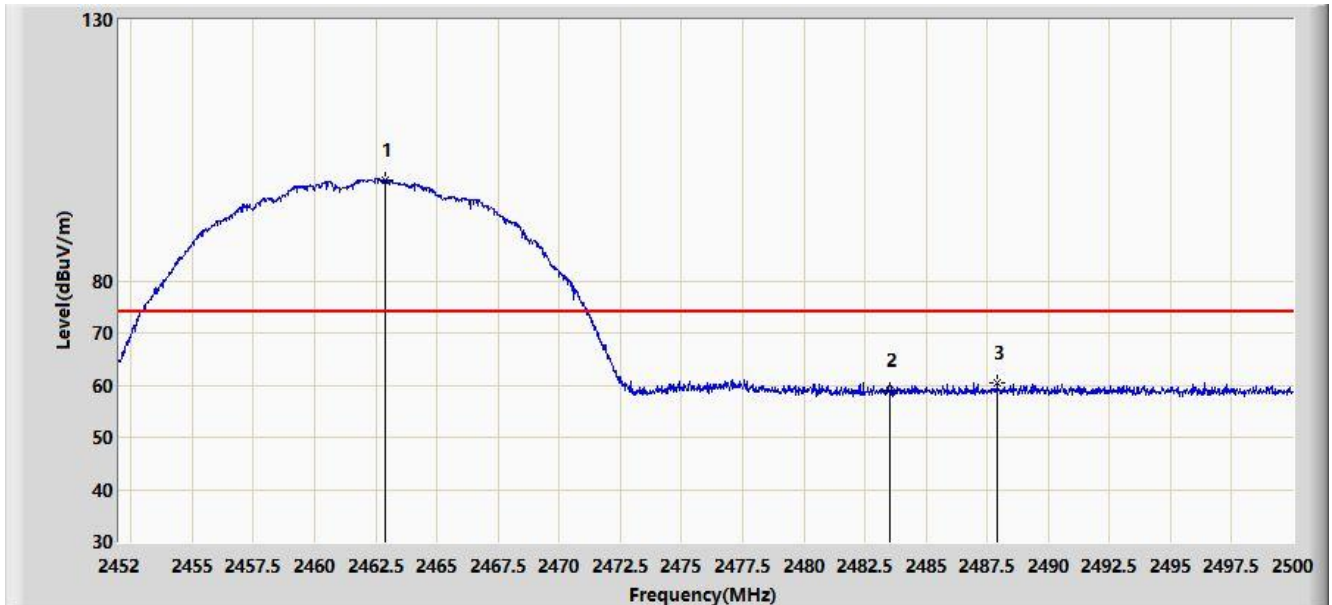


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.896	99.415	66.806	N/A	N/A	32.609	PK
2			2483.500	59.005	26.301	-14.995	74.000	32.704	PK
3			2487.904	60.566	27.842	-13.434	74.000	32.725	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:02
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11b at channel 2462MHz	

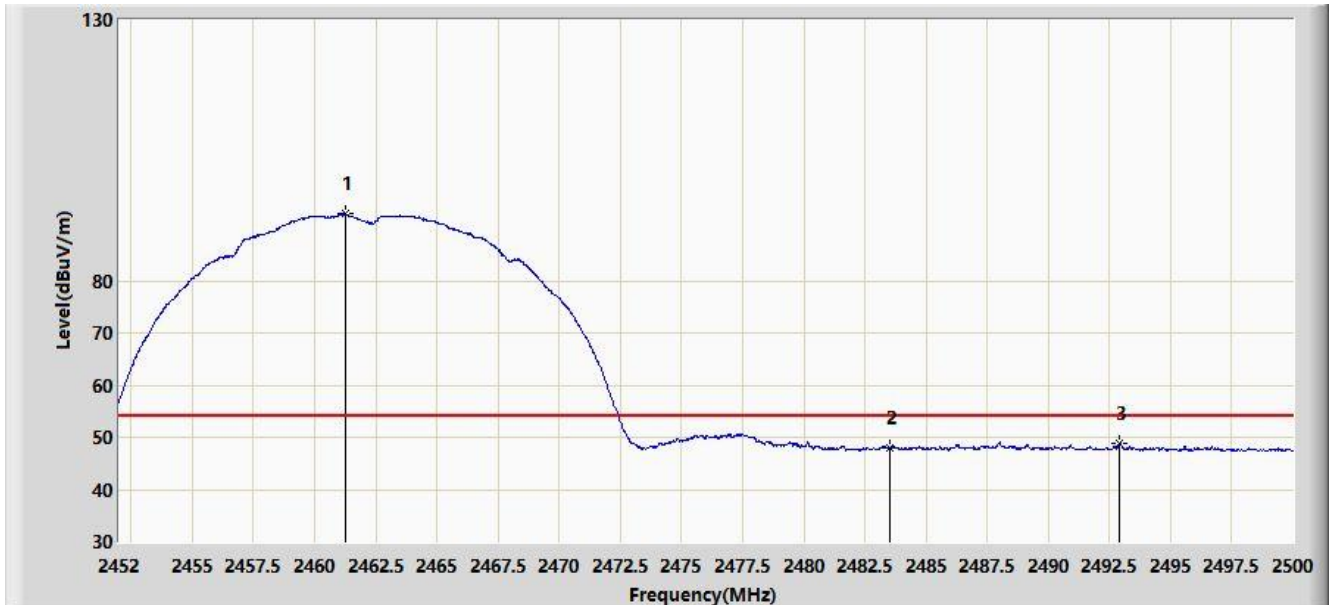


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2461.240	92.806	60.204	N/A	N/A	32.601	AV
2			2483.500	47.950	15.246	-6.050	54.000	32.704	AV
3			2492.920	48.893	16.146	-5.107	54.000	32.747	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:06
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11g at channel 2412MHz	

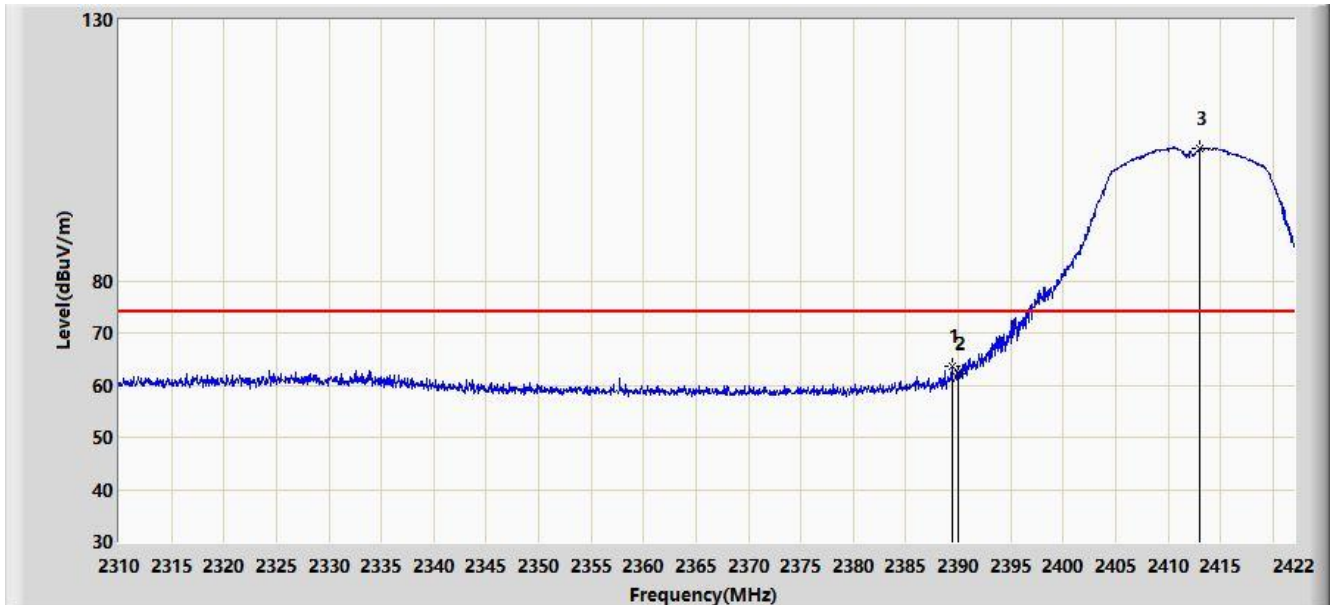


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.408	63.486	31.214	-10.514	74.000	32.271	PK
2			2390.000	62.174	29.900	-11.826	74.000	32.274	PK
3		*	2413.040	105.316	72.937	N/A	N/A	32.379	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:11
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11g at channel 2412MHz	

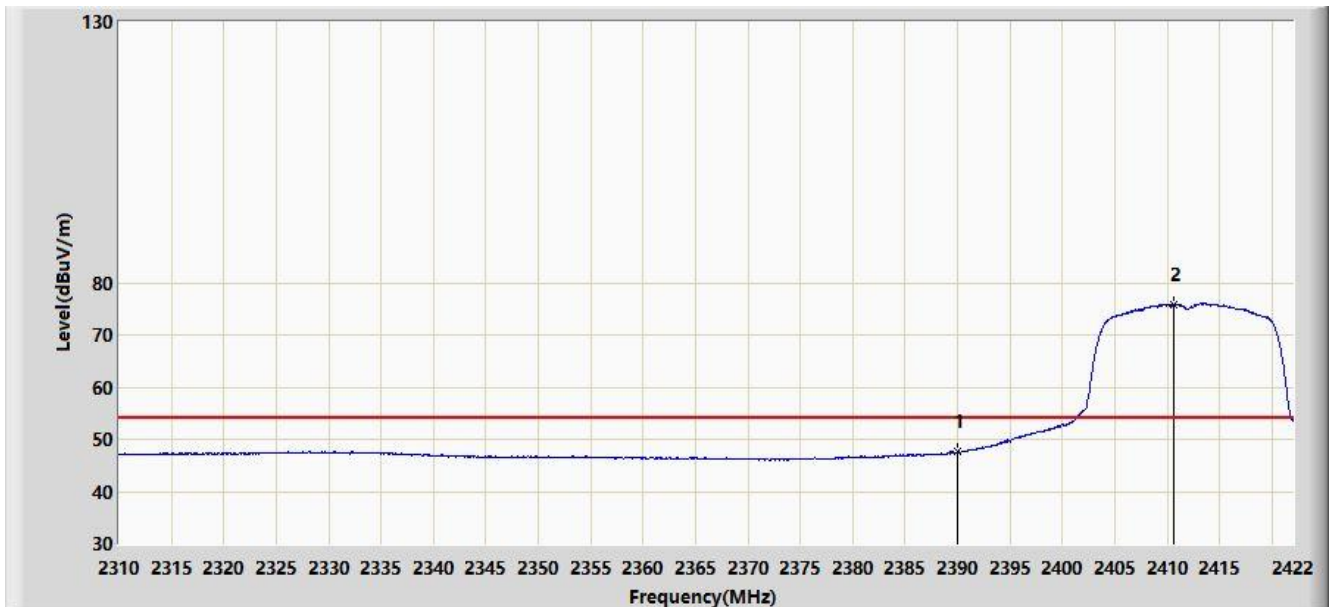


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.582	15.308	-6.418	54.000	32.274	AV
2		*	2410.688	75.826	43.458	N/A	N/A	32.368	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:17
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11g at channel 2412MHz	

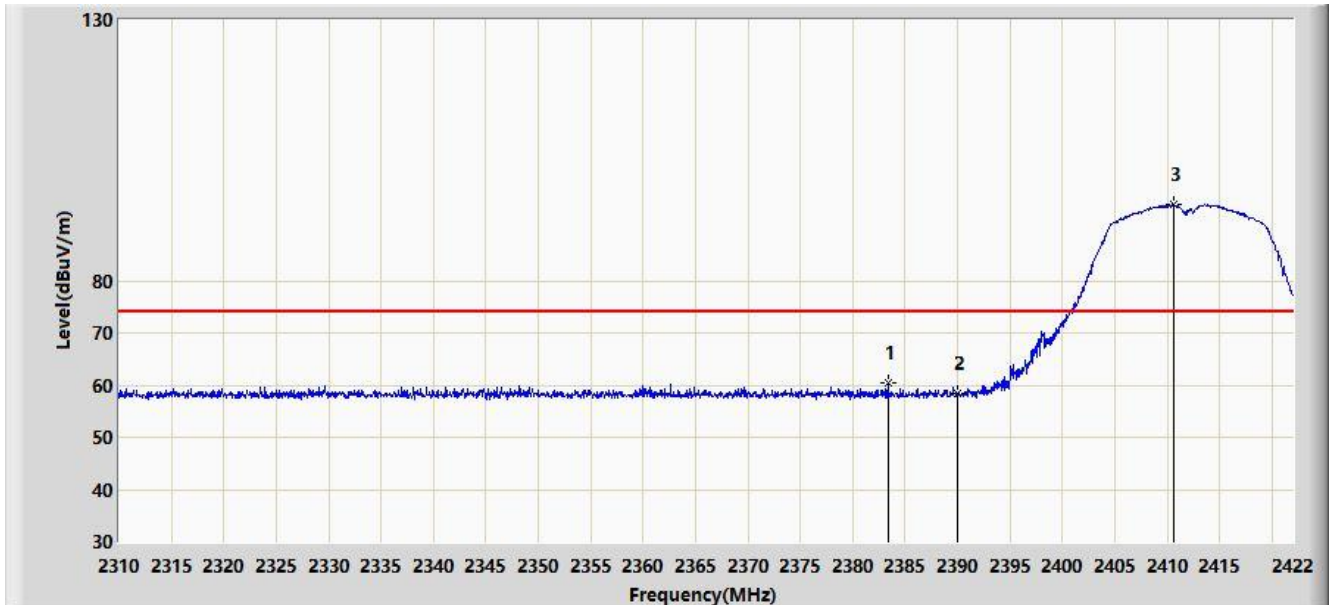


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.360	60.357	28.113	-13.643	74.000	32.244	PK
2			2390.000	58.306	26.032	-15.694	74.000	32.274	PK
3		*	2410.576	94.756	62.388	N/A	N/A	32.368	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:19
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11g at channel 2412MHz	

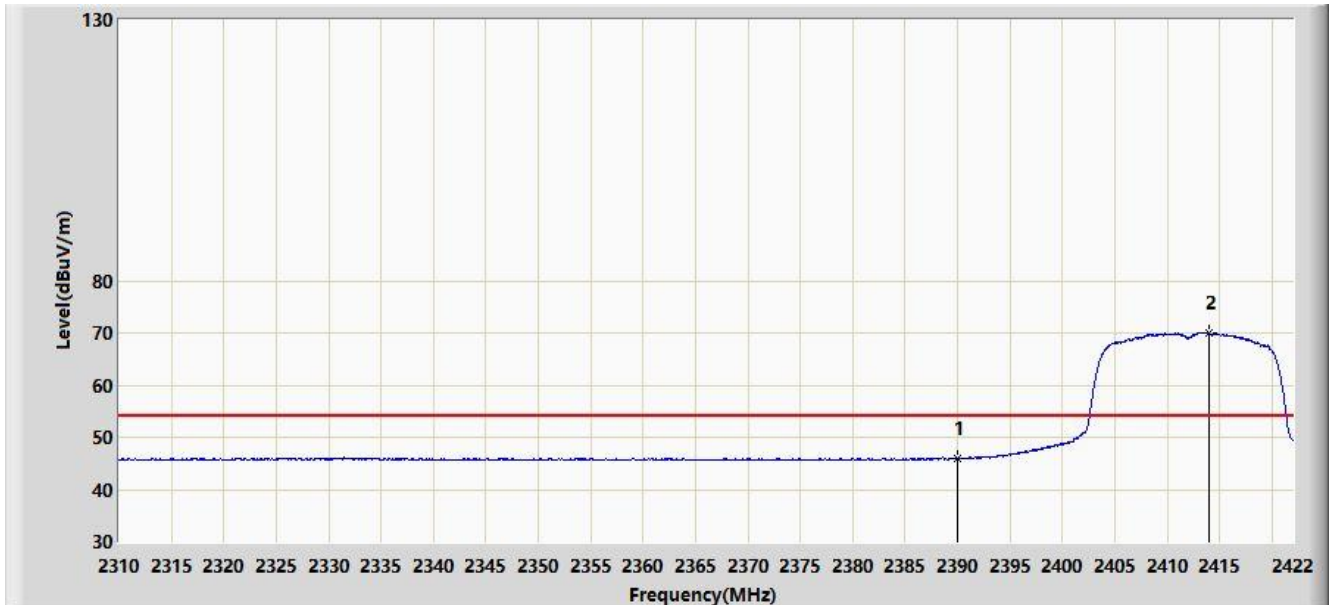


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.892	13.618	-8.108	54.000	32.274	AV
2		*	2414.048	69.924	37.540	N/A	N/A	32.383	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:29
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11g at channel 2462MHz	

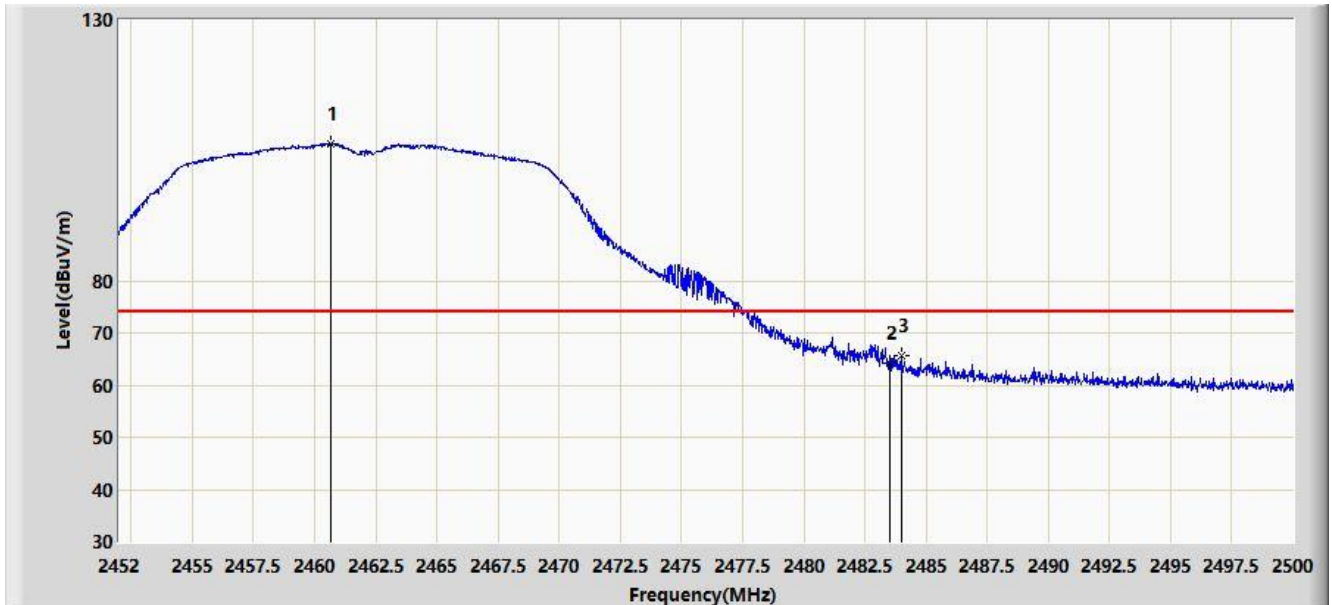


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.640	106.243	73.644	N/A	N/A	32.599	PK
2			2483.500	64.235	31.531	-9.765	74.000	32.704	PK
3			2483.992	65.621	32.914	-8.379	74.000	32.707	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:30
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11g at channel 2462MHz	

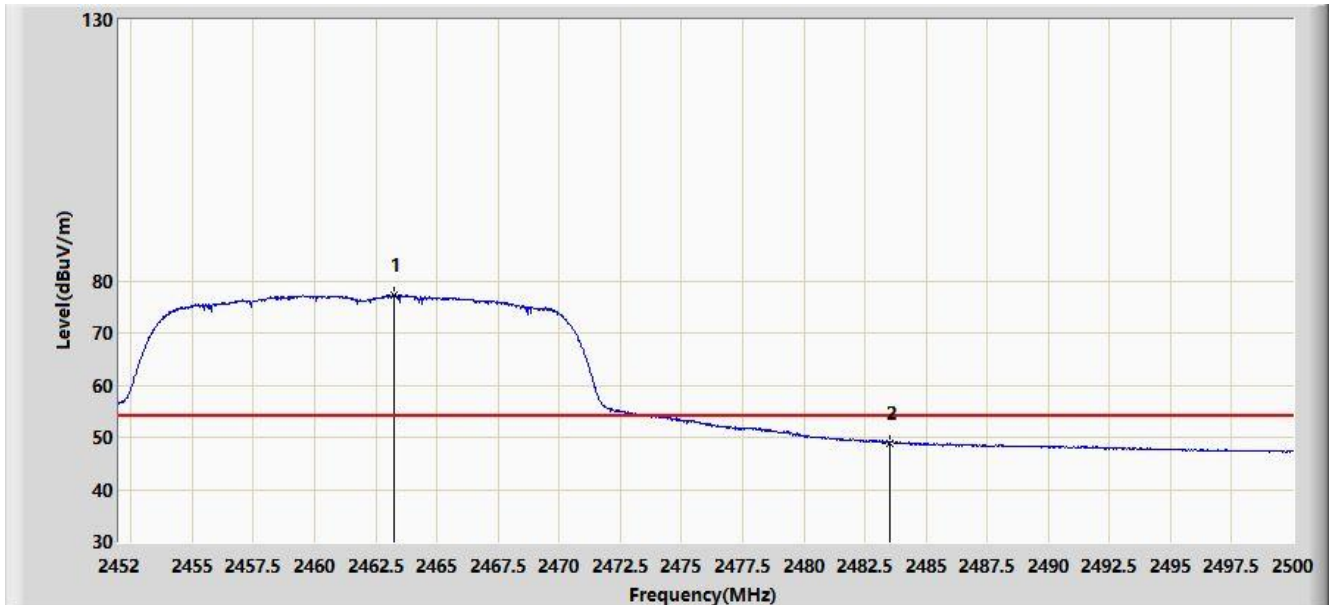


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.256	77.161	44.550	N/A	N/A	32.611	AV
2			2483.500	48.952	16.248	-5.048	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:31
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11g at channel 2462MHz	

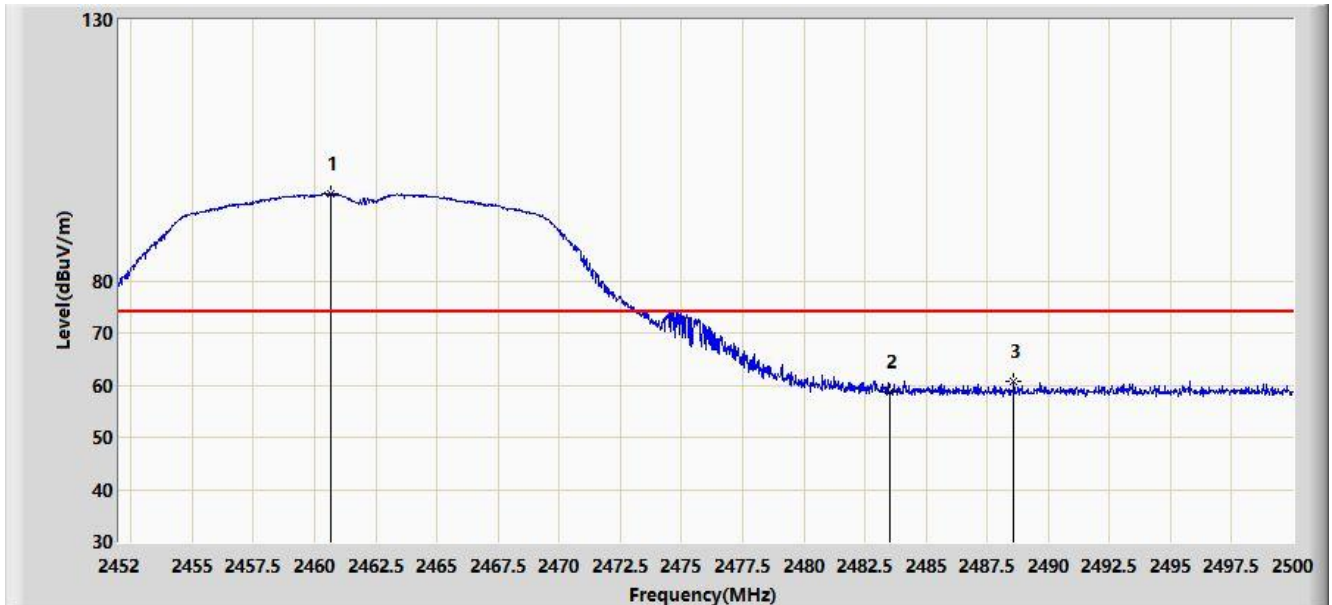


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.640	96.617	64.018	N/A	N/A	32.599	PK
2			2483.500	58.676	25.972	-15.324	74.000	32.704	PK
3			2488.600	60.762	28.034	-13.238	74.000	32.727	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:33
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11g at channel 2462MHz	

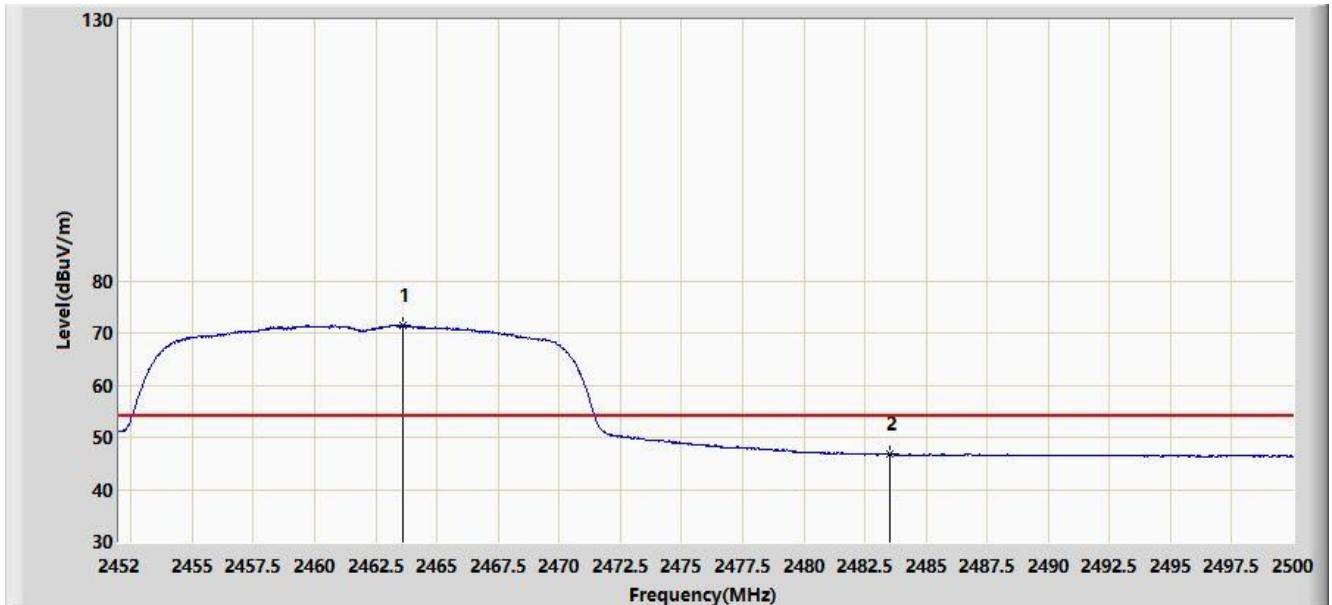


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.616	71.473	38.860	N/A	N/A	32.613	AV
2			2483.500	46.690	13.986	-7.310	54.000	32.704	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:33
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

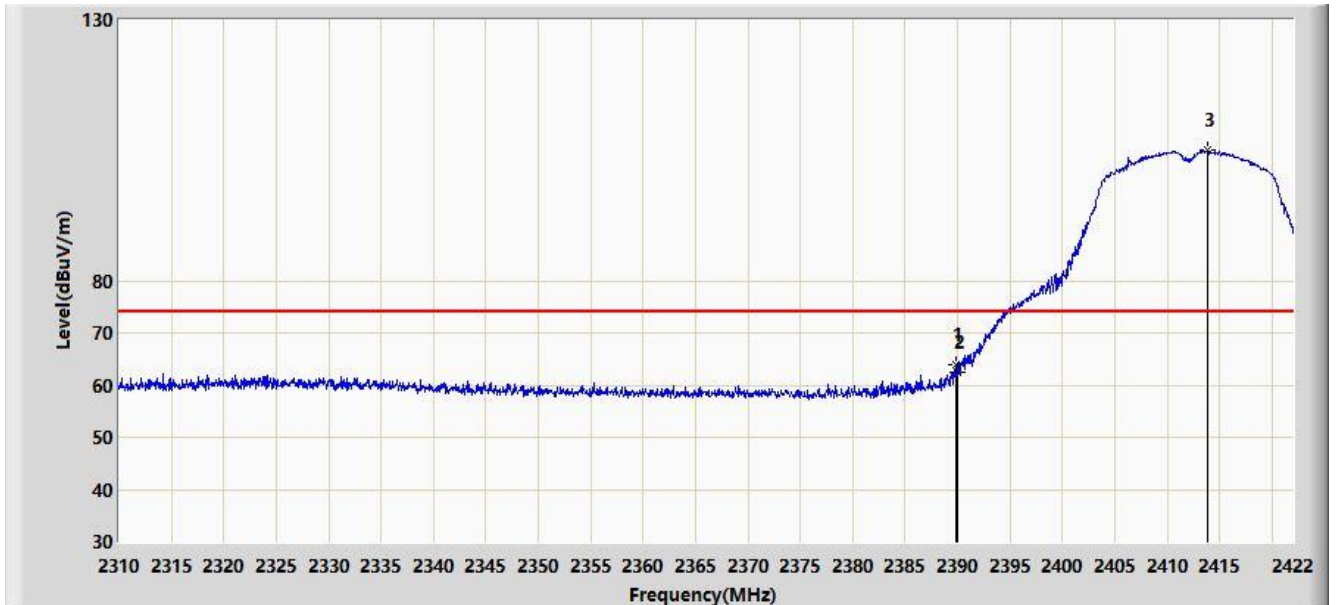


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.800	63.987	31.713	-10.013	74.000	32.274	PK
2			2390.000	62.494	30.220	-11.506	74.000	32.274	PK
3		*	2413.824	105.023	72.640	N/A	N/A	32.383	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:36
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

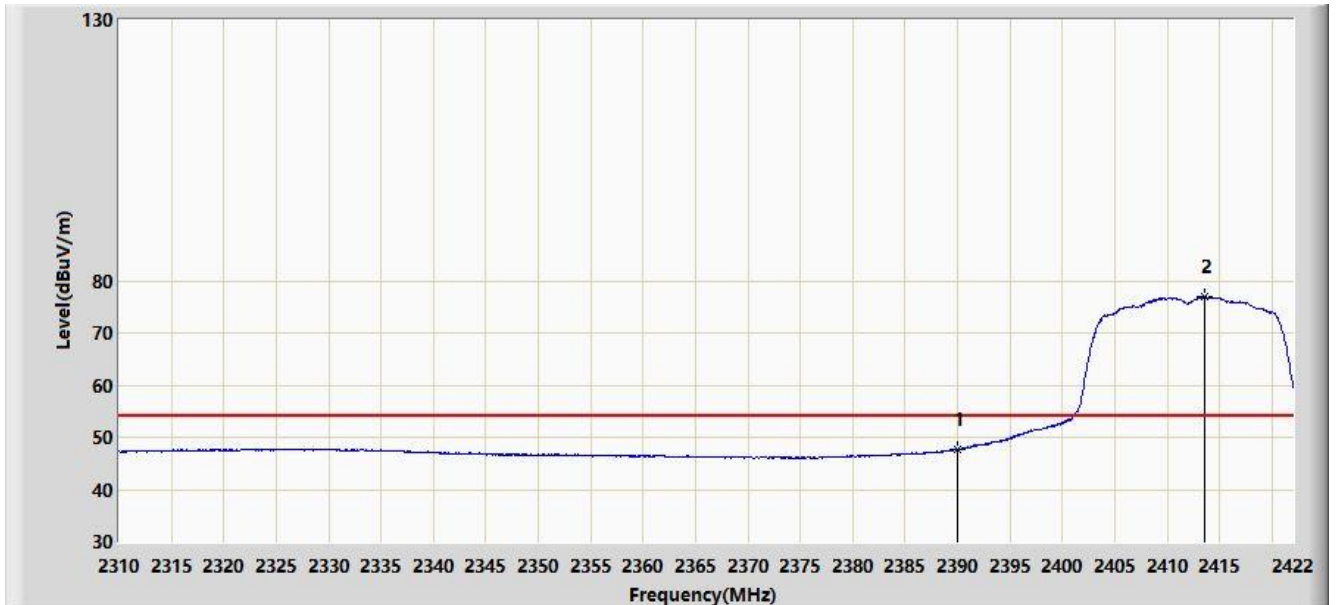


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	47.716	15.442	-6.284	54.000	32.274	AV
2		*	2413.600	76.826	44.444	N/A	N/A	32.382	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:36
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

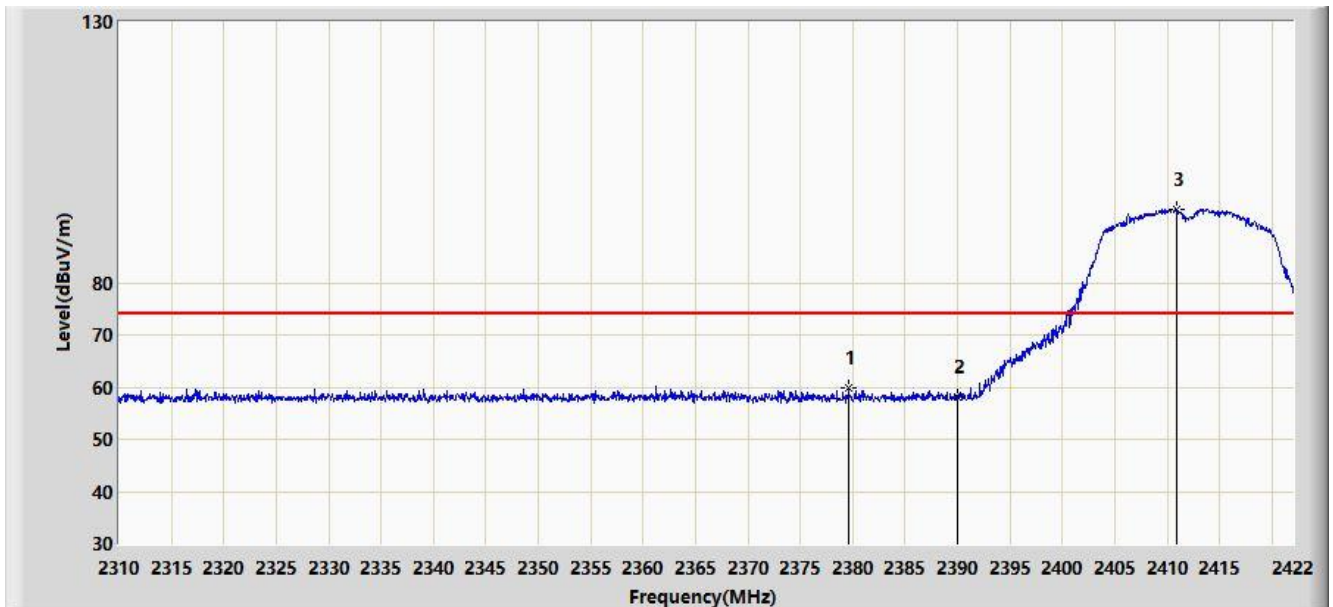


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2379.608	59.947	27.721	-14.053	74.000	32.226	PK
2			2390.000	58.030	25.756	-15.970	74.000	32.274	PK
3		*	2410.856	94.153	61.784	N/A	N/A	32.370	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:38
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11n-HT20 at channel 2412MHz	

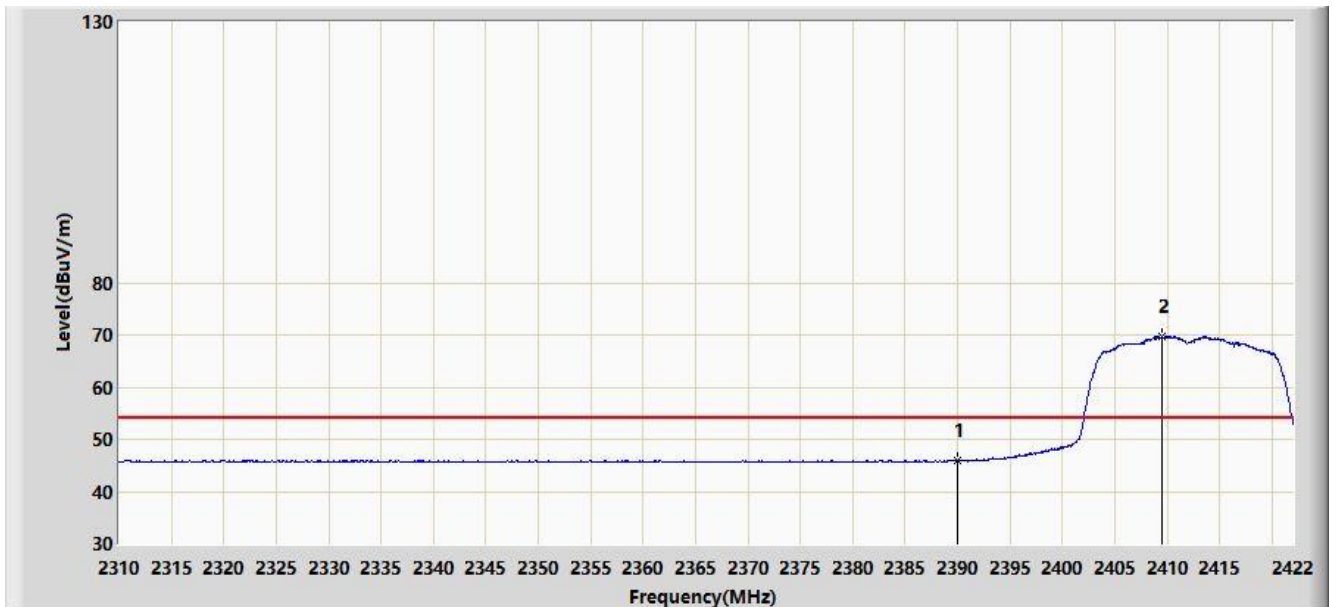


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	45.933	13.659	-8.067	54.000	32.274	AV
2		*	2409.568	69.614	37.251	N/A	N/A	32.363	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:38
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

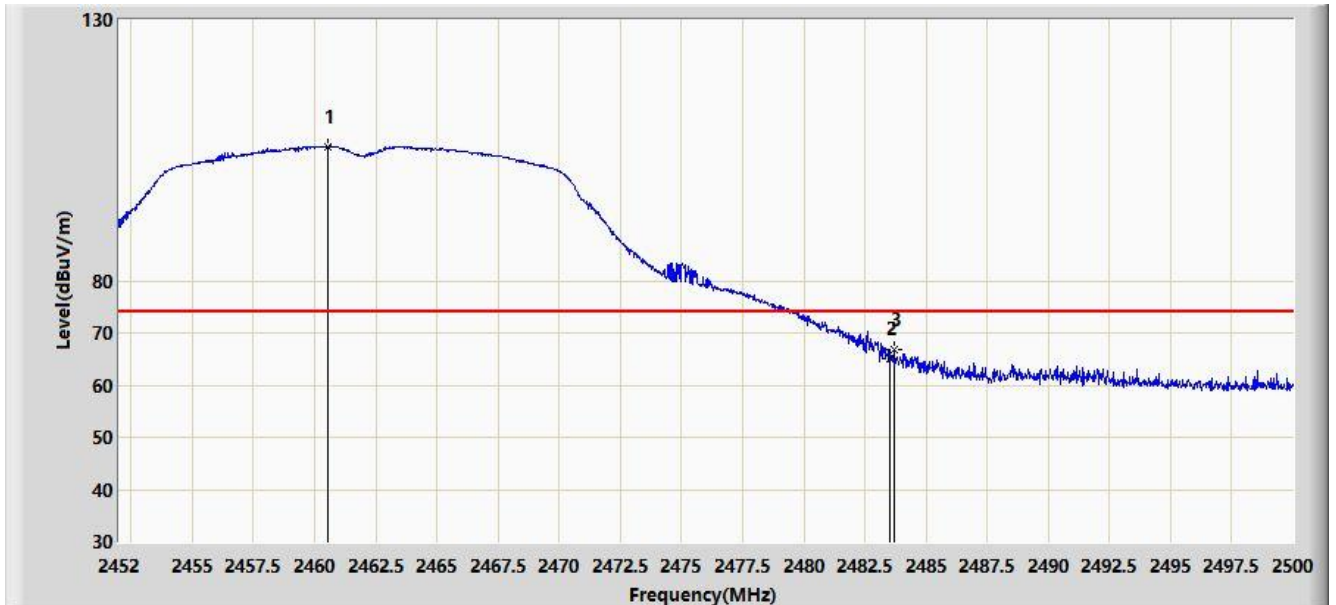


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.568	105.712	73.113	N/A	N/A	32.599	PK
2			2483.500	65.161	32.457	-8.839	74.000	32.704	PK
3			2483.680	66.672	33.967	-7.328	74.000	32.706	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:41
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

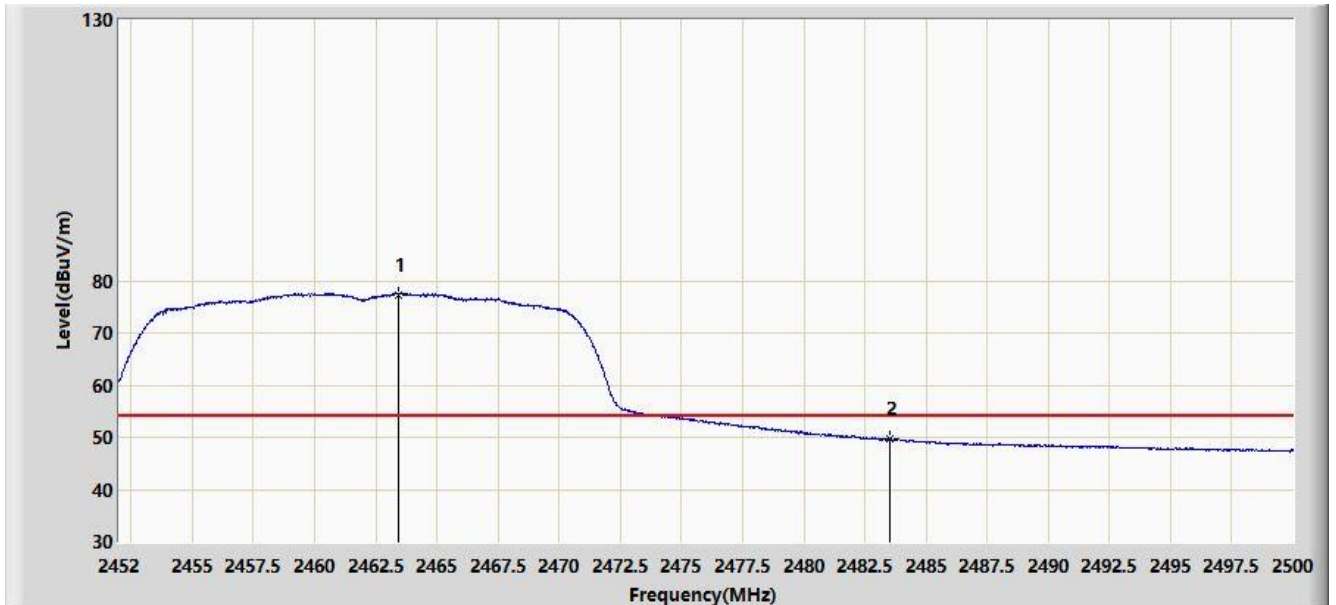


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.400	77.381	44.769	N/A	N/A	32.612	AV
2			2483.500	49.569	16.865	-4.431	54.000	32.704	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:41
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

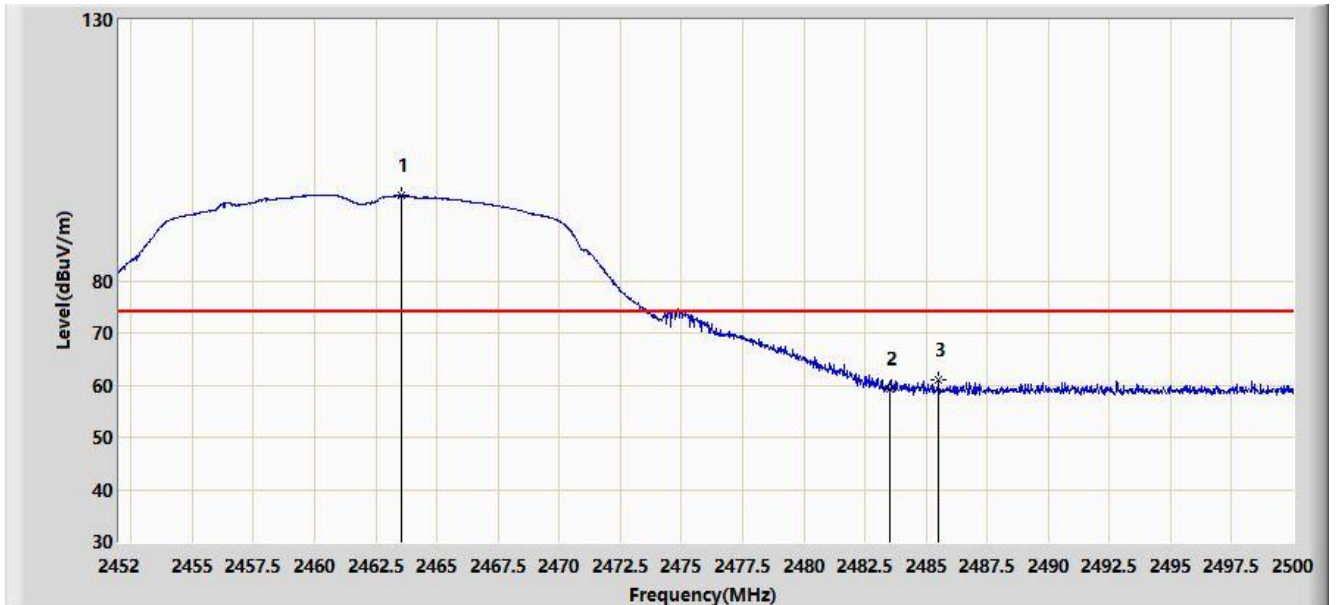


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.544	96.317	63.705	N/A	N/A	32.612	PK
2			2483.500	59.312	26.608	-14.688	74.000	32.704	PK
3			2485.504	60.883	28.169	-13.117	74.000	32.714	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2019/10/22 - 18:43
Limit: FCC_Part15.247_RE(3m)	Engineer: Kevin Ker
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Network Control	Power: DC 12V
Test Mode: Transmit by 802.11n-HT20 at channel 2462MHz	

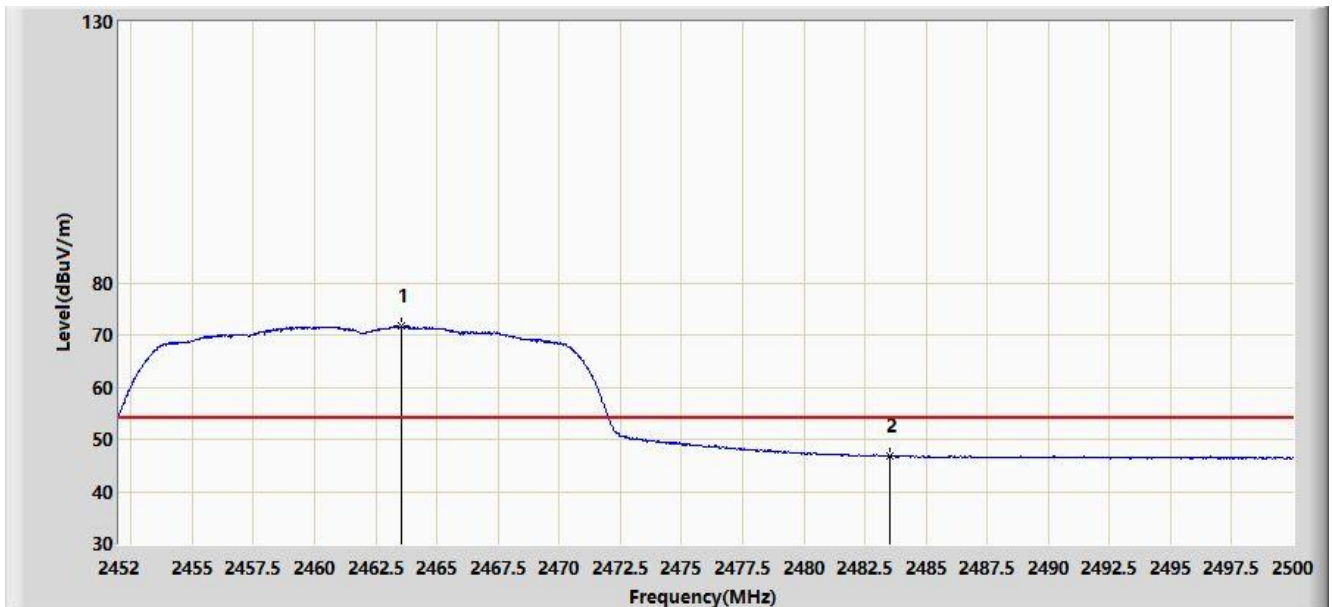

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2463.544	71.641	39.029	N/A	N/A	32.612	AV
2			2483.500	46.723	14.019	-7.277	54.000	32.704	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

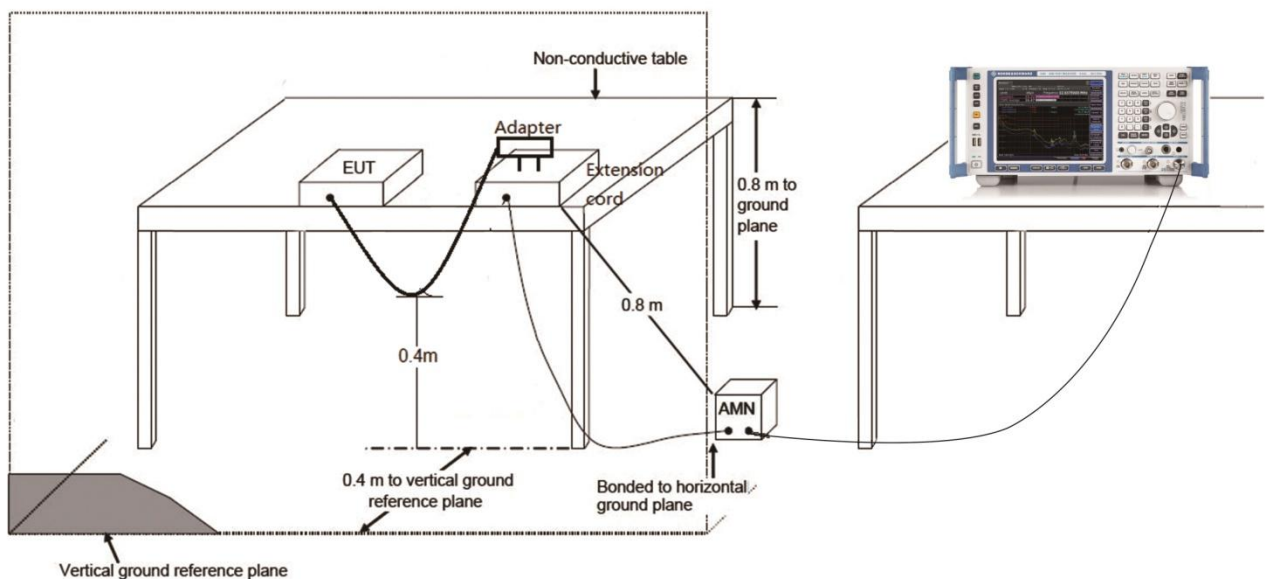

7.8.3.Test Result

Site: SR2	Time: 2019/11/28 - 10:13
Limit: FCC_Part15.207_CE_AC Power	Engineer: Liz Yuan
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Wireless Network Control	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2437MHz	

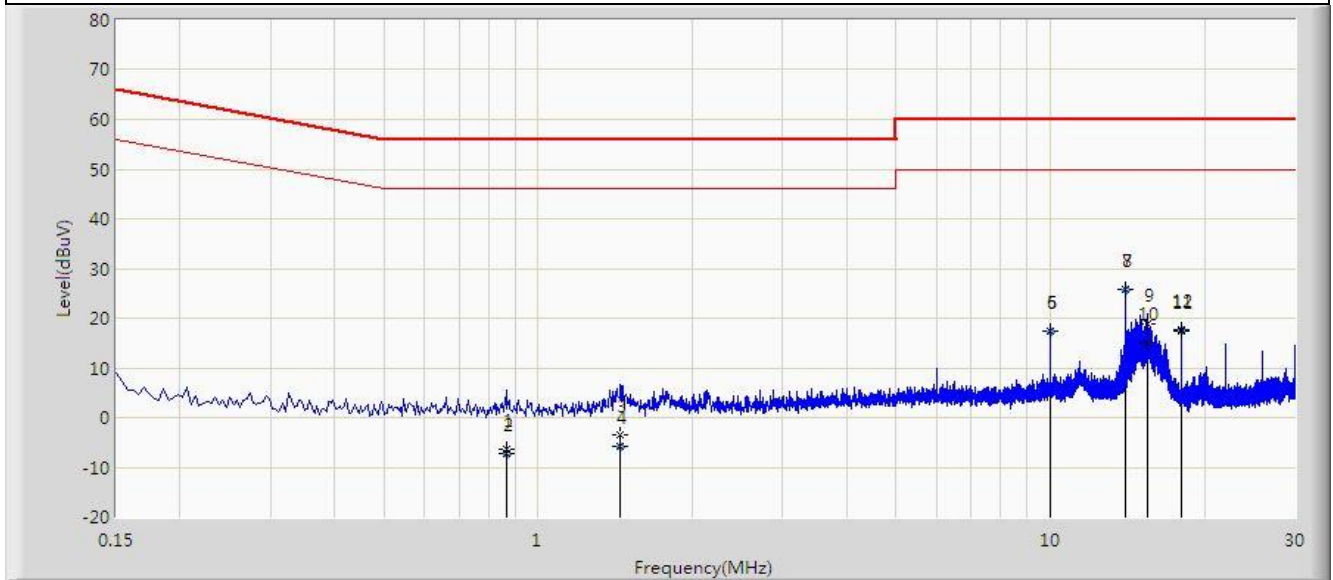


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.866	-6.326	-16.304	-62.326	56.000	9.978	QP
2			0.866	-7.351	-17.329	-53.351	46.000	9.978	AV
3			1.446	-3.390	-13.281	-59.390	56.000	9.891	QP
4			1.446	-5.848	-15.739	-51.848	46.000	9.891	AV
5			9.998	17.278	7.134	-42.722	60.000	10.144	QP
6			9.998	17.322	7.178	-32.678	50.000	10.144	AV
7			13.998	25.801	15.733	-34.199	60.000	10.068	QP
8		*	13.998	25.707	15.639	-24.293	50.000	10.068	AV
9			15.434	18.779	8.708	-41.221	60.000	10.070	QP
10			15.434	15.138	5.067	-34.862	50.000	10.070	AV
11			17.998	17.497	7.398	-42.503	60.000	10.099	QP
12			17.998	17.633	7.535	-32.367	50.000	10.099	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2019/11/28 - 10:33
Limit: FCC_Part15.207_CE_AC Power	Engineer: Liz Yuan
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Wireless Network Control	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at Channel 2437MHz	

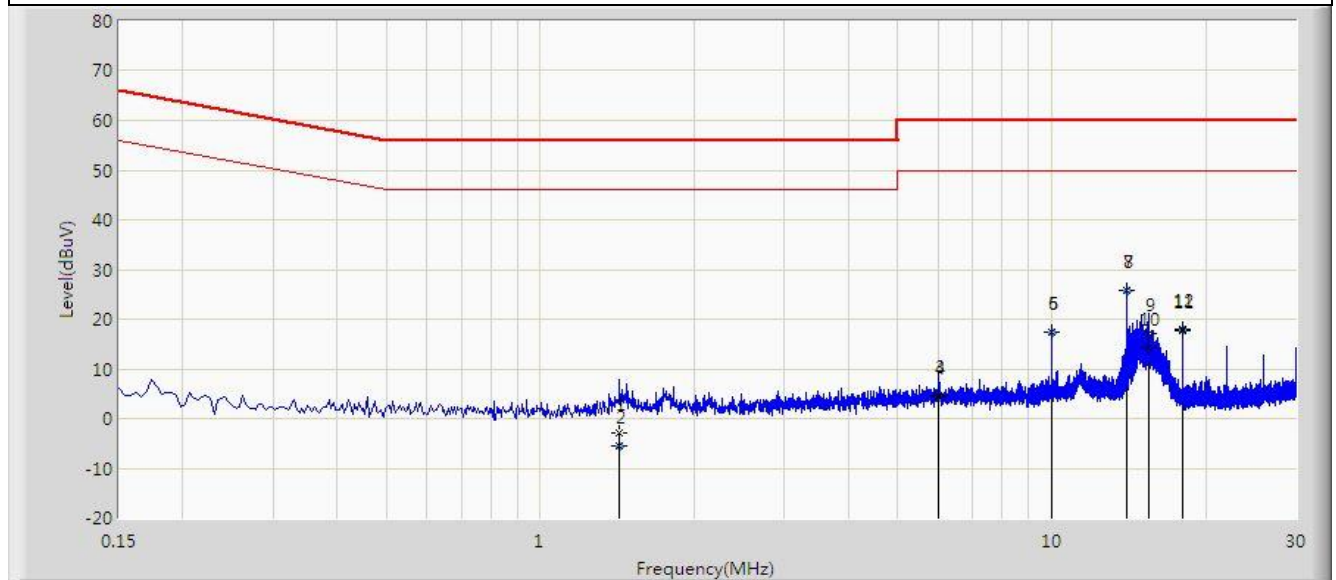

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			1.430	-2.895	-12.787	-58.895	56.000	9.893	QP
2			1.430	-5.634	-15.526	-51.634	46.000	9.893	AV
3			5.998	4.772	-5.361	-55.228	60.000	10.133	QP
4			5.998	4.365	-5.769	-45.635	50.000	10.133	AV
5			9.998	17.353	7.189	-42.647	60.000	10.164	QP
6			9.998	17.471	7.307	-32.529	50.000	10.164	AV
7			13.998	25.928	15.816	-34.072	60.000	10.112	QP
8		*	13.998	25.898	15.786	-24.102	50.000	10.112	AV
9			15.434	17.113	6.994	-42.887	60.000	10.119	QP
10			15.434	14.215	4.096	-35.785	50.000	10.119	AV
11			17.998	17.725	7.588	-42.275	60.000	10.137	QP
12			17.998	17.869	7.732	-32.131	50.000	10.137	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the unit is compliance with Part 15C of the FCC rules and ISED rules.

_____ The End _____

Appendix A - Test Setup Photograph

Refer to "1910TW0109-UT" file.

Appendix B - EUT Photograph

Refer to "1910TW0109-UE" file.