

MEASUREMENT REPORT

FCC PART 15C / RSS-247 WLAN 802.11b/g/n

FCC ID: 2ANOT-MC10
IC: 23166-MC10
APPLICANT: Alliance Laundry Systems LLC


Application Type: Certification
Product: MC10 Transceiver Control Panel
Model No.: MC10
Brand Name: Alliance, UniMac, Huebsch, Primus, IPSO
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
IC Rule(s): RSS-247 Issue 2, RSS-GEN Issue 5
Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01v05r02
Test Date: July 17 ~ August 08, 2019

Reviewed By:



(Sunny Sun)

Approved By:



(Robin Wu)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1907RSU023-U1	Rev. 01	Initial Report	08-14-2019	Valid

CONTENTS

Description	Page
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location.....	6
2. PRODUCT INFORMATION.....	7
2.1. Equipment Description	7
2.2. Product Specification Subjective to this Report	7
2.3. Working Frequencies for this report	8
2.4. Test Mode	8
2.5. Description of Test Software	8
2.6. Device Capabilities	9
2.7. Test Configuration.....	10
2.8. EMI Suppression Device(s)/Modifications.....	10
2.9. Labeling Requirements	10
3. DESCRIPTION of TEST	11
3.1. Evaluation Procedure.....	11
3.2. AC Line Conducted Emissions	11
3.3. Radiated Emissions	12
4. ANTENNA REQUIREMENTS	13
5. TEST EQUIPMENT CALIBRATION DATE.....	14
6. MEASUREMENT UNCERTAINTY	16
7. TEST RESULT	17
7.1. Summary	17
7.2. Occupied Bandwidth Measurement	18
7.2.1. Test Limit	18
7.2.2. Test Procedure used	18
7.2.3. Test Setting	18
7.2.4. Test Setup	19
7.2.5. Test Result	20
7.3. Output Power Measurement	27
7.3.1. Test Limit	27
7.3.2. Test Procedure Used.....	27
7.3.3. Test Setting	27
7.3.4. Test Setup	28

7.3.5.	Test Result	29
7.4.	Power Spectral Density Measurement	31
7.4.1.	Test Limit	31
7.4.2.	Test Procedure Used.....	31
7.4.3.	Test Setting	31
7.4.4.	Test Setup	32
7.4.5.	Test Result	33
7.5.	Conducted Band Edge and Out-of-Band Emissions	37
7.5.1.	Test Limit	37
7.5.2.	Test Procedure Used.....	37
7.5.3.	Test Setting	37
7.5.4.	Test Setup	38
7.5.5.	Test Result	39
7.6.	Radiated Spurious Emission Measurement	46
7.6.1.	Test Limit	46
7.6.2.	Test Procedure Used.....	46
7.6.3.	Test Setting	46
7.6.4.	Test Setup	48
7.6.5.	Test Result	49
7.7.	Radiated Restricted Band Edge Measurement.....	60
7.7.1.	Test Limit	60
7.7.2.	Test Procedure Used.....	63
7.7.3.	Test Setting	63
7.7.4.	Test Setup	64
7.7.5.	Test Result	65
7.8.	AC Conducted Emissions Measurement	89
7.8.1.	Test Limit	89
7.8.2.	Test Setup	89
7.8.3.	Test Result	90
8.	CONCLUSION	92
	Appendix A - Test Setup Photograph	93
	Appendix B - EUT Photograph	94

§2.1033 General Information

Applicant:	Alliance Laundry Systems LLC
Applicant Address:	PO Box 990, Shepard St., Ripon, Wisconsin 54971, United States
Manufacturer:	Alliance Laundry Systems LLC
Manufacturer Address:	PO Box 990, Shepard St., Ripon, Wisconsin 54971, United States
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 893164) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	MC10 Transceiver Control Panel
Model No.:	MC10
Brand Name:	Alliance, UniMac, Huebsch, Primus, IPSO
Wi-Fi Specification:	802.11b/g/n-HT20

2.2. Product Specification Subjective to this Report

Frequency Range:	802.11b/g/n-HT20: 2412MHz ~ 2462MHz
Channel Number:	802.11b/g/n-HT20: 11
Type of Modulation:	802.11b: DSSS 802.11g/n: OFDM
Data Rate:	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 72.2Mbps
Maximum Conducted Output Power:	802.11b: 14.79dBm 802.11g: 11.52dBm 802.11n-HT20: 11.49dBm
Antenna Type:	Dipole Antenna
Antenna Gain:	2.0dBi

2.3. Working Frequencies for this report

802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

2.4. Test Mode

Test Mode	Mode 1: Transmit by 802.11b (1Mbps)
	Mode 2: Transmit by 802.11g (6Mbps)
	Mode 3: Transmit by 802.11n-HT20 (MCS0)

2.5. Description of Test Software

The test utility software used during testing was “MCHPRT”, and the version was 1.4.4.2.

Power parameter values refer to operation description.


2.6. Device Capabilities

This device contains the following capabilities:

2.4GHz WLAN (DTS).

Note: 2.4GHz WLAN (DTS) operation is possible in 20MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11b	99.64%
802.11g	96.65%
802.11n-HT20	95.38%

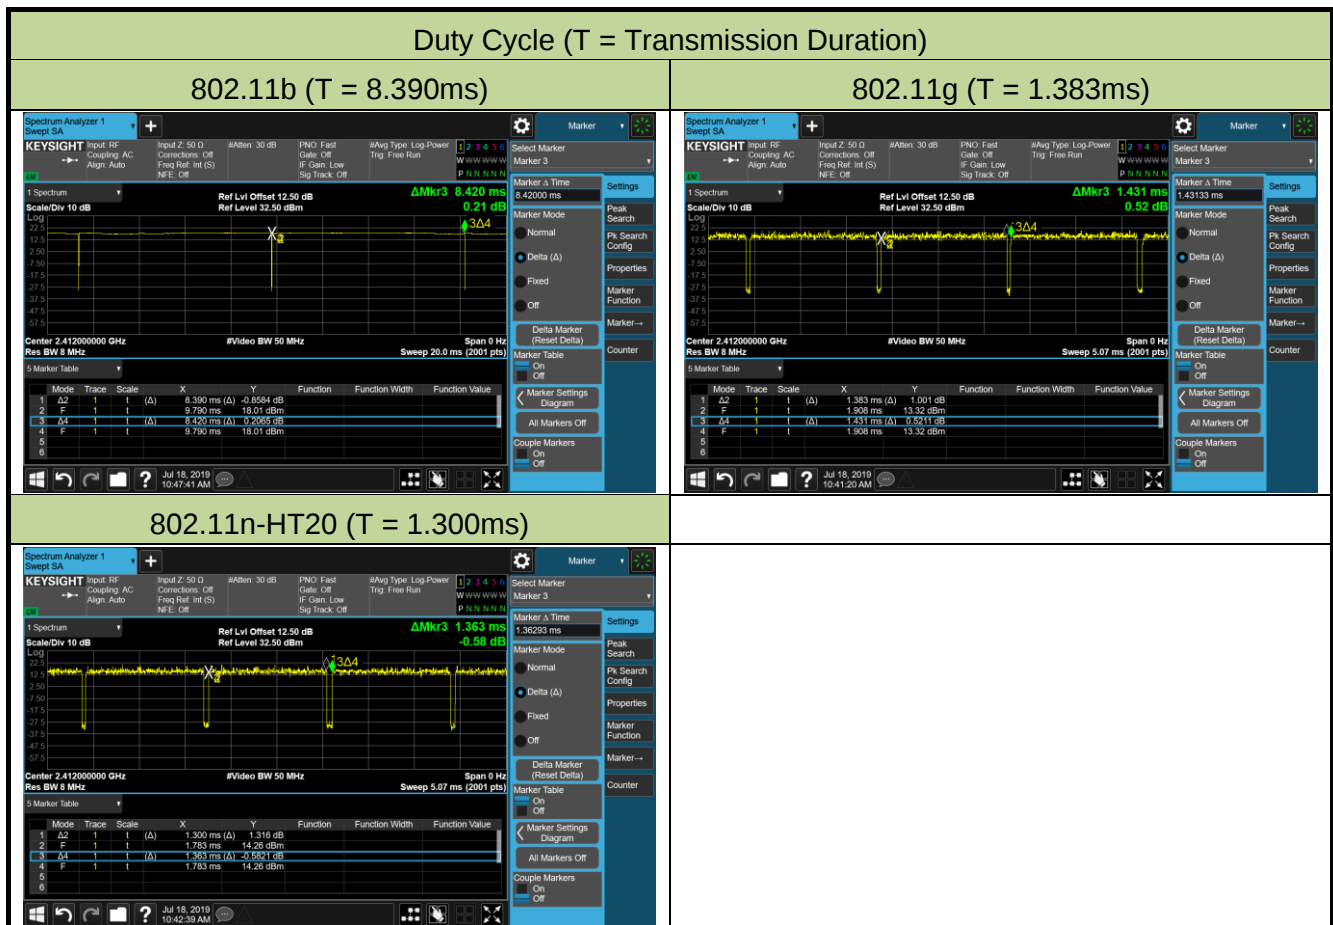

2.7. Test Configuration

The unit was tested per the guidance of ANSI C63.10-2013, which is used as the reference of appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.9. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

RSP-100 Issue 11 Section 3

The manufacturer, importer or distributor shall meet the labelling requirements set out in this section for every unit:

- (i) prior to marketing in Canada, for products manufactured in Canada
- (ii) prior to importation into Canada, for imported products

For information regarding the e-labelling option, see Notice 2014-DRS1003. The label for the certified product represents the manufacturer's or importer's compliance with Innovation, Science and Economic Development Canada's (ISED) regulatory requirements.

Please see attachment for IC label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013) and were used in the measurement.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment which determined the worst-case emission. Once the worst-case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst-case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, which produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the unit is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2020/04/15
Two-Line V-Network	R&S	ENV 216	MRTSUE06002	1 year	2020/06/13
Two-Line V-Network	R&S	ENV 216	MRTSUE06003	1 year	2020/06/13
Thermohygrometer	Testo	608-H1	MRTSUE06404	1 year	2019/08/14
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2020/08/01
PXA Signal Analyzer	Keysight	9030B	MRTSUE06395	1 year	2019/09/25
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2019/11/09
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2020/03/31
Broad Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2019/10/19
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2019/12/17
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2019/11/16
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2020/06/11
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2019/08/14
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2020/04/30

Radiated Emission - AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Keysight	N9038A	MRTSUE06125	1 year	2020/08/01
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2019/11/09
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2019/10/19
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2019/11/09
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2019/12/17
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2019/11/16
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2020/06/11
Temperature/Humidity Meter	Minggao	ETH529	MRTSUE06170	1 year	2019/12/13
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2020/04/30

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2020/04/15
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06452	1 year	2020/07/11
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2020/04/15
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2019/11/16
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2020/06/30
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2020/06/30
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2020/06/13
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2020/06/13
Modulation Analyzer	HP	8901A	MRTSUE06098	1 year	2019/10/18
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2019/11/16
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2019/11/16
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2019/08/14

Software	Version	Function
EMI Software	V3	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz~150kHz: 3.84dB 150kHz~30MHz: 3.46dB
Radiated Emission Measurement - AC1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 30MHz~300MHz: 4.07dB 300MHz~1GHz: 3.63dB 1GHz~18GHz: 4.16dB Vertical: 30MHz~300MHz: 4.18dB 300MHz~1GHz: 3.60dB 1GHz~18GHz: 4.76dB
Radiated Emission Measurement - AC2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 30MHz~300MHz: 3.75dB 300MHz~1GHz: 3.53dB 1GHz~18GHz: 4.28dB Vertical: 30MHz~300MHz: 3.86dB 300MHz~1GHz: 3.53dB 1GHz~18GHz: 4.33dB

7. TEST RESULT

7.1. Summary

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 7.2
N/A	RSS-Gen [6.7]	99% Bandwidth	N/A		Pass	
15.247(b)(3)	RSS-247 [5.4(d)]	Output Power	$\leq 1\text{Watt}$ & $\text{EIRP} \leq 4\text{Watt}$		Pass	Section 7.3
15.247(e)	RSS-247 [5.2]	Power Spectral Density	$\leq 8\text{dBm} / 3\text{kHz}$		Pass	Section 7.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	$\geq 30\text{dBc}$ (Peak)		Pass	Section 7.5
15.205 15.209	RSS-247 [5.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6&7.7
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz - 30MHz	$< \text{FCC 15.207 limits}$	Line Conducted	Pass	Section 7.8

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

7.2. Occupied Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.

7.2.2. Test Procedure used

ANSI C63.10-2013 - Section 11.8 (6dB bandwidth)

ANSI C63.10-2013 - Section 6.9.3 (99% bandwidth)

7.2.3. Test Setting


For 6dB bandwidth

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace was allowed to stabilize

For 99% bandwidth

1. Span = 1.5 times to 5 times the OBW
2. Set RBW = 1% to 5% the OBW
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace was allowed to stabilize

7.2.4.Test Setup

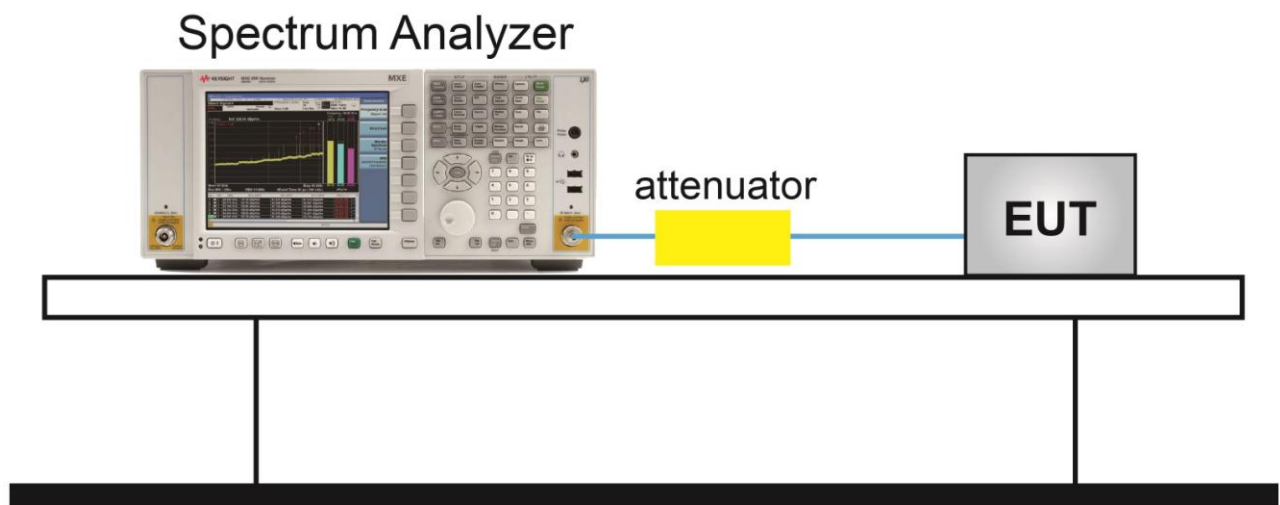


7.2.5. Test Result

Product	MC10 Transceiver Control Panel	Temperature	25°C
Test Engineer	Dandy Li	Relative Humidity	52%
Test Site	TR3	Test Date	2019/07/19~2019/08/07


Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	99% Bandwidth (MHz)	Result
802.11b	1Mbps	01	2412	12.09	≥ 0.5	13.96	Pass
802.11b	1Mbps	06	2437	12.10	≥ 0.5	13.96	Pass
802.11b	1Mbps	11	2462	11.15	≥ 0.5	13.96	Pass
802.11g	6Mbps	01	2412	15.95	≥ 0.5	17.23	Pass
802.11g	6Mbps	06	2437	16.09	≥ 0.5	17.16	Pass
802.11g	6Mbps	11	2462	16.33	≥ 0.5	17.26	Pass
802.11n-HT20	MCS0	01	2412	16.56	≥ 0.5	18.10	Pass
802.11n-HT20	MCS0	06	2437	16.91	≥ 0.5	18.12	Pass
802.11n-HT20	MCS0	11	2462	16.58	≥ 0.5	18.10	Pass

802.11b 6dB Bandwidth


Channel 01 (2412MHz)

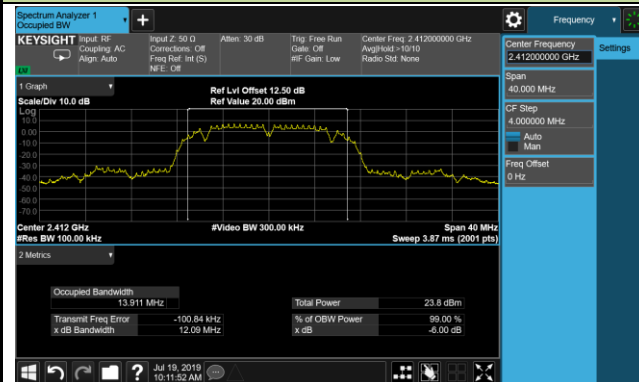

Channel 06 (2437MHz)

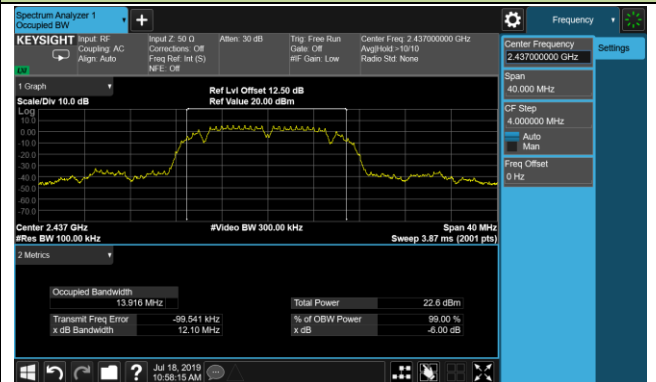


Channel 11 (2462MHz)

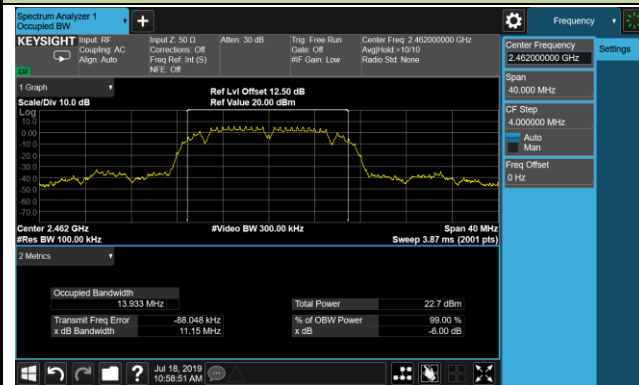


802.11g 6dB Bandwidth


Channel 01 (2412MHz)

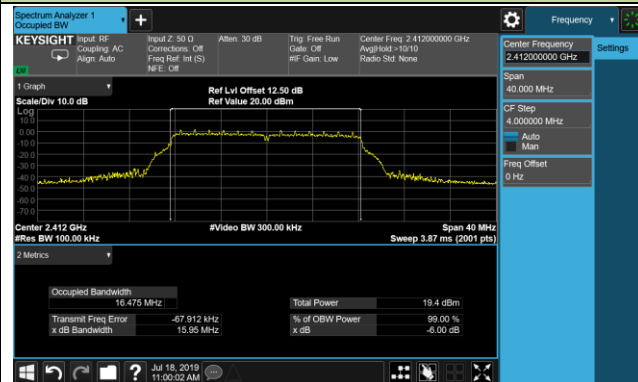

Channel 06 (2437MHz)

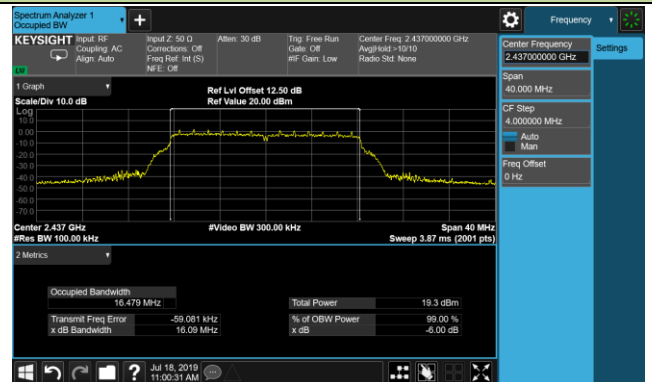


Channel 11 (2462MHz)

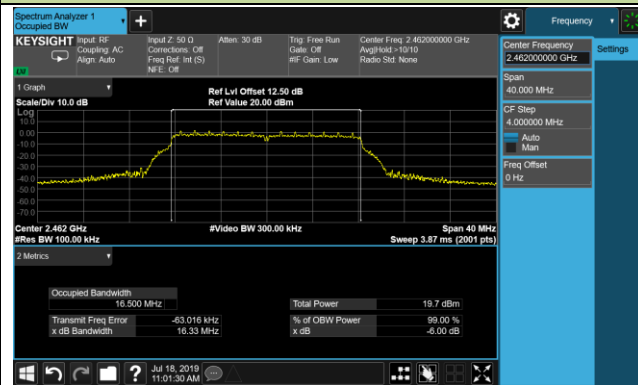


802.11n-HT20 6dB Bandwidth


Channel 01 (2412MHz)

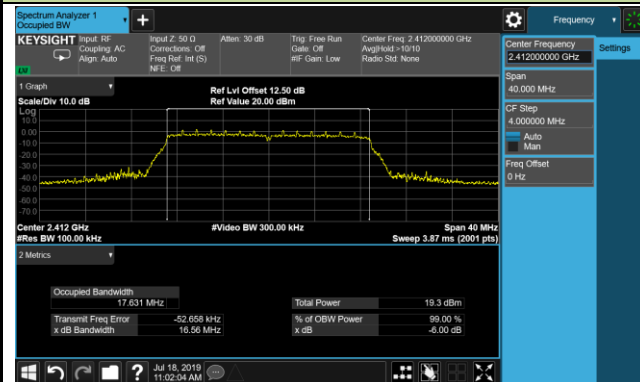

Channel 06 (2437MHz)

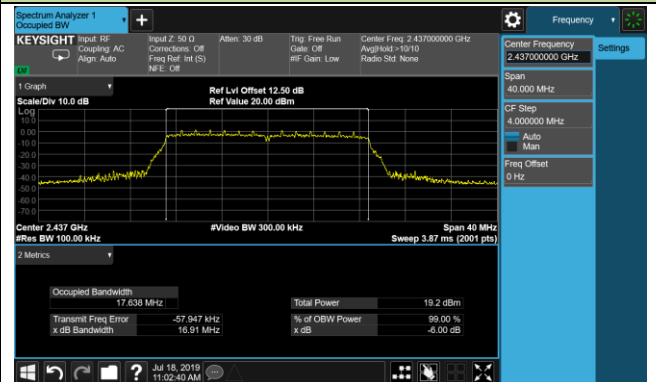


Channel 11 (2462MHz)

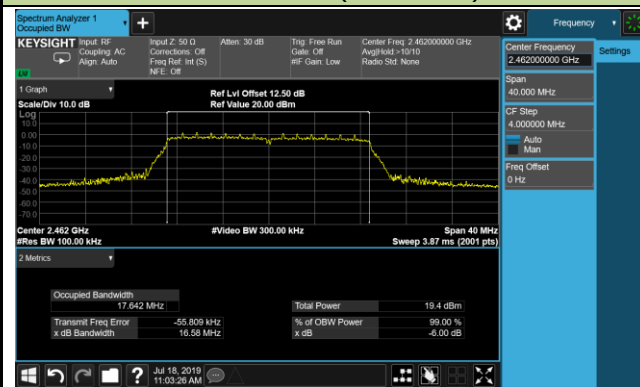

802.11b 99% Bandwidth


Channel 01 (2412MHz)

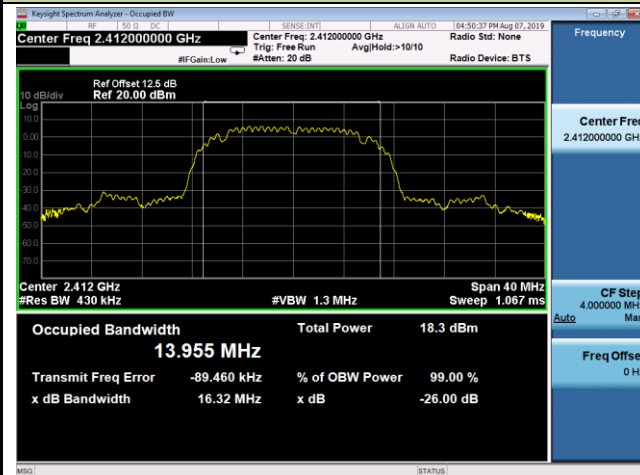

Channel 06 (2437MHz)




Channel 11 (2462MHz)

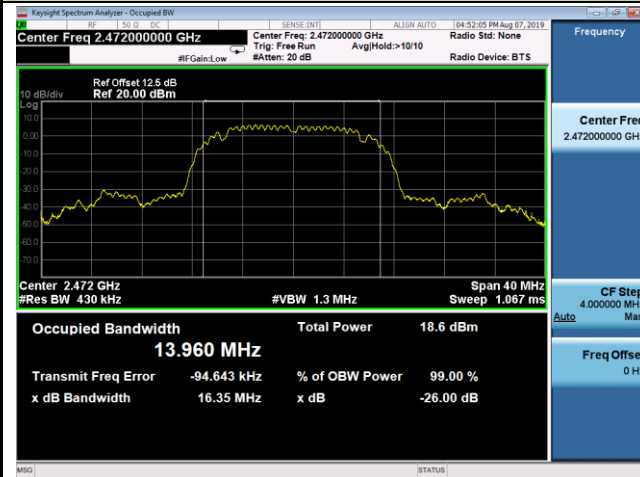


802.11g 99% Bandwidth


Channel 01 (2412MHz)

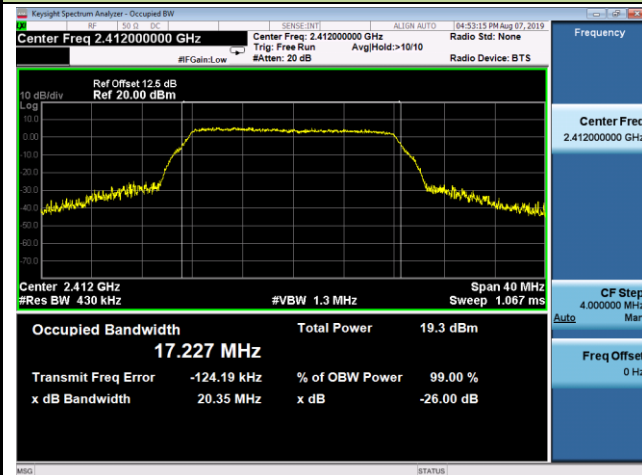

Channel 06 (2437MHz)

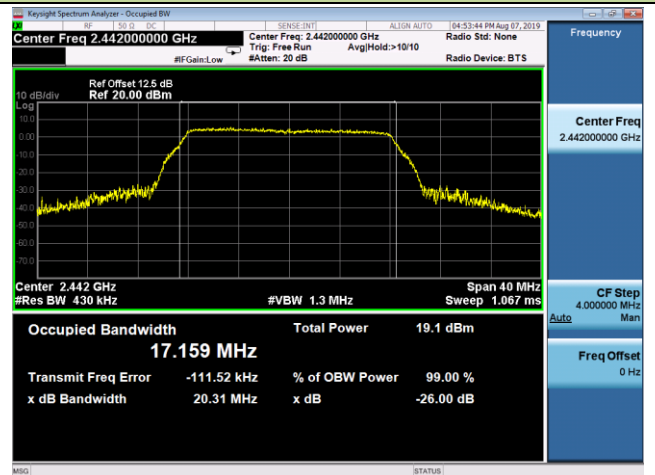


Channel 11 (2462MHz)

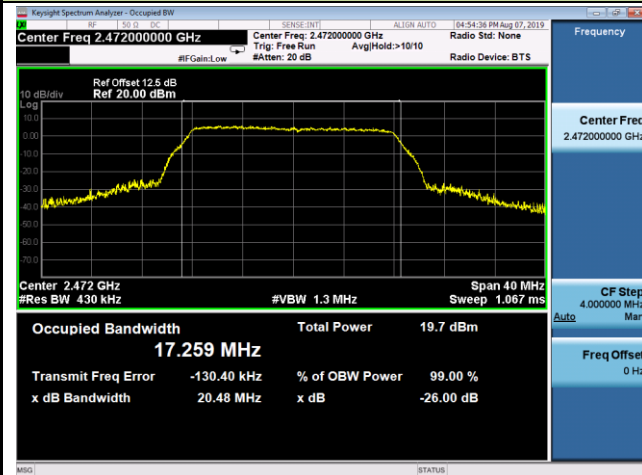

802.11n-HT20 99% Bandwidth


Channel 01 (2412MHz)

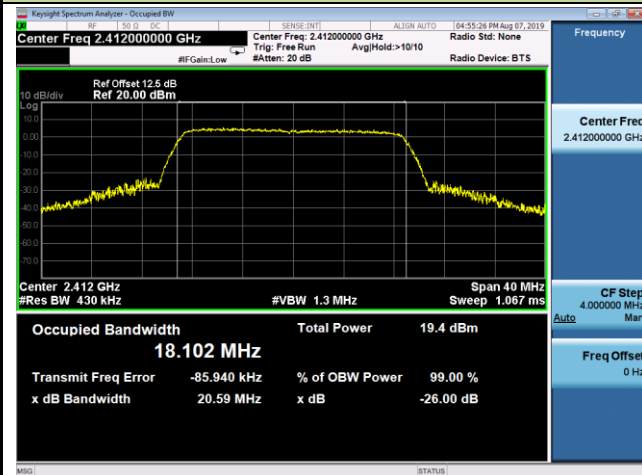

Channel 06 (2437MHz)



Channel 11 (2462MHz)

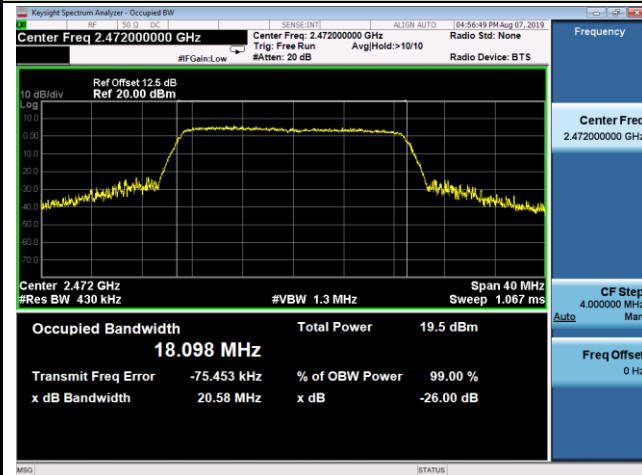

7.3. Output Power Measurement

7.3.1. Test Limit

The maximum conducted output power shall be exceeded 1 Watt (30dBm) and the E.I.R.P shall not exceed 4 Watt (36dBm).

7.3.2. Test Procedure Used

ANSI C63.10 - Section 11.9.1.3

ANSI C63.10 - Section 11.9.2.3.2

7.3.3. Test Setting


Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Measurement using a gated RF average-reading power meter)

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

7.3.4. Test Setup

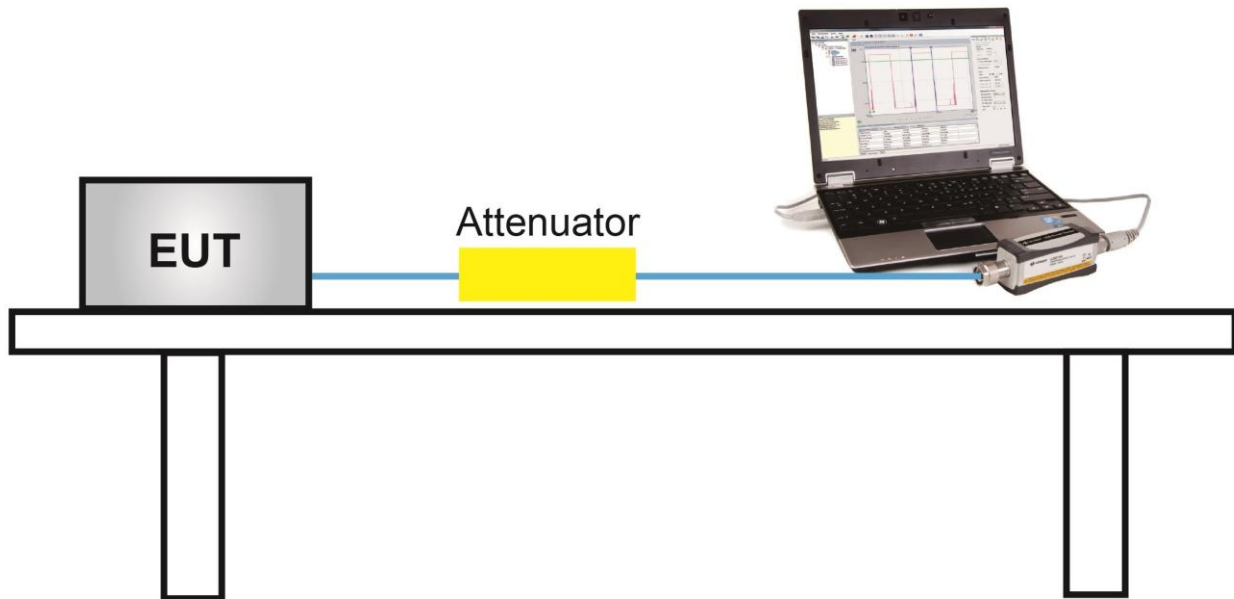

7.3.5.Test Result

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (gray marker) for final test of each channel.

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate / MCS	Average Power (dBm)
802.11b	20	6	2437	1Mbps	14.73
				5.5Mbps	14.62
				11Mbps	14.50
802.11g	20	6	2437	6Mbps	11.49
				24Mbps	11.35
				54Mbps	11.20
802.11n	20	6	2437	MCS0	11.45
				MCS3	11.31
				MCS7	11.18

Product	MC10 Transceiver Control Panel	Temperature	25°C
Test Engineer	Dandy Li	Relative Humidity	52%
Test Site	TR3	Test Date	2019/07/19

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	E.I.R.P (dBm)	E.I.R.P Limit (dBm)	Result
11b	1Mbps	01	2412	14.72	≤ 30.00	16.72	≤ 36.00	Pass
11b	1Mbps	06	2437	14.73	≤ 30.00	16.73	≤ 36.00	Pass
11b	1Mbps	11	2462	14.79	≤ 30.00	16.79	≤ 36.00	Pass
11g	6Mbps	01	2412	11.42	≤ 30.00	13.42	≤ 36.00	Pass
11g	6Mbps	06	2437	11.49	≤ 30.00	13.49	≤ 36.00	Pass
11g	6Mbps	11	2462	11.52	≤ 30.00	13.52	≤ 36.00	Pass
11n-HT20	MCS0	01	2412	11.30	≤ 30.00	13.30	≤ 36.00	Pass
11n-HT20	MCS0	06	2437	11.45	≤ 30.00	13.45	≤ 36.00	Pass
11n-HT20	MCS0	11	2462	11.49	≤ 30.00	13.49	≤ 36.00	Pass

Note: E.I.R.P (dBm) = Average Power (dBm) + Antenna Gain (dBi), Antenna Gain = 2.0 dBi.

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.

7.4.2. Test Procedure Used


ANSI C63.10 Section 11.10.5

7.4.3. Test Setting

1. Measure the duty cycle (x) of the transmitter output signal.
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. RBW = 10 kHz.
5. VBW = 30 kHz.
6. Detector = RMS.
7. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
8. Sweep time = auto couple.
9. Don't use sweep triggering. Allow sweep to "free run".
10. Employ trace averaging (RMS) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.

Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

7.4.4.Test Setup

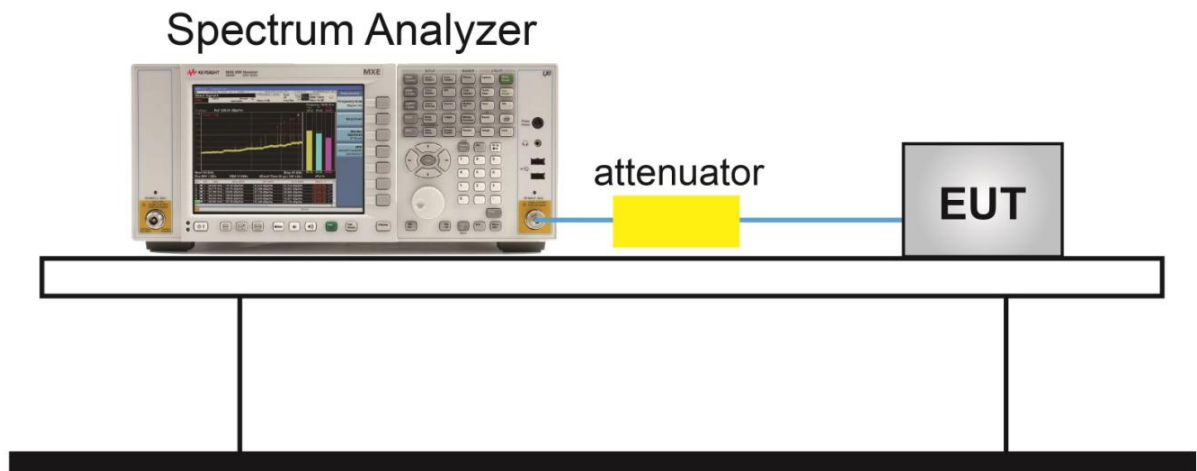

7.4.5. Test Result

Product	MC10 Transceiver Control Panel	Temperature	25°C
Test Engineer	Dandy Li	Relative Humidity	52%
Test Site	TR3	Test Date	2019/07/19

Test Mode	Data Rate	Channel No.	Freq. (MHz)	AVG PSD (dBm / 10kHz)	Duty Cycle (%)	Constant Factor (dBm)	AVG PSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
11b	1Mbps	1	2412	-2.37	99.64	-5.23	-7.60	≤ 8.00	Pass
11b	1Mbps	6	2437	-4.14	99.64	-5.23	-9.37	≤ 8.00	Pass
11b	1Mbps	11	2462	-3.54	99.64	-5.23	-8.77	≤ 8.00	Pass
11g	6Mbps	1	2412	-9.24	96.65	-5.23	-14.32	≤ 8.00	Pass
11g	6Mbps	6	2442	-8.84	96.65	-5.23	-13.92	≤ 8.00	Pass
11g	6Mbps	11	2472	-9.44	96.65	-5.23	-14.52	≤ 8.00	Pass
11n-HT20	MCS0	1	2412	-9.33	95.38	-5.23	-14.35	≤ 8.00	Pass
11n-HT20	MCS0	6	2442	-9.59	95.38	-5.23	-14.61	≤ 8.00	Pass
11n-HT20	MCS0	11	2472	-9.21	95.38	-5.23	-14.23	≤ 8.00	Pass

Note 1: When EUT duty cycle ≥ 98%, AVG PSD (dBm / 3kHz) = AVG PSD + Constant Factor.

Note 2: When EUT duty cycle < 98%, AVG PSD (dBm / 3kHz) = AVG PSD + 10*log (1/duty cycle) + Constant Factor.

802.11b - AVG PSD

Channel 01 (2412MHz)



Channel 06 (2437MHz)




Channel 11 (2462MHz)




802.11g - AVG PSD


Channel 01 (2412MHz)

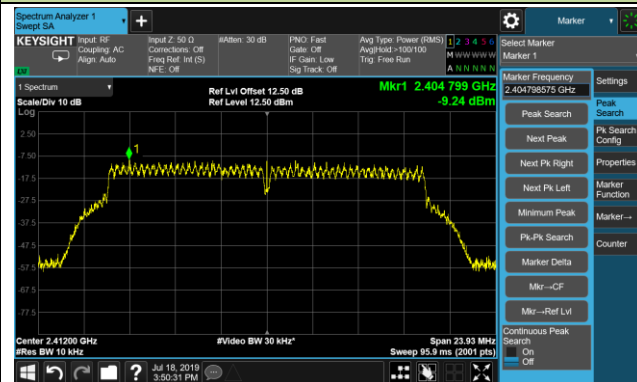

Channel 06 (2437MHz)

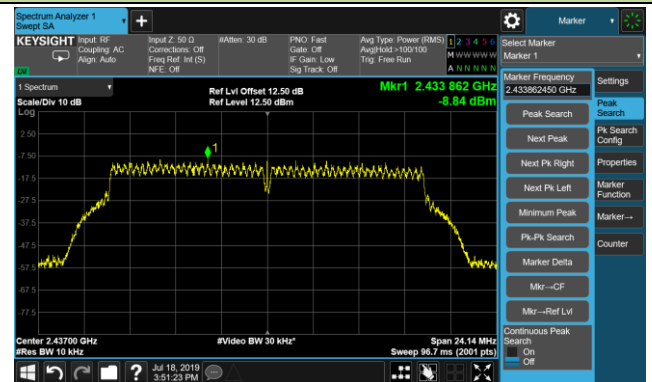


Channel 11 (2462MHz)

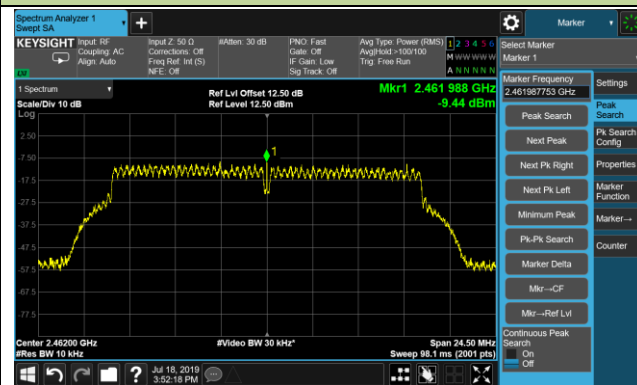


802.11n-HT20 - AVG PSD


Channel 01 (2412MHz)

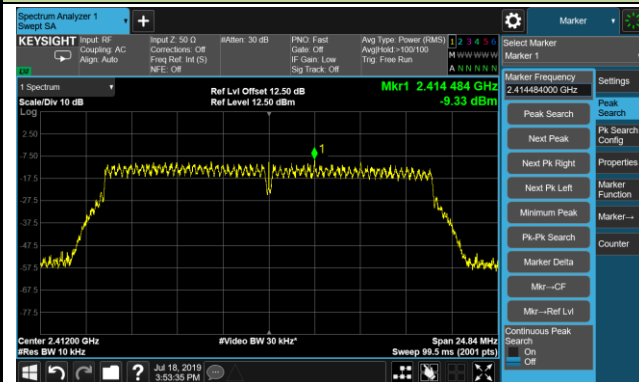

Channel 06 (2437MHz)

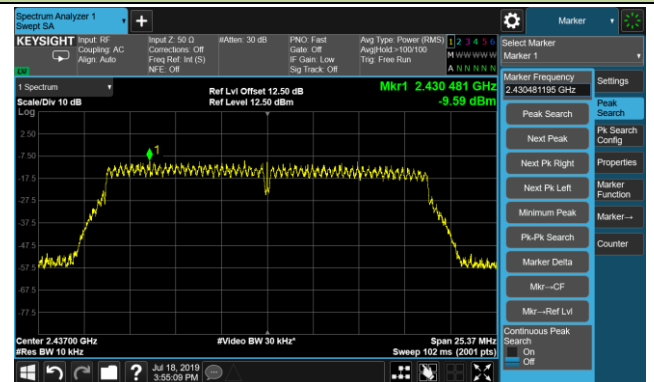

Channel 11 (2462MHz)

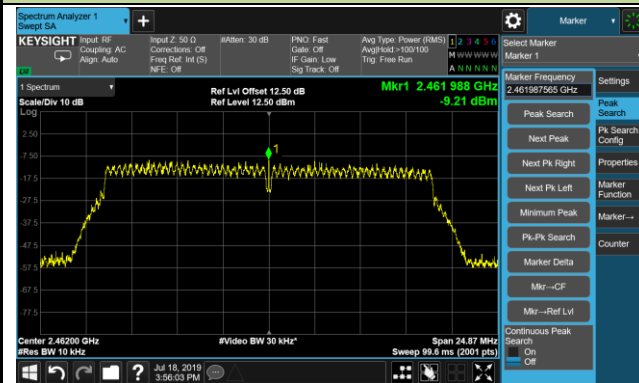

7.5. Conducted Band Edge and Out-of-Band Emissions

7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

7.5.2. Test Procedure Used

ANSI C63.10 - Section 11.11

7.5.3. Test Setting

Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize


Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Notes

1. RBW was set to 1.3MHz rather than 100 kHz in order to increase the measurement speed; meanwhile, the VBW was set to 4MHz instead of 300 kHz.
2. The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100 kHz bandwidth. However, since the traces in the following plots are measured with a 1.3 MHz RBW, the display line may not necessarily appear to be 20 dB below the level of the fundamental measured in a 1.3 MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.

7.5.4.Test Setup

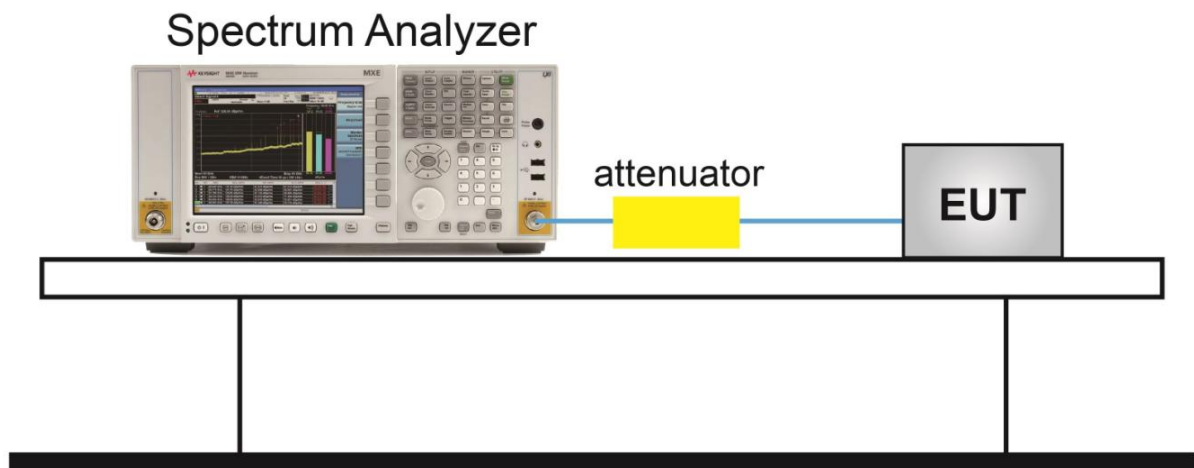

7.5.5. Test Result

Product	MC10 Transceiver Control Panel	Temperature	25°C
Test Engineer	Dandy Li	Relative Humidity	52%
Test Site	TR3	Test Date	2019/07/18 ~ 2019/07/19

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit	Result
802.11b	1Mbps	01	2412	30dBc	Pass
802.11b	1Mbps	06	2437	30dBc	Pass
802.11b	1Mbps	11	2462	30dBc	Pass
802.11g	6Mbps	01	2412	30dBc	Pass
802.11g	6Mbps	06	2437	30dBc	Pass
802.11g	6Mbps	11	2462	30dBc	Pass
802.11n-HT20	MCS0	01	2412	30dBc	Pass
802.11n-HT20	MCS0	06	2437	30dBc	Pass
802.11n-HT20	MCS0	11	2462	30dBc	Pass

802.11b Out-of-Band Emissions

Channel 01 (2412MHz)

100kHz PSD Reference Level



Low Band Edge



Spurious Emission




Note: The Value of the Display Line is -23.64dBm

Channel 06 (2437MHz)

100kHz PSD Reference Level



Spurious Emission

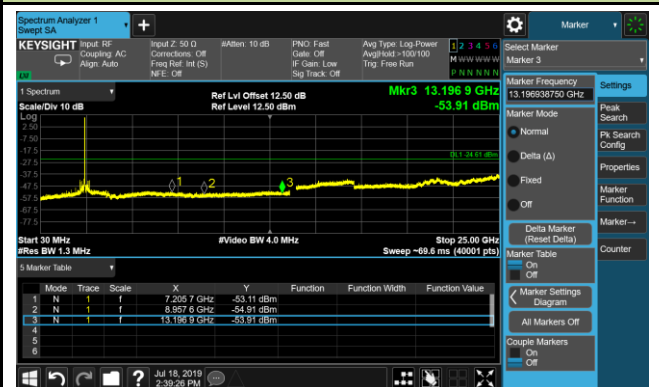


Note: The Value of the Display Line is -24.61dBm

802.11b Out-of-Band Emissions

Channel 11 (2462MHz)

100kHz PSD Reference Level

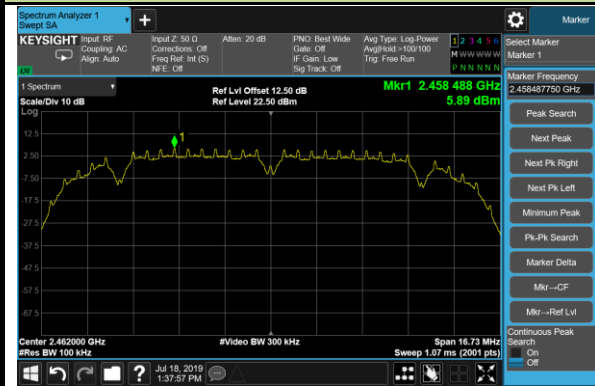

High Band Edge



Spurious Emission




Note: The Value of the Display Line is -24.11dBm


802.11g Out-of-Band Emissions

Channel 01 (2412MHz)

100kHz PSD Reference Level

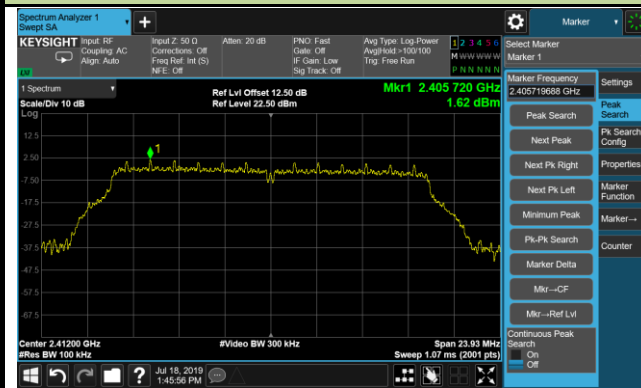

Low Band Edge

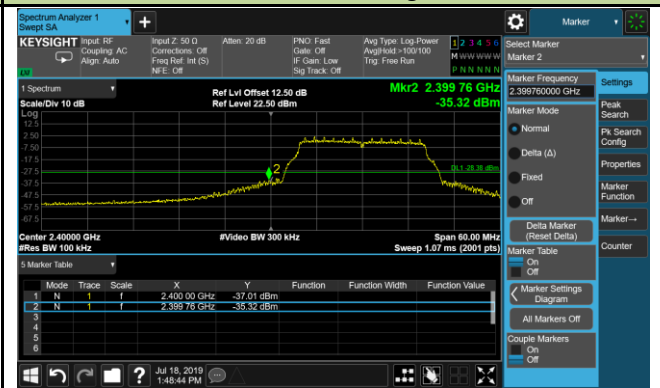

Spurious Emission



Note: The Value of the Display Line is -28.38dBm

Channel 06 (2437MHz)

100kHz PSD Reference Level



Spurious Emission




Note: The Value of the Display Line is -28.32dBm


802.11g Out-of-Band Emissions

Channel 11 (2462MHz)

100kHz PSD Reference Level

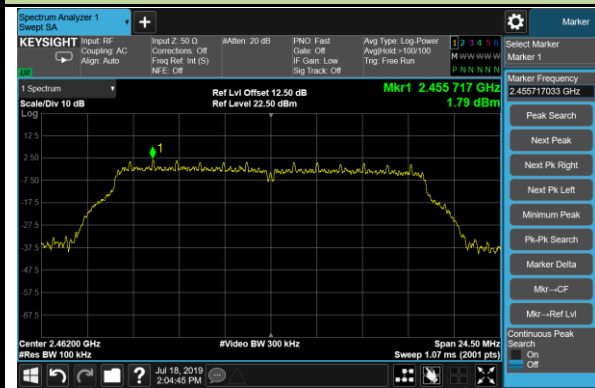

High Band Edge

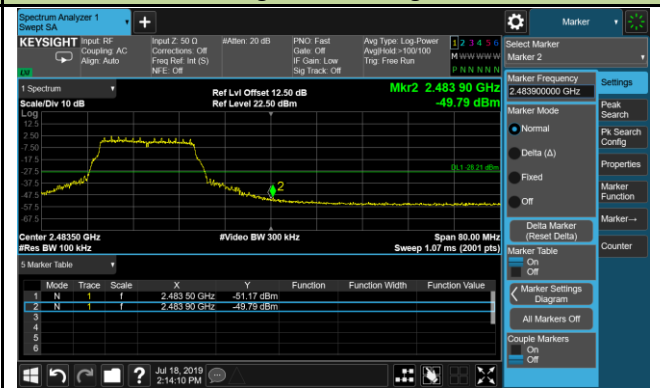

Spurious Emission



Note: The Value of the Display Line is -28.21dBm


802.11n-HT20 Out-of-Band Emissions

Channel 01 (2412MHz)

100kHz PSD Reference Level



Low Band Edge

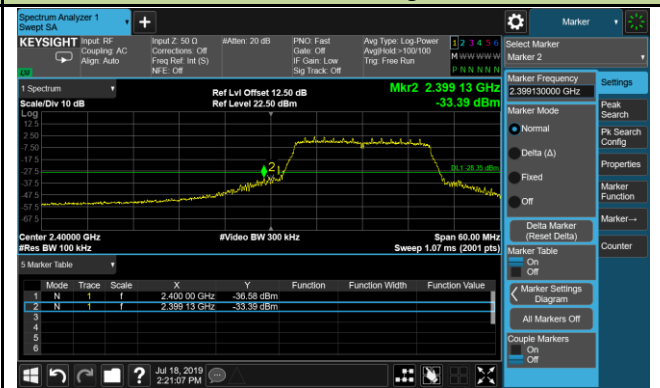

Spurious Emission



Note: The Value of the Display Line is -28.35dBm

Channel 06 (2437MHz)

100kHz PSD Reference Level



Spurious Emission




Note: The Value of the Display Line is -28.32dBm

802.11n-HT20 Out-of-Band Emissions

Channel 11 (2462MHz)

100kHz PSD Reference Level

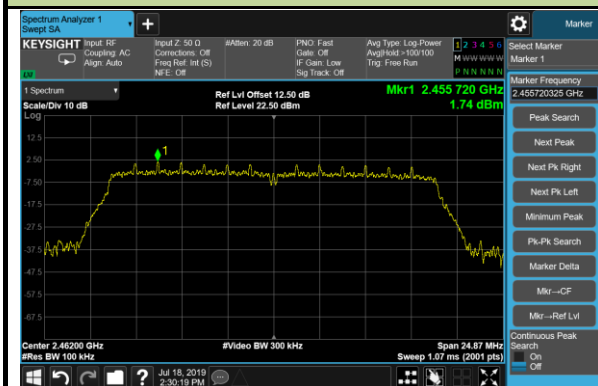

High Band Edge



Spurious Emission



Note: The Value of the Display Line is -28.26dBm

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4.Test Setup

Below 1GHz Test Setup:

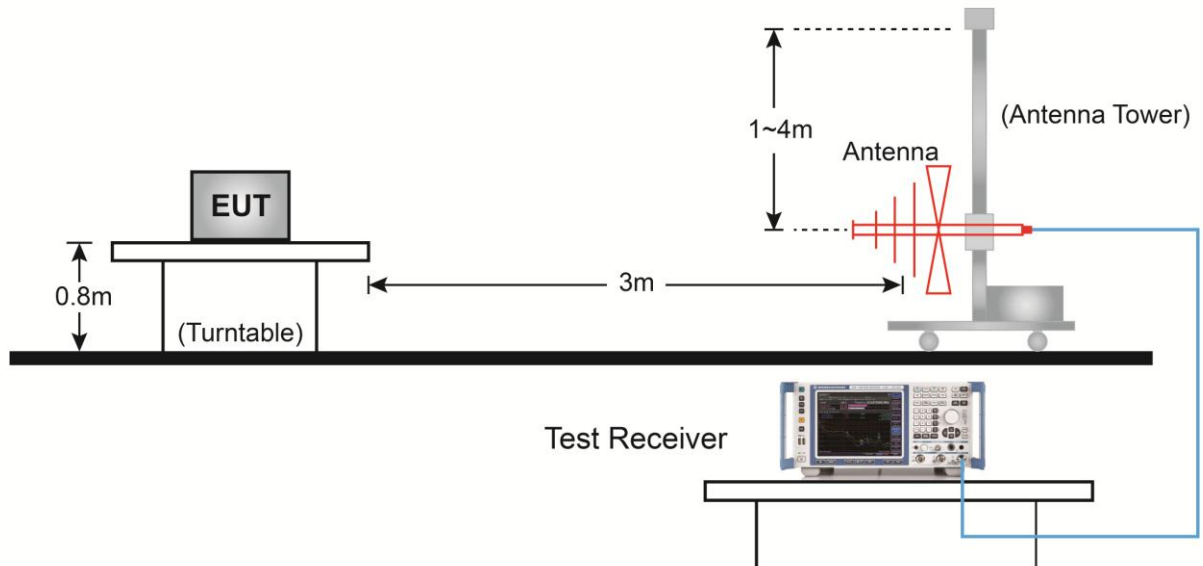

Above 1GHz Test Setup:

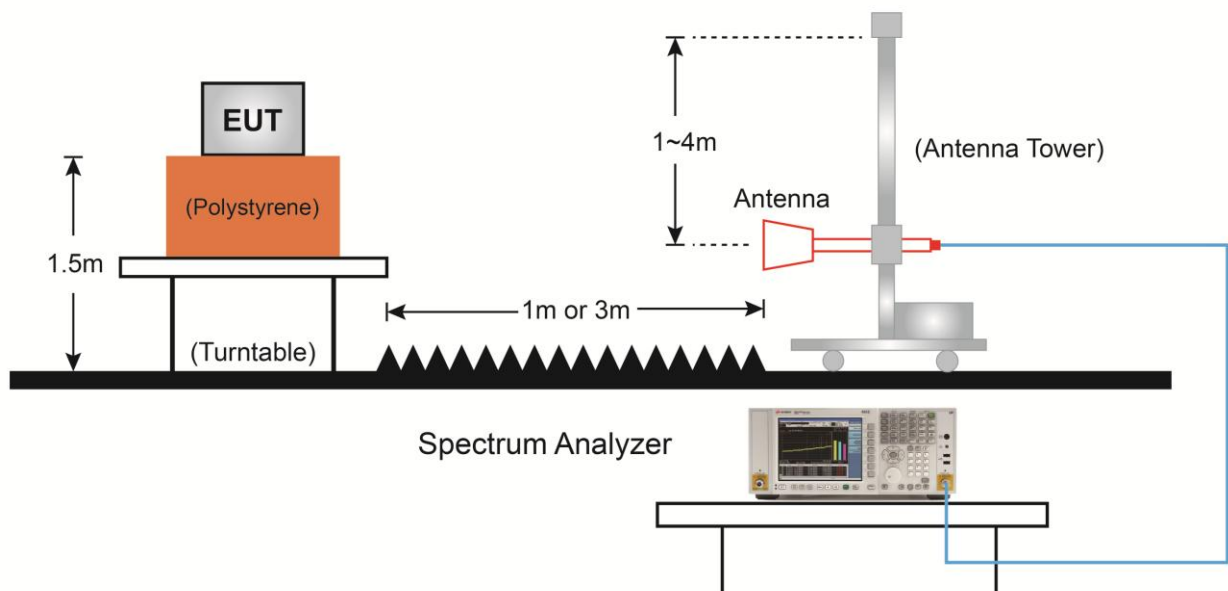

7.6.5. Test Result

Product	MC10 Transceiver Control Panel	Temperature	25°C
Test Engineer	Messiah Li	Relative Humidity	54%
Test Site	AC1	Test Date	2019/07/18
Test Mode:	802.11b	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3983.5	38.9	2.5	41.4	74.0	-32.6	Peak	Horizontal
	4884.5	37.3	5.7	43.0	74.0	-31.0	Peak	Horizontal
*	6006.5	36.2	7.5	43.7	75.1	-31.4	Peak	Horizontal
*	6907.5	36.6	10.2	46.8	75.1	-28.3	Peak	Horizontal
	3983.5	39.3	2.5	41.8	74.0	-32.2	Peak	Vertical
	4893.0	36.9	5.6	42.5	74.0	-31.5	Peak	Vertical
*	5743.0	36.1	7.0	43.1	75.1	-32.0	Peak	Vertical
*	6593.0	35.6	9.8	45.4	75.1	-29.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 30dBc of the fundamental emission level (105.1dBμV/m) or FCC 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	MC10 Transceiver Control Panel	Temperature	25°C
Test Engineer	Messiah Li	Relative Humidity	54%
Test Site	AC1	Test Date	2019/07/18
Test Mode:	802.11b	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3992.0	38.6	2.5	41.1	74.0	-32.9	Peak	Horizontal
	5003.5	36.9	6.1	43.0	74.0	-31.0	Peak	Horizontal
*	6040.5	37.5	7.4	44.9	76.2	-31.3	Peak	Horizontal
*	6610.0	36.3	9.6	45.9	76.2	-30.3	Peak	Horizontal
	4034.5	38.5	2.7	41.2	74.0	-32.8	Peak	Vertical
	4876.0	37.9	5.7	43.6	74.0	-30.4	Peak	Vertical
*	6253.0	38.0	8.2	46.2	76.2	-30.0	Peak	Vertical
*	7001.0	35.6	10.6	46.2	76.2	-30.0	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 30dBc of the fundamental emission level (106.2dBμV/m) or FCC 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	MC10 Transceiver Control Panel	Temperature	25°C
Test Engineer	Messiah Li	Relative Humidity	54%
Test Site	AC1	Test Date	2019/07/18
Test Mode:	802.11b	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3975.0	38.0	2.4	40.4	74.0	-33.6	Peak	Horizontal
	4833.5	36.5	5.5	42.0	74.0	-32.0	Peak	Horizontal
*	5811.0	35.3	7.1	42.4	76.9	-34.5	Peak	Horizontal
*	6584.5	35.3	9.7	45.0	76.9	-31.9	Peak	Horizontal
	4077.0	37.8	2.7	40.5	74.0	-33.5	Peak	Vertical
	4808.0	36.6	5.7	42.3	74.0	-31.7	Peak	Vertical
*	6015.0	35.8	7.5	43.3	76.9	-33.6	Peak	Vertical
*	6771.5	36.0	9.6	45.6	76.9	-31.3	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 30dBc of the fundamental emission level (106.9dBμV/m) or FCC 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	MC10 Transceiver Control Panel	Temperature	25°C
Test Engineer	Messiah Li	Relative Humidity	54%
Test Site	AC1	Test Date	2019/07/18
Test Mode:	802.11g	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4026.0	39.1	2.6	41.7	74.0	-32.3	Peak	Horizontal
	4808.0	36.6	5.7	42.3	74.0	-31.7	Peak	Horizontal
*	5794.0	37.0	7.0	44.0	74.3	-30.3	Peak	Horizontal
*	7001.0	35.3	10.6	45.9	74.3	-28.4	Peak	Horizontal
	4009.0	38.8	2.5	41.3	74.0	-32.7	Peak	Vertical
	4935.5	36.6	5.8	42.4	74.0	-31.6	Peak	Vertical
*	5743.0	36.0	7.0	43.0	74.3	-31.3	Peak	Vertical
*	6576.0	36.3	9.6	45.9	74.3	-28.4	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 30dBc of the fundamental emission level (104.3dBμV/m) or FCC 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	MC10 Transceiver Control Panel	Temperature	25°C
Test Engineer	Messiah Li	Relative Humidity	54%
Test Site	AC1	Test Date	2019/07/18
Test Mode:	802.11g	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4026.0	38.2	2.6	40.8	74.0	-33.2	Peak	Horizontal
	4876.0	37.5	5.7	43.2	74.0	-30.8	Peak	Horizontal
*	6006.5	36.2	7.5	43.7	75.9	-32.2	Peak	Horizontal
*	6678.0	35.6	9.5	45.1	75.9	-30.8	Peak	Horizontal
	4111.0	39.4	3.0	42.4	74.0	-31.6	Peak	Vertical
	5037.5	36.9	6.2	43.1	74.0	-30.9	Peak	Vertical
*	5989.5	36.3	7.4	43.7	75.9	-32.2	Peak	Vertical
*	6831.0	36.5	9.8	46.3	75.9	-29.6	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 30dBc of the fundamental emission level (105.9dBμV/m) or FCC 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	MC10 Transceiver Control Panel	Temperature	25°C
Test Engineer	Messiah Li	Relative Humidity	54%
Test Site	AC1	Test Date	2019/07/18
Test Mode:	802.11g	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4051.5	38.1	2.7	40.8	74.0	-33.2	Peak	Horizontal
	5029.0	36.7	6.1	42.8	74.0	-31.2	Peak	Horizontal
*	5964.0	36.9	7.4	44.3	78.8	-34.5	Peak	Horizontal
*	6567.5	36.8	9.5	46.3	78.8	-32.5	Peak	Horizontal
	4051.5	38.5	2.7	41.2	74.0	-32.8	Peak	Vertical
	4986.5	36.8	6.0	42.8	74.0	-31.2	Peak	Vertical
*	6074.5	37.1	7.7	44.8	78.8	-34.0	Peak	Vertical
*	6652.5	36.5	9.6	46.1	78.8	-32.7	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 30dBc of the fundamental emission level (108.8dBμV/m) or FCC 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	MC10 Transceiver Control Panel	Temperature	25°C
Test Engineer	Messiah Li	Relative Humidity	54%
Test Site	AC1	Test Date	2019/07/18
Test Mode:	802.11n-HT20	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4085.5	38.1	2.7	40.8	74.0	-33.2	Peak	Horizontal
	4808.0	37.5	5.7	43.2	74.0	-30.8	Peak	Horizontal
*	6023.5	36.6	7.5	44.1	75.9	-31.8	Peak	Horizontal
*	6601.5	36.9	9.7	46.6	75.9	-29.3	Peak	Horizontal
	4068.5	38.2	2.7	40.9	74.0	-33.1	Peak	Vertical
	4774.0	36.7	5.3	42.0	74.0	-32.0	Peak	Vertical
*	5955.5	37.0	7.5	44.5	75.9	-31.4	Peak	Vertical
*	6635.5	36.4	9.6	46.0	75.9	-29.9	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 30dBc of the fundamental emission level (105.9dBμV/m) or FCC 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	MC10 Transceiver Control Panel	Temperature	25°C
Test Engineer	Messiah Li	Relative Humidity	54%
Test Site	AC1	Test Date	2019/07/18
Test Mode:	802.11n-HT20	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4043.0	37.8	2.7	40.5	74.0	-33.5	Peak	Horizontal
	4876.0	37.0	5.7	42.7	74.0	-31.3	Peak	Horizontal
*	5870.5	36.3	7.4	43.7	77.1	-33.4	Peak	Horizontal
*	6907.5	35.5	10.2	45.7	77.1	-31.4	Peak	Horizontal
	4162.0	37.6	3.1	40.7	74.0	-33.3	Peak	Vertical
	4774.0	36.4	5.3	41.7	74.0	-32.3	Peak	Vertical
*	5768.5	36.0	7.2	43.2	77.1	-33.9	Peak	Vertical
*	6499.5	35.5	9.4	44.9	77.1	-32.2	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 30dBc of the fundamental emission level (107.1dBμV/m) or FCC 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	MC10 Transceiver Control Panel	Temperature	25°C
Test Engineer	Messiah Li	Relative Humidity	54%
Test Site	AC1	Test Date	2019/07/18
Test Mode:	802.11n-HT20	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4094.0	38.4	2.8	41.2	74.0	-32.8	Peak	Horizontal
	4918.5	36.6	5.8	42.4	74.0	-31.6	Peak	Horizontal
*	5802.5	36.9	7.1	44.0	78.0	-34.0	Peak	Horizontal
*	6482.5	35.8	9.4	45.2	78.0	-32.8	Peak	Horizontal
	4264.0	37.4	3.4	40.8	74.0	-33.2	Peak	Vertical
	5012.0	37.0	6.1	43.1	74.0	-30.9	Peak	Vertical
*	5896.0	37.1	7.5	44.6	78.0	-33.4	Peak	Vertical
*	6550.5	35.9	9.5	45.4	78.0	-32.6	Peak	Vertical


Note 1: “*” is not in restricted band, its limit is 30dBc of the fundamental emission level (108.0dBμV/m) or FCC 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Worst Case of Radiated Emission below 1GHz:

Site: AC1	Time: 2019/08/08 - 11:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Messiah Li
Probe: VULB 9168_20-2000MHz	Polarity: Horizontal
EUT: MC10 Transceiver Control Panel	Power: 120V/60Hz
Worst Case Mode: Transmit by 802.11b at Channel 2437MHz	

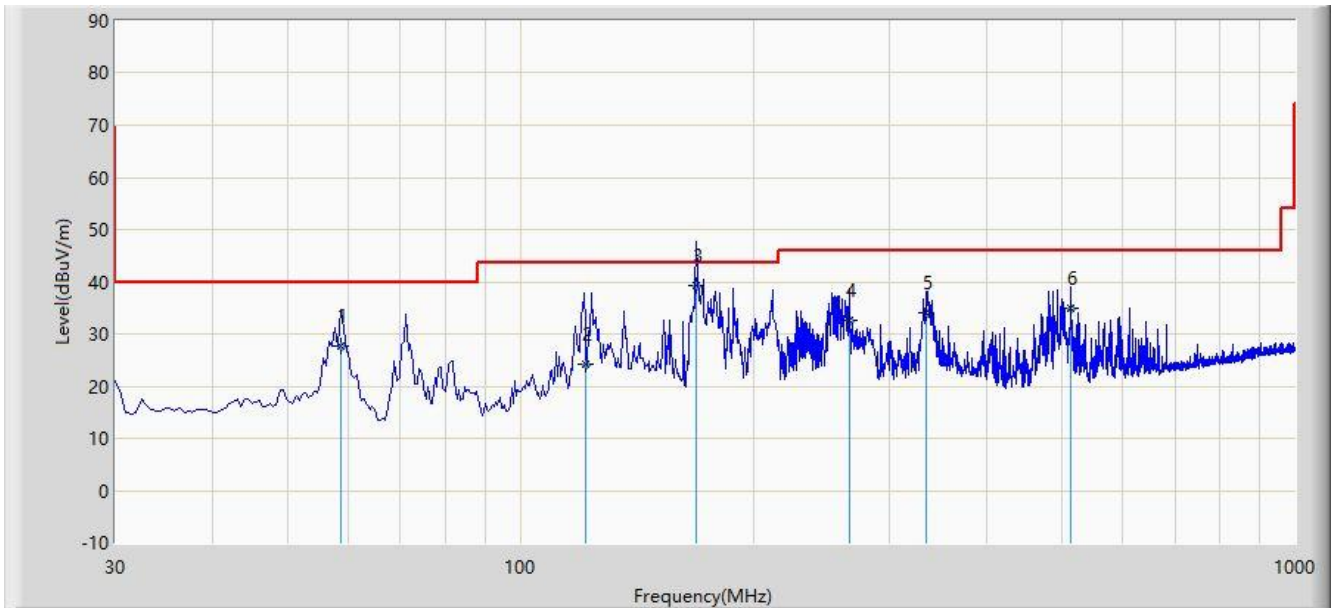

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			58.650	27.719	13.720	-12.281	40.000	13.999	QP
2		*	121.700	24.160	13.270	-19.340	43.500	10.890	QP
3			168.800	39.145	29.110	-4.355	43.500	10.035	QP
4			266.200	32.702	18.950	-13.298	46.000	13.752	QP
5			334.621	34.141	18.904	-11.859	46.000	15.237	QP
6			514.624	35.060	16.908	-10.940	46.000	18.152	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.