Label Location On EUT

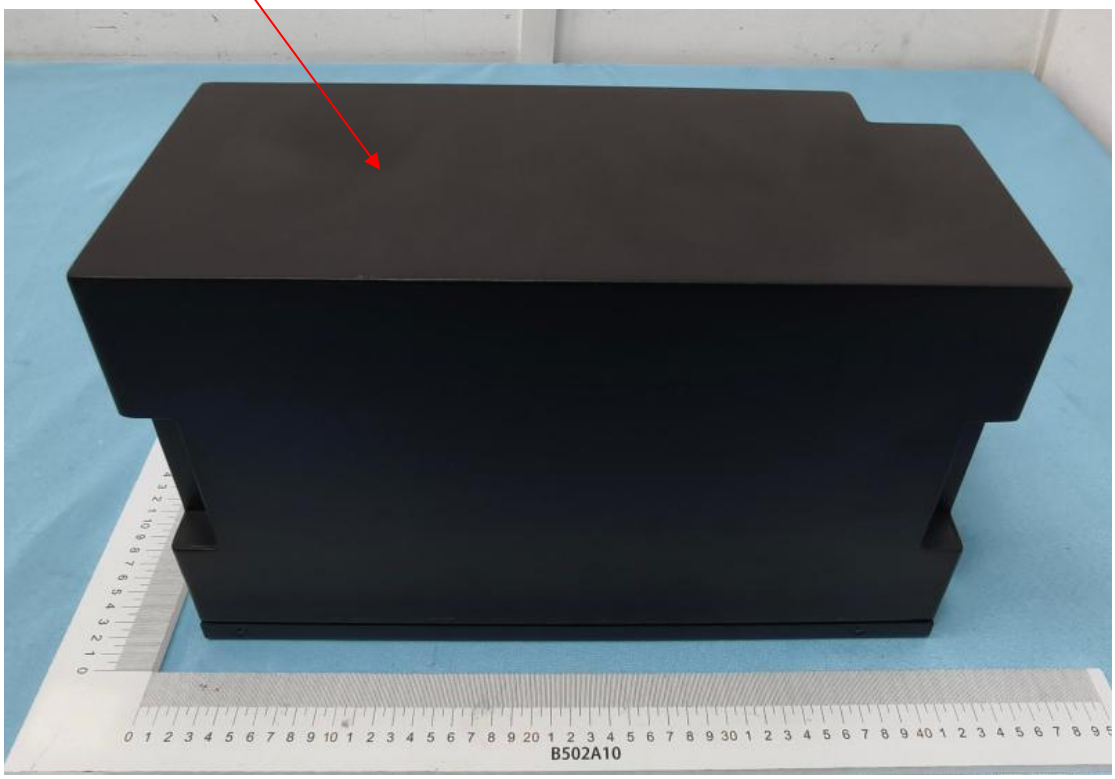

Label

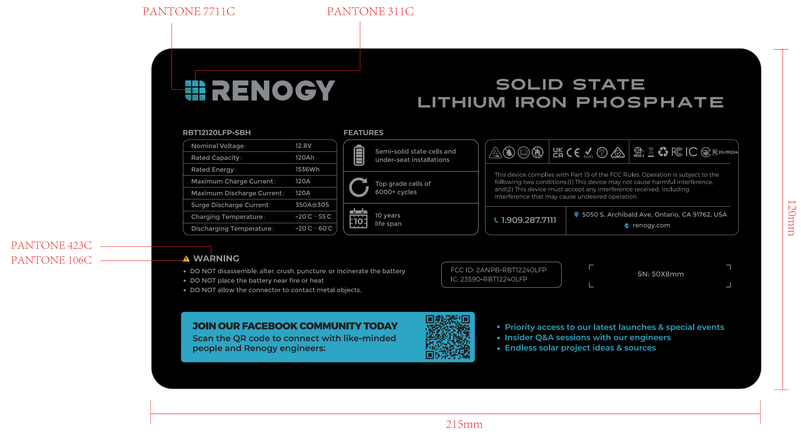
PANTONE 7711C
PANTONE 311C
PANTONE 423C
PANTONE 106C
120mm
215mm
RENOGY
SOLID STATE
LITHIUM IRON PHOSPHATE
RBT12120LFP-SBH
Nominal Voltage: 12.8V
Rated Capacity: 120Ah
Rated Energy: 1536Wh
Maximum Charge Current: 120A
Maximum Discharge Current: 120A
Surge Discharge Current: 350A@30S
Charging Temperature: -20 C - 55 C
Discharging Temperature: -20 C - 60 C
FEATURES
Semi-solid state cells and under-seat installations
Top grade cells of 6000+ cycles
10 years life span
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1) This device may not cause harmful interference, and(2) This device must accept any interference received, including interference that may cause undesired operation.
1.909.287.7111
5050 S. Archibald Ave, Ontario, CA 91762, USA
renogy.com
WARNING
DO NOT disassemble, alter, crush, puncture, or incinerate the battery
DO NOT place the battery near fire or heat
DO NOT allow the connector to contact metal objects.
FCC ID: 2ANPB-RBT12240LFP
IC: 25590-RBT12240LFP
SN: 50X8mm
JOIN OUR FACEBOOK COMMUNITY TODAY
Scan the QR code to connect with like-minded people and Renogy engineers:
Priority access to our latest launches & special events
Insider Q&A sessions with our engineers
Endless solar project ideas & sources