

Test Report of FCC CFR 47 Part 15 Subpart C

On Behalf of **Novomill Creative Co., Ltd**

213 6D-8/Rm 6D-8, Block 213, Chegongmiao Industrial park, Futian District,
ShenZhen, China

Product Name:	E-Button portable bluetooth speaker
Model/Type No.:	ES001
Trade Name:	Novomill
FCC ID:	2ANQJ-ES001
Prepared By:	Shenzhen Hongcai Testing Technology Co., Ltd. 1st-3rd Floor, Building C, Shuanghuan Xin Yi Dai Hi-Tech Industrial Park, No.8 Baoqing Road, Baochang Industrial Zone, Longgang District, Shenzhen, Guangdong, China Tel: +86-755-86337020 Fax: +86-755-86337028
Report Number:	HCT17GR180E-1
Tested Date:	July 07 ~ 11, 2017
Issued Date:	July 11, 2017
Tested By:	Michelle Shi/ 

Reviewed By:



Owen.Yang

Approved By:



Tony Wu

Owen.Yang
EMC Technical Supervisor

Tony Wu
EMC Technical Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS	5
1.3 TEST FACILITY	5
2. SYSTEM TEST CONFIGURATION.....	6
2.1 EUT CONFIGURATION	6
2.2 EUT EXERCISE.....	6
2.3 GENERAL TEST PROCEDURES	6
2.4 MEASUREMENT UNCERTAINTY	6
2.5 MEASURE RESULTS EXPLANATION EXAMPLE.....	7
2.6 LIST OF MEASURING EQUIPMENTS USED.....	8
3. SUMMARY OF TEST RESULTS.....	9
4. TEST OF AC POWER LINE CONDUCTED EMISSION	10
4.1 APPLICABLE STANDARD	10
4.2 TEST SETUP DIAGRAM	10
4.3 TEST RESULT	10
5. OUTPUT POWER MEASUREMENT.....	11
5.1 APPLICABLE STANDARD	11
5.2 EUT SETUP	11
5.3 TEST EQUIPMENT LIST AND DETAILS	11
5.4 TEST PROCEDURE	11
5.5 TEST RESULT	12
6. TEST OF PEAK POWER SPECTRAL DENSITY	14
6.1 APPLICABLE STANDARD	14
6.2 EUT SETUP	14
6.3 TEST EQUIPMENT LIST AND DETAILS	14
6.4 TEST PROCEDURE	14
6.5 TEST RESULT	15
7. TEST OF 6DB BANDWIDTH.....	17
7.1 APPLICABLE STANDARD	17
7.2 EUT SETUP	17
7.3 TEST EQUIPMENT LIST AND DETAILS	17
7.4 TEST PROCEDURE	17
7.5 TEST RESULT	17
8. TEST OF CONDUCTED SPURIOUS EMISSION.....	20
8.1 APPLICABLE STANDARD	20
8.2 EUT SETUP	20
8.3 TEST EQUIPMENT LIST AND DETAILS	20
8.4 TEST PROCEDURE	20
8.5 TEST RESULT	20
9. TEST OF RADIATED SPURIOUS EMISSION.....	23
9.1 RADIATED SPURIOUS EMISSION	23
9.2 LIMITS	23
9.3 EUT SETUP	23
9.4 TEST PROCEDURE	24
9.5 TEST RESULT	25
10. TEST OF BAND EDGES EMISSION.....	39
10.1 APPLICABLE STANDARD	39
10.2 EUT SETUP	39
10.3 TEST EQUIPMENT LIST AND DETAILS	39

10.4 TEST PROCEDURE	39
10.5 TEST RESULT	40
11. ANTENNA REQUIREMENT	47
11.1 STANDARD APPLICABLE	47
11.2 ANTENNA CONNECTED CONSTRUCTION	47



1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant:	Novomill Creative Co., Ltd
Address of applicant:	213 6D-8/Rm 6D-8, Block 213, Chegongmiao Industrial park, Futian District, ShenZhen, China
Manufacturer :	Novomill Creative Co., Ltd
Address of applicant:	213 6D-8/Rm 6D-8, Block 213, Chegongmiao Industrial park, Futian District, ShenZhen, China

General Description of E.U.T

Items	Description
EUT Description:	E-Button portable bluetooth speaker
Model No.:	ES001
Supplementary ModelNo.:	N/A
Trade Name:	Novomill
Frequency Band:	2402~2480MHz
Channel Spacing:	2 MHz
Number of Channels:	40
Type of Modulation:	GFSK
Antenna Gain	0dBi
Antenna Type:	PCB Antenna
Rated Voltage:	DC 3.7V from battery

Remark: * The test data gathered are from the production sample provided by the manufacturer.

1.2 Test standards

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB558074 D01 V04: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under Section 15.247.

RSS-GEN Issue 4: General Requirements for Compliance of Radio Apparatus.

RSS 247 Issue 2: Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices.

1.3 Test Facility

All measurement required was performed at laboratory of Shenzhen CTL Testing Technology Co., Ltd. Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China. There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

FCC – Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December, 2013.

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

2.3 General Test Procedures

Conducted Emissions: The EUT is placed on the table, which is 0.8 m above ground plane According to the requirements in ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions: The EUT is placed on as turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in ANSI C63.10-2013.

2.4 Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Transmitter power conducted	+/- 0.57 dB
Transmitter power Radiated	+/- 2.20 dB
Conducted spurious emission 9KHz-40 GHz	+/- 2.20 dB
Occupied Bandwidth	+/- 0.01 dB
Power Line Conducted Emission	+/- 3.20 dB
Radiated Emission	+/- 4.32 dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.5 Measure Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable less and attenuator factor.
 Offset= RF cable less+ attenuator factor.

Note: Using a temporary antenna connector for the EUT when the conducted measurements are performed.

Equipment	Manufacturer	Model No.	Frequency range(GHz)	Attenuation values(dBm)
Line	Zhenjiang south electronic	RG317	1-12	0.09
			<1G	0.04
			>12G	1.01
Connector	Zhenjiang south electronic	SMA-K/N-J	1-12	0.01
			<1G	0.005
			>12G	0.03



2.6 List of Measuring Equipments Used

Test equipments list of Shenzhen CTL Testing Technology Co., Ltd.

No.	Equipment	Manufacturer	Model No.	S/N	Last Calculator	Due Calculator
1	EMI Test Receiver	R&S	ESCI	100687	2016-7-25	2017-7-24
2	EMI Test Receiver	R&S	ESPI	100097	2016-10-1	2017-10-31
3	Amplifier	HP	8447D	1937A02492	2016-7-25	2017-7-24
4	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	2016-7-25	2017-7-24
5	RF POWER AMPLIFIER	FRANKONIA	FLL-75	1020A1109	2016-7-25	2017-7-24
6	6dB Attenuator	FRANKONIA	N/A	1001698	2016-7-25	2017-7-24
7	10dB attenuator	ELECTRO-METRICS	EM-7600	836	2016-7-25	2017-7-24
8	Spectrum Analyzer	R&S	FSP	100397	2016-10-1	2017-10-31
9	Broadband preamplifier	SCH WARZBECK	BBV9718	9718-182	2016-7-25	2017-7-24
10	Power Sensor	Anritsu	ML2438A	1241002	2016-7-25	2017-7-24
11	Power Sensor	Anritsu	MA2411B	1207366	2016-7-25	2017-7-24
12	Horn Antenna	SCHWARZBECK	BBHA 9120D	0437	2016-7-25	2017-7-24
13	Horn Antenna	SCHWARZBECK	BBHA9170	0483	2016-7-25	2017-7-24

HONGCAI TESTING

3. SUMMARY OF Test RESULTS

FCC/IC Rules	Description of Test	Result
FCC §15.207	AC Power Line Conducted Emission	Pass
FCC §15.247(b)	Output Power Measurement	Pass
FCC §15.247(e)	Power Spectral Density	Pass
FCC §15.247(a)	6dB Bandwidth 99%Occupied Bandwidth	Pass
FCC §15.247 (d)	Conducted Spurious Emission	Pass
FCC §15.205 and §15.209	Radiated Spurious Emission	Pass
FCC§15.247 (d) and §15.205 and §15.209	Unwanted Emissions	Pass
FCC §15.203/15.247(b)/(c)	Antenna Requirement	Pass



4. Test OF AC POWER LINE CONDUCTED EMISSION


4.1 Applicable standard

Refer to FCC §15.207

For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

4.2 Test Setup Diagram

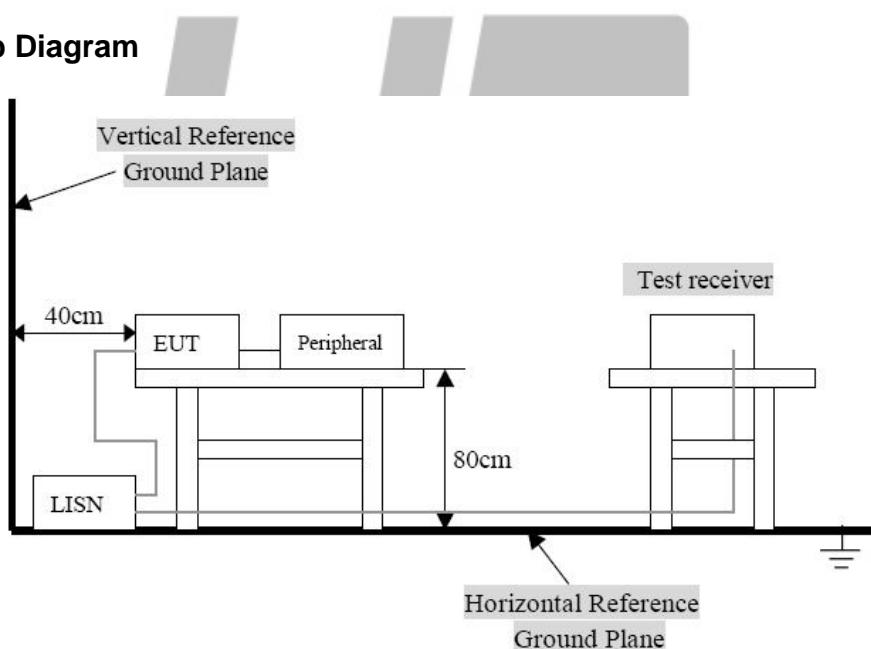

Remark: The EUT was connected to a 120 VAC/ 60Hz power source.

4.3 Test Result

Not applicable.

The EUT is powered by battery.

5. Output Power Measurement


5.1 Applicable standard

Refer to FCC §15.247 (b)


The maximum permissible conducted output power is 1Watt.

5.2 EUT Setup

Peak Output Power:

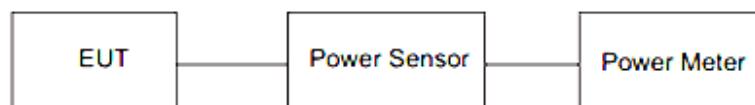

Maximum Conducted (Average) Output Power:

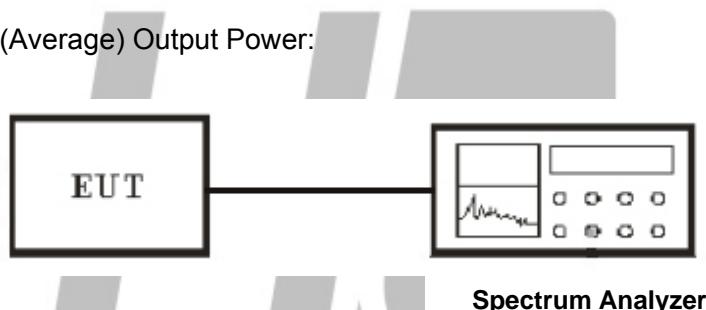

Spectrum Analyzer

5.3 Test Equipment List and Details

See section 2.6

HONGCAI TESTING

5.4 Test Procedure

Maximum Peak Conducted Output Power

Spectrum analyzer

1) Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.

2) Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.

3) Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.

Power meter

A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

Maximum Conducted Average Output Power (For reference only)

Power meter


A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

5.5 Test Result


Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
GFSK	Low	2402	-10.25	21	Pass
GFSK	Middle	2440	-12.04	21	Pass
GFSK	High	2480	-12.91	21	Pass

Test plot as follows:


Channel Low:

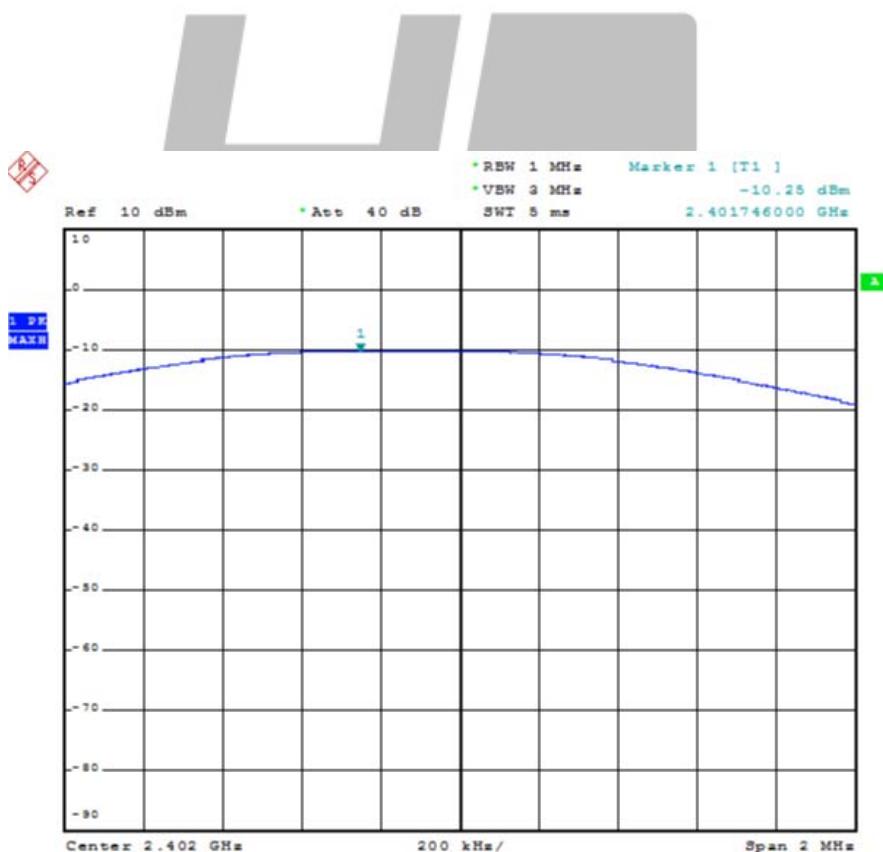

Channel Middle:

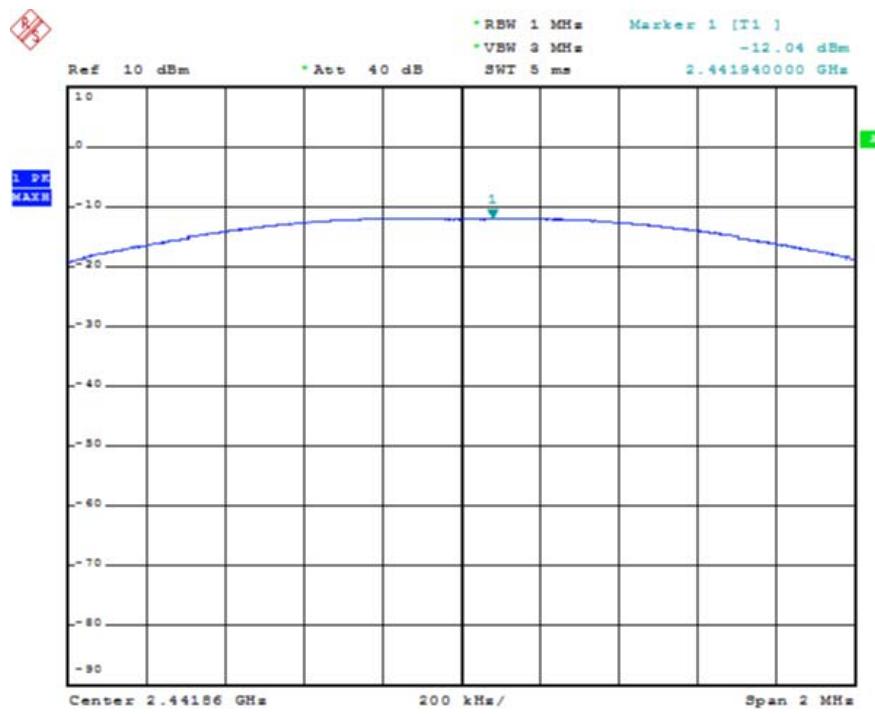

Channel High:

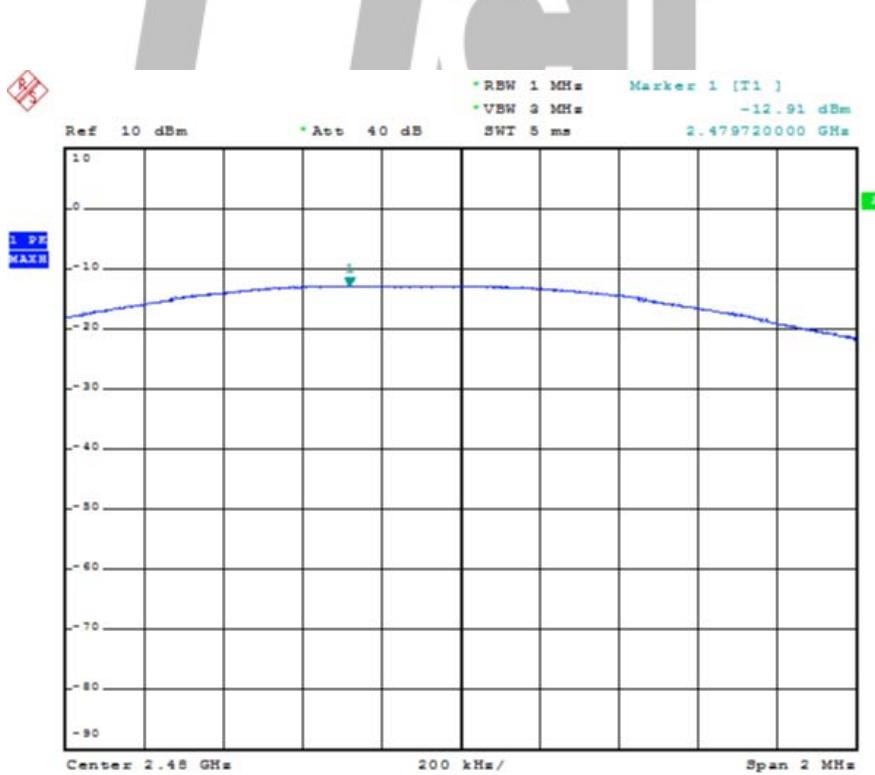


6. Test of Peak Power Spectral Density

6.1 Applicable standard

Refer to FCC §15.247 (e)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.2 EUT Setup

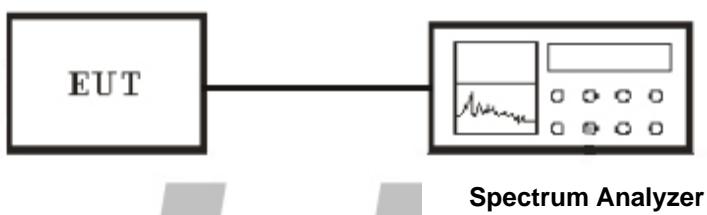

6.3 Test Equipment List and Details

See section 2.6

6.4 Test Procedure

Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.

- 1) Set the RBW = 3kHz, VBW = 10kHz.
- 2) Detector = Peak, Sweep time = auto couple.
- 3) Trace mode = max hold, allow trace to fully stabilize.
- 4) Use the peak marker function to determine the maximum amplitude level.

Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.


- 1) Set the RBW = 100kHz, VBW = 300 kHz.
- 2) Detector = RMS, Sweep time = auto couple.
- 3) Perform the measurement over a single sweep.
- 4) Use the peak marker function to determine the maximum amplitude level.

6.5 Test Result


Temperature (°C) : 22~23	EUT: E-Button portable bluetooth speaker
Humidity (%RH): 50~54	M/N: ES001
Barometric Pressure (mbar): 950~1000	Operation Condition: Continuously Tx Mode

Channel	Channel Frequency (MHz)	Maximum Limit (dBm)	Pass / Fail	
Low	2402	-22.26	8	PASS
Middle	2437	-22.32	8	PASS
High	2462	-24.50	8	PASS


CH Low

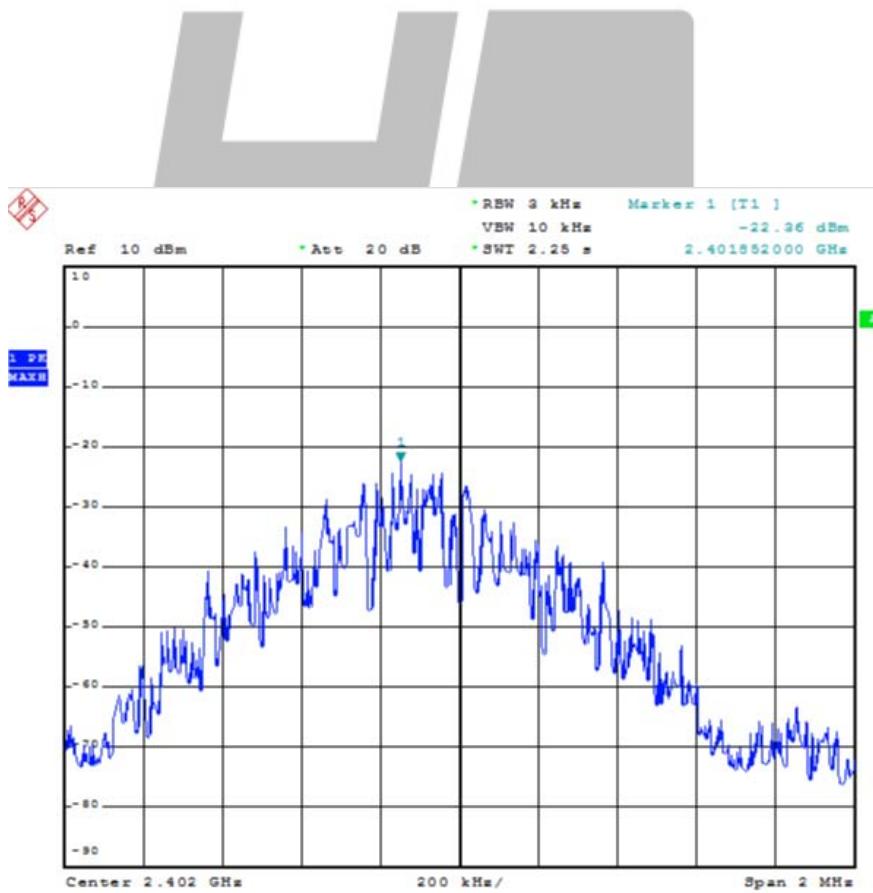

CH Mid

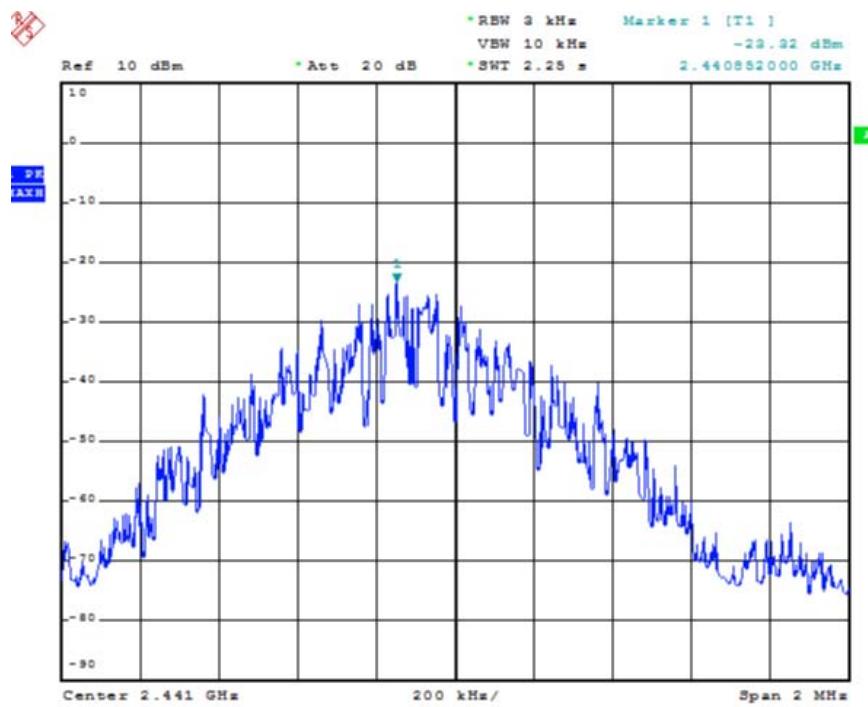

CH High

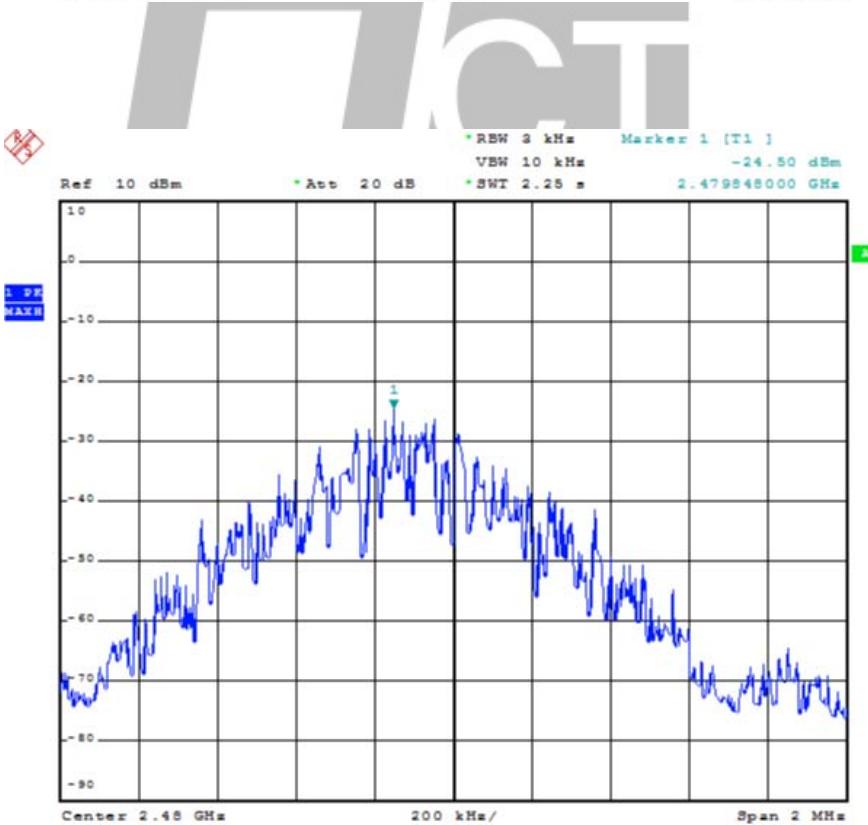


7. Test of 6dB Bandwidth

7.1 Applicable standard

Refer to FCC §15.247 (a) (2)

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

7.2 EUT Setup

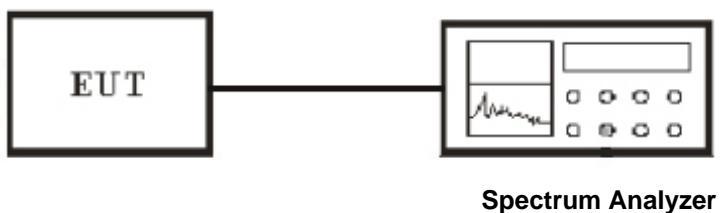

7.3 Test Equipment List and Details

See section 2.6

7.4 Test Procedure

The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB. The transmitter output was connected to a spectrum analyzer and the parameter was set as below:


1. Set resolution bandwidth (RBW) = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.5 Test Result


Temperature (°C) : 22~23	EUT: E-Button portable bluetooth speaker
Humidity (%RH) : 50~54	M/N: ES001
Barometric Pressure (mbar) : 950~1000	Operation Condition: Continuously Tx Mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	0.520	500	PASS
Middle	2437	0.512	500	PASS
High	2462	0.515	500	PASS


CH Low

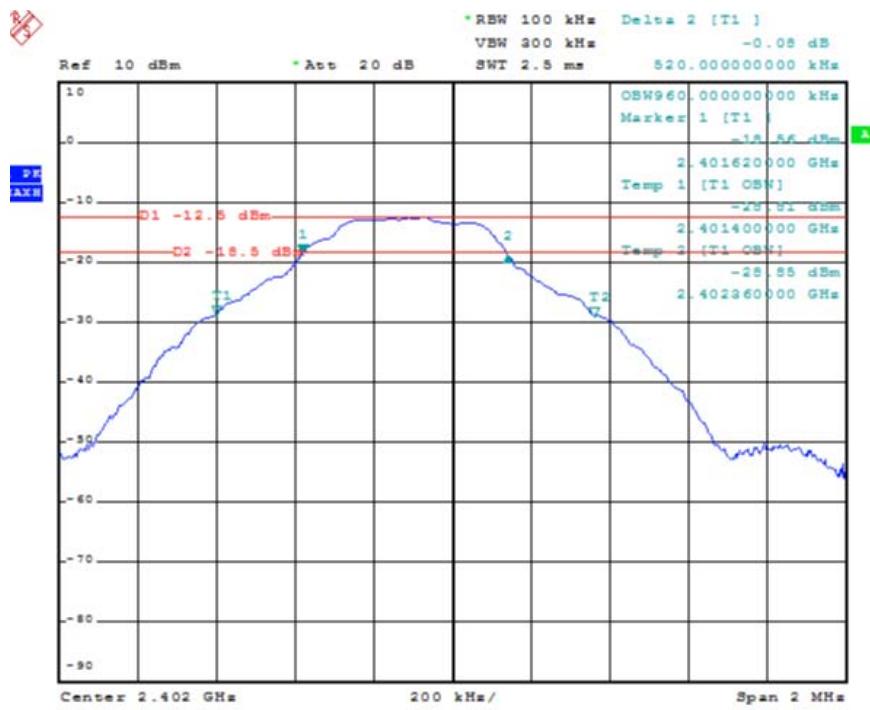

CH Mid

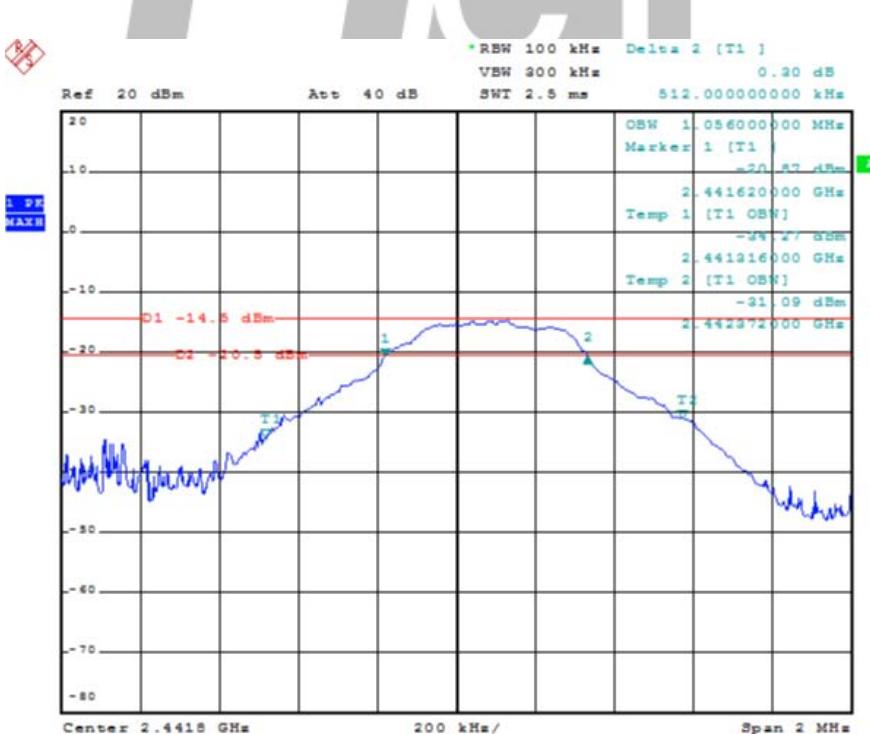

CH High

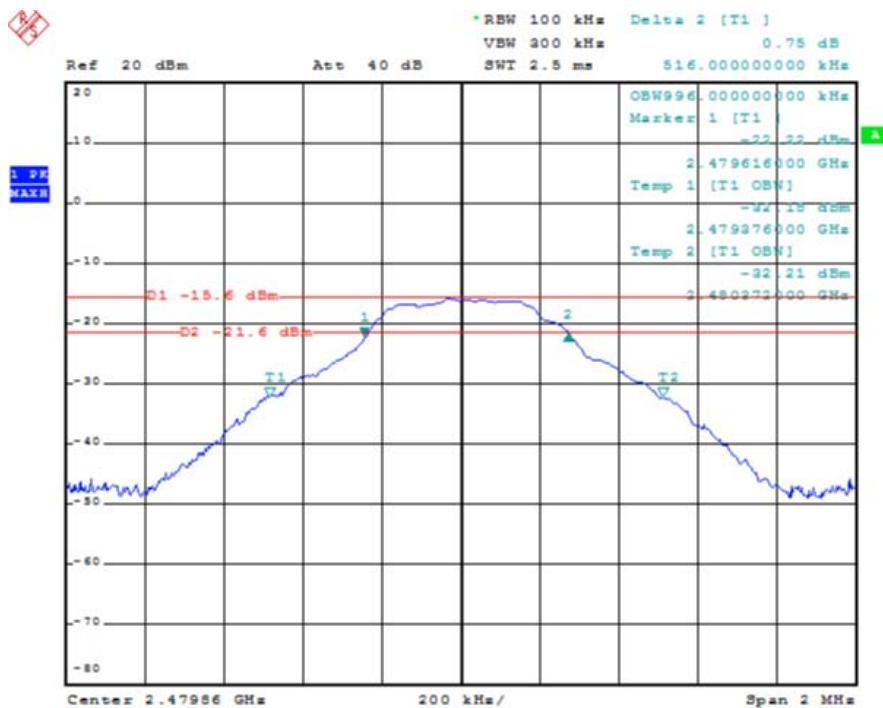

HONGCAI TESTING

8. Test of Conducted Spurious Emission

8.1 Applicable standard

Refer to FCC §15.247 (d) and IC RSS-247 Issue2 Clause 5.5 and KDB558074 D01 V04 Section 11.3

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

8.2 EUT Setup



8.3 Test Equipment List and Details

See section 2.7.

8.4 Test Procedure

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW \geq 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


8.5 Test Result

Temperature (°C) : 22~23	EUT: E-Button portable bluetooth speaker
Humidity (%RH): 50~54	M/N: ES001
Barometric Pressure (mbar): 950~1000	Operation Condition: Continuously Tx Mode


Test Result: PASS

Conducted Spurious Emission Test Data


Channel Low

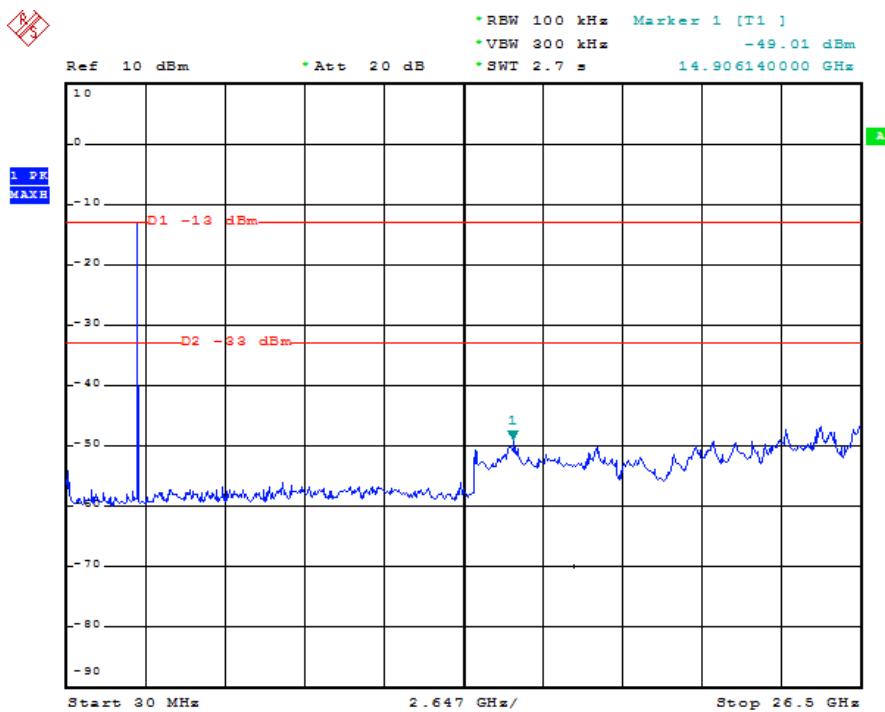

Channel Mid

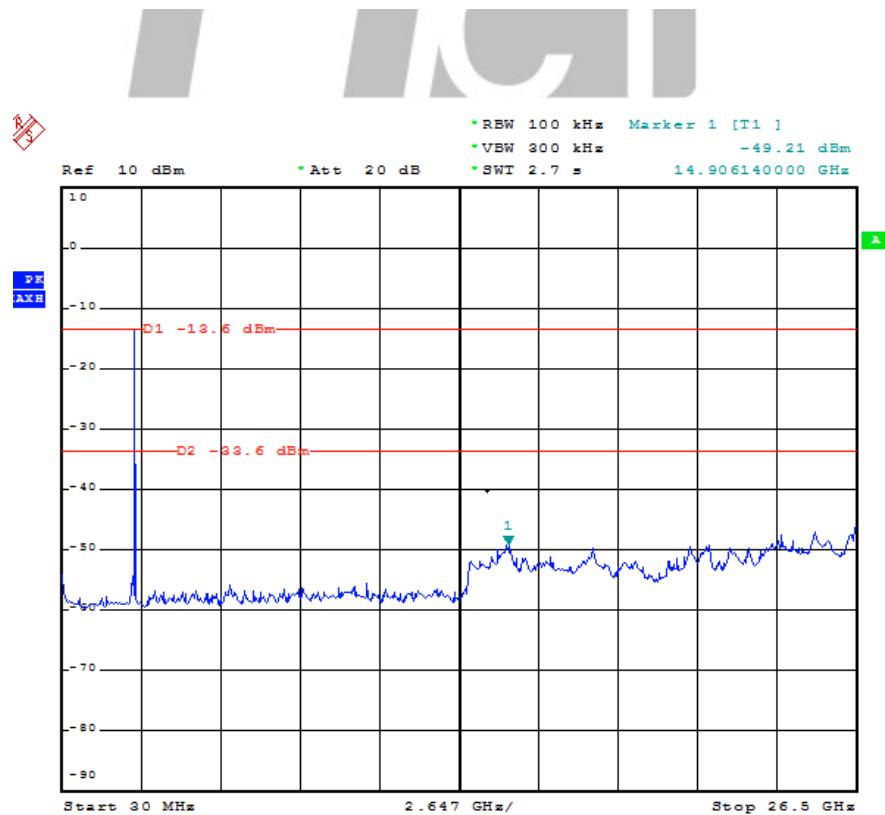

Channel High

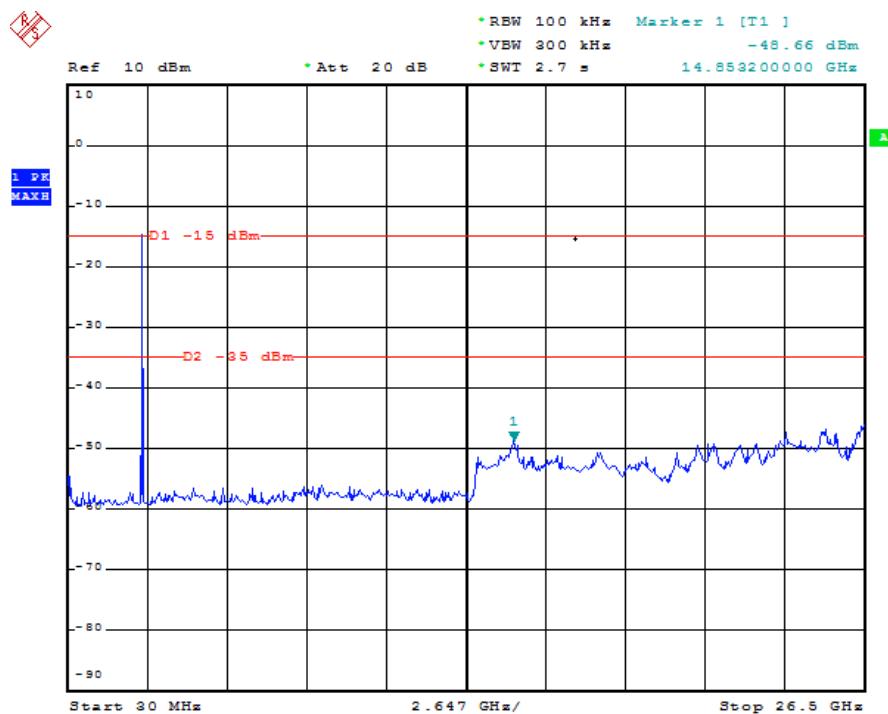

9. Test of Radiated Spurious Emission

9.1 Radiated Spurious Emission

Refer to FCC §15.205 and §15.209,


9.2 Limits

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

9.3 EUT Setup


For radiated emission below 30MHz

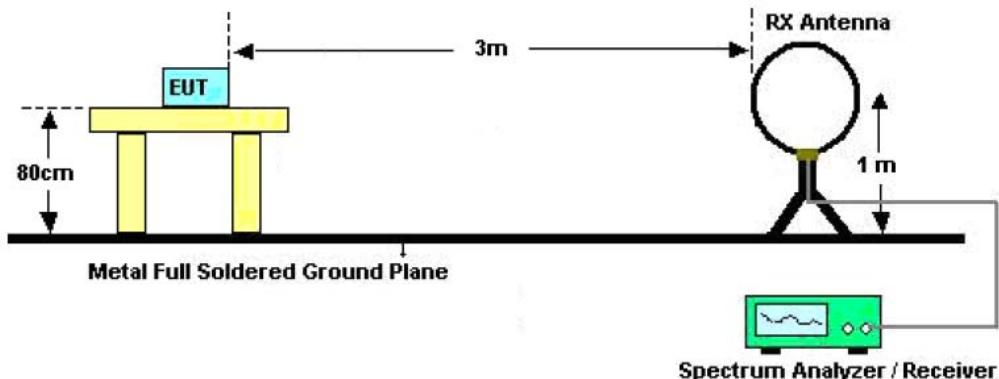

For radiated emission from 30MHz to1GHz

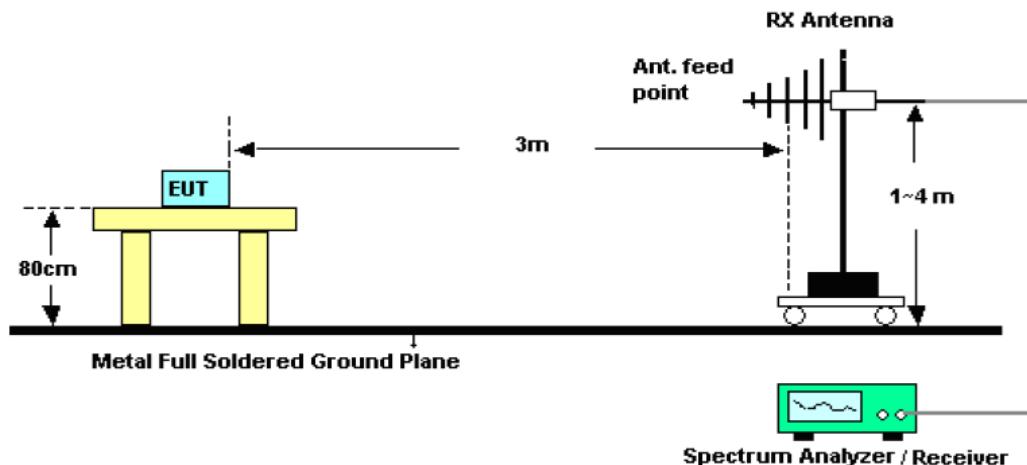

For radiated emission from above1GHz

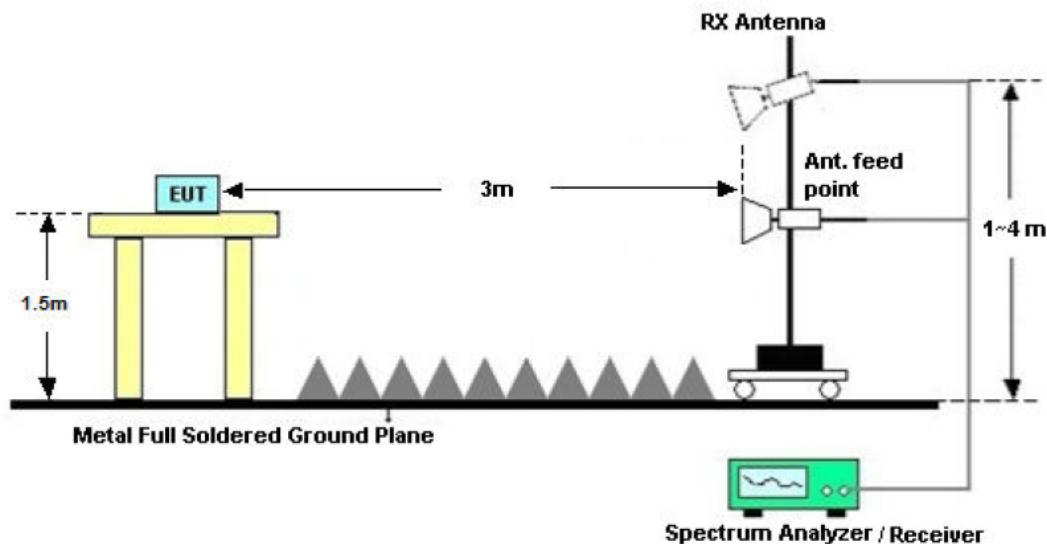

9.4 Test Procedure

KDB558074 D01 V04 Section 12.1, 12.2.7

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Set RBW = 120kHz(for emissions from 30MHz-1GHz)
3. Detector = Quasi-Peak
4. Trace Mode = max hold.
5. Sweep = auto couple.
6. Trace was allowed to stabilize

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Set RBW = 1MHz
3. Set VBW = 3MHz

4. Detector = Peak
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Set RBW = 1MHz
3. Set VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points=1001 ($\geq 2 \times \text{span}/\text{RBW}$)
6. Sweep = auto couple.
7. Trace (RMS) averaging was performed over at least 100 traces

Note:

1. Configure the EUT according to ANSI C63.10-2013
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.

9.5 Test Result

Temperature (°C) : 22~23	EUT: E-Button portable bluetooth speaker
Humidity (%RH) : 50~54	M/N: ES001
Barometric Pressure (mbar) : 950~1000	Operation Condition: Continuously Tx Mode

Test Result: PASS

Radiated Emission Below 30 MHz TX (CH Low)


Frequency (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Levels (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector Mode
0.59	25.56	8.22	-1.01	32.77	67.00	-34.23	QP
19.55	24.45	8.17	-1.20	31.42	49.50	-18.08	QP
22.58	24.00	8.03	-1.05	30.98	49.50	-18.52	QP

Radiated Spurious Emission Data Below 1GHz Channel Low:

EUT: E-Button portable bluetooth speaker
 M/N: ES001
 Operating Condition: TX Mode
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: DC3.7V from battery
 Comment: Polarization: Horizontal

SWEET TABLE: "test (30M-1G)"

Short Description:			Field Strength		
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	9163-2015

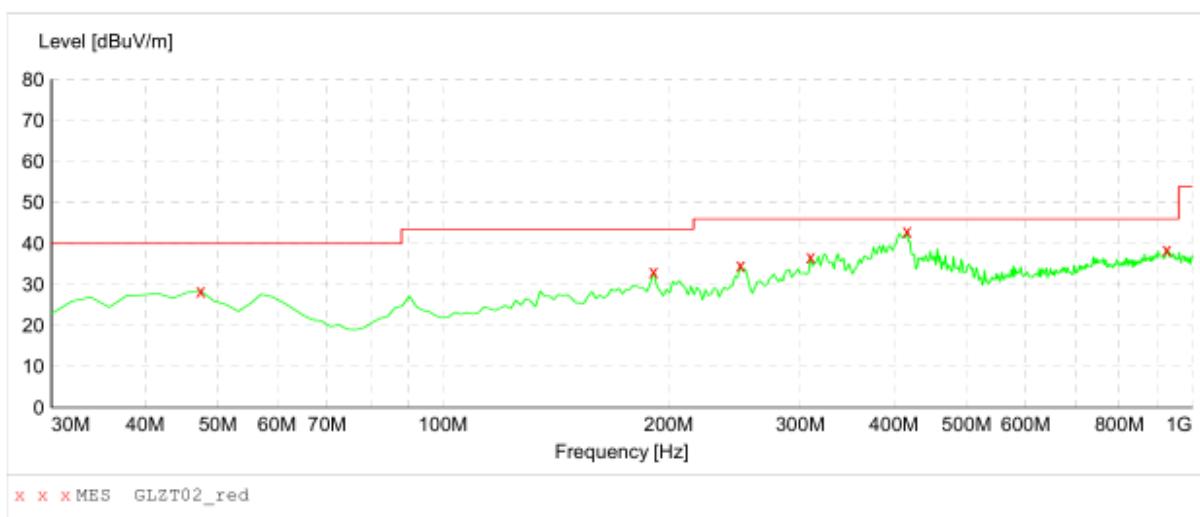

MEASUREMENT RESULT: "GLZT02_red"


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	28.50	16.7	40.0	11.5	---	100.0	0.00	HORIZONTAL
191.020000	33.20	13.6	43.5	10.3	---	100.0	0.00	HORIZONTAL
249.220000	34.70	13.7	46.0	11.3	---	100.0	0.00	HORIZONTAL
309.360000	36.70	15.6	46.0	9.3	---	100.0	0.00	HORIZONTAL
416.060000	43.10	18.2	46.0	2.9	---	100.0	0.00	HORIZONTAL
924.340000	38.50	25.8	46.0	7.5	---	100.0	0.00	HORIZONTAL

Radiated Spurious Emission Data Below 1GHz Channel Low:

EUT: E-Button portable bluetooth speaker
 M/N: ES001
 Operating Condition: TX Mode
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: DC 3.7V from battery
 Comment: Polarization: Vertical

SWEET TABLE: "test (30M-1G)"

Short Description:			Field Strength		
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	9163-2015

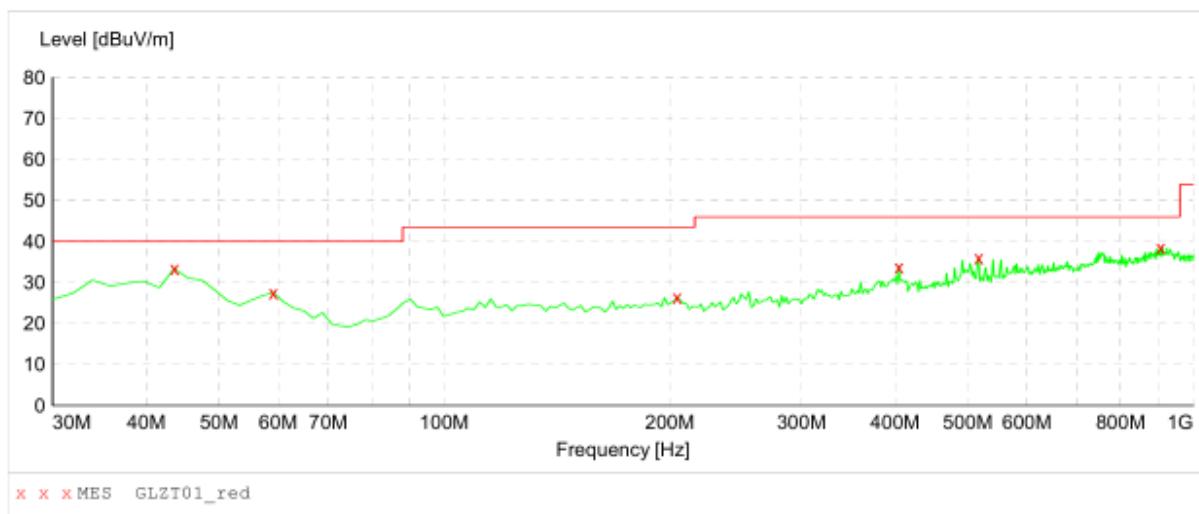

MEASUREMENT RESULT: "MES GLZT01_red "


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det. ---	Height cm	Azimuth deg	Polarization
43.580000	33.40	15.8	40.0	6.6	---	100.0	0.00	VERTICAL
59.100000	27.50	15.7	40.0	12.5	---	100.0	0.00	VERTICAL
204.600000	26.40	14.1	43.5	17.1	---	100.0	0.00	VERTICAL
404.420000	33.80	17.9	46.0	12.2	---	100.0	0.00	VERTICAL
516.940000	36.00	19.6	46.0	10.0	---	100.0	0.00	VERTICAL
904.940000	38.50	25.8	46.0	7.5	---	100.0	0.00	VERTICAL

Radiated Spurious Emission Data Below 1GHz Channel Middle:

EUT: E-Button portable bluetooth speaker
 M/N: ES001
 Operating Condition: TX Mode
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: DC 3.7V from battery
 Comment: Polarization: Horizontal

SWEET TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Time Coupled	Bandw. 100 kHz	9163-2015

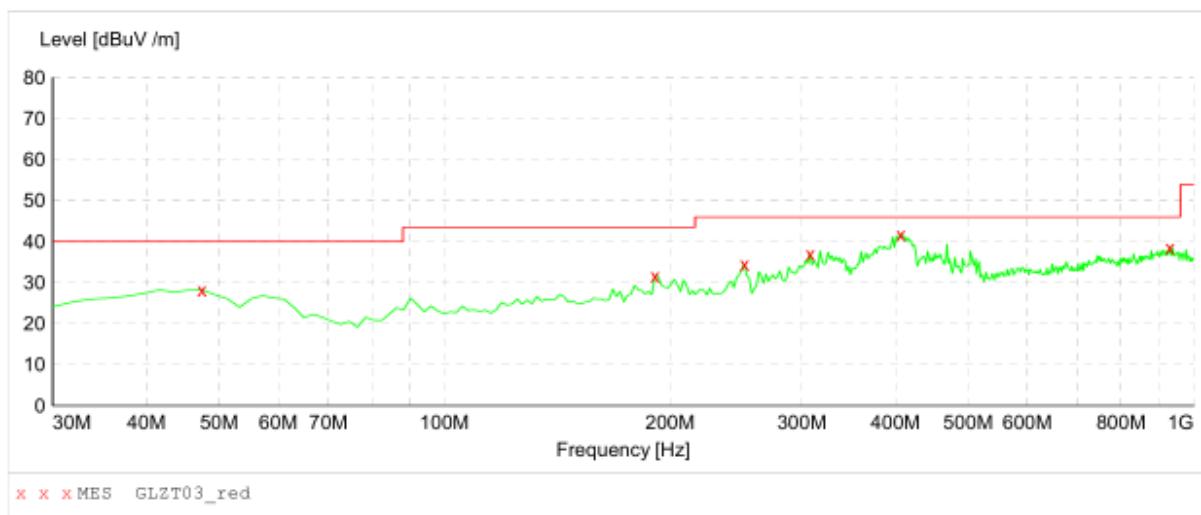

MEASUREMENT RESULT: "GLZT03_red"


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det. ---	Height cm	Azimuth deg	Polarization
47.460000	28.20	16.7	40.0	11.8	---	100.0	0.00	HORIZONTAL
191.020000	31.70	13.6	43.5	11.8	---	100.0	0.00	HORIZONTAL
251.160000	34.50	13.8	46.0	11.5	---	100.0	0.00	HORIZONTAL
307.420000	37.00	15.4	46.0	9.0	---	100.0	0.00	HORIZONTAL
406.360000	41.70	17.9	46.0	4.3	---	100.0	0.00	HORIZONTAL
928.220000	38.60	25.9	46.0	7.4	---	100.0	0.00	HORIZONTAL

Radiated Spurious Emission Data Below 1GHz Channel Middle:

EUT: E-Button portable bluetooth speaker
 M/N: ES001
 Operating Condition: TX Mode
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: DC 3.7V from battery
 Comment: Polarization: Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength		
Start Frequency	Stop Frequency	Detector	Meas.	IF
30.0 MHz	1.0 GHz	MaxPeak	Time Coupled	Bandw.
				100 kHz
				9163-2015

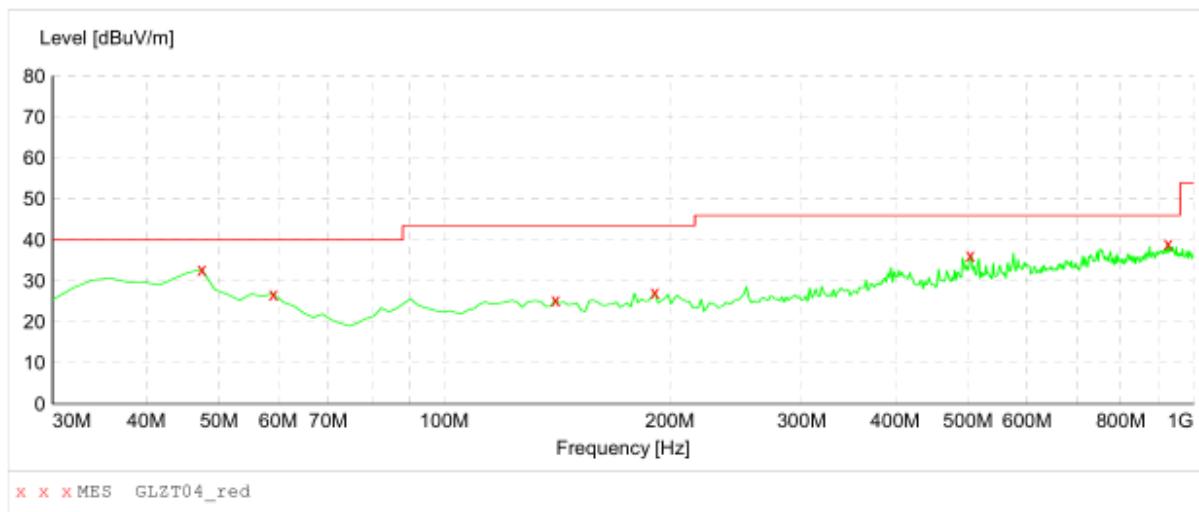

MEASUREMENT RESULT: "GLZT04_red"


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	32.80	16.7	40.0	7.2	---	100.0	0.00	VERTICAL
59.100000	26.80	15.7	40.0	13.2	---	100.0	0.00	VERTICAL
140.580000	25.40	12.5	43.5	18.1	---	100.0	0.00	VERTICAL
191.020000	27.20	13.6	43.5	16.3	---	100.0	0.00	VERTICAL
503.360000	36.30	19.6	46.0	9.7	---	100.0	0.00	VERTICAL
924.340000	39.10	25.8	46.0	6.9	---	100.0	0.00	VERTICAL

Radiated Spurious Emission Data Below 1GHz Channel High:

EUT: E-Button portable bluetooth speaker
 M/N: ES001
 Operating Condition: TX Mode
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: DC 3.7V from battery
 Comment: Polarization: Horizontal

*****SWEEP TABLE: "test (30M-1G)"*****

		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	9163-2015

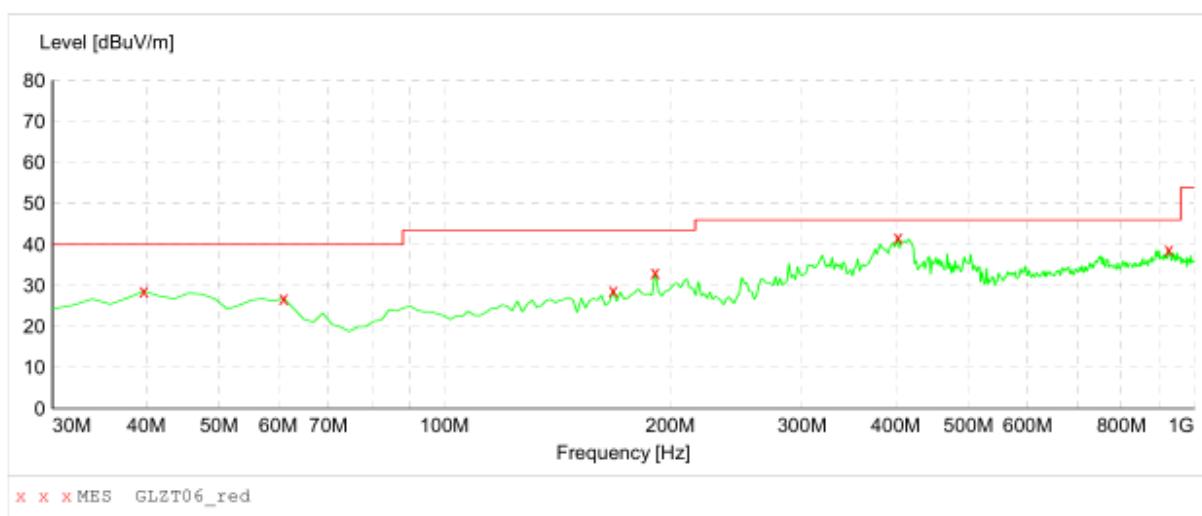
*****MEASUREMENT RESULT: "GLZT06_red"*****


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
39.700000	28.70	15.7	40.0	11.3	---	100.0	0.00	HORIZONTAL
61.040000	26.90	14.9	40.0	13.1	---	100.0	0.00	HORIZONTAL
167.740000	28.80	12.7	43.5	14.7	---	100.0	0.00	HORIZONTAL
191.020000	33.20	13.6	43.5	10.3	---	100.0	0.00	HORIZONTAL
402.480000	41.70	17.8	46.0	4.3	---	100.0	0.00	HORIZONTAL
924.340000	38.80	25.8	46.0	7.2	---	100.0	0.00	HORIZONTAL

Radiated Spurious Emission Data Below 1GHz Channel High:

EUT: E-Button portable bluetooth speaker
 M/N: ES001
 Operating Condition: TX Mode
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: DC 3.7V from battery
 Comment: Polarization: Vertical

SWEET TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Time Coupled	Bandw. 100 kHz	9163-2015

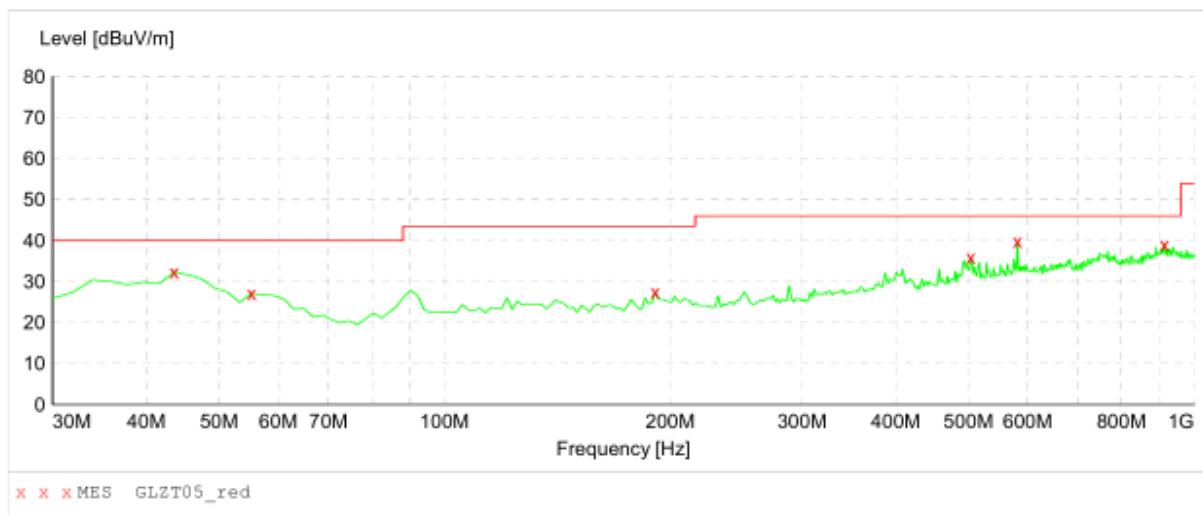

MEASUREMENT RESULT: "GLZT05_red"


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det. ---	Height cm	Azimuth deg	Polarization
43.580000	32.40	15.8	40.0	7.6	---	100.0	0.00	VERTICAL
55.220000	27.10	15.1	40.0	12.9	---	100.0	0.00	VERTICAL
191.020000	27.50	13.6	43.5	16.0	---	100.0	0.00	VERTICAL
503.360000	35.90	19.6	46.0	10.1	---	100.0	0.00	VERTICAL
580.960000	39.80	21.2	46.0	6.2	---	100.0	0.00	VERTICAL
912.700000	39.00	25.8	46.0	7.0	---	100.0	0.00	VERTICAL

Radiated Spurious Emission Test Data Above 1GHz

Polarization: Vertical

Low Channel:2402MHz


pk:

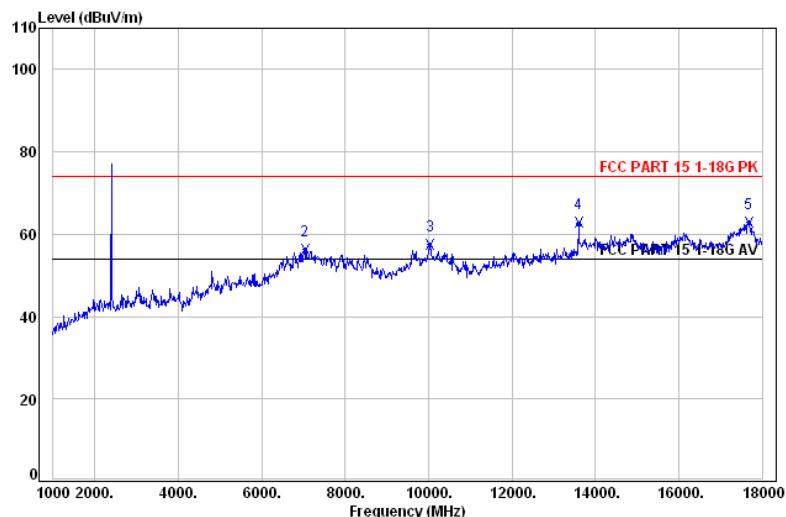

Ant	Read	Limit	Over		
Freq	Factor	Level	Line	Limit	Remark

	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
2	7171.00	39.47	26.96	45.50	74.00	-28.50 Peak
3	10010.00	39.40	28.85	46.24	74.00	-27.76 Peak
4	13614.00	42.39	33.78	48.13	74.00	-25.87 Peak
5	17660.00	43.46	34.87	51.79	74.00	-22.21 Peak

AV:

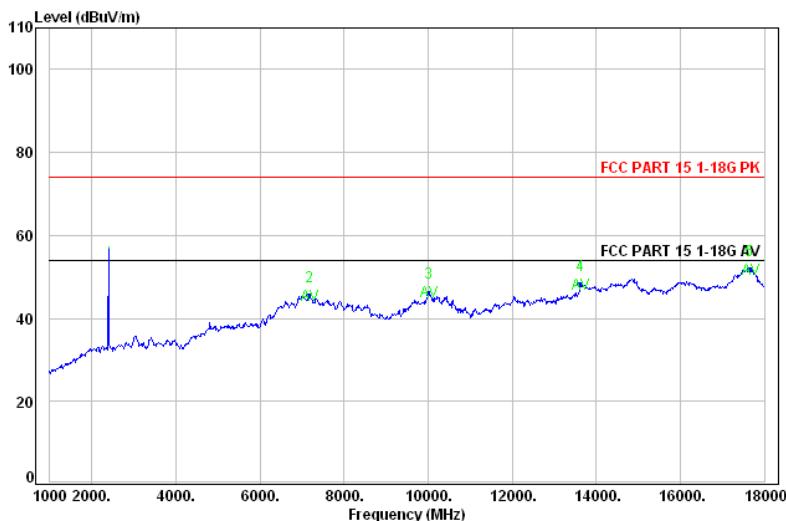


Ant	Read	Limit	Over			
Freq	Factor	Level	Level	Line	Limit	Remark


	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
2	7035.00	39.49	37.37	56.30	74.00	-17.70 Peak
3	10044.00	39.42	40.22	57.51	74.00	-16.49 Peak
4	13597.00	42.38	43.34	62.67	74.00	-11.33 Peak
5	17677.00	43.31	46.09	62.92	74.00	-11.08 Peak

Polarization: Horizontal


PK:

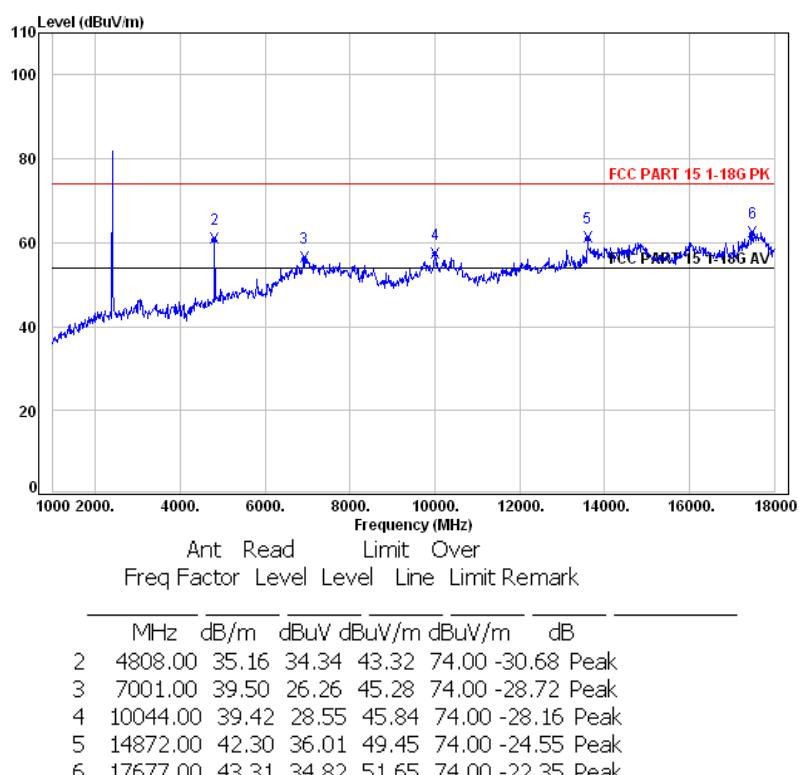

AV:

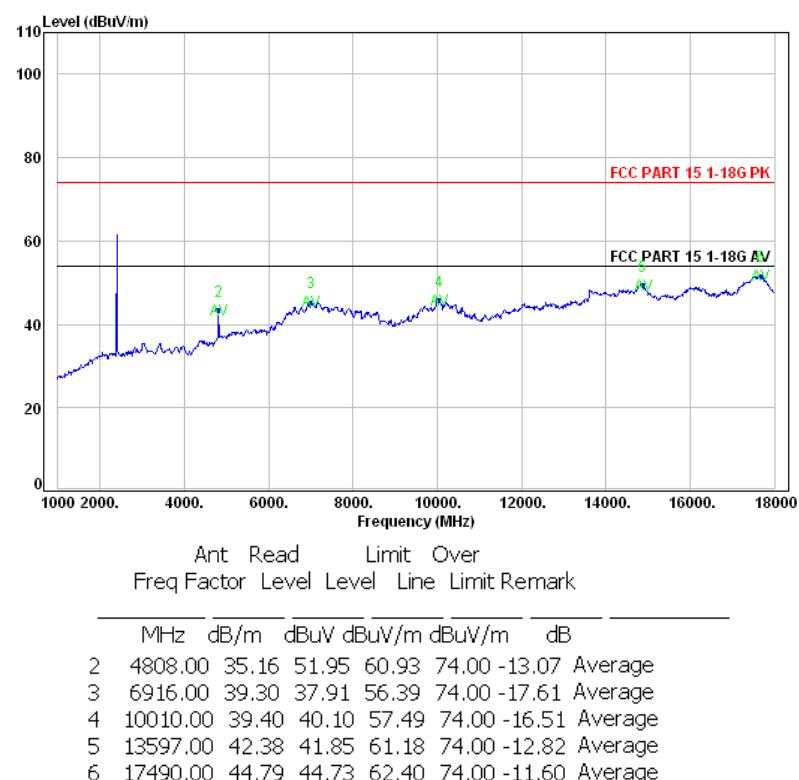


Polarization: Vertical
 Low Channel:2440MHz
 PK:

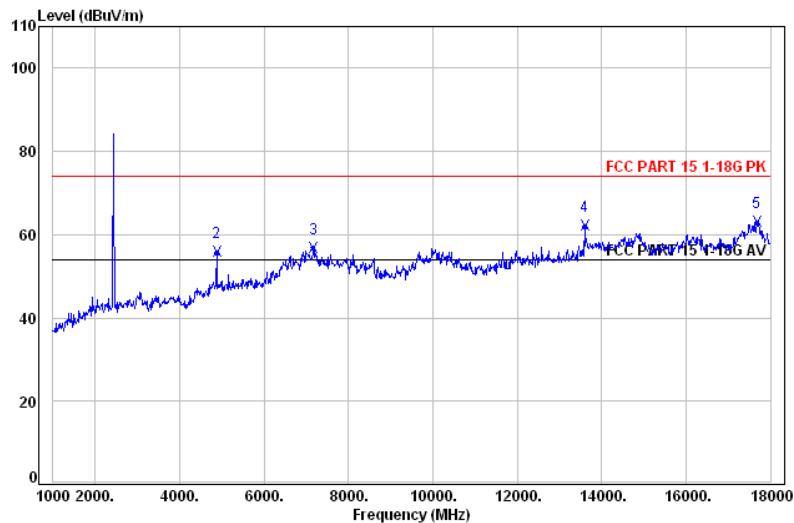

Ant	Read	Limit	Over		
Freq	Factor	Level	Line	Limit	Remark

	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
2	7001.00	39.50	26.54	45.56	74.00	-28.44 Peak
3	10061.00	39.42	28.97	46.19	74.00	-27.81 Peak
4	14889.00	42.28	36.00	49.40	74.00	-24.60 Peak
5	17677.00	43.31	34.96	51.79	74.00	-22.21 Peak

AV:

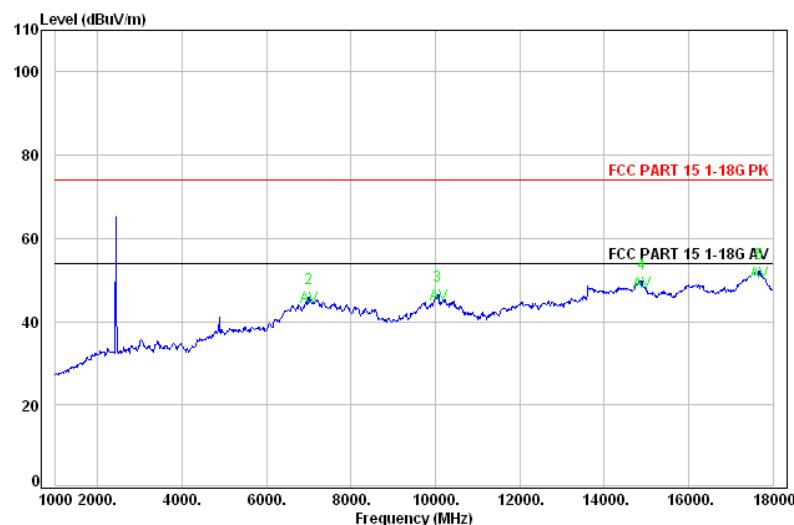


Ant	Read	Limit	Over		
Freq	Factor	Level	Line	Limit	Remark

	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
2	4876.00	35.35	46.46	55.75	74.00	-18.25 Average
3	7171.00	39.47	38.32	56.86	74.00	-17.14 Average
4	13597.00	42.38	42.74	62.07	74.00	-11.93 Average
5	17677.00	43.31	46.26	63.09	74.00	-10.91 Average

Polarization: Horizontal

PK:

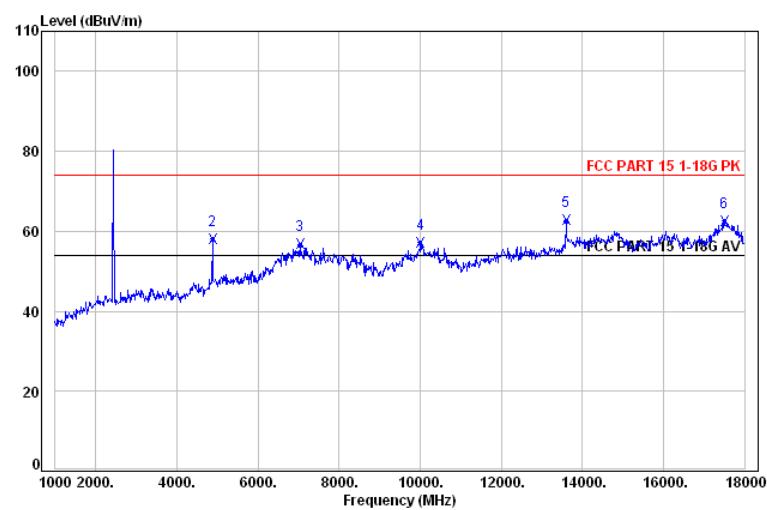


Ant	Read	Limit	Over		
Freq	Factor	Level	Line	Limit	Remark

2	4876.00	35.35	32.55	41.84	74.00	-32.16	Peak
3	7001.00	39.50	26.51	45.53	74.00	-28.47	Peak
4	10010.00	39.40	29.09	46.48	74.00	-27.52	Peak
5	14889.00	42.28	36.15	49.55	74.00	-24.45	Peak
6	17609.00	43.88	34.48	51.65	74.00	-22.35	Peak




AV:

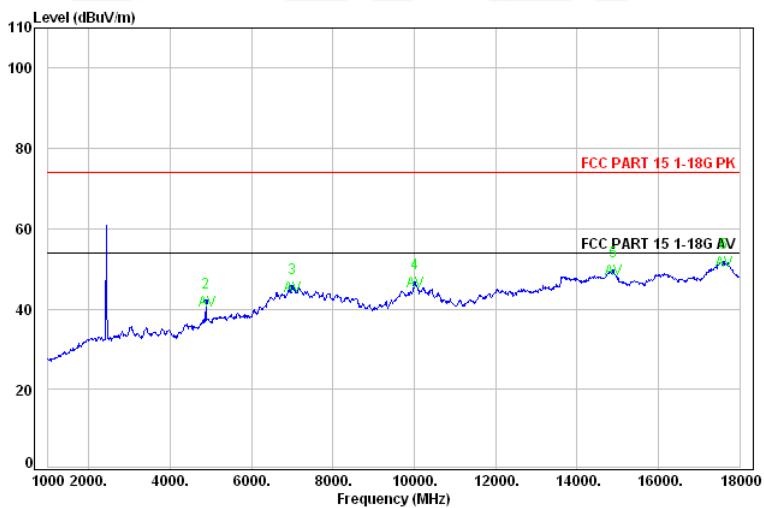

Ant	Read	Limit	Over		
Freq	Factor	Level	Line	Limit	Remark

2	4876.00	35.35	48.73	58.02	74.00	-15.98	Average
3	7035.00	39.49	37.81	56.74	74.00	-17.26	Average
4	10010.00	39.40	39.81	57.20	74.00	-16.80	Average
5	13597.00	42.38	43.34	62.67	74.00	-11.33	Average
6	17507.00	44.74	44.88	62.56	74.00	-11.44	Average


Polarization: Vertical
 Low Channel:2480MHz
 PK:

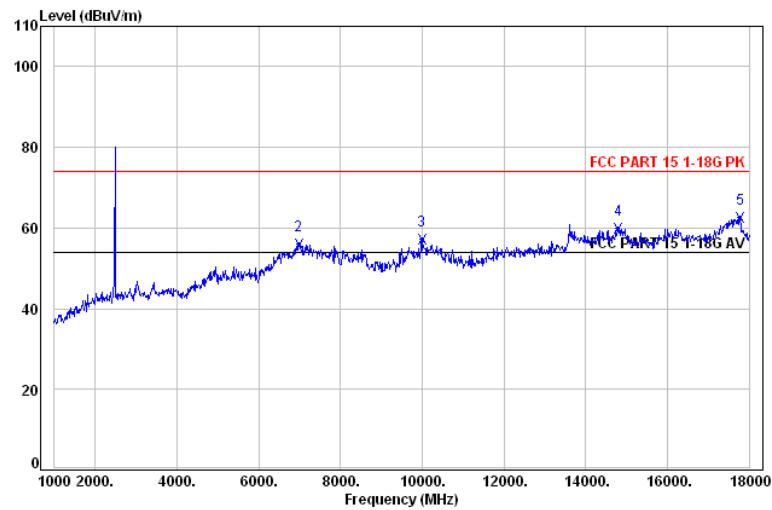

Ant Read Limit Over
 Freq Factor Level Level Line Limit Remark

	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
2	7001.00	39.50	26.44	45.46	74.00	-28.54	Peak
3	10010.00	39.40	28.78	46.17	74.00	-27.83	Peak
4	13631.00	42.40	33.89	48.26	74.00	-25.74	Peak
5	14855.00	42.33	35.90	49.38	74.00	-24.62	Peak
6	17609.00	43.88	34.53	51.70	74.00	-22.30	Peak


AV:

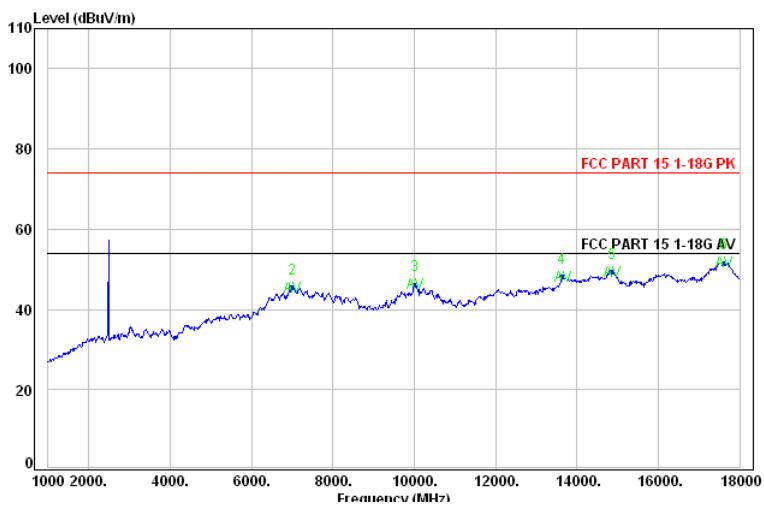

Ant Read Limit Over
 Freq Factor Level Level Line Limit Remark


	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
2	6984.00	39.46	37.07	55.99	74.00	-18.01	Average
3	9993.00	39.39	39.74	57.13	74.00	-16.87	Average
4	14804.00	42.41	46.27	59.89	74.00	-14.11	Average
5	17779.00	42.46	46.27	62.60	74.00	-11.40	Average

Polarization: Horizontal

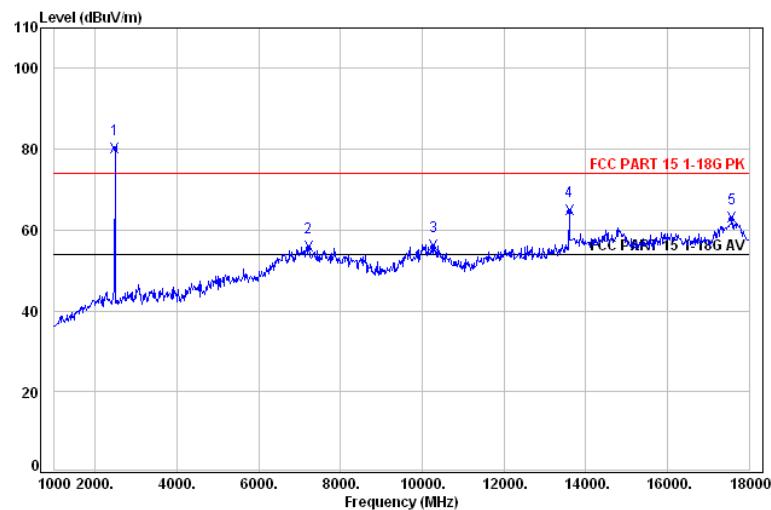

Ant	Read	Limit	Over		
Freq	Factor	Level	Line	Limit	Remark

	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
2	7171.00	39.47	27.00	45.54	74.00	-28.46 Peak
3	10010.00	39.40	28.88	46.27	74.00	-27.73 Peak
4	13665.00	42.43	33.66	48.06	74.00	-25.94 Peak
5	17694.00	43.17	34.77	51.52	74.00	-22.48 Peak

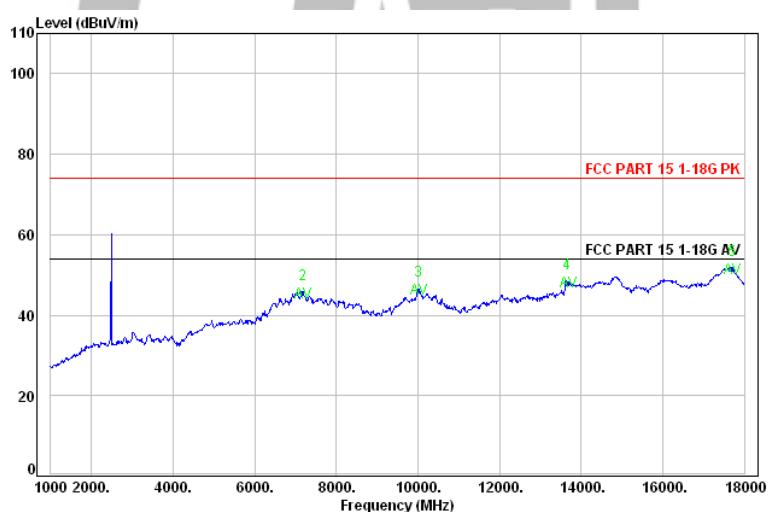

Ant	Read	Limit	Over			
Freq	Factor	Level	Level	Line	Limit	Remark

	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
2	7222.00	39.46	37.44	55.84	74.00	-18.16 Average
3	10282.00	39.51	39.60	56.15	74.00	-17.85 Average
4	13597.00	42.38	45.44	64.77	74.00	-9.23 Average
5	17575.00	44.17	45.71	63.05	74.00	-10.95 Average

Note:

1. The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos. The worst case data is recorded in the report.
2. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
4. The other emission levels were very low against the limit.
5. Margin value = Emission level.- Limit value



10. Test of Band Edges Emission


10.1 Applicable standard

Refer to FCC §15.247 (d),
KDB558074 D01 V04 Section 13.0


Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

10.2 EUT Setup

Radiated Measurement Setup

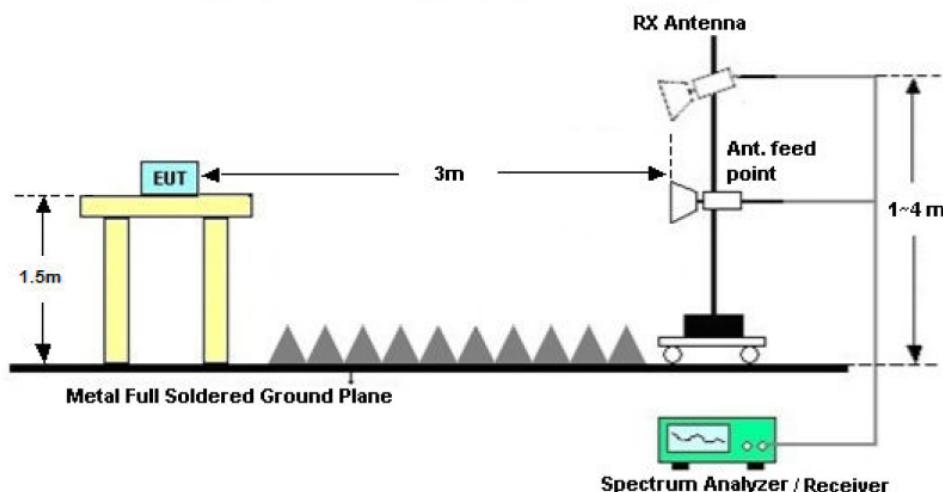

Conducted Measurement Setup

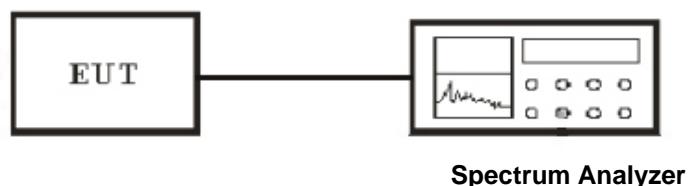

10.3 Test Equipment List and Details

See section 2.6.

10.4 Test Procedure

Conducted Measurement

KDB558074 D01 V04 Section 11.3

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level.

Radiated Measurement

KDB558074 D01 V04 Section 12.1, 12.2.7

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Set RBW = 1MHz
3. Set VBW = 3MHz
4. Detector = Peak
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Set RBW = 1MHz
3. Set VBW = 3MHz
4. Detector = power average (RMS)
5. Sweep = auto couple.
6. Trace (RMS) averaging was performed over at least 100 traces

Note :

1. Configure the EUT according to ANSI C63.10-2013
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.


10.5 Test Result

Temperature (°C) : 22~23	EUT: E-Button portable bluetooth speaker
Humidity (%RH): 50~54	M/N: ES001
Barometric Pressure (mbar): 950~1000	Operation Condition: Continuously Tx Mode


For Radiated Bandedge Measurement



Channel Low: 2402MHz

PK

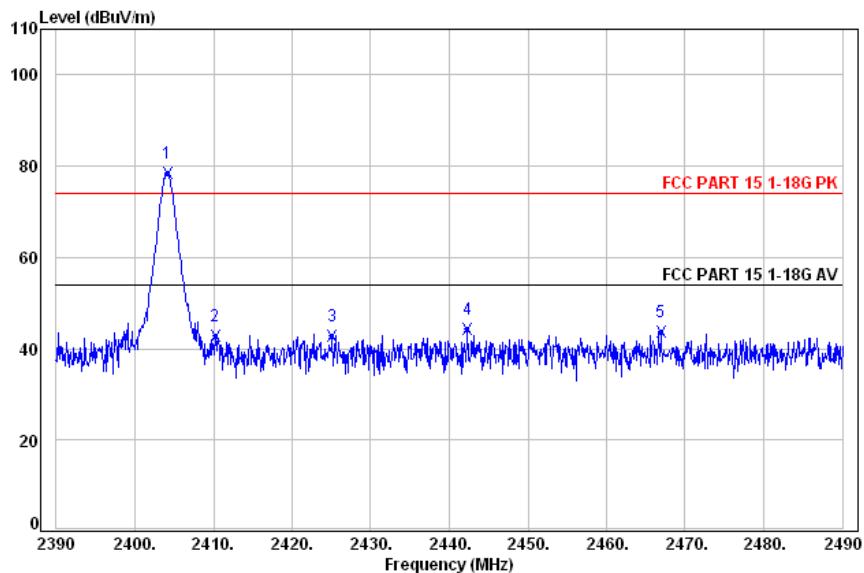


AV:

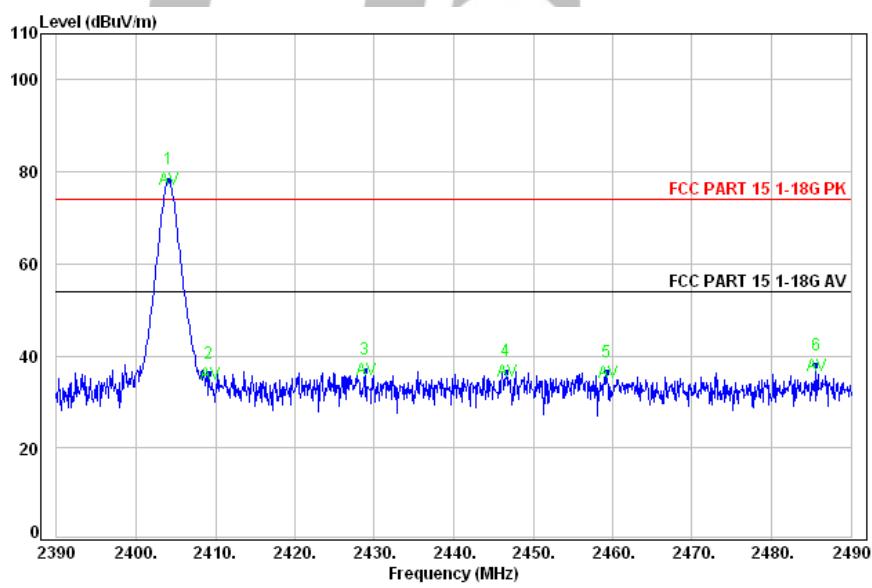


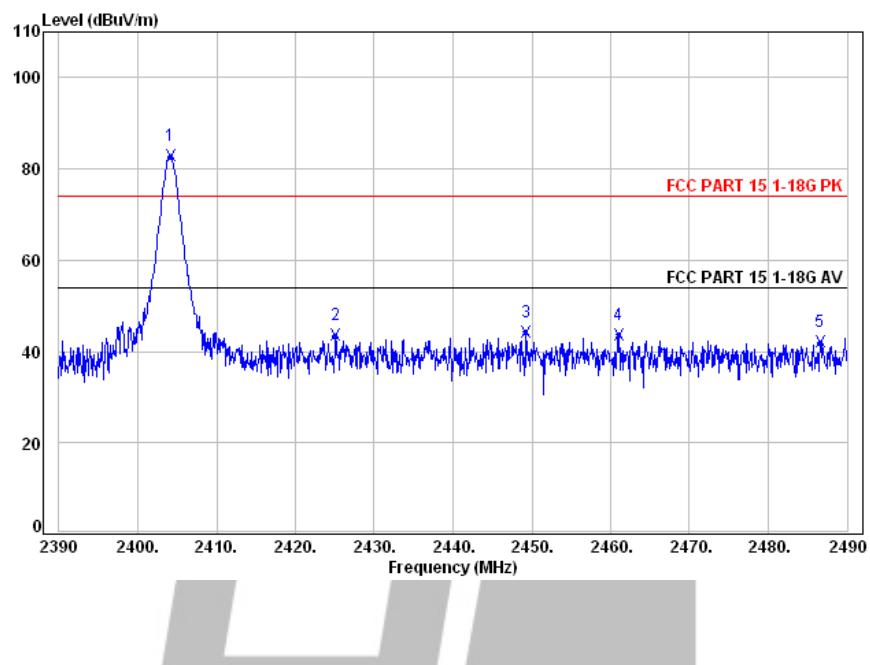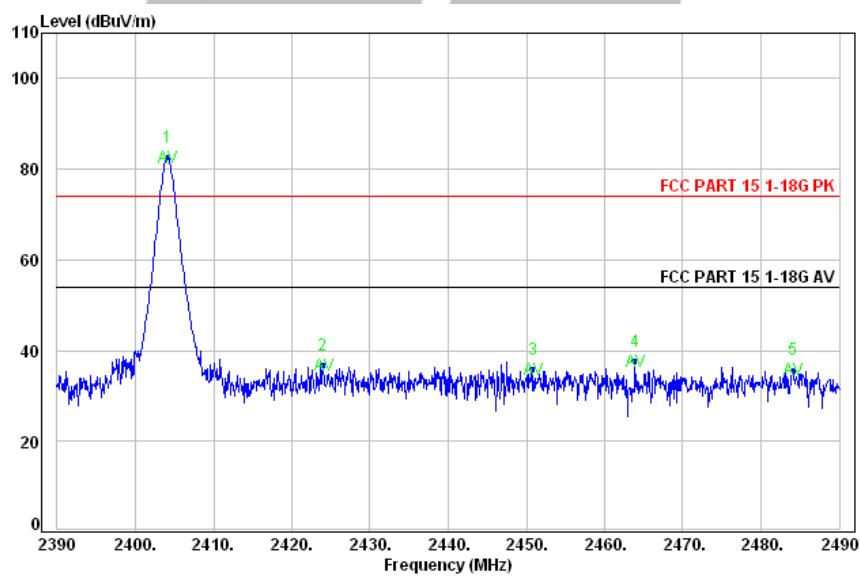PK**AV**


Channel High: 2480MHz
PK

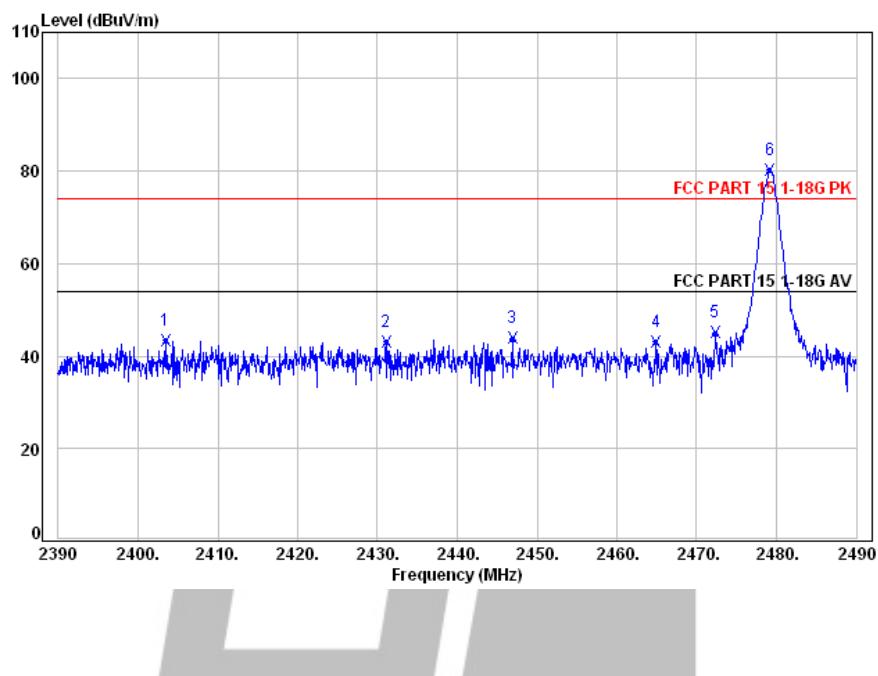


AV

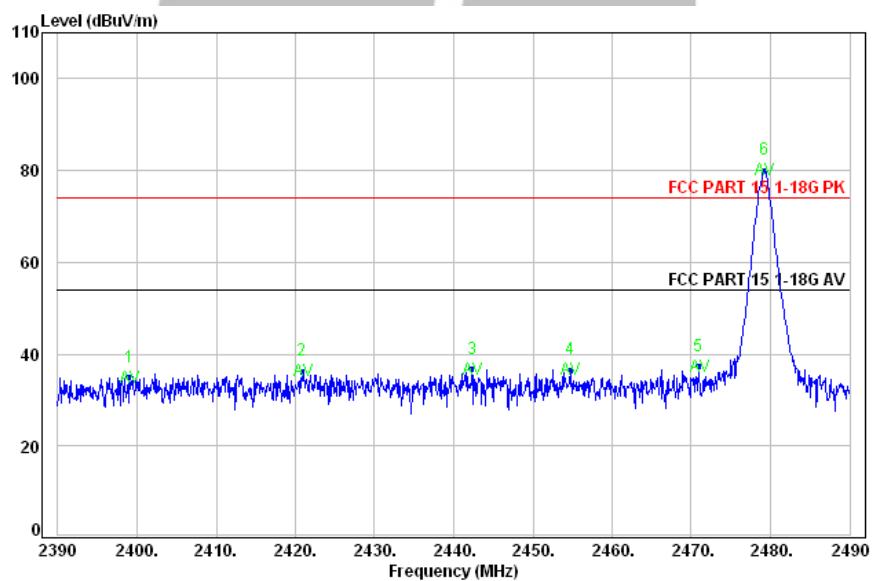

PK

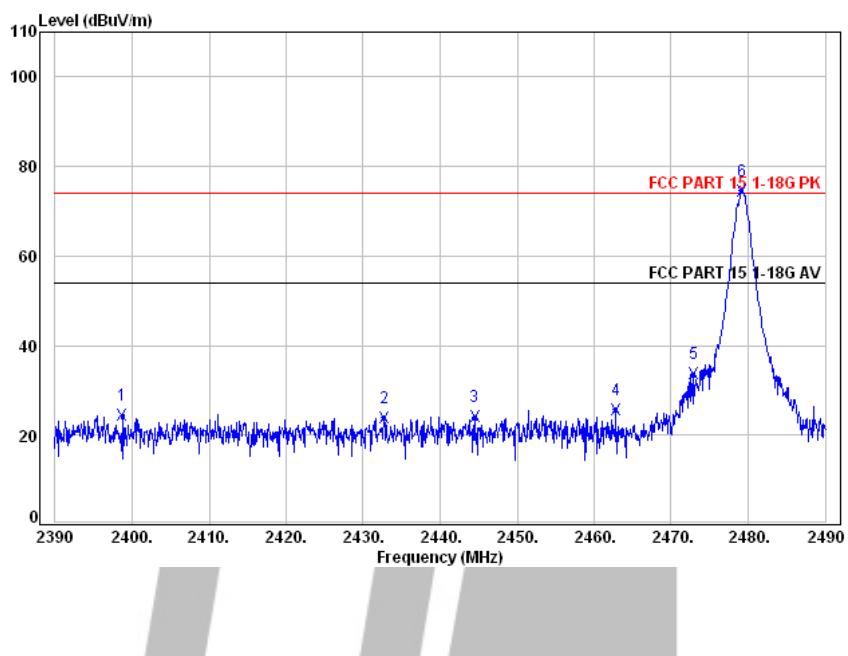

AV

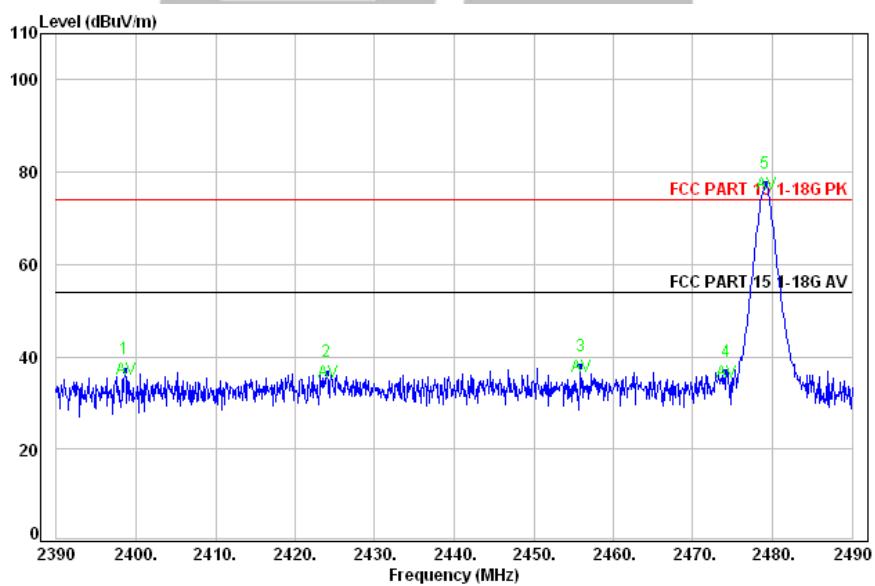


Note:


1. Margin value = Emission level.- Limit
2. The other emission levels were very low against the limit.

For Conducted Bandedge Measurement

Low Channel

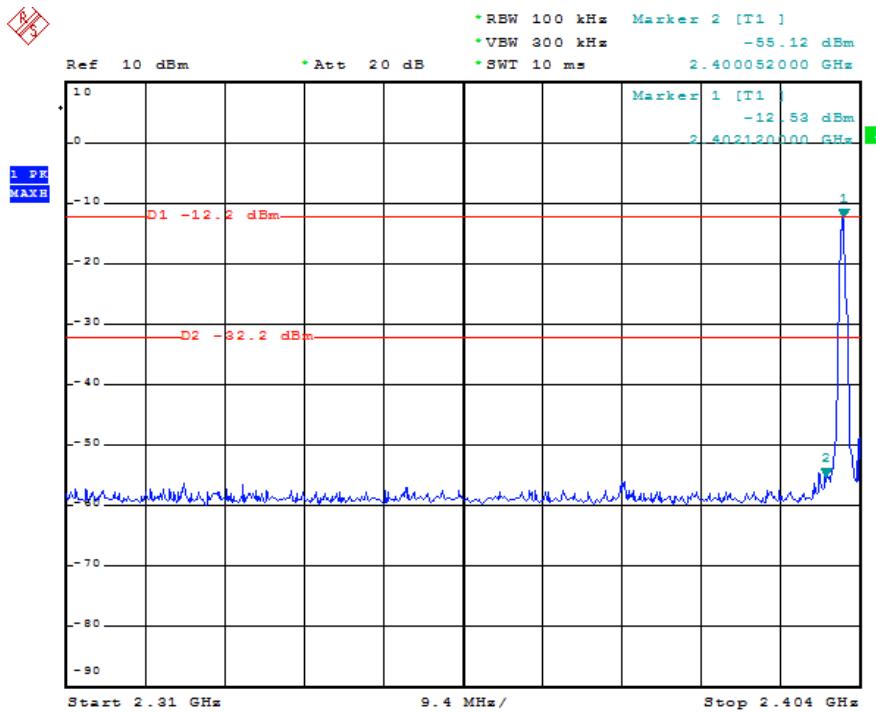


High Channel

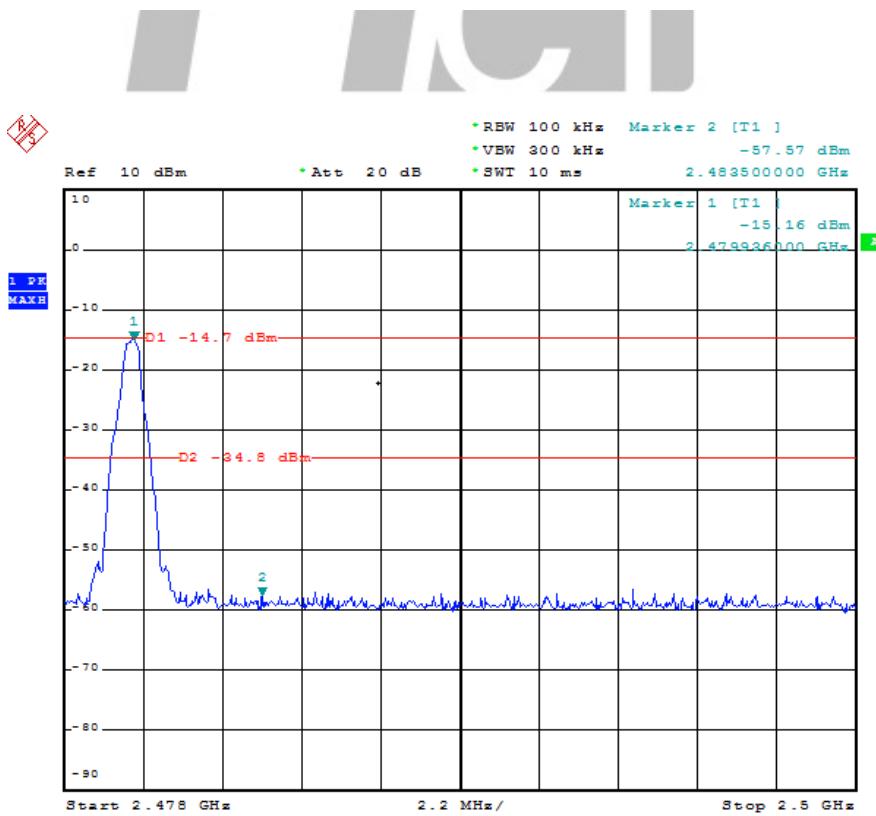


Hopping Conducted Test Result

Low Channel

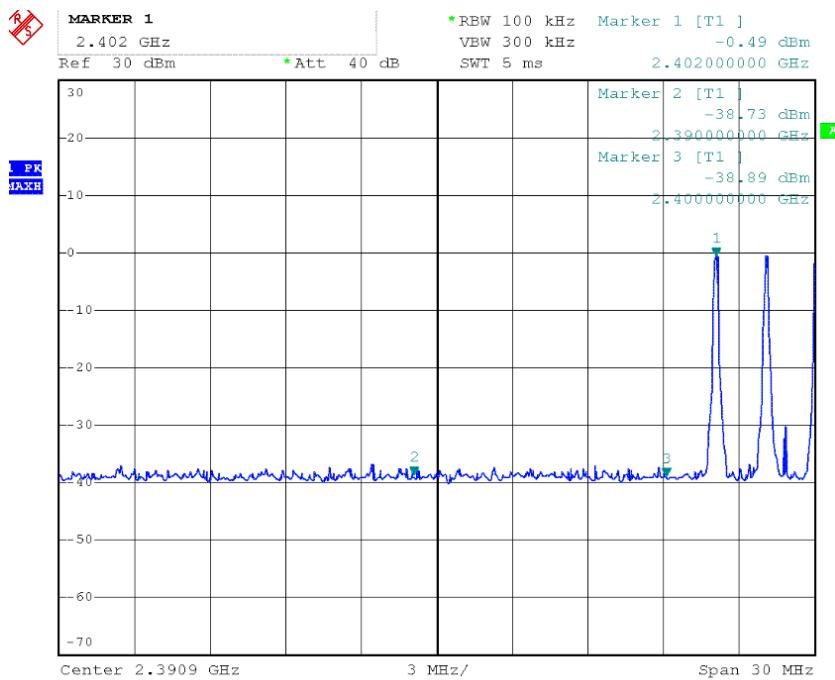

High Channel

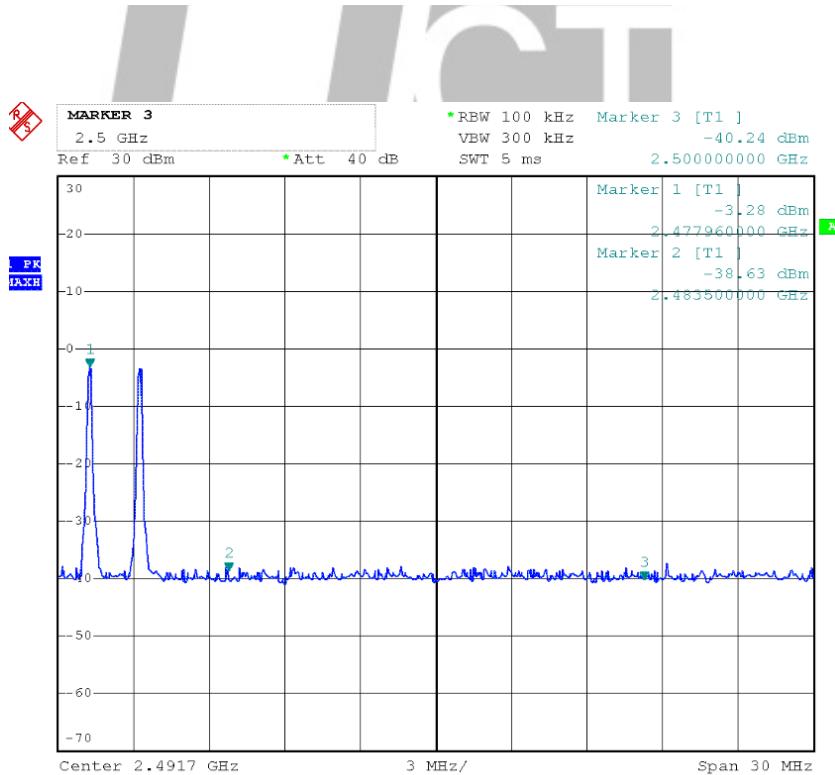

11. ANTENNA REQUIREMENT

11.1 standard Applicable

Section 15.203 & IC RSS-GEN Clause 8.3

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c)

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected Construction

There are no provisions for connections to an external antenna.

The antenna is designed with PCB antenna and no consideration of replacement.

The antenna used in this product is complied with standard. The maximum Gain of the antenna lower than 6.0dBi and have the definite antenna Specification.

...End of Report...