



Radio Test Report

Report No.: STS2502022W03

Issued for

NEEC Audio Barcelona S.L.

Motors 166-168 E- 08038 Barcelona Spain

Product Name: CONTROL TOUCH PANEL

Brand Name: ecler

Model Name: PULSO-6

Series Model(s): PULSO-4, PULSO-10

FCC ID: 2ANSNPULSO

Test Standards: FCC Part15.247

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT**

Applicant's Name: NEEC Audio Barcelona S.L.
Address: Motors 166-168 E- 08038 Barcelona Spain
Manufacturer's Name: Sunworld Technology Limited
Address: 4F, Building No.5, Longbi Industrial Park, No.27 Dafa Road, Dafapu Community, Bantian Street, Longgang District, Shenzhen, Guangdong, China

Product Description

Product Name: CONTROL TOUCH PANEL
Brand Name: ecler
Model Name: PULSO-6
Series Model(s): PULSO-4, PULSO-10
Test Standards: FCC Part 15.247
Test Procedure: ANSI C63.10-2020

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test

Date of receipt of test item: 11 Feb. 2025
Date (s) of performance of tests: 24 Feb. 2025 ~ 14 May 2025
Date of Issue: 14 May 2025
Test Result: **Pass**

Testing Engineer :

(Aaron Bu)

Technical Manager :

(Skylar Li)

Authorized Signatory :

(Bovey Yang)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	10
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	12
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3. EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION MEASUREMENT	22
4. CONDUCTED SPURIOUS & BAND EDGE EMISSION	45
4.1 LIMIT	45
4.2 TEST PROCEDURE	45
4.3 DEVIATION FROM STANDARD	45
4.4 TEST SETUP	45
4.5 EUT OPERATION CONDITIONS	45
4.6 TEST RESULTS	45
5. POWER SPECTRAL DENSITY TEST	46
5.1 LIMIT	46
5.2 TEST PROCEDURE	46
5.3 DEVIATION FROM STANDARD	46
5.4 TEST SETUP	46
5.5 EUT OPERATION CONDITIONS	46
5.6 TEST RESULTS	46
6. BANDWIDTH TEST	47
6.1 LIMIT	47
6.2 TEST PROCEDURE	47
6.3 DEVIATION FROM STANDARD	47
6.4 TEST SETUP	47
6.5 EUT OPERATION CONDITIONS	47



Table of Contents	Page
6.6 TEST RESULTS	47
7. PEAK OUTPUT POWER TEST	48
7.1 LIMIT	48
7.2 TEST PROCEDURE	48
7.3 DEVIATION FROM STANDARD	48
7.4 TEST SETUP	49
7.5 EUT OPERATION CONDITIONS	49
7.6 TEST RESULTS	49
8. ANTENNA REQUIREMENT	50
8.1 STANDARD REQUIREMENT	50
8.2 EUT ANTENNA	50
APPENDIX 1-TEST DATA	51
1. DUTY CYCLE	51
2. MAXIMUM AVERAGE CONDUCTED OUTPUT POWER	57
3. MAXIMUM PEAK CONDUCTED OUTPUT POWER	63
4. -6DB BANDWIDTH	64
5. MAXIMUM POWER SPECTRAL DENSITY LEVEL	70
6. BAND EDGE	76
7. CONDUCTED RF SPURIOUS EMISSION	83
APPENDIX 2-PHOTOS OF TEST SETUP	93

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	14 May 2025	STS2502022W03	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted Band Edge Emission	PASS	--
Part 15.247(d)/ part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.755\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.874\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 3.80\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.18\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 4.90\text{dB}$
6	All emissions, radiated >6G	$\pm 5.24\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.19\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.53\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.5\%$
10	Power Spectral Density, conducted	$\pm 1.245\text{dB}$
11	Duty Cycle	$\pm 3.2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	CONTROL TOUCH PANEL			
Brand Name	ecler			
Model Name	PULSO-6			
Series Model(s)	PULSO-4, PULSO-10			
Model Difference	The screen size and antenna are different			
	Model Name	PULSO-6	PULSO-4	PULSO-10
	Screen Size	5.5 inches	4 inches	10 inches
	Antenna Name	XH240180	XH240060	XH240179
Product Description	The EUT is a CONTROL TOUCH PANEL			
	Operation Frequency:		802.11b/g/n 20: 2412~2462 MHz	
	Modulation Type:		802.11b(DSSS):CCK,DQPSK,DBPSK 802.11g(OFDM):BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM):BPSK,QPSK,16-QAM,64-QAM	
	Bit Rate of Transmitter:		802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz): 65/58.5/52/39/26/19.5/13/6.5Mbps	
	Number of Channel:		802.11b/g/n20: 11CH	
	Antenna Type:		FPC	
	Antenna Gain (dBi):		PULSO-4: 2.62 dBi PULSO-6: 2.03 dBi PULSO-10: 3.9 dBi	
Channel List	Please refer to the Note 3.			
Rating	Input: DC 12V, 2A Output: 5V			
Adapter	N/A			
Battery	N/A			
Hardware Version	RK3566_YC_P6602_V20			
Software Version	Portworld-P6602-HF-35540-B063-A0.720x1280-20240625-Z-V0.01			
Connecting I/O Port(s)	Please refer to the Note 1.			

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.



3.

Operation Frequency of channel	
802.11b/g/n(20MHz)	
Channel	Frequency
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

2.4GHz Test Frequency:

For 802.11b/g/n (HT20)	
Channel	Freq.(MHz)
01	2412
06	2437
11	2462



2.2 DESCRIPTION OF THE TEST MODES

Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11b CH1	1 Mbps
Mode 2	TX IEEE 802.11b CH6	1 Mbps
Mode 3	TX IEEE 802.11 b CH11	1 Mbps
Mode 4	TX IEEE 802.11g CH1	6 Mbps
Mode 5	TX IEEE 802.11g CH6	6 Mbps
Mode 6	TX IEEE 802.11g CH11	6 Mbps
Mode 7	TX IEEE 802.11n HT20 CH1	MCS 0
Mode 8	TX IEEE 802.11n HT20 CH6	MCS 0
Mode 9	TX IEEE 802.11n HT20 CH11	MCS 0

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) We have be tested for all avaiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V /60Hz is shown in the report.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode10: Keeping WIFI TX

2.3 TEST SOFTWARE AND POWER LEVEL


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
WIFI(2.4G)	2.4G WIFI	802.11b	PULSO-4: 2.62 PULSO-6: 2.03 PULSO-10: 3.9	default	cmd
		802.11g		default	
		802.11n(HT20)		default	




2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiation Test Set

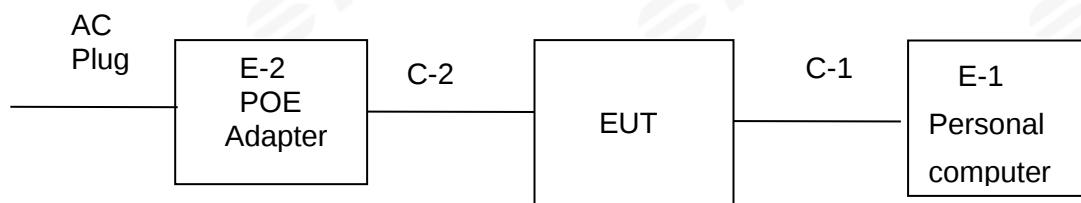

Conduction Test Set

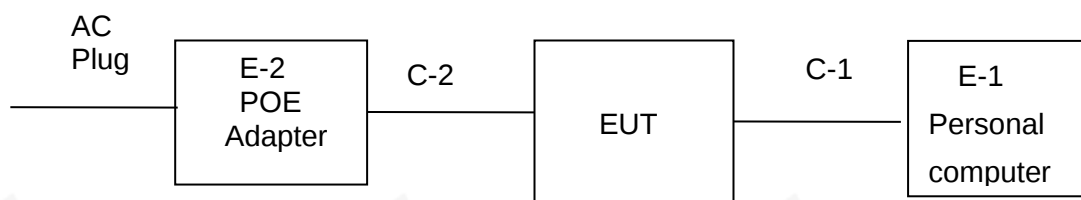



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Note
E-1	Personal computer	DELL	Inspiron 3501	N/A
E-2	POE Adapter	ZTC	NB-A515A	N/A
C-1	USB Cable	ZTC	NB-A515A	N/A
C-2	LAN	ZTC	NB-A515A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
C-1	Shielded	NO	150cm	N/A
C-2	Shielded	NO	150cm	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2024.03.15	2025.03.14
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2024.02.23	2025.02.22
Pre-Amplifier(1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2023.09.26	2024.09.25
Pre-Amplifier(18G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2024.02.23	2025.02.22
Active loop Antenna	ZHINAN	ZN30900C	16035	2023.02.28	2025.02.27
Bilog Antenna	TESEQ	CBL6111D	34678	2022.09.30	2024.09.29
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2023.09.24	2025.09.23
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2023.10.10	2025.10.09
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2023.09.26	2024.09.25
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHENGFENG	DPS-305AF	17064939	2023.09.26	2024.09.25
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
Conduction Test equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2023.09.25	2024.09.24
Limtter	CYBERTEK	EM5010	N/A	2023.09.25	2024.09.24
LISN	R&S	ENV216	101242	2023.09.25	2024.09.24
LISN	EMCO	3810/2NM	23625	2023.09.25	2024.09.24
Temperature & Humidity	SW-108	SuWei	N/A	2024.03.15	2025.03.14
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2024.02.23	2025.02.22
Power detector group	Keysight	NW2021031	N/A	2023.09.26	2024.09.25
Switch control box	MW	MW100-RFCB	N/A	N/A	N/A
Temperature & Humidity	SW-108	SuWei	N/A	2024.03.15	2025.03.14
Test SW	MW	MTS 8310_2.0.0.0			



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

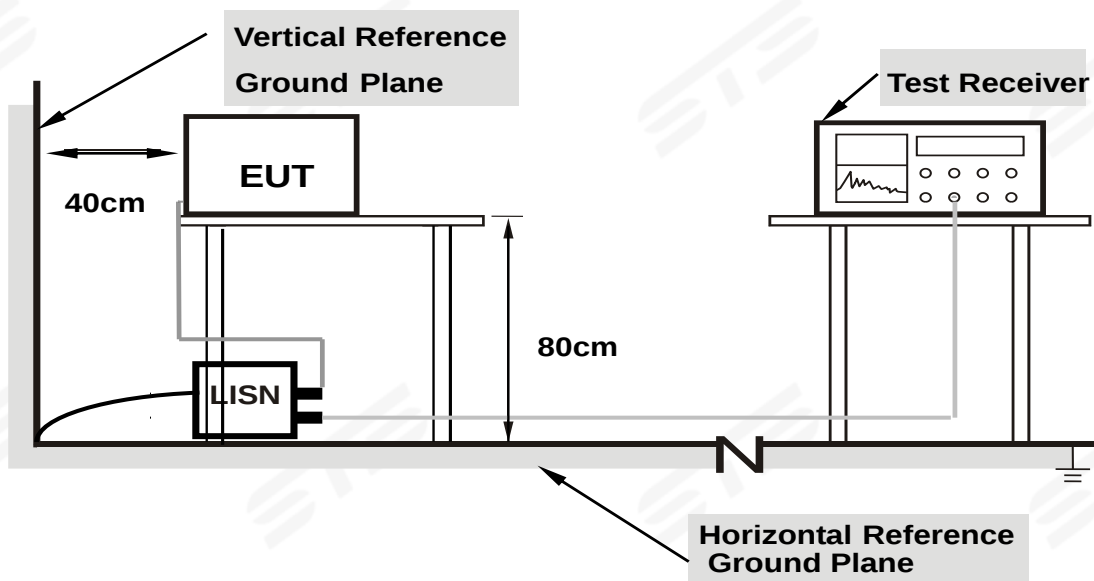

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.5 TEST RESULT

Model: PULSO-4


Temperature:	23.5°C	Relative Humidity:	62%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 10		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.4100	25.04	20.01	45.05	57.65	-12.60	QP
2	0.4100	15.33	20.01	35.34	47.65	-12.31	AVG
3	0.8100	17.14	19.80	36.94	56.00	-19.06	QP
4	0.8100	13.13	19.80	32.93	46.00	-13.07	AVG
5	1.6260	20.00	19.79	39.79	56.00	-16.21	QP
6	1.6260	15.24	19.79	35.03	46.00	-10.97	AVG
7	2.4380	21.83	19.81	41.64	56.00	-14.36	QP
8	2.4380	18.80	19.81	38.61	46.00	-7.39	AVG
9	6.9060	19.50	19.84	39.34	60.00	-20.66	QP
10	6.9060	14.19	19.84	34.03	50.00	-15.97	AVG
11	12.5900	18.92	20.34	39.26	60.00	-20.74	QP
12	12.5900	16.97	20.34	37.31	50.00	-12.69	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

100.0 dBuV

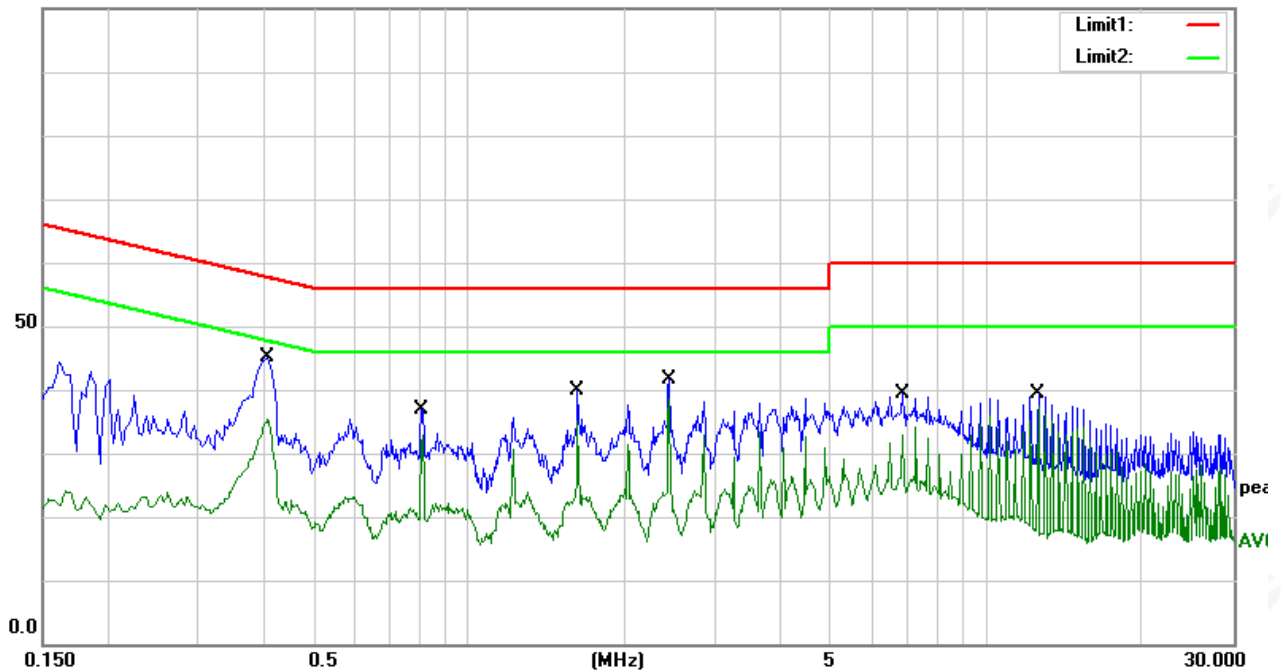




Temperature:	23.5°C	Relative Humidity:	62%RH
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 10		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.4060	26.55	20.04	46.59	57.73	-11.14	QP
2	0.4060	16.87	20.04	36.91	47.73	-10.82	AVG
3	1.2180	17.66	19.80	37.46	56.00	-18.54	QP
4	1.2180	15.54	19.80	35.34	46.00	-10.66	AVG
5	2.4340	21.88	19.90	41.78	56.00	-14.22	QP
6	2.4340	17.48	19.90	37.38	46.00	-8.62	AVG
7	4.4660	19.63	19.93	39.56	56.00	-16.44	QP
8	4.4660	14.12	19.93	34.05	46.00	-11.95	AVG
9	6.9020	19.87	19.84	39.71	60.00	-20.29	QP
10	6.9020	15.33	19.84	35.17	50.00	-14.83	AVG
11	12.5860	19.21	20.13	39.34	60.00	-20.66	QP
12	12.5860	16.36	20.13	36.49	50.00	-13.51	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

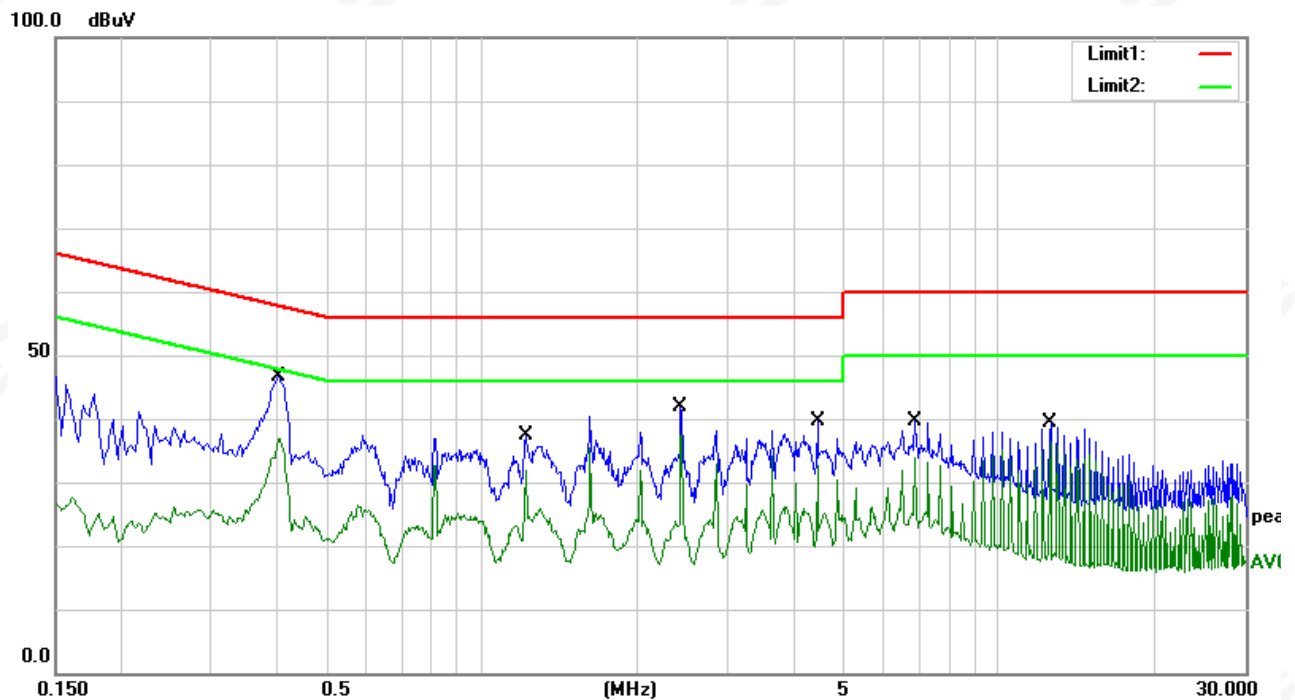



Model: PULSO-6


Temperature:	23.5°C	Relative Humidity:	62%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 10		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(d B)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1500	28.65	19.78	48.43	66.00	-17.57	QP
2	0.1500	10.57	19.78	30.35	56.00	-25.65	AVG
3	0.3940	25.83	20.02	45.85	57.98	-12.13	QP
4	0.3940	18.20	20.02	38.22	47.98	-9.76	AVG
5	1.1780	20.40	19.78	40.18	56.00	-15.82	QP
6	1.1780	16.27	19.78	36.05	46.00	-9.95	AVG
7	2.7460	23.31	19.81	43.12	56.00	-12.88	QP
8	2.7460	18.97	19.81	38.78	46.00	-7.22	AVG
9	5.4940	22.42	19.80	42.22	60.00	-17.78	QP
10	5.4940	15.80	19.80	35.60	50.00	-14.40	AVG
11	11.3820	21.64	20.32	41.96	60.00	-18.04	QP
12	11.3820	18.06	20.32	38.38	50.00	-11.62	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

100.0 dBuV

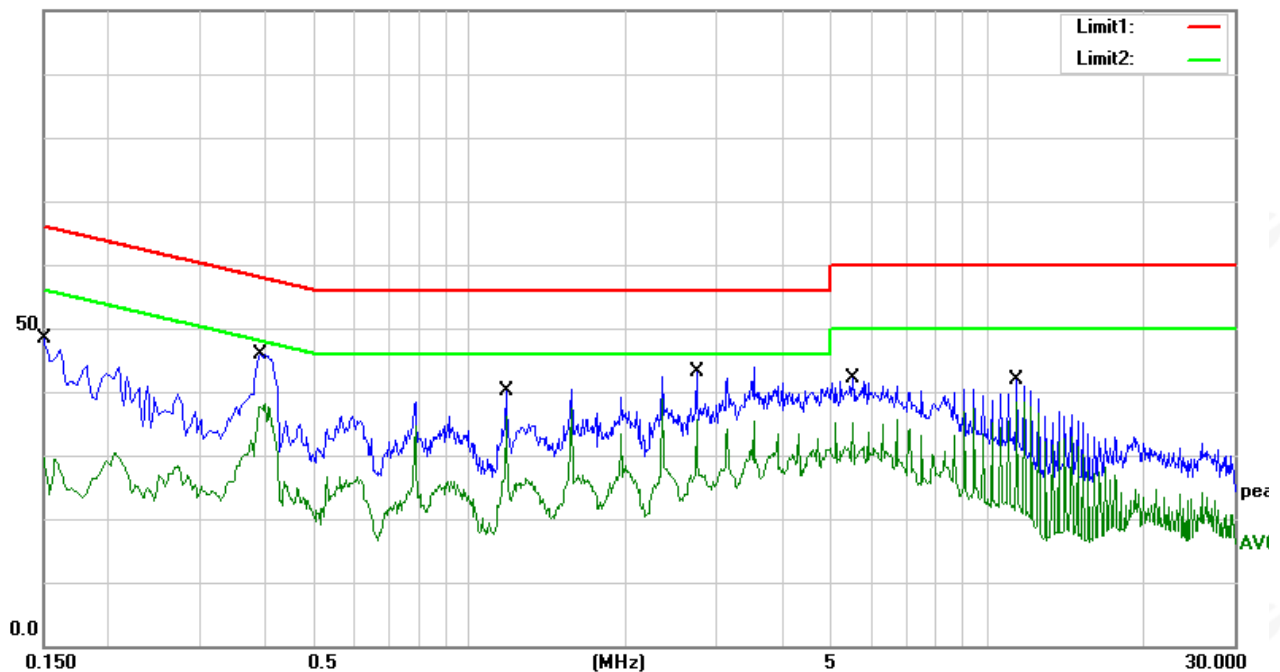




Temperature:	23.5°C	Relative Humidity:	62%RH
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 10		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1660	26.74	19.78	46.52	65.16	-18.64	QP
2	0.1660	10.34	19.78	30.12	55.16	-25.04	AVG
3	0.4060	27.25	20.04	47.29	57.73	-10.44	QP
4	0.4060	17.20	20.04	37.24	47.73	-10.49	AVG
5	0.7860	20.38	19.82	40.20	56.00	-15.80	QP
6	0.7860	15.75	19.82	35.57	46.00	-10.43	AVG
7	2.3580	23.40	19.90	43.30	56.00	-12.70	QP
8	2.3580	18.83	19.90	38.73	46.00	-7.27	AVG
9	4.3220	21.40	19.93	41.33	56.00	-14.67	QP
10	4.3220	16.31	19.93	36.24	46.00	-9.76	AVG
11	11.7780	20.37	20.09	40.46	60.00	-19.54	QP
12	11.7780	17.13	20.09	37.22	50.00	-12.78	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

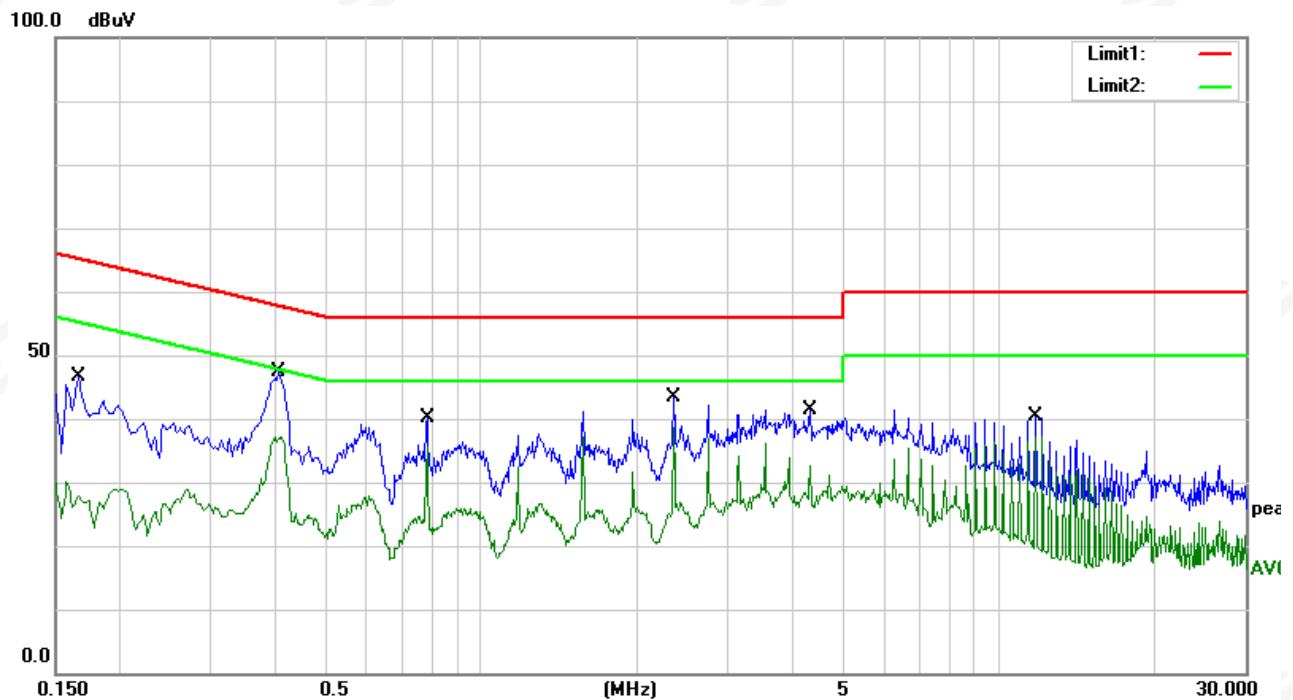



Model: PULSO-10


Temperature:	23.5°C	Relative Humidity:	62%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 10		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(d B)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.4060	25.13	20.01	45.14	57.73	-12.59	QP
2	0.4060	15.67	20.01	35.68	47.73	-12.05	AVG
3	1.6020	17.93	19.78	37.71	56.00	-18.29	QP
4	1.6020	14.66	19.78	34.44	46.00	-11.56	AVG
5	2.4060	20.86	19.81	40.67	56.00	-15.33	QP
6	2.4060	17.03	19.81	36.84	46.00	-9.16	AVG
7	7.2140	19.87	19.87	39.74	60.00	-20.26	QP
8	7.2140	14.68	19.87	34.55	50.00	-15.45	AVG
9	11.4620	20.39	20.32	40.71	60.00	-19.29	QP
10	11.4620	15.05	20.32	35.37	50.00	-14.63	AVG
11	26.8460	20.59	20.15	40.74	60.00	-19.26	QP
12	26.8460	17.30	20.15	37.45	50.00	-12.55	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

100.0 dBuV

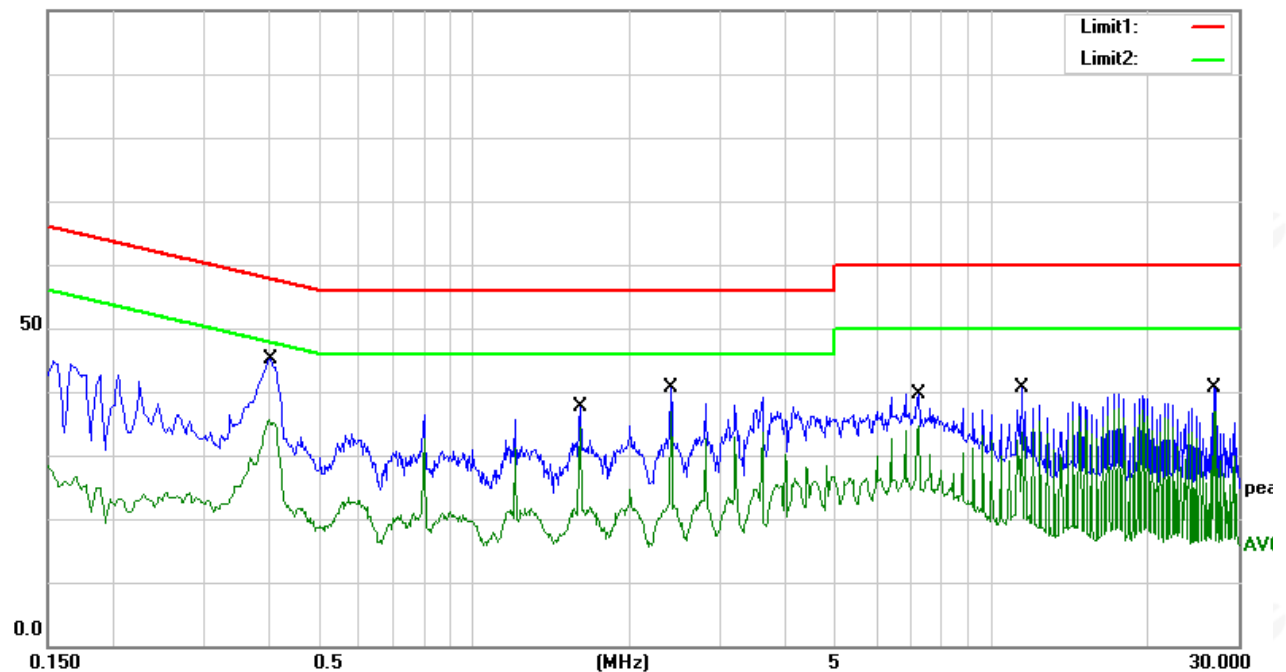




Temperature:	23.5°C	Relative Humidity:	62%RH
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 10		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.4020	27.01	20.04	47.05	57.81	-10.76	QP
2	0.4020	15.50	20.04	35.54	47.81	-12.27	AVG
3	1.2020	16.67	19.79	36.46	56.00	-19.54	QP
4	1.2020	14.33	19.79	34.12	46.00	-11.88	AVG
5	2.4060	20.87	19.90	40.77	56.00	-15.23	QP
6	2.4060	17.03	19.90	36.93	46.00	-9.07	AVG
7	6.8140	19.29	19.83	39.12	60.00	-20.88	QP
8	6.8140	15.58	19.83	35.41	50.00	-14.59	AVG
9	12.4220	18.69	20.12	38.81	60.00	-21.19	QP
10	12.4220	16.73	20.12	36.85	50.00	-13.15	AVG
11	27.2500	14.82	20.33	35.15	60.00	-24.85	QP
12	27.2500	10.93	20.33	31.26	50.00	-18.74	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

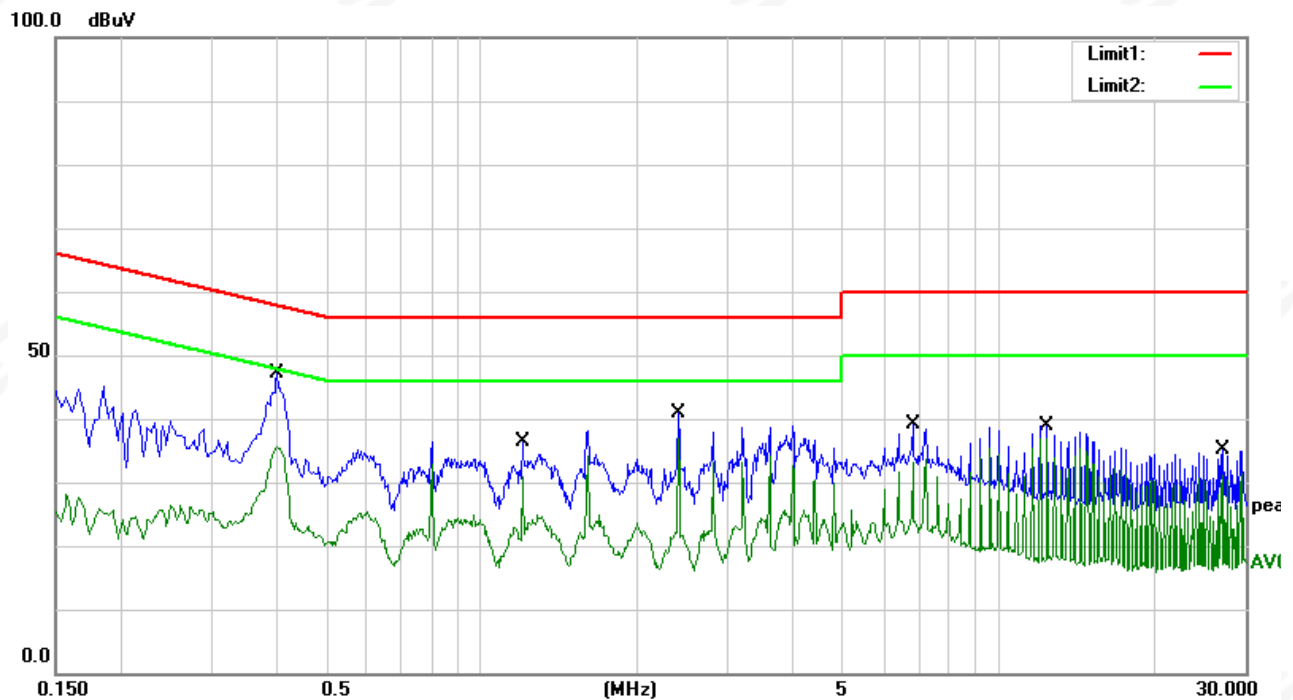



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2020 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2310 to 2430 MHz Upper Band Edge: 2445 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

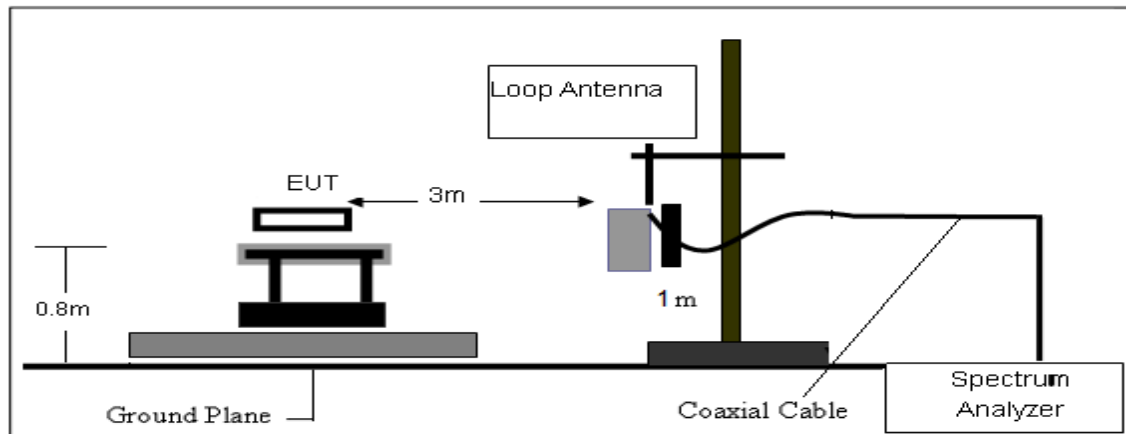

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

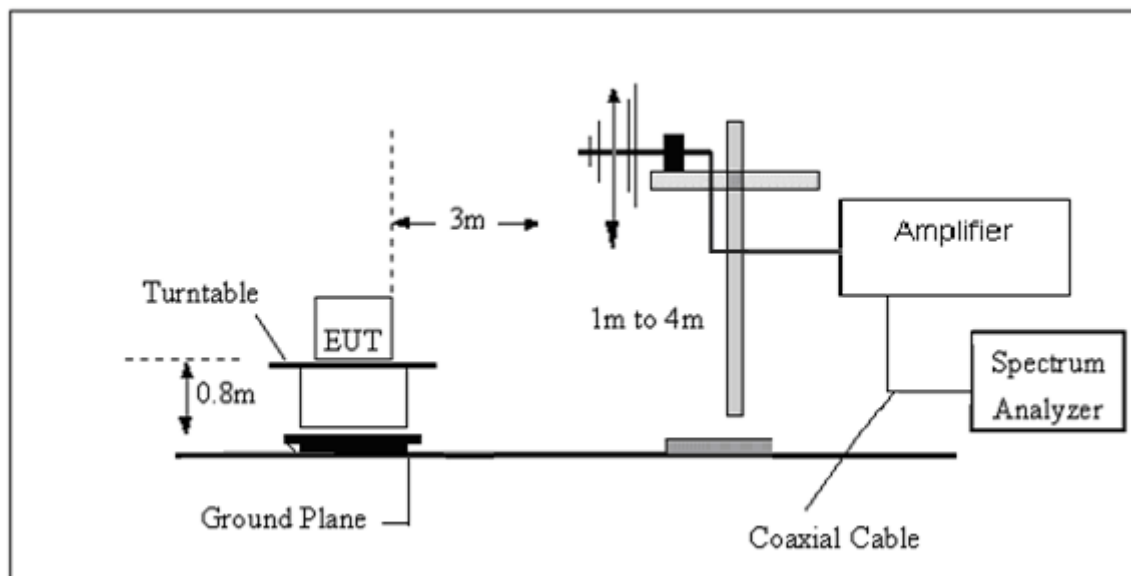

(C) Radiated Emission Test-Up Frequency Above 1GHz

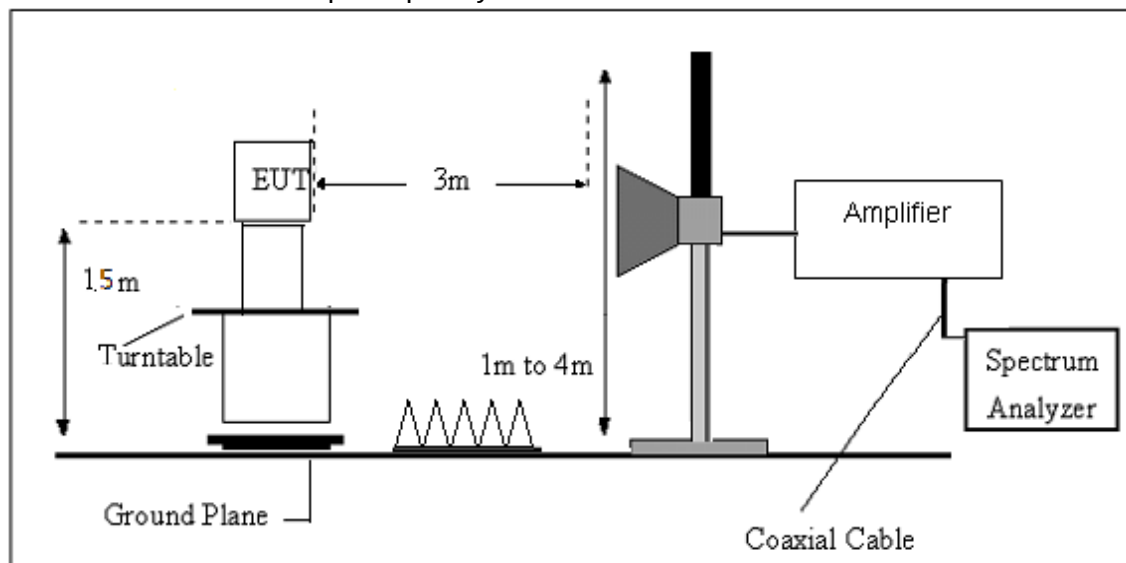

3.2.4 EUT OPERATING CONDITIONS

Please refer to section 3.1.4 of this report.



3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

3.2.6 TEST RESULT

9KHz-30MHz

Temperature:	23.4℃	Relative Humidity:	60%RH
Test Voltage:	DC 12V From POE Adapter	Polarization:	--
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State	Test Result
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F	
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.



(30MHz - 1000MHz)


Model: PULSO-6

Temperature:	23.4℃	Relative Humidity:	60%RH
Test Voltage:	DC 12V From POE Adapter	Phase:	Horizontal
Test Mode:	Mode 1/2/3/4/5/6/7/8/9/10/11/12 (Mode 5 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31.0706	34.34	-13.41	20.93	40.00	-19.07	peak
2	94.9900	46.47	-20.78	25.69	43.50	-17.81	peak
3	214.3000	52.41	-20.21	32.20	43.50	-11.30	peak
4	262.8000	50.41	-14.76	35.65	46.00	-10.35	peak
5	307.4200	51.89	-14.55	37.34	46.00	-8.66	peak
6	750.7100	40.40	-2.16	38.24	46.00	-7.76	peak

Remark:

1. Margin = Result (Result = Reading + Factor) – Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain
3. All modes have been tested, only show the worst case.

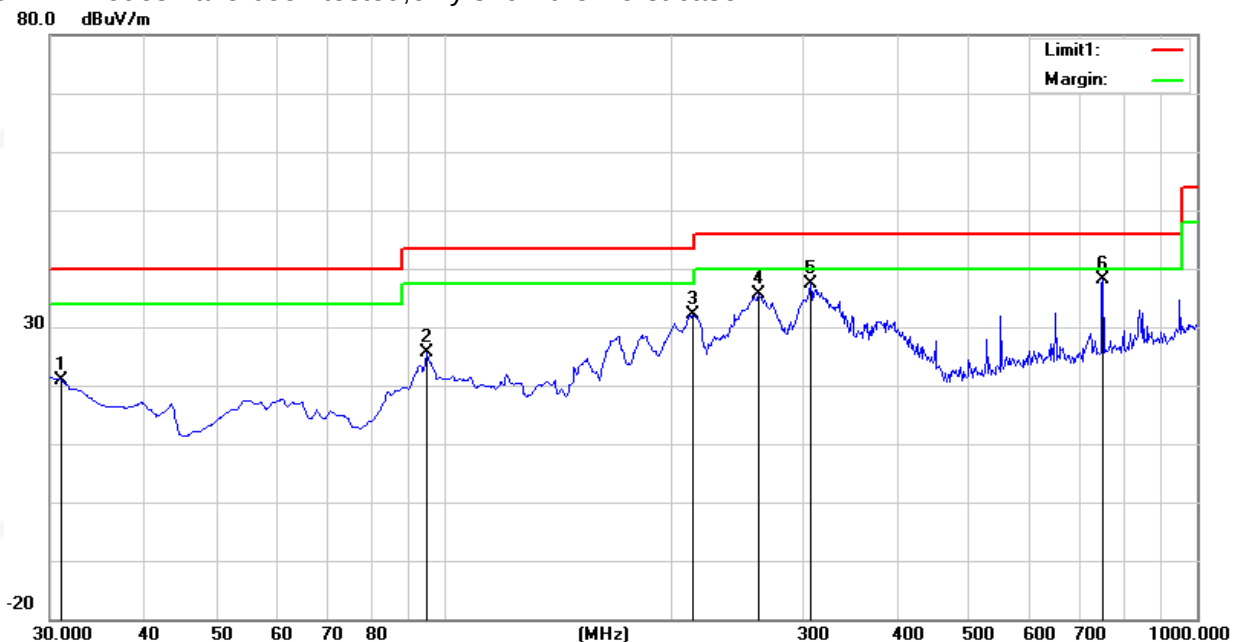




Temperature:	23.4℃	Relative Humidity:	60%RH
Test Voltage:	DC 12V From POE Adapter	Phase:	Vertical
Test Mode:	Mode 1/2/3/4/5/6/7/8/9/10/11/12 (Mode 5 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	45.12	-13.35	31.77	40.00	-8.23	peak
2	49.4000	51.68	-22.95	28.73	40.00	-11.27	peak
3	201.6900	58.96	-21.00	37.96	43.50	-5.54	peak
4	301.6000	49.86	-14.75	35.11	46.00	-10.89	peak
5	389.8700	45.42	-11.60	33.82	46.00	-12.18	peak
6	750.7100	35.93	-2.16	33.77	46.00	-12.23	peak

Remark:.

1. Margin = Result (Result =Reading + Factor)–Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. All modes have been tested,only show the worst case.

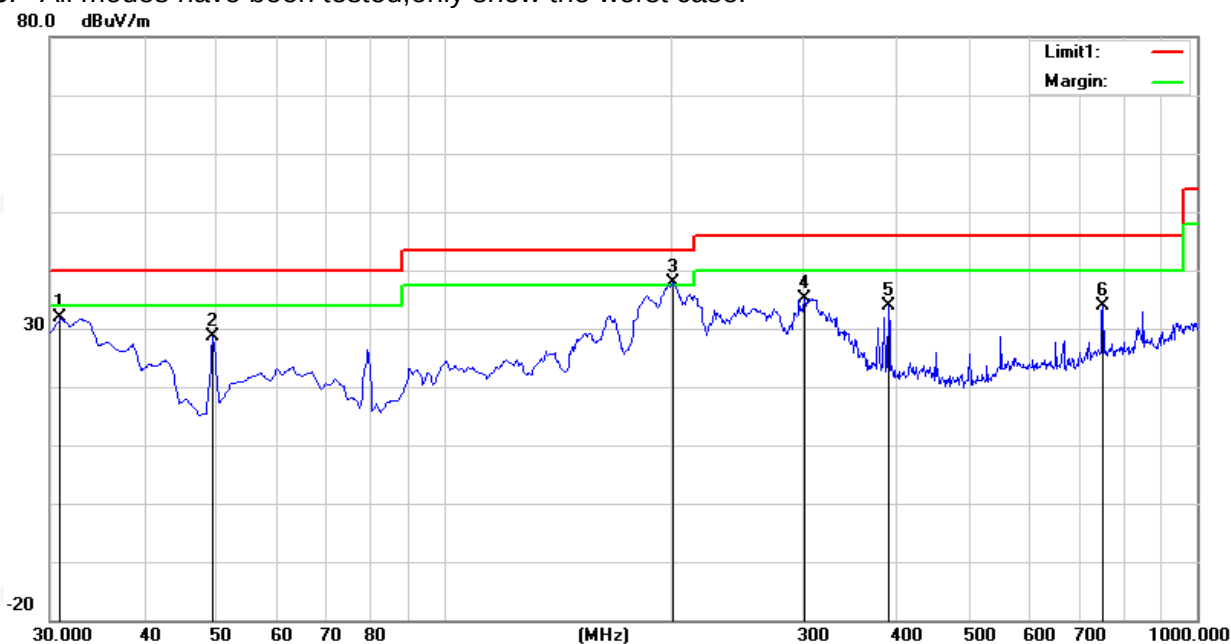



(30MHz - 1000MHz)


Model: PULSO-4

Temperature:	23.4℃	Relative Humidity:	60%RH
Test Voltage:	DC 12V From POE Adapter	Phase:	Horizontal
Test Mode:	Mode 1/2/3/4/5/6/7/8/9/10/11/12 (Mode 5 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31.5095	32.93	-13.63	19.30	40.00	-20.70	peak
2	94.9900	43.01	-20.78	22.23	43.50	-21.27	peak
3	176.4700	51.87	-20.04	31.83	43.50	-11.67	peak
4	295.7800	53.88	-14.95	38.93	46.00	-7.07	peak
5	350.1000	45.80	-13.06	32.74	46.00	-13.26	peak
6	749.7400	34.59	-2.16	32.43	46.00	-13.57	peak

Remark:

- Margin = Result (Result = Reading + Factor) - Limit
- Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain
- All modes have been tested, only show the worst case.

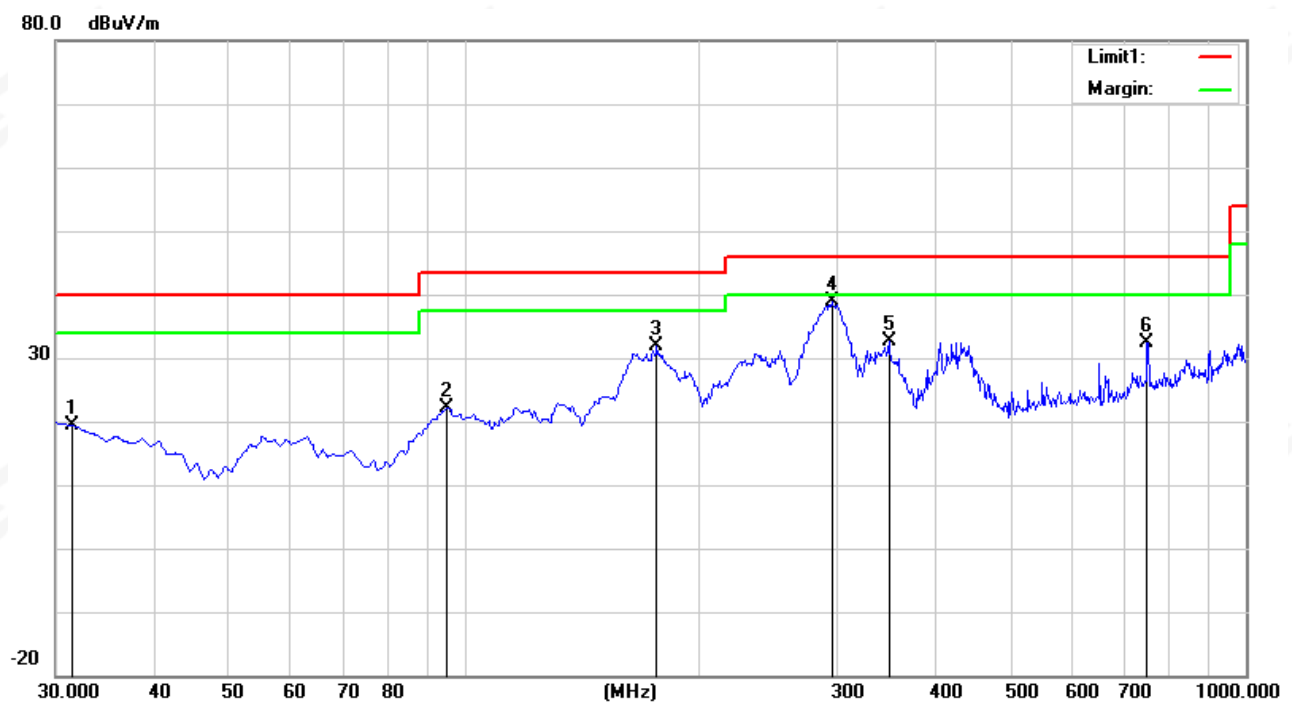



Temperature:	23.4℃	Relative Humidity:	60%RH
Test Voltage:	DC 12V From POE Adapter	Phase:	Vertical
Test Mode:	Mode 1/2/3/4/5/6/7/8/9/10/11/12 (Mode 5 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.9100	45.13	-14.33	30.80	40.00	-9.20	peak
2	165.8000	51.39	-19.40	31.99	43.50	-11.51	peak
3	239.5200	51.09	-18.10	32.99	46.00	-13.01	peak
4	296.7500	53.83	-14.92	38.91	46.00	-7.09	peak
5	594.5400	42.52	-5.84	36.68	46.00	-9.32	peak
6	955.3800	31.25	1.68	32.93	46.00	-13.07	peak


Remark:.

4. Margin = Result (Result =Reading + Factor)–Limit

5. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

6. All modes have been tested,only show the worst case.

80.0 dBuV/m

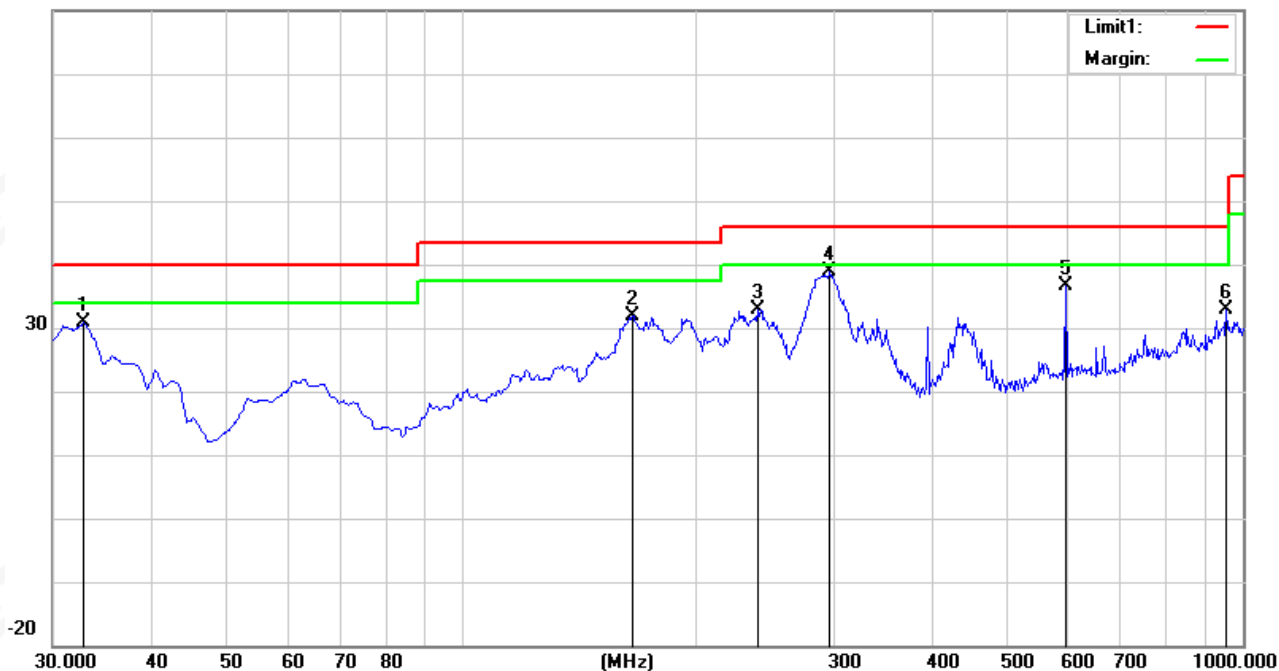



(30MHz - 1000MHz)

Model: PULSO-10

Temperature:	23.4℃	Relative Humidity:	60%RH
Test Voltage:	DC 12V From POE Adapter	Phase:	Horizontal
Test Mode:	Mode 1/2/3/4/5/6/7/8/9/10/11/12 (Mode 5 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.7455	32.16	-13.24	18.92	40.00	-21.08	peak
2	94.9900	44.74	-20.78	23.96	43.50	-19.54	peak
3	164.8300	53.93	-19.31	34.62	43.50	-8.88	peak
4	284.1400	53.79	-15.46	38.33	46.00	-7.67	peak
5	345.2500	48.27	-13.23	35.04	46.00	-10.96	peak
6	876.8100	31.61	-0.62	30.99	46.00	-15.01	peak


Remark:

7. Margin = Result (Result = Reading + Factor) - Limit

8. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain

9. All modes have been tested, only show the worst case.

80.0 dBuV/m

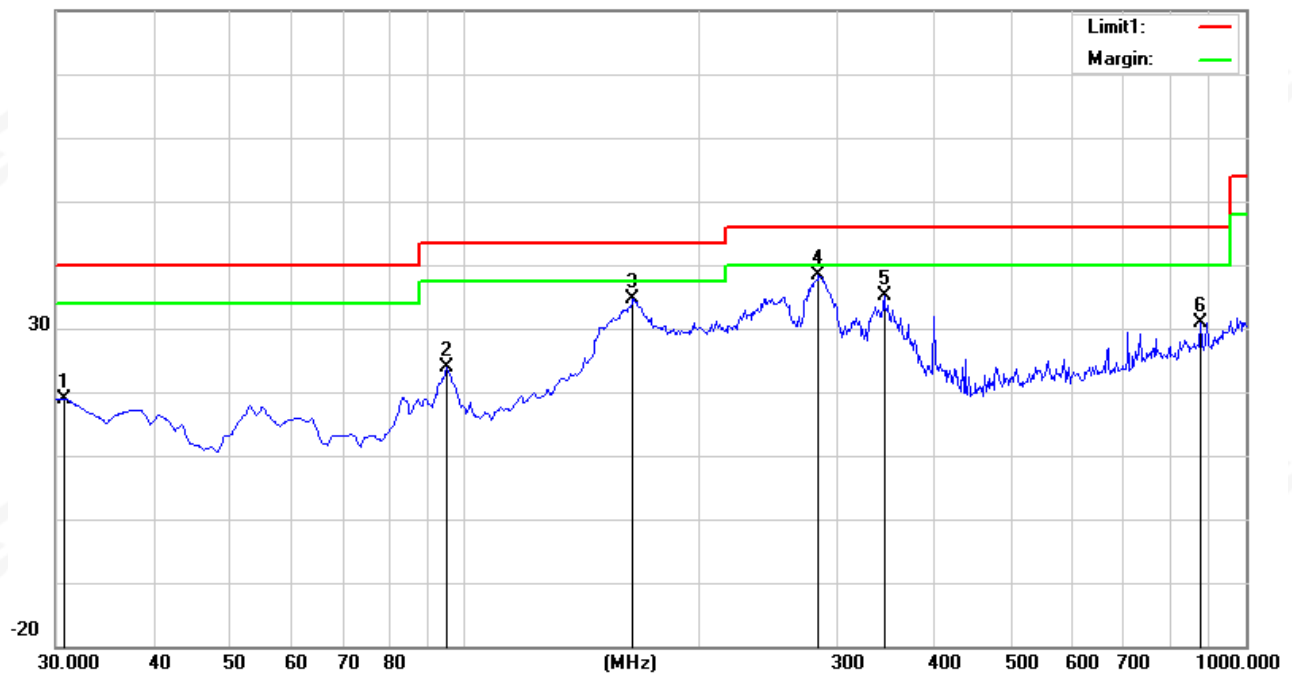



Temperature:	23.4℃	Relative Humidity:	60%RH
Test Voltage:	DC 12V From POE Adapter	Phase:	Vertical
Test Mode:	Mode 1/2/3/4/5/6/7/8/9/10/11/12 (Mode 5 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/ m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	44.94	-13.35	31.59	40.00	-8.41	peak
2	54.2500	47.91	-24.75	23.16	40.00	-16.84	peak
3	164.8300	51.54	-19.31	32.23	43.50	-11.27	peak
4	242.4300	53.78	-17.52	36.26	46.00	-9.74	peak
5	374.3500	50.63	-12.39	38.24	46.00	-7.76	peak
6	647.8900	35.28	-4.88	30.40	46.00	-15.60	peak


Remark:.

7. Margin = Result (Result =Reading + Factor)–Limit

8. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

9. All modes have been tested,only show the worst case.

80.0 dBuV/m

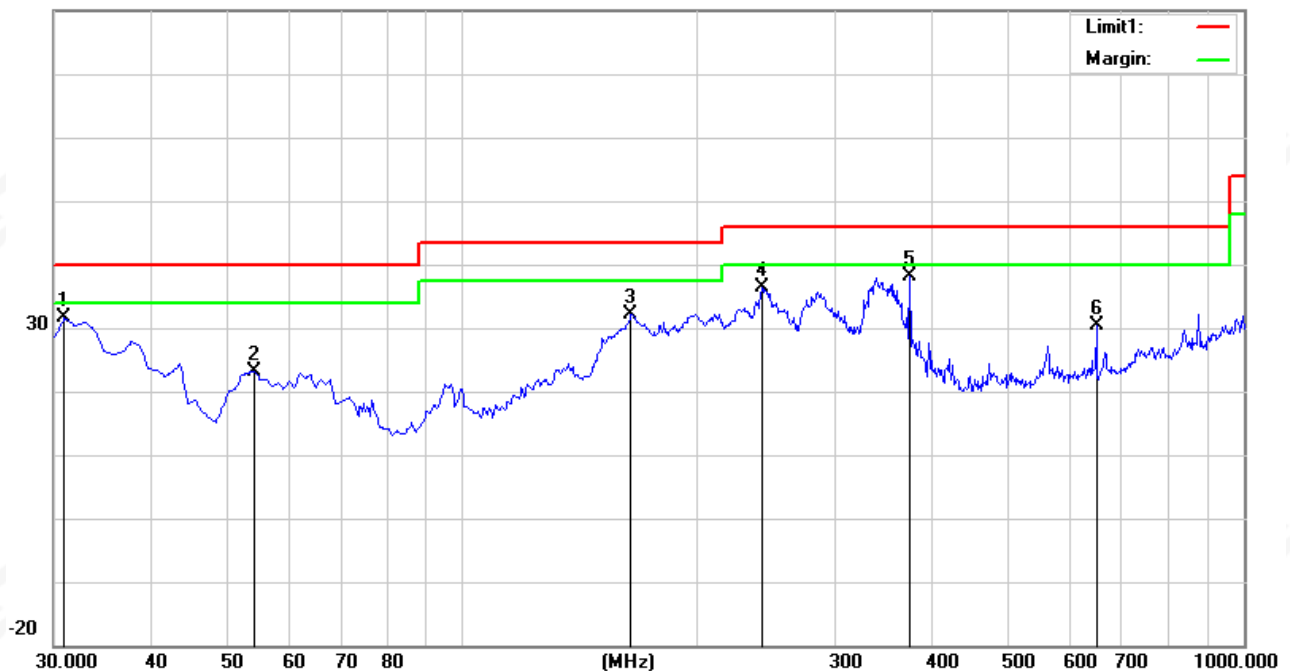



(1000MHz-25GHz) Spurious emission Requirements

Model: PULSO-6

802.11 g

Frequency (MHz)	Meter Reading (dBμV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Corrected Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
Low Channel (802.11g/2412 MHz)										
3264.83	61.44	44.70	6.70	28.20	-9.80	51.64	74.00	-22.36	PK	Vertical
3264.83	51.04	44.70	6.70	28.20	-9.80	41.24	54.00	-12.76	AV	Vertical
3264.67	60.90	44.70	6.70	28.20	-9.80	51.10	74.00	-22.90	PK	Horizontal
3264.67	51.30	44.70	6.70	28.20	-9.80	41.50	54.00	-12.50	AV	Horizontal
4824.29	58.41	44.20	9.04	31.60	-3.56	54.85	74.00	-19.15	PK	Vertical
4824.29	50.23	44.20	9.04	31.60	-3.56	46.67	54.00	-7.33	AV	Vertical
4824.32	59.48	44.20	9.04	31.60	-3.56	55.92	74.00	-18.08	PK	Horizontal
4824.32	49.34	44.20	9.04	31.60	-3.56	45.78	54.00	-8.22	AV	Horizontal
5359.78	48.60	44.20	9.86	32.00	-2.34	46.25	74.00	-27.75	PK	Vertical
5359.78	40.28	44.20	9.86	32.00	-2.34	37.93	54.00	-16.07	AV	Vertical
5359.57	48.05	44.20	9.86	32.00	-2.34	45.71	74.00	-28.29	PK	Horizontal
5359.57	38.48	44.20	9.86	32.00	-2.34	36.13	54.00	-17.87	AV	Horizontal
7235.83	54.93	43.50	11.40	35.50	3.40	58.33	74.00	-15.67	PK	Vertical
7235.83	44.76	43.50	11.40	35.50	3.40	48.16	54.00	-5.84	AV	Vertical
7235.71	53.66	43.50	11.40	35.50	3.40	57.06	74.00	-16.94	PK	Horizontal
7235.71	43.60	43.50	11.40	35.50	3.40	47.00	54.00	-7.00	AV	Horizontal
Middle Channel (802.11g/2437 MHz)										
3264.82	61.83	44.70	6.70	28.20	-9.80	52.03	74.00	-21.97	PK	Vertical
3264.82	50.22	44.70	6.70	28.20	-9.80	40.42	54.00	-13.58	AV	Vertical
3264.63	62.24	44.70	6.70	28.20	-9.80	52.44	74.00	-21.56	PK	Horizontal
3264.63	50.53	44.70	6.70	28.20	-9.80	40.73	54.00	-13.27	AV	Horizontal
4874.49	59.05	44.20	9.04	31.60	-3.56	55.49	74.00	-18.51	PK	Vertical
4874.49	49.50	44.20	9.04	31.60	-3.56	45.94	54.00	-8.06	AV	Vertical
4874.54	59.63	44.20	9.04	31.60	-3.56	56.07	74.00	-17.93	PK	Horizontal
4874.54	50.13	44.20	9.04	31.60	-3.56	46.57	54.00	-7.43	AV	Horizontal
5359.69	48.42	44.20	9.86	32.00	-2.34	46.08	74.00	-27.92	PK	Vertical
5359.69	40.30	44.20	9.86	32.00	-2.34	37.95	54.00	-16.05	AV	Vertical
5359.81	48.18	44.20	9.86	32.00	-2.34	45.83	74.00	-28.17	PK	Horizontal
5359.81	39.22	44.20	9.86	32.00	-2.34	36.88	54.00	-17.12	AV	Horizontal
7310.78	54.62	43.50	11.40	35.50	3.40	58.02	74.00	-15.98	PK	Vertical
7310.78	44.38	43.50	11.40	35.50	3.40	47.78	54.00	-6.22	AV	Vertical
7310.69	54.07	43.50	11.40	35.50	3.40	57.47	74.00	-16.53	PK	Horizontal
7310.69	44.69	43.50	11.40	35.50	3.40	48.09	54.00	-5.91	AV	Horizontal



High Channel (802.11g/2462 MHz)										
3264.78	61.64	44.70	6.70	28.20	-9.80	51.84	74.00	-22.16	PK	Vertical
3264.78	51.45	44.70	6.70	28.20	-9.80	41.65	54.00	-12.35	AV	Vertical
3264.85	61.78	44.70	6.70	28.20	-9.80	51.98	74.00	-22.02	PK	Horizontal
3264.85	51.33	44.70	6.70	28.20	-9.80	41.53	54.00	-12.47	AV	Horizontal
4924.40	59.25	44.20	9.04	31.60	-3.56	55.69	74.00	-18.31	PK	Vertical
4924.40	50.03	44.20	9.04	31.60	-3.56	46.47	54.00	-7.53	AV	Vertical
4924.45	59.54	44.20	9.04	31.60	-3.56	55.98	74.00	-18.02	PK	Horizontal
4924.45	50.19	44.20	9.04	31.60	-3.56	46.63	54.00	-7.37	AV	Horizontal
5359.72	48.75	44.20	9.86	32.00	-2.34	46.41	74.00	-27.59	PK	Vertical
5359.72	39.07	44.20	9.86	32.00	-2.34	36.73	54.00	-17.27	AV	Vertical
5359.84	47.44	44.20	9.86	32.00	-2.34	45.09	74.00	-28.91	PK	Horizontal
5359.84	38.79	44.20	9.86	32.00	-2.34	36.45	54.00	-17.55	AV	Horizontal
7385.70	54.59	43.50	11.40	35.50	3.40	57.99	74.00	-16.01	PK	Vertical
7385.70	44.50	43.50	11.40	35.50	3.40	47.90	54.00	-6.10	AV	Vertical
7385.84	54.72	43.50	11.40	35.50	3.40	58.12	74.00	-15.88	PK	Horizontal
7385.84	44.91	43.50	11.40	35.50	3.40	48.31	54.00	-5.69	AV	Horizontal

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- All modes have been measurement, only worst mode was reported.
Emission Level = Reading + Factor
Margin = Emission Level-Limit
- The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



Model: PULSO-4

802.11 g

Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Corrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (802.11g/2412 MHz)										
3264.83	60.91	44.70	6.70	28.20	-9.80	51.11	74.00	-22.89	PK	Vertical
3264.83	50.15	44.70	6.70	28.20	-9.80	40.35	54.00	-13.65	AV	Vertical
3264.67	61.78	44.70	6.70	28.20	-9.80	51.98	74.00	-22.02	PK	Horizontal
3264.67	50.50	44.70	6.70	28.20	-9.80	40.70	54.00	-13.30	AV	Horizontal
4824.36	58.52	44.20	9.04	31.60	-3.56	54.96	74.00	-19.04	PK	Vertical
4824.36	49.94	44.20	9.04	31.60	-3.56	46.38	54.00	-7.62	AV	Vertical
4824.42	59.32	44.20	9.04	31.60	-3.56	55.76	74.00	-18.24	PK	Horizontal
4824.42	49.21	44.20	9.04	31.60	-3.56	45.65	54.00	-8.35	AV	Horizontal
5359.83	48.51	44.20	9.86	32.00	-2.34	46.17	74.00	-27.83	PK	Vertical
5359.83	39.16	44.20	9.86	32.00	-2.34	36.82	54.00	-17.18	AV	Vertical
5359.84	48.33	44.20	9.86	32.00	-2.34	45.98	74.00	-28.02	PK	Horizontal
5359.84	38.12	44.20	9.86	32.00	-2.34	35.78	54.00	-18.22	AV	Horizontal
7235.74	53.57	43.50	11.40	35.50	3.40	56.97	74.00	-17.03	PK	Vertical
7235.74	44.88	43.50	11.40	35.50	3.40	48.28	54.00	-5.72	AV	Vertical
7235.71	54.72	43.50	11.40	35.50	3.40	58.12	74.00	-15.88	PK	Horizontal
7235.71	43.57	43.50	11.40	35.50	3.40	46.97	54.00	-7.03	AV	Horizontal
Middle Channel (802.11g/2437 MHz)										
3264.73	61.36	44.70	6.70	28.20	-9.80	51.56	74.00	-22.44	PK	Vertical
3264.73	51.12	44.70	6.70	28.20	-9.80	41.32	54.00	-12.68	AV	Vertical
3264.70	61.13	44.70	6.70	28.20	-9.80	51.33	74.00	-22.67	PK	Horizontal
3264.70	51.10	44.70	6.70	28.20	-9.80	41.30	54.00	-12.70	AV	Horizontal
4874.53	59.14	44.20	9.04	31.60	-3.56	55.58	74.00	-18.42	PK	Vertical
4874.53	50.46	44.20	9.04	31.60	-3.56	46.90	54.00	-7.10	AV	Vertical
4874.48	58.48	44.20	9.04	31.60	-3.56	54.92	74.00	-19.08	PK	Horizontal
4874.48	50.16	44.20	9.04	31.60	-3.56	46.60	54.00	-7.40	AV	Horizontal
5359.67	49.38	44.20	9.86	32.00	-2.34	47.04	74.00	-26.96	PK	Vertical
5359.67	38.95	44.20	9.86	32.00	-2.34	36.61	54.00	-17.39	AV	Vertical
5359.84	48.01	44.20	9.86	32.00	-2.34	45.67	74.00	-28.33	PK	Horizontal
5359.84	39.07	44.20	9.86	32.00	-2.34	36.73	54.00	-17.27	AV	Horizontal
7310.86	53.75	43.50	11.40	35.50	3.40	57.15	74.00	-16.85	PK	Vertical
7310.86	44.43	43.50	11.40	35.50	3.40	47.83	54.00	-6.17	AV	Vertical
7310.78	53.91	43.50	11.40	35.50	3.40	57.31	74.00	-16.69	PK	Horizontal
7310.78	44.86	43.50	11.40	35.50	3.40	48.26	54.00	-5.74	AV	Horizontal



High Channel (802.11g/2462 MHz)										
3264.76	61.62	44.70	6.70	28.20	-9.80	51.82	74.00	-22.18	PK	Vertical
3264.76	51.59	44.70	6.70	28.20	-9.80	41.79	54.00	-12.21	AV	Vertical
3264.75	62.12	44.70	6.70	28.20	-9.80	52.32	74.00	-21.68	PK	Horizontal
3264.75	50.81	44.70	6.70	28.20	-9.80	41.01	54.00	-12.99	AV	Horizontal
4924.33	58.27	44.20	9.04	31.60	-3.56	54.71	74.00	-19.29	PK	Vertical
4924.33	50.43	44.20	9.04	31.60	-3.56	46.87	54.00	-7.13	AV	Vertical
4924.58	58.46	44.20	9.04	31.60	-3.56	54.90	74.00	-19.10	PK	Horizontal
4924.58	49.23	44.20	9.04	31.60	-3.56	45.67	54.00	-8.33	AV	Horizontal
5359.70	48.04	44.20	9.86	32.00	-2.34	45.70	74.00	-28.30	PK	Vertical
5359.70	40.38	44.20	9.86	32.00	-2.34	38.04	54.00	-15.96	AV	Vertical
5359.69	47.83	44.20	9.86	32.00	-2.34	45.49	74.00	-28.51	PK	Horizontal
5359.69	38.73	44.20	9.86	32.00	-2.34	36.39	54.00	-17.61	AV	Horizontal
7385.98	53.74	43.50	11.40	35.50	3.40	57.14	74.00	-16.86	PK	Vertical
7385.98	44.26	43.50	11.40	35.50	3.40	47.66	54.00	-6.34	AV	Vertical
7385.81	53.59	43.50	11.40	35.50	3.40	56.99	74.00	-17.01	PK	Horizontal
7385.81	44.15	43.50	11.40	35.50	3.40	47.55	54.00	-6.45	AV	Horizontal

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- All modes have been measurement, only worst mode was reported.
Emission Level = Reading + Factor
Margin = Emission Level-Limit
- The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



Model: PULSO-10

802.11 g

Frequency	Meter Reading	Amplifier	Loss	Antenna Factor	Corrected Factor	Emission Level	Limits	Margin	Detector	Comment
(MHz)	(dBμV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	Type	
Low Channel (802.11g/2412 MHz)										
3264.85	61.42	44.70	6.70	28.20	-9.80	51.62	74.00	-22.38	PK	Vertical
3264.85	50.74	44.70	6.70	28.20	-9.80	40.94	54.00	-13.06	AV	Vertical
3264.58	61.38	44.70	6.70	28.20	-9.80	51.58	74.00	-22.42	PK	Horizontal
3264.58	50.91	44.70	6.70	28.20	-9.80	41.11	54.00	-12.89	AV	Horizontal
4824.48	58.44	44.20	9.04	31.60	-3.56	54.88	74.00	-19.12	PK	Vertical
4824.48	49.64	44.20	9.04	31.60	-3.56	46.08	54.00	-7.92	AV	Vertical
4824.53	58.95	44.20	9.04	31.60	-3.56	55.39	74.00	-18.61	PK	Horizontal
4824.53	50.39	44.20	9.04	31.60	-3.56	46.83	54.00	-7.17	AV	Horizontal
5359.72	48.91	44.20	9.86	32.00	-2.34	46.56	74.00	-27.44	PK	Vertical
5359.72	40.03	44.20	9.86	32.00	-2.34	37.69	54.00	-16.31	AV	Vertical
5359.70	48.25	44.20	9.86	32.00	-2.34	45.91	74.00	-28.09	PK	Horizontal
5359.70	38.55	44.20	9.86	32.00	-2.34	36.20	54.00	-17.80	AV	Horizontal
7235.90	54.12	43.50	11.40	35.50	3.40	57.52	74.00	-16.48	PK	Vertical
7235.90	44.67	43.50	11.40	35.50	3.40	48.07	54.00	-5.93	AV	Vertical
7235.91	53.68	43.50	11.40	35.50	3.40	57.08	74.00	-16.92	PK	Horizontal
7235.91	44.59	43.50	11.40	35.50	3.40	47.99	54.00	-6.01	AV	Horizontal
Middle Channel (802.11g/2437 MHz)										
3264.76	61.90	44.70	6.70	28.20	-9.80	52.10	74.00	-21.90	PK	Vertical
3264.76	51.48	44.70	6.70	28.20	-9.80	41.68	54.00	-12.32	AV	Vertical
3264.65	61.83	44.70	6.70	28.20	-9.80	52.03	74.00	-21.97	PK	Horizontal
3264.65	50.72	44.70	6.70	28.20	-9.80	40.92	54.00	-13.08	AV	Horizontal
4874.50	59.57	44.20	9.04	31.60	-3.56	56.01	74.00	-17.99	PK	Vertical
4874.50	49.98	44.20	9.04	31.60	-3.56	46.42	54.00	-7.58	AV	Vertical
4874.45	58.54	44.20	9.04	31.60	-3.56	54.98	74.00	-19.02	PK	Horizontal
4874.45	49.78	44.20	9.04	31.60	-3.56	46.22	54.00	-7.78	AV	Horizontal
5359.68	48.01	44.20	9.86	32.00	-2.34	45.67	74.00	-28.33	PK	Vertical
5359.68	39.72	44.20	9.86	32.00	-2.34	37.37	54.00	-16.63	AV	Vertical
5359.68	48.09	44.20	9.86	32.00	-2.34	45.75	74.00	-28.25	PK	Horizontal
5359.68	39.24	44.20	9.86	32.00	-2.34	36.90	54.00	-17.10	AV	Horizontal
7310.81	54.89	43.50	11.40	35.50	3.40	58.29	74.00	-15.71	PK	Vertical
7310.81	44.64	43.50	11.40	35.50	3.40	48.04	54.00	-5.96	AV	Vertical
7310.68	54.45	43.50	11.40	35.50	3.40	57.85	74.00	-16.15	PK	Horizontal
7310.68	44.93	43.50	11.40	35.50	3.40	48.33	54.00	-5.67	AV	Horizontal



High Channel (802.11g/2462 MHz)										
3264.83	61.24	44.70	6.70	28.20	-9.80	51.44	74.00	-22.56	PK	Vertical
3264.83	51.07	44.70	6.70	28.20	-9.80	41.27	54.00	-12.73	AV	Vertical
3264.83	61.91	44.70	6.70	28.20	-9.80	52.11	74.00	-21.89	PK	Horizontal
3264.83	50.85	44.70	6.70	28.20	-9.80	41.05	54.00	-12.95	AV	Horizontal
4924.54	58.81	44.20	9.04	31.60	-3.56	55.25	74.00	-18.75	PK	Vertical
4924.54	49.19	44.20	9.04	31.60	-3.56	45.63	54.00	-8.37	AV	Vertical
4924.57	58.93	44.20	9.04	31.60	-3.56	55.37	74.00	-18.63	PK	Horizontal
4924.57	50.09	44.20	9.04	31.60	-3.56	46.53	54.00	-7.47	AV	Horizontal
5359.74	48.41	44.20	9.86	32.00	-2.34	46.07	74.00	-27.93	PK	Vertical
5359.74	39.46	44.20	9.86	32.00	-2.34	37.11	54.00	-16.89	AV	Vertical
5359.59	48.34	44.20	9.86	32.00	-2.34	45.99	74.00	-28.01	PK	Horizontal
5359.59	38.58	44.20	9.86	32.00	-2.34	36.24	54.00	-17.76	AV	Horizontal
7385.96	55.02	43.50	11.40	35.50	3.40	58.42	74.00	-15.58	PK	Vertical
7385.96	43.89	43.50	11.40	35.50	3.40	47.29	54.00	-6.71	AV	Vertical
7385.78	54.77	43.50	11.40	35.50	3.40	58.17	74.00	-15.83	PK	Horizontal
7385.78	44.86	43.50	11.40	35.50	3.40	48.26	54.00	-5.74	AV	Horizontal

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- All modes have been measurement, only worst mode was reported.
Emission Level = Reading + Factor
Margin = Emission Level-Limit
- The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.




3.2.6 TEST RESULTS(Band edge Requirements)

PULSO-6


802.11 g-Low

Horizontal

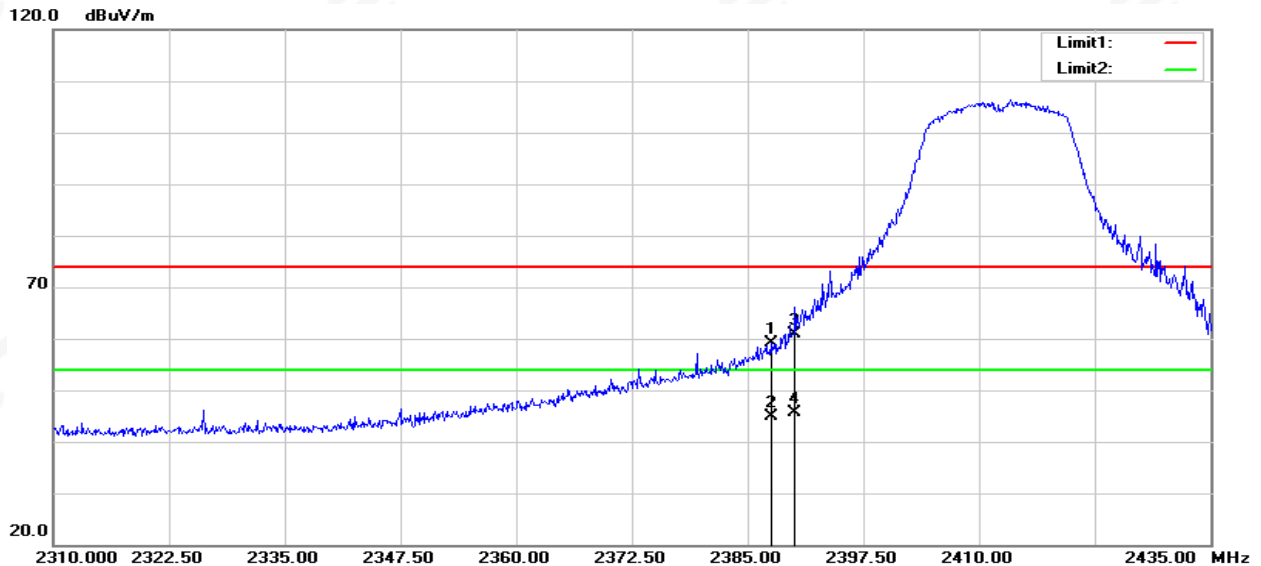

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.500	54.87	4.31	59.18	74.00	-14.82	peak
2	2387.500	40.58	4.31	44.89	54.00	-9.11	AVG
3	2390.000	56.51	4.34	60.85	74.00	-13.15	peak
4	2390.000	41.40	4.34	45.74	54.00	-8.26	AVG

Vertical

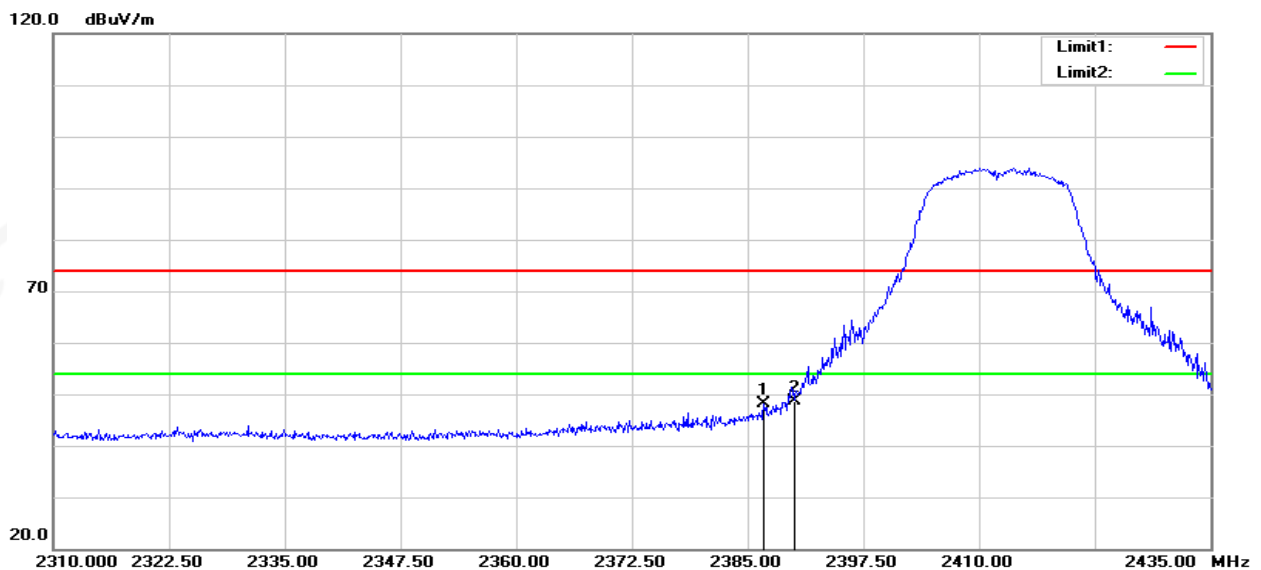


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.750	43.92	4.29	48.21	74.00	-25.79	peak
2	2390.000	44.41	4.34	48.75	74.00	-25.25	peak




802.11 g-High

Horizontal

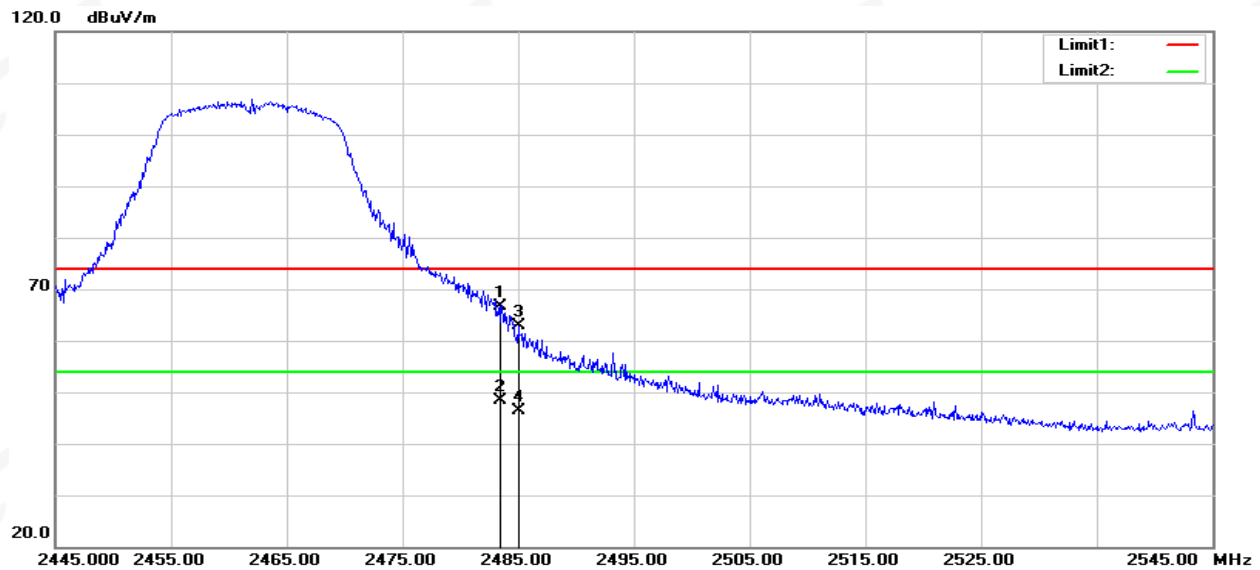

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	61.91	4.60	66.51	74.00	-7.49	peak
2	2483.500	43.68	4.60	48.28	54.00	-5.72	AVG
3	2485.000	58.31	4.61	62.92	74.00	-11.08	peak
4	2485.000	41.86	4.61	46.47	54.00	-7.53	AVG


Vertical

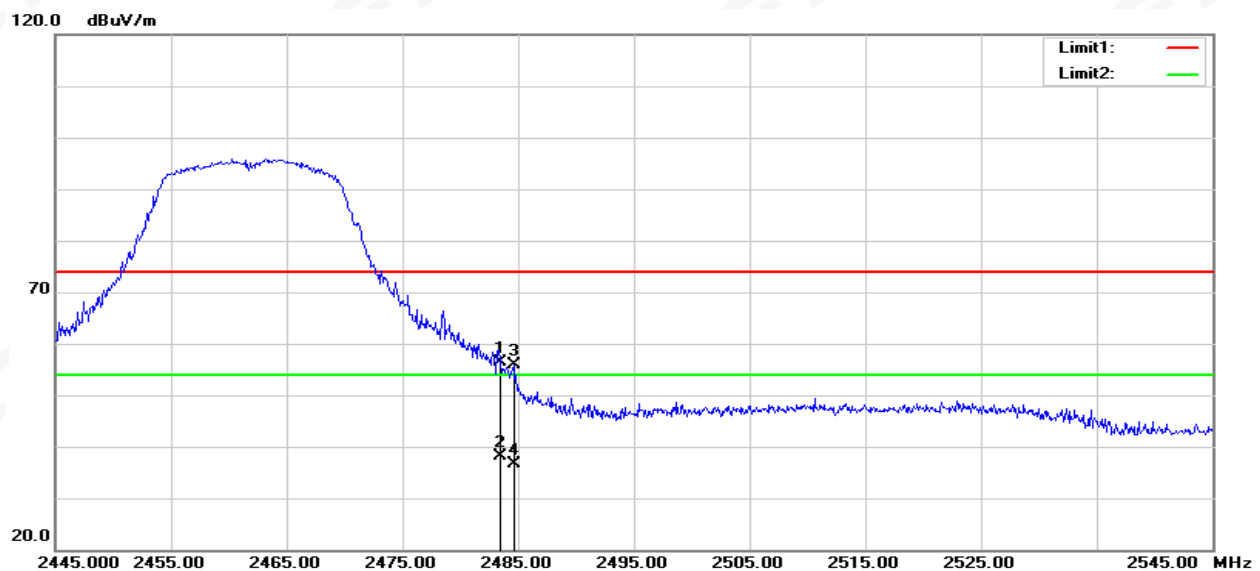

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	51.68	4.60	56.28	74.00	-17.72	peak
2	2483.500	33.50	4.60	38.10	54.00	-15.90	AVG
3	2484.600	51.26	4.61	55.87	74.00	-18.13	peak
4	2484.600	32.08	4.61	36.69	54.00	-17.31	AVG




PULSO-4
802.11 g-Low
Horizontal

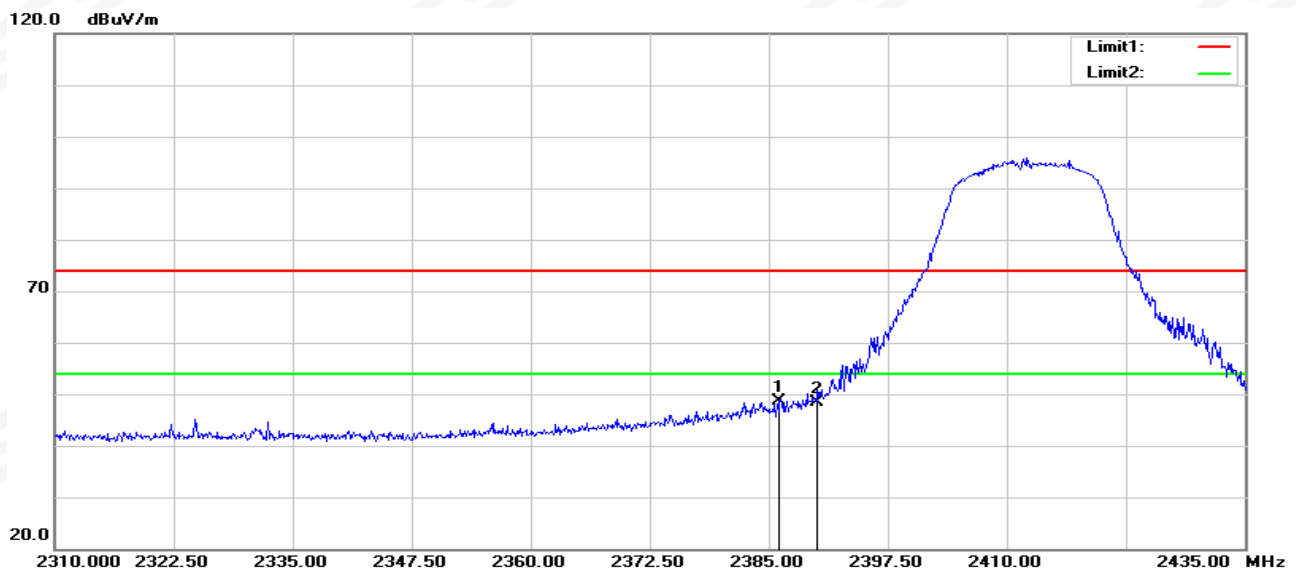

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.125	44.28	4.28	48.56	74.00	-25.44	peak
2	2390.000	44.01	4.34	48.35	74.00	-25.65	peak

Vertical

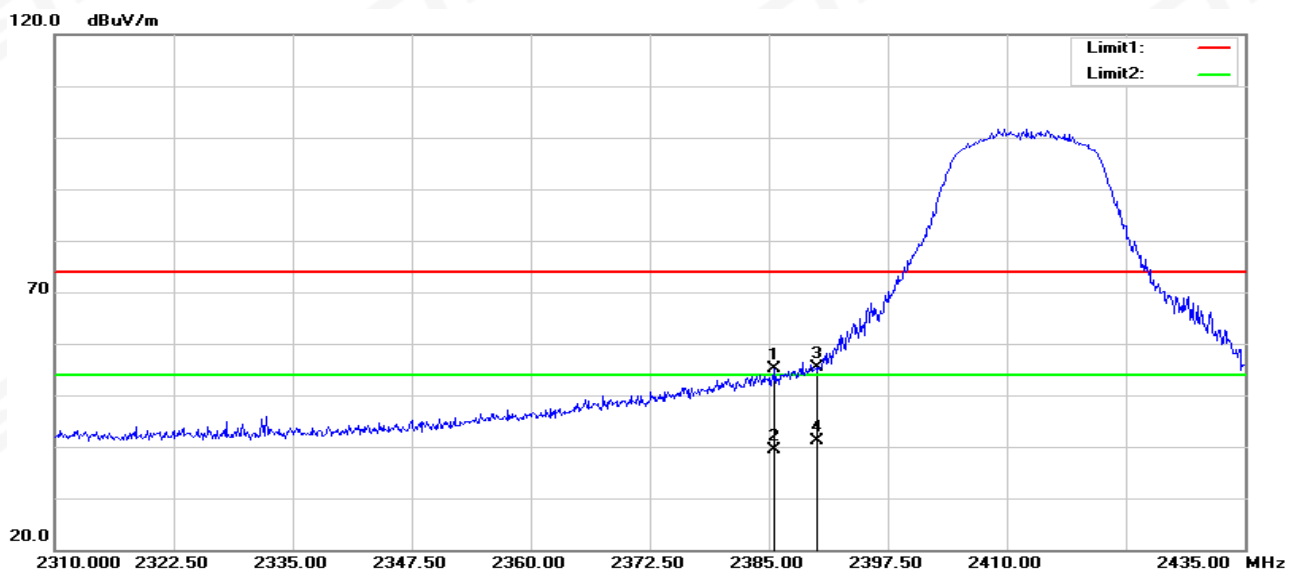


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.625	50.93	4.27	55.20	74.00	-18.80	peak
2	2385.625	35.12	4.27	39.39	54.00	-14.61	AVG
3	2390.000	51.06	4.34	55.40	74.00	-18.60	peak
4	2390.000	36.74	4.34	41.08	54.00	-12.92	AVG




802.11 g-High

Horizontal

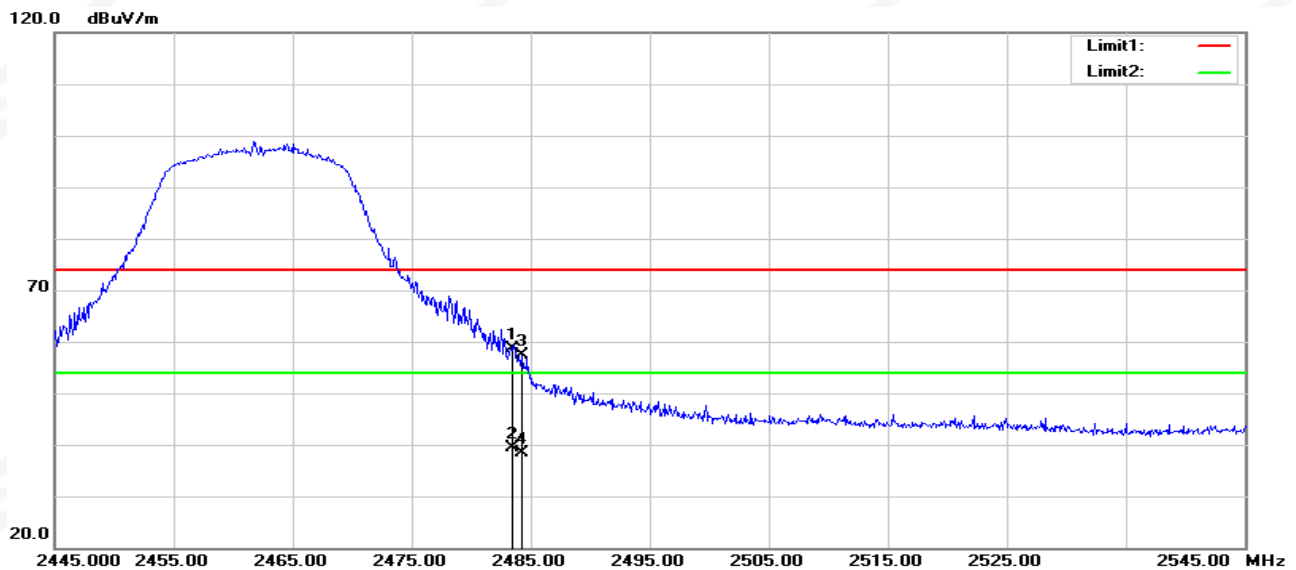

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	54.03	4.60	58.63	74.00	-15.37	peak
2	2483.500	34.69	4.60	39.29	54.00	-14.71	AVG
3	2484.300	52.69	4.61	57.30	74.00	-16.70	peak
4	2484.300	33.89	4.61	38.50	54.00	-15.50	AVG


Vertical

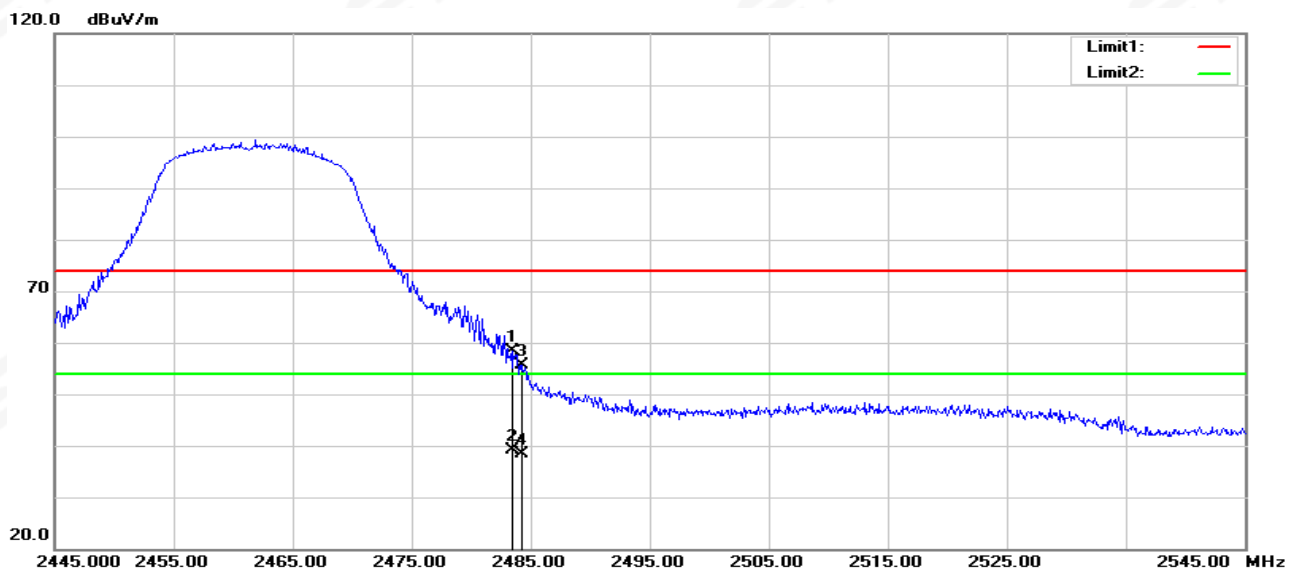

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	53.72	4.60	58.32	74.00	-15.68	peak
2	2483.500	34.61	4.60	39.21	54.00	-14.79	AVG
3	2484.200	51.13	4.61	55.74	74.00	-18.26	peak
4	2484.200	33.65	4.61	38.26	54.00	-15.74	AVG




PULSO-10
802.11 g-Low
Horizontal

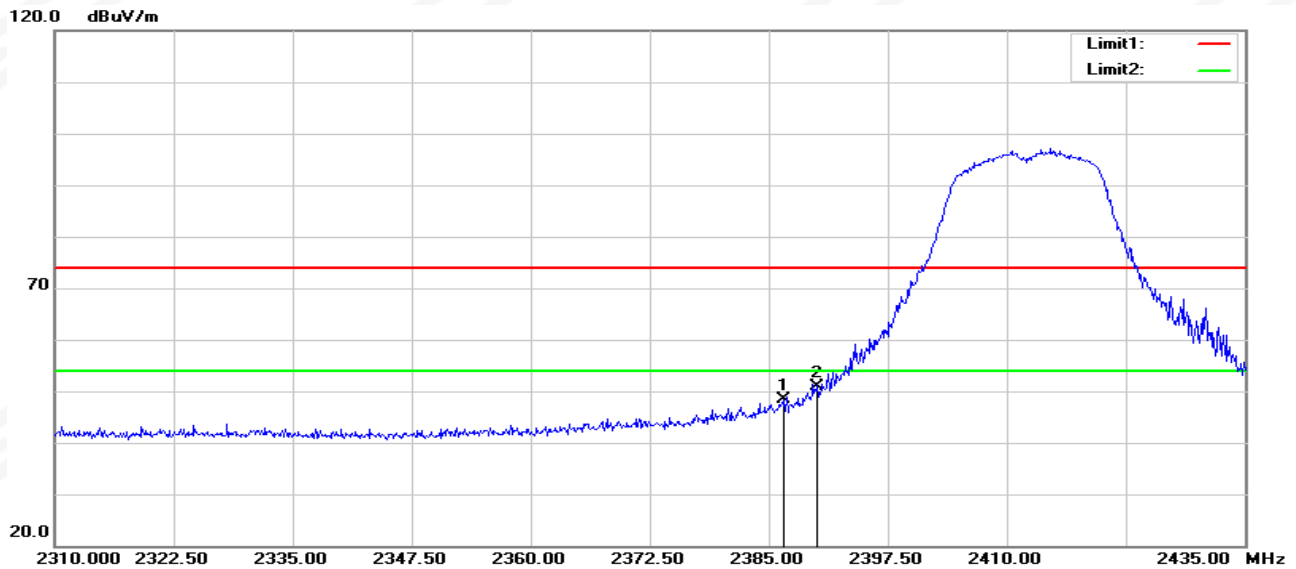

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.625	44.00	4.28	48.28	74.00	-25.72	peak
2	2390.000	46.42	4.34	50.76	74.00	-23.24	peak

Vertical

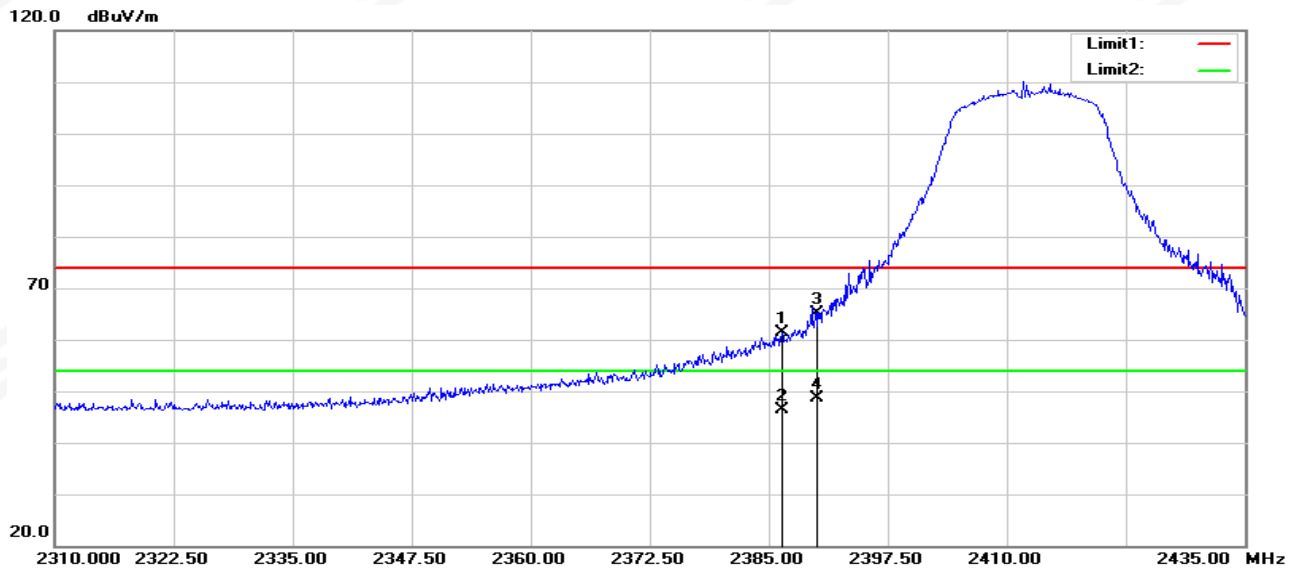


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.375	57.03	4.28	61.31	74.00	-12.69	peak
2	2386.375	42.04	4.28	46.32	54.00	-7.68	AVG
3	2390.000	60.70	4.34	65.04	74.00	-8.96	peak
4	2390.000	44.36	4.34	48.70	54.00	-5.30	AVG




802.11 g-High

Horizontal

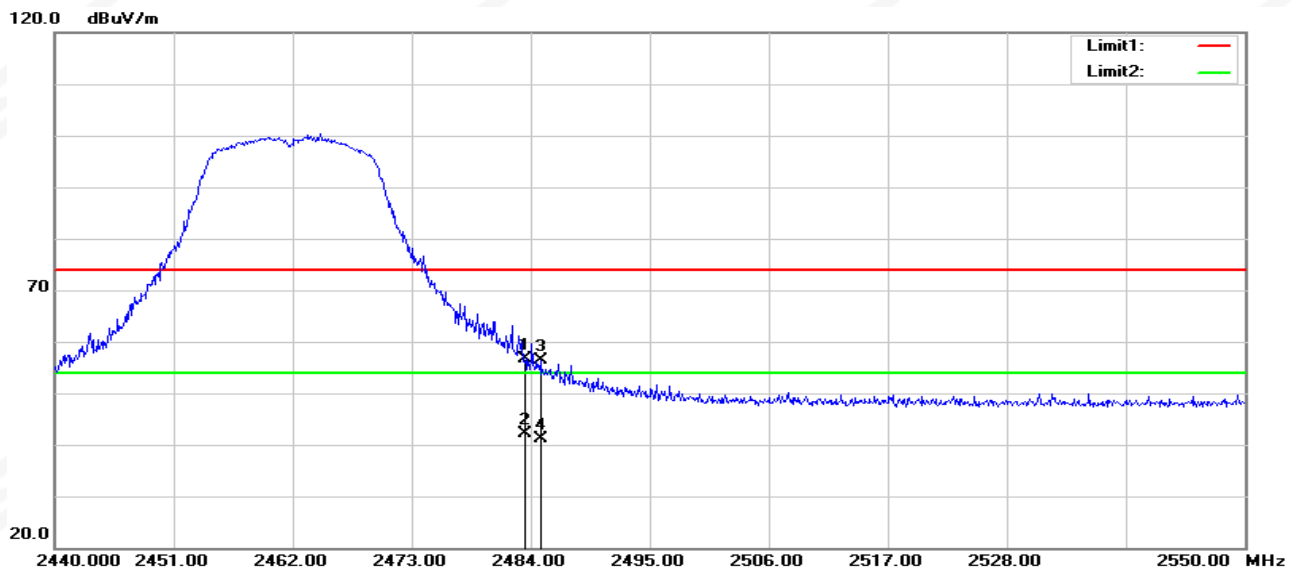

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	52.10	4.60	56.70	74.00	-17.30	peak
2	2483.500	37.59	4.60	42.19	54.00	-11.81	AVG
3	2484.880	51.74	4.61	56.35	74.00	-17.65	peak
4	2484.880	36.61	4.61	41.22	54.00	-12.78	AVG

Vertical

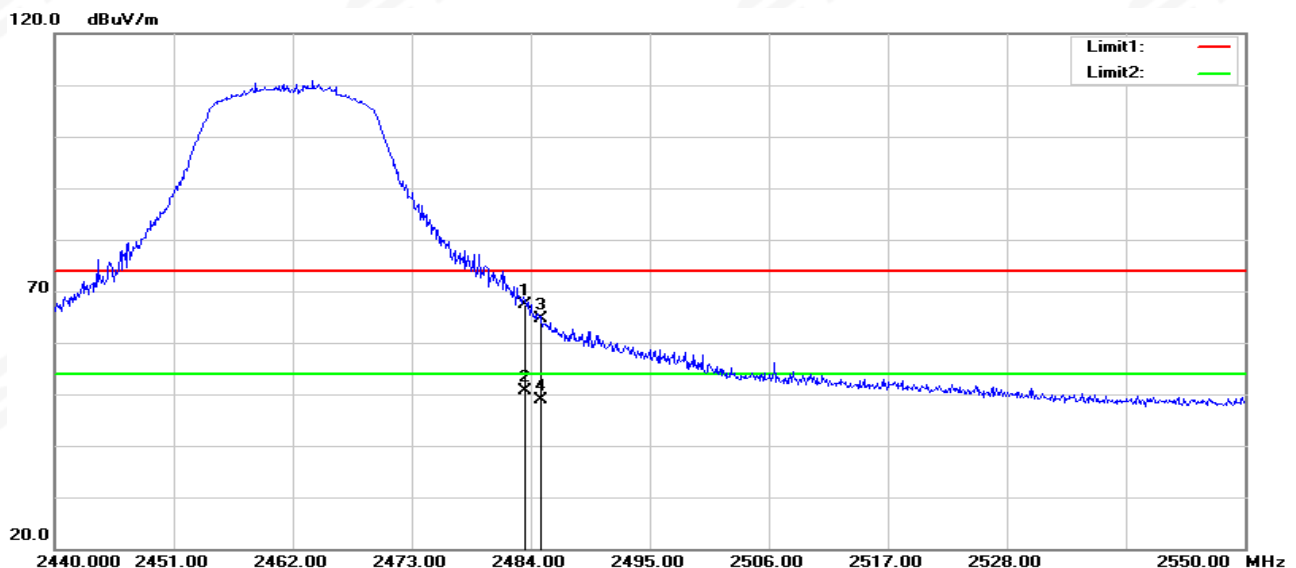

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	62.75	4.60	67.35	74.00	-6.65	peak
2	2483.500	45.97	4.60	50.57	54.00	-3.43	AVG
3	2484.990	59.97	4.61	64.58	74.00	-9.42	peak
4	2484.990	44.15	4.61	48.76	54.00	-5.24	AVG

Note: All modes have been measurement, only worst mode was reported.



4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

4.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 to 2432 MHz Upper Band Edge: 2442 to 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

4.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

4.6 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



5. POWER SPECTRAL DENSITY TEST

5.1 LIMIT

FCC Part15.247 , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	≤ 8 dBm (RBW ≥ 3 KHz)	2400-2483.5	PASS

5.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$.
4. Set the $\text{VBW} \geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

5.6 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



6. BANDWIDTH TEST

6.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

6.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW $\geq$ 3RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

6.6 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



7. PEAK OUTPUT POWER TEST

7.1 LIMIT

FCC Part15.247,Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

7.2 TEST PROCEDURE

One of the following procedures may be used to determine the averaging conducted output power of a DTS EUT.

Method AVGSA-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction. The procedure for this method is as follows:

- Measure the duty cycle D of the transmitter output signal as described in 11.6.
- Set span to at least 1.5 times the OBW.
- Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use the sample detector mode.
- Do not use sweep triggering. Allow the sweep to "free run."
- Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is 25%.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the

DTS bandwidth:

- Set the RBW = 1 MHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Set the span $\geq [1.5 \times \text{DTS bandwidth}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.


PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

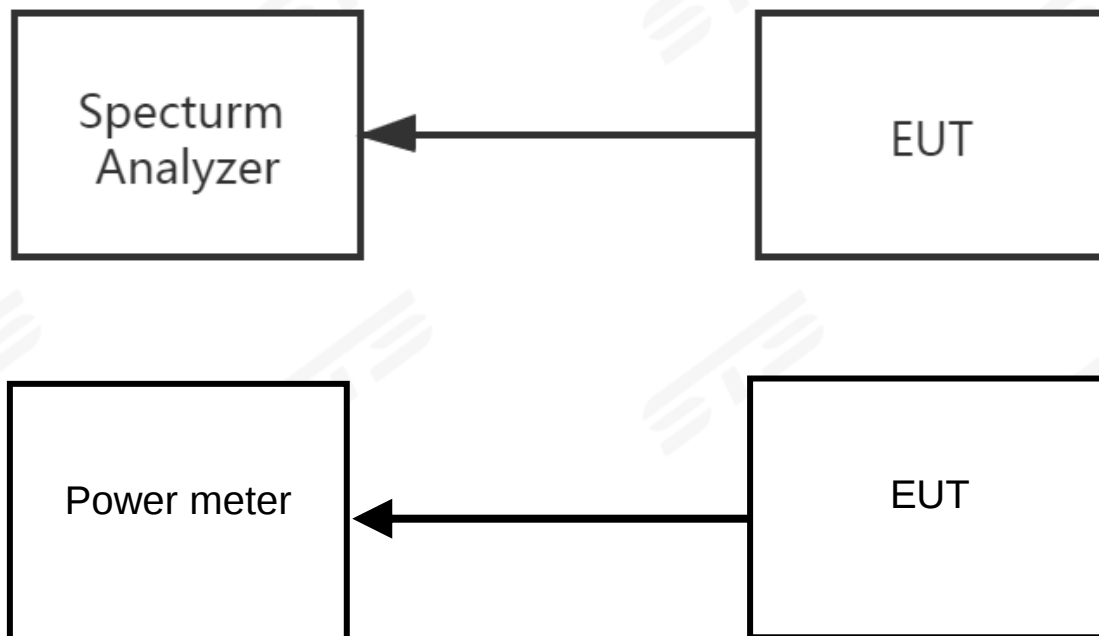

7.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

7.6 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is FPC Antenna. It comply with the standard requirement.



APPENDIX 1-TEST DATA


1. Duty Cycle

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	98.88	0.05	0.12
NVNT	b	2437	98.88	0.05	0.12
NVNT	b	2462	98.88	0.05	0.12
NVNT	g	2412	93.25	0.3	0.72
NVNT	g	2437	93.32	0.3	0.72
NVNT	g	2462	93.39	0.3	0.72
NVNT	n20	2412	92.83	0.32	0.76
NVNT	n20	2437	92.9	0.32	0.76
NVNT	n20	2462	92.9	0.32	0.76





Test Graphs


Duty Cycle NVNT b 2412MHz

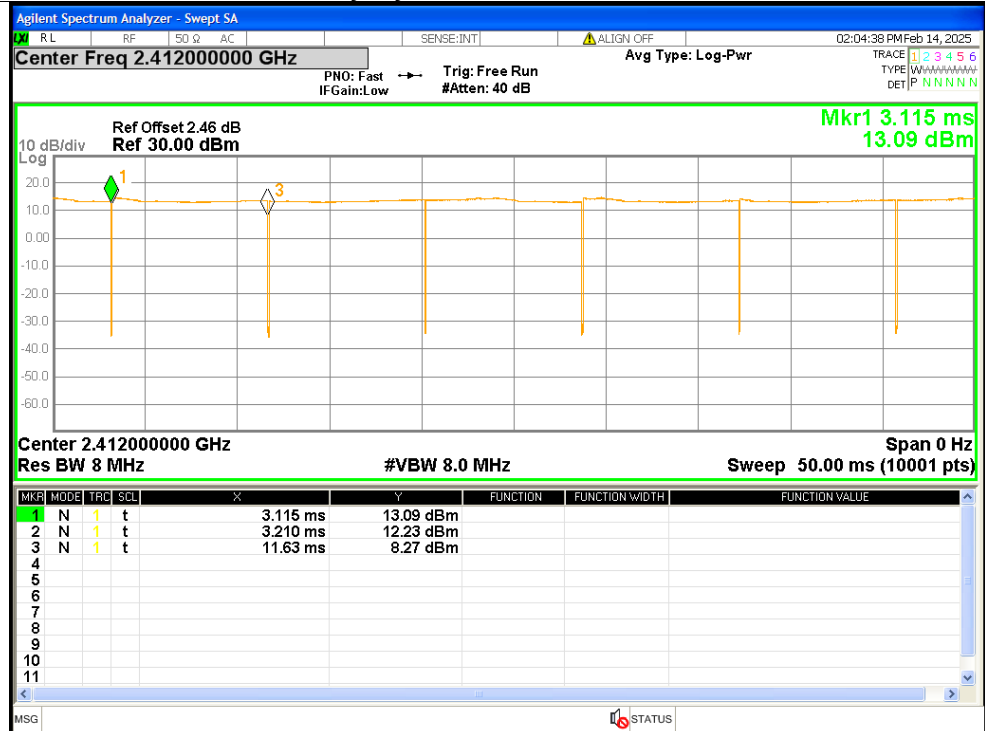

Duty Cycle NVNT b 2437MHz

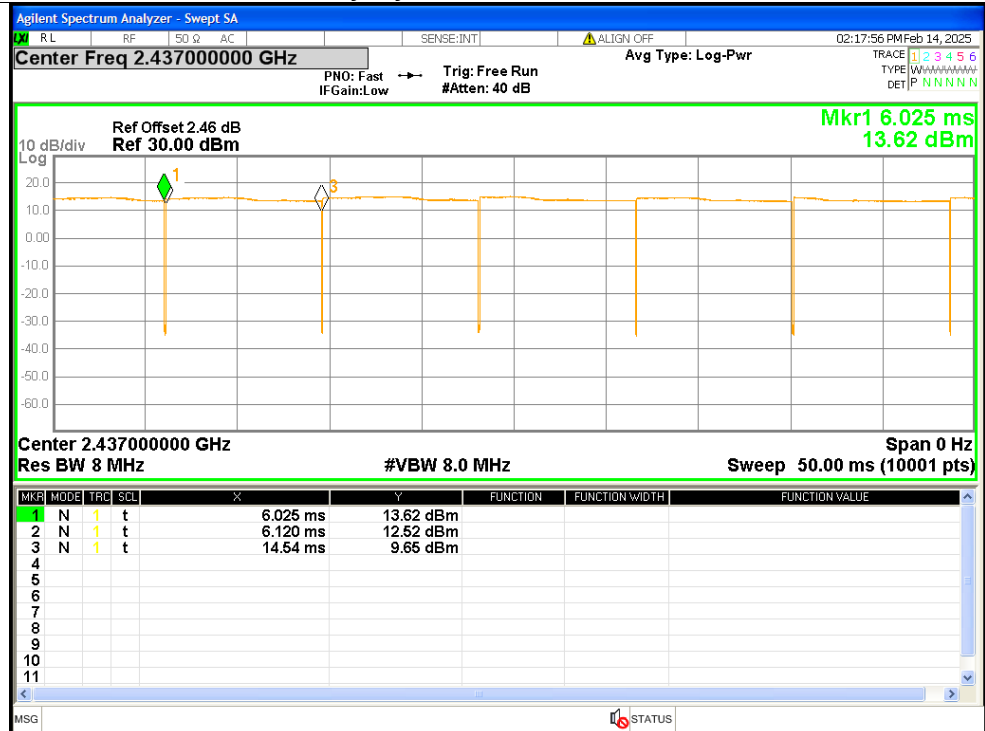


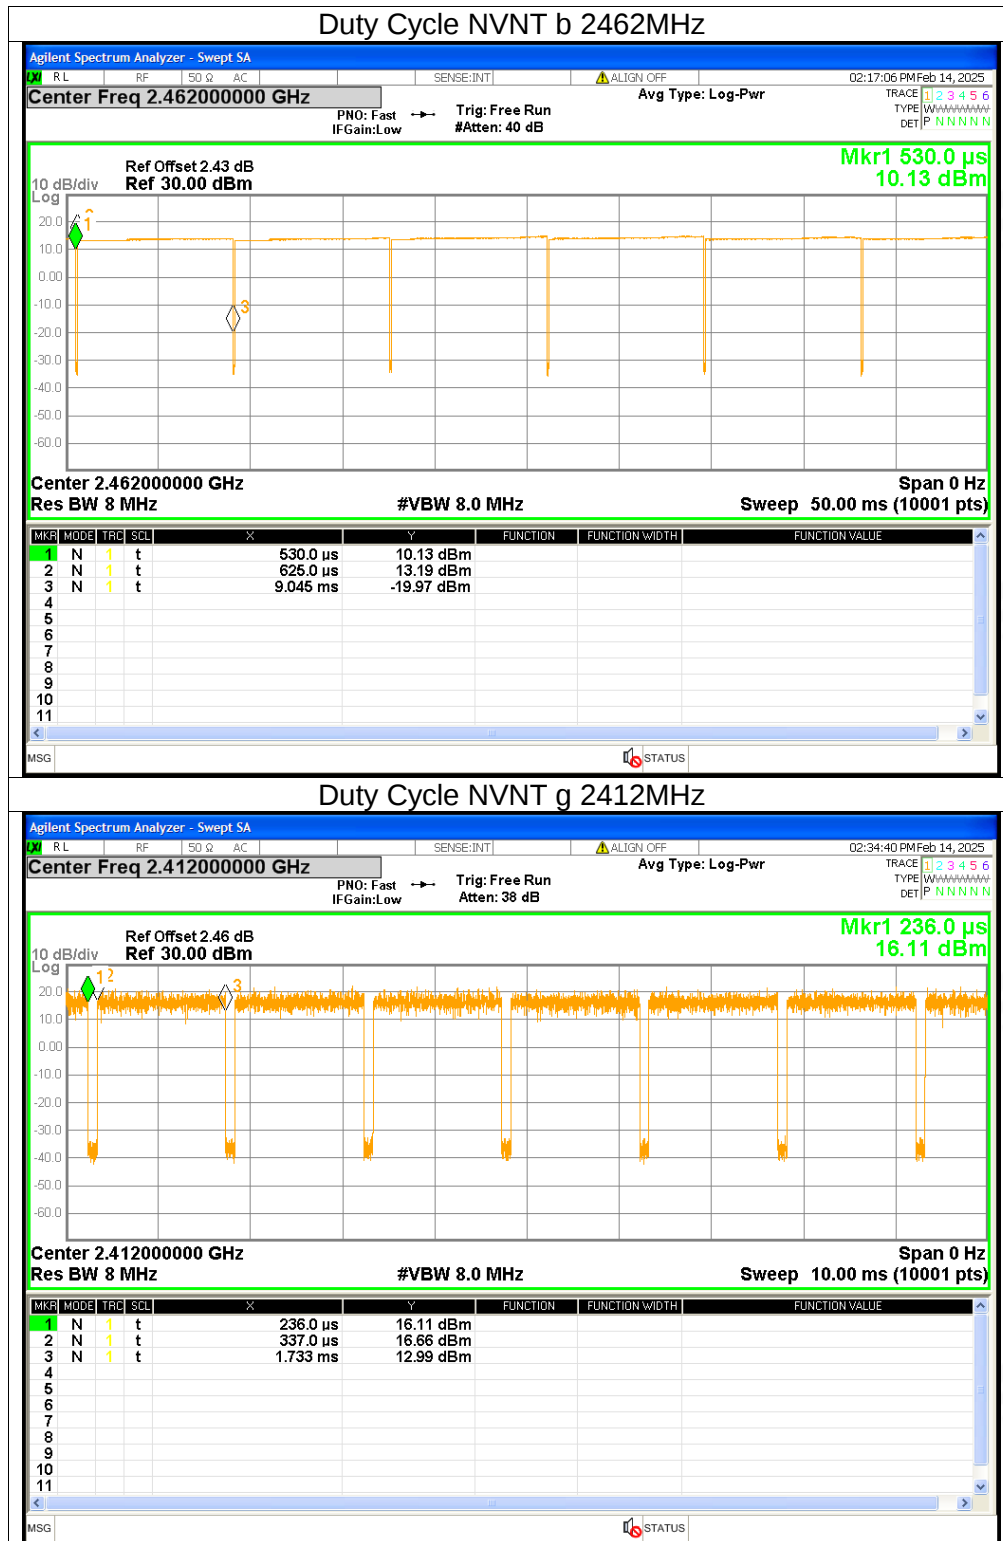

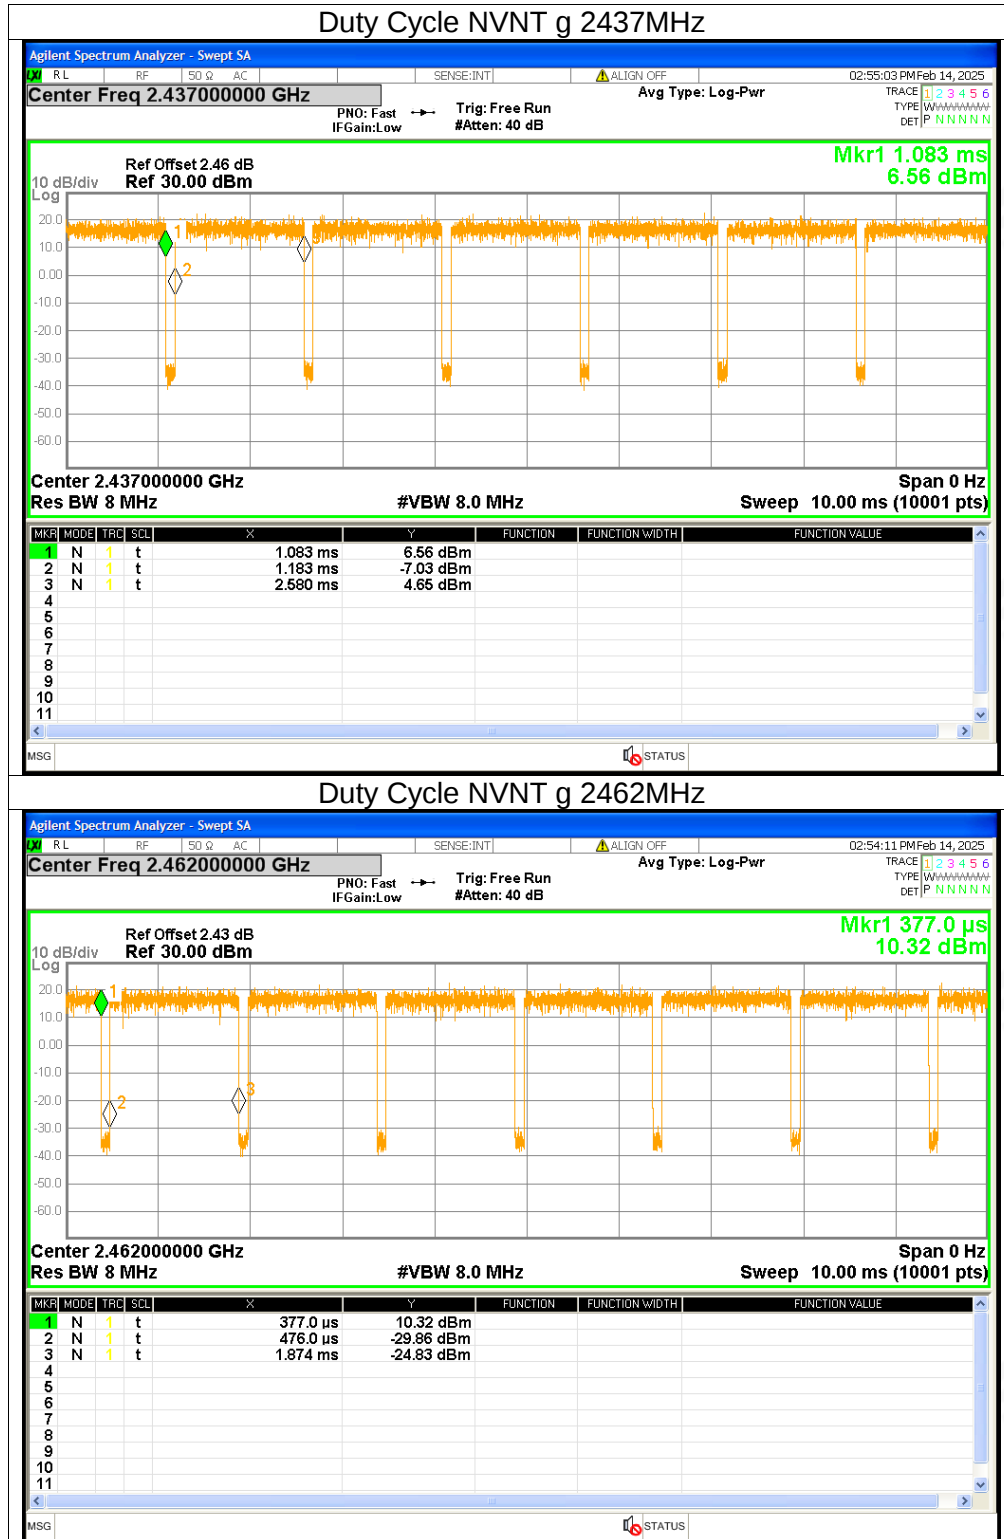





Duty Cycle NVNT n20 2412MHz

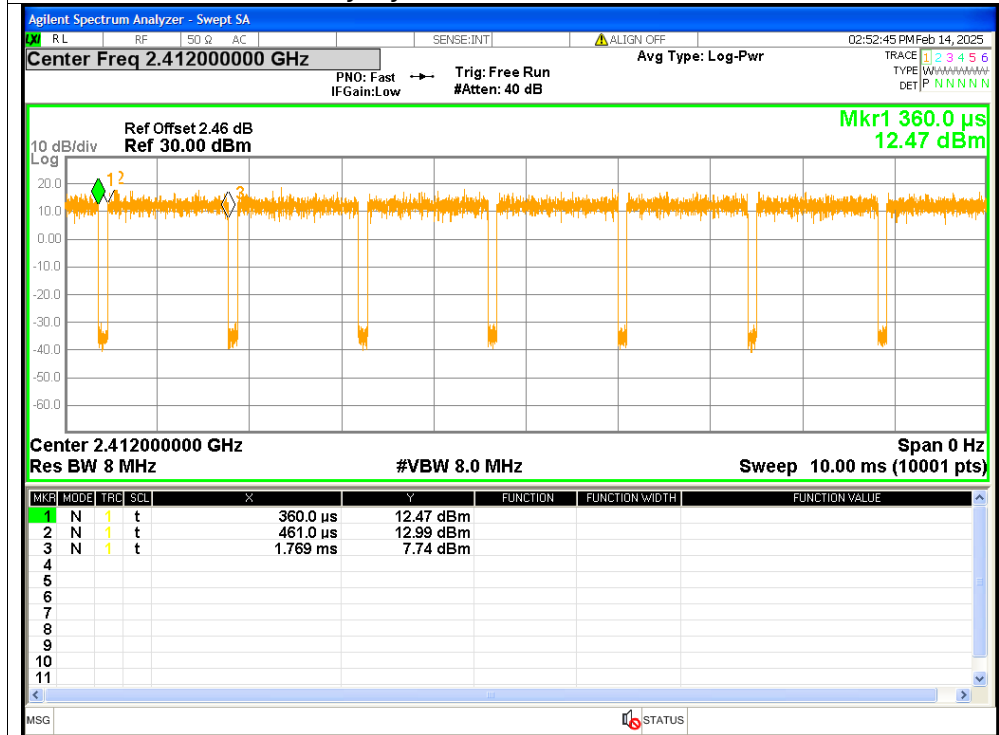

Duty Cycle NVNT n20 2437MHz

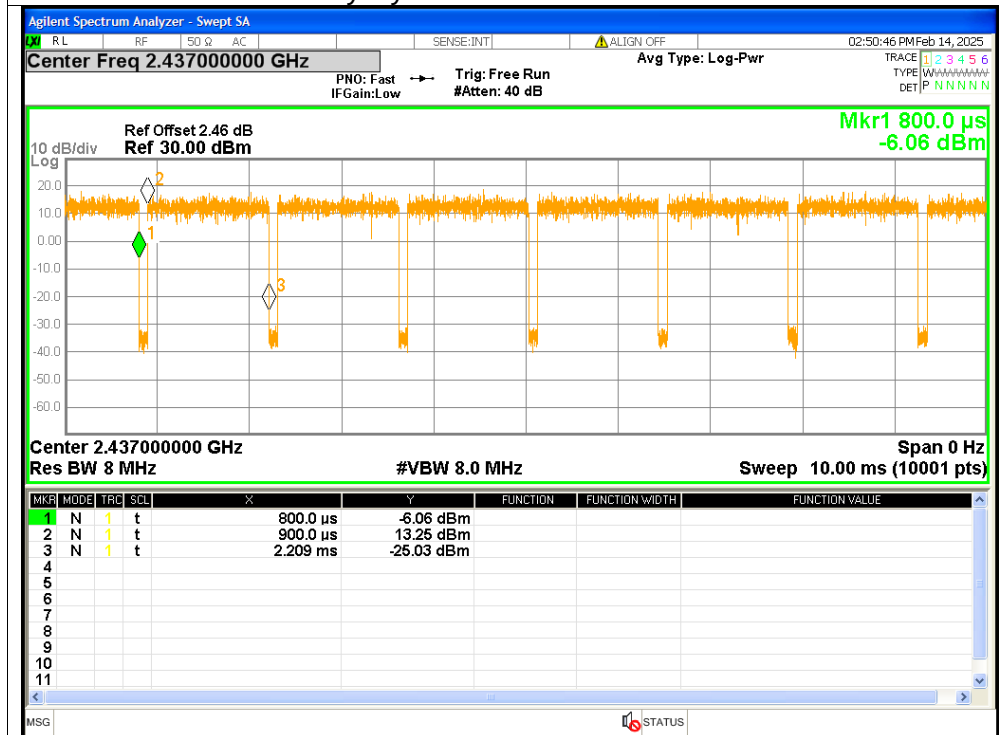


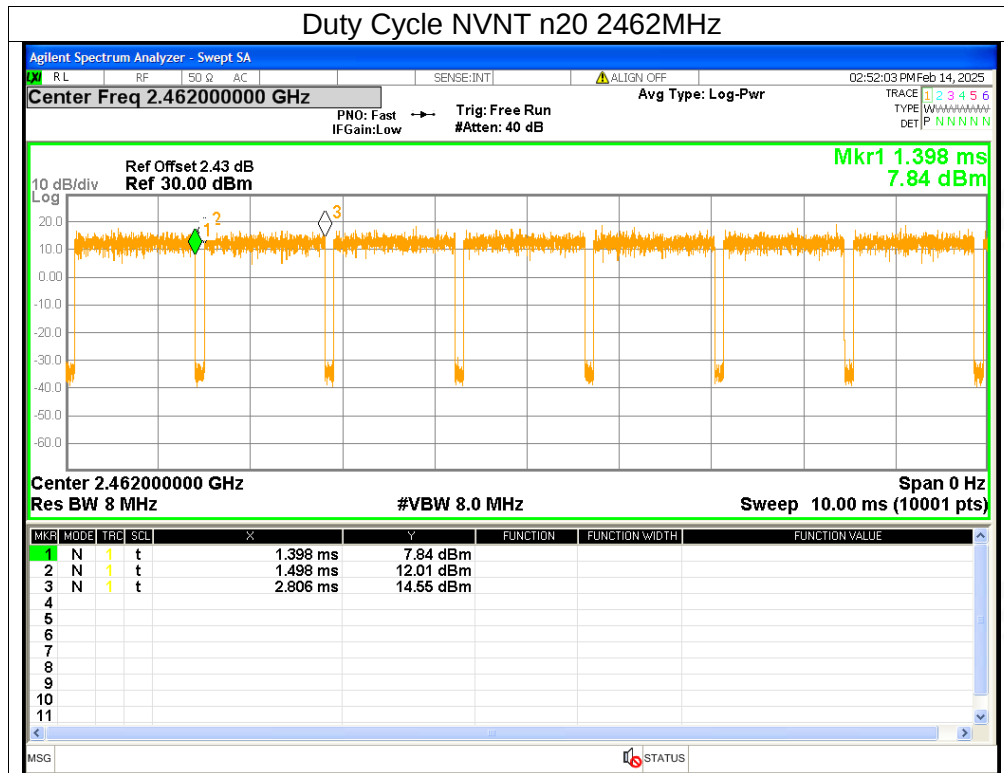






2. Maximum Average Conducted Output Power


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	9.84	0.05	9.89	<=30	Pass
NVNT	b	2437	10.21	0.05	10.26	<=30	Pass
NVNT	b	2462	10	0.05	10.05	<=30	Pass
NVNT	g	2412	13.97	0.3	14.27	<=30	Pass
NVNT	g	2437	14.06	0.3	14.36	<=30	Pass
NVNT	g	2462	14.24	0.3	14.54	<=30	Pass
NVNT	n20	2412	10.03	0.32	10.35	<=30	Pass
NVNT	n20	2437	10.16	0.32	10.48	<=30	Pass
NVNT	n20	2462	10.17	0.32	10.49	<=30	Pass

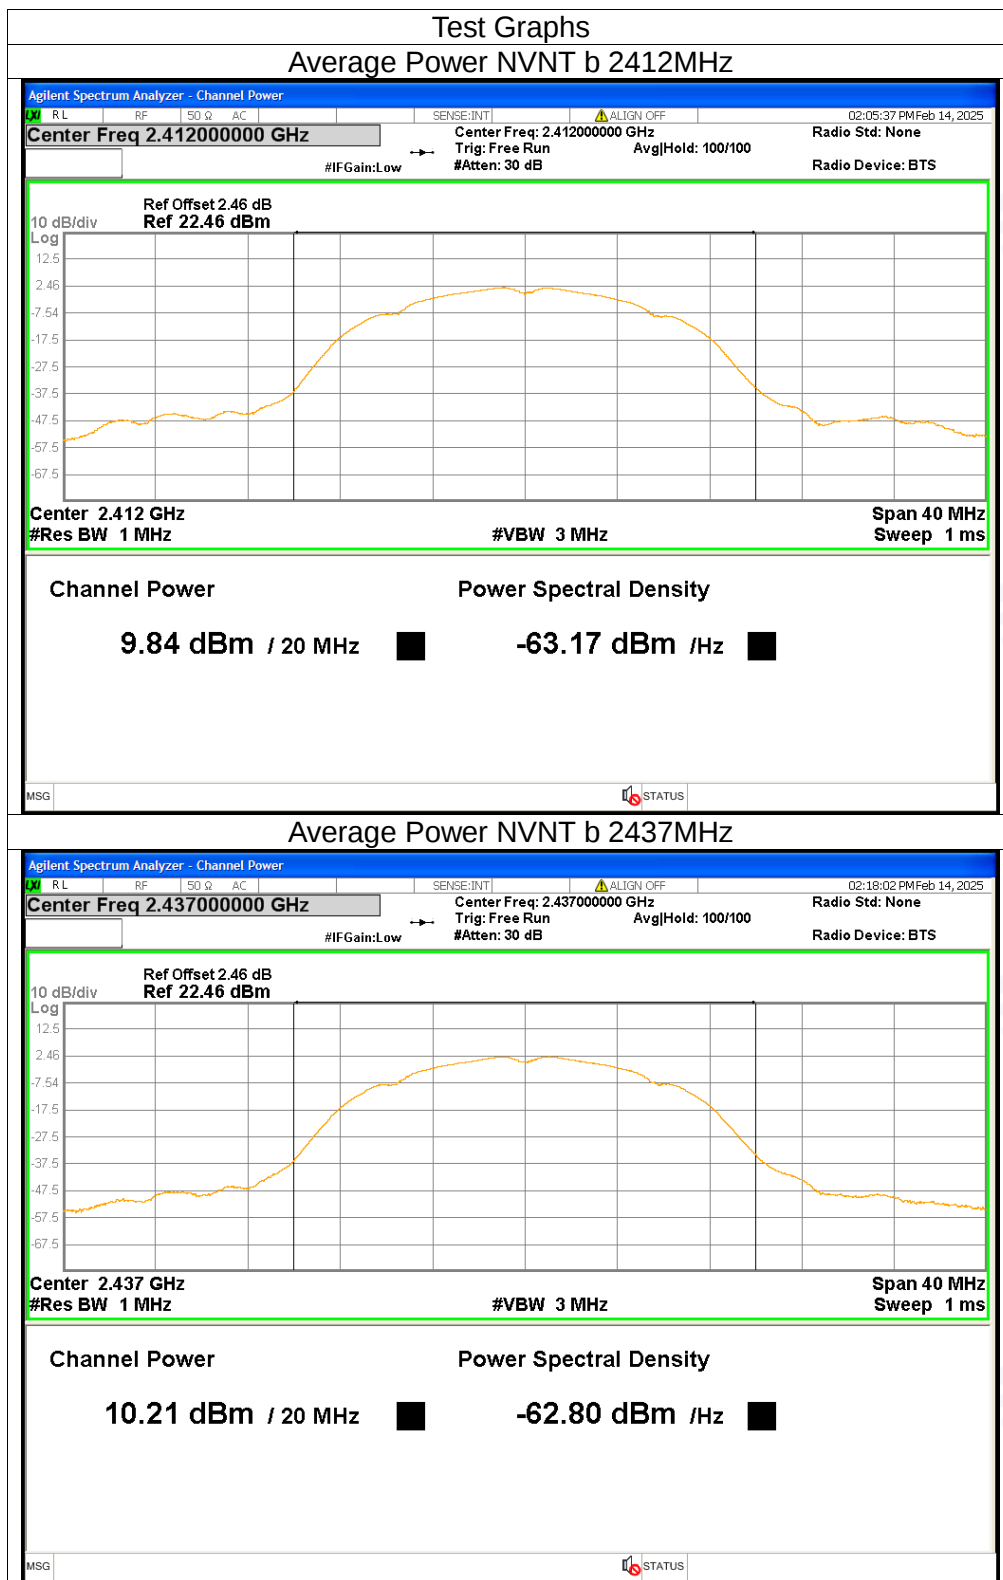

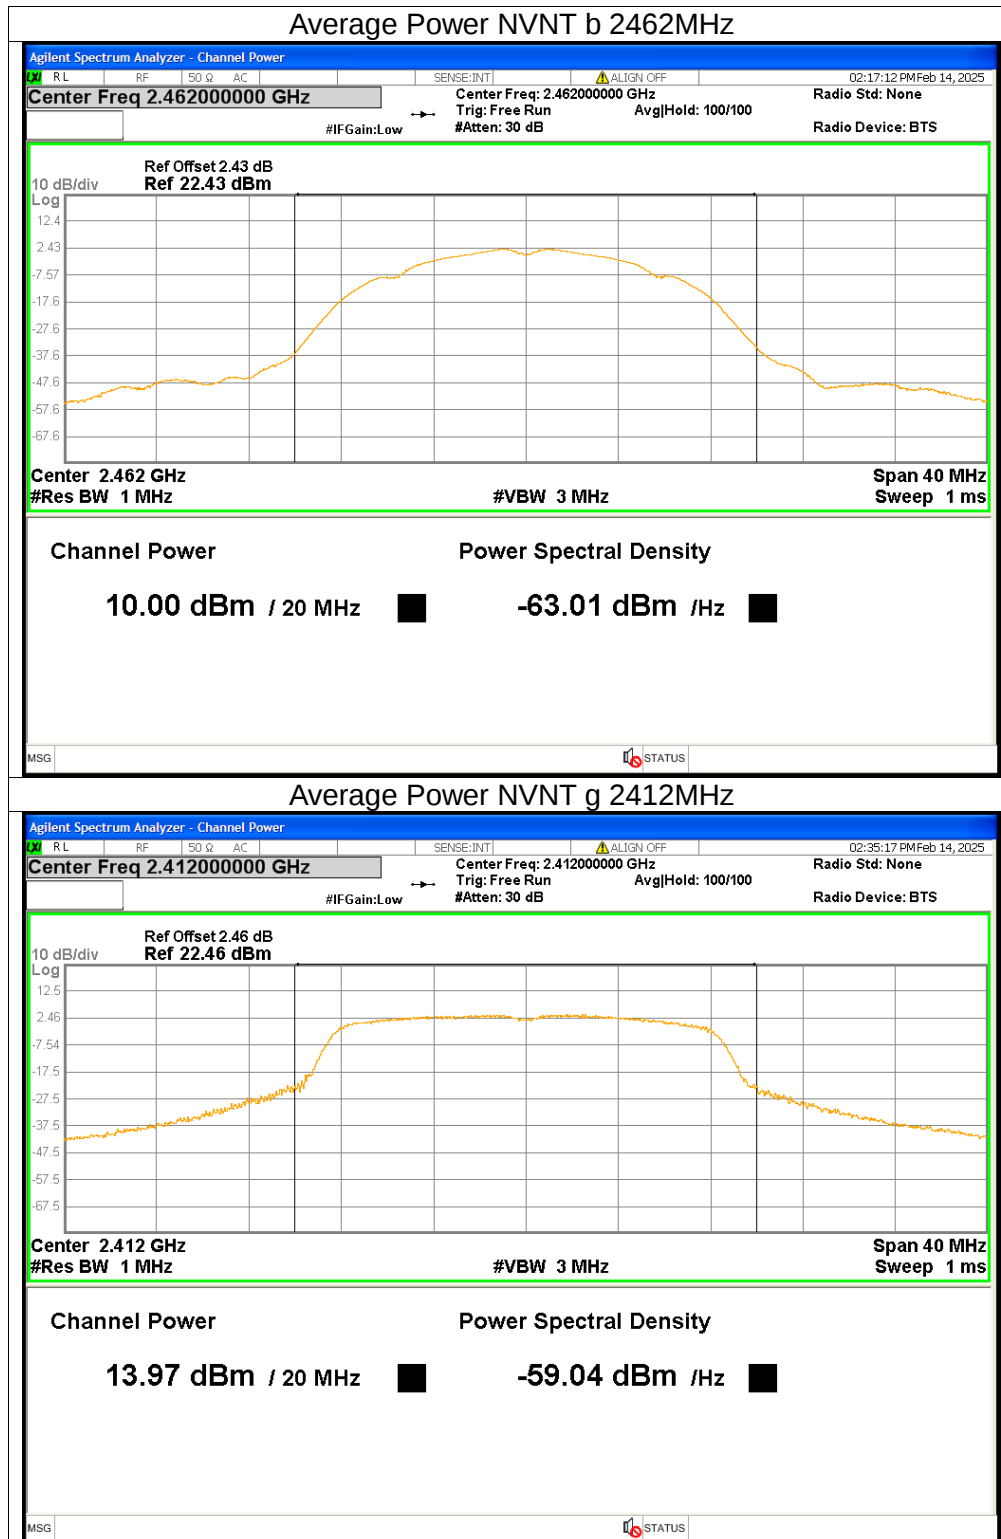

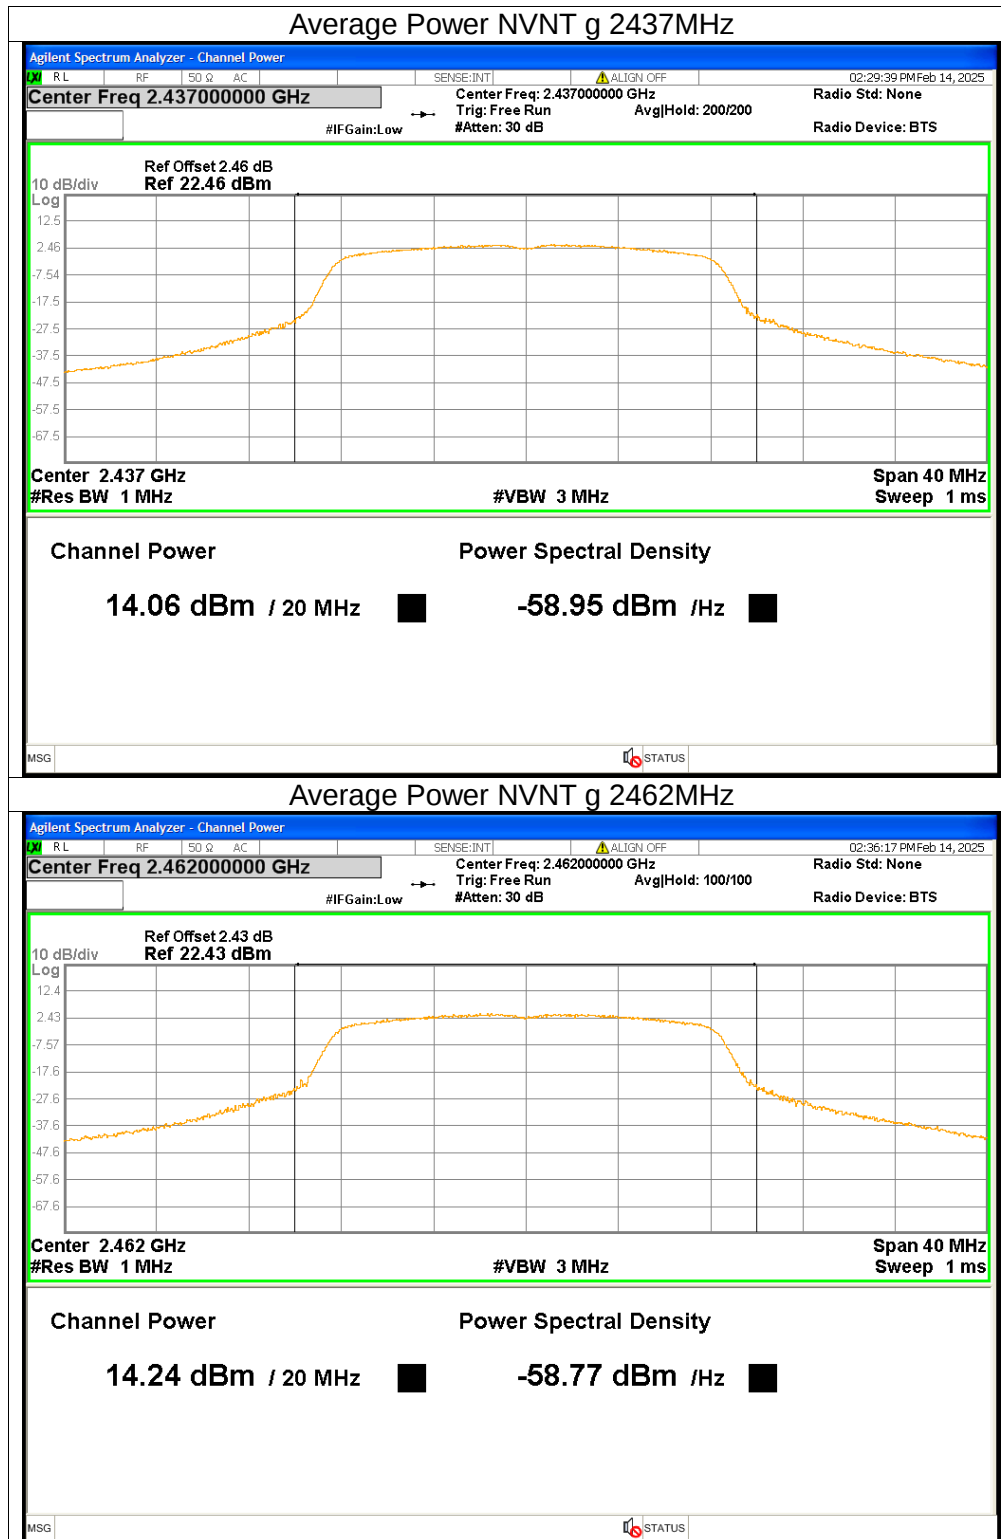

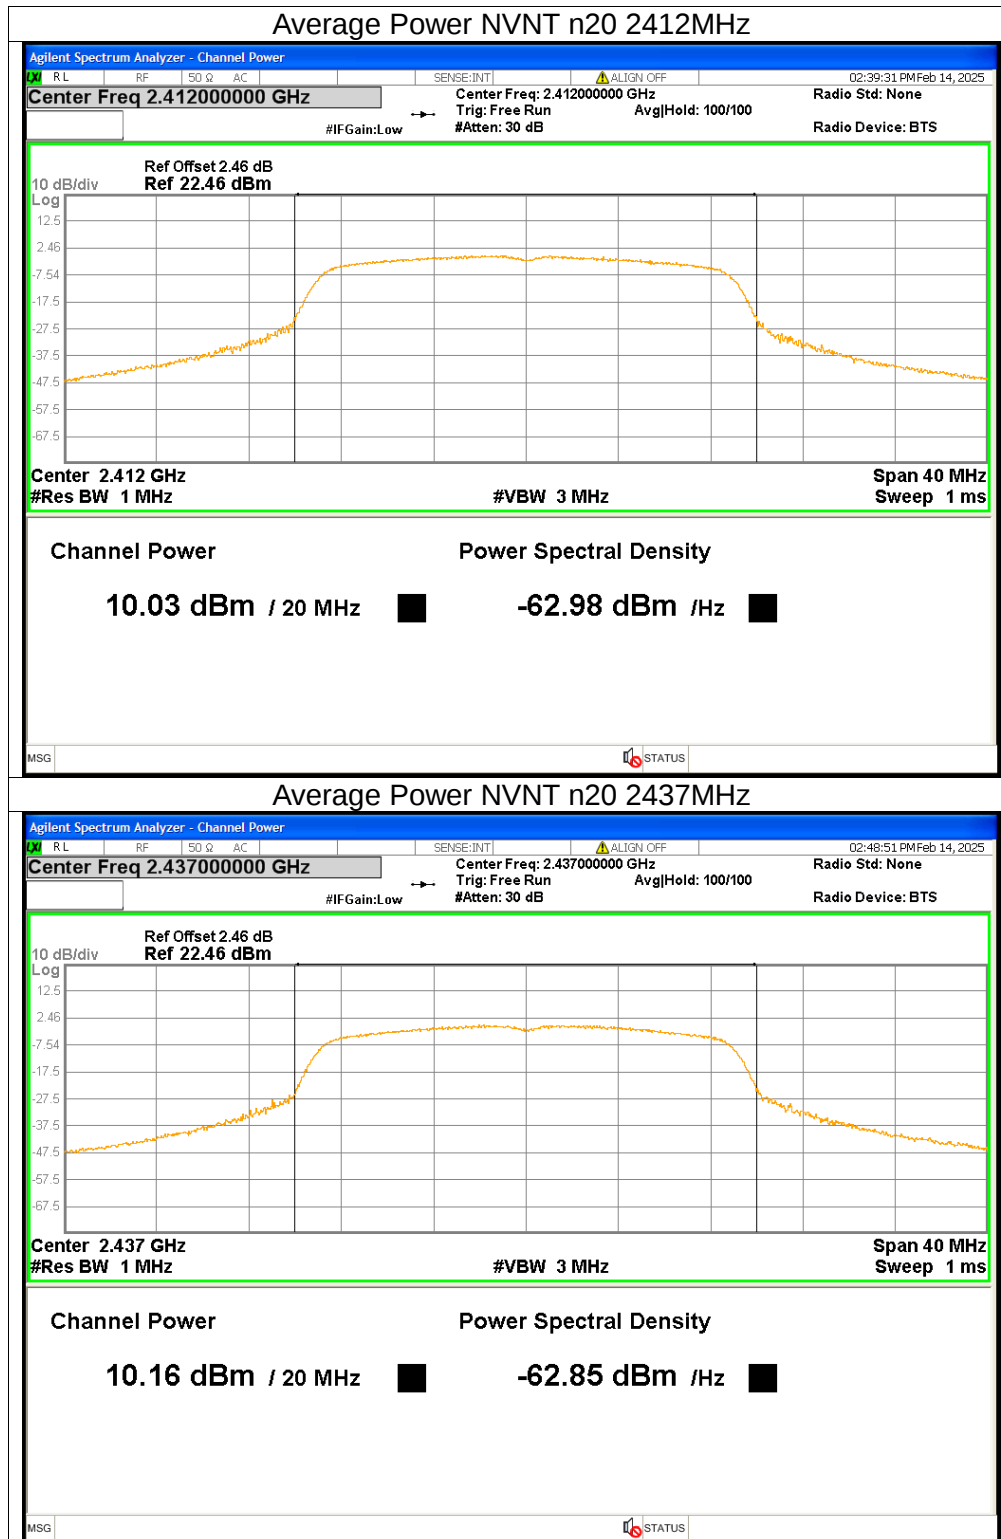

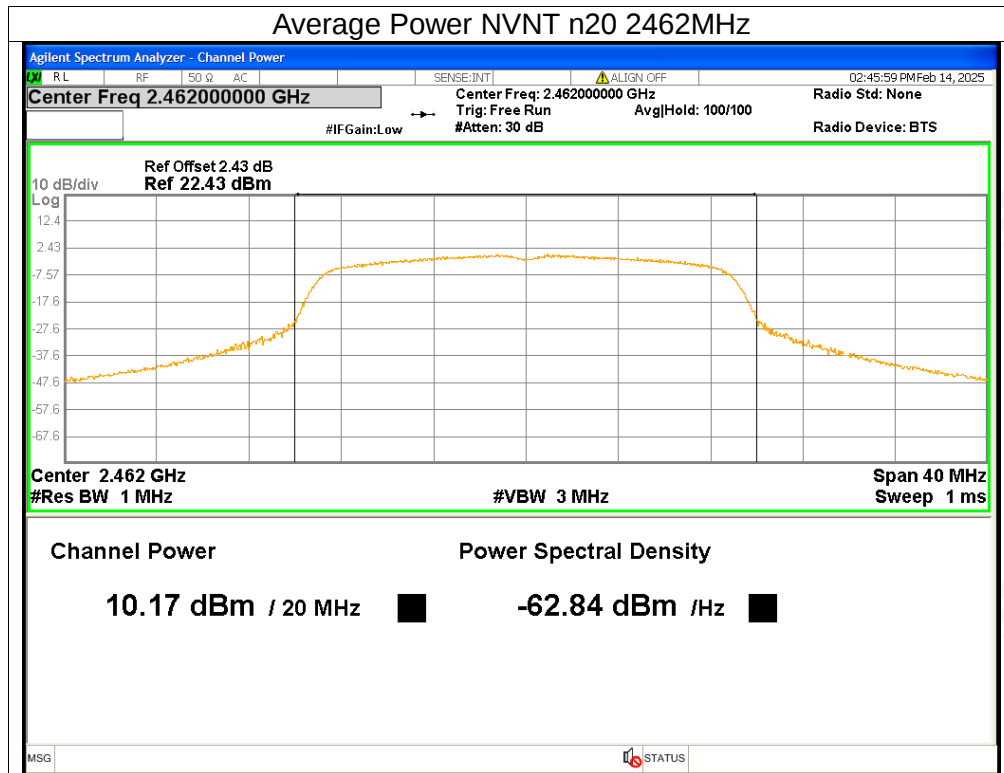




3. Maximum Peak Conducted Output Power


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	13.09	<=30	Pass
NVNT	b	2437	12.87	<=30	Pass
NVNT	b	2462	13.15	<=30	Pass
NVNT	g	2412	21.43	<=30	Pass
NVNT	g	2437	21.67	<=30	Pass
NVNT	g	2462	21.65	<=30	Pass
NVNT	n20	2412	17.48	<=30	Pass
NVNT	n20	2437	17.57	<=30	Pass
NVNT	n20	2462	17.68	<=30	Pass






4. -6dB Bandwidth


Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	8.5984	≥ 0.5	Pass
NVNT	b	2437	9.0648	≥ 0.5	Pass
NVNT	b	2462	9.0766	≥ 0.5	Pass
NVNT	g	2412	15.9793	≥ 0.5	Pass
NVNT	g	2437	15.8247	≥ 0.5	Pass
NVNT	g	2462	15.6414	≥ 0.5	Pass
NVNT	n20	2412	16.078	≥ 0.5	Pass
NVNT	n20	2437	15.7115	≥ 0.5	Pass
NVNT	n20	2462	15.5644	≥ 0.5	Pass

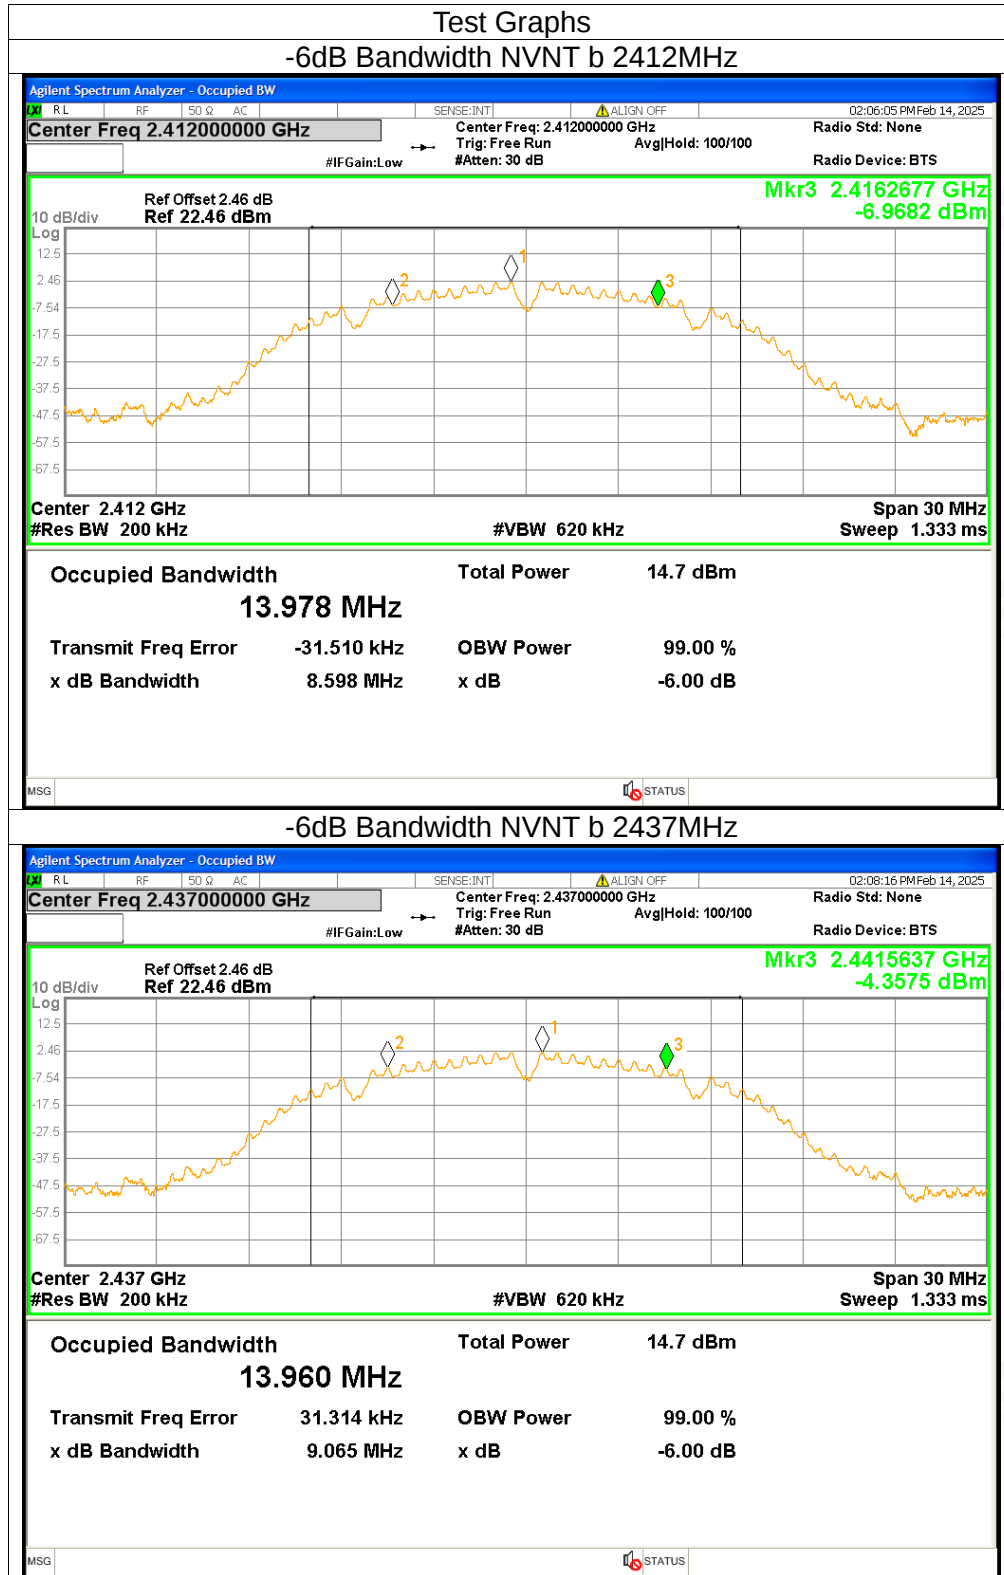

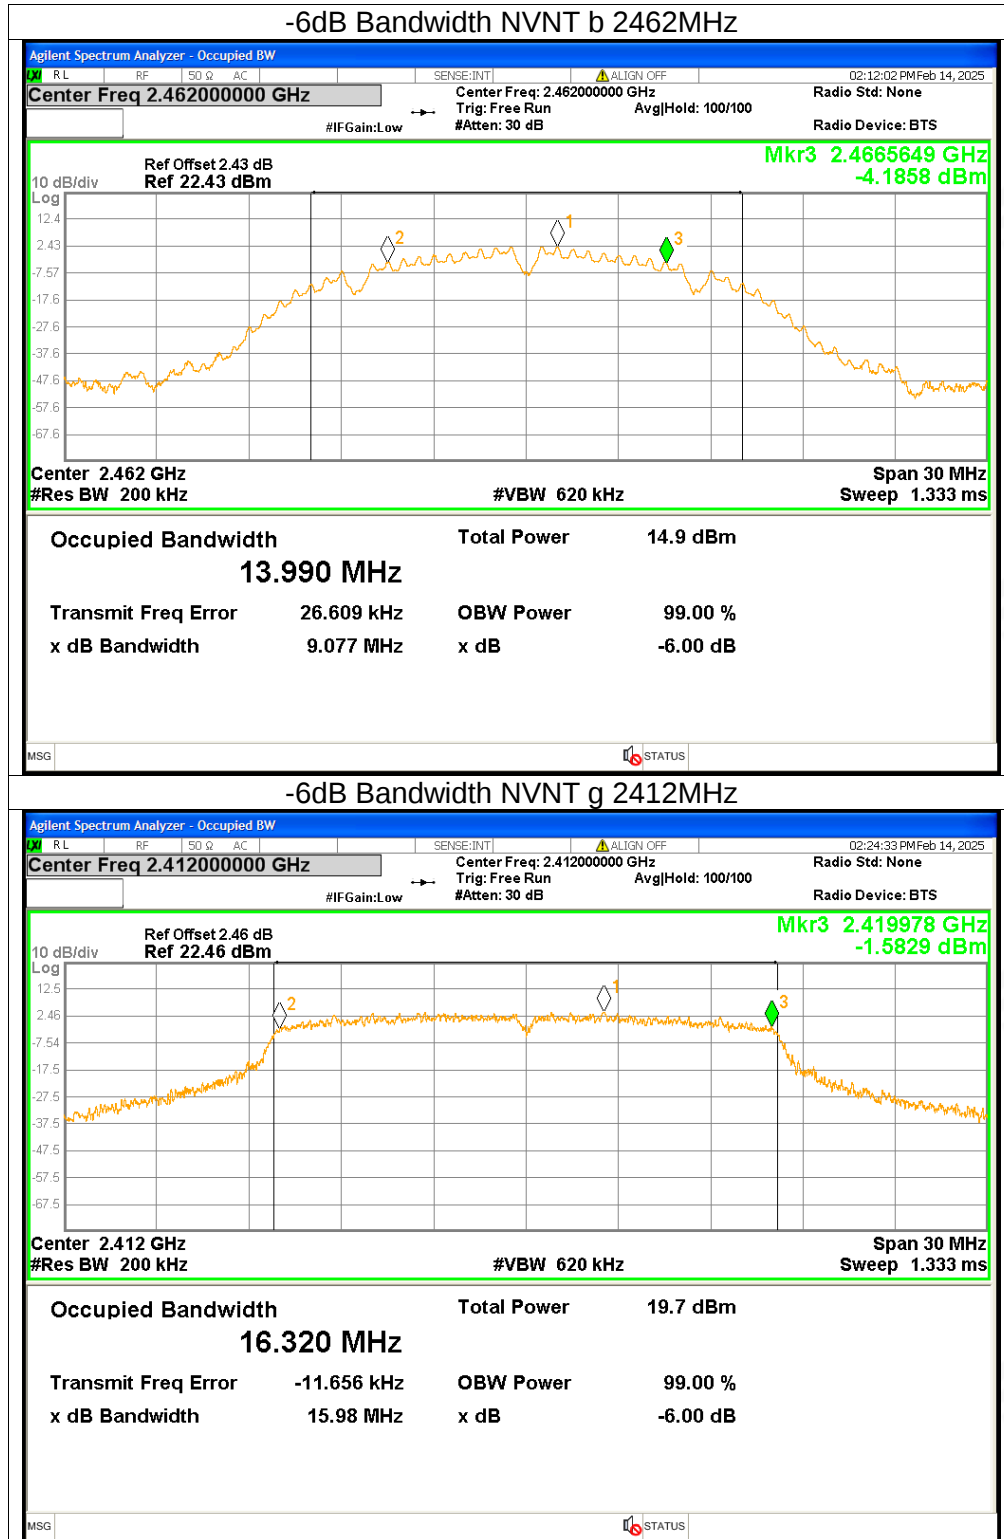

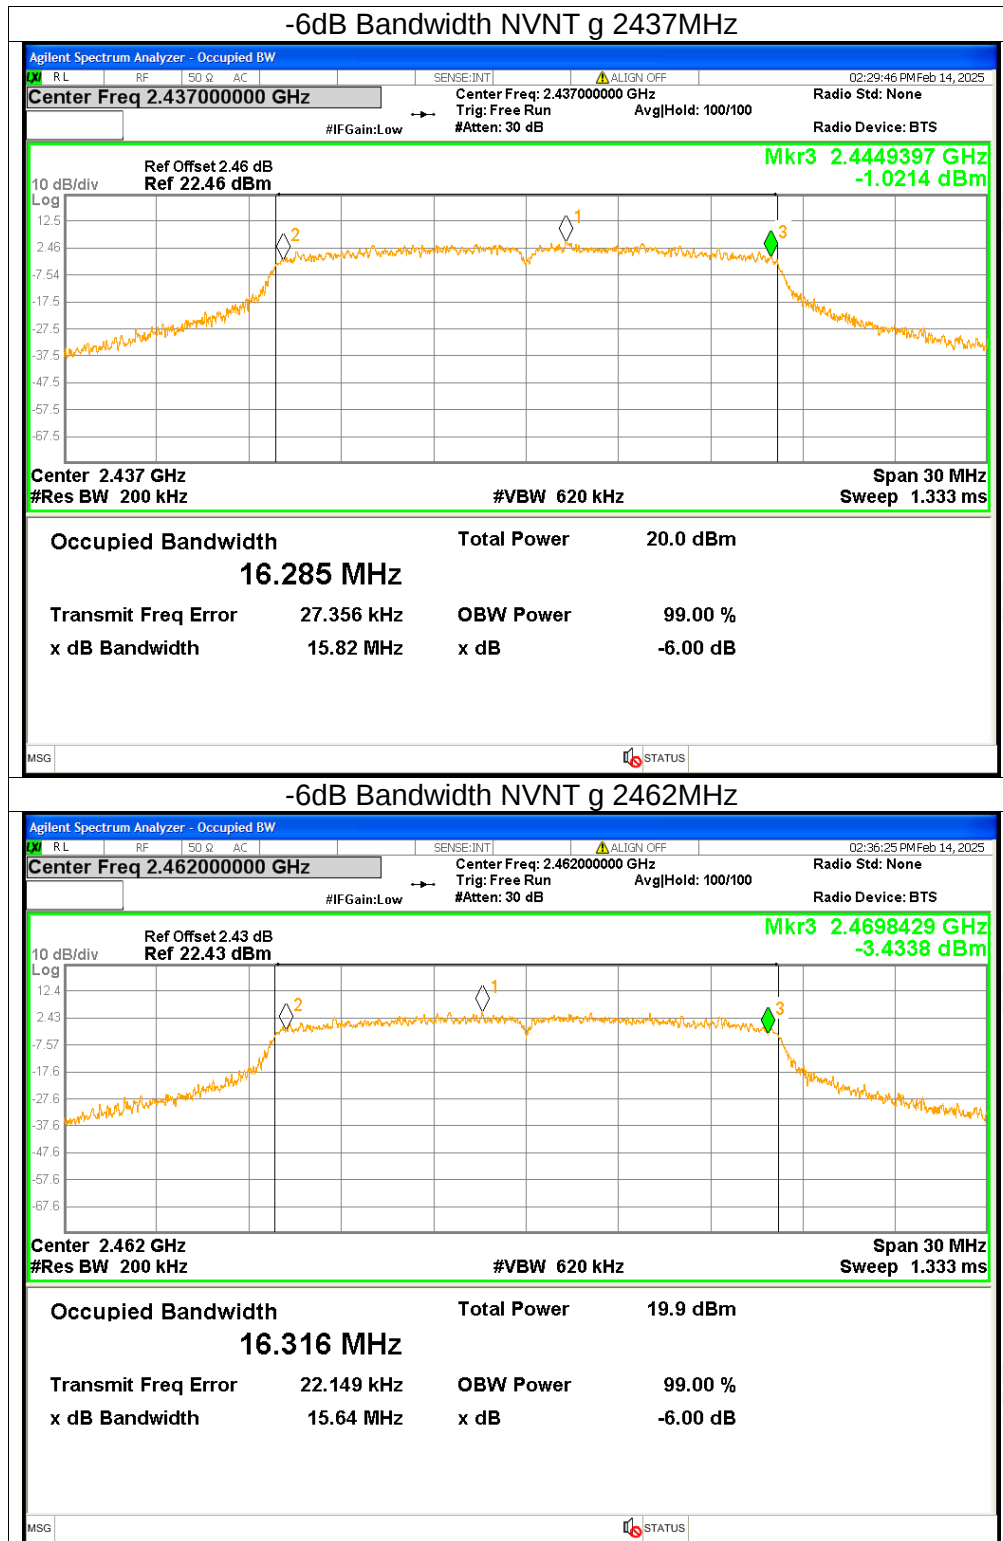

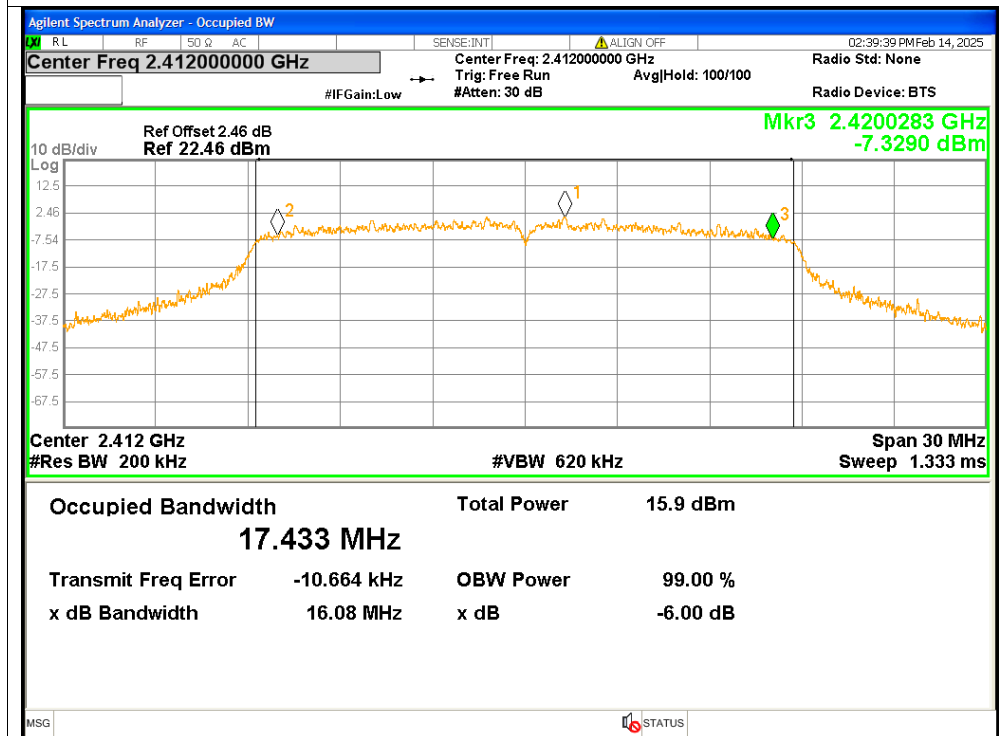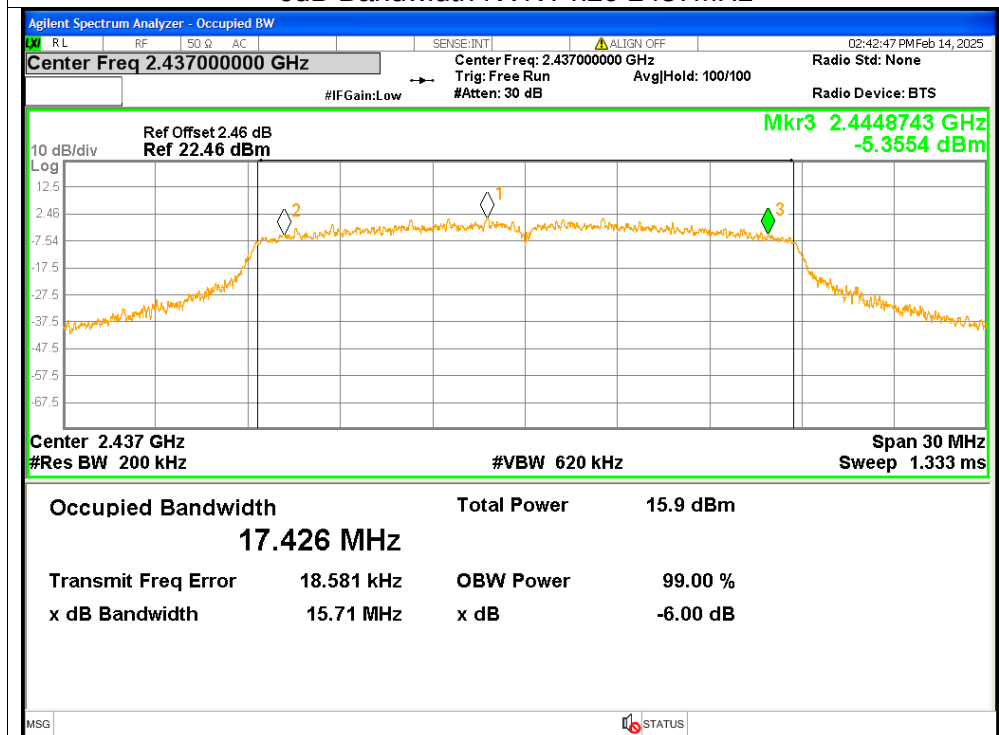
**-6dB Bandwidth NVNT n20 2412MHz****-6dB Bandwidth NVNT n20 2437MHz**

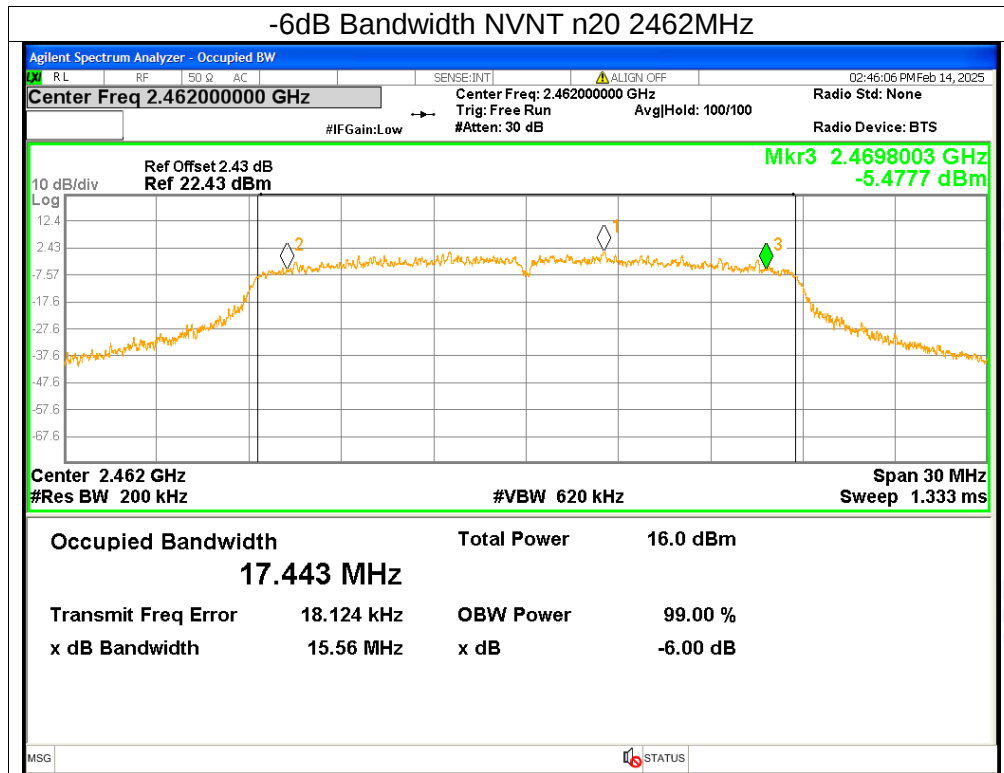






5. Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	-12.44	≤ 8	Pass
NVNT	b	2437	-11.73	≤ 8	Pass
NVNT	b	2462	-11.99	≤ 8	Pass
NVNT	g	2412	-9.53	≤ 8	Pass
NVNT	g	2437	-10.34	≤ 8	Pass
NVNT	g	2462	-9.99	≤ 8	Pass
NVNT	n20	2412	-14.31	≤ 8	Pass
NVNT	n20	2437	-14.21	≤ 8	Pass
NVNT	n20	2462	-13.34	≤ 8	Pass

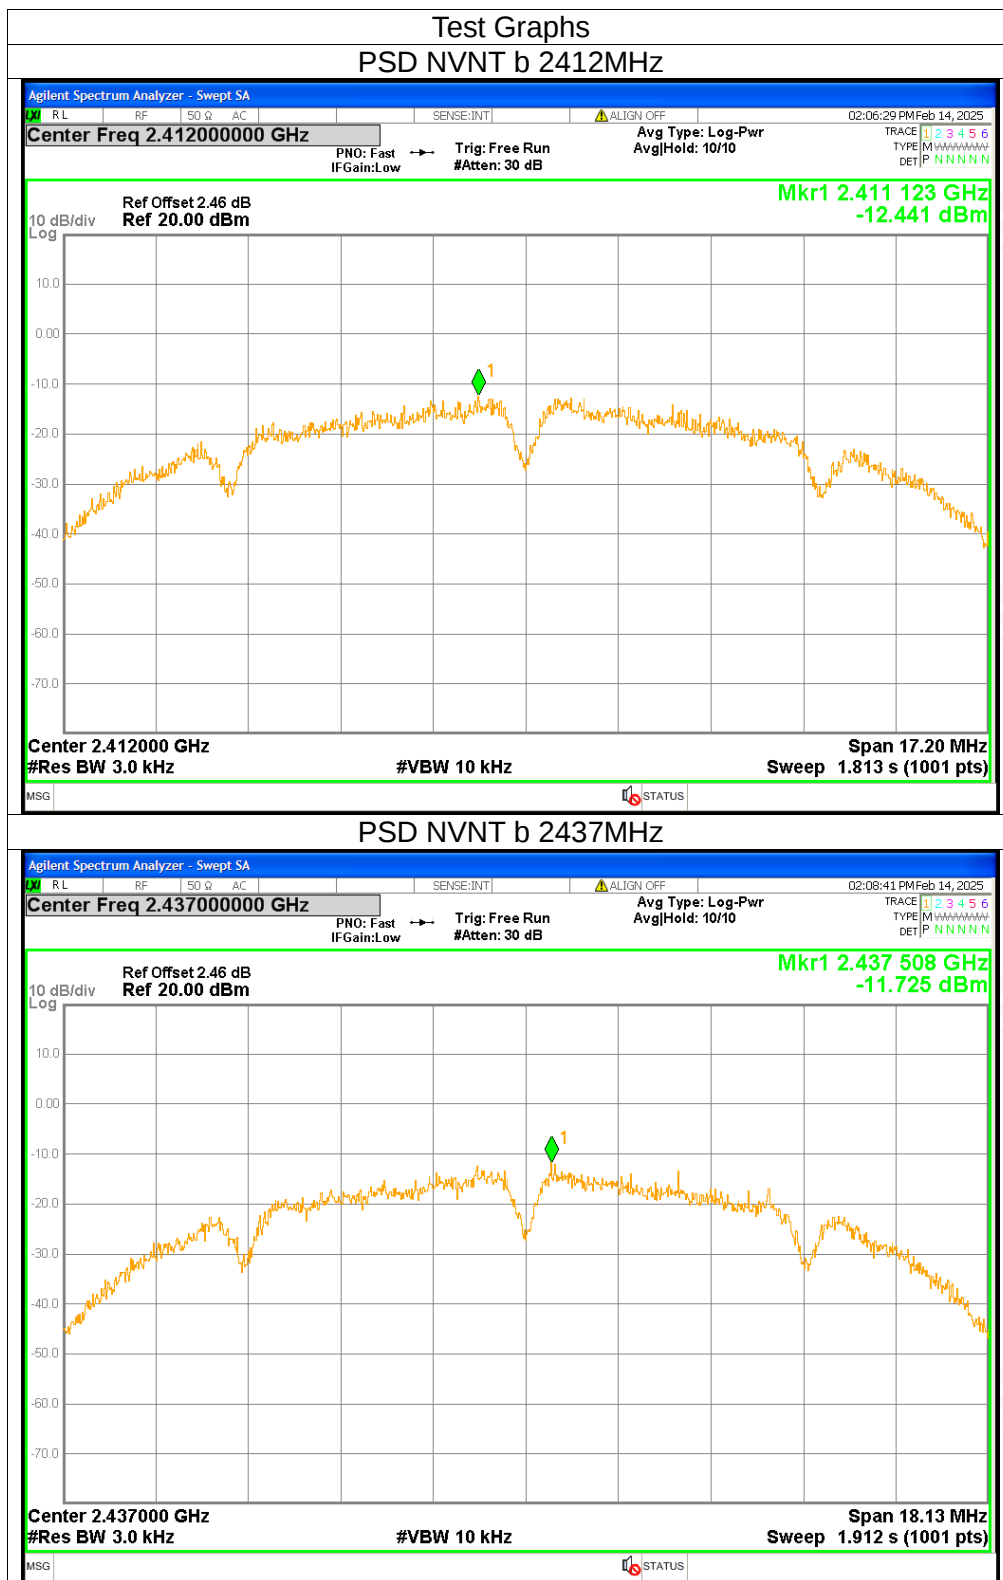

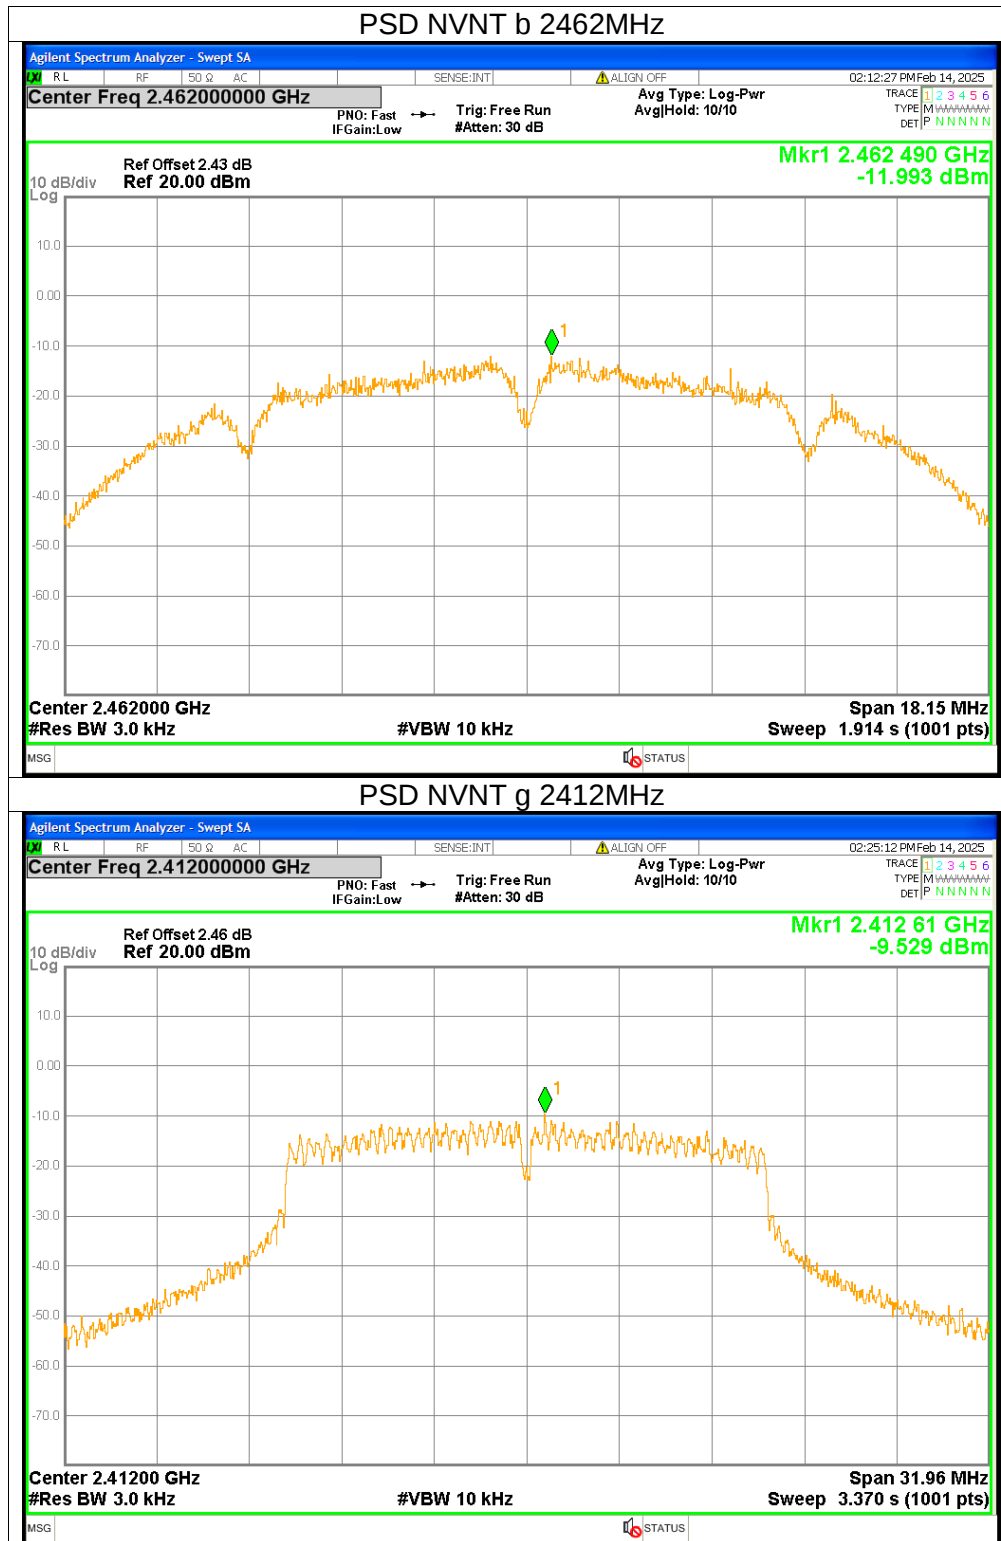

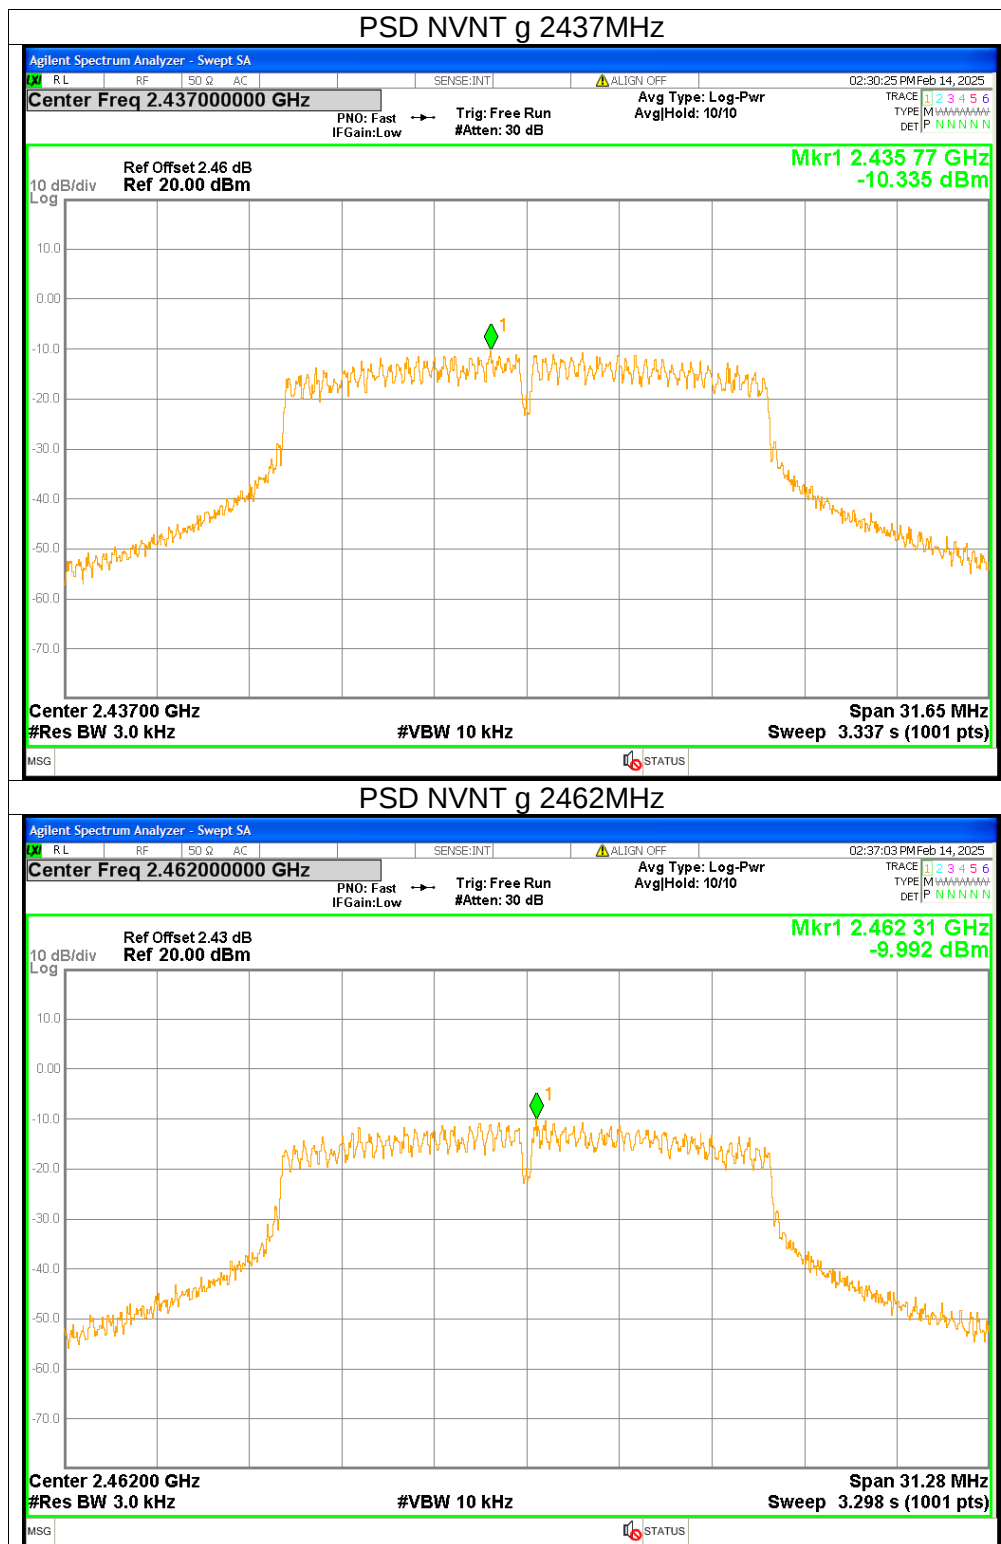

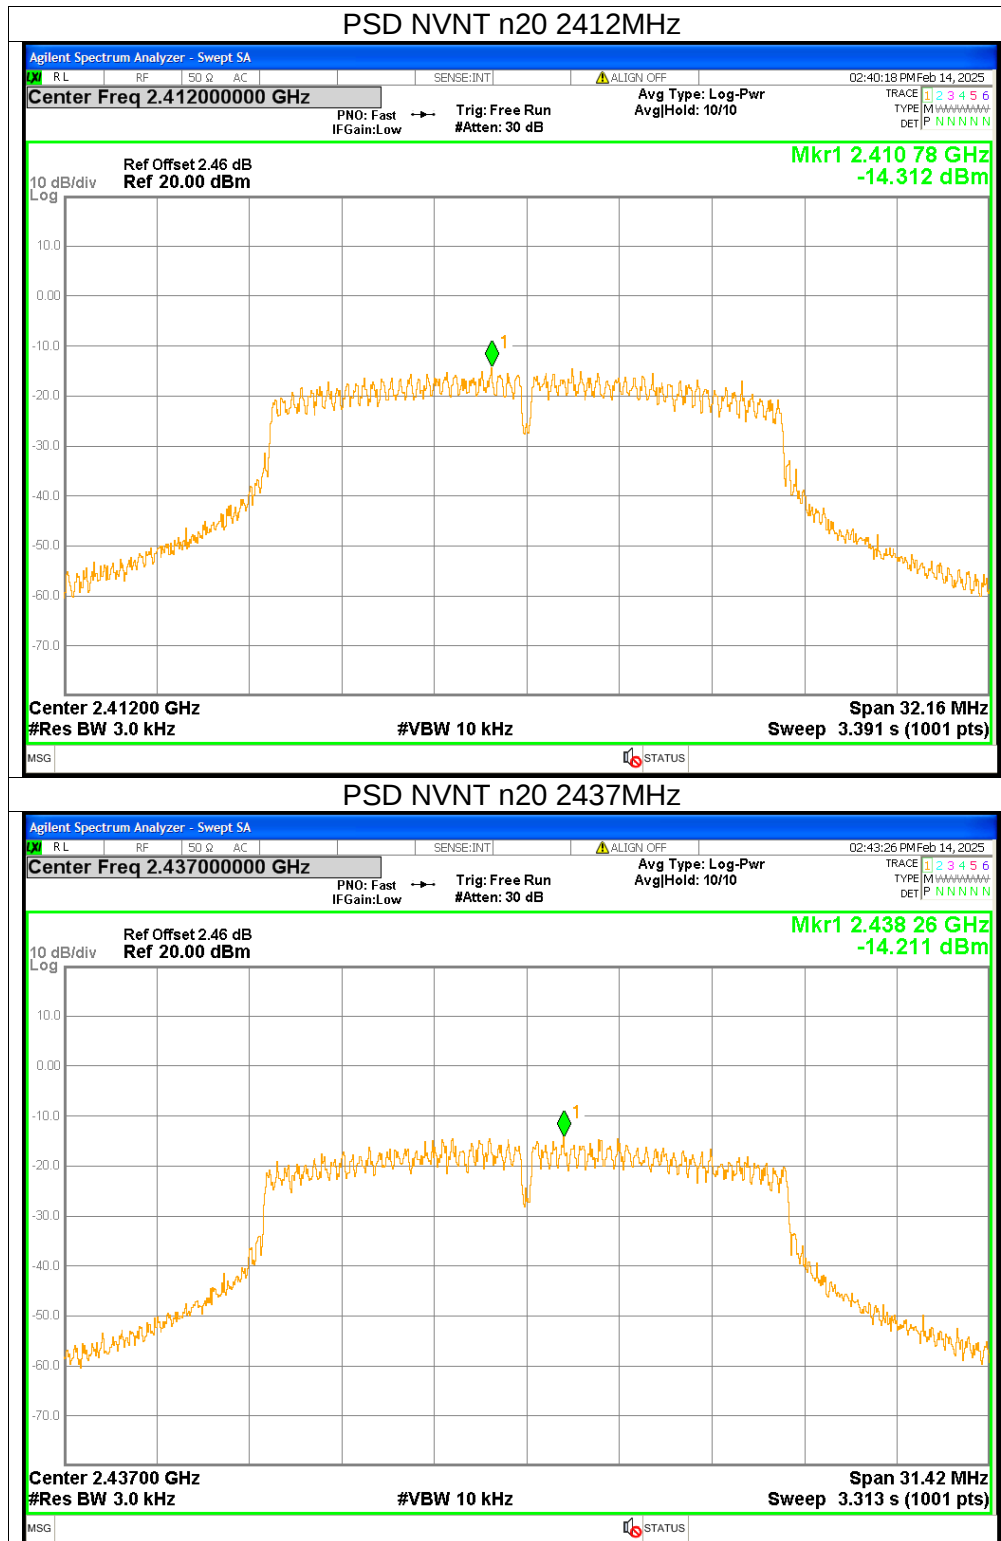


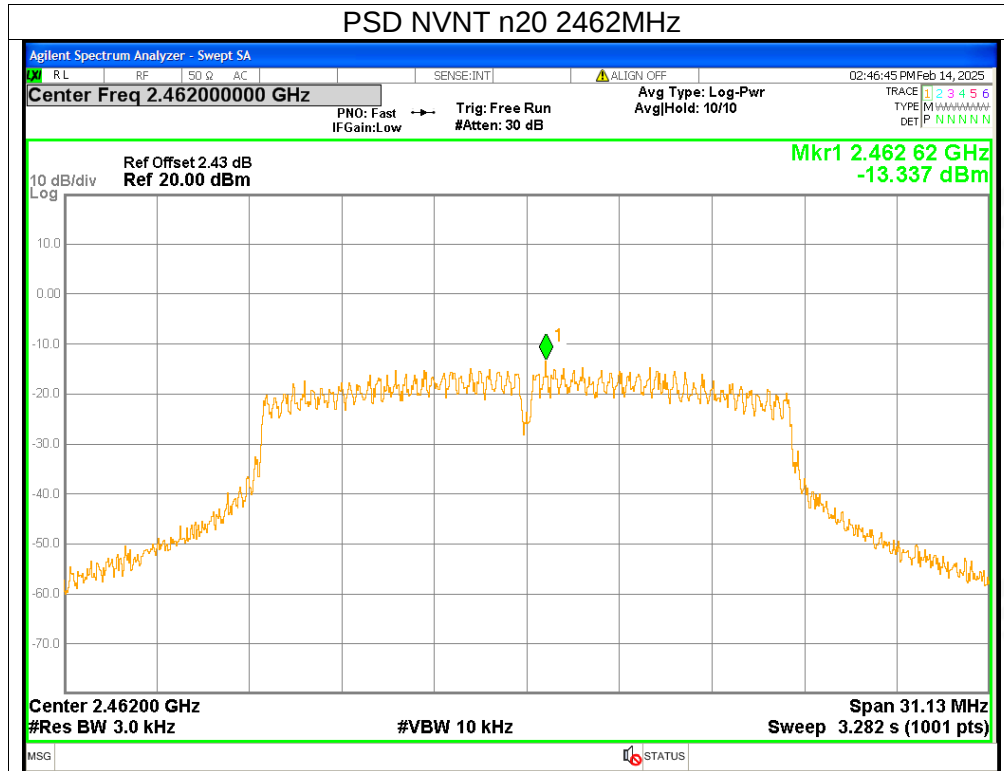






6. Band Edge


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	-44.72	≤ -20	Pass
NVNT	b	2462	-55.1	≤ -20	Pass
NVNT	g	2412	-32.97	≤ -20	Pass
NVNT	g	2462	-46.01	≤ -20	Pass
NVNT	n20	2412	-32.66	≤ -20	Pass
NVNT	n20	2462	-46.68	≤ -20	Pass

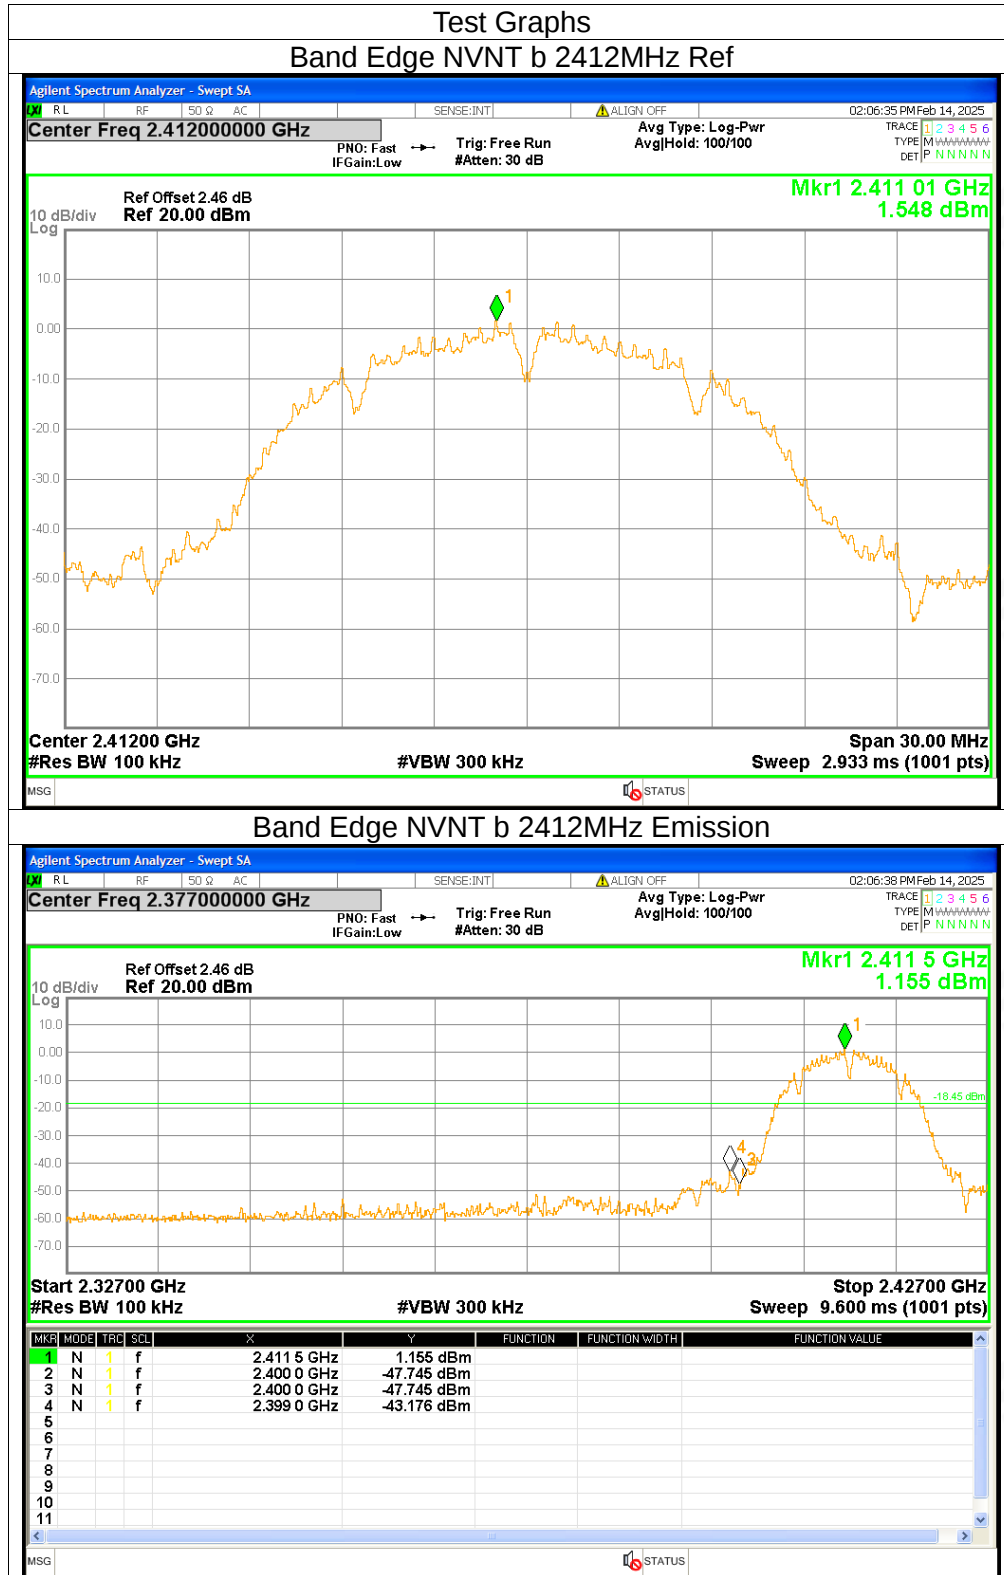


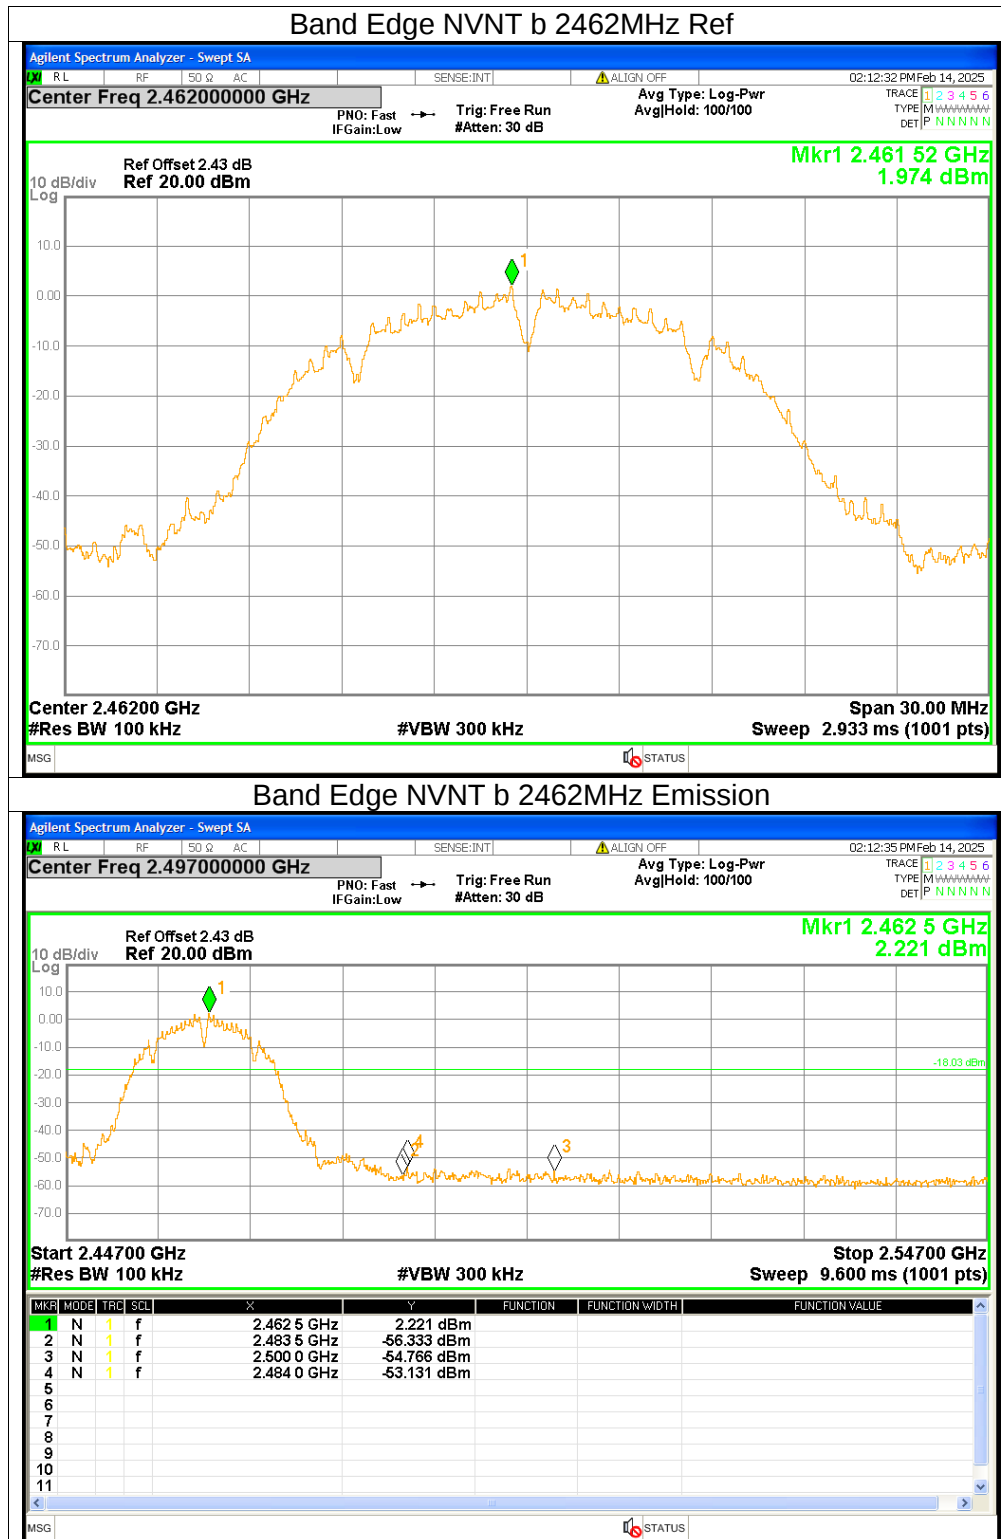

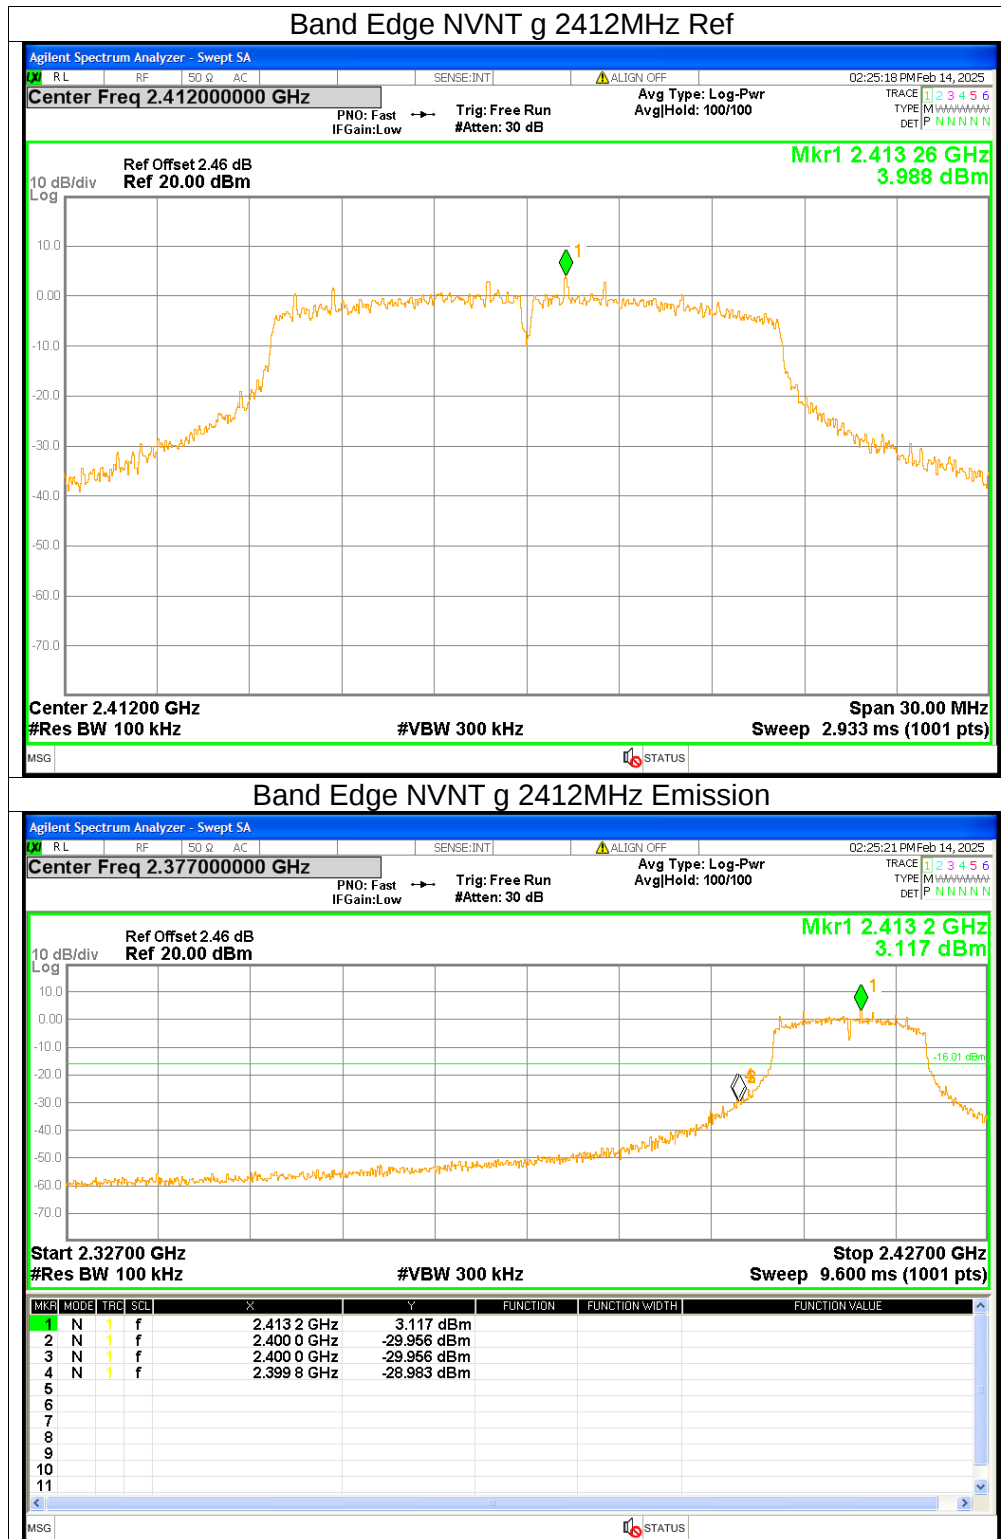

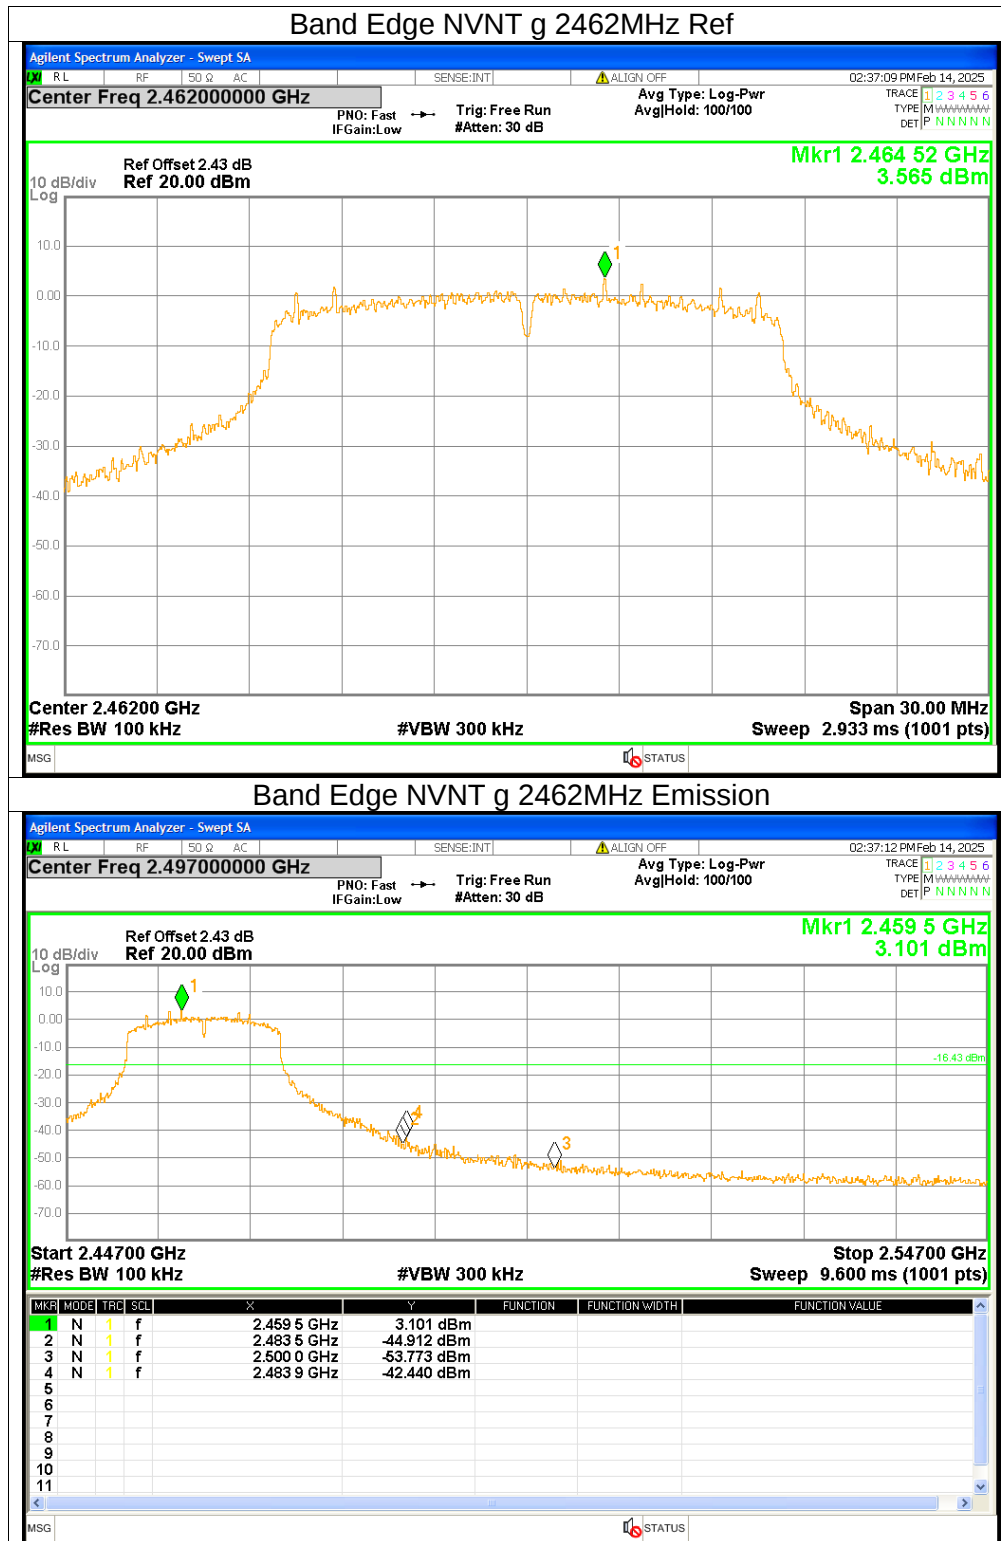

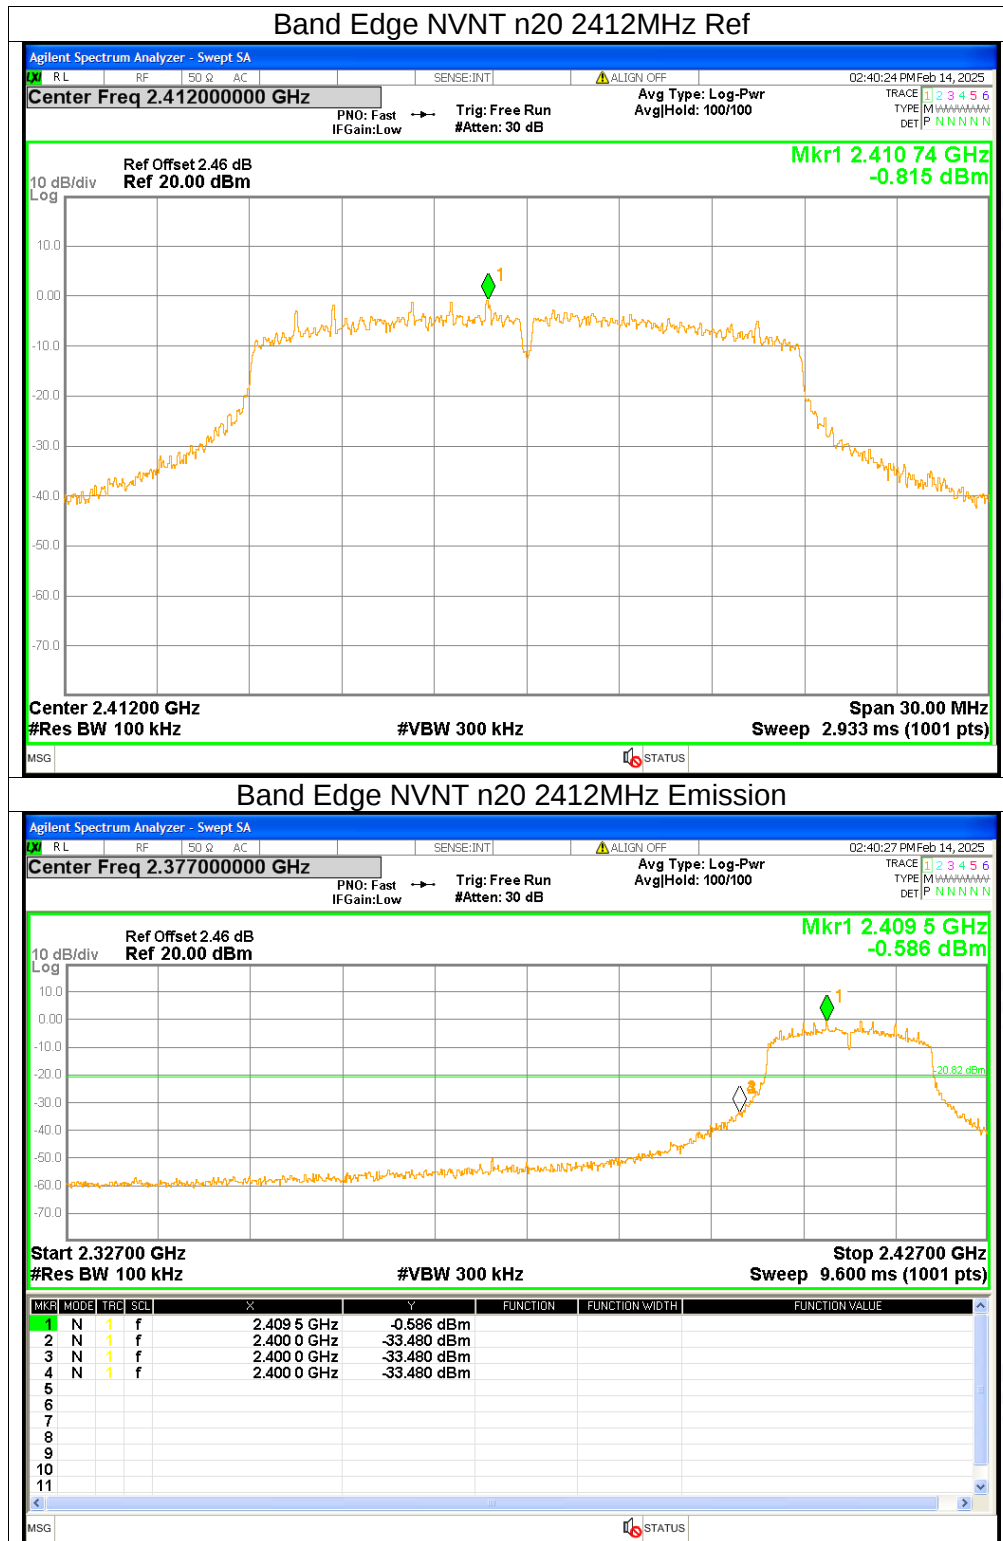


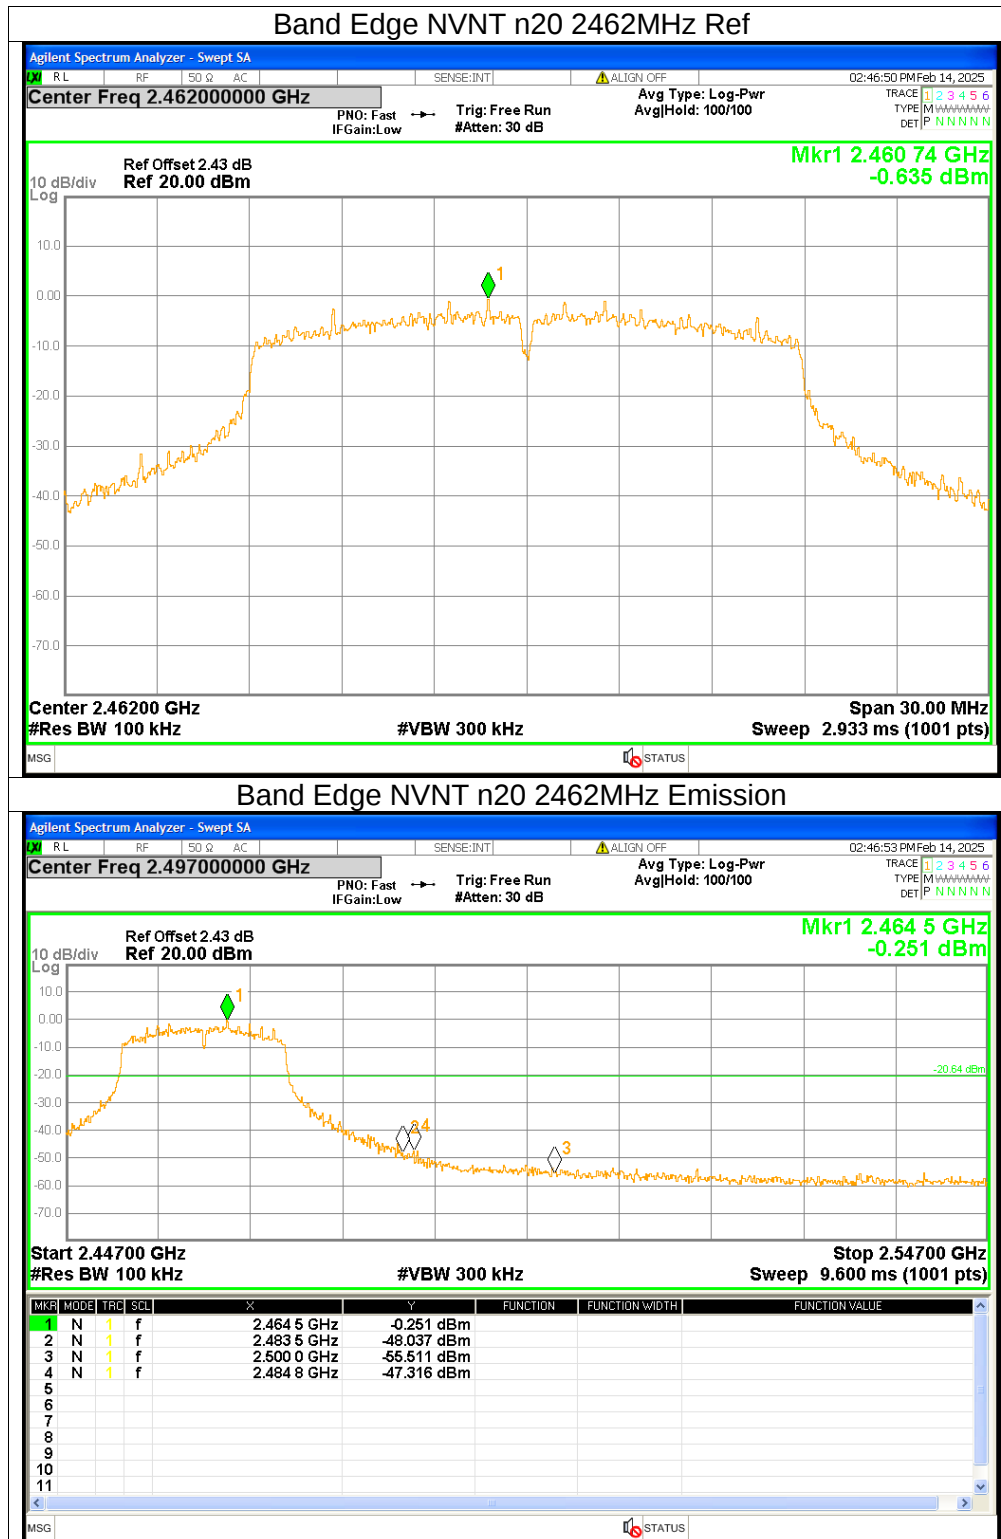






7. Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	-48.12	<=-20	Pass
NVNT	b	2437	-48.13	<=-20	Pass
NVNT	b	2462	-48.13	<=-20	Pass
NVNT	g	2412	-49.54	<=-20	Pass
NVNT	g	2437	-48.58	<=-20	Pass
NVNT	g	2462	-49.81	<=-20	Pass
NVNT	n20	2412	-45.19	<=-20	Pass
NVNT	n20	2437	-46.69	<=-20	Pass
NVNT	n20	2462	-46.47	<=-20	Pass

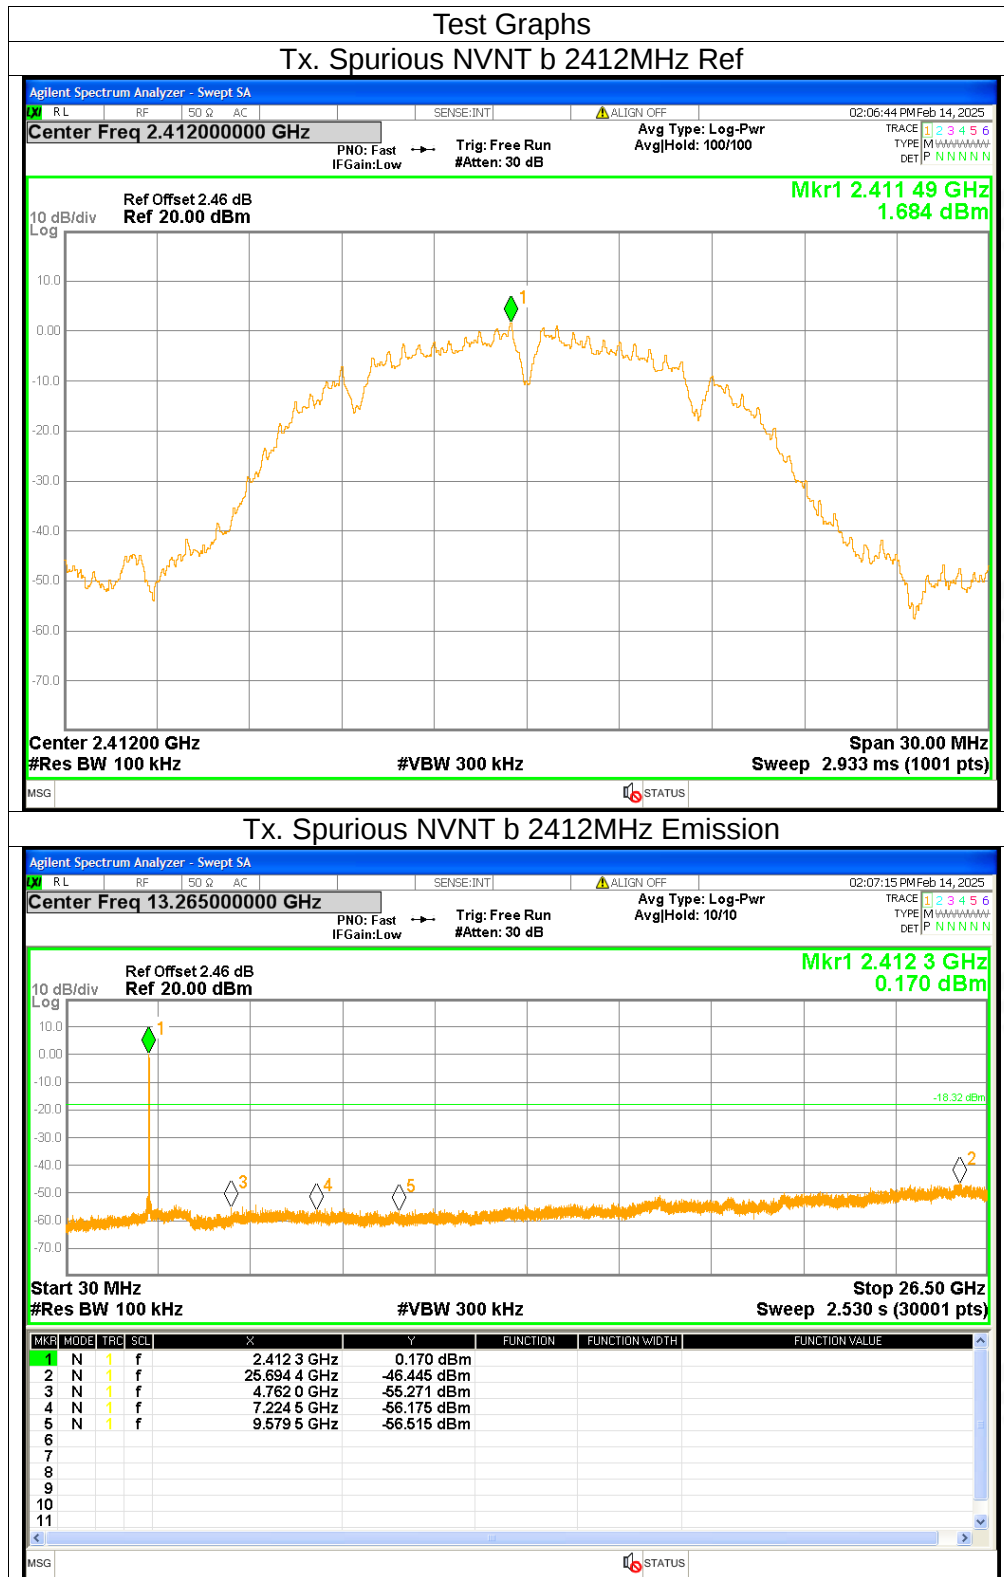


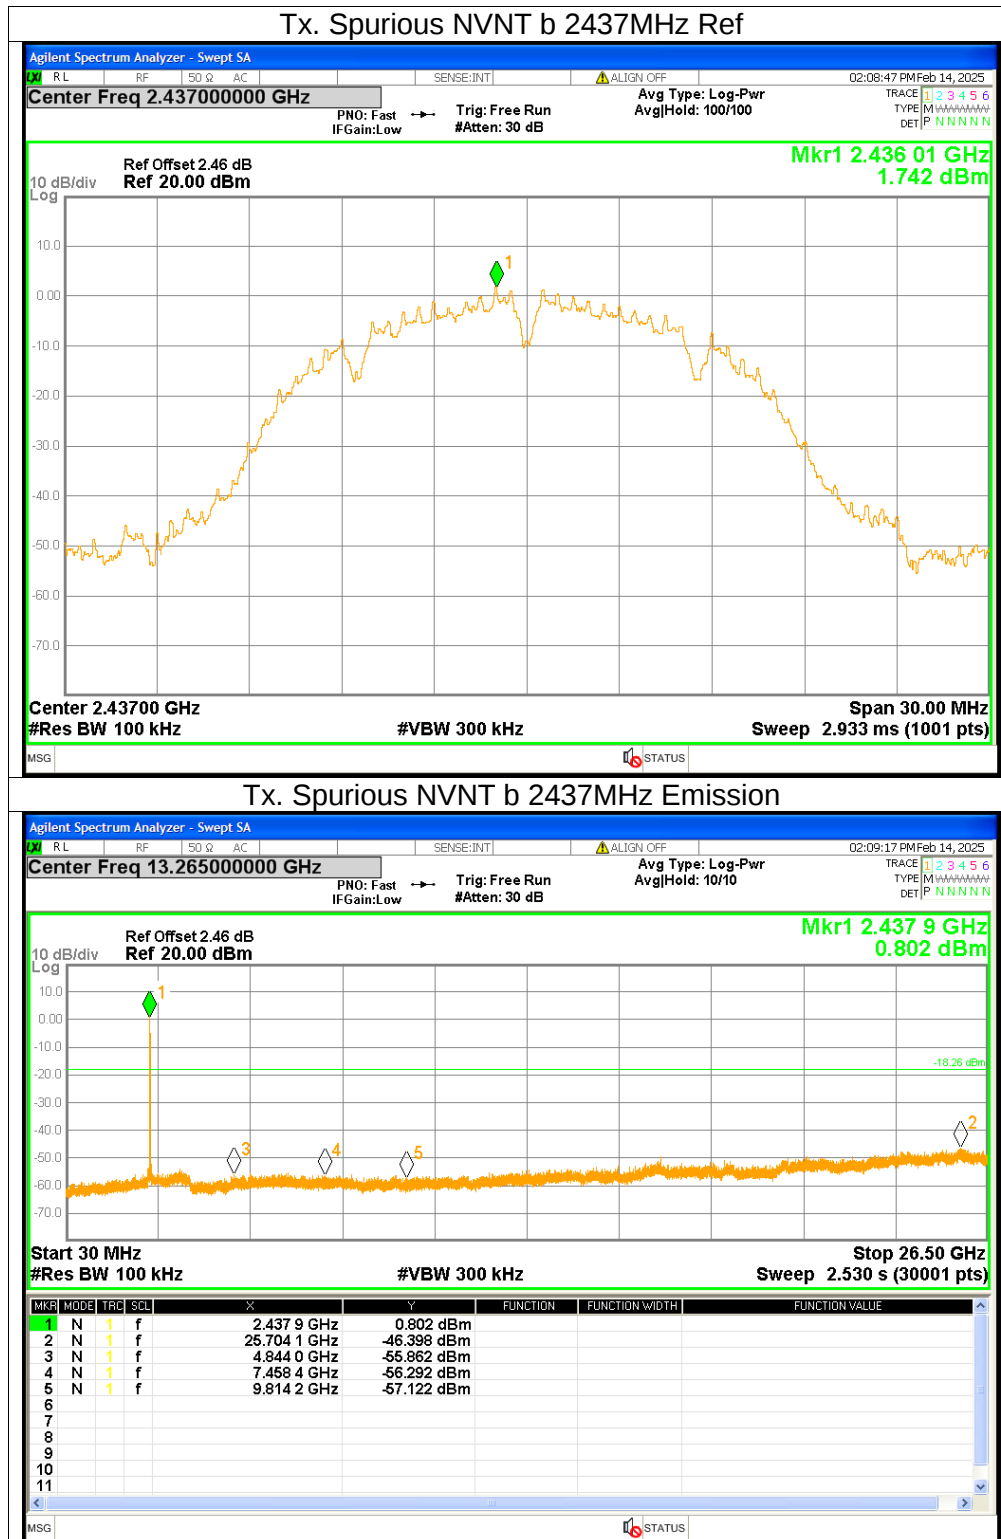

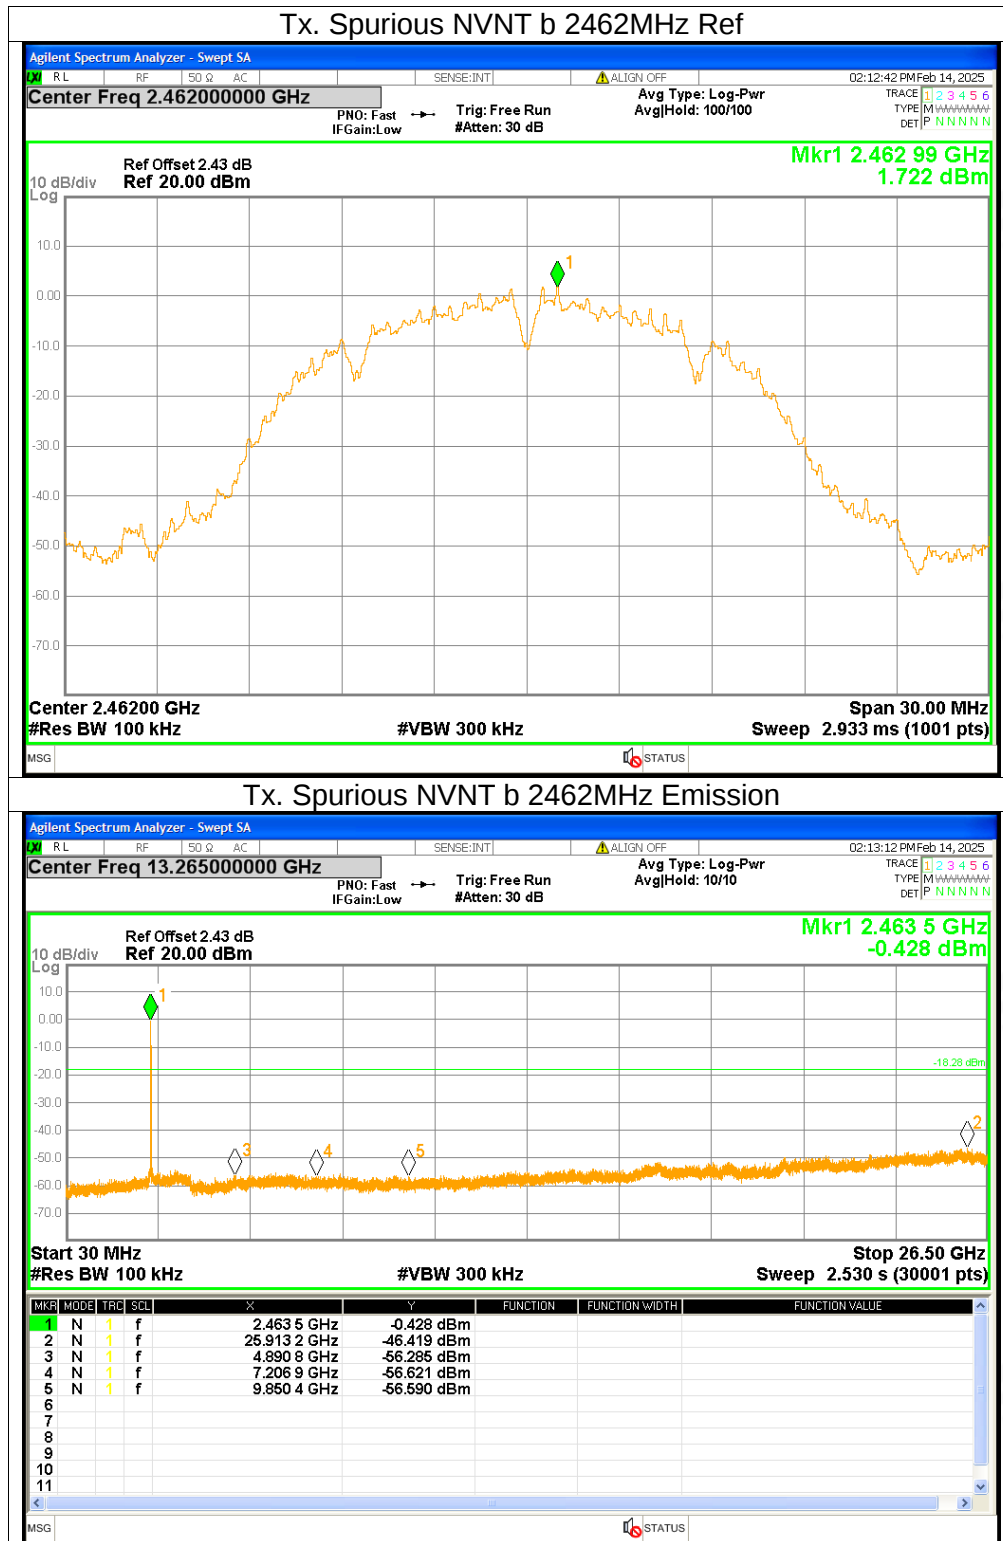

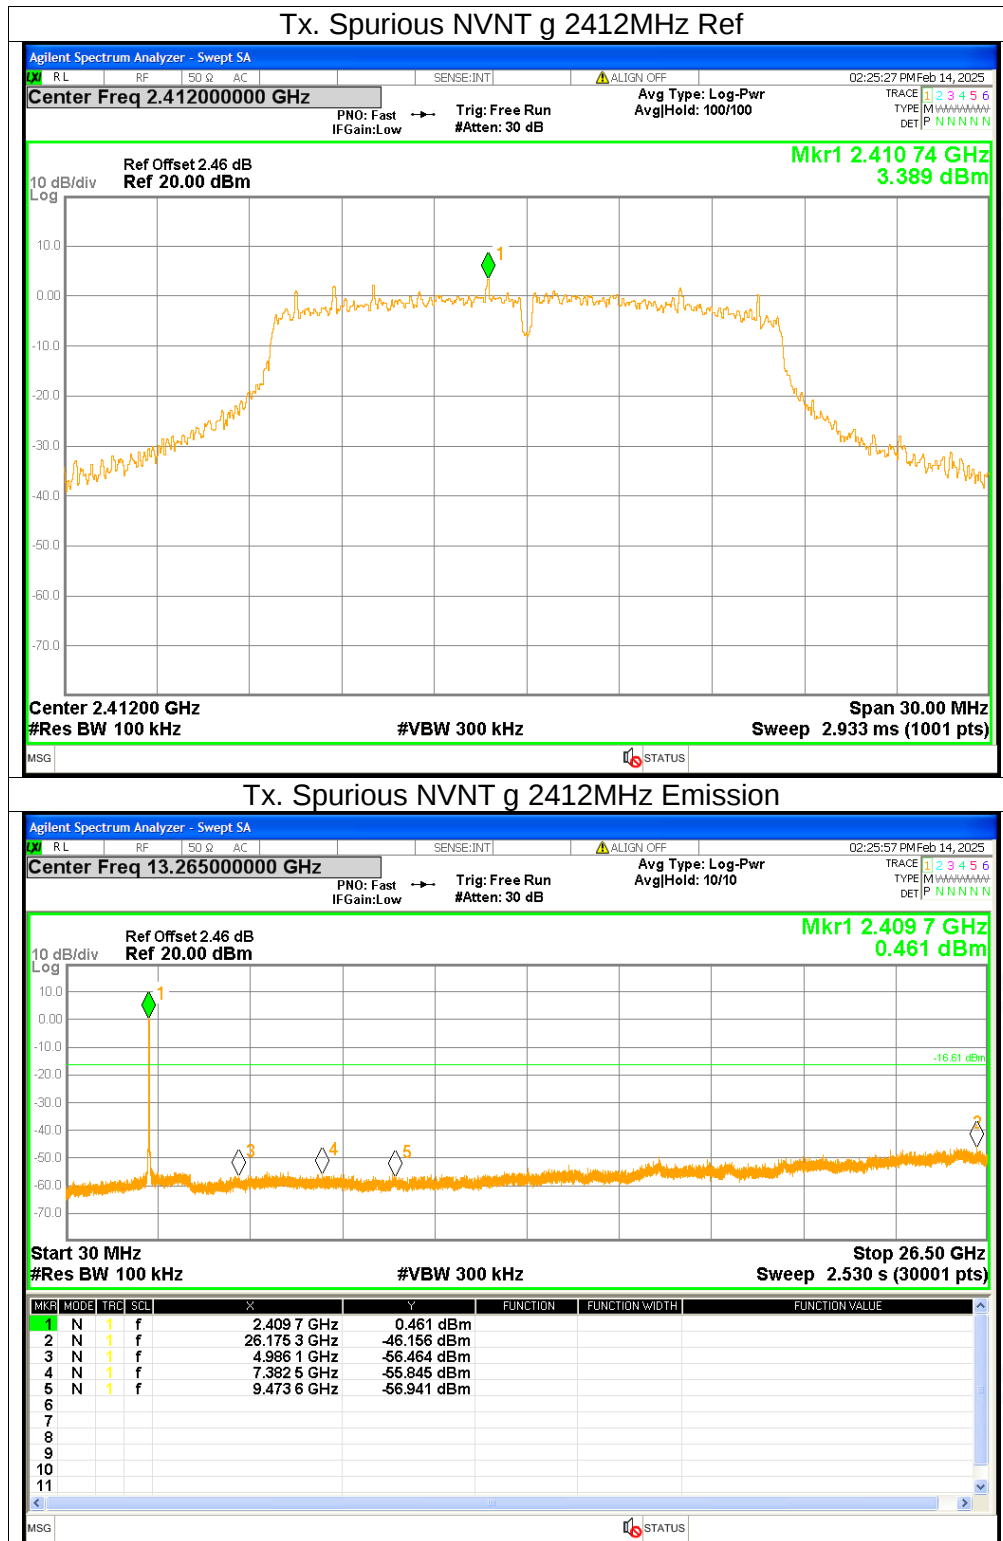


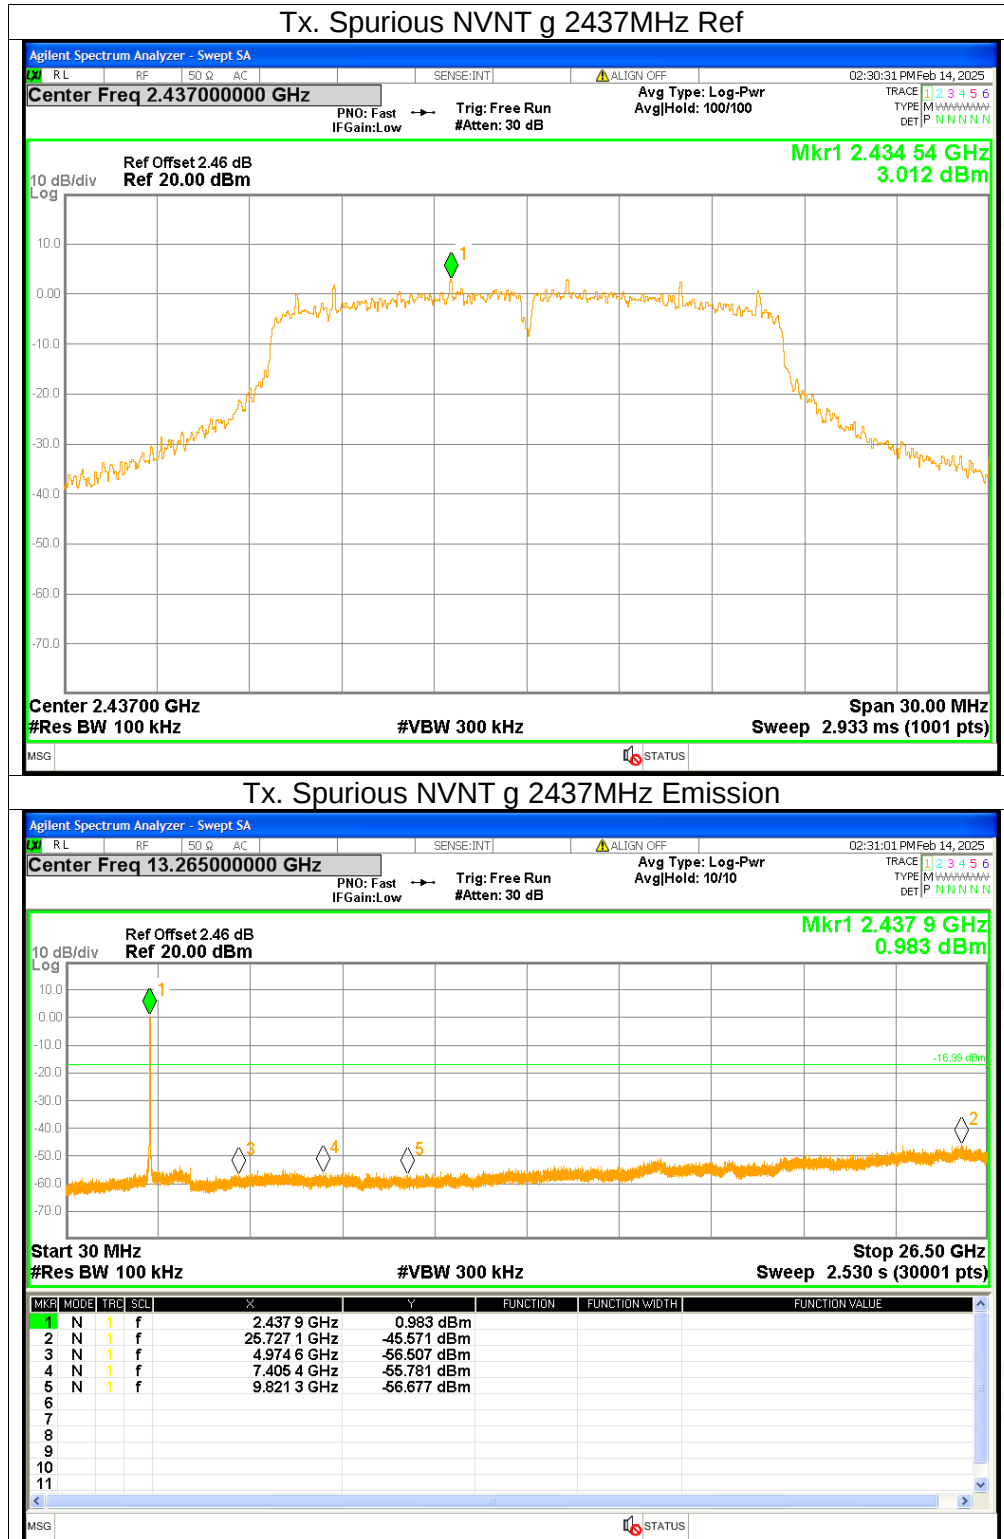

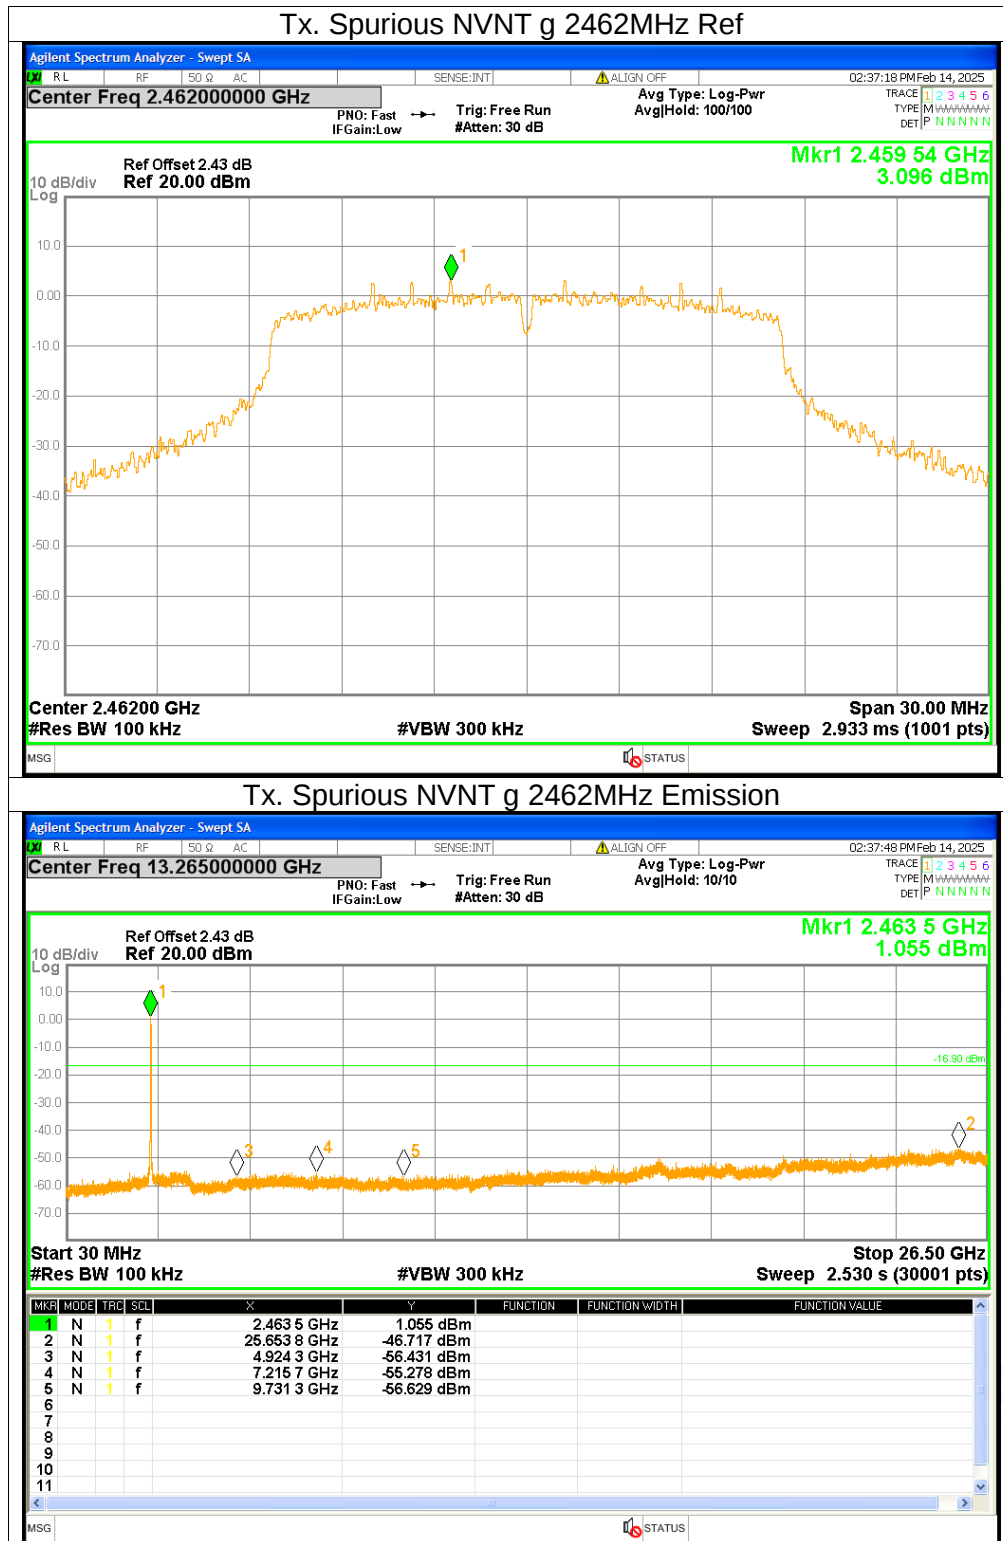




Tx. Spurious NVNT n20 2412MHz Ref

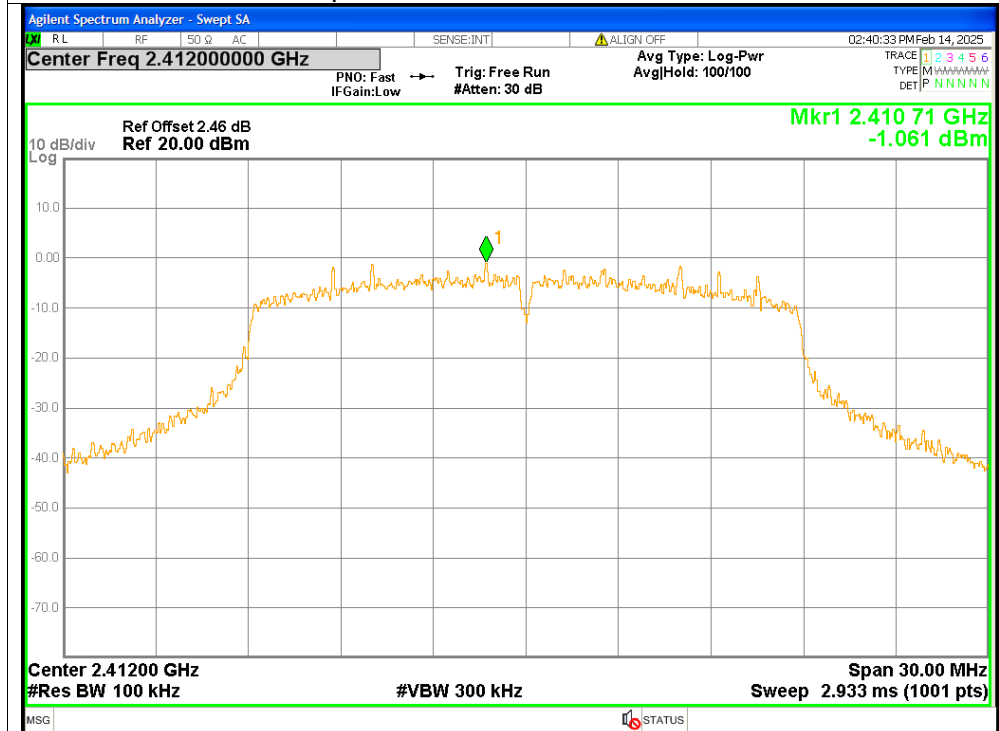


Tx. Spurious NVNT n20 2412MHz Emission

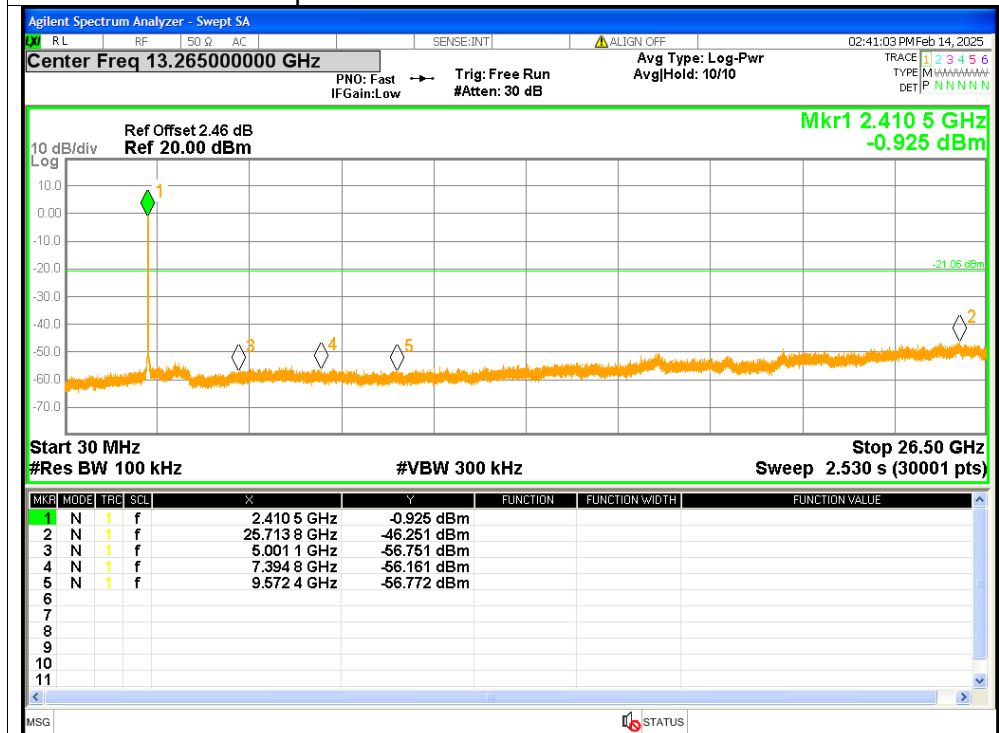




Tx. Spurious NVNT n20 2437MHz Ref

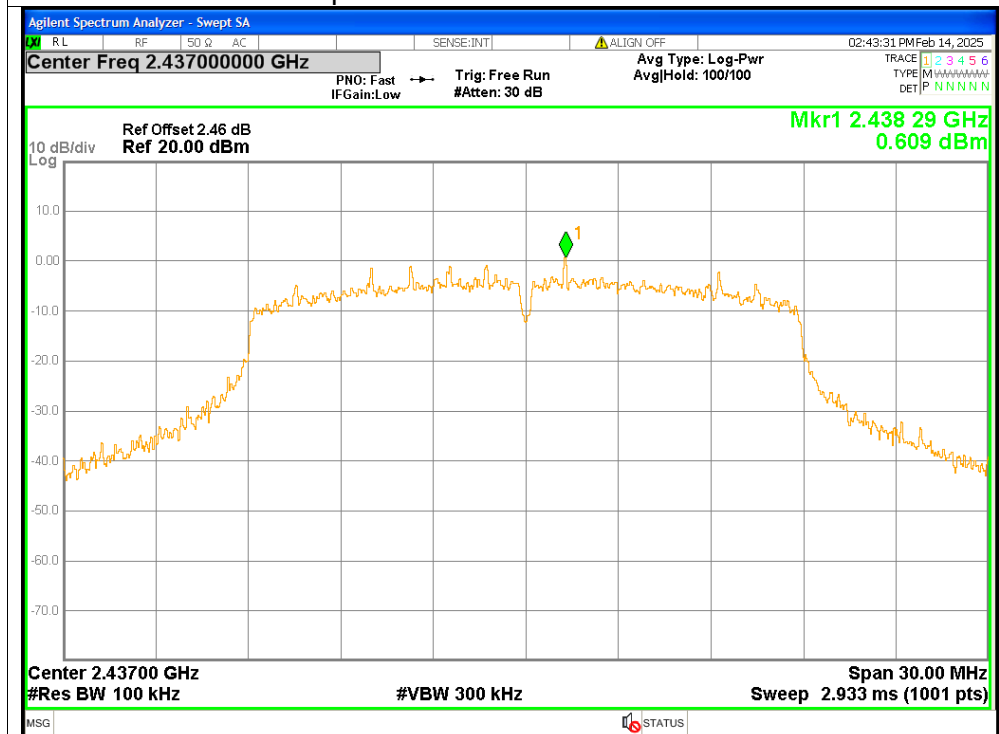


Tx. Spurious NVNT n20 2437MHz Emission

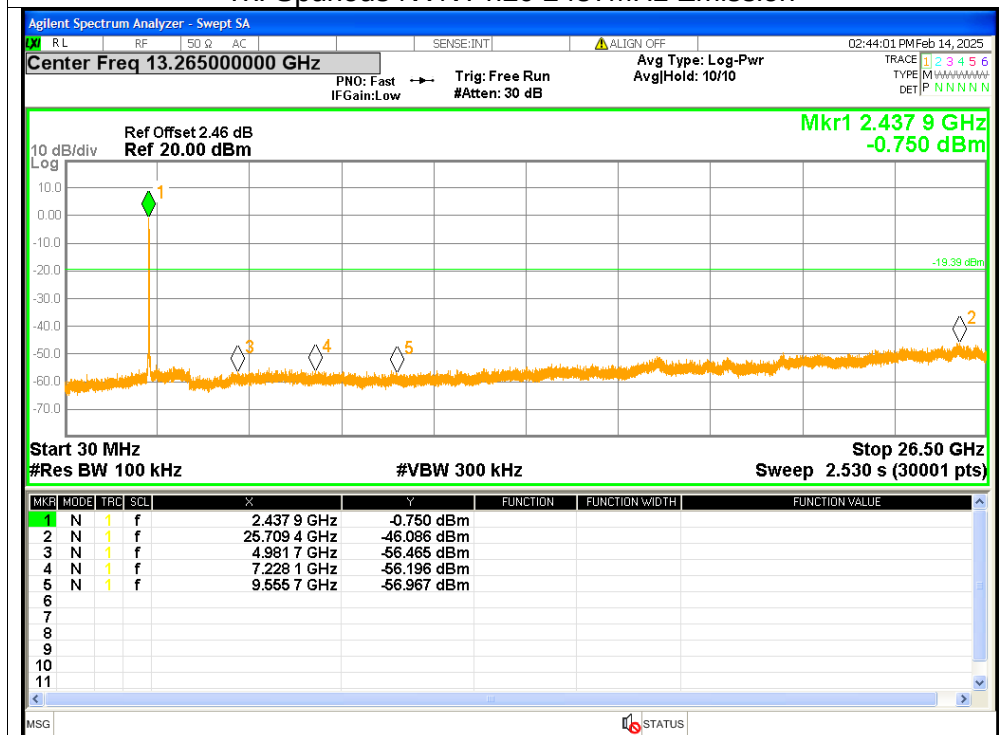




Tx. Spurious NVNT n20 2462MHz Ref

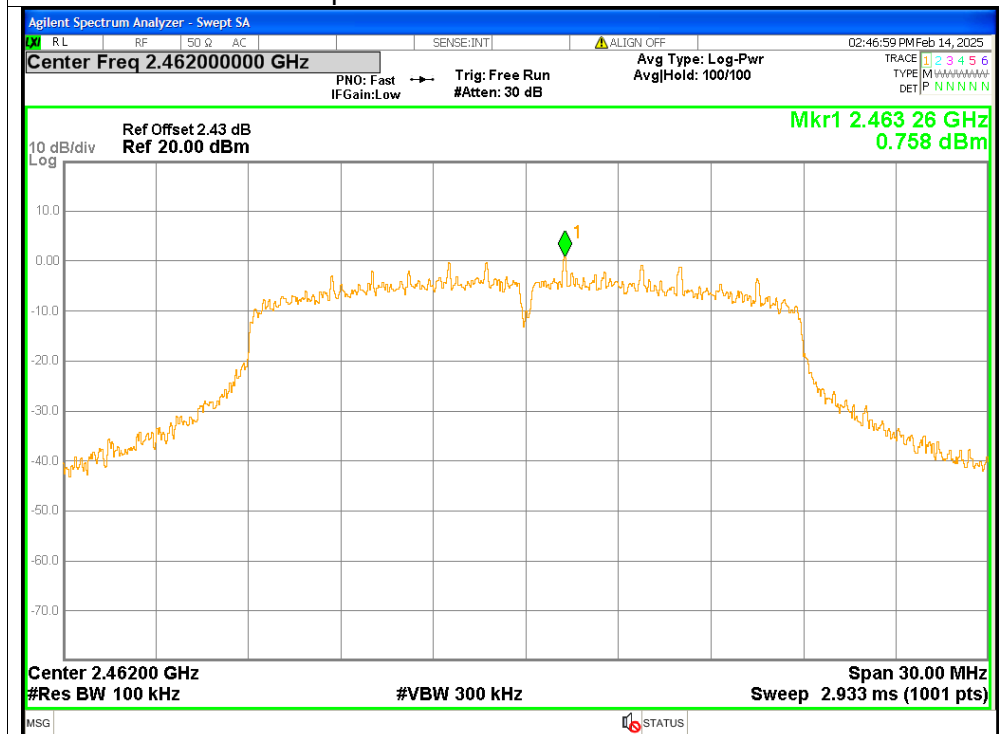

Tx. Spurious NVNT n20 2462MHz Emission

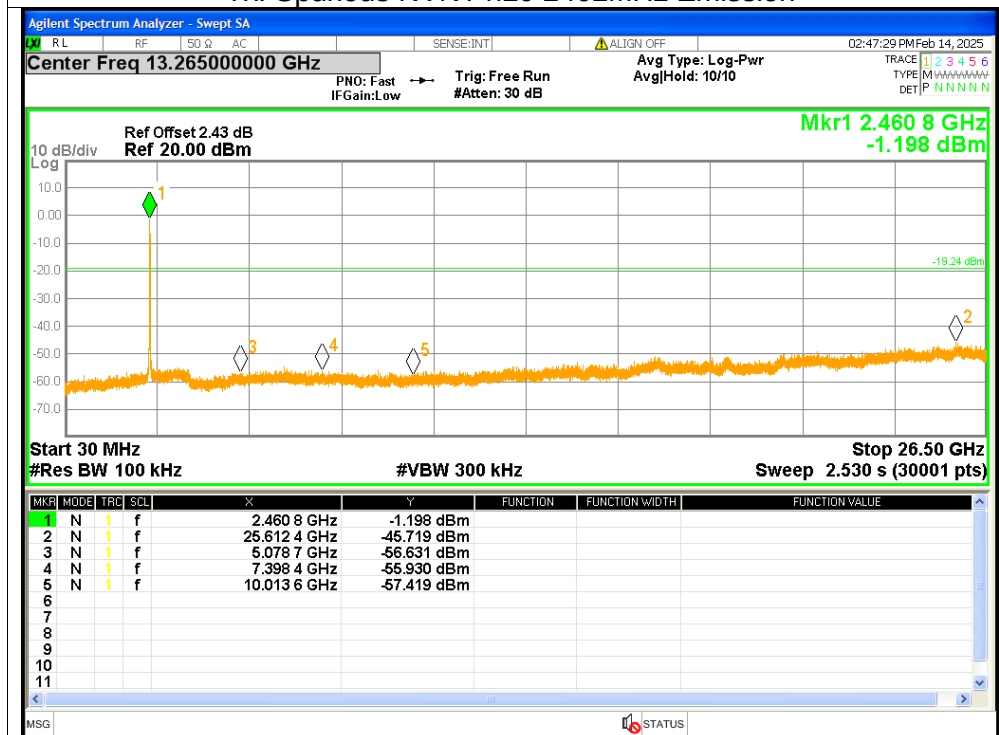



APPENDIX 2-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※