

## TEST REPORT

**Report Number: 103177090MPK-001**  
**Project Number: G103177090**  
**October 30, 2017**

**Testing performed on**  
**Pillbox**  
**Model: v2.5**  
**FCC ID: 2ANUG-PBXV2-5-USA**  
**IC: 23220-PB25US**  
**to**

**FCC Part 15 Subpart C (15.247)**  
**Industry Canada RSS-247 Issue 2**  
**FCC Part 15, Subpart B**  
**Industry Canada ICES-003**


**For**

**TowerView Health, Inc.**

Test Performed by:  
Intertek  
1365 Adams Court  
Menlo Park, CA 94025 USA


Test Authorized by:  
TowerView Health, Inc.  
STE 2500, 2001 Market Street  
Philadelphia, PA 19103 USA

Prepared by:

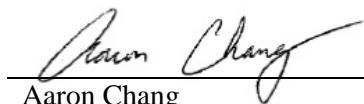  
Aaron Chang

Date: October 30, 2017

Reviewed by:

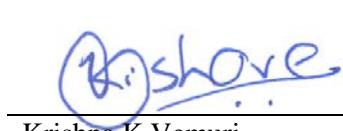  
Krishna K Vemuri

Date: October 30, 2017

*This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.*

## Report No. 103177090MPK-001

**Equipment Under Test:**

Pillbox  
TowerView Health, Inc.  
v2.5

**Trade Name:**

**Model Number:**

**Applicant:**

TowerView Health, Inc.  
Ankur Aggarwal  
TowerView Health, Inc.  
STE 2500, 2001 Market Street  
Philadelphia, PA 19103  
USA

**Contact:**

**Address:**

**Country**

**Tel. Number:**

(650) 776-9322  
Ankur@towerviewhealth.com

**Email:**


**Applicable Regulation:**

FCC Part 15 Subpart C (15.247)  
Industry Canada RSS-247 Issue 2  
FCC Part 15, Subpart B  
Industry Canada ICES-003

**Date of Test:**

October 3-27, 2017

*We attest to the accuracy of this report:*

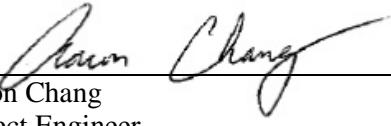  
Aaron Chang  
Project Engineer

  
Krishna K Vemuri  
Engineering Team Lead

## TABLE OF CONTENTS

<b>1.0</b>	<b>Summary of Tests .....</b>	<b>5</b>
<b>2.0</b>	<b>General Information.....</b>	<b>6</b>
2.1	Product Description .....	6
2.2	Related Submittal(s) Grants.....	7
2.3	Test Facility .....	7
2.4	Test Methodology .....	7
2.5	Measurement Uncertainty.....	7
<b>3.0</b>	<b>System Test Configuration.....</b>	<b>8</b>
3.1	Support Equipment .....	8
3.2	Block Diagram of Test Setup.....	8
3.3	Justification.....	9
3.4	Software Exercise Program.....	9
3.5	Mode of Operation during Test.....	9
3.5	Modifications Required for Compliance .....	9
3.6	Additions, Deviations and Exclusions from Standards.....	9
<b>4.0</b>	<b>Measurement Results.....</b>	<b>10</b>
4.1	6-dB Bandwidth and 99% Occupied Bandwidth .....	10
4.1.1	Requirement.....	10
4.1.2	Procedure .....	10
4.1.3	Test Result .....	10
4.2	Maximum Peak Conducted Output Power at Antenna Terminals .....	17
4.2.1	Requirement.....	17
4.2.2	Procedure .....	17
4.2.3	Test Result .....	17
4.3	Maximum Power Spectral Density .....	21
4.3.1	Requirement.....	21
4.3.2	Procedure .....	21
4.3.3	Test Result .....	21
4.4	Unwanted Conducted Emissions .....	25
4.4.1	Requirement.....	25
4.4.2	Procedure .....	25
4.4.3	Test Result .....	25
4.5	Transmitter Radiated Emissions .....	30
4.5.1	Requirement.....	30
4.5.2	Procedure .....	30
4.5.3	Field Strength Calculation .....	31
4.5.4	Antenna-port conducted measurements .....	32
4.5.6	General Procedure for conducted measurements in restricted bands.....	32
4.5.7	Test Results.....	32
4.5.8	Test setup photographs .....	47
4.6	Radiated Emissions .....	51
4.6.1	Requirement.....	51
4.6.2	Procedures.....	52
4.6.3	Test Results.....	53
4.6.4	Test Configuration Photographs .....	57
4.7	AC Line Conducted Emission .....	60

4.7.1	Requirement.....	60
4.7.2	Procedure .....	61
4.7.3	Test Result .....	62
4.7.4	Test Configuration Photographs .....	67
<b>5.0</b>	<b>List of Test Equipment .....</b>	<b>68</b>
<b>6.0</b>	<b>Document History .....</b>	<b>69</b>

## 1.0 Summary of Tests

Test	Reference FCC	Reference Industry Canada	Result
<b>RF Output Power</b>	15.247(b)(3)	RSS-247, 5.4.4	Complies
<b>6 dB Bandwidth</b>	15.247(a)(2)	RSS-247, 5.2.1	Complies
<b>Power Density</b>	15.247(e)	RSS-247, 5.2.2	Complies
<b>Out of Band Antenna Conducted Emission</b>	15.247(d)	RSS-247, 5.5	Complies
<b>Transmitter Radiated Emissions</b>	15.247(d), 15.209, 15.205	RSS-247, 5.5	Complies
<b>AC Line Conducted Emission</b>	15.207	RSS-GEN	Complies
<b>Antenna Requirement</b>	15.203	RSS-GEN	Complies (Internal Antenna)
<b>RF Exposure</b>	15.247(i), 2.1093(d)	RSS-102	Complies
<b>Radiated Emissions</b>	15.109	ICES-003	Complies
<b>AC Line Conducted Emission</b>	15.107	ICES-003	Complies

**EUT receive date:** October 02, 2017

**EUT receive condition:** The pre-production version of the EUT was received in good condition with no apparent damage. As declared by the Applicant, it is identical to the production units.

**Test start date:** October 3, 2017

**Test completion date:** October 27, 2017

The test results in this report pertain only to the item tested.

## 2.0 General Information

### 2.1 Product Description

TowerView Health, Inc. supplied the following description of the EUT:

The TowerView pillbox stores a patient's medications for a week in a 4x7 grid of wells (4 doses per day, 7 days per week). Under each well is a capacitance sensing pad that allows the host microcontroller and system of IC's to detect if and when the patient removes his or her medications. If the patient does not take his or her medications within a certain window of his or her prescribed time, the pillbox triggers alarms in the forms of lights and sound on the pillbox itself, as well as text, phone, and email reminders, as configurable via TowerView's server. The pillbox also periodically sends sensing and telemetry data to the server via wireless networks using WIFI, Bluetooth, and/or cellular technologies.

For more information, see user's manual provided by the manufacturer.

Information about the Bluetooth 4.0 (BLE) radio is presented below:

For more information, refer to the following product specification, declared by the manufacturer.

Information about the 2.4 GHz radio is presented below:

<b>Applicant</b>	TowerView Health, Inc.
<b>Model No.</b>	v2.5
<b>FCC Identifier</b>	2ANUG-PBXV2-5-USA
<b>IC Identifier</b>	23220-PB25US
<b>Type of transmission</b>	Digital Transmission System (DTS)
<b>Rated RF Output</b>	13.94 dBm
<b>Antenna(s) &amp; Gain</b>	Internal Antenna, Gain: 1 dBi
<b>Frequency Range</b>	2402 – 2480 MHz
<b>Type of modulation/data rate</b>	GFSK / 1Mbit/s
<b>Number of Channel(s)</b>	40, Channel 0-39
<b>Applicant Name &amp; Address</b>	TowerView Health, Inc. STE 2500, 2001 Market Street Philadelphia, PA 19103 USA

## 2.2 Related Submittal(s) Grants

None.

## 2.3 Test Facility

The test site used to collect the radiated data is site 1 (10-m semi-anechoic chamber). This test facility and site measurement data have been fully placed on file with the FCC, IC and A2LA accredited.

## 2.4 Test Methodology

Antenna conducted measurements were performed according to the FCC documents "Guidance for Performing Compliance Measurement on Digital Transmission Systems (DTS) Operating under §15.247" (KDB 558074 D01 DTS Meas Guidance v04), and RSS-247, RSS-GEN Issue 4.

Radiated emissions and AC mains conducted emissions measurements were performed according to the procedures in ANSI C63.10: 2013. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Data Sheet" of this report.

## 2.5 Measurement Uncertainty

Compliance with the limits was based on the results of the measurements and doesn't take into account the measurement uncertainty.

Estimated Measurement Uncertainty

Measurement	Expanded Uncertainty (k=2)		
	0.15 MHz – 1 GHz	1 GHz – 2.5 GHz	> 2.5 GHz
RF Power and Power Density – antenna conducted	-	0.7 dB	-
Unwanted emissions - antenna conducted	1.1 dB	1.3 dB	1.9 dB
Bandwidth – antenna conducted	-	30 Hz	-

Measurement	Expanded Uncertainty (k=2)			
	0.15 MHz – 30MHz	30 – 200 MHz	200 MHz – 1 GHz	1 GHz – 18 GHz
Radiated emissions	-	4.7	4.6	5.1 dB
AC mains conducted emissions	2.1 dB	-	-	-

### 3.0 System Test Configuration

#### 3.1 Support Equipment


Description	Manufacturer	Model Number
Laptop	HP	EliteBook 840
AC/DC Power Adapter	No Markings	No Markings

#### 3.2 Block Diagram of Test Setup

Equipment Under Test			
Description	Manufacturer	Model Number	Serial Number
Pillbox	TowerView Health, Inc.	v2.5	17380001


Antenna was removed and co-axial connector with a cable was installed for Conducted Measurements.

#### AC Powered

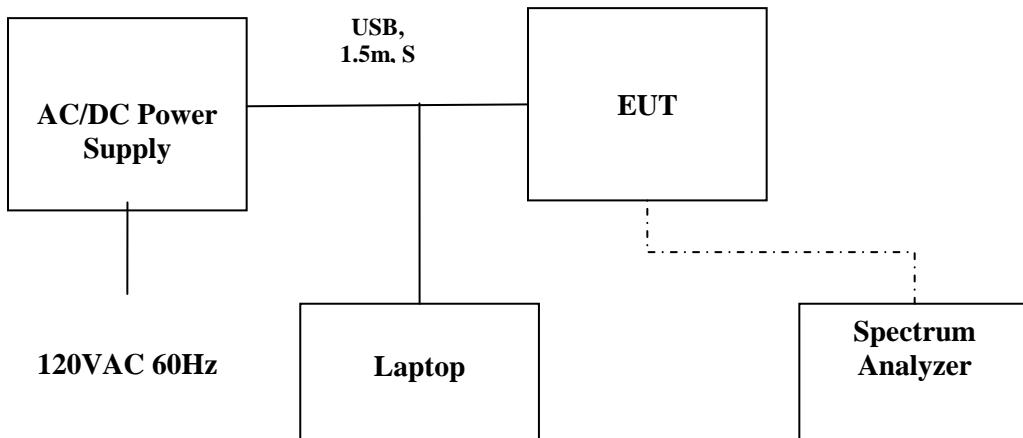

**Battery Powered**  
S = Sh  
U = U

**F** = With Ferrite  
**m** = Length in Meters

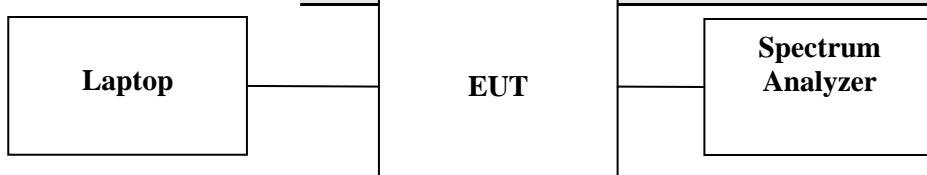

### 3.3 Justification

For radiated emission measurements the EUT is placed on a non-conductive table.

### 3.4 Software Exercise Program

The EUT exercise program used during radiated and conducted testing was provided by TowerView Health, Inc.

### 3.5 Mode of Operation during Test

During transmitter testing, the transmitter was setup to transmit at maximum RF power on low, middle and high frequencies/channels.

### 3.5 Modifications Required for Compliance

No modifications were made by the manufacturer or Intertek to the EUT in order to bring the EUT into compliance.

### 3.6 Additions, Deviations and Exclusions from Standards

No additions, deviations or exclusions from the standard were made.

## 4.0 Measurement Results

### 4.1 6-dB Bandwidth and 99% Occupied Bandwidth FCC Rule: 15.247(a)(2); RSS-247 A8.2 and RSS-GEN;

#### 4.1.1 Requirement

The minimum 6-dB bandwidth shall be at least 500 kHz

#### 4.1.2 Procedure

A spectrum analyzer was connected to the antenna port of the transmitter.

For FCC 6dB Channel Bandwidth the Procedure described in the FCC Publication 558074 D01 DTS Meas Guidance v04 was used to determine the DTS occupied bandwidth. Section 8.1 Option 1 was used.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


For 99% power bandwidth measurement, the bandwidth was determined by using the built-in 99% occupied bandwidth function of the spectrum analyzer. The resolution bandwidth is set to 1% of the selected span as is without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth.

#### 4.1.3 Test Result

Frequency (MHz)	6-dB bandwidth FCC 15.247 & RSS-GEN, kHz	Occupied bandwidth, RSS-GEN, MHz	Plot
2402	642.542	--	1.1
	--	1.010	1.4
2442	643.386	--	1.2
	--	1.010	1.5
2480	647.449	--	1.3
	--	1.012	1.6


Date of Test:	October 5, 2017
Results	Complies

Plot 1. 1

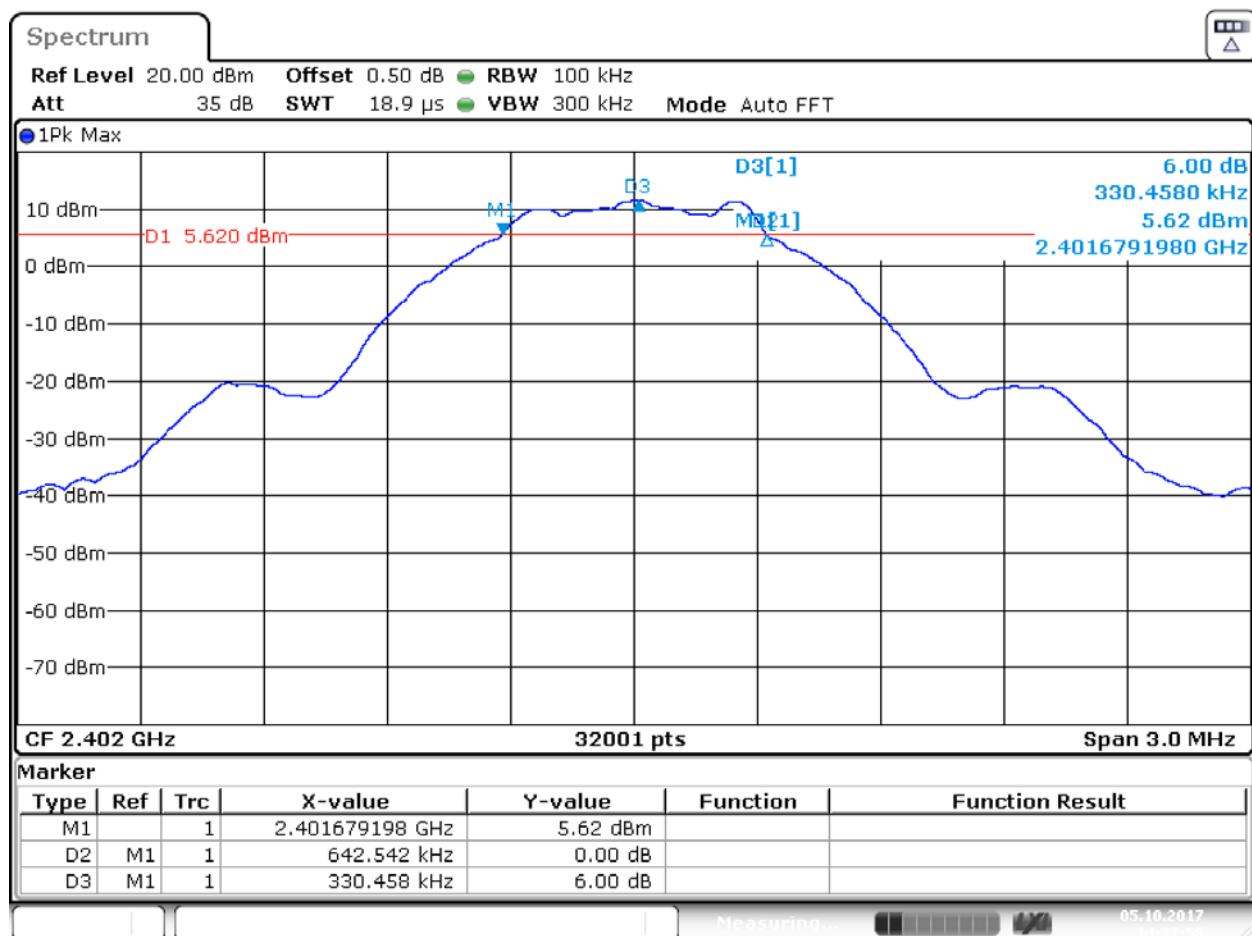


Date: 5.OCT.2017 14:37:58

Plot 1. 2

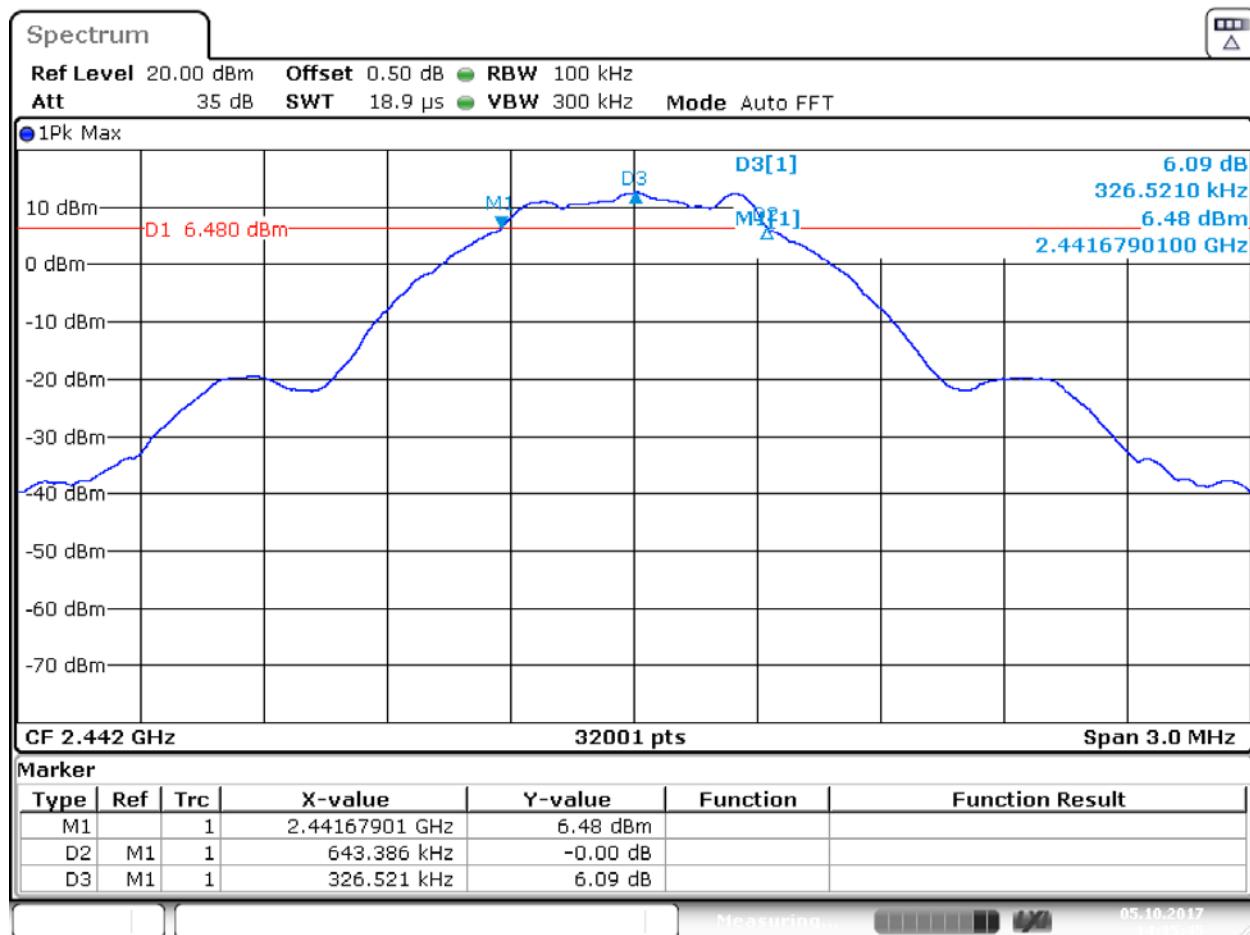


Date: 5.OCT.2017 14:35:45

Plot 1. 3

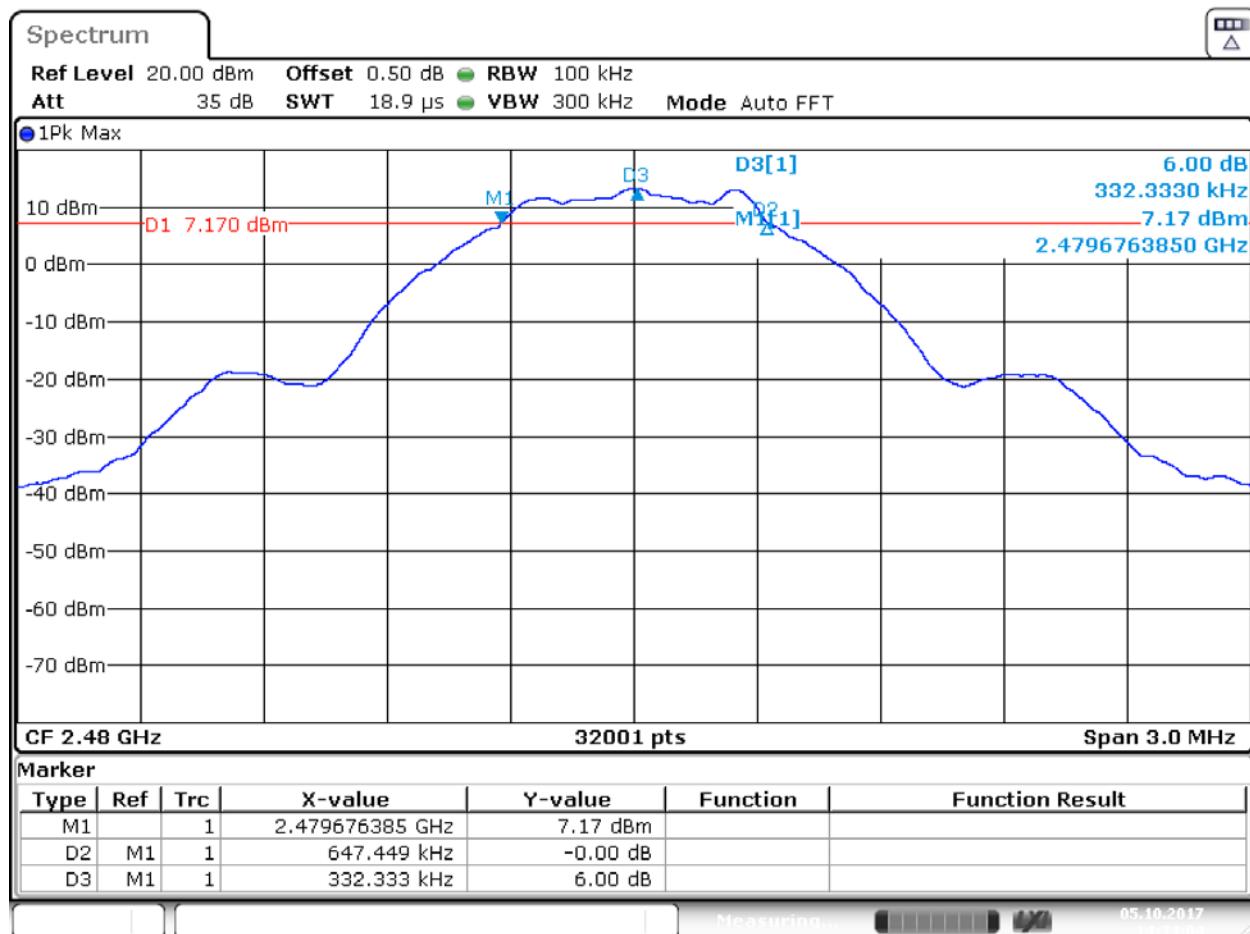


Date: 5.OCT.2017 14:34:04

Plot 1. 4

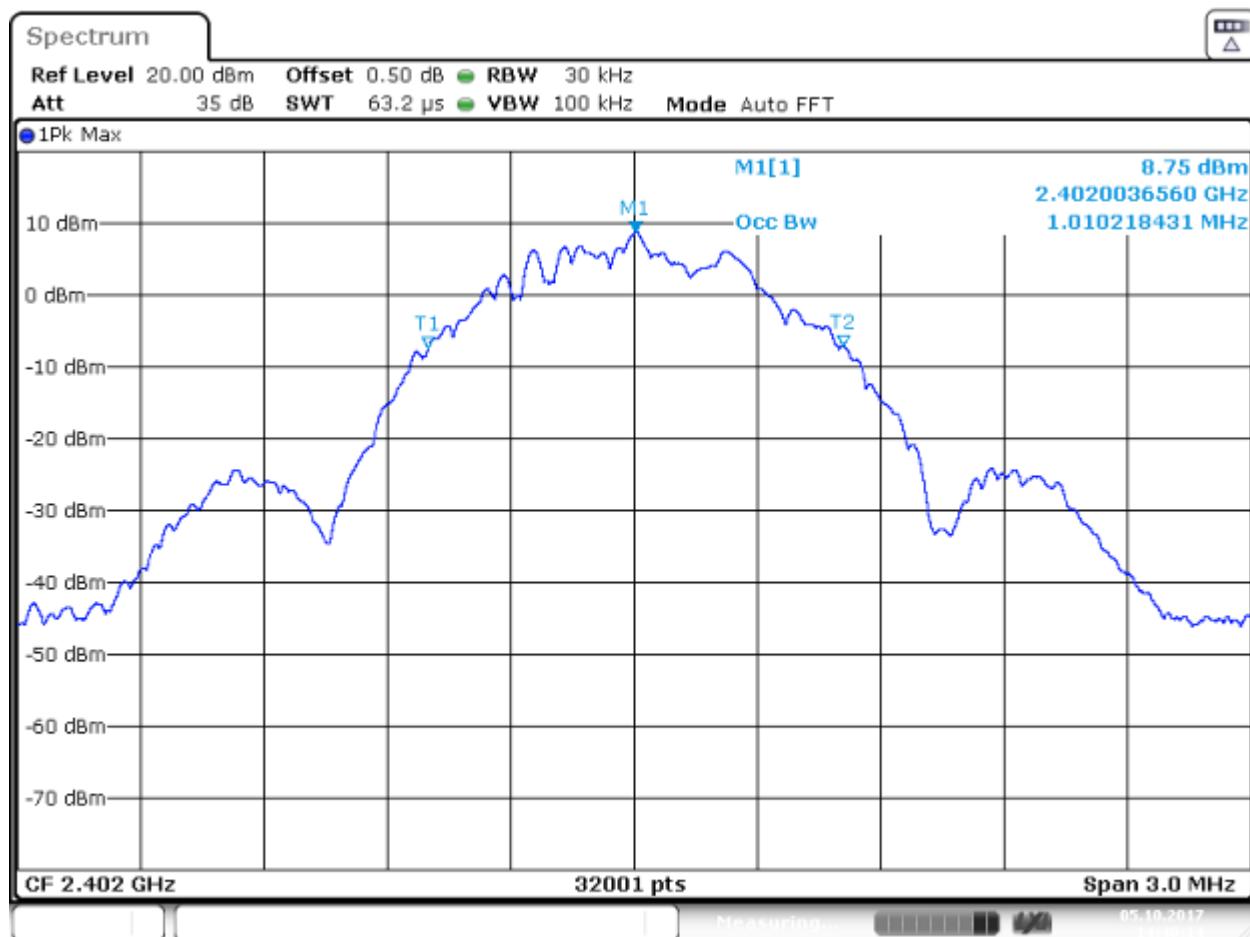


Date: 5.OCT.2017 14:40:14

Plot 1.5

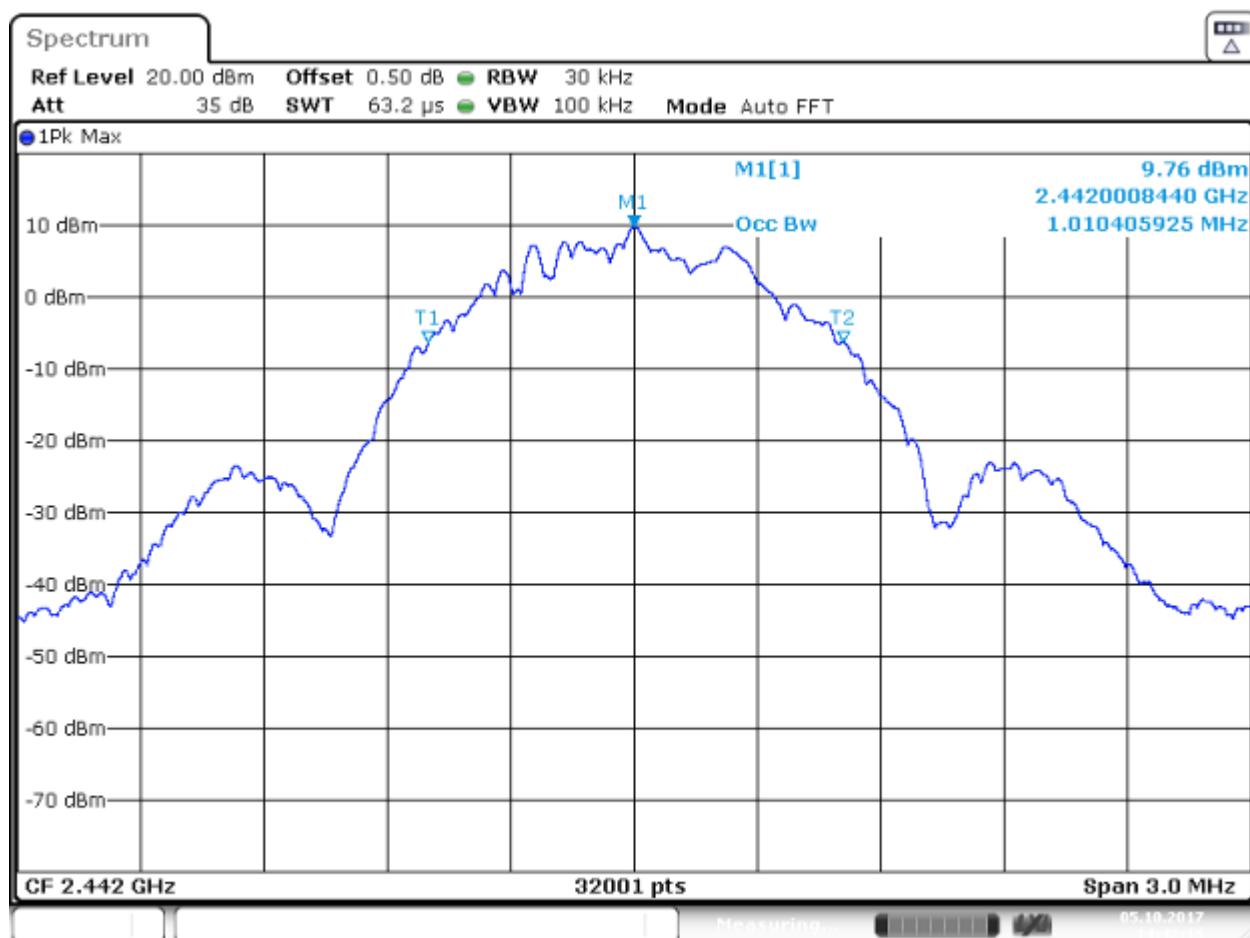

Date: 5.OCT.2017 14:42:16

Plot 1.6

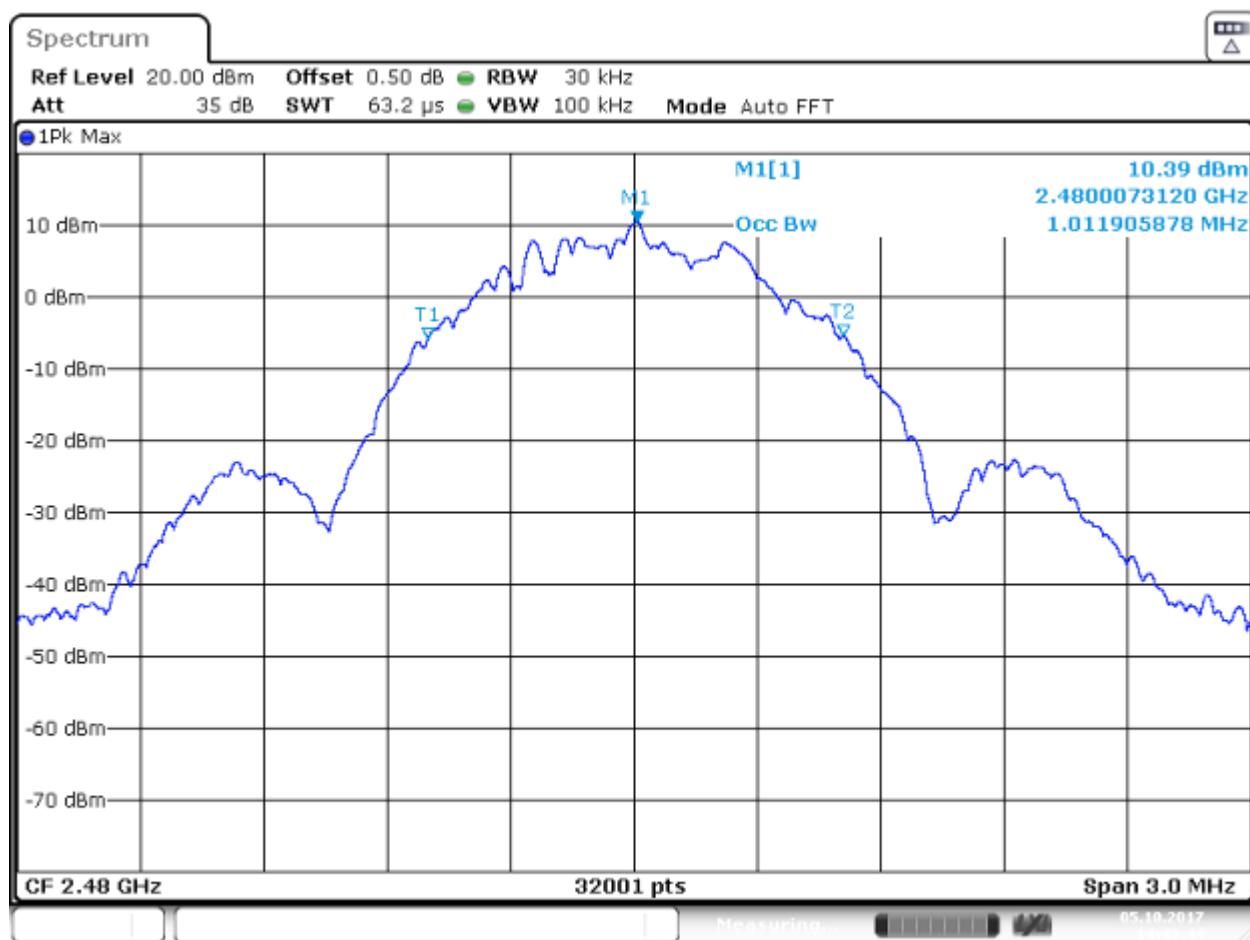

Date: 5.OCT.2017 14:43:44

4.2 Maximum Peak Conducted Output Power at Antenna Terminals  
 FCC Rule: 15.247(b)(3); RSS-247 A8.4;

4.2.1 Requirement

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt or 30 dBm. For antennas with gains greater than 6 dBi, transmitter output level must be decreased appropriately, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2.2 Procedure

The procedure described in FCC Publication 558074 D01 DTS Meas Guidance v04 was used. Specifically, section 9.1.1 RBW  $\geq$  DTS Bandwidth was utilized as the spectrum analyzer's resolution bandwidth was greater than the DTS bandwidth.

1. Set the  $\text{RBW} \geq \text{DTS Bandwidth}$
2. Set the  $\text{VBW} \geq 3 \times \text{RBW}$
3. Set the span  $\geq 3 \times \text{RBW}$
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max Hold
7. Allow trace to fully stabilize
8. Use peak marker function to determine the peak amplitude level.

A spectrum analyzer was connected to the antenna port of the transmitter.


4.3.3 Test Result

Refer to the following plots 2.1 – 2.3 for the test details.

Frequency, MHz	Conducted Power (peak), dBm	Conducted Power (peak), mW	Plot
2402	12.37	17.258	2.1
2442	13.45	22.131	2.2
2480	13.94	24.774	2.3


Date of Test:	October 5, 2017
Results	Complies

Plot 2. 1

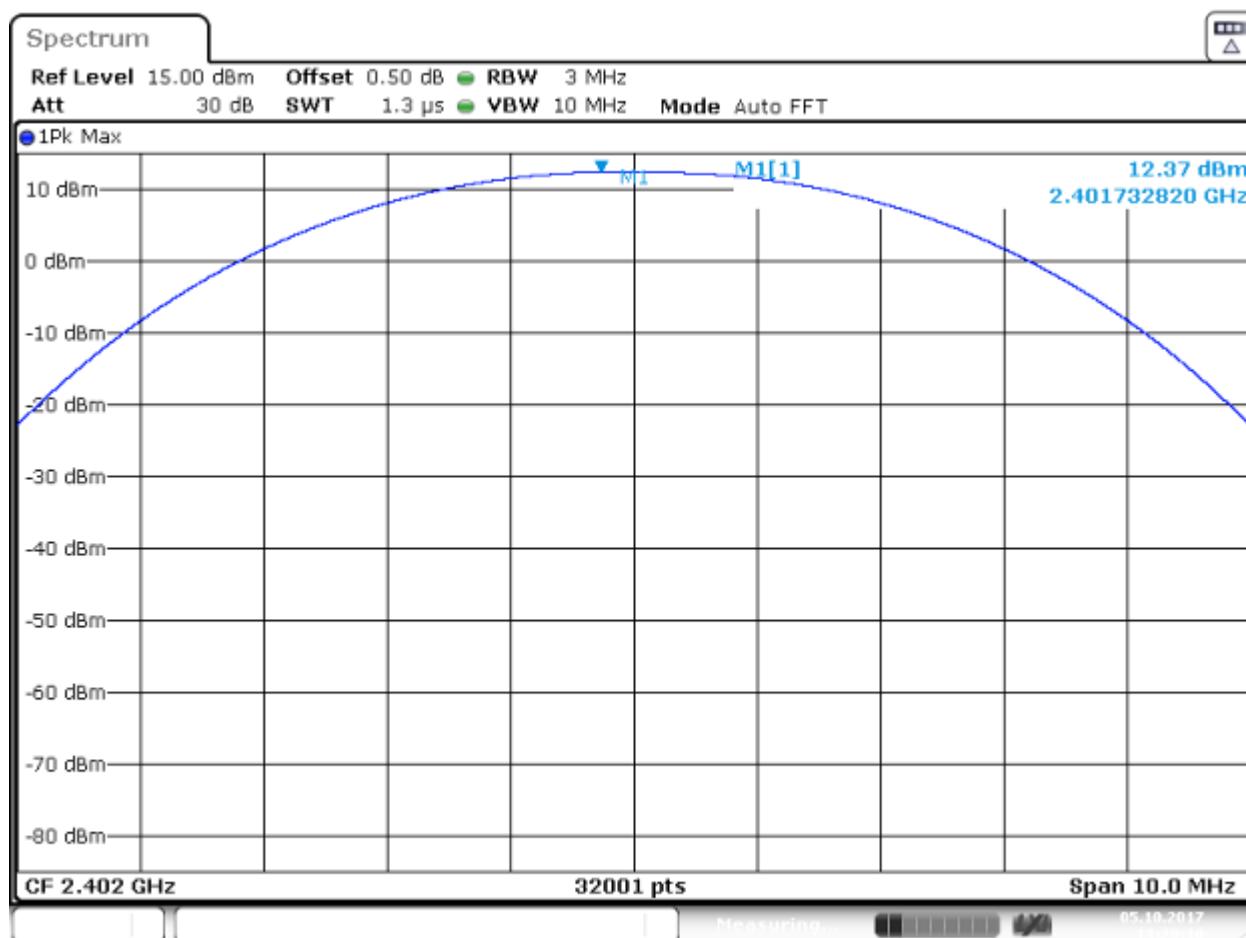


Date: 5.OCT.2017 13:29:10

Plot 2. 2

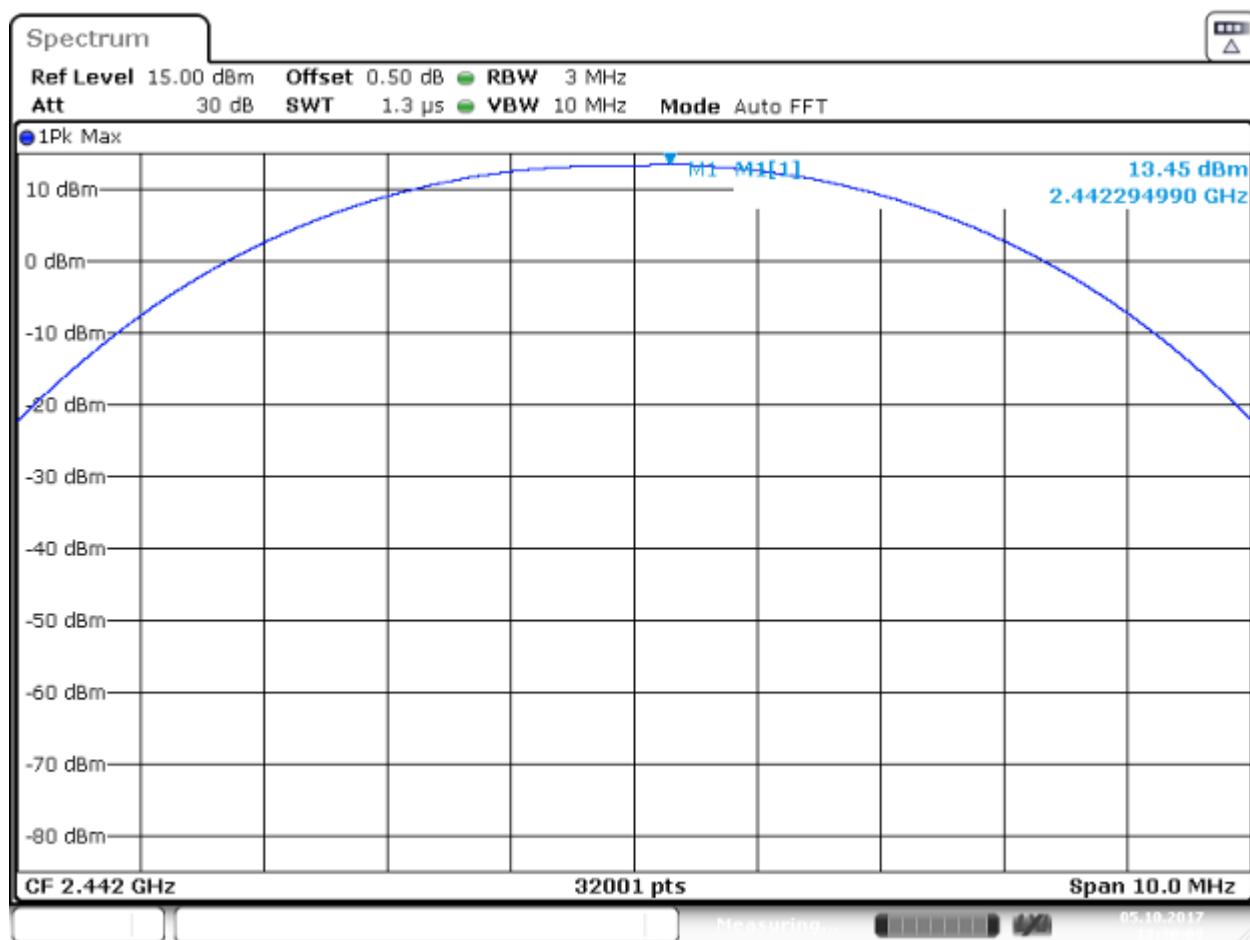

Plot 2. 3

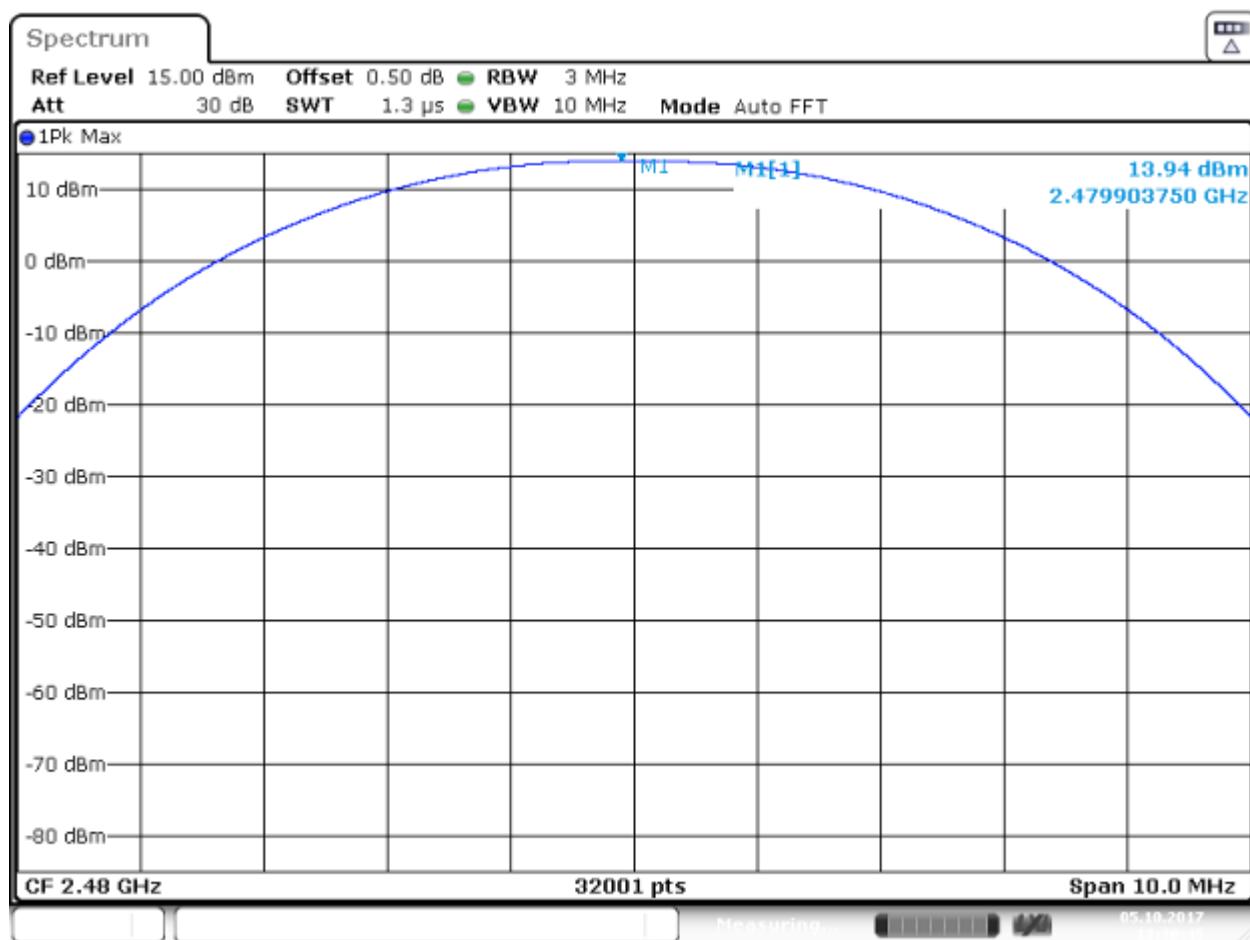

Date: 5.OCT.2017 13:30:46

#### 4.3 Maximum Power Spectral Density FCC: 15.247 (e); RSS-247 A8.2b;

##### 4.3.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna should not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

##### 4.3.2 Procedure

A spectrum analyzer was connected to the antenna port of the transmitter.

The procedure described in FCC Publication 558074 D01 DTS Meas Guidance v04, specifically section 10.2 Method PKPSD (peak PSD).

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the *DTS bandwidth*.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


##### 4.3.3 Test Result

Refer to the following plots for the test result

Frequency, MHz	Maximum Power Spectral Density, dBm	Maximum Power Spectral Density Limit, dBm	Margin, dB	Plot
2402	1.79	8.0	-6.21	3.1
2442	2.87	8.0	-5.13	3.2
2480	3.80	8.0	-4.20	3.3


Date of Test:	October 5, 2017
Results	Complies

Plot 3. 1

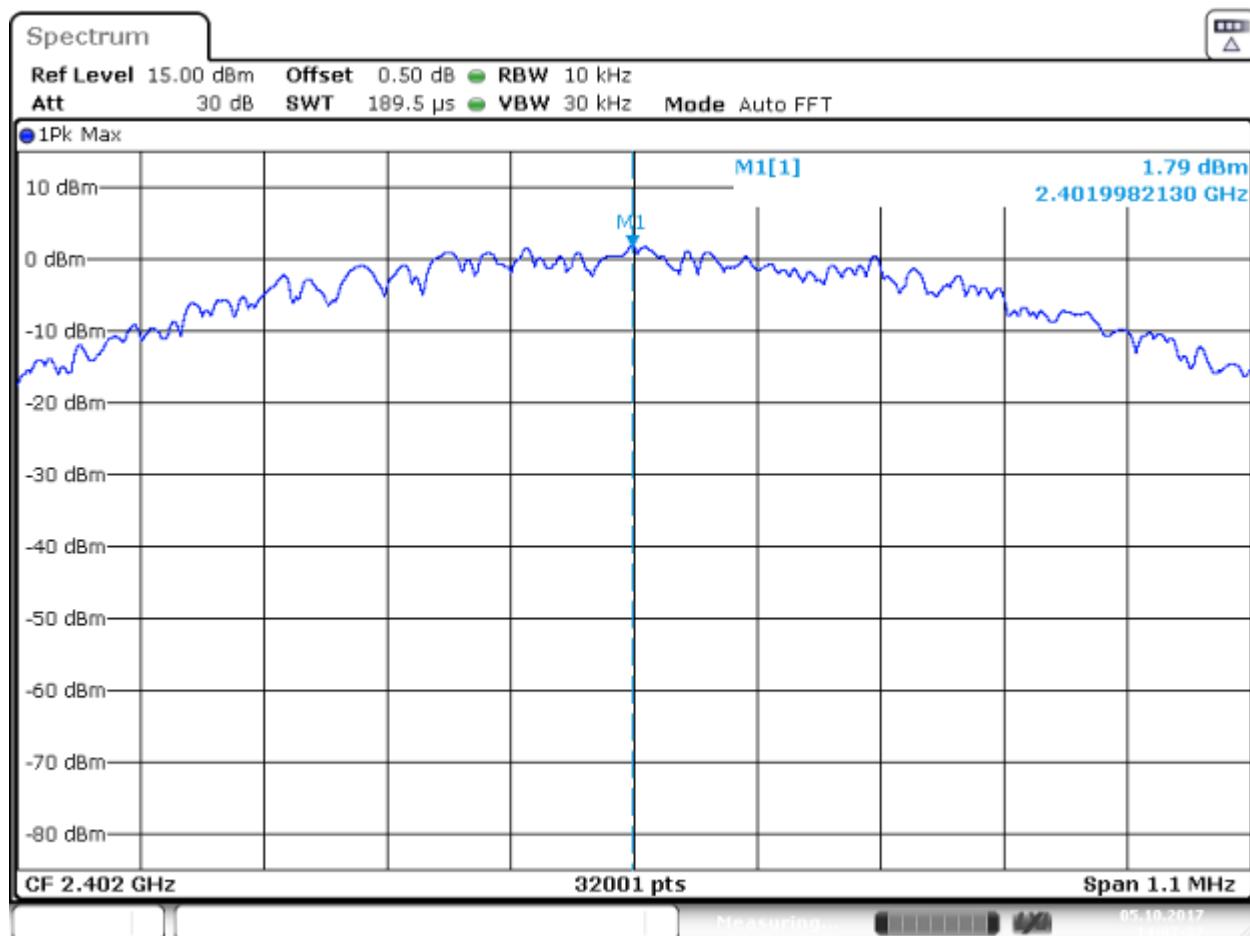


Date: 5.OCT.2017 14:07:32

Plot 3. 2

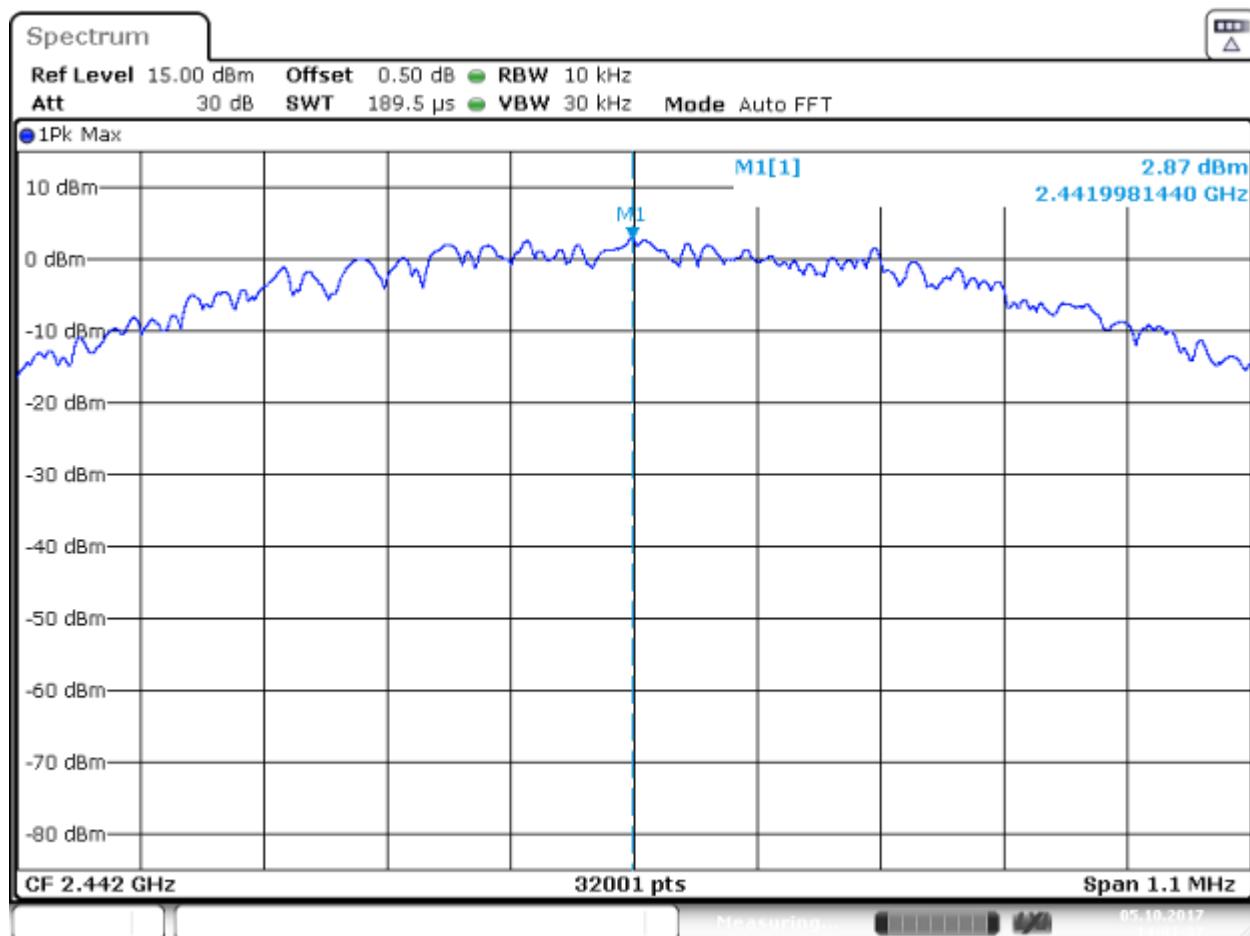

Date: 5.OCT.2017 14:01:37

Plot 3. 3

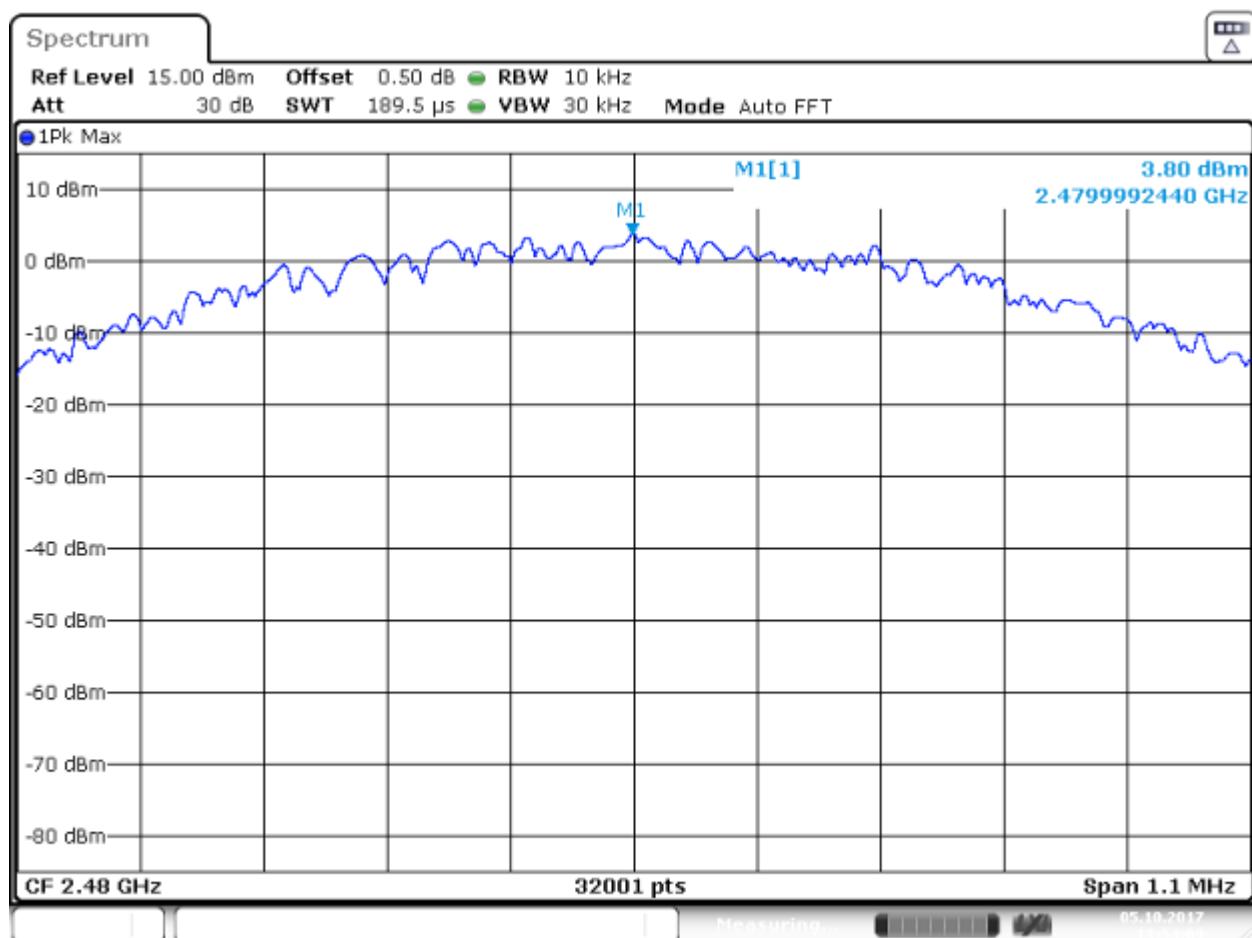

Date: 5.OCT.2017 13:54:09

4.4 Unwanted Conducted Emissions  
FCC: 15.247(d); RSS-247 A8.5;

4.4.1 Requirement

In any 100 kHz bandwidth outside the EUT pass-band, the RF power shall be below the maximum in-band 100 kHz emissions by at least 20 dB (if peak power of in-band emission is measured) or 30 dB (if average power of in-band emission is measured).

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

4.4.2 Procedure

The procedure described in FCC Publication 558074 D01 DTS Meas Guidance v04, specifically section 11.0 Emissions in non-restricted frequency bands.

A spectrum analyzer was connected to the antenna port of the transmitter.


1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq 3 \times$  RBW.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

The unwanted emissions were measured from 30 MHz to 25 GHz. Plots below are corrected for cable loss and then compared to the limits.

4.4.3 Test Result


Refer to the following plots 4.1 – 4.5 for unwanted conducted emissions. The plot shows -20dB attenuation limit line.

Date of Test:	October 5, 2017
Results	Complies

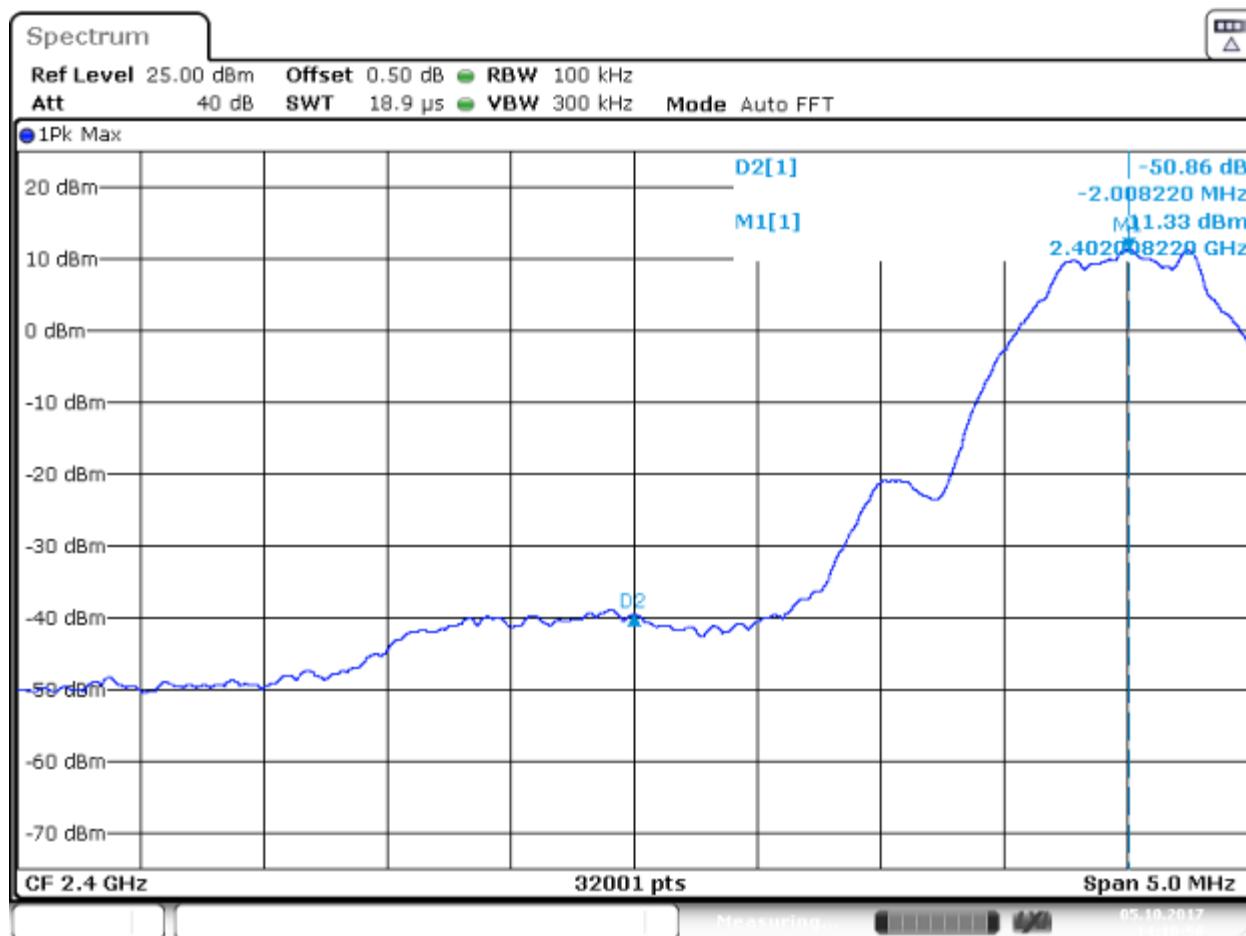Tx @ Low Channel, 2400 MHz Band Edge  
Plot 4.1


Date: 5.OCT.2017 14:10:50

Tx @ Low Channel, 2483.5 MHz Band Edge  
Plot 4.2

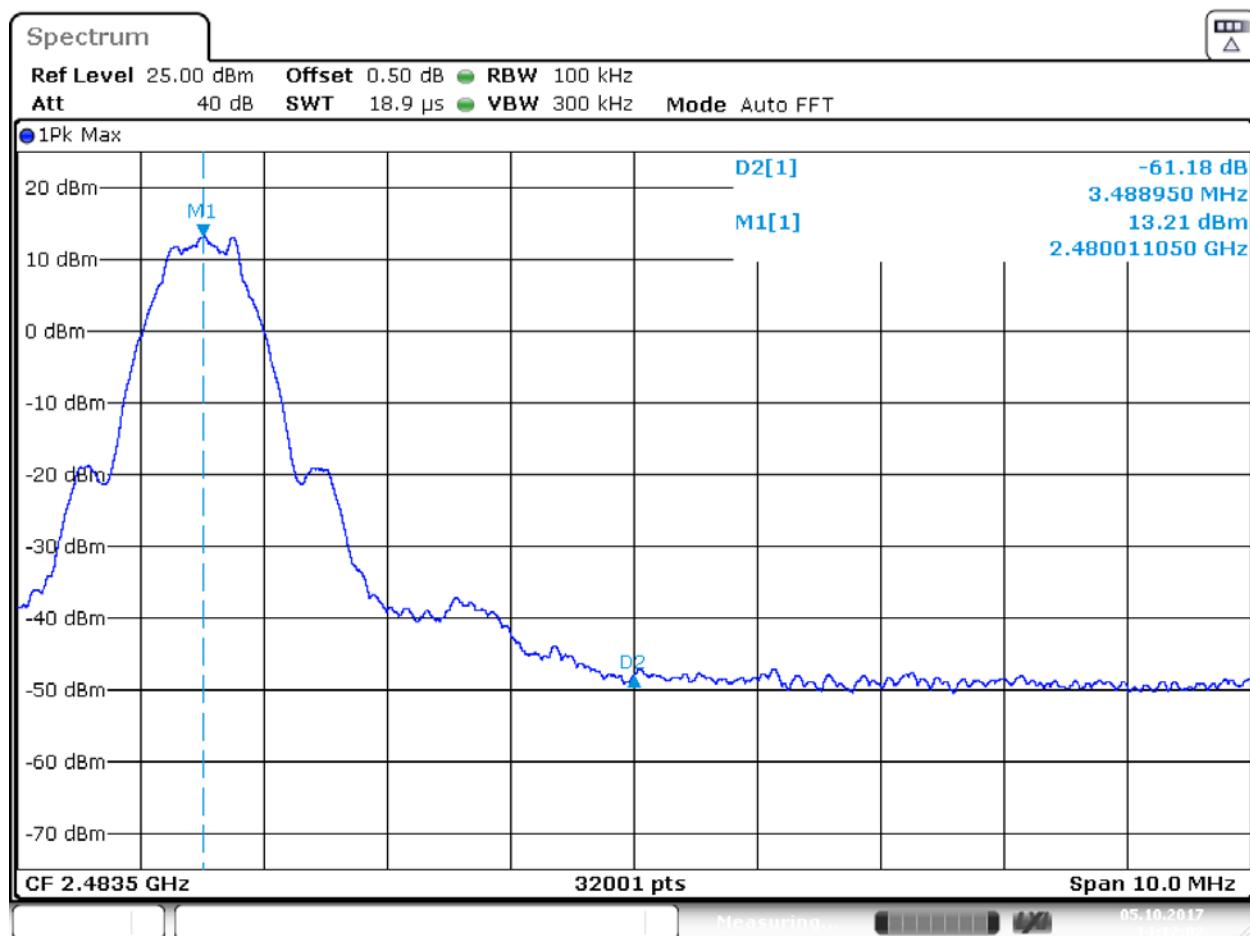



Date: 5.OCT.2017 14:12:03

Tx @ Low Channel, 2402 MHz  
30MHz -26GHz Conducted Spurious  
Plot 4.3

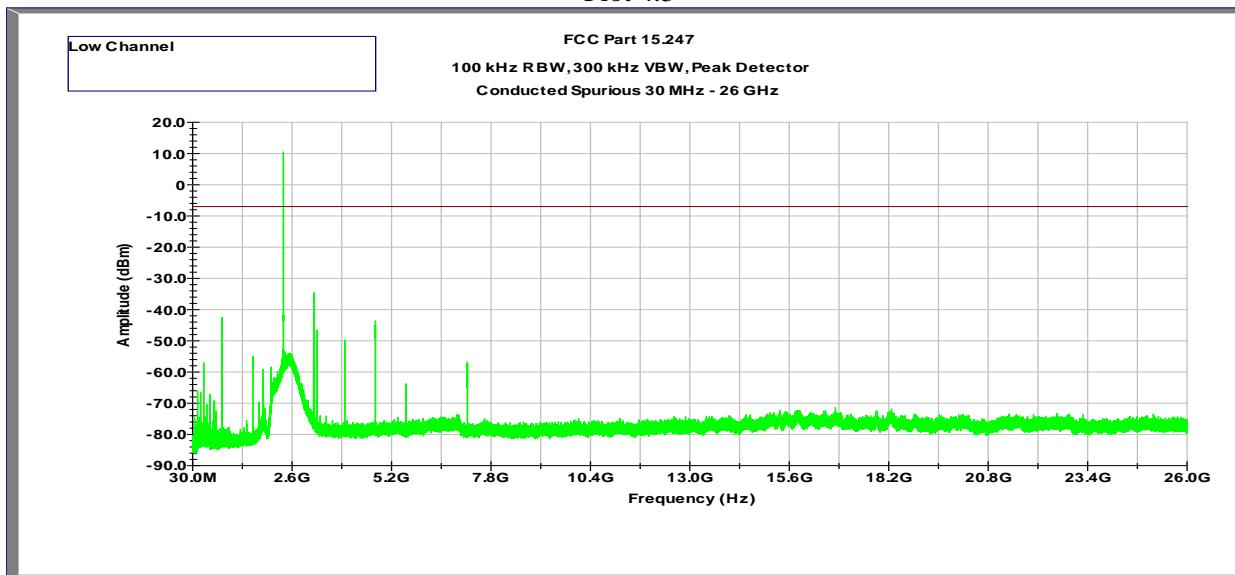

Tx @ Mid Channel, 2442 MHz  
30MHz -26GHz Conducted Spurious  
Plot 4.4

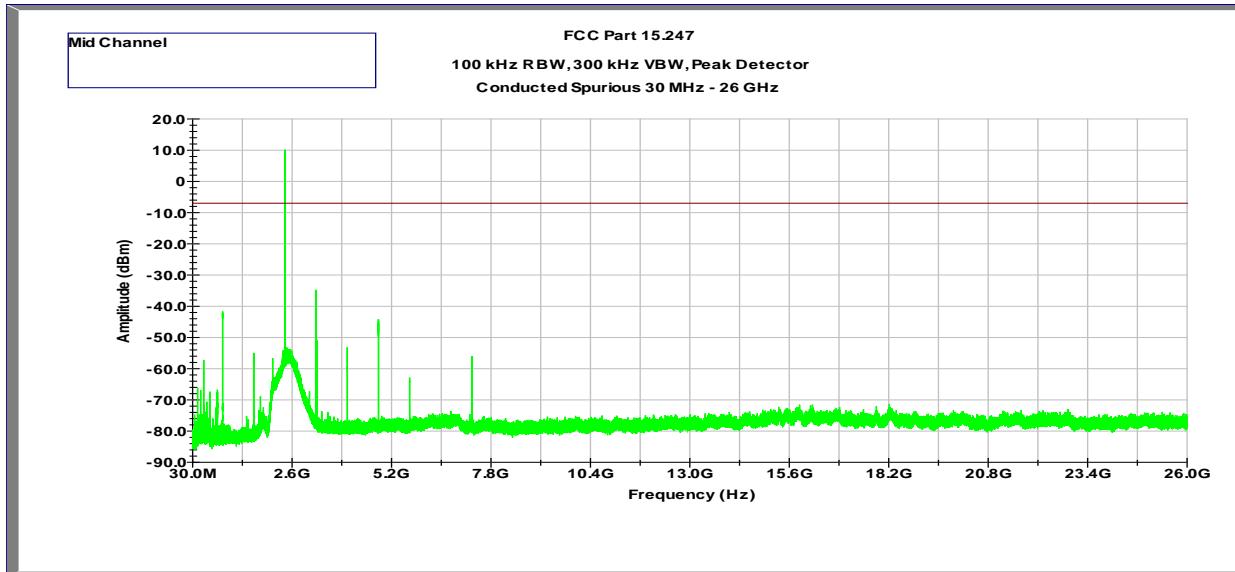

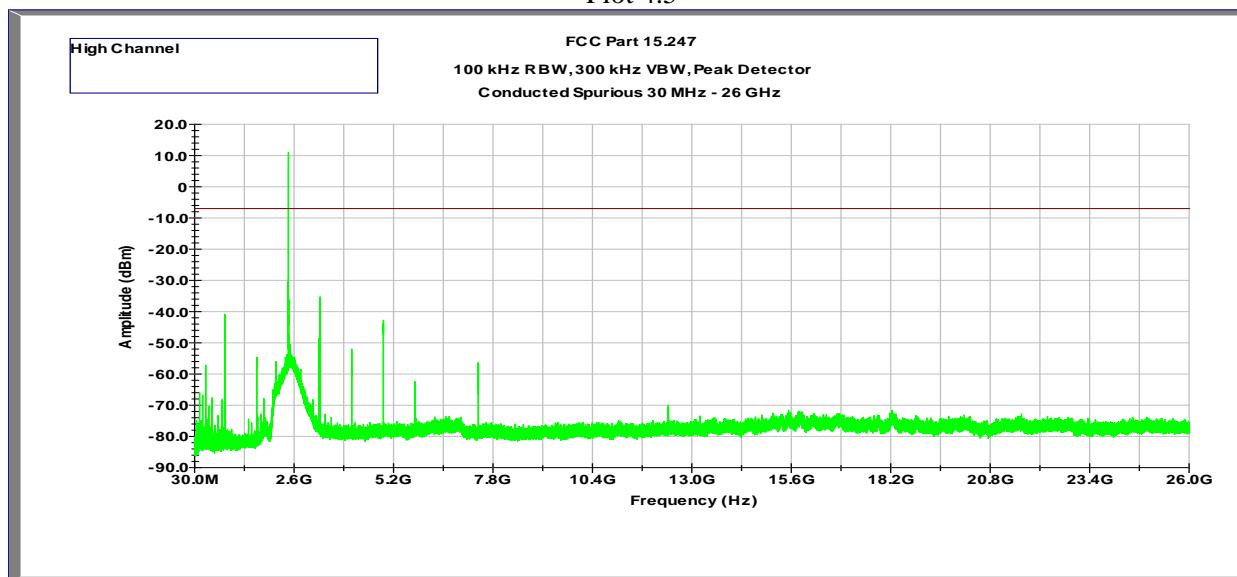Tx @ High Channel, 2480 MHz  
30MHz -26GHz Conducted Spurious  
Plot 4.5

4.5 Transmitter Radiated Emissions  
FCC Rules: 15.247(d), 15.209, 15.205; RSS-247;

4.5.1 Requirement

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

For out of band radiated emissions (except for frequencies in restricted bands), in any 100 kHz bandwidths outside the EUT pass-band, the RF power shall be at least 20dB (peak) or 30 dB (average) below that of the maximum in-band 100 kHz emissions.

4.5.2 Procedure

Radiated emission measurements were performed from 30 MHz to 25 GHz according to the procedure described in ANSI C63.10: 2013. Spectrum Analyzer Resolution Bandwidth is 100 kHz or greater for frequencies 30 MHz to 1000 MHz, 1 MHz for frequencies above 1000 MHz. Above 1000 MHz Peak and Average measurements were performed.

The EUT is placed on a plastic turntable that is 80 cm in height for below 1000MHz and 1.5m in height for above 1GHz. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). During testing, all cables were manipulated to produce worst-case emissions. The signal is maximized through rotation. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at 3 meters for frequencies above 1 GHz and at 10 meters for frequencies below 1 GHz.

Measurements made from 1 GHz to 18GHz had a 2.4-2.5GHz notch filter in place. A preamp was used from 30MHz to 26GHz.

All measurements were made with a Peak Detector and compared to QP limits for 30MHz – 1GHz and Average limits for 1GHz – 26GHz.

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels).

#### 4.5.3 Field Strength Calculation

##### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CF – AG; if measurement is performed at a distance other than specified in the rule, a Distance Correction Factor (DCF) shall be added.

Where FS = Field Strength in dB( $\mu$ V/m)

RA = Receiver Amplitude (including preamplifier) in dB( $\mu$ V); AF = Antenna Factor in dB(1/m)

CF = Cable Attenuation Factor in dB; AG = Amplifier Gain in dB

Assume a receiver reading of 52.0 dB( $\mu$ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB( $\mu$ V/m). This value in dB( $\mu$ V/m) was converted to its corresponding level in  $\mu$ V/m.

RA = 52.0 dB( $\mu$ V)

AF = 7.4 dB(1/m)

CF = 1.6 dB

AG = 29.0 dB

FS = 52.0+7.4+1.6-29.0 = 32 dB( $\mu$ V/m).

Level in  $\mu$ V/m = Common Antilogarithm [(32 dB $\mu$ V/m)/20] = 39.8  $\mu$ V/m.

#### 4.5.4 Antenna-port conducted measurements

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

#### 4.5.6 General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified for determining quasi-peak, peak, and average conducted output power, respectively.
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies  $\leq$  30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $>$  1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (*e.g.*, Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:  
$$E = EIRP - 20\log D + 104.8 + DCF$$
 (DCF for Average measurements)  
where:  
E = electric field strength in dB $\mu$ V/m,  
EIRP = equivalent isotropic radiated power in dBm  
D = specified measurement distance in meters.  
DCF = Duty Cycle Correction Factor
- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test

#### 4.5.7 Test Results



The data on the following pages list the significant emission frequencies, the limit and the margin of compliance where emissions are within 3dB of the limit.



All conducted antenna port plots are corrected with the consideration of a 2 dBi Antenna Gain.

All radiated measurements were conducted with the AC adapter and Battery mode. The worst case data was reported.

Vertical and Horizontal orientations were pre-tested. Worst case orientation was used throughout emission measurements.

<b>Date of Test:</b>	October 4 - 5, 2017
<b>Results</b>	<b>Complies</b>

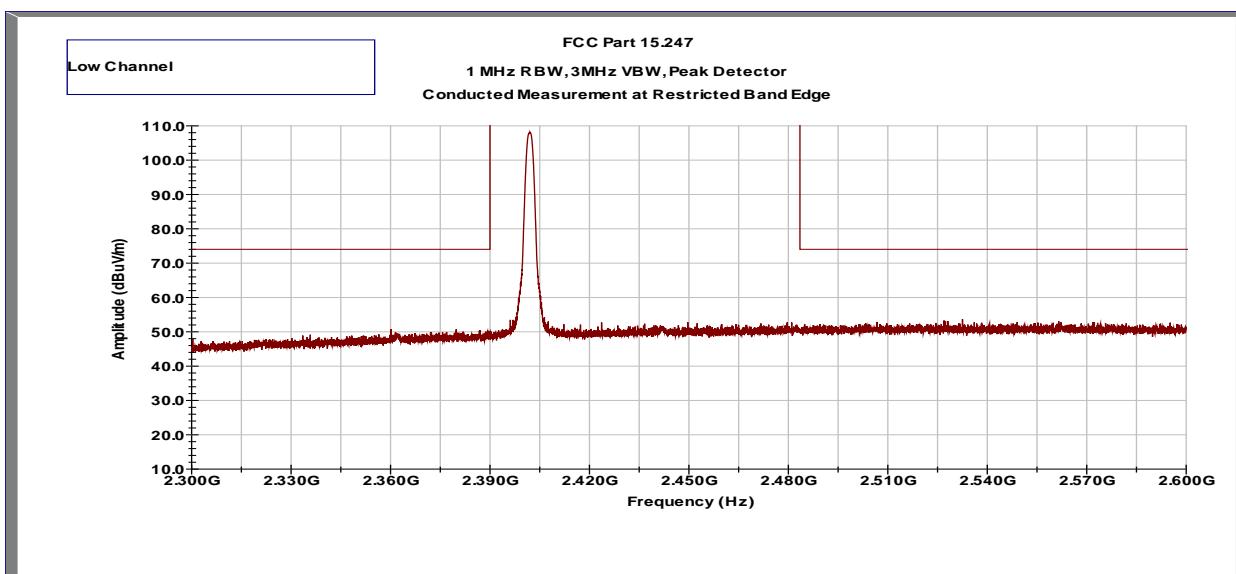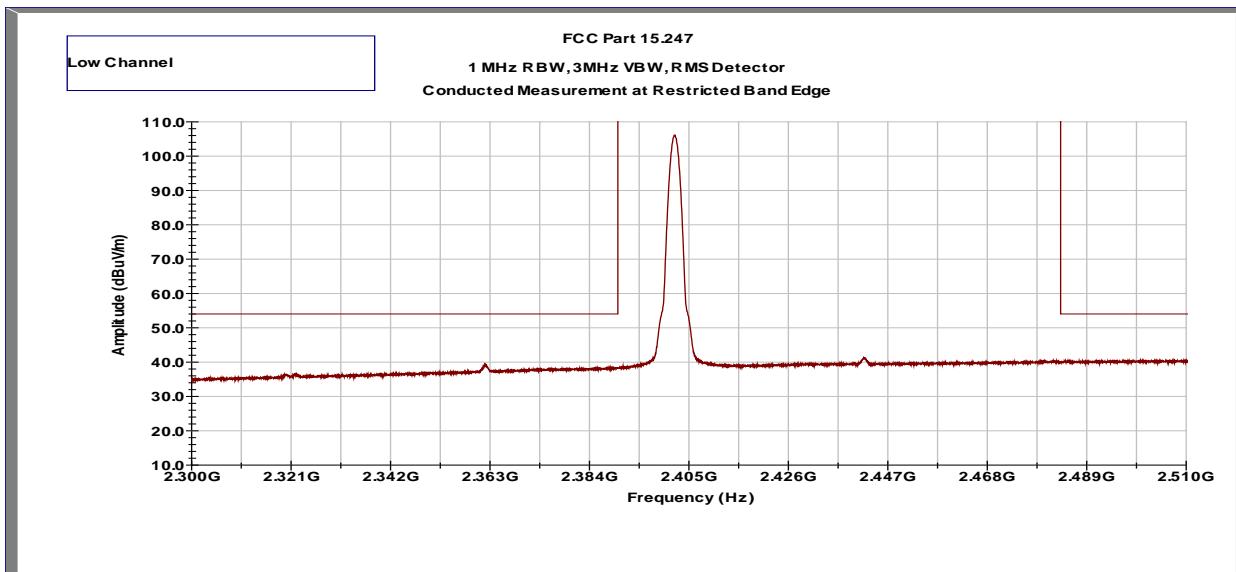
**Test Results: 15.209/15.205 Restricted Band Emissions at Antenna Port****Out-of-Band Spurious Emissions at the Band Edge – Tx @ 2402 MHz**

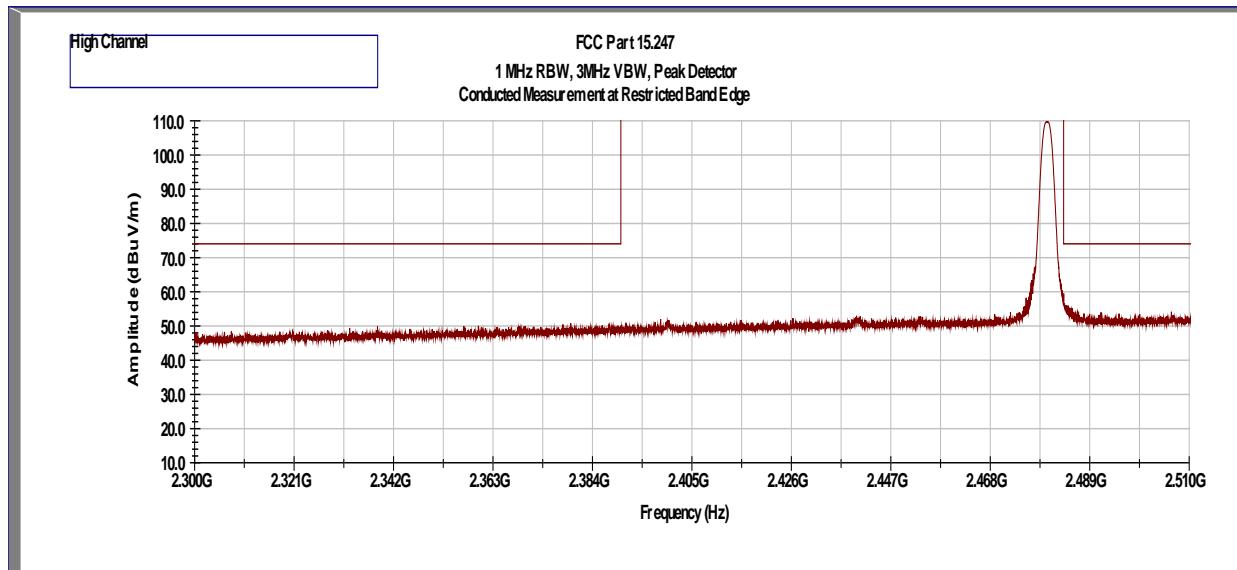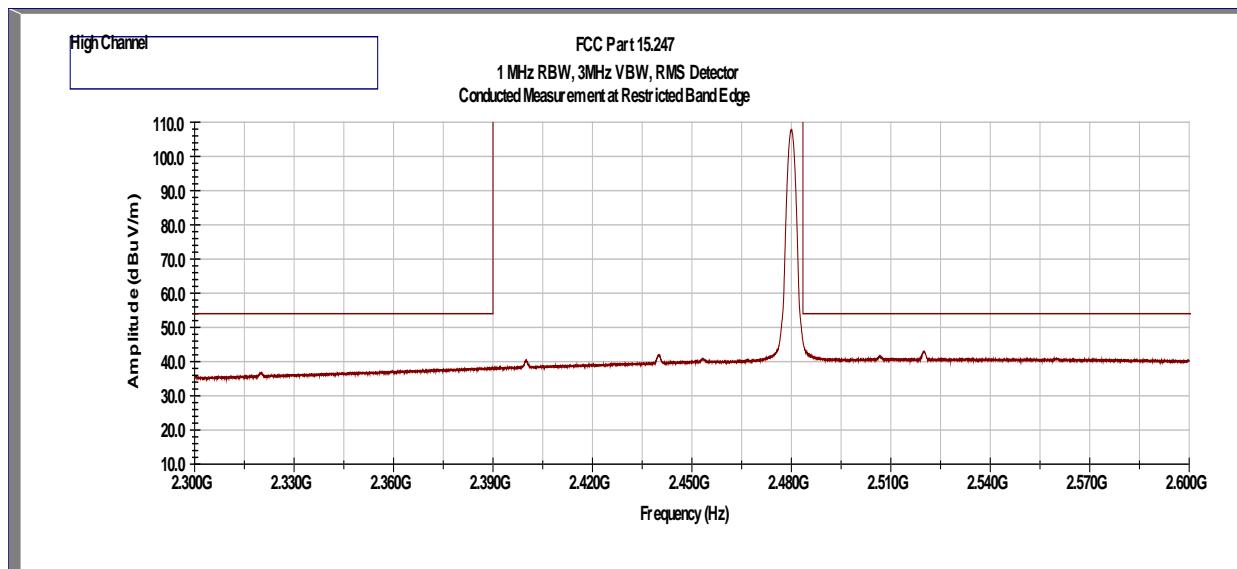**Out-of-Band Spurious Emissions at the Band Edge – Tx @ 2480 MHz**

### Out-of-Band Conducted Spurious Emissions (at Antenna Port)


**Tx @ 2402MHz**

#### Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

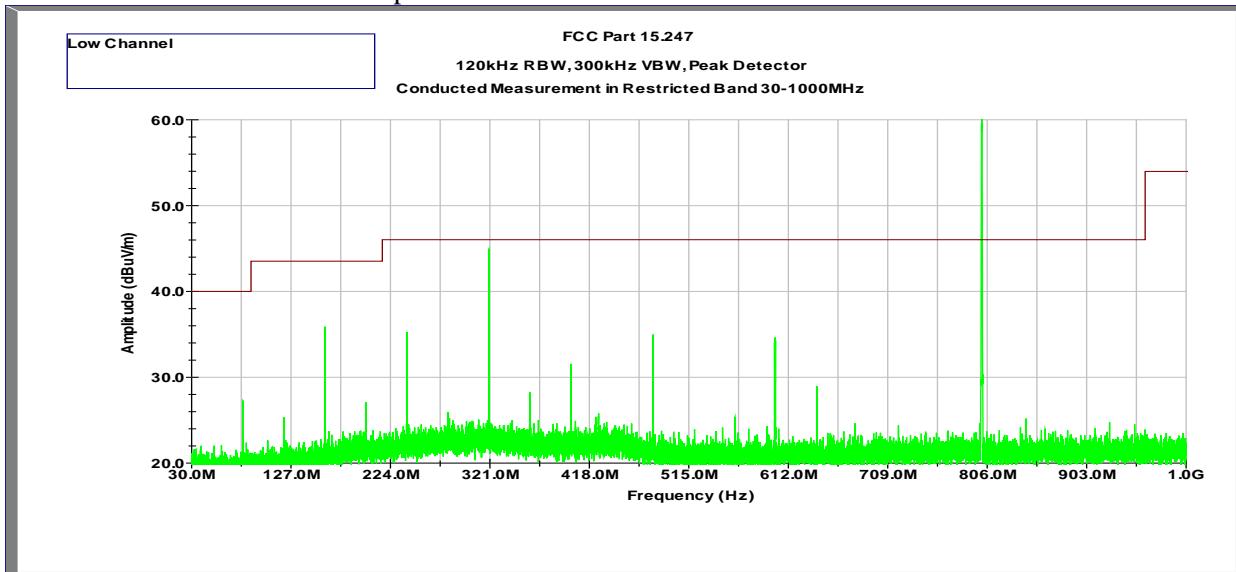

\*The spurious at 800 MHz is not in the Restricted Frequency band per §15.205. Therefore the limit of 15.209 does not apply to this particular frequency. Compliance for this frequency outside the restricted band is shown in report number 103177090MPK-001; section 4.4.

#### Out-of-Band Spurious Emissions at Antenna Port – 1 - 26 GHz Peak Detector vs Avg Limit

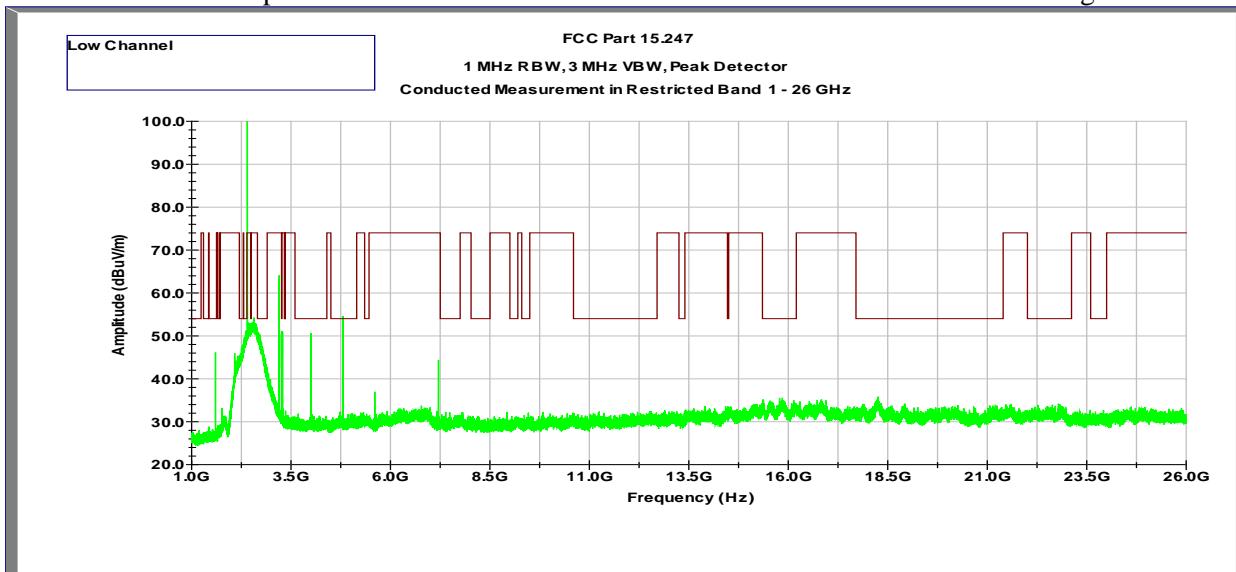


Frequency	Corrected Amplitude	Avg Limit	Margin	Detector	Results
GHz	dB $\mu$ V/m	dB $\mu$ V/m	dB		
4.804	51.5	54	2.5	RMS	Pass

### Out-of-Band Conducted Spurious Emissions (at Antenna Port)


**Tx @ 2442MHz**

Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

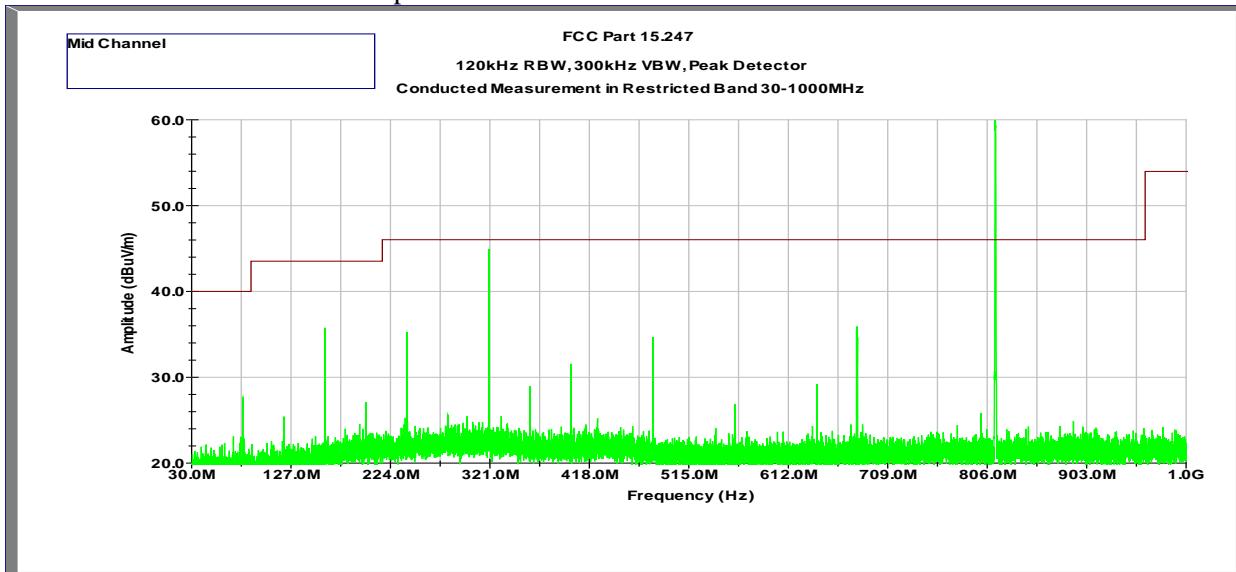

\*The spurious at 813 MHz is not in the Restricted Frequency band per §15.205. Therefore the limit of 15.209 does not apply to this particular frequency. Compliance for this frequency outside the restricted band is shown in report number 103177090MPK-001; section 4.4.

Out-of-Band Spurious Emissions at Antenna Port – 1 - 26 GHz Peak Detector vs Avg Limit

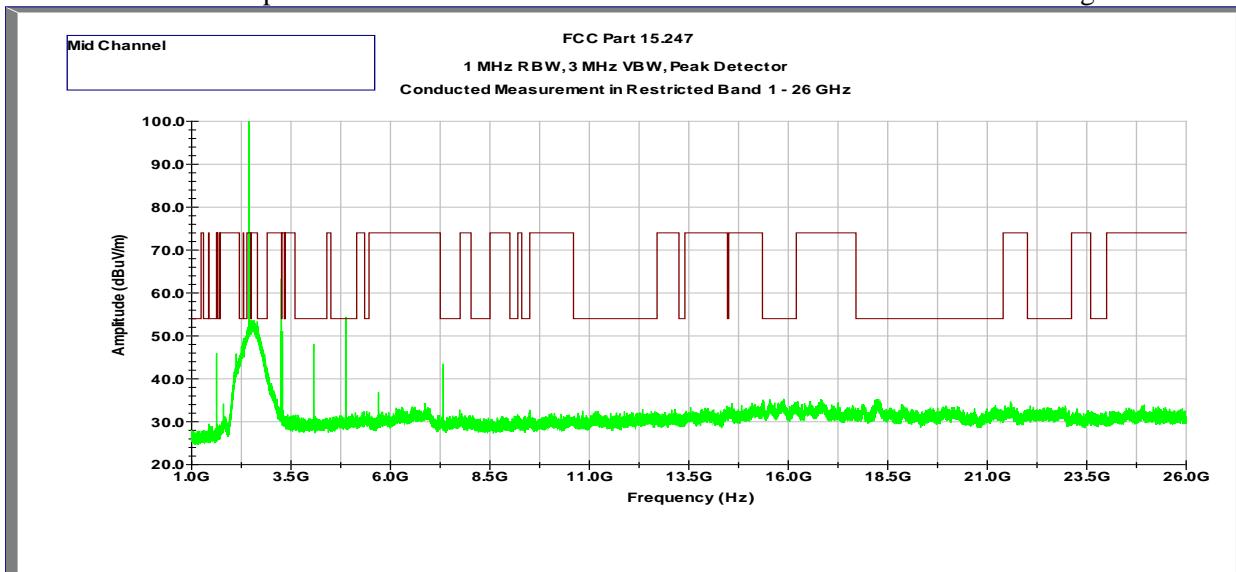


Frequency	Corrected Amplitude	Avg Limit	Margin	Detector	Results
GHz	dBµV/m	dBµV/m	dB		
4.884	51.4	54	2.6	RMS	Pass

### Out-of-Band Conducted Spurious Emissions (at Antenna Port)


**Tx @ 2480MHz**

Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

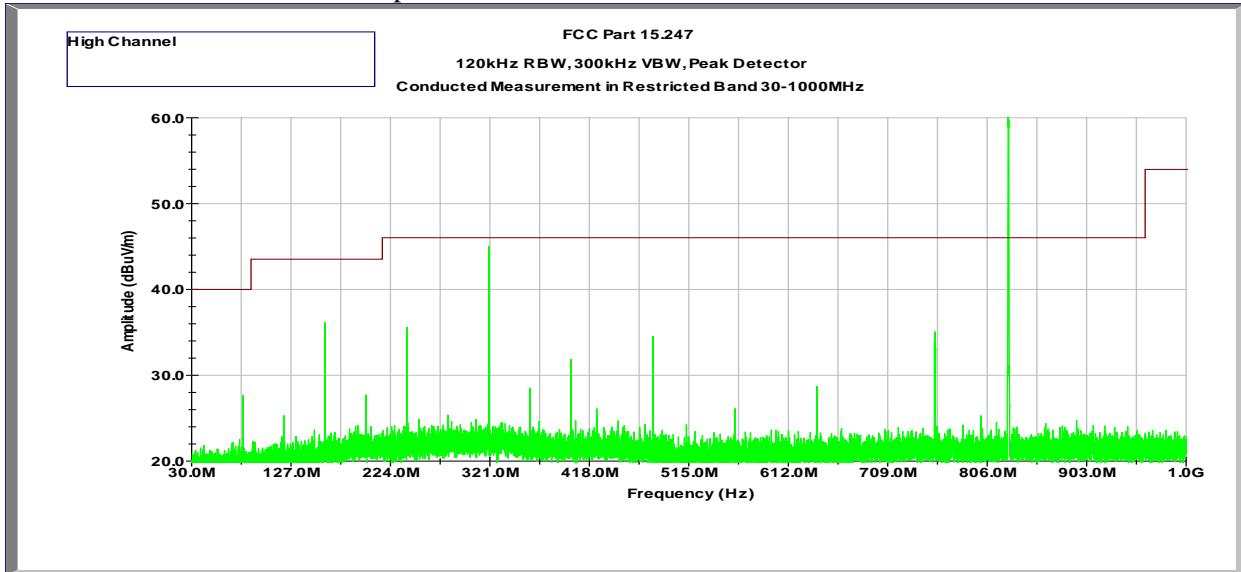

\*The spurious at 826 MHz is not in the Restricted Frequency band per §15.205. Therefore the limit of 15.209 does not apply to this particular frequency. Compliance for this frequency outside the restricted band is shown in report number 103177090MPK-001; section 4.4.

Out-of-Band Spurious Emissions at Antenna Port – 1 - 26 GHz Peak Detector vs Avg Limit

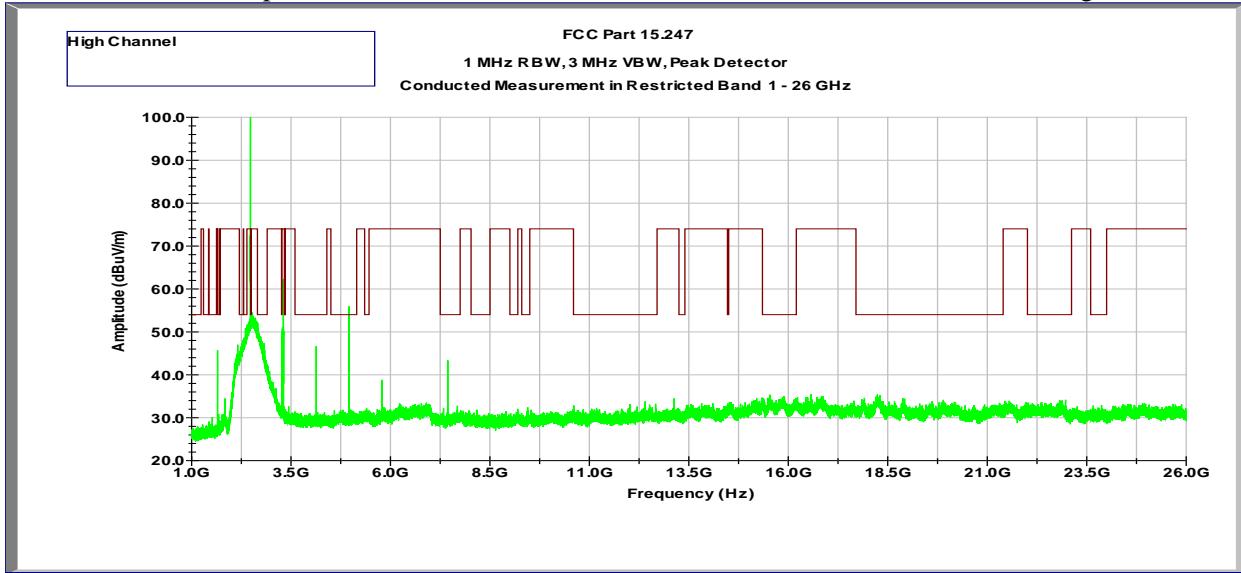


Frequency	Corrected Amplitude	Avg Limit	Margin	Detector	Results
GHz	dBµV/m	dBµV/m	dB		
4.960	53.2	54	0.8	RMS	Pass


**Out-of-Band Radiated Spurious Emissions (Cabinet Radiation)**

Test Results: 15.209 Radiated Spurious Emissions Low Channel, Tx at 2402MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

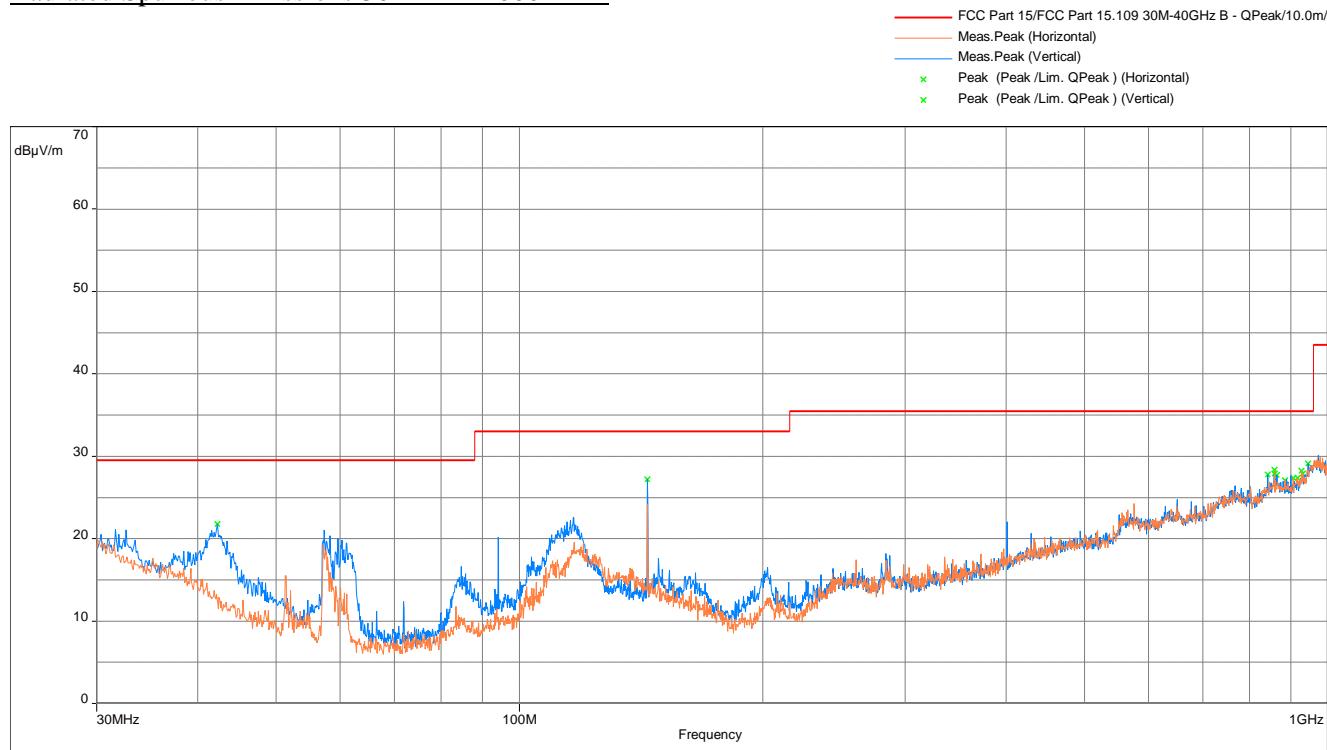


### Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak Limit

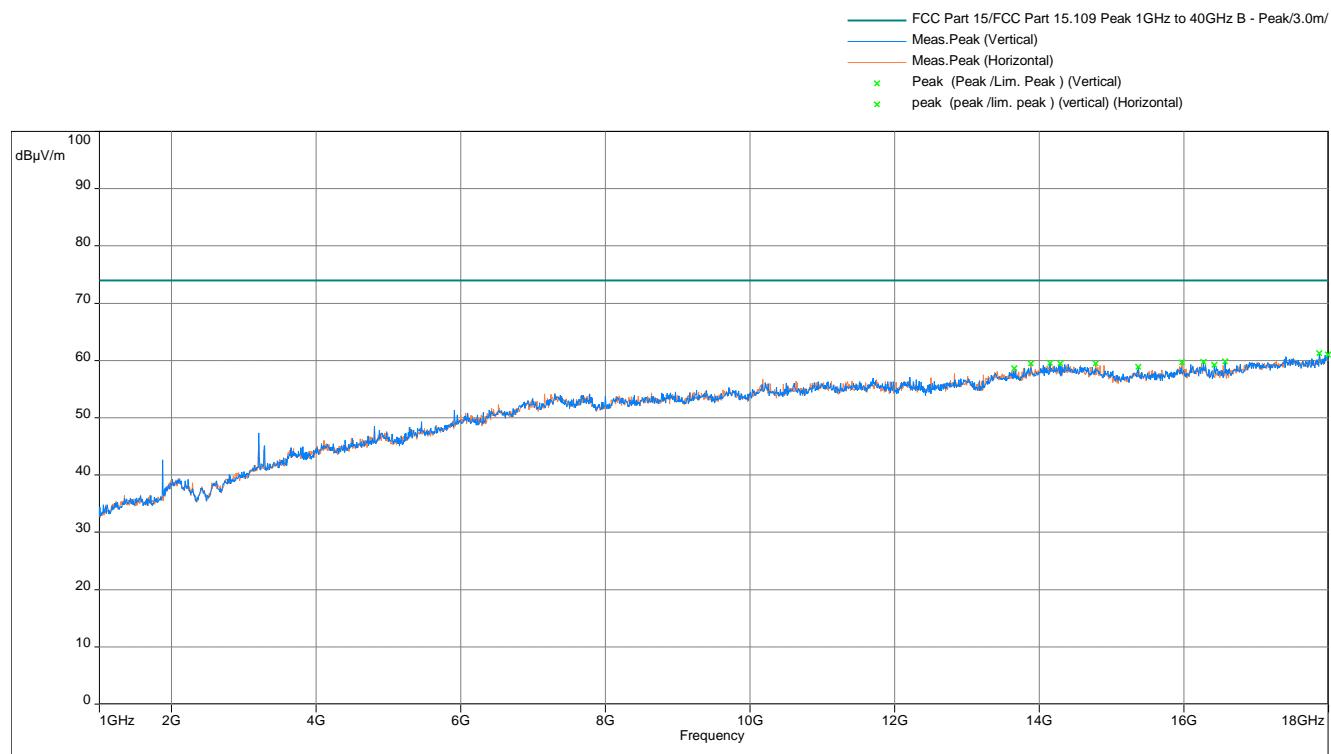

Model: ; Client: ; Comments: ; Test Date: 10/11/2017 16:43

### Radiated Spurious Emissions 1000 - 18000 MHz, Avg Scan vs Avg Limit

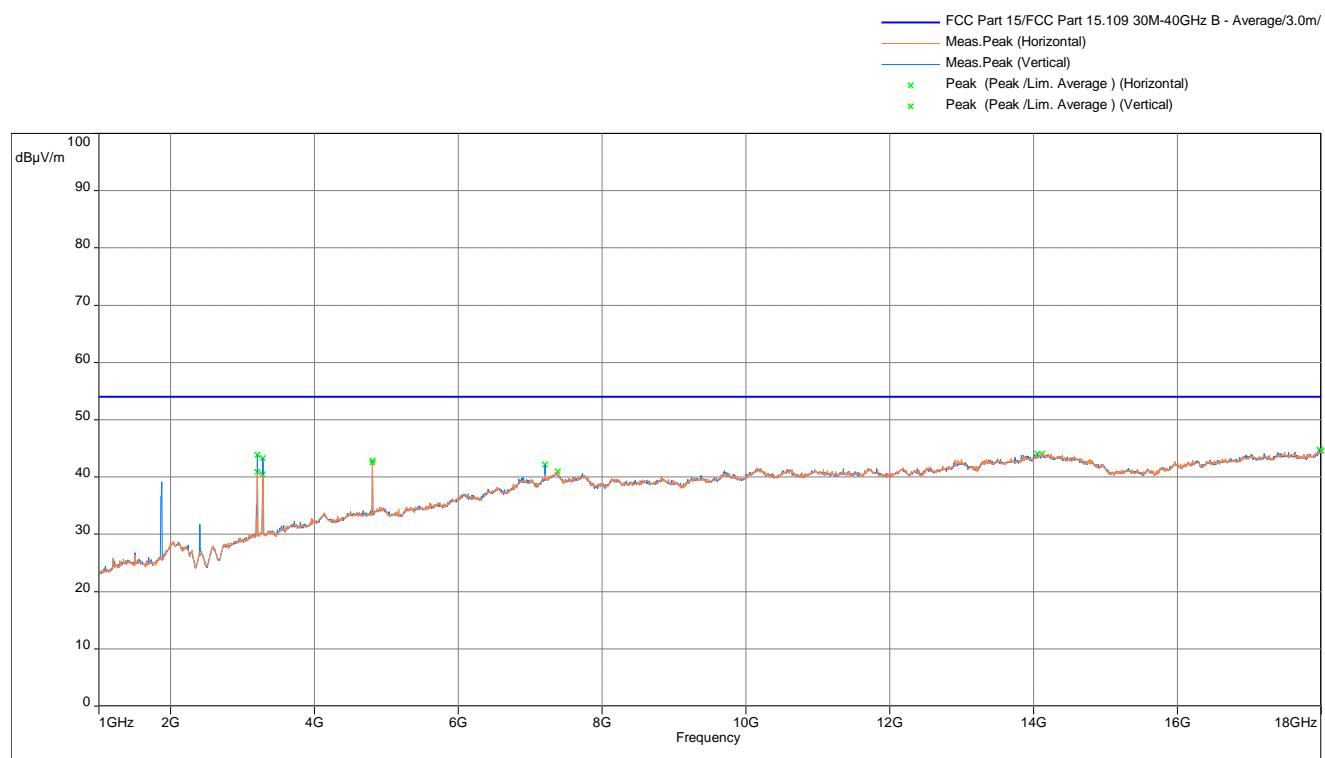

Model:; Client:; Comments:; Test Date: 10/11/2017 16:20

Note: Radiated emission measurements were performed up to 25GHz. No Emissions were identified when scanned from 18-25 GHz


Note: FS@3m = RA + AF + CF - Preamp

**Results**


**Complies**

Test Results: 15.209 Radiated Spurious Emissions Mid Channel, Tx at 2442MHz


Radiated Spurious Emissions 30 MHz - 1000 MHz

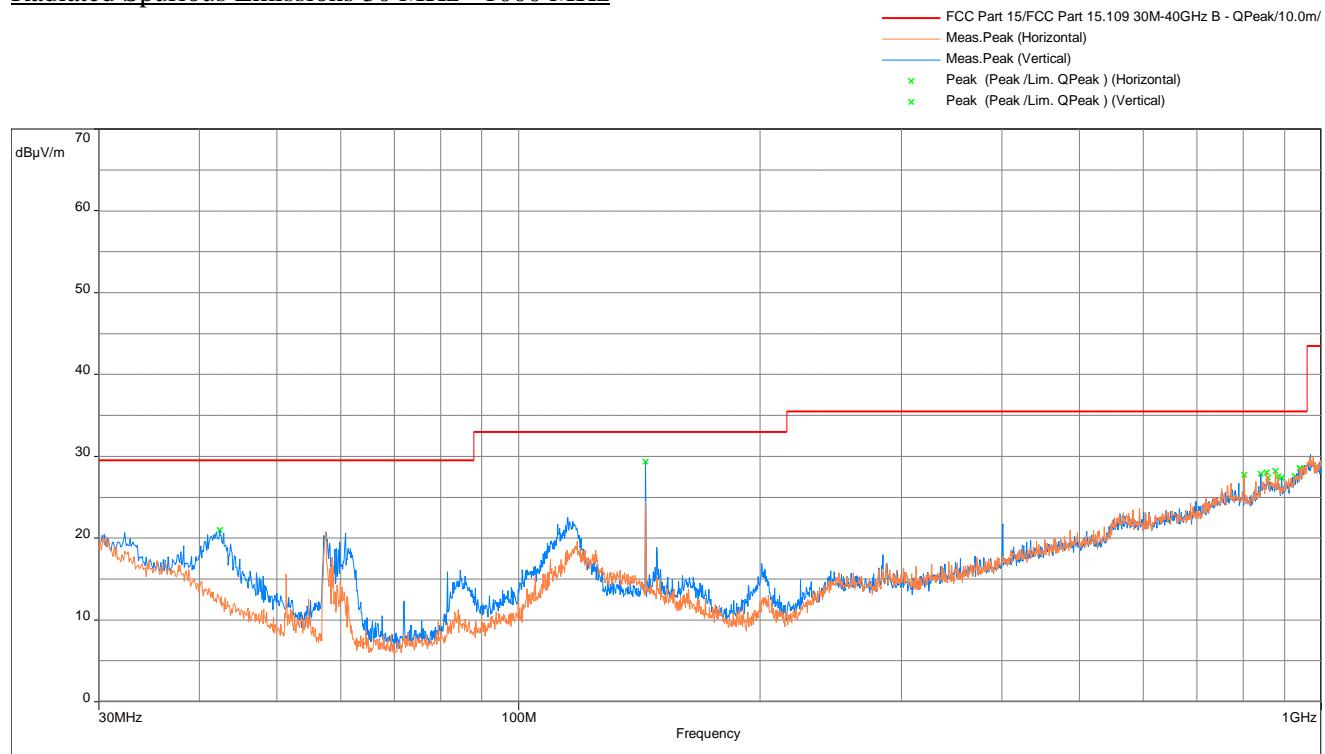

Model: ; Client: ; Comments: ; Test Date: 10/06/2017 17:38

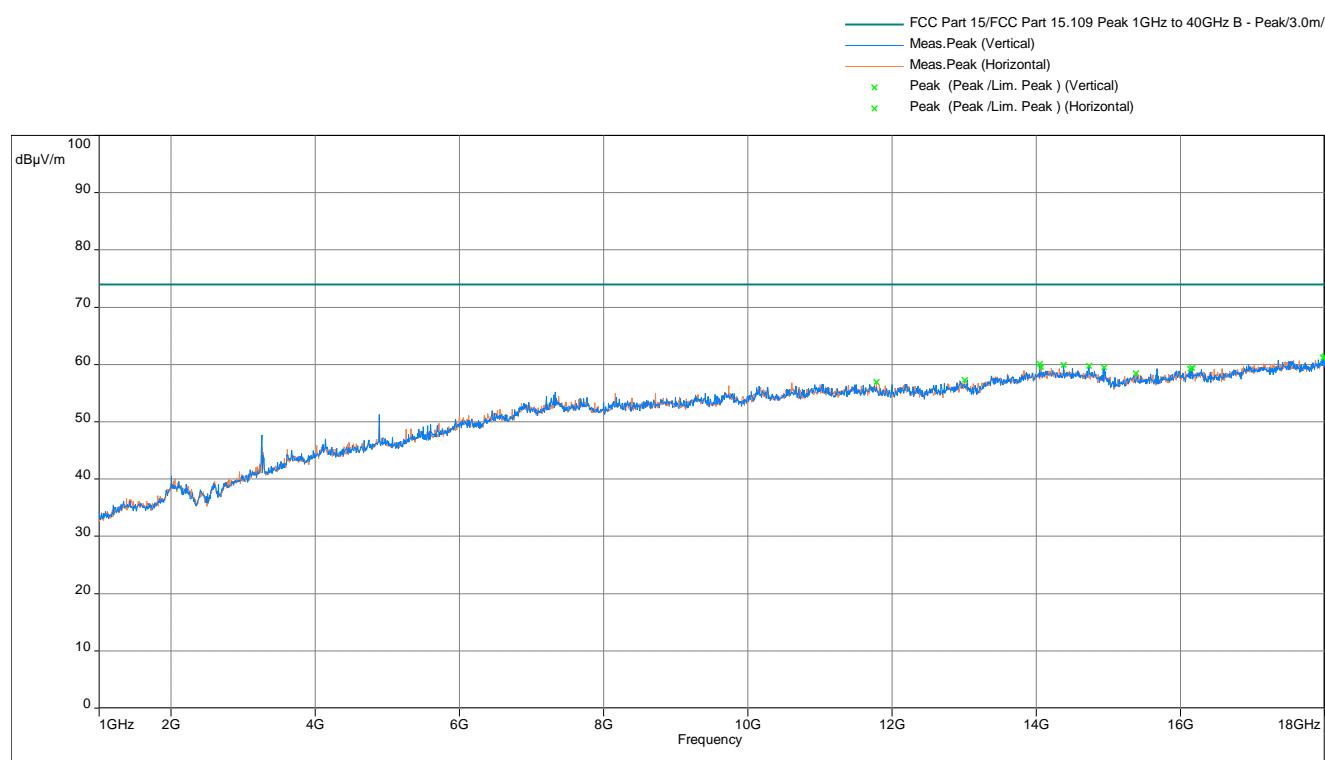Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak Limit

### Radiated Spurious Emissions 1000 - 18000 MHz, Avg Scan vs Avg Limit

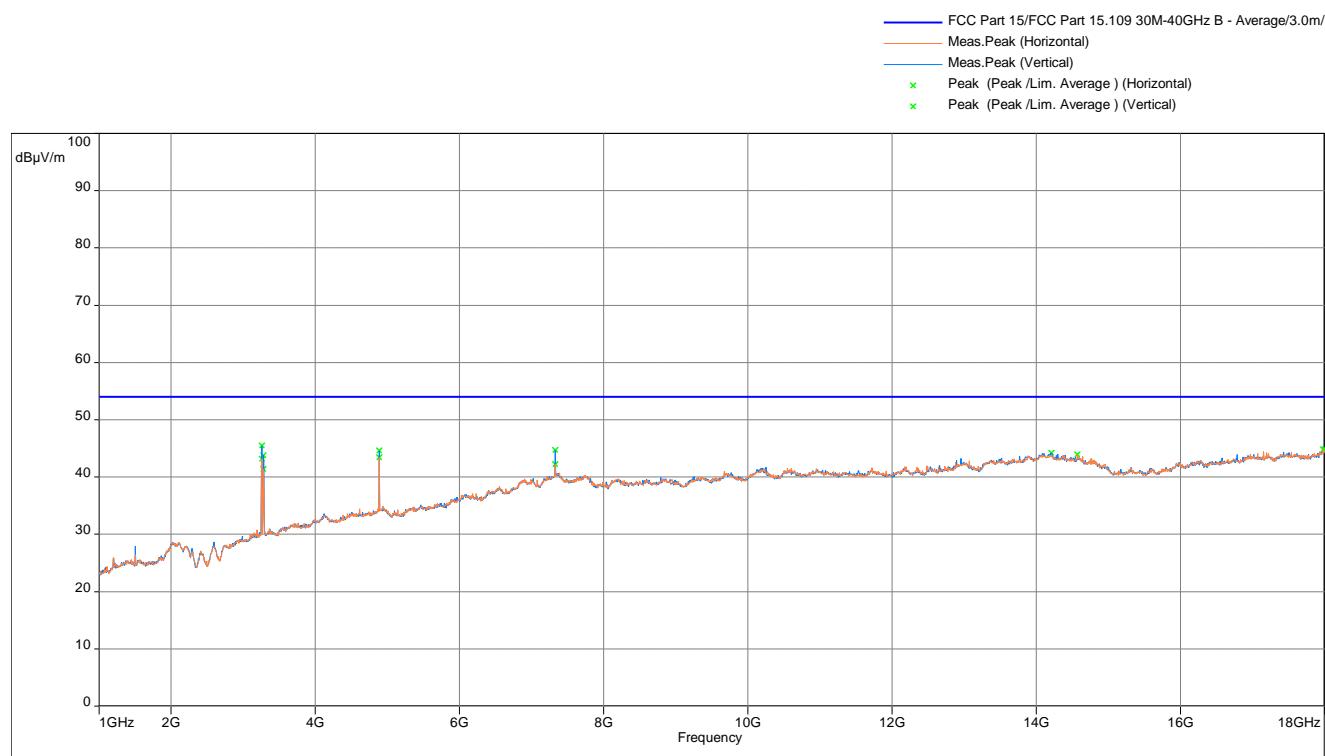

Note: Radiated emission measurements were performed up to 25GHz. No Emissions were identified when scanned from 18-25 GHz


Note: FS@3m = RA + AF + CF - Preamp


**Results**

**Complies**


Test Results: 15.209 Radiated Spurious Emissions High Channel, Tx at 2480MHz

Radiated Spurious Emissions 30 MHz - 1000 MHz

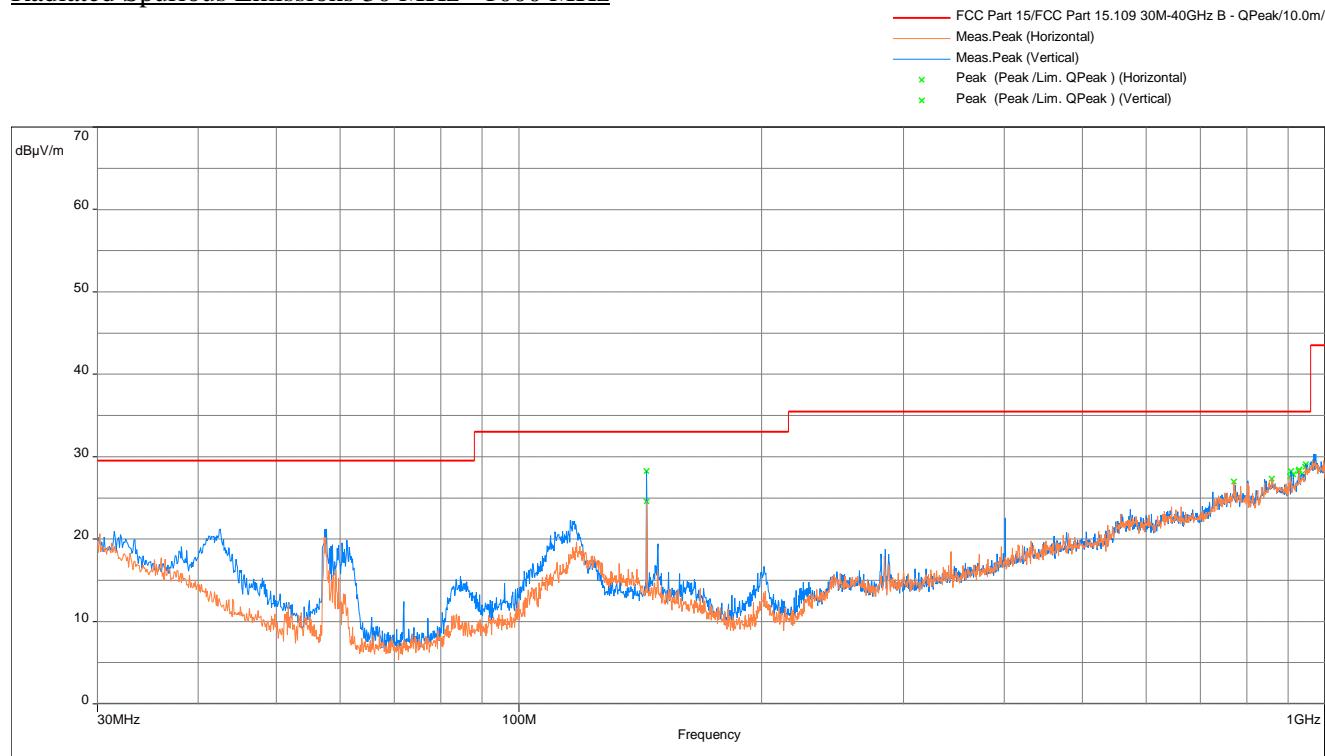

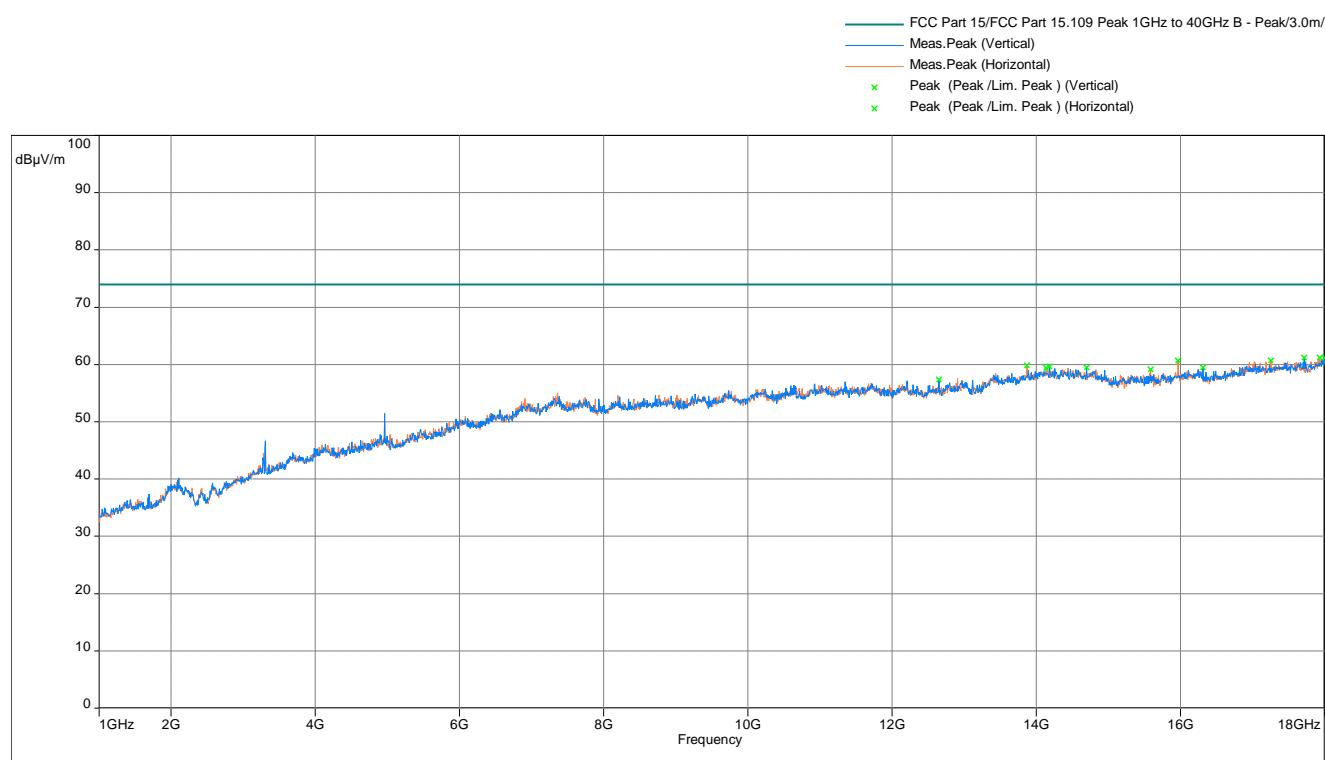Radiated Spurious Emissions 1000 - 18000 MHz, Peak Scan vs Peak Limit

### Radiated Spurious Emissions 1000 - 18000 MHz, Avg Scan vs Avg Limit

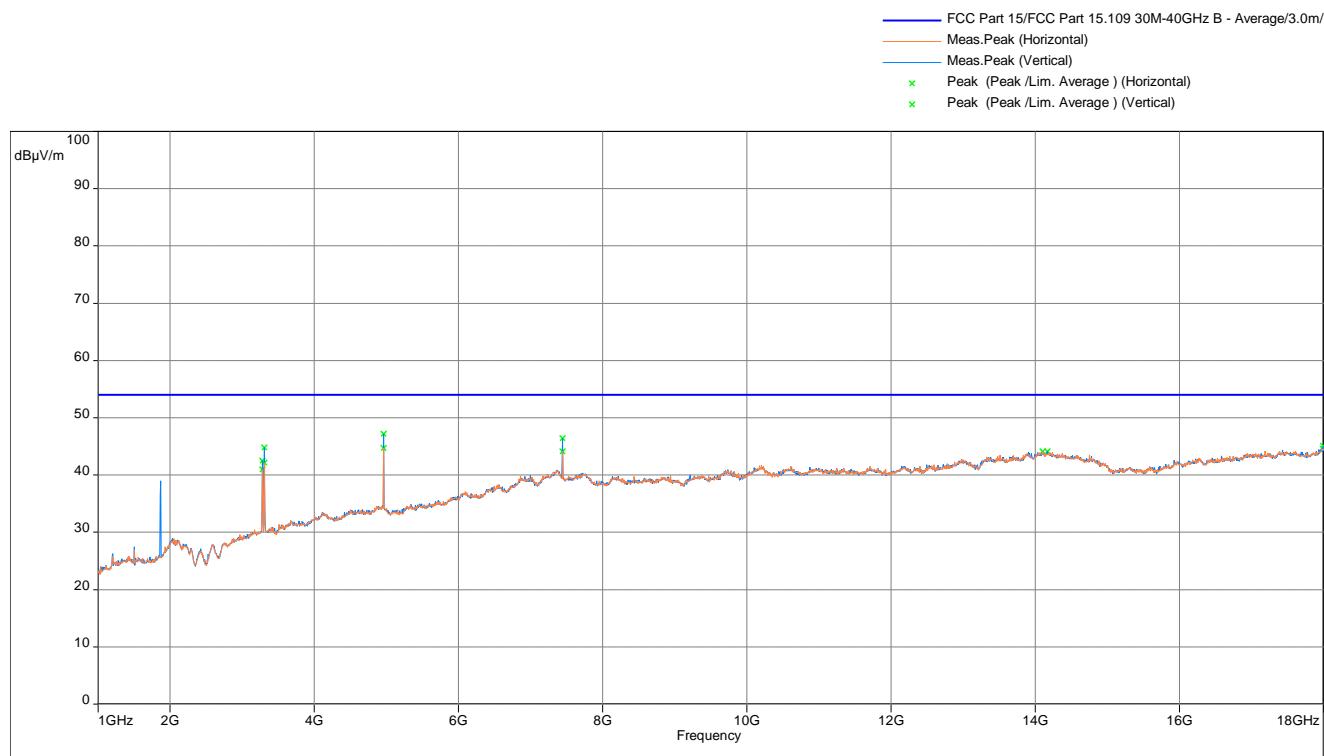

Note: Radiated emission measurements were performed up to 25GHz. No Emissions were identified when scanned from 18-25 GHz


Note: FS@3m = RA + AF + CF - Preamp

**Results**



**Complies**

#### 4.5.8 Test setup photographs



**The following photographs show the testing configurations used.**

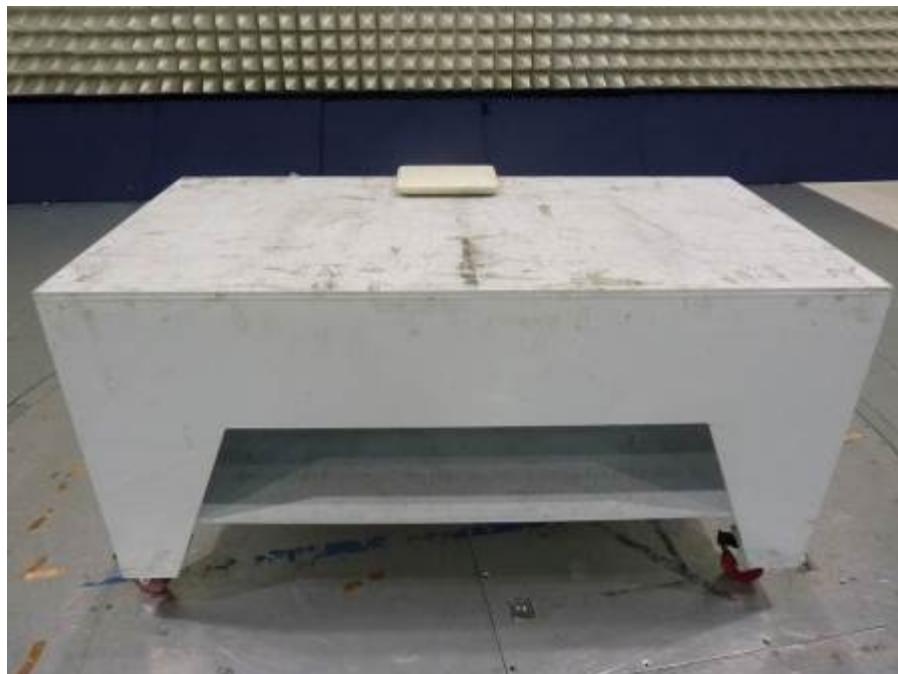


## 4.5.8 Test Setup Photographs (Continued)

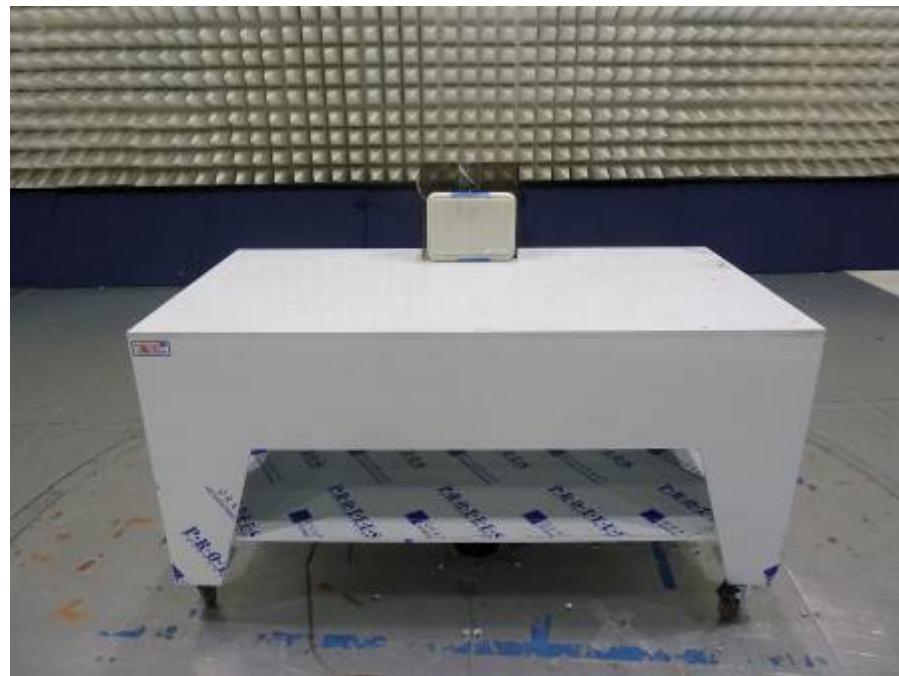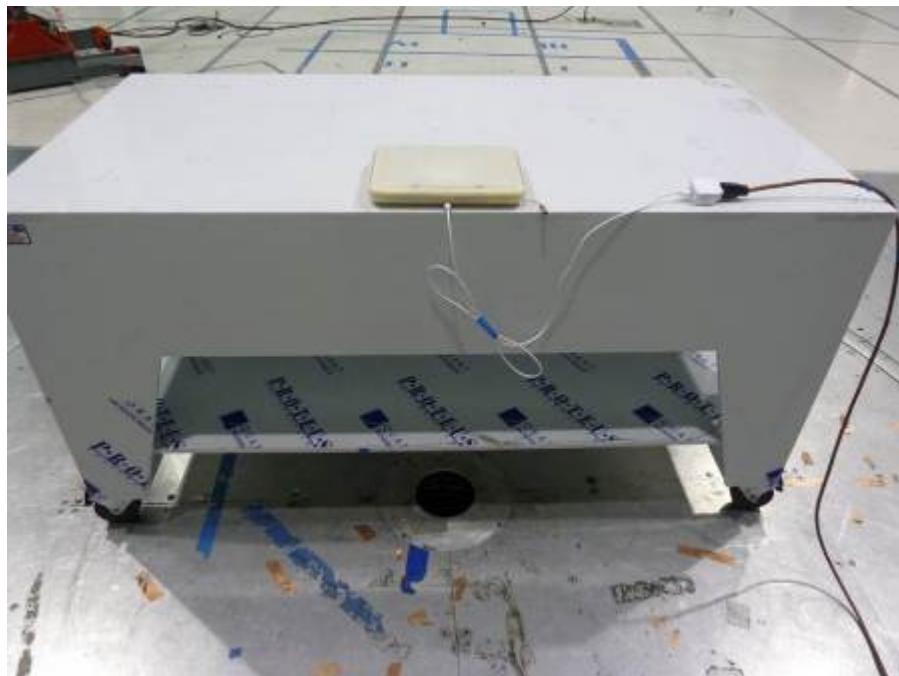

4.5.8 Test Setup Photographs (Continued)

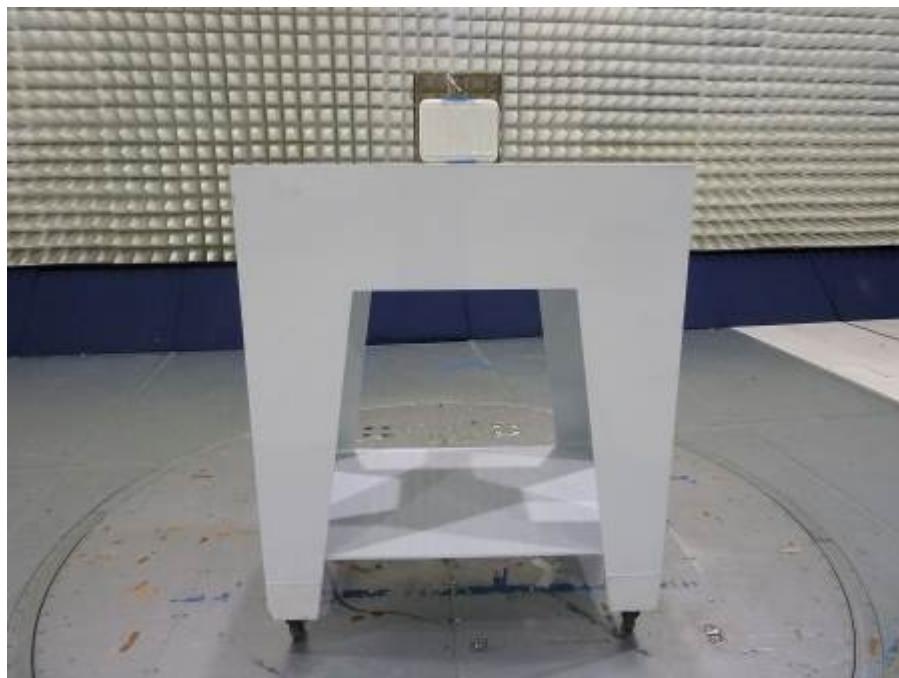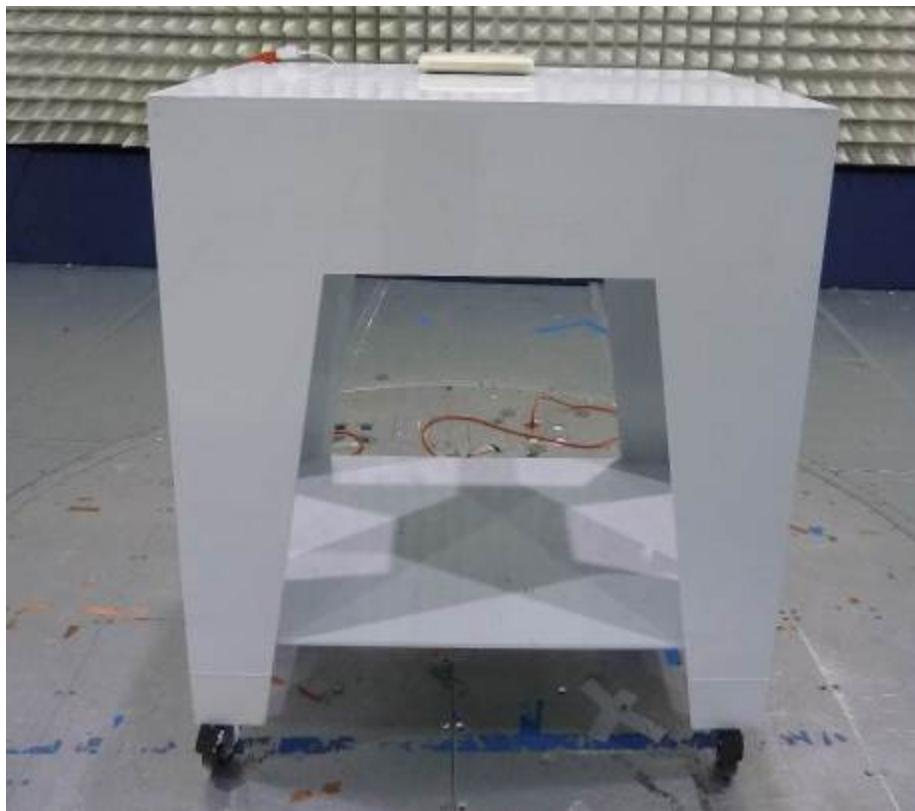

## 4.5.8 Test Setup Photographs (Continued)

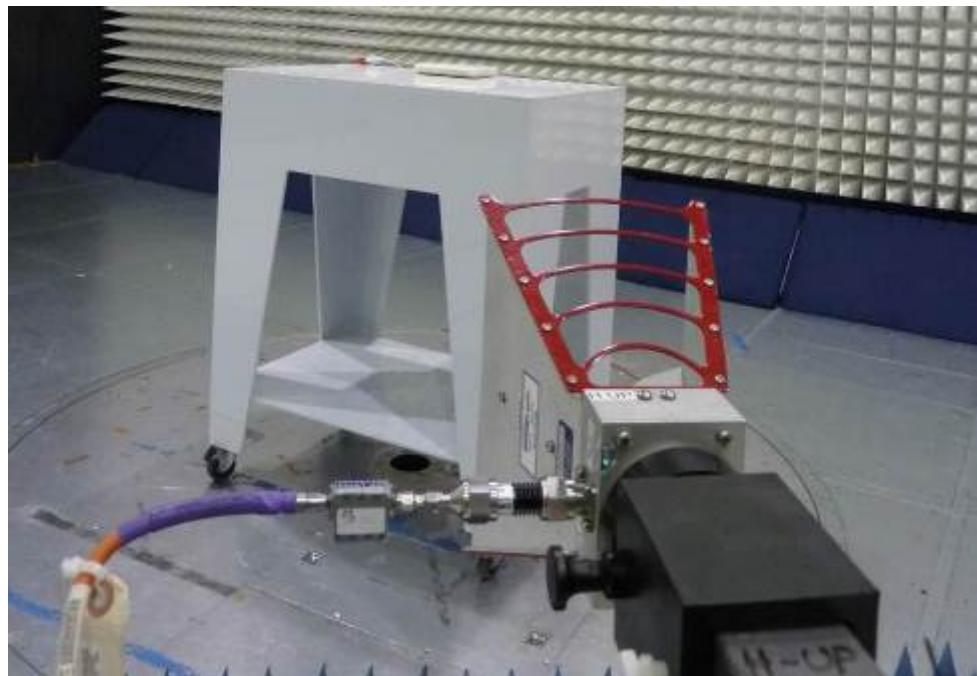

#### 4.6 Radiated Emissions

FCC Ref: 15.109, ICES 003

##### 4.6.1 Requirement

***Limits for Electromagnetic Radiated Emissions FCC Section 15.109(b), ICES 003\*, RSS GEN***

Frequency (MHz)	Class A at 10m dB(µV/m)	Class B at 3m dB(µV/m)
30-88	39	40.0
88-216	43.5	43.5
216-960	46.4	46.0
Above 960	49.5	54.0

\* According to FCC Part 15.109(g) an alternative to the radiated emission limits shown above, digital devices may be shown to comply with the limit of CISPR Pub. 22

#### 4.6.2 Procedures

Measurements are conducted with a quasi-peak detector instrument in the frequency range of 30 MHz to 1000 MHz and with the average detector instrument in the frequency range above 1000 MHz. The measuring receiver meets the requirements of Section One of CISPR 16 and the measuring antenna correlates to a balanced dipole.

Measurements of the radiated field are made with the antenna located at a distance of 10 meters from the EUT. If the field-strength measurements at 10m cannot be made because of high ambient noise level or for other reasons, measurements of Class B equipment may be made at a closer distance, for example 3m. An inverse proportionality factor of 20 dB per decade should be used to normalize the measured data to the specified distance for determining compliance.

The antenna is adjusted between 1m and 4m in height above the ground plane for maximum meter reading at each test frequency.

The antenna-to-EUT azimuth is varied during the measurement to find the maximum field-strength readings.

The antenna-to-EUT polarization (horizontal and vertical) is varied during the measurements to find the maximum field-strength readings.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for a larger EUT.

Floor standing EUT are placed on a horizontal metal ground plane and isolated from the ground plane by resting on an insulating material.

Equipment setup for radiated disturbance tests followed the guidelines of ANSI C63.4-2014.

<b>Tested By:</b>	Aaron Chang
<b>Test Date:</b>	October 3, 2017


#### 4.6.3 Test Results

The EUT met the radiated disturbance requirements of FCC & ICES 003 for a Class B device.

#### FCC & ICES 003 Radiated Disturbance


30MHz to 1GHz

120V 60Hz

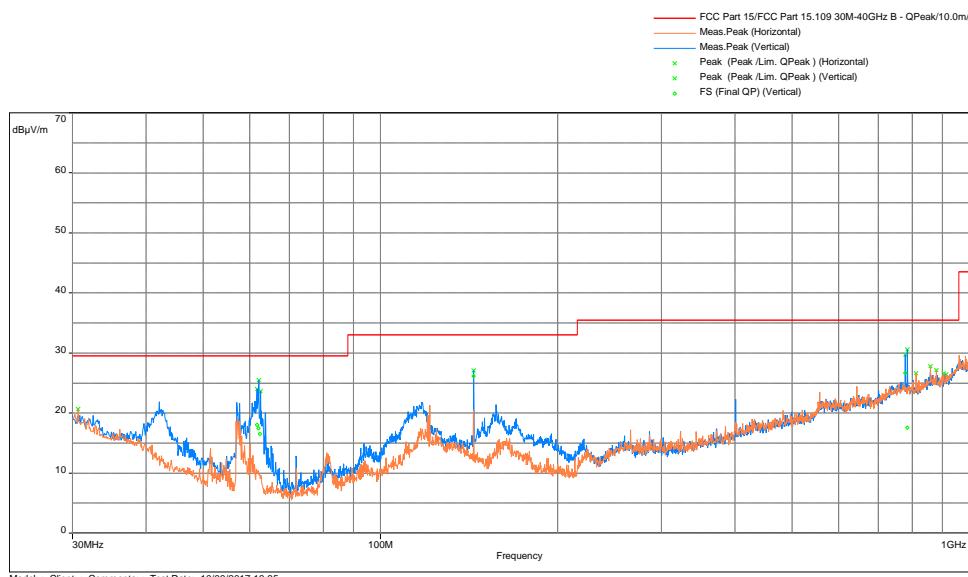


Frequency	FS	Limit	Margin	Azimuth	Height	Polarity	RA	Correction
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB	deg	m		dBuV	dB
61.737	18.04	29.5	-11.46	298.25	3	Vertical	39.45	-21.41
62.074	17.47	29.5	-12.03	298.5	1.49	Vertical	38.88	-21.41
62.408	16.53	29.5	-12.97	296.25	2.1	Vertical	37.93	-21.4
144.005	26.11	33	-6.89	3	1.94	Vertical	41.35	-15.24
778.013	26.64	35.5	-8.86	157	1.69	Vertical	28.98	-2.34
785.041	17.56	35.5	-17.94	192.75	2.31	Vertical	19.98	-2.41

**FCC & ICES 003 Radiated Disturbance**  
**1GHz to 18GHz, Average**  
**120V 60Hz**

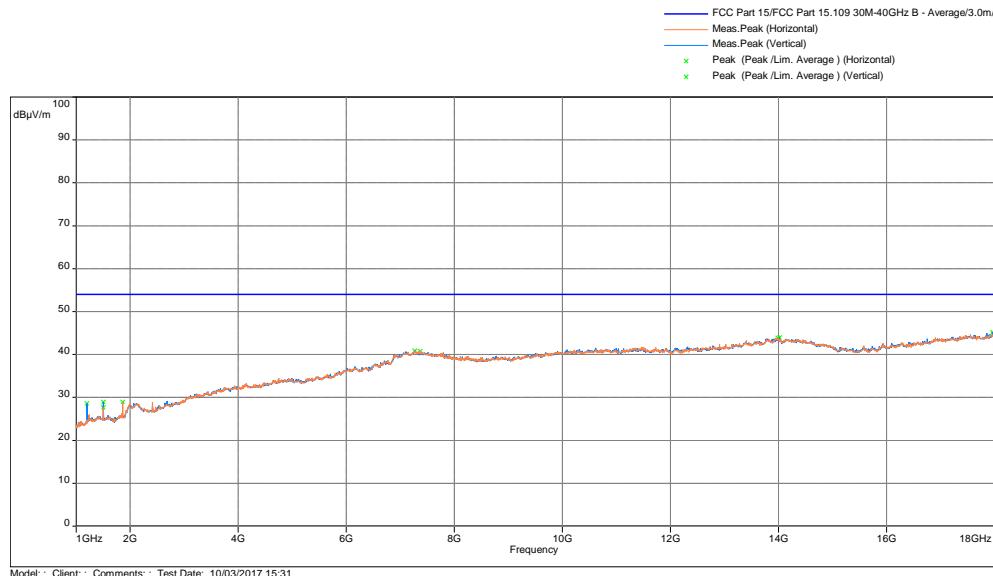


**FCC & ICES 003 Radiated Disturbance**  
**1GHz to 18GHz, Peak**  
**120V 60Hz**

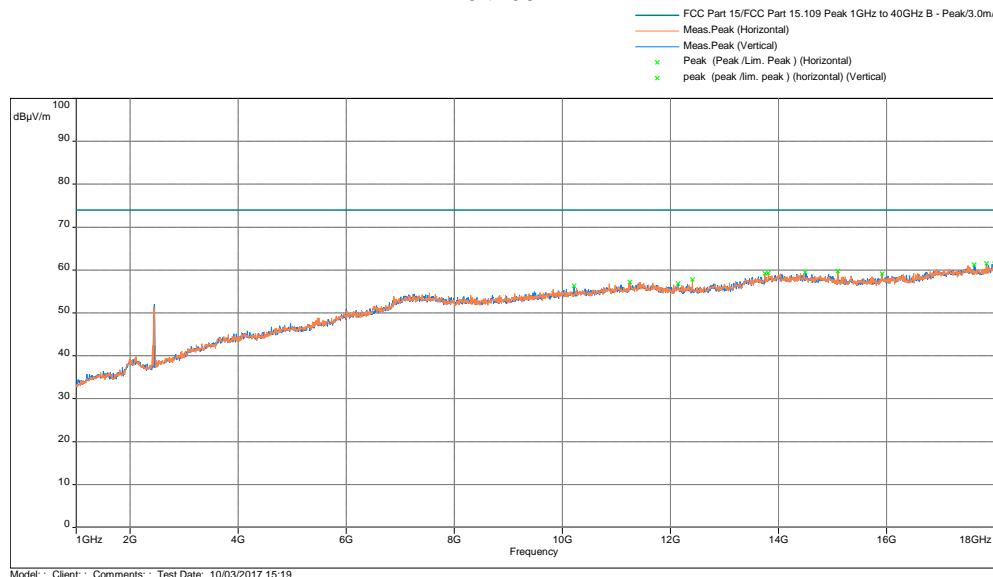

Note: Radiated emission measurements were performed up to 25GHz. No Emissions were identified when scanned from 18-25 GHz

<b>Result:</b>	<b>Complies by 6.89 dB</b>
----------------	----------------------------


**FCC & ICES 003 Radiated Disturbance**  
**30MHz to 1GHz**  
**Battery**

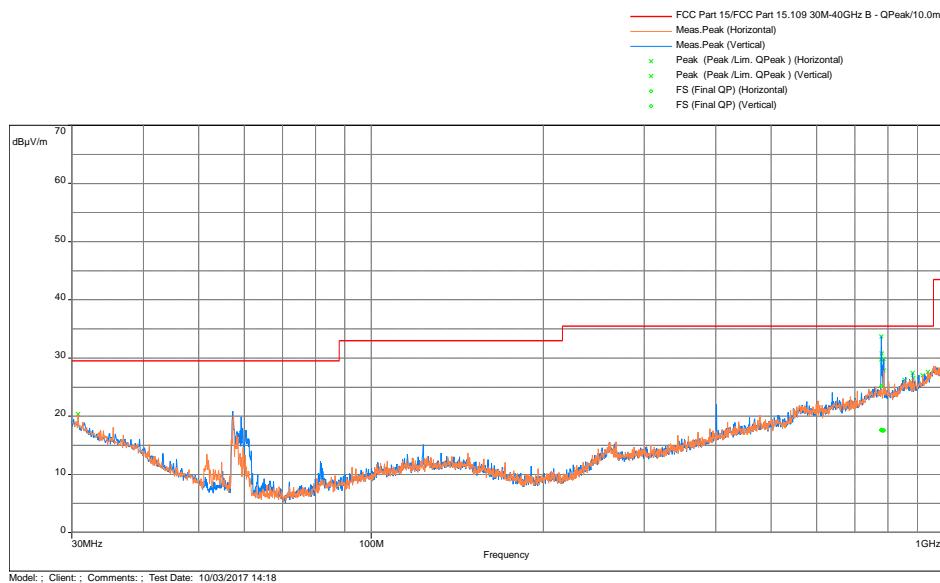

Frequency	FS	Limit	Margin	Azimuth	Height	Polarity	RA	Correction
MHz	dB $\mu$ V/m	dB $\mu$ V/m	dB	deg	m		dB $\mu$ V	dB
785.880	17.58	35.5	-17.92	19.25	3.63	Horizontal	19.99	-2.41
777.538	17.63	35.5	-17.87	84.5	3.6	Vertical	19.97	-2.34
778.224	25.15	35.5	-10.35	130.5	2	Vertical	27.49	-2.34
779.763	17.65	35.5	-17.85	57.25	2.41	Vertical	19.98	-2.33
782.213	17.51	35.5	-17.99	101	2.13	Vertical	19.88	-2.37
785.691	17.56	35.5	-17.94	141.5	1.32	Vertical	19.97	-2.41

**FCC & ICES 003 Radiated Disturbance**  
**1GHz to 18GHz, Average**  
**Battery**


— FCC Part 15/FCC Part 15.109 30M-40GHz B - Average/3.0m/  
— Meas.Peak (Horizontal)  
— Meas.Peak (Vertical)  
x Peak (Peak /Lim. Average ) (Horizontal)  
x Peak (Peak /Lim. Average ) (Vertical)

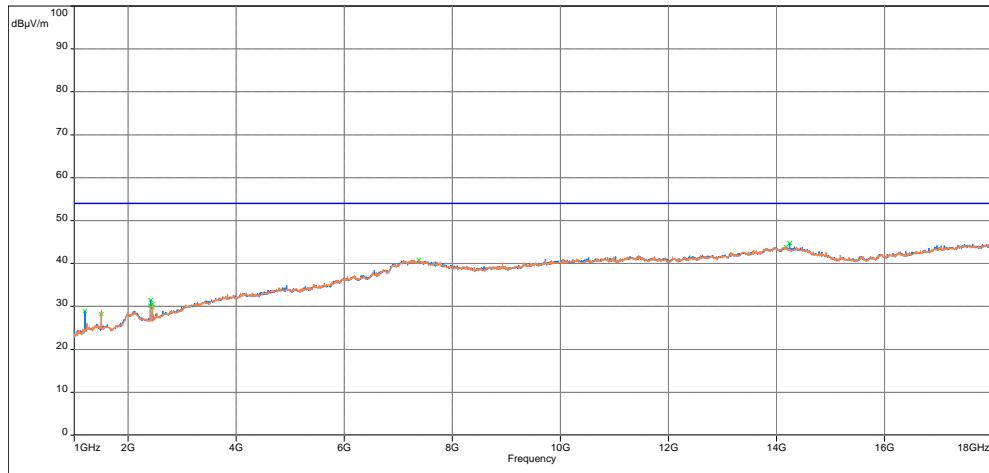

Model: ; Client: ; Comments: ; Test Date: 10/03/2017 15:55

**FCC & ICES 003 Radiated Disturbance**  
**1GHz to 18GHz, Peak**  
**Battery**

— FCC Part 15/FCC Part 15.109 Peak 1GHz to 40GHz B - Peak/3.0m/  
— Meas.Peak (Horizontal)  
— Meas.Peak (Vertical)  
x Peak (Peak /Lim. Peak ) (Horizontal)  
x Peak (Peak /Lim. Peak ) (Vertical)

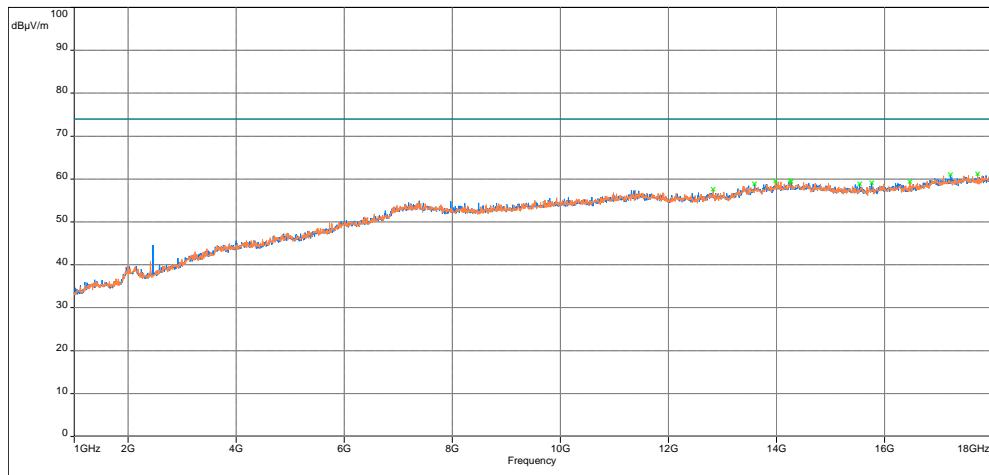



Model: ; Client: ; Comments: ; Test Date: 10/03/2017 15:44

Note: Radiated emission measurements were performed up to 25GHz. No Emissions were identified when scanned from 18-25 GHz


<b>Result:</b>	<b>Complies by 10.35</b>
----------------	--------------------------

#### 4.6.4 Test Configuration Photographs

**The following photographs** show the testing configurations used.

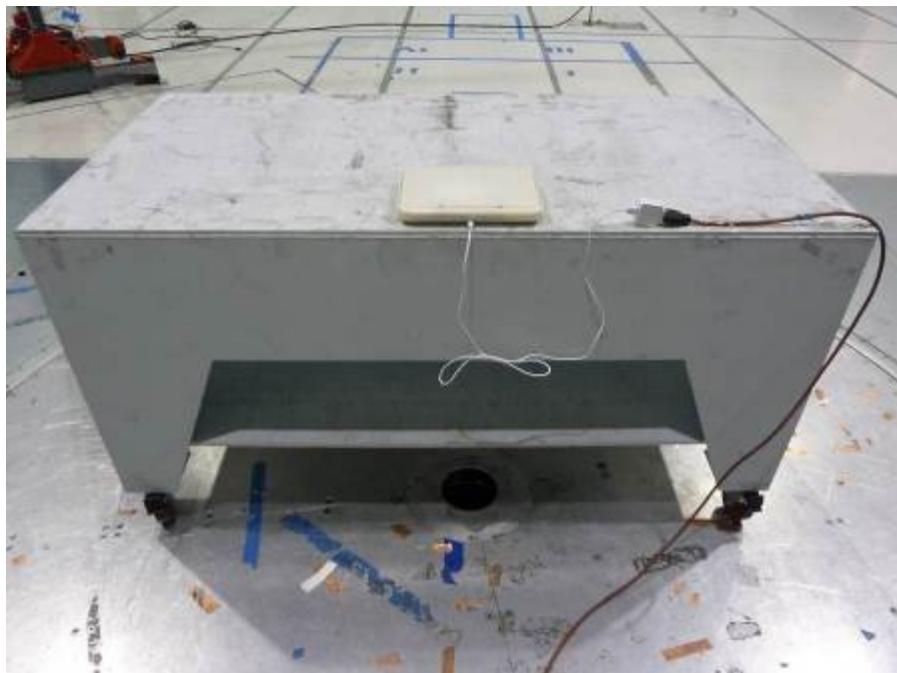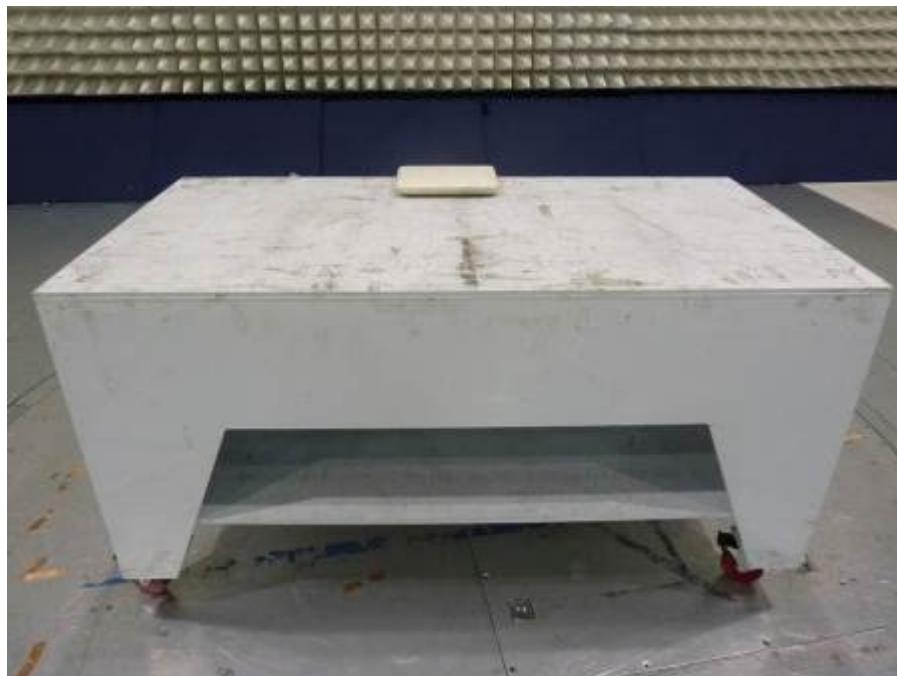


#### 4.6.4 Test Configuration Photographs (Continued)

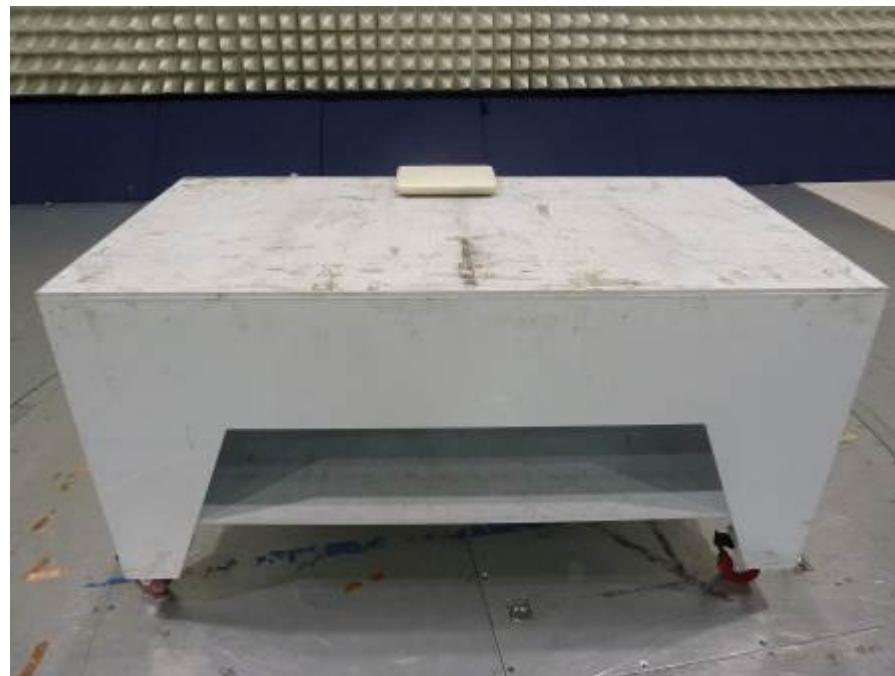

*Electromagnetic Radiated Disturbance Setup Photograph*

## 4.6.4 Test Configuration Photographs (Continued)

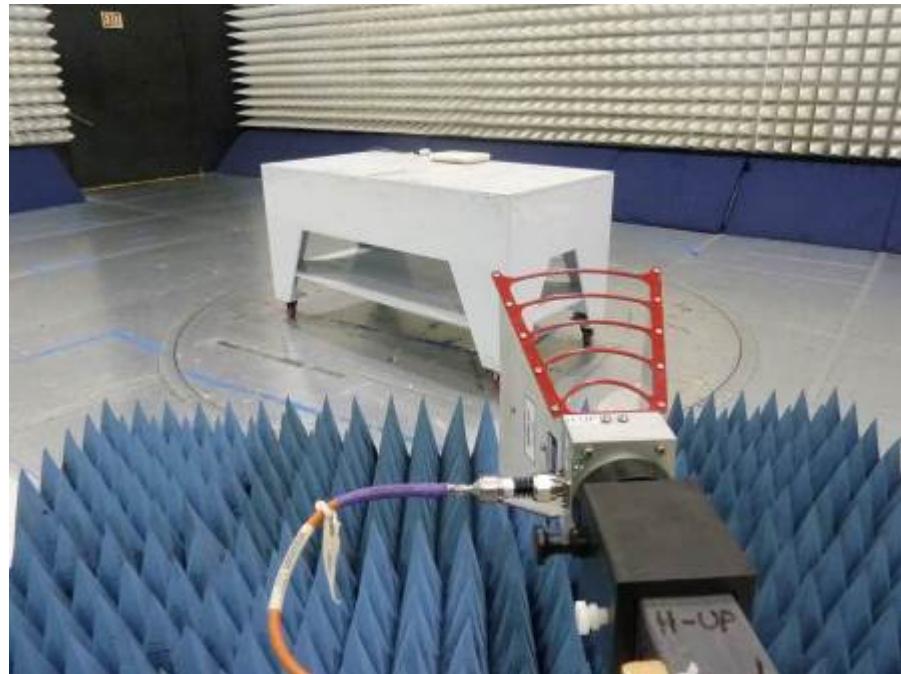*Electromagnetic Radiated Disturbance Setup Photograph*

4.7 AC Line Conducted Emission  
FCC: 15.207, 15.107; RSS-GEN;

4.7.1 Requirement

<b>Frequency Band MHz</b>	<b>FCC 15.207 Limit dB(µV)</b>		<b>FCC 15.107 Class A Limit dB(µV)</b>	
	<b>Quasi-Peak</b>	<b>Average</b>	<b>Quasi-Peak</b>	<b>Average</b>
0.15-0.50	66 to 56 *	56 to 46 *	79	66
0.50-5.00	56	46	73	60
5.00-30.00	60	50	73	60

*Note: \*Decreases linearly with the logarithm of the frequency. At the transition frequency the lower limit applies.*

#### 4.7.2 Procedure

Measurements are carried out using quasi-peak and average detector receivers in accordance with CISPR 16. An AMN is required to provide defined impedance at high frequencies across the power feed at the point of measurement of terminal voltage and also to provide isolation of the circuit under test from the ambient noise on the power lines. An AMN as defined in CISPR 16 shall be used.

The EUT is located so that the distance between the boundary of the EUT and the closest surface of the AMN is 0.8m.

Where a flexible mains cord is provided by the manufacturer, this shall be 1m long or if in excess of 1m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4m in length.

The EUT is arranged and connected with cables terminated in accordance with the product specification.

Conducted disturbance is measured between the phase lead and the reference ground, and between the neutral lead and the reference ground. Both measured values are reported.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. A vertical, metal reference plane is placed 0.4m from the EUT. The vertical metal reference-plane is at least 2m by 2m. The EUT shall be kept at least 0.8m from any other metal surface or other ground plane not being part of the EUT. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.

Floor standing EUTs are placed on a horizontal metal ground plane and isolated from the ground plane by an insulating material up to 12mm thick. The metal ground plane extends at least 0.5m beyond the boundaries of the EUT and has minimum dimensions of 2m by 2m.


Equipment setup for conducted disturbance tests followed the guidelines of ANSI C63.10: 2013 & ANSI C63.4-2014.

<b>Tested By:</b>	Aaron Chang
<b>Test Date:</b>	October 3 & 27, 2017

#### 4.7.3 Test Result

The EUT met the conducted disturbance requirement of FCC & ICES 003 for a Class B device.

#### 15.107 FCC & ICES 003 Conducted Disturbance at AC Mains 120V 60Hz

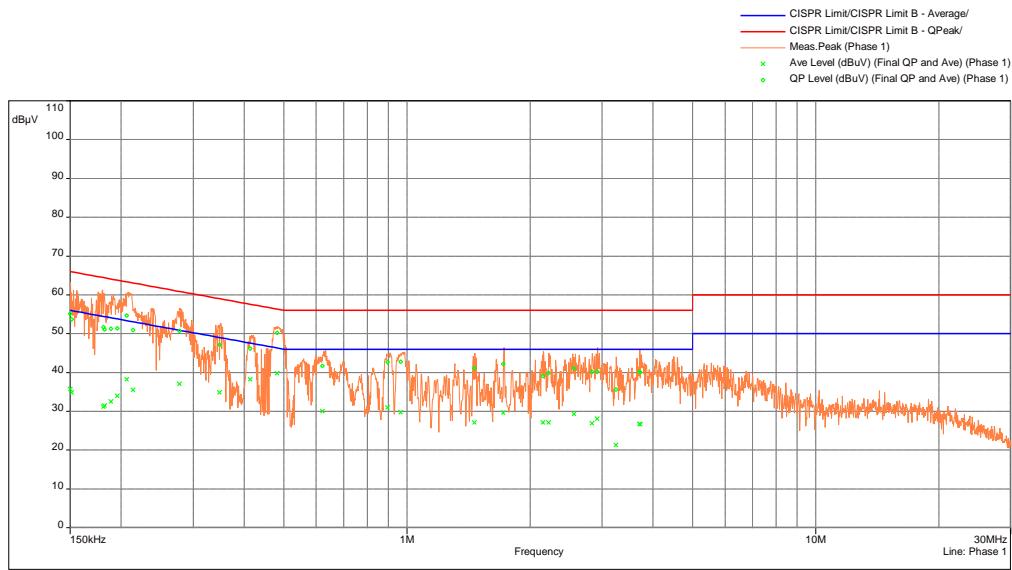


Freq.	Ave Level	QP Level	Ave Limit	QP Limit	Ave Margin	QP Margin	Line	Correction
MHz	dB $\mu$ V	dB $\mu$ V	dB $\mu$ V	dB $\mu$ V	dB	dB		dB
0.150	35.73	55.15	56	66	-20.27	-10.85	Line	11.01
0.151	34.79	53.7	55.93	65.93	-21.14	-12.22	Line	11.01
0.181	31.19	51.68	54.44	64.44	-23.25	-12.77	Line	11.03
0.182	31.46	51.05	54.38	64.38	-22.92	-13.33	Line	11.03
0.189	32.5	51.31	54.09	64.09	-21.59	-12.78	Line	11.04
0.196	33.99	51.41	53.79	63.79	-19.8	-12.38	Line	11.04
0.206	38.18	54.67	53.35	63.35	-15.17	-8.68	Line	11.06
0.214	35.56	50.9	53.06	63.06	-17.5	-12.17	Line	11.06
0.278	37.08	50.69	50.88	60.88	-13.8	-10.19	Line	11.08
0.348	34.84	47.09	49.01	59.01	-14.17	-11.92	Line	11.09
0.414	38.24	46.15	47.57	57.57	-9.33	-11.42	Line	11.09
0.482	39.73	50.17	46.31	56.31	-6.57	-6.14	Line	11.1
0.622	30.02	41.72	46	56	-15.98	-14.28	Line	11.1
0.896	31.01	42.65	46	56	-14.99	-13.35	Line	11.15
0.966	29.67	42.78	46	56	-16.33	-13.22	Line	11.15
1.464	27.15	41.1	46	56	-18.85	-14.9	Line	11.17
1.721	29.64	42.21	46	56	-16.36	-13.79	Line	11.2
2.150	27.14	39.06	46	56	-18.86	-16.94	Line	11.21

2.221	27.14	39.84	46	56	-18.86	-16.16	Line	11.22
2.562	29.36	41.01	46	56	-16.64	-14.99	Line	11.22
2.836	26.88	40.13	46	56	-19.12	-15.87	Line	11.22
2.919	28.1	40.27	46	56	-17.9	-15.73	Line	11.23
3.245	21.26	35.63	46	56	-24.74	-20.37	Line	11.27
3.708	26.68	40.15	46	56	-19.32	-15.85	Line	11.29
3.722	26.64	40.09	46	56	-19.36	-15.91	Line	11.29
0.150	36.16	56.72	56	66	-19.84	-9.28	Neutral	11.01
0.179	30.49	53.09	54.55	64.55	-24.05	-11.46	Neutral	11.03
0.181	31.4	52.88	54.44	64.44	-23.05	-11.57	Neutral	11.03
0.207	38.33	56.2	53.32	63.32	-14.99	-7.12	Neutral	11.06
0.208	37.87	56.27	53.3	63.3	-15.43	-7.03	Neutral	11.06
0.276	34.8	51.15	50.93	60.93	-16.12	-9.78	Neutral	11.08
0.350	32.38	47.59	48.97	58.97	-16.58	-11.38	Neutral	11.09
0.417	32.68	46.28	47.51	57.51	-14.83	-11.23	Neutral	11.09
0.479	32.54	47.59	46.35	56.35	-13.81	-8.76	Neutral	11.1
0.627	25.14	40.43	46	56	-20.86	-15.57	Neutral	11.1
0.975	24.53	38.75	46	56	-21.47	-17.25	Neutral	11.15
1.461	24	38.54	46	56	-22	-17.46	Neutral	11.17
2.996	24.47	36.42	46	56	-21.53	-19.58	Neutral	11.24

<b>Result:</b>	<b>Complies by 6.14 dB</b>
----------------	----------------------------


**15.207 FCC & ICES 003 Conducted Disturbance at AC Mains**  
**Bluetooth Low Energy**  
**120V 60Hz**

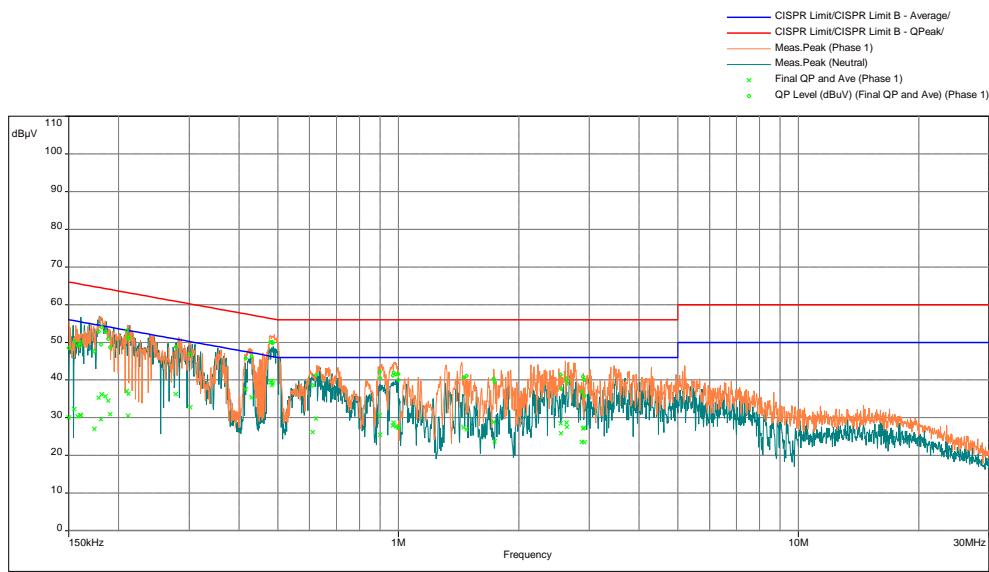

Freq.	Ave Level	QP Level	Ave Limit	QP Limit	Ave Margin	QP Margin	Line	Correction
MHz	dB $\mu$ V	dB $\mu$ V	dB $\mu$ V	dB $\mu$ V	dB	dB		dB
0.150	30.01	48.53	56	66	-25.99	-17.47	Phase 1	11.01
0.158	30.3	49.14	55.58	65.58	-25.28	-16.43	Phase 1	11.02
0.161	30.6	49.92	55.41	65.41	-24.81	-15.5	Phase 1	11.02
0.178	35.31	52.82	54.56	64.56	-19.25	-11.74	Phase 1	11.03
0.182	36.13	54.03	54.42	64.42	-18.28	-10.39	Phase 1	11.03
0.188	34.53	50.89	54.12	64.12	-19.58	-13.23	Phase 1	11.04
0.211	30.56	51.02	53.15	63.15	-22.6	-12.14	Phase 1	11.06
0.302	32.73	46.75	50.18	60.18	-17.45	-13.43	Phase 1	11.1
0.430	35.42	46.25	47.26	57.26	-11.84	-11.01	Phase 1	11.09
0.483	38.63	49.93	46.28	56.28	-7.65	-6.35	Phase 1	11.1
0.611	26.19	38.61	46	56	-19.81	-17.39	Phase 1	11.1
0.901	25.47	40.5	46	56	-20.53	-15.5	Phase 1	11.15
0.969	27.94	41.18	46	56	-18.06	-14.82	Phase 1	11.15
0.988	27.34	41.57	46	56	-18.66	-14.43	Phase 1	11.15
1.480	26.93	41.07	46	56	-19.07	-14.93	Phase 1	11.17
1.744	23.71	39.46	46	56	-22.29	-16.54	Phase 1	11.2
2.550	25.85	37.75	46	56	-20.15	-18.25	Phase 1	11.22
2.641	27.49	39.3	46	56	-18.51	-16.7	Phase 1	11.21
2.880	23.52	36.92	46	56	-22.48	-19.08	Phase 1	11.22
2.917	23.42	35.76	46	56	-22.58	-20.24	Phase 1	11.23

**Result:** Complies by 6.35 dB

**15.207 FCC & ICES 003 Conducted Disturbance at AC Mains**  
**Bluetooth FHSS**  
**120V 60Hz**


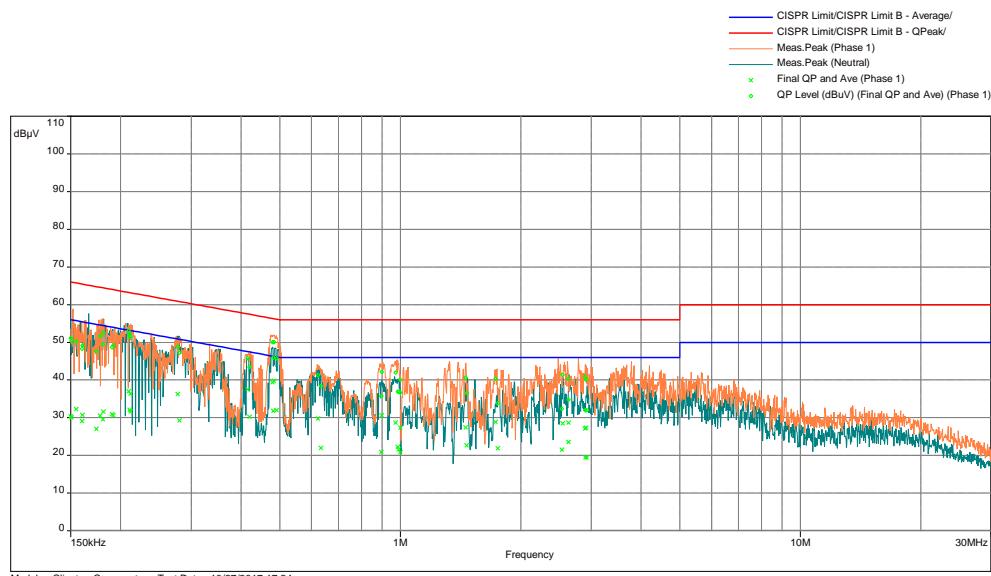


Freq.	Ave Level	QP Level	Ave Limit	QP Limit	Ave Margin	QP Margin	Line	Correction
MHz	dB $\mu$ V	dB $\mu$ V	dB $\mu$ V	dB $\mu$ V	dB	dB		dB
0.150	30.37	51.12	56	66	-25.63	-14.88	Phase 1	11.01
0.151	30	50.3	55.96	65.96	-25.97	-15.66	Phase 1	11.01
0.160	29.04	48.31	55.46	65.46	-26.42	-17.15	Phase 1	11.02
0.178	30.55	51.64	54.6	64.6	-24.05	-12.96	Phase 1	11.03
0.181	31.55	52.55	54.44	64.44	-22.9	-11.89	Phase 1	11.03
0.192	30.61	49.16	53.97	63.97	-23.36	-14.81	Phase 1	11.04
0.211	32.04	52.06	53.18	63.18	-21.14	-11.12	Phase 1	11.06
0.280	29.26	47.24	50.8	60.8	-21.54	-13.57	Phase 1	11.08
0.420	30.21	43.46	47.46	57.46	-17.25	-14	Phase 1	11.09
0.491	32	45.77	46.16	56.16	-14.16	-10.38	Phase 1	11.1
0.633	22.01	38.36	46	56	-23.99	-17.64	Phase 1	11.1
0.897	20.86	35.79	46	56	-25.14	-20.21	Phase 1	11.15
0.986	22.24	36.94	46	56	-23.76	-19.06	Phase 1	11.15
0.989	21.57	36.85	46	56	-24.43	-19.15	Phase 1	11.15
0.991	20.84	36.59	46	56	-25.16	-19.41	Phase 1	11.15
1.464	22.67	36.58	46	56	-23.33	-19.42	Phase 1	11.17
1.753	21.91	33.83	46	56	-24.09	-22.17	Phase 1	11.2
2.635	23.55	34.82	46	56	-22.45	-21.18	Phase 1	11.21
2.905	19.45	31.94	46	56	-26.55	-24.06	Phase 1	11.23
2.925	19.46	32.01	46	56	-26.54	-23.99	Phase 1	11.23

**Result:** Complies by 10.38 dB

**15.207 FCC & ICES 003 Conducted Disturbance at AC Mains**

 WiFi  
 120V 60Hz

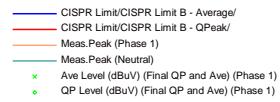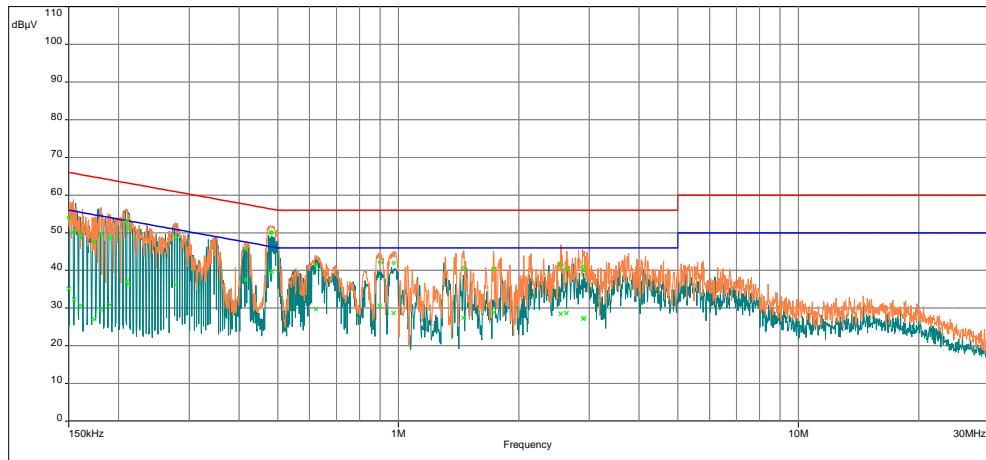



Freq.	Ave Level	QP Level	Ave Limit	QP Limit	Ave Margin	QP Margin	Line	Correction
MHz	dB $\mu$ V	dB $\mu$ V	dB $\mu$ V	dB $\mu$ V	dB	dB		dB
0.150	35.05	54	56	66	-20.95	-12	Phase 1	11.01
0.155	32.23	50.28	55.74	65.74	-23.51	-15.46	Phase 1	11.02
0.160	30.76	49.15	55.44	65.44	-24.68	-16.29	Phase 1	11.02
0.174	27.02	47.6	54.77	64.77	-27.75	-17.18	Phase 1	11.02
0.181	29.57	49.5	54.45	64.45	-24.88	-14.96	Phase 1	11.03
0.190	30.87	48.72	54.03	64.03	-23.16	-15.31	Phase 1	11.04
0.209	37.04	53.03	53.23	63.23	-16.19	-10.2	Phase 1	11.06
0.211	36.33	51.41	53.15	63.15	-16.82	-11.74	Phase 1	11.06
0.278	36.22	48.83	50.88	60.88	-14.66	-12.05	Phase 1	11.08
0.416	37.5	45.74	47.54	57.54	-10.04	-11.8	Phase 1	11.09
0.479	39.38	50.1	46.35	56.35	-6.97	-6.25	Phase 1	11.1
0.483	39.72	50.09	46.28	56.28	-6.56	-6.19	Phase 1	11.1
0.622	29.78	41.35	46	56	-16.22	-14.65	Phase 1	11.1
0.899	30.63	42.16	46	56	-15.37	-13.84	Phase 1	11.15
0.974	28.67	42.01	46	56	-17.33	-13.99	Phase 1	11.15
1.456	27.38	40.66	46	56	-18.62	-15.34	Phase 1	11.17
1.732	28.83	40.32	46	56	-17.17	-15.68	Phase 1	11.2
2.545	28.52	41.44	46	56	-17.48	-14.56	Phase 1	11.22
2.633	28.7	40.36	46	56	-17.3	-15.64	Phase 1	11.21
2.893	27.12	40.92	46	56	-18.88	-15.08	Phase 1	11.23
2.915	27.34	40.07	46	56	-18.66	-15.93	Phase 1	11.23

**Result: Complies by 10.38 dB**

#### 4.7.4 Test Configuration Photographs

The following photographs show the testing configurations used.

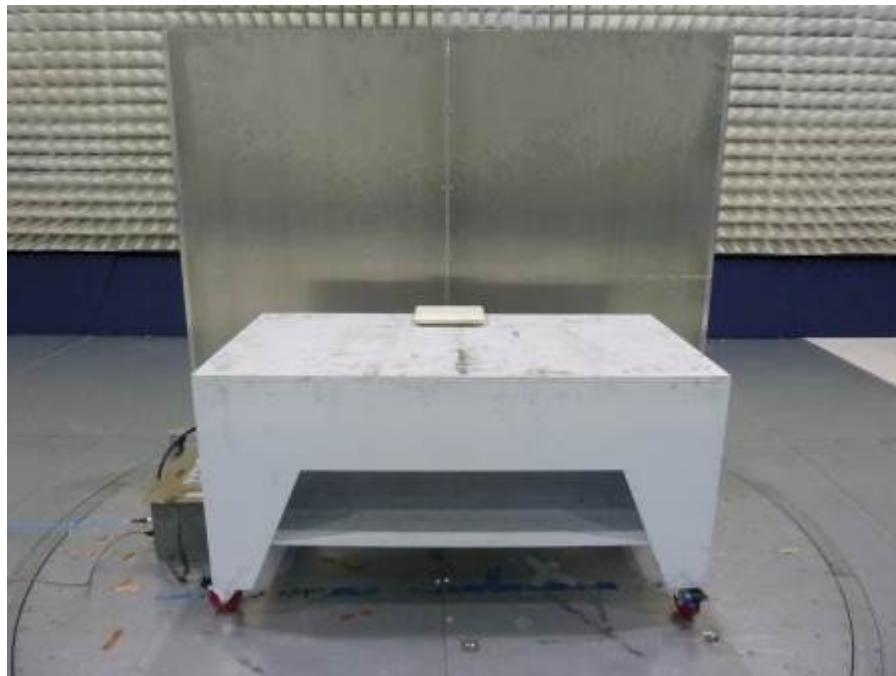

*AC Mains Line-Conducted Disturbance Setup Photograph*

## 5.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list:

Equipment	Manufacturer	Model/Type	Asset #	Cal Int	Cal Due
Spectrum Analyzer	Rohde and Schwarz	FSV	ITS 01534	12	05/16/18
Pyramidal Horn Antenna	EMCO	3160-09	ITS 00571	#	#
Pre-Amplifier (18-40GHz)	Miteq	TTA1840-35-S-M	ITS 01393	12	04/18/18
Pre-Amplifier (1-18GHz)	Miteq	AMF-4D-001180-24-10P	ITS 00526	12	01/04/18
Horn Antenna	ETS-Lindgren	3115	ITS 00982	12	02/03/18
EMI Receiver	Rohde and Schwarz	ESU	ITS 00961	12	07/10/18
BI-Log Antenna	Teseq	CBL 6111D	ITS 01058	12	08/11/18
Pre-Amplifier	Sonoma Instrument	310	ITS 00942	12	01/19/18
RF Cable	TRU Corporation	TRU CORE 300	ITS 01462	12	08/19/18
Notch Filter	Micro-Tronics	BRM50702	ITS 01166	12	02/08/18
RF Cable	TRU Corporation	TRU CORE 300	ITS 01465	12	08/19/18
RF Cable	TRU Corporation	TRU CORE 300	ITS 01470	12	08/19/18
Attenuator	Narda	FSCM99899	ITS 01583	12	08/31/18
RF Cable	Megaphase	EMC1-K1K1-236	ITS 01538	12	06/13/18
RF Cable	Megaphase	TM40-K1K1-19	ITS 01154	12	01/26/18
Transient Limiter	COM-POWER	LIT-153A	ITS 01452	12	06/19/18
RF Cable	Megaphase	TM40-K1K1-59 RF	ITS 01156	12	01/26/18

# No Calibration required

Software used for emission compliance testing utilized the following:

Name	Manufacturer	Version	Template/Profile
Tile	Quantum Change	3.4.K.22	Conducted Restricted Band Edge_Avg Conducted Restricted Band Edge_Peak Conducted Restricted Band_1-26GHz Conducted Restricted Band_30M-1GHz Conducted Spurious_30M-26GHz
BAT-EMC	Nexio	3.16.0.64	Towerview 10-3-17.bpp
RS Commander	Rohde Schwarz	1.6.4	Not Applicable (Screen grabber)

**6.0 Document History**

<b>Revision/ Job Number</b>	<b>Writer Initials</b>	<b>Reviewers Initials</b>	<b>Date</b>	<b>Change</b>
1.0 / G103177090	AC	KV	October 30, 2017	Original document