

Test Report

FCC ID: 2ANVD-RVM740SM

Date of issue: Jul. 02, 2017

Report Number: MTi170907E018

Sample Description: Smart Mirror

Model(s): RVM740SM

Applicant: Coagent Global Limited

Address: 1/F, 94 Wellington Street, Central, Hong Kong

Date of Test: Jun. 20, 2017 – Jul. 02, 2017

Shenzhen Microtest Co., Ltd.
<http://www.mtitest.com>

This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen Microtest Co., Ltd.

Tel: (86-755) 88850135

Fax: (86-755) 88850136

Web: <http://www.mtitest.com>

E-mail: mti@51mti.com

Address: No. 102A & 302A, East Block, Hengfang Industrial Park, Xingye Road, Xixiang, Bao'an District, Shenzhen, Guangdong, China

TEST RESULT CERTIFICATION	
Applicant's name	Coagent Global Limited
Address	1/F, 94 Wellington Street, Central, Hong Kong
Manufacture's Name	Guangdong Coagent Global S&T Co., Ltd.
Address	Room 501, 5/F(F1), NO.25-8, Section C, Xi'nan Industrial Park, Sanshui Technology Industrail Zone, Foshan City, Guangdong Province, China
Product name	Smart Mirror
Model and/or type reference	RVM740SM
Serial Model	N/A
Standards	FCC Part 15.247
Test procedure	ANSI C63.4-2014 ; ANSI C63.10-2013

This device described above has been tested by Shenzhen Toby Technology Co., Ltd. and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Tested by:



Demi Mu

Jul. 02, 2017


Reviewed by:



Smith Chen

Jul. 02, 2017

Approved by:



Tom Xue

Jul. 02, 2017

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	16
3.2.1 RADIATED EMISSION LIMITS	16
3.2.2 TEST PROCEDURE	16
3.2.3 DEVIATION FROM TEST STANDARD	17
3.2.4 TEST SETUP	18
3.2.5 EUT OPERATING CONDITIONS	19
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	20
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	21
3.2.8 TEST RESULTS (1G-25GHZ)	22
4 . 20 DB OCCUPY BANDWIDTH	27
4.1 APPLIED PROCEDURES / LIMIT	27
4.1.1 TEST PROCEDURE	27
4.1.2 DEVIATION FROM STANDARD	27
4.1.3 TEST SETUP	27
4.1.4 EUT OPERATION CONDITIONS	27
4.1.5 TEST RESULTS	28
5 . CARRIER FREQUENCY SEPARATION TEST	34

Table of Contents

	Page
5.1 APPLIED PROCEDURES / LIMIT	34
5.1.1 TEST PROCEDURE	34
5.1.2 DEVIATION FROM STANDARD	34
5.1.3 TEST SETUP	34
5.1.4 EUT OPERATION CONDITIONS	34
5.1.5 TEST RESULTS	35
6 . NUMBER OF HOPPING CHANNEL	37
6.1 APPLIED PROCEDURES / LIMIT	37
6.1.1 TEST PROCEDURE	37
6.1.2 DEVIATION FROM STANDARD	37
6.1.3 TEST SETUP	37
6.1.4 EUT OPERATION CONDITIONS	37
6.1.5 TEST RESULTS	37
7 . DWELL TIME	40
7.1 APPLIED PROCEDURES / LIMIT	40
7.1.1 TEST PROCEDURE	40
7.1.2 DEVIATION FROM STANDARD	40
7.1.3 TEST SETUP	40
7.1.4 EUT OPERATION CONDITIONS	40
7.1.5 TEST RESULTS	40
8 . PEAK OUTPUT POWER TEST	48
8.1 APPLIED PROCEDURES / LIMIT	48
8.1.1 TEST PROCEDURE	48
8.1.2 DEVIATION FROM STANDARD	48
8.1.3 TEST SETUP	48
8.1.4 EUT OPERATION CONDITIONS	48
8.1.5 TEST RESULTS	49
9 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	50
9.1 DEVIATION FROM STANDARD	50
9.2 TEST SETUP	50
9.3 EUT OPERATION CONDITIONS	50
9.4 TEST RESULTS	51
10 . ANTENNA REQUIREMENT	59
10.1 STANDARD REQUIREMENT	59
10.2 EUT ANTENNA	59

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.203/15.247(c)	Antenna Requirement	PASSED	
15.207	Conducted Emission	PASSED	
15.247(b)(1)	Conducted Peak Output Power	PASSED	
15.247(a)(1)	20dB Occupied Bandwidth	PASSED	
15.247(a)(1)	Carrier Frequencies Separation	PASSED	
15.247(a)(1)	Hopping Channel Number	PASSED	
15.247(a)(1)	Dwell Time	PASSED	
15.205/15.209	Spurious Emission	PASSED	
15.247(d)	Band Edge	PASSED	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

Shenzhen Toby Technology Co., Ltd.

Add.: 10/F.,A Block, Jiada R&D Bldg., No.5 Songpingshan, Road, Science&Technology Park,
Shenzhen, 518057

FCC Registration No.:811562

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Mirror	
Trade Name	N/A	
Model Name	RVM740SM	
Serial Model	N/A	
Model Difference	N/A	
Product Description	The EUT is a Smart Mirror	
	Operation Frequency:	2402-2480MHz
	Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
	Bit Rate of Transmitter	1,2,3Mbps
	Number Of Channel	79CH
	Antenna Designation:	Please see Note 3.
	Antenna Gain (dBi)	0dBi
	DC IN	12V FROM CAR BATTERY
Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.		
Channel List	Please refer to the Note 2.	
Adapter information:	N/A	
Battery	N/A	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466

11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		
Remark: Channel 0, 39 & 78 selected for GFSK, $\pi/4$ -DQPSK and 8DPSK.					

3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
A	N/A	N/A	PCB antenna	/	0	BT Antenna

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	GFSK CH1/CH40/CH79
Mode 2	$\pi/4$ -DQPSK CH1/CH40/CH79
Mode 3	8-DPSK CH1/CH40/CH79
Mode 4	TX Mode


For Conducted Emission	
Final Test Mode	Description
Mode 4	TX Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	GFSK CH1/CH40/CH79
Mode 2	$\pi/4$ -DQPSK CH1/CH40/CH79
Mode 3	8-DPSK CH1/CH40/CH79

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

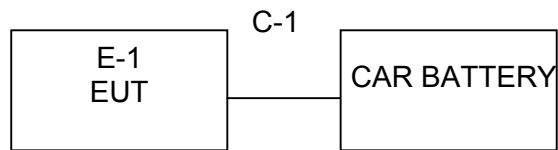

Note: FULL CAR BATTERY IS USED DURING ALL TEST

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Smart Mirror	N/A	RVM740SM	N/A	EUT
	/	/	/	/	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.0m	
C-2	NO	NO	0.8m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

For RF conducted test:

Equipment	Manufacturer	Model	Serial No.	Calibration Due
Universal Radio Communication Tester	Rohde&schwarz	CMU200	114587	2017/11/4
Spectrum analyzer	Agilent	E4407B	MY41441082	2017/11/4
Dc Power Supply	GW	GPR-6030D	/	2017/11/4
Temperature & Humidity Chamber	GIANT FORCE	GTH-056P	GF-94454-1	2017/11/14
Broadband TRILOG Antenna	Schwarabeck	VULB9163	9163-872	2017/11/14
Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-1145	2017/11/14
Amplifier	HP	8447D	3113A06150	2017/11/4
Amplifier	Agilent	8449B	3008A02400	2018/7/4
Test Receiver	Schwarabeck	ESPI7	100314	2017/11/4
Spectrum analyzer	Agilent	E4407B	MY41441082	2017/11/4
Signal Generator	R&S	SMT 06	832080/007	2017/11/4
Broadband TRILOG Antenna	Schwarabeck	VULB9163	9163-872	2017/11/14
Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-1145	2017/11/14
Amplifier	HP	8447D	3113A06150	2017/11/4
Amplifier	Agilent	8449B	3008A02400	2018/7/4
Test Receiver	Schwarabeck	ESPI	100314	2017/11/4
Spectrum analyzer	Agilent	E4407B	MY41441082	2017/11/4
LISN	R&S	ENV216	1001131	2017/9/25
Test Cable	United Microwave	57793	1m	2017/12/05
Test Cable	United Microwave	A30A30-5006	10m	2017/12/05

Note: the calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

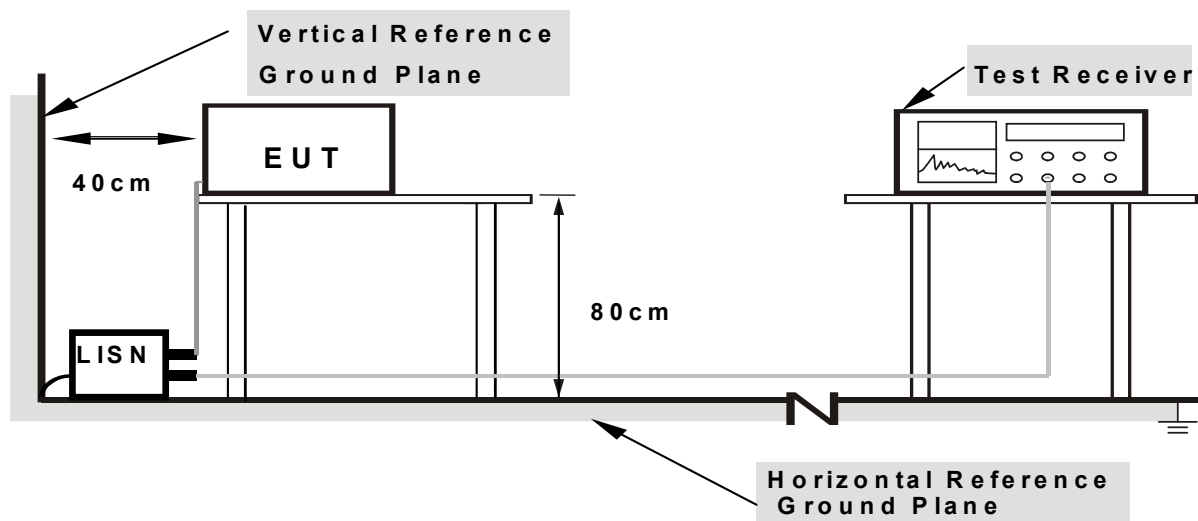

Note: 1.Support units were connected to second LISN .

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80
from other units and other metal planes**

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.6 TEST RESULTS

EUT :	Smart Mirror	Model Name. :	RVM740SM
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N/A
Test Voltage :	N/A	Test Mode :	N/A

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz PK detector for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.

f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

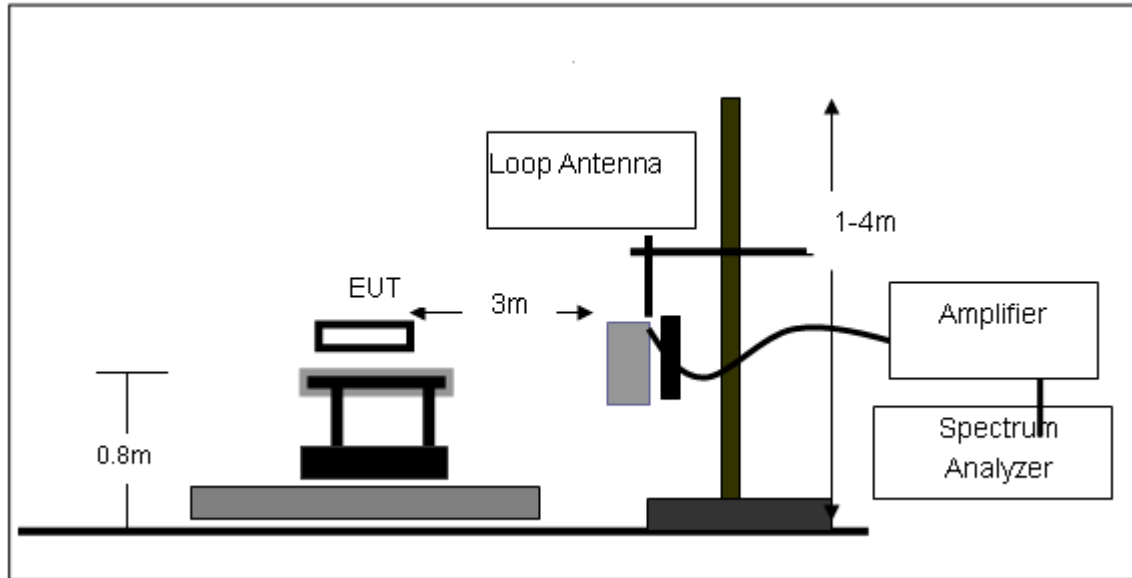

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

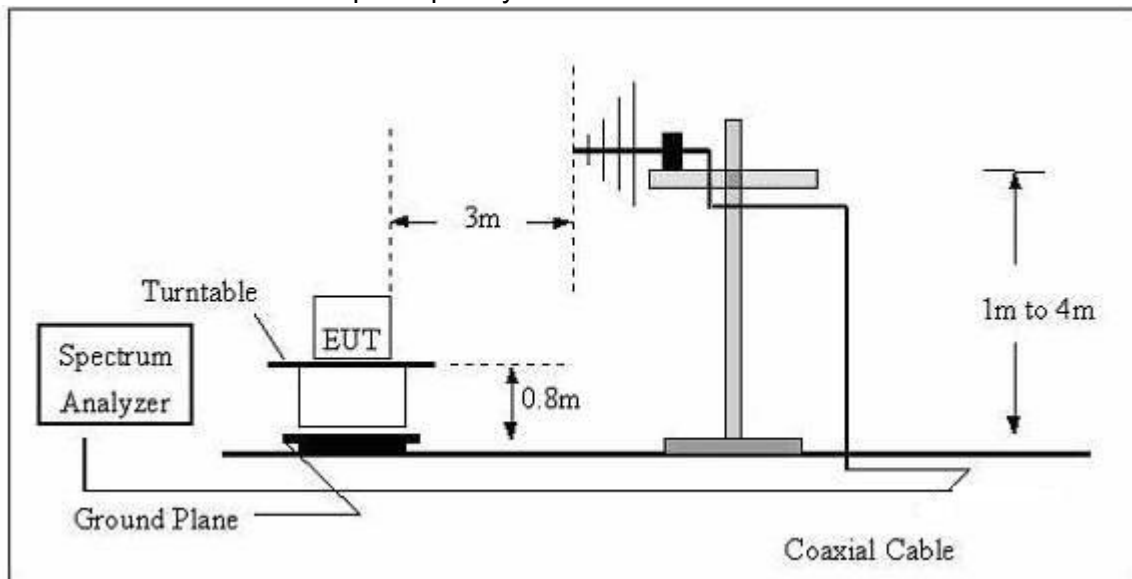

(C) Radiated Emission Test-Up Frequency Above 1GHz

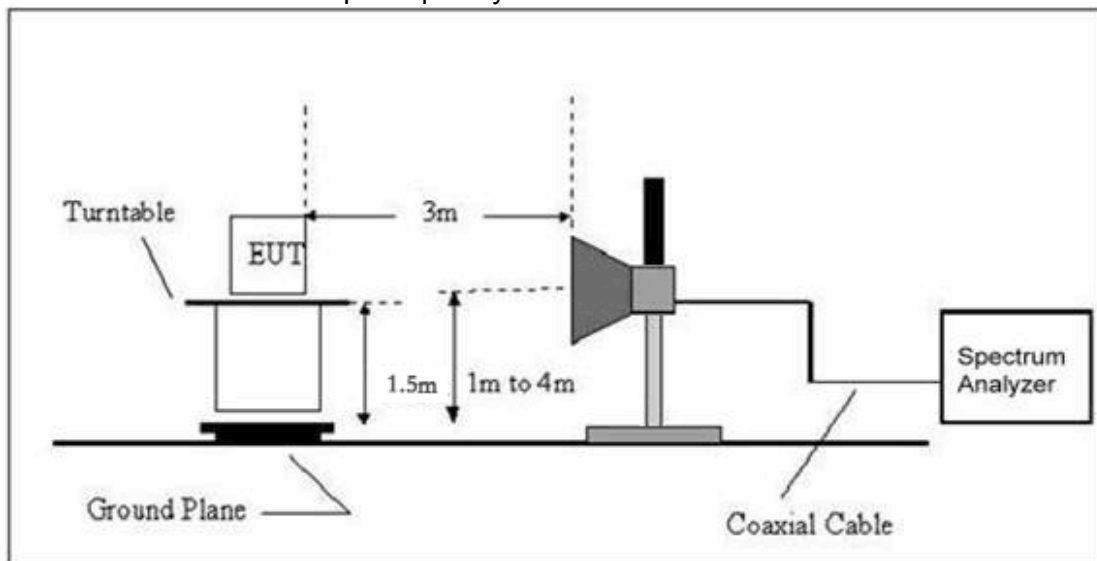

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

EUT:	Smart Mirror	Model Name. :	RVM740SM
Temperature:	22°C	Relative Humidity:	55%
Pressure:	1010 hPa	Test Voltage :	DC 12V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	Smart Mirror	Model Name :	RVM740SM
Temperature :	22℃	Relative Humidity:	55%
Pressure:	1010 hPa	Test Voltage :	DC 12V
Test Mode :	TX		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	119.4360	15.57	12.08	27.65	43.5	15.85	QP
V	128.1129	15.86	12.2	28.06	43.5	15.44	QP
V	170.7926	20.41	10.35	30.76	43.5	12.74	QP
V	341.9786	12.75	16.19	28.94	46	17.06	QP
V	468.8761	17.83	19.69	37.52	46	8.48	QP
V	935.5462	9.64	29.42	39.06	46	6.94	QP
H	170.7923	27.41	10.35	37.76	43.5	5.74	QP
H	341.9786	24.85	16.19	41.04	46	4.96	QP
H	468.8761	20.41	19.69	40.1	46	5.9	QP
H	726.8052	14.38	26	40.38	46	5.62	QP
H	813.1114	16.51	26.35	42.86	46	3.14	QP
H	854.0247	12.45	27.51	39.96	46	6.04	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level- Limit

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Factor added by measurement software automatically

3.2.8 TEST RESULTS (1G-25GHZ)

GFSK,
Normal Voltage

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (2402 MHz)							
Vertical	2491.777	60.32	-11.65	48.67	74	25.33	Pk
Horizontal	2498.247	57.22	-12.73	44.49	74	29.51	Pk
Vertical	4804.156	57.32	-3.6	53.72	74	20.28	Pk
Horizontal	4804.156	57.32	-9.23	48.09	74	25.91	Pk
Vertical	1485.838	61.02	-17.1	43.92	74	30.08	Pk
Vertical	1636.784	60.71	-16.06	44.65	74	29.35	Pk
Vertical	2095.928	59.52	-11.88	47.64	74	26.36	Pk
Horizontal	1074.301	61.25	-19.69	41.56	74	32.44	Pk
Horizontal	1483.178	60.24	-17.09	43.15	74	30.85	Pk
Horizontal	1895.832	57.26	-14.25	43.01	74	30.99	Pk
Mid Channel (2441 MHz)							
Vertical	2474.777	57.01	-11.65	45.36	74	28.64	Pk
Horizontal	2474.144	57.7	-9.37	48.33	74	25.67	Pk
Vertical	4882.539	57.08	-6.15	50.93	74	23.07	Pk
Horizontal	4882.539	57.08	-6.83	50.25	74	23.75	Pk
Vertical	1433.535	64.07	-17.12	46.95	74	27.05	Pk
Vertical	1636.784	61.4	-16.06	45.34	74	28.66	Pk
Vertical	2284.166	55.14	-12.83	42.31	74	31.69	Pk
Horizontal	1280.515	60.8	-17.82	42.98	74	31.02	Pk
Horizontal	1636.784	59.63	-16.06	43.57	74	30.43	Pk
Horizontal	1892.438	59.75	-14.28	45.47	74	28.53	Pk
High Channel (2480 MHz)							
Vertical	2453.883	57.7	-12.91	44.79	74	29.21	Pk
Horizontal	2453.839	57.7	-11.59	46.11	74	27.89	Pk
Vertical	4960.256	54.21	-9.22	44.99	74	29.01	Pk
Horizontal	4960.478	54.21	-3.64	50.57	74	23.43	Pk
Vertical	1187.688	58.73	-18.27	40.46	74	33.54	Pk
Vertical	1636.784	57.54	-16.06	41.48	74	32.52	Pk
Vertical	2084.693	55.13	-11.99	43.14	74	30.86	Pk
Horizontal	1534.540	57.79	-16.94	40.85	74	33.15	Pk
Horizontal	1786.985	57.5	-15.04	42.46	74	31.54	Pk
Horizontal	1892.438	57.38	-14.28	43.1	74	30.9	Pk

$\pi/4$ -DQPSK

Normal Voltage

Normal Voltage							
Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402							
V	4804.28	57.35	-3.64	60.99	74	-13.01	Pk
V	4804.28	43.11	-3.64	46.75	54	-7.25	AV
H	4804.15	51.94	-3.64	55.58	74	-18.42	Pk
H	4804.15	43.68	-3.64	47.32	54	-6.68	AV
operation frequency:2441							
V	4882.87	53.22	-3.68	56.90	74	-17.10	Pk
V	4882.87	43.64	-3.68	47.32	54	-6.68	AV
H	4882.57	51.10	-3.68	54.78	74	-19.22	Pk
H	4882.57	41.40	-3.68	45.08	54	-8.92	AV
operation frequency:2480							
V	4960.98	56.13	-3.59	59.72	74	-14.28	pk
V	4960.98	43.96	-3.59	47.55	54	-6.45	AV
H	4960.70	53.80	-3.59	57.39	74	-16.61	pk
H	4960.70	41.33	-3.59	44.92	54	-9.08	AV
Remark:							
Absolute Level= Reading Level+ Factor, Margin= Absolute Level - Limit							

8-DPSK
Normal Voltage

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:2402							
V	4804.93	49.03	-3.64	52.67	74	-16.33	Pk
H	4804.43	50.05	-3.64	53.69	74	-20.31	Pk
operation frequency:2441							
V	4882.95	49.34	-3.68	53.02	74	-14.98	Pk
H	4882.40	48.56	-3.68	52.24	74	-18.76	Pk
operation frequency:2480							
V	4960.27	49.47	-3.59	53.06	74	-16.94	pk
H	4960.09	48.99	-3.59	52.58	74	-15.42	pk
Remark:							
Absolute Level= Reading Level+ Factor, Margin= Absolute Level - Limit							

Note:The PK value is less than the AV value, AV value is not required
Factor added by measurement software automatically.

BAND EDGE(Radiated)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
GFSK							
2390	51.66	-12.78	38.88	74	-35.12	peak	Vertical
2390	53.85	-12.78	41.07	74	-32.93	peak	Horizontal
2483.5	51.86	-12.78	39.08	74	-34.92	peak	Vertical
2483.5	51.20	-12.78	38.42	74	-35.58	peak	Horizontal
π/4-DQPSK							
2390	50.48	-13.06	37.42	74	-36.58	peak	Vertical
2390	52.52	-13.06	39.46	74	-34.54	peak	Horizontal
2483.5	51.27	-12.78	38.49	74	-35.51	peak	Vertical
2483.5	54.12	-12.78	41.34	74	-32.66	peak	Horizontal
8-DPSK							
2390	53.85	-13.06	40.79	74	-33.21	peak	Vertical
2390	52.06	-13.06	39.00	74	-35.00	peak	Horizontal
2483.5	52.85	-12.78	40.07	74	-33.93	peak	Vertical
2483.5	51.90	-12.78	39.12	74	-34.88	peak	Horizontal

NOTE:The PK value is less than the AV value, AV value is not required.

BAND EDGE(Radiated)(Hopping Mode)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
GFSK							
2390	57.89	-13.06	44.83	74	29.17	peak	Vertical
2390	58.35	-13.06	45.29	74	28.71	peak	Horizontal
2483.5	57.57	-12.78	44.79	74	29.21	peak	Vertical
2483.5	55.93	-12.78	43.15	74	30.85	peak	Horizontal
π/4-DQPSK							
2390	58.03	-13.06	44.97	74	29.03	peak	Vertical
2390	58.49	-13.06	45.43	74	28.57	peak	Horizontal
2483.5	57.71	-12.78	44.93	74	29.07	peak	Vertical
2483.5	56.07	-12.78	43.29	74	30.71	peak	Horizontal
8-DPSK							
2390	58.46	-13.06	45.4	74	28.6	peak	Vertical
2390	58.92	-13.06	45.86	74	28.14	peak	Horizontal
2483.5	58.14	-12.78	45.36	74	28.64	peak	Vertical
2483.5	56.51	-12.78	43.72	74	30.28	peak	Horizontal

NOTE: The PK value is less than the AV value, AV value is not required.

4. 20 DB OCCUPY BANDWIDTH

4.1 APPLIED PROCEDURES / LIMIT

FCC ParCN186-W5 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	20dB bandwidth	/	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
Bandwidth: RBW=30 kHz, VBW=100 kHz, detector= Peak

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

EUT :	Smart Mirror	Model Name :	RVM740SM
Temperature :	22°C	Relative Humidity:	55%
Pressure :	1015 hPa	Test Voltage :	DC 12V
Test Mode :	GFSK Mode /CH01, CH40, CH79		


Frequency	20dB Bandwidth (MHz)	Limit	Result
2402 MHz	0.8918	/	PASS
2441 MHz	0.8946	/	PASS
2480 MHz	0.9104	/	PASS



TX CH40



TX CH79

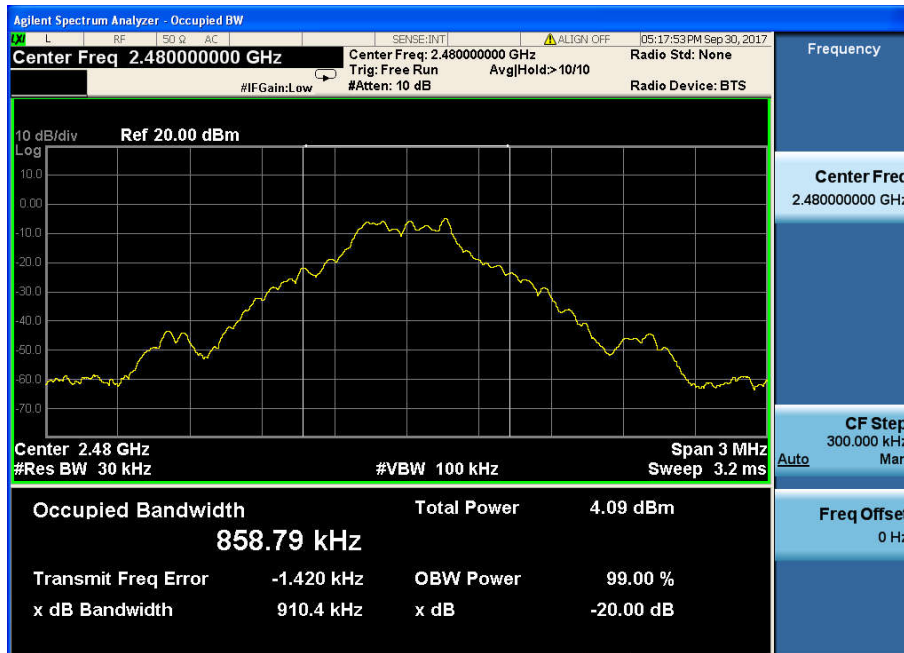

EUT :	Smart Mirror	Model Name :	RVM740SM
Temperature :	22℃	Relative Humidity:	55%
Pressure :	1015 hPa	Test Voltage :	DC 12V
Test Mode :	$\pi/4$ -DQPSK, Mode /CH01, CH40, CH79		

Frequency	20dB Bandwidth (MHz)	Limit	Result
2402 MHz	1.129	/	PASS
2441 MHz	1.156	/	PASS
2480 MHz	1.141	/	PASS

