

## TEST REPORT

**Report No.: 17080606HKG-001**

Luckies of London Ltd.

Application For Certification  
(Original Grant)

**FCC ID: 2ANWKLKPOCB17**

Transceiver

**PREPARED AND CHECKED BY:**

**APPROVED BY:**

Signed On File  
Wong Cheuk Ho, Herbert  
Lead Engineer

---

Wong Kwok Yeung, Kenneth  
Senior Lead Engineer  
Date: September 21, 2017

## TEST REPORT

### GENERAL INFORMATION

|                                  |                                                                                                          |
|----------------------------------|----------------------------------------------------------------------------------------------------------|
| <b>Grantee:</b>                  | Luckies of London Ltd.                                                                                   |
| <b>Grantee Address:</b>          | Unit 24/25, The Tay Building,<br>2A Wrentham Avenue,<br>London NW10 3HA.                                 |
| <b>Contact Person:</b>           | Lauren Almond                                                                                            |
| <b>Tel:</b>                      | 0845 230 3533                                                                                            |
| <b>Fax:</b>                      | 0845 230 3633                                                                                            |
| <b>e-mail:</b>                   | lauren@luckies.co.uk                                                                                     |
| <b>Manufacturer:</b>             | MSC Production Ltd.                                                                                      |
| <b>Manufacturer Address:</b>     | 2/F., B5 Building, Zhi Gu Science and Technology Park,<br>Gekeng Industrial Park, Hengli Town, Dongguan. |
| <b>Brand Name:</b>               | Luckies of London                                                                                        |
| <b>Model:</b>                    | LUKPOCB                                                                                                  |
| <b>Type of EUT:</b>              | Transceiver                                                                                              |
| <b>Description of EUT:</b>       | Pocket Tin Speaker Gold Bluetooth                                                                        |
| <b>Serial Number:</b>            | N/A                                                                                                      |
| <b>FCC ID:</b>                   | 2ANWKLKPOCB17                                                                                            |
| <b>Date of Sample Submitted:</b> | August 10, 2017                                                                                          |
| <b>Date of Test:</b>             | August 10, 2017 to September 08, 2017                                                                    |
| <b>Report No.:</b>               | 17080606HKG-001                                                                                          |
| <b>Report Date:</b>              | September 21, 2017                                                                                       |
| <b>Environmental Conditions:</b> | Temperature: +10 to 40°C<br>Humidity: 10 to 90%                                                          |

## TEST REPORT

### SUMMARY OF TEST RESULT

| TEST SPECIFICATION                         | REFERENCE      | RESULTS |
|--------------------------------------------|----------------|---------|
| Transmitter Power Line Conducted Emissions | 15.207         | Pass    |
| Radiated Emission                          | 15.249, 15.209 | Pass    |
| Radiated Emission on the Bandedge          |                |         |
| Radiated Emission in Restricted Bands      | 15.205         | Pass    |

The equipment under test is found to be complying with the following standards:  
FCC Part 15, October 1, 2016 Edition

Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.  
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

## TEST REPORT

### TABLE OF CONTENTS

|             |                                                   |           |
|-------------|---------------------------------------------------|-----------|
| <b>1.0</b>  | <b>GENERAL DESCRIPTION .....</b>                  | <b>5</b>  |
| 1.1         | Product Description .....                         | 5         |
| 1.2         | Related Submittal(s) Grants .....                 | 5         |
| 1.3         | Test Methodology .....                            | 5         |
| 1.4         | Test Facility .....                               | 5         |
| <b>2.0</b>  | <b>SYSTEM TEST CONFIGURATION .....</b>            | <b>6</b>  |
| 2.1         | Justification .....                               | 6         |
| 2.2         | EUT Exercising Software .....                     | 6         |
| 2.3         | Special Accessories .....                         | 6         |
| 2.4         | Measurement Uncertainty .....                     | 6         |
| 2.5         | Support Equipment List and Description .....      | 6         |
| <b>3.0</b>  | <b>EMISSION RESULTS .....</b>                     | <b>7</b>  |
| 3.1         | Field Strength Calculation .....                  | 7         |
| 3.2         | Radiated Emission Configuration Photograph .....  | 8         |
| 3.3         | Radiated Emission Data .....                      | 8         |
| 3.4         | Conducted Emission Configuration Photograph ..... | 8         |
| 3.5         | Conducted Emission Data .....                     | 8         |
| <b>4.0</b>  | <b>EQUIPMENT PHOTOGRAPHS .....</b>                | <b>14</b> |
| <b>5.0</b>  | <b>PRODUCT LABELLING .....</b>                    | <b>14</b> |
| <b>6.0</b>  | <b>TECHNICAL SPECIFICATIONS .....</b>             | <b>14</b> |
| <b>7.0</b>  | <b>INSTRUCTION MANUAL .....</b>                   | <b>14</b> |
| <b>8.0</b>  | <b>MISCELLANEOUS INFORMATION .....</b>            | <b>15</b> |
| 8.1         | Radiated Emission on the Bandedge .....           | 15        |
| 8.2         | Discussion of Pulse Desensitization .....         | 18        |
| 8.3         | Calculation of Average Factor .....               | 18        |
| 8.4         | Emissions Test Procedures .....                   | 19        |
| <b>9.0</b>  | <b>CONFIDENTIALITY REQUEST .....</b>              | <b>23</b> |
| <b>10.0</b> | <b>EQUIPMENT LIST .....</b>                       | <b>23</b> |

## TEST REPORT

### 1.0 GENERAL DESCRIPTION

#### 1.1 Product Description

The Equipment Under Test (EUT) is a Rechargeable Bluetooth Speaker which equips 2.4GHz Bluetooth feature. The EUT operates at frequency range of 2402MHz to 2480MHz. There are total 79 channels with 1MHz channel spacing. The EUT can play wireless audio signal when paired with a Bluetooth devices. The audio signal is then amplified and driving internal loudspeaker. The EUT is powered by a 3.7V internal rechargeable battery which can be charged via USB port. The applicant declared that Bluetooth 4.0 BLE is not used in the product. The USB port is for charging only.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

#### 1.2 Related Submittal(s) Grants

This is a single application for certification of a transmitter.

#### 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

#### 1.4 Test Facility

The 3m Chamber and conducted measurement facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been placed on file with the FCC.

## TEST REPORT

### 2.0 SYSTEM TEST CONFIGURATION

#### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The device was powered by new 3.7VDC rechargeable battery and/or USB port (5VDC). Both powering method were tested and only the worse-case data is shown in report (powered by USB port of PC).

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

#### 2.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated testing was designed to exercise the various system components in a manner similar to a typical use.

#### 2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

#### 2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

#### 2.5 Support Equipment List and Description

1. HP Notebook Computer (Adaptor Model: HSTNN-CA15)
2. 1 x LAN cable of 2m long  
(Provided by Intertek)
3. 1 x USB cable of 0.2m long  
(Provided by Applicant)

## TEST REPORT

### 3.0 EMISSION RESULTS

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

#### 3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where FS = Field Strength in dB $\mu$ V/m

RR = RA - AG - AV in dB $\mu$ V

LF = CF + AF in dB

Assume a receiver reading of 52.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$RA = 52.0 \text{ dB}\mu\text{V/m}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$AV = 5.0 \text{ dB}$$

$$FS = RR + LF$$

$$FS = 18 + 9 = 27 \text{ dB}\mu\text{V/m}$$

$$RR = 18.0 \text{ dB}\mu\text{V}$$

$$LF = 9.0 \text{ dB}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V/m})/20] = 22.4 \mu\text{V/m}$$

## TEST REPORT

### 3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 604.272 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

### 3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 7.2 dB

### 3.4 Conducted Emission Configuration Photograph

The worst case in line-conducted emission was found at 0.168 MHz

For electronic filing, the worst case line-conducted configuration photographs are saved with filename: conducted photo.pdf.

### 3.5 Conducted Emission Data

For electronic filing, the graph and data table of conducted emission is saved with filename: conducted.pdf.

Judgment: Pass by 13.8 dB


## TEST REPORT

### CONDUCTED EMISSION

Model: LUKPOCB

Date of Test: September 08, 2017

Worst-Case Operating Mode: Powered by USB port of PC + Bluetooth Audio Playing

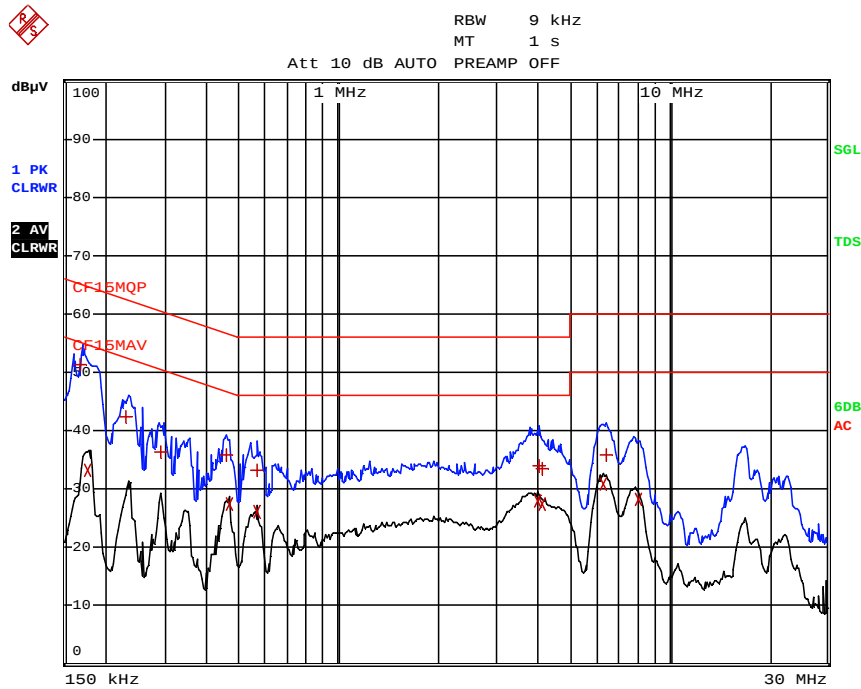

| EDIT PEAK LIST (Final Measurement Results) |            |            |    |                |
|--------------------------------------------|------------|------------|----|----------------|
| Trace1:                                    | CF15MQP    |            |    |                |
| Trace2:                                    | CF15MAV    |            |    |                |
| Trace3:                                    | ---        |            |    |                |
| TRACE                                      | FREQUENCY  | LEVEL dBμV |    | DELTA LIMIT dB |
| 1 Quasi Peak                               | 168 kHz    | 51.22      | N  | -13.83         |
| 2 CISPR Average                            | 177 kHz    | 33.09      | N  | -21.53         |
| 1 Quasi Peak                               | 231 kHz    | 42.41      | N  | -20.00         |
| 1 Quasi Peak                               | 294 kHz    | 36.26      | L1 | -24.14         |
| 1 Quasi Peak                               | 456 kHz    | 35.84      | L1 | -20.92         |
| 2 CISPR Average                            | 465 kHz    | 27.51      | L1 | -19.09         |
| 1 Quasi Peak                               | 568.5 kHz  | 33.31      | L1 | -22.68         |
| 2 CISPR Average                            | 568.5 kHz  | 26.13      | N  | -19.86         |
| 2 CISPR Average                            | 3.984 MHz  | 28.03      | L1 | -17.96         |
| 1 Quasi Peak                               | 4.038 MHz  | 33.87      | N  | -22.12         |
| 2 CISPR Average                            | 4.119 MHz  | 27.55      | L1 | -18.44         |
| 1 Quasi Peak                               | 4.1235 MHz | 33.46      | L1 | -22.54         |
| 2 CISPR Average                            | 6.3105 MHz | 30.90      | N  | -19.09         |
| 1 Quasi Peak                               | 6.4275 MHz | 35.69      | N  | -24.30         |
| 2 CISPR Average                            | 8.0565 MHz | 28.22      | L1 | -21.77         |

Note: Measurement Uncertainty is  $\pm 4.2$  dB at a level of confidence of 95%.

## TEST REPORT

### RADIATED EMISSIONS

Model: LUKPOCB

Date of Test: September 08, 2017

Worst-Case Operating Mode: Transmitting

Table 1  
Pursuant to FCC Part 15 Section 15.249 Requirement

#### Lowest Channel

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Average Factor (dB) | Calculated at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------|---------------------------|------------------------------|--------------|
| H            | 2402.000         | 96.0           | 33                | 29.4                | 92.4                      | 24                  | 68.4                      | 94.0                         | -25.6        |
| <b>H</b>     | <b>4804.000</b>  | <b>51.5</b>    | <b>33</b>         | <b>34.9</b>         | <b>53.4</b>               | <b>24</b>           | <b>29.4</b>               | <b>54.0</b>                  | <b>-24.6</b> |
| H            | 7206.000         | 37.9           | 33                | 37.9                | 42.8                      | 24                  | 18.8                      | 54.0                         | -35.2        |
| H            | 9608.000         | 37.8           | 33                | 40.4                | 45.2                      | 24                  | 21.2                      | 54.0                         | -32.8        |
| <b>H</b>     | <b>12010.000</b> | <b>40.5</b>    | <b>33</b>         | <b>40.5</b>         | <b>48.0</b>               | <b>24</b>           | <b>24.0</b>               | <b>54.0</b>                  | <b>-30.0</b> |
| H            | 14412.000        | 43.4           | 33                | 40.0                | 50.4                      | 24                  | 26.4                      | 54.0                         | -27.6        |

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| H            | 2402.000         | 96.0           | 33                | 29.4                | 92.4                      | 114.0                     | -21.6        |
| <b>H</b>     | <b>4804.000</b>  | <b>51.5</b>    | <b>33</b>         | <b>34.9</b>         | <b>53.4</b>               | <b>74.0</b>               | <b>-20.6</b> |
| H            | 7206.000         | 37.9           | 33                | 37.9                | 42.8                      | 74.0                      | -31.2        |
| H            | 9608.000         | 37.8           | 33                | 40.4                | 45.2                      | 74.0                      | -28.8        |
| <b>H</b>     | <b>12010.000</b> | <b>40.5</b>    | <b>33</b>         | <b>40.5</b>         | <b>48.0</b>               | <b>74.0</b>               | <b>-26.0</b> |
| H            | 14412.000        | 43.4           | 33                | 40.0                | 50.4                      | 74.0                      | -23.6        |

- NOTES:
1. Peak Detector Data unless otherwise stated.
  2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative sign in the column shows value below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
  6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

Model: LUKPOCB

Date of Test: September 08, 2017

Worst-Case Operating Mode: Transmitting

Table 2  
Pursuant to FCC Part 15 Section 15.249 Requirement

### Middle Channel

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Average Factor (dB) | Calculated at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------|---------------------------|------------------------------|--------------|
| H            | 2442.000         | 96.0           | 33                | 29.4                | 92.4                      | 24                  | 68.4                      | 94.0                         | -25.6        |
| <b>H</b>     | <b>4884.000</b>  | <b>51.3</b>    | <b>33</b>         | <b>34.9</b>         | <b>53.2</b>               | <b>24</b>           | <b>29.2</b>               | <b>54.0</b>                  | <b>-24.8</b> |
| <b>H</b>     | <b>7326.000</b>  | <b>37.8</b>    | <b>33</b>         | <b>37.9</b>         | <b>42.7</b>               | <b>24</b>           | <b>18.7</b>               | <b>54.0</b>                  | <b>-35.3</b> |
| H            | 9768.000         | 38.2           | 33                | 40.4                | 45.6                      | 24                  | 21.6                      | 54.0                         | -32.4        |
| <b>H</b>     | <b>12210.000</b> | <b>40.9</b>    | <b>33</b>         | <b>40.5</b>         | <b>48.4</b>               | <b>24</b>           | <b>24.4</b>               | <b>54.0</b>                  | <b>-29.6</b> |
| H            | 14652.000        | 45.4           | 33                | 38.4                | 50.8                      | 24                  | 26.8                      | 54.0                         | -27.2        |

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| H            | 2442.000         | 96.0           | 33                | 29.4                | 92.4                      | 114.0                     | -21.6        |
| <b>H</b>     | <b>4884.000</b>  | <b>51.3</b>    | <b>33</b>         | <b>34.9</b>         | <b>53.2</b>               | <b>74.0</b>               | <b>-20.8</b> |
| <b>H</b>     | <b>7326.000</b>  | <b>37.8</b>    | <b>33</b>         | <b>37.9</b>         | <b>42.7</b>               | <b>74.0</b>               | <b>-31.3</b> |
| H            | 9768.000         | 38.2           | 33                | 40.4                | 45.6                      | 74.0                      | -28.4        |
| <b>H</b>     | <b>12210.000</b> | <b>40.9</b>    | <b>33</b>         | <b>40.5</b>         | <b>48.4</b>               | <b>74.0</b>               | <b>-25.6</b> |
| H            | 14652.000        | 45.4           | 33                | 38.4                | 50.8                      | 74.0                      | -23.2        |

- NOTES:
1. Peak Detector Data unless otherwise stated.
  2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative sign in the column shows value below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
  6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

Model: LUKPOCB

Date of Test: September 08, 2017

Worst-Case Operating Mode: Transmitting

Table 3  
Pursuant to FCC Part 15 Section 15.249 Requirement

### Highest Channel

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Average Factor (dB) | Calculated at 3m (dBμV/m) | Average Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------|---------------------------|------------------------------|--------------|
| H            | 2480.000         | 96.2           | 33                | 29.4                | 92.6                      | 24                  | 68.6                      | 94.0                         | -25.4        |
| <b>H</b>     | <b>4960.000</b>  | <b>51.9</b>    | <b>33</b>         | <b>34.9</b>         | <b>53.8</b>               | <b>24</b>           | <b>29.8</b>               | <b>54.0</b>                  | <b>-24.2</b> |
| <b>H</b>     | <b>7440.000</b>  | <b>37.9</b>    | <b>33</b>         | <b>37.9</b>         | <b>42.8</b>               | <b>24</b>           | <b>18.8</b>               | <b>54.0</b>                  | <b>-35.2</b> |
| H            | 9920.000         | 38.4           | 33                | 40.4                | 45.8                      | 24                  | 21.8                      | 54.0                         | -32.2        |
| <b>H</b>     | <b>12400.000</b> | <b>40.7</b>    | <b>33</b>         | <b>40.5</b>         | <b>48.2</b>               | <b>24</b>           | <b>24.2</b>               | <b>54.0</b>                  | <b>-29.8</b> |
| H            | 14880.000        | 45.4           | 33                | 38.4                | 50.8                      | 24                  | 26.8                      | 54.0                         | -27.2        |

| Polarization | Frequency (MHz)  | Reading (dBμV) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dBμV/m) | Peak Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|------------------|----------------|-------------------|---------------------|---------------------------|---------------------------|--------------|
| H            | 2480.000         | 96.2           | 33                | 29.4                | 92.6                      | 114.0                     | -21.4        |
| <b>H</b>     | <b>4960.000</b>  | <b>51.9</b>    | <b>33</b>         | <b>34.9</b>         | <b>53.8</b>               | <b>74.0</b>               | <b>-20.2</b> |
| <b>H</b>     | <b>7440.000</b>  | <b>37.9</b>    | <b>33</b>         | <b>37.9</b>         | <b>42.8</b>               | <b>74.0</b>               | <b>-31.2</b> |
| H            | 9920.000         | 38.4           | 33                | 40.4                | 45.8                      | 74.0                      | -28.2        |
| <b>H</b>     | <b>12400.000</b> | <b>40.7</b>    | <b>33</b>         | <b>40.5</b>         | <b>48.2</b>               | <b>74.0</b>               | <b>-25.8</b> |
| H            | 14880.000        | 45.4           | 33                | 38.4                | 50.8                      | 74.0                      | -23.2        |

- NOTES:
1. Peak Detector Data unless otherwise stated.
  2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative sign in the column shows value below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
  6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

Model: LUKPOCB

Date of Test: September 08, 2017

Worst-Case Operating Mode: Powered by USB port of PC + Bluetooth Audio Playing

Table 4  
Pursuant to FCC Part 15 Section 15.209 Requirement

| Polarization | Frequency (MHz) | Reading (dBμV) | Pre-amp (dB) | Antenna Factor (dB) | Net at 3m (dBμV/m) | Limit at 3m (dBμV/m) | Margin (dB)  |
|--------------|-----------------|----------------|--------------|---------------------|--------------------|----------------------|--------------|
| H            | 151.750         | 29.0           | 16           | 15.0                | 28.0               | 43.5                 | -15.5        |
| <b>H</b>     | <b>252.054</b>  | <b>30.8</b>    | <b>16</b>    | <b>20.0</b>         | <b>34.8</b>        | <b>46.0</b>          | <b>-11.2</b> |
| H            | 345.044         | 26.5           | 16           | 24.0                | 34.5               | 46.0                 | -11.5        |
| H            | 431.210         | 22.5           | 16           | 25.0                | 31.5               | 46.0                 | -14.5        |
| H            | 437.668         | 22.8           | 16           | 26.0                | 32.8               | 46.0                 | -13.2        |
| H            | 478.740         | 23.8           | 16           | 26.0                | 33.8               | 46.0                 | -12.2        |
| H            | 503.968         | 25.2           | 16           | 26.0                | 35.2               | 46.0                 | -10.8        |
| H            | 507.504         | 22.6           | 16           | 27.0                | 33.6               | 46.0                 | -12.4        |
| H            | 604.272         | 25.8           | 16           | 29.0                | 38.8               | 46.0                 | -7.2         |
| H            | 952.590         | 19.4           | 16           | 33.0                | 36.4               | 46.0                 | -9.6         |

- NOTES:
1. Peak Detector Data unless otherwise stated.
  2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative sign in the column shows value below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
  6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

### 4.0 EQUIPMENT PHOTOGRAPHS

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

### 5.0 PRODUCT LABELLING

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

### 6.0 TECHNICAL SPECIFICATIONS

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

### 7.0 INSTRUCTION MANUAL

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

## TEST REPORT

### 8.0 MISCELLANEOUS INFORMATION

The miscellaneous information includes details of the test procedure and measured bandwidth / calculation of factor such as pulse desensitization and averaging factor (calculation and timing diagram).



#### 8.1 Radiated Emission on the Bandedge

From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz to 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.10 (2013) for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of part 15.249(d).

## TEST REPORT

### Peak Measurement

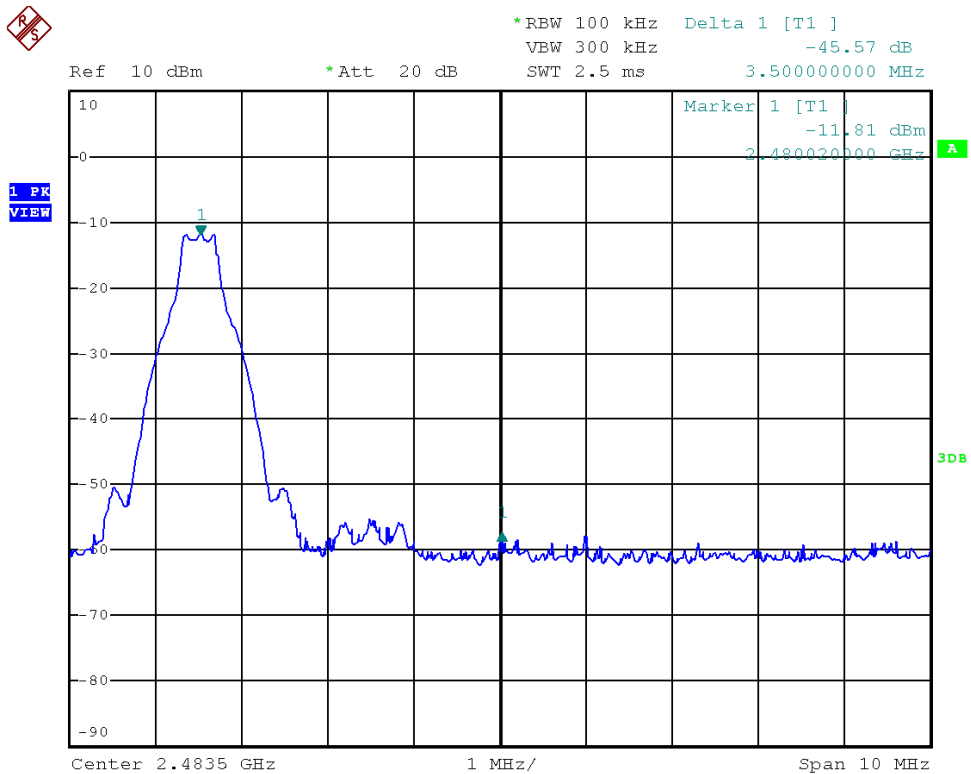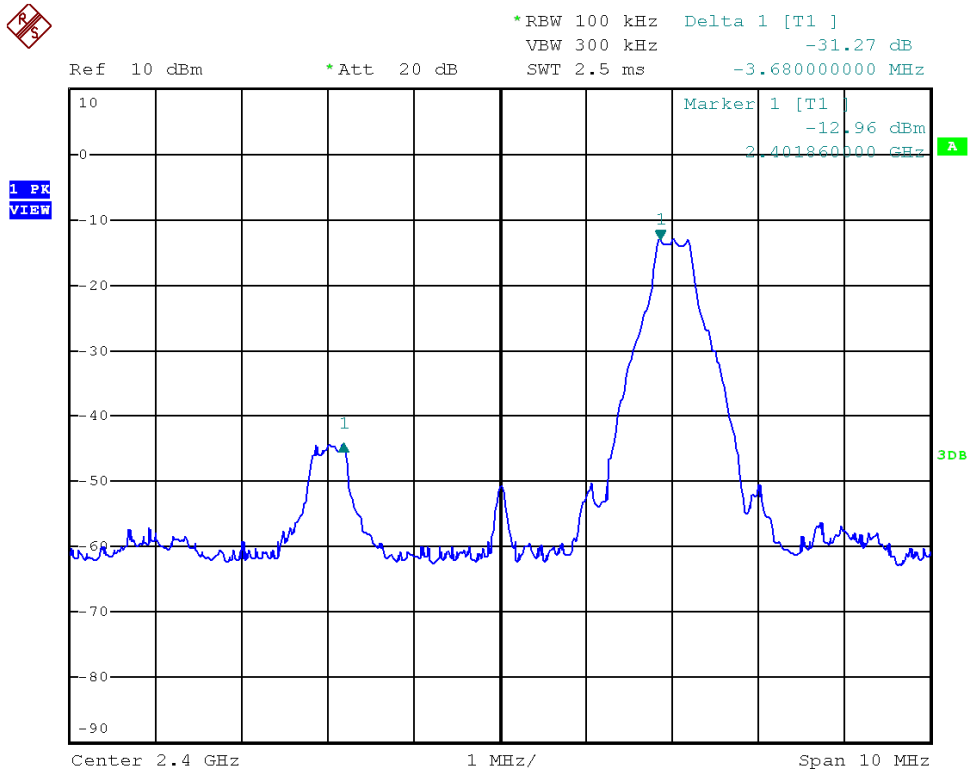

## TEST REPORT

### Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

=92.4 dB $\mu$ V/m - 31.3 dB

=61.1 dB $\mu$ V/m

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

=68.4 dB $\mu$ V/m – 31.3 dB

=37.1 dB $\mu$ V/m

Upper bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

=92.6 dB $\mu$ V/m – 45.6 dB

=47.0 dB $\mu$ V/m

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

=68.6 dB $\mu$ V/m - 45.6 dB

=23.0 dB $\mu$ V/m

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dB $\mu$ V/m (Peak Limit) and 54 dB $\mu$ V/m (Average Limit).

## TEST REPORT

### 8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period ( $T_{eff}$ ) is approximately  $625\mu s$  for a digital "1" bit which illustrated on technical specification, with a resolution bandwidth (3dB) of 3MHz, so the pulse desensitivity factor is 0dB.

### 8.3 Calculation of Average Factor

Based on the Bluetooth Specification Version 3.0 + EDR, the transmitter ON time for each timeslot of Bluetooth is  $625\mu s$ . DH5 has the maximum duty cycle, which consists of 5 continuous Tx slots and 1 Rx slot. Therefore one hopset take  $(5+1) \times 625\mu s = 3.75ms$ . For one period for a pseudo-random hopping through at least 20 RF channels in adaptive mode (worse case), it take:  $20 \times 3.75ms = 75ms$ .

The dwell time for DH5 is  $5 \times 625\mu s = 3.125ms$ .

For the worst case calculation, there are two transmissions might occur in 100ms. Therefore,

$$\begin{aligned} \text{Duty Cycle (DC)} &= \text{Maximum On time in } 100ms / 100ms \\ &= 3.125ms \times 2 / 100ms \\ &= 0.0625 \end{aligned}$$

$$\begin{aligned} \text{Average Factor (AF) of Bluetooth in dB} &= 20 \log_{10} (0.0625) \\ &= -24 \text{ dB} \end{aligned}$$

## TEST REPORT

### 8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz.

## TEST REPORT

### 8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.10 (2013).


The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 3 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.


## TEST REPORT

### 8.4.1 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

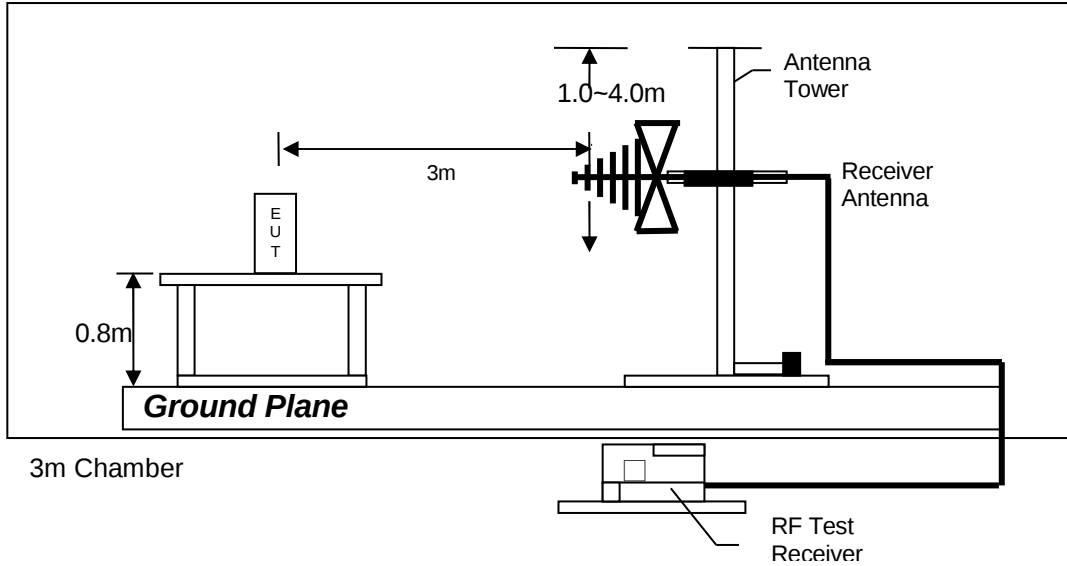

Test setup of radiated emissions up to 1GHz

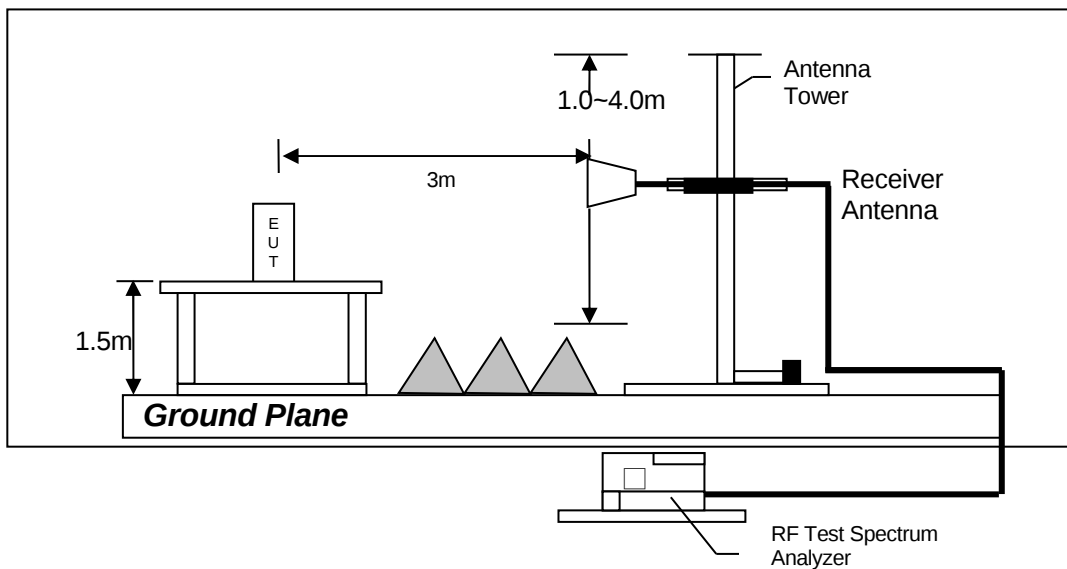

Test setup of radiated emissions above 1GHz


## TEST REPORT

### 8.4.2 Conducted Emission Test Procedures

For tabletop equipment, the EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table. For floor-standing equipment, the EUT and all cables were insulated, if required, from the ground plane by up to 12 mm of insulating material. The EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

### 8.4.3 Conducted Emission Test Setup

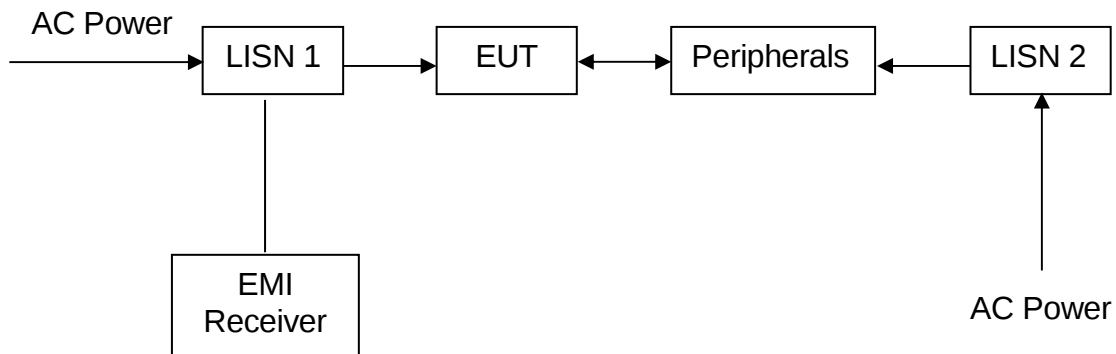

## TEST REPORT

### 9.0 CONFIDENTIALITY REQUEST

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: request.pdf.

### 10.0 EQUIPMENT LIST

#### 1) Radiated Emissions Test

| EQUIPMENT            | EMI Test Receiver<br>(9kHz to 26.5GHz) | BICONICAL ANTENNA | LOG PERIODIC ANTENNA |
|----------------------|----------------------------------------|-------------------|----------------------|
| Registration No.     | EW-3156                                | EW-0954           | EW-0446              |
| Manufacturer         | ROHDESCHWARZ                           | EMCO              | EMCO                 |
| Model No.            | ESR26                                  | 3104C             | 3146                 |
| Calibration Date     | Dec. 06, 2016                          | Jul. 07, 2016     | Jul. 15, 2016        |
| Calibration Due Date | Dec. 06, 2017                          | Jan. 07, 2018     | Jan. 15, 2018        |

| EQUIPMENT            | SPECTRUM ANALYZER | Pyramidal Horn<br>Antenna | DOUBLE RIDGED GUIDE<br>ANTENNA |
|----------------------|-------------------|---------------------------|--------------------------------|
| Registration No.     | EW-2249           | EW-0905                   | EW-1015                        |
| Manufacturer         | R&S               | EMCO                      | EMCO                           |
| Model No.            | FSP30             | 3160-09                   | 3115                           |
| Calibration Date     | Dec. 23, 2016     | Aug. 18, 2017             | Apr. 26, 2016                  |
| Calibration Due Date | Nov, 27, 2017     | Feb. 18, 2019             | Oct. 26, 2017                  |

| Equipment            | Active Loop H-field<br>(9kHz to 30MHz) | RF Cable 9kHz to<br>1000MHz | RF Cable (up to 40GHz) |
|----------------------|----------------------------------------|-----------------------------|------------------------|
| Registration No.     | EW-2313                                | EW-3170                     | EW-3155                |
| Manufacturer         | ELECTROMETRI                           | N/A                         | N/A                    |
| Model No.            | EM-6876                                | 9kHz to 1000MHz             | 1-40 GHz               |
| Calibration Date     | May. 18, 2016                          | Mar. 20, 2017               | Dec. 05, 2016          |
| Calibration Due Date | Nov. 18, 2017                          | Mar. 20, 2018               | Dec. 05, 2017          |

| Equipment            | Solid State Low Noise<br>Preamplifier Assembly<br>(1 - 18)GHz | Notch Filter (cutoff<br>frequency 2.4GHz to<br>2.5GHz) | RF Pre-amplifier<br>(9kHz to 40GHz) |
|----------------------|---------------------------------------------------------------|--------------------------------------------------------|-------------------------------------|
| Registration No.     | EW-3229                                                       | EW-3155                                                | EW-3006                             |
| Manufacturer         | BONN ELEKTRO                                                  | MICROTRONICS                                           | SCHWARZBECK                         |
| Model No.            | BLMA 0118-5G                                                  | BRM50701-02                                            | BBV 9744                            |
| Calibration Date     | Oct. 24, 2016                                                 | May. 26, 2017                                          | Mar. 23, 2017                       |
| Calibration Due Date | Oct. 24, 2017                                                 | May. 26, 2018                                          | Mar. 23, 2018                       |

## TEST REPORT

### 2) Conducted Emissions Test

| EQUIPMENT            | EMI TEST RECEIVER | LISN          | RF Cable<br>9kHz to 1000MHz |
|----------------------|-------------------|---------------|-----------------------------|
| Registration No.     | EW-2251           | EW-2874       | EW-3170                     |
| Manufacturer         | R&S               | R&S           | N/A                         |
| Model No.            | ESCI              | ENV-216       | 9kHz to 1000MHz             |
| Calibration Date     | Mar. 03, 2017     | Mar. 16, 2017 | Mar. 20, 2017               |
| Calibration Due Date | Mar. 03, 2018     | Mar. 16, 2018 | Mar. 20, 2018               |

### 3) Bandedge Measurement

| Equipment            | Spectrum Analyzer |
|----------------------|-------------------|
| Registration No.     | EW-2249           |
| Manufacturer         | R&S               |
| Model No.            | FSP30             |
| Calibration Date     | Dec. 23, 2016     |
| Calibration Due Date | Nov. 27, 2017     |

END OF TEST REPORT