

# RADIO RM8003-03 USER GUIDE

VERSION 0.1

## Table Of Contents

---

Radio RM8003-03 Transceiver .....	2
Overview .....	2
Features .....	2
Ratings.....	3
Available Antennas.....	3
FCC Information .....	3
FCC-Approved Antennas .....	3
Warnings .....	3
Hookup and Layout .....	4
Host Layout.....	5
Frequency Hopping Spread Spectrum.....	5
Modes of Operation.....	5
RSSI - Received Signal Strength .....	6
System Timing and Latency.....	6
System Throughput .....	6
System Operation .....	7
Ordering Information.....	7
Available Antennas.....	7

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



**Note:** This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment.

## RADIO RM8003-03 TRANSCEIVER

The compact Radio RM8003-03 900MHz transceiver replaces miles of cable in harsh industrial environments. Using field-proven FHSS technology, which needs no additional FCC licensing in the Americas, OEMs can easily make existing systems wireless with little or no RF expertise.

## OVERVIEW

The Radio RM8003-03 is a cost effective, high performance, frequency hopping spread spectrum (FHSS) transceiver designed for integration into OEM systems operating under FCC part 15.247 regulations for the 900 MHz ISM band.

Radio RM8003-03 transceivers operate in a Masterless architecture. The Radio RM8003-03 instead uses a Timekeeper to synchronize the network. The Timekeeper can be selected manually or the network can use built in a.i. to pick a timekeeper. Timekeeper can act as a pseudo gateway in order to synchronize signals or devices can communicate directly to one another when synchronization is not necessary.

All Timekeeper devices broadcast an RF sync pulse on periodic intervals along with timing information for secondary io beacons that are pulsed on a digital output line.

Serial data will be routed according to the destination serial number.

Digital input signals will be broadcast and then synchronized on the timekeeper pulses.

To boost data integrity and security, the Radio RM8003-03 uses FHSS technology with data whitening and 16bit CRC data integrity checks. Configuration data is stored in an on-board EEPROM.

All frequency hopping, synchronization, and RF system data transmission/reception is programmed in the factory and is performed by the transceiver, transparent to the OEM host.

The manufacturer is responsible for ensuring the final product meets all appropriate regulatory agency requirements listed herein before shipping any product.

The integrator is responsible for meeting the requirements of KDB 996369, D04.

The integrator should contact TAPCO for information regarding test modes or configuration options.

**Note:** Unless mentioned specifically by name, Radio RM8003-03 modules are referred to as the radio or transceiver.

Individual naming is used to differentiate product-specific features.

The host (any device to which the Radio RM8003-03 is connected, such as a PC) are referred to as OEM host

## FEATURES

- Standard IO - 2 digital input lines, 2 digital output lines, host serial lines for OTA serial.
- Options - 10 additional IO/serial communication lines are available for customization via custom factory firmware modification.
- 120kBaud
- Serial data rate is 19.2kBaud.
- Green LED signaling RF Transmission and Timekeeper Beacons.
- RED LED signaling RF Packet Reception.

## Ratings

- Operating Temperature -40 to 80C
- Operating Voltage 5VDC at Vin relative to ground
- Operating Voltage on all io/serial lines is 0V to 3.3V DC.
- Operating Humidity < 90%
- When operating outdoors use an appropriately rated enclosure to prevent moisture from contacting the module.
- RF Output Maximum 20dBm (+/- 1.1dB)
- RF Frequency range >= 902.4MHz and <= 927.6MHz

## Available Antennas

- 1. 5.15dBi Halfwave OMNI Fiberglass
- 2. 3dBi Omni Whip antenna - RPSMA
- 3. 4dBi Omni Low Profile 'Puck' shaped Antenna
- 4. 10.65dBi Yagi

## FCC INFORMATION

### FCC-Approved Antennas

#### NOTICE

- This equipment is approved only for mobile and base station transmitting devices. Antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.
- Radio RM8003-03 Module may be used only with Approved Antennas that have been tested with this module.

### Warnings

- Radio RM8003-03 is intended to be installed in a fixed location.
- A minimum separation distance  $\geq$  20 cm is required between the antenna and radiating structures of the device and nearby persons.
- Radio RM8003-03 will be sold with fixed power levels respective of the antenna that is provided and network data rate that is programmed into the radio by the manufacturer.
- The user shall not make changes or modifications to Radio RM8003-03 unless expressly approved by TAPCO or the consequences could void the user's authority to operate the equipment.

### FCC ID: 2ANWN-RM8003-03

**This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.**

**The host device in which the module is installed shall have on its label, the statement "Contains FCC ID: 2ANWN-RM8003-03" or if an electronic display is used, it will be available without need of password protection and will be available in less than 3 steps from the main menu.**

**The host product manufacturer is responsible for compliance to any other FCC rules that apply to the host and is not covered by the modular transmitter grant of certification.**

### Industry Canada IC ID: 25608-RM800303

This device complies with Industry Canada license-exempt RSS standard(s).

Operation is subject to the following three conditions:

1. This device may not cause interference, (2) this device must accept any interference, including interference that may cause undesired operation of the device, and (3) Radio RM8003-03 and available antenna options must be used at a distance greater than 20cm from the user.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes:

- L'appareil ne doit pas produire de brouillage, et
- L'utilisateur de l'appareil doit accepter tout brouillage radioelectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement
- La Radio RM8003-03 et les options d'antenna disponibles doivent être utilisées à une distance supérieure à 20 cm de l'utilisateur.

The host device in which the module is installed shall have on its label, the statement:  
"Contains IC: 25608-RM800303"

or if an electronic display is used, it will be available without need of password protection and will be available in less than 3 steps from the main menu.

### Installation Instructions

To satisfy ISED Canada RF exposure requirements, Radio RM8003-03 and available antenna options must be used at a distance greater than 20 cm from the user.

## HOOKUP AND LAYOUT



Ratings	Min.	Nom.	Max.
Vin	4.5V	4.8V	5.2V
Din1	0V	-	3.3V
Dout1/2	0V	-	3.3V
TermTx/Rx	0V	-	3.3V
RSSI	0V	-	3.3V

Din1 is a Buffered Input with min active Low voltage 0.7V and Active High voltage 2.5V.


Dout1/2 are push pull outputs.

RSSI uses 8bit 1 start 1 stop bit active low 460,800baud to transmit RSSI information in ascii format.

TermTx/Rx uses 8bit 1 start 1 stop bit active low 19,200baud to transmit and receive serial data over the air.

TermTx is in reference to the Host TX and TermRx is in reference to Host Rx.

## HOST LAYOUT

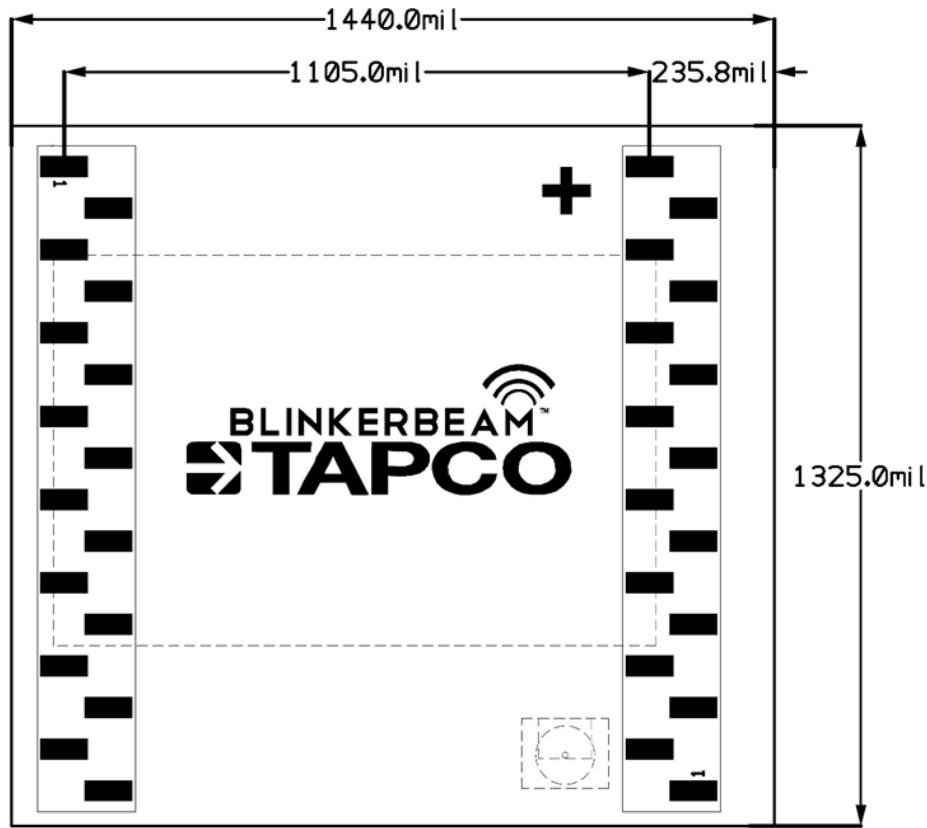

TAPCO suggested Host layout using Samtec SMM-116-02-S-S

\*Host layout may use any 2mm pitch connector suitable for mating with Samtec TMM-116-01-S-S-SM.

### Frequency Hopping Spread Spectrum

A FHSS radio does just what its name implies – that is, it ‘hops’ from frequency to frequency over a wide band. The specific order in which frequencies are occupied is fixed but in a pseudo random order.

### Modes of Operation

The Radio RM8003-03 has 4 operating functions:

- Transmit serial data
- Receive serial data
- Hardware IO control
- Hardware Beacon outputs

Hardware IO mode acts like a one to many remote controls so when Digital input one on any device is activated, the radio broadcasts this information to all other radios on a synchronized beacon. When a remote device receives information that one of the other radios Digital Input 1 has been activated, it activates its Digital Output 1.

Hardware Beacon outputs are configurable at the factory to output a beacon pulse on Digital Output 2 in any 1 second period increment. The Fundamental System Timekeeper generates the timing for this pulse and keeps Listener radios updated as to the status of this Hardware Beacon Pulse.

Serial Data Received on any radio will be directed to the remote radio device that is getting addressed by the host application.

Local Serial Data received for device configuration will not be transmitted on the RF network.

### Transmit Mode

All packets sent over the air are either Addressed or Broadcast packets. Broadcast and Addressed delivery can be controlled dynamically with the API Control byte. Contact the factory for details.

When a radio has data to transmit, it sends it out on its reserved timeslot. The number of devices on a network is configurable at the factory.

To increase the odds of successful delivery the host application is required to Transmit Retries.

RF Serial Communication is not transparent to the OEM host and the Manufacturer will need to advise the Host on how to apply data packaging for transmission OTA (over the air). Contact the factory for details.

### Receive Mode

Serial data can be asynchronously received by Radio RM8003-03 OTA then directed to the Host serial port.

### **RSSI - Received Signal Strength**

RSSI is in units of dBm and is available through serial communication. Contact the factory for details on reading this information from the transceiver.

### **System Timing and Latency**

Latency is the amount of time that it takes for an action to take place. There are different actions available in TapNet including remote digital control and serial data transmission/reception.

IO latency is dependent on the size of the RF network.

Device networks require a maximum of 143ms for one transceiver to transmit information to the system and in as little as 9ms to transmit information directly.

### **System Throughput**

#### Maximum System Throughput

- Timekeeper to Listener = 1280 baud continuous max host throughput rate
- Listener to Listener in direct mode = 1280 baud continuous max rate
- Listener to Listener in sync mode = 640 bytes baud continuous
- Maximum host serial payload size is 64 bytes.
- RF Data Rate default is 120kBaud.

Other data rates and payload sizes are available. Contact TAPCO for details on custom serial data configurations.

### **System Operation**

The Radio RM8003-03 network is preconfigured at the factory so all the user needs to do is power up the devices and they will automatically sync and begin working. IO and OTA serial functionality is only available once a device is sync'd.

A flashing green LED indicates the TimeKeeper device. The Green LED specifically indicates that data has been transmitted OTA.

A red flashing LED indicates that a Listener Device is in sync with the TimeKeeper. The Red LED specifically indicates that RF data has been received OTA.

## ORDERING INFORMATION

This radio transmitter 25608-RM800303 has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Product Part Number: Radio RM8003-03 – Radio Transceiver Module

### Available Antennas:

#### Antennas:

- TAPCO Part No: 146299, Max 4dBi 50 Ohms, Dome Style Antenna Kit with 24" COAX
- TAPCO Part No: 149096, Max 5.15dBi 50 Ohms, Halfwave Omni Base Station Antenna
- TAPCO Part No: 101962, Max 3dBi 50 Ohms, Whip Antenna
- TAPCO Part No: 1343-00006, Max 10.65dBi 50 Ohms, Yagi Antenna

#### Antenna Accessories:

- Lightning Arrestor, L-com Model AL-NFNFB
- L-Com Cable Model CA-RSPNMA002

Antennas with connectors that do not meet the requirement of a non-standard antenna connector will have an adapter permanently connected with industrial epoxy, "Loctite" or solder to make the connection permanent prior to shipping.

TAPCO is a leader in the design and manufacture of customized, performance-critical products for wireless and other advanced electronics applications. TAPCO partners with its customers to provide solutions for various applications such as:

- Intelligent Warning Systems
- Traffic Signals and Intelligent Transportation Systems
- Cloud-based Traffic Device Management
- Parking and Security Systems
- Custom Traffic Signs and Accessories
- Streetscape Decoratives
- Signmaking and Inventory
- Sign Post Anchoring
- Federal Applications

TAPCO offers its customers unique product solutions, dedication to research and development, as well as a seamless network of manufacturing and customer support facilities across the globe.

Copyright ©2021 Traffic and Parking Control Company, Inc. (TAPCO®) All rights reserved. The information contained in this manual and the accompanying software programs are copyrighted and all rights are reserved by TAPCO.

TAPCO reserves the right to make periodic modifications of this product without obligation to notify any person or entity of such revision. Copying, duplicating, selling, or otherwise distributing any part of this product or accompanying documentation/software without the prior consent of an authorized representative of TAPCO is strictly prohibited. All brands and product names in this publication are registered trademarks or trademarks of their respective holders.

Information furnished by TAPCO in this specification is believed to be accurate. Devices sold by TAPCO are covered by the warranty and patent indemnification provisions appearing in its Terms of Sale only. TAPCO makes no warranty, express, statutory, and implied or by description, regarding the information set forth herein. TAPCO reserves the right to change specifications at any time and without notice. TAPCO's products are intended for use solely in normal commercial and industrial applications. Applications requiring unusual environmental requirements such as military, medical life-support or life-sustaining equipment are specifically not recommended without additional testing for such application.



**For technical support, call TAPCO® at 800-236-0112 or email [customerservice@tapconet.com](mailto:customerservice@tapconet.com).**

**8 am–5 pm (CST) Monday through Friday**

**For faster service, have the serial number on the TAPCO® cabinet label ready.**



(800) 236-0112



[TAPCO.net](http://TAPCO.net)