



RADIO TEST REPORT FCC ID: 2ANWY-SB911194

Product: GAME:PAD S PRO

Trade Mark: N/A

Model No.: SB911194

Serial Model: SP5218, FT1026

Report No.: SER171031978

Issue Date: 24 Oct. 2017

Prepared for

Shenzhen ChuangHongTai Electronics Co., Ltd.
A1-302/R, Third Floor, Building A, TianYou ChuangKe Industrial Park
LiXin Road No.2, QiaoTou Community, FuYong Street, Baoan District,
Shenzhen, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

Tel.: +86-755-6115 9388 Fax.: +86-755-6115 6599 Website:http://www.ntek.org.cn

Version.1.2 Page 1 of 48





TABLE OF CONTENTS

1 T	EST RESULT CERTIFICATION	3
2 SU	UMMARY OF TEST RESULTS	4
3 FA	ACILITIES AND ACCREDITATIONS	5
3.1	FACILITIES	5
3.2	LABORATORY ACCREDITATIONS AND LISTINGS	
3.3	MEASUREMENT UNCERTAINTY	5
4 G	ENERAL DESCRIPTION OF EUT	6
5 D	ESCRIPTION OF TEST MODES	8
6 SI	ETUP OF EQUIPMENT UNDER TEST	9
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	9
6.2	SUPPORT EQUIPMENTEQUIPMENTS LIST FOR ALL TEST ITEMS	10
6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS	11
7 T	EST REQUIREMENTS	13
7.1	CONDUCTED EMISSIONS TEST	13
7.2	RADIATED SPURIOUS EMISSION	16
7.3	NUMBER OF HOPPING CHANNEL	24
7.4	HOPPING CHANNEL SEPARATION MEASUREMENT	
7.5	AVERAGE TIME OF OCCUPANCY (DWELL TIME)	30
7.6	20DB BANDWIDTH TEST	34
7.7	PEAK OUTPUT POWER	
7.8	CONDUCTED BAND EDGE MEASUREMENT	42
7.9	SPURIOUS RF CONDUCTED EMISSION	44
7.10	ANTENNA APPI ICATION	18





1 TEST RESULT CERTIFICATION

Applicant's name:	Shenzhen ChuangHongTai Electronics Co., Ltd.
Address:	A1-302/R, Third Floor, Building A, TianYou ChuangKe Industrial Park, LiXin Road No.2, QiaoTou Community, FuYong Street, Baoan District, Shenzhen, China
Manufacturer's Name:	Shenzhen ChuangHongTai Electronics Co., Ltd.
Address:	A1-302/R, Third Floor, Building A, TianYou ChuangKe Industrial Park, LiXin Road No.2, QiaoTou Community, FuYong Street, Baoan District, Shenzhen, China
Product description	
Product name:	GAME:PAD S PRO
Model and/or type reference:	SB911194
Serial Model:	SP5218, FT1026

Measurement Procedure Used:

APPLICABLE STANDARDS		
STANDARD/ TEST PROCEDURE TEST RESULT		
FCC 47 CFR Part 2, Subpart J:2016 FCC 47 CFR Part 15, Subpart C:2016 KDB 174176 D01 Line Conducted FAQ v01r01 ANSI C63.10-2013	Complied	

This device described above has been tested by Shenzhen NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK Testing Technology Co., Ltd., this document may be altered or revised by Shenzhen NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test	: 28 Sep. 2017 ~ 24 Oct. 2017
Testing Engineer	: Eileen Wu.
	(Eileen Liu)
Technical Manager	: Joseph Chen (Jason Chen)
Authorized Signatory	Sam . Chew
	(Sam Chen)

Version.1.2 Page 3 of 48





2 SUMMARY OF TEST RESULTS

FCC Part15 (15.247), Subpart C			
Standard Section	Test Item	Verdict	Remark
15.207	Conducted Emission	PASS	
15.247(c)	Radiated Spurious Emission	PASS	
15.247(a)(1)	Hopping Channel Separation	PASS	
15.247(b)(1)	Peak Output Power	PASS	
15.247(a)(iii)	Number of Hopping Frequency	PASS	
15.247(a)(iii)	Dwell Time	PASS	
15.247(a)(1)	Bandwidth	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

- "N/A" denotes test is not applicable in this Test Report.
 All test items were verified and recorded according to the standards and without any deviation during the test.

Version.1.2 Page 4 of 48





3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : Accredited by CNAS, 2014.09.04

The Laboratory has been assessed and proved to be in compliance with

CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)

The Certificate Registration Number is L5516.

IC-Registration Accredited by Industry Canada, August 29, 2012

The Certificate Registration Number is 9270A-1.

FCC- Accredited Test Firm Registration Number: 463705.

Designation Number: CN1184

A2LA-Lab. The Certificate Registration Number is 4298.01

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for

the competence of testing and calibration laboratories.

This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang

Street, Bao'an District, Shenzhen 518126 P.R. China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	±2.80dB
2	RF power, conducted	±0.16dB
3	Spurious emissions, conducted	±0.21dB
4	All emissions, radiated(30MHz~1GHz)	±2.64dB
5	All emissions, radiated(1GHz~6GHz)	±2.40dB
6	All emissions, radiated(>6GHz)	±2.52dB
7	Temperature	±0.5°C
8	Humidity	±2%

Version.1.2 Page 5 of 48





4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification		
Equipment	GAME:PAD S PRO	
Trade Mark	N/A	
FCC ID	2ANWY-SB911194	
Model No.	SB911194	
Serial Model	SP5218, FT1026	
Model Difference	There is no difference between all the models, except the model number and colour, this report performs the model SB911194.	
Operating Frequency	2402MHz~2480MHz	
Modulation	GFSK	
Bluetooth Version	BT V2.1	
Number of Channels	79 Channels	
Antenna Type	PCB Antenna	
Antenna Gain	0dBi	
Power supply	☑DC supply: DC 3.7V from battery or DC 5V from USB for charge.	
1 ower suppry	☐Adapter supply:	
HW Version	V1.0	
SW Version	V1.0	

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.

Version.1.2 Page 6 of 48





Revision History

	_		
Report No.	Version	Description	Issued Date
SER171031978	Rev.01	Initial issue of report	Oct. 24, 2017

Version.1.2 Page 7 of 48





5 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for GFSK modulation)

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

Carrier Frequency and Channel list:

Carrier requeries and charmer list.	
Channel	Frequency(MHz)
0	2402
1	2403
39	2441
40	2442
77	2479
78	2480

Note: $fc=2402MHz+k\times 1MHz$ k=0 to 78

The following summary table is showing all test modes to demonstrate in compliance with the standard.

	For AC Conducted Emission
Final Test Mode	Description
Mode 1	normal link mode

Note: AC power line Conducted Emission was tested under maximum output power.

For Radiated Test Cases		
Final Test Mode	Description	
Mode 1	normal link mode	
Mode 2	CH00(2402MHz)	
Mode 3	CH39(2441MHz)	
Mode 4	CH78(2480MHz)	

Note: For radiated test cases, the worst mode data rate 3Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.

_	For Conducted Test Cases
Final Test Mode	Description
Mode 2	CH00(2402MHz)
Mode 3	CH39(2441MHz)
Mode 4	CH78(2480MHz)
Mode 5	Hopping mode

Note: The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.

1. AC power line Conducted Emission was tested under maximum output power.

Version.1.2 Page 8 of 48









6 SETUP OF EQUIPMENT UNDER TEST


6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

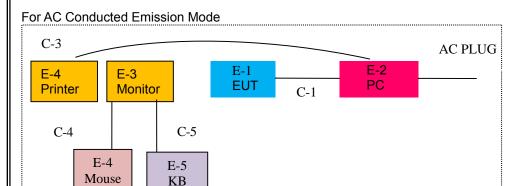

For Radiated Test Cases

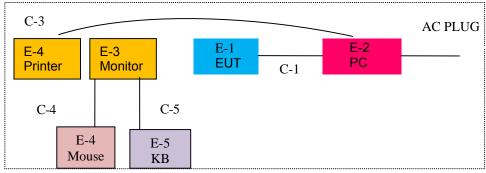

For Conducted Test Cases

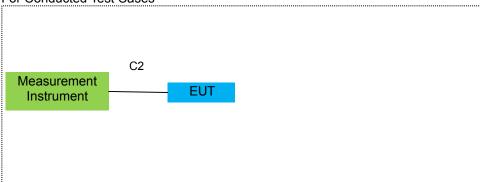

Note:The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Version.1.2 Page 9 of 48





6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

icolo.			_		
Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
E-1	GAME:PAD S PRO	N/A	SB911194	2ANWY-SB911194	EUT
E-2	PC	DELL	FT4Y23X	34413561645	
E-3	Monitor	SHAPP	LCD-32MS46A	09426089241597	Peripherals
E-4	Printer	Canon	L11121E	LBP2900	Peripherals
E-5	KB	DELL	SK-8185	OY526KUS	
E-6	Mouse	DELL	MS111-P	cn-011d3v-71581-11e-1th 7	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	USB Cable	NO	NO	1.8m
C-2	RF Cable	NO	NO	1.0m
C-3	USB Cable	NO	NO	1.2m
C-4	KB Cable	NO	NO	1.2m
C-5	Mouse Cable	NO	NO	1.2m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>[Length]</code> column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

Version.1.2 Page 10 of 48





6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

R <u>adiatio</u>	on Test equipmer	<u>nt</u>					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibrati on period
1	Spectrum Analyzer	Aglient	E4407B	MY45108040	2017.06.06	2018.06.05	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2016.11.10	2017.11.09	1 year
3	EMI Test Receiver	Agilent	N9038A	MY53227146	2017.06.06	2018.06.05	1 year
4	Test Receiver	R&S	ESPI	101318	2017.06.06	2018.06.05	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2017.04.09	2018.04.08	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2017.06.06	2018.06.05	1 year
7	Horn Antenna	EM	EM-AH-1018 0	2011071402	2017.04.09	2018.04.08	1 year
8	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2017.07.06	2018.07.05	1 year
9	Amplifier	EMC	EMC051835 SE	980246	2017.08.09	2018.08.08	1 year
10	Amplifier	MITEQ	TTA1840-35- HG	177156	2017.06.06	2018.06.05	1 year
11	Loop Antenna	ARA	PLA-1030/B	1029	2017.06.06	2018.06.05	1 year
12	Power Meter	DARE	RPR3006W	15I00041SN O84	2017.08.09	2018.08.08	1 year
13	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2017.04.21	2020.04.20	3 year
14	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2017.04.21	2020.04.20	3 year
15	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2017.04.21	2020.04.20	3 year
16	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	2017.04.21	2020.04.20	3 year
17	temporary antenna connector (Note)	NTS	R001	N/A	N/A	N/A	N/A

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test And this temporary antenna connector is listed within the instrument list

Version.1.2 Page 11 of 48





Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2017.06.06	2018.06.05	1 year
2	LISN	R&S	ENV216	101313	2017.04.19	2018.04.18	1 year
3	LISN	SCHWARZBE CK	NNLK 8129	8129245	2017.06.06	2018.06.05	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2017.06.06	2018.06.05	1 year
5	Test Cable (9KHz-30MH z)	N/A	C01	N/A	2017.04.21	2020.04.20	3 year
6	Test Cable (9KHz-30MH z)	N/A	C02	N/A	2017.04.21	2020.04.20	3 year
7	Test Cable (9KHz-30MH z)	N/A	C03	N/A	2017.04.21	2020.04.20	3 year

1	Filter	TRILTHIC	2400MHz	29	2017.04.19	2018.04.18	1 year
---	--------	----------	---------	----	------------	------------	--------

Note: Each piece of equipment is scheduled for calibration once a year.

Version.1.2 Page 12 of 48



7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC Part 15.207(a) and KDB 174176 D01 Line Conducted FAQ v01r01


7.1.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit				
Frequency(WiF12)	Quasi-peak	Average			
0.15-0.5	66-56*	56-46*			
0.5-5.0	56	46			
5.0-30.0	60	50			

Note: 1. *Decreases with the logarithm of the frequency

- 2. The lower limit shall apply at the transition frequencies
- 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Test Configuration

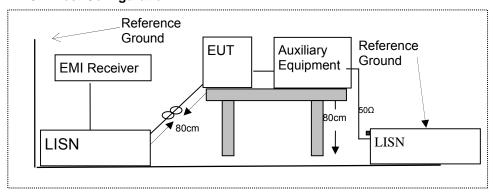

7.1.4 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

- 1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
- 2. The EUT was placed on a table which is 0.8m above ground plane.
- Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- 4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
- 5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- 6. LISN at least 80 cm from nearest part of EUT chassis.
- 7. The frequency range from 150KHz to 30MHz was searched.
- 8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
- 9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

7.1.5 Test Results

Pass

Version.1.2 Page 13 of 48






7.1.6 Test Results

EUT:	GAME:PAD S PRO	Model Name:	SB911194
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
	DC 5V through the USB port connecting PC	Test Mode:	Mode 1

All the modulation modes have been tested, and the worst result was report as below:

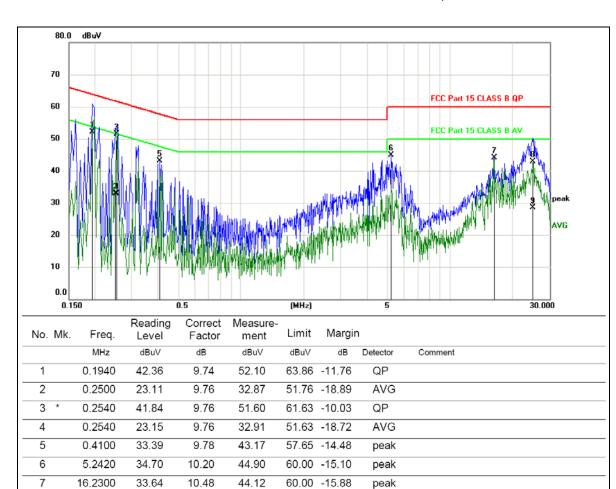

Maximum data x:Over limit !:over margin

32.12

17.82

10.78

10.78

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current

42.90

28.60

Probe)Factor+Cable

24.8819

24.8819

8

9

Version.1.2 Page 14 of 48

60.00 -17.10

50.00 -21.40


QP

AVG





EUT:	GAME:PAD S PRO	Model Name:	SB911194
Temperature:	26 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
	DC 5V through the USB port connecting PC	Test Mode:	Mode 1

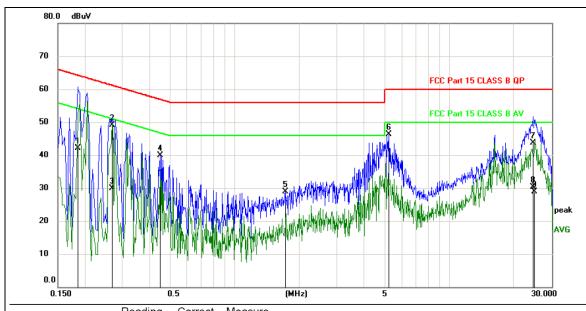

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margir	า	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1860	32.46	9.74	42.20	64.21	-22.01	QP	
2	*	0.2700	39.34	9.76	49.10	61.12	-12.02	QP	
3		0.2700	20.16	9.76	29.92	51.12	-21.20	AVG	
4		0.4500	30.14	9.78	39.92	56.88	-16.96	peak	
5		1.7180	19.10	9.90	29.00	56.00	-27.00	peak	
6		5.2340	36.08	10.20	46.28	60.00	-13.72	peak	
7		24.6500	33.04	10.76	43.80	60.00	-16.20	QP	
8		24.6500	19.45	10.76	30.21	50.00	-19.79	AVG	
9		24.8819	18.13	10.78	28.91	50.00	-21.09	AVG	

Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Version.1.2 Page 15 of 48





7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and ANSI C63.10-2013

7.2.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part15.205, Restricted bands

According to FCC Part 13.20	According to FCC Part 15.205, Restricted bands						
MHz	MHz	MHz	GHz				
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15				
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46				
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75				
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5				
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2				
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5				
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7				
6.26775-6.26825	123-138	2200-2300	14.47-14.5				
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2				
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4				
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12				
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0				
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8				
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5				
12.57675-12.57725	322-335.4	3600-4400	(2)				
13.36-13.41		-					

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Fraguanov(MHz)	Class B (dBuV/m) (at 3M)		
Frequency(MHz)	PEAK	AVERAGE	
Above 1000	74	54	

Remark :1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB); Limit line=Specific limits(dBuV) + distance extrapolation factor.

Version.1.2 Page 16 of 48






7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration


(a) For radiated emissions below 30MHz

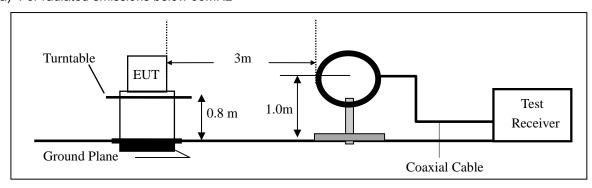

(b) For radiated emissions from 30MHz to 1000MHz

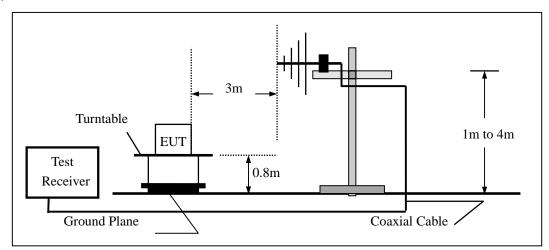

(c) For radiated emissions above 1000MHz

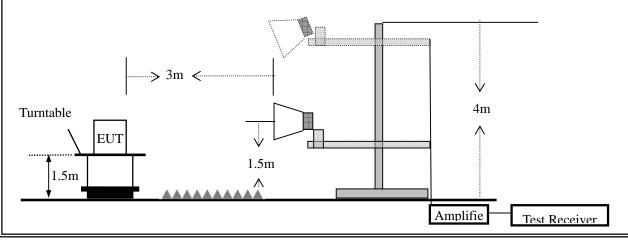

Version.1.2 Page 17 of 48





7.2.5 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

<u> </u>								
Spectrum Parameter	Setting							
Attenuation	Auto							
Start Frequency	1000 MHz							
Stop Frequency	10th carrier harmonic							
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average							

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For the radiated emission test above 1GHz:
 - Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- e. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- f. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

Version.1.2 Page 18 of 48





During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	30 to 1000 QP		300 kHz
Ab 2.12 4000	Peak	1 MHz	1 MHz
Above 1000	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =10*lg(100 [kHz]/narrower RBW [kHz]). , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.2.6 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

EUT:	GAME:PAD S PRO	Model No.:	SB911194
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2	Test By:	Eileen Liu

Freq.	Ant.Pol.	Emission L	evel(dBuV/m)	Limit 3	m(dBuV/m)	Over(dB)		
(MHz)	H/V	PK	AV	PK	AV	PK	AV	

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor

Version.1.2 Page 19 of 48






Spurious Emission below 1GHz (30MHz to 1GHz)

All the modulation modes have been tested, and the worst result was report as below:

EUT:	GAME:PAD S PRO	Model Name:	SB911194
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010hPa	Test Mode:	Mode 1
	DC 5V through the USB port connecting PC	Polarization:	Vertical

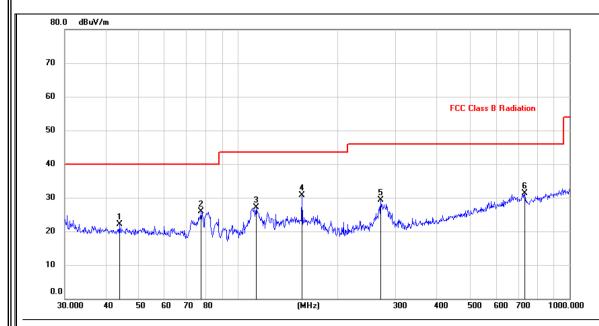

	No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		Antenna Height	Table Degree	
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
	1		43.8119	8.26	13.89	22.15	40.00	-17.85	peak			
-	2		77.5928	15.97	9.88	25.85	40.00	-14.15	peak			
-	3		113.3163	15.22	11.87	27.09	43.50	-16.41	peak			
-	4	*	155.9101	16.22	14.57	30.79	43.50	-12.71	peak			
-	5		269.4284	16.49	12.75	29.24	46.00	-16.76	peak			
	6		731.9203	9.92	21.38	31.30	46.00	-14.70	peak			
_												


Note:1. *:Maximum data; x:Over limit; !:over margin.
2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Version.1.2 Page 20 of 48





EUT:	GAME:PAD S PRO	Model Name:	SB911194
Temperature:	20 ℃	Relative Humidity:	48%
Pressure:	1010hPa	Test Mode:	Mode 1
	DC 5V through the USB port connecting PC	Polarization:	Horizontal

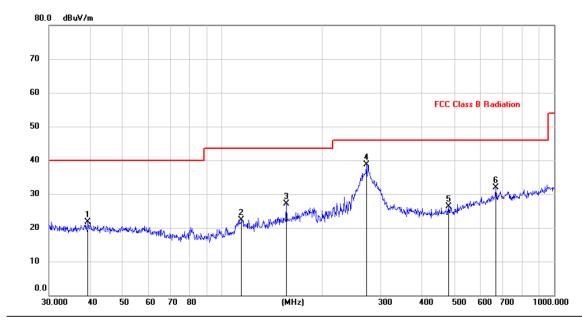

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		39.2991	7.40	14.21	21.61	40.00	-18.39	peak			
2		114.1138	10.43	11.96	22.39	43.50	-21.11	peak			
3		155.9101	12.46	14.57	27.03	43.50	-16.47	peak			
4	*	271.3246	25.91	12.81	38.72	46.00	-7.28	peak			
5	•	480.5276	9.13	17.08	26.21	46.00	-19.79	peak			
6		670.4893	11.41	20.51	31.92	46.00	-14.08	peak			

Note:1. *:Maximum data; x:Over limit; !:over margin.
2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Version.1.2 Page 21 of 48





■ Spurious Emission Above 1GHz (1GHz to 25GHz)										
EUT:			AD S PRO		odel No.:		SB911194			
Tempera	ture:	20 ℃		R	Relative Humidity: 48%					
Test Mod	e:	lode3/Mod	le4 Te	est By:		Eile	en Liu			
All the mo	dulation mo	des have	been teste	d, and	the worst re	sult was	repo	ort as below:		
Test Mode: GFSK TX Low										
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dl		Resi (dBuV		Limit (dBuV/m)	Margin (dB)	Remark
4804	43.24	V	33.95	10.18	34.26	53.1	1	74	-20.89	PK
4804	33.91	V	33.95	10.18	34.26	43.7	'8	54	-10.22	AV
7206	1		1							
9608	1		1							
4804	42.77	Н	33.95	10.18	34.26	52.6	64	74	-21.36	PK
4804	33.34	Н	33.95	10.18	34.26	43.2	11	54	-10.79	AV
7206	1		1							
9608	1		/							
Test Mo	de: GFSK TX	K Mid								
4882	40.76	V	33.93	10.2	34.29	50.6	0	74	-23.40	PK
4882	32.22	V	33.93	10.2	34.29	42.0	6	54	-11.94	AV
7323	1		1							
9764	1		1							
4882	41.24	Н	33.93	10.2	34.29	51.0	8	74	-22.92	PK
4882	31.29	Н	33.93	10.2	34.29	41.1	3	54	-12.87	AV
7323	1		1							
9764	1		1							
Test Mo	de: GFSK TX	K High								
4960	41.63	V	33.98	10.22	2 34.25	51.5	8	74	-22.42	PK
4960	32.17	V	33.98	10.22	2 34.25	42.1	2	54	-11.88	AV
7440	1		1							
9920	1		1							
4960	41.12	Н	33.98	10.22	2 34.25	51.0	7	74	-22.93	PK
4960	31.07	Н	33.98	10.22	2 34.25	41.0	2	54	-12.98	AV
7440	1		1							
9920	1		/							
Note:					•					

Version.1.2 Page 22 of 48

Note:
1, Result = Read level + Antenna factor + cable loss-Amp factor
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.





■ Spurious Emission in Band edge										
EUT: GAME:PAD S PRO Model No.: SB911194										
Temperature:	20 ℃	Relative Humidity:	48%							
Test Mode: Mode2/Mode3/Mode4 Test By: Eileen Liu										
A 11 41 1 1 41										

All the modulation modes have been tested, and the worst result was report as below:

Test mode: GFSK Tx Low											
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss (dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark		
2390	53.88	V	27.62	3.92	34.97	50.45	74	23.55	PK		
2390	42.46	V	27.62	3.94	34.97	39.05	54	14.95	AV		
2390	53.90	Н	27.62	3.92	34.97	50.47	74	23.53	PK		
2390		Н	27.62	3.94	34.97		54		AV		
Test mode: GF	SK Tx High										
2483.5	54.30	V	27.89	4	34.97	41.22	74	22.78	PK		
2483.5		V					54		AV		
2483.5	53.92	Н	27.89	4	34.97	40.84	74	23.16	PK		
2483.5		Н					54		AV		

Version.1.2 Page 23 of 48

^{1,} Result = Read level + Antenna factor + cable loss-Amp factor
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.





7.3 NUMBER OF HOPPING CHANNEL

7.3.1 Applicable Standard

According to FCC Part 15.247(a)(1) (iii)and ANSI C63.10-2013

7.3.2 Conformance Limit

Frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Setup

Please refer to Section 6.1 of this test report.

7.3.5 Test Procedure

The testing follows ANSI C63.10-2013 clause 7.8.3

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW : To identify clearly the individual channels, set the RBW to less than 30% of the channel

spacing or the 20 dB bandwidth, whichever is smaller.

 $VBW \geq RBW$

Sweep = auto

Detector function = peak

Trace = max hold

7.3.6 Test Results

EUT:	GAME:PAD S PRO	Model No.:	SB911194
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode 5	Test By:	Eileen Liu


Number of Hopping (Channel)	Adaptive Frequency hopping (Channel)	limit	Verdict
79	1	≥15	Pass

Version.1.2 Page 24 of 48







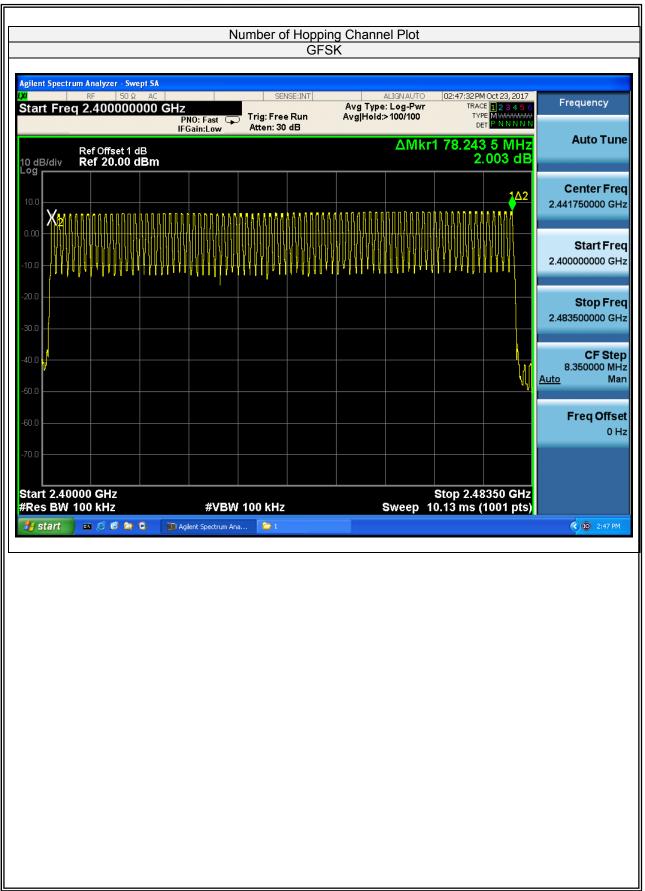

Version.1.2 Page 25 of 48





7.4 HOPPING CHANNEL SEPARATION MEASUREMENT

7.4.1 Applicable Standard

According to FCC Part 15.247(a)(1) and ANSI C63.10-2013

7.4.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

The testing follows ANSI C63.10-2013 clause 7.8.2

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Measurement Bandwidth or Channel Separation

RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.

 $VBW \geq RBW$

Sweep = auto

Detector function = peak

Trace = max hold

Version.1.2 Page 26 of 48





7.4.6 Test Results


EUT:	GAME:PAD S PRO	Model No.:	SB911194
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Eileen Liu

Modulation Mode	Channel Number	Channel Frequency (MHz)	Measured Channel Separation (kHz)		Limit (kHz)	Verdict
_	0	2402	100Ó	>681.33	2/3 of 20dB BW	PASS
GFSK	39	2441	1000	>681.33	2/3 of 20dB BW	PASS
	78	2480	1000	>680.67	2/3 of 20dB BW	PASS

Version.1.2 Page 27 of 48









(1Mbps) Channel Separation plot on channel 39-40



Version.1.2 Page 28 of 48







Version.1.2 Page 29 of 48





7.5 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

7.5.1 Applicable Standard

According to FCC Part 15.247(a)(1)(iii) and ANSI C63.10-2013

7.5.2 Conformance Limit

The average time of occupancy on any channel shall not be greater than 0.4s within a period of 0.4s multiplied by the number of hopping channels employed.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

The testing follows ANSI C63.10-2013 clause 7.8.4

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

 $RBW \geq 1MHz \\$

 $\mathsf{VBW} \geq \mathsf{RBW}$

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

Measure the maximum time duration of one single pulse.

Set the EUT for DH5, DH3 and DH1 packet transmitting.

Measure the maximum time duration of one single pulse.

Version.1.2 Page 30 of 48





7.5.6 Test Results

EUT:	GAME:PAD S PRO	Model No.:	SB911194
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Eileen Liu

Mode	Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Conclusion
GFSK	DH1	2441	0.405	0.130	<0.4	PASS
	DH3	2441	1.670	0.267	<0.4	PASS
	DH5	2441	2.925	0.312	<0.4	PASS

Note: 1 A period time = 0.4 (s) * 79 = 31.6(s)

For Example:

- 1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels. With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s), Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
- 2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels. With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s), Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
- 3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time


Version.1.2 Page 31 of 48

² DH1 time slot = Pulse Duration * (1600/(2*79)) * A period time/1000 DH3 time slot = Pulse Duration * (1600/(4*79)) * A period time/1000 DH5 time slot = Pulse Duration * (1600/(6*79)) * A period time/1000






Test Plot Package Transfer Time Plot CH39-DH1

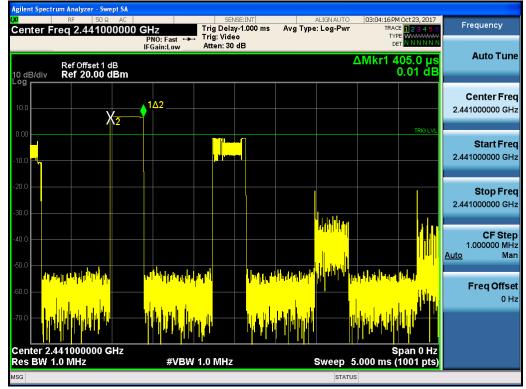


Package Transfer Time Plot CH39-DH3

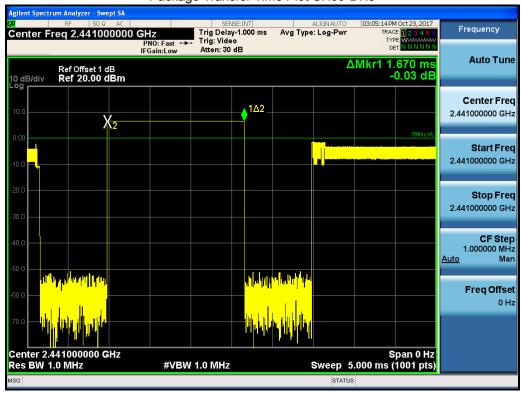

Version.1.2 Page 32 of 48





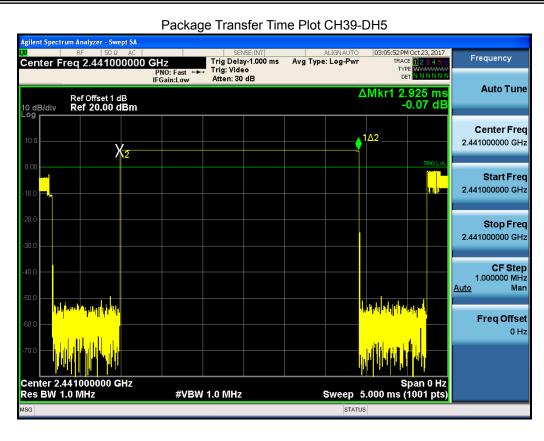

Version.1.2 Page 33 of 48





7.6 20DB BANDWIDTH TEST

7.6.1 Applicable Standard

According to FCC Part 15.247(a)(1) and ANSI C63.10-2013

7.6.2 Conformance Limit

No limit requirement.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The testing follows ANSI C63.10-2013 clause 6.9.2

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW ≥ 1% of the 20 dB bandwidth

 $VBW \ge RBW$

Sweep = auto

Detector function = peak

Trace = max hold

Version.1.2 Page 34 of 48





7.6.6 Test Results

EUT:	GAME:PAD S PRO	Model No.:	SB911194
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Eileen Liu


Mode	Freq (MHz)	20dB Bandwidth (KHz)	Limit (kHz)	Conclusion
	2402	1022	1	PASS
GFSK	2441	1022	1	PASS
	2480	1021	/	PASS

Note: N/A (Not Applicable)

Version.1.2 Page 35 of 48









20dB Bandwidth plot on channel 39 (1Mbps)



Version.1.2 Page 36 of 48







Version.1.2 Page 37 of 48





7.7 PEAK OUTPUT POWER

7.7.1 Applicable Standard

According to FCC Part 15.247(b)(1) and ANSI C63.10-2013

7.7.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows ANSI C63.10-2013 clause 7.8.5.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW ≥ the 20 dB bandwidth of the emission being measured

 $VBW \ge RBW$

Sweep = auto

Detector function = peak

Trace = max hold

Version.1.2 Page 38 of 48





7.7.6 Test Results

EUT:	GAME:PAD S PRO	Model No.:	SB911194
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2/Mode3/Mode4	Test By:	Eileen Liu

Freq (MHz)	PK Output Power (dBm)	PK Output Power (mW)	Limit (dBm)	Margin (dB)
2402	3.713	2.351	21	17.287
2441	3.816	2.408	21	17.184
2480	4.447	2.784	21	16.553
	(MHz) 2402 2441	(MHz) (dBm) 2402 3.713 2441 3.816	Preq (MHz) PK Output Power (mW) 2402 3.713 2.351 2441 3.816 2.408	Freq (MHz) PK Output Power (dBm) Power (mW) Limit (dBm) 2402 3.713 2.351 21 2441 3.816 2.408 21


Conclusion: PASS

Version.1.2 Page 39 of 48






Test Plot Peak output Power plot on channel 00 (1Mbps)

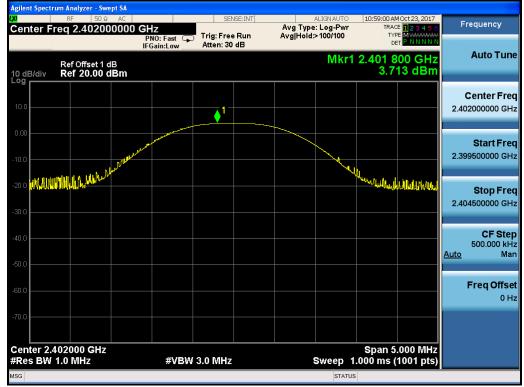

Peak output Power plot on channel 39 (1Mbps)

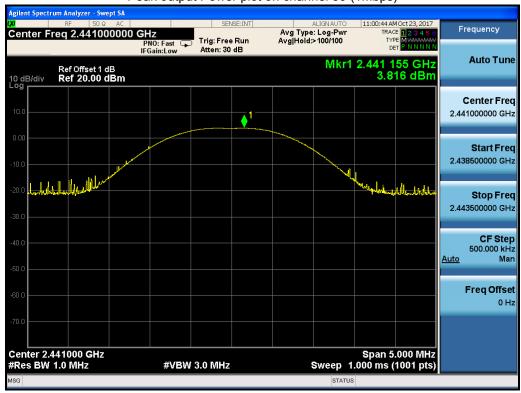


Version.1.2 Page 40 of 48







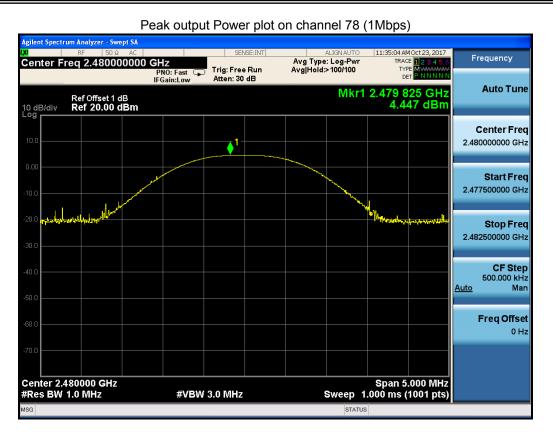

Version.1.2 Page 41 of 48





7.8 CONDUCTED BAND EDGE MEASUREMENT

7.8.1 Applicable Standard

According to FCC Part 15.247(d) and ANSI C63.10-2013

7.8.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.4 Test Setup

Please refer to Section 6.1 of this test report.

7.8.5 Test Procedure

The testing follows ANSI C63.10-2013 clause 7.8.6.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT must have its hopping function enabled.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = 100KHz

VBW = 300KHz

Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.

Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.

Repeat above procedures until all measured frequencies were complete.

Version.1.2 Page 42 of 48





7.8.6 Test Results

EUT:	GAME:PAD S PRO	Model No.:	SB911194
Temperature:	20 ℃	Relative Humidity:	48%
Test Mode:	Mode2 /Mode4/ Mode 5	Test By:	Eileen Liu

Note: Hopping enabled and disabled have evaluated, and the wortest data was reported

Test Plot

GFSK: Band Edge-Low Channel




GFSK: Band Edge-High Channel



GFSK: Band Edge-Low Channel (Hopping Mode)



GFSK: Band Edge-High Channel (Hopping Mode)



Version.1.2 Page 43 of 48





7.9 SPURIOUS RF CONDUCTED EMISSION

7.9.1 Applicable Standard

According to FCC Part 15.247(d) and ANSI C63.10-2013.

7.9.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.9.4 Test Setup

Please refer to Section 6.1 of this test report.

7.9.5 Test Procedure

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW \geq [3 \times RBW].
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Then the limit shall be attenuated by at least 20 dB relative to the maximum amplitude level in 100 kHz.


7.9.6 Test Results

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

The worst mode is 8-DPSK mode, and the report only show the worst mode data.


Version.1.2 Page 44 of 48



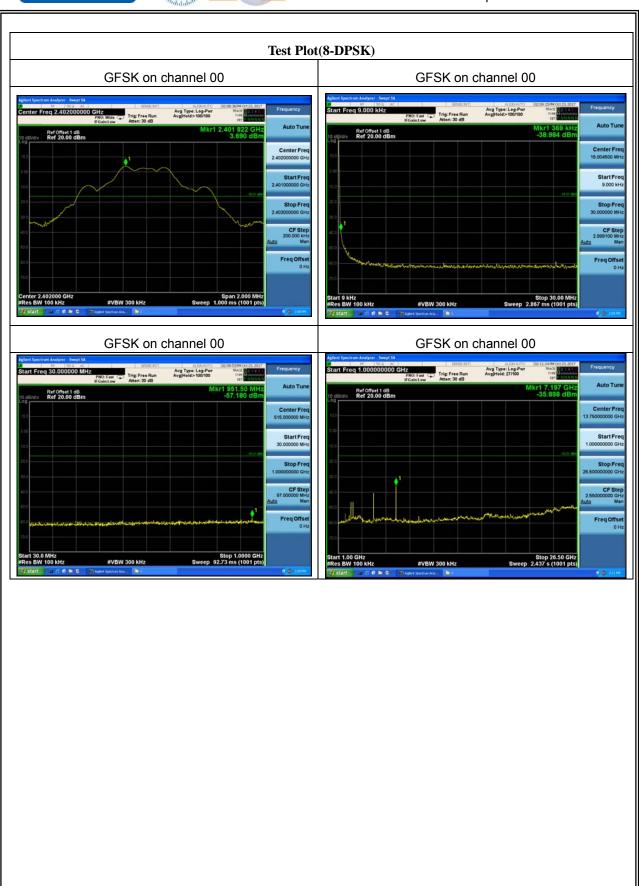

Version.1.2 Page 45 of 48




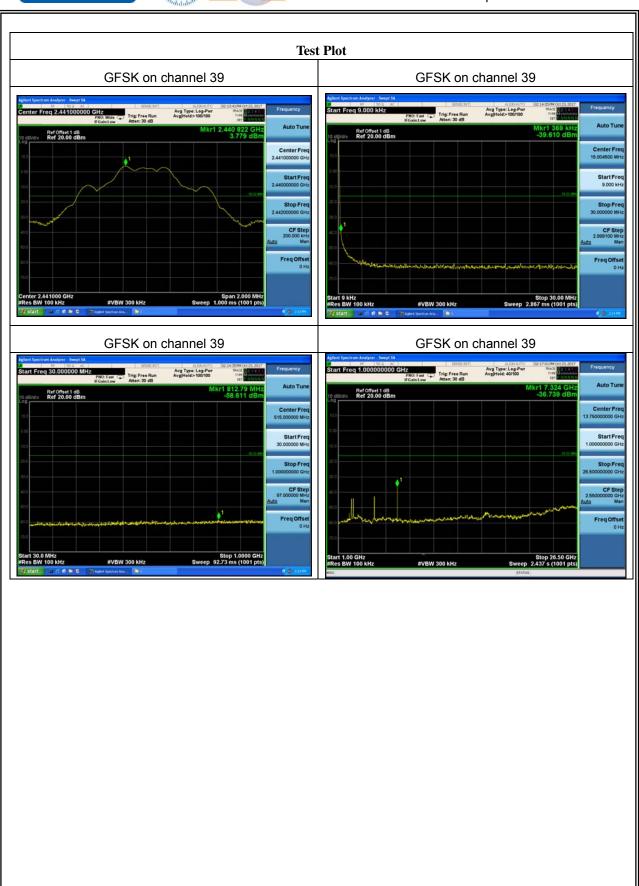

Version.1.2 Page 46 of 48





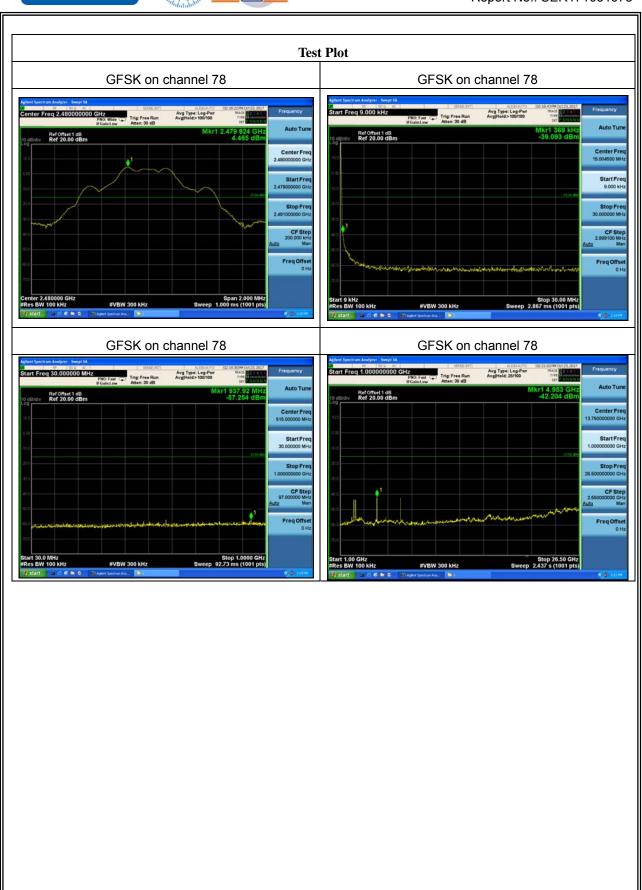

Version.1.2 Page 47 of 48





7.10 ANTENNA APPLICATION

7.10.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible partyshall be used with the device.

7.10.2 Result

The EUT antenna is permanent attached PCB antenna(Gain:0dBi). It comply with the standard requirement.

END OF REPORT

Version.1.2 Page 48 of 48