



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13501 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

December 19, 2017

Weir Group Management Services
1 West Regent Street
Glasgow, Scotland G2 1RW

Dear Wayne Cooke,

Enclosed is the EMC Wireless test report for compliance testing of the Weir Group Management Services, Weir Industrial Gateway as tested to the requirements of Title 47 of the CFR, Ch. 1, Title 47 of the CFR, Part 15.407, Subpart E (UNII 3).

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Joel Huna
Documentation Department

Reference: (\Weir Group Management Services\ EMCA92659-FCC407 UNII 3 Rev. 1)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. While use of the A2LA logo in this report reflects MET accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.





MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13501 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

Electromagnetic Compatibility Criteria Test Report

for the

**Weir Group Management Services
Model Weir Industrial Gateway**

Tested under
The FCC Certification Rules
contained in
Title 47 of the CFR
15.407 Subpart E

MET Report: EMCA92659-FCC407 UNII 3 Rev. 1

December 19, 2017

Prepared For:

**Weir Group Management Services
1 West Regent Street
Glasgow, Scotland G2 1RW**

Prepared By:
MET Laboratories, Inc.
13501 McCallen Pass,
Austin TX 78753

Electromagnetic Compatibility Criteria Test Report

for the

**Weir Group Management Services
Model Weir Industrial Gateway**

Tested under

The FCC Certification Rules
contained in
Title 47 of the CFR
15.407 Subpart E




Giuliano Messina, Project Engineer
Electromagnetic Compatibility Lab



Joel Huna
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Parts 15B, 15.407, of the FCC Rules under normal use and maintenance.



John Mason,
Director, Electromagnetic Compatibility Lab



Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	November 29, 2017	Initial Issue.
1	December 19, 2017	Engineer corrections.



Table of Contents

I.	Executive Summary	1
A.	Purpose of Test	2
B.	Executive Summary	2
II.	Equipment Configuration	3
A.	Overview.....	4
B.	References.....	5
C.	Test Site	5
D.	Description of Test Sample.....	5
E.	Equipment Configuration.....	7
F.	Support Equipment	7
G.	Ports and Cabling Information.....	8
H.	Mode of Operation.....	8
I.	Method of Monitoring EUT Operation.....	8
J.	Modifications	8
a)	Modifications to EUT	8
b)	Modifications to Test Standard	8
K.	Disposition of EUT	8
III.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	9
§ 15.203	Antenna Requirement	10
§ 15.403(i)	26 dB Bandwidth	11
§ 15.407	Duty Cycle.....	33
§ 15.407(a)(3)	Maximum Conducted Output Power	36
§ 15.407(a)(3)	Maximum Power Spectral Density	49
§ 15.407(b)(4) & (6 - 7)	Undesirable Emissions	62
§ 15.407(b)(6)	Conducted Emissions	85
§ 15.407(c)	Automatic Discontinue of Transmission	89
§ 15.247(i)	Maximum Permissible Exposure	90
§ 15.407(g)	Frequency Stability	91
IV.	Test Equipment	92
V.	Certification & User's Manual Information.....	94
A.	Certification Information	95
B.	Label and User's Manual Information	99



List of Tables

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing	2
Table 2. EUT Summary.....	4
Table 3. References	5
Table 4. Equipment Configuration.....	7
Table 5. Support Equipment.....	7
Table 6. Ports and Cabling Information	8
Table 7. 26 dB and 6 dB Occupied Bandwidth, Value Table.....	12
Table 8. Duty Cycle, Test Results	33
Table 9. Peak Conducted Output Power, 802.11a Mode, Test Results	37
Table 10. Peak Conducted Output Power, 802.11n 20 Mode, Test Results	37
Table 11. Peak Conducted Output Power, 802.11ac 20 Mode, Test Results.....	37
Table 12. Peak Conducted Output Power, 802.11n 40 Mode, Test Results	38
Table 13. Peak Conducted Output Power, 802.11ac 40 Mode, Test Results.....	38
Table 14. Peak Conducted Output Power, 802.11ac 80 Mode, Test Results.....	38
Table 15. Power Spectral Density with Correction Added, 802.11a Mode, Test Results	50
Table 16. Power Spectral Density with Correction Added, 802.11n 20 Mode, Test Results	50
Table 17. Power Spectral Density with Correction Added, 802.11ac 20 Mode, Test Results.....	50
Table 18. Power Spectral Density with Correction Added, 802.11n 40 Mode, Test Results	51
Table 19. Power Spectral Density with Correction Added, 802.11ac 40 Mode, Test Results.....	51
Table 20. Power Spectral Density with Correction Added, 802.11ac 80 Mode, Test Results.....	51
Table 21. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)	85
Table 22. Maximum Permissible Exposure.....	90
Table 23. Test Equipment List	93

List of Figures

Figure 1. Block Diagram of Test Configuration.....	6
--	---

List of Photographs

Photograph 1. Radiated setup, 30M-1GHz front view	82
Photograph 2. Radiated setup, 30M-1GHz rear view.....	82
Photograph 3. Radiated setup, 30M-1GHz antenna view.....	82
Photograph 4. Radiated setup, 1-18GHz front view.....	83
Photograph 5. Radiated setup, 1-18GHz rear view	83
Photograph 6. Radiated setup, 1-18GHz, antenna view	83
Photograph 7. Radiated setup, 18-40GHz front view.....	84
Photograph 8. Radiated setup, 18-40GHz rear view	84
Photograph 9. Radiated setup, 18-40GHz antenna view	84
Photograph 10. Conducted Emissions, 15.207(a), CEV Station Setup	88
Photograph 11. Conducted Emissions, 15.207(a), LISN Connection.....	88

List of Plots

Plot 1. 6dB Occupied Bandwidth, 802.11a 20 – 5745 – Path A.....	13
Plot 2. 6 dB Occupied Bandwidth, 802.11a 20 – 5785 – Path A.....	13
Plot 3. 6 dB Occupied Bandwidth, 802.11a 20 – 5825 – Path A.....	13
Plot 4. 6 dB Occupied Bandwidth, 802.11n 20 – 5745 – Path A	14
Plot 5. 6 dB Occupied Bandwidth, 802.11n 20 – 5785 – Path A	14
Plot 6. 6 dB Occupied Bandwidth, 802.11n 20 – 5825 – Path A	14
Plot 7. 6 dB Occupied Bandwidth, 802.11n 40 – 5755 – Path A	15
Plot 8. 6 dB Occupied Bandwidth, 802.11n 40 – 5795 – Path A	15



Plot 9. 6 dB Occupied Bandwidth, 802.11ac 20 – 5745 – Path A	16
Plot 10. 6 dB Occupied Bandwidth, 802.11ac 20 – 5785 – Path A	16
Plot 11. 6 dB Occupied Bandwidth, 802.11ac 20 – 5825 – path A	16
Plot 12. 6 dB Occupied Bandwidth, 802.11ac 40 – 5755 – Path A	17
Plot 13. 6 dB Occupied Bandwidth, 802.11ac 40 – 5795 – Path A	17
Plot 14. 6 dB Occupied Bandwidth, 802.11ac 80 – 5755 – Path A	17
Plot 15. 6dB Occupied Bandwidth, 802.11a 20 – 5745 – Path B	18
Plot 16. 6 dB Occupied Bandwidth, 802.11a 20 – 5785 – Path B	18
Plot 17. 6 dB Occupied Bandwidth, 802.11a 20 – 5825 – Path B	18
Plot 18. 6 dB Occupied Bandwidth, 802.11n 20 – 5745 – Path B	19
Plot 19. 6 dB Occupied Bandwidth, 802.11n 20 – 5785 – Path B	19
Plot 20. 6 dB Occupied Bandwidth, 802.11n 20 – 5825 – Path B	19
Plot 21. 6 dB Occupied Bandwidth, 802.11n 40 – 5755 – Path B	20
Plot 22. 6 dB Occupied Bandwidth, 802.11n 40 – 5795 – Path B	20
Plot 23. 6 dB Occupied Bandwidth, 802.11ac 20 – 5745 – Path B	21
Plot 24. 6 dB Occupied Bandwidth, 802.11ac 20 – 5785 – Path B	21
Plot 25. 6 dB Occupied Bandwidth, 802.11ac 20 – 5825 – Path B	21
Plot 26. 6 dB Occupied Bandwidth, 802.11ac 40 – 5755 – Path B	22
Plot 27. 6 dB Occupied Bandwidth, 802.11ac 40 – 5795 – Path B	22
Plot 28. 6 dB Occupied Bandwidth, 802.11ac 80 – 5755 – Path B	22
Plot 29. 26 dB Occupied Bandwidth, 802.11a 20 – 5745 – Path A	23
Plot 30. 26 dB Occupied Bandwidth, 802.11a 20 – 5785 – Path A	23
Plot 31. 26 dB Occupied Bandwidth, 802.11a 20 – 5825 – Path A	23
Plot 32. 26 dB Occupied Bandwidth, 802.11n 20 – 5745 – Path A	24
Plot 33. 26 dB Occupied Bandwidth, 802.11n 20 – 5785 – Path A	24
Plot 34. 26 dB Occupied Bandwidth, 802.11n 20 – 5825 – Path A	24
Plot 35. 26 dB Occupied Bandwidth, 802.11n 40 – 5755 – Path A	25
Plot 36. 26 dB Occupied Bandwidth, 802.11n 40 – 5795 – Path A	25
Plot 37. 26 dB Occupied Bandwidth, 802.11ac 20 – 5745 – Path A	26
Plot 38. 26 dB Occupied Bandwidth, 802.11ac 20 – 5785 – Path A	26
Plot 39. 26 dB Occupied Bandwidth, 802.11ac 20 – 5825 – Path A	26
Plot 40. 26 dB Occupied Bandwidth, 802.11ac 40 – 5755 – Path A	27
Plot 41. 26 dB Occupied Bandwidth, 802.11ac 40 – 5795 – Path A	27
Plot 42. 26 dB Occupied Bandwidth, 802.11ac 80 – 5775 – Path A	27
Plot 43. 26 dB Occupied Bandwidth, 802.11a 20 – 5745 – Path B	28
Plot 44. 26 dB Occupied Bandwidth, 802.11a 20 – 5785 – Path B	28
Plot 45. 26 dB Occupied Bandwidth, 802.11a 20 – 5825 – Path B	28
Plot 46. 26 dB Occupied Bandwidth, 802.11n 20 – 5745 – Path B	29
Plot 47. 26 dB Occupied Bandwidth, 802.11n 20 – 5785 – Path B	29
Plot 48. 26 dB Occupied Bandwidth, 802.11n 20 – 5825 – Path B	29
Plot 49. 26 dB Occupied Bandwidth, 802.11n 40 – 5755 – Path B	30
Plot 50. 26 dB Occupied Bandwidth, 802.11n 40 – 5795 – Path B	30
Plot 51. 26 dB Occupied Bandwidth, 802.11ac 20 – 5745 – Path B	31
Plot 52. 26 dB Occupied Bandwidth, 802.11ac 20 – 5785 – Path B	31
Plot 53. 26 dB Occupied Bandwidth, 802.11ac 20 – 5825 – Path B	31
Plot 54. 26 dB Occupied Bandwidth, 802.11ac 40 – 5755 – Path B	32
Plot 55. 26 dB Occupied Bandwidth, 802.11ac 40 – 5795 – Path B	32
Plot 56. 26 dB Occupied Bandwidth, 802.11ac 80 – 5775 – Path B	32
Plot 57. Duty Cycle, 802.11a	33
Plot 58. Duty Cycle, 802.11ac 20	34
Plot 59. Duty Cycle, 802.11ac 40	34
Plot 60. Duty Cycle, 802.11ac 80	34
Plot 61. Duty Cycle, 802.11n 20	35
Plot 62. Duty Cycle, 802.11n 40	35
Plot 63. Conducted Transmitter Power, 802.11a, 5745, Path A	39
Plot 64. Conducted Transmitter Power, 802.11a, 5745, Path B	39



Plot 65. Conducted Transmitter Power, 802.11a, 5785, Path A	39
Plot 66. Conducted Transmitter Power, 802.11a, 5825, Path A	40
Plot 67. Conducted Transmitter Power, 802.11a, 5825, Path B	40
Plot 68. Conducted Transmitter Power, 802.11a, 5785, Path B	40
Plot 69. Conducted Transmitter Power, 802.11ac 20, 5745, Path B.	41
Plot 70. Conducted Transmitter Power, 802.11ac 20, 5785, Path A	41
Plot 71. Conducted Transmitter Power, 802.11ac 20, 5745, Path A	41
Plot 72. Conducted Transmitter Power, 802.11ac 20, 5785, Path B.	42
Plot 73. Conducted Transmitter Power, 802.11ac 20, 5825, Path A	42
Plot 74. Conducted Transmitter Power, 802.11ac 20, 5825, Path B.	42
Plot 75. Conducted Transmitter Power, 802.11ac 40, 5755, Path A	43
Plot 76. Conducted Transmitter Power, 802.11ac 40, 5755, Path B.	43
Plot 77. Conducted Transmitter Power, 802.11ac 40, 5795, Path A	43
Plot 78. Conducted Transmitter Power, 802.11ac 40, 5795, Path B.	44
Plot 79. Conducted Transmitter Power, 802.11ac 80, 5775, Path A	44
Plot 80. Conducted Transmitter Power, 802.11ac 80, 5775, Path B.	44
Plot 81. Conducted Transmitter Power, 802.11n 20, 5745, Path A	45
Plot 82. Conducted Transmitter Power, 802.11n 20, 5745, Path B	45
Plot 83. Conducted Transmitter Power, 802.11n 20, 5785, Path A	45
Plot 84. Conducted Transmitter Power, 802.11n 20, 5785, Path B	46
Plot 85. Conducted Transmitter Power, 802.11n 20, 5825, Path A	46
Plot 86. Conducted Transmitter Power, 802.11n 20, 5825, Path B	46
Plot 87. Conducted Transmitter Power, 802.11n 40, 5755, Path A	47
Plot 88. Conducted Transmitter Power, 802.11n 40, 5755, Path B	47
Plot 89. Conducted Transmitter Power, 802.11n 40, 5795, Path A	47
Plot 90. Conducted Transmitter Power, 802.11n 40, 5795, Path B	48
Plot 91. Power Spectral Density, 802.11a - 5745 - Path A	52
Plot 92. Power Spectral Density, 802.11a - 5745 - Path B	52
Plot 93. Power Spectral Density, 802.11a - 5785 - Path A	52
Plot 94. Power Spectral Density, 802.11a - 5785 - Path B	53
Plot 95. Power Spectral Density, 802.11a - 5825 - Path A	53
Plot 96. Power Spectral Density, 802.11a - 5825 - Path B	53
Plot 97. Power Spectral Density, 802.11ac 20 - 5745 - Path A	54
Plot 98. Power Spectral Density, 802.11ac 20 - 5745 - Path B	54
Plot 99. Power Spectral Density, 802.11ac 20 - 5785 - Path A	54
Plot 100. Power Spectral Density, 802.11ac 20 - 5785 - Path B	55
Plot 101. Power Spectral Density, 802.11ac 20 - 5825 - Path A	55
Plot 102. Power Spectral Density, 802.11ac 20 - 5825 - Path B	55
Plot 103. Power Spectral Density, 802.11ac 40 - 5755 - Path A	56
Plot 104. Power Spectral Density, 802.11ac 40 - 5755 - Path B	56
Plot 105. Power Spectral Density, 802.11ac 40 - 5795 - Path A	56
Plot 106. Power Spectral Density, 802.11ac 40 - 5795 - Path B	57
Plot 107. Power Spectral Density, 802.11ac 80 - 5775 - Path A	57
Plot 108. Power Spectral Density, 802.11ac 80 - 5775 - Path B	57
Plot 109. Power Spectral Density, 802.11n 20 - 5745 - Path A	58
Plot 110. Power Spectral Density, 802.11n 20 - 5745 - Path B	58
Plot 111. Power Spectral Density, 802.11n 20 - 5785 - Path A	58
Plot 112. Power Spectral Density, 802.11n 20 - 5785 - Path B	59
Plot 113. Power Spectral Density, 802.11n 20 - 5825 - Path A	59
Plot 114. Power Spectral Density, 802.11n 20 - 5825 - Path B	59
Plot 115. Power Spectral Density, 802.11n 40 - 5755 - Path A	60
Plot 116. Power Spectral Density, 802.11n 40 - 5755 - Path B	60
Plot 117. Power Spectral Density, 802.11n 40 - 5795 - Path A	60
Plot 118. Power Spectral Density, 802.11n 40 - 5795 - Path B	61
Plot 119. Spurious Emissions, TX Off	63
Plot 120. Spurious Emissions, 802.11a - 5745 - 30M-1GHz - QP	63



Plot 121. Spurious Emissions, 802.11a - 5785 - 30M-1GHz - QP	63
Plot 122. Spurious Emissions, 802.11a - 5825 - 30M-1GHz - QP	64
Plot 123. Spurious Emissions, 802.11ac 20 - 5745 - 30M-1GHz - QP	64
Plot 124. Spurious Emissions, 802.11ac 20 - 5785 - 30M-1GHz - QP	64
Plot 125. Spurious Emissions, 802.11ac 20 - 5825 - 30M-1GHz - QP	65
Plot 126. Spurious Emissions, 802.11ac 40 - 5755 - 30M-1GHz - QP	65
Plot 127. Spurious Emissions, 802.11ac 40 - 5795 - 30M-1GHz - QP	65
Plot 128. Spurious Emissions, 802.11ac 80 - 5775 - 30M-1GHz - QP	66
Plot 129. Spurious Emissions, 802.11n 20 - 5745 - 30M-1GHz - QP	66
Plot 130. Spurious Emissions, 802.11n 20 - 5785 - 30M-1GHz - QP	66
Plot 131. Spurious Emissions, 802.11n 20 - 5825 - 30M-1GHz - QP	67
Plot 132. Spurious Emissions, 802.11n 40 - 5755 - 30M-1GHz - QP	67
Plot 133. Spurious Emissions, 802.11n 40 - 5795 - 30M-1GHz - QP	67
Plot 134. Undesirable Emissions, 802.11a - 5745 - EIRP - 1-7GHz	68
Plot 135. Undesirable Emissions, 802.11a - 5745 - EIRP - 7-18GHz	68
Plot 136. Undesirable Emissions, 802.11a - 5785 - EIRP - 1-7GHz	68
Plot 137. Undesirable Emissions, 802.11a - 5785 - EIRP - 7-18GHz	69
Plot 138. Undesirable Emissions, 802.11a - 5825 - EIRP - 1-7GHz	69
Plot 139. Undesirable Emissions, 802.11a - 5825 - EIRP - 7-18GHz	69
Plot 140. Undesirable Emissions, 802.11ac 20 - 5745 - EIRP - 1-7GHz	70
Plot 141. Undesirable Emissions, 802.11ac 20 - 5745 - EIRP - 7-18GHz	70
Plot 142. Undesirable Emissions, 802.11ac 20 - 5785 - EIRP - 1-7GHz	70
Plot 143. Undesirable Emissions, 802.11ac 20 - 5785 - EIRP - 7-18GHz	71
Plot 144. Undesirable Emissions, 802.11ac 20 - 5825 - EIRP - 1-7GHz	71
Plot 145. Undesirable Emissions, 802.11ac 20 - 5825 - EIRP - 7-18GHz	71
Plot 146. Undesirable Emissions, 802.11ac 40 - 5755 - EIRP - 1-7GHz	72
Plot 147. Undesirable Emissions, 802.11ac 40 - 5755 - EIRP - 7-18GHz	72
Plot 148. Undesirable Emissions, 802.11ac 40 - 5795 - EIRP - 1-7GHz	72
Plot 149. Undesirable Emissions, 802.11ac 40 - 5795 - EIRP - 7-18GHz	73
Plot 150. Undesirable Emissions, 802.11ac 80 - 5775 - EIRP - 1-7GHz	73
Plot 151. Undesirable Emissions, 802.11ac 80 - 5775 - EIRP - 7-18GHz	73
Plot 152. Undesirable Emissions, 802.11n 20 - 5745 - EIRP - 1-7GHz	74
Plot 153. Undesirable Emissions, 802.11n 20 - 5745 - EIRP - 7-18GHz	74
Plot 154. Undesirable Emissions, 802.11n 20 - 5785 - EIRP - 1-7GHz	74
Plot 155. Undesirable Emissions, 802.11n 20 - 5785 - EIRP - 7-18GHz	75
Plot 156. Undesirable Emissions, 802.11n 20 - 5825 - EIRP - 1-7GHz	75
Plot 157. Undesirable Emissions, 802.11n 20 - 5825 - EIRP - 7-18GHz	75
Plot 158. Undesirable Emissions, 802.11n 40 - 5755 - EIRP - 1-7GHz	76
Plot 159. Undesirable Emissions, 802.11n 40 - 5755 - EIRP - 7-18GHz	76
Plot 160. Undesirable Emissions, 802.11n 40 - 5795 - EIRP - 1-7GHz	76
Plot 161. Undesirable Emissions, 802.11n 40 - 5795 - EIRP - 7-18GHz	77
Plot 162. Undesirable Emissions, Bandedge, 802.11a, 5745 MHz, EIRP	78
Plot 163. Undesirable Emissions, Bandedge, 802.11a, 5825 MHz, EIRP	78
Plot 164. Undesirable Emissions, Bandedge, 802.11ac 20 MHz, 5745 MHz, EIRP	79
Plot 165. Undesirable Emissions, Bandedge, 802.11ac 20 MHz, 5825 MHz, EIRP	79
Plot 166. Undesirable Emissions, Bandedge, 802.11ac 40 MHz, 5755 MHz, EIRP	79
Plot 167. Undesirable Emissions, Bandedge, 802.11ac 40 MHz, 5795 MHz, EIRP	80
Plot 168. Undesirable Emissions, Bandedge, 802.11ac 80 MHz, 5775 MHz, EIRP	80
Plot 169. Undesirable Emissions, Bandedge, 802.11n 20 MHz, 5745 MHz, EIRP	80
Plot 170. Undesirable Emissions, Bandedge, 802.11n 20 MHz, 5825 MHz, EIRP	81
Plot 171. Undesirable Emissions, Bandedge, 802.11n 40 MHz, 5755 MHz, EIRP	81
Plot 172. Undesirable Emissions, Bandedge, 802.11n 40 MHz, 5795 MHz, EIRP	81
Plot 173. Conducted Emissions, 15.207(a), Transmit Off, Phase Line	86
Plot 174. Conducted Emissions, 15.207(a), 5 GHz UNII-1, 802.11n HT20, Phase Line	86
Plot 175. Conducted Emissions, 15.207(a), Transmit Off, Neutral Line	87
Plot 176. Conducted Emissions, 15.207(a), 5 GHz UNII-1, 802.11n HT20, Neutral Line	87



List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dBμA	Decibels above one microamp
dBμV	Decibels above one microvolt
dBμA/m	Decibels above one microamp per meter
dBμV/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	Kilohertz
kPa	Kilopascal
kV	Kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μH	Microhenry
μ	Microfarad
μ s	Microseconds
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane



Weir Group Management Services
Weir Industrial Gateway

Electromagnetic Compatibility
Executive Summary
CFR Title 47, Part 15.407 Subpart E

I. Executive Summary



A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Weir Group Management Services Weir Industrial Gateway, with the requirements of Part 15, §15.407. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the Weir Industrial Gateway. Weir Group Management Services should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Weir Industrial Gateway, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.407, in accordance with Weir Group Management Services, purchase order number T10536863. All tests were conducted using measurement procedure ANSI C63.4-2014.

FCC Reference	Description	Results
§15.203	Antenna Requirement	Compliant
§15.403(i)	26 dB Bandwidth	Compliant
§15.407	Duty Cycle	Compliant
§15.407 (a)(3)	Maximum Conducted Output Power	Compliant
§15.407 (a)(3)	Maximum Power Spectral Density	Compliant
§15.407 (b)(4)& (6 - 7)	Undesirable Emissions	Compliant
§15.407(b)(6)	Conducted Emission Limits	Compliant
§15.407(c)	Automatic Discontinue of Transmitter	Not Applicable
§15.407(e)	6 dB Bandwidth	Compliant
§15.407(f)	RF Exposure	Compliant
§15.407(g)	Frequency Stability	Not Applicable

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing



Weir Group Management Services
Weir Industrial Gateway

Electromagnetic Compatibility
Equipment Configuration
CFR Title 47, Part 15.407 Subpart E

II. Equipment Configuration



A. Overview

MET Laboratories, Inc. was contracted by Weir Group Management Services to perform testing on the Weir Industrial Gateway, under Weir Group Management Services's purchase order number T10536863.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Weir Group Management Services Weir Industrial Gateway.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	Weir Industrial Gateway
Model(s) Covered:	Weir Industrial Gateway
EUT Specifications:	<p>Primary Power: 120/240 VAC 50/60 Hz</p> <p>FCC ID: 2ANXR-STXMPM</p> <p>Type of Modulations: OFDM</p> <p>Equipment Code: NII</p> <p>Max. RF Output Power: 10.26 dBm, 10.62 mW</p> <p>Max. EIRP: 12.69 dBm @ 802.11n HT20, 5825 MHz</p> <p>EUT Frequency Ranges: 5745 – 5825 MHz</p> <p>Duty Cycle: 802.11a: 90.8% max 802.11n: 87.4% max 802.11ac: 69.8% max</p> <p>Data rates: 1M (worst case), 2M, 5.5M, 11M, 22M, 6M, 9M, 12M, 18M, 24M, 36M, 48M, 54M, 72M, MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7, MCS8, MCS9, MCS10, MCS11, MCS12, MCS13, MCS14, MCS15, VHT_SS1_MCS0, VHT_SS1_MCS1, VHT_SS1_MCS2, VHT_SS1_MCS3, VHT_SS1_MCS4, VHT_SS1_MCS5, VHT_SS1_MCS6, VHT_SS1_MCS7, VHT_SS1_MCS8, VHT_SS1_MCS9, VHT_SS2_MCS0, VHT_SS2_MCS1, VHT_SS2_MCS2, VHT_SS2_MCS3, VHT_SS2_MCS4, VHT_SS2_MCS5, VHT_SS2_MCS6, VHT_SS2_MCS7, VHT_SS2_MCS8, VHT_SS2_MCS9</p>
Analysis:	The results obtained relate only to the item(s) tested.
Environmental Test Conditions:	<p>Temperature: 15-35° C</p> <p>Relative Humidity: 30-60%</p> <p>Barometric Pressure: 860-1060 mbar</p>
Evaluated by:	Giuliano Messina
Report Date(s):	December 19, 2017

Table 2. EUT Summary



B. References

CFR 47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices (UNII)
ANSI C63.4:2014	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2005	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
KDB 789033 D02 General UNII Test Procedures New Rules v01 (May 2, 2017)	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 (April 8, 2016)	Compliance measurement procedures for unlicensed- national information infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection.

Table 3. References

C. Test Site

All testing was performed at MET Laboratories, Inc., 13501 McCallen Pass, Austin TX 78753. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

MET Laboratories is a ISO/IEC 17025 accredited site by A2LA. Austin #0591.06.

D. Description of Test Sample

The Weir Group Management Services Weir Industrial Gateway, Equipment Under Test (EUT), is used to monitor the operation of the components of a drilling rig, in particular the sound and vibration from the bearings in the system. This is monitored through digital signal processing to determine if the bearing is nearing the end of its life and needs to be replaced.

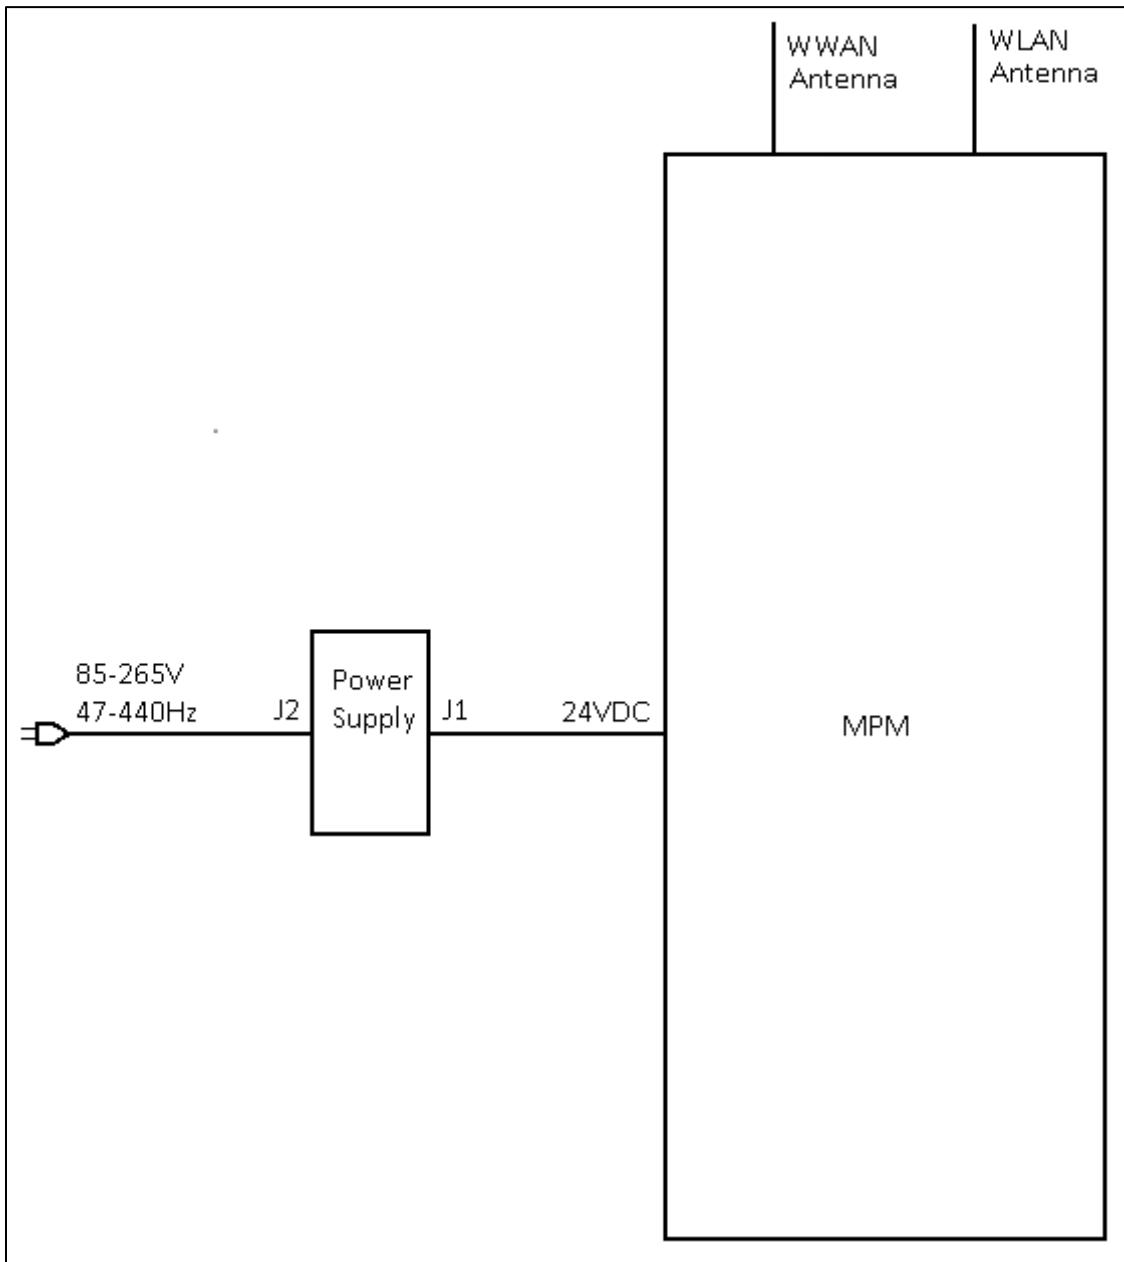


Figure 1. Block Diagram of Test Configuration



Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Serial Number	Rev. #
A	Power Supply	CH-SAN500AC-24	161103	01
B	MPM	North America: STX-000004	006	01
P	Antenna	CH-SAN500AC-24	161103	01

Table 4. Equipment Configuration

E. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number	*Customer Supplied Calibration Data
E	Ethernet Switch	Netgear	N300	N/A
F	External Laptop	Dell	Latitude E5570	N/A

The 'Customer Supplied Calibration Data' column will be marked as either not applicable, not available, or will contain the calibration date supplied by the customer.

Table 5. Support Equipment

F. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length (m)	Shielded? (Y/N)	Termination Box ID & Port Name
1	AC Input	3 conductor, bare wires at AC Mains end, 14 AWG	1	10	50	No	Power Box.J2
2	24VDC	4 conductor, 14 AWG	1	2	50	No	Power Box.J1
9	LAN	8 conductor, 20 AWG	1	5	50	Yes	Ethernet switch
33	MPM	Antenna cable, 1 conductor, coax, CA120/195-XC	1	10	10	Yes	Antenna

Table 6. Ports and Cabling Information

G. Mode of Operation

Custom software (Labtool) will exercise the transmitter and display the system performance via ethernet link to be monitored by an external laptop.

H. Method of Monitoring EUT Operation

An external laptop with an ethernet link will monitor the system and display the system performance.

I. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

J. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Weir Group Management Services upon completion of testing.

III. Electromagnetic Compatibility Criteria for Intentional Radiators



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: **§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant the criteria of §15.203.

The EUT is professionally installed only.

Test Engineer(s): Giuliano Messina

Test Date(s): May 19, 2017

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.403(i) and 15.407(e)

26 dB Bandwidth and 6 dB Bandwidth

Test Requirements:

§ 15.403(i): For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1% to 5% of the emission bandwidth of the device under measurement.

§ 15.407(e): Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure:

The transmitter was set to low, mid, and high operating frequencies at the highest output power and connected to the spectrum analyzer through a cable. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% - 5% (26 dB OBW) or 100 kHz (6 dB OBW) of the total emission bandwidth, $VBW > RBW$ (26 dB OBW) or $VBW \geq 3 \times RBW$ (6 dB OBW). The 26 dB and 6 dB Bandwidths were measured and recorded.

Test Results


The 26 dB and 6 dB Bandwidths were compliant with the requirements of this section.

Test Engineer(s):

Giuliano Messina

Test Date(s):

May 1, 2017

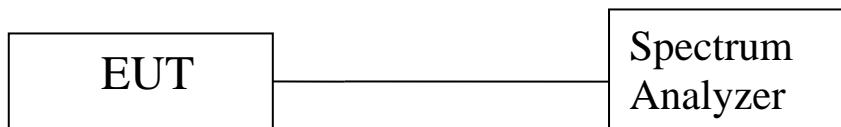





BW	Mode	Freq (MHz)	Path A			Path B			
			99% (MHz)	-26dB (MHz)	-6dB (MHz)	99% (MHz)	-26dB (MHz)	-6dB (MHz)	
20	A	5745	16.7690	19.855	16.350	16.7210	19.876	16.523	
		5785	16.7018	19.735	16.353	16.7377	19.982	16.544	
		5825	16.7611	19.873	16.370	16.7805	19.767	16.503	
20	N	5745	17.7254	20.423	17.591	17.7038	20.198	17.664	
		5785	17.6836	20.317	17.336	17.6766	20.139	17.679	
40		5825	17.7067	20.457	17.555	17.6850	20.264	17.656	
		5755	36.3947	41.242	35.700	36.4540	41.091	34.764	
		5795	36.3420	41.443	35.669	36.3513	40.758	36.303	
20	AC	5745	17.6863	20.275	17.562	17.6785	20.148	17.697	
		5785	17.6678	20.341	17.264	17.6919	20.368	17.691	
40		5825	17.6717	20.203	17.525	17.6882	20.315	17.666	
		5755	36.3909	41.666	35.719	36.3071	41.342	35.439	
		5795	36.2536	41.230	35.567	36.3227	41.215	35.353	
80		5775	76.2356	81.595	76.067	76.1123	81.581	76.215	

Table 7. 26 dB and 6 dB Occupied Bandwidth, Value Table


6 dB Bandwidth Path A

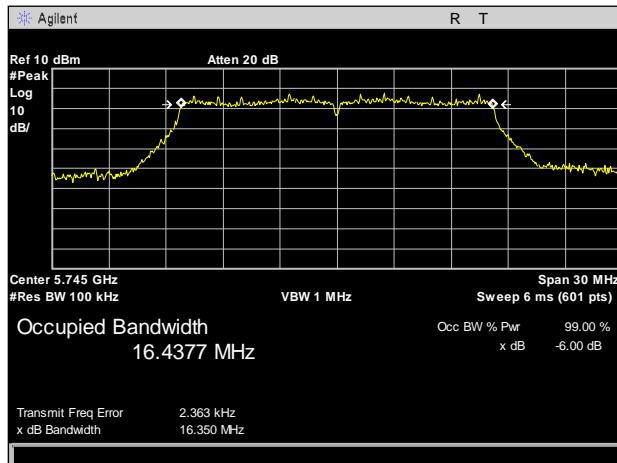


Plot 1. 6dB Occupied Bandwidth, 802.11a 20 – 5745 – Path A

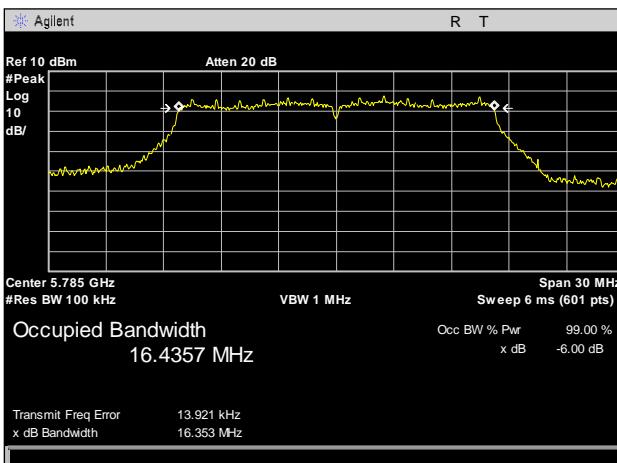


Plot 2. 6 dB Occupied Bandwidth, 802.11a 20 – 5785 – Path A

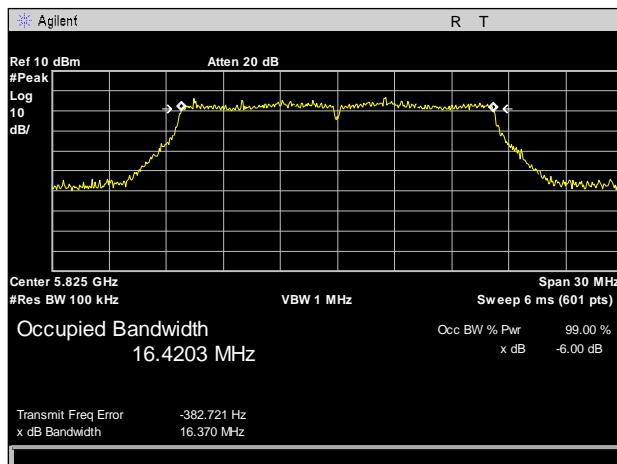


Plot 3. 6 dB Occupied Bandwidth, 802.11a 20 – 5825 – Path A

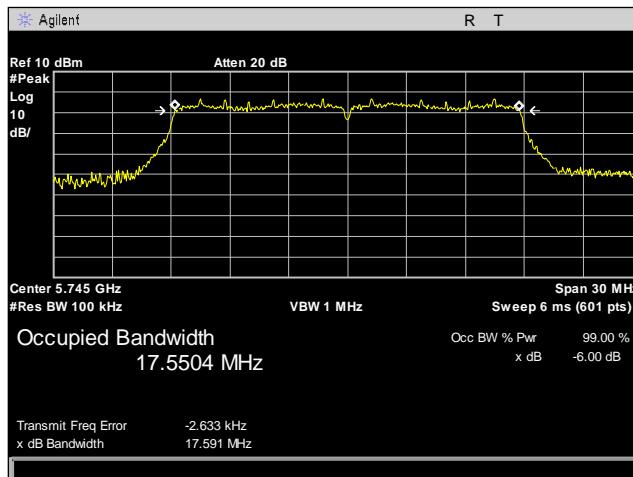


Plot 4. 6 dB Occupied Bandwidth, 802.11n 20 – 5745 – Path A

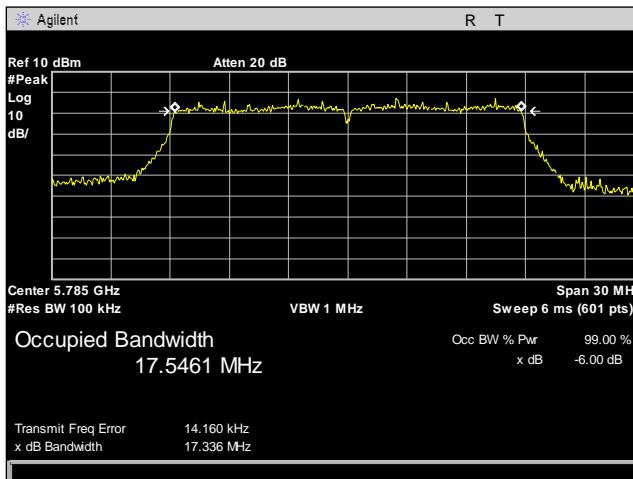


Plot 5. 6 dB Occupied Bandwidth, 802.11n 20 – 5785 – Path A

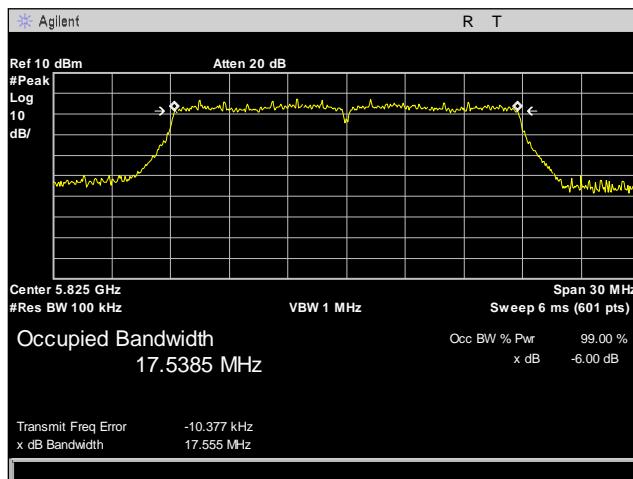


Plot 6. 6 dB Occupied Bandwidth, 802.11n 20 – 5825 – Path A

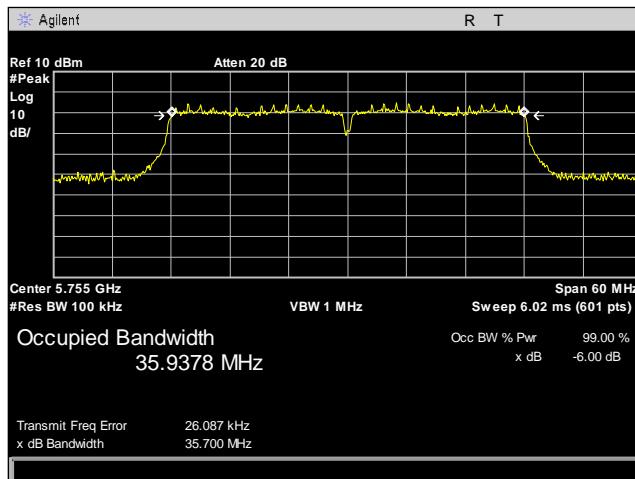


Plot 7. 6 dB Occupied Bandwidth, 802.11n 40 – 5755 – Path A

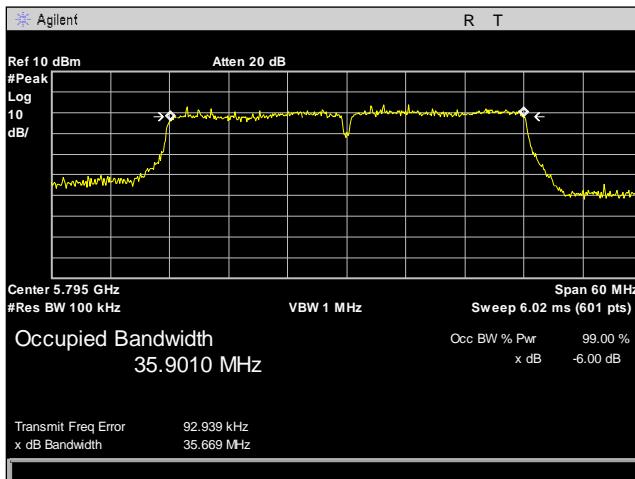


Plot 8. 6 dB Occupied Bandwidth, 802.11n 40 – 5795 – Path A

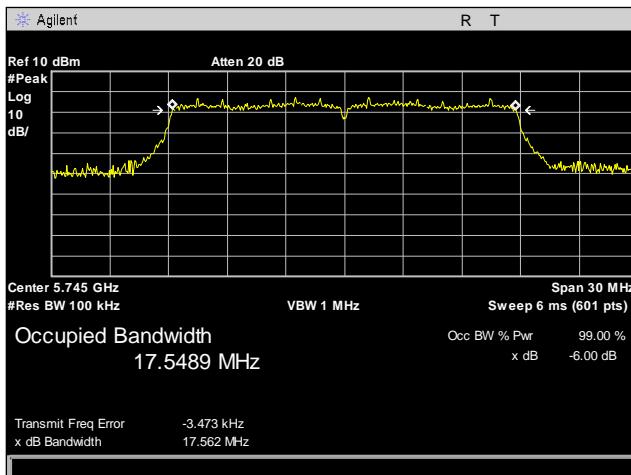


Plot 9. 6 dB Occupied Bandwidth, 802.11ac 20 – 5745 – Path A

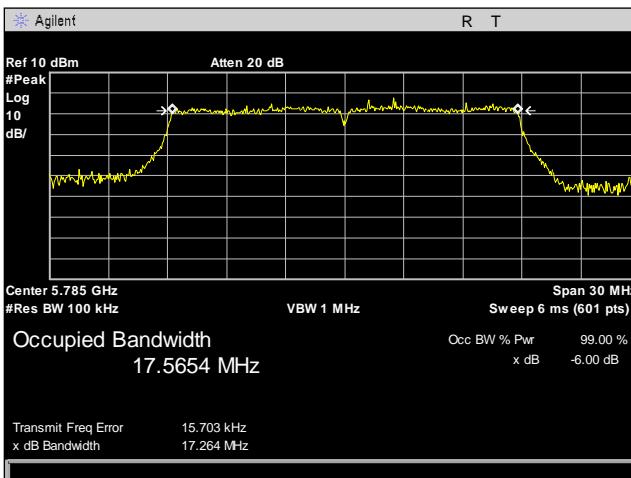


Plot 10. 6 dB Occupied Bandwidth, 802.11ac 20 – 5785 – Path A

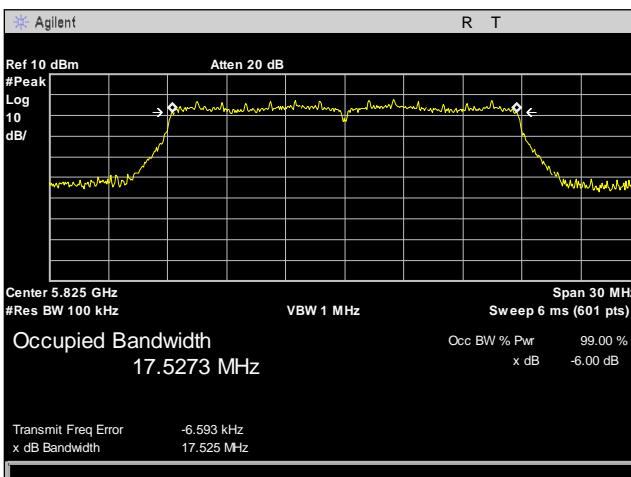


Plot 11. 6 dB Occupied Bandwidth, 802.11ac 20 – 5825 – path A

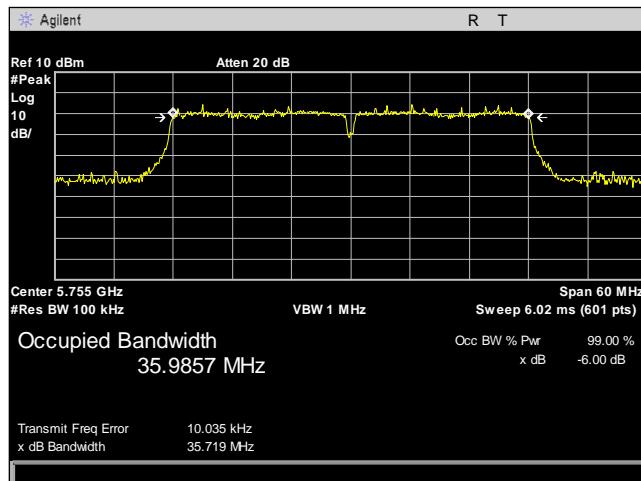

Plot 12. 6 dB Occupied Bandwidth, 802.11ac 40 – 5755 – Path A

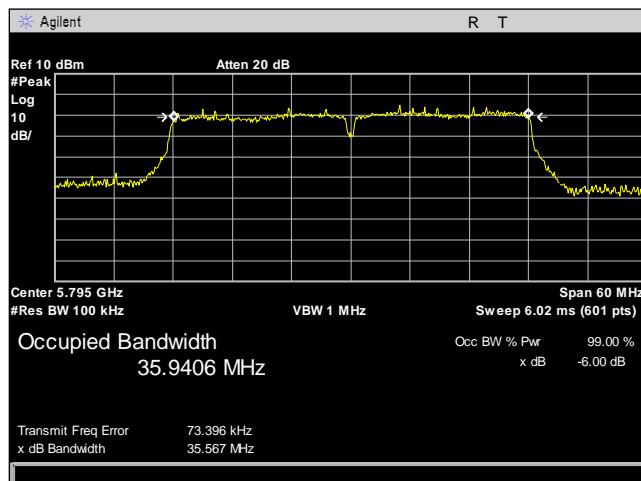


Plot 13. 6 dB Occupied Bandwidth, 802.11ac 40 – 5795 – Path A

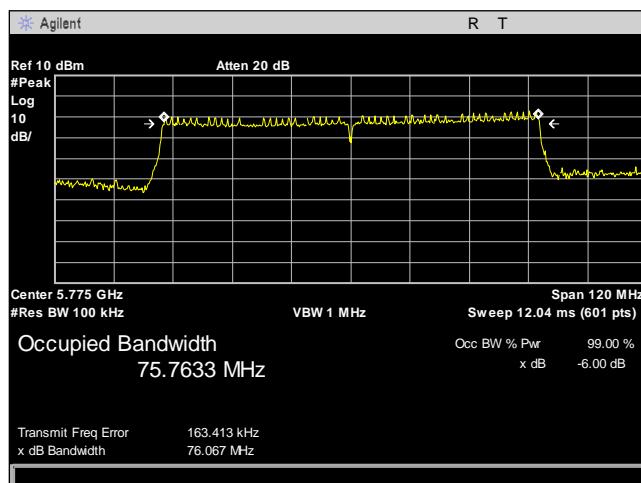


Plot 14. 6 dB Occupied Bandwidth, 802.11ac 80 – 5755 – Path A


6 dB Bandwidth Path B

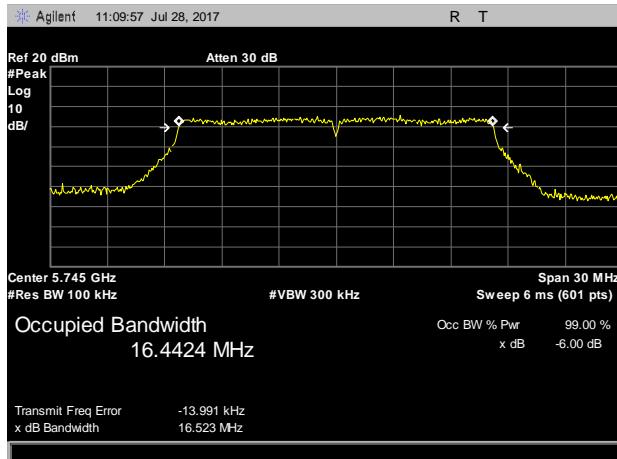


Plot 15. 6dB Occupied Bandwidth, 802.11a 20 – 5745 – Path B

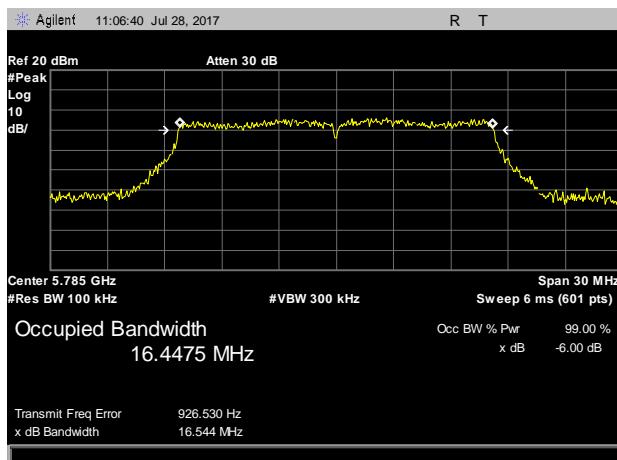


Plot 16. 6 dB Occupied Bandwidth, 802.11a 20 – 5785 – Path B

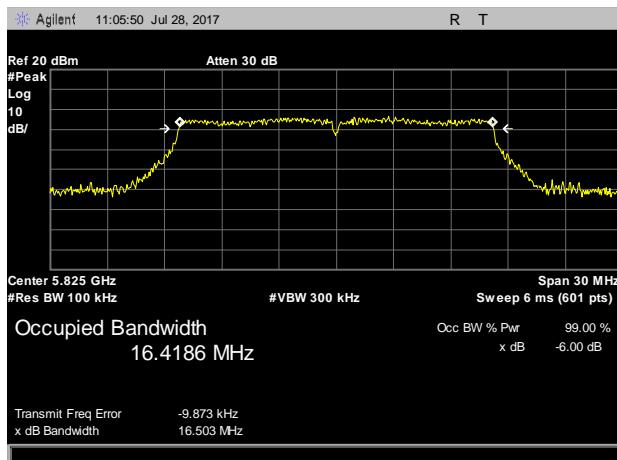


Plot 17. 6 dB Occupied Bandwidth, 802.11a 20 – 5825 – Path B

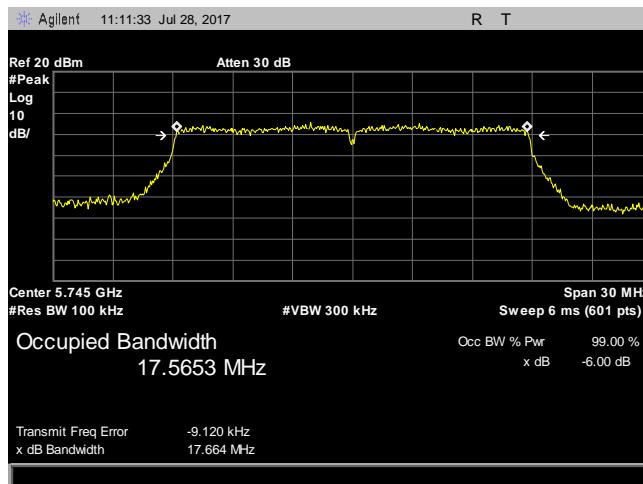


Plot 18. 6 dB Occupied Bandwidth, 802.11n 20 – 5745 – Path B

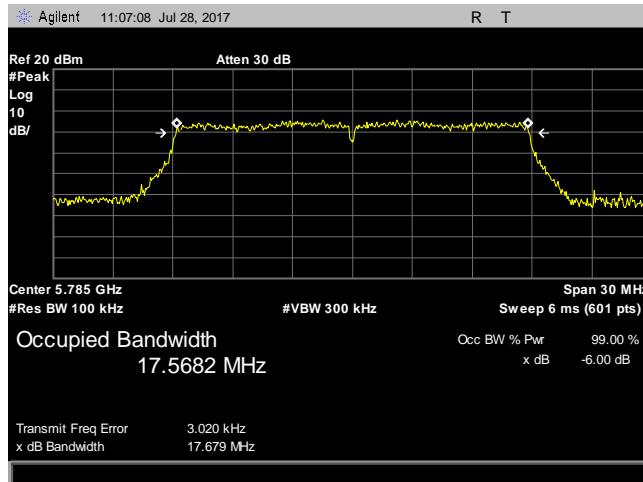


Plot 19. 6 dB Occupied Bandwidth, 802.11n 20 – 5785 – Path B

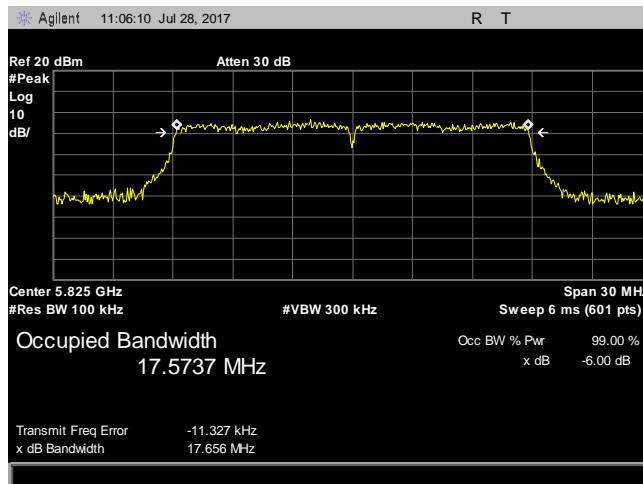


Plot 20. 6 dB Occupied Bandwidth, 802.11n 20 – 5825 – Path B

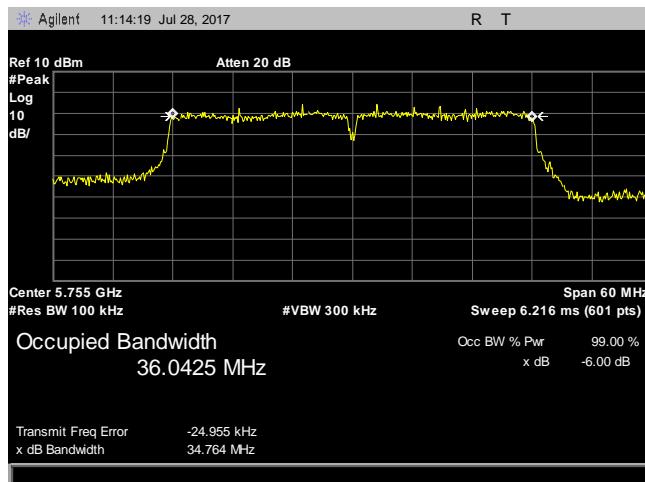


Plot 21. 6 dB Occupied Bandwidth, 802.11n 40 – 5755 – Path B

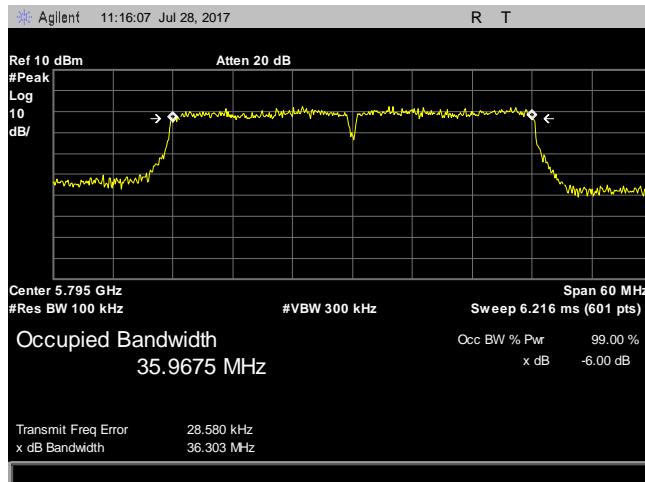


Plot 22. 6 dB Occupied Bandwidth, 802.11n 40 – 5795 – Path B

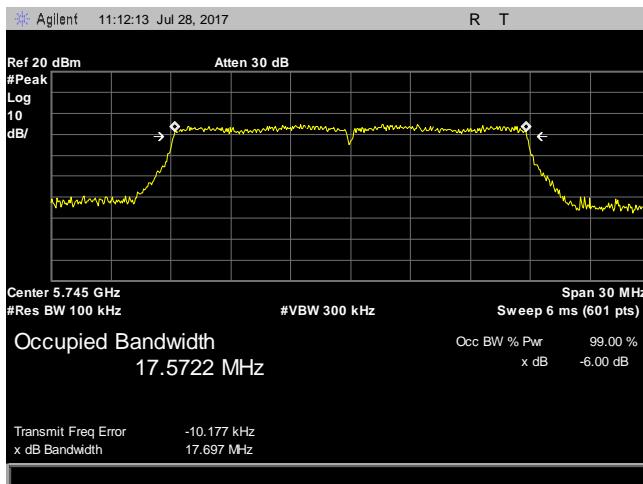


Plot 23. 6 dB Occupied Bandwidth, 802.11ac 20 – 5745 – Path B

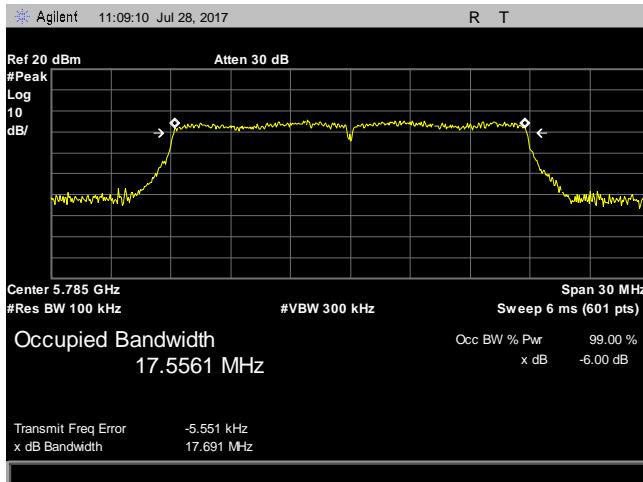


Plot 24. 6 dB Occupied Bandwidth, 802.11ac 20 – 5785 – Path B

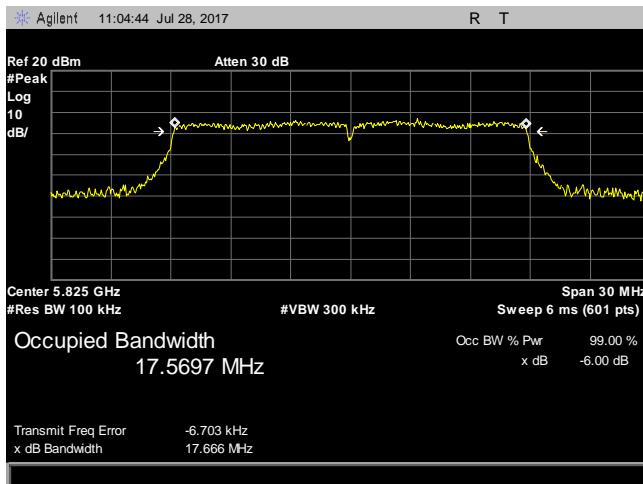


Plot 25. 6 dB Occupied Bandwidth, 802.11ac 20 – 5825 – Path B

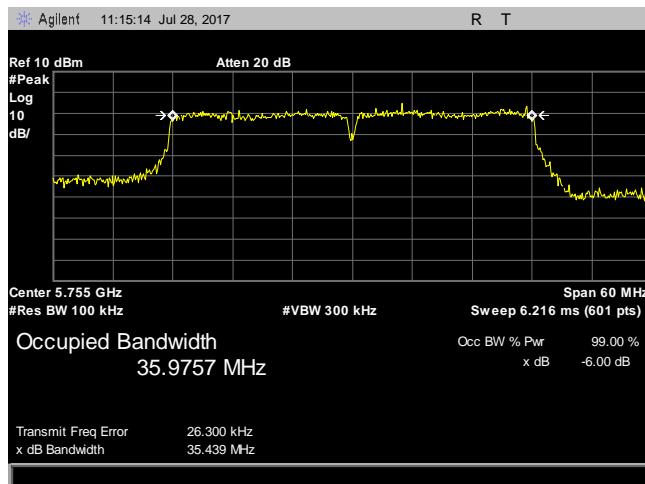

Plot 26. 6 dB Occupied Bandwidth, 802.11ac 40 – 5755 – Path B

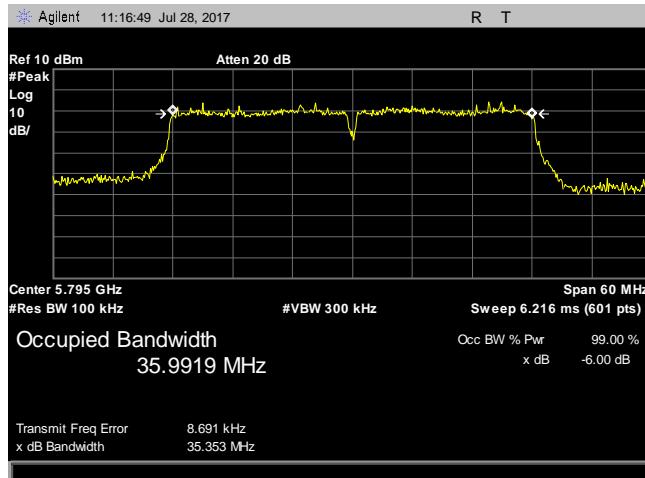


Plot 27. 6 dB Occupied Bandwidth, 802.11ac 40 – 5795 – Path B

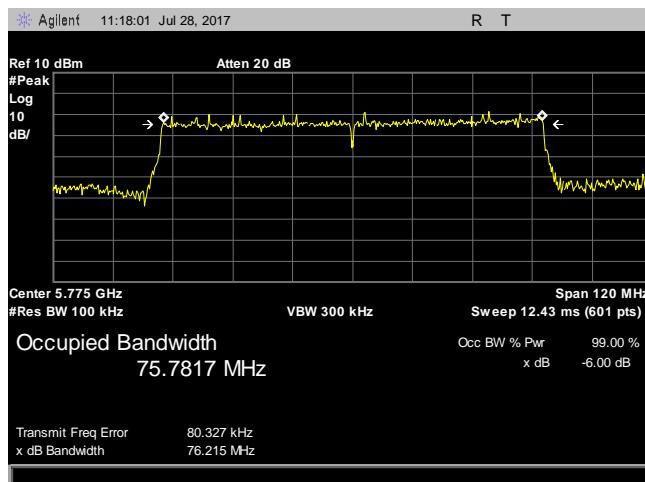


Plot 28. 6 dB Occupied Bandwidth, 802.11ac 80 – 5755 – Path B


26 dB Bandwidth Path A

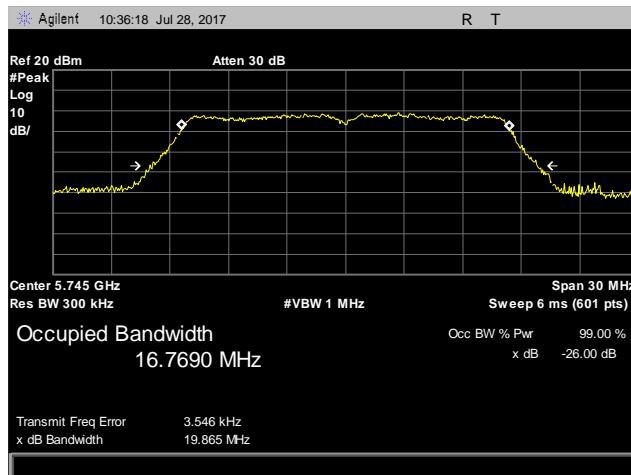


Plot 29. 26 dB Occupied Bandwidth, 802.11a 20 – 5745 – Path A

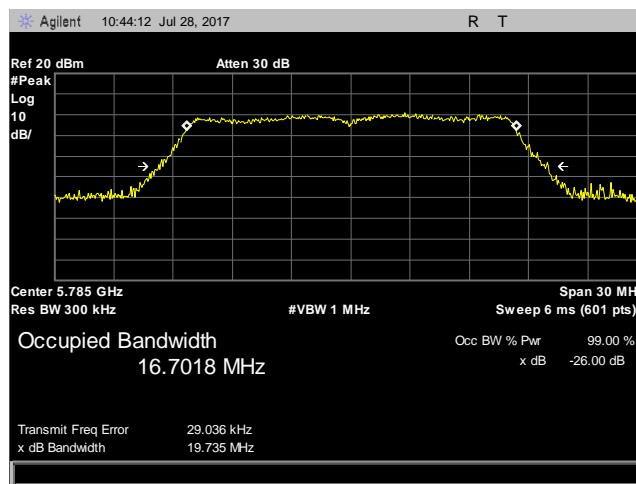


Plot 30. 26 dB Occupied Bandwidth, 802.11a 20 – 5785 – Path A

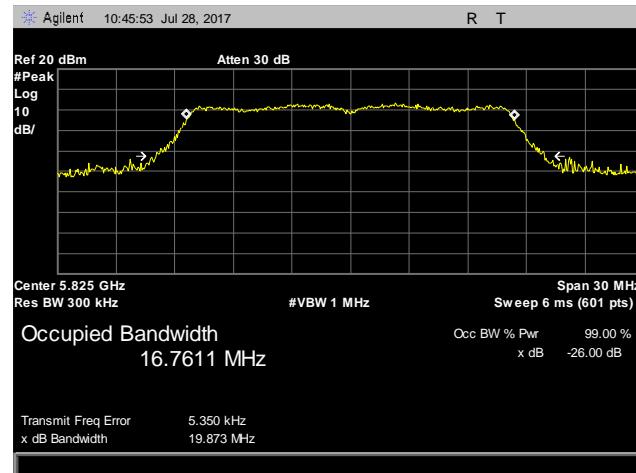


Plot 31. 26 dB Occupied Bandwidth, 802.11a 20 – 5825 – Path A

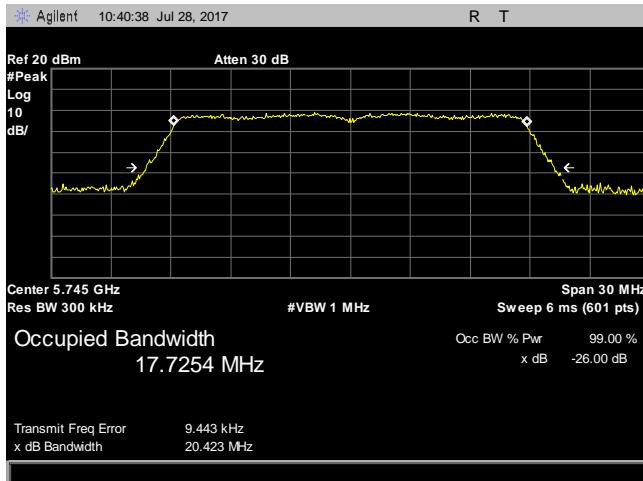


Plot 32. 26 dB Occupied Bandwidth, 802.11n 20 – 5745 – Path A

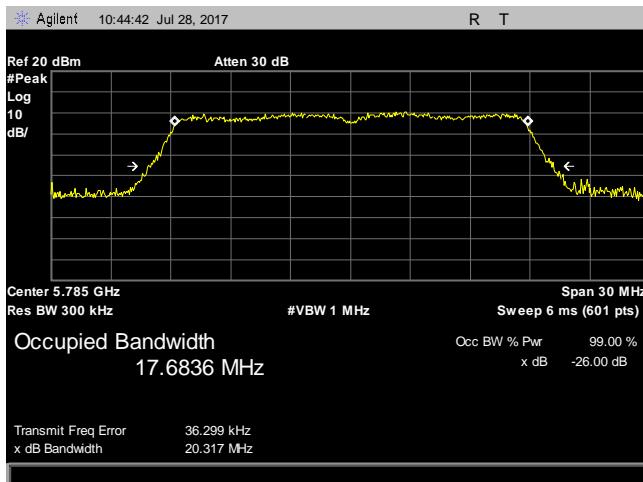


Plot 33. 26 dB Occupied Bandwidth, 802.11n 20 – 5785 – Path A

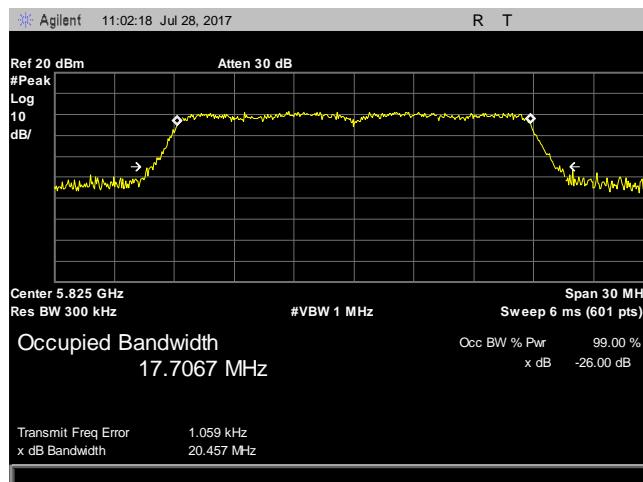




Plot 34. 26 dB Occupied Bandwidth, 802.11n 20 – 5825 – Path A

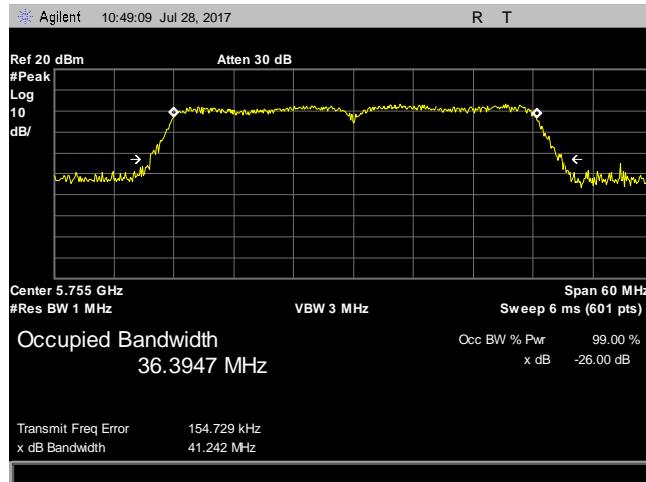


Plot 35. 26 dB Occupied Bandwidth, 802.11n 40 – 5755 – Path A

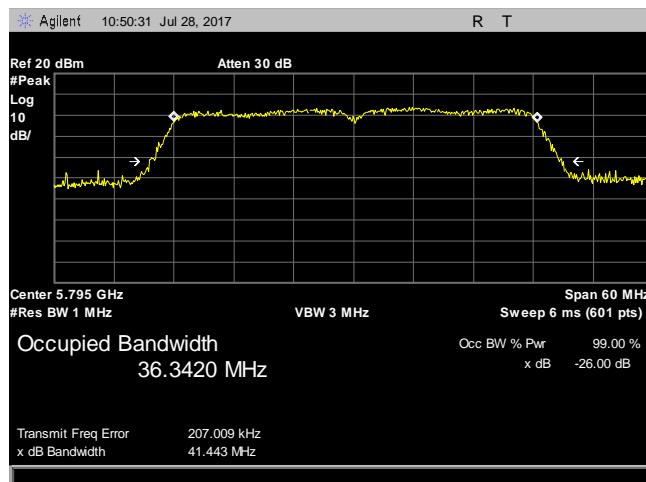


Plot 36. 26 dB Occupied Bandwidth, 802.11n 40 – 5795 – Path A

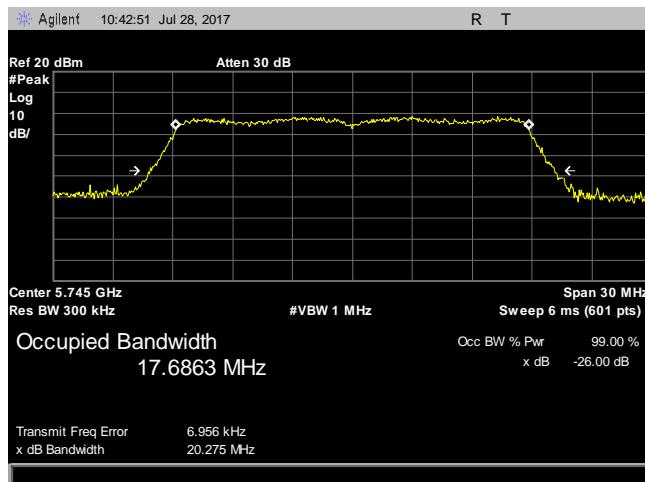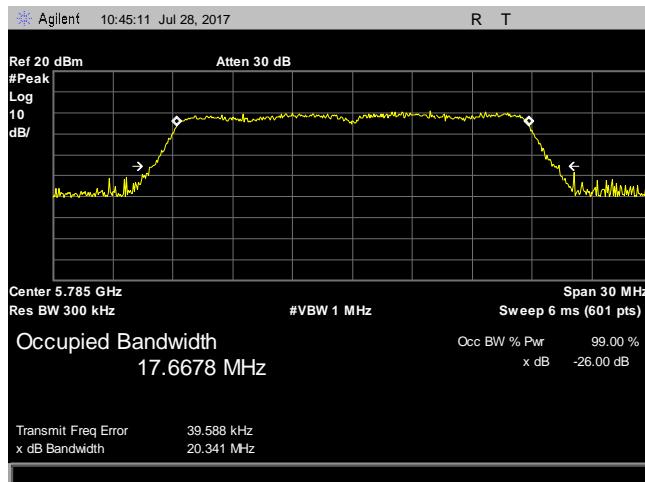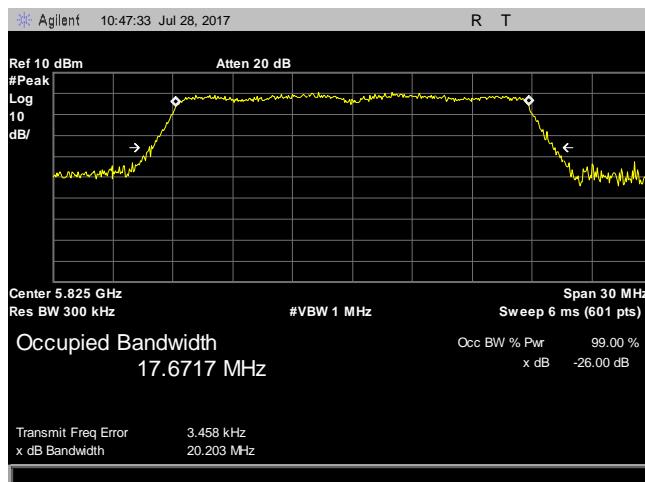

Plot 37. 26 dB Occupied Bandwidth, 802.11ac 20 – 5745 – Path A

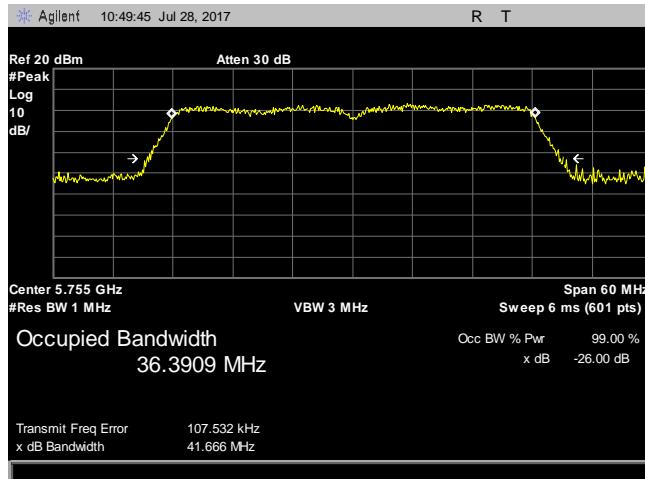Plot 38. 26 dB Occupied Bandwidth, 802.11ac 20 – 5785 – Path A

Plot 39. 26 dB Occupied Bandwidth, 802.11ac 20 – 5825 – Path A

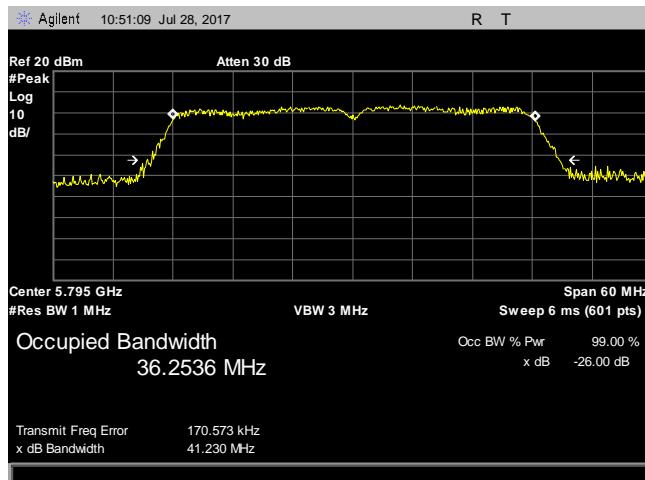

Plot 40. 26 dB Occupied Bandwidth, 802.11ac 40 – 5755 – Path A

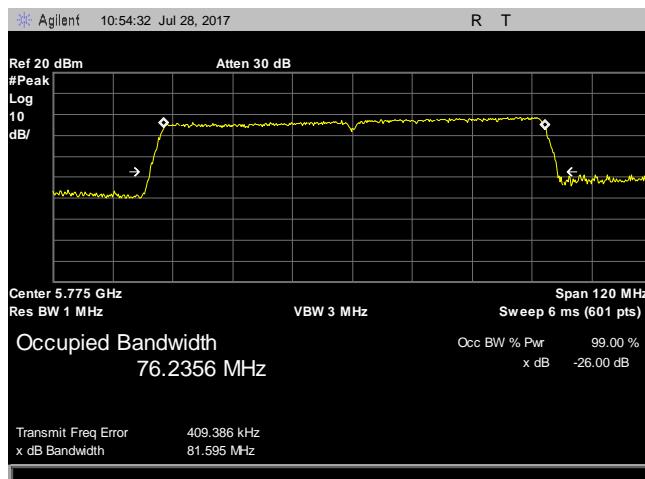


Plot 41. 26 dB Occupied Bandwidth, 802.11ac 40 – 5795 – Path A




Plot 42. 26 dB Occupied Bandwidth, 802.11ac 80 – 5775 – Path A


26 dB Bandwidth Path B

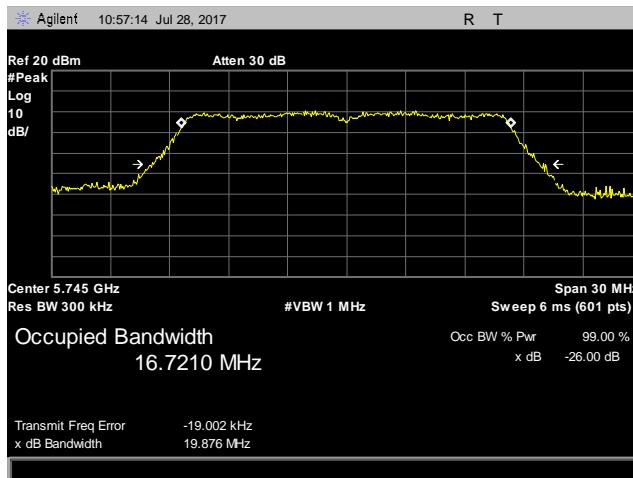


Plot 43. 26 dB Occupied Bandwidth, 802.11a 20 – 5745 – Path B

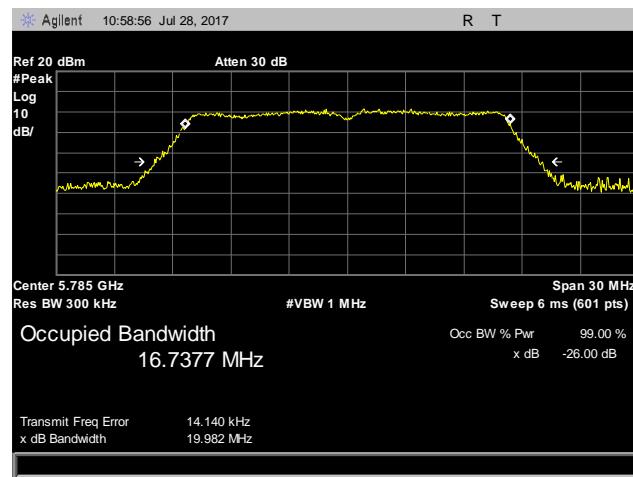


Plot 44. 26 dB Occupied Bandwidth, 802.11a 20 – 5785 – Path B

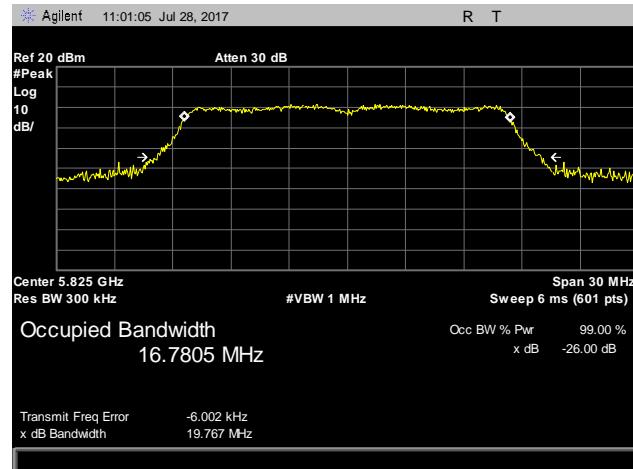


Plot 45. 26 dB Occupied Bandwidth, 802.11a 20 – 5825 – Path B

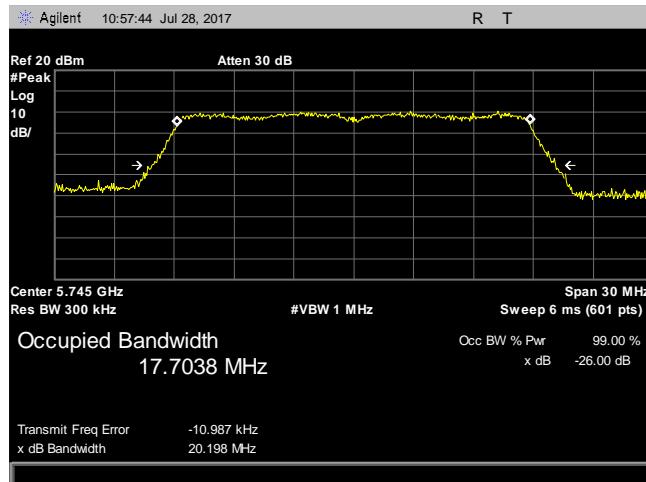


Plot 46. 26 dB Occupied Bandwidth, 802.11n 20 – 5745 – Path B

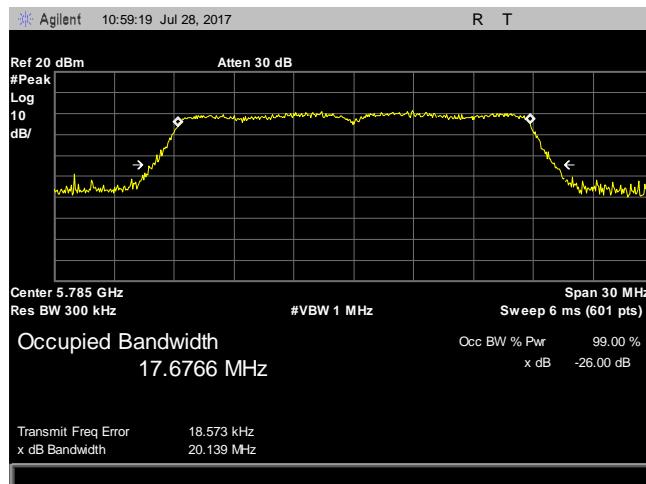


Plot 47. 26 dB Occupied Bandwidth, 802.11n 20 – 5785 – Path B

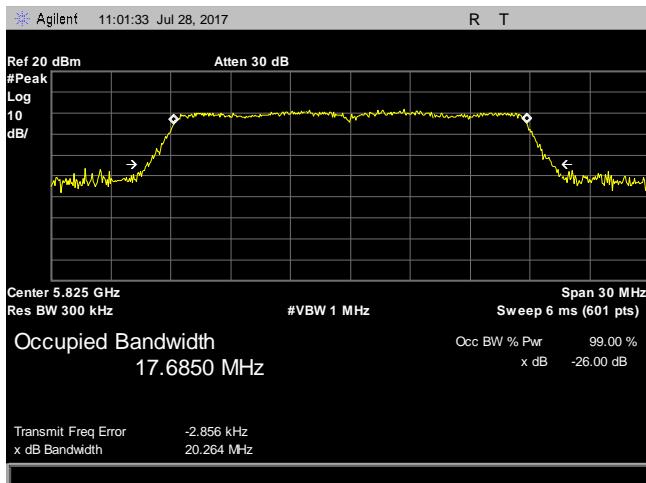




Plot 48. 26 dB Occupied Bandwidth, 802.11n 20 – 5825 – Path B

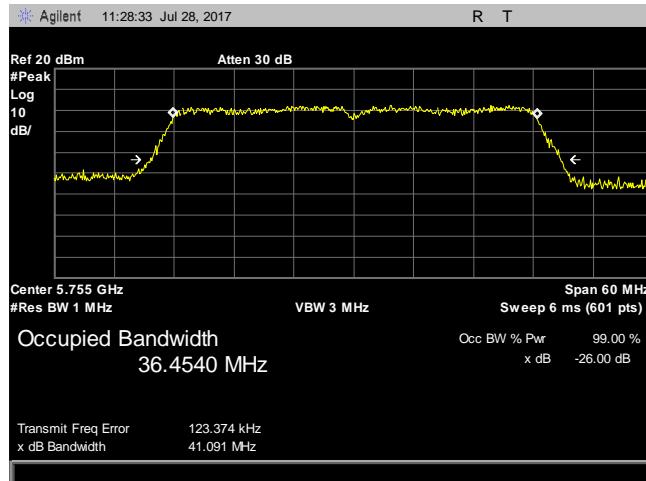


Plot 49. 26 dB Occupied Bandwidth, 802.11n 40 – 5755 – Path B

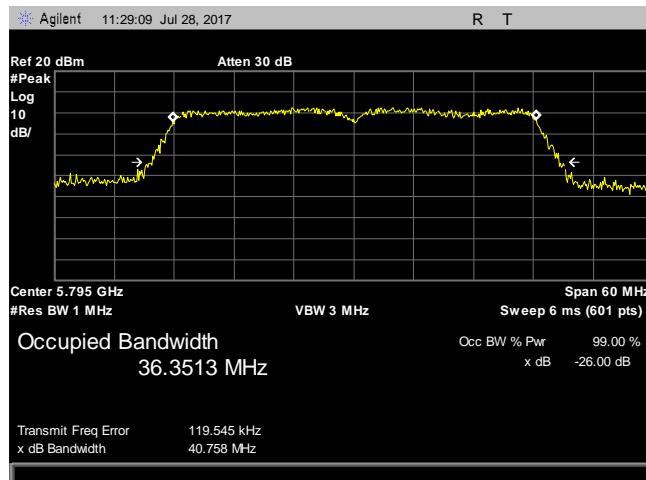


Plot 50. 26 dB Occupied Bandwidth, 802.11n 40 – 5795 – Path B

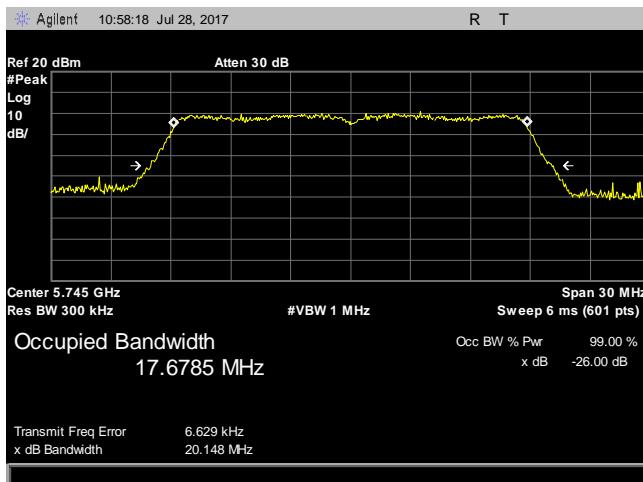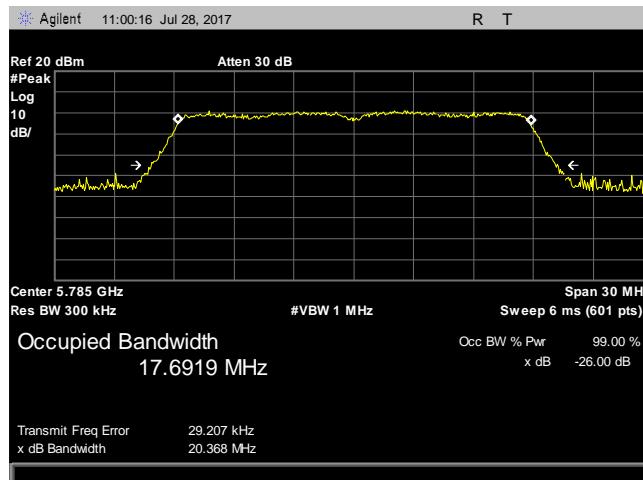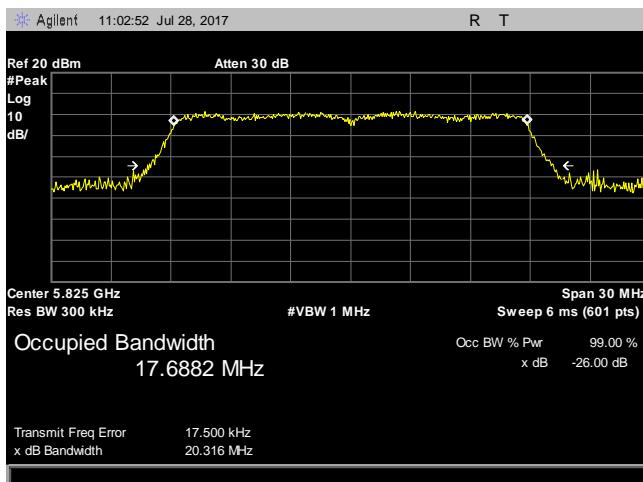

Plot 51. 26 dB Occupied Bandwidth, 802.11ac 20 – 5745 – Path B

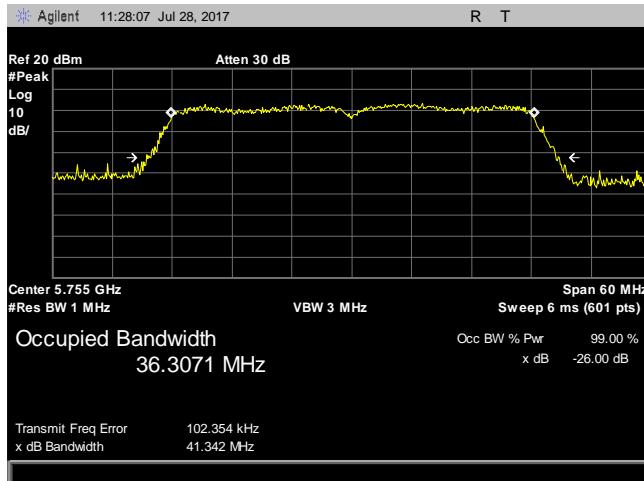Plot 52. 26 dB Occupied Bandwidth, 802.11ac 20 – 5785 – Path B

Plot 53. 26 dB Occupied Bandwidth, 802.11ac 20 – 5825 – Path B

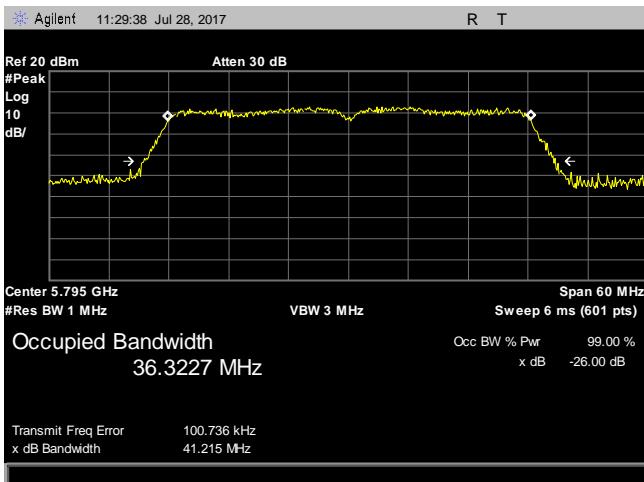

Plot 54. 26 dB Occupied Bandwidth, 802.11ac 40 – 5755 – Path B

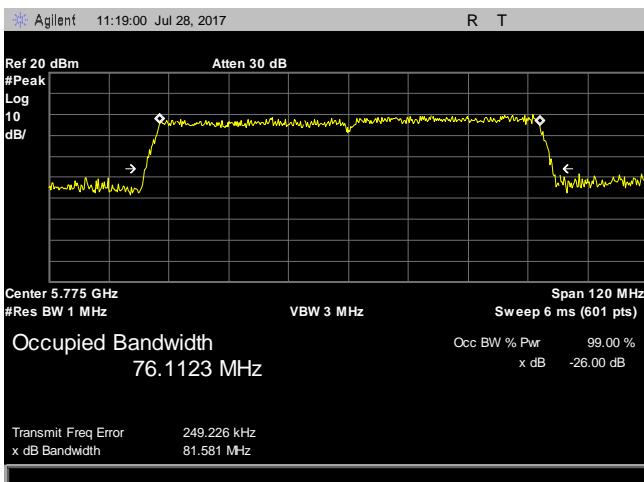

Plot 55. 26 dB Occupied Bandwidth, 802.11ac 40 – 5795 – Path B



Plot 56. 26 dB Occupied Bandwidth, 802.11ac 80 – 5775 – Path B

Electromagnetic Compatibility Criteria for Intentional Radiators

§15.407 Duty Cycle


Test Results: For data recording purposes only.

Test Engineer: Giuliano Messina


Test Date: May 19, 2017

Mode	Bandwidth (MHz)	Duty Cycle (%)	Duty Cycle Correction (dB)
A	20	90.8	0.418
N	20	87.3	0.587
	40	65.6	1.827
AC	20	70	1.56
	40	29.2	5.349
	80	18.2	7.388


Table 8. Duty Cycle, Test Results

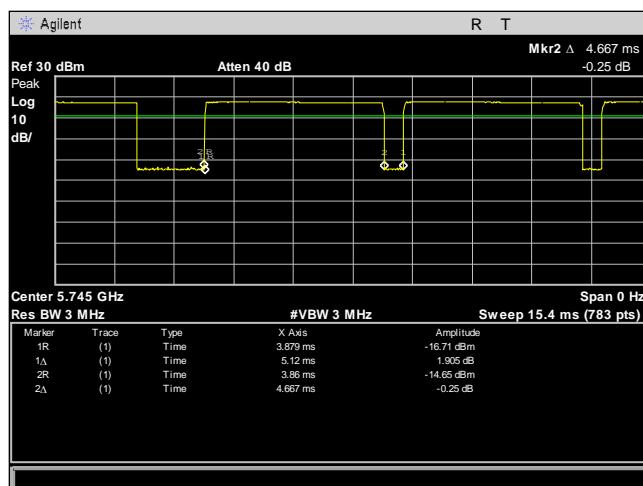


Plot 57. Duty Cycle, 802.11a

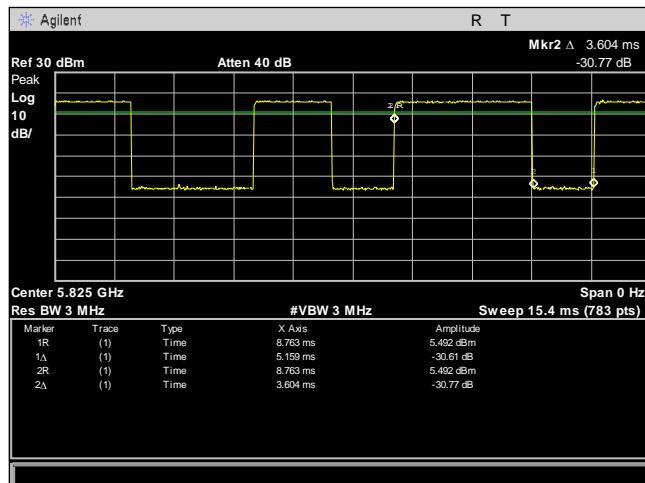


Plot 58. Duty Cycle, 802.11ac 20

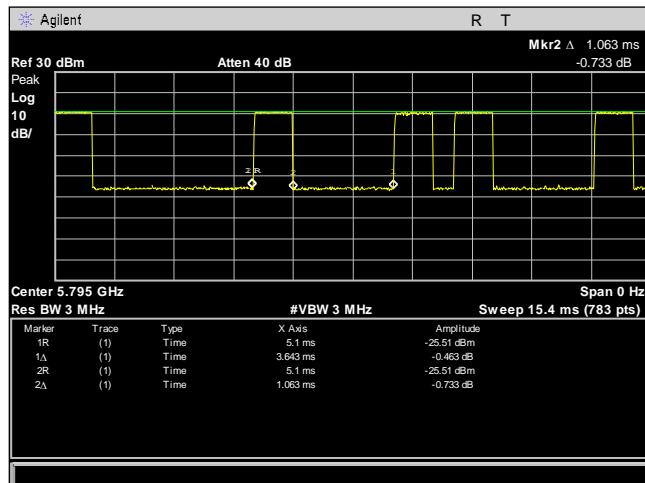


Plot 59. Duty Cycle, 802.11ac 40

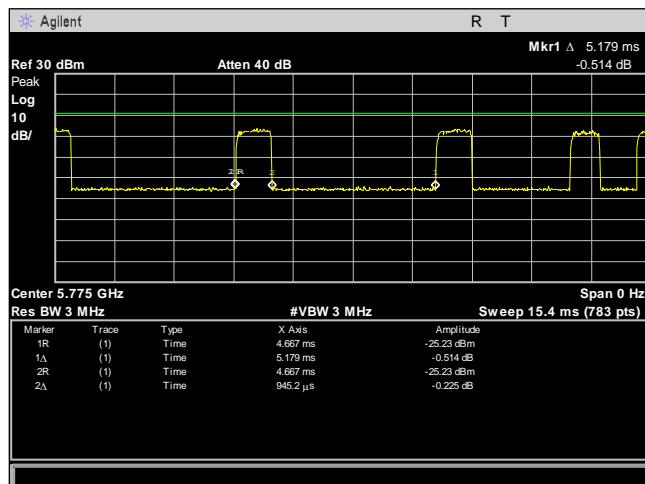

Plot 60. Duty Cycle, 802.11ac 80

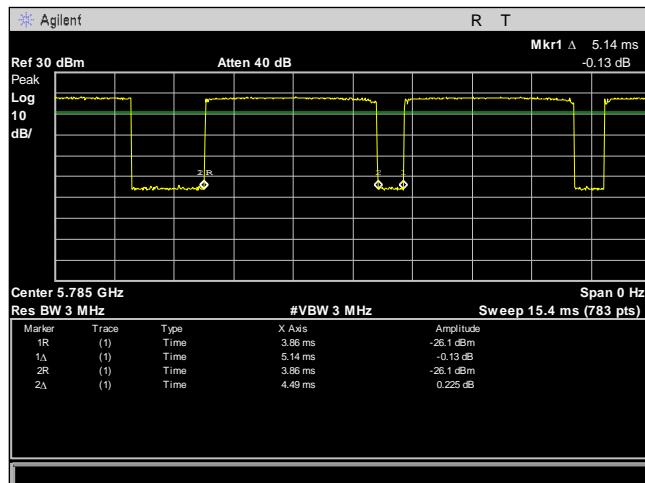

Plot 61. Duty Cycle, 802.11n 20

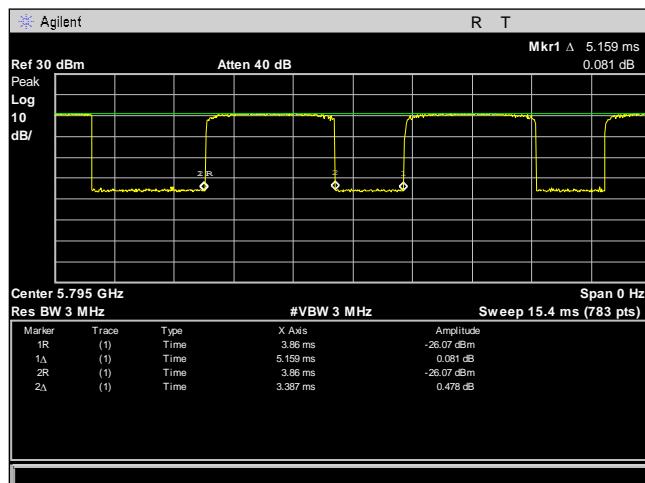

Plot 62. Duty Cycle, 802.11n 40

Electromagnetic Compatibility Criteria for Intentional Radiators

§15. 407(a)(3) Maximum Conducted Output Power

Test Requirements: **§15.407(a)(3):** For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.


Test Procedure: The EUT was connected to a spectrum analyzer through a cable. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. Its power was measured according to measurement method SA-1, as described in 789033 D02 General UNII Test Procedures v01, Method SA-3.

Test Results: The EUT as tested is compliant with the requirements of this section.

No anomalies detected.

Test Engineer(s): Giuliano Messina

Test Date(s): May 3, 2017

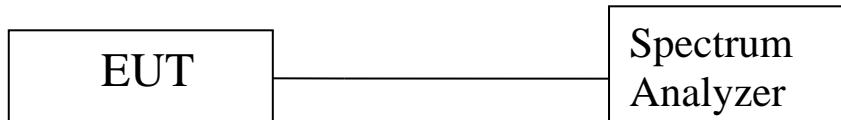



Peak Conducted Output Power						
Carrier Channel	Frequency (MHz)	Measured PCOP (dBm) PathA	Measured PCOP (dBm) PathB	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	5745	6.13	6.02	9.09	27	-17.91
Mid	5785	6.14	5.96	9.07	27	-17.93
High	5825	5.6	5.89	8.76	27	-18.24

Table 9. Peak Conducted Output Power, 802.11a Mode, Test Results

Peak Conducted Output Power						
Carrier Channel	Frequency (MHz)	Measured PCOP (dBm) PathA	Measured PCOP (dBm) PathB	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	5745	6.53	5.95	9.26	27	-17.74
Mid	5785	5.86	5.5	8.7	27	-18.3
High	5825	6.98	7.5	10.26	27	-16.74

Table 10. Peak Conducted Output Power, 802.11n 20 Mode, Test Results

Peak Conducted Output Power						
Carrier Channel	Frequency (MHz)	Measured PCOP (dBm) PathA	Measured PCOP (dBm) PathB	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	5745	6.69	6.24	9.49	27	-17.51
Mid	5785	5.61	5.2	8.43	27	-18.57
High	5825	6.32	6.08	9.22	27	-17.78

Table 11. Peak Conducted Output Power, 802.11ac 20 Mode, Test Results



Peak Conducted Output Power						
Carrier Channel	Frequency (MHz)	Measured PCOP (dBm) PathA	Measured PCOP (dBm) PathB	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	5755	4.86	5.34	8.12	27	-18.88
High	5795	5.23	5.17	8.22	27	-18.78


Table 12. Peak Conducted Output Power, 802.11n 40 Mode, Test Results

Peak Conducted Output Power						
Carrier Channel	Frequency (MHz)	Measured PCOP (dBm) PathA	Measured PCOP (dBm) PathB	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	5755	5.4	5.27	8.35	27	-18.65
High	5795	4.76	4.6	7.7	27	-19.3


Table 13. Peak Conducted Output Power, 802.11ac 40 Mode, Test Results

Peak Conducted Output Power						
Carrier Channel	Frequency (MHz)	Measured PCOP (dBm) PathA	Measured PCOP (dBm) PathB	Total Power (dBm)	Limit (dBm)	Margin (dB)
Mid	5775	-1.89	-2.39	0.88	27	-26.12


Table 14. Peak Conducted Output Power, 802.11ac 80 Mode, Test Results

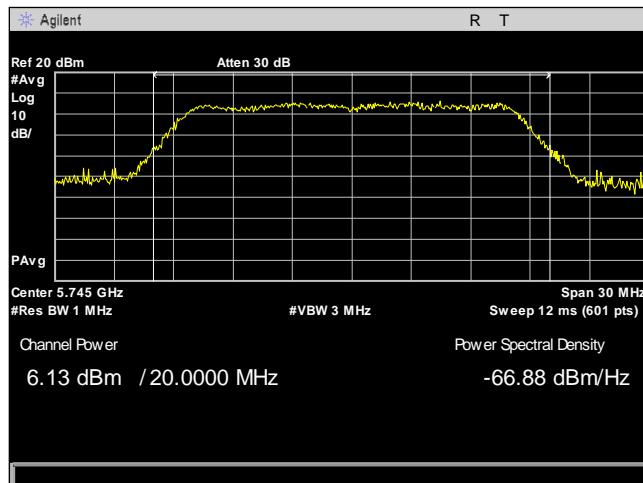


Plot 63. Conducted Transmitter Power, 802.11a, 5745, Path A

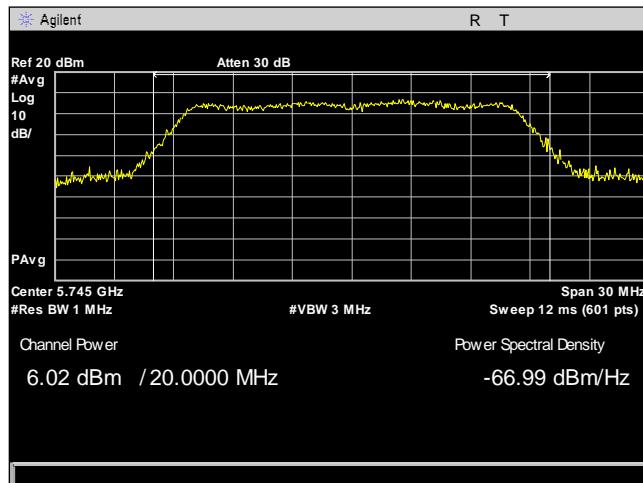


Plot 64. Conducted Transmitter Power, 802.11a, 5745, Path B

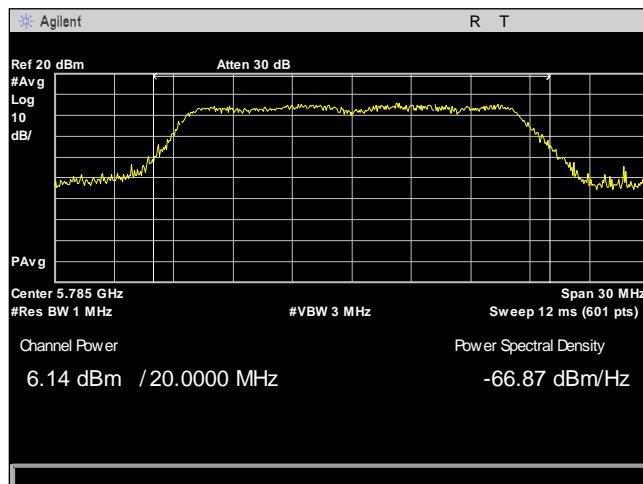


Plot 65. Conducted Transmitter Power, 802.11a, 5785, Path A

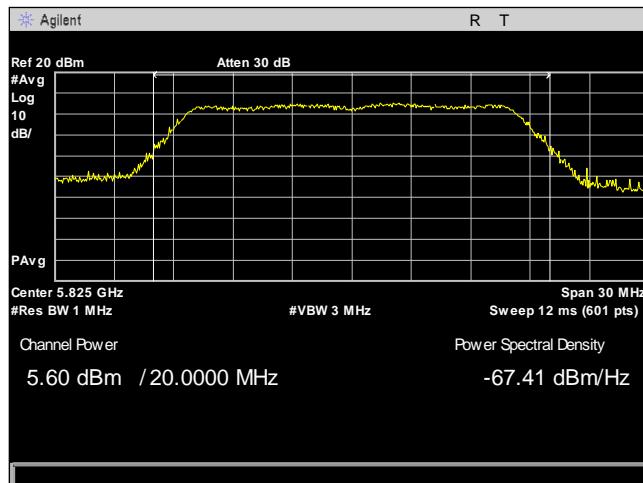


Plot 66. Conducted Transmitter Power, 802.11a, 5825, Path A

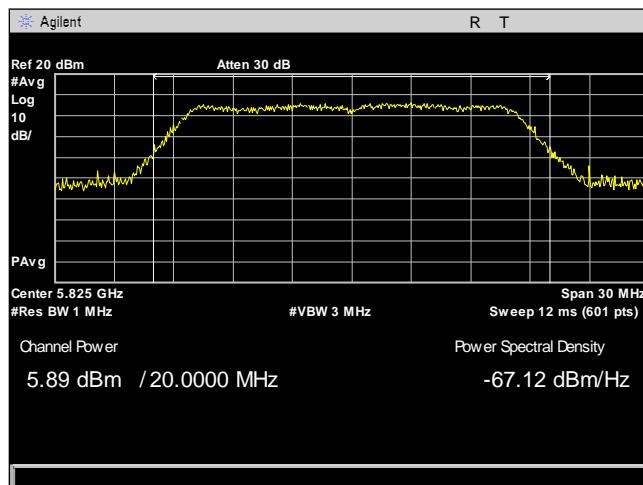


Plot 67. Conducted Transmitter Power, 802.11a, 5825, Path B

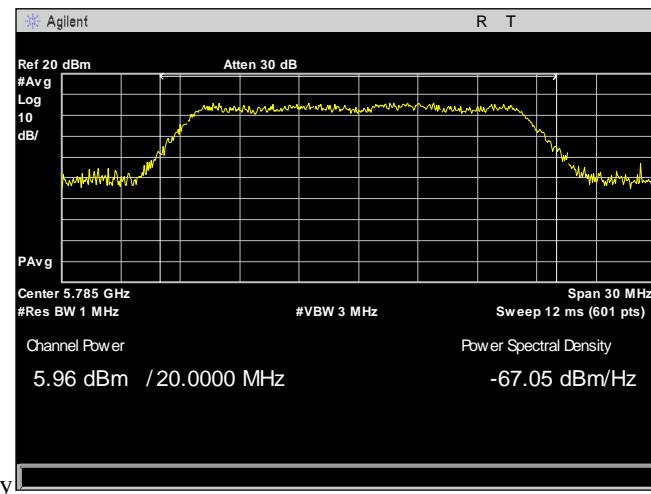


Plot 68. Conducted Transmitter Power, 802.11a, 5785, Path B

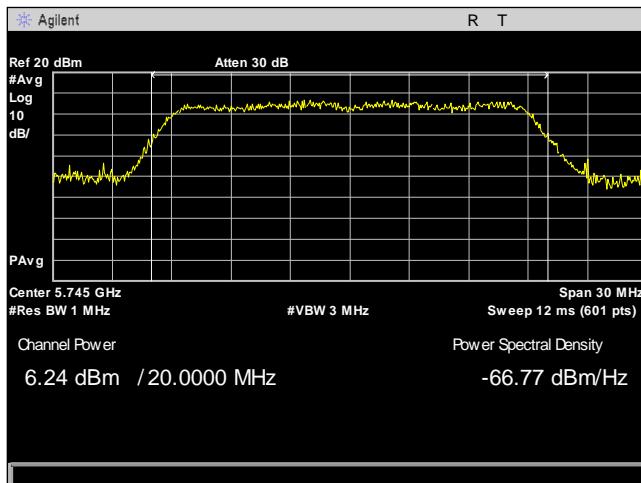


Plot 69. Conducted Transmitter Power, 802.11ac 20, 5745, Path B

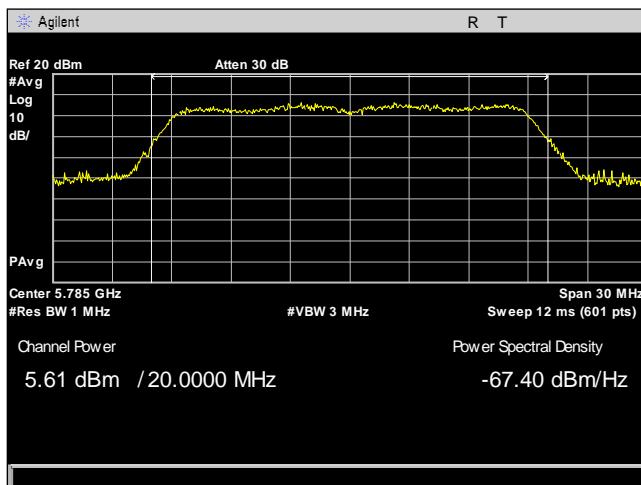


Plot 70. Conducted Transmitter Power, 802.11ac 20, 5785, Path A

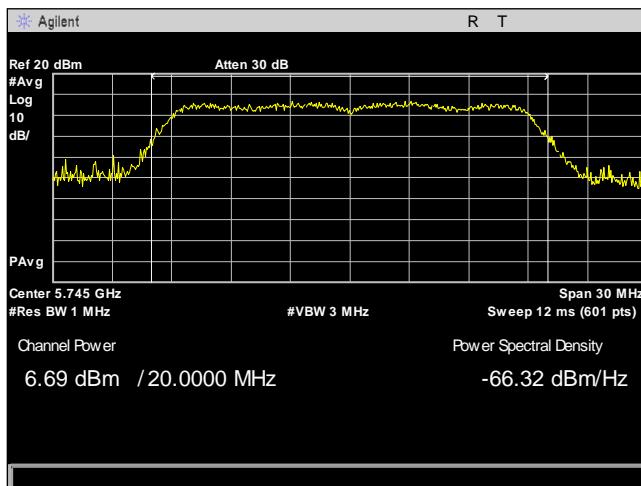


Plot 71. Conducted Transmitter Power, 802.11ac 20, 5745, Path A

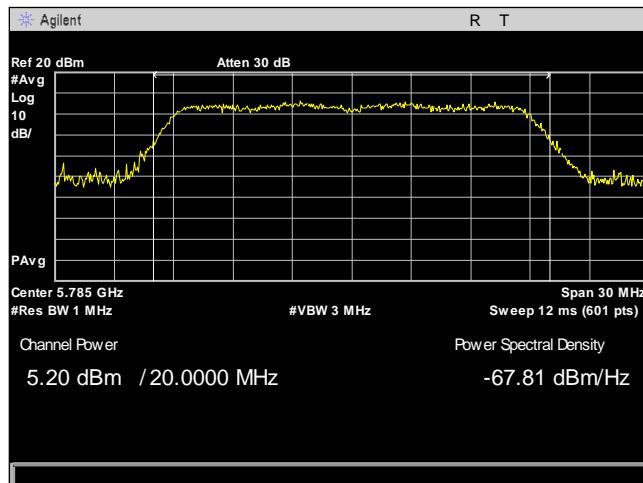


Plot 72. Conducted Transmitter Power, 802.11ac 20, 5785, Path B

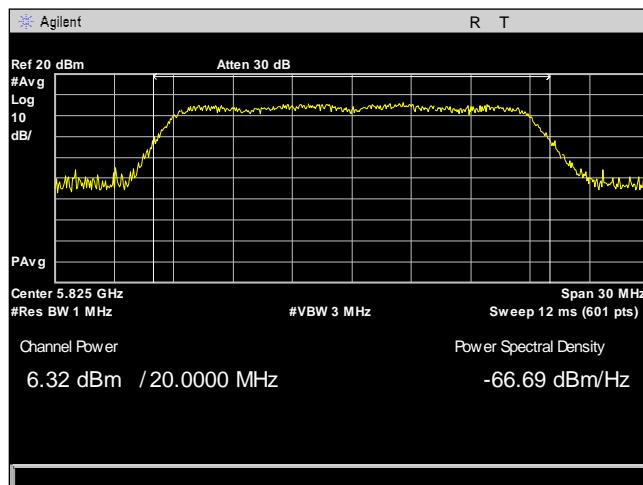


Plot 73. Conducted Transmitter Power, 802.11ac 20, 5825, Path A

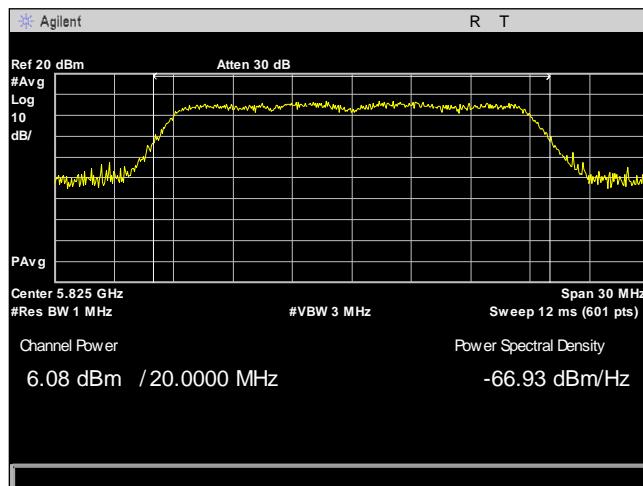


Plot 74. Conducted Transmitter Power, 802.11ac 20, 5825, Path B

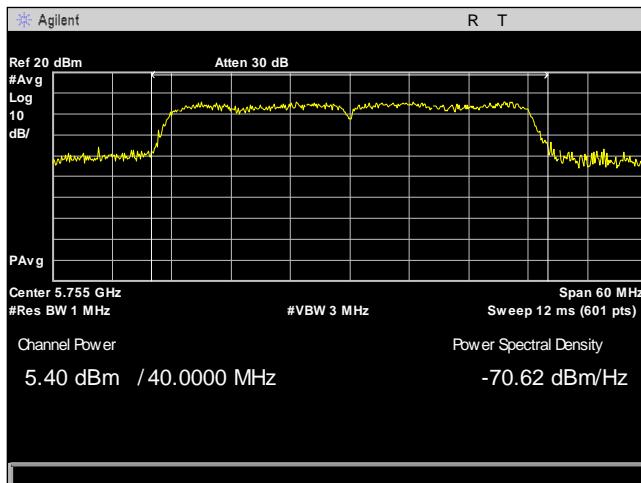


Plot 75. Conducted Transmitter Power, 802.11ac 40, 5755, Path A

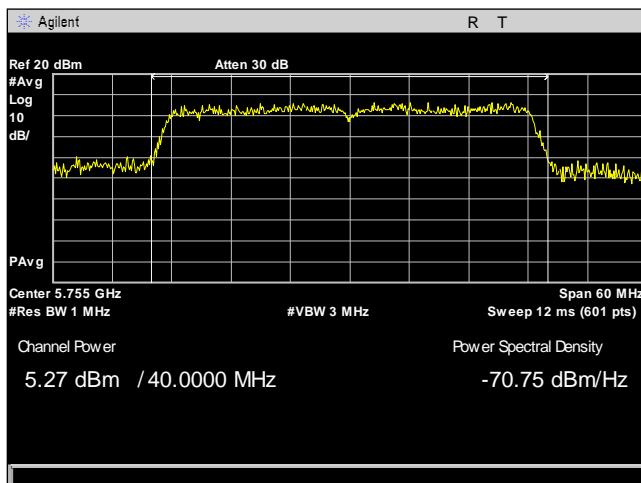


Plot 76. Conducted Transmitter Power, 802.11ac 40, 5755, Path B

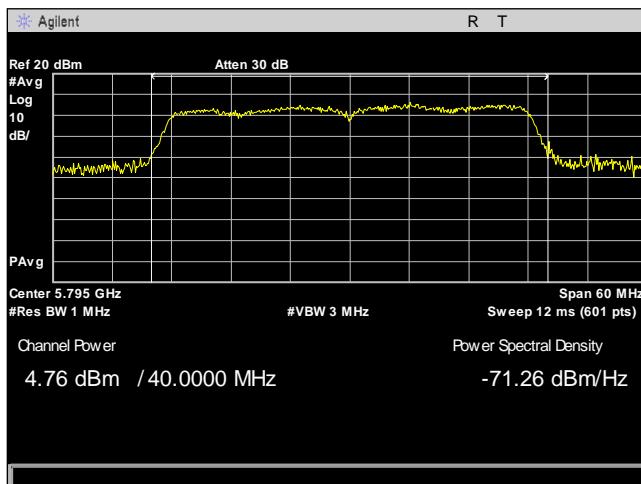


Plot 77. Conducted Transmitter Power, 802.11ac 40, 5795, Path A

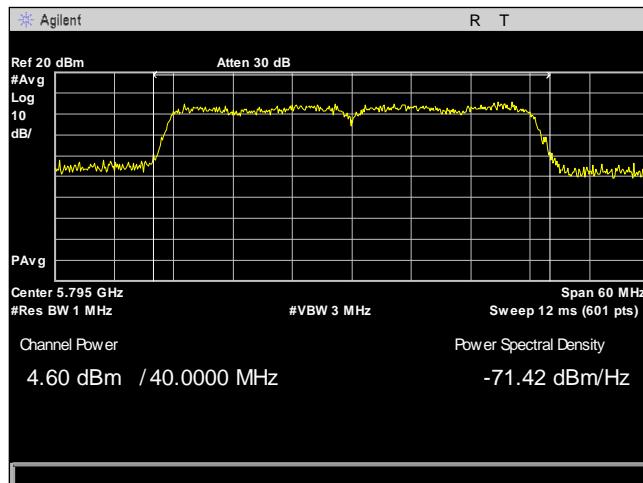


Plot 78. Conducted Transmitter Power, 802.11ac 40, 5795, Path B

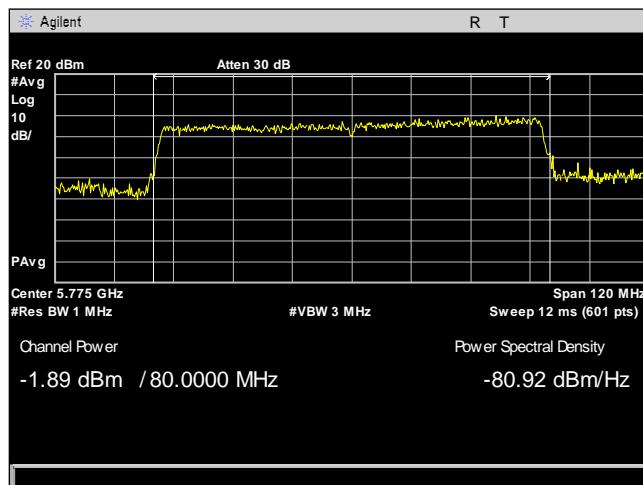


Plot 79. Conducted Transmitter Power, 802.11ac 80, 5775, Path A

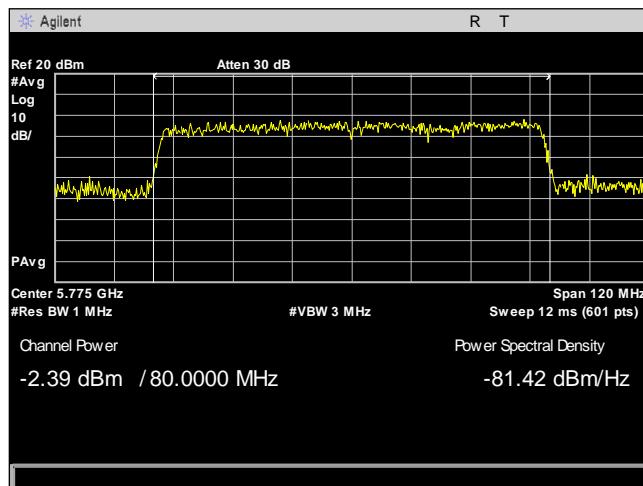


Plot 80. Conducted Transmitter Power, 802.11ac 80, 5775, Path B

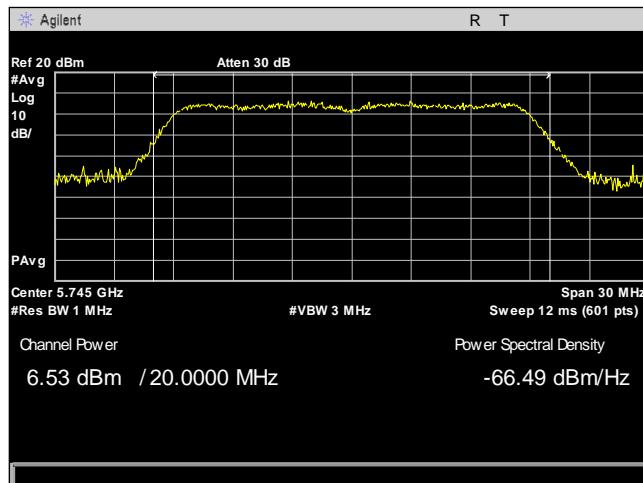


Plot 81. Conducted Transmitter Power, 802.11n 20, 5745, Path A

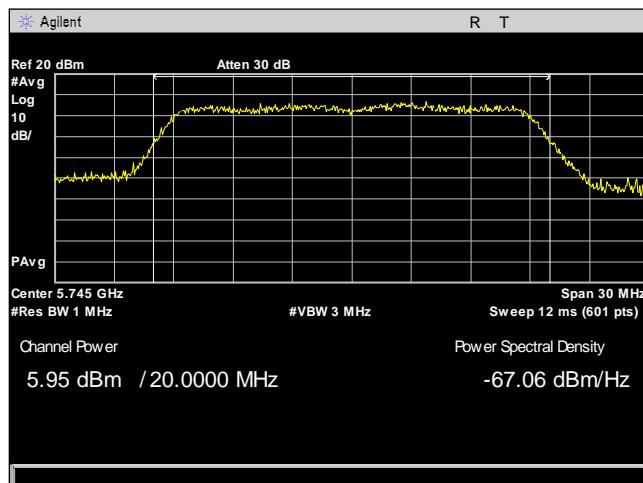


Plot 82. Conducted Transmitter Power, 802.11n 20, 5745, Path B

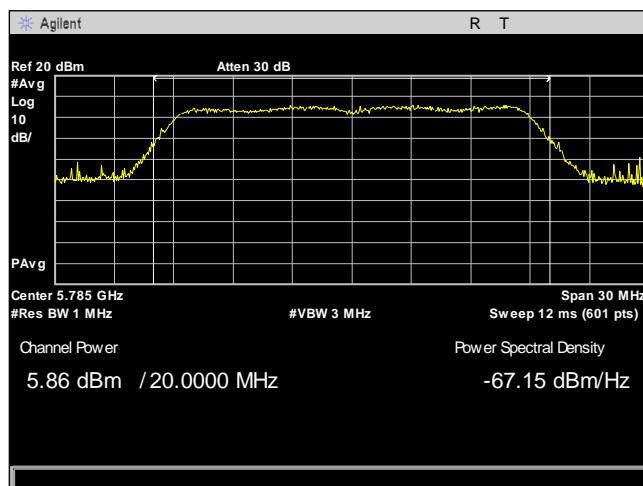


Plot 83. Conducted Transmitter Power, 802.11n 20, 5785, Path A

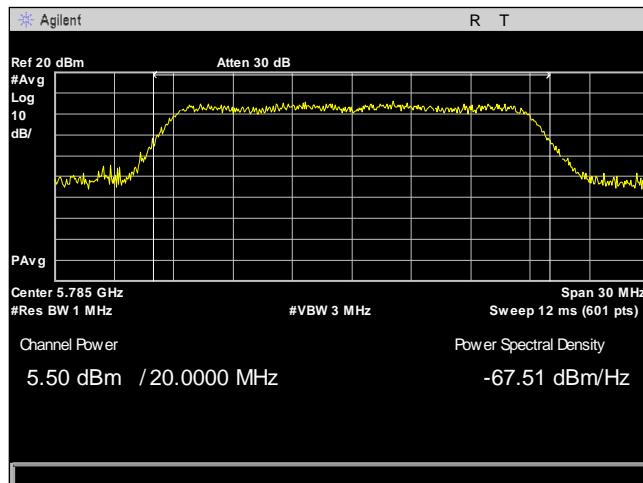


Plot 84. Conducted Transmitter Power, 802.11n 20, 5785, Path B

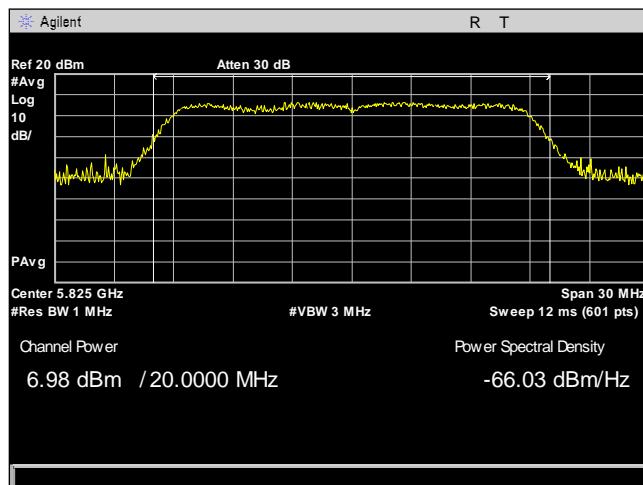


Plot 85. Conducted Transmitter Power, 802.11n 20, 5825, Path A

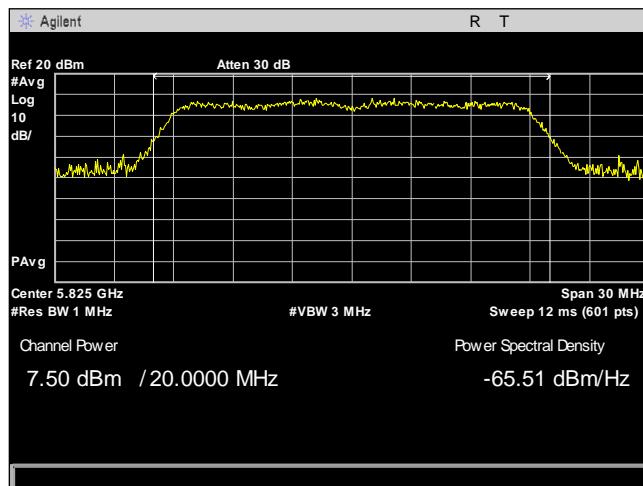


Plot 86. Conducted Transmitter Power, 802.11n 20, 5825, Path B

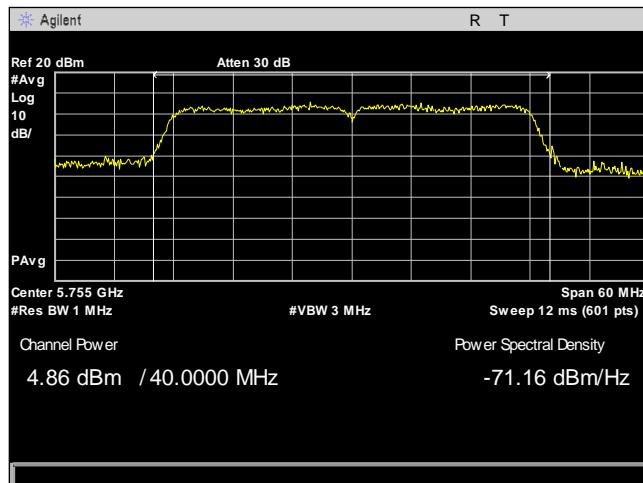


Plot 87. Conducted Transmitter Power, 802.11n 40, 5755, Path A

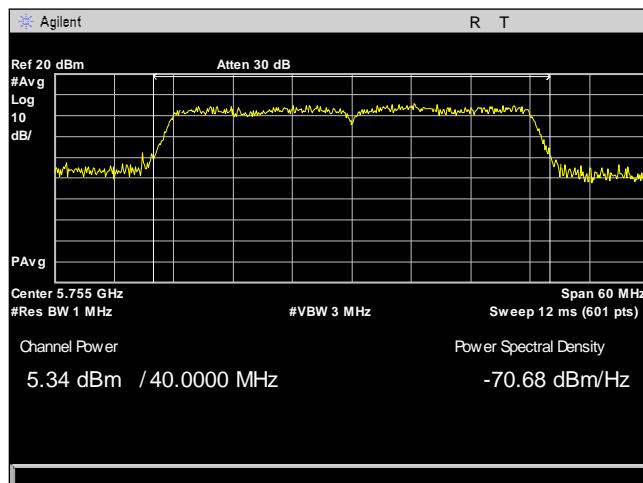

Plot 88. Conducted Transmitter Power, 802.11n 40, 5755, Path B

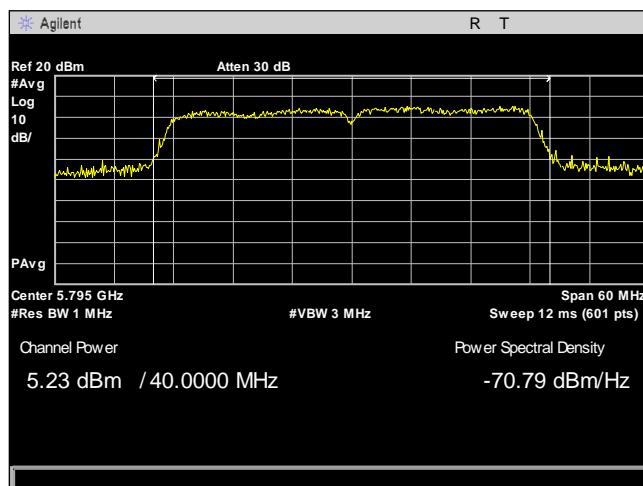

Plot 89. Conducted Transmitter Power, 802.11n 40, 5795, Path A

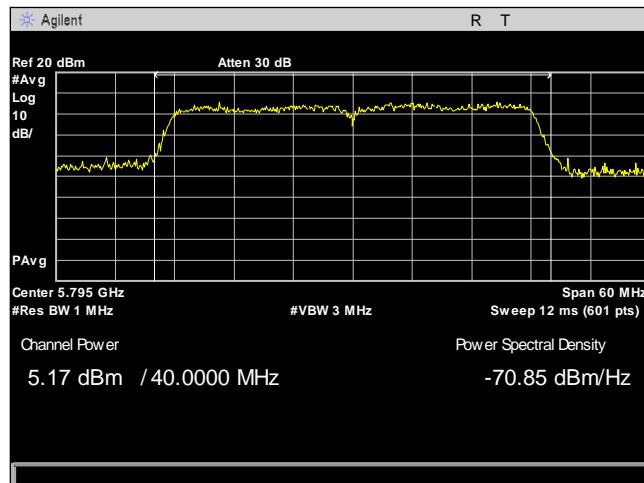

Plot 90. Conducted Transmitter Power, 802.11n 40, 5795, Path B

Electromagnetic Compatibility Criteria for Intentional Radiators

§15.407(a)(3) Maximum Power Spectral Density

Test Requirements: **§15.407(a)(3):** In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.


Test Procedure: The EUT was connected to a spectrum analyzer through a cable. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. Its power was measured according KDB 789033 D02 General UNII Test Procedures v01r04, Method SA-3. A 100 kHz RBW was used during testing and correction per Section F. 5.c.

Test Results: The EUT as tested is compliant with the requirements of this section.

No anomalies detected.

Test Engineer(s): Giuliano Messina

Test Date(s): May 4, 2017

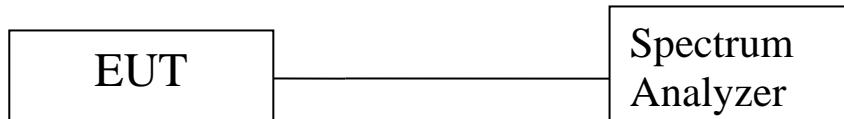



Peak Power Spectral Density						
Carrier Channel	Frequency (MHz)	Measured PSD (dBm) PathA	Measured PSD (dBm) PathB	Total PSD	Limit (dBm)	Margin (dB)
Low	5745	4.8117	4.8657	7.85	27	-19.15
Mid	5785	4.5567	4.4827	7.54	27	-19.46
High	5825	3.9167	3.6357	6.79	27	-20.21

Table 15. Power Spectral Density with Correction Added, 802.11a Mode, Test Results

Peak Power Spectral Density						
Carrier Channel	Frequency (MHz)	Measured PSD (dBm) PathA	Measured PSD (dBm) PathB	Total PSD	Limit (dBm)	Margin (dB)
Low	5745	3.4057	4.5697	7.04	27	-19.96
Mid	5785	3.5157	3.8027	6.68	27	-20.32
High	5825	4.4387	4.8847	7.68	27	-19.32

Table 16. Power Spectral Density with Correction Added, 802.11n 20 Mode, Test Results

Peak Power Spectral Density						
Carrier Channel	Frequency (MHz)	Measured PSD (dBm) PathA	Measured PSD (dBm) PathB	Total PSD	Limit (dBm)	Margin (dB)
Low	5745	4.2307	4.6017	7.44	27	-19.56
Mid	5785	3.5357	4.2527	6.92	27	-20.08
High	5825	4.7927	4.7817	7.8	27	-19.2

Table 17. Power Spectral Density with Correction Added, 802.11ac 20 Mode, Test Results

Peak Power Spectral Density						
Carrier Channel	Frequency (MHz)	Measured PSD (dBm) PathA	Measured PSD (dBm) PathB	Total PSD	Limit (dBm)	Margin (dB)
Low	5755	4.2977	3.8947	7.12	27	-19.88
Mid	--	--	--	--	--	--
High	5795	4.2737	4.6027	7.46	27	-19.54


Table 18. Power Spectral Density with Correction Added, 802.11n 40 Mode, Test Results

Peak Power Spectral Density						
Carrier Channel	Frequency (MHz)	Measured PSD (dBm) PathA	Measured PSD (dBm) PathB	Total PSD	Limit (dBm)	Margin (dB)
Low	5755	4.7537	4.5687	7.68	27	-19.32
Mid	--	--	--	--	--	--
High	5795	4.6517	3.8767	7.3	27	-19.7


Table 19. Power Spectral Density with Correction Added, 802.11ac 40 Mode, Test Results

Peak Power Spectral Density						
Carrier Channel	Frequency (MHz)	Measured PSD (dBm) PathA	Measured PSD (dBm) PathB	Total PSD	Limit (dBm)	Margin (dB)
Low	--	--	--	--	--	--
Mid	5775	-0.0423	-2.3173	1.98	27	-25.02
High	--	--	--	--	--	--


Table 20. Power Spectral Density with Correction Added, 802.11ac 80 Mode, Test Results

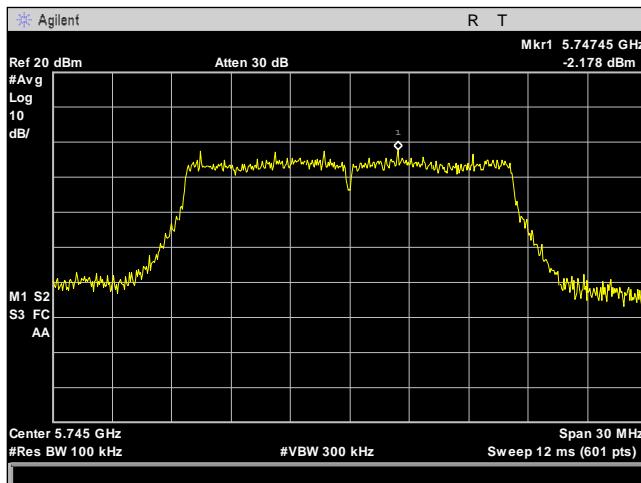


Plot 91. Power Spectral Density, 802.11a - 5745 - Path A

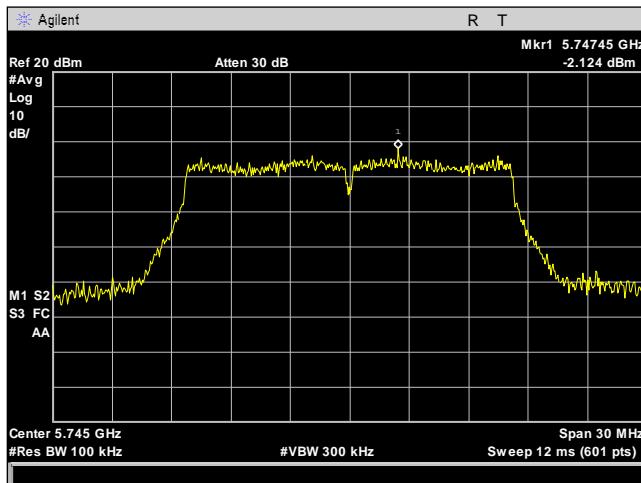


Plot 92. Power Spectral Density, 802.11a - 5745 - Path B

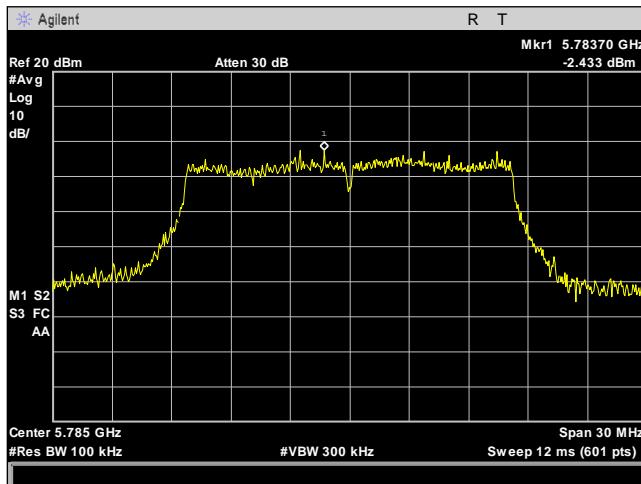


Plot 93. Power Spectral Density, 802.11a - 5785 - Path A

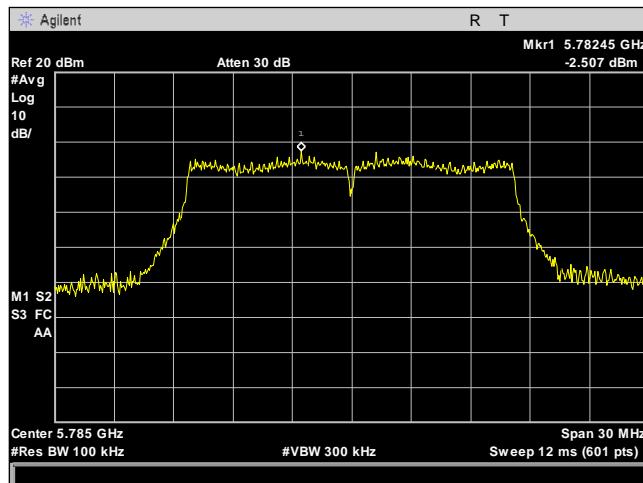


Plot 94. Power Spectral Density, 802.11a - 5785 - Path B

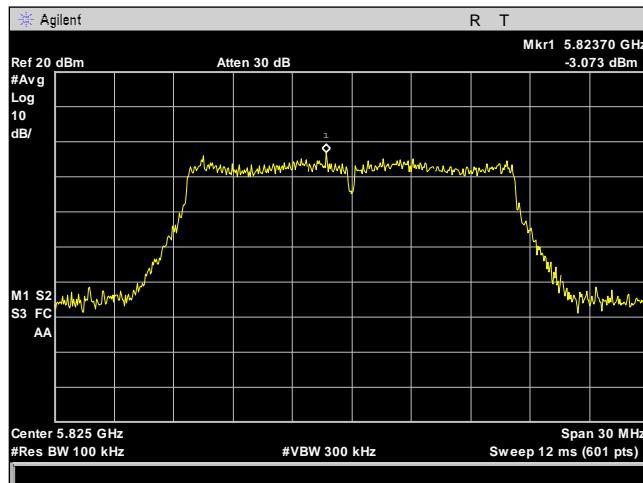


Plot 95. Power Spectral Density, 802.11a - 5825 - Path A

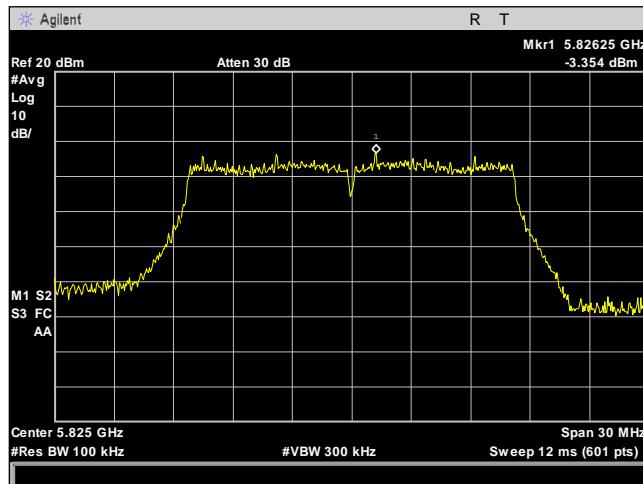


Plot 96. Power Spectral Density, 802.11a - 5825 - Path B

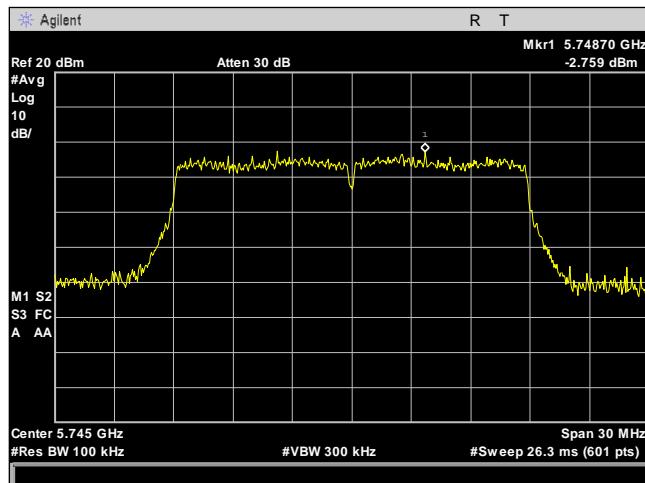


Plot 97. Power Spectral Density, 802.11ac 20 - 5745 - Path A

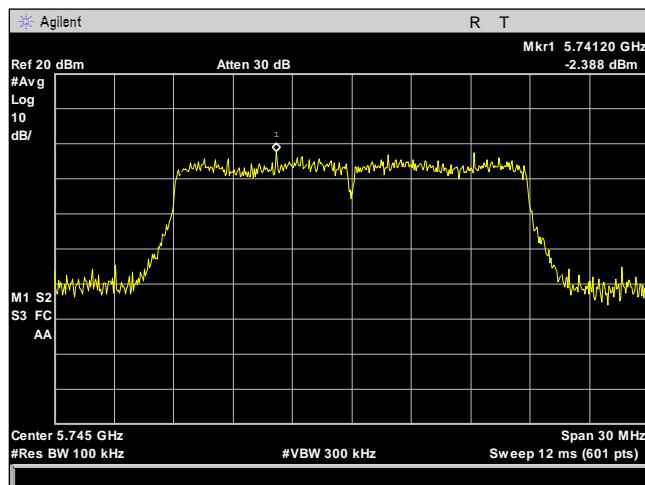


Plot 98. Power Spectral Density, 802.11ac 20 - 5745 - Path B

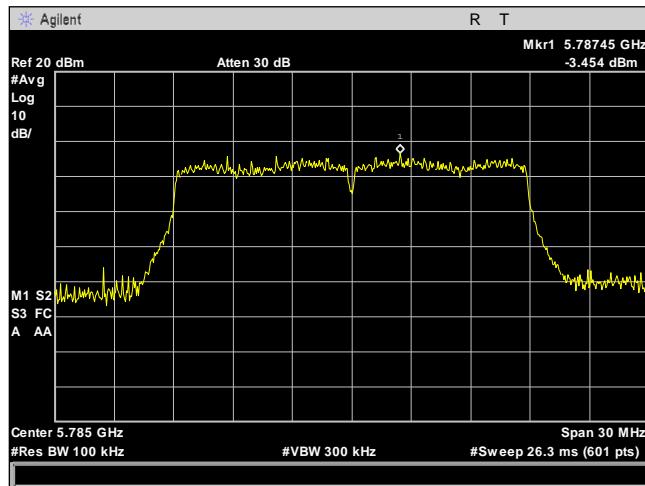


Plot 99. Power Spectral Density, 802.11ac 20 - 5785 - Path A

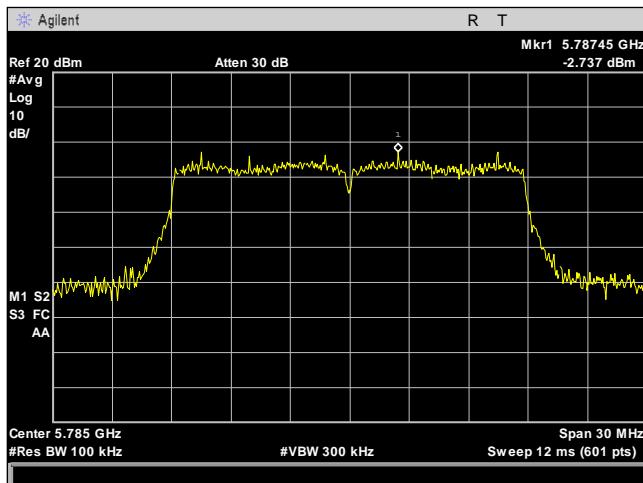


Plot 100. Power Spectral Density, 802.11ac 20 - 5785 - Path B

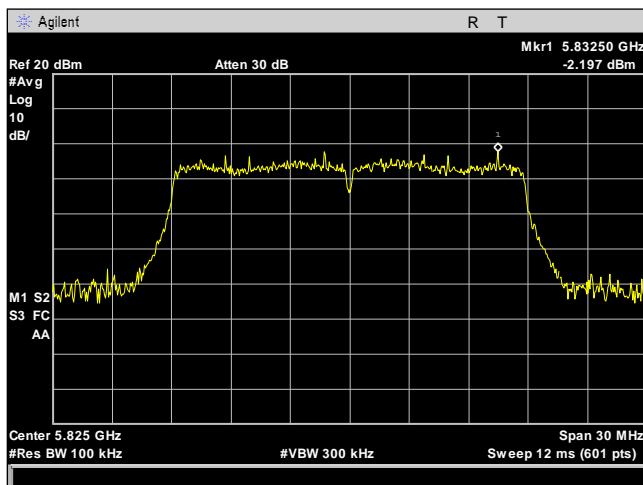


Plot 101. Power Spectral Density, 802.11ac 20 - 5825 - Path A

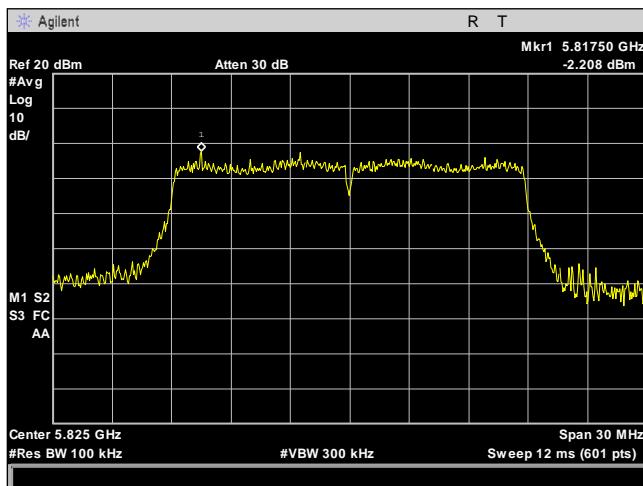


Plot 102. Power Spectral Density, 802.11ac 20 - 5825 - Path B

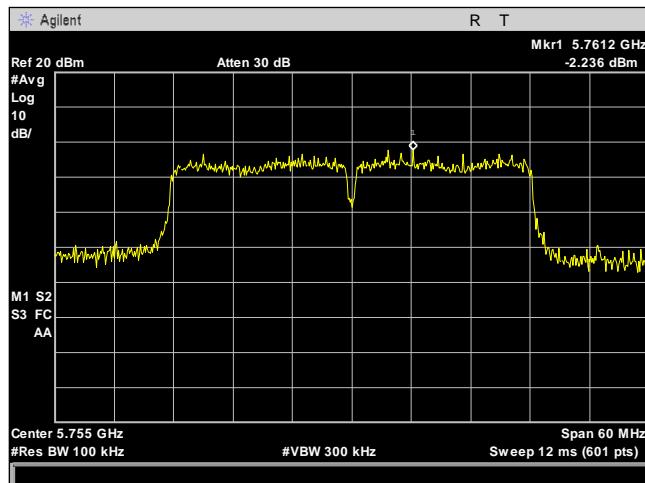


Plot 103. Power Spectral Density, 802.11ac 40 - 5755 - Path A

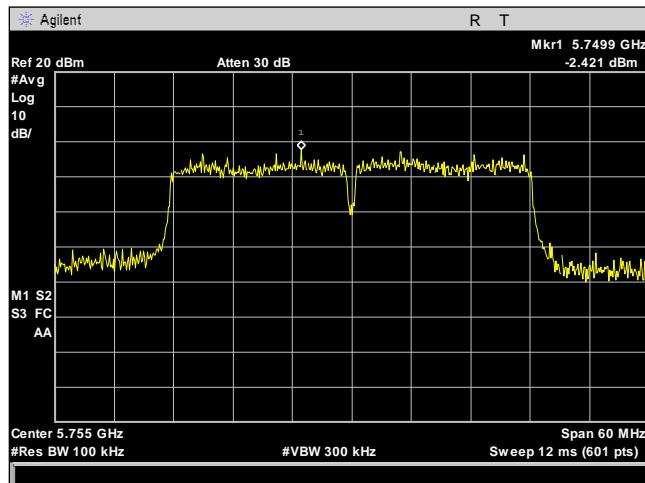


Plot 104. Power Spectral Density, 802.11ac 40 - 5755 - Path B

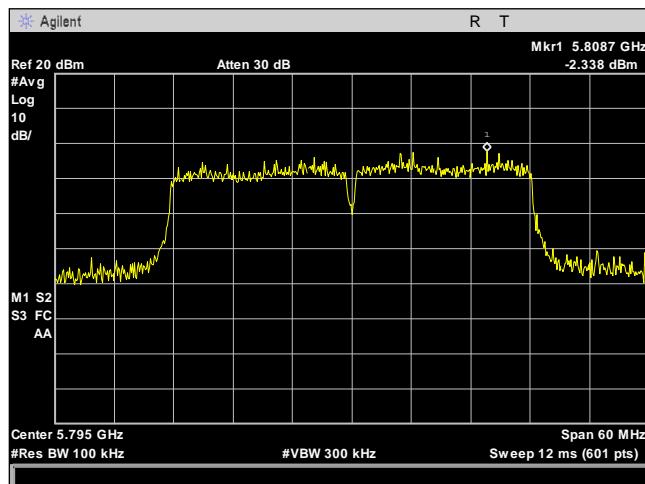


Plot 105. Power Spectral Density, 802.11ac 40 - 5795 - Path A

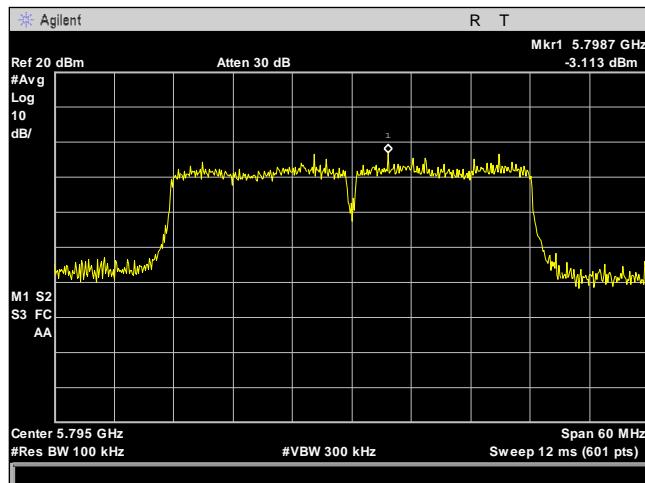


Plot 106. Power Spectral Density, 802.11ac 40 - 5795 - Path B

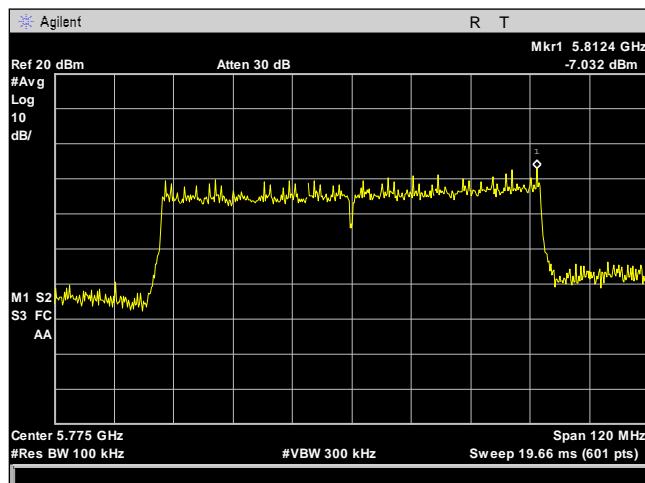


Plot 107. Power Spectral Density, 802.11ac 80 - 5775 - Path A

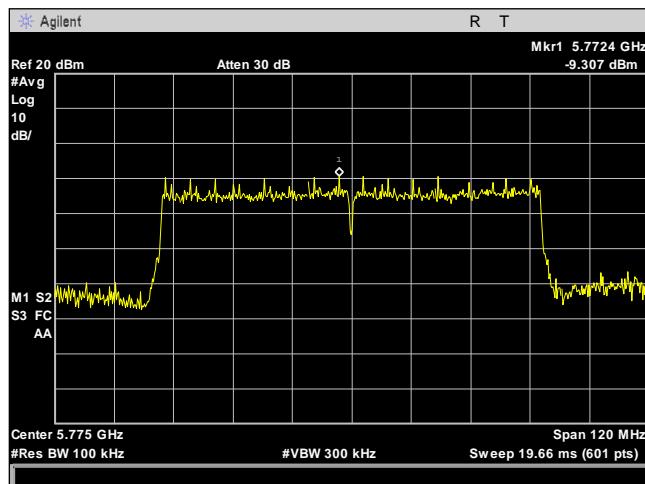


Plot 108. Power Spectral Density, 802.11ac 80 - 5775 - Path B

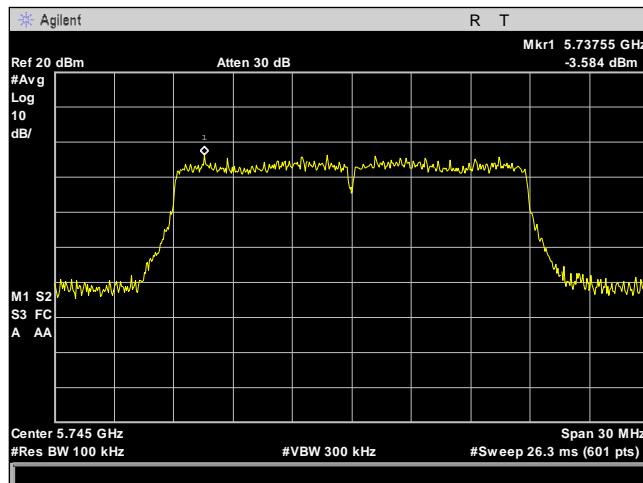


Plot 109. Power Spectral Density, 802.11n 20 - 5745 - Path A

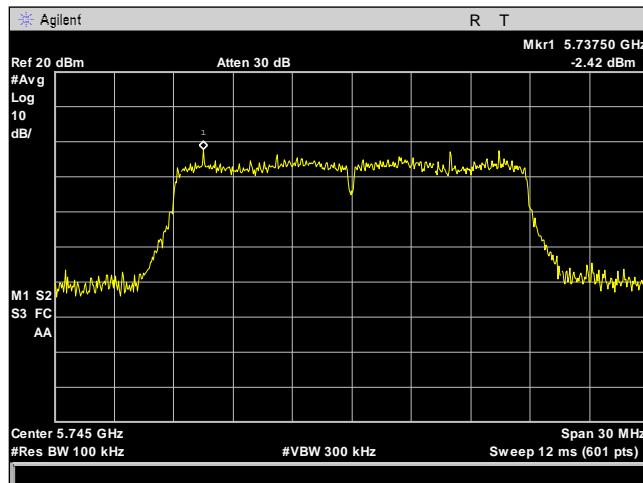


Plot 110. Power Spectral Density, 802.11n 20 - 5745 - Path B

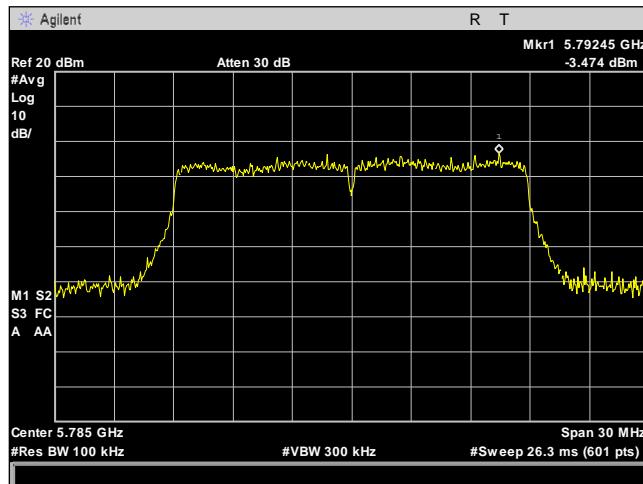


Plot 111. Power Spectral Density, 802.11n 20 - 5785 - Path A

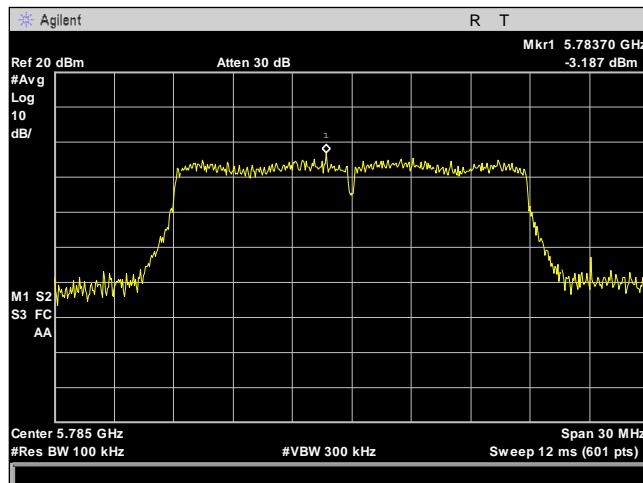


Plot 112. Power Spectral Density, 802.11n 20 - 5785 - Path B

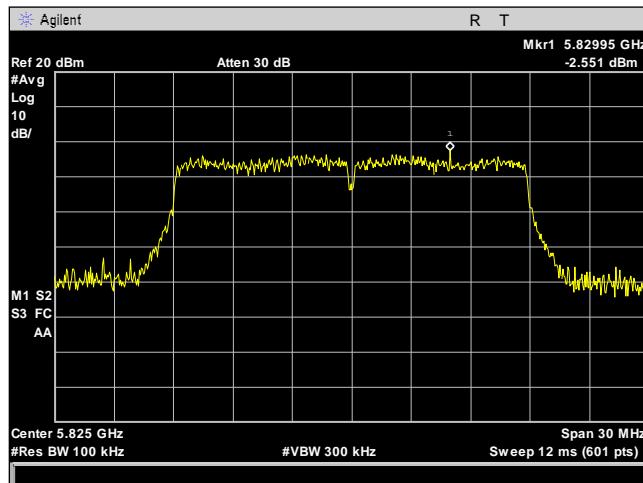


Plot 113. Power Spectral Density, 802.11n 20 - 5825 - Path A

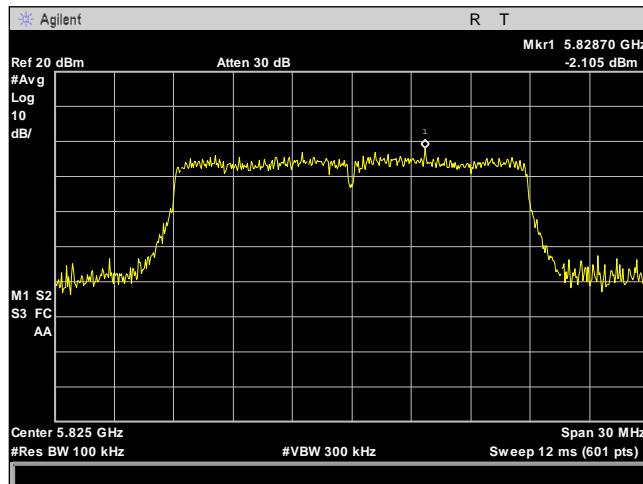


Plot 114. Power Spectral Density, 802.11n 20 - 5825 - Path B

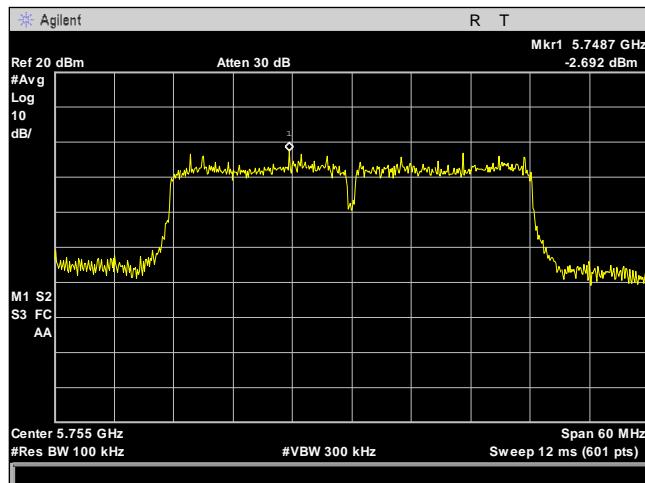


Plot 115. Power Spectral Density, 802.11n 40 - 5755 - Path A

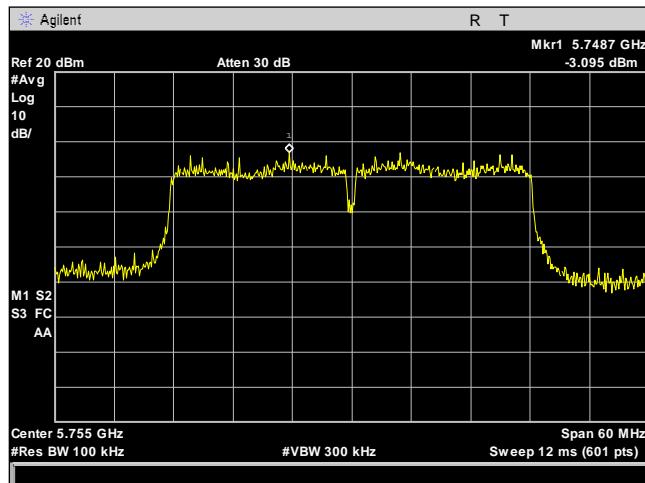

Plot 116. Power Spectral Density, 802.11n 40 - 5755 - Path B

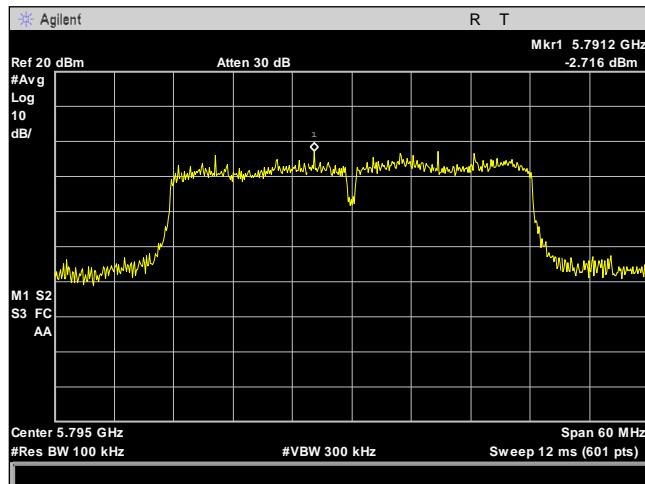

Plot 117. Power Spectral Density, 802.11n 40 - 5795 - Path A

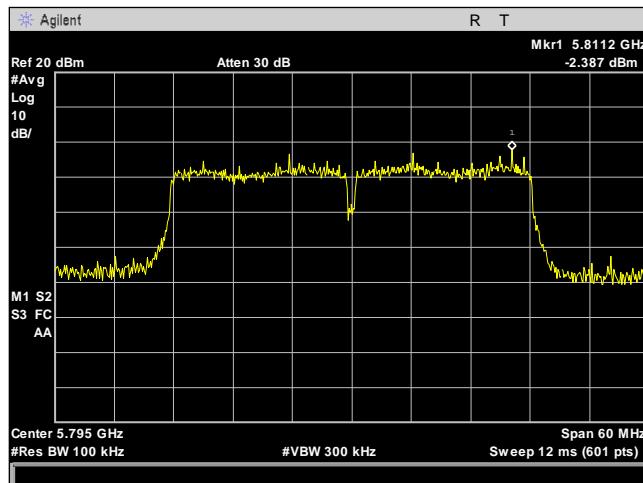

Plot 118. Power Spectral Density, 802.11n 40 - 5795 - Path B

Electromagnetic Compatibility Criteria for Intentional Radiators

§15.407(b)(4) & (6 – 7) Undesirable Emissions

Test Requirements: **§ 15.407(b)(4):** For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz ; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz .

§ 15.407(b)(6): Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

§ 15.407(b)(7): The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Test Procedure: The EUT was placed on a non-conducting stand on a turntable in a chamber. To find the maximum emission the EUT was set to transmit on low, mid, and high channels. Additionally, the turntable was rotated 360 degrees, the EUT was oriented through its three orthogonal axes, and the receive antenna height was varied in order to maximize emissions.

For frequencies from 30 MHz to 1 GHz, measurements were first made using a peak detector with a 100 kHz resolution bandwidth. Emissions which exceeded the limits were re-measured using a quasi-peak detector with a 120 kHz resolution bandwidth.

Above 1 GHz, measurements were made pursuant the method described in FCC KDB 789033 D02 General UNII Test Procedure New Rules v01. The equation, $\text{EIRP} = \mathbf{E} + 20 \log \mathbf{D} - 104.8$ was used to convert field strength to EIRP (\mathbf{E} = field strength ($\text{dB}\mu\text{V/m}$) and \mathbf{D} = Reference measurement distance).

For emissions above 1 GHz and in restricted bands, measurements of the field strength were made with a peak detector and an average detector and compared with the limits of 15.209. For measurements above 1 GHz (spurious emissions only), a bandpass filter was used in between the horn antenna and the preamp in order to block the fundamental frequency.

As an alternative, according to FCC KDB 789033 D02 General UNII Test Procedure New Rules v01, all emissions above 1 GHz that comply with the peak and average limits of 15.209 satisfy the requirements of unwanted emissions in 15.407.

Measurements were taken with the transmitter off to ensure that any frequencies over the limit were not caused by the transmitter.


Test Results: For below 1 GHz, the EUT was compliant with the requirements of this section.

For above 1 GHz, the EUT was compliant with the requirements of this section.


Only noise floor was measured above 18 GHz.

Measured emissions were within applicable limits. Emissions above the limit (Below 1 GHz) were present with the transmitter off and are likely to not be caused by the transmitter.


Test Engineer(s): Giuliano Messina
Test Date(s): May 16, 2017

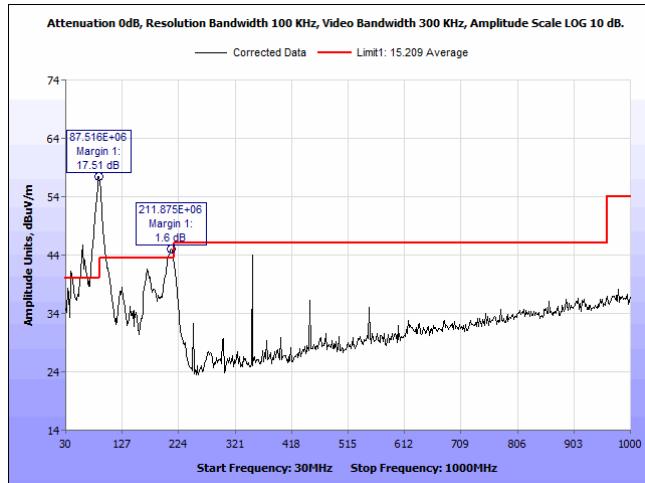


Plot 119. Spurious Emissions, TX Off

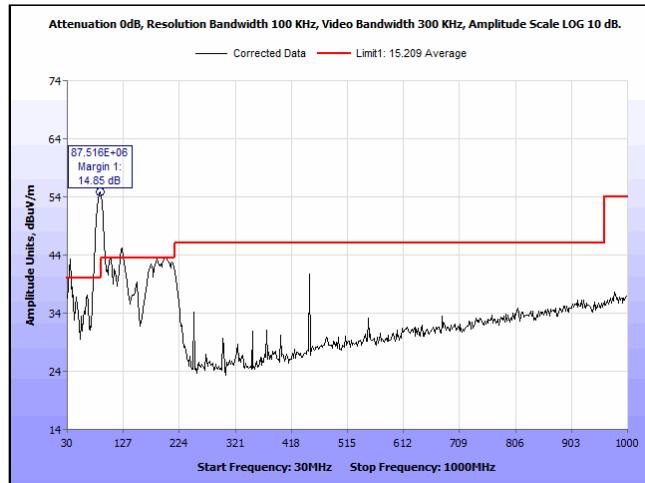


Plot 120. Spurious Emissions, 802.11a - 5745 - 30M-1GHz - QP

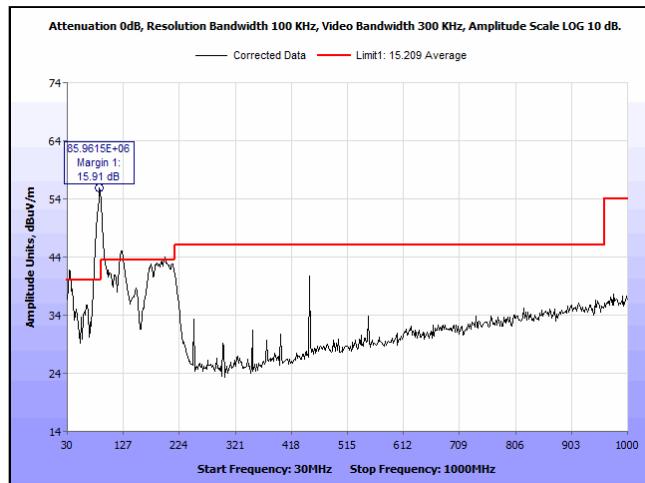


Plot 121. Spurious Emissions, 802.11a - 5785 - 30M-1GHz - QP

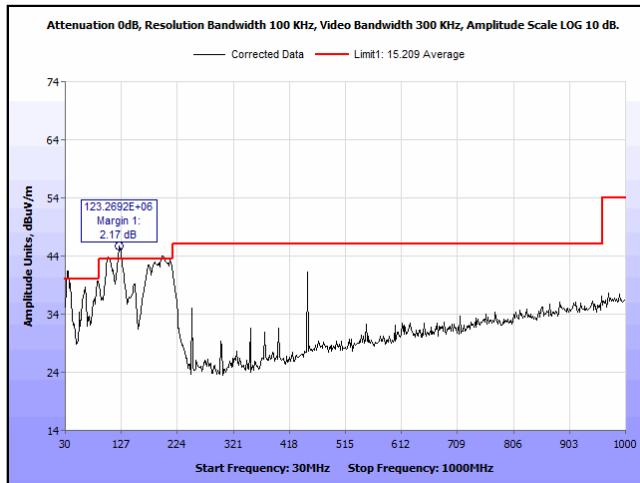


Plot 122. Spurious Emissions, 802.11a - 5825 - 30M-1GHz - QP

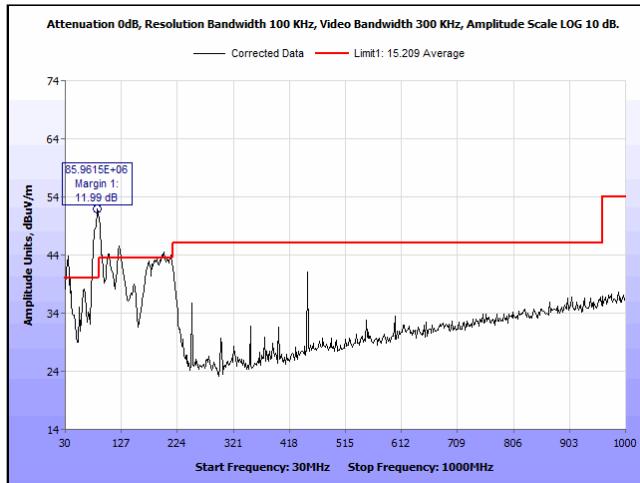


Plot 123. Spurious Emissions, 802.11ac 20 - 5745 - 30M-1GHz - QP

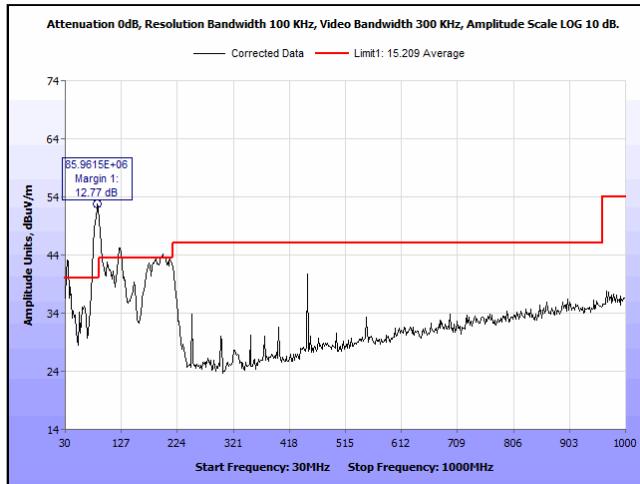


Plot 124. Spurious Emissions, 802.11ac 20 - 5785 - 30M-1GHz - QP

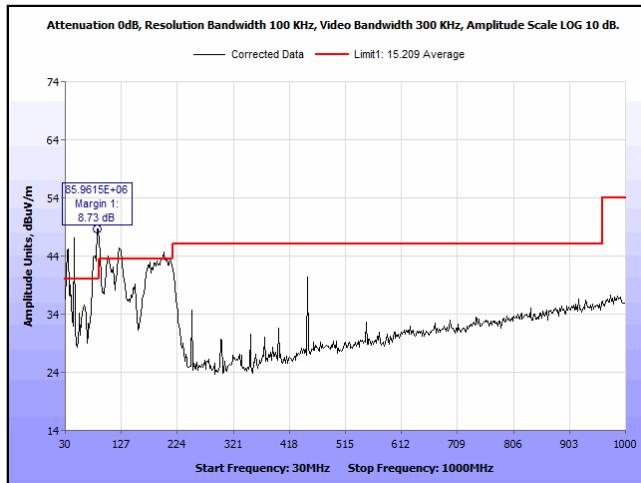


Plot 125. Spurious Emissions, 802.11ac 20 - 5825 - 30M-1GHz - QP

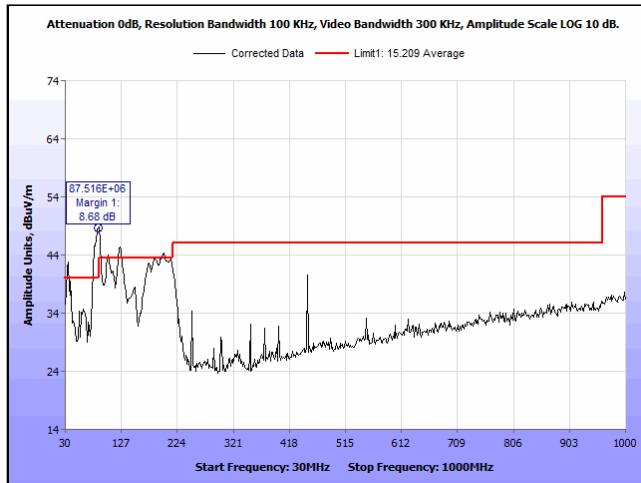


Plot 126. Spurious Emissions, 802.11ac 40 - 5755 - 30M-1GHz - QP

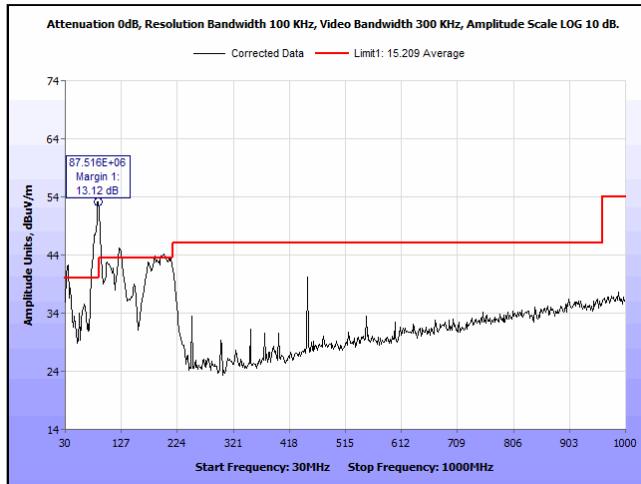


Plot 127. Spurious Emissions, 802.11ac 40 - 5795 - 30M-1GHz - QP

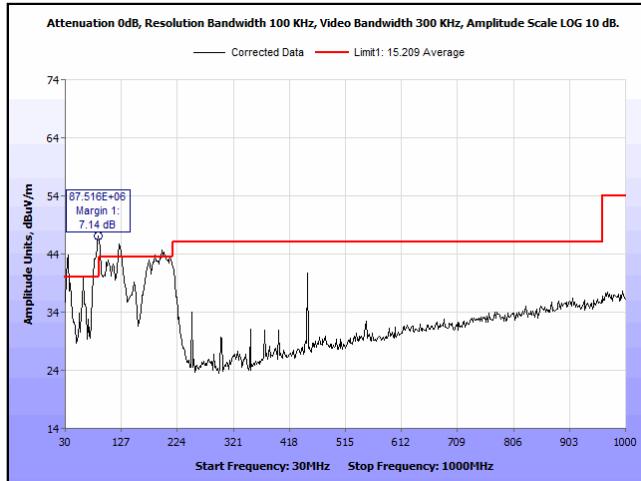


Plot 128. Spurious Emissions, 802.11ac 80 - 5775 - 30M-1GHz - QP

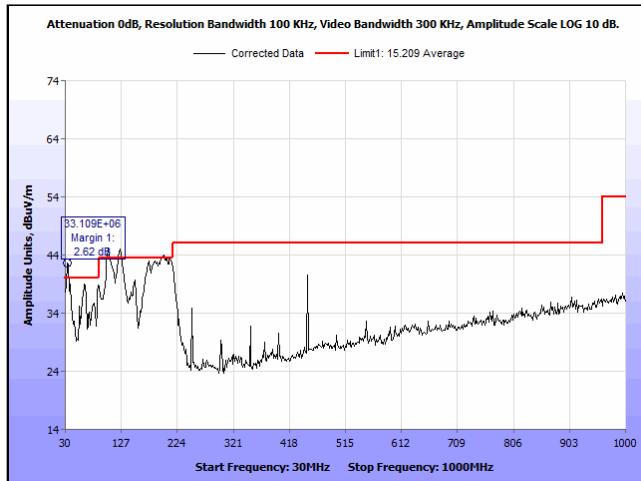


Plot 129. Spurious Emissions, 802.11n 20 - 5745 - 30M-1GHz - QP

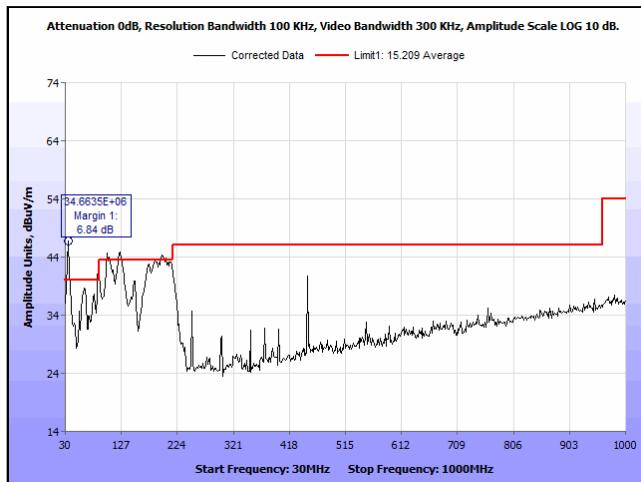


Plot 130. Spurious Emissions, 802.11n 20 - 5785 - 30M-1GHz - QP

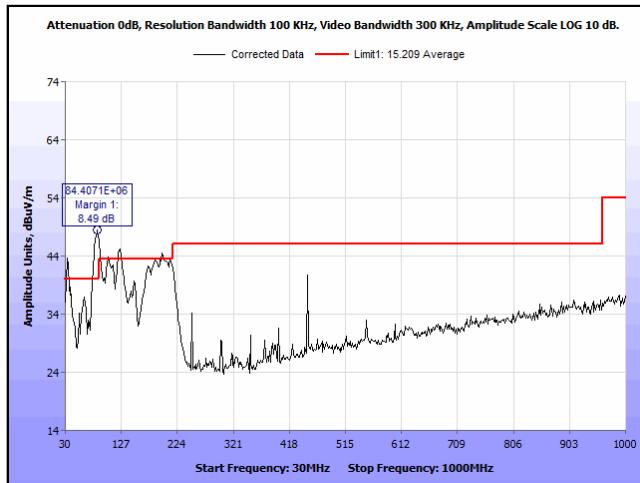


Plot 131. Spurious Emissions, 802.11n 20 - 5825 - 30M-1GHz - QP

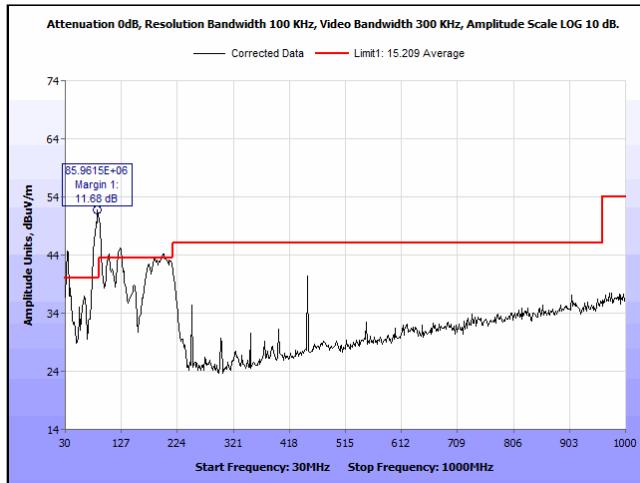


Plot 132. Spurious Emissions, 802.11n 40 - 5755 - 30M-1GHz - QP

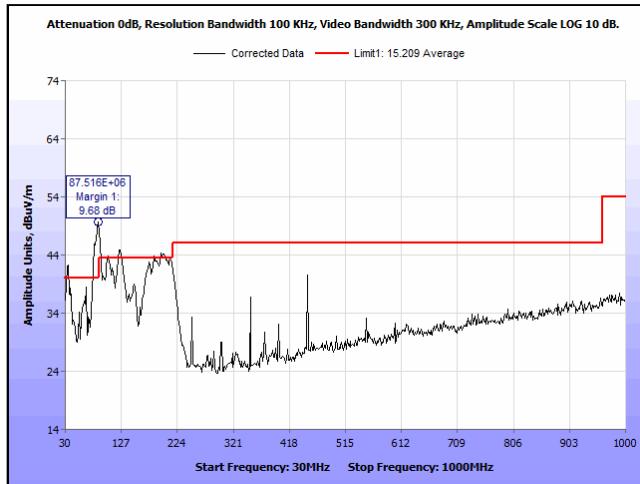


Plot 133. Spurious Emissions, 802.11n 40 - 5795 - 30M-1GHz - QP

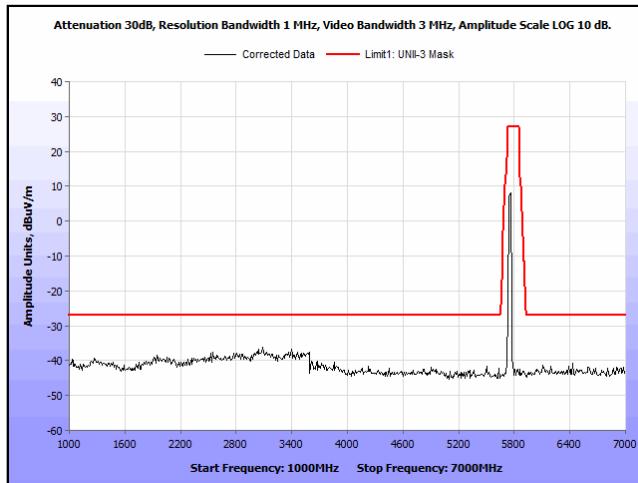


Plot 134. Undesirable Emissions, 802.11a - 5745 - EIRP - 1-7GHz

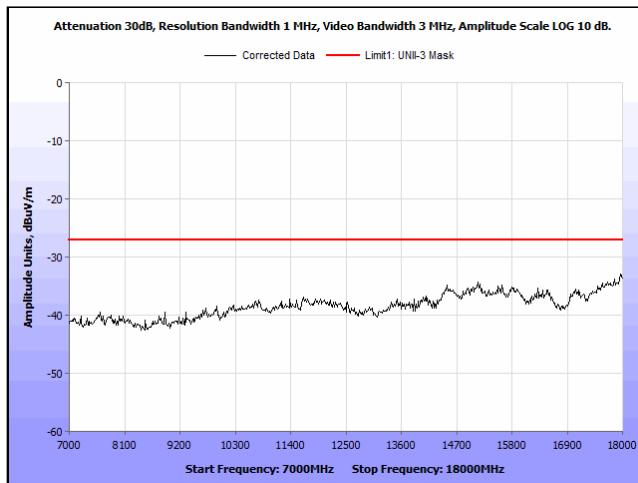


Plot 135. Undesirable Emissions, 802.11a - 5745 - EIRP - 7-18GHz

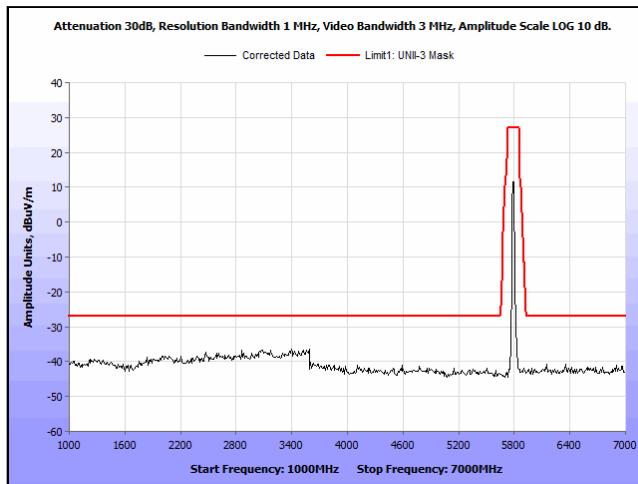


Plot 136. Undesirable Emissions, 802.11a - 5785 - EIRP - 1-7GHz

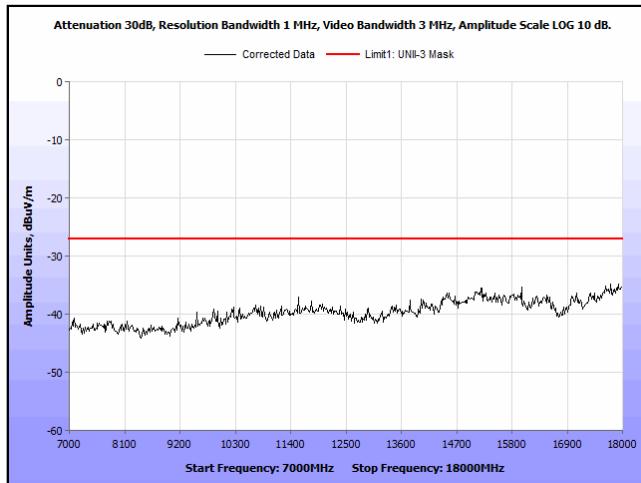


Plot 137. Undesirable Emissions, 802.11a - 5785 - EIRP - 7-18GHz

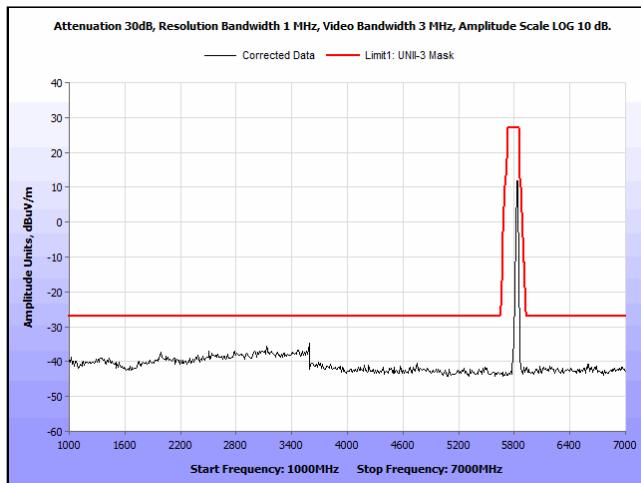


Plot 138. Undesirable Emissions, 802.11a - 5825 - EIRP - 1-7GHz

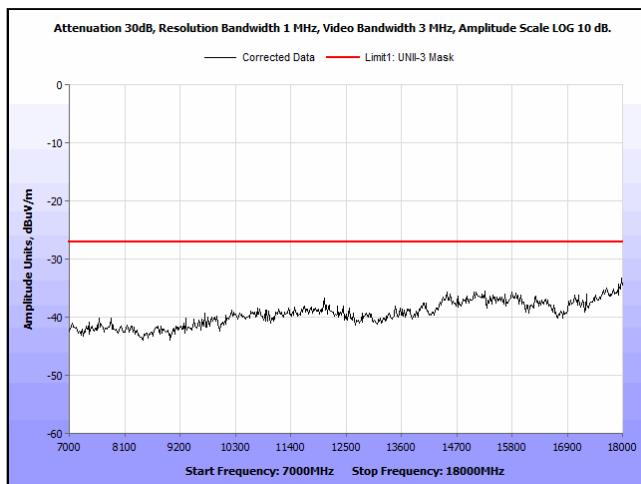


Plot 139. Undesirable Emissions, 802.11a - 5825 - EIRP - 7-18GHz

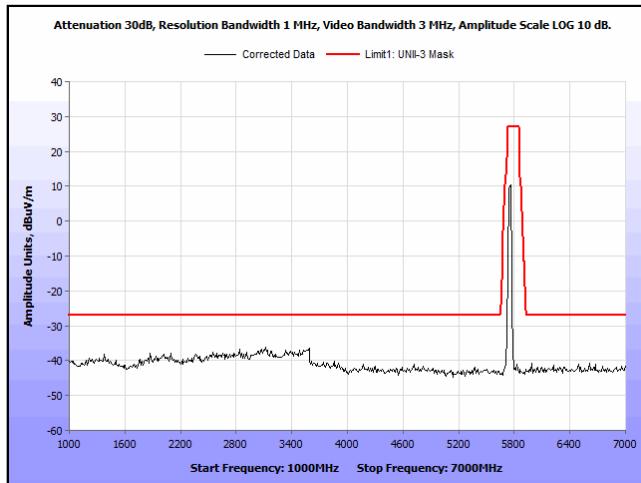


Plot 140. Undesirable Emissions, 802.11ac 20 - 5745 - EIRP - 1-7GHz

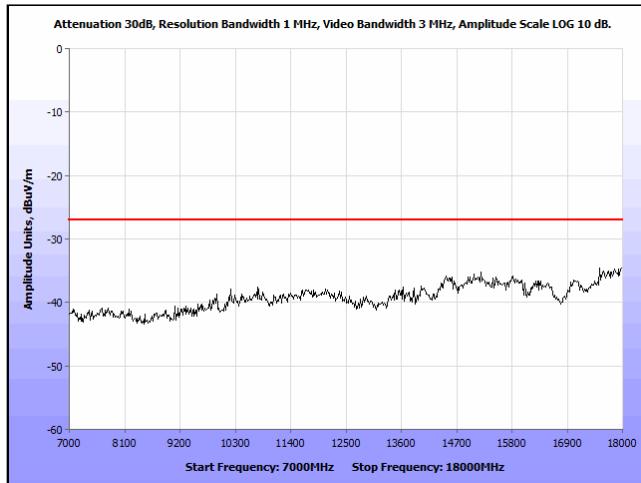


Plot 141. Undesirable Emissions, 802.11ac 20 - 5745 - EIRP - 7-18GHz

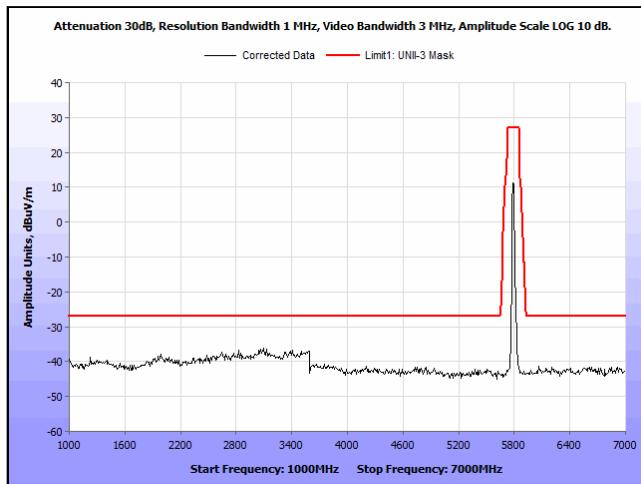


Plot 142. Undesirable Emissions, 802.11ac 20 - 5785 - EIRP - 1-7GHz

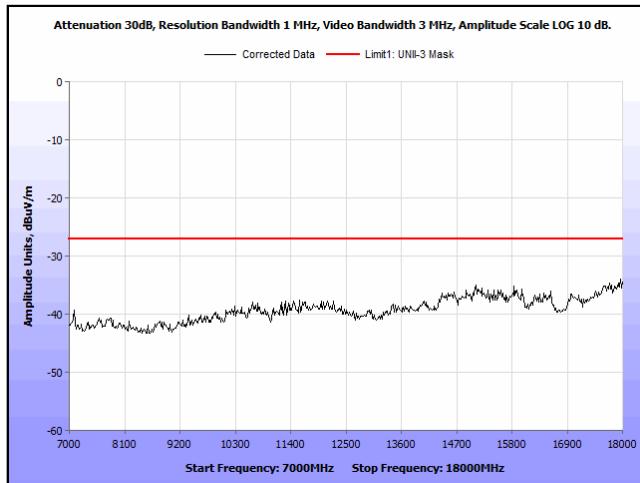


Plot 143. Undesirable Emissions, 802.11ac 20 - 5785 - EIRP - 7-18GHz

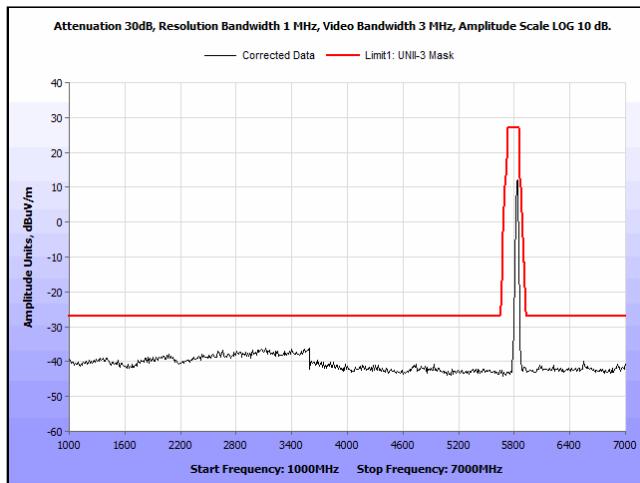


Plot 144. Undesirable Emissions, 802.11ac 20 - 5825 - EIRP - 1-7GHz

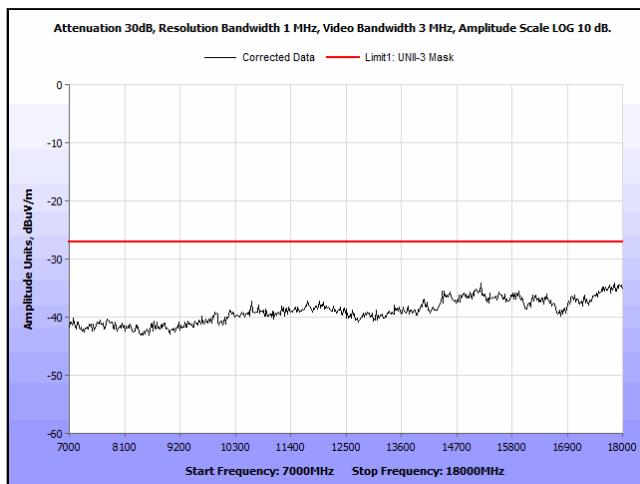


Plot 145. Undesirable Emissions, 802.11ac 20 - 5825 - EIRP - 7-18GHz

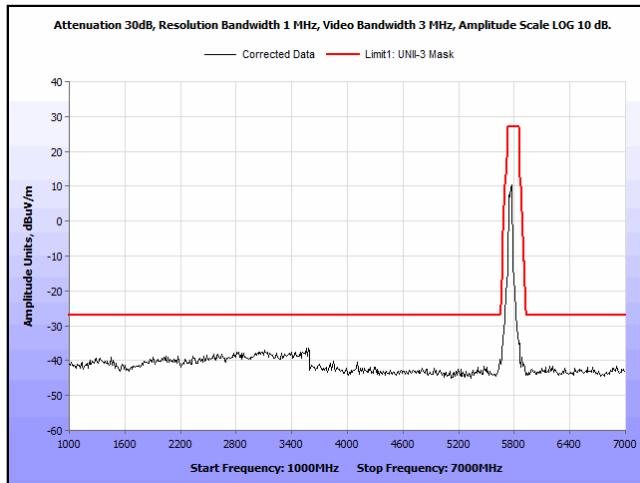


Plot 146. Undesirable Emissions, 802.11ac 40 - 5755 - EIRP - 1-7GHz

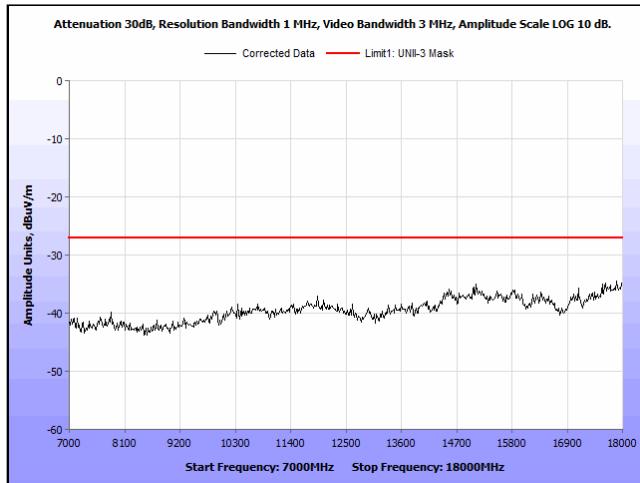


Plot 147. Undesirable Emissions, 802.11ac 40 - 5755 - EIRP - 7-18GHz

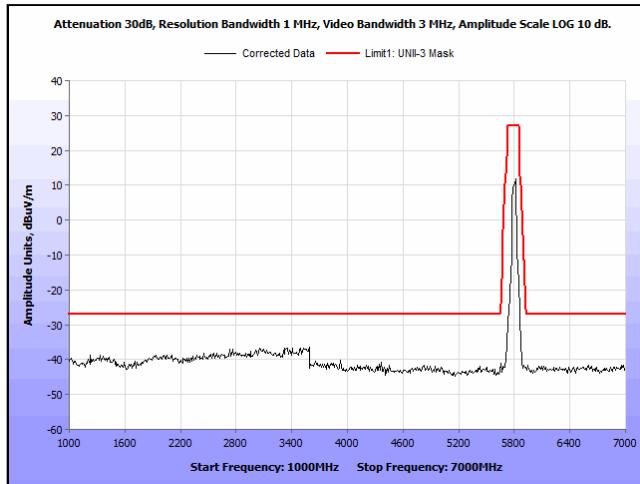


Plot 148. Undesirable Emissions, 802.11ac 40 - 5795 - EIRP - 1-7GHz

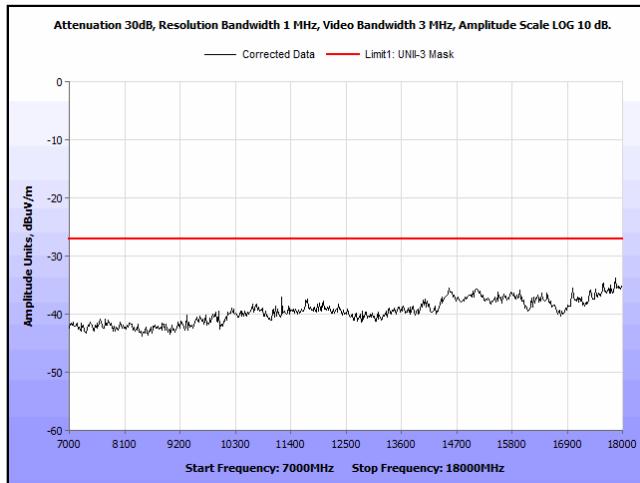


Plot 149. Undesirable Emissions, 802.11ac 40 - 5795 - EIRP - 7-18GHz

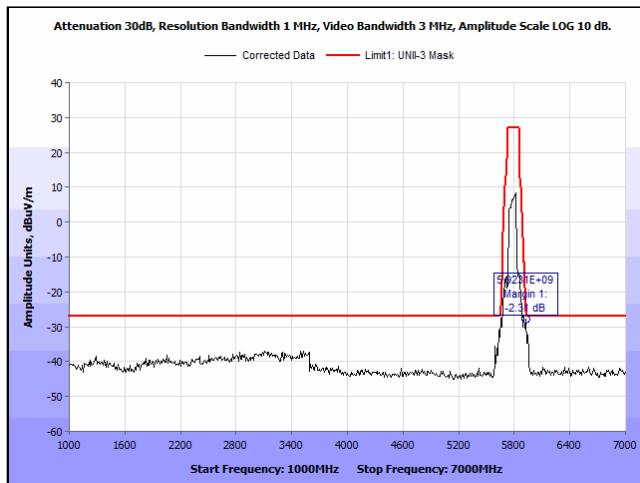


Plot 150. Undesirable Emissions, 802.11ac 80 - 5775 - EIRP - 1-7GHz

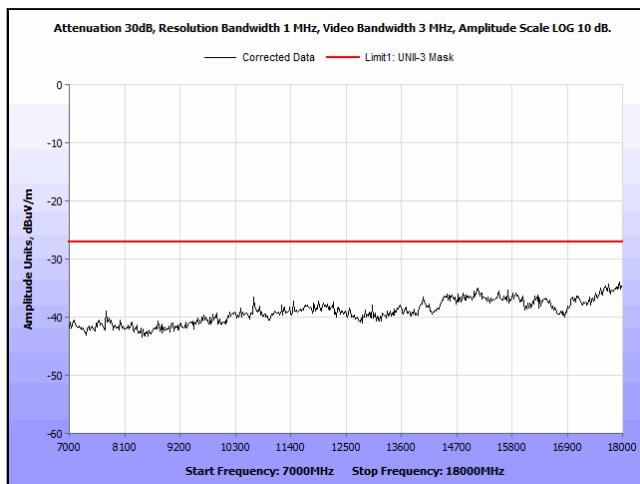


Plot 151. Undesirable Emissions, 802.11ac 80 - 5775 - EIRP - 7-18GHz

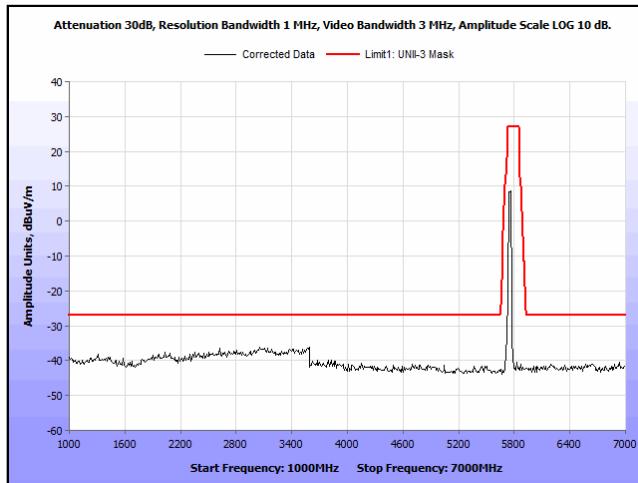


Plot 152. Undesirable Emissions, 802.11n 20 - 5745 - EIRP - 1-7GHz

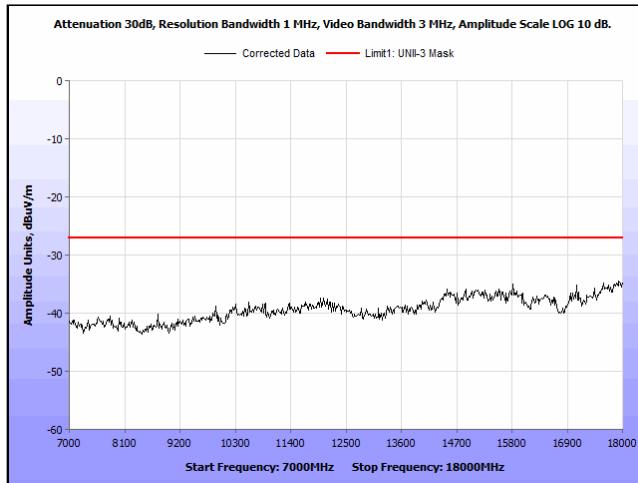


Plot 153. Undesirable Emissions, 802.11n 20 - 5745 - EIRP - 7-18GHz

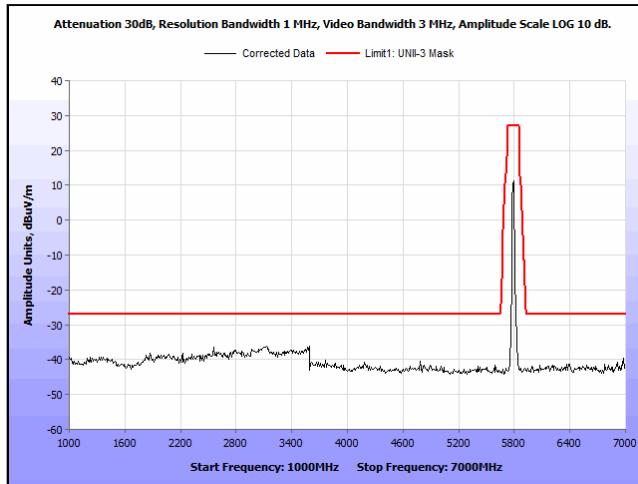


Plot 154. Undesirable Emissions, 802.11n 20 - 5785 - EIRP - 1-7GHz

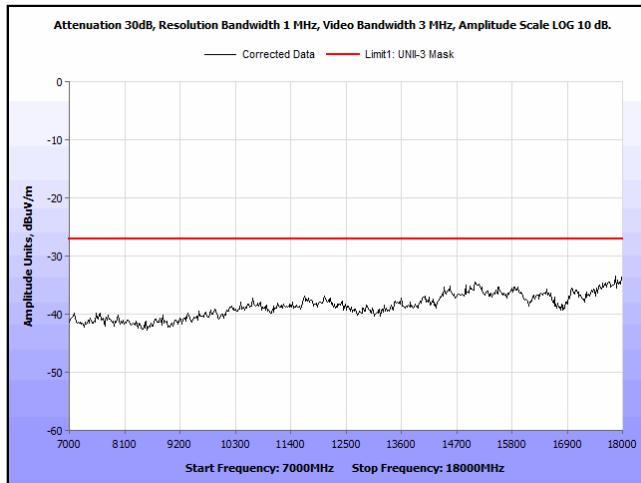


Plot 155. Undesirable Emissions, 802.11n 20 - 5785 - EIRP - 7-18GHz

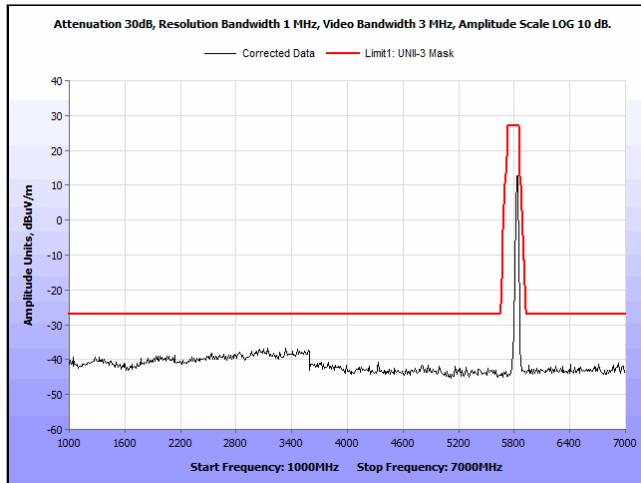


Plot 156. Undesirable Emissions, 802.11n 20 - 5825 - EIRP - 1-7GHz

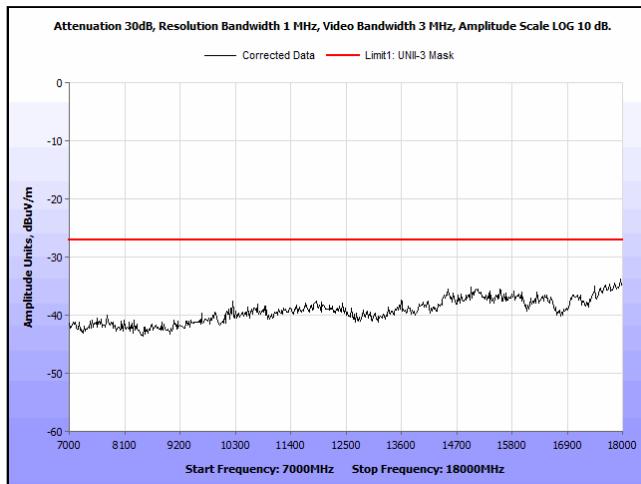


Plot 157. Undesirable Emissions, 802.11n 20 - 5825 - EIRP - 7-18GHz

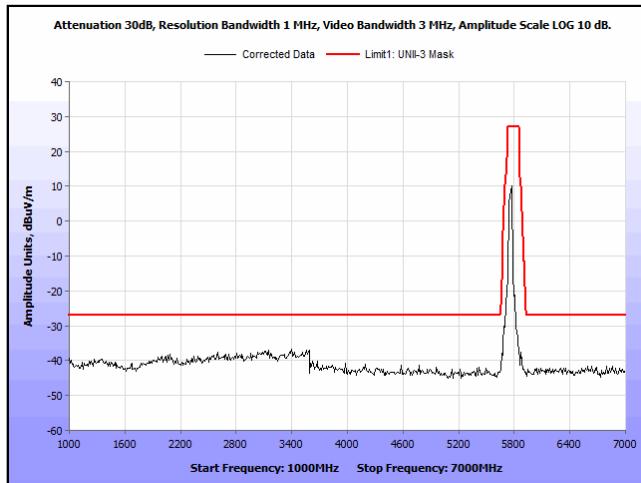


Plot 158. Undesirable Emissions, 802.11n 40 - 5755 - EIRP - 1-7GHz

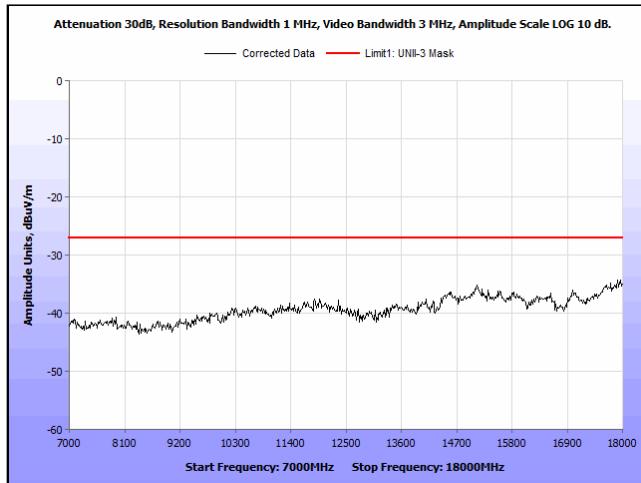

Plot 159. Undesirable Emissions, 802.11n 40 - 5755 - EIRP - 7-18GHz

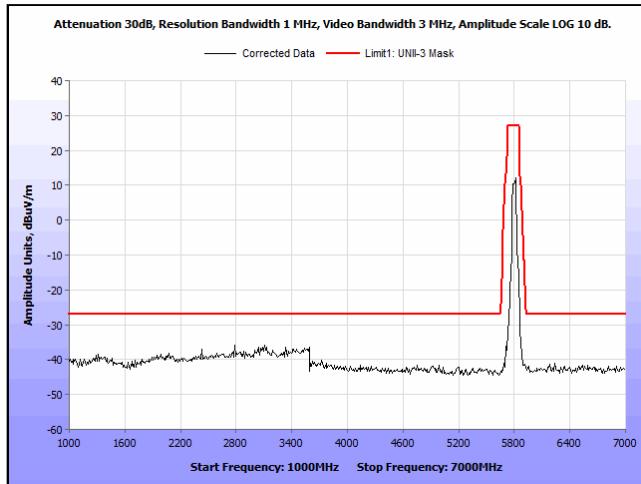


Plot 160. Undesirable Emissions, 802.11n 40 - 5795 - EIRP - 1-7GHz

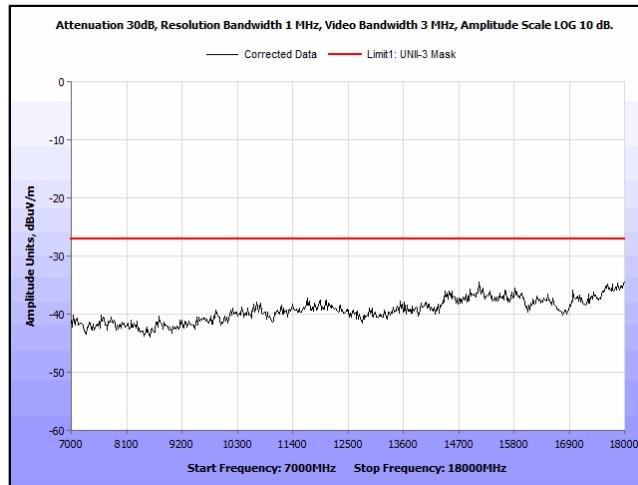


Plot 161. Undesirable Emissions, 802.11n 40 - 5795 - EIRP - 7-18GHz


Band Edge

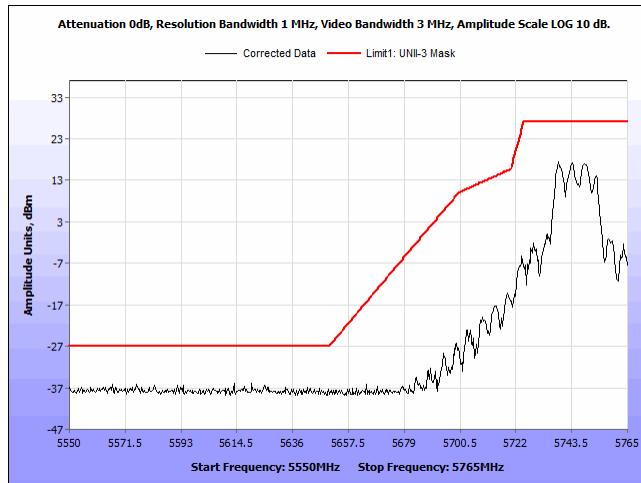


Plot 162. Undesirable Emissions, Bandedge, 802.11a, 5745 MHz, EIRP

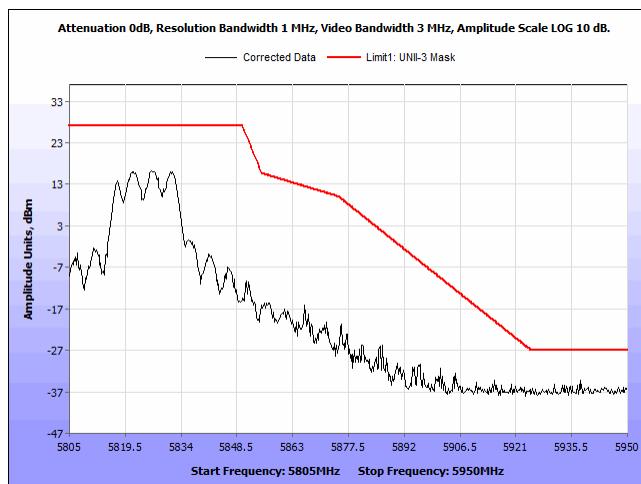


Plot 163. Undesirable Emissions, Bandedge, 802.11a, 5825 MHz, EIRP

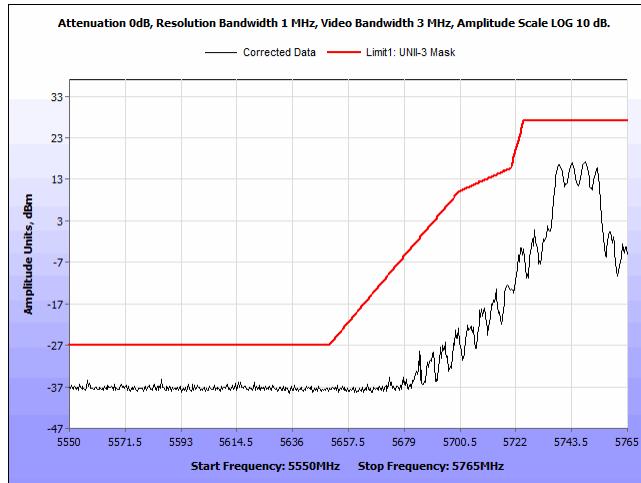


Plot 164. Undesirable Emissions, Bandedge, 802.11ac 20 MHz, 5745 MHz, EIRP

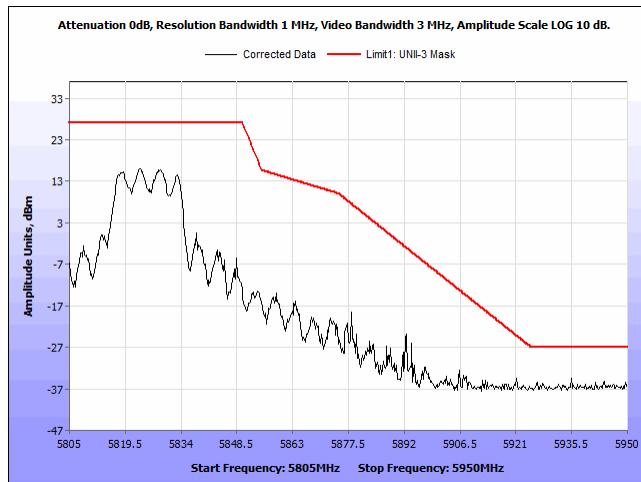


Plot 165. Undesirable Emissions, Bandedge, 802.11ac 20 MHz, 5825 MHz, EIRP

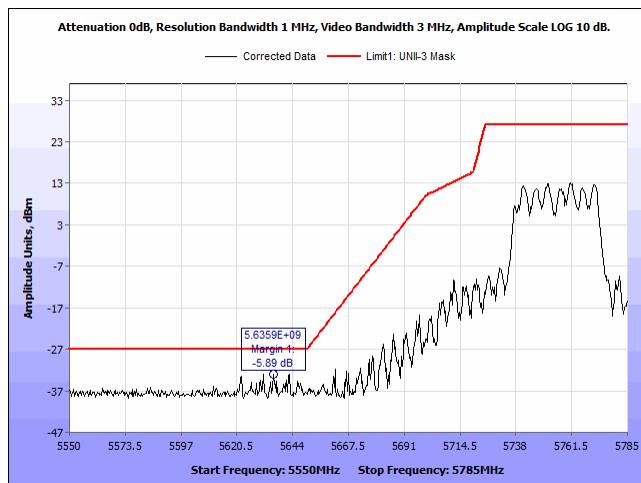


Plot 166. Undesirable Emissions, Bandedge, 802.11ac 40 MHz, 5755 MHz, EIRP

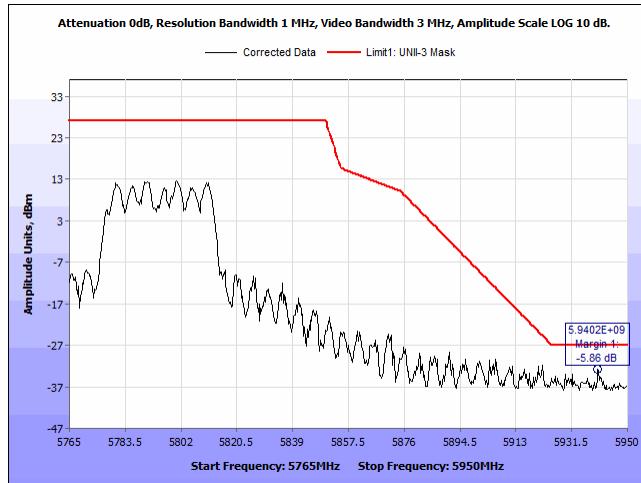


Plot 167. Undesirable Emissions, Bandedge, 802.11ac 40 MHz, 5795 MHz, EIRP

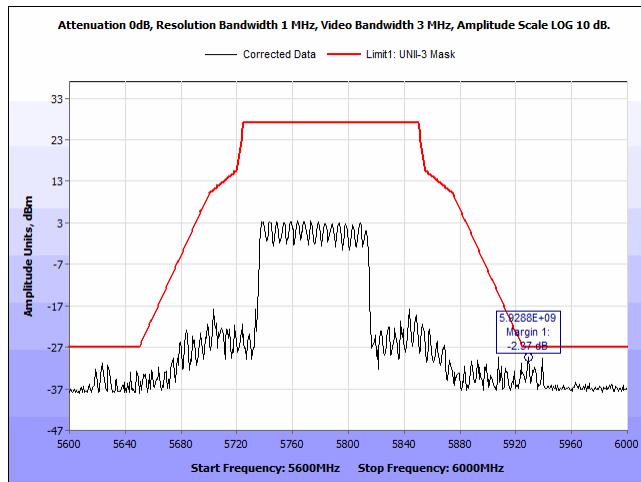


Plot 168. Undesirable Emissions, Bandedge, 802.11ac 80 MHz, 5775 MHz, EIRP

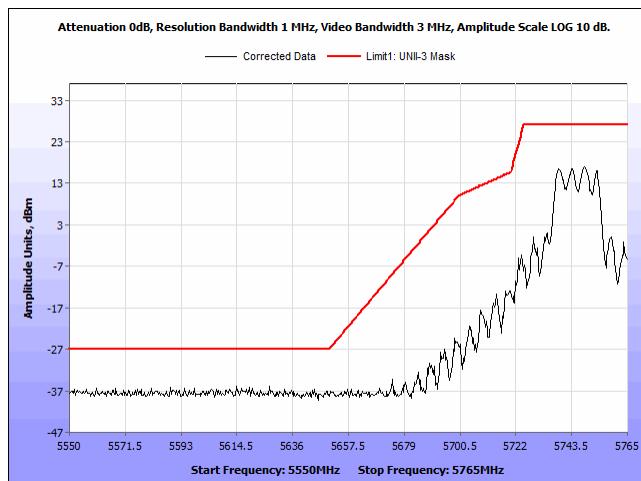


Plot 169. Undesirable Emissions, Bandedge, 802.11n 20 MHz, 5745 MHz, EIRP

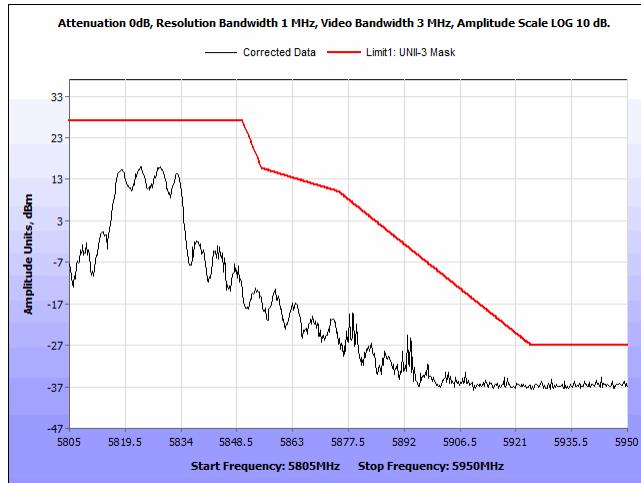

Plot 170. Undesirable Emissions, Bandedge, 802.11n 20 MHz, 5825 MHz, EIRP

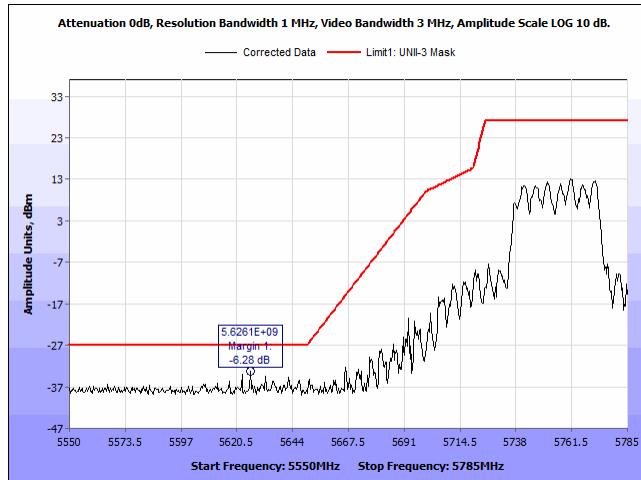

Plot 171. Undesirable Emissions, Bandedge, 802.11n 40 MHz, 5755 MHz, EIRP

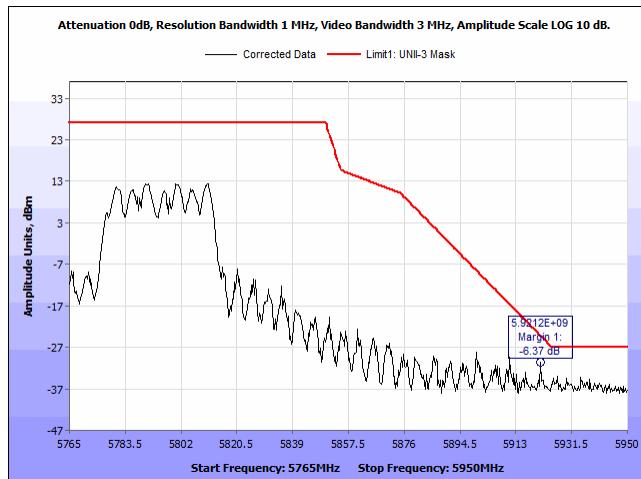


Plot 172. Undesirable Emissions, Bandedge, 802.11n 40 MHz, 5795 MHz, EIRP


Radiated Emissions Test Setup Photos




Photograph 1. Radiated setup, 30M-1GHz front view

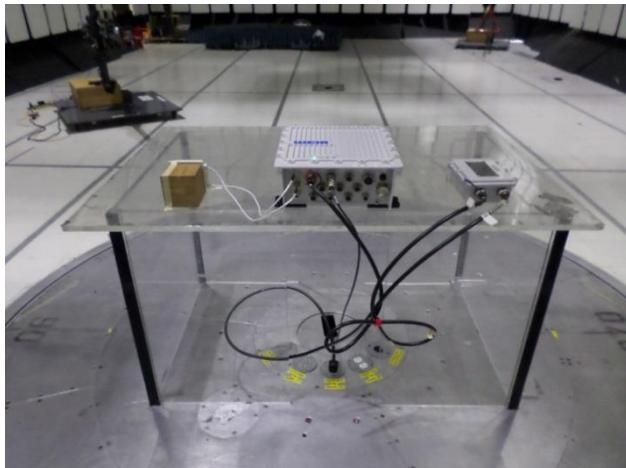

Photograph 2. Radiated setup, 30M-1GHz rear view

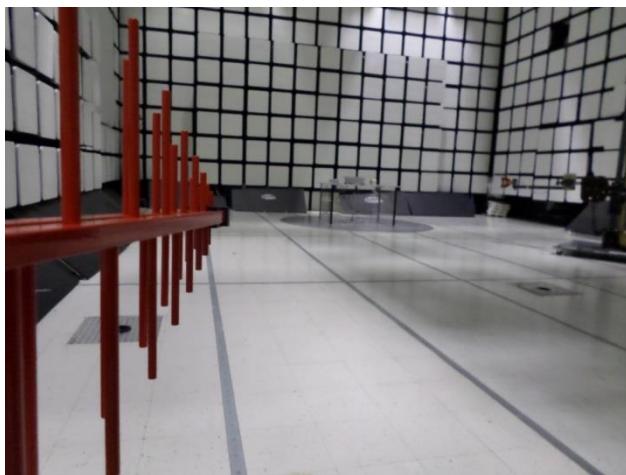

Photograph 3. Radiated setup, 30M-1GHz antenna view

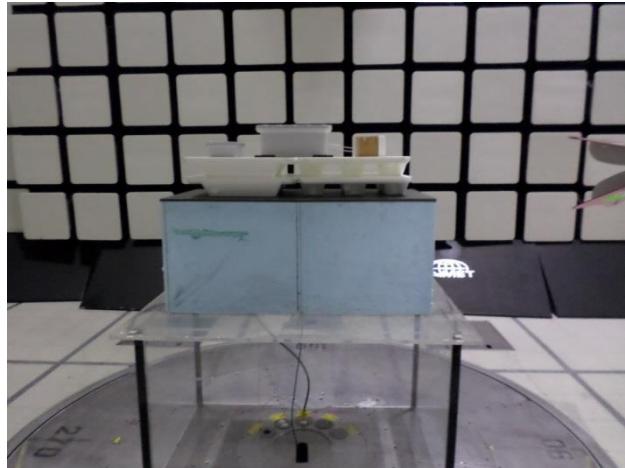


Photograph 4. Radiated setup, 1-18GHz front view



Photograph 5. Radiated setup, 1-18GHz rear view



Photograph 6. Radiated setup, 1-18GHz, antenna view

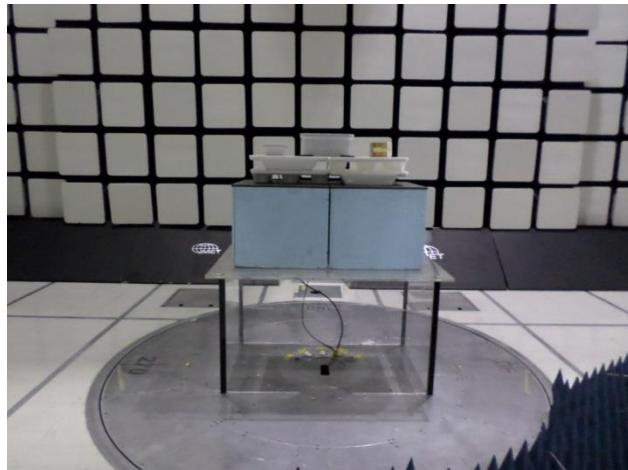

Photograph 7. Radiated setup, 18-40GHz front view



Photograph 8. Radiated setup, 18-40GHz rear view



Photograph 9. Radiated setup, 18-40GHz antenna view

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(b)(6) Conducted Emissions

Test Requirement(s): **§ 15.407 (b)(6):** Any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

§ 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Σ line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 – 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Table 21. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure:

The EUT was placed on a non-metallic table above a ground plane. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2014 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. Scans were performed with the transmitter on. Measurements were taken with the transmitter off to ensure that any frequencies over the limit were not caused by the transmitter.


Test Results:

The EUT was compliant with requirements of this section. Emissions above the limit were also present with the transmitter off and are likely to not be caused by the transmitter.


Test Engineer(s): Giuliano Messina

Test Date(s): May 12, 2017


15.207(a) Conducted Emissions Test Results

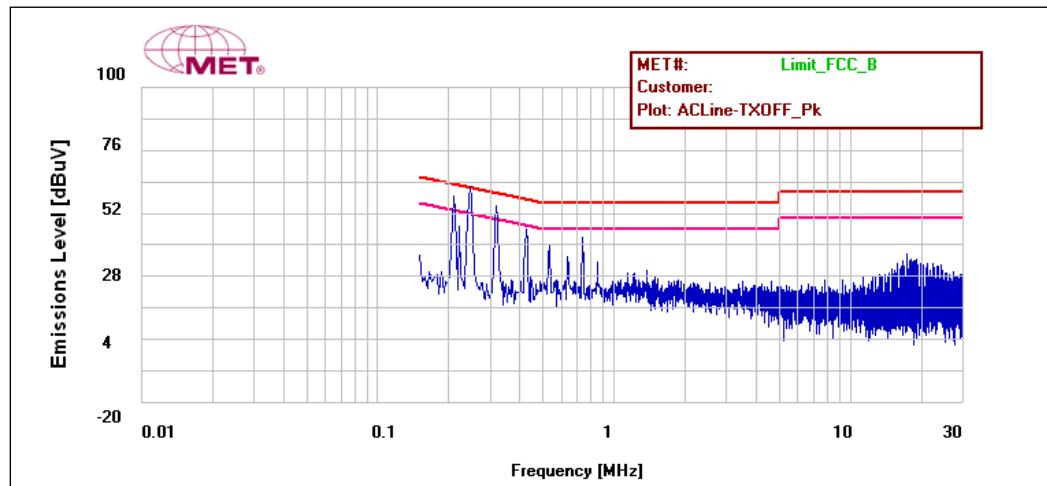


Plot 173. Conducted Emissions, 15.207(a), Transmit Off, Phase Line

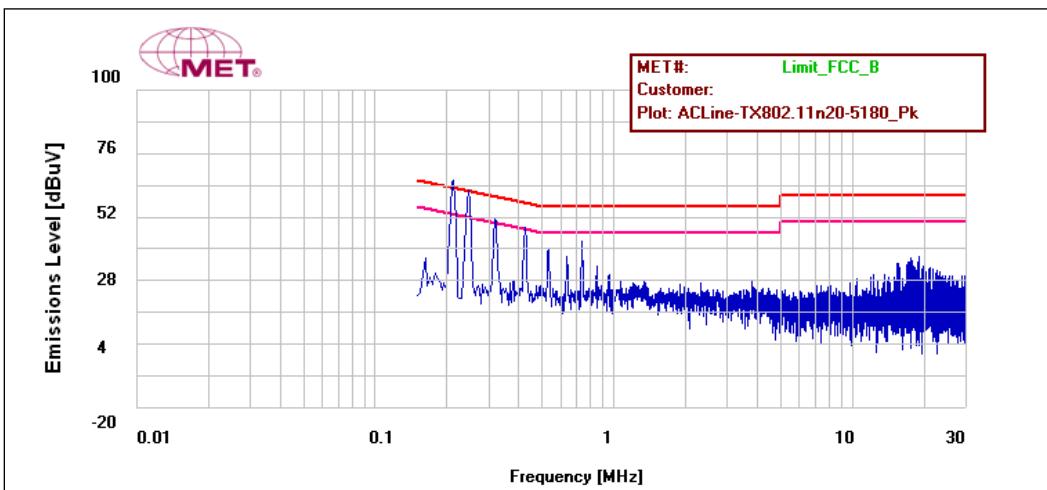

Plot 174. Conducted Emissions, 15.207(a), 5 GHz UNII-1, 802.11n HT20, Phase Line

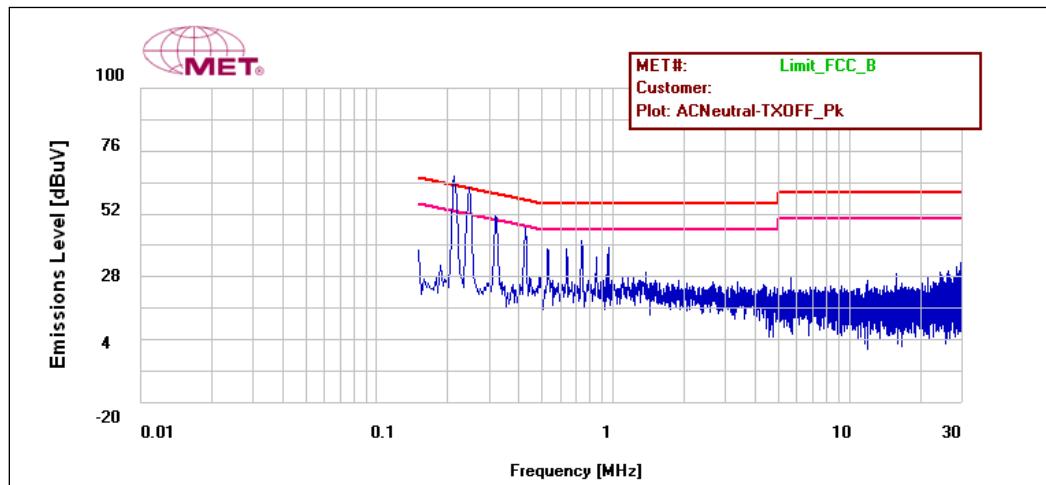


Plot 175. Conducted Emissions, 15.207(a), Transmit Off, Neutral Line

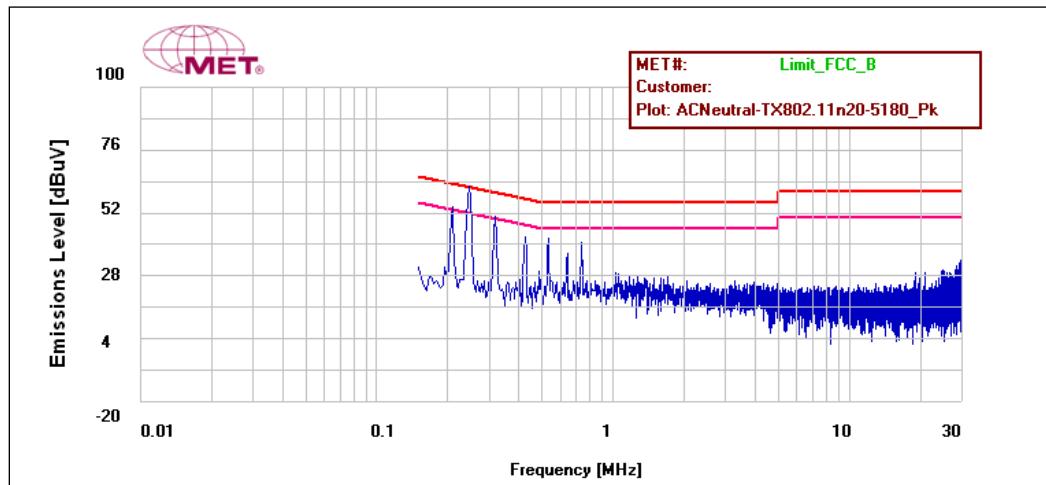


Plot 176. Conducted Emissions, 15.207(a), 5 GHz UNII-1, 802.11n HT20, Neutral Line

15.207(a) Conducted Emissions Test Setup Photos

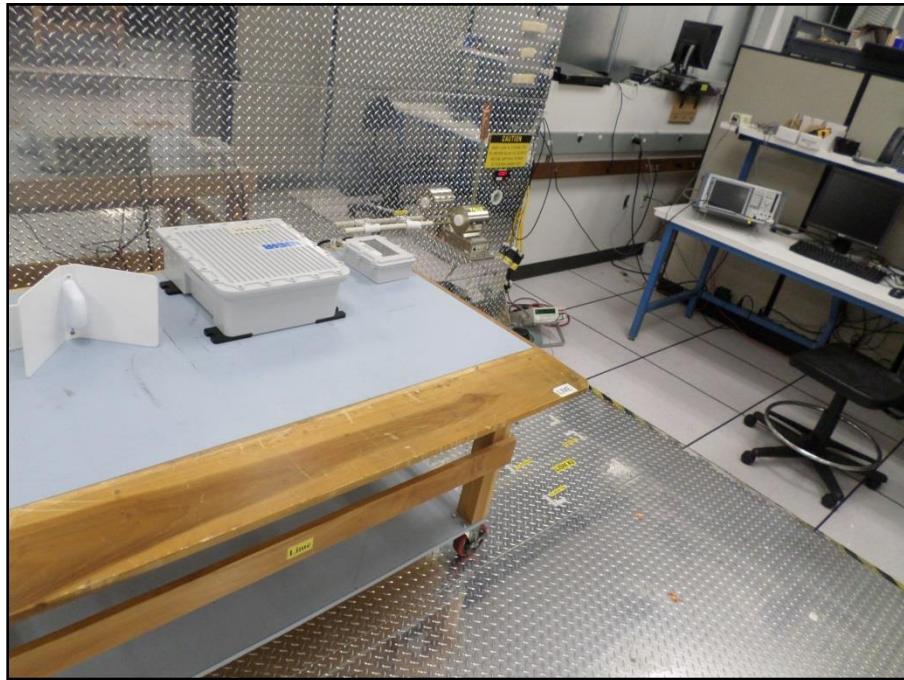

Photograph 10. Conducted Emissions, 15.207(a), CEV Station Setup

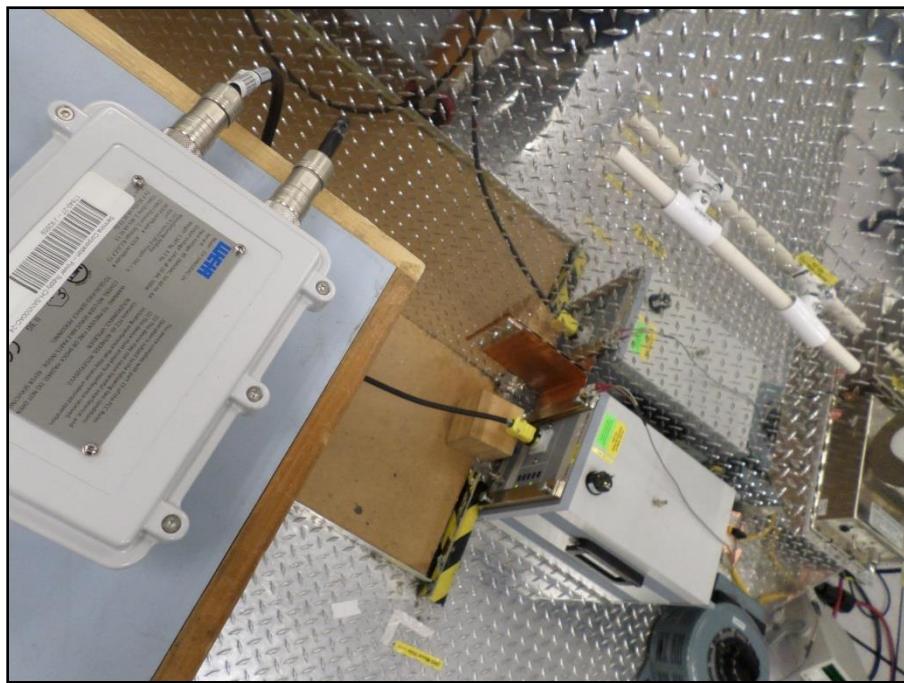

Photograph 11. Conducted Emissions, 15.207(a), LISN Connection

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(c) Automatic Discontinue of Transmission

Test Requirement(s): **§ 15.207 (c):** The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Test Results: Per the Manufacturer, the EUT was not applicable with the requirement of this section.



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(f)

Maximum Permissible Exposure

Test Requirement(s):

§15.407(f): U-NII devices are subject to the radio frequency radiation exposure requirements specified in §1.1307(b), §2.1091 and §2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a “general population/uncontrolled” environment.

RF Exposure Requirements:

§1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission’s guidelines.

RF Radiation Exposure Limit:

§1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit: EUT's operating frequencies @ 5725 - 5850 MHz; **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where,
S = Power Density (mW/cm²)
P = Power Input to antenna (mW)
G = Antenna Gain (numeric value)
R = Distance (cm)

Test Results:

FCC									
Frequency (MHz)	Con. Pwr. (dBm)	Con. Pwr. (mW)	Ant. Gain (dBi)	Ant. Gain numeric	Pwr. Density (mW/cm ²)	Limit (mW/cm ²)	Margin	Distance (cm)	Result
5745	10.26	10.617	9	7.943	0.01678	1	0.98322	20	Pass

Table 22. Maximum Permissible Exposure

The safe distance where Power Density is less than the MPE Limit listed above was found to be 20 cm.

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(g) Frequency Stability

Test Requirements: Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

Test Procedure: The EUT was connected directly to a spectrum analyzer through an attenuator. The 1st trace of the Spectrum Analyzer was taken at ambient conditions and used as a reference. A 2nd trace was used to show the drift of the carrier at extreme conditions. A delta marker was used to find the drift at a given extreme condition.

Test Results: The EUT was not applicable with the requirements of this section.

Frequency stability has been verified by the module manufacturer (FCC ID: VBYLB1EN). This host device leverages those results.



Weir Group Management Services
Weir Industrial Gateway

Electromagnetic Compatibility
Test Equipment
CFR Title 47, Part 15.407 Subpart E

IV. Test Equipment



Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1A1083	EMI Test Receiver	Rohde & Schwarz	ESU40	8/2/2016	8/2/2017
1A1106A	10m Chamber (FCC)	ETS	Semi-Anechoic	12/1/2016	12/1/2017
1A1147	Bilog Antenna (30MHz to 1GHz)	Sunol Sciences Corp	JB3	3/9/2017	3/9/2018
1A1047	Horn Antenna	ETS	3117	2/23/2017	8/23/2018
1A1161	DRG Horn Antenna	ETS	3116C-PA	3/6/2017	9/6/2018
1A1099	Generator	COM-Power Corp	CGO-51000	See Note	
1A1088	Pre-Amp	Rohde & Schwarz	TS-PR1	See Note	
1A1044	Generator	COM-Power Corp	CG-520	See Note	
1A1073	Multi Device Controller	ETS EMCO	2090	See Note	
1A1074	System Controller	Panasonic	WV-CU101	See Note	
1A1075	System Controller	Panasonic	WV-CU101	See Note	
1A1080	Multi Device Controller	ETS EMCO	2090	See Note	
1A1180	Pre-Amp	Miteq	AMF-7D-01001800-22-10P	See Note	
1A1065	EMI Receiver	Rohde & Schwarz	ESCI	3/14/2017	3/14/2018
1A1177	Pulse Limiter	Rohde & Schwarz	ESH3Z2	2/21/2017	8/21/2018
1A1119	Test Area	Custom Made	N/A	8/14/2015	8/14/2017
1A1122	LISN	Teseq	NNB 51	5/26/2016	5/26/2017
1A1149	Milliohm Meter	GW Instek	GOM-802	4/27/2017	4/27/2018
1A1141	Spectrum Analyzer	Agilent	E4407B	4/10/2017	4/10/2018

Table 23. Test Equipment List

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



Weir Group Management Services
Weir Industrial Gateway

Electromagnetic Compatibility
Certification & User's Manual Information
CFR Title 47, Part 15.407 Subpart E

V. Certification & User's Manual Information



Certification & User's Manual Information

K. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of emitting radio-frequency energy by radiation, conduction, or other means. Radio-frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer,* be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.



Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
 - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
 - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
 - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
 - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Weir Group Management Services
Weir Industrial Gateway

Electromagnetic Compatibility
End of Report
CFR Title 47, Part 15.407 Subpart E

End of Report