

# TEST REPORT

Reference No. .... : WTS18S10125849-5W  
FCC ID..... : 2ANY6-M5  
Applicant..... : Telo Systems Ltd.  
Address..... : Room 408, Chuangye Building, Seven-Star Park, Chuangye 2nd Road, Bao'an 28th District, Xin'an Bao'an District, Shenzhen, China  
Manufacturer..... : The same as above  
Address..... : The same as above  
Product Name..... : Smart LTE VEHICULAR COMMUNICATOR  
Model No. .... : M5  
Brand..... : Telo Systems  
Standards..... : FCC CFR47 Part 15 C Section 15.407:2017  
Date of Receipt sample..... : 2018-10-10  
Date of Test..... : 2018-10-11 to 2018-10-28  
Date of Issue..... : 2018-10-29  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.  
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

*Ford Wang*

Ford Wang / Project Engineer



Approved by:

*Philip Zhong*

Philip Zhong / Manager

## 2 Laboratories Introduction

**Waltek Services (Shenzhen) Co., Ltd** is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation, the certification number is 4243.01) of USA, CNAS (China National Accreditation Service for Conformity Assessment, the registration number is L3110) of China. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC (The Federal Communications Commission), CEC (California energy efficiency), ISED (Innovation, Science and Economic Development Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek (ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.



Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. Electro Magnetic Compatibility (EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

**Test Facility:****A. Accreditations for Conformity Assessment (International)**

Country/Region	Scope Covered By	Scope	Note
USA	ISO/IEC 17025	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India		WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note:			
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.			
2. ISED Canada Registration No.: 7760A			

**B. TCBs and Notify Bodies Recognized Testing Laboratory.**

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

### 3 Contents

	<b>Page</b>
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 LABORATORIES INTRODUCTION</b> .....	<b>2</b>
<b>3 CONTENTS</b> .....	<b>4</b>
<b>4 REVISION HISTORY</b> .....	<b>5</b>
<b>5 GENERAL INFORMATION</b> .....	<b>6</b>
5.1 GENERAL DESCRIPTION OF E.U.T. ....	6
5.2 DETAILS OF E.U.T. ....	6
5.3 CHANNEL LIST.....	7
<b>6 EQUIPMENT USED DURING TEST</b> .....	<b>10</b>
6.1 EQUIPMENTS LIST.....	10
6.2 DESCRIPTION OF SUPPORT UNITS.....	11
6.3 MEASUREMENT UNCERTAINTY.....	11
6.4 TEST EQUIPMENT CALIBRATION.....	11
<b>7 TEST SUMMARY</b> .....	<b>12</b>
<b>8 RADIATED EMISSIONS</b> .....	<b>13</b>
8.1 EUT OPERATION.....	13
8.2 TEST SETUP.....	14
8.3 SPECTRUM ANALYZER SETUP.....	15
8.4 TEST PROCEDURE.....	16
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	16
8.6 SUMMARY OF TEST RESULTS.....	17
<b>9 DUTY CYCLE</b> .....	<b>26</b>
9.1 SUMMARY OF TEST RESULTS.....	26
<b>10 BAND EDGE</b> .....	<b>30</b>
10.1 TEST PROCEDURE.....	30
10.2 TEST RESULT.....	31
<b>11 6 DB BANDWIDTH</b> .....	<b>37</b>
11.1 TEST PROCEDURE:.....	37
11.2 TEST RESULT:.....	37
<b>12 26 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH</b> .....	<b>42</b>
12.1 TEST PROCEDURE:.....	42
12.2 TEST RESULT:.....	43
<b>13 CONDUCTED OUTPUT POWER</b> .....	<b>52</b>
13.1 TEST PROCEDURE:.....	52
13.2 TEST RESULT :.....	53
<b>14 POWER SPECTRAL DENSITY</b> .....	<b>62</b>
14.1 TEST PROCEDURE:.....	62
14.2 TEST RESULT:.....	63
<b>15 FREQUENCY STABILITY</b> .....	<b>72</b>
15.1 TEST PROCEDURE:.....	72
15.2 TEST RESULT:.....	73
<b>16 ANTENNA REQUIREMENT</b> .....	<b>74</b>
<b>17 PHOTOGRAPHS OF TEST SETUP AND EUT</b> .....	<b>75</b>

#### 4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS18S10125 849-5W	2018-10-10	2018-10-11 to 2018-10- 28	2018-10-29	original	-	Valid

## 5 General Information

### 5.1 General Description of E.U.T.

Product:	Smart LTE VEHICULAR COMMUNICATOR
Model(s):	M5
Model Description:	N/A
GSM Band(s):	GSM 850/900/1800/1900MHz
GPRS/EGPRS Class:	12
WCDMA Band(s):	FDD Band II/IV/V
LTE Band(s):	FDD Band 2/4/5/7/12/17
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40 5G-802.11a/n HT20/n HT40
Bluetooth Version:	Bluetooth v4.0 with BLE
GPS:	Support
NFC:	N/A
Hardware Version:	R610_MB_V1_20180126
Software Version:	M5_US_V2P_20180820
Highest frequency (Exclude Radio):	1.25GHz
Storage Location:	Internal Storage
Note:	N/A

### 5.2 Details of E.U.T.

Operation Frequency:	802.11a/ n(HT20/40): 5150MHz to 5250MHz 802.11a/ n(HT20/40): 5725MHz to 5850MHz
Max. RF output power:	Band I: 14.97dBm Band IV: 16.14dBm
Type of Modulation:	OFDM
Antenna installation:	internal permanent antenna
Antenna Gain:	Band I: 0.3dBi Band IV: 0.5dBi
Ratings:	DC12V-24V

### 5.3 Channel List

U-NII-1 (5.15-5.25GHz)		U-NII-3 (5.725-5.85GHz)	
channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	149	5745
38	5190	151	5755
40	5200	153	5765
42	5210	155	5785
44	5220	157	5785
46	5230	159	5795
48	5240	161	5805
		165	5825

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11a/n(HT20):

channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11 n(HT40):

channel	Frequency(MHz)	channel	Frequency(MHz)
38	5190	151	5755
46	5230	159	5795

## Test Mode Description:

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Transmitting duty cycle is no less 98%.

The software is installed in operation system, named "RFTestTool.apk", Version 1, date 20160518.

Test Items	Mode	Data Rate	Channel	TX/RX
Radiated Emissions	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
Duty Cycle	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
Band Edge	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
6dB Bandwidth	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
26dB Bandwidth and 99% Occupied Bandwidth	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
Conducted Output Power	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX



Power Spectral Density	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
Frequency Stability	Un-modulation	/	U-NII-1 36/40/48 U-NII-3 149/155/165	TX

## 6 Equipment Used during Test

### 6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2018-09-14	2019-09-13
2.	LISN	R&S	ENV216	101215	2018-09-14	2019-09-13
3.	Cable	Top	TYPE16(3.5M)	-	2018-09-14	2019-09-13
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2018-09-14	2019-09-13
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2018-09-14	2019-09-13
3.	Limitter	York	MTS-IMP-136	261115-001-0024	2018-09-14	2019-09-13
4.	Cable	LARGE	RF300	-	2018-09-14	2019-09-13
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	2018-09-14	2019-09-13
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2018-09-14	2019-09-13
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2018-09-14	2019-09-13
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2018-09-14	2019-09-13
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2018-09-14	2019-09-13
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2018-09-14	2019-09-13
7	Broadband Preampfier	COMPLIANCE DIRECTION	PAP-1G18	2004	2018-09-14	2019-09-13
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2018-09-14	2019-09-13
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2018-09-14	2019-09-13
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2018-09-14	2019-09-13
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2018-09-14	2019-09-13
4	Cable	HUBER+SUHNER	CBL2	525178	2018-09-14	2019-09-13
RF Conducted Testing						

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2018-09-14	2019-09-13
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2018-09-14	2019-09-13
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2018-09-14	2019-09-13

## 6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

## 6.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Radiated Spurious Emissions test	$\pm 5.03$ dB (30M~1000MHz)
	$\pm 5.47$ dB (1000M~25000MHz)
Conducted Spurious Emissions test	$\pm 3.64$ dB (AC mains 150KHz~30MHz)

## 6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 7 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207(a)	N/A
Radiated Emissions	15.407(a) 15.205(a) 15.209(a)	PASS
Duty Cycle	KDB 789033	--
6dB Bandwidth	15.407(a)	PASS
26 dB Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	PASS
Maximum Conducted Output Power	15.407(a)	PASS
Power Spectral Density	15.407(a)	PASS
Restricted bands around fundamental frequency	15.407(a)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

## 8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.407

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Distance	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


## 8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

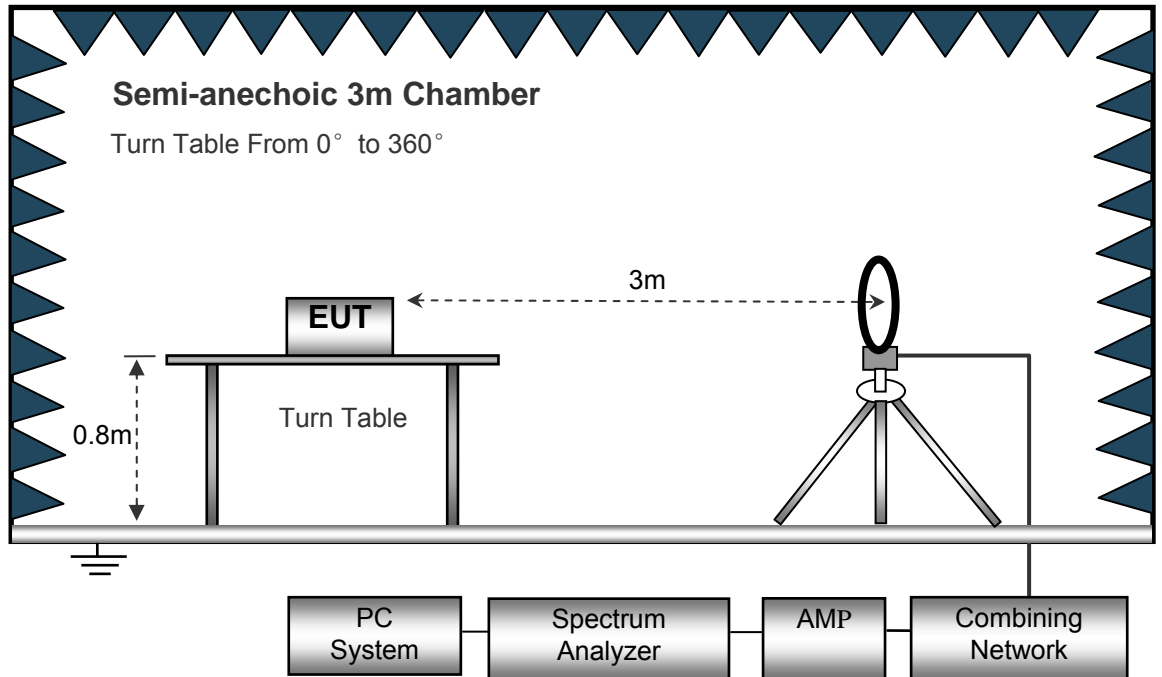

The test setup for emission measurement from 30 MHz to 1 GHz.

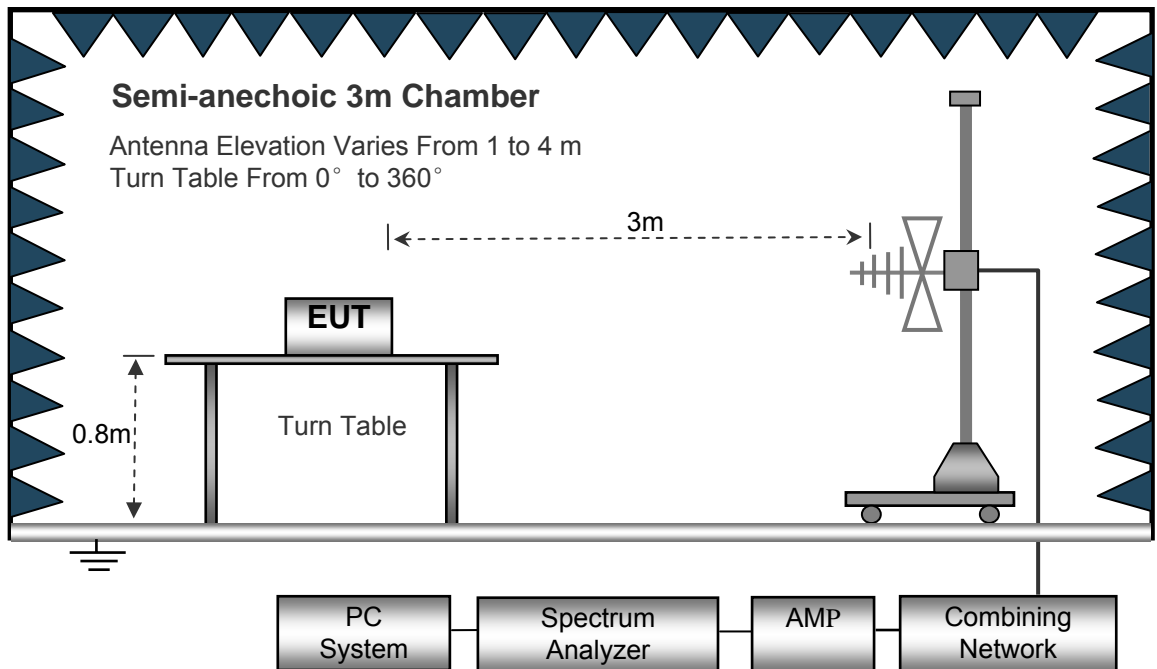

The test setup for emission measurement above 1 GHz.

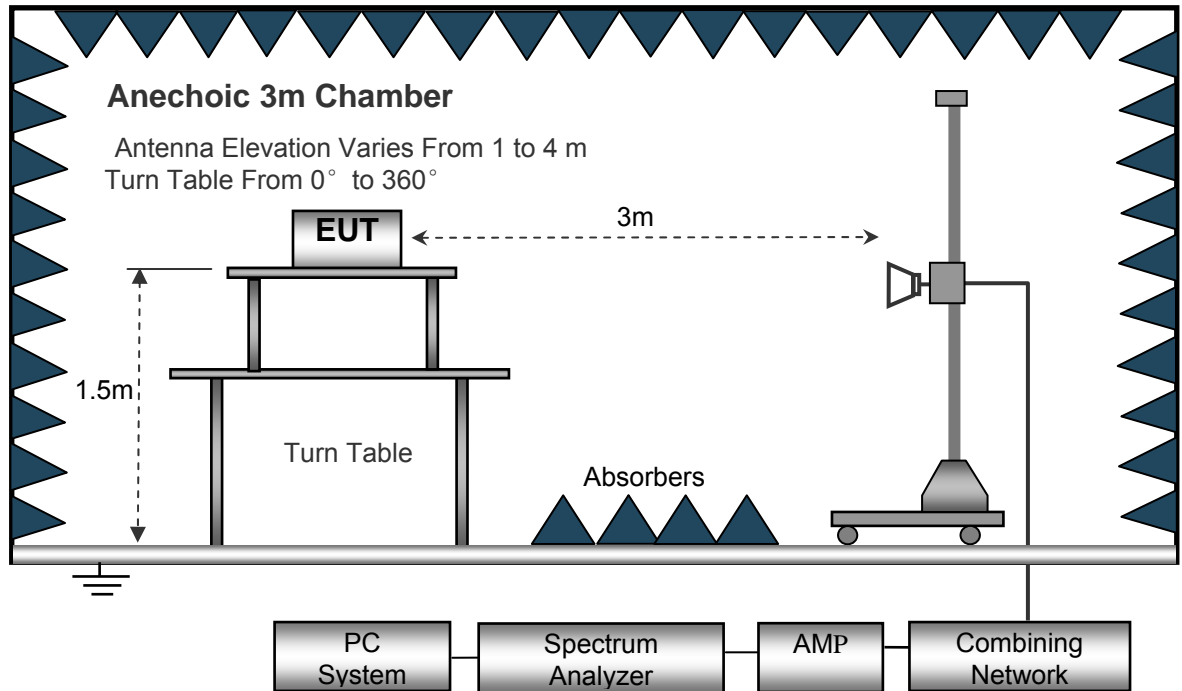

### 8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth..... 10kHz  
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 3MHz  
 Detector ..... Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 10Hz

## 8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

## 8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$



## 8.6 Summary of Test Results

### Test Frequency: 9KHz~30MHz

Remark: only the worst data (802.11a (HT20) U-NII-1/ U-NII-3, 802.11n(HT20/40) U-NII-1/ U-NII-3 Low channel mode) were recorded.

Frequency	Measurement results dB $\mu$ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB $\mu$ V/m @30m	Limits dB $\mu$ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
802.11a (HT20) U-NII-1							
6.021	25.36	QP	21.84	40.00	7.20	29.54	-22.34
15.730	25.67	QP	21.35	40.00	7.02	29.54	-22.52
25.680	25.24	QP	20.67	40.00	5.91	29.54	-23.63
802.11a (HT20) U-NII-3							
6.021	25.44	QP	21.84	40.00	7.28	29.54	-22.26
15.730	25.32	QP	21.35	40.00	6.67	29.54	-22.87
25.680	25.28	QP	20.67	40.00	5.95	29.54	-23.59
802.11n(HT20) U-NII-1							
6.021	25.77	QP	21.84	40.00	7.61	29.54	-21.93
15.730	25.98	QP	21.35	40.00	7.33	29.54	-22.21
25.680	25.50	QP	20.67	40.00	6.17	29.54	-23.37
802.11n(HT20) U-NII-3							
6.021	25.78	QP	21.84	40.00	7.62	29.54	-21.92
15.730	24.98	QP	21.35	40.00	6.33	29.54	-23.21
25.680	25.50	QP	20.67	40.00	6.17	29.54	-23.37
802.11n(HT40) U-NII-1							
6.021	27.33	QP	21.84	40.00	9.17	29.54	-20.37
8.304	26.99	QP	21.02	40.00	8.01	29.54	-21.53
26.127	23.88	QP	20.55	40.00	4.43	29.54	-25.11
802.11n(HT40) U-NII-3							
6.021	26.09	QP	21.84	40.00	7.93	29.54	-21.61
8.304	27.12	QP	21.02	40.00	8.14	29.54	-21.40
26.127	23.89	QP	20.55	40.00	4.44	29.54	-25.10

**Test Frequency : 30MHz ~ 18GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
<b>802.11a U-NII-1 Low Channel 5180MHz</b>									
223.45	39.99	QP	242	1.2	H	-11.62	28.37	46.00	-17.63
223.45	35.21	QP	57	1.3	V	-11.62	23.59	46.00	-22.41
4500.37	49.00	PK	109	1.8	H	-2.03	46.97	74.00	-27.03
4500.37	45.66	Ave	109	1.8	H	-2.03	43.63	54.00	-10.37
5116.05	51.75	PK	231	1.8	H	-1.02	50.73	74.00	-23.27
5116.05	49.12	Ave	231	1.8	H	-1.02	48.10	54.00	-5.90
10360.00	41.87	PK	359	1.3	H	5.33	47.20	74.00	-26.80
10360.00	36.00	Ave	359	1.3	H	5.33	41.33	54.00	-12.67
<b>802.11a U-NII-1 middle channel 5200MHz</b>									
223.45	40.79	QP	286	1.2	H	-11.62	29.17	46.00	-16.83
223.45	34.59	QP	164	1.2	V	-11.62	22.97	46.00	-23.03
4531.52	50.05	PK	246	1.8	H	-1.94	48.11	74.00	-25.89
4531.52	44.98	Ave	246	1.8	H	-1.94	43.04	54.00	-10.96
5120.05	53.58	PK	3	1.1	H	-1.06	52.52	74.00	-21.48
5120.05	50.80	Ave	3	1.1	H	-1.06	49.74	54.00	-4.26
10400.00	42.05	PK	110	1.6	H	5.21	47.26	74.00	-26.74
10400.00	36.17	Ave	110	1.6	H	5.21	41.38	54.00	-12.62

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11a U-NII-1 High channel 5240MHz									
223.45	39.60	QP	272	1.7	H	-11.62	27.98	46.00	-18.02
223.45	36.78	QP	68	1.8	V	-11.62	25.16	46.00	-20.84
4521.34	50.16	PK	256	1.5	H	-2.03	48.13	74.00	-25.87
4521.34	47.15	Ave	256	1.5	H	-2.03	45.12	54.00	-8.88
5133.57	54.10	PK	218	1.2	H	-1.02	53.08	74.00	-20.92
5133.57	49.20	Ave	218	1.2	H	-1.02	48.18	54.00	-5.82
10360.00	40.41	PK	38	1.0	H	5.33	45.74	74.00	-28.26
10360.00	38.08	Ave	38	1.0	H	5.33	43.41	54.00	-10.59
802.11a U-NII-3 low Channel 5745MHz									
223.45	38.95	QP	29	1.6	H	-11.62	27.33	46.00	-18.67
223.45	37.80	QP	40	1.9	V	-11.62	26.18	46.00	-19.82
4520.90	49.42	PK	257	1.8	H	-1.94	47.48	74.00	-26.52
4520.90	46.78	Ave	257	1.8	H	-1.94	44.84	54.00	-9.16
5125.96	55.42	PK	182	1.3	H	-1.06	54.36	74.00	-19.64
5125.96	48.92	Ave	182	1.3	H	-1.06	47.86	54.00	-6.14
10400.00	39.24	PK	209	2.0	H	5.21	44.45	74.00	-29.55
10400.00	39.38	Ave	209	2.0	H	5.21	44.59	54.00	-9.41

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-3 middle channel 5785MHz									
223.45	37.86	QP	197	1.2	H	-11.62	26.24	46.00	-19.76
223.45	33.33	QP	359	1.1	V	-11.62	21.71	46.00	-24.29
4505.68	49.64	PK	301	1.1	H	-2.03	47.61	74.00	-26.39
4505.68	44.19	Ave	301	1.1	H	-2.03	42.16	54.00	-11.84
11570.00	42.39	PK	67	1.2	H	5.81	48.20	74.00	-25.80
11570.00	37.03	Ave	67	1.2	H	5.81	42.84	54.00	-11.16
5350.34	45.93	PK	234	1.9	H	-1.22	44.71	74.00	-29.29
5350.34	39.54	Ave	234	1.9	H	-1.22	38.32	54.00	-15.68
802.11a U-NII-3 High channel 5825MHz									
223.45	36.43	QP	134	1.3	H	-11.62	24.81	46.00	-21.19
223.45	33.58	QP	238	1.1	V	-11.62	21.96	46.00	-24.04
4506.47	49.90	PK	27	1.2	H	-1.84	48.06	74.00	-25.94
4506.47	45.26	Ave	27	1.2	H	-1.84	43.42	54.00	-10.58
11650.00	40.65	PK	188	1.5	H	5.84	46.49	74.00	-27.51
11650.00	36.39	Ave	188	1.5	H	5.84	42.23	54.00	-11.77
5355.40	46.85	PK	4	1.3	H	-1.30	45.55	74.00	-28.45
5355.40	38.75	Ave	4	1.3	H	-1.30	37.45	54.00	-16.55

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT20) U-NII-1 low Channel 5180MHz									
223.45	40.68	QP	35	1.2	H	-11.62	29.06	46.00	-16.94
223.45	36.96	QP	356	1.5	V	-11.62	25.34	46.00	-20.66
4508.47	52.31	PK	298	1.0	H	-2.06	50.25	74.00	-23.75
4508.47	47.09	Ave	298	1.0	H	-2.06	45.03	54.00	-8.97
11490.00	41.84	PK	211	1.5	H	5.93	47.77	74.00	-26.23
11490.00	37.22	Ave	211	1.5	H	5.93	43.15	54.00	-10.85
5380.70	46.91	PK	220	1.9	H	-1.25	45.66	74.00	-28.34
5380.70	37.62	Ave	220	1.9	H	-1.25	36.37	54.00	-17.63
802.11n(HT20) U-NII-1 middle channel 5200MHz									
223.45	39.01	QP	173	1.6	H	-11.62	27.39	46.00	-18.61
223.45	33.92	QP	233	1.9	V	-11.62	22.30	46.00	-23.70
4536.90	49.22	PK	143	1.5	H	-2.12	47.10	74.00	-26.90
4536.90	46.16	Ave	143	1.5	H	-2.12	44.04	54.00	-9.96
5140.65	46.27	PK	228	1.6	H	-1.06	45.21	74.00	-28.79
5140.65	38.03	Ave	228	1.6	H	-1.06	36.97	54.00	-17.03
10400.00	42.80	PK	21	1.9	H	5.21	48.01	74.00	-25.99
10400.00	36.07	Ave	21	1.9	H	5.21	41.28	54.00	-12.72

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT20) U-NII-1 High channel 5240MHz									
223.45	39.70	QP	51	1.6	H	-11.62	28.08	46.00	-17.92
223.45	36.85	QP	141	1.5	V	-11.62	25.23	46.00	-20.77
4504.70	52.30	PK	287	1.3	H	-2.14	50.16	74.00	-23.84
4504.70	48.43	Ave	287	1.3	H	-2.14	46.29	54.00	-7.71
5133.97	46.07	PK	294	1.9	H	-1.06	45.01	74.00	-28.99
5133.97	41.21	Ave	294	1.9	H	-1.06	40.15	54.00	-13.85
10360.00	40.05	PK	51	1.7	H	5.33	45.38	74.00	-28.62
10360.00	36.81	Ave	51	1.7	H	5.33	42.14	54.00	-11.86
802.11n(HT20) U-NII-3 low Channel 5745MHz									
223.45	38.74	QP	114	1.0	H	-11.62	27.12	46.00	-18.88
223.45	32.93	QP	1	1.7	V	-11.62	21.31	46.00	-24.69
4528.18	46.98	PK	330	2.0	H	-1.85	45.13	74.00	-28.87
4528.18	44.16	Ave	330	2.0	H	-1.85	42.31	54.00	-11.69
11490.00	40.72	PK	328	1.9	H	5.93	46.65	74.00	-27.35
11490.00	34.03	Ave	328	1.9	H	5.93	39.96	54.00	-14.04
5365.50	45.76	PK	114	1.5	H	-1.01	44.75	74.00	-29.25
5365.50	37.06	Ave	114	1.5	H	-1.01	36.05	54.00	-17.95

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT20) U-NII-3 middle channel 5785MHz									
223.45	39.76	QP	348	1.2	H	-11.62	28.14	46.00	-17.86
223.45	35.17	QP	180	1.4	V	-11.62	23.55	46.00	-22.45
4503.00	52.68	PK	60	1.6	H	-1.96	50.72	74.00	-23.28
4503.00	49.24	Ave	60	1.6	H	-1.96	47.28	54.00	-6.72
5128.52	45.81	PK	104	1.7	H	-1.06	44.75	74.00	-29.25
5128.52	42.20	Ave	104	1.7	H	-1.06	41.14	54.00	-12.86
10480.00	39.49	PK	320	1.1	H	5.14	44.63	74.00	-29.37
10480.00	38.61	Ave	320	1.1	H	5.14	43.75	54.00	-10.25
802.11n(HT20) U-NII-3 High channel 5825MHz									
223.45	38.45	QP	145	1.7	H	-11.62	26.83	46.00	-19.17
223.45	34.60	QP	152	1.1	V	-11.62	22.98	46.00	-23.02
4527.80	51.68	PK	104	1.6	H	-1.89	49.79	74.00	-24.21
4527.80	47.95	Ave	104	1.6	H	-1.89	46.06	54.00	-7.94
11570.00	40.45	PK	282	1.3	H	5.81	46.26	74.00	-27.74
11570.00	38.62	Ave	282	1.3	H	5.81	44.43	54.00	-9.57
5372.41	46.01	PK	321	1.2	H	-1.04	44.97	74.00	-29.03
5372.41	39.53	Ave	321	1.2	H	-1.04	38.49	54.00	-15.51

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT40) U-NII-1 low Channel 5190MHz									
223.45	38.29	QP	54	1.3	H	-11.62	26.67	46.00	-19.33
223.45	38.56	QP	78	1.9	V	-11.62	26.94	46.00	-19.06
4512.86	42.27	PK	71	1.9	H	-1.89	40.38	74.00	-33.62
4512.86	35.94	Ave	71	1.9	H	-1.89	34.05	54.00	-19.95
5111.79	46.97	PK	38	1.2	H	-1.06	45.91	74.00	-28.09
5111.79	40.90	Ave	38	1.2	H	-1.06	39.84	54.00	-14.16
10380.00	38.79	PK	23	1.2	H	5.26	44.05	74.00	-29.95
10380.00	35.49	Ave	23	1.2	H	5.26	40.75	54.00	-13.25
802.11n(HT40) U-NII-1 High channel 5230MHz									
223.45	37.71	QP	85	1.9	H	-11.62	26.09	46.00	-19.91
223.45	38.82	QP	162	1.7	V	-11.62	27.20	46.00	-18.80
4509.92	42.17	PK	279	1.6	H	-1.94	40.23	74.00	-33.77
4509.92	35.02	Ave	279	1.6	H	-1.94	33.08	54.00	-20.92
5125.05	48.71	PK	241	1.2	H	-1.06	47.65	74.00	-26.35
5125.05	42.32	Ave	241	1.2	H	-1.06	41.26	54.00	-12.74
10460.00	40.88	PK	166	1.9	H	5.28	46.16	74.00	-27.84
10480.00	38.55	Ave	166	1.9	H	5.28	43.83	54.00	-10.17



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
802.11n(HT40) U-NII-3 low Channel 5755MHz									
223.45	30.55	QP	131	1.9	H	-11.62	18.93	74.00	-55.07
223.45	37.28	QP	50	1.1	V	-11.62	25.66	74.00	-48.34
4518.91	36.13	PK	331	1.3	H	-1.92	34.21	74.00	-39.79
4518.91	36.85	Ave	331	1.3	H	-1.92	34.93	54.00	-19.07
11510.00	38.40	PK	49	2.0	H	5.88	44.28	74.00	-29.72
11510.00	37.02	Ave	49	2.0	H	5.88	42.90	54.00	-11.10
5366.56	45.32	PK	99	1.7	H	-1.07	44.25	74.00	-29.75
5366.56	38.24	Ave	99	1.7	H	-1.07	37.17	54.00	-16.83
802.11n(HT40) U-NII-3 High channel 5795MHz									
223.45	30.22	QP	315	1.2	H	-11.62	18.60	74.00	-55.40
223.45	36.72	QP	99	1.9	V	-11.62	25.10	74.00	-48.90
4505.66	36.85	PK	20	1.6	H	-1.86	34.99	74.00	-39.01
4505.66	37.01	Ave	20	1.6	H	-1.86	35.15	54.00	-18.85
11590.00	41.12	PK	200	1.1	H	5.63	46.75	74.00	-27.25
11590.00	37.60	Ave	200	1.1	H	5.63	43.23	54.00	-10.77
5389.64	46.91	PK	248	1.8	H	-1.03	45.88	74.00	-28.12
5389.64	39.27	Ave	248	1.8	H	-1.03	38.24	54.00	-15.76

**Test Frequency: 18GHz~40GHz**

The measurements were more than 20 dB below the limit and not reported.

## 9 Duty cycle


Test Requirement:	47 CFR Part 15C 15.407 and 789033 D02 General UNII Test Procedures New Rules v01, Section (B)
Test Method:	ANSI C63.10: 2013
Test Limit:	N/A
Test Result:	PASS
Remark:	Through Pre-scan, and found 802.11a at lowest channel is the worst case. Only the worst case is recorded in the report.

### 9.1 Summary of Test Results


802.11a mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11n(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11n(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
151	100	100	100

Test result plots shown as follows:


802.11a U-NII-1 Low channel

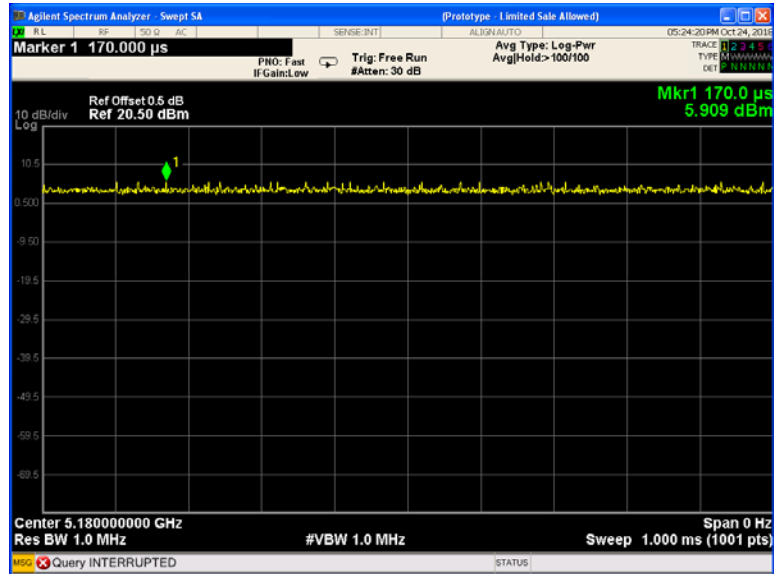


802.11n(HT20) U-NII-1 Low channel

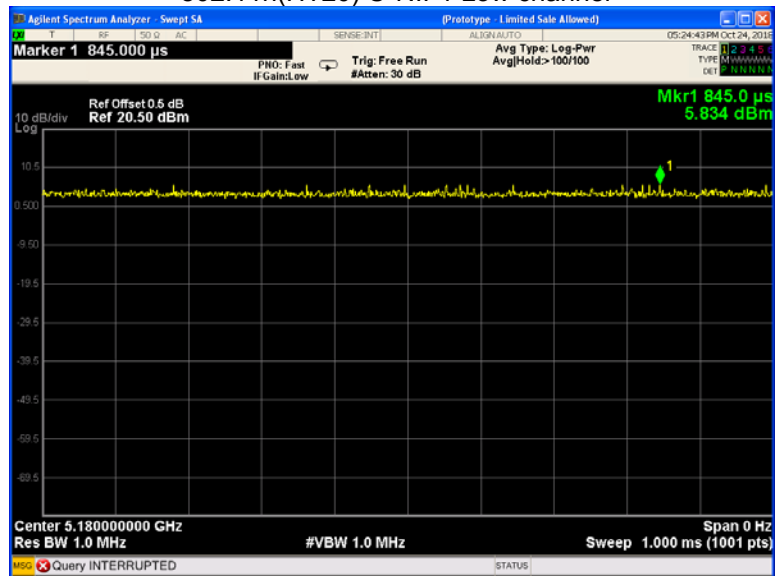


### 802.11n(HT40) U-NII-1 Low channel

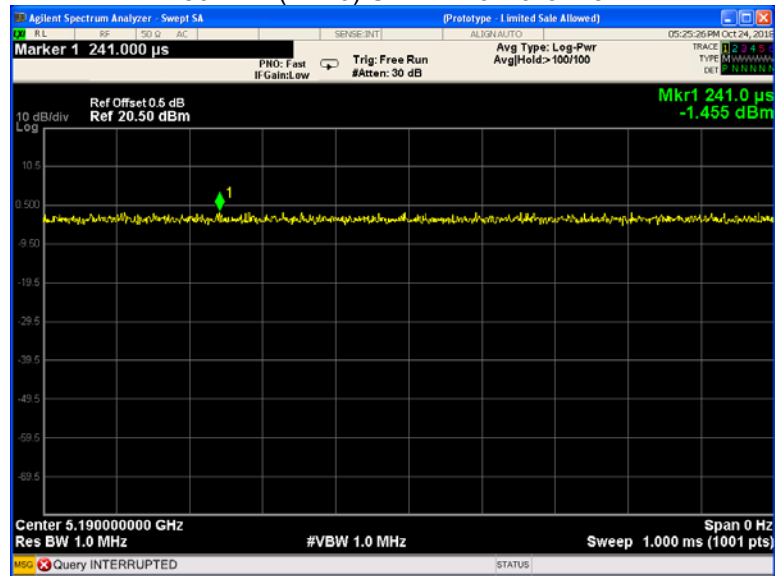


### 802.11a U-NII-3 Low channel

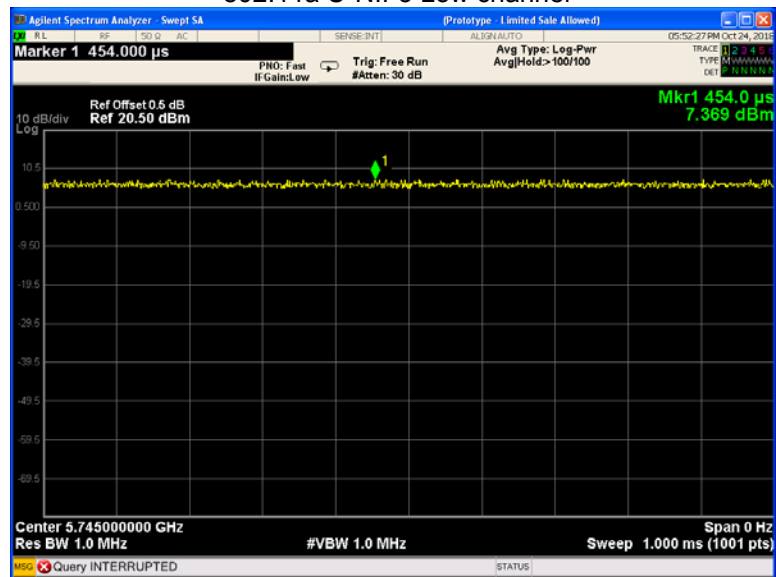

### 802.11n(HT20) U-NII-3 Low channel

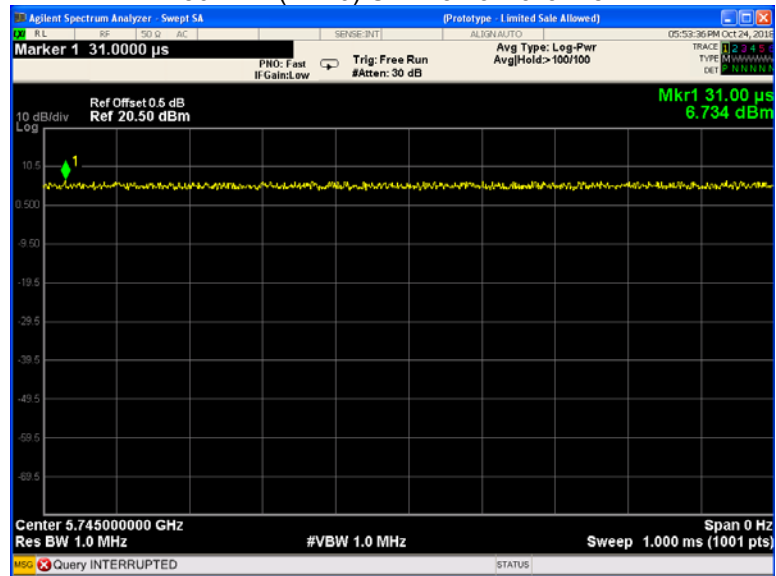

### 802.11n(HT40) U-NII-3 Low channel

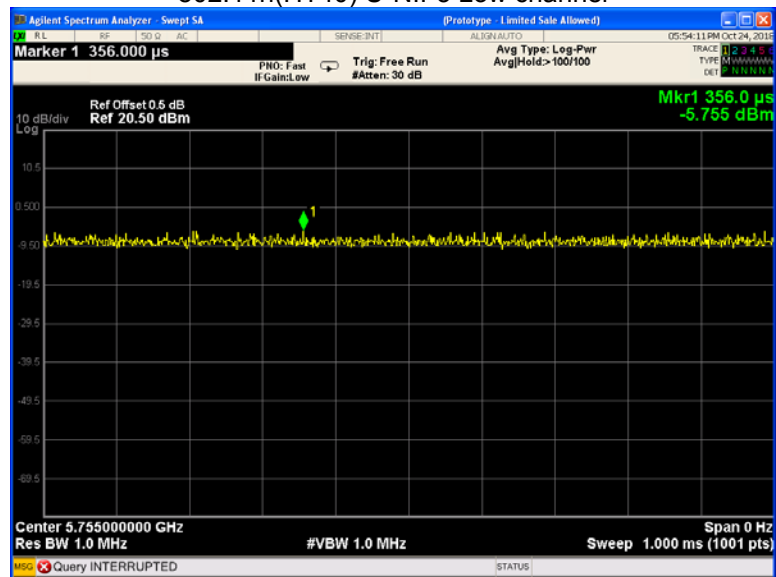

## 10 Band Edge


Test Requirement:	FCC CFR47 Part 15 Section 15.407
Test Method:	ANSI C63.10 2013
Test Limit:	(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of $-27\text{dBm/MHz}$ . (2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of $-17\text{dBm/MHz}$ ; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of $-27\text{dBm/MHz}$ .
Test Result:	PASS

### 10.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



### 802.11a U-NII-3 Band edge-left side

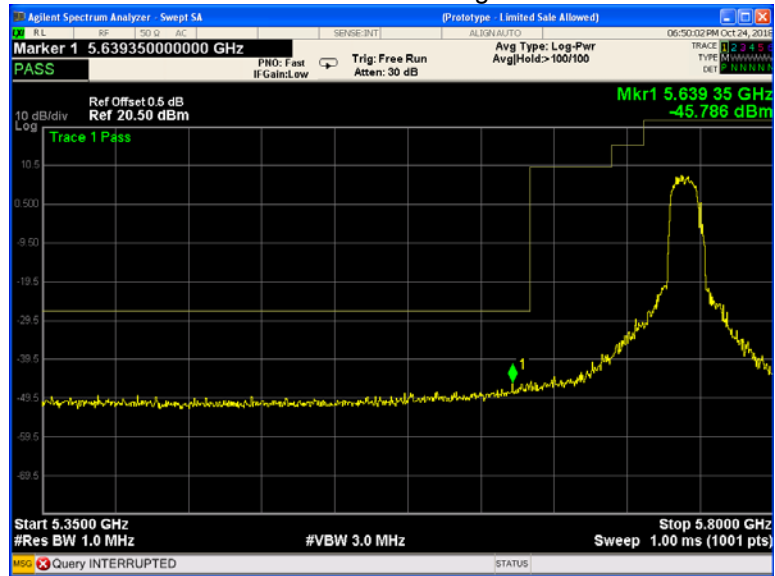


### 802.11a U-NII-3 Band edge-right side

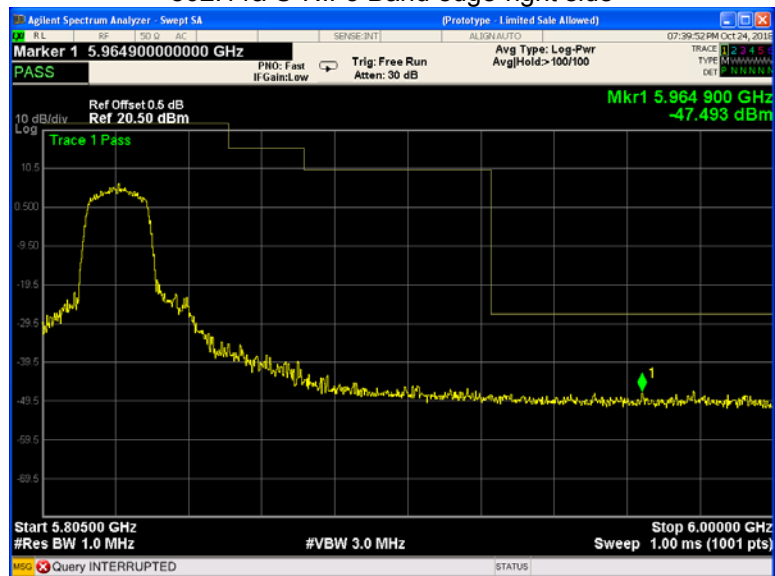





### 802.11n(HT20) U-NII-1 Band edge-left side

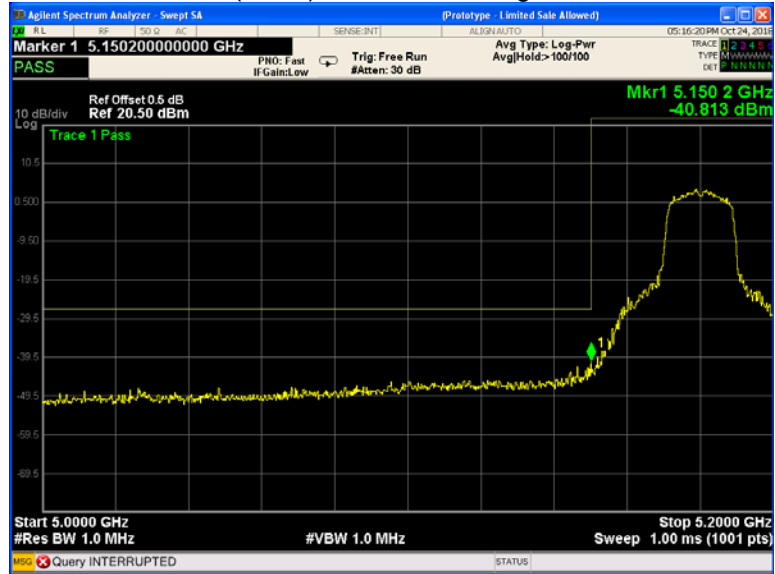

### 802.11n(HT20) U-NII-1 Band edge-right side

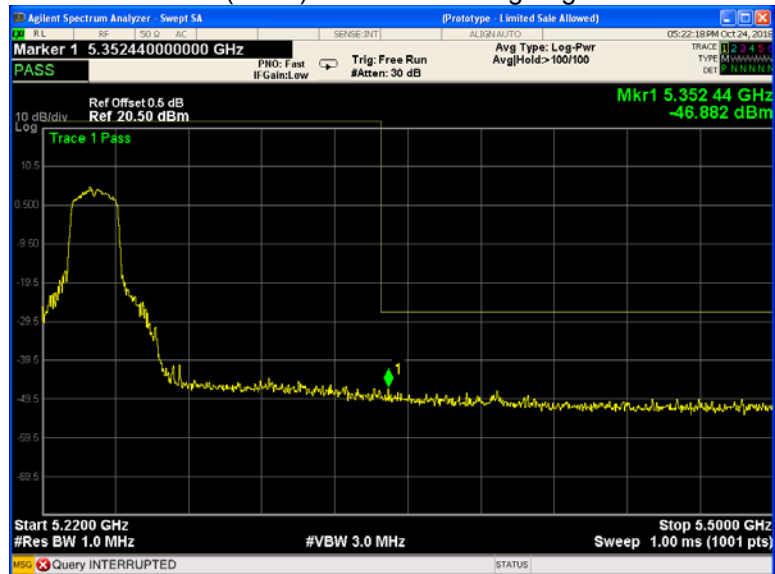


### 802.11n(HT20) U-NII-3 Band edge-left side

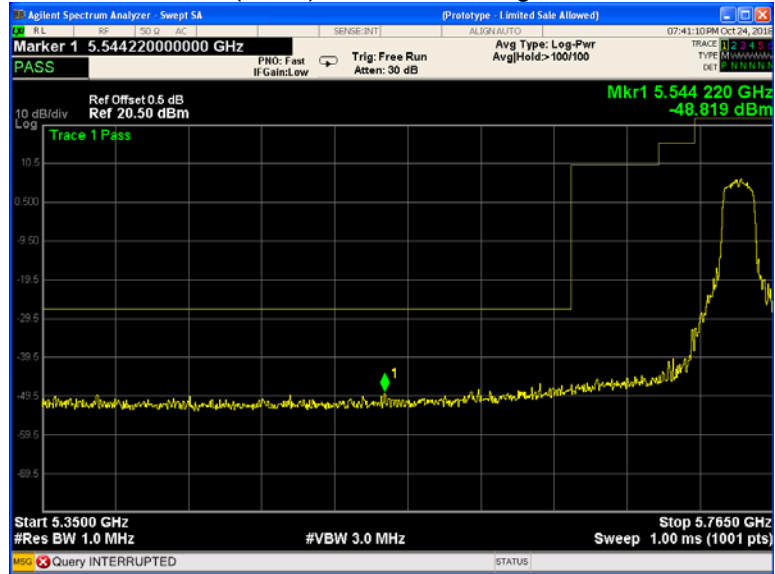


### 802.11n(HT20) U-NII-3 Band edge-right side




### 802.11n(HT40) U-NII-1 Band edge-left side

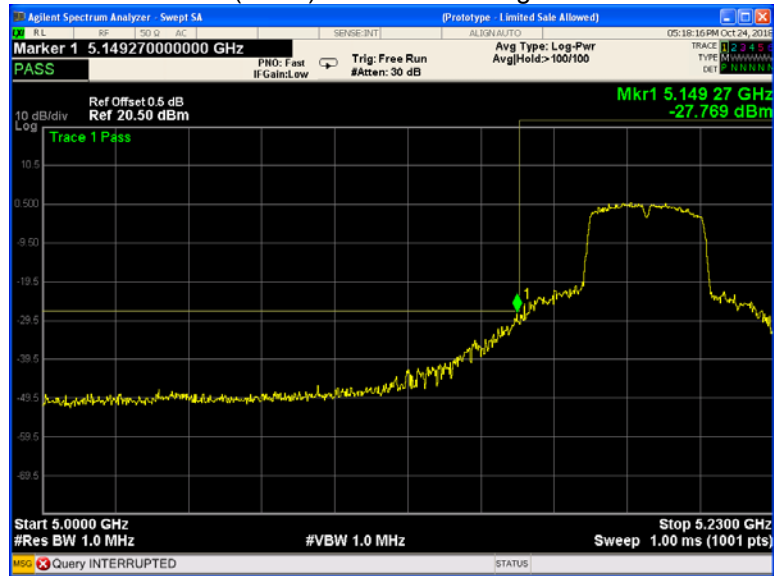

### 802.11n(HT40) U-NII-1 Band edge-right side

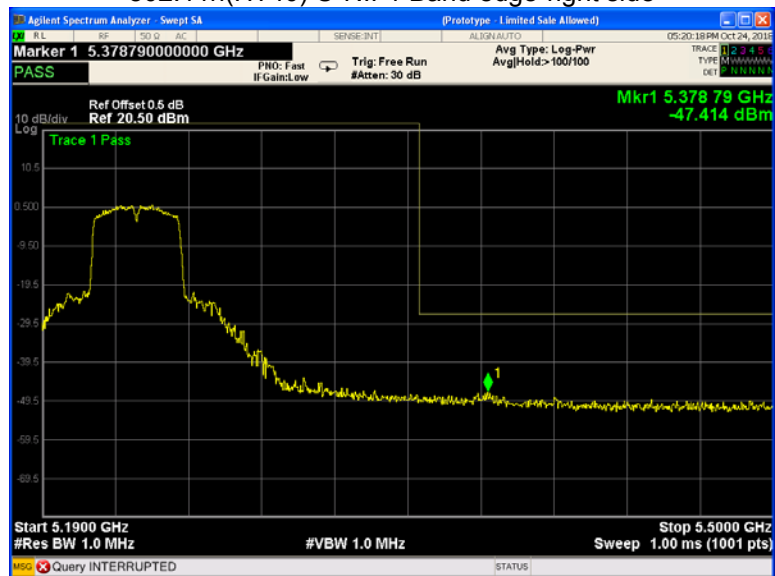

### 802.11n(HT40) U-NII-3 Band edge-left side

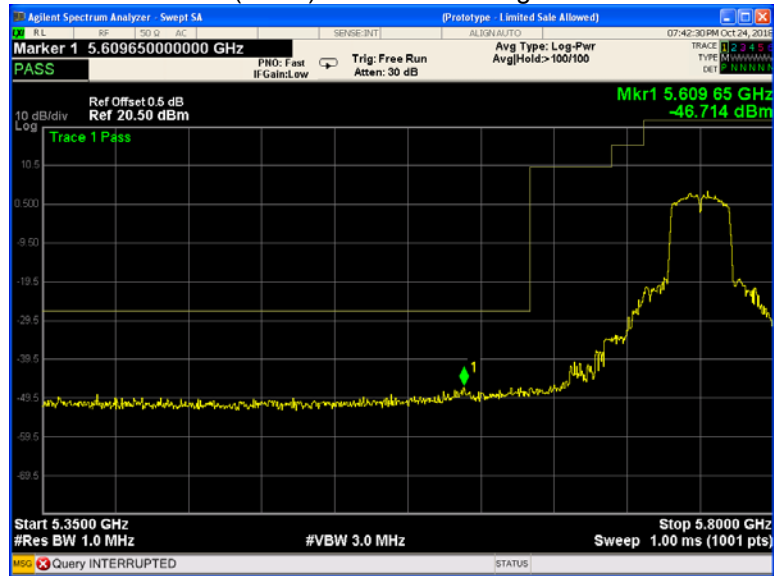

### 802.11n(HT40) U-NII-3 Band edge-right side



## 11 6 dB Bandwidth

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v01 Section C
Test Limit:	≥ 500 kHz
Test Result:	PASS

### 11.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

### 11.2 Test Result:


Band	Operation mode	6 dB Bandwidth (MHz)		
		Low	Middle	High
U-NII-3	802.11a	16.39	15.97	15.10
	802.11n(HT20)	15.06	17.05	15.12
	802.11n(HT40)	35.14	/	35.16

Test result plots shown as follows:


802.11a U-NII-3 Low channel

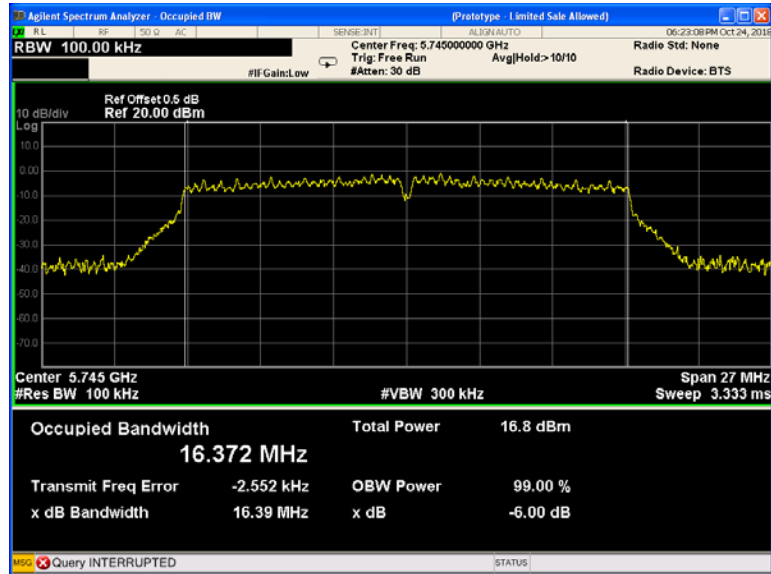


802.11a U-NII-3 Middle channel

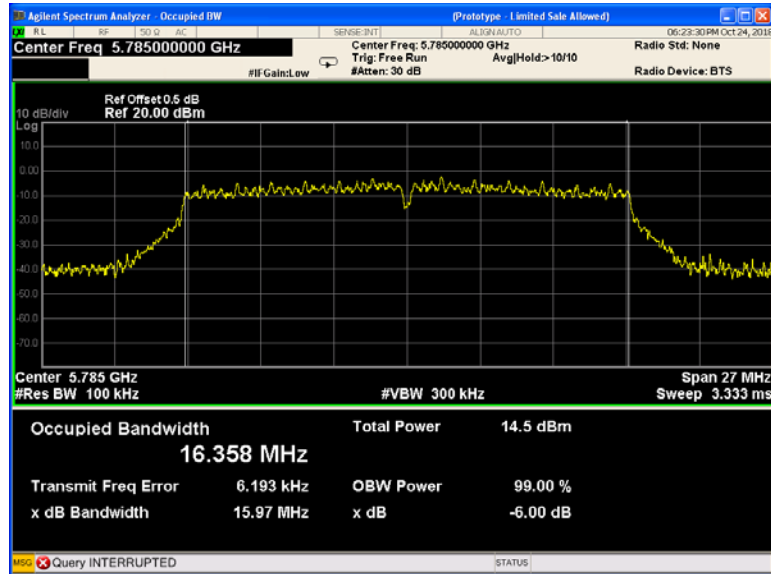


### 802.11a U-NII-3 High channel

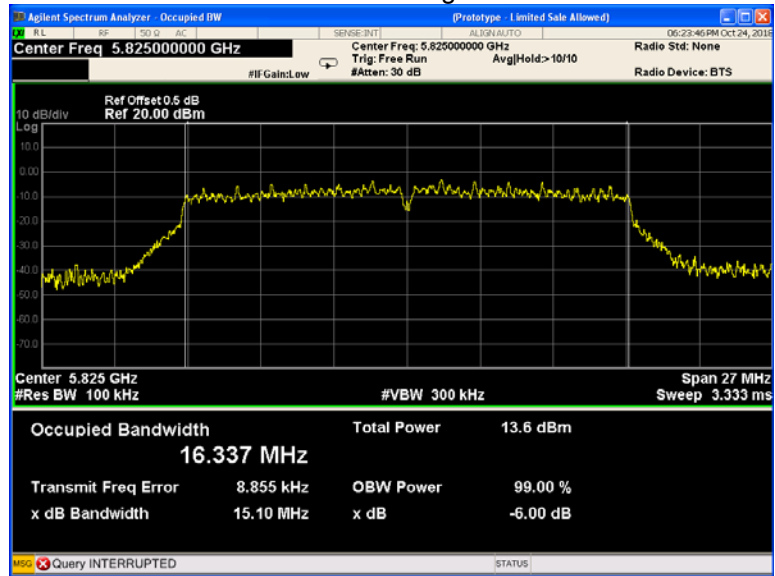


### 802.11n(HT20) U-NII-3 Low channel

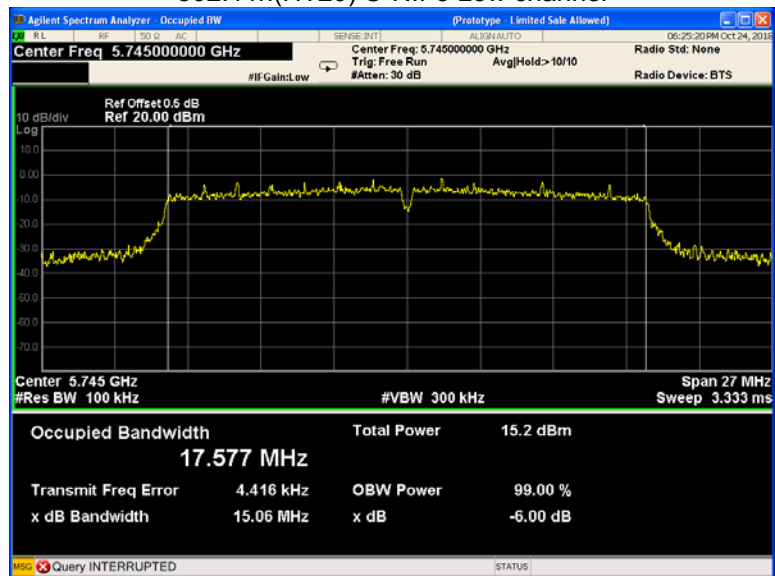

802.11n(HT20) U-NII-3 Middle channel

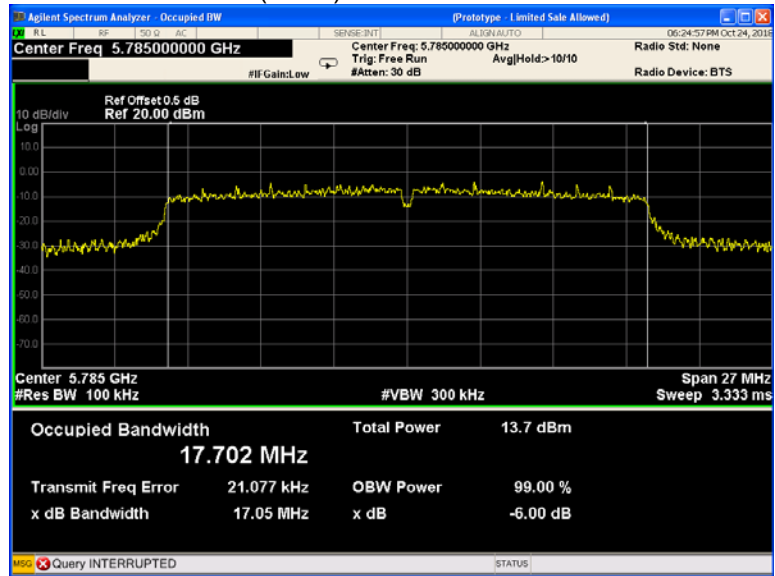


802.11n(HT20) U-NII-3 High channel

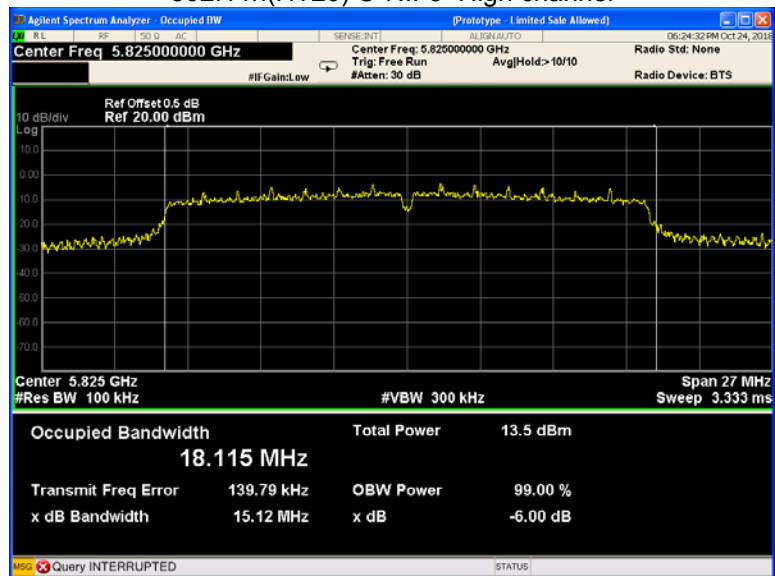




### 802.11n(HT40) U-NII-3 Low channel

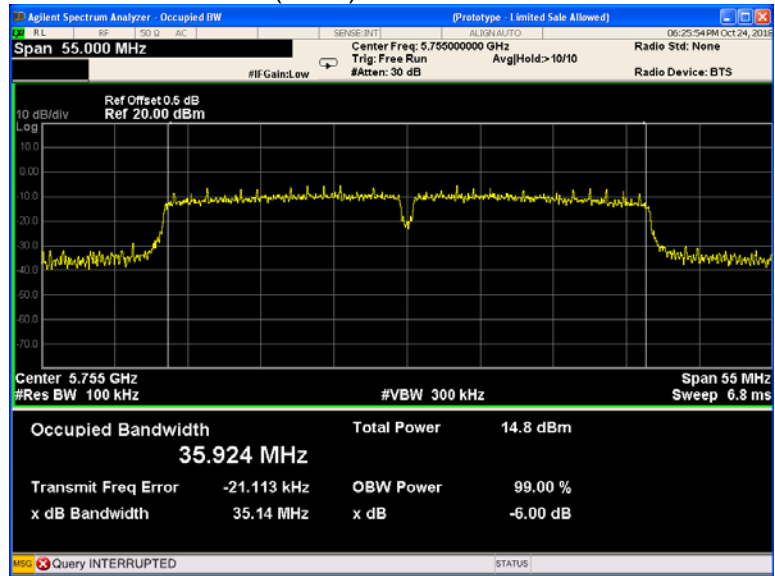

### 802.11n(HT40) U-NII-3 High channel

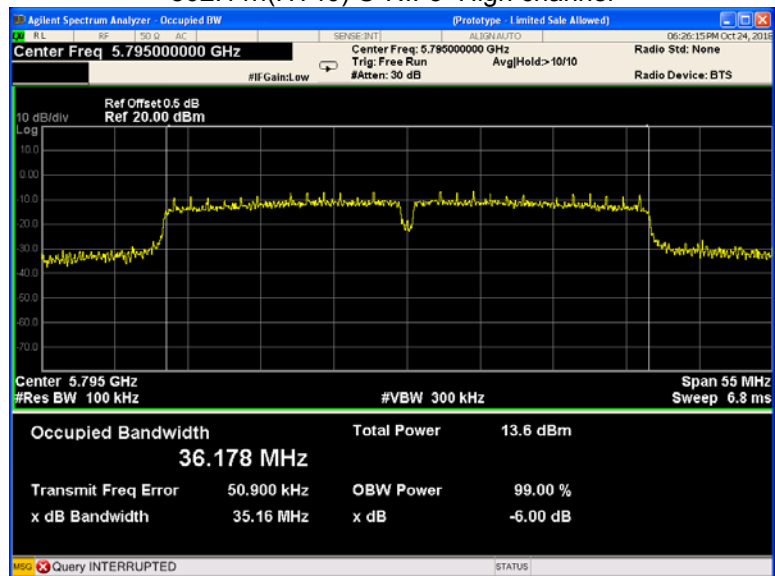

## 12 26 dB Bandwidth and 99% Occupied Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.407 (a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v01 Section D
Test Limit:	No restriction limits
Test Result:	PASS

### 12.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

**12.2 Test Result:**


Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-1	802.11a	19.25	19.31	19.26	16.468	16.458	16.469
	802.11n(HT20)	26.37	25.01	23.36	17.666	17.694	17.637
	802.11n(HT40)	59.00	/	53.90	36.145	/	36.099
U-NII-3	802.11a	18.85	18.60	18.71	16.357	16.361	16.368
	802.11n(HT20)	19.71	25.28	27.00	17.567	17.658	18.125
	802.11n(HT40)	40.51	/	55.00	35.918	/	36.207

Test result plots shown as follows:


802.11a U-NII-1 Low channel

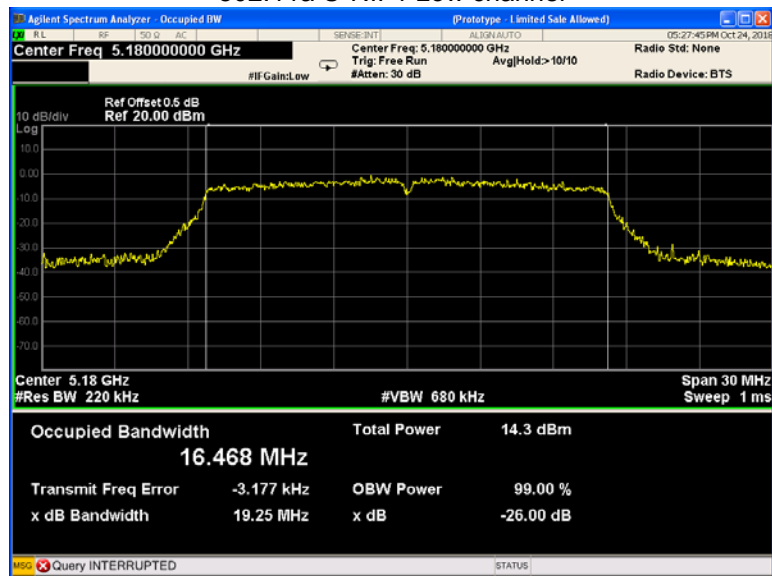


802.11a U-NII-1 Middle channel

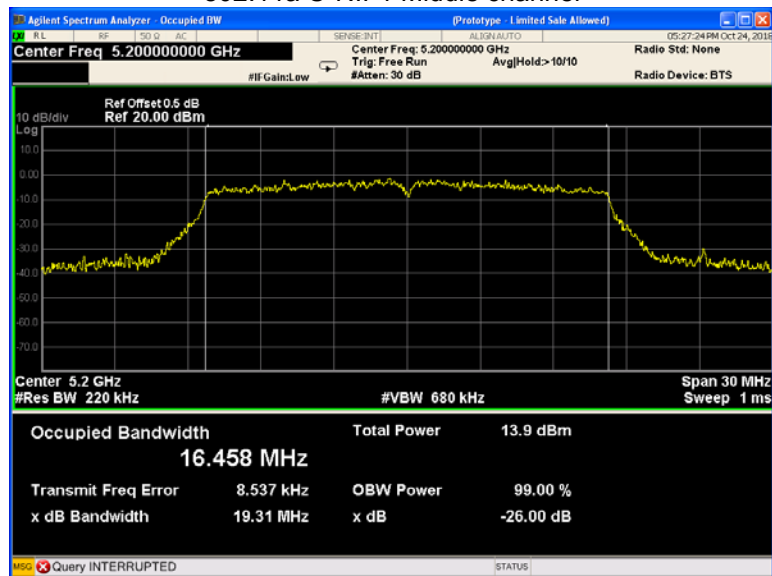


### 802.11a U-NII-1 High channel

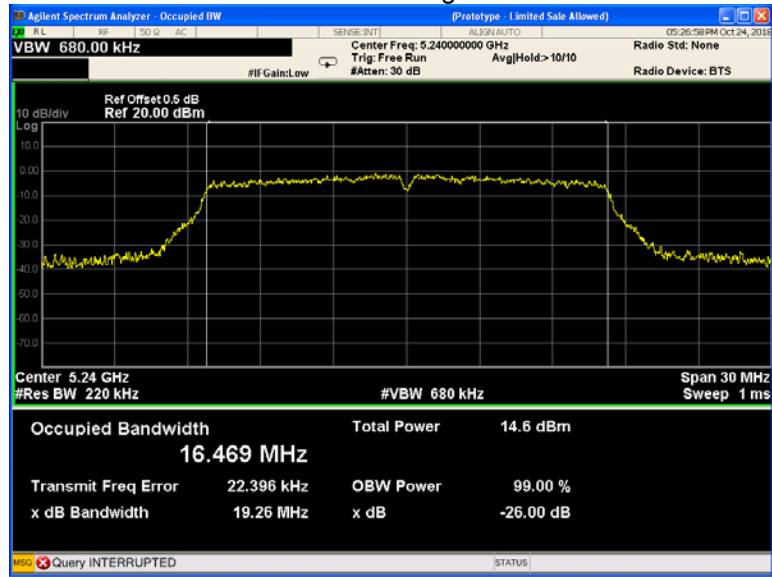


### 802.11n(HT20) U-NII-1 Low channel

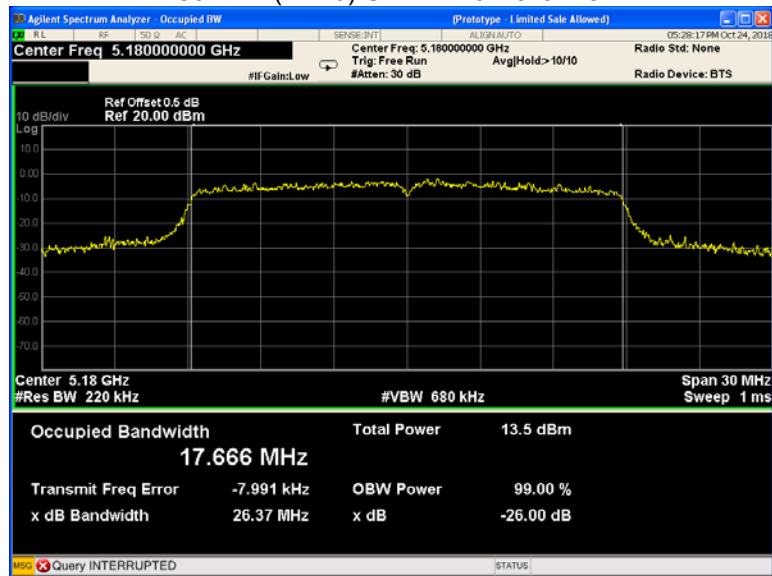


802.11n(HT20) U-NII-1 Middle channel

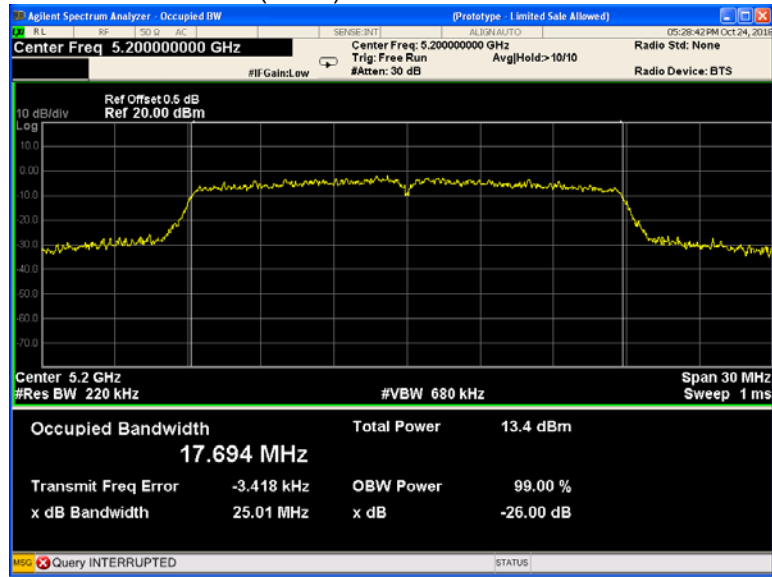


802.11n(HT20) U-NII-1 High channel

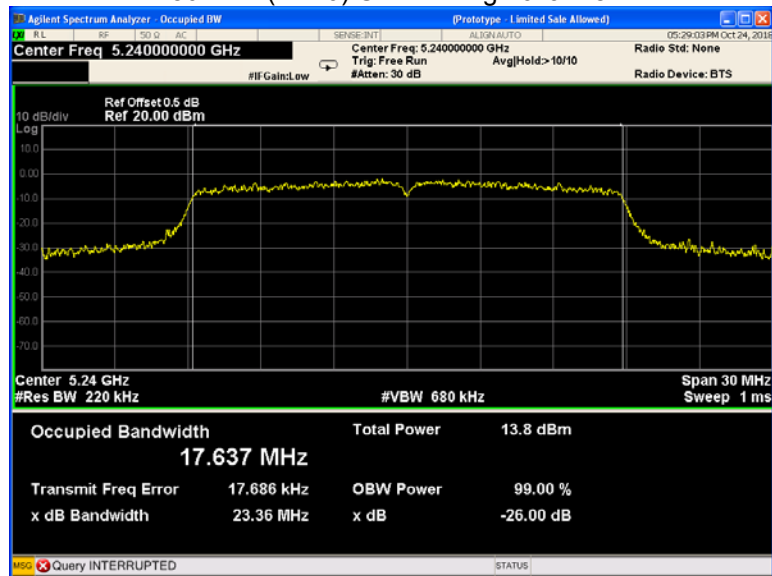


802.11n(HT40) U-NII-1 Low channel

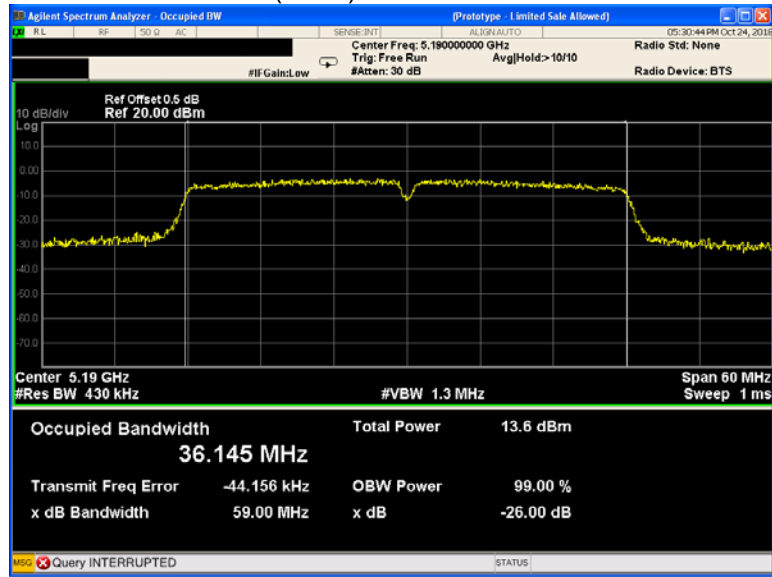


802.11n(HT40) U-NII-1 High channel

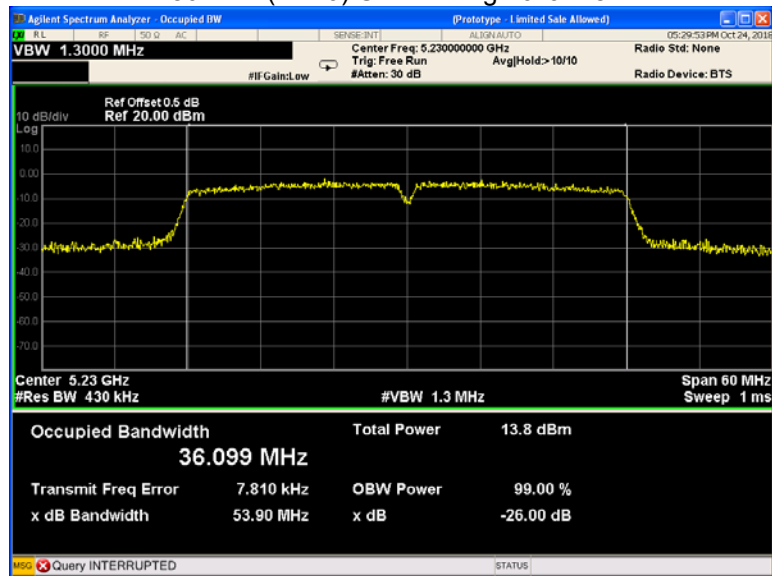

### 802.11a U-NII-3 Low channel

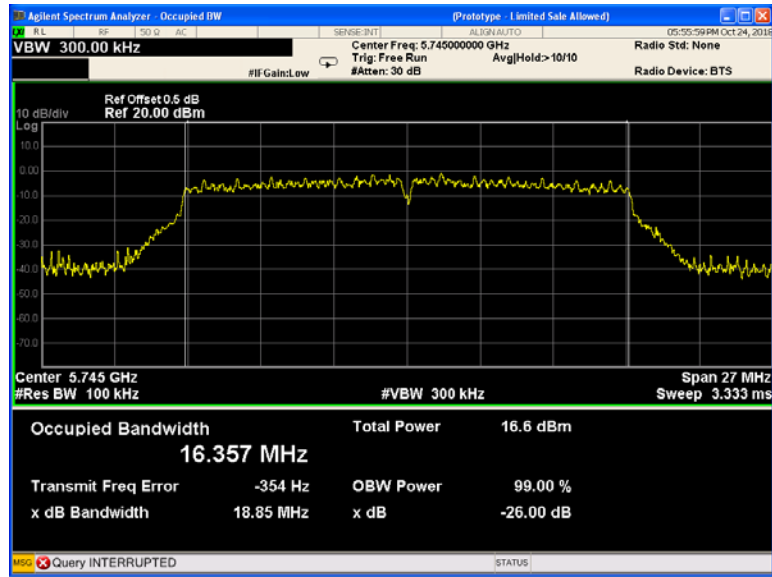


### 802.11a U-NII-3 Middle channel

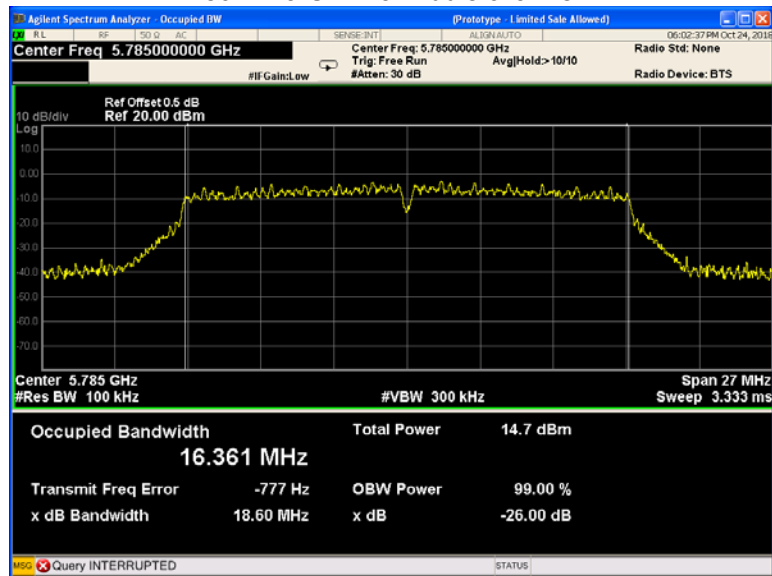





802.11a U-NII-3 High channel

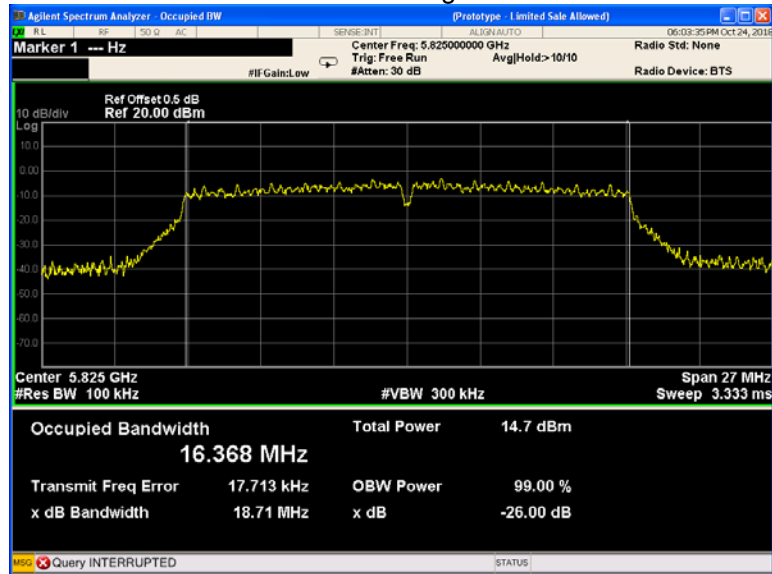


802.11n(HT20) U-NII-3 Low channel

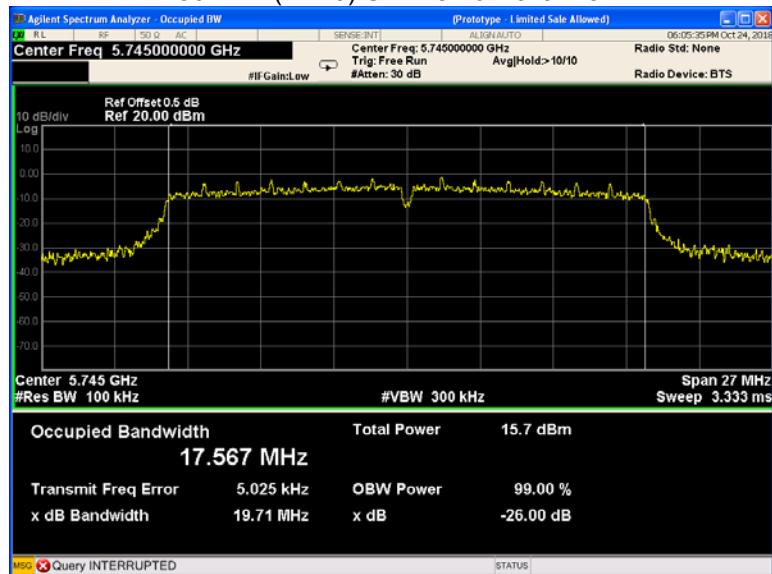


### 802.11n(HT20) U-NII-3 Middle channel

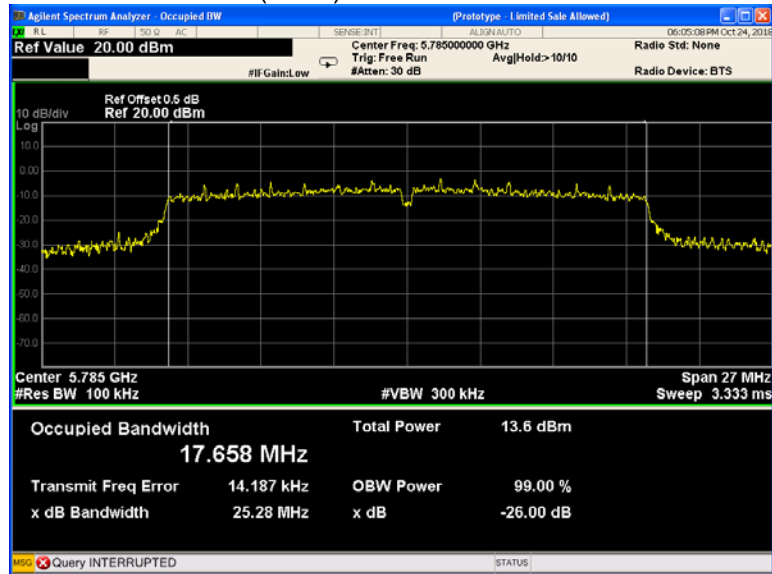


### 802.11n(HT20) U-NII-3 High channel

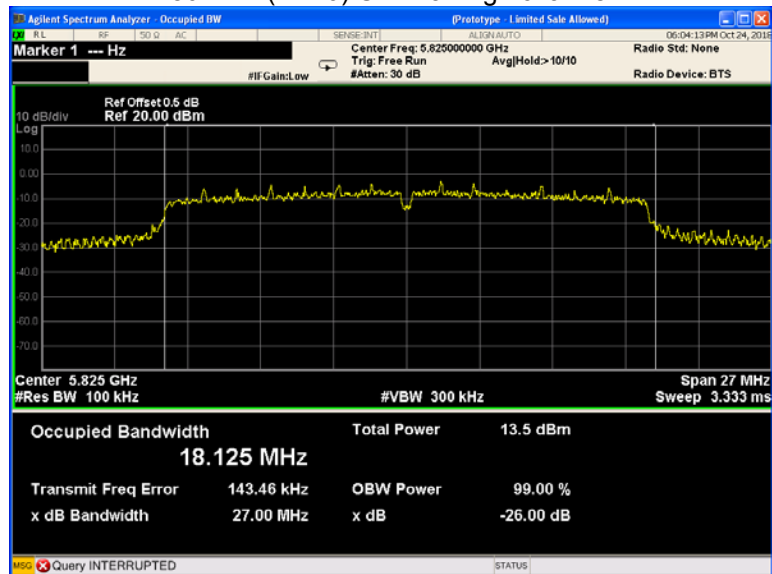

802.11n(HT40) U-NII-3 Low channel

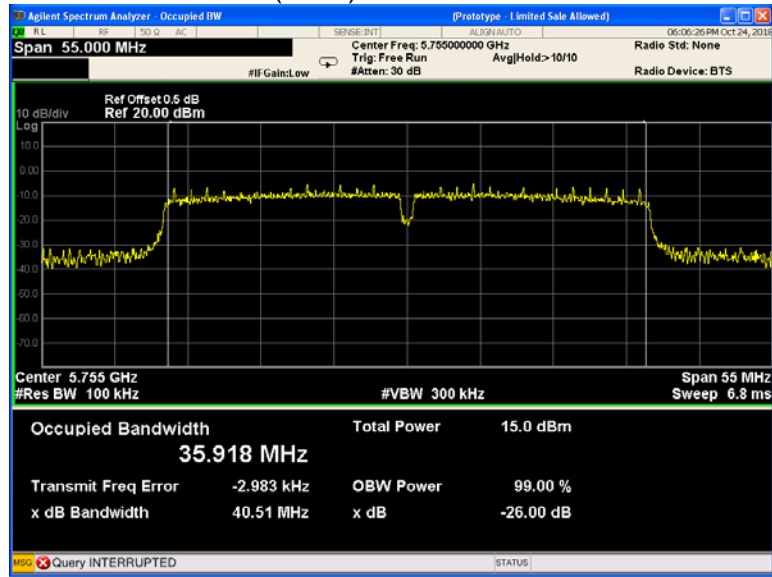

802.11n(HT40) U-NII-3 High channel

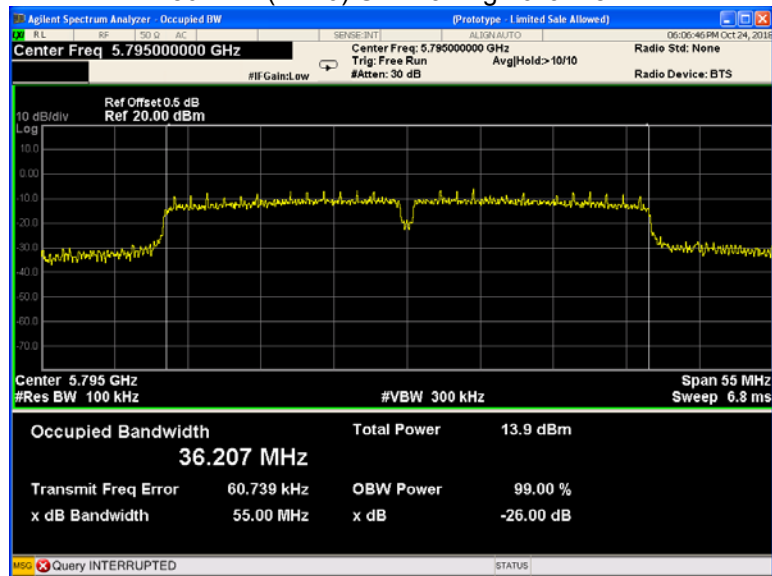

## 13 Conducted Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.407(a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v01 Section E
Test Limit:	U-NII-1 250mW(24dBm) U-NII-3 1W(30dBm)
Test Result:	PASS Conducted output power= measurement power+10log(1/x)
Remark:	X is duty cycle=1, so 10log(1/1)=0 Conducted output power= measurement power

### 13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


**13.2 Test Result :**

Band	Operation mode	Conducted Output Power (dBm)		
		Low	Middle	High
U-NII-1	802.11a	14.88	14.36	14.97
	802.11n(HT20)	13.69	13.36	14.28
	802.11n(HT40)	14.32	/	14.26
U-NII-3	802.11a	15.83	14.86	14.47
	802.11n(HT20)	16.14	14.65	13.64
	802.11n(HT40)	15.37	/	13.95


\* All transmit signals are completely uncorrelated with each other, Directional gain =  $G_{ANT}$  which is less than 6dBi. So the limit does not be reduced.

Test result plots shown as follows:


802.11a U-NII-1 Low channel

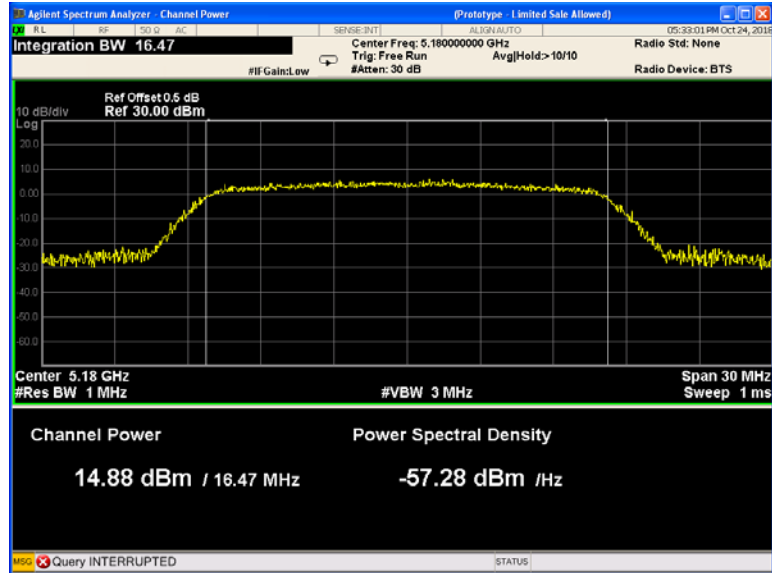


802.11a U-NII-1 Middle channel

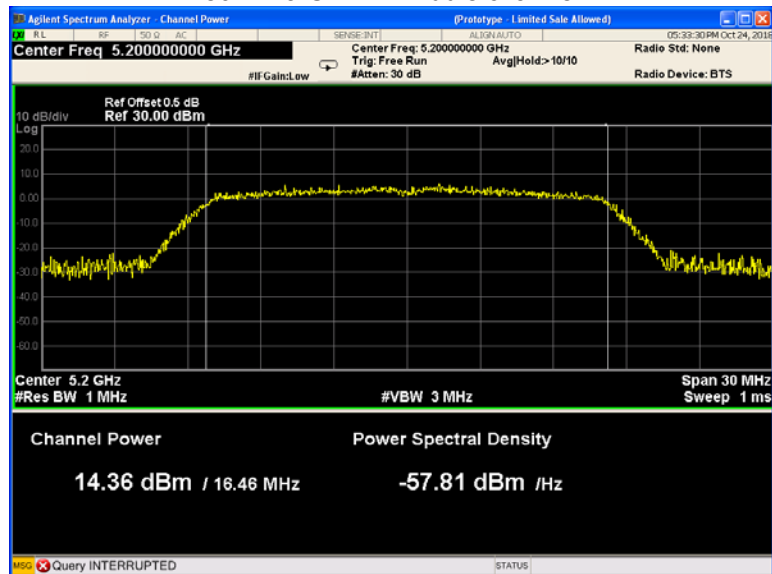

### 802.11a U-NII-1 High channel

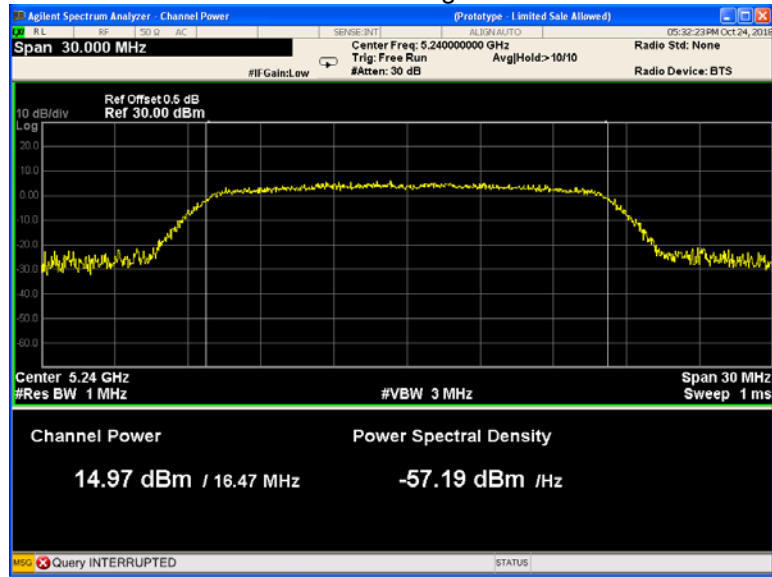

### 802.11n(HT20) U-NII-1 Low channel

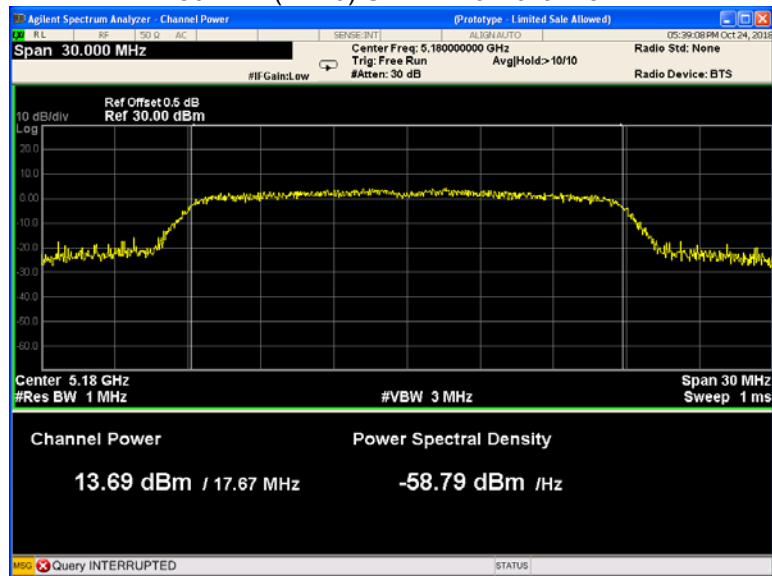

### 802.11n(HT20) U-NII-1 Middle channel




### 802.11n(HT20) U-NII-1 High channel







802.11n(HT40) U-NII-1 Low channel

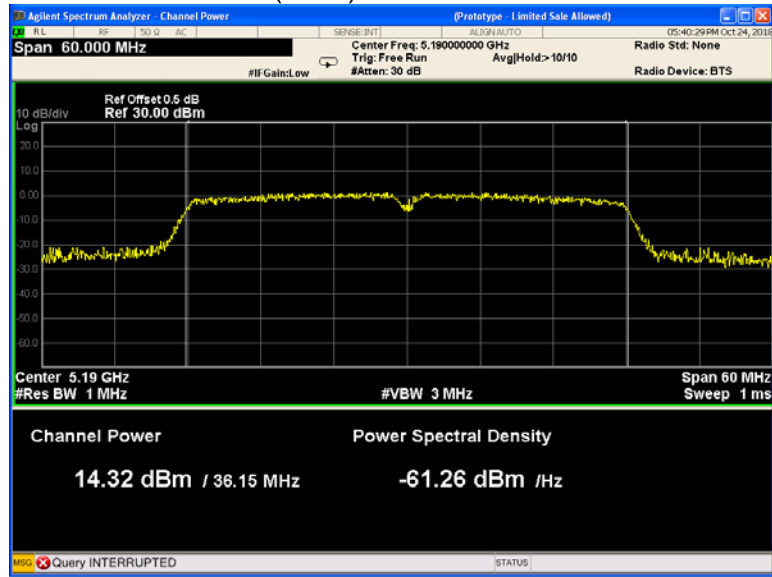


802.11n(HT40) U-NII-1 High channel

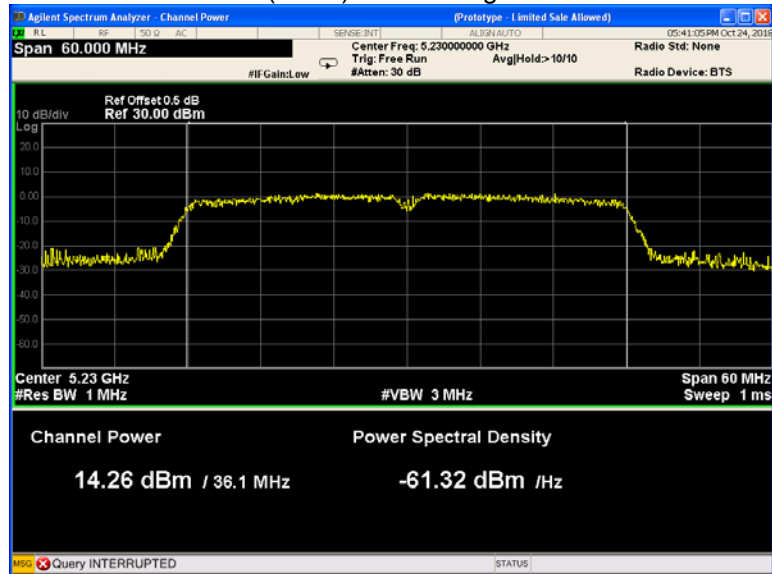


802.11a U-NII-3 Low channel

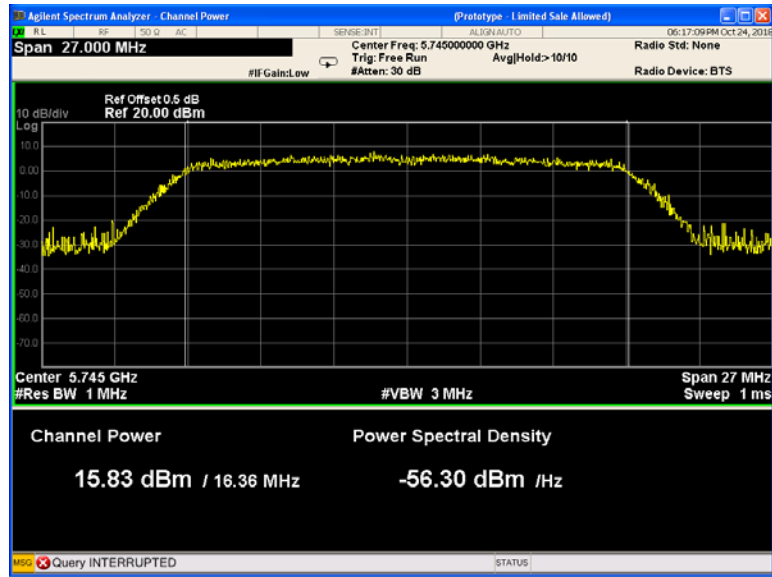


802.11a U-NII-3 Middle channel

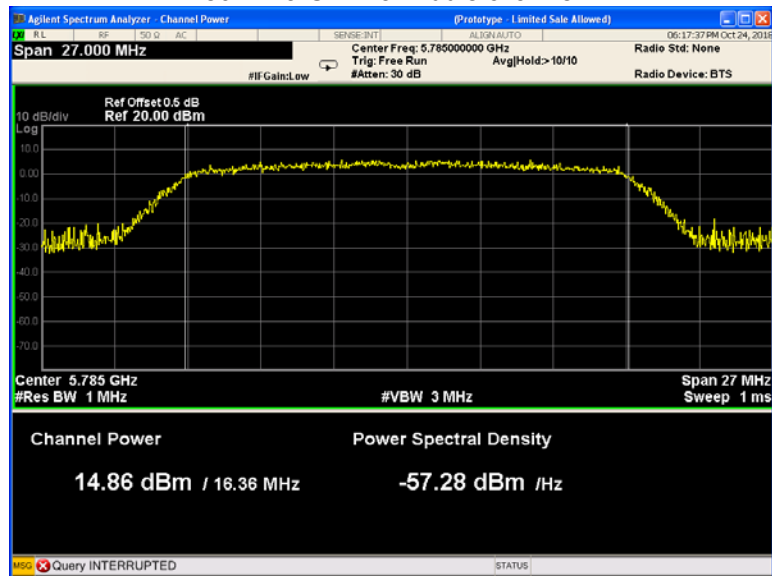


### 802.11a U-NII-3 High channel

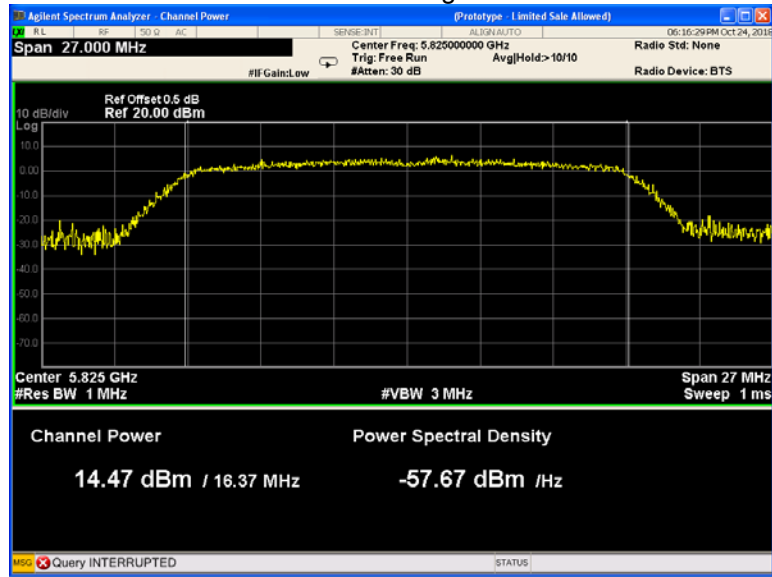


### 802.11n(HT20) U-NII-3 Low channel

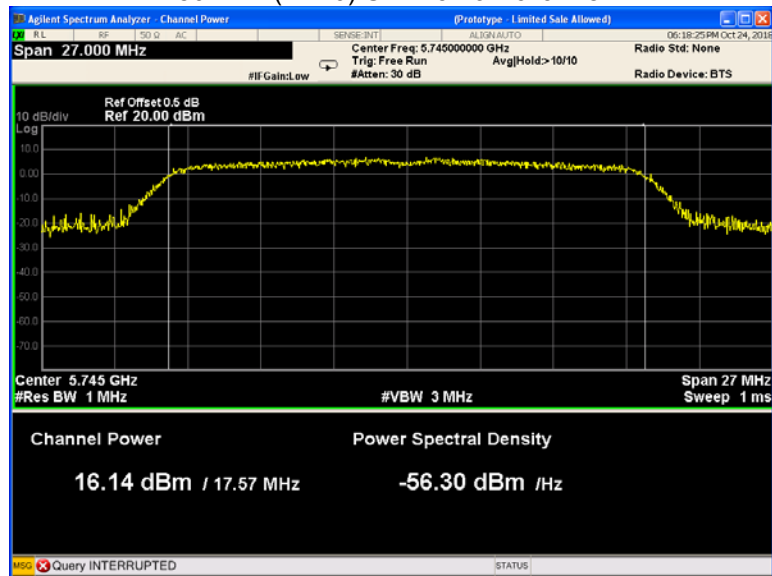


### 802.11n(HT20) U-NII-3 Middle channel

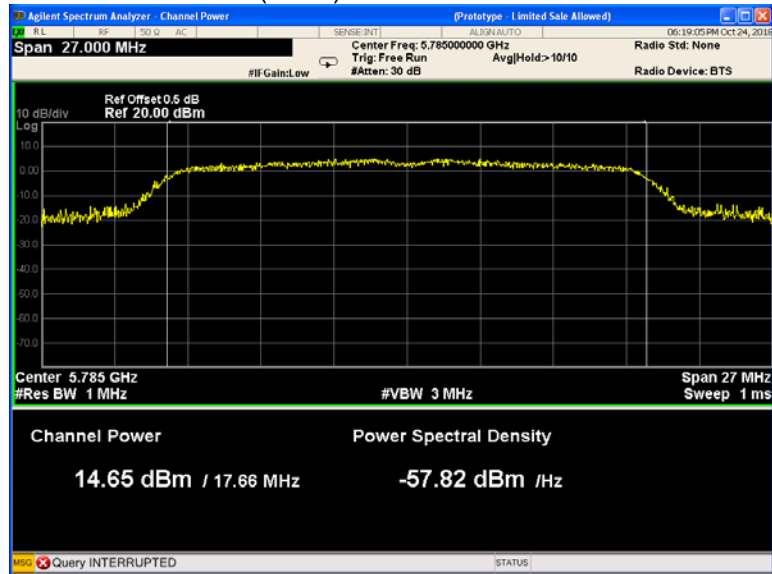


### 802.11n(HT20) U-NII-3 High channel

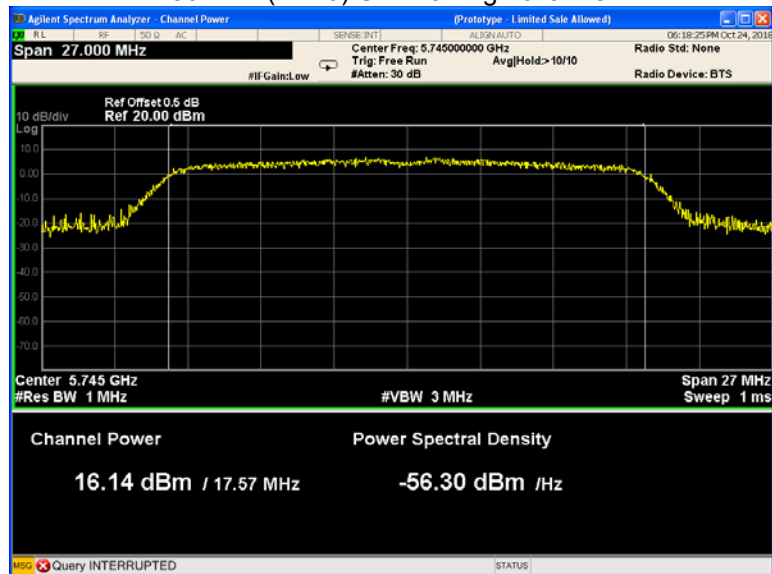

### 802.11n(HT40) U-NII-3 Low channel

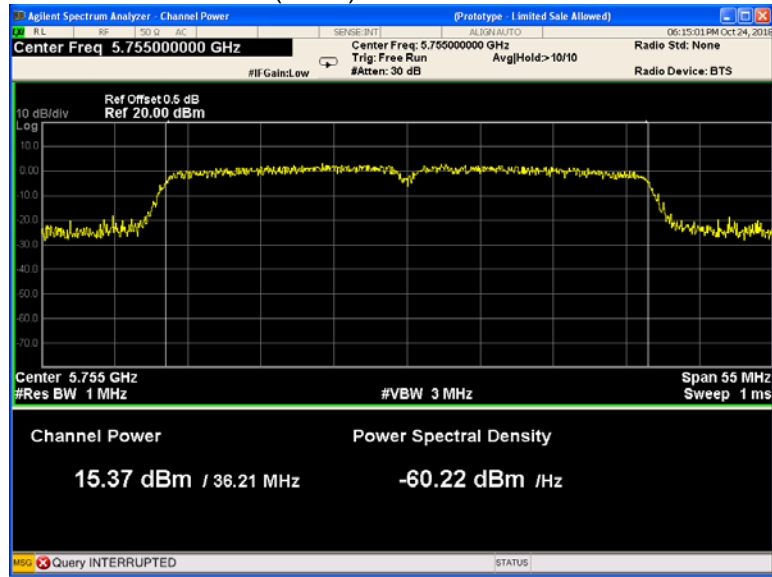

### 802.11n(HT40) U-NII-3 High channel

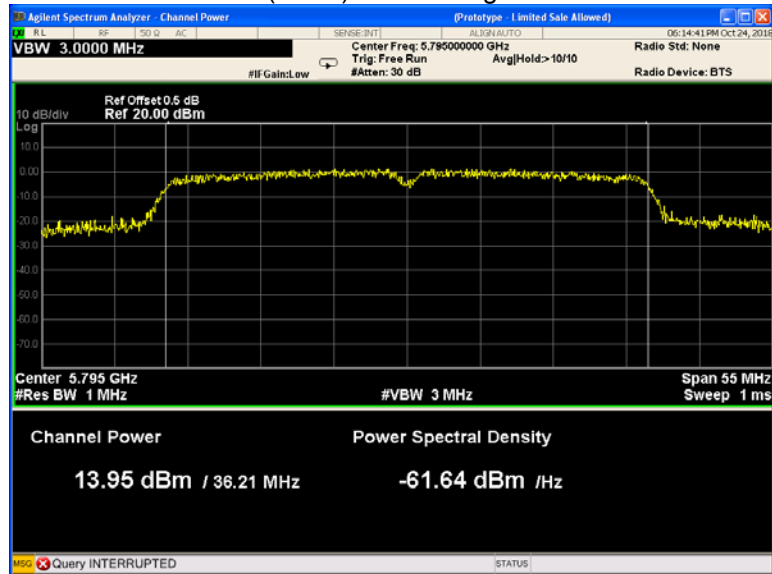

## 14 Power Spectral density

Test Requirement:	FCC CFR47 Part 15 Section 15.407(a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v01, Section F
Test Limit:	$\leq 11.00\text{dBm/MHz}$ for Operation in the U-NII-1(5150MHz-5250MHz)of mobile device $\leq 30.00\text{dBm/500KHz}$ for Operation in the U-NII-3(5725MHz- 5850MHz)of device
Test Result:	PASS

### 14.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer:  
U-NII-1  
RBW = 1MHz, VBW  $\geq 3^*$  RBW Sweep = auto; Detector Function = Peak. Trace = Max hold.  
U-NII-3  
RBW = 510KHz, VBW  $\geq 3^*$  RBW Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section  
Submit this plot.

**14.2 Test Result:**


Band	Operation mode	Power Spectral Density (dBm/MHz)		
		Low	Middle	High
U-NII-1	802.11a	6.760	6.394	6.243
	802.11n(HT20)	4.634	4.443	4.918
	802.11n(HT40)	1.755	/	1.796
	Limit	≤11.00dBm/MHz		

Band	Operation mode	Power Spectral Density (dBm/MHz)		
		Low	Middle	High
U-NII-3	802.11a	-14.091	-17.285	-16.820
	802.11n(HT20)	-15.643	-15.481	-17.013
	802.11n(HT40)	-18.947	/	-20.701
	Limit	≤11.00dBm/MHz		


\* All transmit signals are completely uncorrelated with each other, Directional gain =  $G_{ANT}$  which is less than 6dBi. So the limit does not be reduced.

Test result plots shown as follows:

802.11a U-NII-1 Low channel

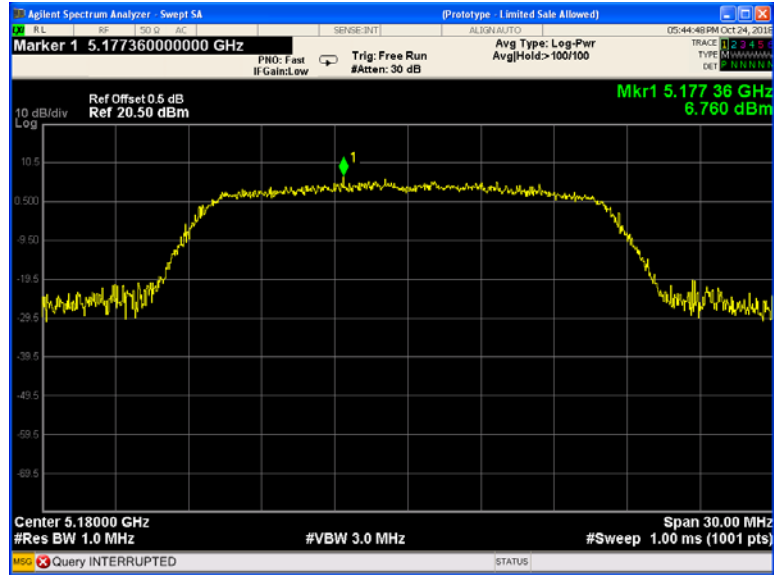


802.11a U-NII-1 Middle channel

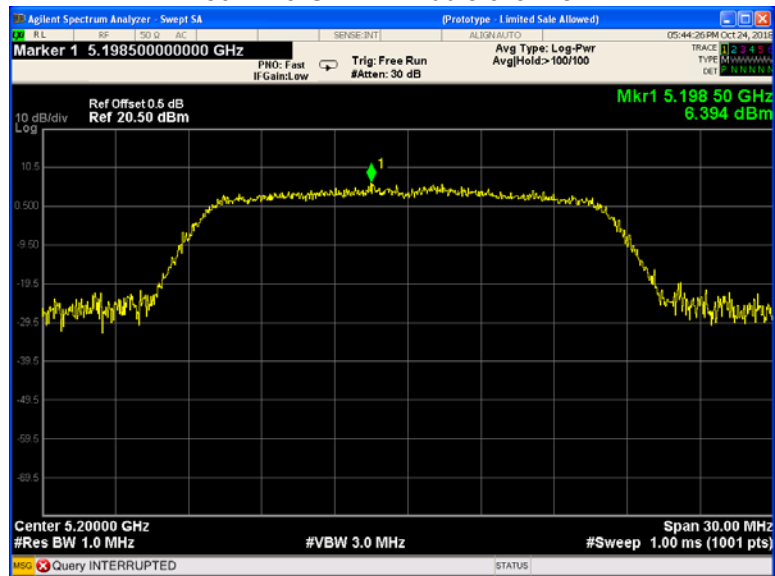





### 802.11a U-NII-1 High channel

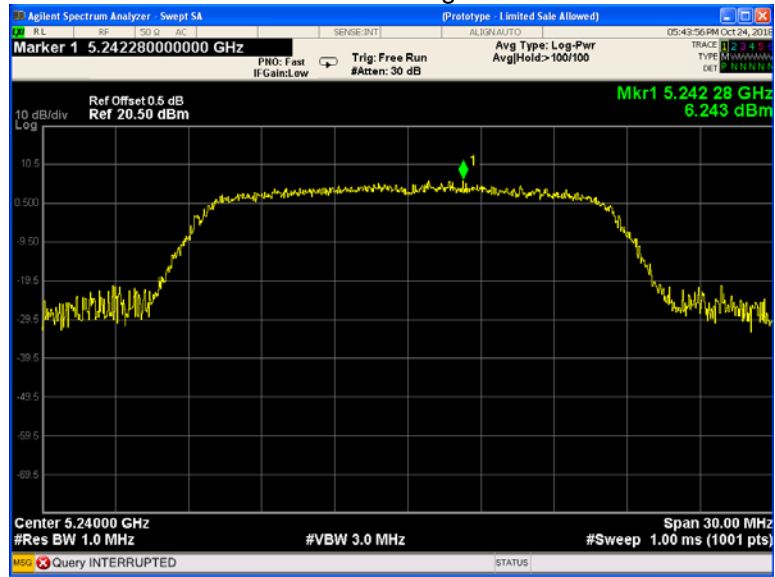


### 802.11n(HT20) U-NII-1 Low channel

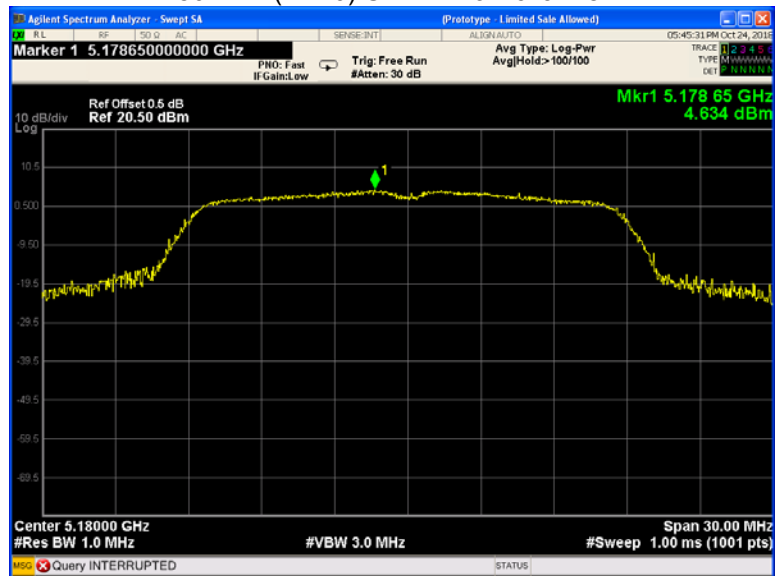


### 802.11n(HT20) U-NII-1 Middle channel

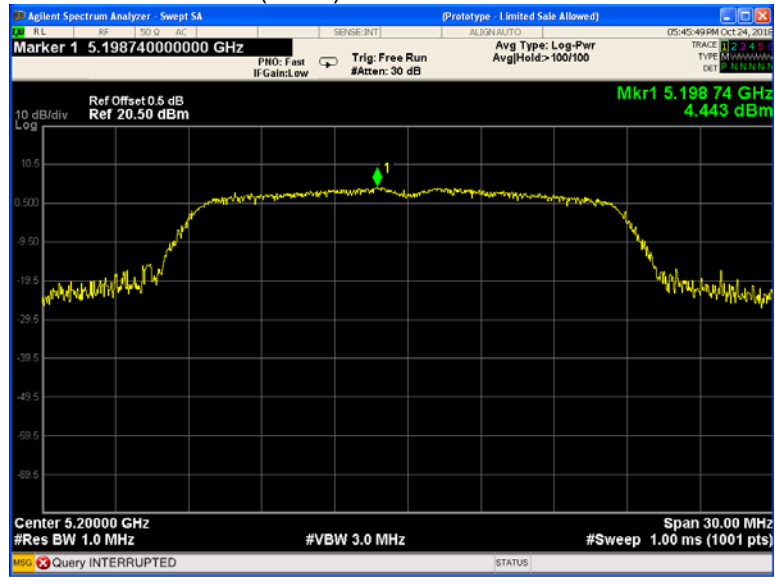


### 802.11n(HT20) U-NII-1 High channel

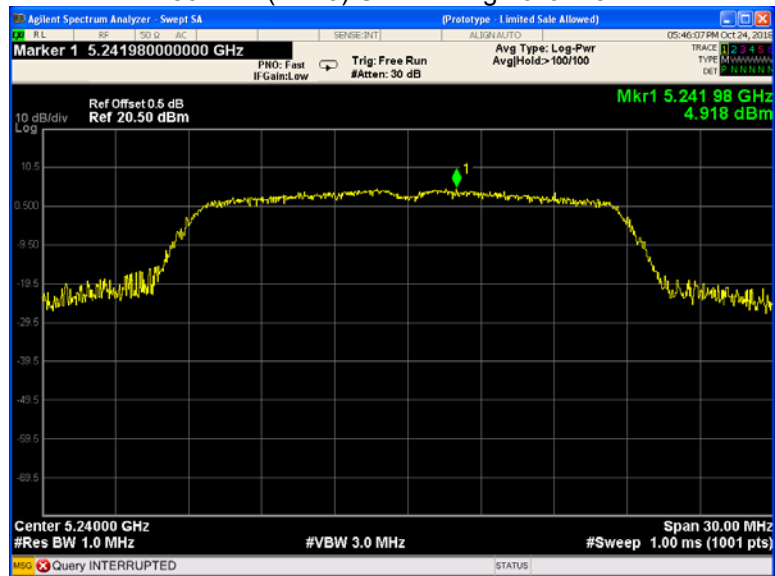


### 802.11n(HT40) U-NII-1 Low channel

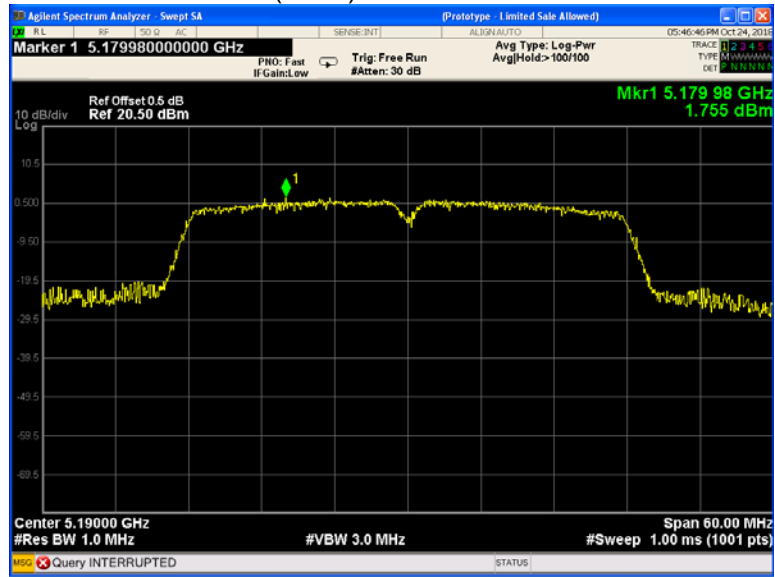


### 802.11n(HT40) U-NII-1 High channel

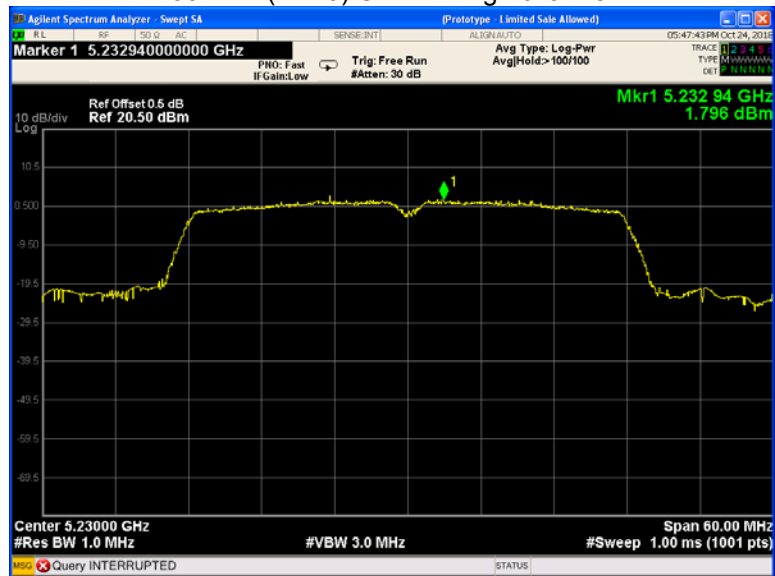


### 802.11a U-NII-3 Low channel

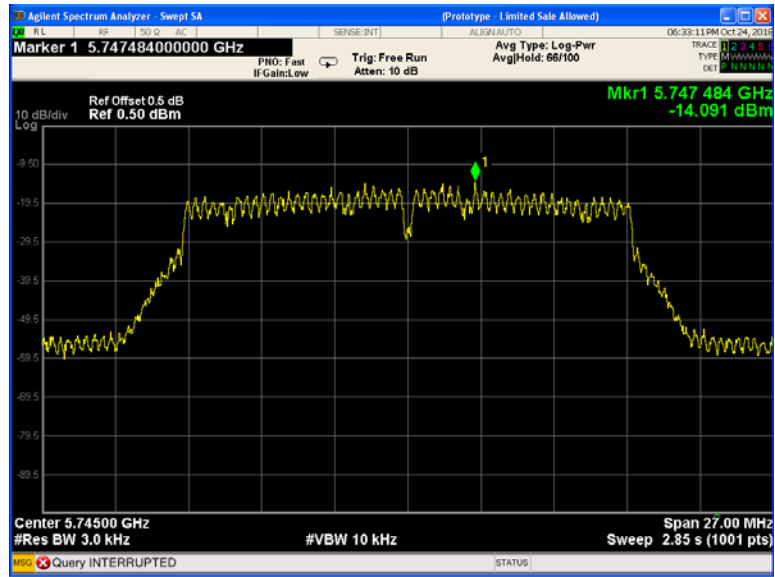


### 802.11a U-NII-3 Middle channel

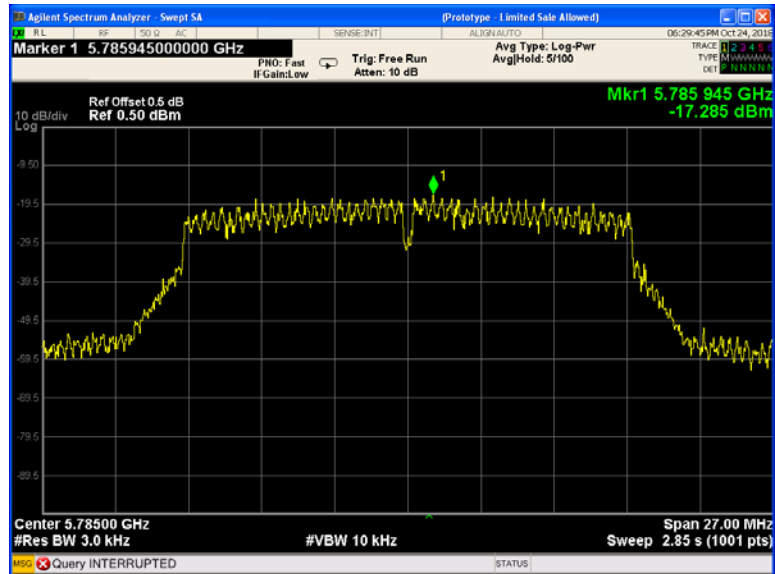


### 802.11a U-NII-3 High channel

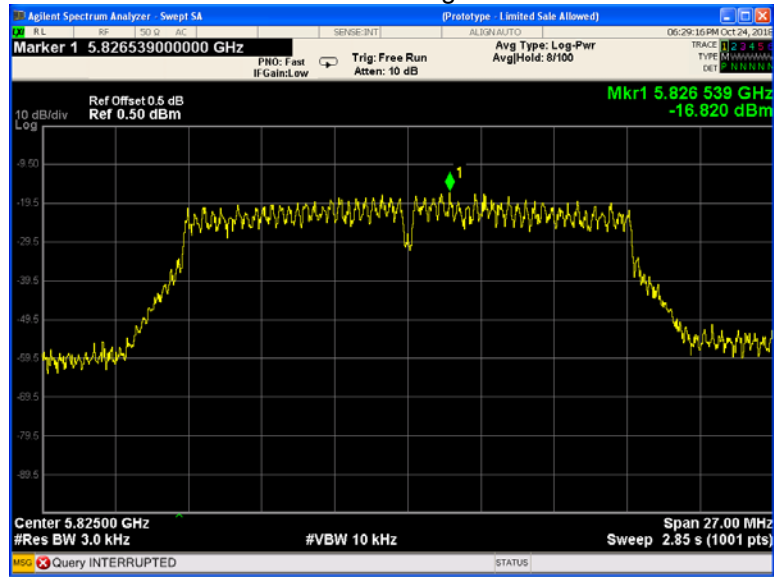


### 802.11n(HT20) U-NII-3 Low channel

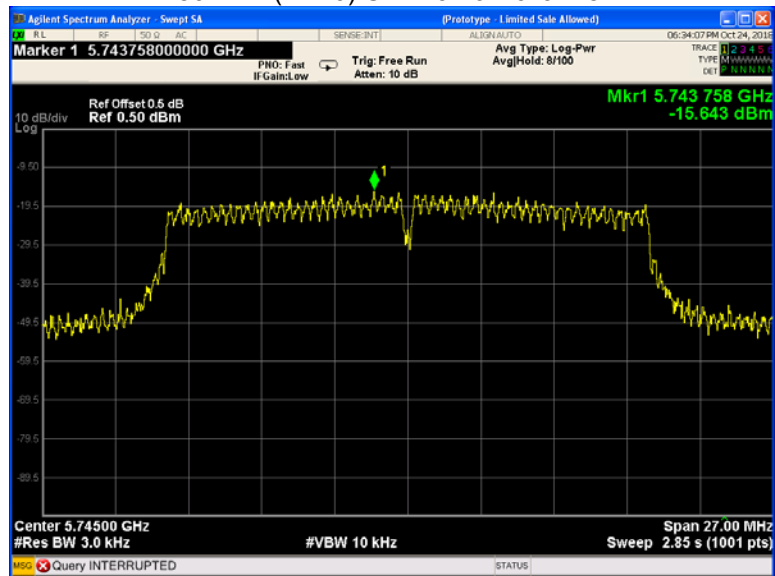


### 802.11n(HT20) U-NII-3 Middle channel

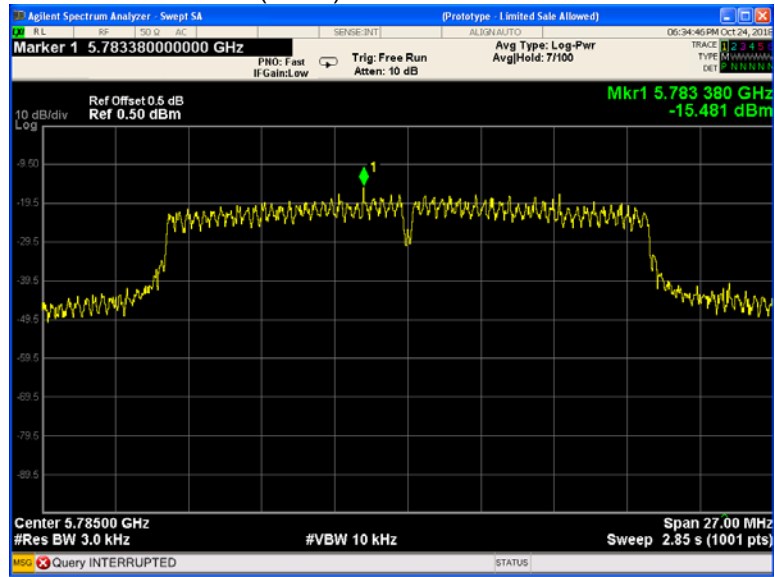


### 802.11n(HT20) U-NII-3 High channel

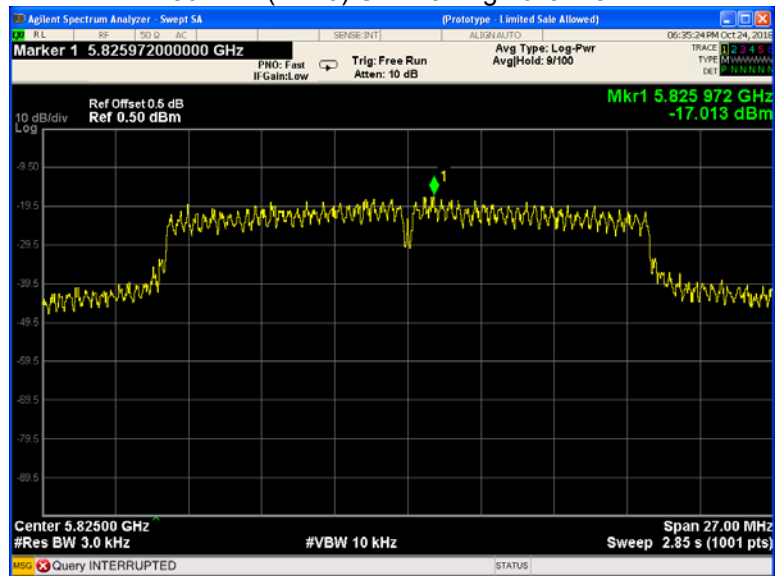

### 802.11n(HT40) U-NII-3 Low channel

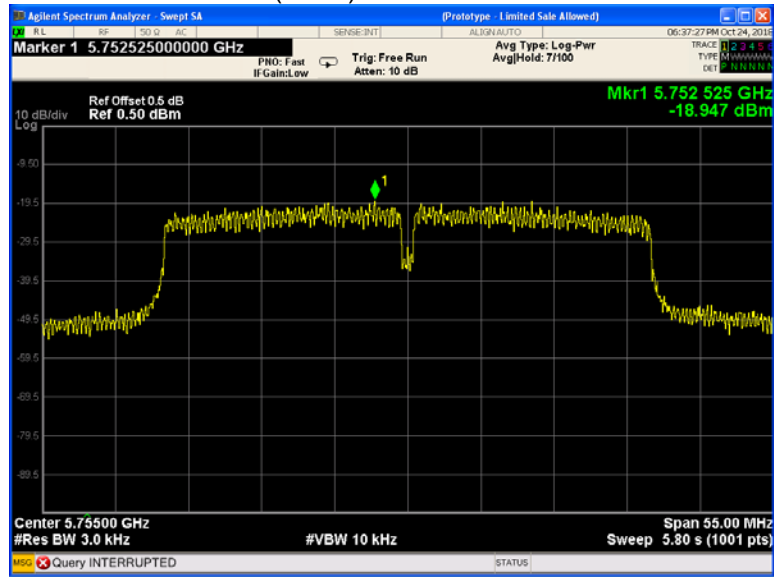

### 802.11n(HT40) U-NII-3 High channel

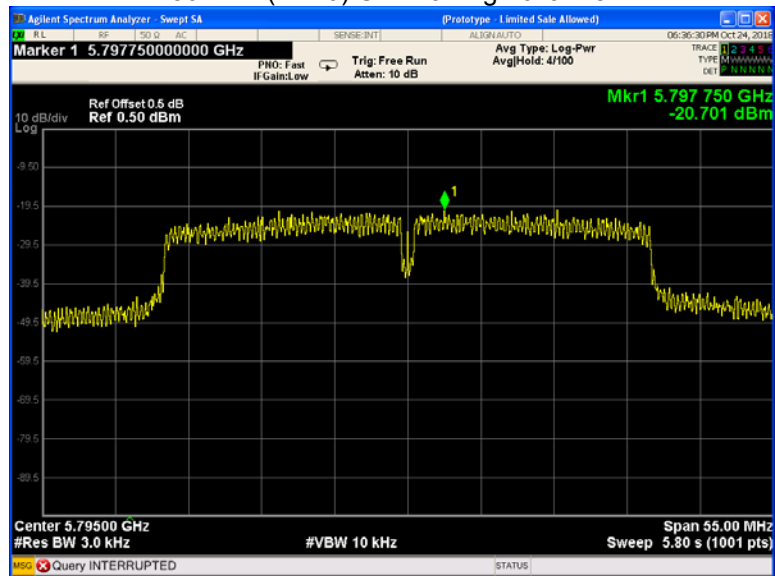

## 15 Frequency Stability

Test Requirement:	FCC CFR47 Part 15 Section 15.407(g)
Test Method:	ANSI C63.10:2013
Test Limit:	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual or 20ppm.
Test Result:	PASS

### 15.1 Test Procedure:

1. The transmitter output (antenna port) was connected to the spectrum analyzer.  
EUT have transmitted absence of unmodulation signal and fixed channelise. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
2. Extreme temperature rule is  $-15^{\circ}\text{C} \sim 50^{\circ}\text{C}$ .



**15.2 Test Result:**

<b>U-NII-1 Test Frequency:5180MHz</b>				
<b>Temperature (°C)</b>	<b>Power Supply (VAC)</b>	<b>Frequency Error (Hz)</b>	<b>Frequency Error (ppm)</b>	<b>Limit (ppm)</b>
50	120	/	/	/
45		1807	2.1599	20
30		1800	2.1516	20
20		1806	2.1587	20
10		1800	2.1516	20
0		1803	2.1552	20
-10		1800	2.1516	20
-15		1809	2.1623	20
-30		/	/	/
20		108	1810	2.1635
20	132	1798	2.1492	20

<b>U-NII-3 Test Frequency:5785MHz</b>				
<b>Temperature (°C)</b>	<b>Power Supply (VAC)</b>	<b>Frequency Error (Hz)</b>	<b>Frequency Error (ppm)</b>	<b>Limit (ppm)</b>
50	120	/	/	/
45		1919	2.2938	20
30		1911	2.2842	20
20		1915	2.2890	20
10		1923	2.2986	20
0		1907	2.2795	20
-10		1908	2.2807	20
-15		1914	2.2878	20
-30		/	/	/
20		108	1918	2.2926
20	132	1906	2.2783	20

## 16 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

This device uses of two antennas that uses a specified coupling to the intentional radiator. Antenna connectors complied with the requirement.

## **17 Photographs of test setup and EUT.**

Note: Please refer to appendix: WTS18S10125849W\_Photo.

=====**End of Report**=====