

ISED CABid: ES1909  
Lab. Company Number: 4621A

Test Report No:  
71590RRF.004

## Test Report

### USA FCC Part 15.247, 15.209

### CANADA RSS-247, RSS-Gen

|                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| (*) Identification of item tested         | Proximity electromechanic lock                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| (*) Trademark                             | Ojmar                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| (*) Model and /or type reference          | OTS Pulse (Full PCB 233-16)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| (*) Derived model not tested              | 233-01                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Other identification of the product       | FCC ID: 2ANY7OJM007<br>IC: Not provided                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| (*) Features                              | Technologies: Mifare Classic, Mifare Desfire EV1/EV2 2K, 4K and 8K, Mifare Ultralight, HID iClass and HID Seos. Compatible with Ultralight C and technogym. BLE. Wireless protocol: Proprietary protocol based on 802.15.4 Power supply: 4x1,5V AA Alkaline batteries Functional temperature range: -10° to 42° (without condensation) Autonomy: Up to 8 years (Depending on usage, humidity and temperature) Approximate weight: 375 g<br>HW version: OTS Pulse 1.0.2<br>SW version: 2.0.0                                                                                                                                                                              |
| Applicant                                 | OJMAR S.A<br>Polígono Industrial de Ierun, s/n, 20870, Elgoibar, Guipúzcoa, Spain                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test method requested, standard           | USA FCC Part 15.247 (10-1-23 Edition): Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz.<br>USA FCC Part 15.209 (10-1-23 Edition): Radiated emission limits; general requirements.<br>CANADA RSS-247 Issue 3 (August 2023).<br>CANADA RSS-Gen Issue 5 amendment 2 (February 2021).<br>Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid Systems Devices Operating Under Section 15.247 of the FCC Rules. 558074 D01 Meas Guidance v05r02 dated April 2, 2019.<br>ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices. |
| Summary                                   | IN COMPLIANCE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Approved by (name / position & signature) | José Manuel Gómez Galván<br>EMC Consumer & RF<br>Lab. Manager                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |

|                    |                                               |
|--------------------|-----------------------------------------------|
| Date of issue      | 2024-07-22                                    |
| Report template No | FDT08_24<br>(*) "Data provided by the client" |

|                                                                     |           |
|---------------------------------------------------------------------|-----------|
| INDEX .....                                                         | 3         |
| ACRONYMS .....                                                      | 4         |
| COMPETENCES AND GUARANTEES .....                                    | 4         |
| GENERAL CONDITIONS .....                                            | 5         |
| UNCERTAINTY .....                                                   | 5         |
| DATA PROVIDED BY THE CLIENT .....                                   | 5         |
| USAGE OF SAMPLES .....                                              | 7         |
| TEST SAMPLE DESCRIPTION .....                                       | 8         |
| IDENTIFICATION OF THE CLIENT .....                                  | 9         |
| TESTING PERIOD AND PLACE .....                                      | 9         |
| DOCUMENT HISTORY .....                                              | 9         |
| ENVIRONMENTAL CONDITIONS .....                                      | 9         |
| REMARKS AND COMMENTS .....                                          | 10        |
| TESTING VERDICTS .....                                              | 12        |
| SUMMARY .....                                                       | 12        |
| <b>APPENDIX A: TEST RESULTS. BLUETOOTH LOW ENERGY (2M, 1M).....</b> | <b>13</b> |

## Acronyms

| Acronym ID      | Acronym Description                 |
|-----------------|-------------------------------------|
| BW              | Bandwidth                           |
| Detector        | Detector used                       |
| Ebw             | Emission Bandwidth                  |
| Equipment       | Equipment Type                      |
| Freq            | Frequency                           |
| Freq Rng        | Frequency Range                     |
| Inband Peak Lvl | Inband Peak Level                   |
| Lvl             | Level                               |
| MP              | Measurement Point                   |
| Mod             | Modulation                          |
| Mode            | MIMO Mode                           |
| Occ Ch BW       | Occupied Channel Bandwidth          |
| PSD             | Power Spectral Density              |
| Peak Power      | Maximum Peak Conducted Output Power |
| Pol             | Polarization                        |
| Port            | Active Port                         |
| Unwanted Freq   | Unwanted Emissions Frequency        |
| Unwanted Lvl    | Unwanted Emissions Level            |

## Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification S.A.U. is an FCC-recognized accredited testing laboratory with appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification S.A.U. is an ISED-recognized accredited testing laboratory, CABid: ES1909, Company Number: 4621A, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

## General conditions

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

## Uncertainty

---

Uncertainty (factor  $k=2$ ) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

The total uncertainty of the measurement system for the radiated emissions of EUT from 30 MHz to 1 GHz is:  
Measurement uncertainty  $\leq \pm 5,35$  dB with factor ( $k = 2$ ).

The total uncertainty of the measurement system for the radiated emissions of EUT from 1 GHz to 17 GHz is:  
Measurement uncertainty  $\leq \pm 4,32$  dB with factor ( $k = 2$ ).

The total uncertainty of the measurement system for the radiated emissions of EUT from 17 GHz to 26 GHz is:  
Measurement uncertainty  $\leq \pm 5,51$  dB with factor ( $k = 2$ ).

The total uncertainty of the measurement system for the conducted testing of EUT is:

RF Peak Output Power: Measurement uncertainty  $\leq \pm 0,80$  dB

RF Average Output Power: Measurement uncertainty  $\leq \pm 0,99$  dB

Power Spectral Density: Measurement uncertainty  $\leq \pm 0,99$  dB

6dB Bandwidth: Measurement uncertainty  $\leq \pm 2,84$  %

Occupied Channel Bandwidth: Measurement uncertainty  $\leq \pm 1,17$  %

Conducted Band-edge spurious emissions: Measurement uncertainty  $\leq \pm 1,76$  dB

## Data provided by the client

---

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of a 233. Proximity electromechanic lock that communicates via RFID (13,56MHz) using Mifare Classic, Mifare Desfire and Mifare Ultralight technologies. Lock is powered by 4 AA batteries of 1,5V each one. Lock also allows NFC communication at 13,56MHz for maintenance purposes. Working mode is following one: Once knob is pressed, a switch is activated that starts communication between interior antenna and proximity card. Lock reads the UID of the card or the UID of the smartphone that is sent by BLE and send the information to the Gateway. Gateway, with the information that has stored in its memory, answers back accepting or denying the petition operation. Once received, lock moves the motor and closes. After that, lock sends the event of operation to Gateway. Opening is made in the same way. Lock is sleep until the switch is pressed.
3. Letter of Equivalence:



INTELLIGENT LOCKING SYSTEMS™

Letter of Equivalence  
**OTS PULSE**

Pag. 1 of 1  
F03.04 R01

We hereby confirm the equivalence between the following OTS Pulse system boards

| Full PCB | Equivalent PCB |
|----------|----------------|
| 233-16   | 233-01         |

Ambas placas poseen las siguientes características:

- Same RFID antenna design.
- Same BLE antenna design.
- Same Wireless antenna design.
- Same functional Firmware and bootloader.

Both boards have the same PCB layout. The only difference is that the following component "CHIP HID SEL55100000" is not mounted on the 233-01 board:

This chip is used to read the static serial number of the HID Seos cards, using the same antenna circuit.

The reason for having two boards is purely economic, as the price difference is significant.

Signed

At Elgoibar, 30/08/2023



Xabier Martínez

Product Manager

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

## Usage of samples

Samples undergoing test have been selected by: The client.

| Id   | Control Number | Description                        | Model                       | Serial Nº | Date of Reception | Application        |
|------|----------------|------------------------------------|-----------------------------|-----------|-------------------|--------------------|
| S/01 | 71590B_15.1    | OTS Emisiones radiadas (TEST MODE) | OTS Pulse (Full PCB 233-16) | -         | 2023-05-04        | Element Under Test |
| S/02 | 71590B_11.1    | OTS Emisiones conducidas           | OTS Pulse (Full PCB 233-16) | -         | 2023-05-04        | Element Under Test |
| S/02 | 71590B_7.1     | Cable USB                          | -                           | -         | 2023-05-04        | Auxiliary Element  |

Notes referenced to samples during the project:

| Id   | Type             |
|------|------------------|
| S/01 | Radiated tests.  |
| S/02 | Conducted tests. |

Test sample description

|                                                 |                           |                                |                          |                          |                                   |   |
|-------------------------------------------------|---------------------------|--------------------------------|--------------------------|--------------------------|-----------------------------------|---|
| Ports..... :                                    | Port name and description | Cable                          |                          |                          |                                   |   |
|                                                 |                           | Specified max length [m]       | Attached during test     | Shielded                 | Coupled to patient <sup>(3)</sup> |   |
|                                                 | -                         | -                              | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/>          |   |
| Supplementary information to the ports..... :   | -                         |                                |                          |                          |                                   |   |
| Rated power supply ..... :                      | Voltage and Frequency     |                                | Reference poles          |                          |                                   |   |
|                                                 |                           |                                | L1                       | L2                       | L3                                | N |
|                                                 | <input type="checkbox"/>  | AC:                            |                          |                          |                                   |   |
| <input checked="" type="checkbox"/>             | DC: 4 AA Batteries (6V)   |                                |                          |                          |                                   |   |
| Rated Power..... :                              | -                         |                                |                          |                          |                                   |   |
| Clock frequencies..... :                        | -                         |                                |                          |                          |                                   |   |
| Other parameters ..... :                        | -                         |                                |                          |                          |                                   |   |
| Software version..... :                         | 2.0.0                     |                                |                          |                          |                                   |   |
| Hardware version ..... :                        | OTS Pulse 1.0.2           |                                |                          |                          |                                   |   |
| Dimensions in cm (W x H x D) ... :              | -                         |                                |                          |                          |                                   |   |
| Mounting position ..... :                       | <input type="checkbox"/>  | Table top equipment            |                          |                          |                                   |   |
|                                                 | <input type="checkbox"/>  | Wall/Ceiling mounted equipment |                          |                          |                                   |   |
|                                                 | <input type="checkbox"/>  | Floor standing equipment       |                          |                          |                                   |   |
|                                                 | <input type="checkbox"/>  | Hand-held equipment            |                          |                          |                                   |   |
|                                                 | <input type="checkbox"/>  | Other:                         |                          |                          |                                   |   |
| Modules/parts..... :                            | Module/parts of test item |                                | Type                     |                          | Manufacturer                      |   |
|                                                 | -                         |                                | -                        |                          | -                                 |   |
| Accessories (not part of the test item) ..... : | Description               |                                | Type                     |                          | Manufacturer                      |   |
|                                                 | -                         |                                | -                        |                          | -                                 |   |
| Documents as provided by the applicant..... :   | Description               |                                | File name                |                          | Issue date                        |   |
|                                                 | -                         |                                | -                        |                          | -                                 |   |

<sup>(3)</sup> Only for Medical Equipment

## Identification of the client

OJMAR S.A.  
Polígono Industrial de Ierun, s/n, 20870, Elgoibar, Guipúzcoa, Spain

## Testing period and place

|               |                                        |
|---------------|----------------------------------------|
| Test Location | DEKRA Testing and Certification S.A.U. |
| Date (start)  | 2024-05-13                             |
| Date (finish) | 2024-05-15                             |

## Document history

| Report number | Date       | Description    |
|---------------|------------|----------------|
| 71590RRF.004  | 2024-07-22 | First release. |

## Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

|                   |                              |
|-------------------|------------------------------|
| Temperature       | Min. = 15 °C<br>Max. = 35 °C |
| Relative humidity | Min. = 20 %<br>Max. = 75 %   |

In the semianechoic chamber, the following limits were not exceeded during the test.

|                   |                              |
|-------------------|------------------------------|
| Temperature       | Min. = 15 °C<br>Max. = 35 °C |
| Relative humidity | Min. = 20 %<br>Max. = 75 %   |

In the chamber for conducted measurements, the following limits were not exceeded during the test:

|                   |                              |
|-------------------|------------------------------|
| Temperature       | Min. = 15 °C<br>Max. = 35 °C |
| Relative humidity | Min. = 20 %<br>Max. = 75 %   |

## Remarks and comments

The tests have been performed by the technical personnel: Alvaro Gutierrez Naranjo.

Used instrumentation:

| Control No. | Equipment                                  | Model           | Manufacturer          | Next Calibration |
|-------------|--------------------------------------------|-----------------|-----------------------|------------------|
| 07445       | DC POWER SUPPLY 30V/5A                     | U8002A          | KEYSIGHT TECHNOLOGIES | N/A              |
| 05850       | DIGITAL MULTIMETER                         | 179             | FLUKE                 | 2024-11-02       |
| 07760       | DIGITAL MULTIMETER                         | 175             | FLUKE                 | 2024-11-08       |
| 10304       | EMI TEST RECEIVER 2Hz-44GHz                | ESW44           | ROHDE AND SCHWARZ     | 2026-02-19       |
| 06615       | ETHERNET TEMPERATURE AND HUMIDITY LOGGER   | HWg-STE         | HW GROUP              | 2025-04-04       |
| 06609       | ETHERNET TEMPERATURE AND HUMIDITY LOGGER   | HWg-STE         | HW GROUP              | 2025-04-22       |
| 07040       | EXTENSION FOR OPEN SWITCH UNIT UP TO 40GHz | OSP-B157Wx      | ROHDE AND SCHWARZ     | 2025-04-19       |
| 09029       | HIGH PASS FILTER 17-40 GHZ                 | STHP-17-40G-92  | TEMSTRON/TEM WELL     | 2025-03-29       |
| 08770       | HIGH PASS FILTER 3-18 GHZ                  | ST-3GA2833-HS   | TEMSTRON/TEM WELL     | 2024-07-27       |
| 06496       | HORN ANTENNA 1-18GHz                       | BBHA 9120 D     | SCHWARZBECK           | 2026-12-01       |
| 04657       | HORN ANTENNA 18-40GHz                      | BBHA 9170       | SCHWARZBECK           | 2026-06-12       |
| 06143       | HYBRID BILOG ANTENNA 30MHz-6GHz            | 3142E           | ETS LINDGREN          | 2027-01-22       |
| 07193       | MULTI-DEVICE CONTROLLER                    | CO3000          | INNCO                 | N/A              |
| 08848       | OPEN SWITCH UNIT UP TO 7.5 GHz             | OSP-B157W8 PLUS | ROHDE & SCHWARZ       | 2024-12-21       |
| 00922       | POWER SUPPLY DC 40 V / 40 A                | NGPE 40/40      | ROHDE AND SCHWARZ     | N/A              |
| 08856       | PRE-AMPLIFIER G>30dB 18-40GHz              | BLMA 1840-4A    | BONN ELEKTRONIK       | 2025-02-27       |
| 03783       | PRE-AMPLIFIER G>30dB 1GHz-18GHz            | BLMA 0118-3A    | BONN ELEKTRONIK       | 2025-03-15       |
| 06142       | PRE-AMPLIFIER G>38dB 30MHz-6GHz            | BLNA 0360-01N   | BONN ELEKTRONIK       | 2024-06-28       |
| 06144       | PRE-AMPLIFIER G>40dB 10MHz-6GHz            | BLNA 0160-01N   | BONN ELEKTRONIK       | 2024-07-25       |
| 06791       | SEMIANECHOIC ABSORBER LINED CHAMBER IV     | FACT 3 200 STP  | ETS LINDGREN          | N/A              |
| 06793       | SHIELDED ROOM                              | S101            | ETS LINDGREN          | N/A              |
| 07794       | SIGNAL AND SPECTRUM ANALYZER 10Hz-40GHz    | FSV40           | ROHDE AND SCHWARZ     | 2025-04-21       |

| Control No. | Equipment                               | Model   | Manufacturer      | Next Calibration |
|-------------|-----------------------------------------|---------|-------------------|------------------|
| 06668       | SIGNAL AND SPECTRUM ANALYZER 10Hz-40GHz | FSV40   | ROHDE AND SCHWARZ | 2024-12-14       |
| 04848       | SOFTWARE FOR EMC/RF TESTING             | EMC32   | ROHDE AND SCHWARZ | N/A              |
| 06611       | TEMPERATURE AND HUMIDITY PROBE          | HWg-STE | HW GROUP          | 2025-04-04       |
| 07798       | WMS32                                   | WMS32   | ROHDE AND SCHWARZ | N/A              |

## Testing verdicts

|                |     |
|----------------|-----|
| Fail           | F   |
| Inconclusive   | I   |
| Not applicable | N/A |
| Not measured   | N/M |
| Pass           | P   |

## Summary

### Bluetooth Low Energy (2M, 1M):

| FCC PART 15 PARAGRAPH/ RSS-247                |                                              |         |        |
|-----------------------------------------------|----------------------------------------------|---------|--------|
| Requirement – Test case                       |                                              | Verdict | Remark |
| FCC 15.247 (a)(2) / RSS-247 5.2. (a)          | 6 dB Bandwidth                               | P       |        |
| FCC 15.247 (b) / RSS-247 5.4. (d)             | Maximum output power and antenna gain        | P       |        |
| FCC 15.247 (d) / RSS-247 5.5.                 | Band-edge emissions compliance (Transmitter) | P       |        |
| FCC 15.247 (e) / RSS-247 5.2. (b)             | Power spectral density                       | P       |        |
| FCC 15.247 (d) / RSS-247 5.5.                 | Emission limitations radiated (Transmitter)  | P       |        |
| <u>Supplementary information and remarks:</u> |                                              |         |        |
| None.                                         |                                              |         |        |

# Appendix A: Test results. Bluetooth Low Energy (2M, 1M)

|                                                                                                  |           |
|--------------------------------------------------------------------------------------------------|-----------|
| TEST CONDITIONS .....                                                                            | 15        |
| TEST CASES DETAILS .....                                                                         | 18        |
| <i>RSS-247 5.2 (a) / FCC 15.247 (a) (2) [6dBw] 6 dB Bandwidth .....</i>                          | <i>18</i> |
| <i>RSS-247 5.2 (b) / FCC 15.247 (e) [Psd] Power spectral density .....</i>                       | <i>34</i> |
| <i>RSS-247 5.4 (d) / FCC 15.247 (b) (3) [Pkcp] Maximum Peak Conducted output power .....</i>     | <i>42</i> |
| <i>RSS-247 5.5 / FCC 15.247 (d) [Bndedge] Band-edge emissions compliance (Transmitter) .....</i> | <i>50</i> |
| <i>RSS-247 5.5 / FCC 15.247 (d) [RSE] Emission limitations radiated (Transmitter) .....</i>      | <i>57</i> |
| <i>99dBw Occupied Channel Bandwidth 99% .....</i>                                                | <i>18</i> |

## TEST CONDITIONS

(\*): Data provided by the client.

**POWER SUPPLY (\*):**

Vnominal: 6 Vdc  
Type of Power Supply: 4 AA Batteries

**ANTENNA (\*):**

Type of Antenna: Multiband antenna  
Maximum Declared Antenna Gain: 1.5 dBi

**TEST FREQUENCIES (\*):**

| Modulation | Data rates  | Low Channel: | Middle Channel | High Channel |
|------------|-------------|--------------|----------------|--------------|
| BLE GFSK   | 1M 1 Mbit/s | 2402 MHz     | 2440 MHz       | 2480 MHz     |
| BLE GFSK   | 2M 2 Mbit/s | 2402 MHz     | 2440 MHz       | 2480 MHz     |

During transmitter test the EUT was controlled by a SW tool provided by the client to operate in a continuous transmit mode on the modulation schemes and test channels as required.

**CONDUCTED MEASUREMENTS:**

The equipment under test was set up in a shielded room and it is connected to the TS8997 using a low loss RF cable. The reading of the spectrum analyser is corrected taking into account the cable loss.



**RADIATED MEASUREMENTS:**

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Bilog antenna for the range between 30 MHz to 1000 MHz and 1 GHz-17 GHz Double ridge horn antenna) is situated at a distance of 3 m and at a distance of 1.5 m for the frequency range 17 GHz-26 GHz (17 GHz-40 GHz horn antenna).


For radiated emissions in the range 17 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height (Bilog antenna and Double ridge horn antenna) was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

A resolution bandwidth/video bandwidth of 100 kHz / 300 kHz was used for frequencies below 1 GHz and 1 MHz / 3 MHz for frequencies above 1 GHz.


Radiated measurements setup from 30 MHz to 1 GHz:

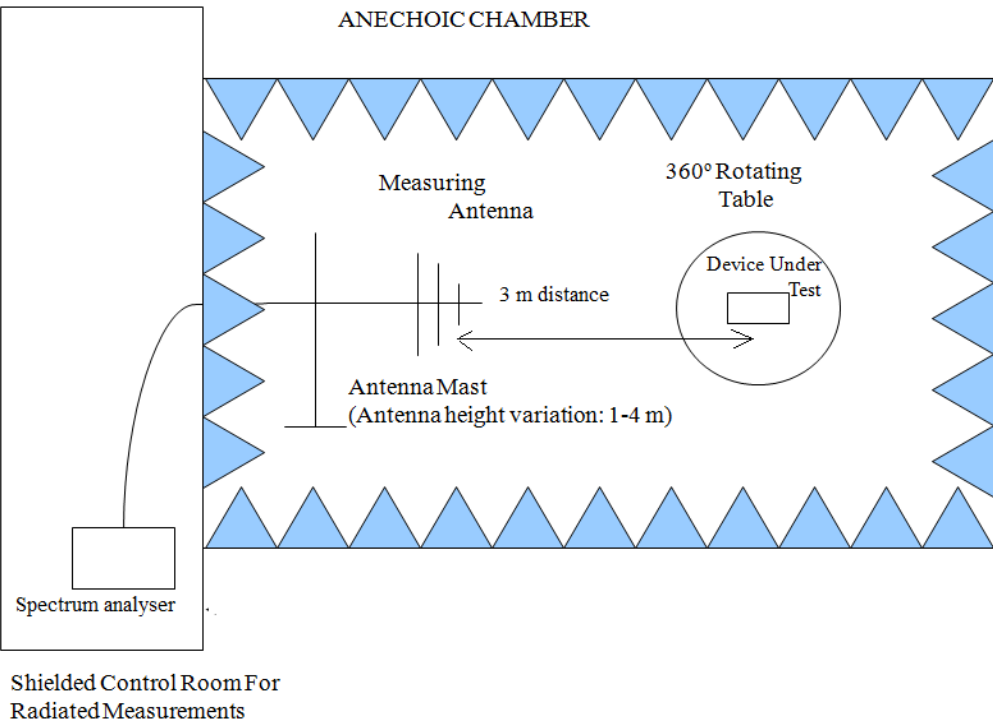

Radiated measurements setup from 1 GHz to 17 GHz:

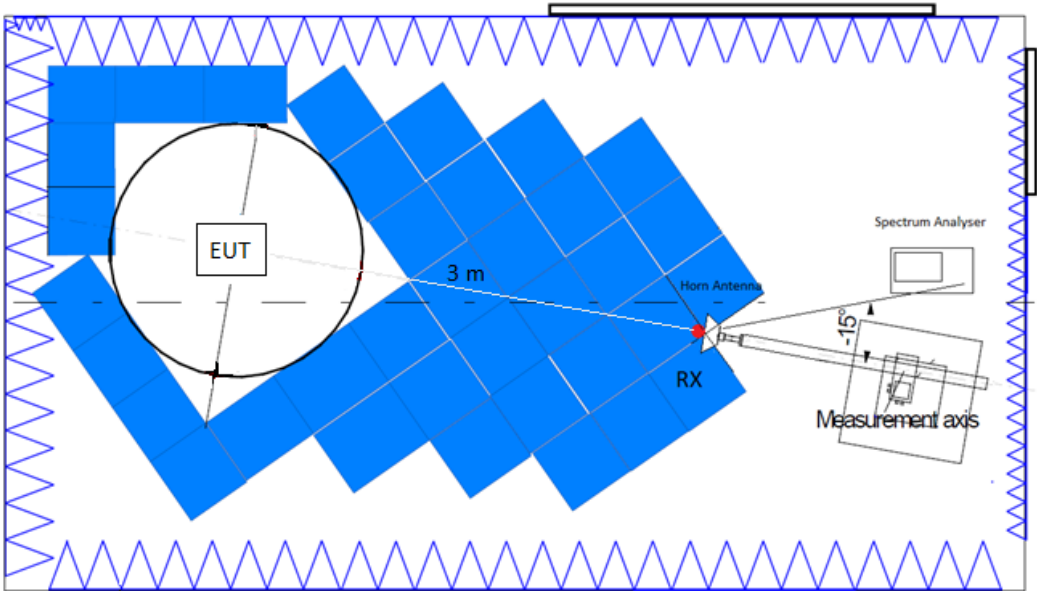

Radiated measurements setup  $f > 17$  GHz:

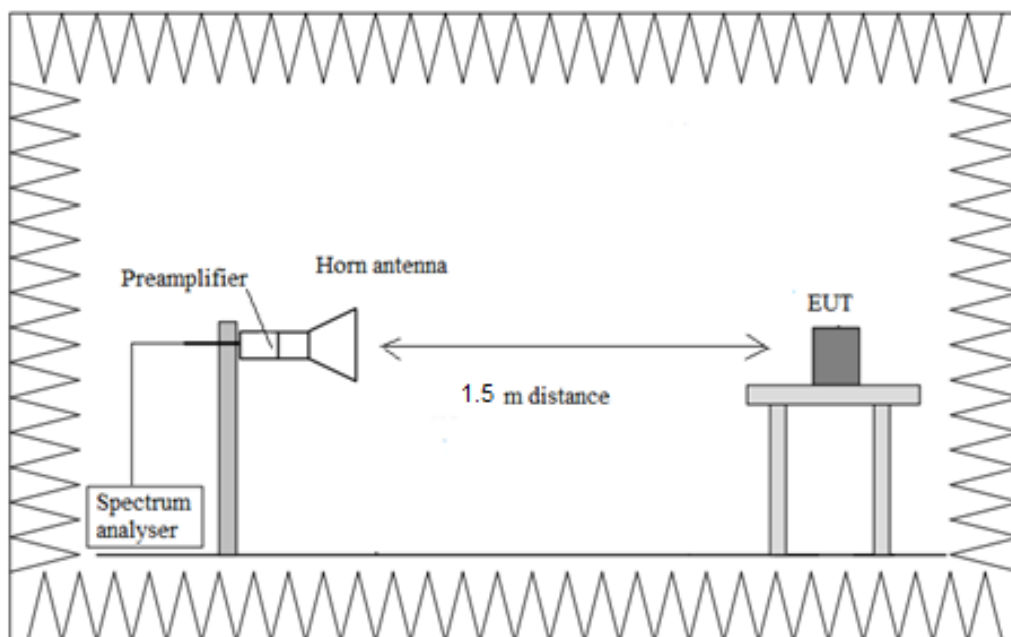

## TEST CASES DETAILS

### 99dBw Occupied Channel Bandwidth 99%

Modulation: BLE (GFSK 1 Mbit/s)

MIMO Mode: SISO

**Results**

| Freq (MHz) | Occ Ch BW (MHz) |
|------------|-----------------|
| 2402.00000 | 1.030           |
| 2440.00000 | 1.035           |
| 2480.00000 | 1.035           |



**Verdict**

Pass

Attachments



Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BLE (GFSK 1 Mbit/s)    Frequency MHz = 2402.00000  
MIMO Mode = SISO    Active Port = 1

Images:

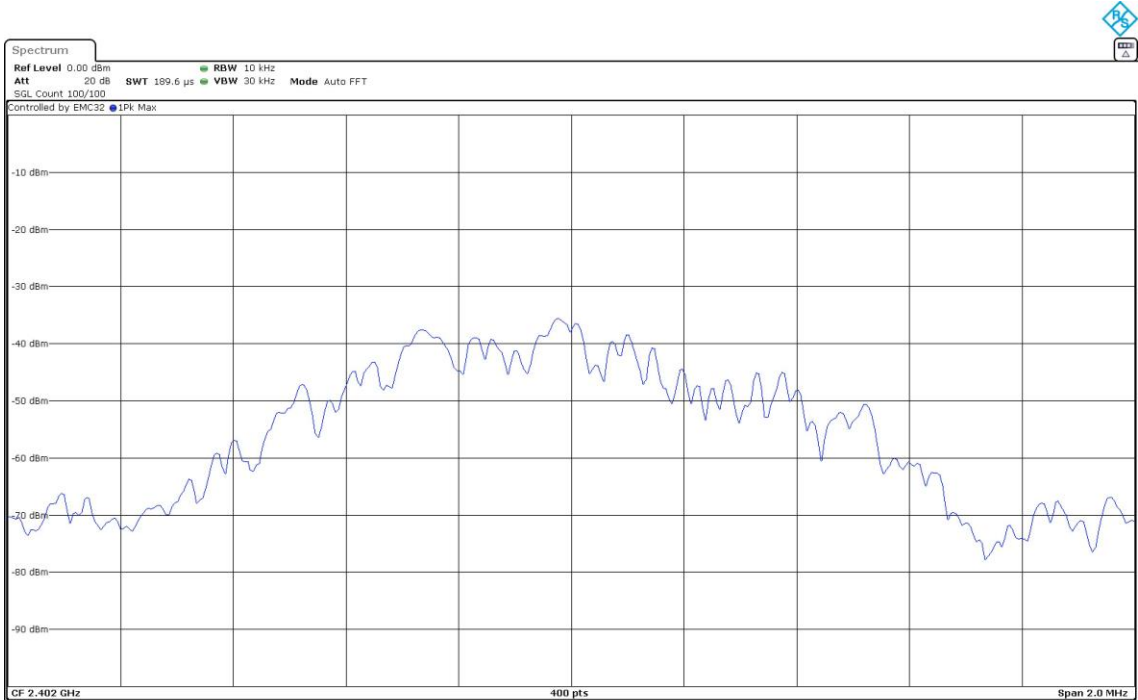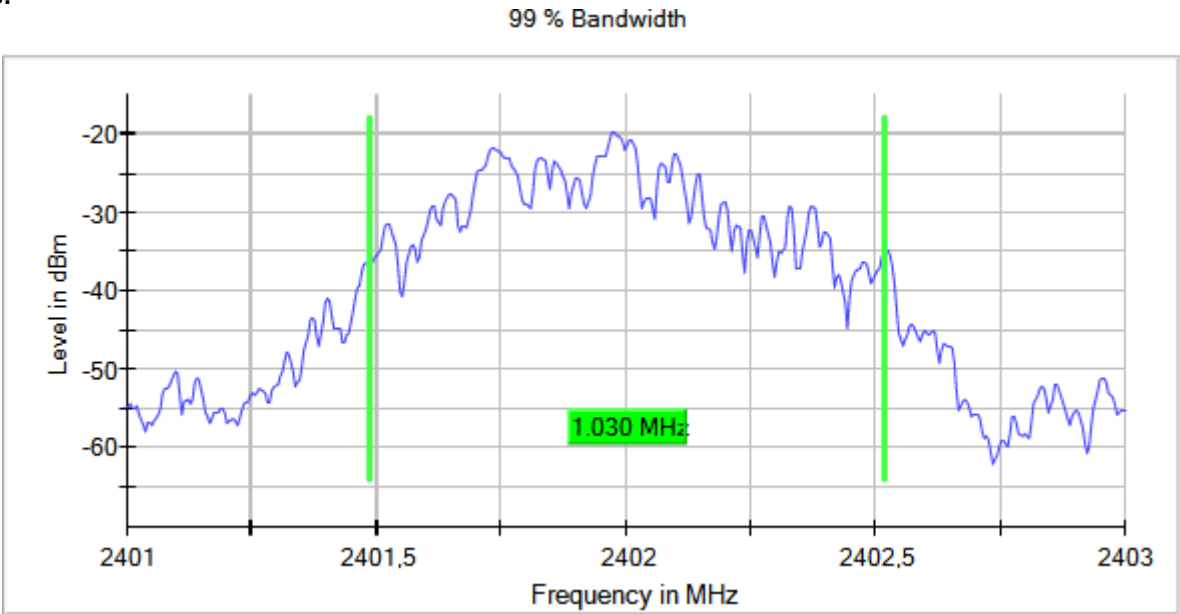



Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BLE (GFSK 1 Mbit/s)    Frequency MHz = 2440.00000  
MIMO Mode = SISO    Active Port = 1

Images:

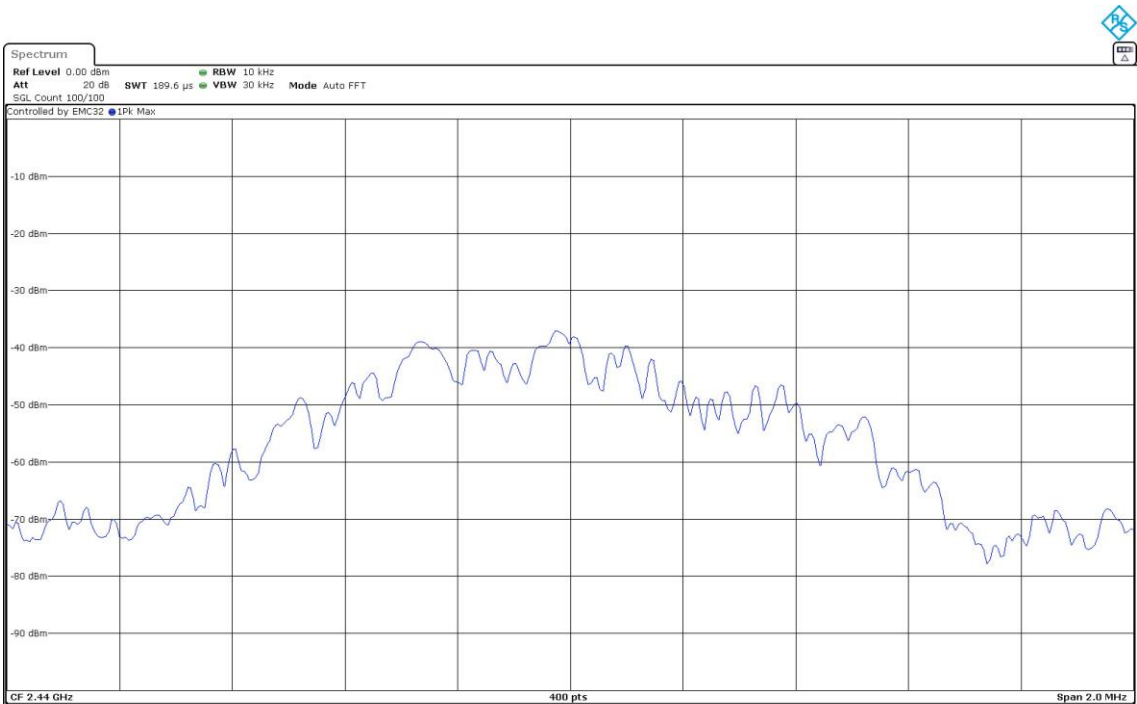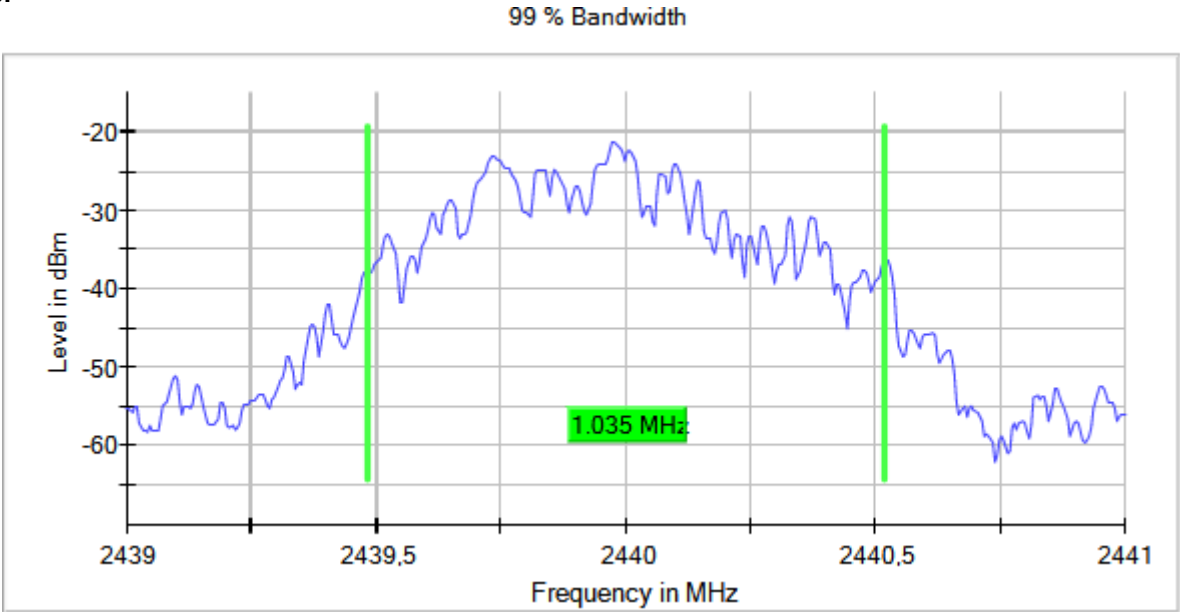

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BLE (GFSK 1 Mbit/s)    Frequency MHz = 2480.00000  
MIMO Mode = SISO    Active Port = 1

Images:

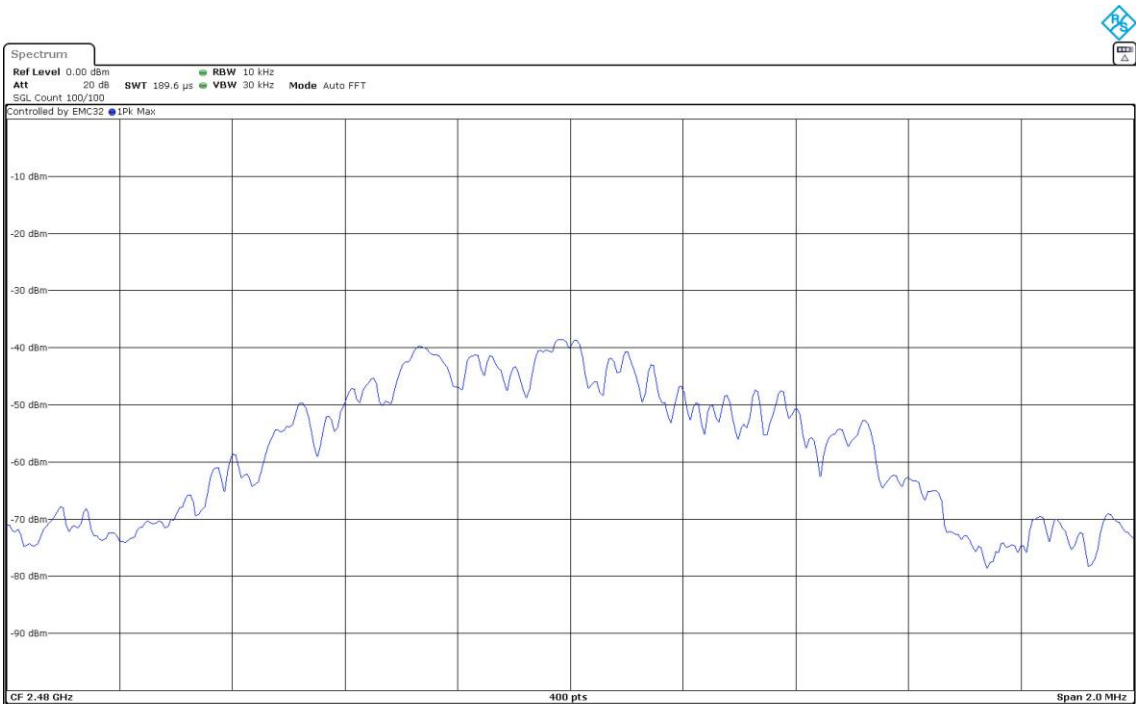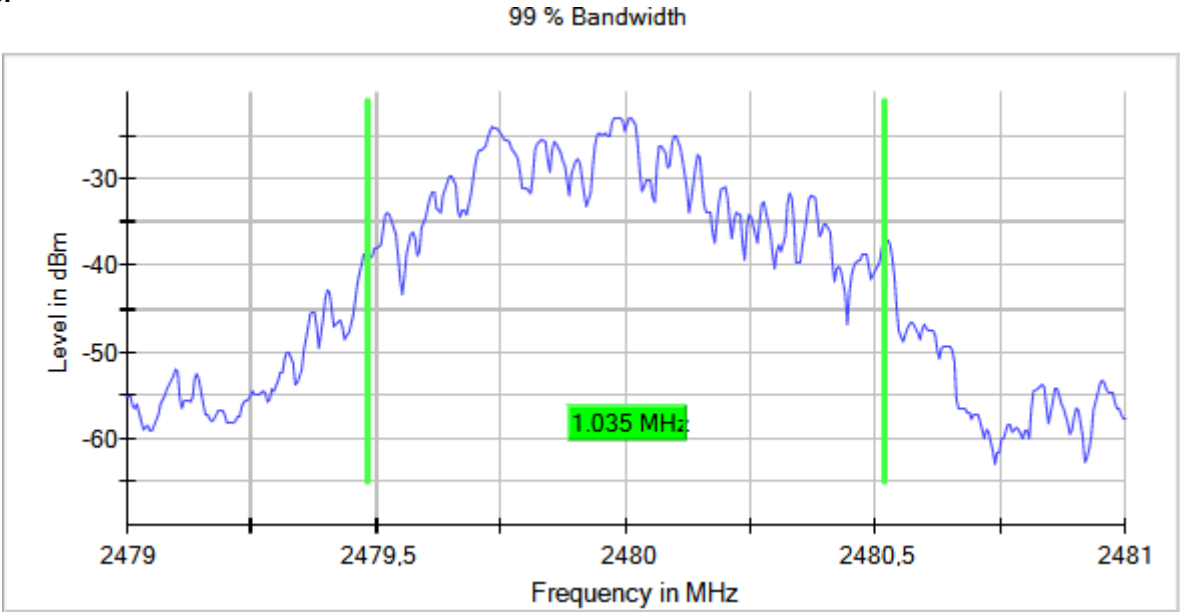

Modulation: BLE (GFSK 2 Mbit/s)

MIMO Mode: SISO

Results

| Freq (MHz) | Occ Ch BW (MHz) |
|------------|-----------------|
| 2402.00000 | 2.040           |
| 2440.00000 | 2.050           |
| 2480.00000 | 2.050           |



Verdict

Pass

Attachments



Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 2  
Modulation = BLE (GFSK 2 Mbit/s)    Frequency MHz = 2402.00000  
MIMO Mode = SISO    Active Port = 1

Images:

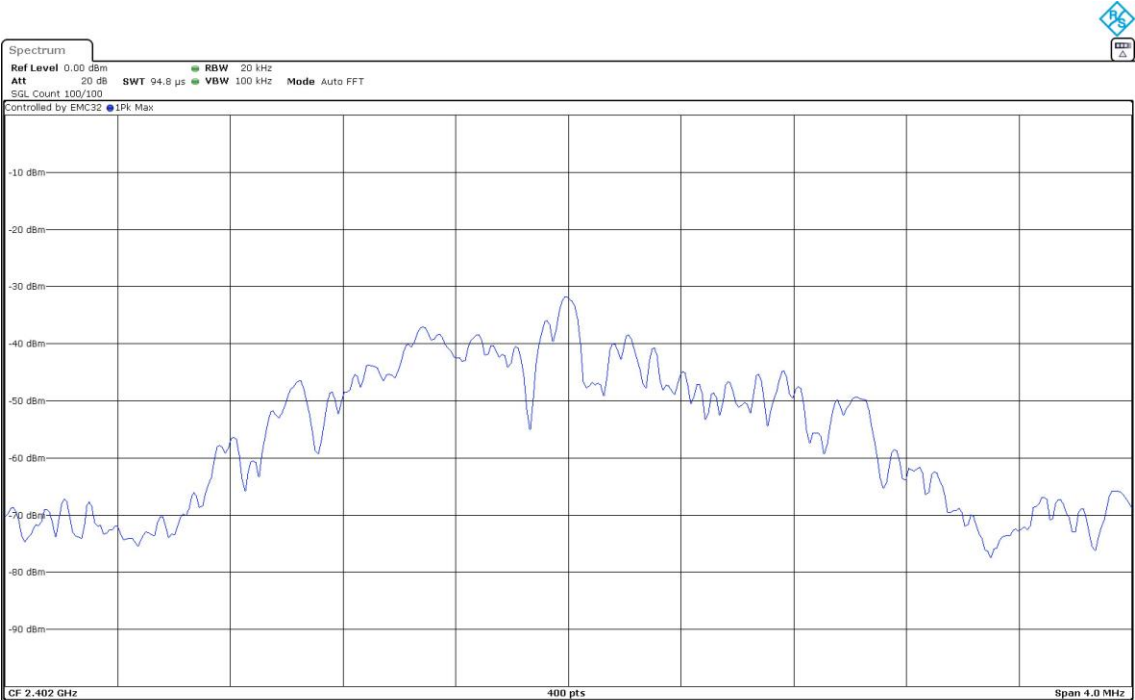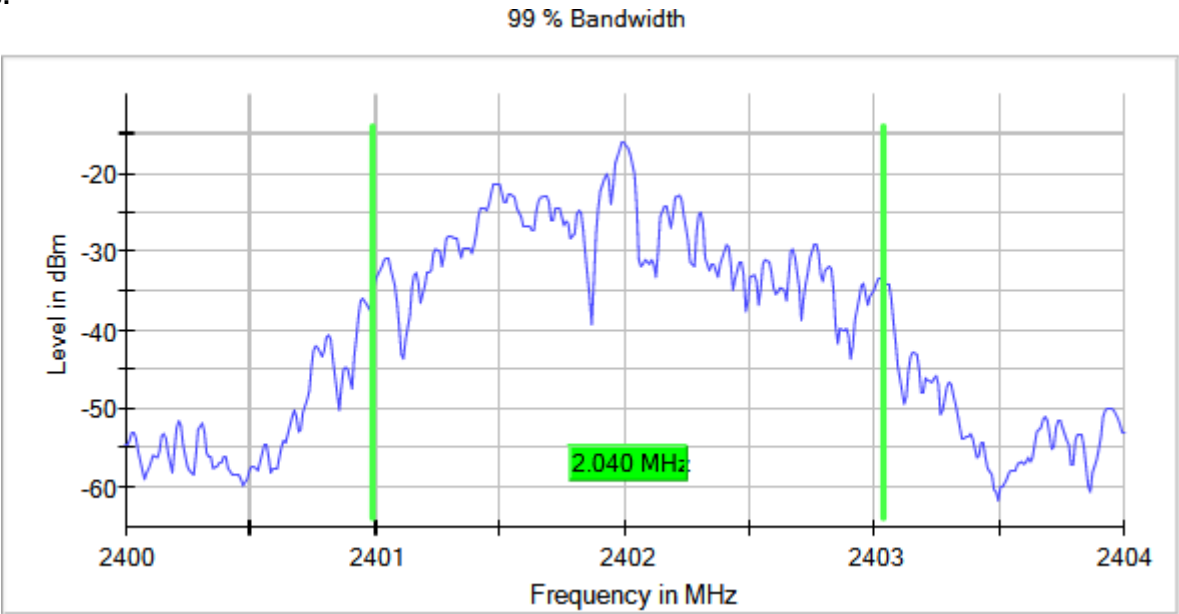



Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 2  
Modulation = BLE (GFSK 2 Mbit/s)    Frequency MHz = 2440.00000  
MIMO Mode = SISO    Active Port = 1

Images:

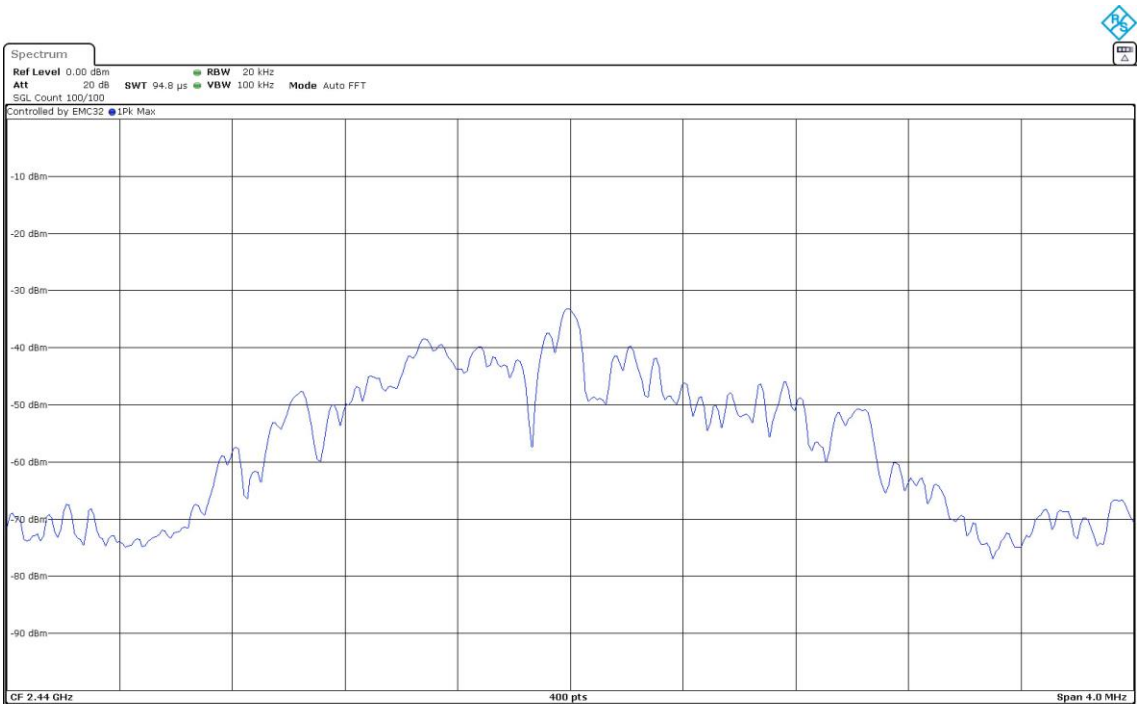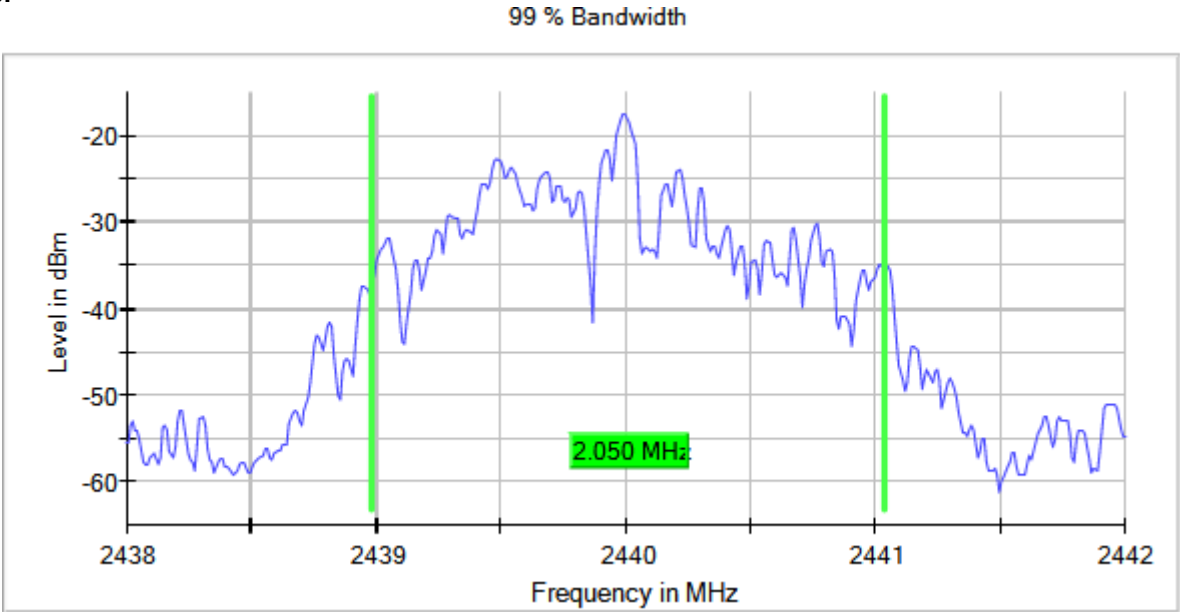

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 2  
Modulation = BLE (GFSK 2 Mbit/s)    Frequency MHz = 2480.00000  
MIMO Mode = SISO    Active Port = 1

Images:

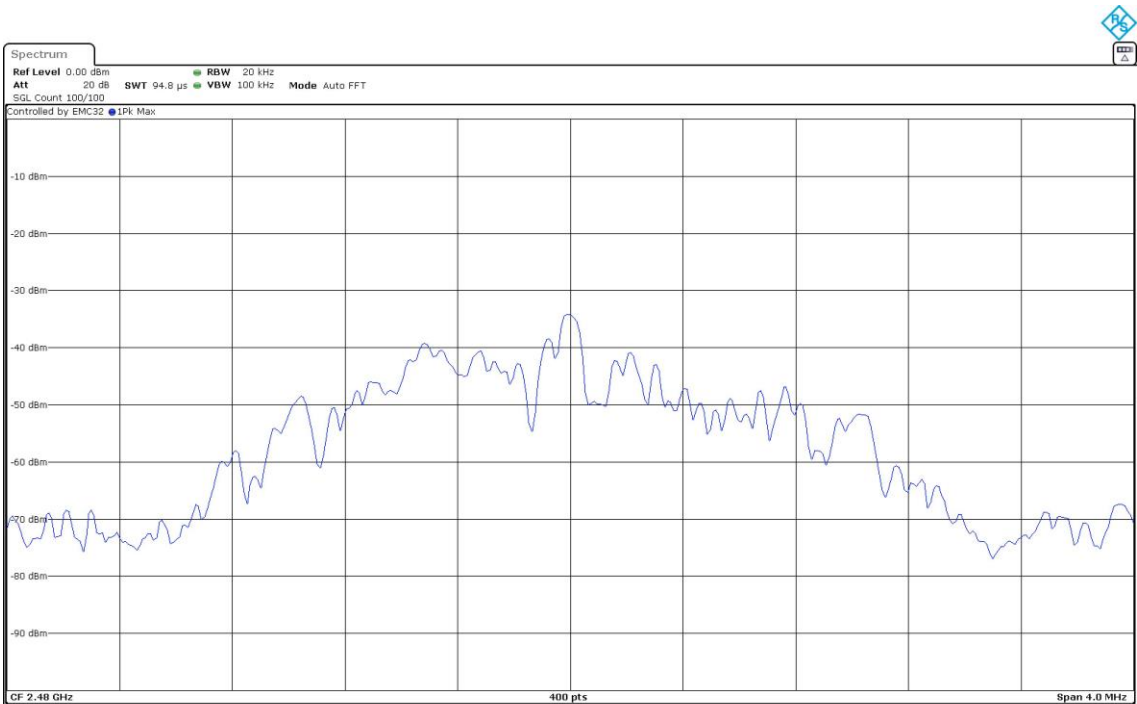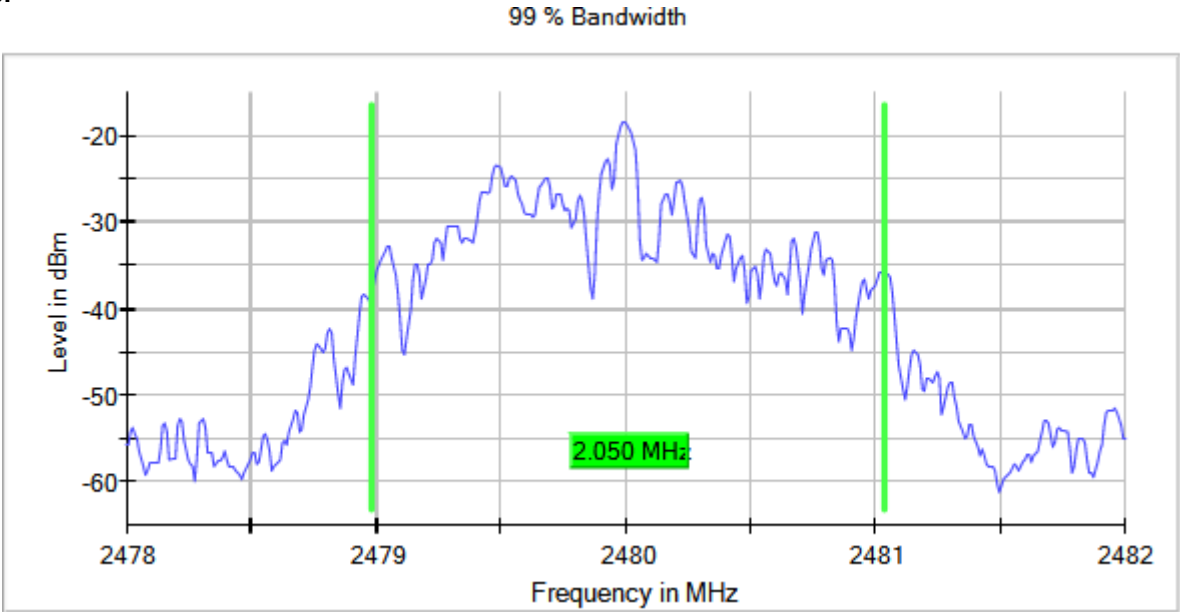

RSS-247 5.2 (a) / FCC 15.247 (a) (2) [6dBw] 6 dB Bandwidth

Limits

The minimum 6 dB bandwidth shall be at least 500 kHz.

Modulation: BLE (GFSK 1 Mbit/s)

MIMO Mode: SISO

Results

| Freq (MHz) | Ebw (MHz) |
|------------|-----------|
| 2402.00000 | 0.535     |
| 2440.00000 | 0.535     |
| 2480.00000 | 0.535     |



Verdict

Pass

Attachments



Bandwidth MHz = 1                      Modulation = BLE (GFSK 1 Mbit/s)  
Frequency MHz = 2402.00000      MIMO Mode = SISO  
Active Port = 1

Images:

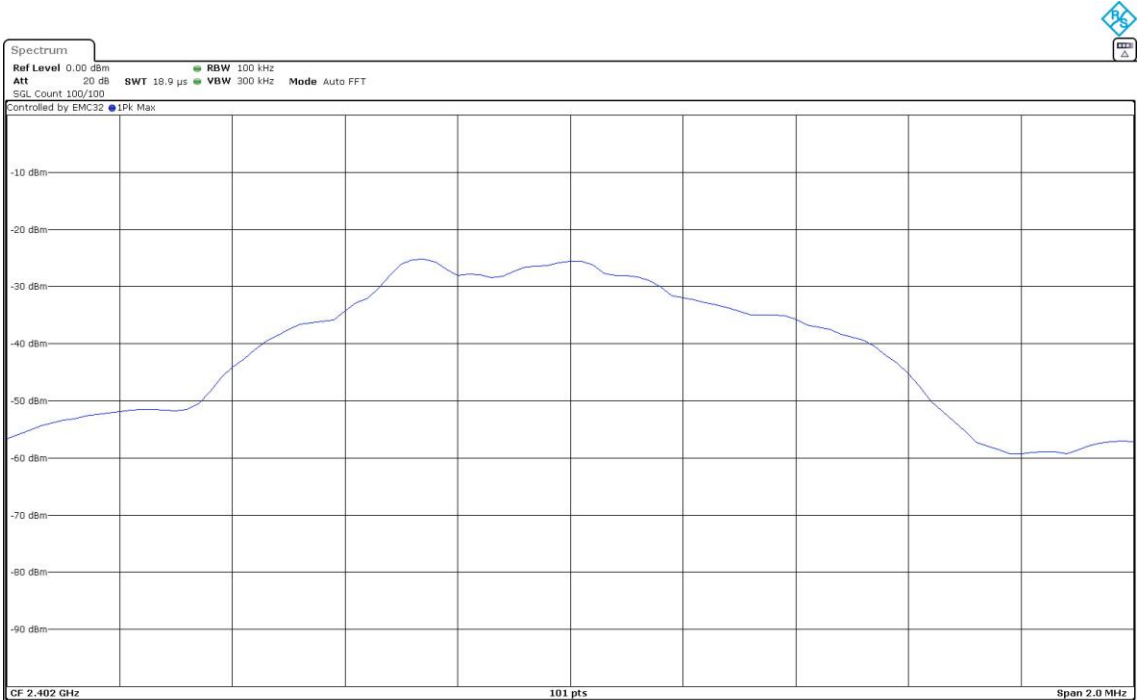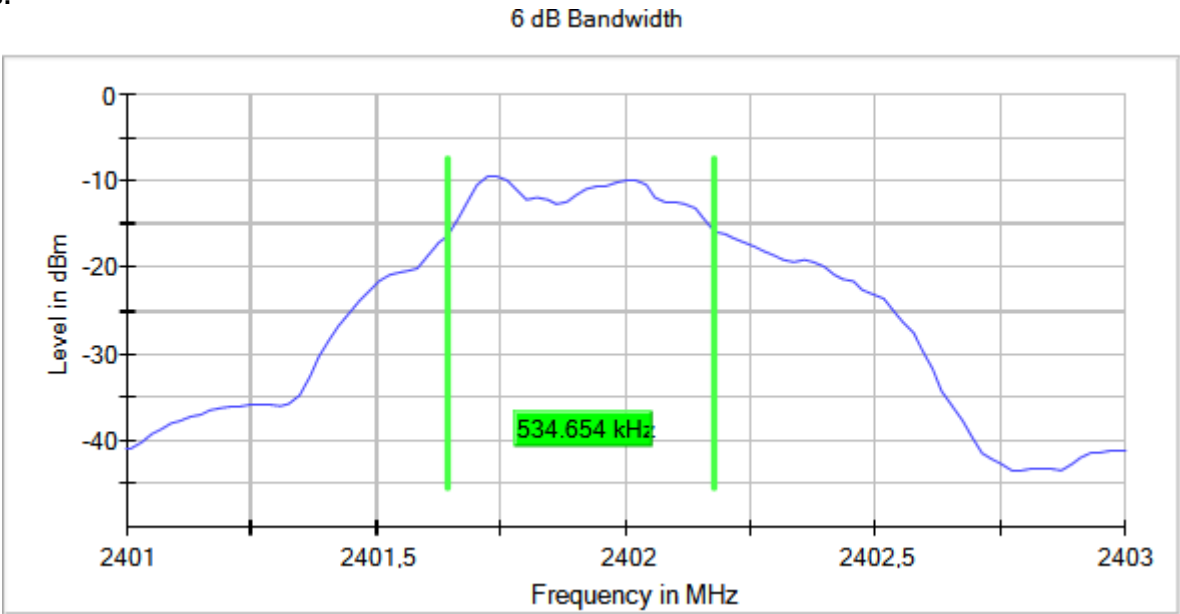



Bandwidth MHz = 1                      Modulation = BLE (GFSK 1 Mbit/s)  
Frequency MHz = 2440.00000      MIMO Mode = SISO  
Active Port = 1

Images:

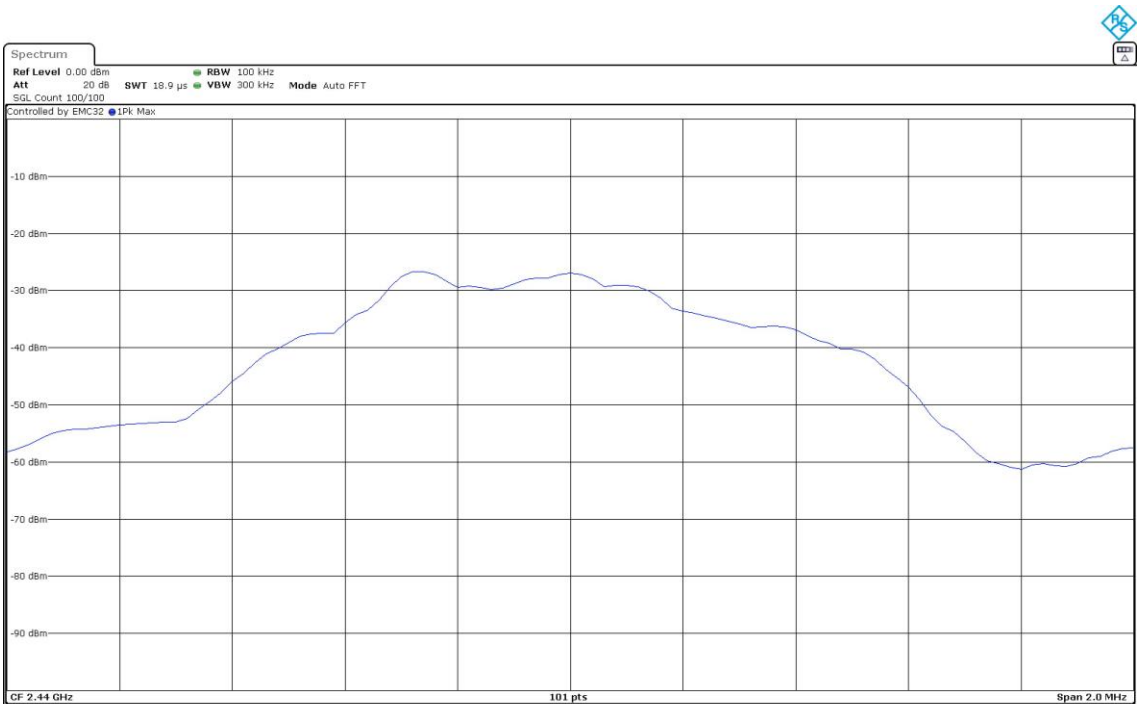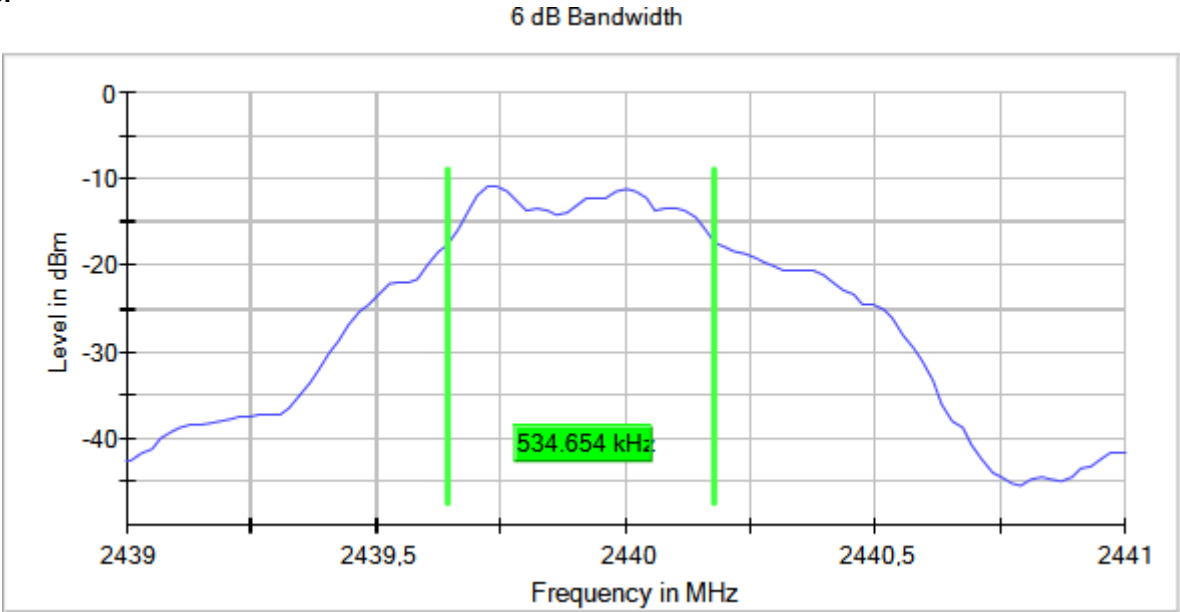

Bandwidth MHz = 1                      Modulation = BLE (GFSK 1 Mbit/s)  
Frequency MHz = 2480.00000      MIMO Mode = SISO  
Active Port = 1

Images:

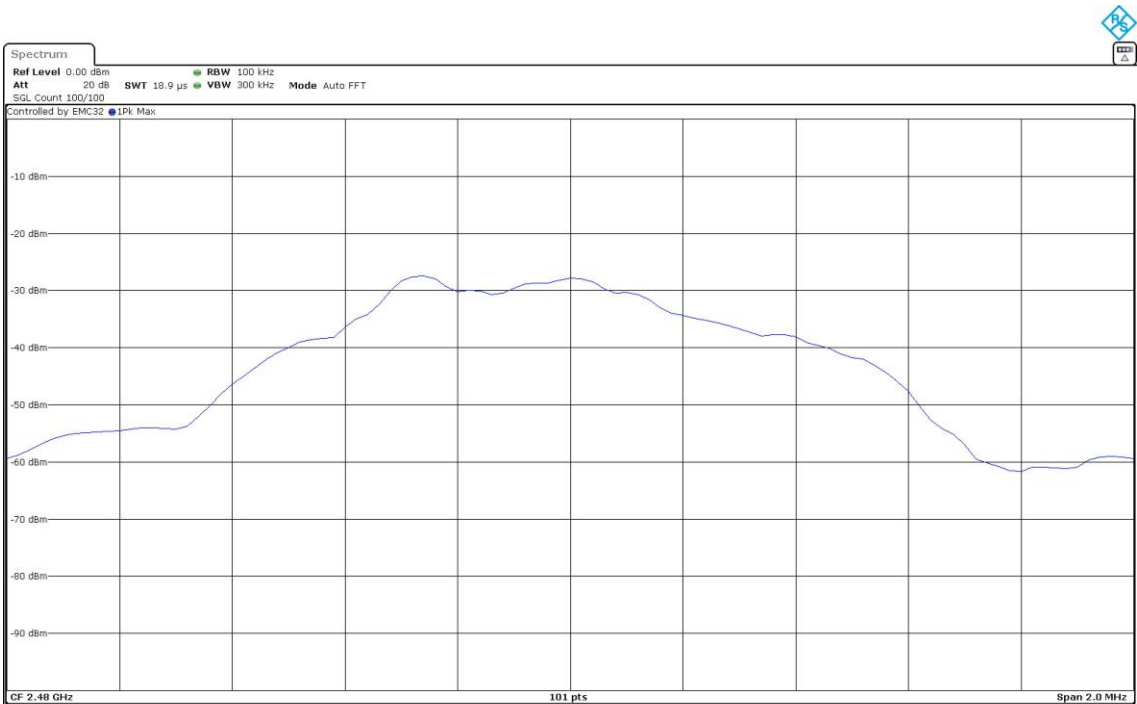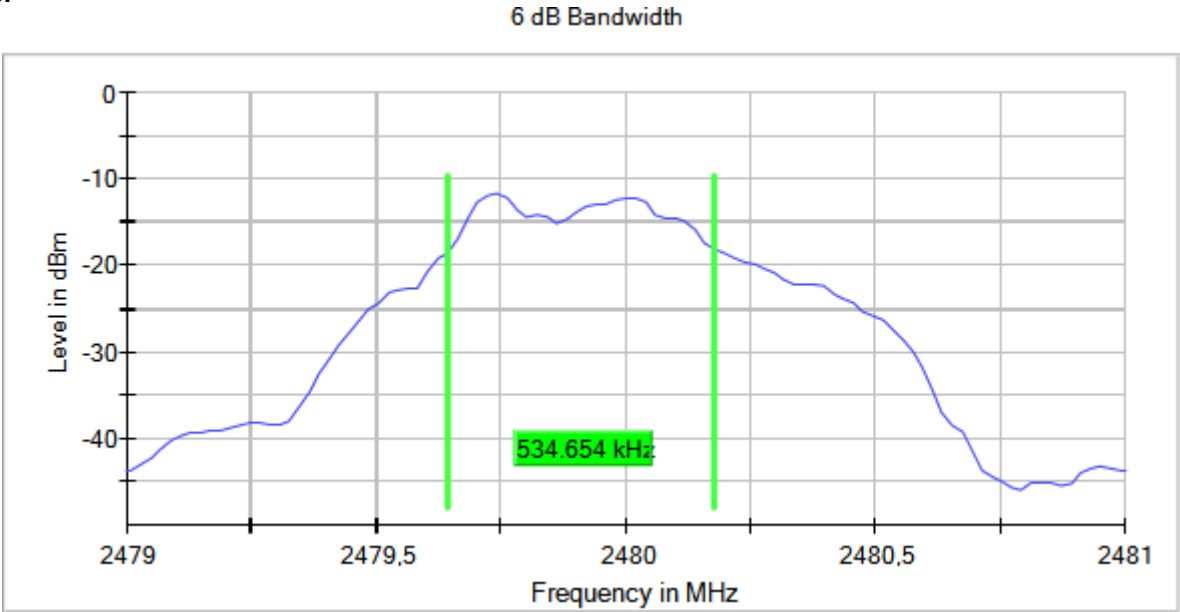

Modulation: BLE (GFSK 2 Mbit/s)

MIMO Mode: SISO

Results

| Freq (MHz) | Ebw (MHz) |
|------------|-----------|
| 2402.00000 | 0.950     |
| 2440.00000 | 0.950     |
| 2480.00000 | 0.950     |



Verdict

Pass

Attachments



Bandwidth MHz = 2                      Modulation = BLE (GFSK 2 Mbit/s)  
Frequency MHz = 2402.00000      MIMO Mode = SISO  
Active Port = 1

Images:

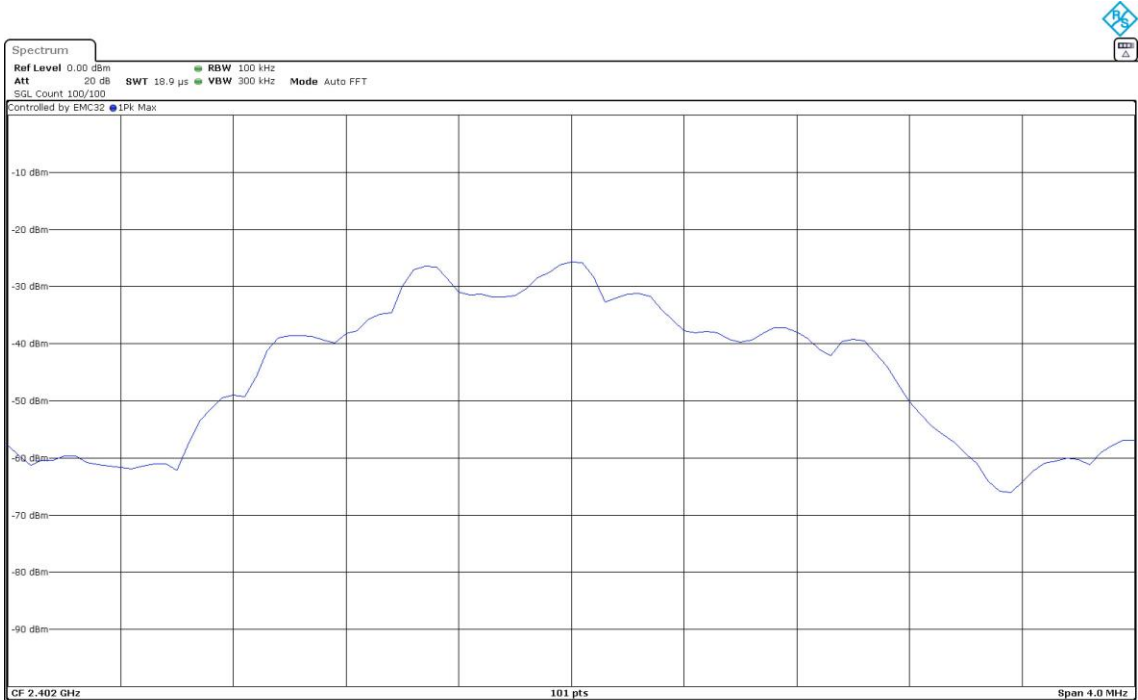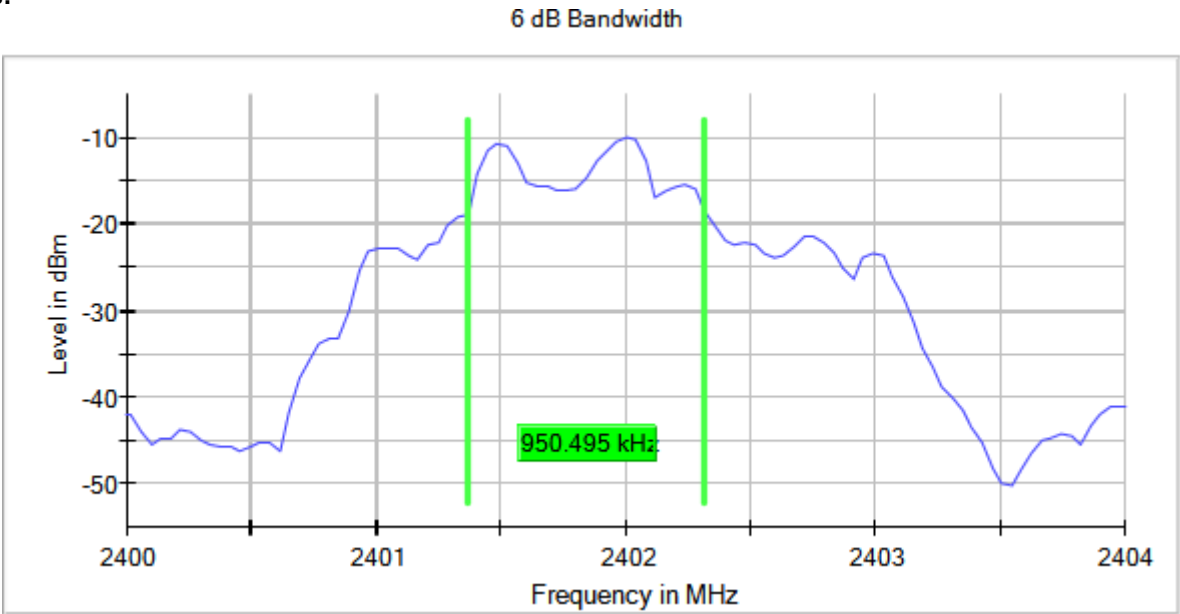



Bandwidth MHz = 2                      Modulation = BLE (GFSK 2 Mbit/s)  
Frequency MHz = 2440.00000      MIMO Mode = SISO  
Active Port = 1

Images:

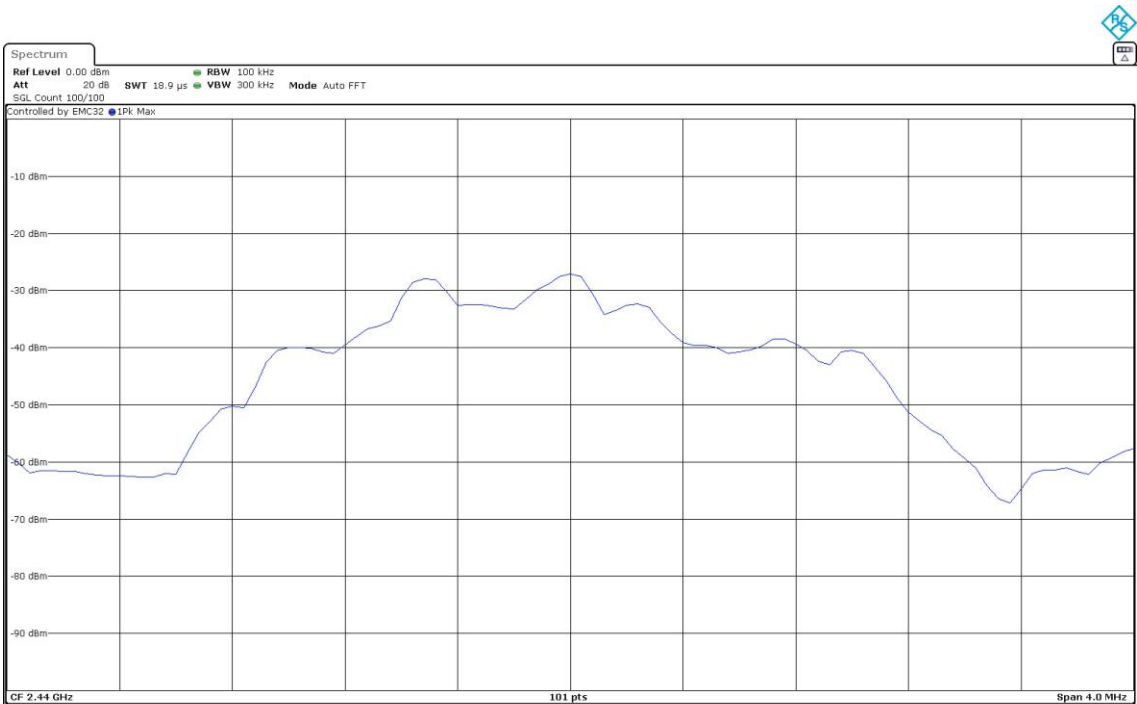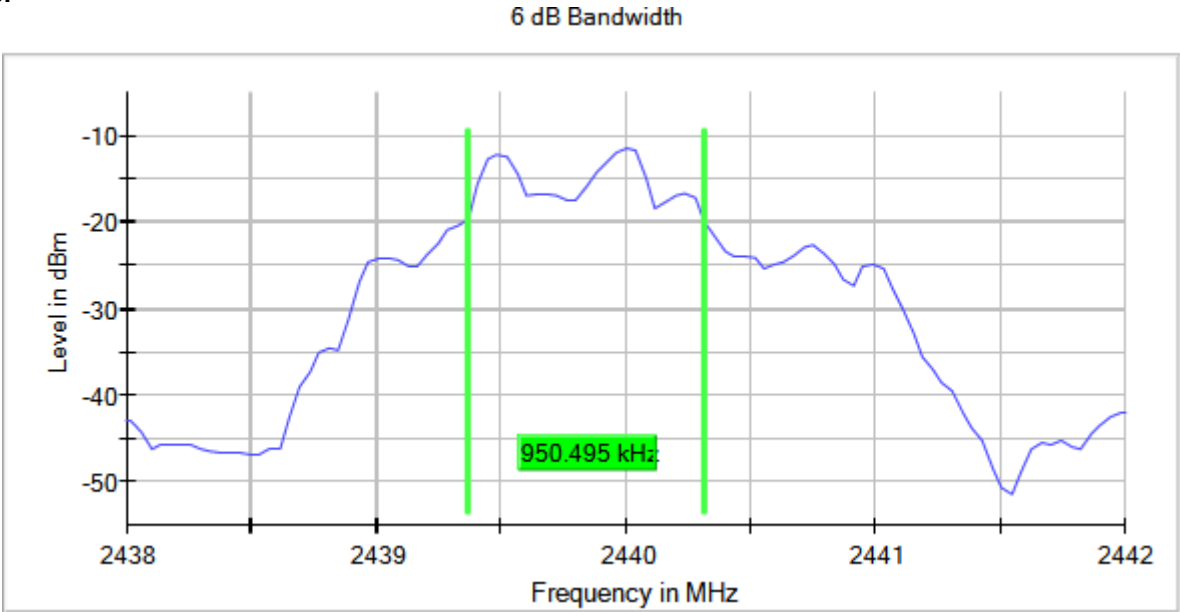

Bandwidth MHz = 2                      Modulation = BLE (GFSK 2 Mbit/s)  
Frequency MHz = 2480.00000      MIMO Mode = SISO  
Active Port = 1

Images:

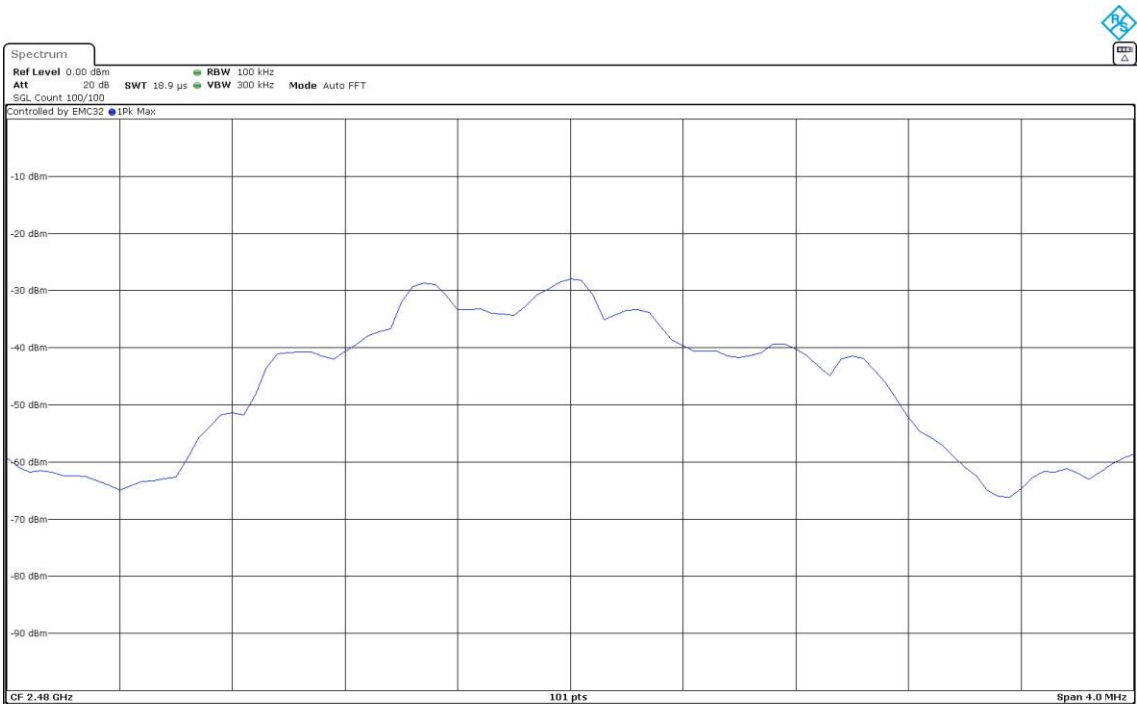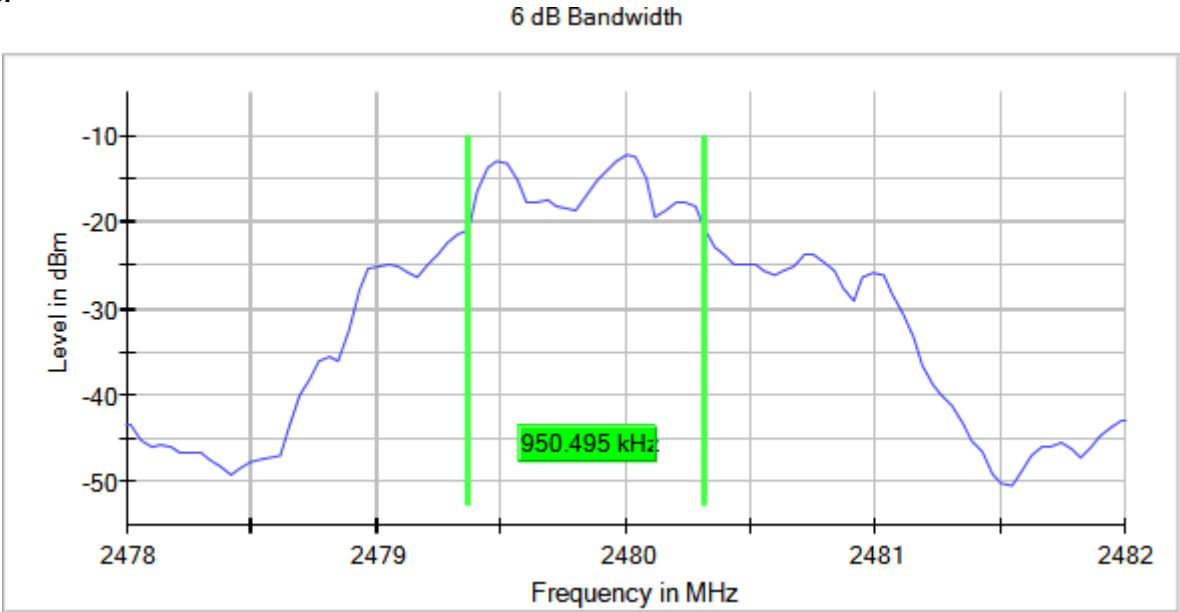

RSS-247 5.2 (b) / FCC 15.247 (e) [Psd] Power spectral density

Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Modulation: BLE (GFSK 1 Mbit/s)

MIMO Mode: SISO

Results

| Freq (MHz) | PSD (dBm) |
|------------|-----------|
| 2402.00000 | -19.92    |
| 2440.00000 | -21.32    |
| 2480.00000 | -22.20    |



Verdict

Pass

Attachments



Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BLE (GFSK 1 Mbit/s)    Frequency MHz = 2402.00000  
MIMO Mode = SISO    Active Port = 1

Images:

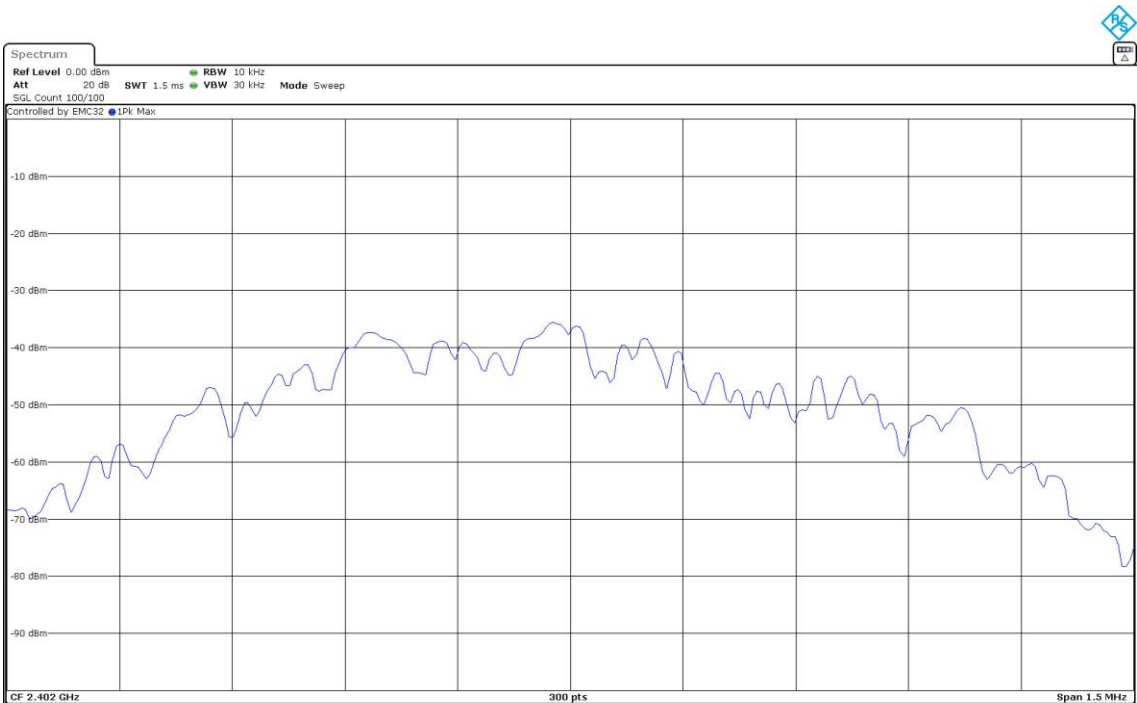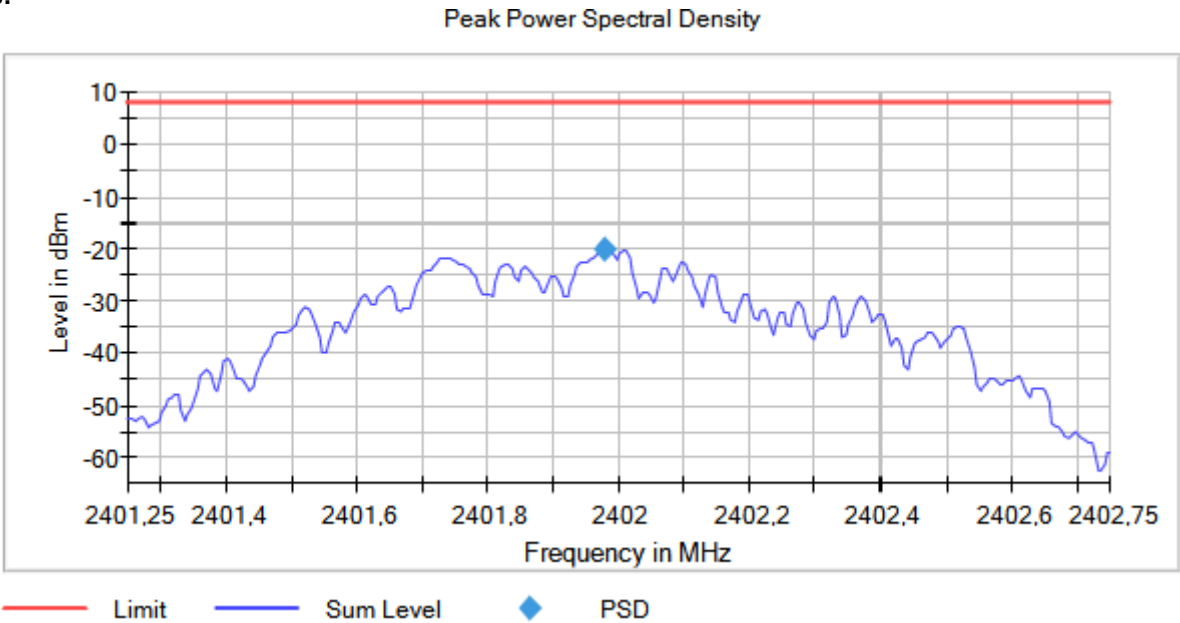



Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BLE (GFSK 1 Mbit/s)    Frequency MHz = 2440.00000  
MIMO Mode = SISO    Active Port = 1

Images:

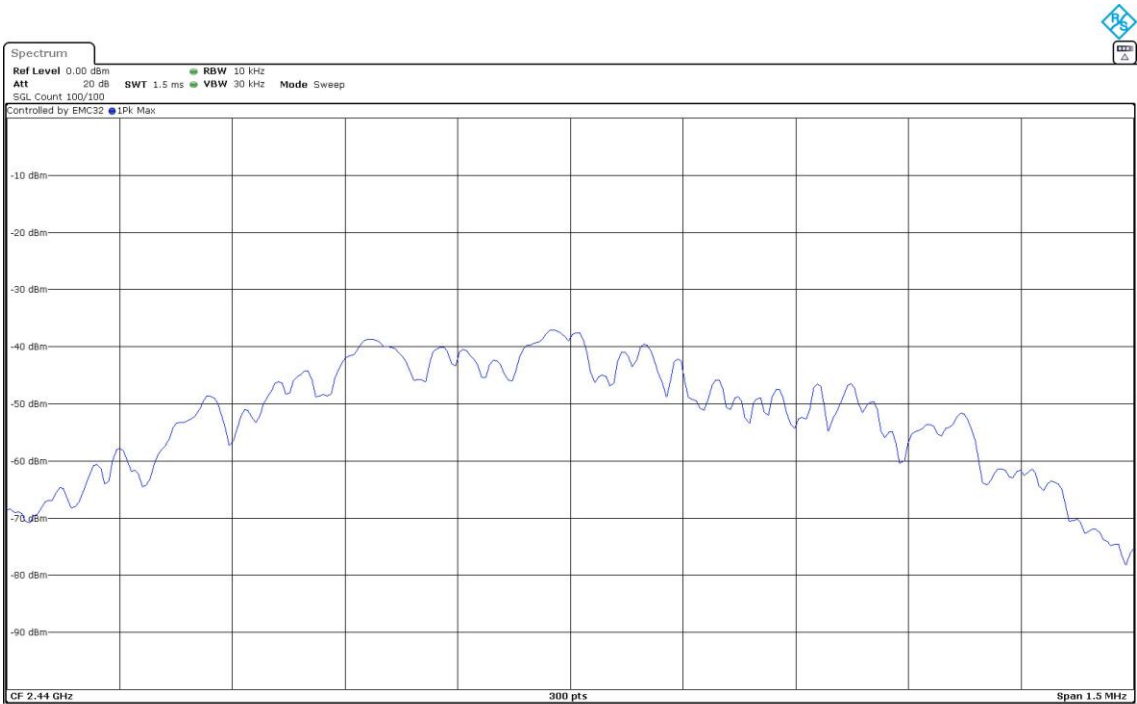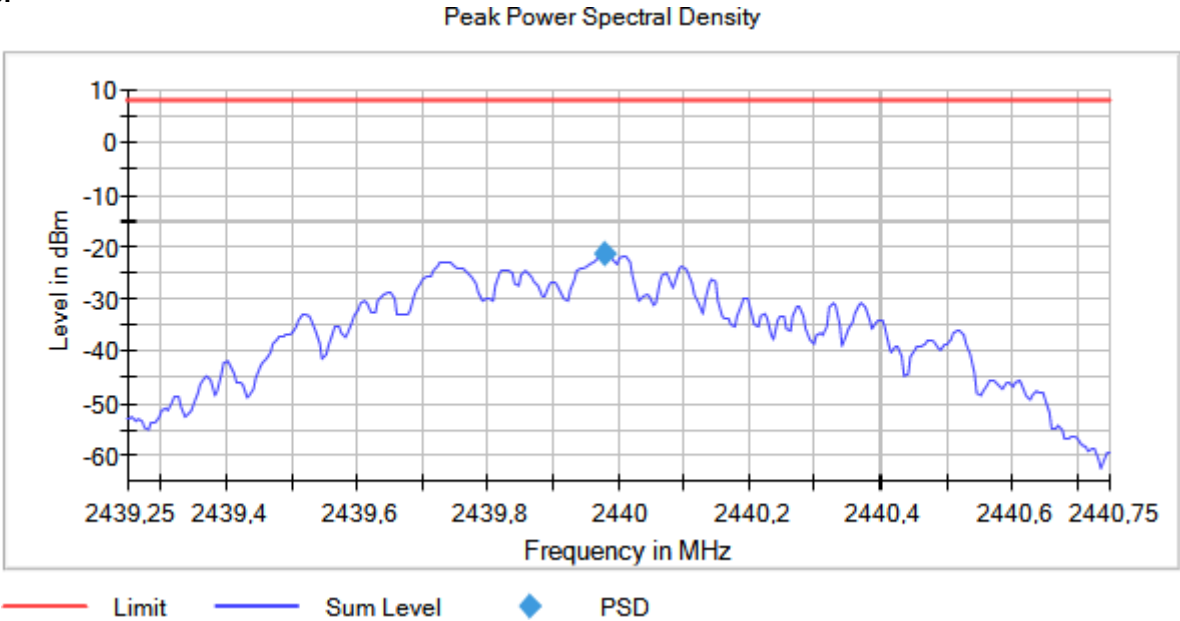

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BLE (GFSK 1 Mbit/s)    Frequency MHz = 2480.00000  
MIMO Mode = SISO    Active Port = 1

Images:

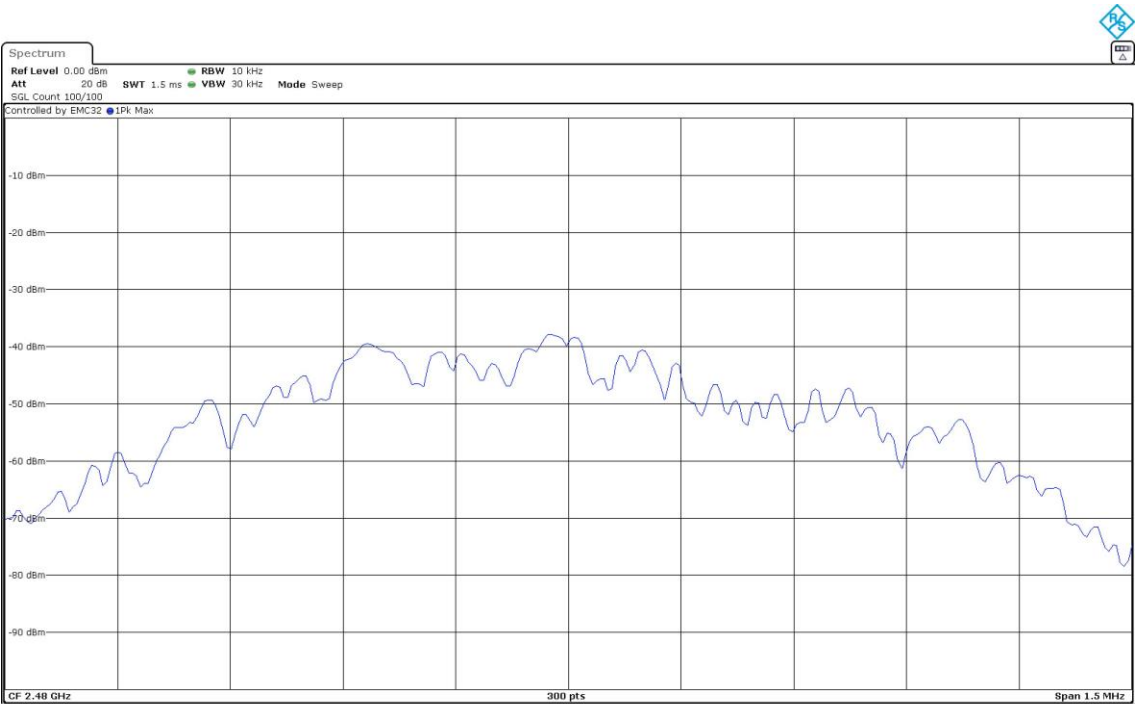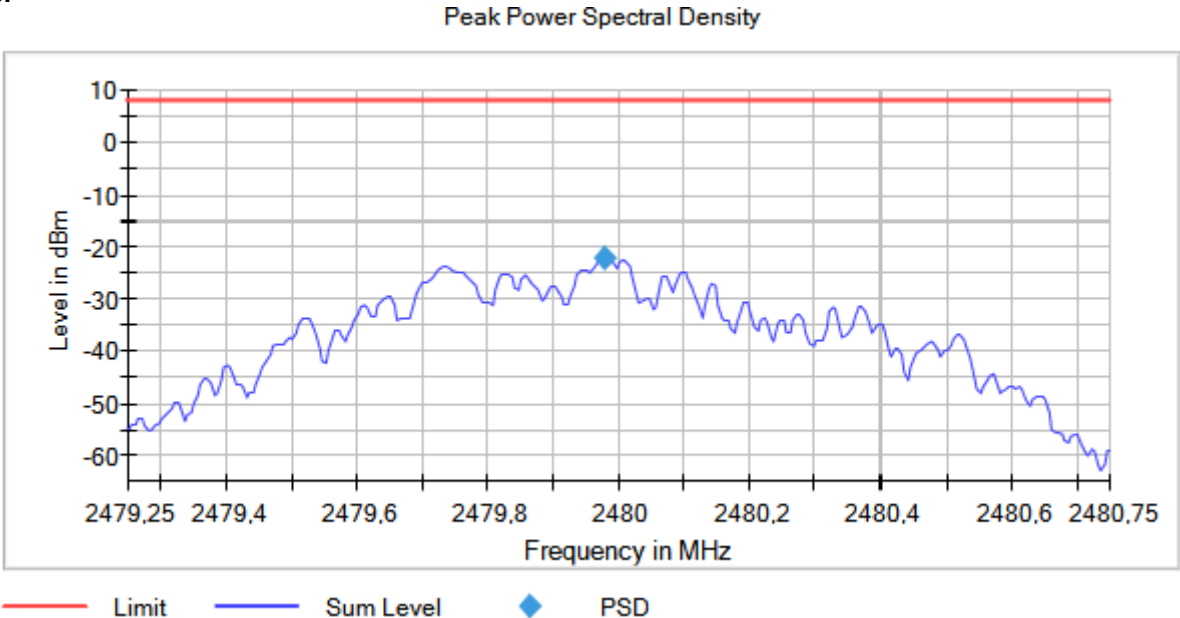

Modulation: BLE (GFSK 2 Mbit/s)

MIMO Mode: SISO

Results

| Freq (MHz) | PSD (dBm) |
|------------|-----------|
| 2402.00000 | -20.36    |
| 2440.00000 | -21.80    |
| 2480.00000 | -22.69    |



Verdict

Pass

Attachments



Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 2  
Modulation = BLE (GFSK 2 Mbit/s)    Frequency MHz = 2402.00000  
MIMO Mode = SISO    Active Port = 1

Images:

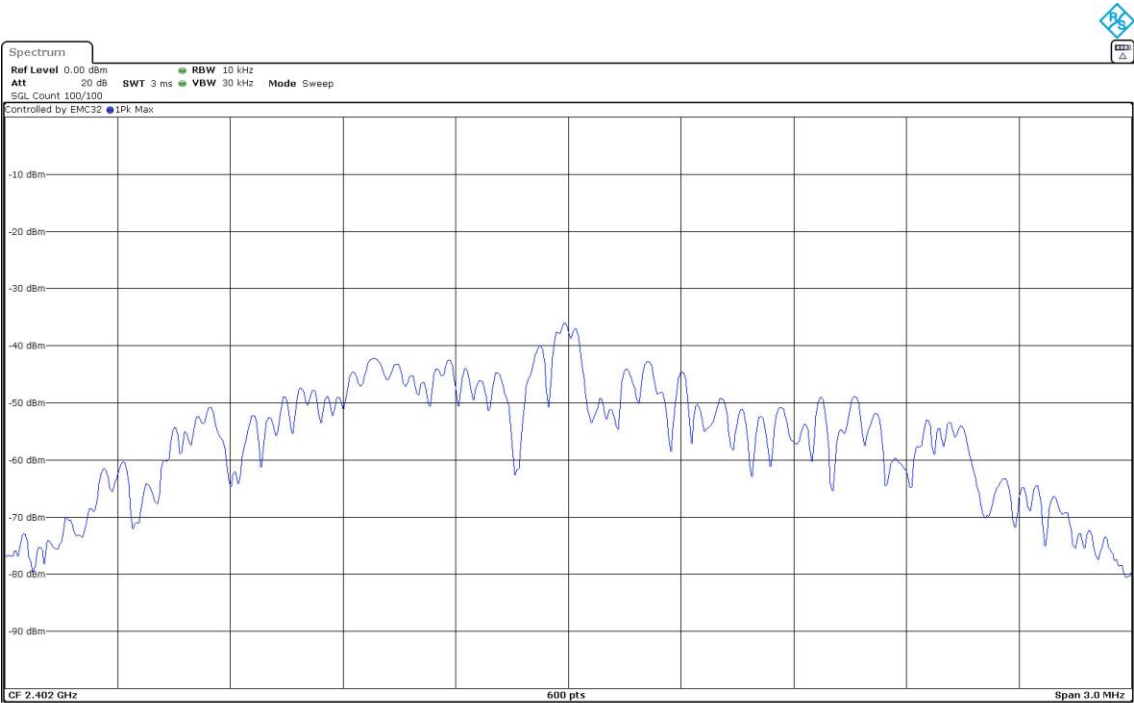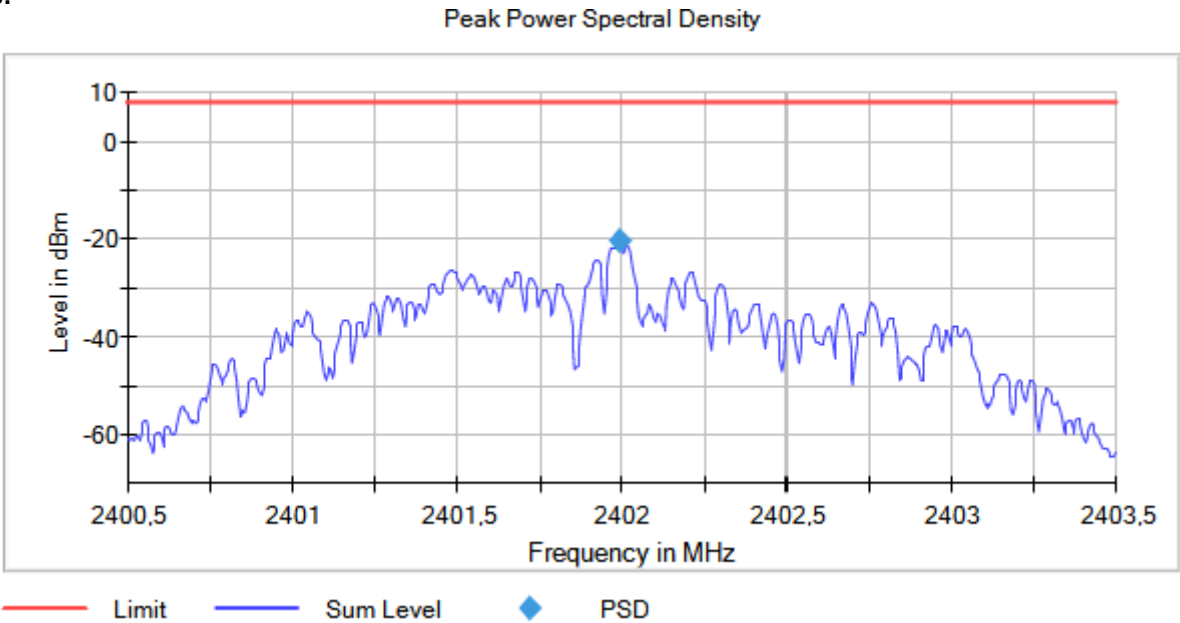



Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 2  
Modulation = BLE (GFSK 2 Mbit/s)    Frequency MHz = 2440.00000  
MIMO Mode = SISO    Active Port = 1

Images:

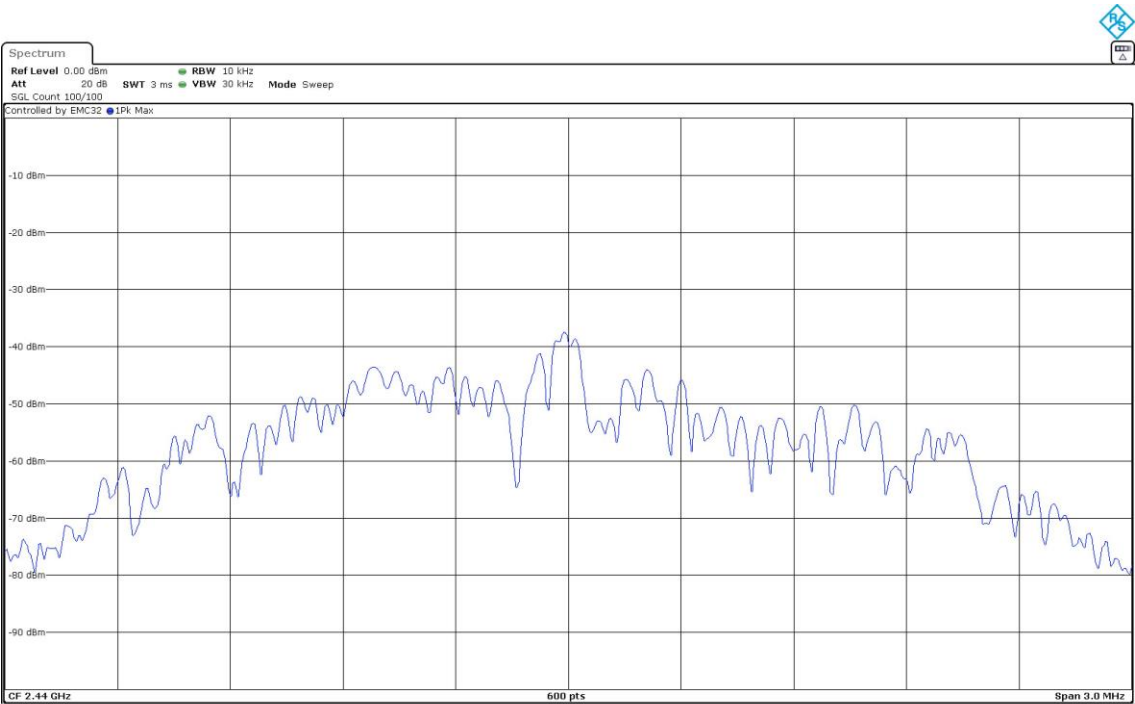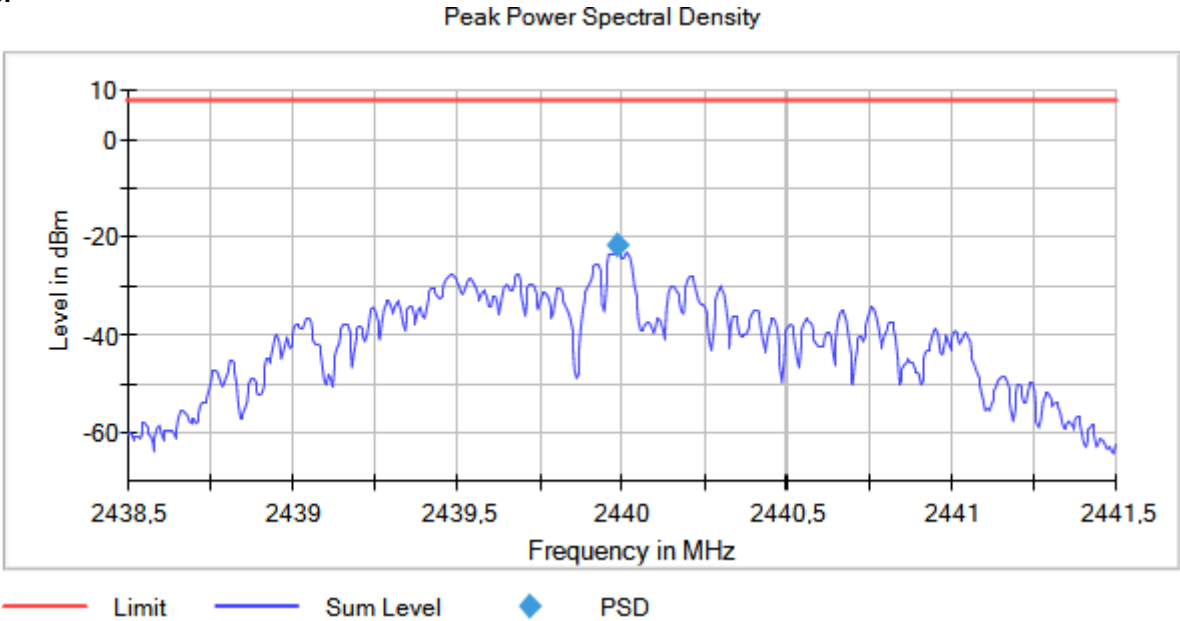

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 2  
Modulation = BLE (GFSK 2 Mbit/s)    Frequency MHz = 2480.00000  
MIMO Mode = SISO    Active Port = 1

Images:

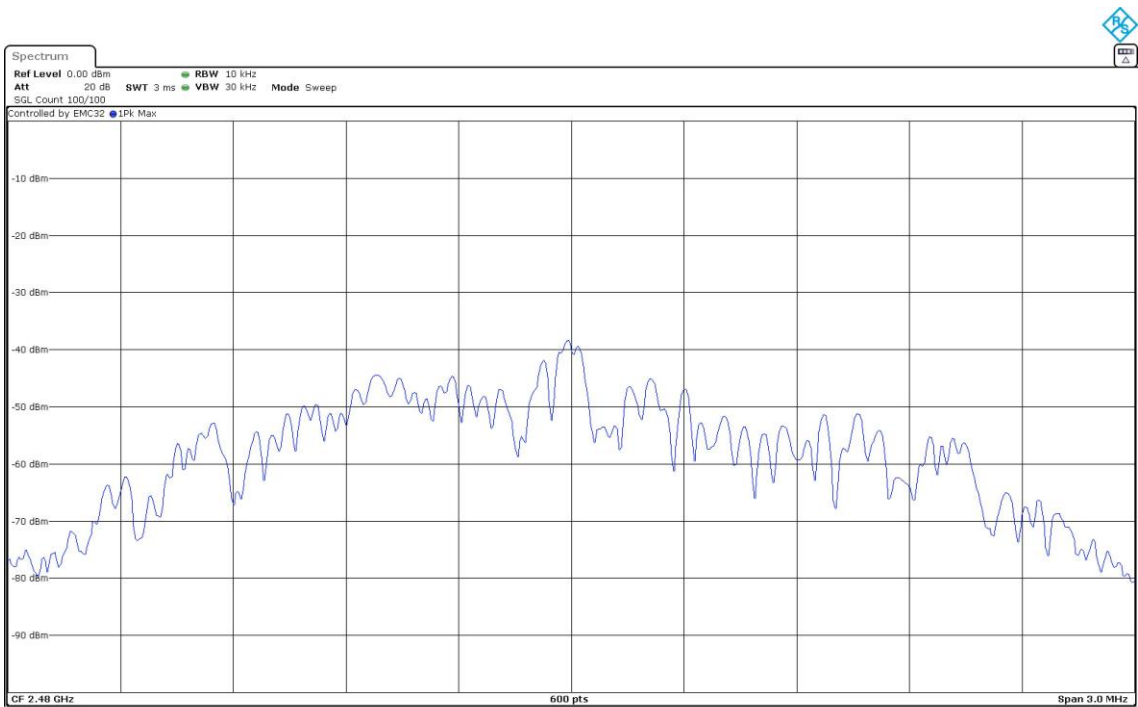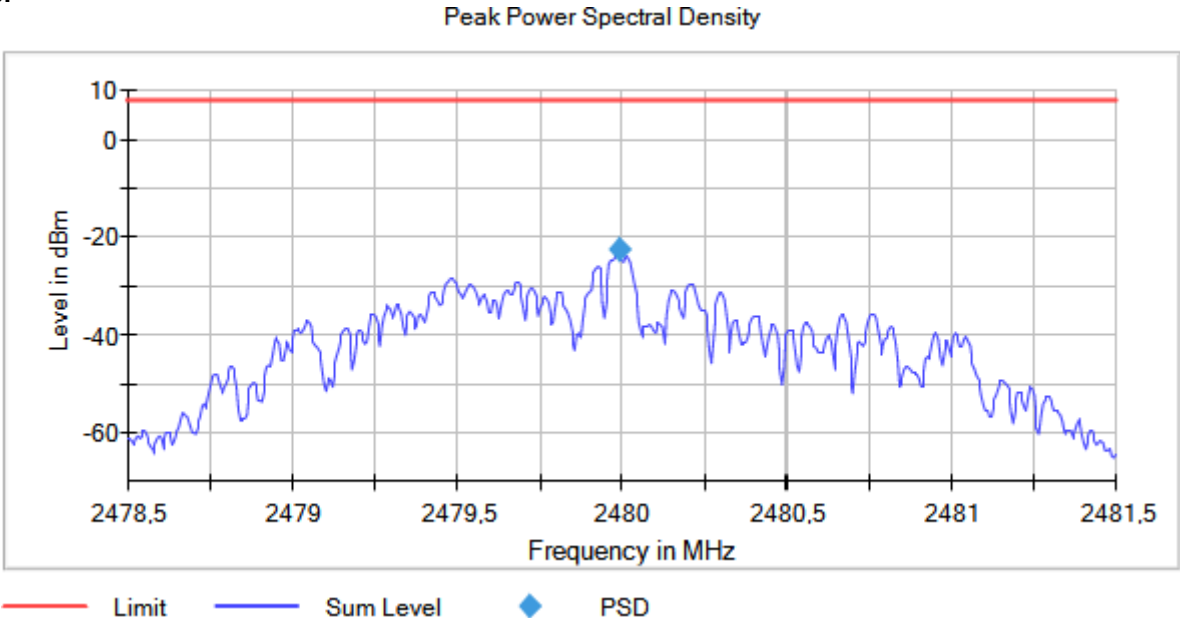

RSS-247 5.4 (d) / FCC 15.247 (b) (3) [Pkcp] Maximum Peak Conducted  
output power

Limits

For systems using digital modulation in the 2400-2483.5 MHz band: 1 watt (30 dBm).  
The e.i.r.p. shall not exceed 4 W (RSS-247).

Modulation: BLE (GFSK 1 Mbit/s)  
MIMO Mode: SISO

Results

| Freq (MHz) | Peak Power (dBm) | EIRP Power (dBm) |
|------------|------------------|------------------|
| 2402.00000 | -9.2030          | -7.703           |
| 2440.00000 | -10.4190         | -8.919           |
| 2480.00000 | -11.3990         | -9.899           |



Verdict

Pass

Attachments



Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BLE (GFSK 1 Mbit/s)    Frequency MHz = 2402.00000  
MIMO Mode = SISO    Active Port = 1

Images:

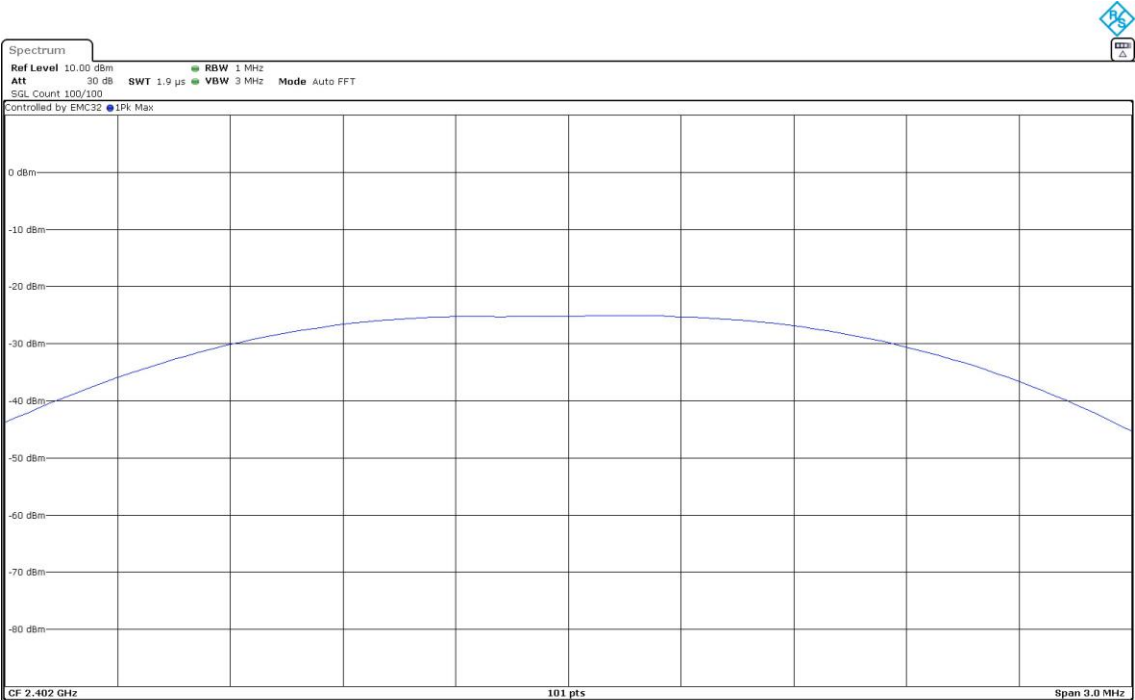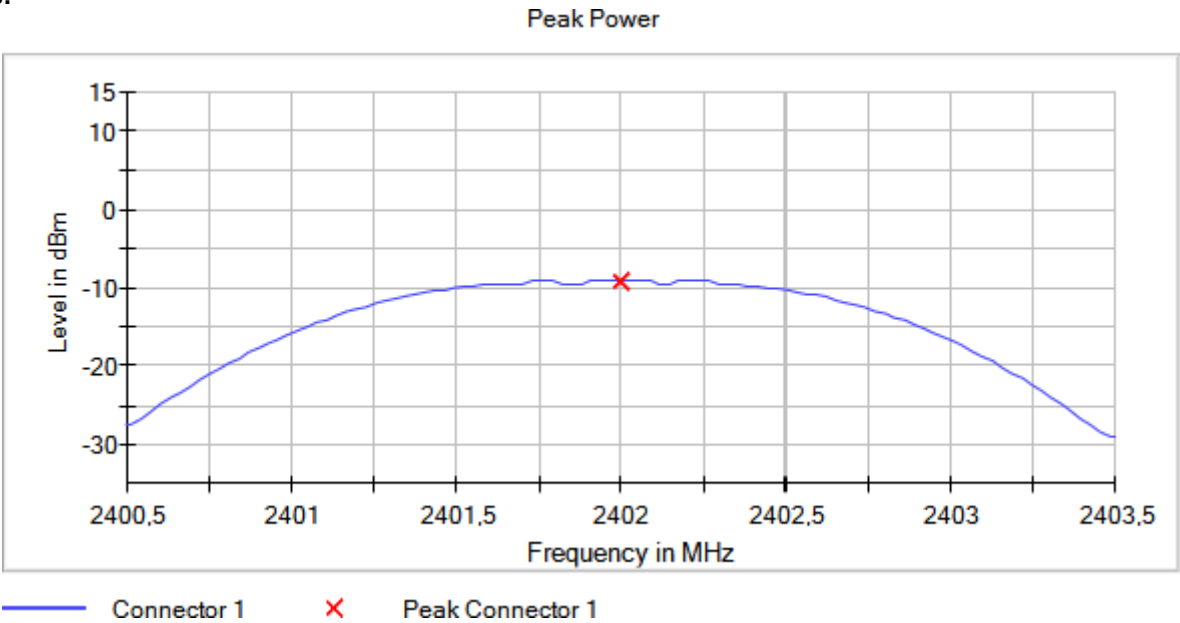



Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BLE (GFSK 1 Mbit/s)    Frequency MHz = 2440.00000  
MIMO Mode = SISO    Active Port = 1

Images:

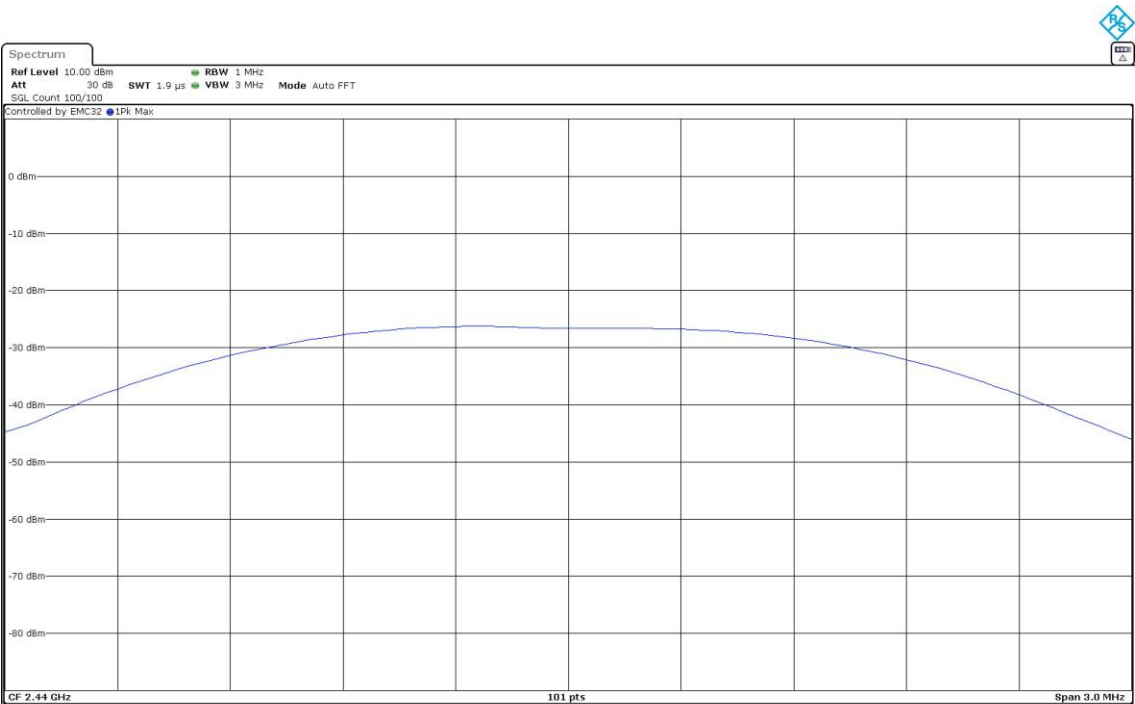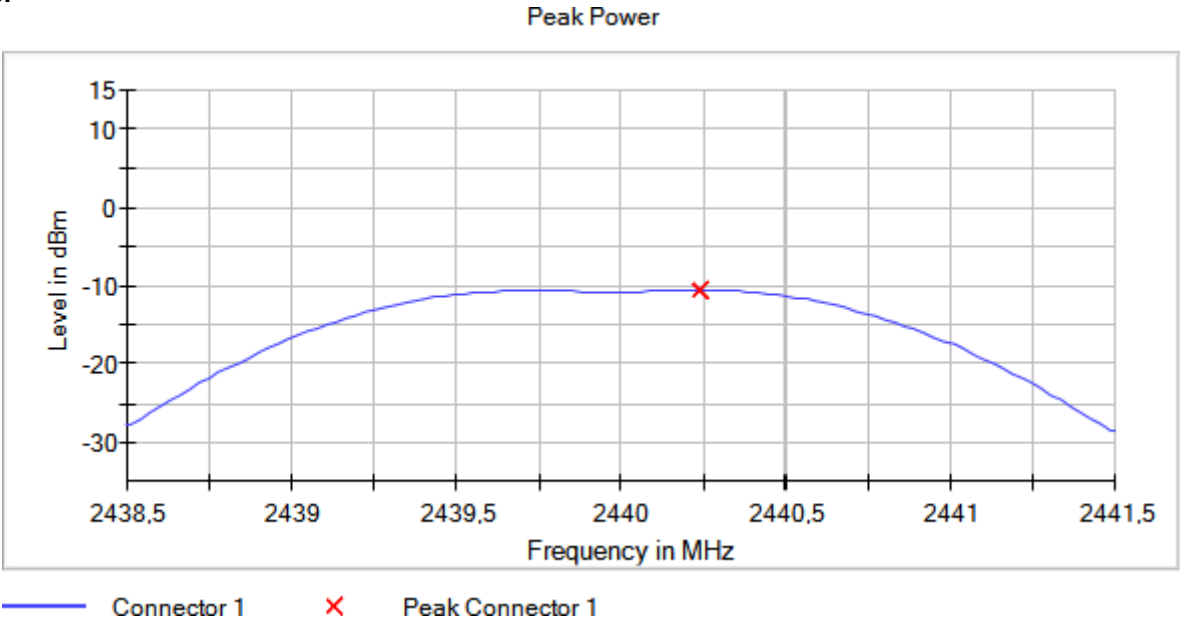

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BLE (GFSK 1 Mbit/s)    Frequency MHz = 2480.00000  
MIMO Mode = SISO    Active Port = 1

Images:

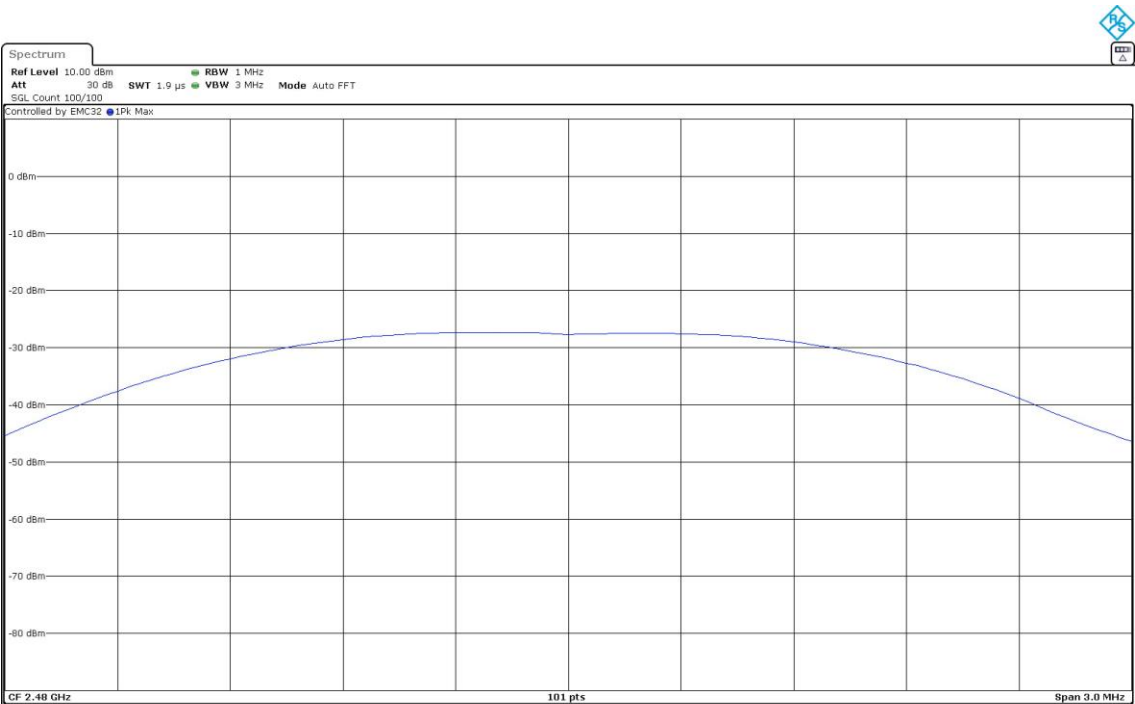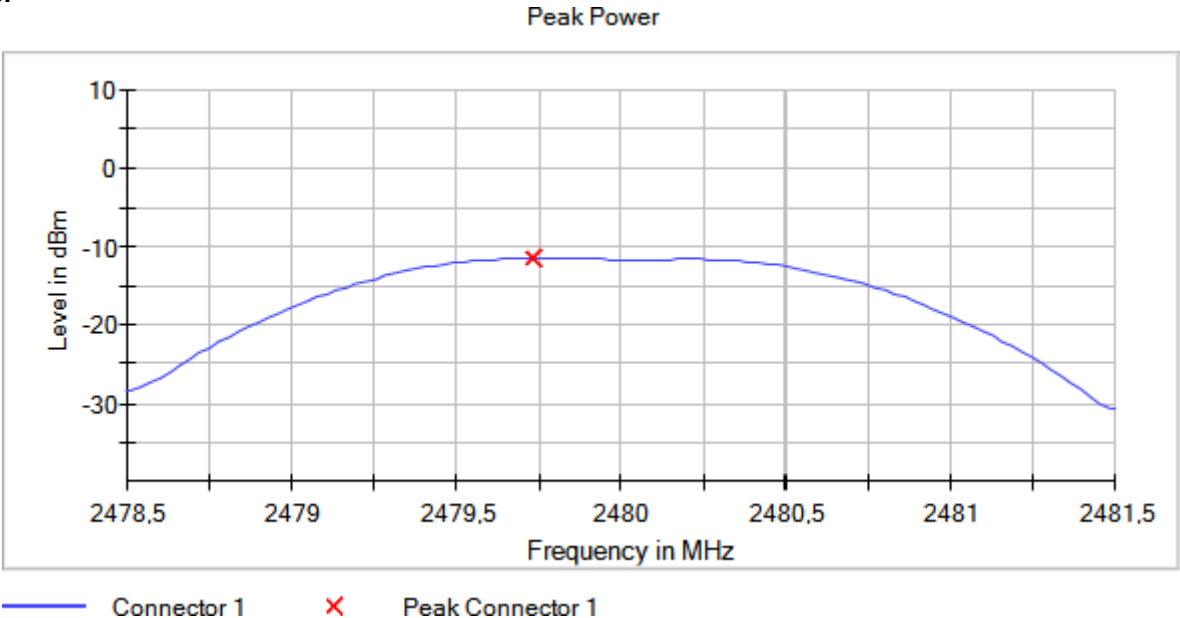

Modulation: BLE (GFSK 2 Mbit/s)

MIMO Mode: SISO

Results

| Freq (MHz) | Peak Power (dBm) | EIRP Power (dBm) |
|------------|------------------|------------------|
| 2402.00000 | -9.2550          | -7.755           |
| 2440.00000 | -10.7510         | -9.251           |
| 2480.00000 | -11.5250         | -10.025          |



Verdict

Pass

Attachments



Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 2  
Modulation = BLE (GFSK 2 Mbit/s)    Frequency MHz = 2402.00000  
MIMO Mode = SISO    Active Port = 1

Images:

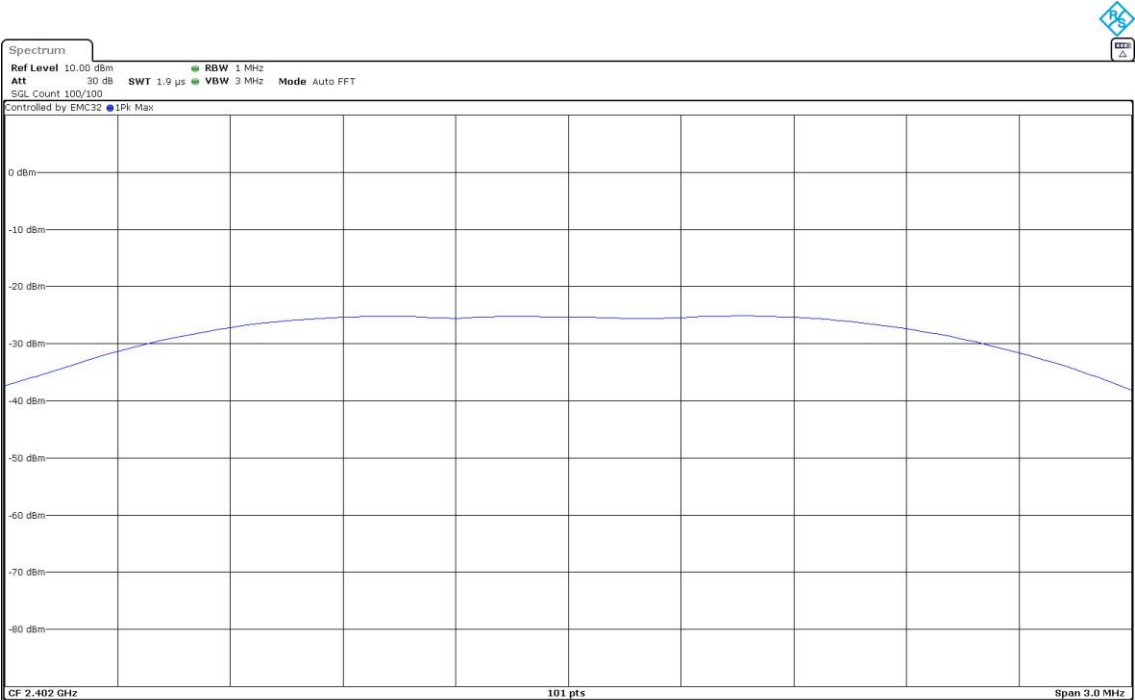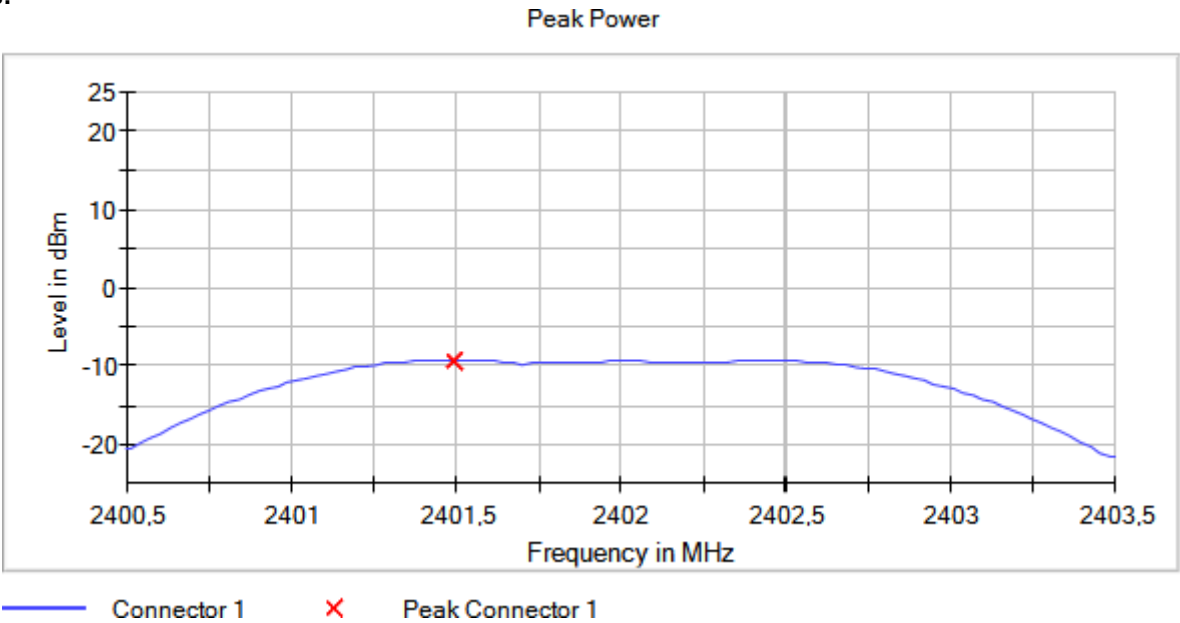



Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 2  
Modulation = BLE (GFSK 2 Mbit/s)    Frequency MHz = 2440.00000  
MIMO Mode = SISO    Active Port = 1

Images:

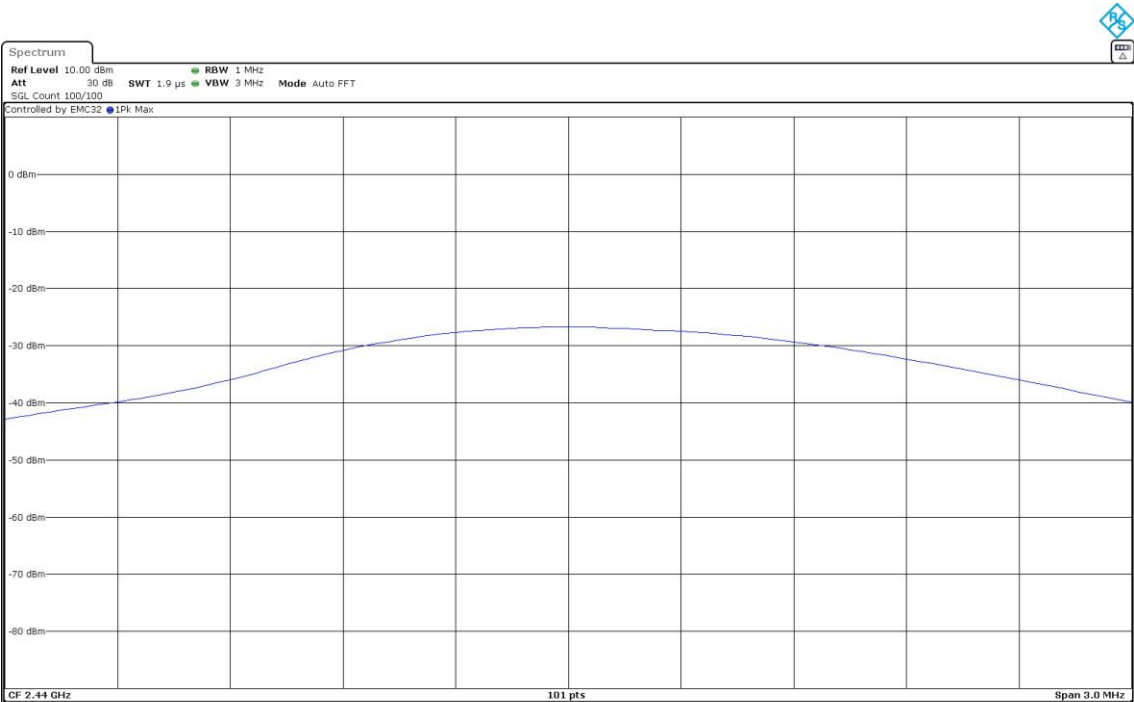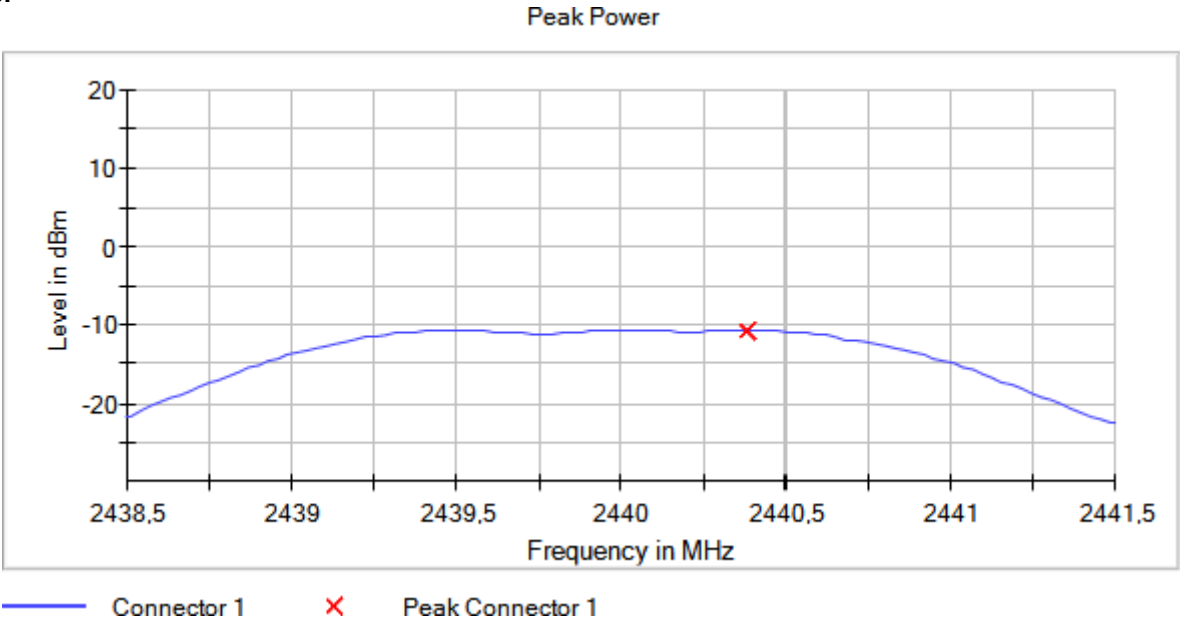

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 2  
Modulation = BLE (GFSK 2 Mbit/s)    Frequency MHz = 2480.00000  
MIMO Mode = SISO    Active Port = 1

Images:

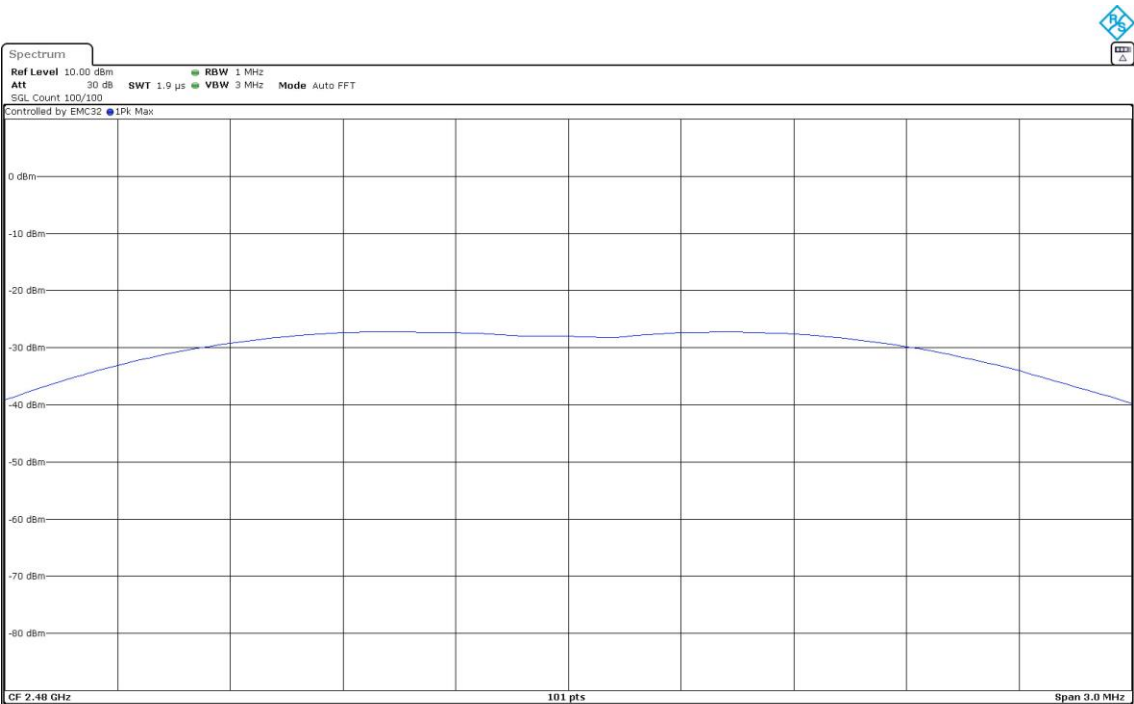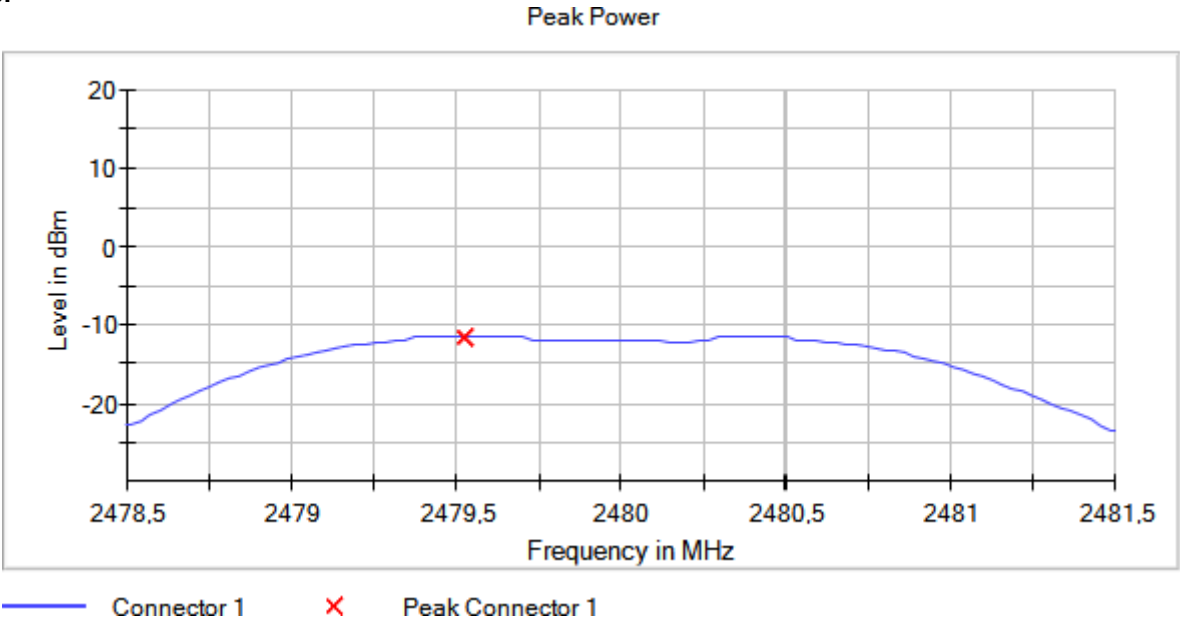

# RSS-247 5.5 / FCC 15.247 (d) [Bndedge] Band-edge emissions compliance (Transmitter)

### Limits

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

Modulation: BLE (GFSK 1 Mbit/s)

MIMO Mode: SISO

### Results

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

| Freq (MHz) | Freq (MHz)  | Lvl (dBm) | Limit (dBm) |
|------------|-------------|-----------|-------------|
| 2402.00000 | 2386.525000 | -51.661   | -27.896     |
| 2402.00000 | 2374.775000 | -51.868   | -27.896     |
| 2402.00000 | 2326.475000 | -51.898   | -27.896     |
| 2402.00000 | 2326.525000 | -51.912   | -27.896     |
| 2402.00000 | 2386.575000 | -51.927   | -27.896     |
| 2402.00000 | 2341.075000 | -51.934   | -27.896     |
| 2402.00000 | 2326.875000 | -51.979   | -27.896     |
| 2402.00000 | 2326.825000 | -51.989   | -27.896     |
| 2402.00000 | 2388.025000 | -51.990   | -27.896     |
| 2402.00000 | 2310.975000 | -52.004   | -27.896     |
| 2402.00000 | 2389.675000 | -52.087   | -27.896     |
| 2402.00000 | 2312.125000 | -52.101   | -27.896     |
| 2402.00000 | 2317.775000 | -52.111   | -27.896     |
| 2402.00000 | 2341.025000 | -52.140   | -27.896     |
| 2402.00000 | 2312.075000 | -52.171   | -27.896     |
| 2480.00000 | 2484.825000 | -51.455   | -29.916     |
| 2480.00000 | 2483.775000 | -51.515   | -29.916     |
| 2480.00000 | 2484.875000 | -51.642   | -29.916     |
| 2480.00000 | 2483.825000 | -51.646   | -29.916     |
| 2480.00000 | 2484.675000 | -51.820   | -29.916     |
| 2480.00000 | 2485.575000 | -51.904   | -29.916     |
| 2480.00000 | 2484.725000 | -51.957   | -29.916     |

| Freq (MHz) | Freq (MHz)  | Lvl (dBm) | Limit (dBm) |
|------------|-------------|-----------|-------------|
| 2480.00000 | 2488.275000 | -51.962   | -29.916     |
| 2480.00000 | 2485.625000 | -52.010   | -29.916     |
| 2480.00000 | 2485.825000 | -52.040   | -29.916     |
| 2480.00000 | 2499.675000 | -52.084   | -29.916     |
| 2480.00000 | 2484.775000 | -52.103   | -29.916     |
| 2480.00000 | 2491.425000 | -52.168   | -29.916     |
| 2480.00000 | 2485.875000 | -52.184   | -29.916     |
| 2480.00000 | 2499.375000 | -52.222   | -29.916     |


Verdict

Pass

Attachments

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BLE (GFSK 1 Mbit/s)    Frequency MHz = 2402.00000  
MIMO Mode = SISO    Active Port = 1

Images:

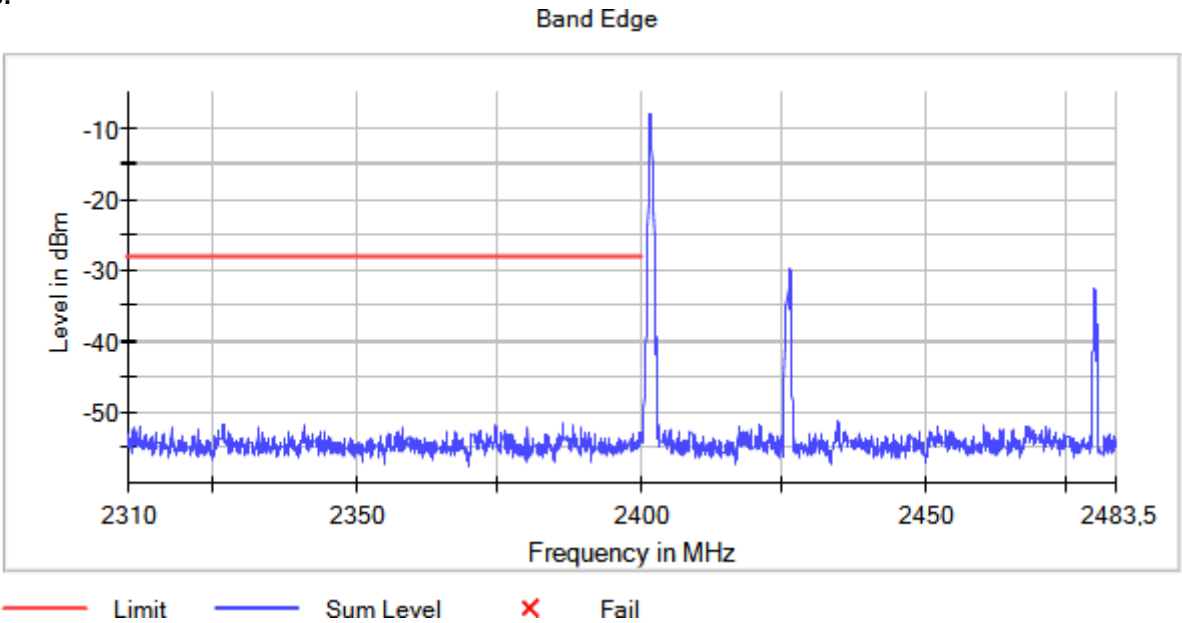


Tables:

Spectrum Analyzer Parameters

| Setting               | Instrument Value | Target Value   |
|-----------------------|------------------|----------------|
| RBW                   | 100.000 kHz      | <= 100.000 kHz |
| VBW                   | 300.000 kHz      | >= 300.000 kHz |
| SweepPoints           | 1800             | ~ 1800         |
| SweepTime             | 113.672 µs       | AUTO           |
| Reference Level       | 10.000 dBm       | 10.000 dBm     |
| Attenuation           | 30.000 dB        | AUTO           |
| Detector              | MaxPeak          | MaxPeak        |
| SweepCount            | 100              | 100            |
| Filter                | 3 dB             | 3 dB           |
| Trace Mode            | Max Hold         | Max Hold       |
| SweepType             | FFT              | AUTO           |
| Preamplifier          | off              | off            |
| Stablemode            | Trace            | Trace          |
| Stablevalue           | 0.50 dB          | 0.50 dB        |
| Run                   | 4 / max. 150     | max. 150       |
| Stable                | 3 / 3            | 3              |
| Max Stable Difference | 0.00 dB          | 0.50 dB        |

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
Modulation = BLE (GFSK 1 Mbit/s)    Frequency MHz = 2480.00000  
MIMO Mode = SISO    Active Port = 1

Images:

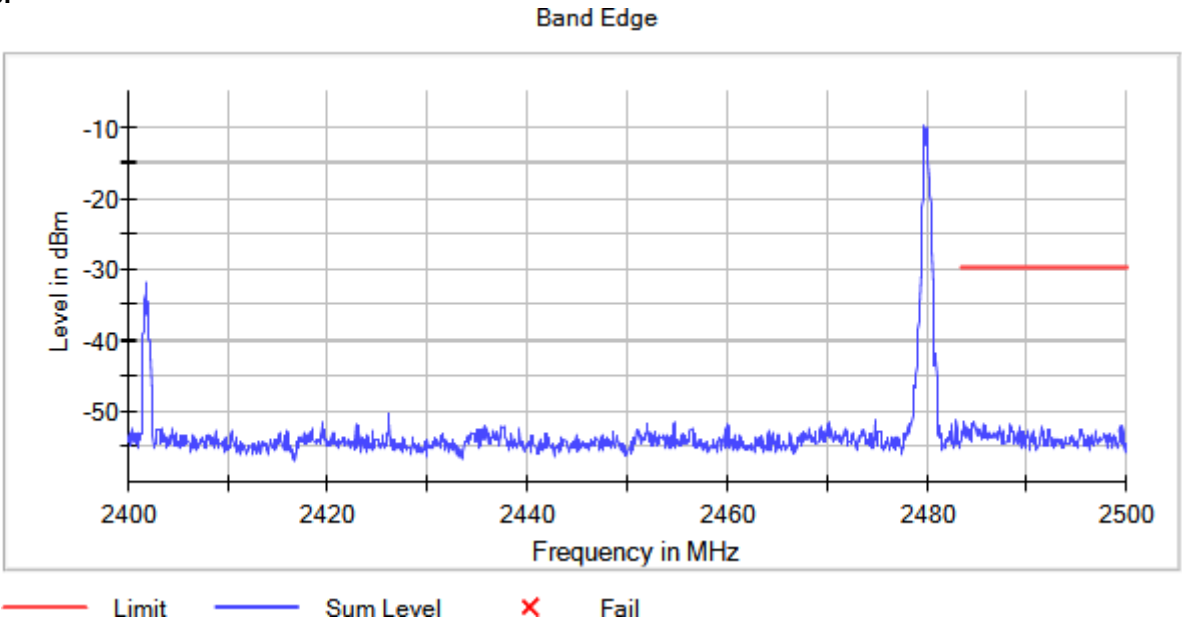

**Tables:**  
Spectrum Analyzer Parameters

| Setting               | Instrument Value | Target Value   |
|-----------------------|------------------|----------------|
| RBW                   | 100.000 kHz      | <= 100.000 kHz |
| VBW                   | 300.000 kHz      | >= 300.000 kHz |
| SweepPoints           | 1800             | ~ 1800         |
| SweepTime             | 113.672 µs       | AUTO           |
| Reference Level       | 10.000 dBm       | 10.000 dBm     |
| Attenuation           | 30.000 dB        | AUTO           |
| Detector              | MaxPeak          | MaxPeak        |
| SweepCount            | 100              | 100            |
| Filter                | 3 dB             | 3 dB           |
| Trace Mode            | Max Hold         | Max Hold       |
| SweepType             | FFT              | AUTO           |
| Preamp                | off              | off            |
| Stablemode            | Trace            | Trace          |
| Stablevalue           | 0.50 dB          | 0.50 dB        |
| Run                   | 4 / max. 150     | max. 150       |
| Stable                | 3 / 3            | 3              |
| Max Stable Difference | 0.00 dB          | 0.50 dB        |

Modulation: BLE (GFSK 2 Mbit/s)

MIMO Mode: SISO

Results

Radiated measurements were used to show compliance with the limits in the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

| Freq (MHz) | Freq (MHz)  | Lvl (dBm) | Limit (dBm) |
|------------|-------------|-----------|-------------|
| 2402.00000 | 2399.975000 | -39.813   | -28.139     |
| 2402.00000 | 2399.925000 | -40.769   | -28.139     |
| 2402.00000 | 2399.875000 | -43.816   | -28.139     |
| 2402.00000 | 2399.825000 | -46.744   | -28.139     |
| 2402.00000 | 2399.775000 | -49.950   | -28.139     |
| 2402.00000 | 2399.725000 | -50.095   | -28.139     |
| 2402.00000 | 2386.325000 | -50.913   | -28.139     |
| 2402.00000 | 2399.675000 | -51.014   | -28.139     |
| 2402.00000 | 2399.625000 | -51.068   | -28.139     |
| 2402.00000 | 2386.275000 | -51.150   | -28.139     |
| 2402.00000 | 2387.575000 | -51.684   | -28.139     |
| 2402.00000 | 2345.975000 | -52.008   | -28.139     |
| 2402.00000 | 2386.775000 | -52.023   | -28.139     |
| 2402.00000 | 2371.325000 | -52.061   | -28.139     |
| 2402.00000 | 2360.775000 | -52.070   | -28.139     |
| 2480.00000 | 2488.875000 | -50.781   | -30.279     |
| 2480.00000 | 2485.475000 | -50.808   | -30.279     |
| 2480.00000 | 2488.925000 | -50.821   | -30.279     |
| 2480.00000 | 2484.175000 | -51.118   | -30.279     |
| 2480.00000 | 2484.225000 | -51.249   | -30.279     |
| 2480.00000 | 2498.175000 | -51.323   | -30.279     |
| 2480.00000 | 2498.225000 | -51.539   | -30.279     |
| 2480.00000 | 2486.075000 | -51.592   | -30.279     |
| 2480.00000 | 2486.125000 | -51.601   | -30.279     |
| 2480.00000 | 2485.425000 | -51.646   | -30.279     |
| 2480.00000 | 2490.625000 | -51.675   | -30.279     |
| 2480.00000 | 2488.375000 | -51.784   | -30.279     |
| 2480.00000 | 2488.525000 | -51.904   | -30.279     |
| 2480.00000 | 2485.525000 | -51.933   | -30.279     |
| 2480.00000 | 2490.675000 | -51.993   | -30.279     |


Verdict

Pass

Attachments

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 2  
Modulation = BLE (GFSK 2 Mbit/s)    Frequency MHz = 2402.00000  
MIMO Mode = SISO    Active Port = 1

Images:

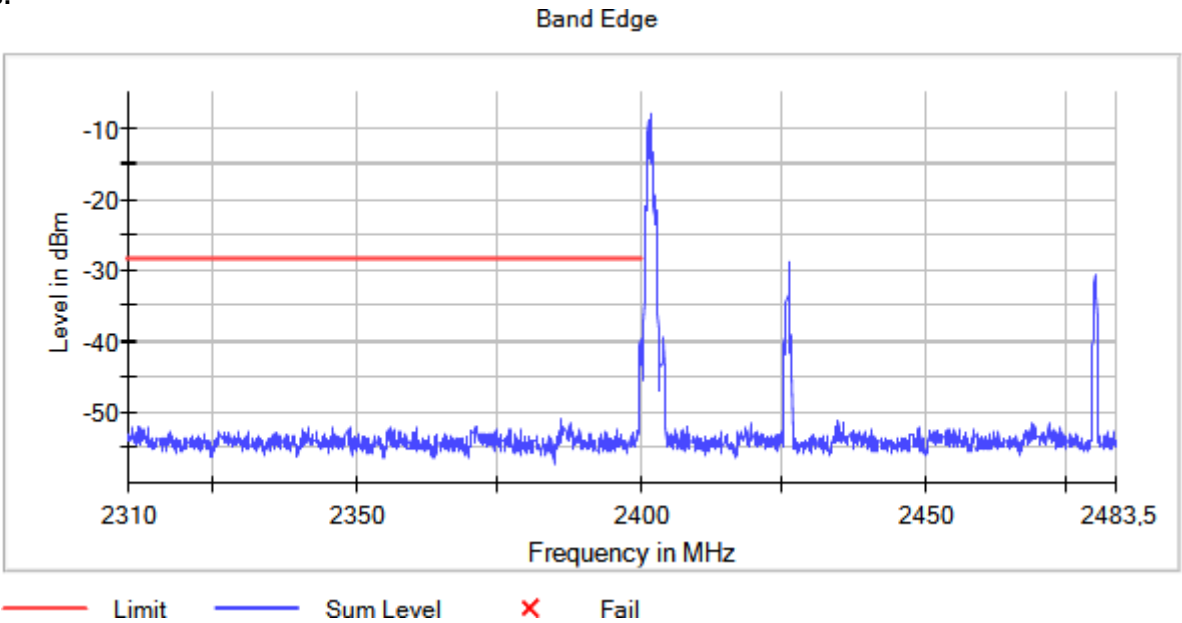


Tables:

Spectrum Analyzer Parameters

| Setting               | Instrument Value | Target Value   |
|-----------------------|------------------|----------------|
| RBW                   | 100.000 kHz      | <= 100.000 kHz |
| VBW                   | 300.000 kHz      | >= 300.000 kHz |
| SweepPoints           | 1800             | ~ 1800         |
| SweepTime             | 113.672 µs       | AUTO           |
| Reference Level       | 10.000 dBm       | 10.000 dBm     |
| Attenuation           | 30.000 dB        | AUTO           |
| Detector              | MaxPeak          | MaxPeak        |
| SweepCount            | 100              | 100            |
| Filter                | 3 dB             | 3 dB           |
| Trace Mode            | Max Hold         | Max Hold       |
| SweepType             | FFT              | AUTO           |
| Preamp                | off              | off            |
| Stablemode            | Trace            | Trace          |
| Stablevalue           | 0.50 dB          | 0.50 dB        |
| Run                   | 9 / max. 150     | max. 150       |
| Stable                | 3 / 3            | 3              |
| Max Stable Difference | 0.00 dB          | 0.50 dB        |

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 2  
Modulation = BLE (GFSK 2 Mbit/s)    Frequency MHz = 2480.00000  
MIMO Mode = SISO    Active Port = 1

Images:

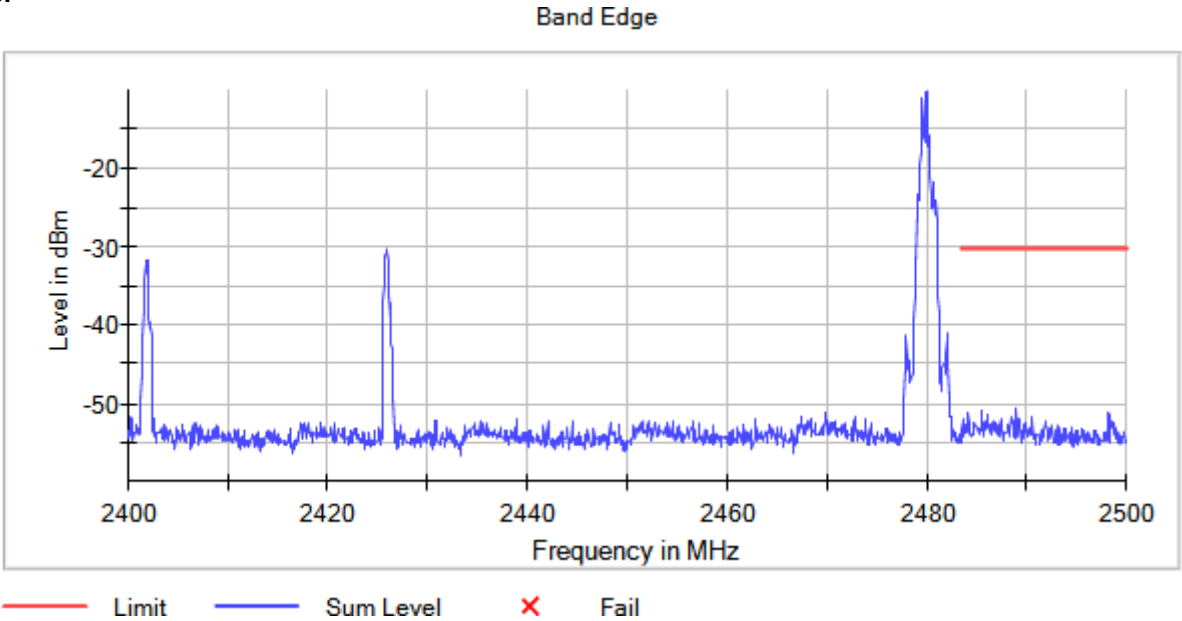

Tables:

Spectrum Analyzer Parameters 1

| Setting               | Instrument Value | Target Value   |
|-----------------------|------------------|----------------|
| RBW                   | 100.000 kHz      | <= 100.000 kHz |
| VBW                   | 300.000 kHz      | >= 300.000 kHz |
| SweepPoints           | 1800             | ~ 1800         |
| SweepTime             | 113.672 µs       | AUTO           |
| Reference Level       | 10.000 dBm       | 10.000 dBm     |
| Attenuation           | 30.000 dB        | AUTO           |
| Detector              | MaxPeak          | MaxPeak        |
| SweepCount            | 100              | 100            |
| Filter                | 3 dB             | 3 dB           |
| Trace Mode            | Max Hold         | Max Hold       |
| SweepType             | FFT              | AUTO           |
| Preamp                | off              | off            |
| Stablemode            | Trace            | Trace          |
| Stablevalue           | 0.50 dB          | 0.50 dB        |
| Run                   | 9 / max. 150     | max. 150       |
| Stable                | 3 / 3            | 3              |
| Max Stable Difference | 0.00 dB          | 0.50 dB        |

## RSS-247 5.5 / FCC 15.247 (d) [RSE] Emission limitations radiated (Transmitter)

### Limits

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c) / RSS-Gen):

| Frequency Range (MHz) | Field strength ( $\mu\text{V/m}$ ) | Field strength ( $\text{dB}\mu\text{V/m}$ ) | Measurement distance (m) |
|-----------------------|------------------------------------|---------------------------------------------|--------------------------|
| 0.009-0.490           | 2400/F(kHz)                        | -                                           | 300                      |
| 0.490-1.705           | 24000/F(kHz)                       | -                                           | 30                       |
| 1.705 - 30.0          | 30                                 | -                                           | 30                       |
| 30 - 88               | 100                                | 40                                          | 3                        |
| 88 - 216              | 150                                | 43.5                                        | 3                        |
| 216 - 960             | 200                                | 46                                          | 3                        |
| Above 960             | 500                                | 54                                          | 3                        |

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table, specified when measuring with peak detector function.

RSS-247: Attenuation below the general field strength limits specified in RSS-Gen is not required.

Modulation: BLE (GFSK 1 Mbit/s)

MIMO Mode: SISO

### Result

No spurious emission were found at less than 20 dB


### Verdict

Pass

Attachments

Frequency Range GHz = [0.03, 1]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 1 Mbit/s)      Frequency MHz = 2402.00000  
MIMO Mode = SISO      Active Port = 1

Images:

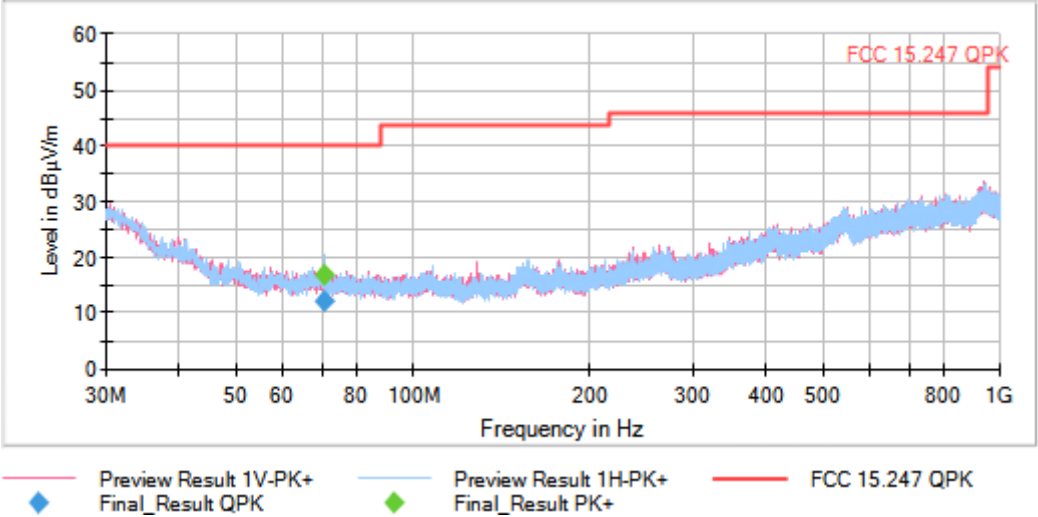


Tables:

Spectrum Analyzer Parameters

|  | Subrange           | Step Size  | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|------------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |            |           |           |            |        |
|  | 30 MHz - 1 GHz     | 30,312 kHz | PK+       | 100 kHz   | 1 s        | 0 dB   |

Frequency Range GHz = [0.03, 1]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 1 Mbit/s)      Frequency MHz = 2440.00000  
MIMO Mode = SISO      Active Port = 1

Images:

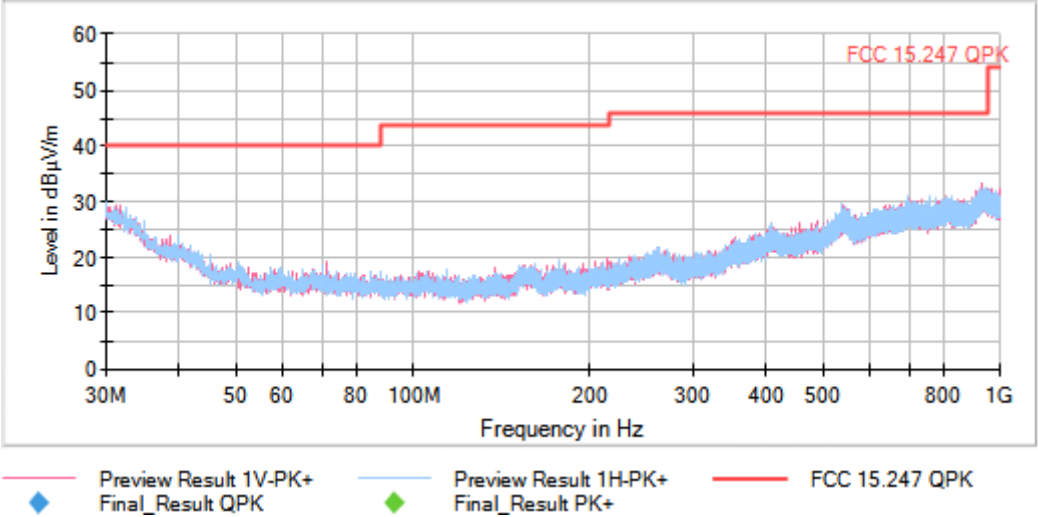


Tables:

Spectrum Analyzer Parameters

|  | Subrange           | Step Size  | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|------------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |            |           |           |            |        |
|  | 30 MHz - 1 GHz     | 30,312 kHz | PK+       | 100 kHz   | 1 s        | 0 dB   |

Frequency Range GHz = [0.03, 1]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 1 Mbit/s)      Frequency MHz = 2480.00000  
MIMO Mode = SISO      Active Port = 1

Images:

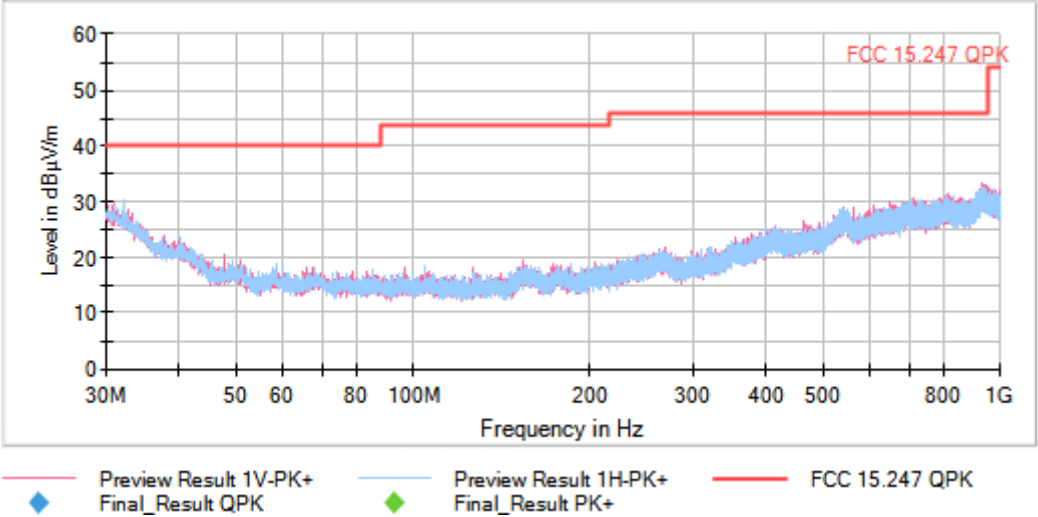


Tables:

Spectrum Analyzer Parameters


|  | Subrange           | Step Size  | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|------------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |            |           |           |            |        |
|  | 30 MHz - 1 GHz     | 30,312 kHz | PK+       | 100 kHz   | 1 s        | 0 dB   |


Frequency Range GHz = [1, 3]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 1 Mbit/s)      Frequency MHz = 2402.00000  
MIMO Mode = SISO      Active Port = 1

Images:

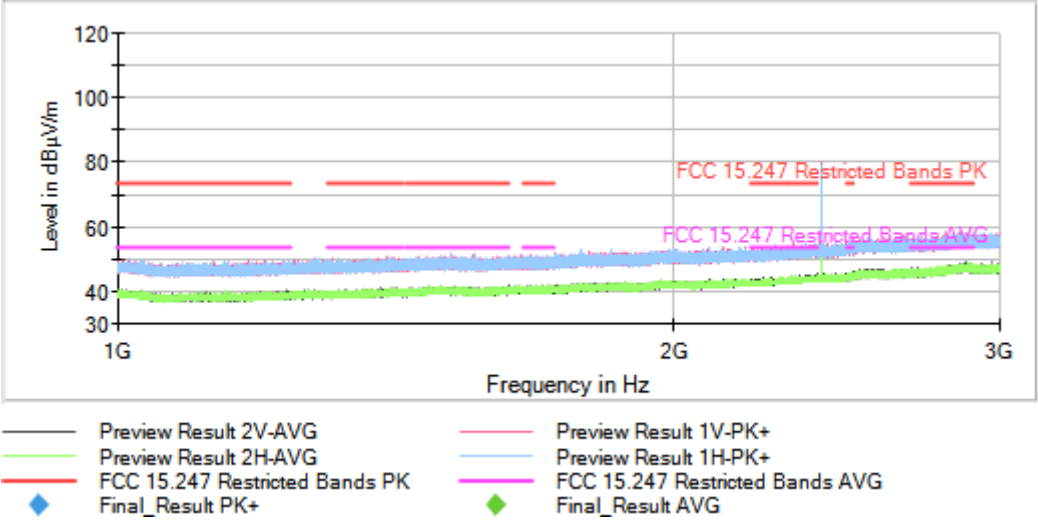

Full Spectrum

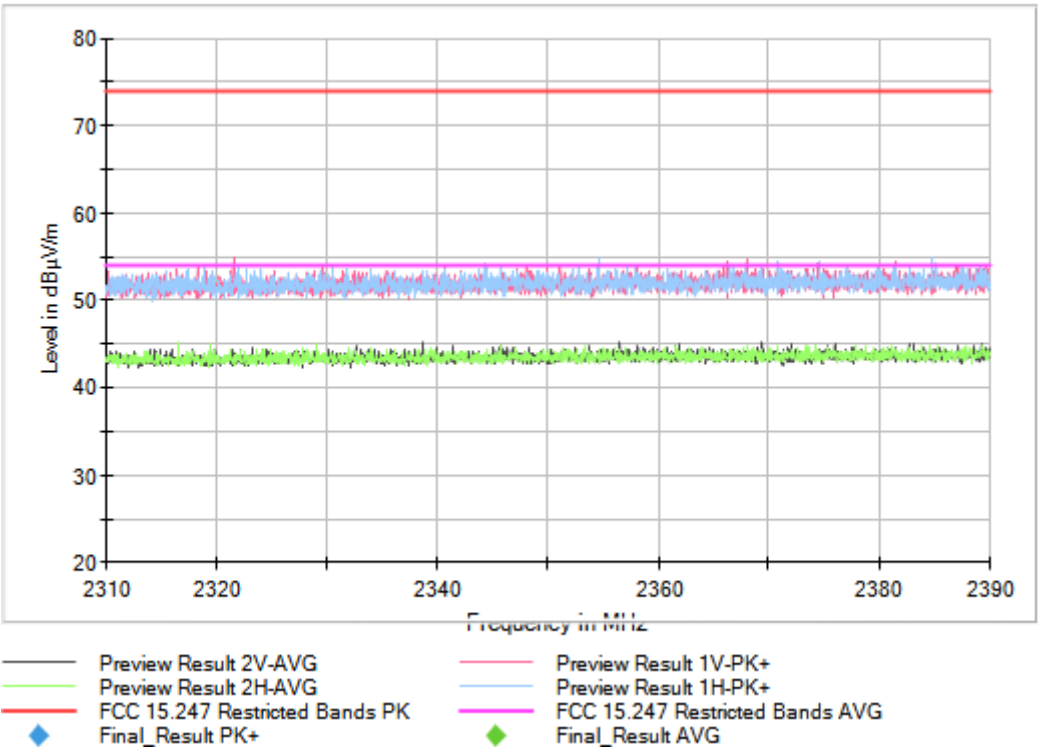

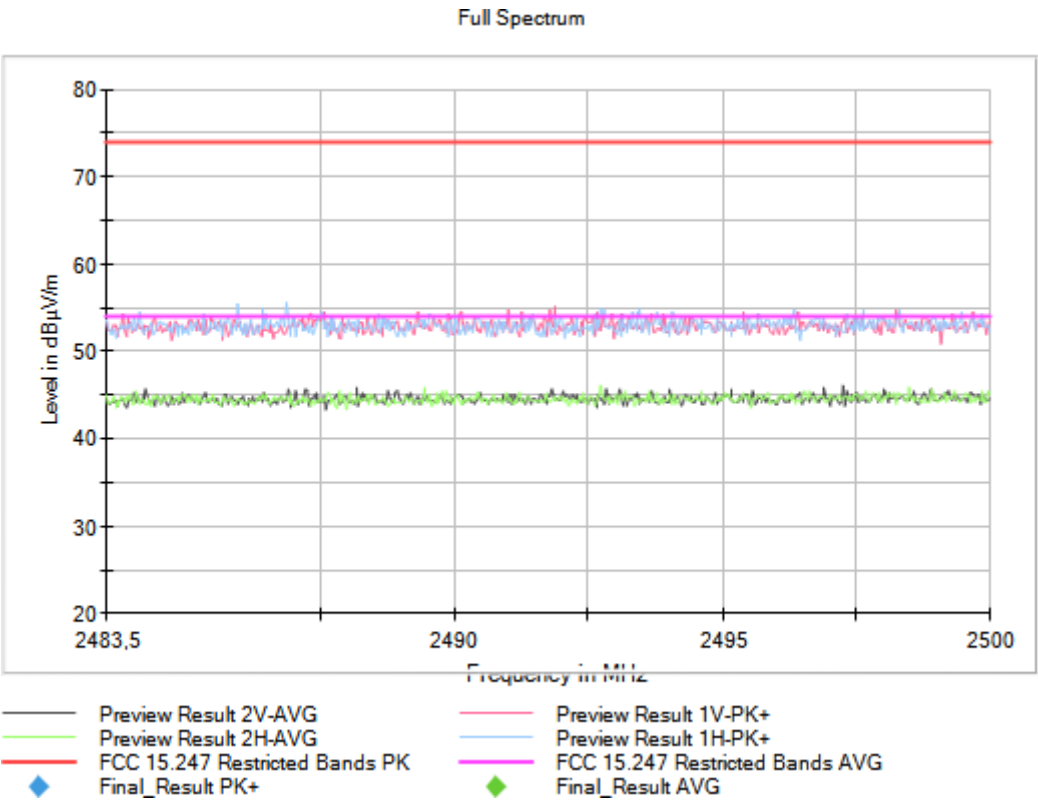


Tables:  
Spectrum Analyzer Parameters


|  | Subrange           | Step Size  | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|------------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |            |           |           |            |        |
|  | 1 GHz - 3 GHz      | 30,769 kHz | PK+ ; AVG | 1 MHz     | 1 s        | 0 dB   |


Frequency Range GHz = [1, 3]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 1 Mbit/s)      Frequency MHz = 2440.00000  
MIMO Mode = SISO      Active Port = 1

Images:

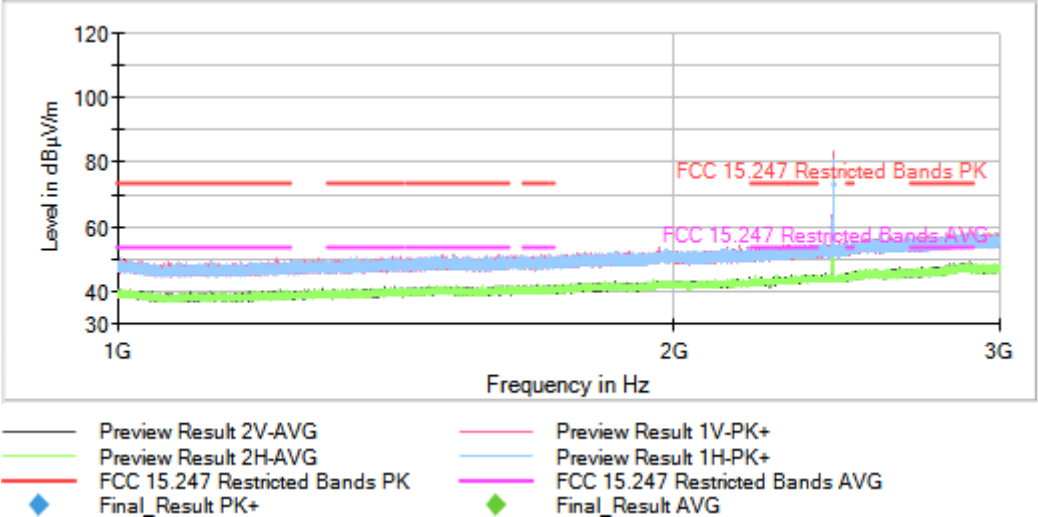

Full Spectrum

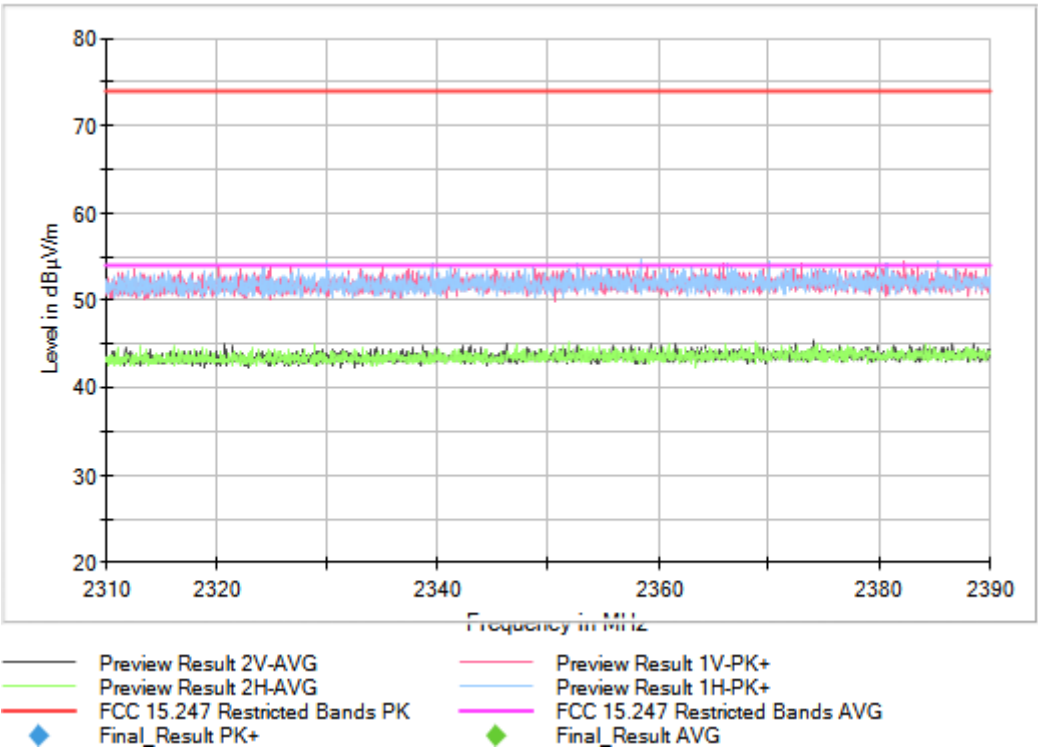

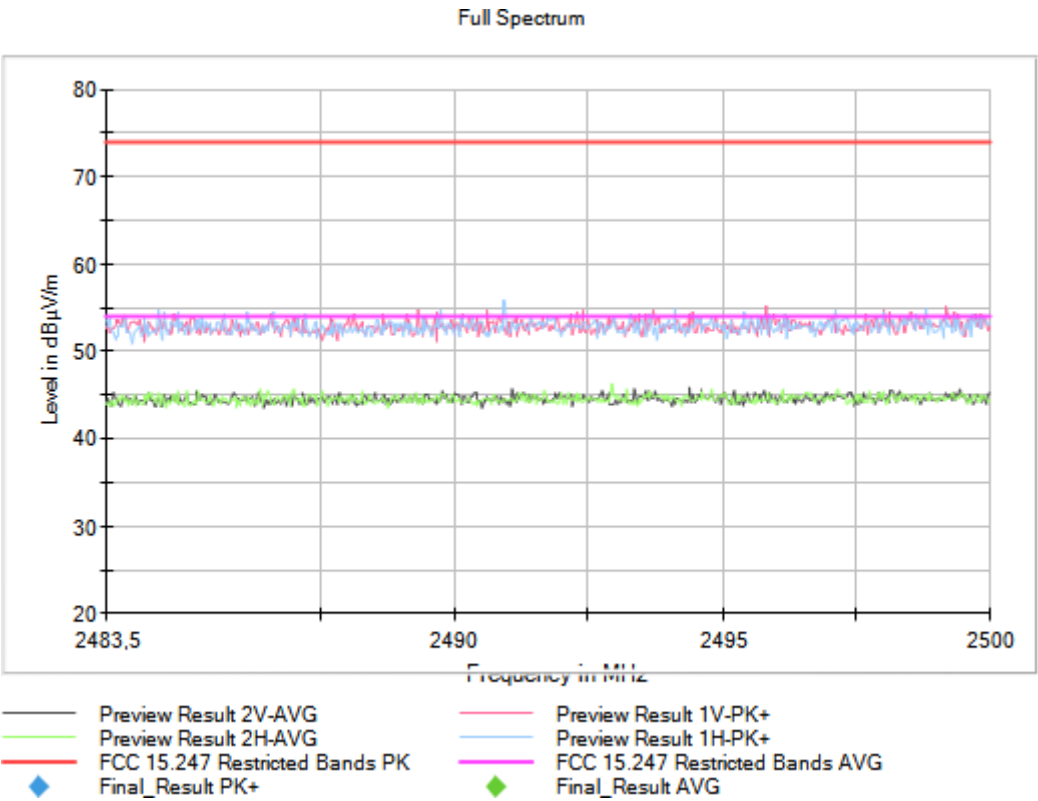


Tables:  
Spectrum Analyzer Parameters


|  | Subrange           | Step Size  | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|------------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |            |           |           |            |        |
|  | 1 GHz - 3 GHz      | 30,769 kHz | PK+ ; AVG | 1 MHz     | 1 s        | 0 dB   |


Frequency Range GHz = [1, 3]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 1 Mbit/s)      Frequency MHz = 2480.00000  
MIMO Mode = SISO      Active Port = 1

Images:

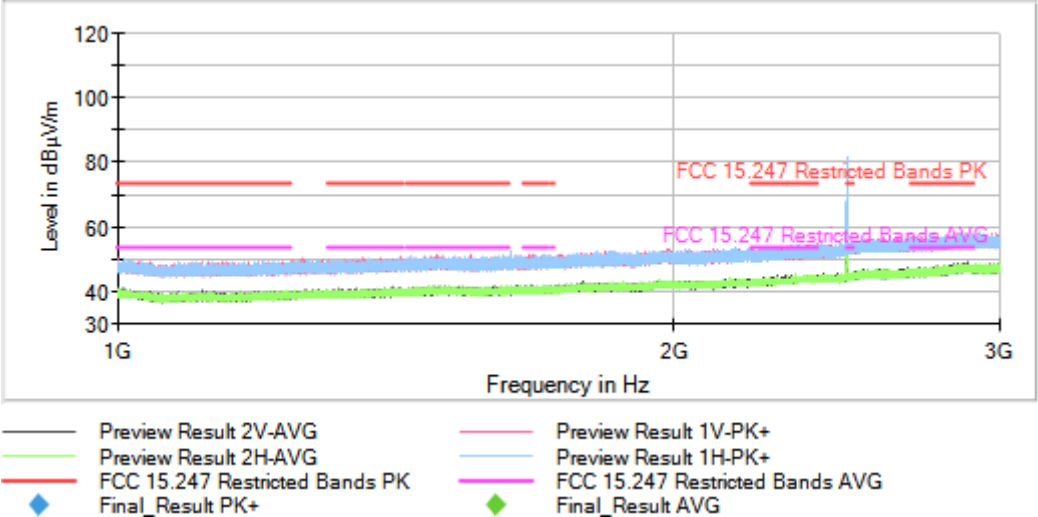

Full Spectrum

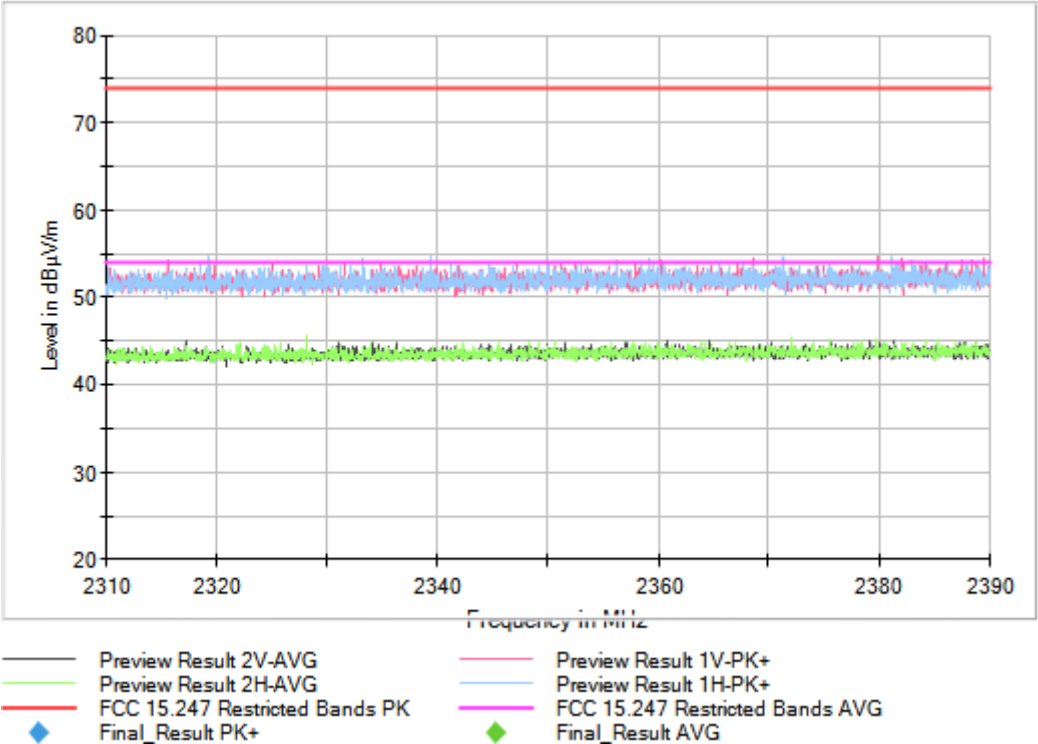

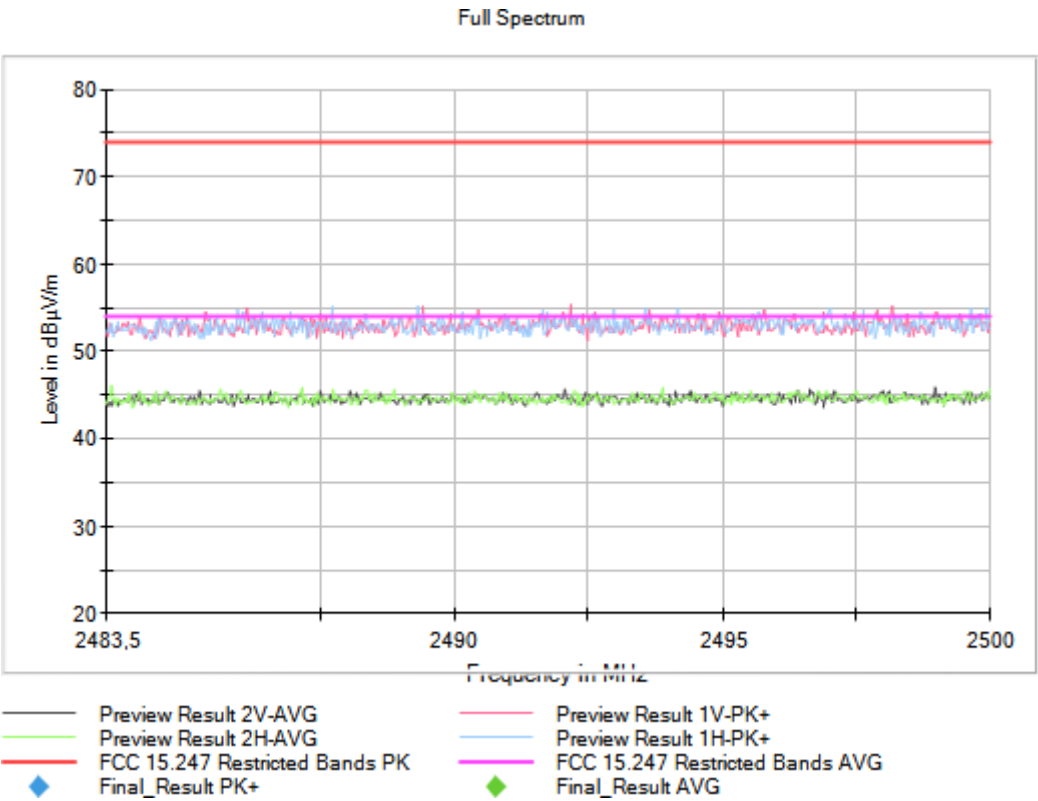


Tables:  
Spectrum Analyzer Parameters

|  | Subrange           | Step Size  | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|------------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |            |           |           |            |        |
|  | 1 GHz - 3 GHz      | 30,769 kHz | PK+ ; AVG | 1 MHz     | 1 s        | 0 dB   |

Frequency Range GHz = [3, 17]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 1 Mbit/s)      Frequency MHz = 2402.00000  
MIMO Mode = SISO      Active Port = 1

Images:

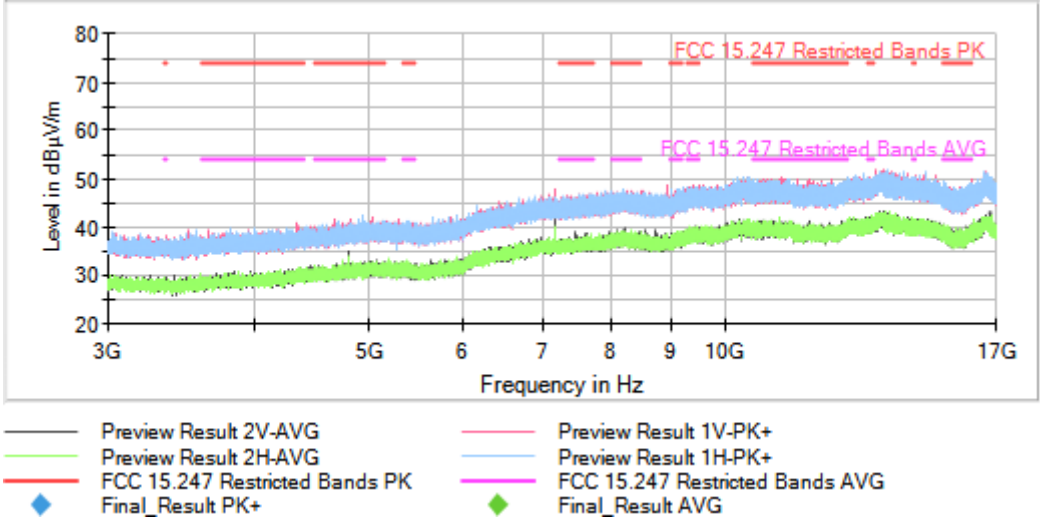


Tables:

Spectrum Analyzer Parameters

|  | Subrange           | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|-----------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |           |           |           |            |        |
|  | 3 GHz - 17 GHz     | 140 kHz   | PK+ ; AVG | 1 MHz     | 1 s        | 30 dB  |

Frequency Range GHz = [3, 17]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 1 Mbit/s)      Frequency MHz = 2440.00000  
MIMO Mode = SISO      Active Port = 1

Images:

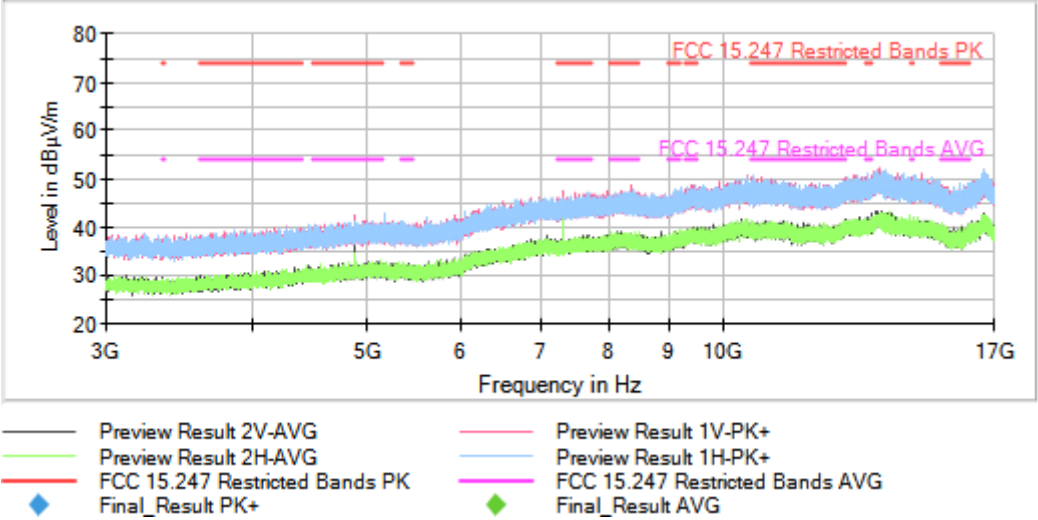


Tables:

Spectrum Analyzer Parameters

|  | Subrange           | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|-----------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |           |           |           |            |        |
|  | 3 GHz - 17 GHz     | 140 kHz   | PK+ ; AVG | 1 MHz     | 1 s        | 30 dB  |

Frequency Range GHz = [3, 17]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 1 Mbit/s)      Frequency MHz = 2480.00000  
MIMO Mode = SISO      Active Port = 1

Images:

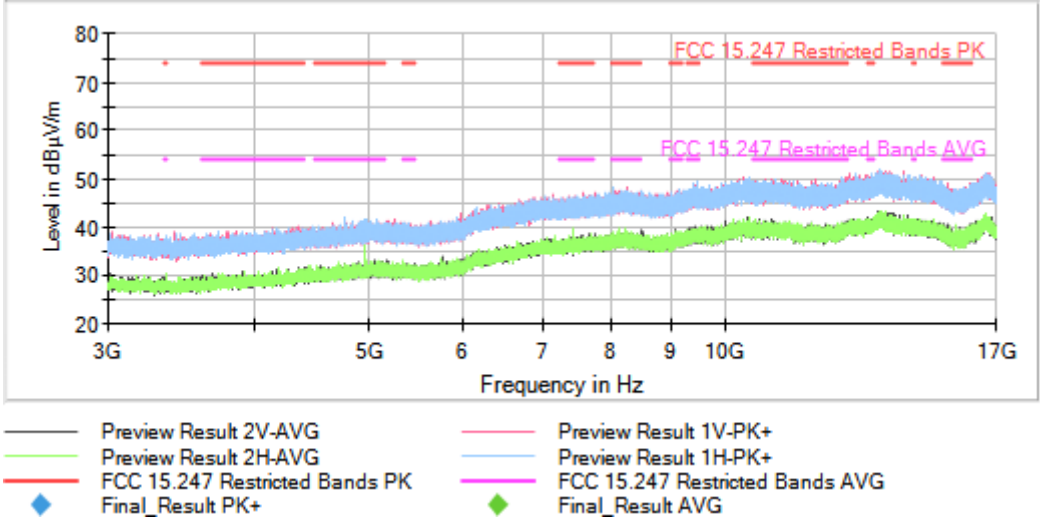


Tables:

Spectrum Analyzer Parameters

|  | Subrange           | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|-----------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |           |           |           |            |        |
|  | 3 GHz - 17 GHz     | 140 kHz   | PK+ ; AVG | 1 MHz     | 1 s        | 30 dB  |

Frequency Range GHz = [17, 26]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 1 Mbit/s)      Frequency MHz = 2402.00000  
MIMO Mode = SISO      Active Port = 1

Images:

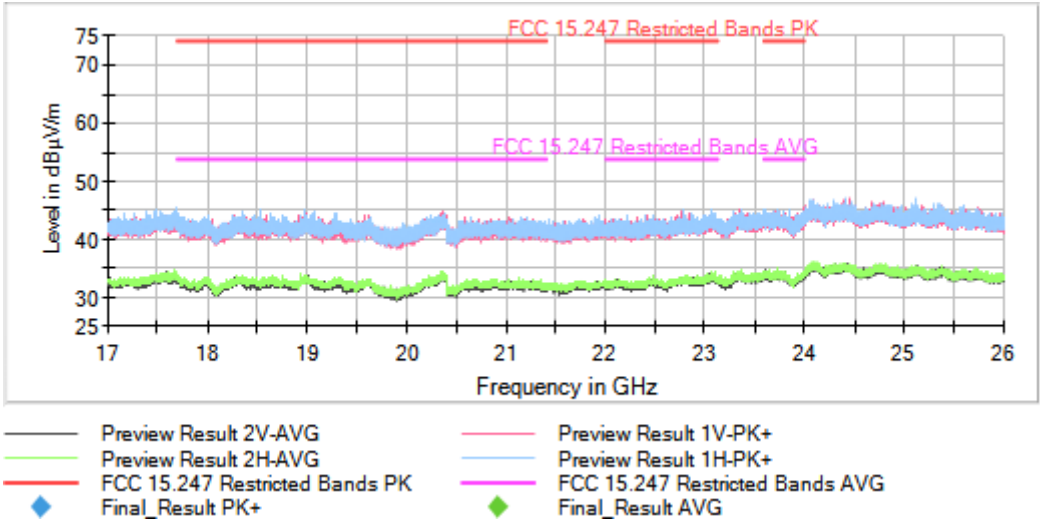


Tables:

Spectrum Analyzer Parameters

|  | Subrange           | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|-----------|-----------|-----------|------------|--------|
|  | Receiver: [FSV 40] |           |           |           |            |        |
|  | 17 GHz - 26 GHz    | 300 kHz   | PK+ ; AVG | 1 MHz     | 1 s        | 0 dB   |

Frequency Range GHz = [17, 26]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 1 Mbit/s)      Frequency MHz = 2440.00000  
MIMO Mode = SISO      Active Port = 1

Images:

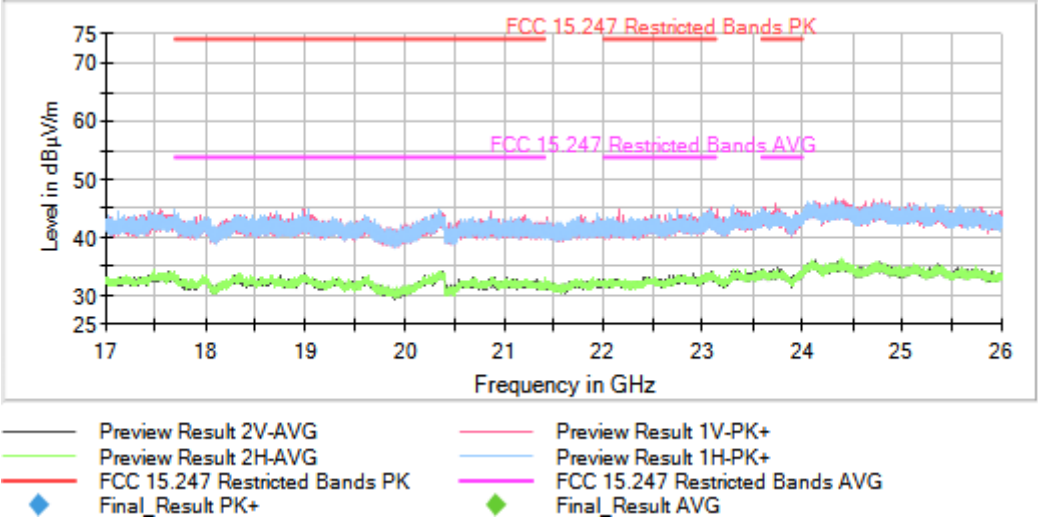


Tables:

Spectrum Analyzer Parameters

|  | Subrange           | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|-----------|-----------|-----------|------------|--------|
|  | Receiver: [FSV 40] |           |           |           |            |        |
|  | 17 GHz - 26 GHz    | 300 kHz   | PK+ ; AVG | 1 MHz     | 1 s        | 0 dB   |

Frequency Range GHz = [17, 26]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 1 Mbit/s)      Frequency MHz = 2480.00000  
MIMO Mode = SISO      Active Port = 1

Images:

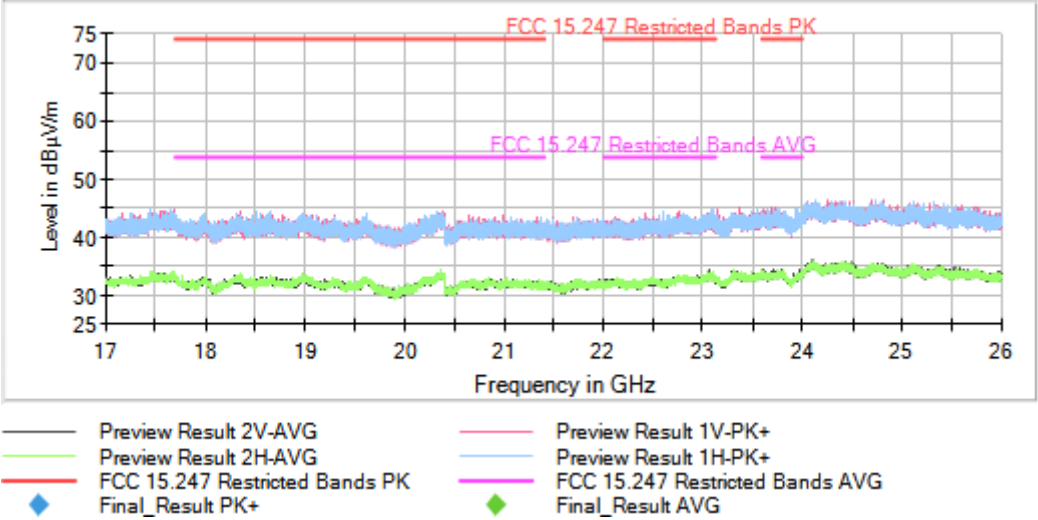

Tables:

Spectrum Analyzer Parameters

|  | Subrange           | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|-----------|-----------|-----------|------------|--------|
|  | Receiver: [FSV 40] |           |           |           |            |        |
|  | 17 GHz - 26 GHz    | 300 kHz   | PK+ ; AVG | 1 MHz     | 1 s        | 0 dB   |

Modulation: BLE (GFSK 2 Mbit/s)

MIMO Mode: SISO

**Results**

No spurious emissions were found at less than 20 dB


**Verdict**

Pass

Attachments

Frequency Range GHz = [0.03, 1]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 2 Mbit/s)      Frequency MHz = 2402.00000  
MIMO Mode = SISO      Active Port = 1

Images:

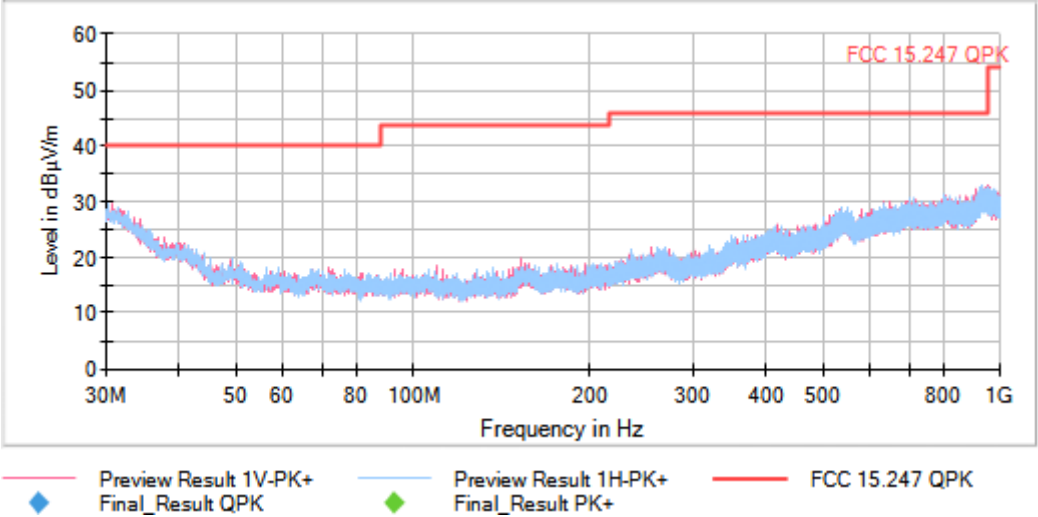


Tables:

Spectrum Analyzer Parameters

|  | Subrange           | Step Size  | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|------------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |            |           |           |            |        |
|  | 30 MHz - 1 GHz     | 30,312 kHz | PK+       | 100 kHz   | 1 s        | 0 dB   |

Frequency Range GHz = [0.03, 1]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 2 Mbit/s)      Frequency MHz = 2440.00000  
MIMO Mode = SISO      Active Port = 1

Images:

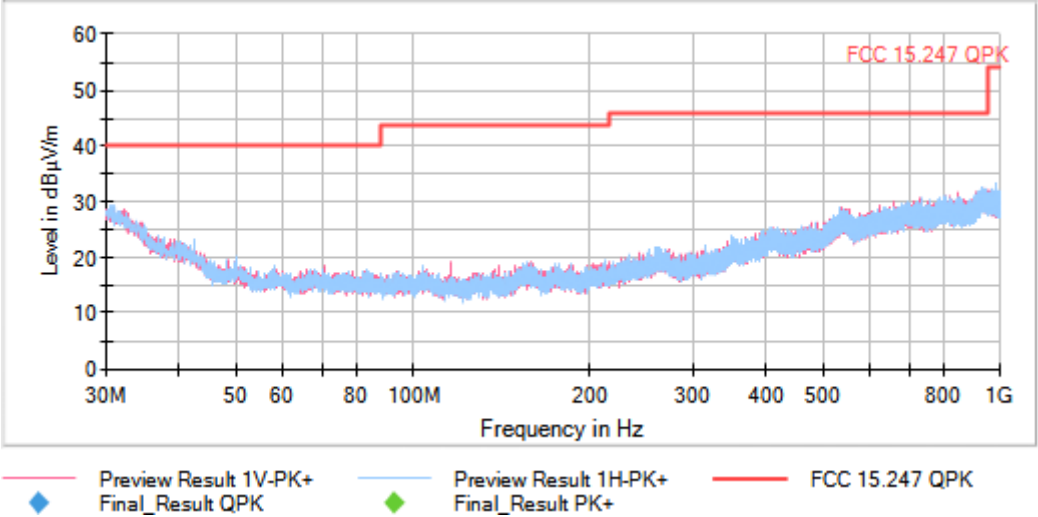


Tables:

Spectrum Analyzer Parameters

|  | Subrange           | Step Size  | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|------------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |            |           |           |            |        |
|  | 30 MHz - 1 GHz     | 30,312 kHz | PK+       | 100 kHz   | 1 s        | 0 dB   |

Frequency Range GHz = [0.03, 1]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 2 Mbit/s)      Frequency MHz = 2480.00000  
MIMO Mode = SISO      Active Port = 1

Images:

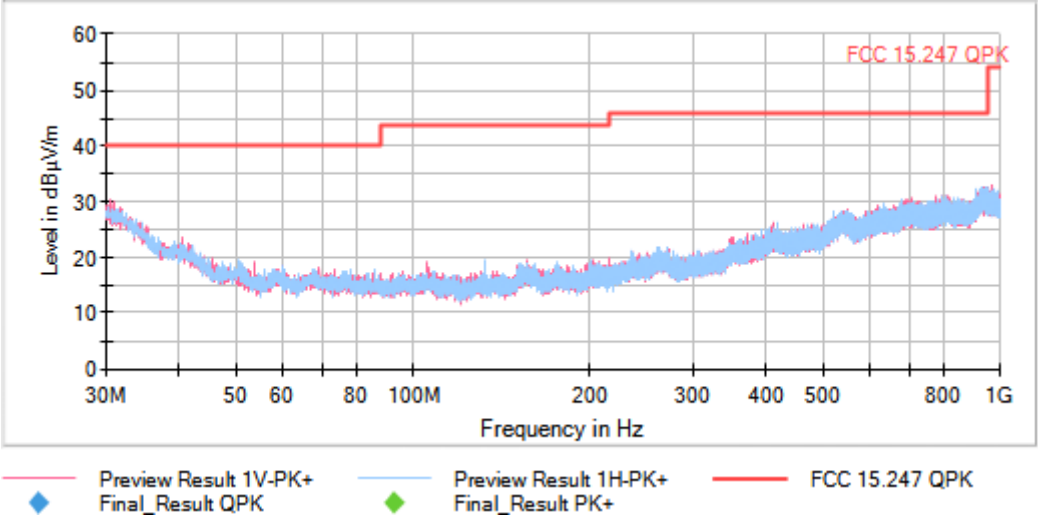


Tables:

Spectrum Analyzer Parameters


|  | Subrange           | Step Size  | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|------------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |            |           |           |            |        |
|  | 30 MHz - 1 GHz     | 30,312 kHz | PK+       | 100 kHz   | 1 s        | 0 dB   |


Frequency Range GHz = [1, 3]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 2 Mbit/s)      Frequency MHz = 2402.00000  
MIMO Mode = SISO      Active Port = 1

Images:

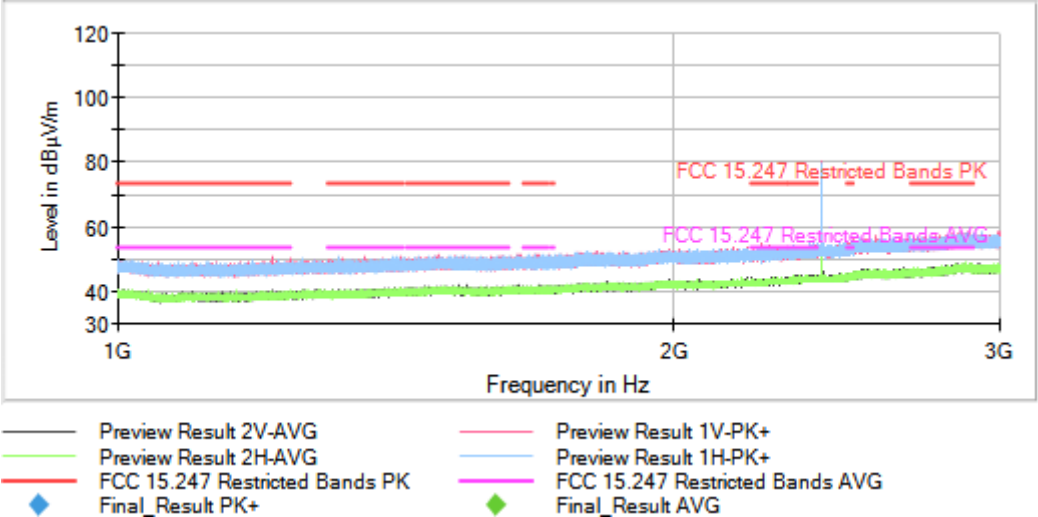

Full Spectrum

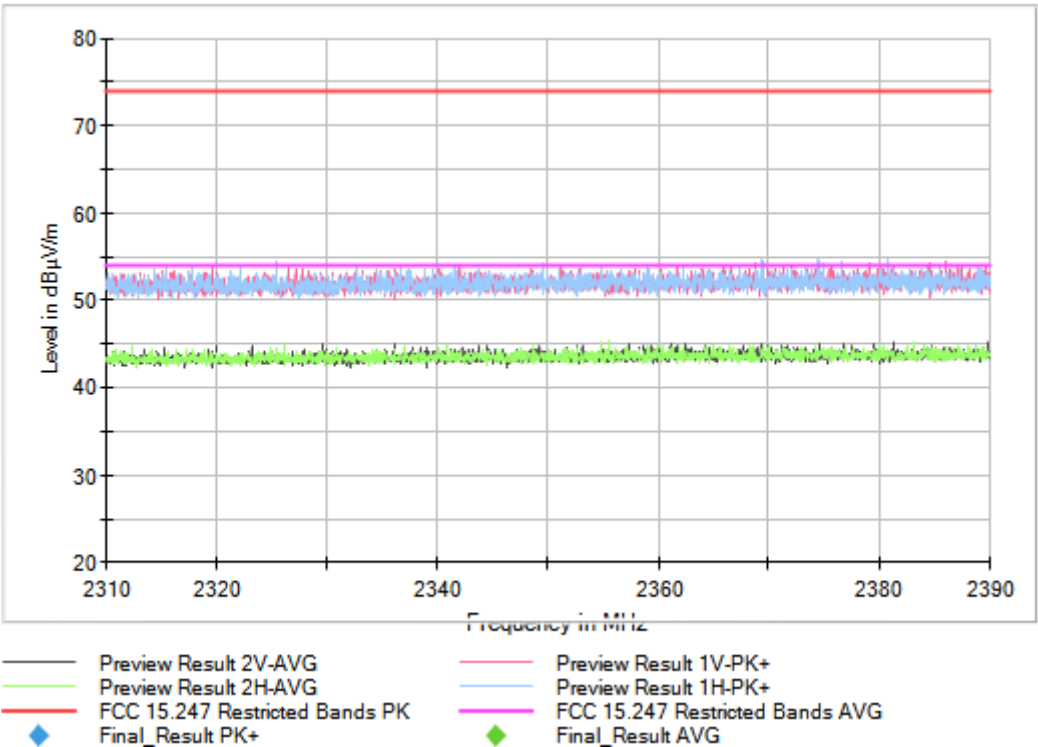

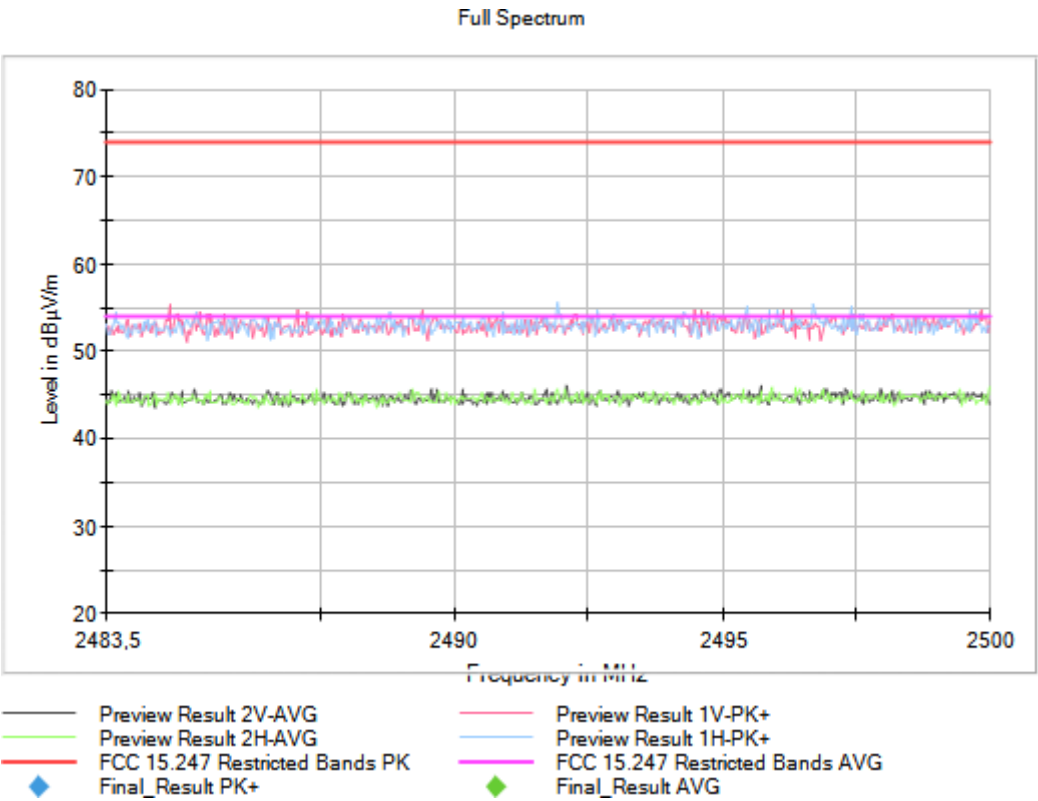


Tables:  
Spectrum Analyzer Parameters


|  | Subrange           | Step Size  | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|------------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |            |           |           |            |        |
|  | 1 GHz - 3 GHz      | 30,769 kHz | PK+ ; AVG | 1 MHz     | 1 s        | 0 dB   |


Frequency Range GHz = [1, 3]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 2 Mbit/s)      Frequency MHz = 2440.00000  
MIMO Mode = SISO      Active Port = 1

Images:

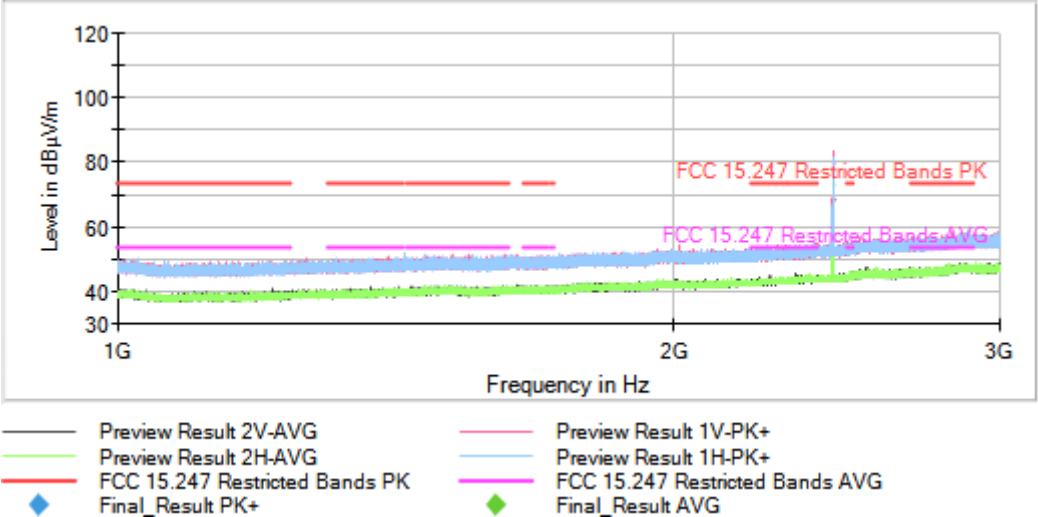

Full Spectrum

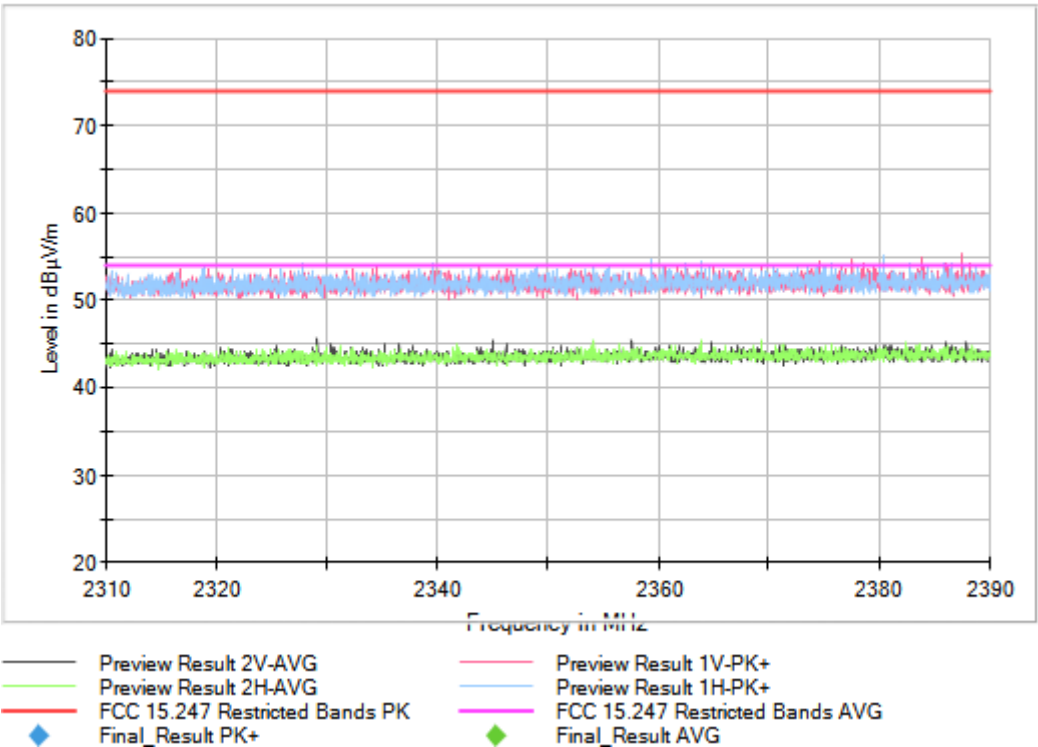

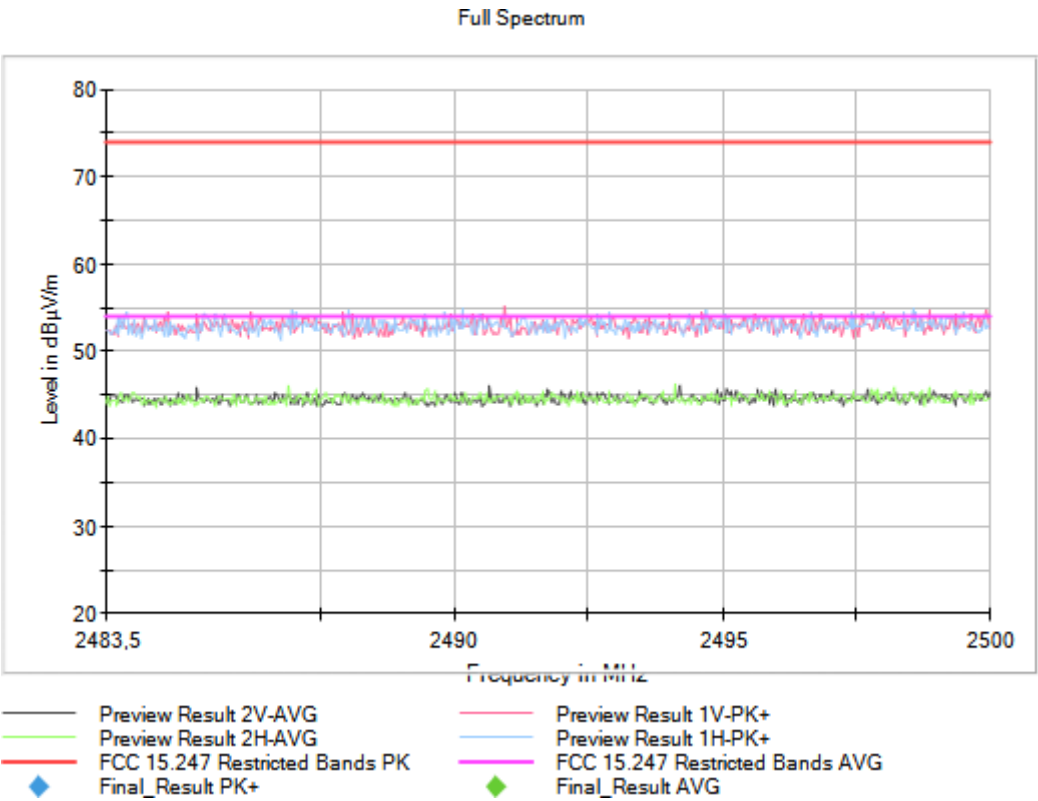


Tables:  
Spectrum Analyzer Parameters


|  | Subrange           | Step Size  | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|------------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |            |           |           |            |        |
|  | 1 GHz - 3 GHz      | 30,769 kHz | PK+ ; AVG | 1 MHz     | 1 s        | 0 dB   |


Frequency Range GHz = [1, 3]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 2 Mbit/s)      Frequency MHz = 2480.00000  
MIMO Mode = SISO      Active Port = 1

Images:

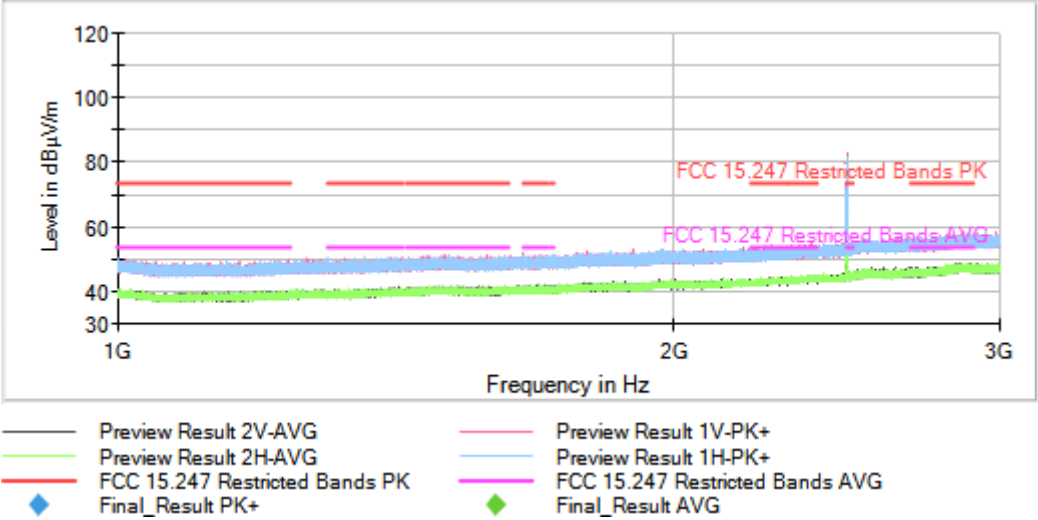

Full Spectrum

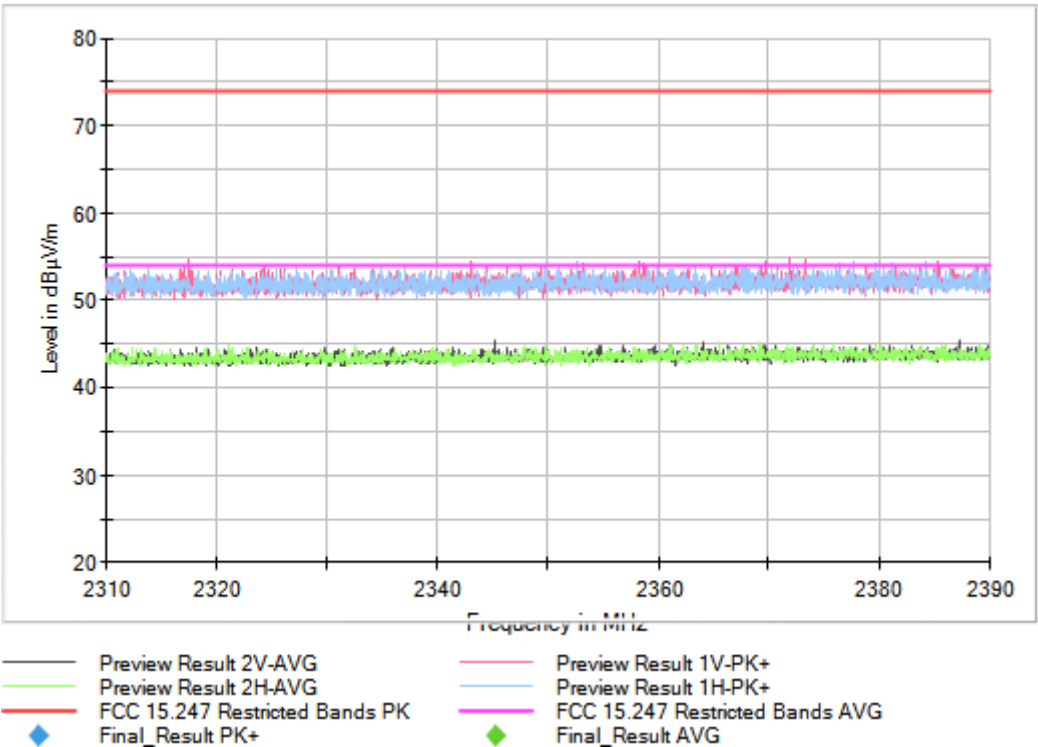

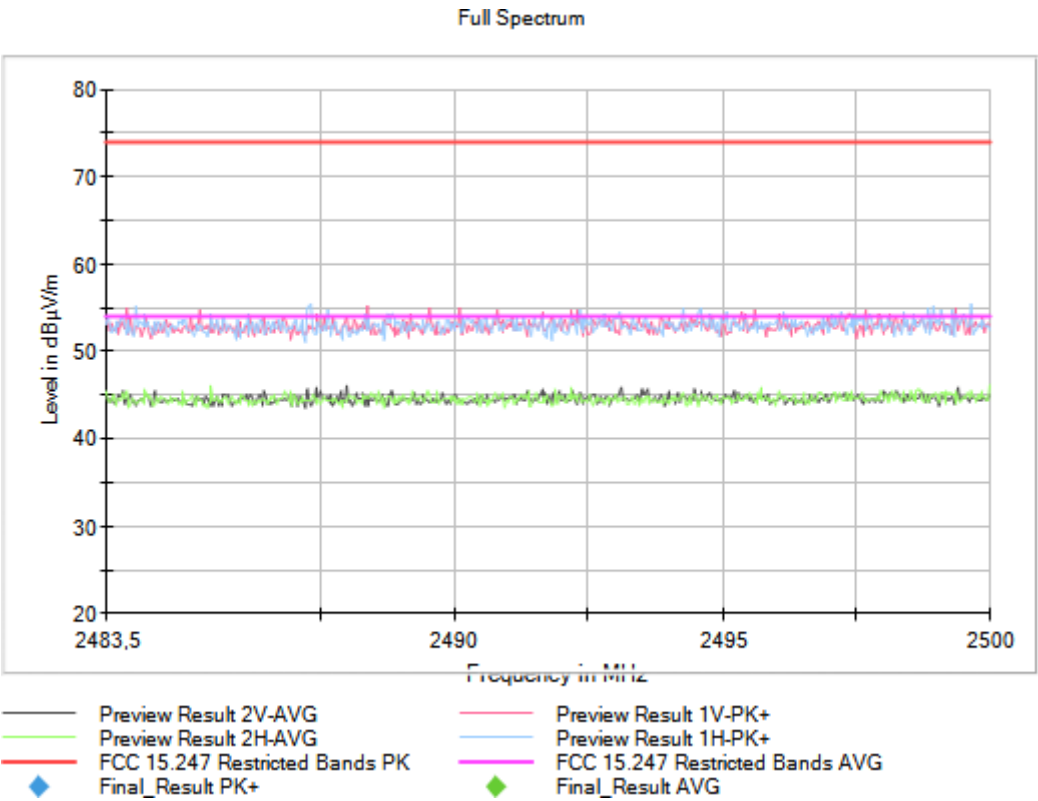


Tables:  
Spectrum Analyzer Parameters

|  | Subrange           | Step Size  | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|------------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |            |           |           |            |        |
|  | 1 GHz - 3 GHz      | 30,769 kHz | PK+ ; AVG | 1 MHz     | 1 s        | 0 dB   |

Frequency Range GHz = [3, 17]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 2 Mbit/s)      Frequency MHz = 2402.00000  
MIMO Mode = SISO      Active Port = 1

Images:

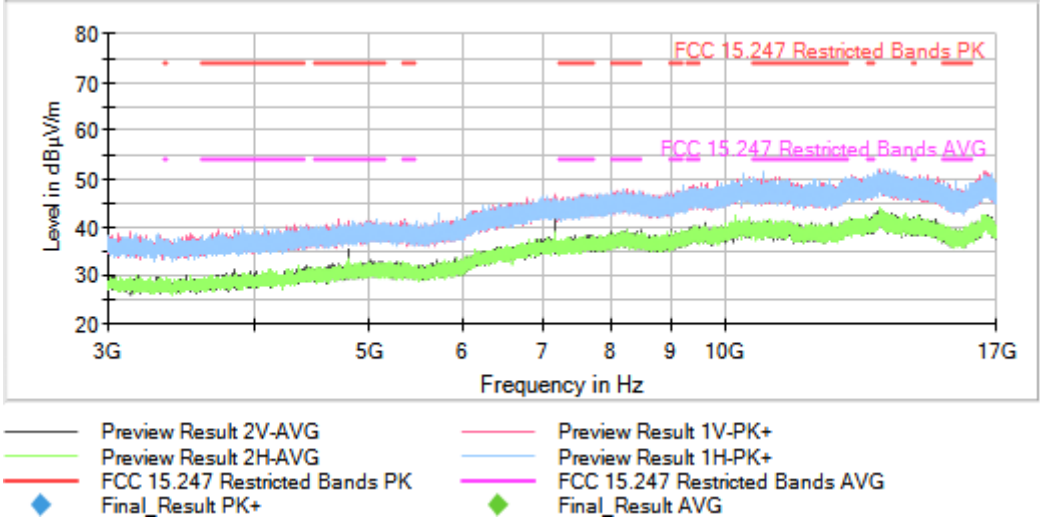


Tables:

Spectrum Analyzer Parameters

|  | Subrange           | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|-----------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |           |           |           |            |        |
|  | 3 GHz - 17 GHz     | 140 kHz   | PK+ ; AVG | 1 MHz     | 1 s        | 30 dB  |

Frequency Range GHz = [3, 17]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 2 Mbit/s)      Frequency MHz = 2440.00000  
MIMO Mode = SISO      Active Port = 1

Images:

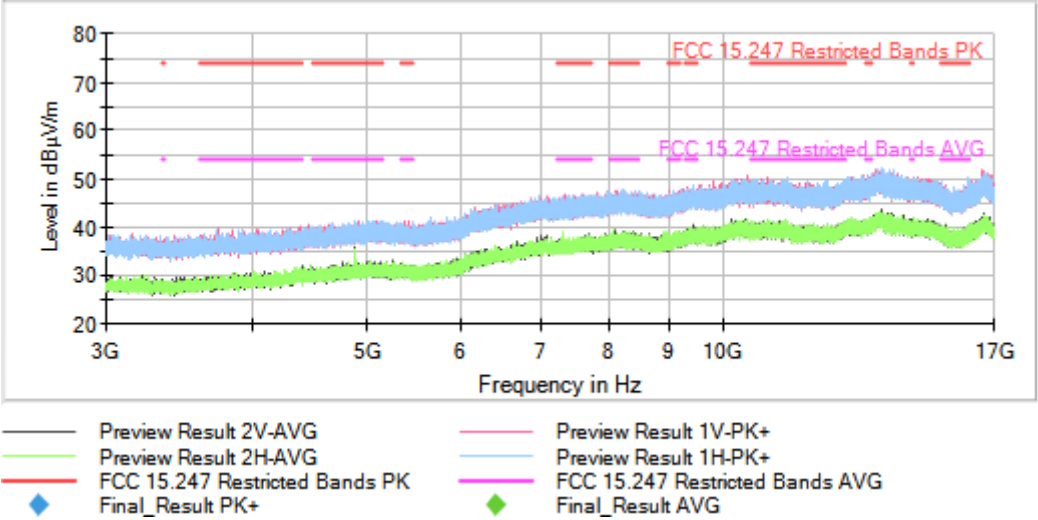


Tables:

Spectrum Analyzer Parameters

|  | Subrange           | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|-----------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |           |           |           |            |        |
|  | 3 GHz - 17 GHz     | 140 kHz   | PK+ ; AVG | 1 MHz     | 1 s        | 30 dB  |

Frequency Range GHz = [3, 17]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 2 Mbit/s)      Frequency MHz = 2480.00000  
MIMO Mode = SISO      Active Port = 1

Images:

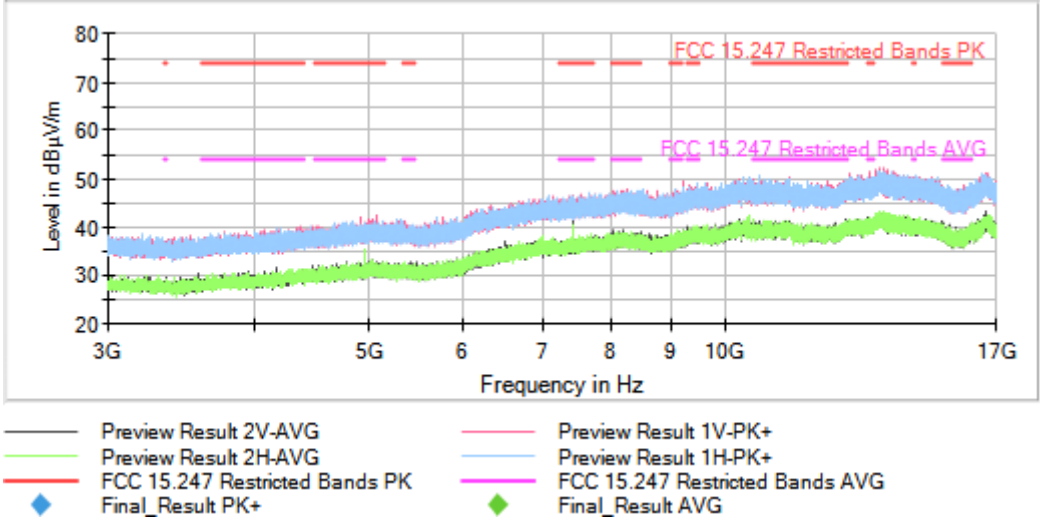


Tables:

Spectrum Analyzer Parameters

|  | Subrange           | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|-----------|-----------|-----------|------------|--------|
|  | Receiver: [ESW 44] |           |           |           |            |        |
|  | 3 GHz - 17 GHz     | 140 kHz   | PK+ ; AVG | 1 MHz     | 1 s        | 30 dB  |

Frequency Range GHz = [17, 26]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 2 Mbit/s)      Frequency MHz = 2402.00000  
MIMO Mode = SISO      Active Port = 1

Images:

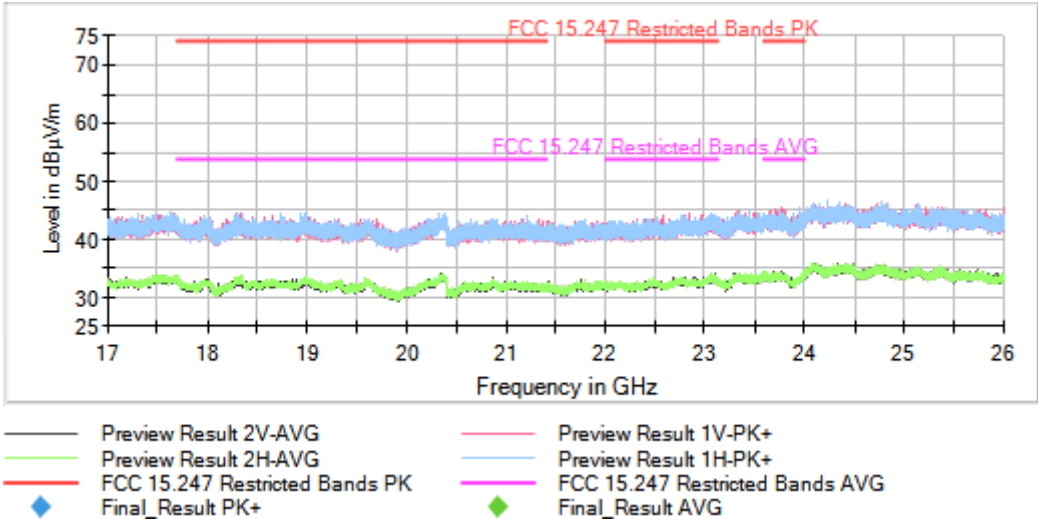


Tables:

Spectrum Analyzer Parameters

|  | Subrange           | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|-----------|-----------|-----------|------------|--------|
|  | Receiver: [FSV 40] |           |           |           |            |        |
|  | 17 GHz - 26 GHz    | 300 kHz   | PK+ ; AVG | 1 MHz     | 1 s        | 0 dB   |

Frequency Range GHz = [17, 26]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 2 Mbit/s)      Frequency MHz = 2440.00000  
MIMO Mode = SISO      Active Port = 1

Images:

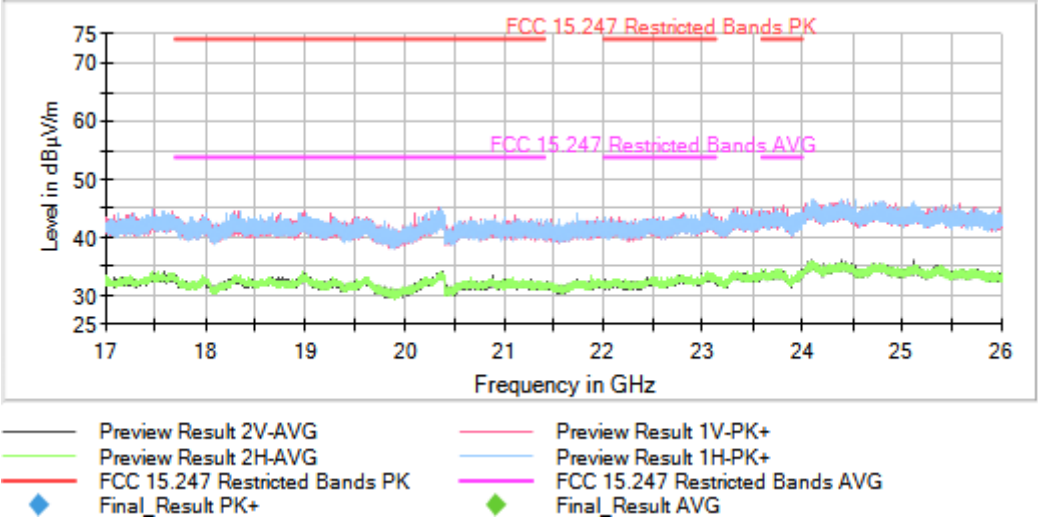


Tables:

Spectrum Analyzer Parameters

|  | Subrange           | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|-----------|-----------|-----------|------------|--------|
|  | Receiver: [FSV 40] |           |           |           |            |        |
|  | 17 GHz - 26 GHz    | 300 kHz   | PK+ ; AVG | 1 MHz     | 1 s        | 0 dB   |

Frequency Range GHz = [17, 26]      Equipment Type = Digital Transmission System (DTS)  
Modulation = BLE (GFSK 2 Mbit/s)      Frequency MHz = 2480.00000  
MIMO Mode = SISO      Active Port = 1

Images:

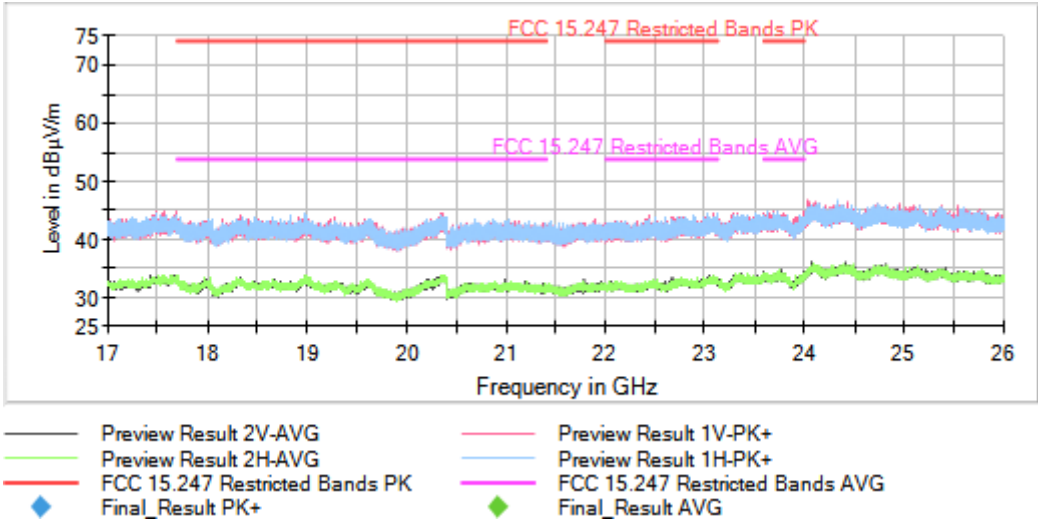

Tables:

Spectrum Analyzer Parameters

|  | Subrange           | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|--|--------------------|-----------|-----------|-----------|------------|--------|
|  | Receiver: [FSV 40] |           |           |           |            |        |
|  | 17 GHz - 26 GHz    | 300 kHz   | PK+ ; AVG | 1 MHz     | 1 s        | 0 dB   |