

FCC 47 CFR PART 15 SUBPART E DFS TEST REPORT

For

Mi Smart Compact Projector

MODEL No.: M055MGN

FCC ID: 2AO2D-M055MGN

Trade Mark: N/A

REPORT NO: ES191115017W05

ISSUE DATE: December 4, 2019

Prepared for

Fengmi (Beijing) Technology Co., Ltd

301,3F,Building 3,No.10,Barracks South Street,Renhe Town,Shunyi District,Beijing,China

Prepared by

EMTEK(SHENZHEN) CO., LTD.

Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

TEL: 86-755-26954280 FAX: 86-755-26954282

TTRF No.: FCC 15.407/A Page 1 of 22 Report No.: ES191115017W05 Ver.1.0



TABLE OF CONTENTS

1. TES	ST RESULT CERTIFICATION	3
2. EU	T DESCRIPTION	4
3. SU	MMARY OF TEST RESULT	5
4. TES	ST METHODOLOGY	6
4.1 4.2	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
4.3	DESCRIPTION OF TEST MODES	
5. FA	CILITIES AND ACCREDITATIONS	9
5.1 5.2 5.3	FACILITIES EQUIPMENT LABORATORY ACCREDITATIONS AND LISTINGS	9
6. SE	TUP OF EQUIPMENT UNDER TEST	10
6.1 6.2 6.3	SETUP CONFIGURATION OF EUT	10
7. DY	NAMIC FREQUENCY SELECTION REQUIREMENTS	12
7.1 7.2 7.3 7.4 7.5 7.6 7.7	APPLICABLE STANDARD CONFORMANCE LIMIT TEST CONFIGURATION TEST PARAMETERS OF DFS TEST SIGNAL TRANSMITTER OUTPUT POWER OPERATION MODES AND REQUIREMENT TEST ITEMS TEST PROCEDURE	12 13 14 15
8. TES	ST RESULT	16
8.1 8.2 8.3	DETAILED TEST RESULTS	17



1. TEST RESULT CERTIFICATION

Applicant : Fengmi (Beijing) Technology Co., Ltd

Address: 301,3F,Building 3,No.10,Barracks South Street,Renhe Town,Shunyi District,

Beijing,China

Manufacturer : Fengmi (Beijing) Technology Co., Ltd

Address: 301,3F,Building 3,No.10,Barracks South Street,Renhe Town,Shunyi District,

Beijing, China

EUT : Mi Smart Compact Projector

Model Name : M055MGN

Trademark : N/A

Measurement Procedure Used:

APPLICABLE STANDARDS				
STANDARD TEST RESULT				
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart E	PASS			

The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.407.

The test results of this report relate only to the tested sample identified in this report.

Date of Test :	November 16,2019 to December 3, 2019
Prepared by :	Severano
	Sewen Guo /Editor
	Scur Ci &
Reviewer :	Sevin Li/Supervisor
Approve & Authorized Signer:	/ESTING
	Lisa Wang/Manager

TTRF No.: FCC 15.407/A Page 3 of 22 Report No.: ES191115017W05 Ver.1.0



2. EUT DESCRIPTION

Characteristics	Description				
Product	Mi Smart Compact Projector				
Model Number	M055MGN				
Wifi Type	□ UNII-1: 5150MHz-5250MHz Band □ UNII-2A: with 5250MHz-5350MHz Band □ UNII-2C: with 5470MHz-5725MHz Band □ UNII-3 with 5725MHz-5850MHz Band				
WLAN Supported	 ⊠802.11a ⊠802.11n(20MHz channel bandwidth) ⊠802.11n(40MHz channel bandwidth) ⊠802.11ac(20MHz channel bandwidth) ⊠802.11ac(40MHz channel bandwidth) ⊠802.11ac(80MHz channel bandwidth) 				
Data Rate	802.11a:54/48/36/24/18/12/9/6Mbps 802.11n:up to 600 Mbps 802.11ac:up to 1.733Gbps				
Modulation	☑OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/n; ☑OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11ac;				
	⊠UNII-2A: with 5250MHz-5350MHz Band				
Frequency Range					
Frequency Range	⊠UNII-2C: with 5470MHz-5725MHz Band				
					
TPC Function					
Antenna Type	Internal Antenna				
Antenna Gain	Antenna1: 5.34 dBi Antenna2: 5.57 dBi				
device was functioned	☐Master ⊠Slave device				

Note: for more details, please refer to the User's manual of the EUT.

TTRF No.: FCC 15.407/A Page 4 of 22 Report No.: ES191115017W05 Ver.1.0



3. SUMMARY OF TEST RESULT

Clause	Test Parameter	Remarks	Pass/Fail
15.407	DFS Detection Threshold	N/A	N/A
15.407	Channel Availability Check Time	N/A	N/A
15.407	Channel Move Time	Applicable	Pass
15.407	Channel Closing Transmission Time	Applicable	Pass
15.407	Non- Occupancy Period	N/A	N/A
15.407	Uniform Spreading	N/A	N/A
15.407	U-NII Detection Bandwidth	N/A	N/A

TTRF No.: FCC 15.407/A Page 5 of 22 Report No.: ES191115017W05 Ver.1.0



4. TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards: FCC 06-96

FCC 47 CFR Parts 15, Subpart E

FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

4.2 MEASUREMENT EQUIPMENT USED

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	Due Cal.
Vector Signal Generater	Agilent	N5182B	My53050553	05/20/2019	05/19/2020
Analog Signal Generator	Agilent	N5171B	My53050878	05/20/2019	05/19/2020
Signal Analyzer	Agilent	N9010A	My53470879	05/20/2019	05/19/2020
Power Analyzer	Agilent	PS-X10-100	N/A	05/20/2019	05/19/2020
Test Accessories	Agilent	PS-X10-100	N/A	05/20/2019	05/19/2020

Remark: Each piece of equipment is scheduled for calibration once a year.

TTRF No.: FCC 15.407/A Page 6 of 22 Report No.: ES191115017W05 Ver.1.0



4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Wifi 5G with U-NII -2A

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300		(1711 12)
56	5280	64	5320		

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
54	5270				
62	5310				

Frequency and Channel list for 802.11ac (HT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
58	5290				

Test Frequency and Channel for 802.11a/n (HT20)/802.11ac (HT20):

Lowest Frequency		Middle F	requency	Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300	64	5320

Test Frequency and channel for 802.11n (HT40)/ 802.11ac (HT40):

Lowest Frequency		Middle F	requency	Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
54	5270	N/A	N/A	62	5310

Test Frequency and channel for 802.11ac (HT80):

Lowest Frequency		Middle F	requency	Highe	st Frequency
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
58	5290				

TTRF No.: FCC 15.407/A Page 7 of 22 Report No.: ES191115017W05 Ver.1.0



☑ Wifi 5G with U-NII -2C

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (HT20):

			/ /		
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	116	5580	132	5660
104	5520	120	5600	136	5680
108	5540	124	5620	140	5700
112	5560	128	5640		

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
102	5510	118	5590	134	5670
110	5550	126	5630		

Frequency and Channel list for 802.11ac (HT80):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
106	5530	122	5610		

Test Frequency and Channel for 802.11a/n (HT20)/802.11ac (HT20):

Lowest Frequency		Middle F	requency	Highest Frequency		
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	
100	5500	116	5580	140	5700	

Test Frequency and channel for 802.11n (HT40)/ 802.11ac (HT40):

Lowest Frequency		Middle F	requency	Highest Frequency		
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	
102	5510	110	5550	134	5670	

Test Frequency and channel for 802.11ac (HT80):

rect reducing and charmer or est. ride (11166).									
Lowest Frequency		Middle F	requency	Highest Frequency					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)				
106	5530								

TTRF No.: FCC 15.407/A Page 8 of 22 Report No.: ES191115017W05 Ver.1.0



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab. : Accredited by CNAS, 2018.11.30

The certificate is valid until 2022.10.28

The Laboratory has been assessed and proved to be in compliance with

CNAS-CL01:2006 (identical to ISO/IEC 17025:2017) The Certificate Registration Number is L2291

Accredited by TUV Rheinland Shenzhen 2018.03.30

The Laboratory has been assessed according to the requirements

ISO/IEC 17025

Accredited by FCC, August 09, 2018

Designation Number: CN1204
Test Firm Registration Number: 882943

Accredited by A2LA, August 08, 2018

The Certificate Registration Number is 4321.01

Accredited by Industry Canada, November 09, 2018 The Conformity Assessment Body Identifier is CN0008

Name of Firm : EMTEK(SHENZHEN) CO., LTD.

Site Location : Bldg 69, Majialong Industry Zone,

Nanshan District, Shenzhen, Guangdong, China


TTRF No.: FCC 15.407/A Page 9 of 22 Report No.: ES191115017W05 Ver.1.0




6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

Master Modes

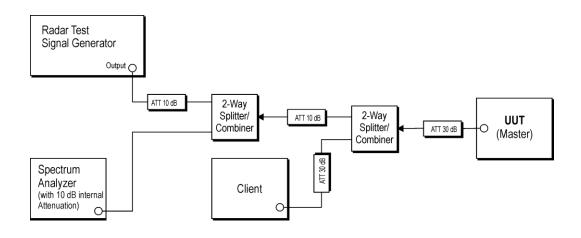

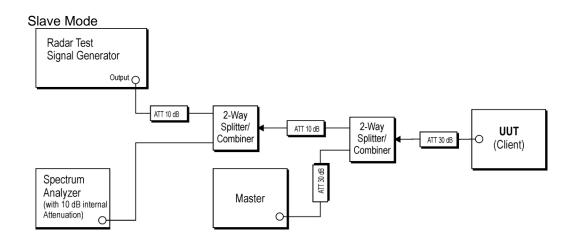

6.2 CALIBRATION OF DFS DETECTION THRESHOLD LEVEL:

A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected in place of the master device and the signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of –62 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. Measure the amplitude and calculate the difference from –62 dBm. Adjust the Reference Level Offset of the spectrum analyzer to this difference.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of –62 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

Set the signal generator to produce a radar waveform, trigger a burst manually and measure the level on the spectrum analyzer. Readjust the amplitude of the signal generator as required so that the peak level of the waveform is at a displayed level equal to the required or desired interference detection threshold. Separate signal generator amplitude settings are determined as required for each radar type.

TTRF No.: FCC 15.407/A Page 10 of 22 Report No.: ES191115017W05 Ver.1.0



6.3 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	FCC ID/IC
1.	Wireless Access Point	Cisco	AIR-CAP3702E-A -K9	FTX182276QD	FCC ID: LDK102087 IC:2461B-102087

Note: Software for transferring data between master and slave devices is TFGEN-1.00 (transmission rate >80%)

Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

TTRF No.: FCC 15.407/A Page 11 of 22 Report No.: ES191115017W05 Ver.1.0



7. DYNAMIC FREQUENCY SELECTION REQUIREMENTS

7.1 APPLICABLE STANDARD

According to 15.407

7.2 CONFORMANCE LIMIT

The dynamic frequency selection requirement

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds
	See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second periods. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate a *Channel* move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

The following table lists the DFS The detection threshold values

Value
(See Notes 1, 2, and 3)
-64 dBm
-62 dBm
-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

7.3 TEST CONFIGURATION

Conducted measurements shall be used for DFS test

TTRF No.: FCC 15.407/A Page 12 of 22 Report No.: ES191115017W05 Ver.1.0



7.4 TEST PARAMETERS OF DFS TEST SIGNAL

The following table lists the parameters of radar test signals

Short Pulse Radar Test Waveforms

Radar	Pulse Width	PRI	Number of Pulses	Minimum	Minimum
Type	(µsec)	(µsec)		Percentage of	Number of
				Successful	Trials
				Detection	
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A	Roundup $ \left\{ \frac{\left(\frac{1}{360}\right)}{\left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu \text{sec}}}\right)} \right\} $	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (I	Radar Types 1-	4)		80%	120
Note 1. She	ort Dulca Rada	r Type 0 should be u	sed for the detection ba	ndwidth test ch	annel move

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

TTRF No.: FCC 15.407/A Page 13 of 22 Report No.: ES191115017W05 Ver.1.0



7.5 TRANSMITTER OUTPUT POWER

THE CONDUCTED OUTPUT POWER LIST

FREQUENCY BAND (MHz)		MAX. POWER			
		OUTPUT POWER(dBm)	OUTPUT POWER(mW)		
TX	5260~5320	19.47	88.51		
(11n20/ac20)	5500~5700	17.40	54.95		
TX (11ac 40/n40MHz)	5270~5310	19.75	94.41		
	5510~5670	18.13	65.01		
TX (11ac 80 MHz)	5290	18.33	68.08		
	5530	15.97	39.54		

THE MAX EIRP LIST

FREQUENCY BAND (MHz)		MAX. POWER			
		OUTPUT POWER(dBm)	OUTPUT POWER(mW)		
TV (110)	5260~5320	25.04	319.15		
TX (11a)	5500~5700	22.97	198.15		
TX (11n 40MHz)	5270~5310	25.32	340.40		
	5510~5670	23.70	234.42		
TX (11ac 80 MHz)	5290	23.90	245.47		
	5530	21.54	142.56		



7.6 OPERATION MODES AND REQUIREMENT TEST ITEMS

The manufacture shall state whether the EUT is capable of operating as a Master or a Slave modes, if the EUT is capable of operating in more than one operational mode then every operating mode shall be assessed separately.

Applicability of DFS Requirements Prior to Use of a Channel

	Operational Mode				
Requirement	Master	Client Without Radar Detection	Client With Radar Detection		
Non-Occupancy Period	Yes	Not required	Yes		
DFS Detection Threshold	Yes	Not required	Yes		
Channel Availability Check Time	Yes	Not required	Not required		
Uniform Spreading	Yes	Not required	Not required		
U-NII Detection Bandwidth	Yes	Not required	Yes		

Applicability of DFS requirements during normal operation

Requirement	Operational Mode				
Kequilement	Master	Client Without Radar Detection	Client With Radar Detection		
DFS Detection Threshold	Yes	Not required	Yes		
Channel Closing Transmission Time	Yes	Yes	Yes		
Channel Move Time	Yes	Yes	Yes		
U-NII Detection Bandwidth	Yes	Not required	Yes		

7.7 TEST PROCEDURE

According to KDB 905462 D02v02 Section 7.

TTRF No.: FCC 15.407/A Page 15 of 22 Report No.: ES191115017W05 Ver.1.0



8. TEST RESULT

8.1 DETAILED TEST RESULTS

Clause	MODES	Test Parameter	Remark	Verdict
15.407		DFS Detection Threshold	N/A	N/A
15.407		Channel Availability Check Time	N/A	N/A
15.407		Channel Move Time	N/A	N/A
15.407	□Master	Channel Closing Transmission Time	N/A	N/A
15.407		Non-Occupancy Period	N/A	N/A
15.407		Uniform Spreading	N/A	N/A
15.407		U-NII Detection Bandwidth	N/A	N/A
15.407		Radar Detection Threshold	N/A	N/A
15.407		Channel Move Time	Applicable	PASS
15.407	⊠Slave	Channel Closing Transmission Time	Applicable	PASS
15.407		Non-Occupancy Period	N/A	N/A
15.407		U-NII Detection Bandwidth	N/A	N/A



8.2 RADAR WAVEFORM


Calibration:

Maximum Transmit Power is be greater than than 200 milliwatt and power spectral density < 10 dBm/MHz in this report, so detection threshold level is -64dBm.


The 801.11n/ac have been tested, and the worst result have been recorded in the below page.

TTRF No.: FCC 15.407/A Page 17 of 22 Report No.: ES191115017W05 Ver.1.0



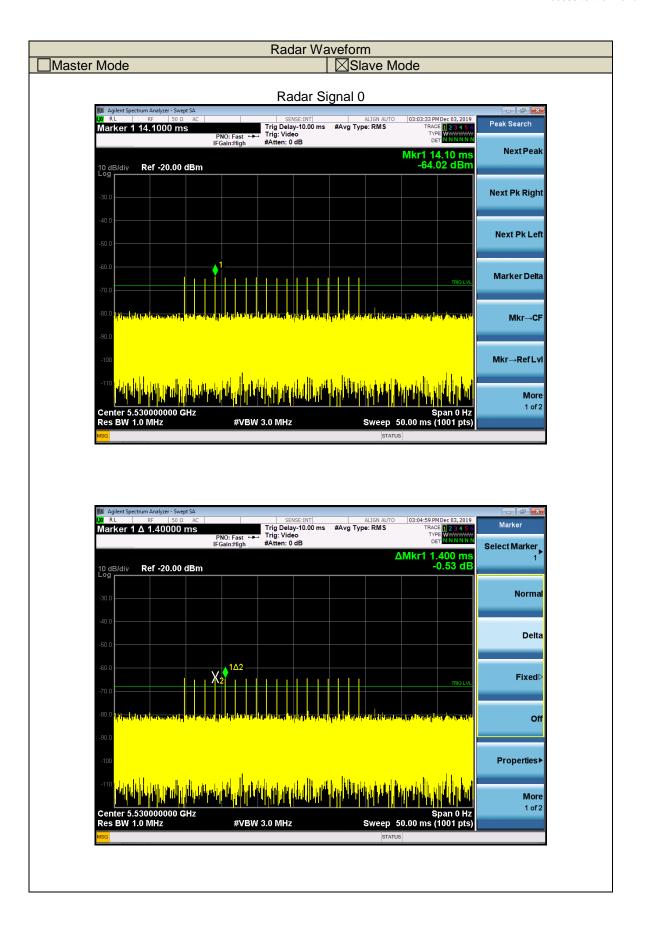



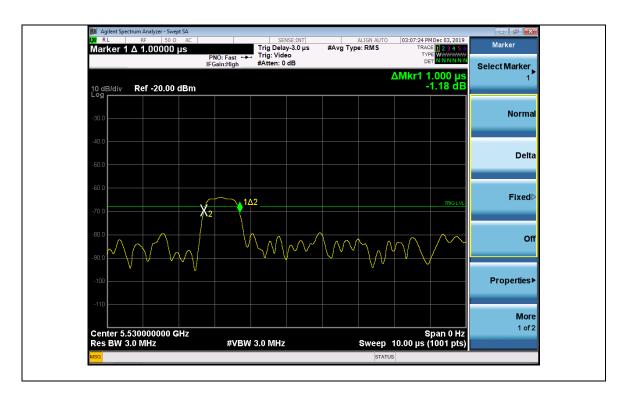



8.3 IN-SERVICE MONITORING

UNII Band II-A

ONII Danu II					
Trial ID	Pulse	DDI/s\	Number of	Waveform	Detection(Y/N)
Trial ID	Width(us)	PRI(us)	Pulses	Length(us)	, ,
0	1.0	1428.0	18	25704.0	Υ
1	1.0	1428.0	18	25704.0	Υ
2	1.0	1428.0	18	25704.0	Υ
3	1.0	1428.0	18	25704.0	N
4	1.0	1428.0	18	25704.0	Υ
5	1.0	1428.0	18	25704.0	Y
6	1.0	1428.0	18	25704.0	Y
7	1.0	1428.0	18	25704.0	Y
8	1.0	1428.0	18	25704.0	Y
9	1.0	1428.0	18	25704.0	Y
10	1.0	1428.0	18	25704.0	Y
11	1.0	1428.0	18	25704.0	Y
12	1.0	1428.0	18	25704.0	Y
13	1.0	1428.0	18	25704.0	Y
14	1.0	1428.0	18	25704.0	Y
15	1.0	1428.0	18	25704.0	Y
16	1.0	1428.0	18	25704.0	Y
17	1.0	1428.0	18	25704.0	N
18	1.0	1428.0	18	25704.0	Y
19	1.0	1428.0	18	25704.0	Y
20	1.0	1428.0	18	25704.0	Y
21	1.0	1428.0	18	25704.0	Y
22	1.0	1428.0	18	25704.0	Y
23	1.0	1428.0	18	25704.0	Y
24	1.0	1428.0	18	25704.0	Y
25	1.0	1428.0	18	25704.0	Y
26	1.0	1428.0	18	25704.0	Y
27	1.0	1428.0	18	25704.0	N
28	1.0	1428.0	18	25704.0	Y
29	1.0	1428.0	18	25704.0	Y
	90%				



UNII Band II-C

ONII Bana II					
Trial ID	Pulse	DDI/s)	Number of	Waveform	Detection(Y/N)
Trial ID	Width(us)	PRI(us)	Pulses	Length(us)	, ,
0	1.0	1428.0	18	25704.0	Υ
1	1.0	1428.0	18	25704.0	Υ
2	1.0	1428.0	18	25704.0	Υ
3	1.0	1428.0	18	25704.0	Υ
4	1.0	1428.0	18	25704.0	Υ
5	1.0	1428.0	18	25704.0	N
6	1.0	1428.0	18	25704.0	Υ
7	1.0	1428.0	18	25704.0	Υ
8	1.0	1428.0	18	25704.0	Υ
9	1.0	1428.0	18	25704.0	Y
10	1.0	1428.0	18	25704.0	Υ
11	1.0	1428.0	18	25704.0	Y
12	1.0	1428.0	18	25704.0	Υ
13	1.0	1428.0	18	25704.0	Υ
14	1.0	1428.0	18	25704.0	Υ
15	1.0	1428.0	18	25704.0	Υ
16	1.0	1428.0	18	25704.0	Υ
17	1.0	1428.0	18	25704.0	Υ
18	1.0	1428.0	18	25704.0	Υ
19	1.0	1428.0	18	25704.0	Y
20	1.0	1428.0	18	25704.0	N
21	1.0	1428.0	18	25704.0	Υ
22	1.0	1428.0	18	25704.0	Υ
23	1.0	1428.0	18	25704.0	Υ
24	1.0	1428.0	18	25704.0	Y
25	1.0	1428.0	18	25704.0	N
26	1.0	1428.0	18	25704.0	Υ
27	1.0	1428.0	18	25704.0	Υ
28	1.0	1428.0	18	25704.0	Υ
29	1.0	1428.0	18	25704.0	Υ
	90%				



