



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 17159
Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltalab.com>

Dates of Tests: October 10 ~ 20, 2017
Test Report S/N: LR500111711E
Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID.

2AO32WB-100

APPLICANT

3pigs Co., Ltd.

Equipment Class	:	Digital Transmission System (DTS)
Manufacturing Description	:	WOAZ BASEBALL
Manufacturer	:	3pigs Co., Ltd.
Model name	:	WB-100
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C ; ANSI C-63.4-2014
Frequency Range	:	2402 ~ 2480 MHz
Max. Output Power	:	Max -13.90 dBm – Conducted
Data of issue	:	November 22, 2017

This test report is issued under the authority of:

Yong-Cheol, Wang / Manager

The test was supervised by:

Jung-won Seo, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION	-----	3
2. INFORMATION ABOUT TEST ITEM	-----	4
3. TEST REPORT	-----	5
3.1 SUMMARY OF TESTS	-----	5
3.2 TECHNICAL CHARACTERISTICS TEST	-----	6
3.2.1 6 dB BANDWIDTH	-----	6
3.2.2 PEAK OUTPUT POWER	-----	9
3.2.3 POWER SPECTRAL DENSITY	-----	12
3.2.4 BAND EDGE	-----	15
3.2.5 CONDUCTED SPURIOUS EMISSIONS	-----	18
3.2.6 RADIATED SPURIOUS EMISSIONS	-----	21
3.2.7 AC Conducted Emissions	-----	33
 APPENDIX		
APPENDIX TEST EQUIPMENT USED FOR TESTS	-----	34

1. General information

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 17159
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	Updating	ECT accredited Lab.
RRA	KOREA	KR0049	-	EMC accredited Lab.
FCC	U.S.A	649054	2019-04-13	FCC CAB
VCCI	JAPAN	R-2133(10 m), C-2307	Updating	VCCI registration
VCCI	JAPAN	T-2009	2017-12-23	VCCI registration
VCCI	JAPAN	G-847	2018-12-13	VCCI registration
IC	CANADA	5799A-1	2019-11-07	IC filing
KOLAS	KOREA	NO.551	2021-08-20	KOLAS accredited Lab.

2. Information about test item

2-1 Client & Manufacturer

Company name : 3pigs Co., Ltd.
 Address : A dong-1201 ho, 201, Songpa-daero, Songpa-gu, Seoul, Korea
 Tel / Fax : TEL No : +82-2-2554-0517 / FAX No : +82-2-2554-0518

2-2 Equipment Under Test (EUT)

Trade name : WOAZ BASEBALL
 Model name : WB-100
 Serial number : Identical prototype
 Date of receipt : September 21, 2017
 EUT condition : Pre-production, not damaged
 Antenna type : Chip Antenna (Max Gain : 3.5 dBi)
 Frequency Range : 2402 ~ 2480 MHz
 RF output power : Max -13.90 dBm – Conducted
 Number of channels : 40
 Type of Modulation : GFSK
 Power Source : 3.7 Vdc

2-3 Tested frequency

	LOW	MID	HIGH
Frequency (MHz)	2402	2440	2480

2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
-	-	-	-

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	Transmitter Peak Output Power	< 1 Watt		C
15.247(d)	Transmitter Power Spectral Density	< 8 dBm @ 3 kHz		C
15.247(d)	Band Edge	> 20 dBc		C
15.209	Field Strength of Harmonics	Emission	Radiated	C
15.207	AC Conducted Emissions	Emissions	Conducted	N/A
15.203	Antenna requirement	-	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The above equipment was tested by LTA Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247 The test results of this report relate only to the tested sample identified in this report.

→ Antenna Requirement

The 3pigs Co., Ltd. FCC ID: 2AO32WB-100 unit complies with the requirement of §15.203.

The antenna type is Chip Antenna.

3.2 Technical Characteristics Test

3.2.1 6 dB Bandwidth

Procedure:

The bandwidth at 6 dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 2 MHz

VBW = 100 kHz (VBW $\geq$ RBW)

Sweep = auto

Trace = max hold

Detector function = peak

Measurement Data : **Complies**

Frequency (MHz)	Test Results	
	Measured Bandwidth (MHz)	Result
2402	0.535	Complies
2440	0.535	Complies
2480	0.507	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:

6 dB Bandwidth > 500 kHz

Measurement Setup



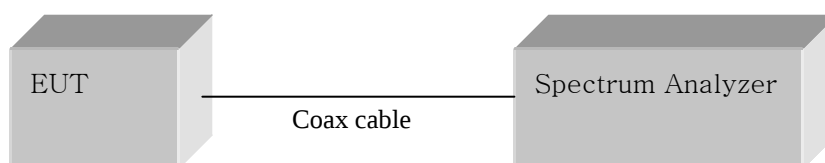


Figure 1: Measurement setup for the carrier frequency separation


Low Channel

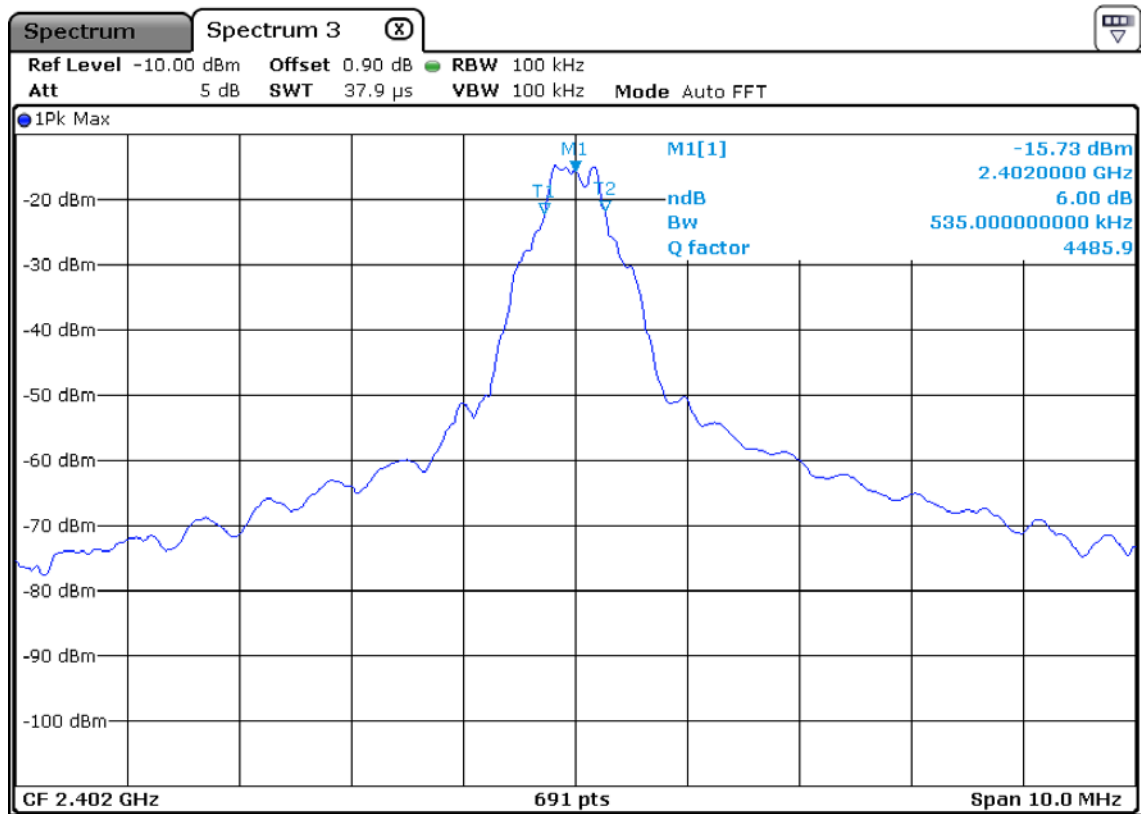

Middle Channel

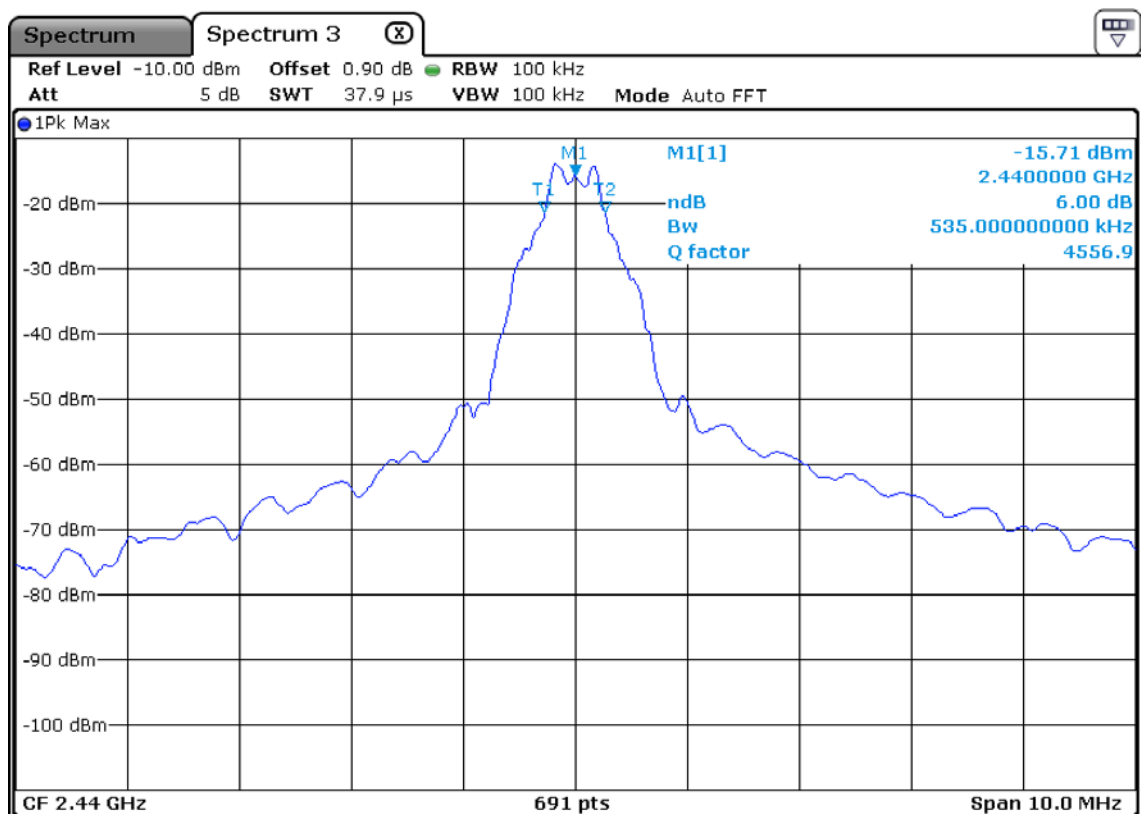

High Channel

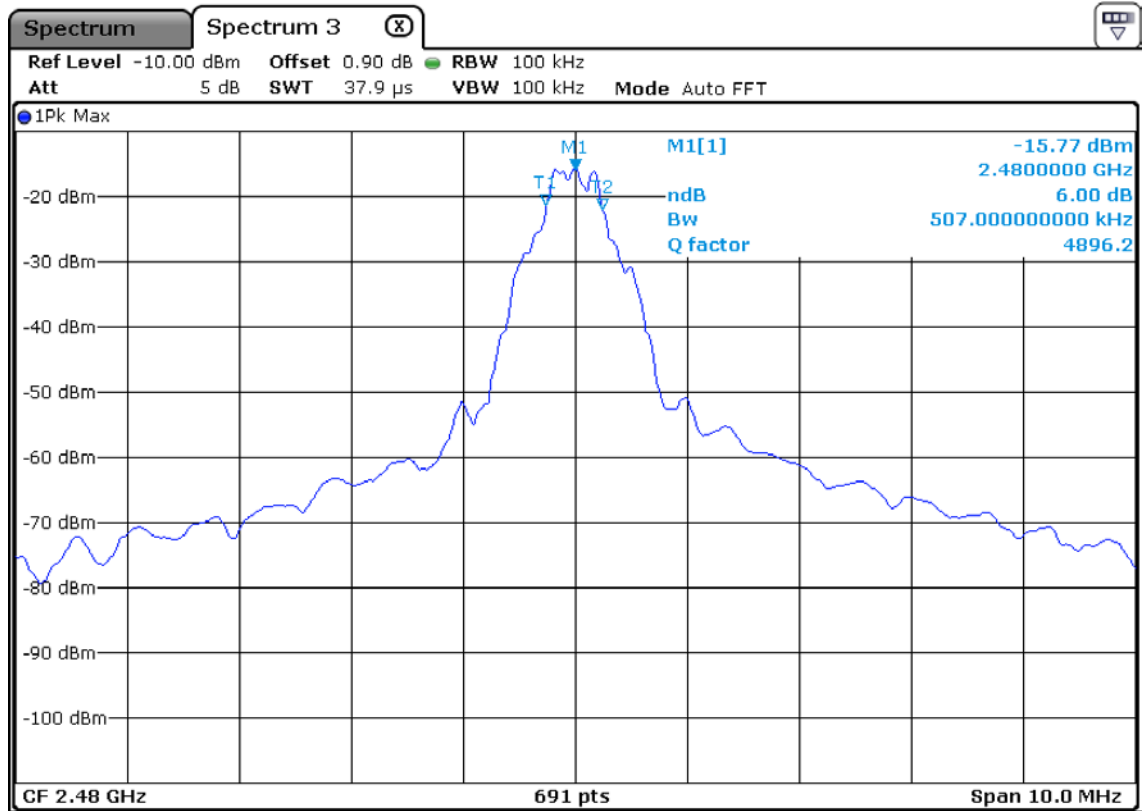

3.2.2 Peak Output Power Measurement

Procedure:

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The spectrum analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99 % bandwidth. The EUT was operating in transmit mode at the appropriate center frequency.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 1 MHz

Span = auto

VBW = 1 MHz (VBW $\geq$ RBW)

Sweep = auto

Detector function = peak

Measurement Data : **Complies**

Frequency (MHz)	Test Results		
	dBm	mW	Result
2402	-13.98	0.040	Complies
2440	-13.90	0.041	Complies
2480	-14.50	0.035	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:

Peak output power	< 1 W
-------------------	-------


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


Low Channel

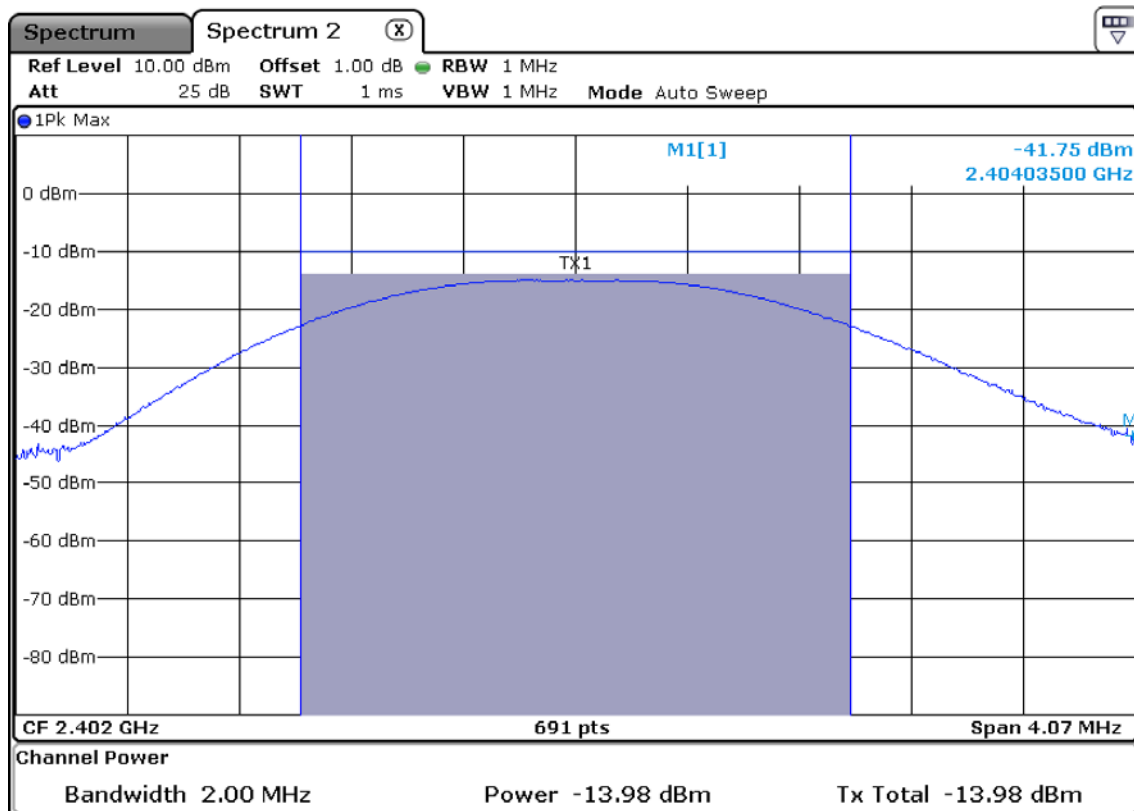

Middle Channel

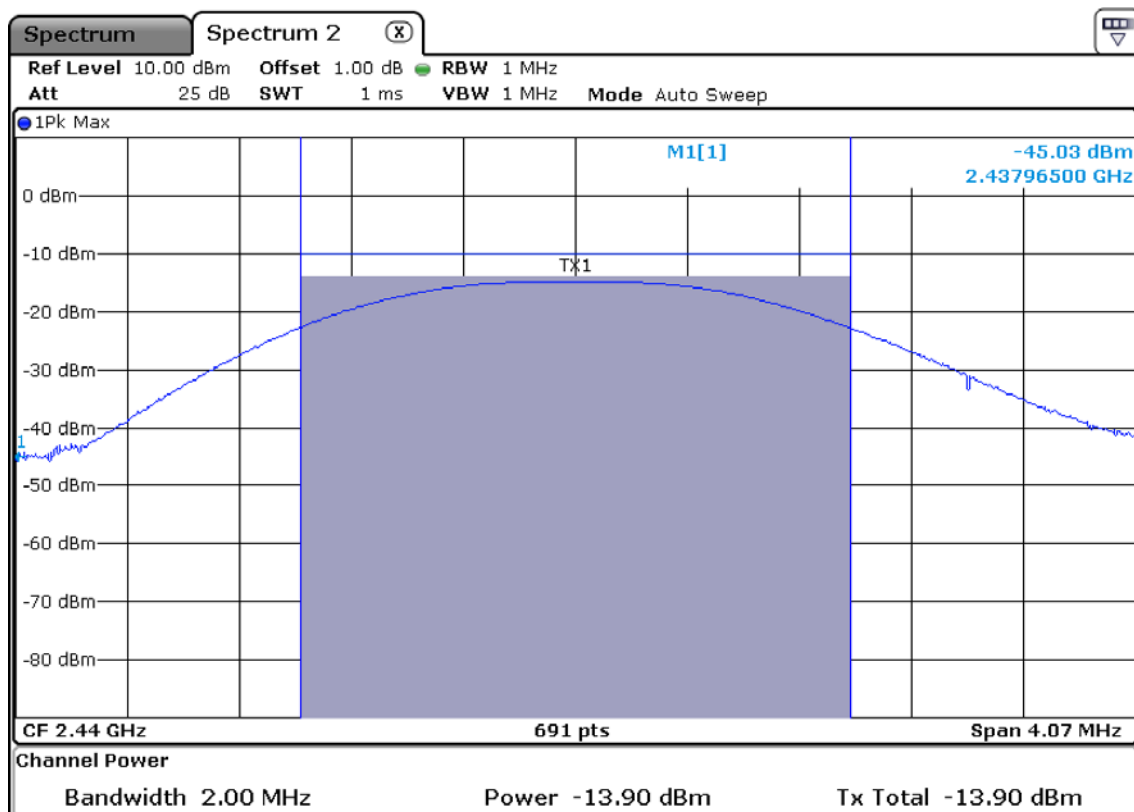

High Channel

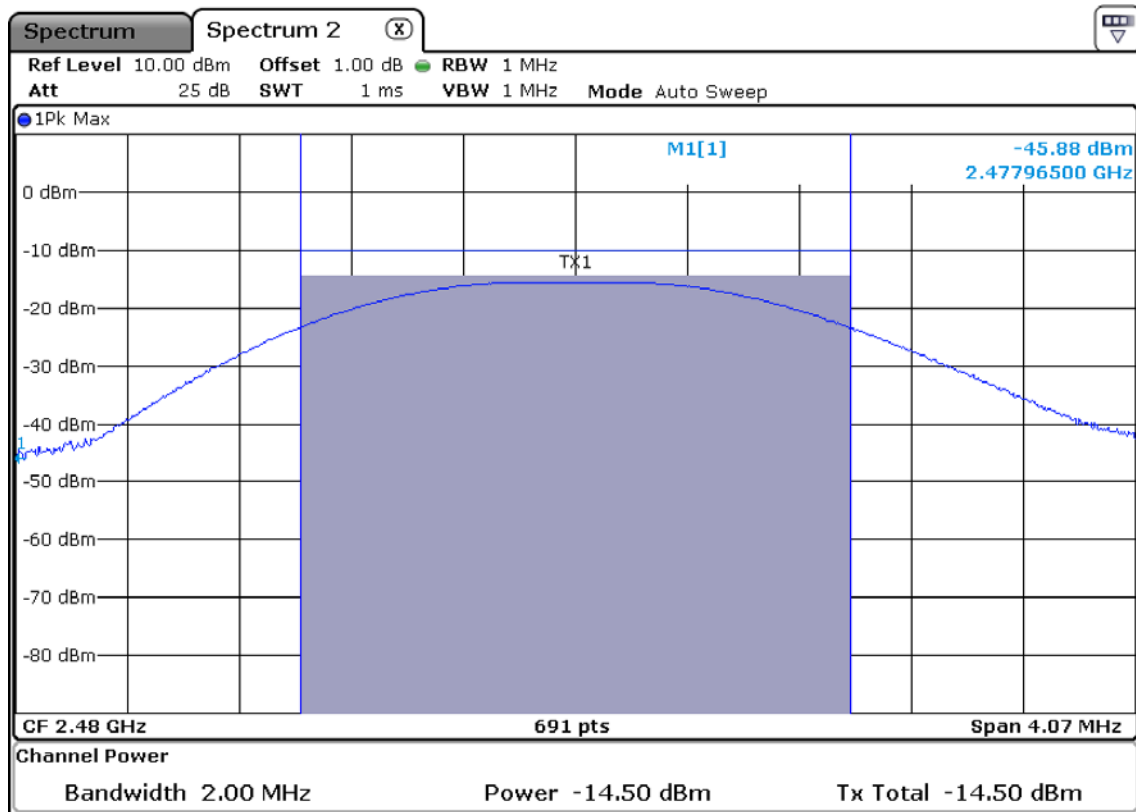

3.2.3 Power Spectral Density

Procedure:

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The spectrum analyzer is set to:

RBW = 3 kHz

Span = 1.5 MHz (1.5 times the DTS bandwidth)

VBW = 10 kHz ($\geq 3 \times$ RBW)

Sweep = auto

Detector function = peak

Trace = max hold

Measurement Data : **Complies**

Frequency (MHz)	Test Results	
	dBm/ 3 kHz BW	Result
2402	-26.35	Complies
2440	-25.81	Complies
2480	-27.60	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:


Power Spectral Density	< 8 dBm @ 3 kHz BW
------------------------	--------------------

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

Power Density Measurement


Low Channel

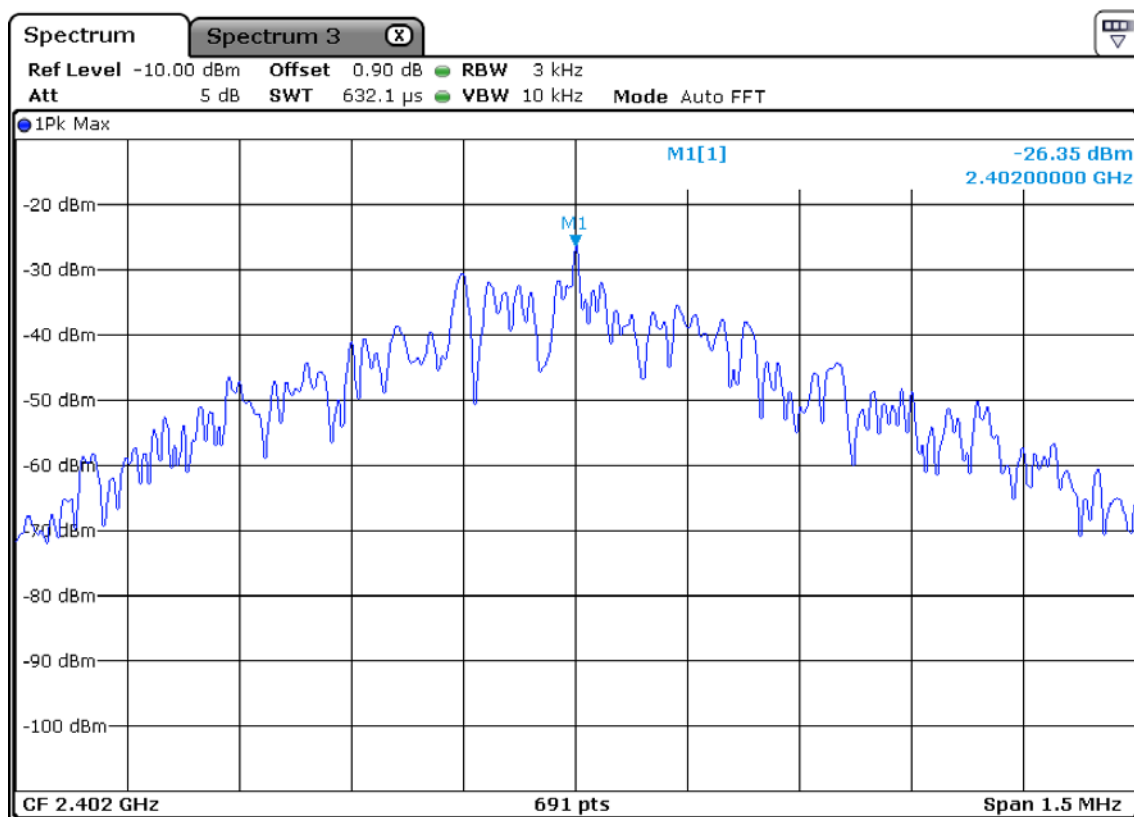

Middle Channel

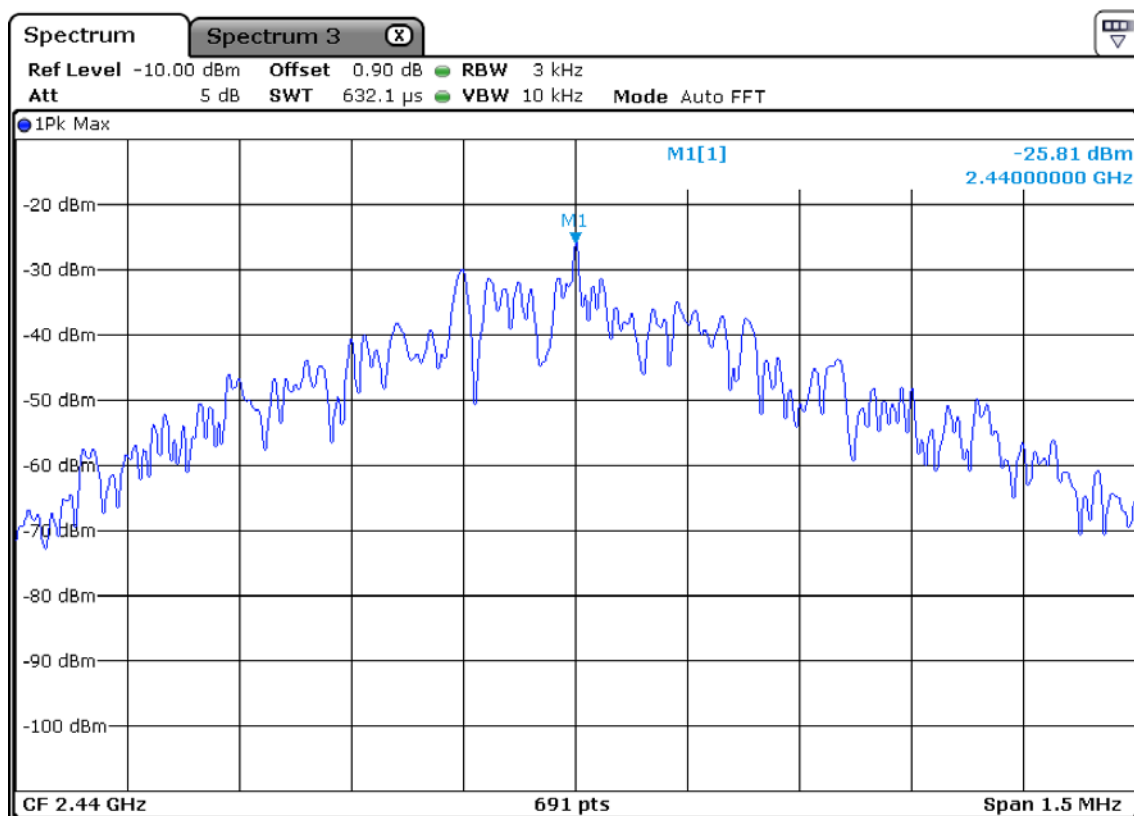

High Channel

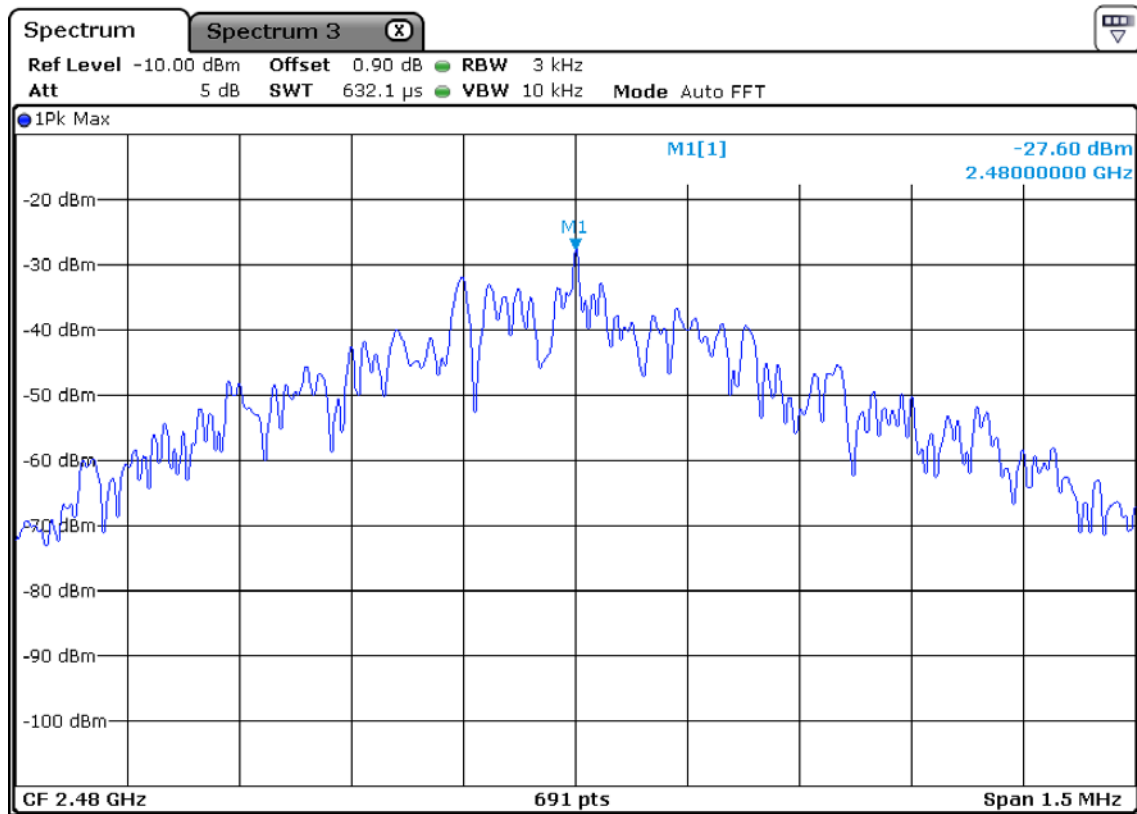

3.2.4 Band Edge

Procedure:

The bandwidth at 20 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 40 MHz, 100 MHz

Detector function = peak

Trace = max hold

Sweep = auto

Radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

The spectrum analyzer is set to:

Center frequency = the highest, the lowest channels

PEAK:

RBW = VBW = 1 MHz, Sweep=Auto

Average:

RBW = 1 MHz, VBW=10 Hz, Sweep=Auto

Measurement Distance:

3 m

Polarization:


Horizontal / Vertical

Measurement Data: Complies


- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------

Lower edge

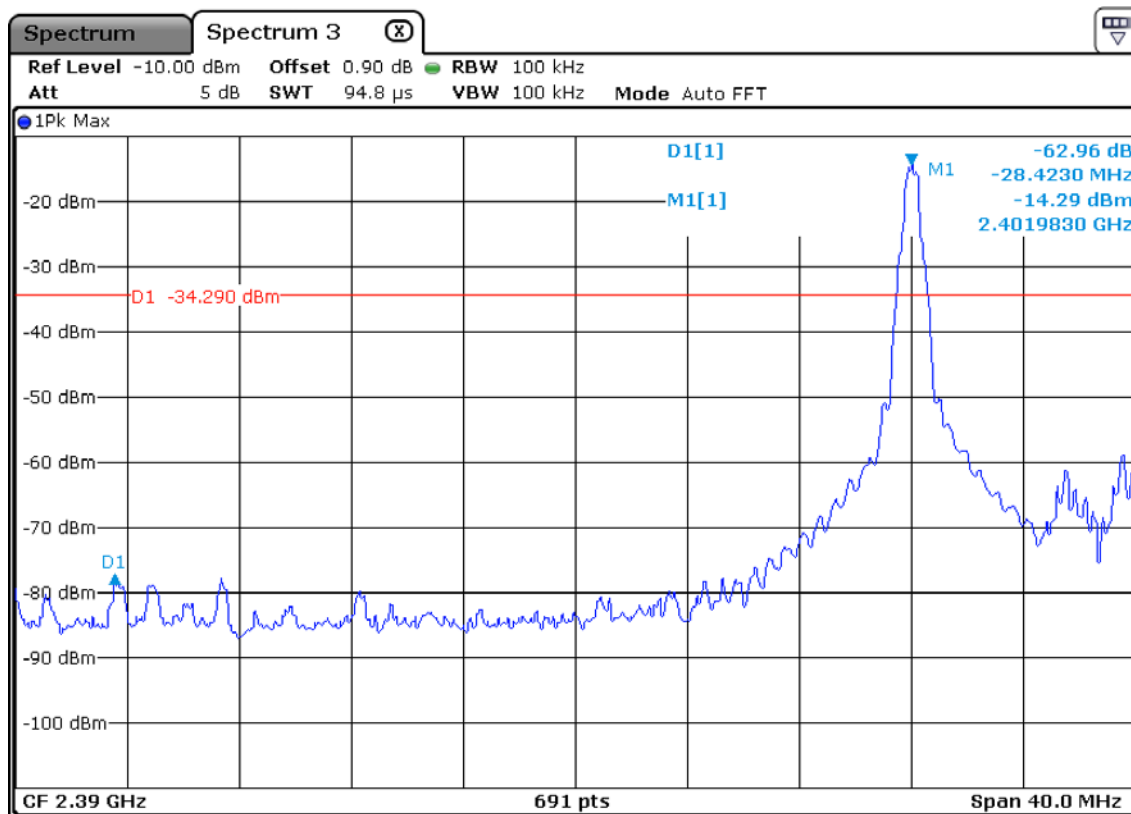

Upper edge

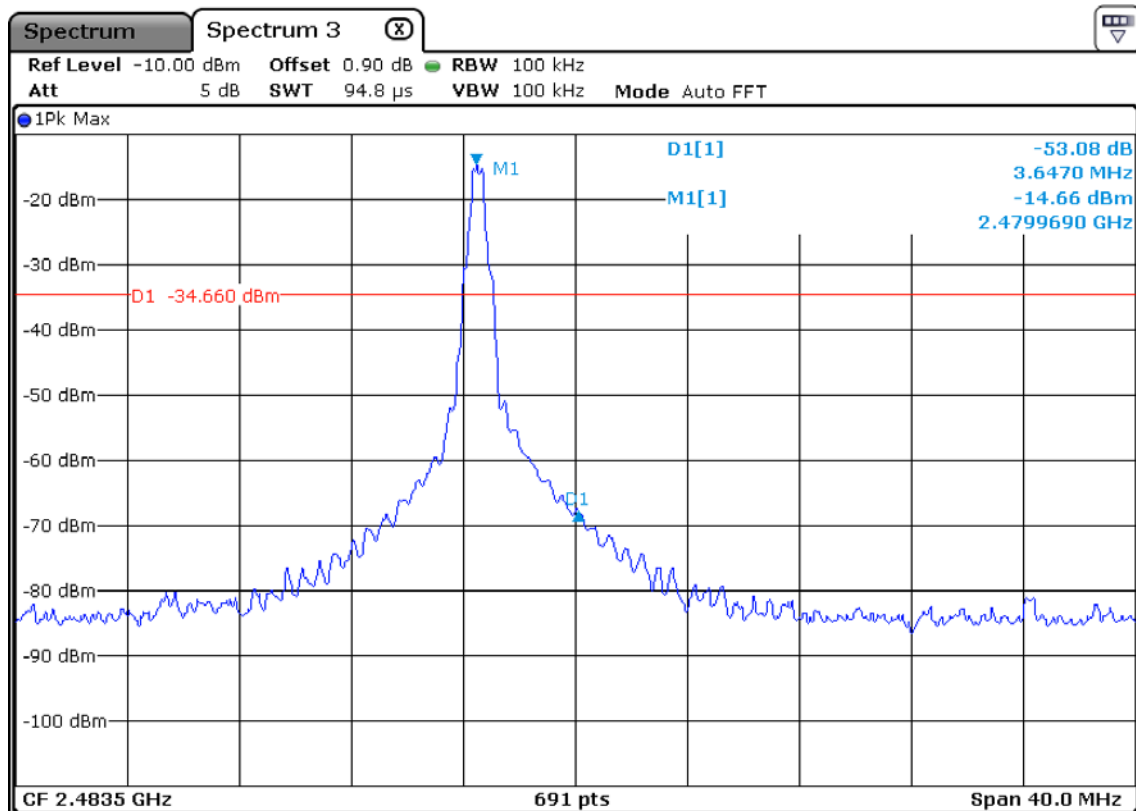

Radiated Band-edges in the restricted band 2310-2390 MHz measurement

Frequency [MHz]	Reading [dBuV / m]		Pol.	Correction Factor		Limits [dBuV / m]		Result [dBuV / m]		Margin [dB]	
	AV / Peak			Antenna	Amp. Gain + Cable Loss	AV / Peak		AV / Peak		AV / Peak	
2373.8	40.60	41.16	H	28.08	47.82	54.0	74.0	20.86	21.42	33.14	52.58
2379.5	41.12	41.03	H	28.09	47.83	54.0	74.0	21.38	21.29	32.62	52.71
2375.8	42.56	42.36	H	28.08	47.82	54.0	74.0	22.82	22.62	31.18	51.38

Radiated Band-edges in the restricted band 2483.5-2500 MHz measurement

Frequency [MHz]	Reading [dBuV / m]		Pol.	Correction Factor		Limits [dBuV / m]		Result [dBuV / m]		Margin [dB]	
	AV / Peak			Antenna	Amp. Gain + Cable Loss	AV / Peak		AV / Peak		AV / Peak	
2500.1	37.90	38.06	H	27.88	47.73	54.0	74.0	18.05	18.21	35.95	55.79
2499.2	35.63	36.18	H	27.88	47.73	54.0	74.0	15.78	16.33	38.22	57.67
2499.8	35.30	36.75	H	27.88	47.73	54.0	74.0	15.45	16.90	38.55	57.10

Note : This EUT was tested in 3 orthogonal positions and the worst-case data was presented

3.2.5 Conducted Spurious Emissions

Procedure:

The test follows KDB558074. The conducted spurious emissions were measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, set the marker on the peak of any spurious emission recorded.

The spectrum analyzer is set to:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions

RBW = 100 kHz

Sweep = auto

VBW = 100 kHz

Detector function = peak

Trace = max hold

Measurement Data: **Complies**


- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 20 dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


Unwanted Emission – Low Channel
Frequency Range = 30 MHz ~ 26.5 GHz

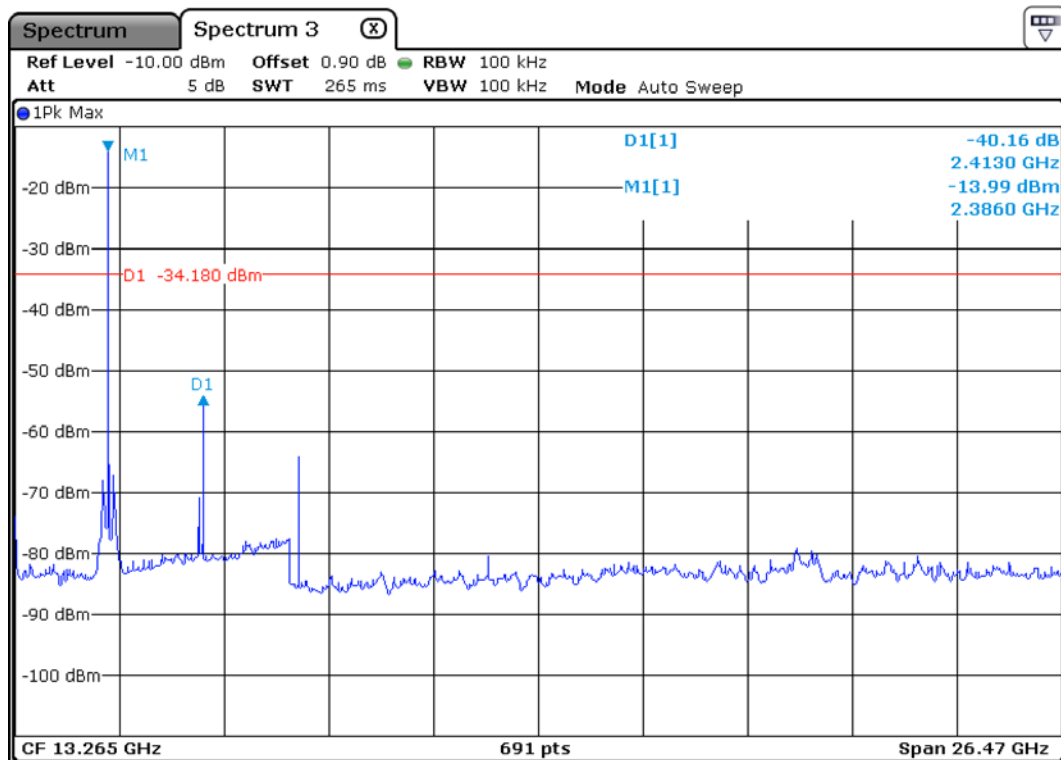

Unwanted Emission – Middle Channel
Frequency Range = 30 MHz ~ 26.5 GHz

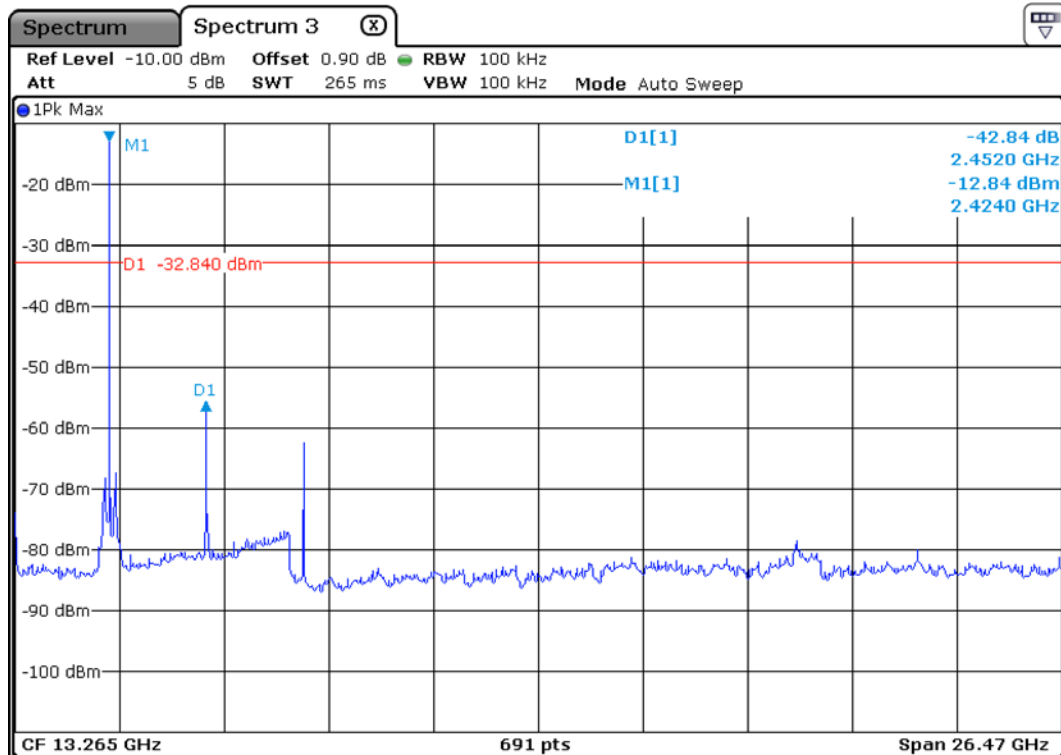

Unwanted Emission – High Channel
Frequency Range = 30 MHz ~ 26.5 GHz

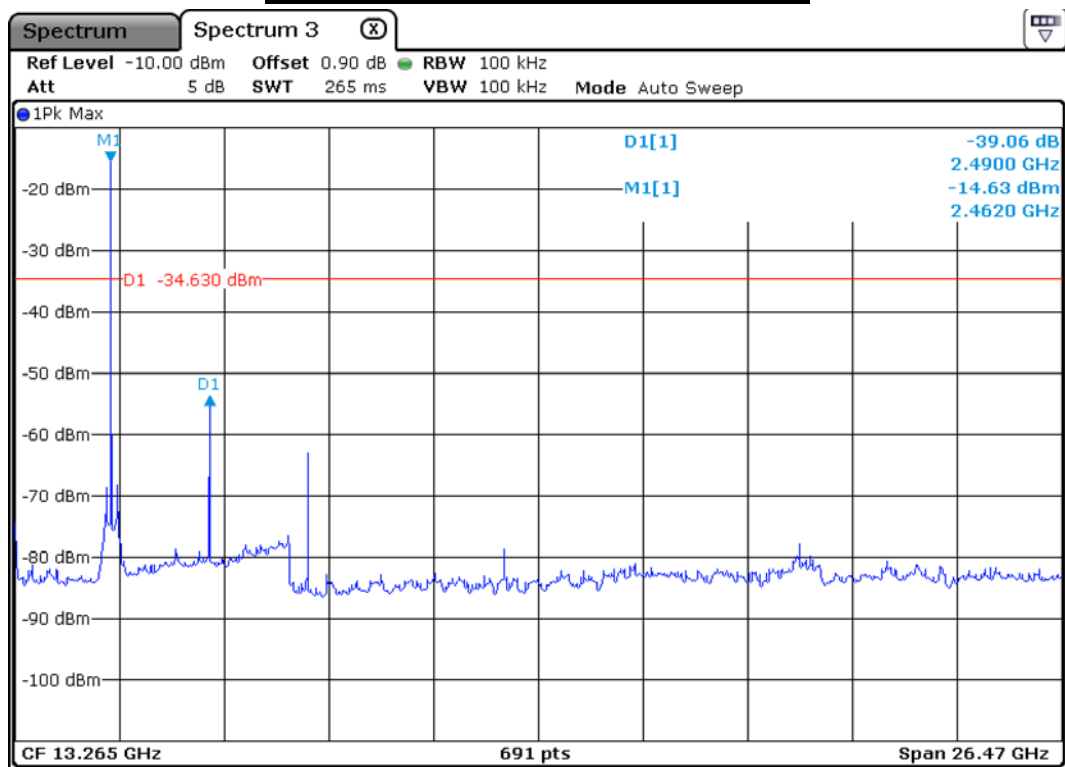

3.2.6 Radiated Spurious Emissions

Procedure:

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013.

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 kHz ~ 10th harmonic.

RBW = 100 kHz (30 MHz ~ 1 GHz)

= 1 MHz (1 GHz ~ 10th harmonic)

Span = 100 MHz


Trace = max hold

VBW ≥ RBW


Detector function = peak

Sweep = auto


below 30 MHz

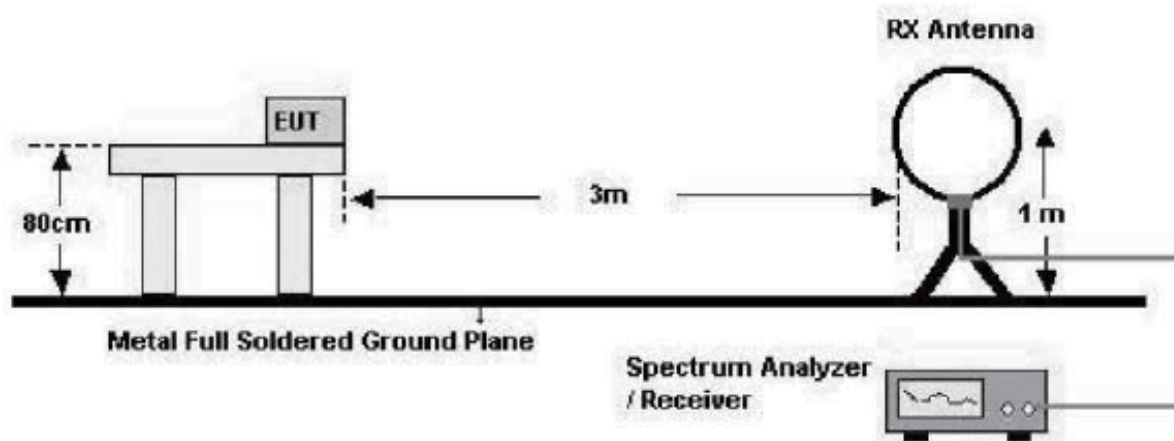

below 1 GHz (30 MHz to 1 GHz)

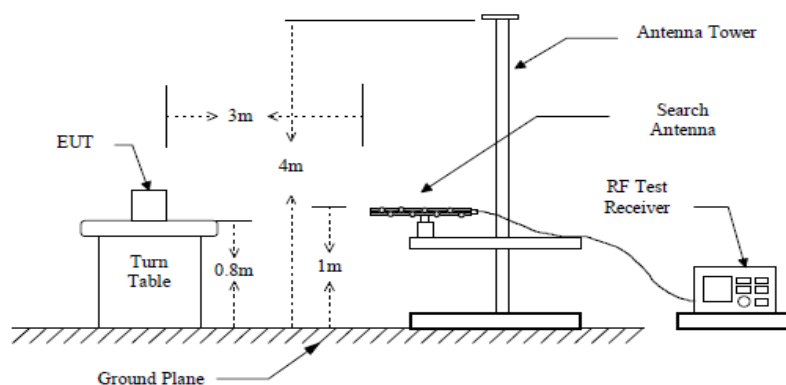

above 1 GHz

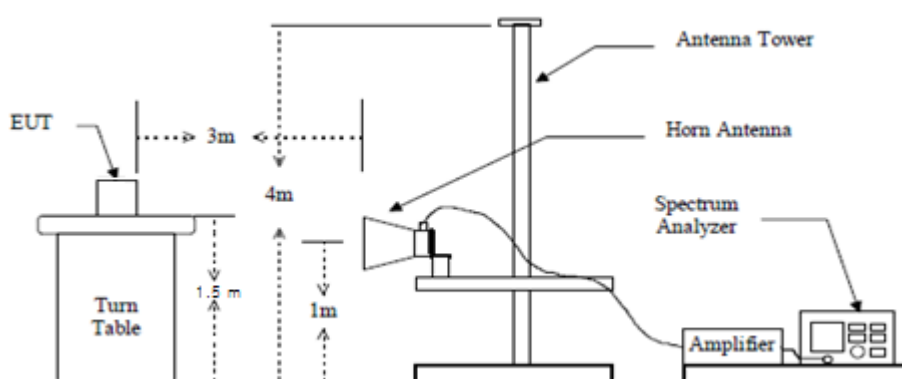

Measurement Data: Complies

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20 dB below limit include from 9 kHz to 30MHz.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3 m
0.009 ~ 0.490	2400/F(kHz) (@ 300 m)
0.490 ~ 1.705	24000/F(kHz) (@ 30 m)
1.705 ~ 30	30(@ 30 m)
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data : (Above 1 GHz)

Frequency [MHz]	Reading [dBuV / m]		Pol.	Correction Factor		Limits [dBuV / m]		Result [dBuV / m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain+Cable	AV / Peak		AV / Peak		AV / Peak	
5644.9	19.40	21.55	V	34.13	14.12	54.0	74.0	39.4	41.6	14.6	32.4
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

- No other emissions were detected at a level greater than 20 dB below limit.

Measurement Data : (Below 1 GHz)

Frequency [MHz]	Reading [dBuV / m]		Pol.	Correction Factor		Limits [dBuV / m]		Result [dBuV / m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain+Cable	AV / Peak		AV / Peak		AV / Peak	
62.01	42.87	45.89	V	12.0	26.73	54.0	74.0	28.1	31.2	25.9	42.8
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

*No emissions were detected at a level greater than 20 dB below limit.

Measurement Data : (9 kHz – 30 MHz)

Frequency [MHz]	Reading [dBuV / m]		Pol.	Correction Factor		Limits [dBuV / m]		Result [dBuV / m]		Margin [dB]	
	AV / Peak			Antenna	Amp.Gain+Cable	AV / Peak	AV / Peak	AV / Peak	AV / Peak		
-	-	-	-	-	-	-	-	-	-	-	-
No emissions were detected at a level greater than 20 dB below limit.											
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-

*No emissions were detected at a level greater than 20 dB below limit.

Radiated Emissions (Below 1 GHz) – Bluetooth(LOW) mode, Vertical

4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: WB-100

Temp/Humi: 22 / 61


Test Mode : Wireless mode

Tested by: KIM T W

Data: 156

File: C:\Program Files (x86)\e3\1710-1.EM6 (2036)

Date: 2017-10-11

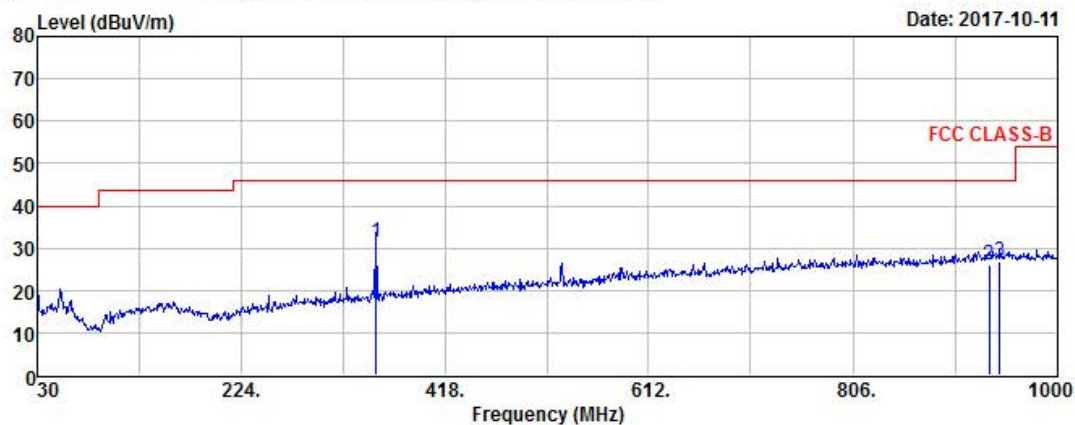

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
353.01	41.07	-9.55	31.52	46.00	14.48	102	183	VERTICAL
935.01	24.44	1.66	26.10	46.00	19.90	122	134	VERTICAL
944.71	24.71	1.95	26.66	46.00	19.34	118	201	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Bluetooth(LOW) mode, Horizontal

4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: WB-100

Temp/Humi: 22 / 61


Test Mode : Wireless mode

Tested by: KIM T W

Data: 155

File: C:\Program Files (x86)\e3\1710-1.EM6 (2036)

Date: 2017-10-11

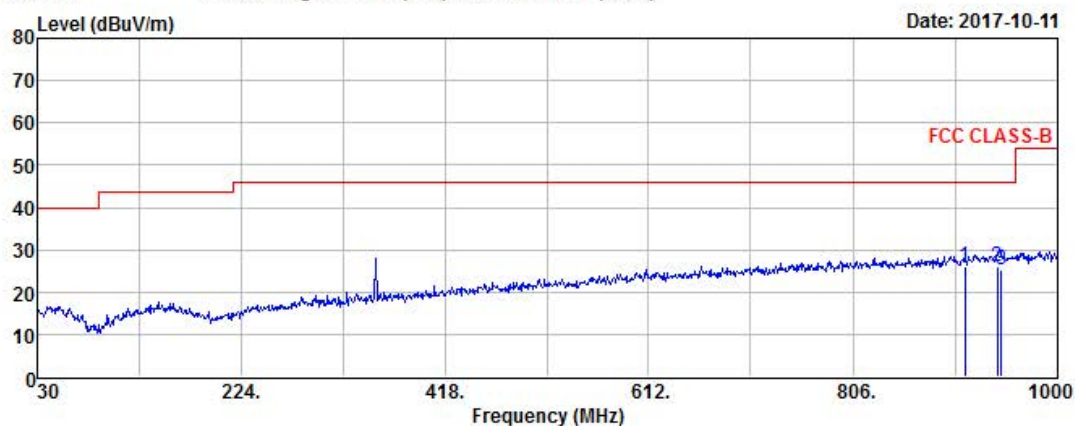

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
911.73	24.94	0.96	25.90	46.00	20.10	348	154	HORIZONTAL
942.77	24.06	1.93	25.99	46.00	20.01	368	118	HORIZONTAL
946.65	23.38	1.99	25.37	46.00	20.63	391	182	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Bluetooth(MID) mode, Vertical

4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: WB-100

Temp/Humi: 22 / 61


Test Mode : Wireless mode (MID)

Tested by: KIM T W

Data: 162

File: C:\Program Files (x86)\e3\1710-1.EM6 (2036)

Date: 2017-10-11

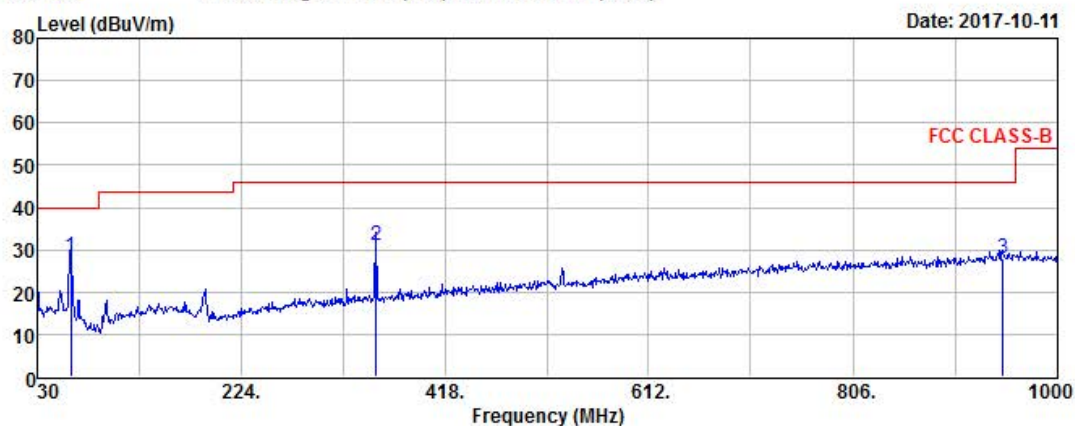

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
62.01	42.87	-14.73	28.14	40.00	11.86	153	192	VERTICAL
353.01	40.49	-9.55	30.94	46.00	15.06	135	91	VERTICAL
947.62	25.80	2.00	27.80	46.00	18.20	105	181	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Bluetooth(MID) mode, Horizontal

4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: WB-100

Temp/Humi: 22 / 61


Test Mode : Wireless mode (MID)

Tested by: KIM T W

Data: 159

File: C:\Program Files (x86)\e3\1710-1.EM6 (2036)

Date: 2017-10-11

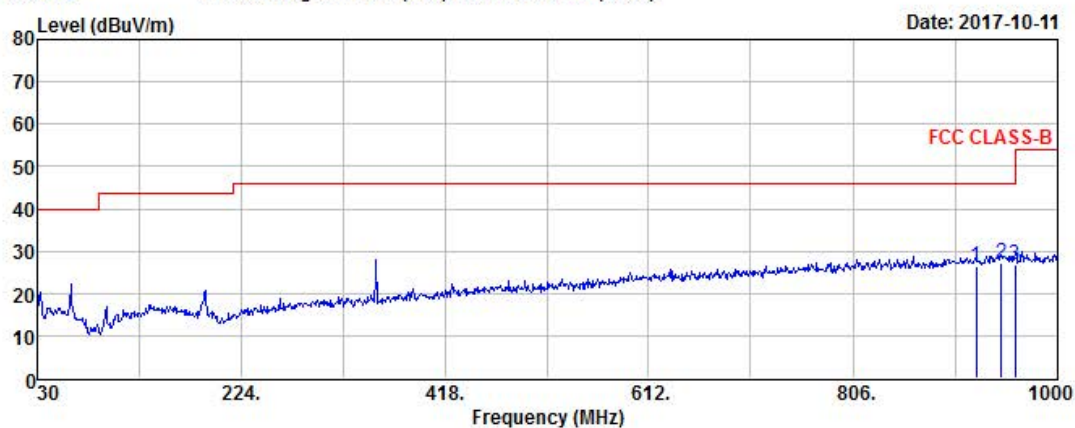

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
922.40	25.00	1.24	26.24	46.00	19.76	382	155	HORIZONTAL
946.65	25.12	1.99	27.11	46.00	18.89	361	91	HORIZONTAL
959.26	24.67	1.99	26.66	46.00	19.34	371	188	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Bluetooth(HIGH) mode, Vertical

4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: WB-100

Temp/Humi: 22 / 61


Test Mode : Wireless mode (MID)

Tested by: KIM T W

Data: 166

File: C:\Program Files (x86)\e3\1710-1.EM6 (2036)

Date: 2017-10-11

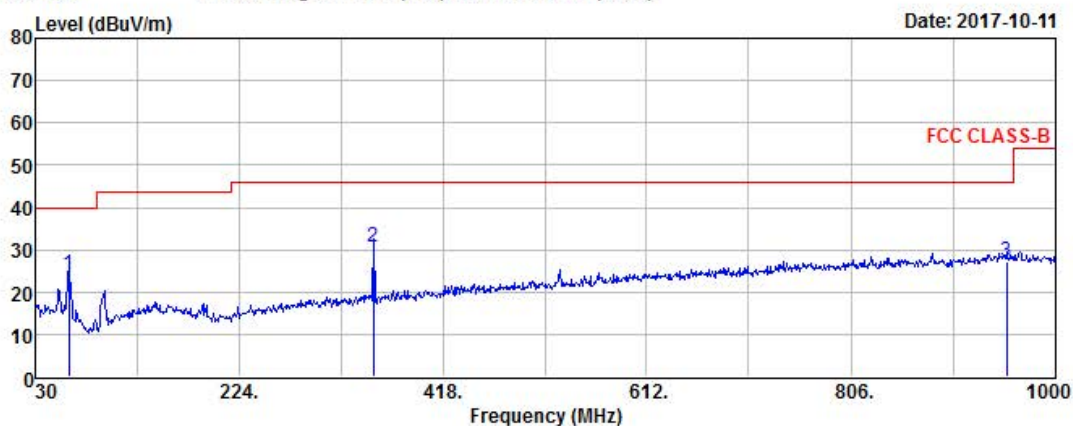

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
62.01	38.76	-14.73	24.03	40.00	15.97	154	162	VERTICAL
352.04	40.02	-9.58	30.44	46.00	15.56	132	82	VERTICAL
953.44	25.28	2.02	27.30	46.00	18.70	108	193	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Bluetooth(HIGH) mode, Horizontal

4, Songjuro 236Beon-gil, yanggi-myeon,
Yongin-si, Gyeonggi-do, Korea
Tel : +82-31-3236008,9
Fax : +82-31-3236010
www.ltalab.com

EUT/Model No.: WB-100

Temp/Humi: 22 / 61


Test Mode : Wireless mode (HIGH)

Tested by: KIM T W

Data: 165

File: C:\Program Files (x86)\e3\1710-1.EM6 (2036)

Date: 2017-10-11

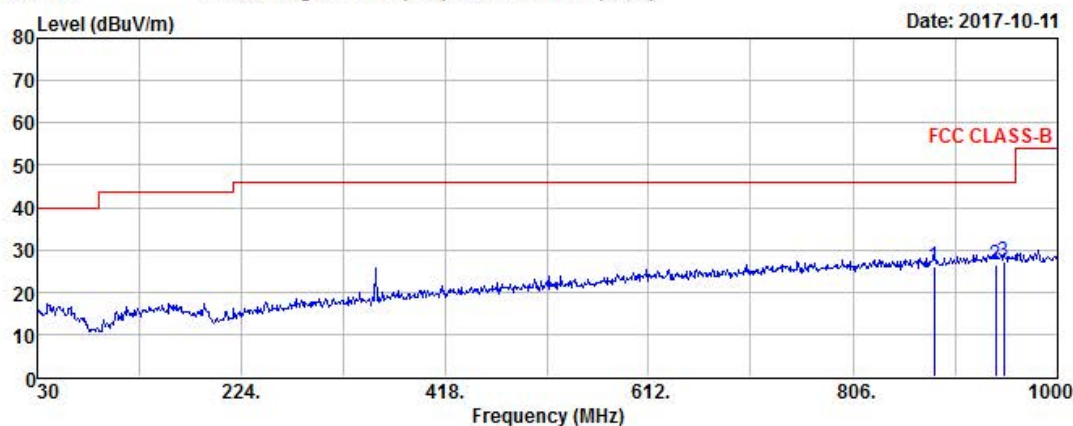

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	QP dBuV/m	dBuV/m	dB	cm	deg	
882.63	25.80	0.29	26.09	46.00	19.91	381	116	HORIZONTAL
940.83	24.65	1.89	26.54	46.00	19.46	394	184	HORIZONTAL
948.59	25.12	2.02	27.14	46.00	18.86	364	192	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Radiated Emissions (Above 1 GHz) – Bluetooth(LOW) mode


EMI Chamber of LTA CO.,LTD.
 4, Songjuro236Beon-gil, Yangji-myeon,
 Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
 Tel :+82-31-3236008,9 www.ltalab.com
 Fax:+82-31-3236010

EUT/Model No. : WB-100

Test Mode: Wireless mode (LOW)

Tested by : KIM T W

Temp/Humi: 22 / 61

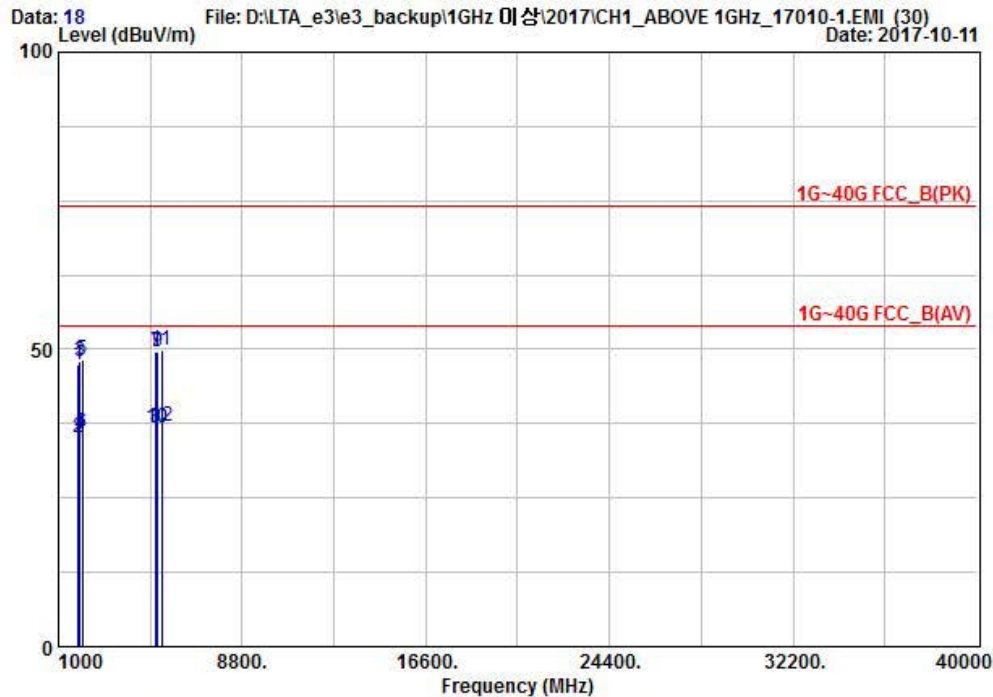

	Freq	Reading	C.F	Result	Limit	Margin	Polarity
	MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
1	1853.40	47.20	0.31	47.51	74.00	26.49	VERTICAL
2	1853.40	34.80	0.31	35.11	54.00	18.89	VERTICAL
3	1917.50	46.90	1.06	47.96	74.00	26.04	HORIZONTAL
4	1917.50	34.60	1.06	35.66	54.00	18.34	HORIZONTAL
5	2027.30	46.60	1.73	48.33	74.00	25.67	HORIZONTAL
6	2027.30	34.20	1.73	35.93	54.00	18.07	HORIZONTAL
7	5134.80	31.20	18.48	49.68	74.00	24.32	VERTICAL
8	5134.80	18.20	18.48	36.68	54.00	17.32	VERTICAL
9	5227.60	30.90	18.70	49.60	74.00	24.40	HORIZONTAL
10	5227.60	18.10	18.70	36.80	54.00	17.20	HORIZONTAL
11	5391.10	30.50	19.28	49.78	74.00	24.22	VERTICAL
12	5391.10	17.70	19.28	36.98	54.00	17.02	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Blue : Vertical Black : Horizontal

Bluetooth(MID) mode


EMI Chamber of LTA CO.,LTD.
 4, Songjuro236Beon-gil, Yangji-myeon,
 Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
 Tel :+82-31-3236008,9 www.ltalab.com
 Fax:+82-31-3236010

EUT/Model No. : WB-100

Test Mode: Wireless mode (MID)

Tested by : KIM T W

Temp/Humi: 22 / 61

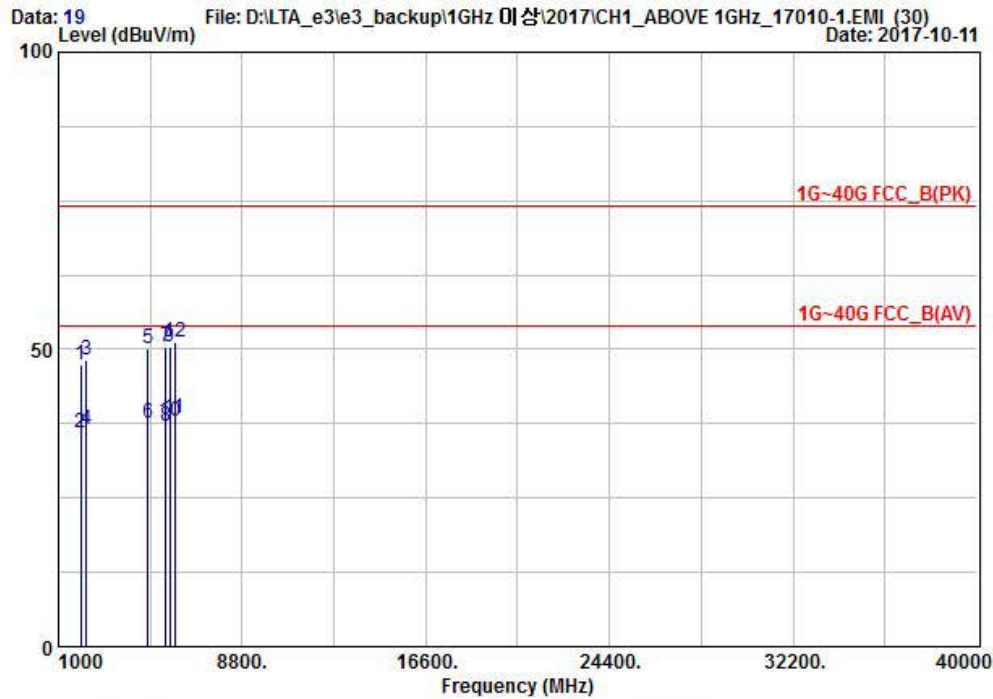

Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
1 1948.20	46.30	1.24	47.54	74.00	26.46	VERTICAL
2 1948.20	34.70	1.24	35.94	54.00	18.06	VERTICAL
3 2194.50	46.10	2.19	48.29	74.00	25.71	HORIZONTAL
4 2194.50	34.20	2.19	36.39	54.00	17.61	HORIZONTAL
5 4815.60	32.40	17.81	50.21	74.00	23.79	VERTICAL
6 4815.60	19.70	17.81	37.51	54.00	16.49	VERTICAL
7 5561.20	30.50	19.83	50.33	74.00	23.67	HORIZONTAL
8 5561.20	17.10	19.83	36.93	54.00	17.07	HORIZONTAL
9 5719.60	30.10	20.22	50.32	74.00	23.68	HORIZONTAL
10 5719.60	17.60	20.22	37.82	54.00	16.18	HORIZONTAL
11 5941.10	16.90	21.52	38.42	54.00	15.58	VERTICAL
12 5941.10	29.70	21.52	51.22	74.00	22.78	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
 Blue : Vertical Black : Horizontal

Bluetooth(HIGH) mode


EMI Chamber of LTA CO.,LTD.
4, Songjuro236Beon-gil, Yangji-myeon,
Yongin-si, Gyeonggi-do, Korea Autho.by NVLAP
Tel :+82-31-3236008,9 www.ltalab.com
Fax:+82-31-3236010

EUT/Model No. : WB-100

Test Mode: Wireless mode (HIGH)

Tested by : KIM T W

Temp/Humi: 22 / 61

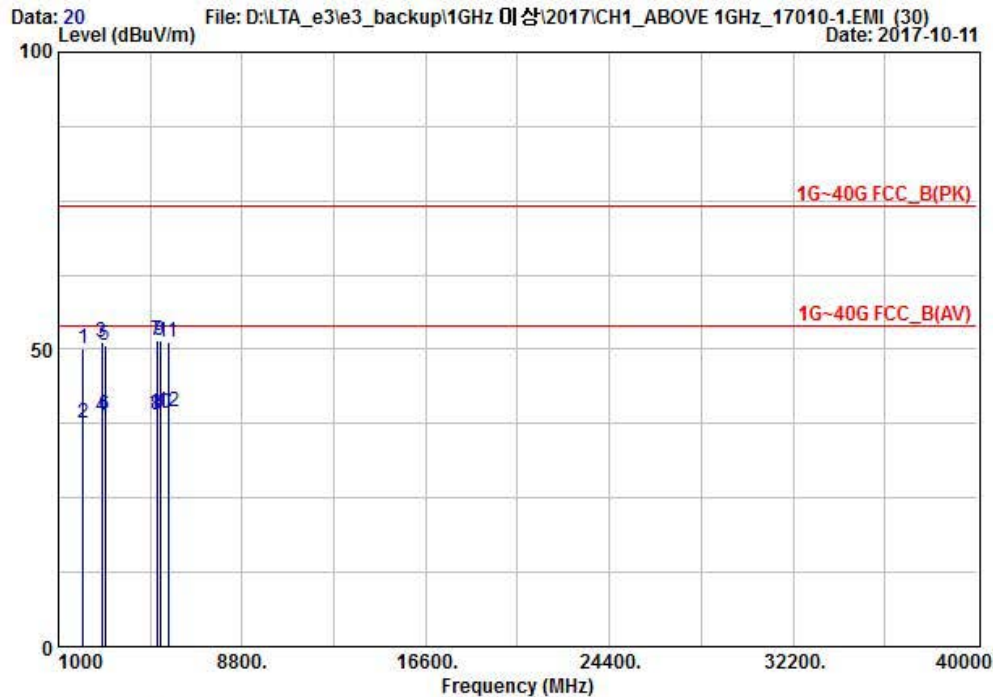

Freq	Reading	C.F	Result	Limit	Margin	Polarity
MHz	dBuV	dB	PK dBuV/m	dBuV/m	dB	
1 2041.30	48.20	1.83	50.03	74.00	23.97	VERTICAL
2 2041.30	35.90	1.83	37.73	54.00	16.27	VERTICAL
3 2841.60	45.30	6.06	51.36	74.00	22.64	HORIZONTAL
4 2841.60	32.70	6.06	38.76	54.00	15.24	HORIZONTAL
5 2977.10	43.20	7.54	50.74	74.00	23.26	VERTICAL
6 2977.10	31.50	7.54	39.04	54.00	14.96	VERTICAL
7 5172.60	32.80	18.61	51.41	74.00	22.59	HORIZONTAL
8 5172.60	20.40	18.61	39.01	54.00	14.99	HORIZONTAL
9 5317.40	32.40	19.01	51.41	74.00	22.59	VERTICAL
10 5317.40	20.10	19.01	39.11	54.00	14.89	VERTICAL
11 5644.90	31.20	20.01	51.21	74.00	22.79	HORIZONTAL
12 5644.90	19.40	20.01	39.41	54.00	14.59	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain
Blue : Vertical Black : Horizontal

3.2.7 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Minimum Standard: FCC Part 15.207(a) / EN 55022

Class B

Frequency Range	quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Use	Description	Model No.	Serial No.	Manufacturer	Interval	Last Cal. Date
1	■	Signal Analyzer (9 kHz ~ 30 GHz)	FSV30	100757	R&S	1 year	2017-09-07
2	■	Signal Generator (~3.2 GHz)	8648C	3623A02597	HP	1 year	2017-03-20
3		SYNTHESIZED CW GENERATOR	83711B	US34490456	HP	1 year	2017-03-20
4		Attenuator (3 dB)	8491A	37822	HP	1 year	2017-09-07
5		Attenuator (10 dB)	8491A	63196	HP	1 year	2017-09-07
6		EMI Test Receiver (~7 GHz)	ESCI7	100722	R&S	1 year	2017-09-07
7	■	RF Amplifier (~1.3 GHz)	8447D OPT 010	2944A07684	HP	1 year	2017-09-07
8	■	RF Amplifier (1~26.5 GHz)	8449B	3008A02126	HP	1 year	2017-03-21
9	■	Horn Antenna (1~18 GHz)	3115	00114105	ETS	2 year	2016-08-04
10		DRG Horn (Small)	3116B	81109	ETS-Lindgren	2 year	2016-05-03
11		DRG Horn (Small)	3116B	133350	ETS-Lindgren	2 year	2016-05-03
12	■	TRILOG Antenna	VULB 9160	9160-3237	SCHWARZBECK	2 year	2017-04-17
13		Temp.Humidity Data Logger	SK-L200TH II A	00801	SATO	1 year	2017-03-21
14		Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
15	■	DC Power Supply	6674A	3637A01657	Agilent	-	-
16		Frequency Counter	5342A	2826A12411	HP	1 year	2017-03-21
17	■	Power Meter	EPM-441A	GB32481702	HP	1 year	2017-03-20
18	■	Power Sensor	8481A	3318A94972	HP	1 year	2016-12-30
19		Audio Analyzer	8903B	3729A18901	HP	1 year	2017-09-07
20		Modulation Analyzer	8901B	3749A05878	HP	1 year	2017-09-07
21	■	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2017-09-07
22		Stop Watch	HS-3	812Q08R	CASIO	2 year	2017-03-21
23		LISN	KNW-407	8-1430-1	Kyoritsu	1 year	2017-09-07
24		Two-Lime V-Network	ESH3-Z5	893045/017	R&S	1 year	2017-03-20
25		UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	1 year	2017-03-20
26		Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	1 year	2017-03-20
27		Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	1 year	2017-03-20
28	■	OSP120 BASE UNIT	OSP120	101230	R&S	1 year	2017-03-21
29		Signal Generator(100 kHz ~ 40 GHz)	SMB100A03	177621	R&S	1 year	2017-03-23
30		Signal Analyzer (10 Hz ~ 40 GHz)	FSV40	101367	R&S	1 year	2017-03-21