



Zacta

TEST REPORT

Report number : JPD-TR-18004-0

Issue date : April 18, 2018

The device, as described herewith, was tested pursuant to applicable test procedure and complies with the requirements of;

FCC Part15 Subpart C ISED RSS-247

The test results are traceable to the international or national standards.

Applicant	: MORITEX Corporation
Equipment under test (EUT)	: Handy Skin Sensor II
Model number	: HSS II
FCC ID	: 2AO35-HSS2
IC Certification Number	: 23766-HSS2

Date of test : January 9, 25, 26, 29, 30, 31, 2018

Test place : TÜV SÜD Zacta Ltd. Yonezawa Testing Center
5-4149-7, Hachimanpara, Yonezawa-shi,
Yamagata, 992-1128 Japan
Phone: +81-238-28-2881 Fax: +81-238-28-2888

Test results : Complied

The results in this report are applicable only to the equipment tested.

This report shall not be re-produced except in full without the written approval of TÜV SÜD Zacta Ltd.

This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, ILAC-MRA, or any agency of the federal government.

Tested by : Tadahiro Seino Chiaki Kanno
Tadahiro Seino Chiaki Kanno

Approved by : Hiroaki Suzuki
Hiroaki Suzuki
Lab Manager of RF Lab



Table of contents

	Page
1. Summary of Test	4
1.1 Purpose of test	4
1.2 Standards	4
1.3 List of applied test to the EUT	4
1.4 Modification to the EUT by laboratory	4
2. Equipment Under Test	5
2.1 General Description of equipment	5
2.2 EUT information	5
2.3 Variation of the family model(s)	6
2.4 Operating channels and frequencies	6
2.5 Operating mode	6
2.6 Operating flow	7
3. Configuration of equipment	8
3.1 Equipment(s) used	8
3.2 Cable(s) used	8
3.3 System configuration	8
4. DTS Bandwidth / Occupied Bandwidth (99%)	9
4.1 Measurement procedure	9
4.2 Limit	9
4.3 Measurement result	9
4.4 Trace data	10
5. Maximum Conducted Output Power	13
5.1 Measurement procedure	13
5.2 Limit	13
5.3 Measurement result	13
6. Band Edge Compliance of RF Conducted Emissions	15
6.1 Measurement procedure	15
6.2 Limit	15
6.3 Measurement result	16
6.4 Trace data	17
7. Spurious emissions - Conducted -	20
7.1 Measurement procedure	20
7.2 Limit	20
7.3 Measurement result	20
8. Spurious Emissions - Radiated -	30
8.1 Measurement procedure	30
8.2 Calculation method	31
8.3 Limit	31
8.4 Test data	32
9. Restricted Band of Operation	54
9.1 Measurement procedure	54
9.2 Limit	54
9.3 Measurement Result	55



Zacta

9.4 Test data.....	55
10. Transmitter Power Spectral Density.....	62
10.1 Measurement procedure.....	62
10.2 Limit	62
10.3 Measurement result.....	62
11. AC Power Line Conducted Emissions.....	67
11.1 Measurement procedure	67
11.2 Calculation method	67
11.3 Limit.....	68
11.4 Test data.....	68
12. Antenna requirement.....	69
13. Uncertainty of measurement.....	70
14. Laboratory Information	71
Appendix A. Test equipment.....	72
Appendix B. Duty Cycle.....	73

1. Summary of Test

1.1 Purpose of test

It is the original test in order to verify conformance to FCC Part 15 Subpart C and ISSED RSS-247.

1.2 Standards

CFR47 FCC Part 15 Subpart C
ISSED RSS-247

1.2.1 Test Methods

ANSI C63.10-2013, KDB 558074 D01 DTS Meas Guidance v04

1.2.2 Deviation from standards

None

1.3 List of applied test to the EUT

FCC Section	ISSED Section	Test items	Condition	Result
15.247(a)(2)	RSS-247 5.2(a)	DTS Bandwidth / Occupied Bandwidth (99%)	Conducted	PASS
15.247(b)(3)	RSS-247 5.4(d)	Maximum conducted (average) output power	Conducted	PASS
15.247(d)	RSS-247 5.5	Band Edge Compliance of RF Conducted Emissions	Conducted	PASS
15.247(d) 15.209	RSS-247 5.5 RSS-Gen 8.9	Spurious Emissions	Conducted Radiated	PASS
15.205	RSS-Gen 8.10	Restricted Bands of Operation	Radiated	PASS
15.247(e)	RSS-247 5.2(b)	Transmitter Power Spectral Density	Conducted	PASS
15.207	RSS-Gen 8.8	AC Power Line Conducted Emissions	Conducted	PASS

1.3.1 Test set up

Table-Top

1.4 Modification to the EUT by laboratory

None

2. Equipment Under Test

2.1 General Description of equipment

EUT is the Handy Skin Sensor.

2.2 EUT information

Applicant	: MORITEX Corporation 3-13-45, Senzui, Asaka-shi, Saitama 351-0024 Phone: +81(0)48-218-2907 Fax: +81(0)48-467-3720
Equipment under test	: Handy Skin Sensor II
Trade name	: SHISEIDO
Model number	: HSS II
Serial number	: N/A
EUT condition	: Pre-Production
Power ratings	: Battery: DC 3.6V
Size	: (W) 64.0 mm×(D) 58.6 mm×(H) 171.0 mm
Environment	: Indoor and Outdoor use
Terminal limitation	: 5°C to 35°C
RF Specification Protocol	: IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)
Frequency range	: IEEE802.11b /11g/11n (HT20): 2412MHz-2462MHz
Number of RF Channels	: 11 Channels
Modulation type	: IEEE802.11b: DSSS (DBPSK, DQPSK, CCK) IEEE802.11g / n (HT20) : OFDM (BPSK, QPSK, 16QAM, 64QAM)
Data rate	: IEEE802.11b: 1, 2, 5.5, 11Mbps IEEE802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps IEEE802.11n (HT20 LGI): 6.5, 13, 19.5, 26, 39, 52, 58.5, 65Mbps IEEE802.11n (HT20 SGI): 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65, 72.2Mbps
Channel separation	: 5MHz
Output power	: 38.815mW (IEEE802.11b) 119.124mW (IEEE802.11g) 105.439mW (IEEE802.11n: HT20)
Antenna type	: Internal antenna
Antenna gain	: 2.16dBi

2.3 Variation of the family model(s)

Not applicable

2.4 Operating channels and frequencies

Channel	Frequency [MHz]
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

2.5 Operating mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Tested Channel	Frequency [MHz]
Low	2412
Middle	2437
High	2462

The pre-test has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates.

Tested Channel	Modulation Type	Data Rate
Low, Middle, High	IEEE802.11b: DSSS	1Mbps
Low, Middle, High	IEEE802.11g: OFDM	6Mbps
Low, Middle, High	IEEE802.11n (HT20 LGI): OFDM	MCS0 (6.5Mbps)

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in Z axis and the worst case recorded.

2.6 Operating flow

[Tx mode]

- i) Test program setup to the Software
- ii) Select a Test mode
[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]
Operating frequency: Channel Low: 2412MHz, Channel Middle: 2437MHz, Channel High: 2462MHz
- iii) Start test mode

[Rx mode]

- i) Test program setup to the Software
- ii) Select a Test mode
[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]
Operating frequency: Channel Low: 2412MHz, Channel Middle: 2437MHz, Channel High: 2462MHz
- iii) Start test mode

3. Configuration of equipment

3.1 Equipment(s) used

No.	Equipment	Company	Model No.	Serial No.	FCC ID / DoC	Comment
1	Handy Skin Sensor II	MORITEX Corporation	HSS II	N/A	2AO35-HSS2	EUT
2	Sensor Stand	MORITEX Corporation	HSS II Stand	N/A	N/A	*
3	AC Adapter	MORITEX Corporation	UBX310-0520	H05-0559112	N/A	*


*: AC power line Conducted Emission Test.

3.2 Cable(s) used

No.	Cable	Length[m]	Shield	Connector	Comment
a	Micro USB cable (for AC Adapter)	1.6	Yes	Metal	*

*: AC power line Conducted Emission Test.

3.3 System configuration

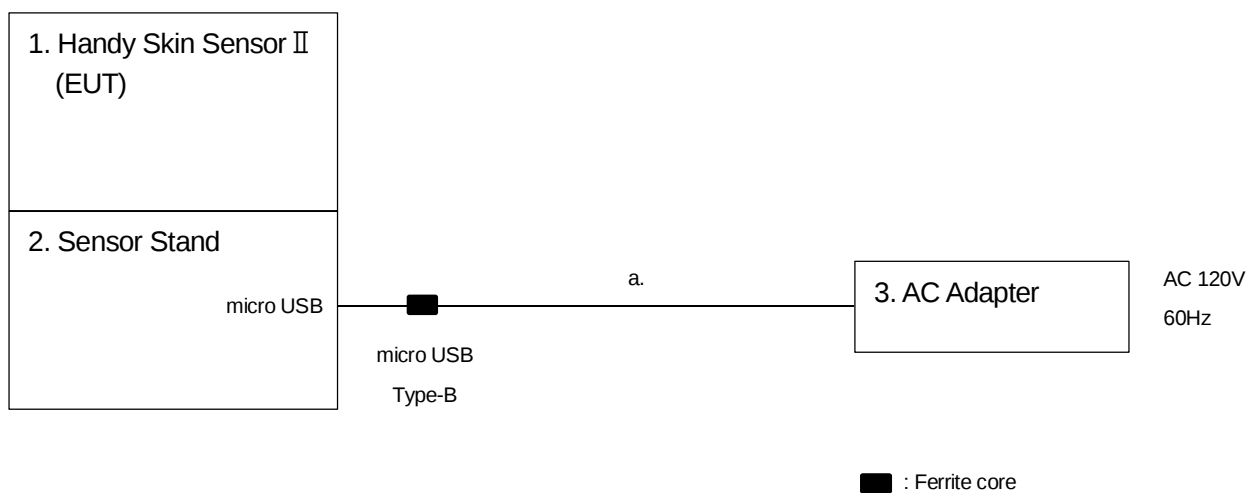

Note1: Numbers assigned to equipment or cables on this diagram correspond to the list in "3.1 Equipment(s) used" and "3.2 Cable(s) used".

4. DTS Bandwidth / Occupied Bandwidth (99%)

4.1 Measurement procedure


[FCC 15.247(a)(2), RSS-247 5.2(a), KDB 558074 D01 v04, Section 8.2]

The bandwidth at 6dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) RBW = 100kHz.
- b) VBW $\geq 3 \times$ RBW.
- c) Sweep time = auto-couple.
- d) Detector = peak.
- e) Trace mode = max hold.

- Test configuration

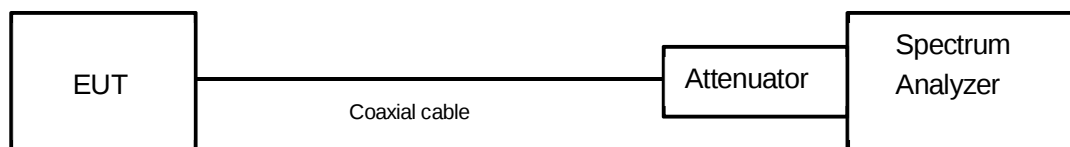

4.2 Limit

The minimum permissible 6dB bandwidth is 500kHz.

4.3 Measurement result

Date : January 9, 2018
 Temperature : 20.8 [°C]
 Humidity : 35.2 [%]
 Test place : Shielded room No.4

Test engineer : Chiaki Kanno


[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]

Channel	Frequency [MHz]	DTS Bandwidth [MHz]		
		IEEE802.11b	IEEE802.11g	IEEE802.11n (HT20)
Low	2412	8.099	15.117	15.133
Middle	2437	8.091	15.118	15.133
High	2462	8.068	15.126	15.126


Channel	Frequency [MHz]	Occupied Bandwidth (99%) [MHz]		
		IEEE802.11b	IEEE802.11g	IEEE802.11n (HT20)
Low	2412	12.126	16.313	17.470
Middle	2437	12.120	16.313	17.474
High	2462	12.102	16.313	17.464

4.4 Trace data
[IEEE802.11b]


Channel Low

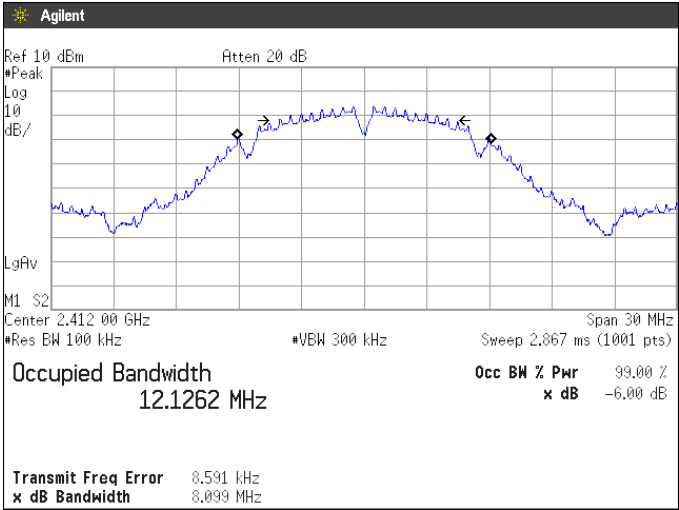

Channel Middle

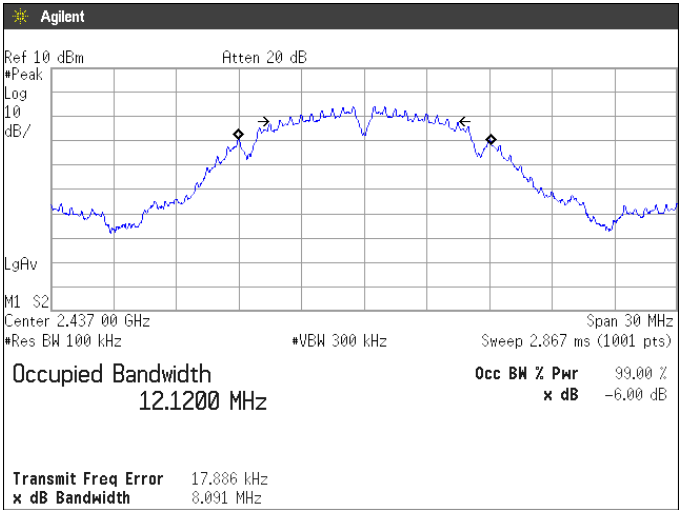


Channel High

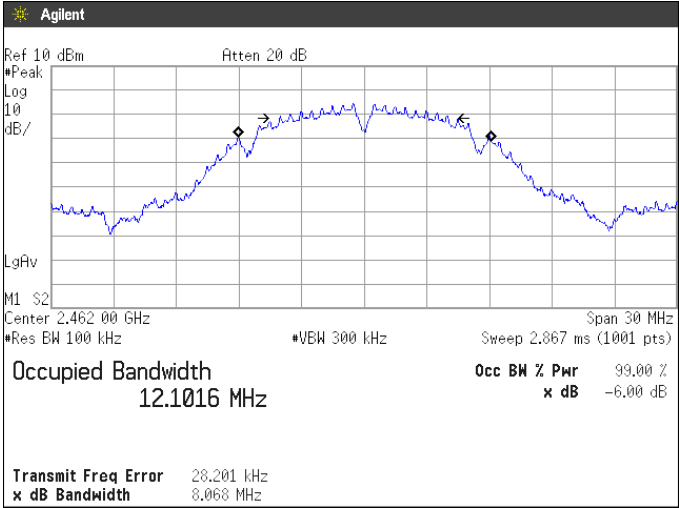


[IEEE802.11g]


Channel Low

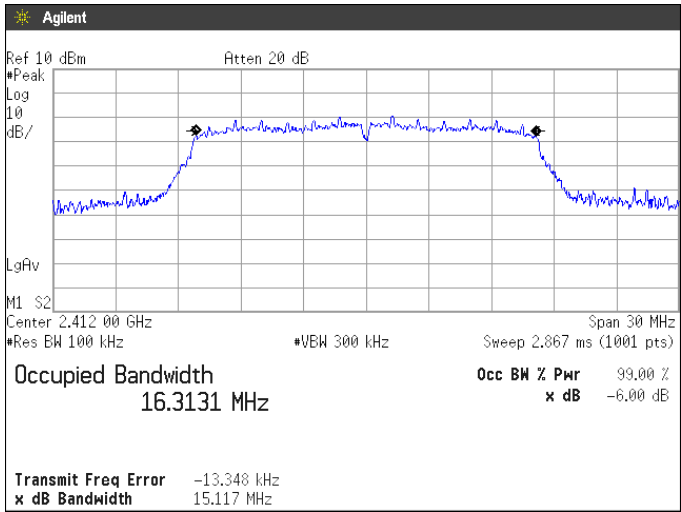

Channel Middle

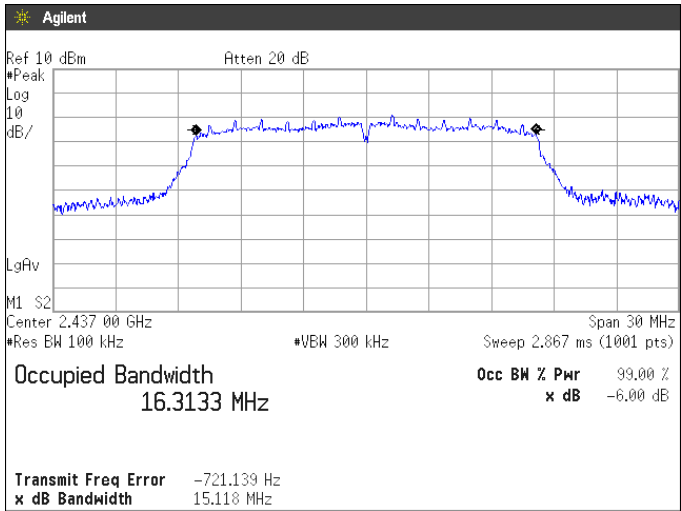


Channel High

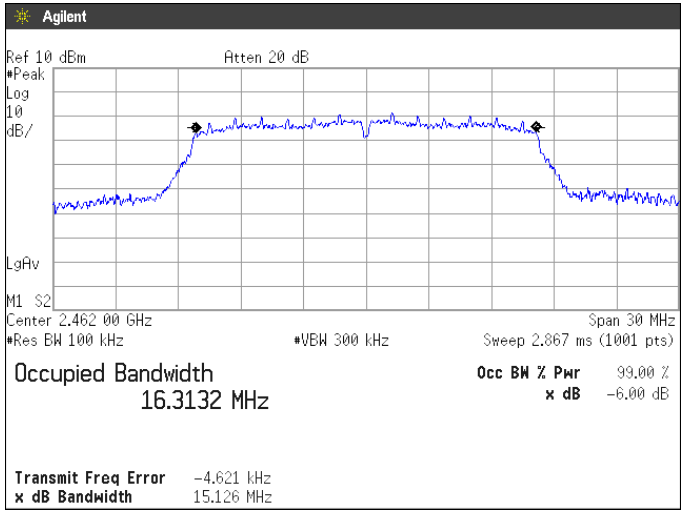


[IEEE802.11n (HT20)]


Channel Low

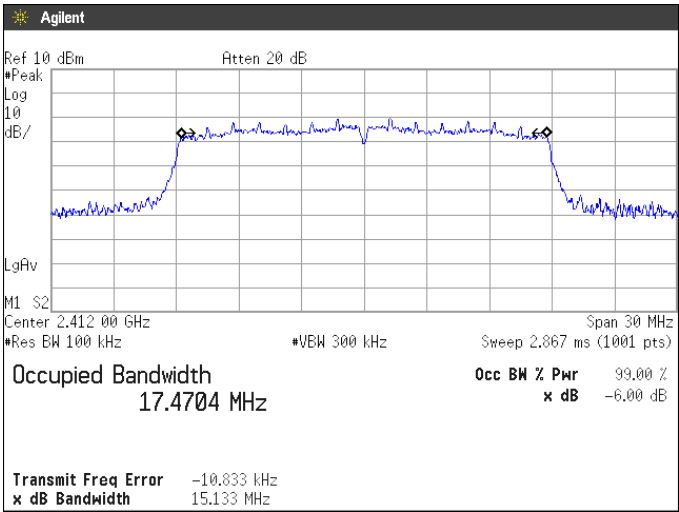

Channel Middle

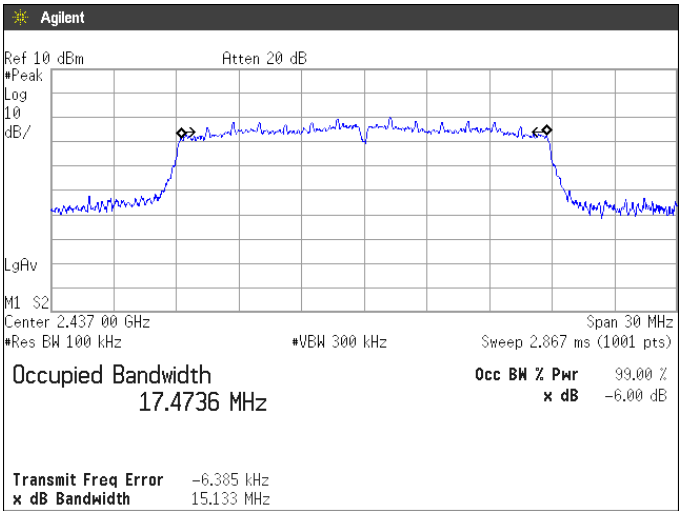

Channel High

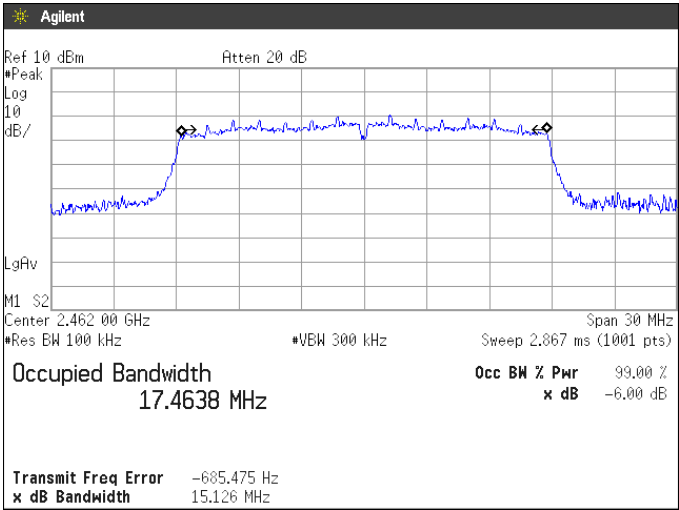


5. Maximum Conducted Output Power

5.1 Measurement procedure

[FCC 15.247(b)(3), RSS-247 5.4(d), KDB 558074 D01 v04, Section 9.1.3]

The peak power is measured with a power sensor connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

- Test configuration

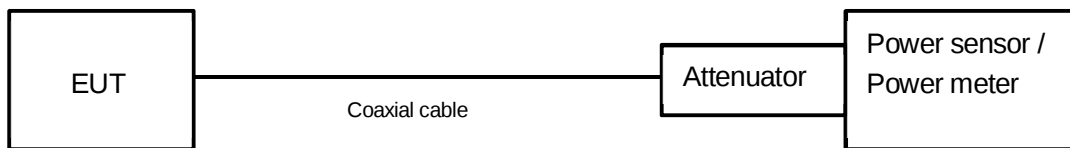

5.2 Limit

1W(1000mW) or less

5.3 Measurement result

Date : January 9, 2018
Temperature : 20.8 [°C]
Humidity : 35.2 [%]
Test place : Shielded room No.4

Test engineer : Chiaki Kanno

[IEEE802.11b]
Battery Full

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Output Power (mW)	Limit (mW)	Result
Low	2412	4.79	10.62	15.41	34.754	≤ 1000	PASS
Middle	2437	5.03	10.62	15.65	36.728	≤ 1000	PASS
High	2462	5.27	10.62	15.89	38.815	≤ 1000	PASS

[IEEE802.11g]
Battery Full

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Output Power (mW)	Limit (mW)	Result
Low	2412	9.06	10.62	19.68	92.897	≤ 1000	PASS
Middle	2437	9.45	10.62	20.07	101.625	≤ 1000	PASS
High	2462.	10.14	10.62	20.76	119.124	≤ 1000	PASS

[IEEE802.11n (HT20)]
Battery Full

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Output Power (mW)	Limit (mW)	Result
Low	2412	8.62	10.62	19.24	83.946	≤ 1000	PASS
Middle	2437	9.40	10.62	20.02	100.462	≤ 1000	PASS
High	2462	9.61	10.62	20.23	105.439	≤ 1000	PASS

Calculation;

Reading (dBm) + Factor (dB) = Level (dBm)

$10\log P = \text{Level (dBm)}$

$P = 10^{(\text{Maximum Peak Output Power} / 10)} \text{ (mW)}$

6. Band Edge Compliance of RF Conducted Emissions

6.1 Measurement procedure


[FCC 15.247(d), RSS-247 5.5, KDB 558074 D01 v04, Section 11.0]

The Band Edge is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = Arbitrary setting. (Setting suitable for measurement.)
- b) RBW = 100kHz.
- c) VBW $\geq 3 \times$ RBW
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

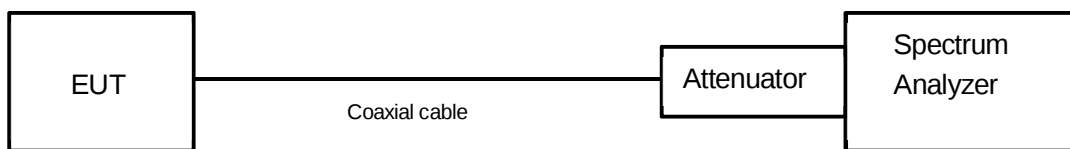

6.2 Limit

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

6.3 Measurement result

Date : January 9, 2018
 Temperature : 20.8 [°C]
 Humidity : 35.2 [%]
 Test place : Shielded room No.4

Test engineer : Chiaki Kanno

[IEEE802.11b]

Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2412	-5.93	2396.96	-45.42	39.49	At least 20dB below from peak of RF	PASS
High	2462	-5.59	2487.50	-59.47	53.88	At least 20dB below from peak of RF	PASS

[IEEE802.11g]


Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2412	-9.20	2398.80	-44.53	35.33	At least 20dB below from peak of RF	PASS
High	2462	-9.47	2483.50	-49.63	40.16	At least 20dB below from peak of RF	PASS

[IEEE802.11n (HT20)]


Channel	Frequency (MHz)	RF Power Level (dBm)	Band-edge Frequency (MHz)	Band-edge Level (dBm)	Difference Level (dBm)	Limit (dBm)	Result
Low	2412	-10.72	2399.84	-45.60	34.88	At least 20dB below from peak of RF	PASS
High	2462	-10.14	2483.58	-49.50	39.36	At least 20dB below from peak of RF	PASS

6.4 Trace data
[IEEE802.11b]

Channel Low

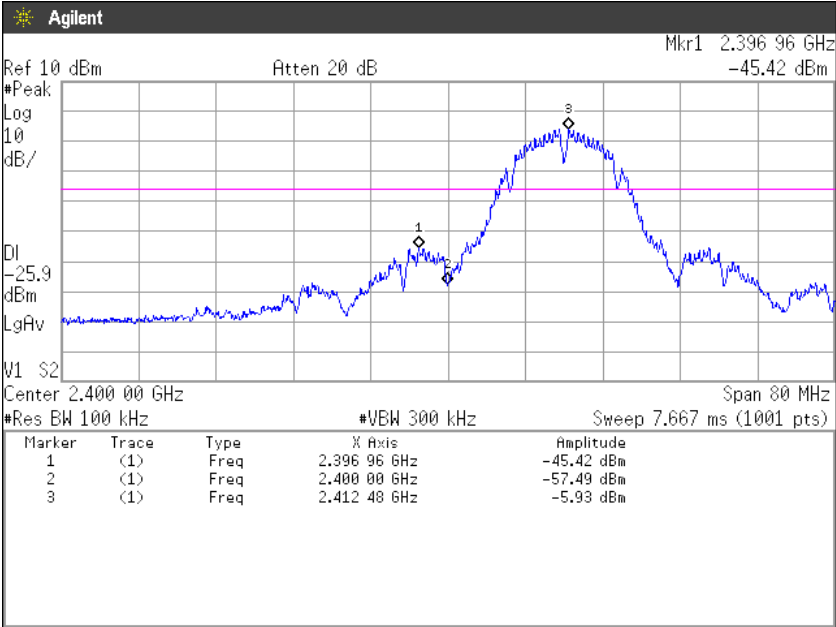


Channel High

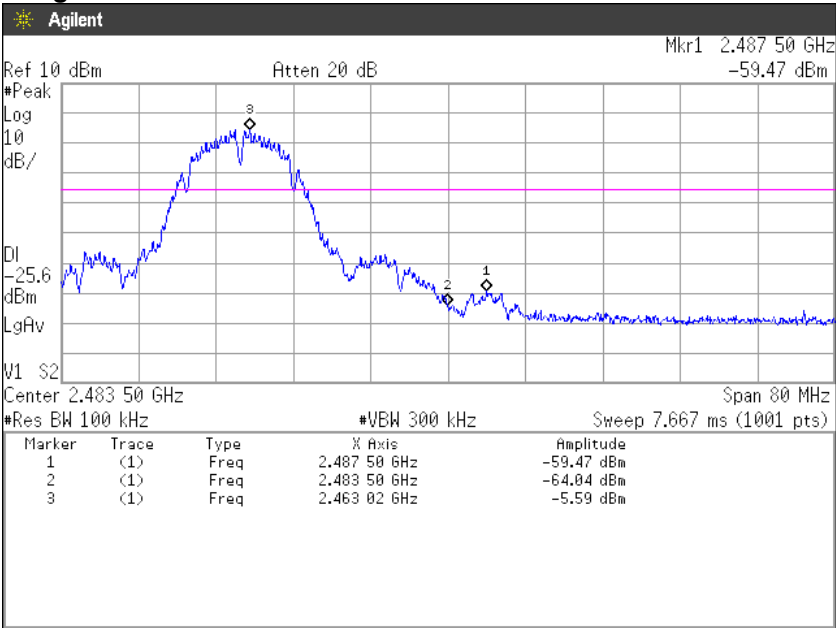


[IEEE802.11g]

Channel Low

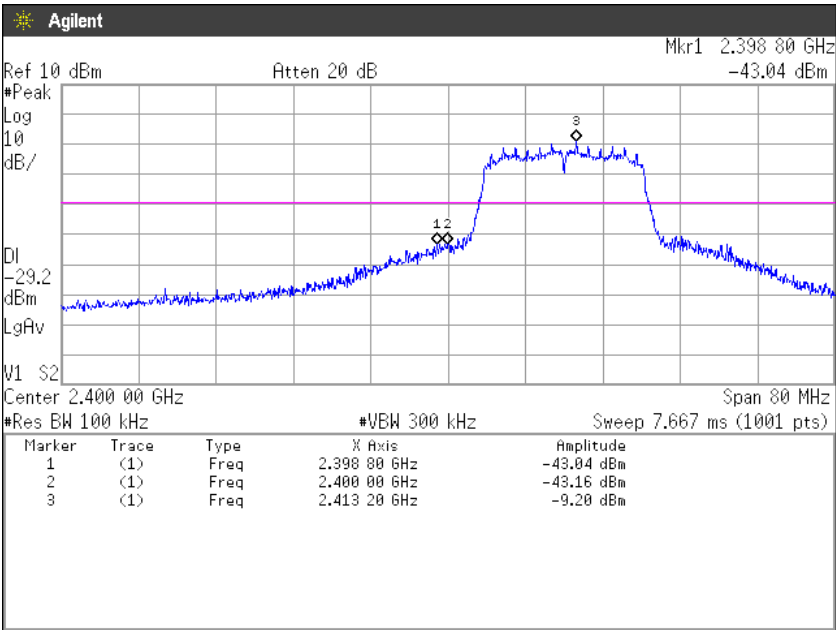


Channel High

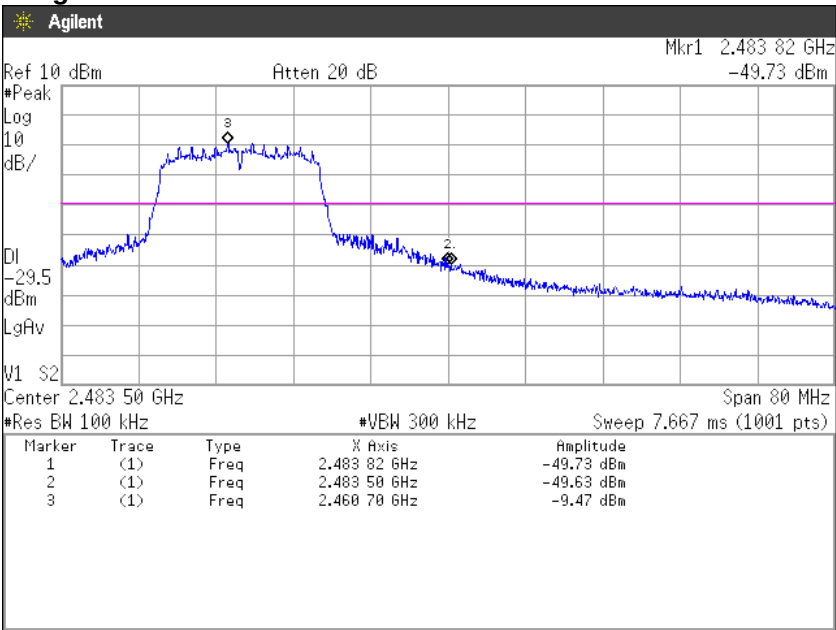


[IEEE802.11n (HT20)]

Channel Low

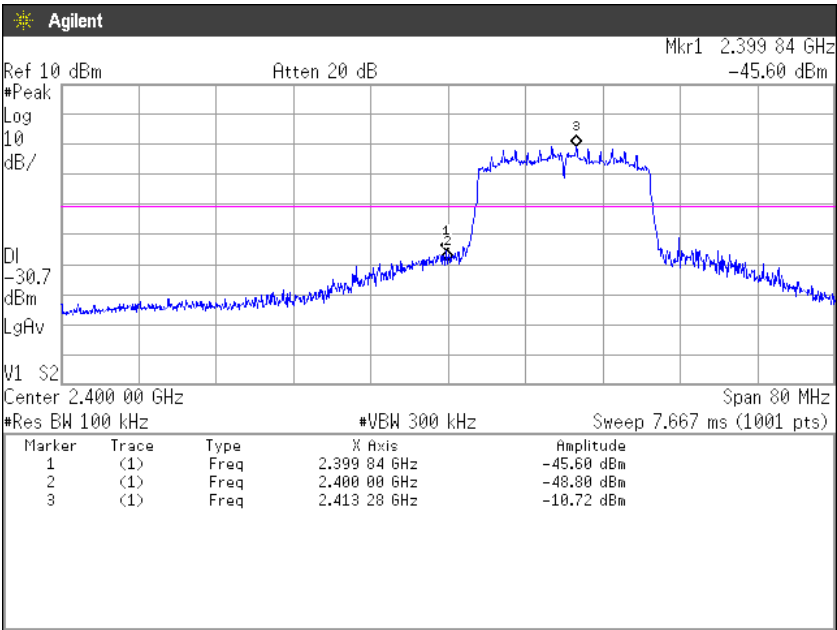

Channel High

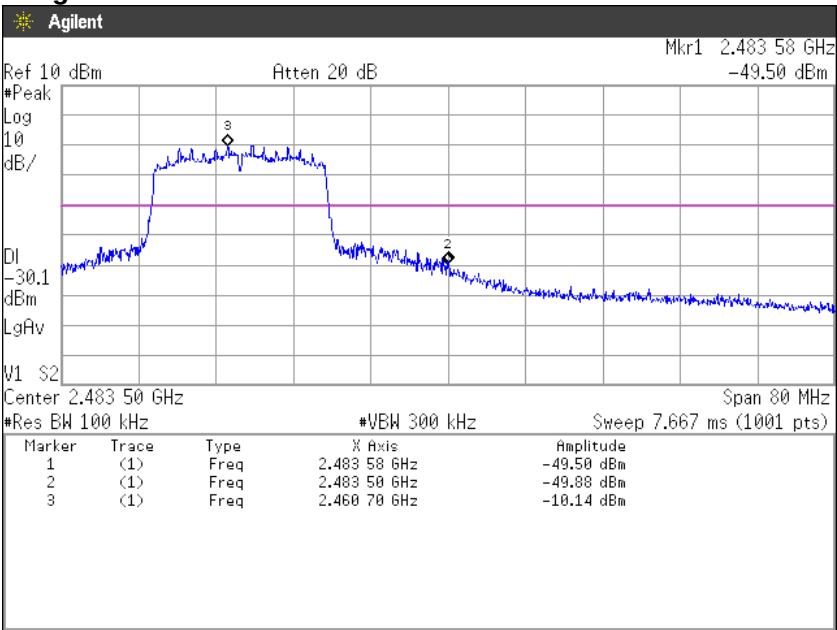

7. Spurious emissions - Conducted -

7.1 Measurement procedure

[FCC 15.247(d), RSS-247 5.5, KDB 558074 D01 v04, Section 11.0]

The spurious emissions (Conducted) are measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = wide enough to fully capture the emission being measured.
- b) RBW = 100 kHz.
- c) VBW $\geq$ RBW.
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration



7.2 Limit

In any 100kHz bandwidth outside the frequency band the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

7.3 Measurement result

Date : January 9, 2018
 Temperature : 20.8 [°C]
 Humidity : 35.2 [%]
 Test place : Shielded room No.4

Test engineer :
 Chiaki Kanno

[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]


Channel	Frequency [MHz]	Limit [dB]	Results Chart	Result
Low	2412	At least 20dB below from peak of RF	See the trace Data	PASS
Middle	2437	At least 20dB below from peak of RF	See the trace Data	PASS
High	2462	At least 20dB below from peak of RF	See the trace Data	PASS

7.4 Trace data


[IEEE802.11b]

Channel Low


30MHz-1GHz

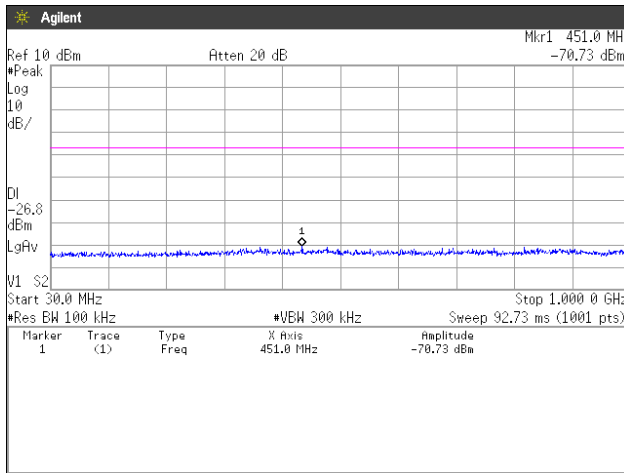


1GHz-5GHz

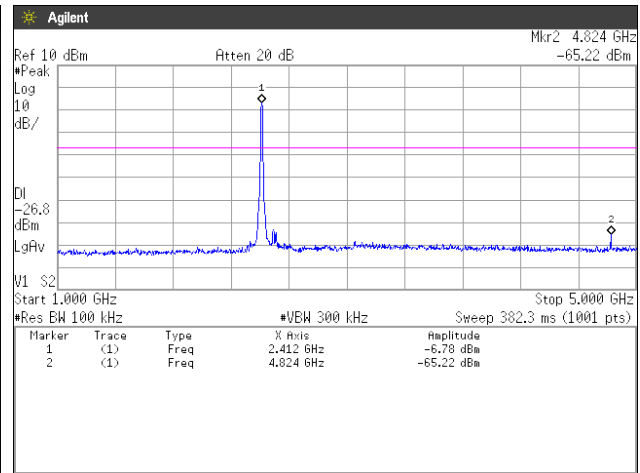


5GHz-10GHz

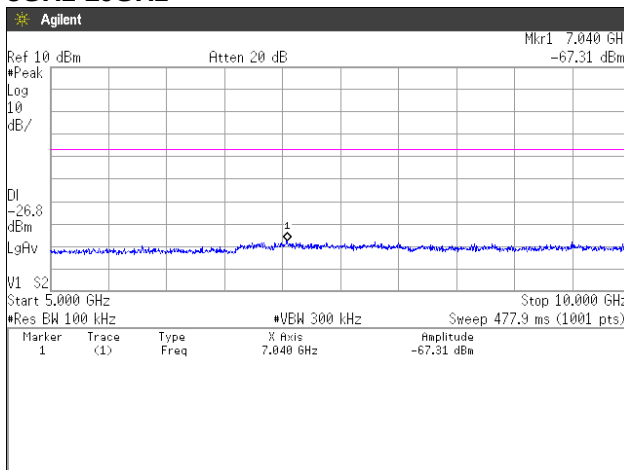


10GHz-15GHz

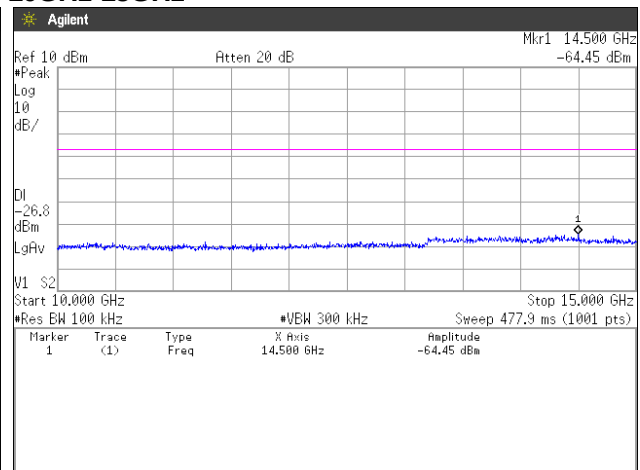


15GHz-20GHz

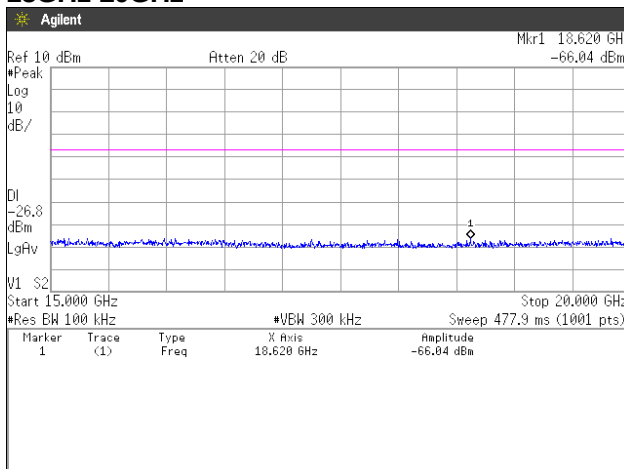


20GHz-25GHz

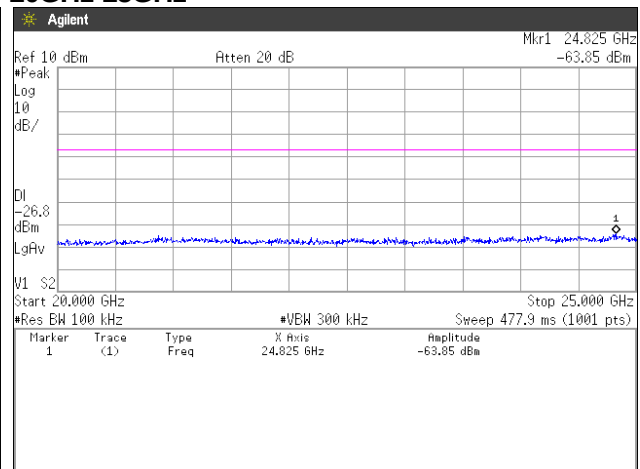


Channel Middle 30MHz-1GHz

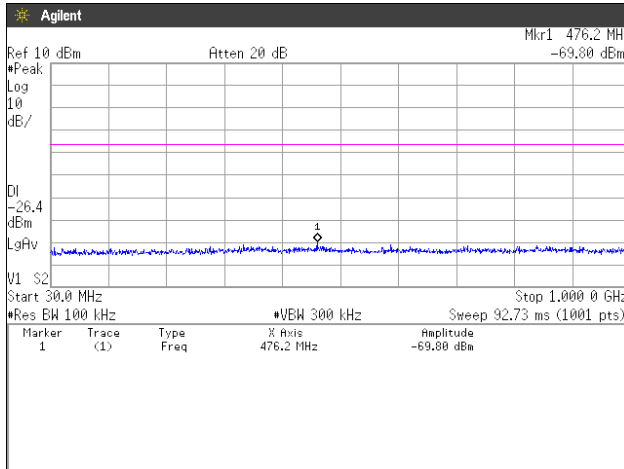


1GHz-5GHz

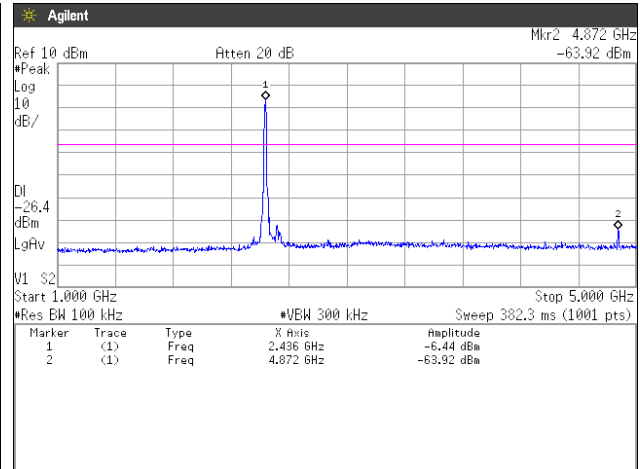


5GHz-10GHz

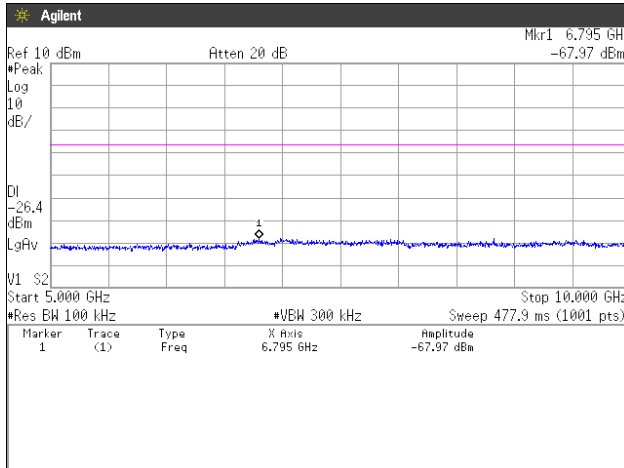


10GHz-15GHz

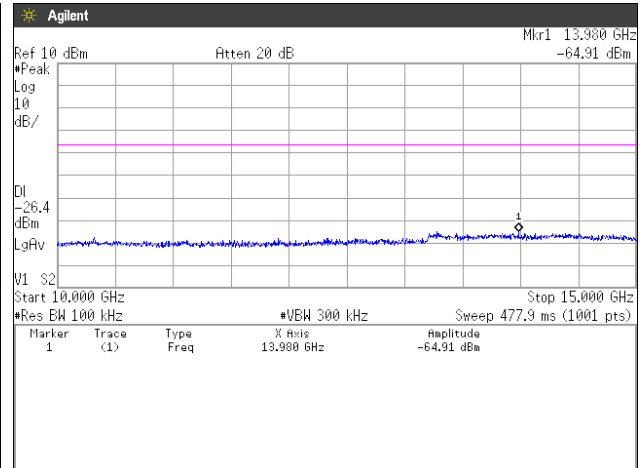


15GHz-20GHz

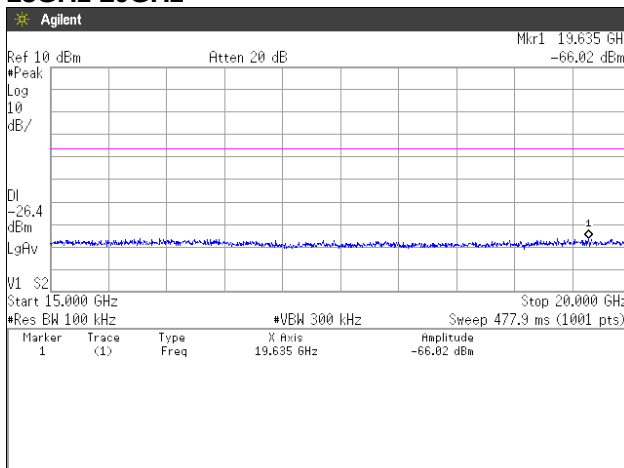


20GHz-25GHz

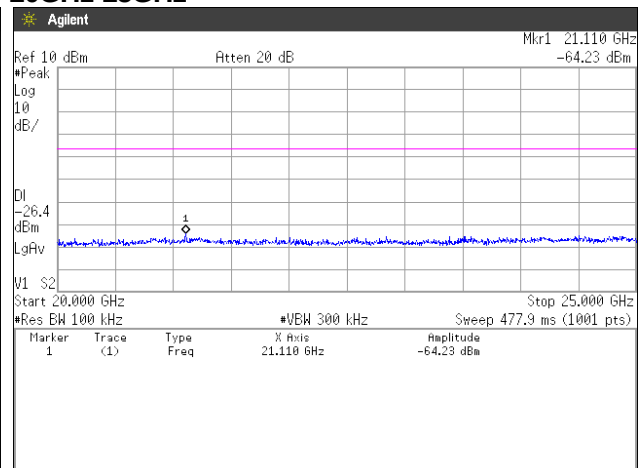


Channel High 30MHz-1GHz

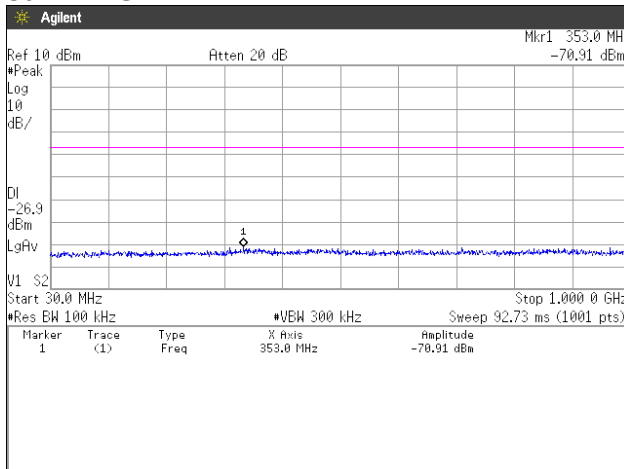


1GHz-5GHz

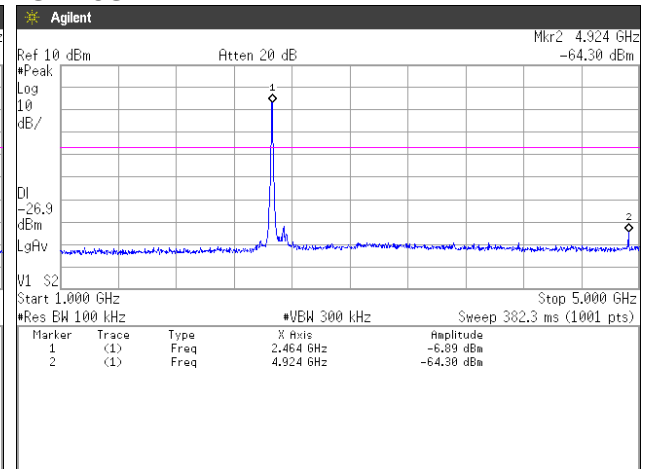


5GHz-10GHz

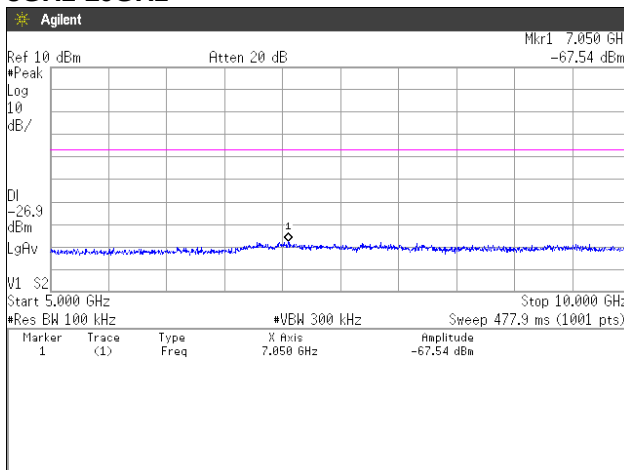


10GHz-15GHz

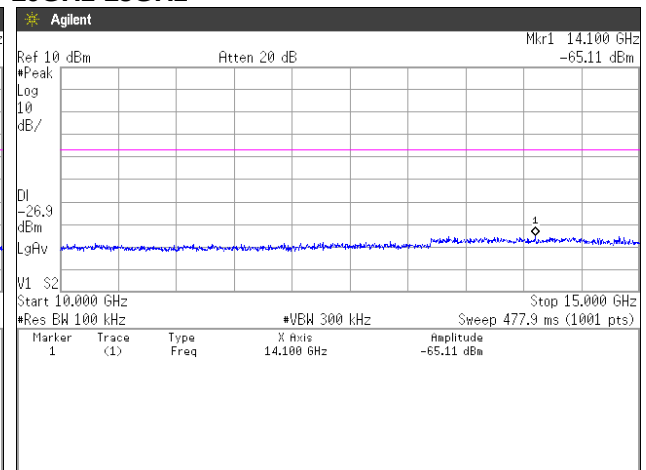


15GHz-20GHz

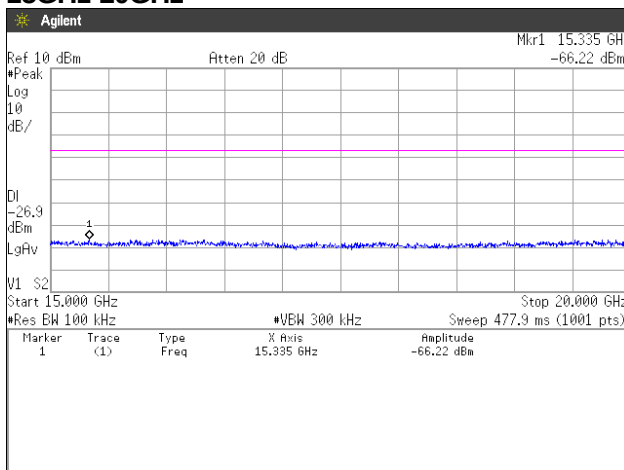


20GHz-25GHz

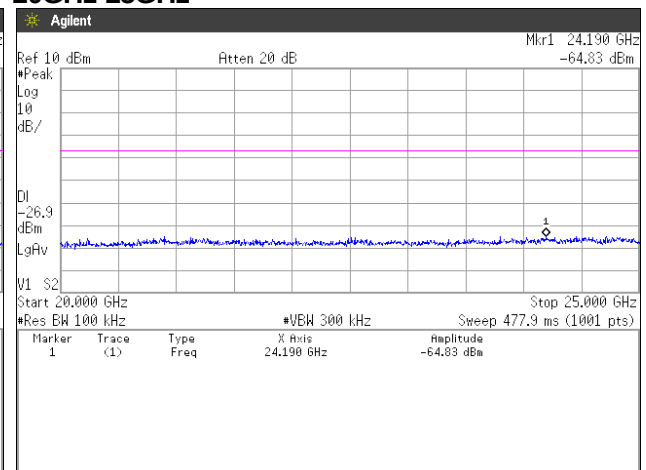


[IEEE802.11g] Channel Low 30MHz-1GHz

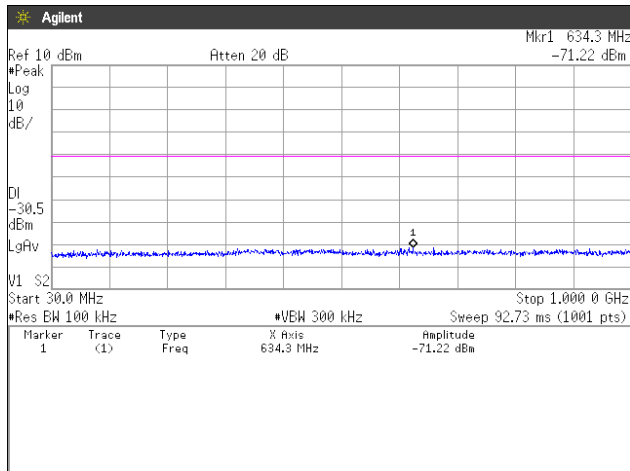


1GHz-5GHz

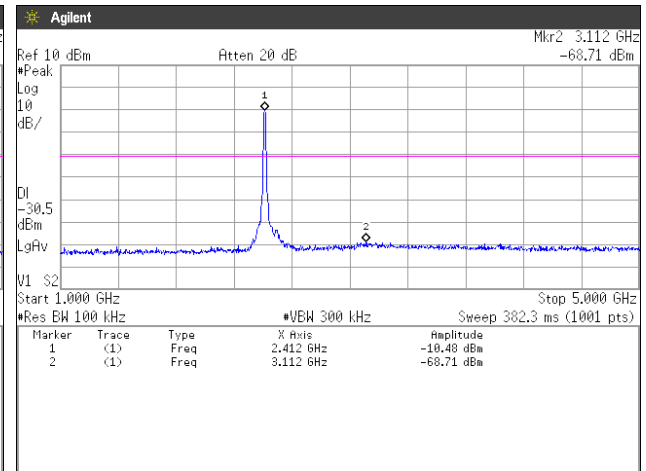


5GHz-10GHz

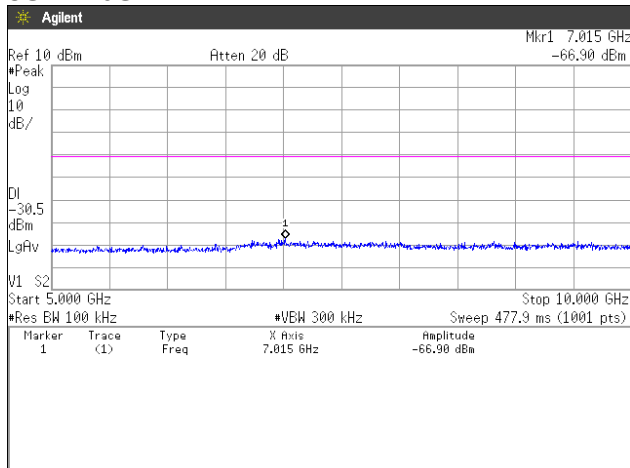


10GHz-15GHz

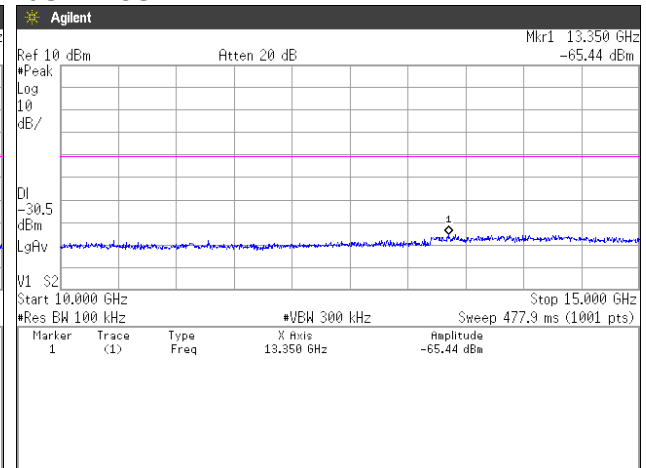


15GHz-20GHz

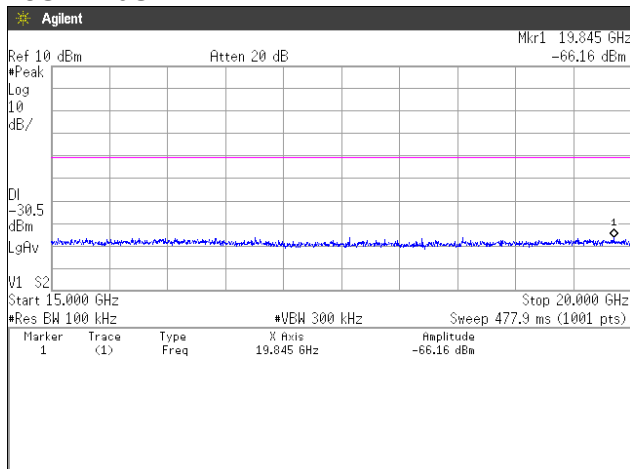


20GHz-25GHz

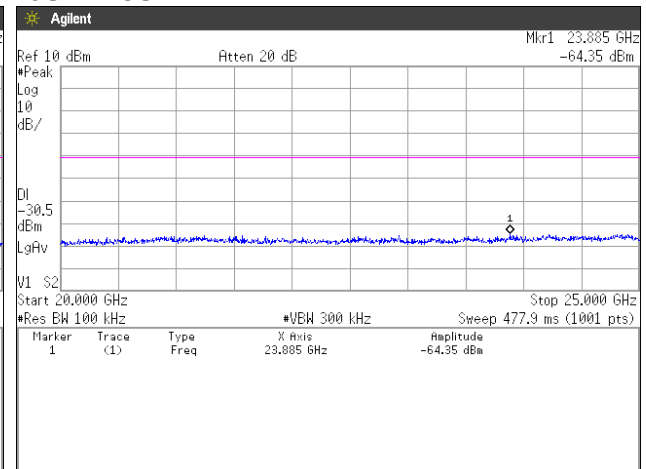


Channel Middle 30MHz-1GHz

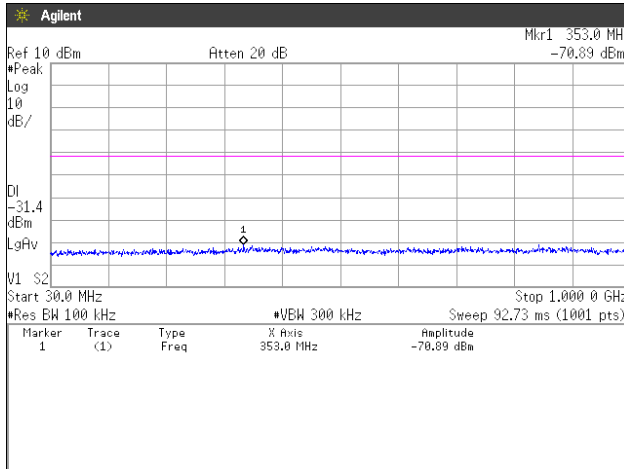


1GHz-5GHz

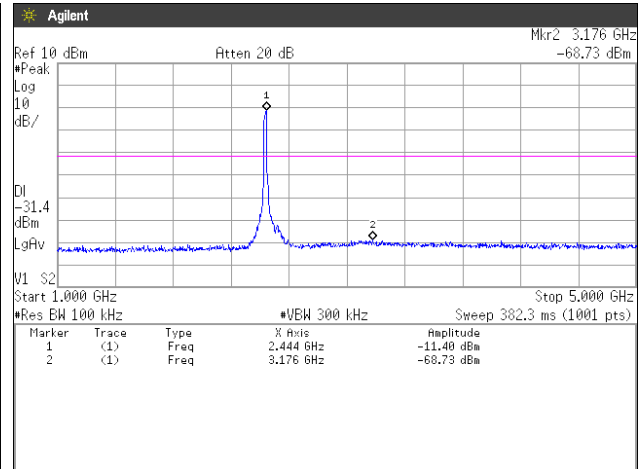


5GHz-10GHz

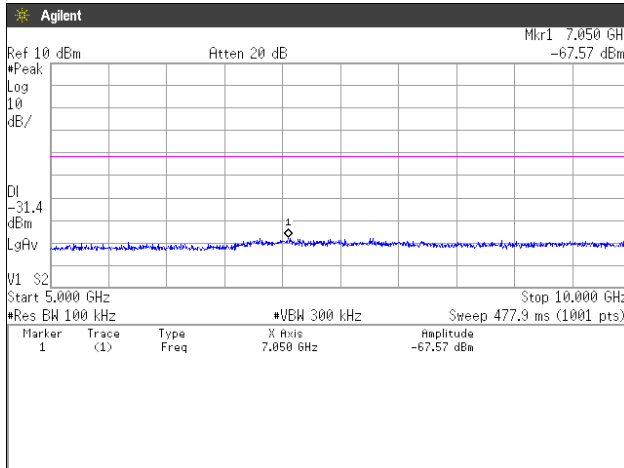


10GHz-15GHz

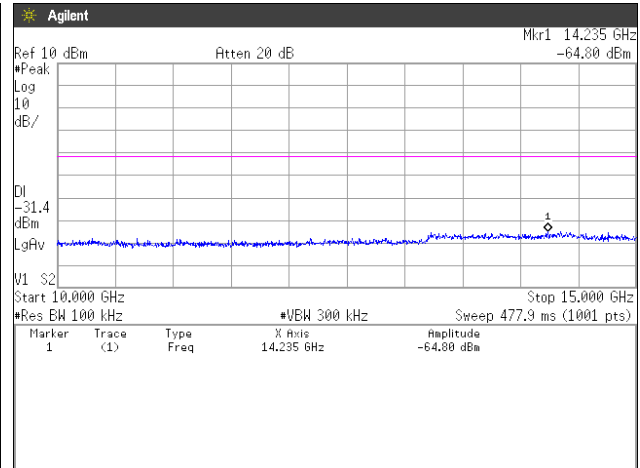


15GHz-20GHz

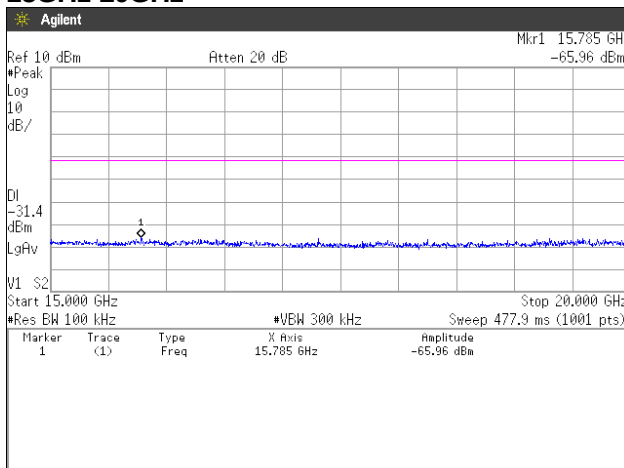


20GHz-25GHz

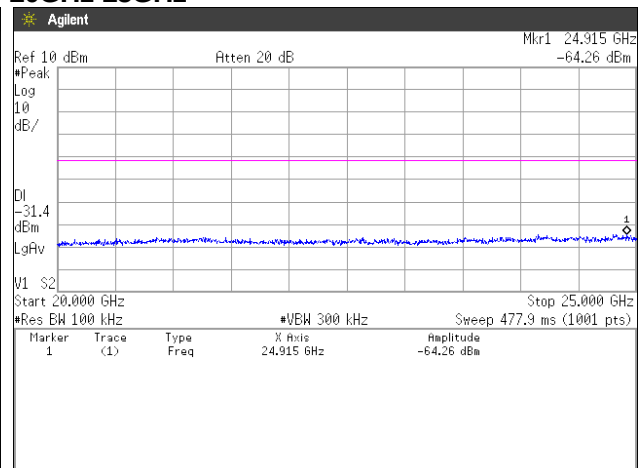


Channel High 30MHz-1GHz

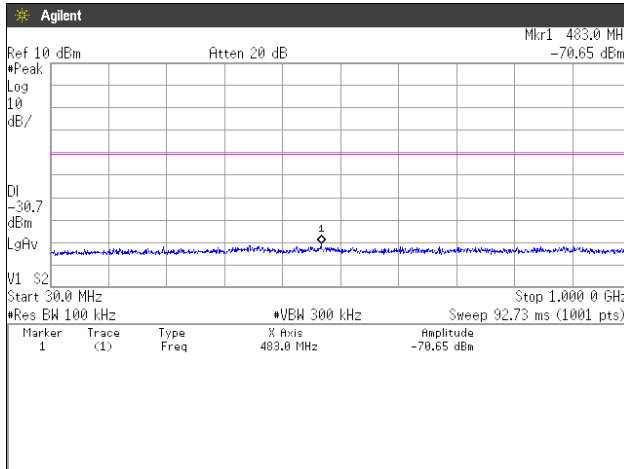


1GHz-5GHz

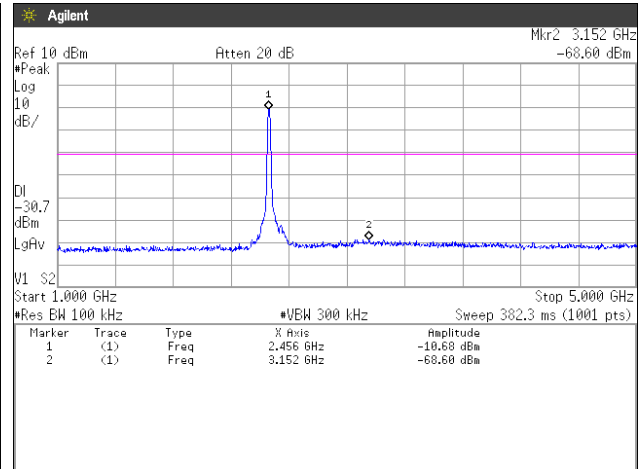


5GHz-10GHz

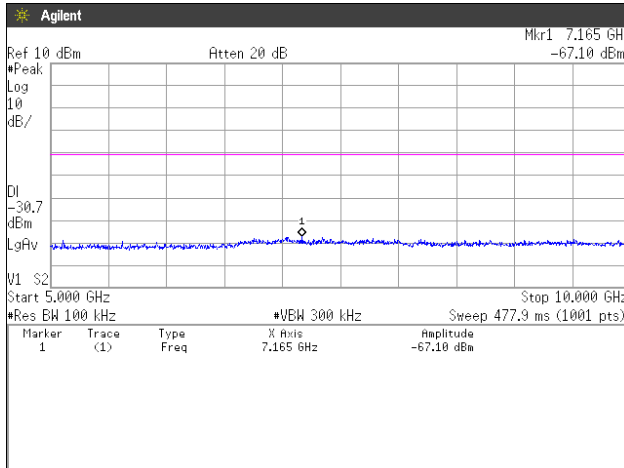


10GHz-15GHz

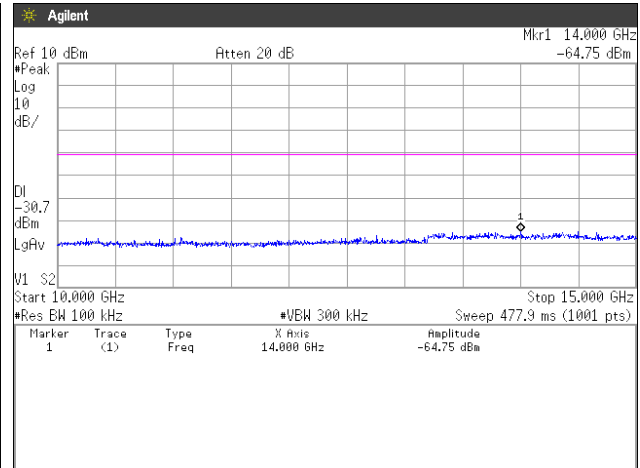

15GHz-20GHz

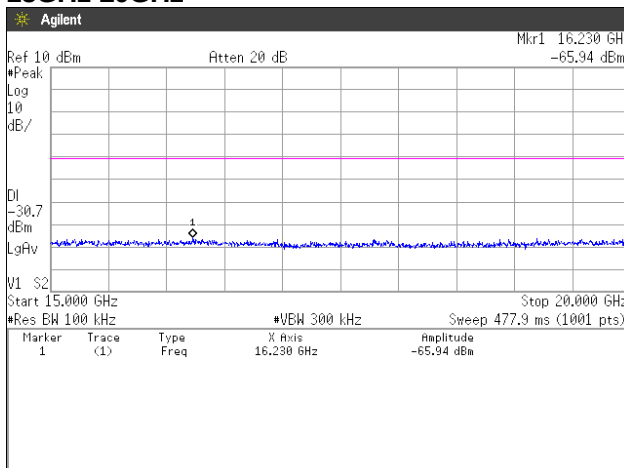


20GHz-25GHz

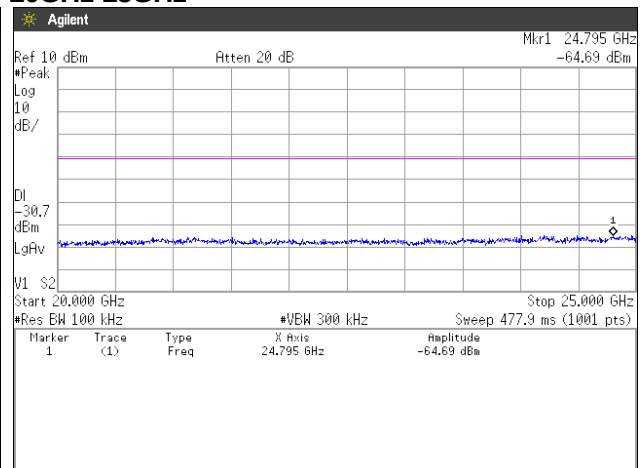


[IEEE802.11n (HT20)]

Channel Low


30MHz-1GHz

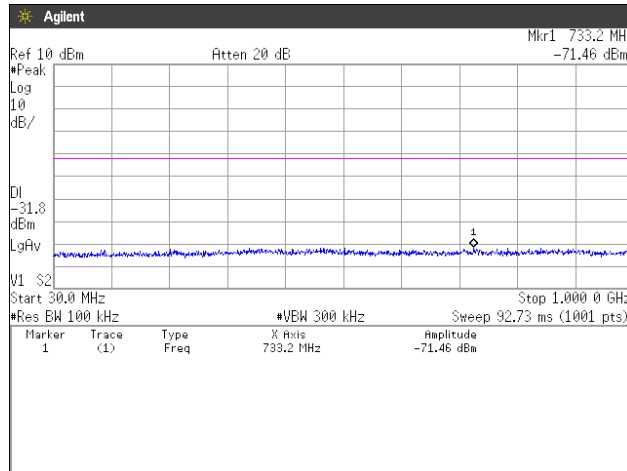


1GHz-5GHz

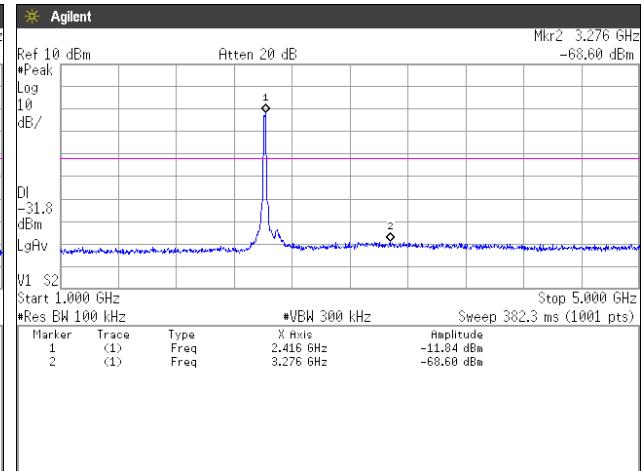


5GHz-10GHz

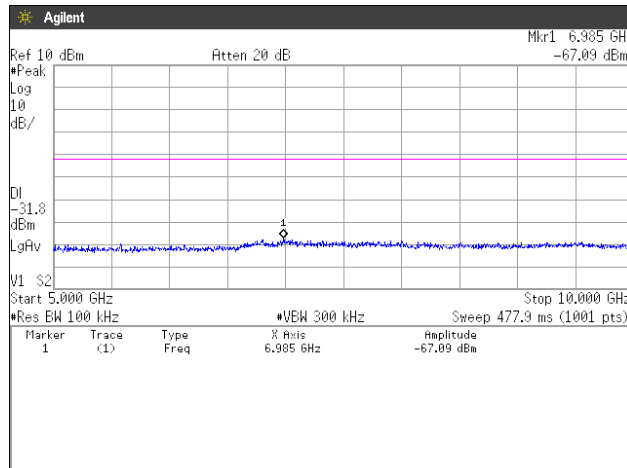


10GHz-15GHz

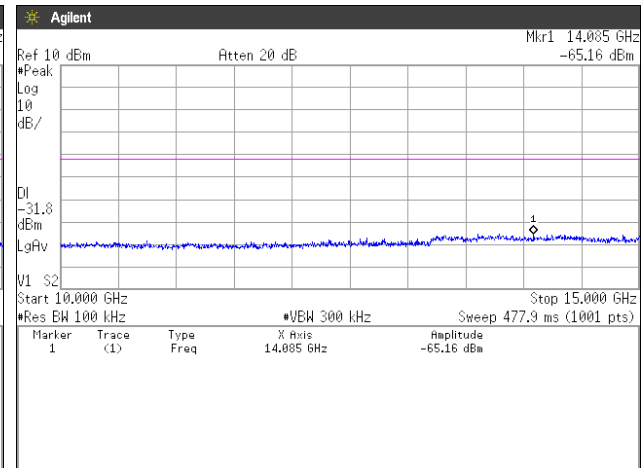


15GHz-20GHz

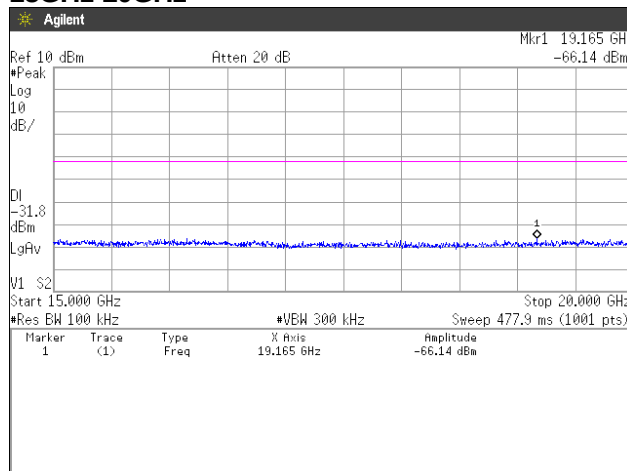


20GHz-25GHz

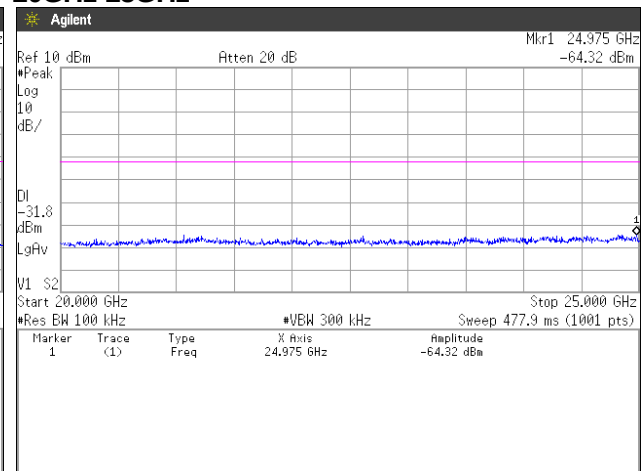


Channel Middle 30MHz-1GHz

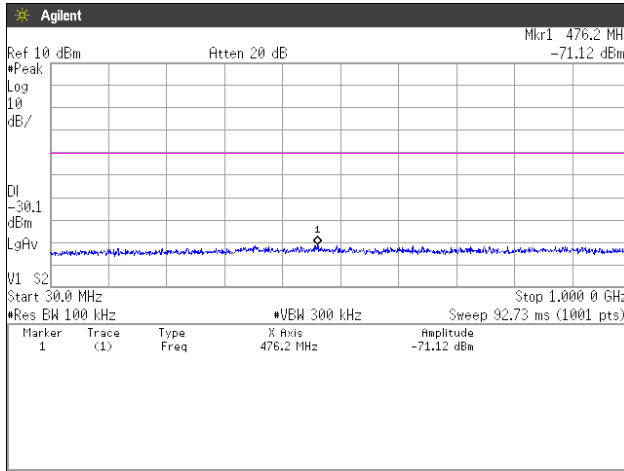


1GHz-5GHz

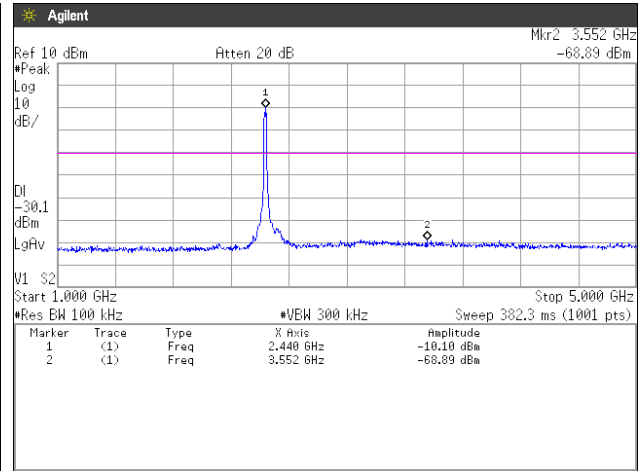


5GHz-10GHz

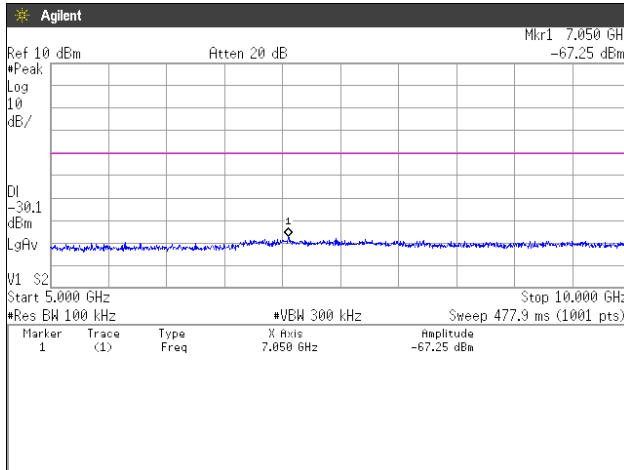


10GHz-15GHz

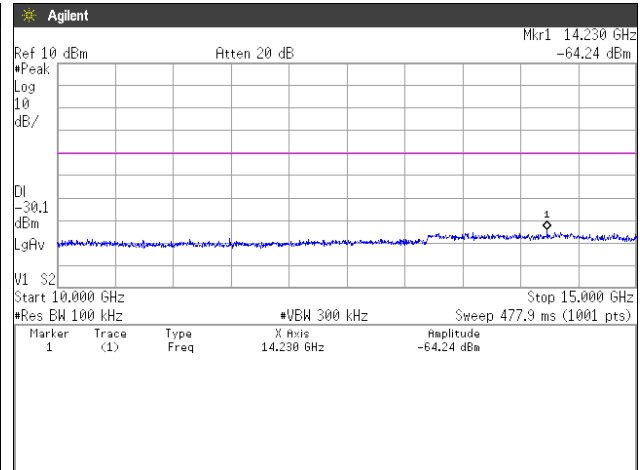


15GHz-20GHz

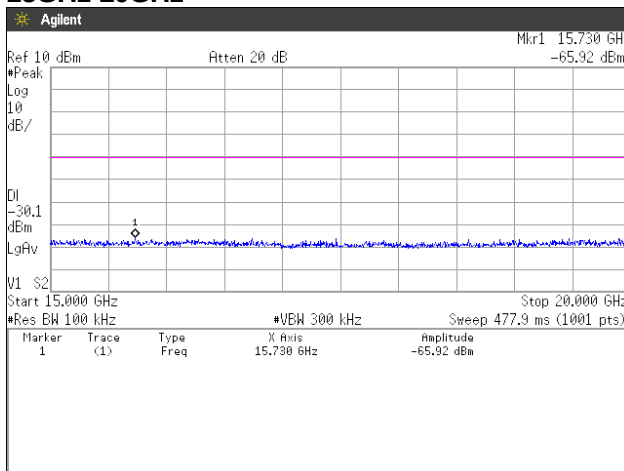


20GHz-25GHz

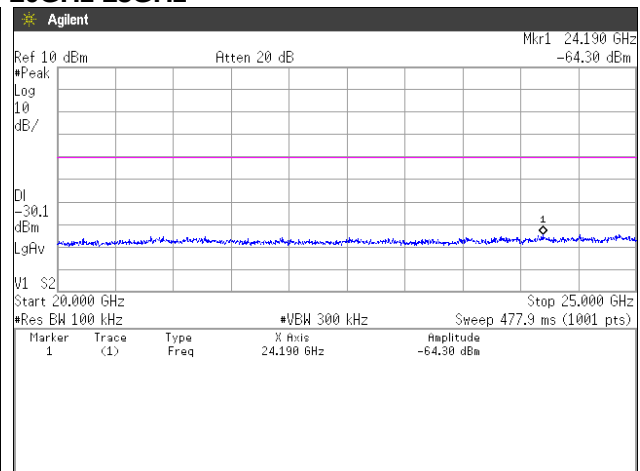


Channel High 30MHz-1GHz

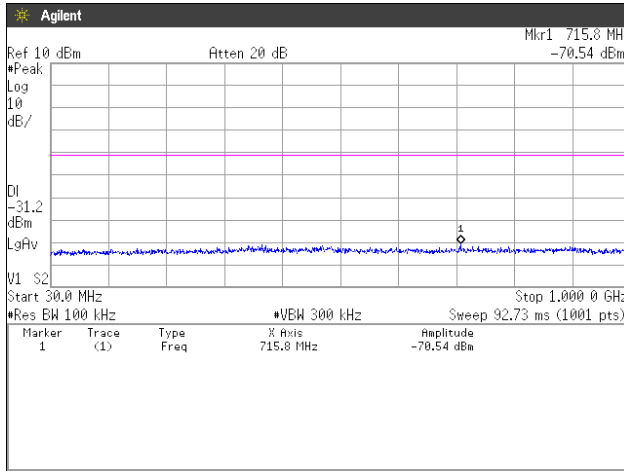


1GHz-5GHz

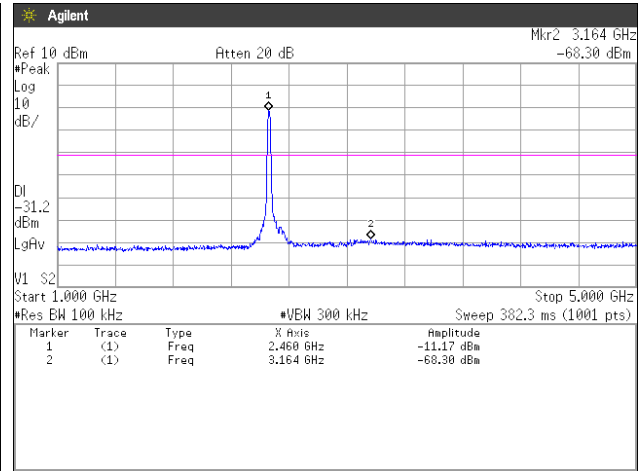


5GHz-10GHz

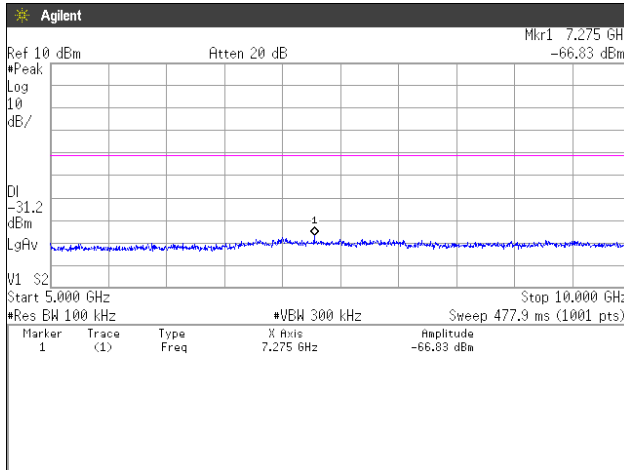


10GHz-15GHz

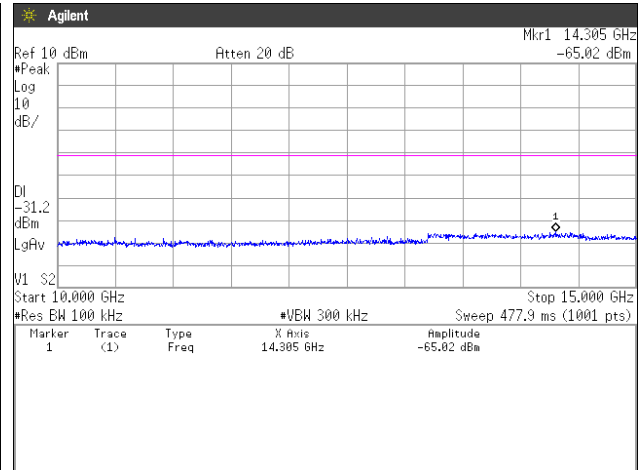

15GHz-20GHz

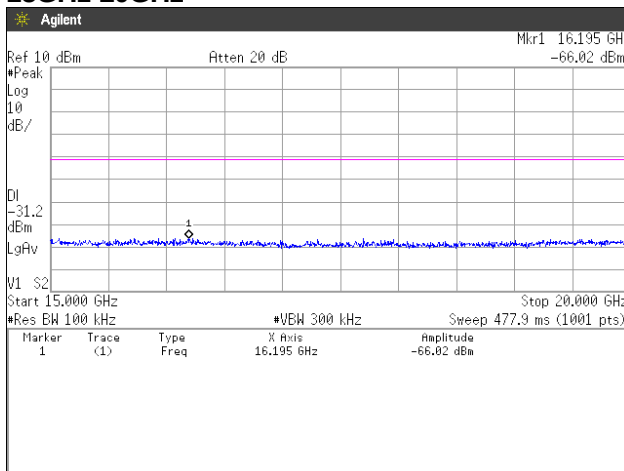

20GHz-25GHz

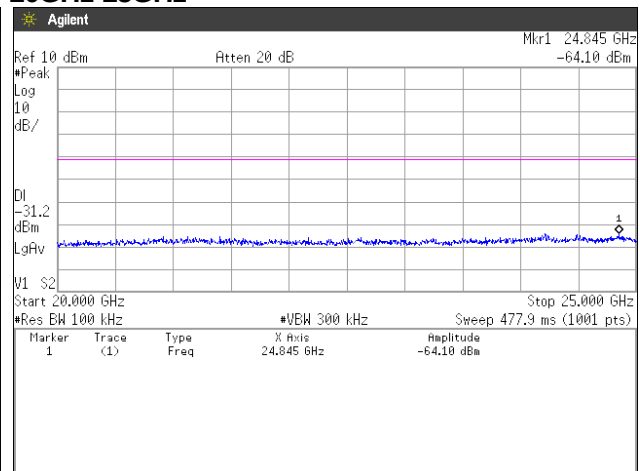

8. Spurious Emissions - Radiated -

8.1 Measurement procedure

[FCC 15.209, RSS-Gen 8.9, KDB 558074 D01 v04, Section 12.1]

Test was applied by following conditions.

Test method	: ANSI C63.10
Frequency range	: 9kHz to 25GHz
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m (below 1GHz) Styrofoam table / (W)0.6m × (D)0.6m × (H)1.5m (above 1GHz)
Antenna distance	: 3m
Test receiver setting	Below 1GHz
- Detector	: Average (9kHz-90kHz, 110kHz-490kHz), Quasi-peak
- Bandwidth	: 200Hz, 120kHz
Spectrum analyzer setting	Above 1GHz
- Peak	: RBW=1MHz, VBW=3MHz, Span=0Hz, Sweep=auto
- Average	: RBW=1MHz, VBW=10Hz (11b), 1kHz (11g, 11n HT20), Span=0Hz, Sweep=auto, Display mode=Linear

Average Measurement Setting [VBW]

Mode	Duty Cycle (%)	T _{on} (us)	T _{off} (us)	1/T _{on} (kHz)	Determined VBW Setting
IEEE802.11b	99.53	8410	40	0.119	10Hz
IEEE802.11g	97.21	1390	40	0.719	1kHz
IEEE802.11n(HT20)	97.03	1308	40	0.765	1kHz


Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Loop antenna, Biconical antenna, Log periodic antenna and Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission. As for the Loop antenna, it is positioned with its plane vertical, and the center of the Loop antenna is 1m above the ground plane.

The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

- Test configuration

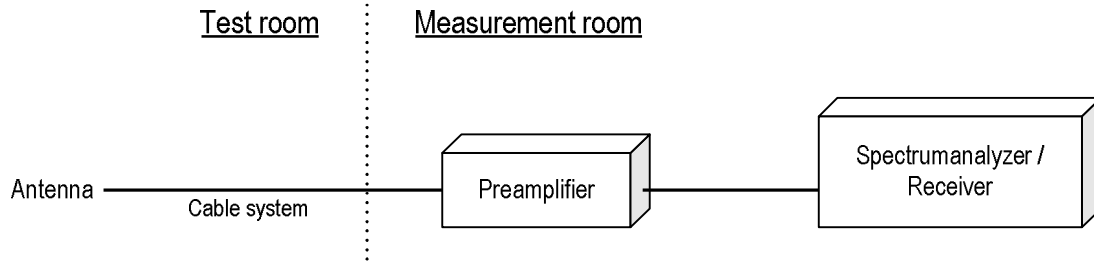

8.2 Calculation method

[9kHz to 150kHz]

Emission level = Reading + (Ant factor + Cable system loss)

Margin = Limit – Emission level

[150kHz to 25GHz]

Emission level = Reading + (Ant factor + Cable system loss - Amp. Gain)

Margin = Limit – Emission level

Example:

Limit @ 4824.0MHz : 74.0dBuV/m (Peak Limit)

S.A Reading = 49.5dBuV Cable system loss = 8.4dB

Result = 49.5 + 8.4 = 45.1dBuV/m

Margin = 74.0 - 45.1 = 16.1dB

8.3 Limit

Frequency [MHz]	Field strength		Distance [m]
	[uV/m]	[dBuV/m]	
0.009-0.490	2400 / F [kHz]	20logE [uV/m]	300
0.490-1.705	24000 / F [kHz]	20logE [uV/m]	30
1.705-30	30	29.5	30
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level [dBuV/m] = 20log Emission [uV/m]
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition modulation.

8.4 Test data

Date : January 25, 2018
Temperature : 20.2 [°C]
Humidity : 20.1 [%]
Test place : 3m Semi-anechoic chamber

Test engineer : Tadahiro Seino

Date : January 26, 2018
Temperature : 20.3 [°C]
Humidity : 20.2 [%]
Test place : 3m Semi-anechoic chamber

Test engineer : Tadahiro Seino

Date : January 29, 2018
Temperature : 20.3 [°C]
Humidity : 20.2 [%]
Test place : 3m Semi-anechoic chamber

Test engineer : Tadahiro Seino


Date : January 31, 2018
Temperature : 20.1 [°C]
Humidity : 20.2 [%]
Test place : 3m Semi-anechoic chamber

Test engineer : Tadahiro Seino

8.4.1 Transmission mode

[11b] Channel Low BELOW 1GHz

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

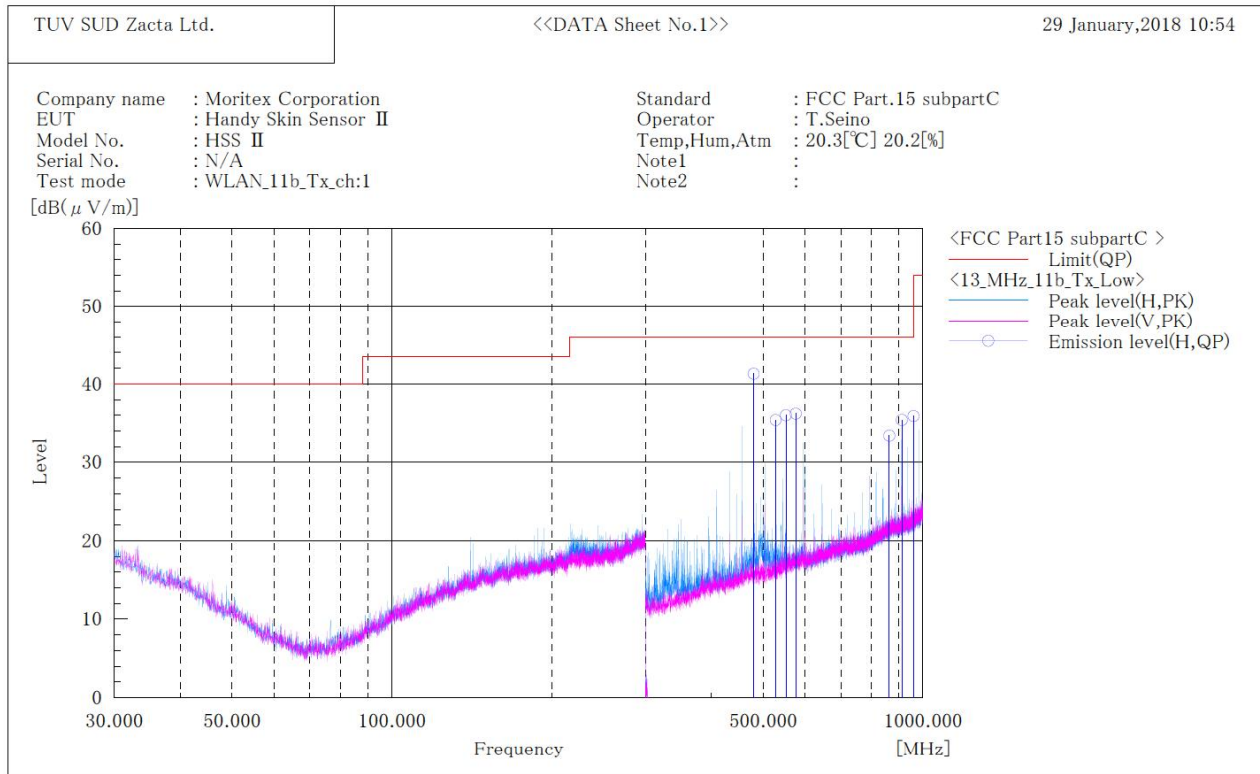

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μ V)]	c. f [dB(1/m)]	Result QP [dB(μ V/m)]	Limit QP [dB(μ V/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	480.010	H	50.5	-9.2	41.3	46.0	4.7	195.0	0.0
2	528.011	H	44.0	-8.6	35.4	46.0	10.6	196.0	322.0
3	552.005	H	44.1	-8.1	36.0	46.0	10.0	184.0	340.0
4	576.012	H	43.8	-7.6	36.2	46.0	9.8	165.0	322.0
5	864.010	H	36.5	-3.1	33.4	46.0	12.6	108.0	0.0
6	912.008	H	37.8	-2.4	35.4	46.0	10.6	100.0	0.0
7	960.000	H	37.6	-1.7	35.9	46.0	10.1	100.0	13.0

Note:


- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



Zacta

**[11b]
Channel Low
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

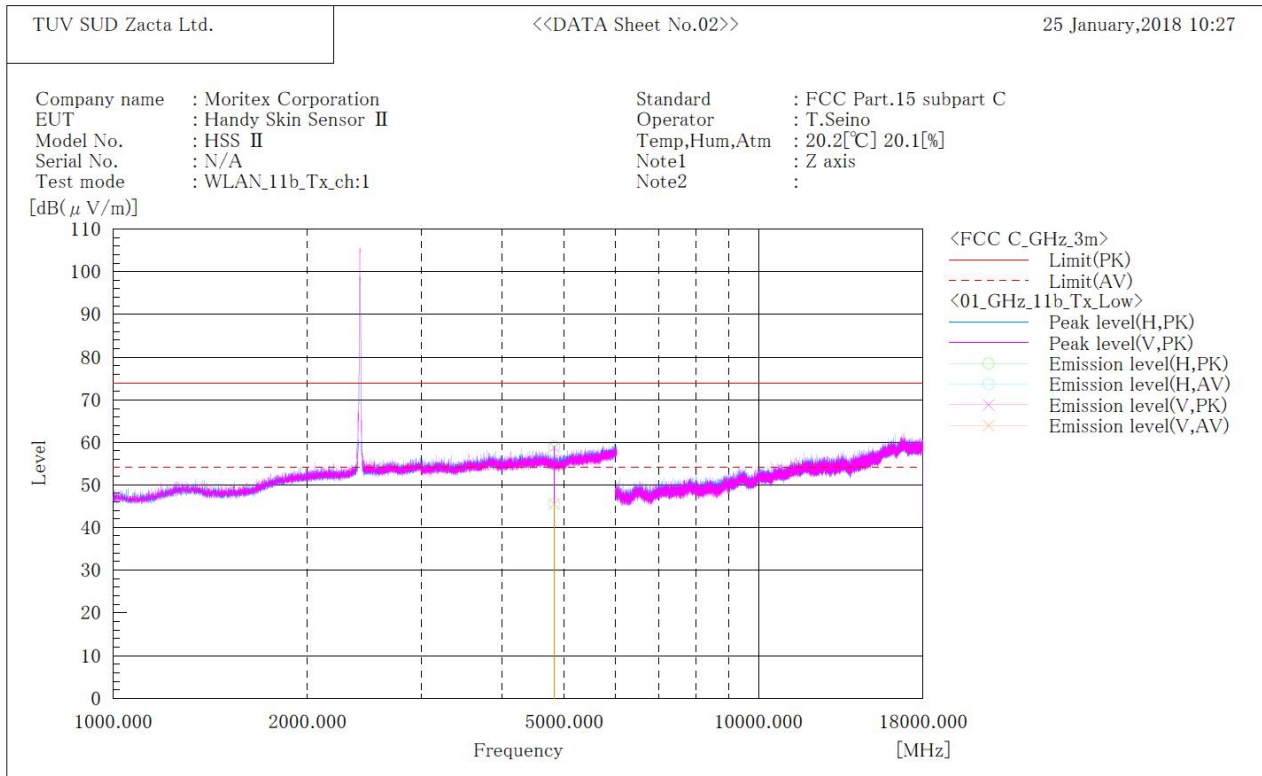

Final Result


No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4824.000	H	49.9	36.3	9.3	59.2	45.6	74.0	54.0	14.8	8.4	172.0	108.0
2	4824.000	V	49.6	36.2	9.3	58.9	45.5	74.0	54.0	15.1	8.5	172.0	205.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11b]
Channel Middle
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

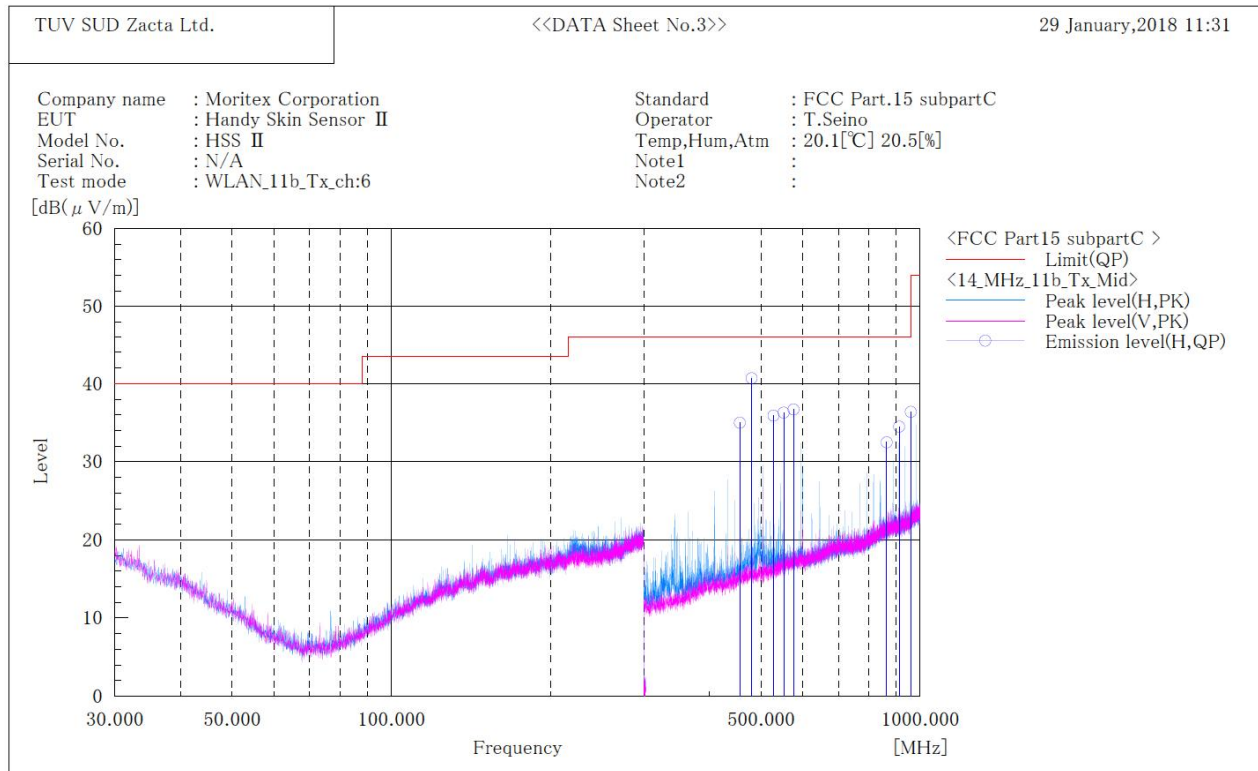

Final Result


No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	456.004	H	44.8	-9.8	35.0	46.0	11.0	220.0	0.0
2	480.003	H	49.9	-9.2	40.7	46.0	5.3	200.0	0.0
3	528.010	H	44.5	-8.6	35.9	46.0	10.1	190.0	325.0
4	552.003	H	44.4	-8.1	36.3	46.0	9.7	100.0	330.0
5	576.009	H	44.3	-7.6	36.7	46.0	9.3	166.0	335.0
6	864.012	H	35.6	-3.1	32.5	46.0	13.5	106.0	21.0
7	912.012	H	36.9	-2.4	34.5	46.0	11.5	100.0	7.0
8	960.015	H	38.1	-1.7	36.4	54.0	17.6	100.0	10.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11b]
Channel Middle
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

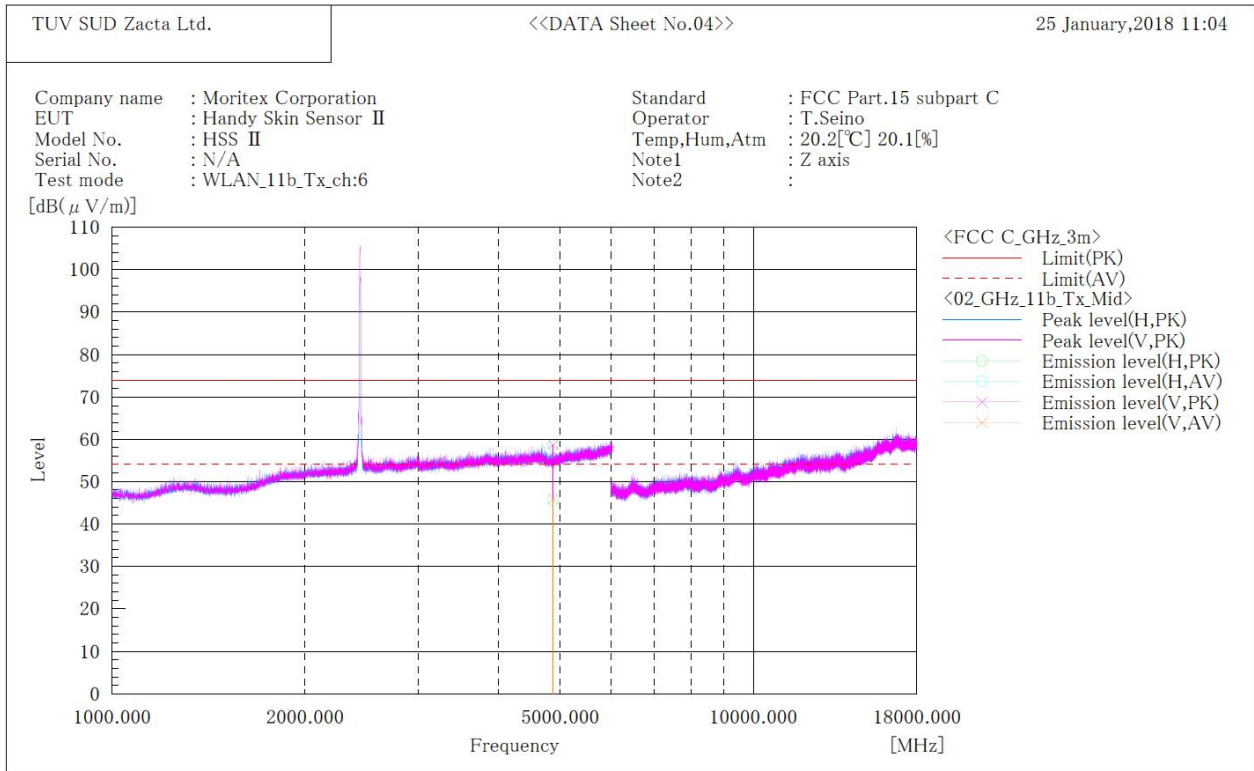

Final Result


No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c. f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4874.000	V	49.4	36.4	9.4	58.8	45.8	74.0	54.0	15.2	8.2	169.0	203.0
2	4874.000	H	49.2	36.2	9.4	58.6	45.6	74.0	54.0	15.4	8.4	180.0	271.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11b]
Channel High
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

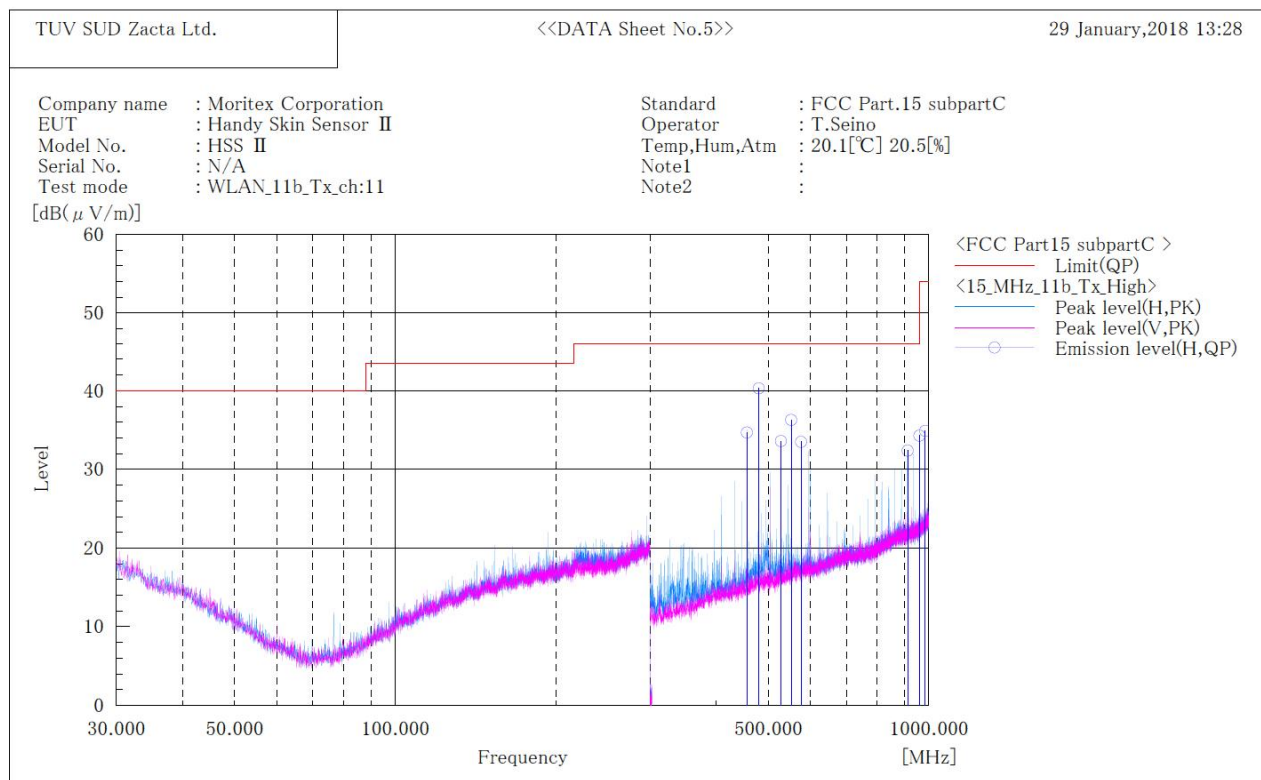

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	456.006	H	44.5	-9.8	34.7	46.0	11.3	228.0	0.0
2	480.004	H	49.5	-9.2	40.3	46.0	5.7	200.0	0.0
3	528.005	H	42.2	-8.6	33.6	46.0	12.4	184.0	324.0
4	552.005	H	44.4	-8.1	36.3	46.0	9.7	177.0	336.0
5	576.005	H	41.1	-7.6	33.5	46.0	12.5	163.0	334.0
6	912.012	H	34.8	-2.4	32.4	46.0	13.6	100.0	13.0
7	960.000	H	36.0	-1.7	34.3	46.0	11.7	100.0	7.0
8	984.005	H	36.1	-1.2	34.9	54.0	19.1	100.0	6.0

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



Zacta

**[11b]
Channel High
ABOVE 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

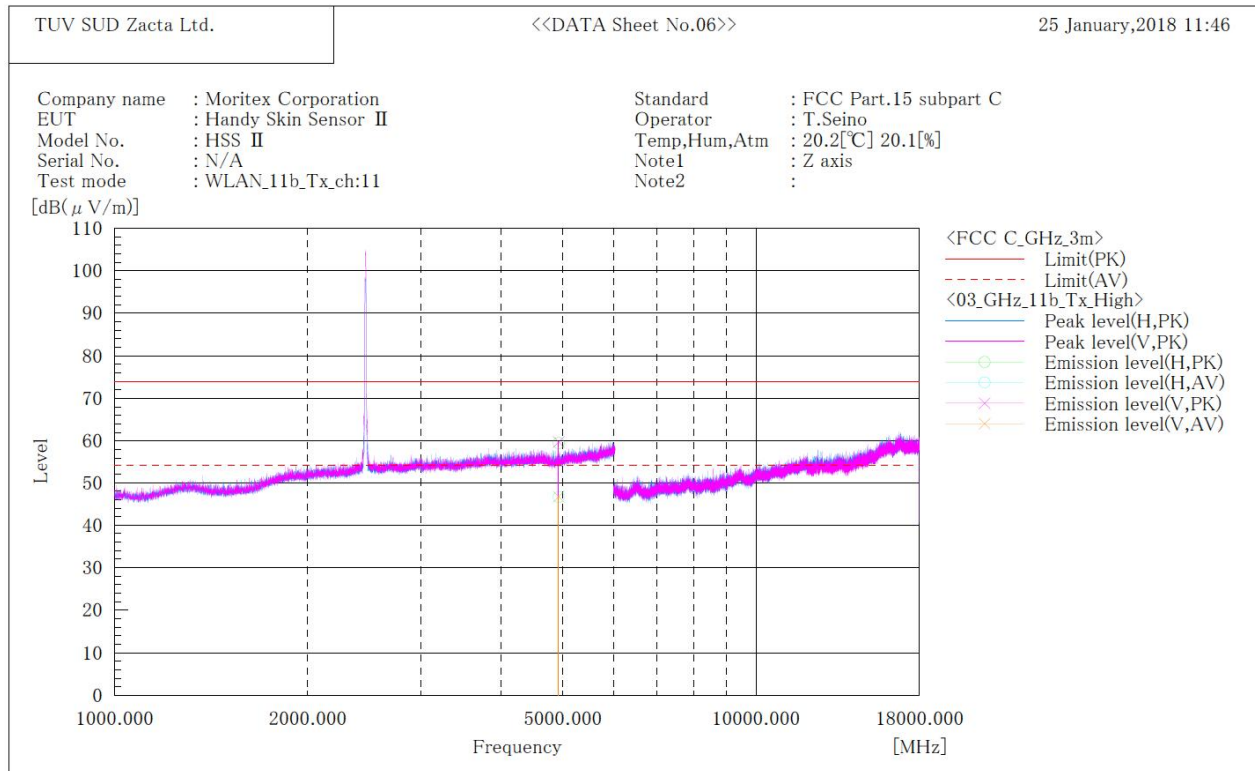

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4924.000	V	50.2	37.1	9.6	59.8	46.7	74.0	54.0	14.2	7.3	179.0	211.0
2	4924.000	H	49.9	37.0	9.6	59.5	46.6	74.0	54.0	14.5	7.4	207.0	258.0

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.



Zacta

**[11g]
Channel Low
BELOW 1GHz**

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

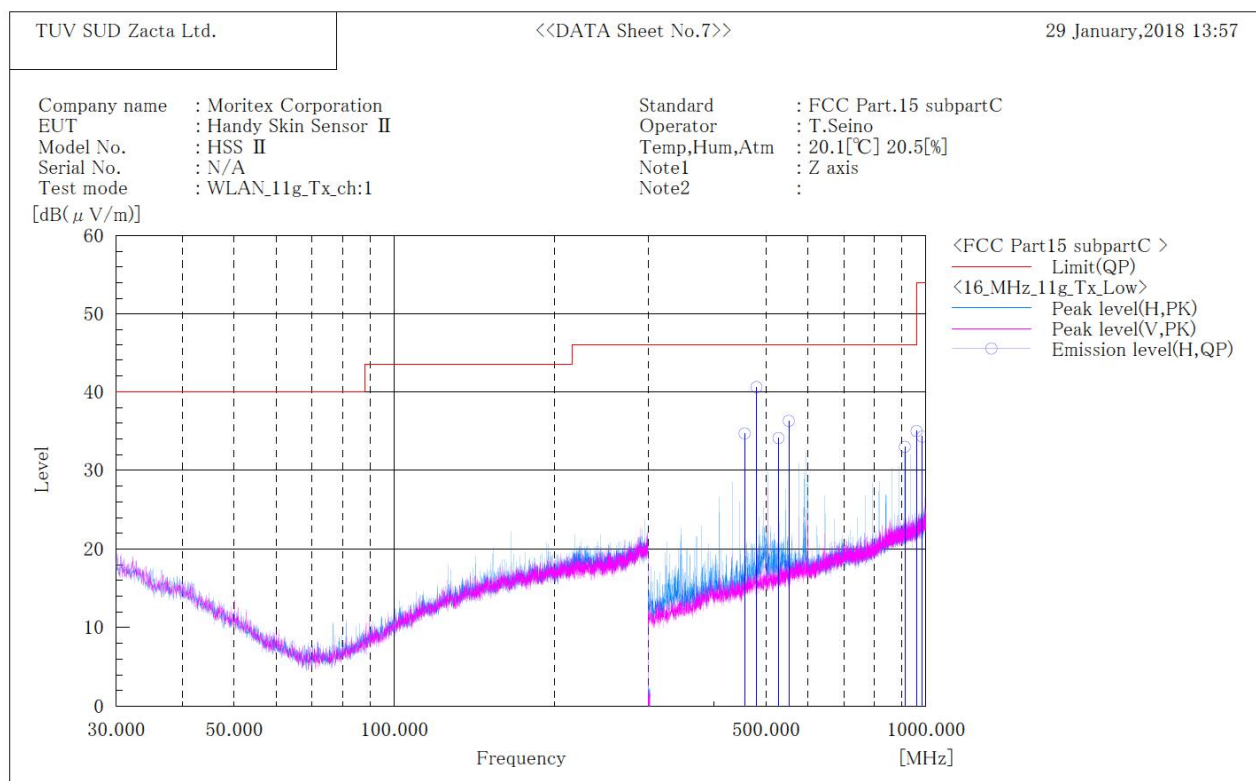

Final Result


No.	Frequency [MHz]	(P)	Reading QP [dB(μ V)]	c. f [dB(1/m)]	Result QP [dB(μ V/m)]	Limit QP [dB(μ V/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	456.006	H	44.5	-9.8	34.7	46.0	11.3	227.0	0.0
2	480.004	H	49.8	-9.2	40.6	46.0	5.4	208.0	0.0
3	528.006	H	42.7	-8.6	34.1	46.0	11.9	187.0	328.0
4	552.005	H	44.4	-8.1	36.3	46.0	9.7	179.0	331.0
5	912.006	H	35.4	-2.4	33.0	46.0	13.0	100.0	8.0
6	960.000	H	36.7	-1.7	35.0	46.0	11.0	100.0	7.0
7	984.011	H	35.5	-1.2	34.3	54.0	19.7	100.0	12.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11g]
Channel Low
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

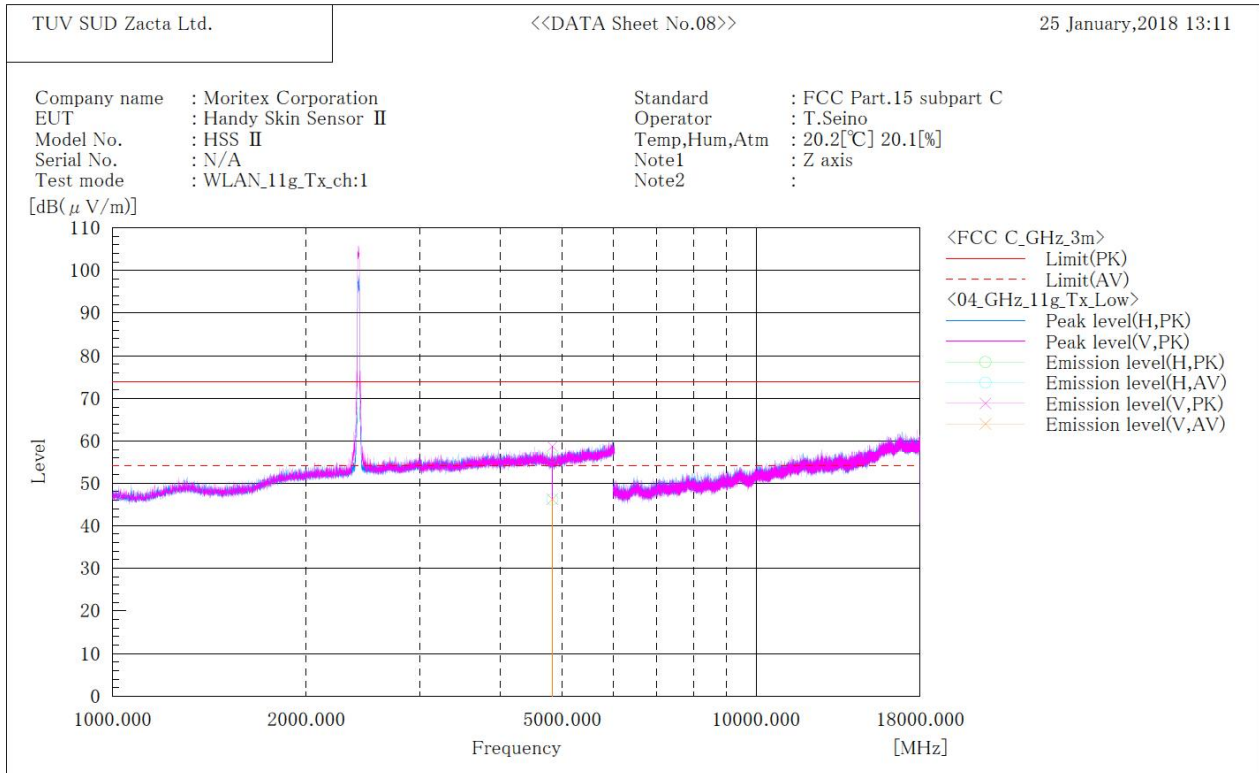

Final Result


No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4824.000	V	49.5	36.9	9.3	58.8	46.2	74.0	54.0	15.2	7.8	193.0	175.0
2	4824.000	H	46.9	36.8	9.3	56.2	46.1	74.0	54.0	17.8	7.9	157.0	247.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11g]
Channel Middle
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

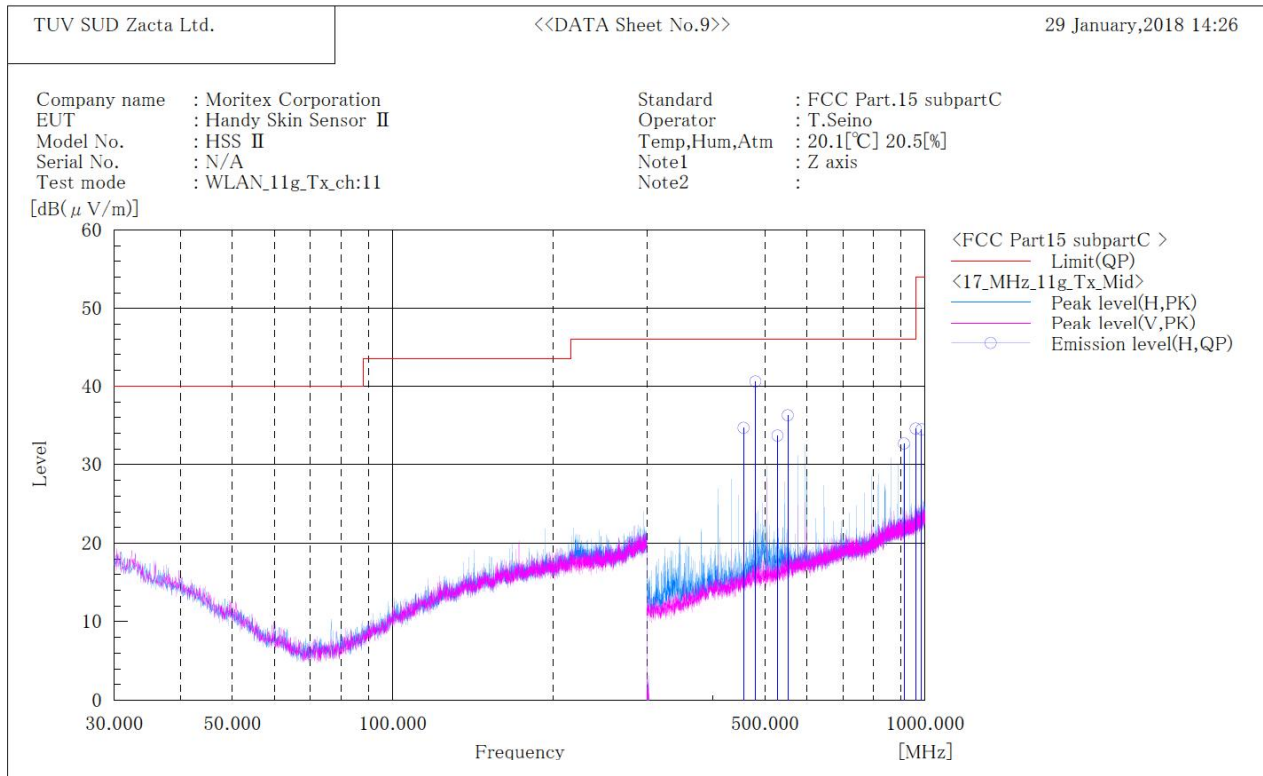

Final Result


No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	456.005	H	44.5	-9.8	34.7	46.0	11.3	225.0	0.0
2	480.006	H	49.8	-9.2	40.6	46.0	5.4	201.0	0.0
3	528.006	H	42.3	-8.6	33.7	46.0	12.3	186.0	322.0
4	552.005	H	44.4	-8.1	36.3	46.0	9.7	178.0	334.0
5	912.010	H	35.1	-2.4	32.7	46.0	13.3	100.0	7.0
6	960.000	H	36.3	-1.7	34.6	46.0	11.4	100.0	6.0
7	984.008	H	35.7	-1.2	34.5	54.0	19.5	100.0	12.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11g]
Channel Middle
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

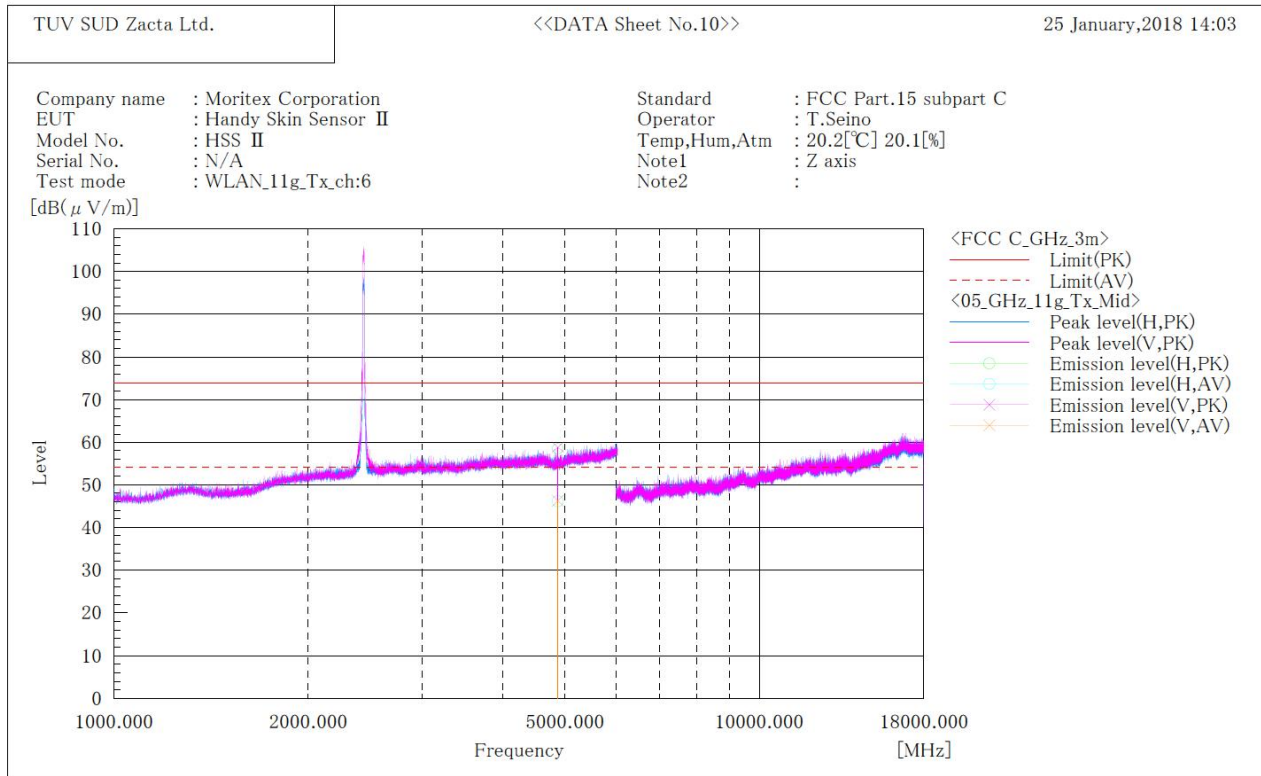

Final Result


No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4874.000	H	49.1	36.7	9.4	58.5	46.1	74.0	54.0	15.5	7.9	175.0	251.0
2	4874.000	V	49.5	36.8	9.4	58.9	46.2	74.0	54.0	15.1	7.8	156.0	131.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11g]
Channel High
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

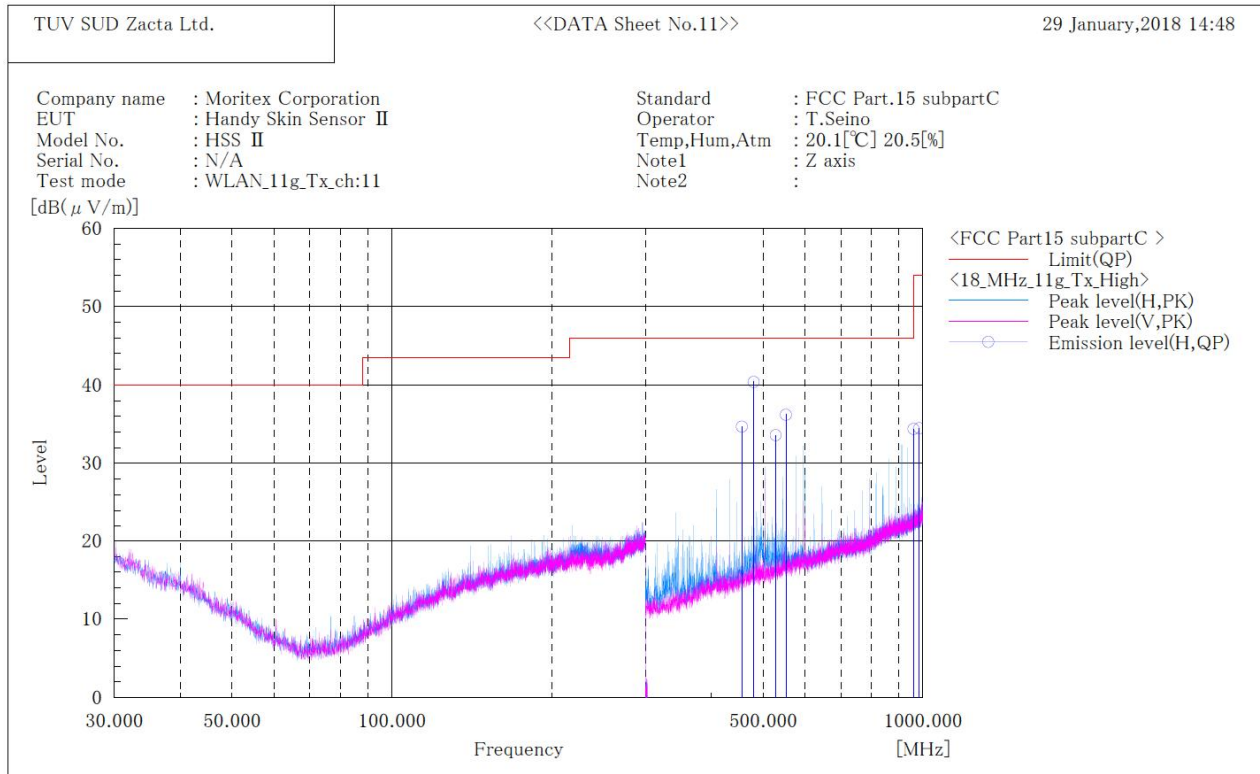

Final Result


No.	Frequency [MHz]	(P)	Reading QP [dB(μ V)]	c. f [dB(1/m)]	Result QP [dB(μ V/m)]	Limit QP [dB(μ V/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	456.006	H	44.5	-9.8	34.7	46.0	11.3	222.0	0.0
2	480.007	H	49.6	-9.2	40.4	46.0	5.6	211.0	0.0
3	528.000	H	42.2	-8.6	33.6	46.0	12.4	184.0	330.0
4	552.006	H	44.3	-8.1	36.2	46.0	9.8	179.0	330.0
5	960.000	H	36.1	-1.7	34.4	46.0	11.6	100.0	11.0
6	984.009	H	35.7	-1.2	34.5	54.0	19.5	100.0	12.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11g]
Channel High
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

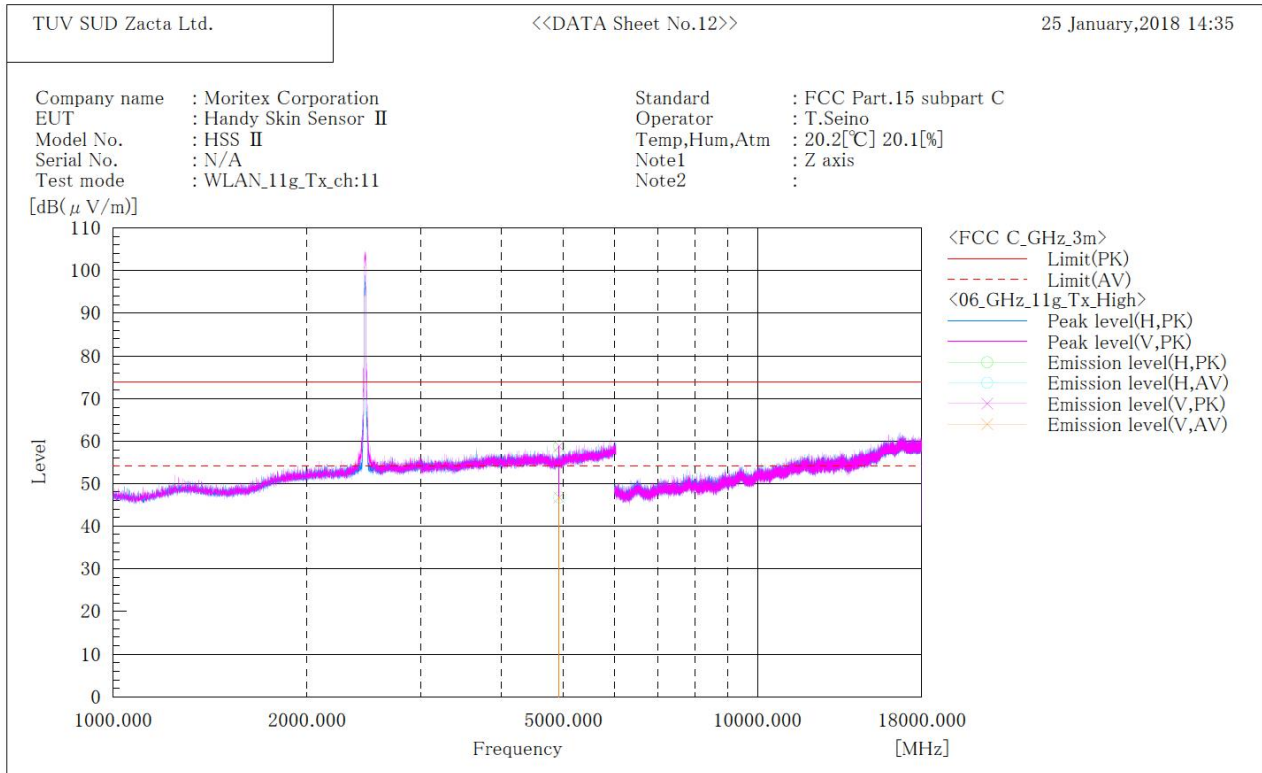

Final Result


No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4924.000	H	49.3	37.1	9.6	58.9	46.7	74.0	54.0	15.1	7.3	168.0	177.0
2	4924.000	V	49.3	37.1	9.6	58.9	46.7	74.0	54.0	15.1	7.3	188.0	259.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11n(HT20)]
Channel Low
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

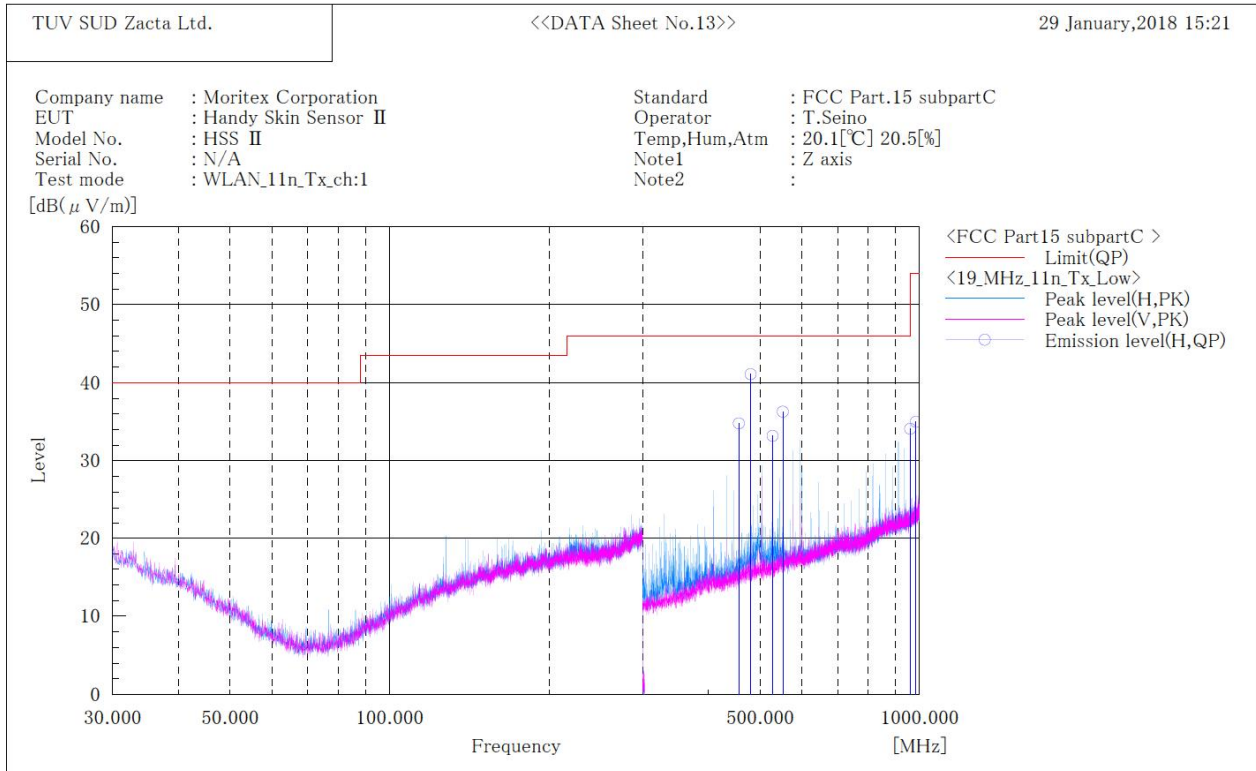

Final Result


No.	Frequency [MHz]	(P)	Reading QP [dB(μ V)]	c. f [dB(1/m)]	Result QP [dB(μ V/m)]	Limit QP [dB(μ V/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	456.006	H	44.6	-9.8	34.8	46.0	11.2	216.0	0.0
2	480.005	H	50.3	-9.2	41.1	46.0	4.9	202.0	0.0
3	528.005	H	41.8	-8.6	33.2	46.0	12.8	186.0	326.0
4	552.010	H	44.4	-8.1	36.3	46.0	9.7	170.0	337.0
5	960.000	H	35.8	-1.7	34.1	46.0	11.9	100.0	12.0
6	984.013	H	36.2	-1.2	35.0	54.0	19.0	100.0	10.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11n(HT20)]
Channel Low
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

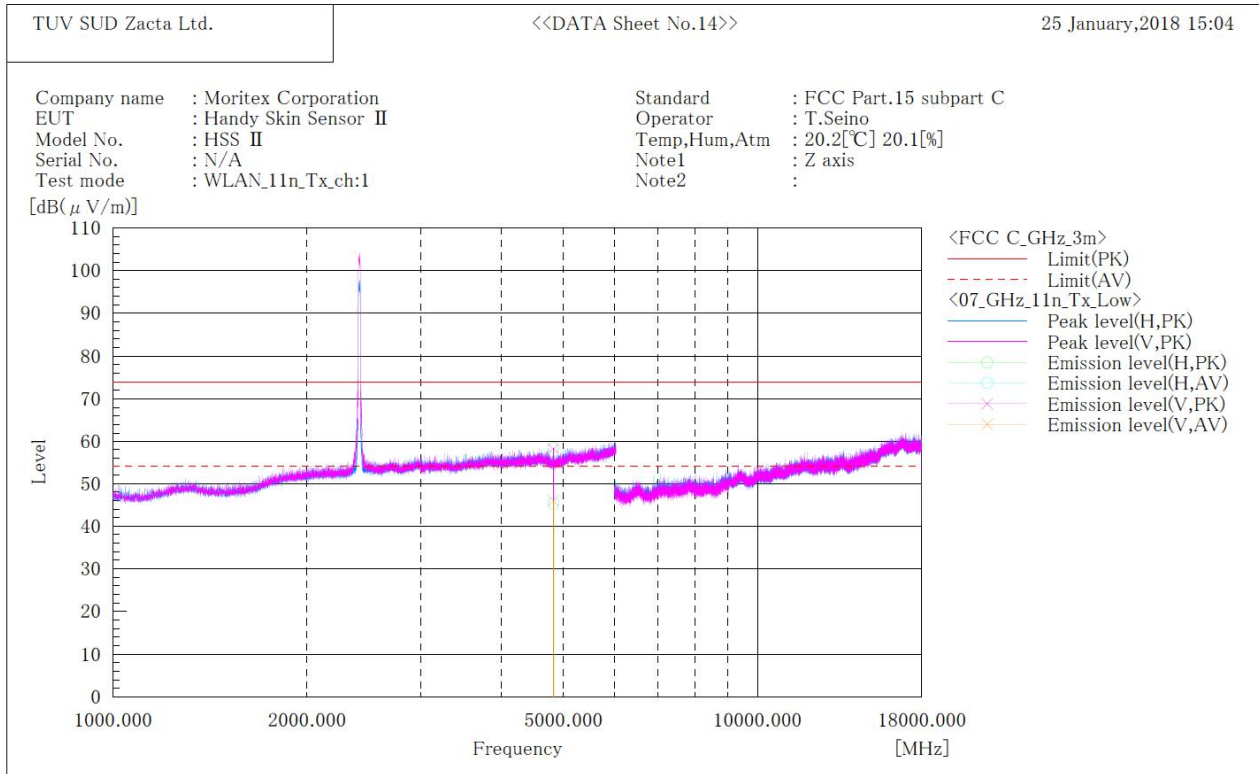

Final Result


No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4824.000	H	49.2	36.0	9.3	58.5	45.3	74.0	54.0	15.5	8.7	162.0	232.0
2	4824.000	V	49.0	36.7	9.3	58.3	46.0	74.0	54.0	15.7	8.0	182.0	179.0

Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

[11n(HT20)]
Channel Middle
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

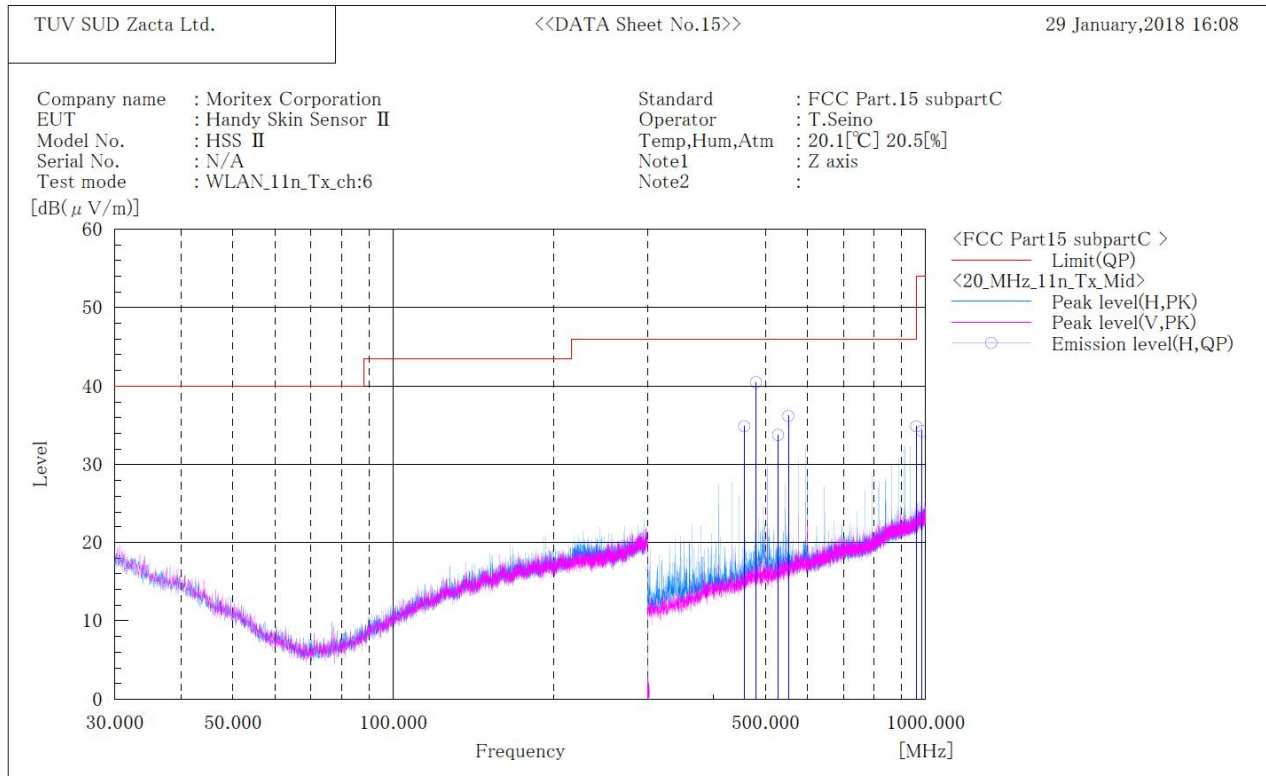

Final Result


No.	Frequency [MHz]	(P)	Reading QP [dB(μ V)]	c. f [dB(1/m)]	Result QP [dB(μ V/m)]	Limit QP [dB(μ V/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	456.007	H	44.7	-9.8	34.9	46.0	11.1	207.0	0.0
2	480.005	H	49.7	-9.2	40.5	46.0	5.5	209.0	0.0
3	528.004	H	42.4	-8.6	33.8	46.0	12.2	189.0	332.0
4	552.003	H	44.3	-8.1	36.2	46.0	9.8	172.0	334.0
5	960.000	H	36.6	-1.7	34.9	46.0	11.1	100.0	7.0
6	984.014	H	35.5	-1.2	34.3	54.0	19.7	100.0	15.0

Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.

[11n(HT20)]
Channel Middle
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

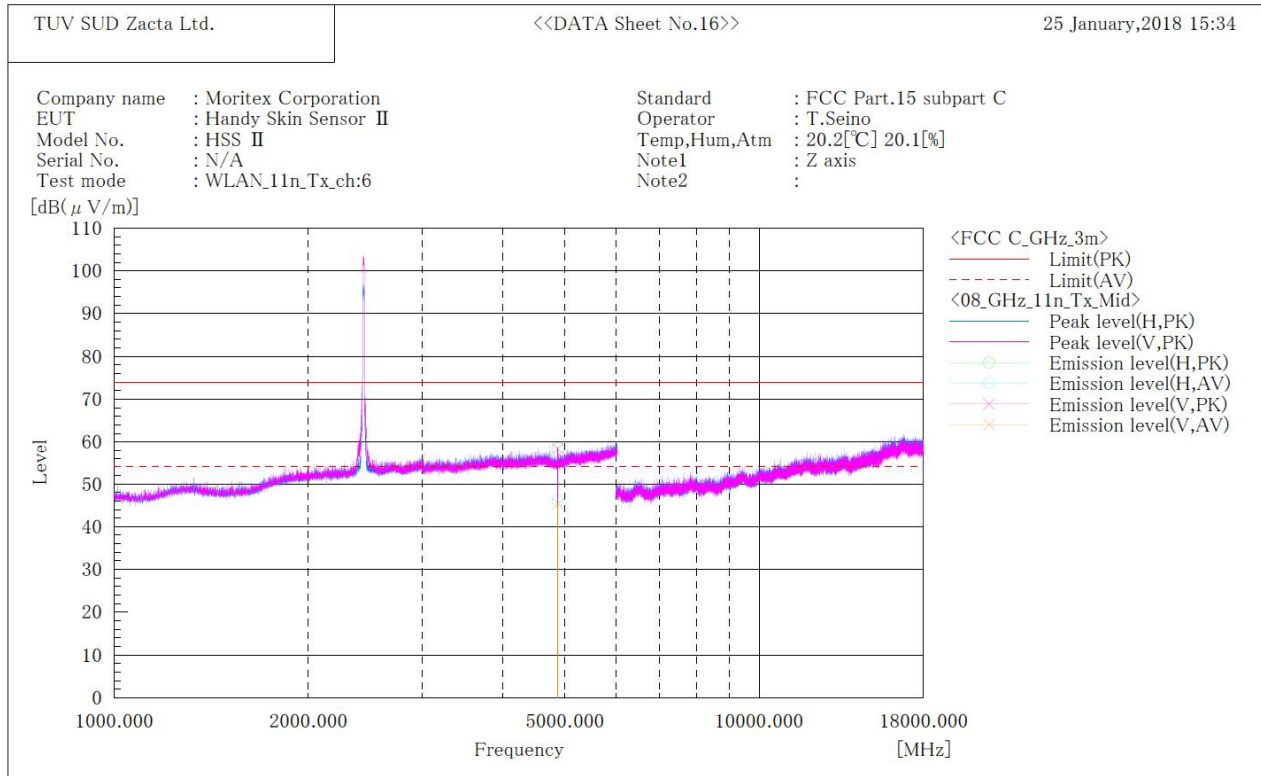

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4874.000	H	49.2	36.7	9.4	58.6	46.1	74.0	54.0	15.4	7.9	130.0	205.0
2	4874.000	V	49.0	35.9	9.4	58.4	45.3	74.0	54.0	15.6	8.7	181.0	179.0

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.



Zacta

[11n(HT20)]
Channel High
BELOW 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

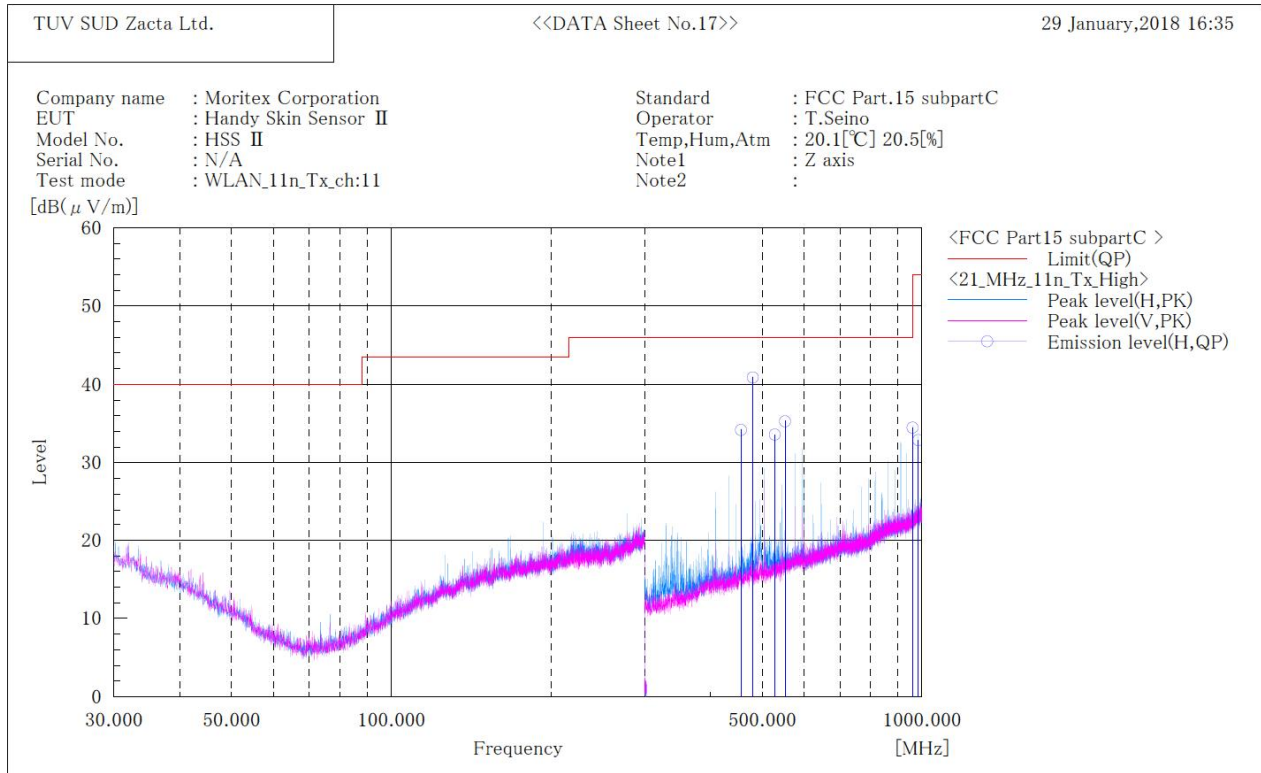

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μV)]	c. f [dB(1/m)]	Result QP [dB(μV/m)]	Limit QP [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	456.009	H	44.0	-9.8	34.2	46.0	11.8	219.0	0.0
2	480.009	H	50.1	-9.2	40.9	46.0	5.1	202.0	0.0
3	528.001	H	42.2	-8.6	33.6	46.0	12.4	188.0	324.0
4	552.008	H	43.4	-8.1	35.3	46.0	10.7	180.0	330.0
5	960.000	H	36.2	-1.7	34.5	46.0	11.5	100.0	10.0
6	984.013	H	34.1	-1.2	32.9	54.0	21.1	100.0	10.0

Note:


1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 9kHz to 1000MHz at the 3 meters distance.



Zacta

[11n(HT20)]
Channel High
ABOVE 1GHz

***** RADIATED EMISSION *****
 [3m Semi-anechoic chamber]

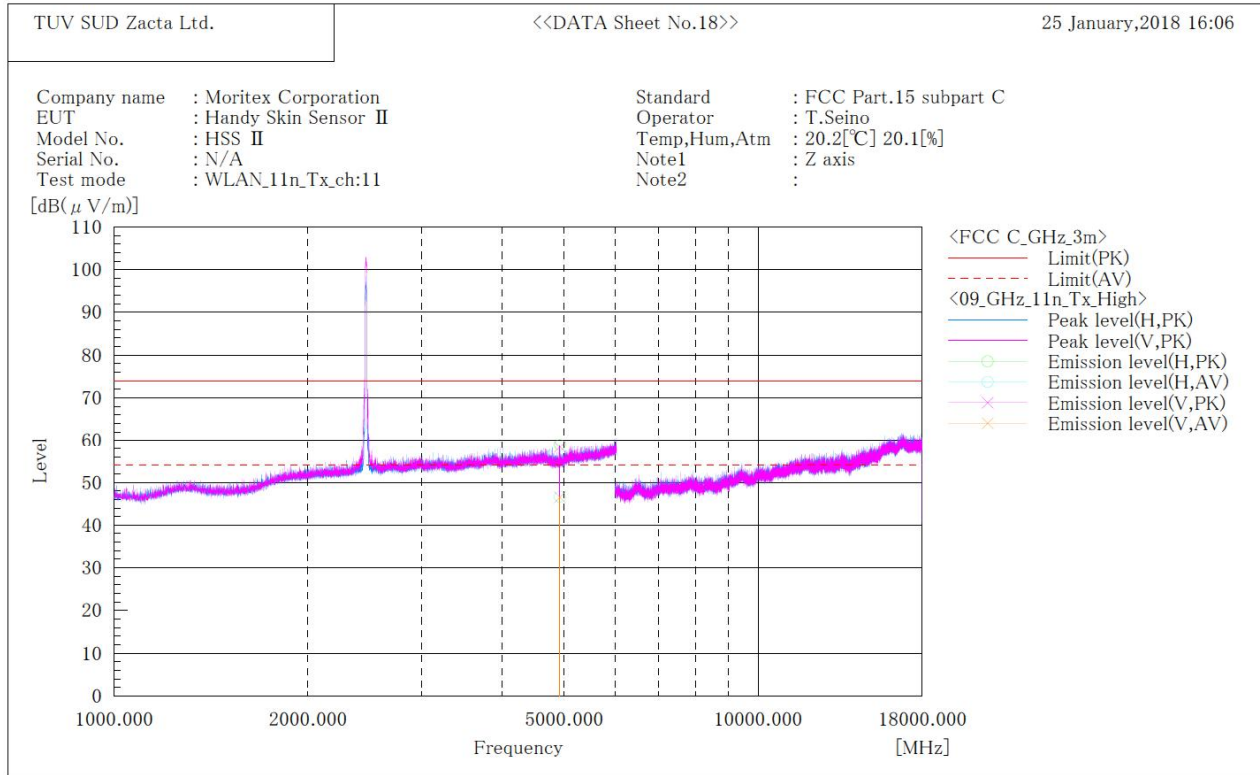

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(μV)]	Reading AV [dB(μV)]	c.f [dB(1/m)]	Result PK [dB(μV/m)]	Result AV [dB(μV/m)]	Limit PK [dB(μV/m)]	Limit AV [dB(μV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [°]
1	4924.000	H	49.3	37.0	9.6	58.9	46.6	74.0	54.0	15.1	7.4	219.0	146.0
2	4924.000	V	48.8	36.9	9.6	58.4	46.5	74.0	54.0	15.6	7.5	158.0	216.0


Note:

1. Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
2. No emission were detected in frequency range 18GHz to 25GHz at the 3 meters distance.

8.4.2 Receive mode

Channel Low BELOW 1GHz

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

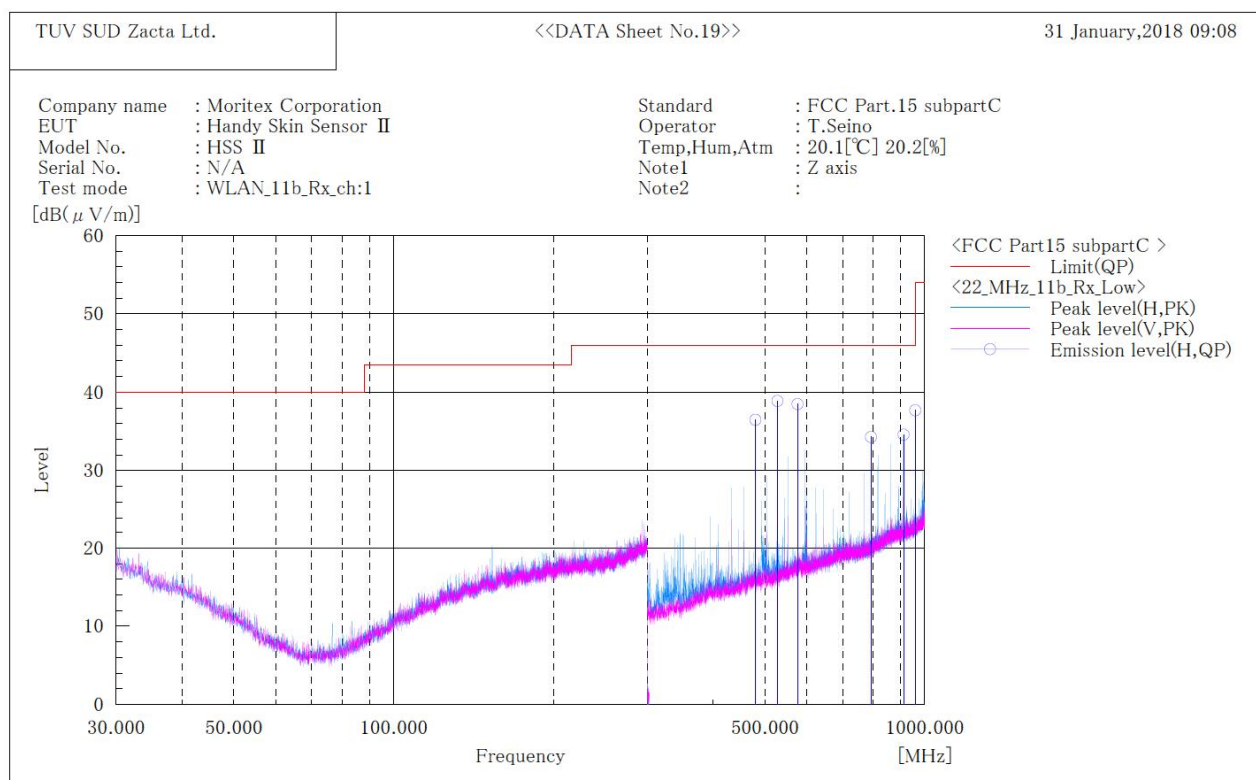

Final Result


No.	Frequency	(P)	Reading	c. f	Result	Limit	Margin	Height	Angle
	[MHz]		QP [dB(μV)]	[dB(1/m)]	QP [dB(μV/m)]	QP [dB(μV/m)]	QP [dB]	[cm]	[°]
1	480.005	H	45.7	-9.2	36.5	46.0	9.5	206.0	324.0
2	528.006	H	47.5	-8.6	38.9	46.0	7.1	182.0	333.0
3	576.008	H	46.1	-7.6	38.5	46.0	7.5	164.0	334.0
4	792.000	H	39.2	-4.9	34.3	46.0	11.7	202.0	161.0
5	912.008	H	37.0	-2.4	34.6	46.0	11.4	100.0	217.0
6	960.000	H	39.4	-1.7	37.7	46.0	8.3	100.0	0.0

Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 9kHz to 1000MHz and 1GHz to 25GHz at the 3 meters distance.

Channel Middle BELOW 1GHz

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

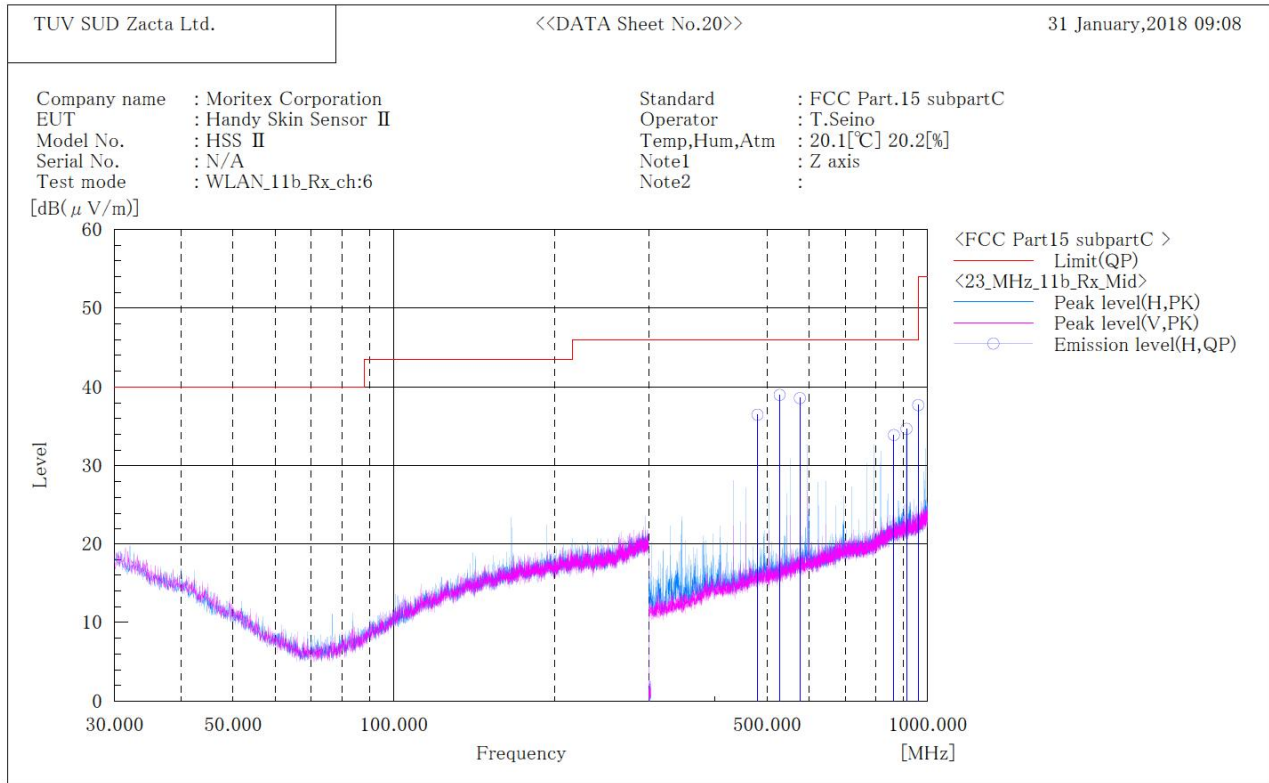

Final Result


No.	Frequency [MHz]	(P)	Reading QP [dB(μ V)]	c. f [dB(1/m)]	Result QP [dB(μ V/m)]	Limit QP [dB(μ V/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	480.005	H	45.7	-9.2	36.5	46.0	9.5	212.0	327.0
2	528.004	H	47.6	-8.6	39.0	46.0	7.0	185.0	329.0
3	576.004	H	46.2	-7.6	38.6	46.0	7.4	160.0	343.0
4	864.013	H	37.0	-3.1	33.9	46.0	12.1	100.0	18.0
5	912.012	H	37.1	-2.4	34.7	46.0	11.3	100.0	219.0
6	960.012	H	39.4	-1.7	37.7	54.0	16.3	100.0	0.0

Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 9kHz to 1000MHz and 1GHz to 25GHz at the 3 meters distance.

Channel High BELOW 1GHz

***** RADIATED EMISSION *****
[3m Semi-anechoic chamber]

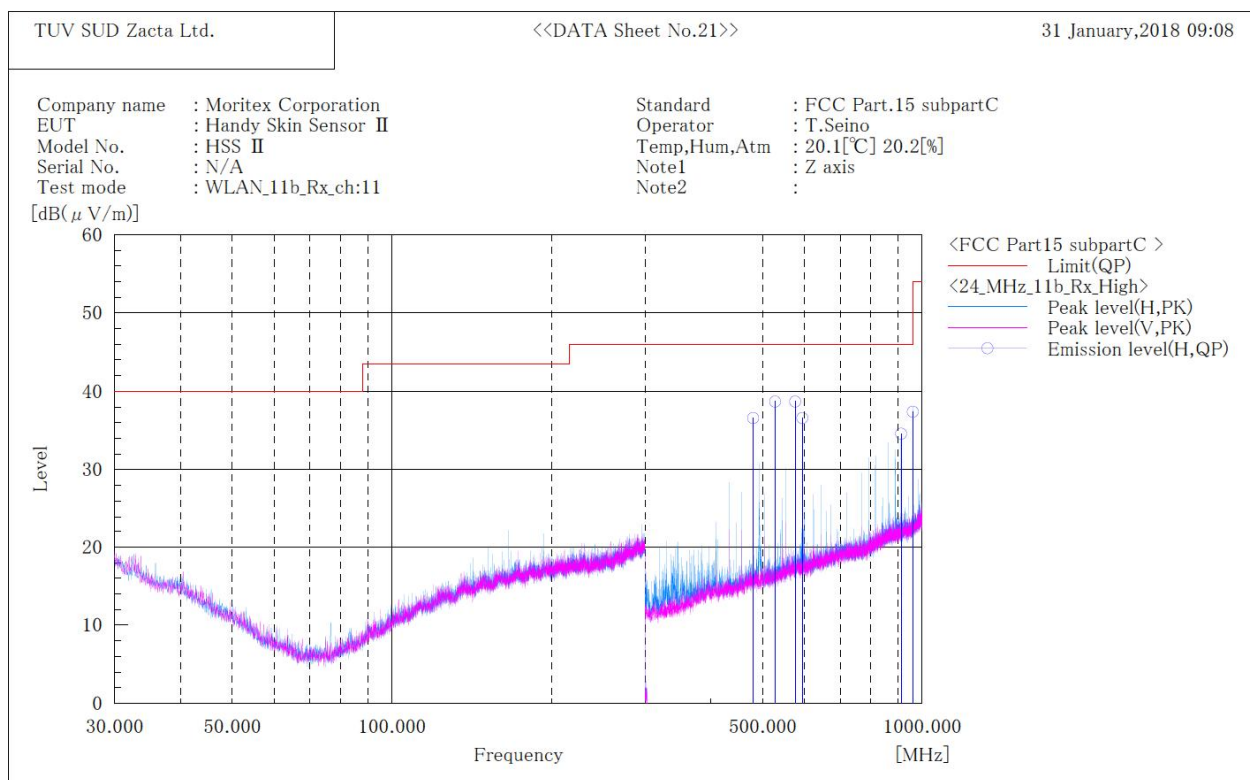

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(μ V)]	c. f [dB(1/m)]	Result QP [dB(μ V/m)]	Limit QP [dB(μ V/m)]	Margin QP [dB]	Height [cm]	Angle [°]
1	480.008	H	45.8	-9.2	36.6	46.0	9.4	200.0	327.0
2	528.004	H	47.3	-8.6	38.7	46.0	7.3	190.0	327.0
3	576.006	H	46.3	-7.6	38.7	46.0	7.3	166.0	340.0
4	594.008	H	44.1	-7.5	36.6	46.0	9.4	159.0	168.0
5	912.004	H	37.0	-2.4	34.6	46.0	11.4	100.0	218.0
6	960.000	H	39.1	-1.7	37.4	46.0	8.6	100.0	0.0

Note:

- Emission Level (Margin) = Limit - [Reading + Factor (Antenna + Cable – Amp)]
- No emission were detected in frequency range 9kHz to 1000MHz and 1GHz to 25GHz at the 3 meters distance.

9. Restricted Band of Operation

9.1 Measurement procedure

[FCC 15.205, RSS-Gen 8.10, KDB 558074 D01 v04, Section 12.0]

Test was applied by following conditions.

Test method	: ANSI C63.10
Test place	: 3m Semi-anechoic chamber
EUT was placed on	: Styrofoam table / (W)1.0m × (D)1.0m × (H)0.8m (below 1GHz) Styrofoam table / (W)0.6m × (D)0.6m × (H)1.5m (above 1GHz)
Antenna distance	: 3m
Spectrum analyzer setting	
- Peak	: RBW=1MHz, VBW=3MHz, Span=Arbitrary setting, Sweep=auto
- Average	: RBW=1MHz, VBW=10Hz (11b), 1kHz (11g, 11n HT20), Span=Arbitrary setting, Sweep=auto, Display mode=Linear

Average Measurement Setting [VBW]

Mode	Duty Cycle (%)	T _{on} (us)	T _{off} (us)	1/T _{on} (kHz)	Determined VBW Setting
IEEE802.11b	99.53	8410	40	0.119	10Hz
IEEE802.11g	97.21	1390	40	0.719	1kHz
IEEE802.11n(HT20)	97.03	1308	40	0.765	1kHz


Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

Radiated emission measurements are performed at 3m distance with the broadband antenna (Double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1m to 4m and stopped at height producing the maximum emission.

The EUT is Placed on a turntable, which is 0.8m/1.5m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. The test results represent the worst case emission for each emission with manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation. Sufficient time for the EUT, support equipment, and test equipment are allowed in order for them to warm up to their normal operating condition.

- Test configuration

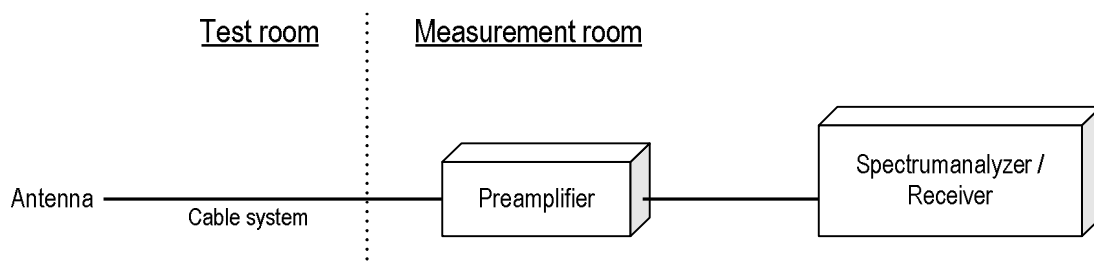

9.2 Limit

Emission at the boundary of the restricted band provided by 15.205 shall be lower than 15.209 limit.

9.3 Measurement Result

[IEEE802.11b, IEEE802.11g, IEEE802.11n (HT20)]

Channel	Frequency [MHz]	Results Chart	Result
Low	2412	See the Trace Data	Pass
High	2462	See the Trace Data	Pass

9.4 Test data


Date : January 26, 2018
 Temperature : 20.3 [°C]
 Humidity : 20.2 [%]
 Test place : 3m Semi-anechoic chamber

Test engineer :

Tadahiro Seino


[IEEE802.11b]

Channel Low
Horizontal
Peak

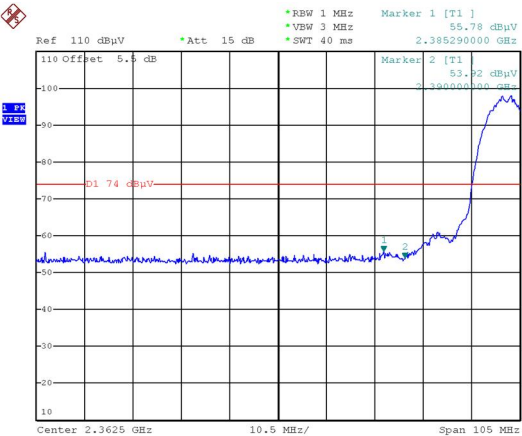


Date: 26.JAN.2018 09:08:33

Average

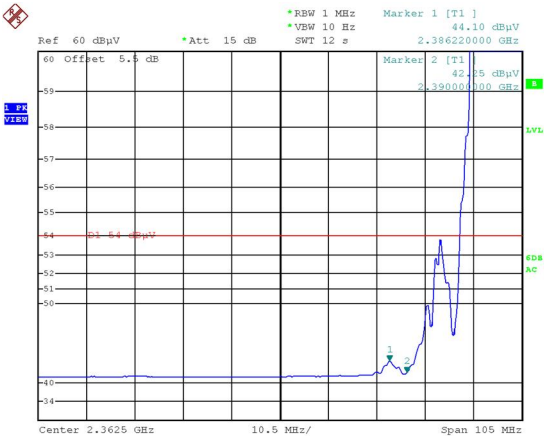


Date: 26.JAN.2018 09:09:34

Vertical
Peak

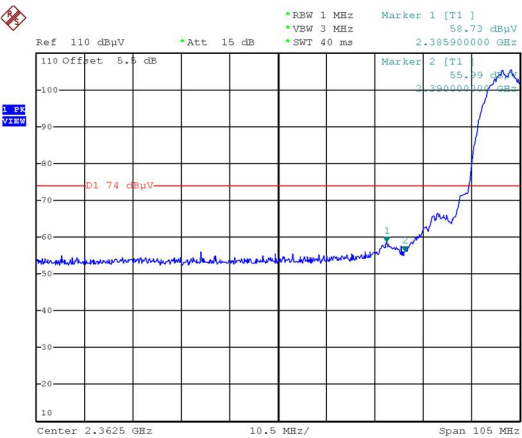


Date: 26.JAN.2018 09:13:28

Average

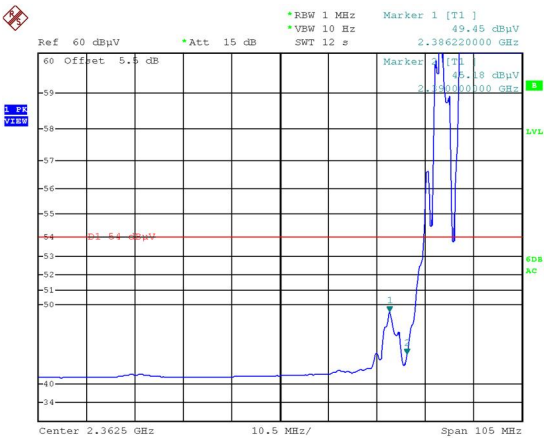


Date: 26.JAN.2018 09:14:13

**Channel High
Horizontal
Peak**

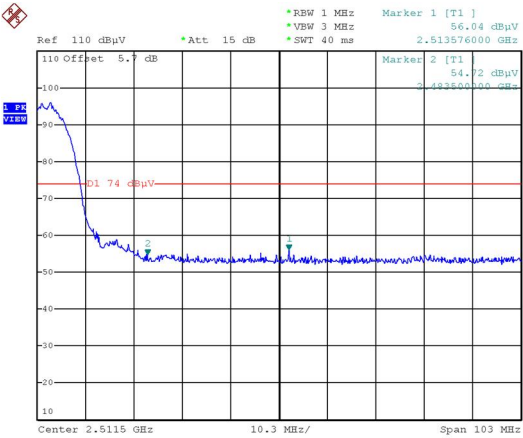


Date: 26.JAN.2018 09:19:26

Average

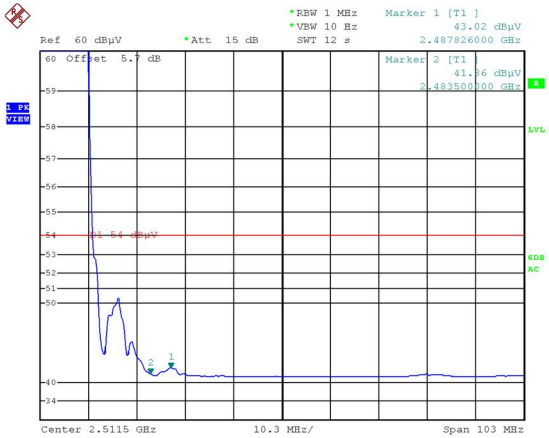


Date: 26.JAN.2018 09:20:16

**Vertical
Peak**

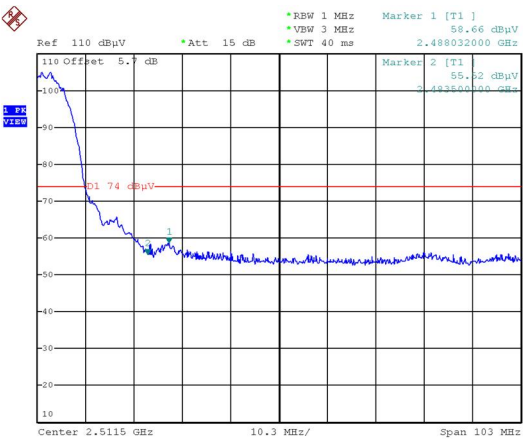

Date: 26.JAN.2018 09:23:55


Average

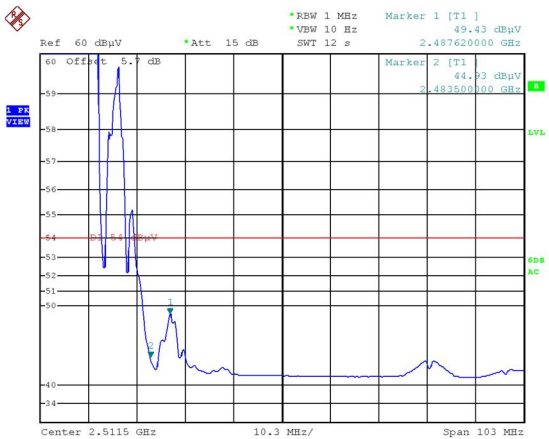

Date: 26.JAN.2018 09:24:41


[IEEE802.11g]

Channel Low
Horizontal
Peak

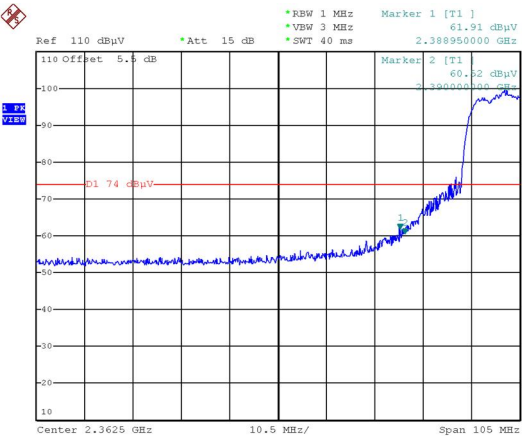


Date: 26.JAN.2018 09:30:12

Average

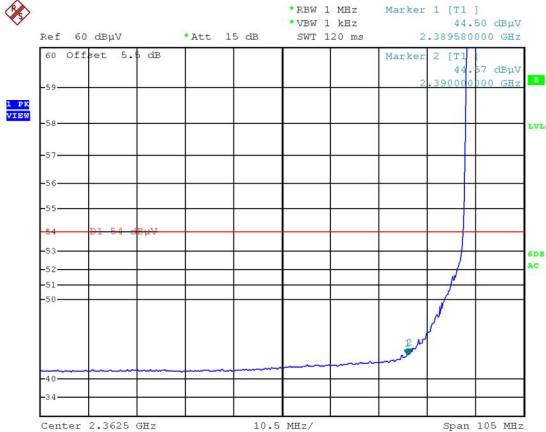


Date: 26.JAN.2018 09:31:55

Vertical
Peak

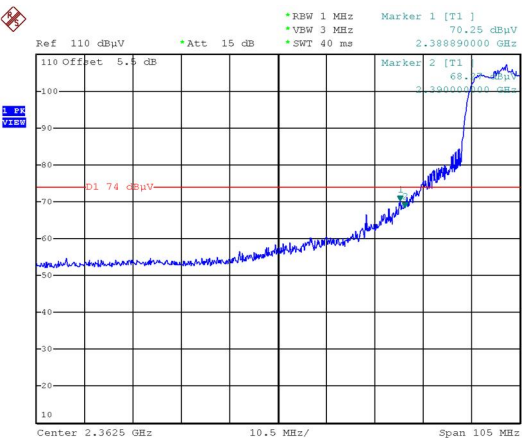


Date: 26.JAN.2018 09:35:39

Average

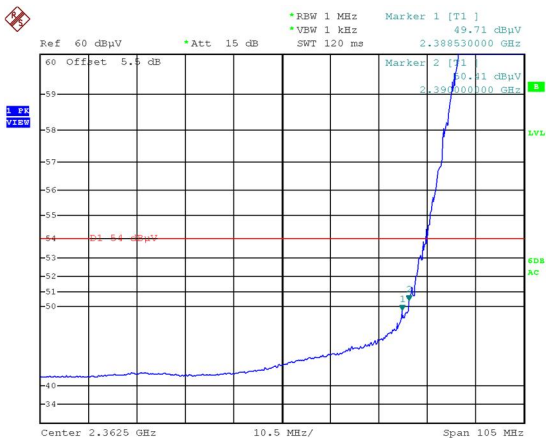


Date: 26.JAN.2018 09:37:15

**Channel High
Horizontal
Peak**

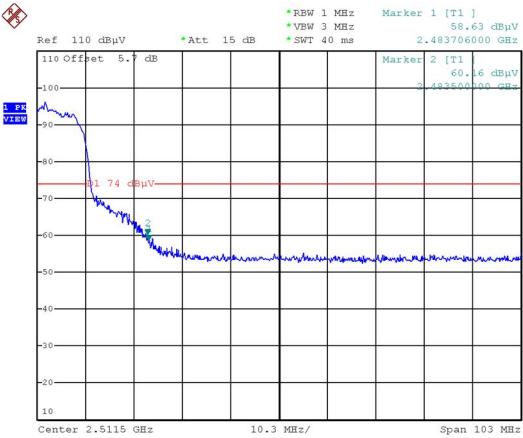


Date: 26.JAN.2018 09:45:48

Average

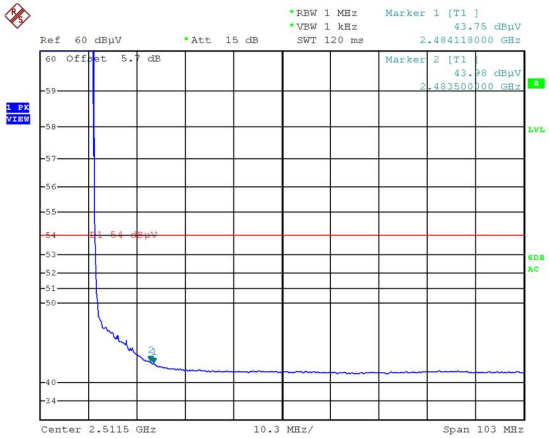


Date: 26.JAN.2018 09:47:19

**Vertical
Peak**

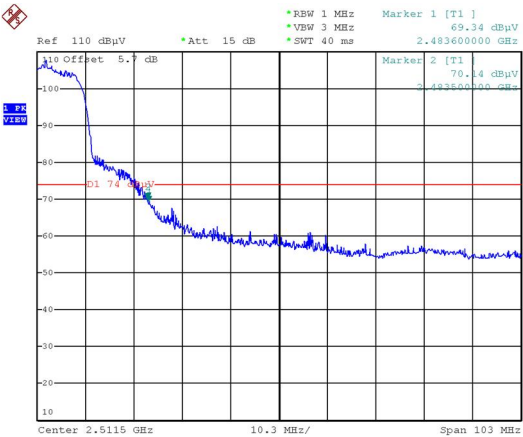

Date: 26.JAN.2018 09:52:09


Average

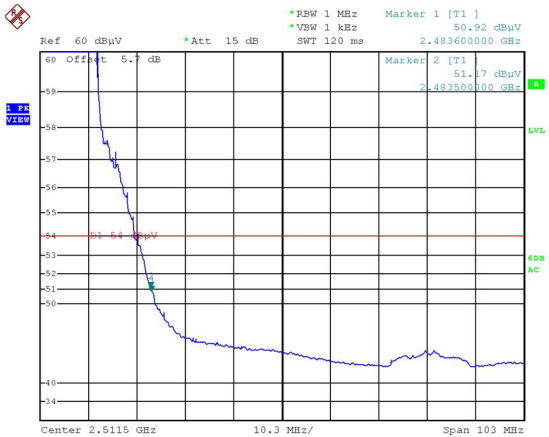

Date: 26.JAN.2018 09:54:01


[IEEE802.11n (HT20)]

Channel Low
Horizontal
Peak

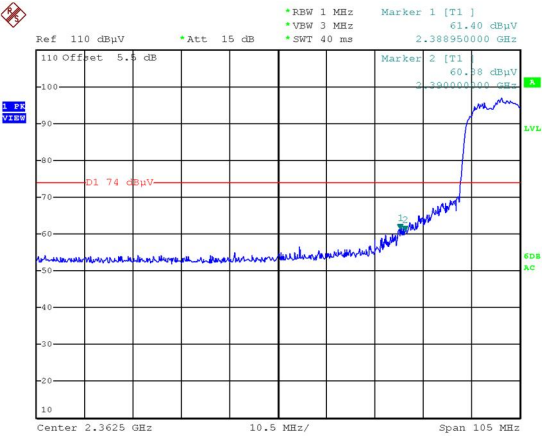


Date: 26.JAN.2018 10:00:00

Average

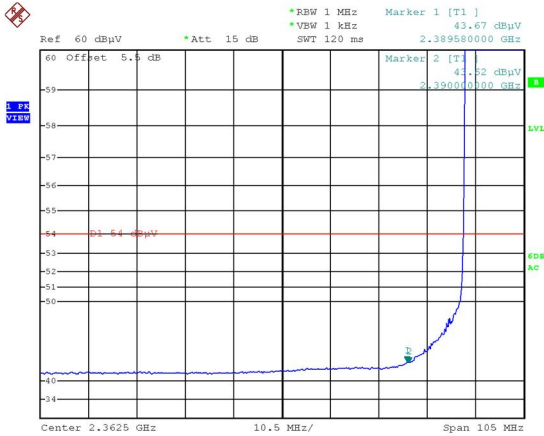


Date: 26.JAN.2018 10:01:09

Vertical
Peak

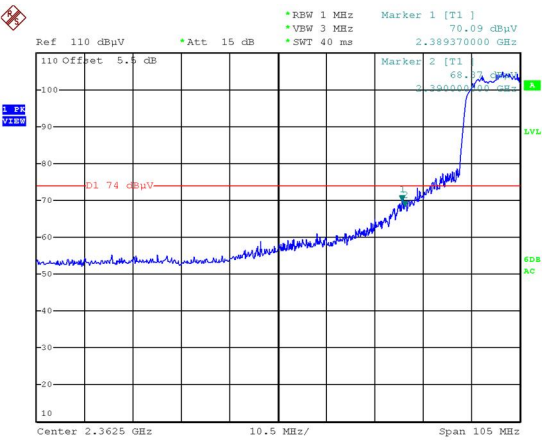


Date: 26.JAN.2018 10:05:21

Average

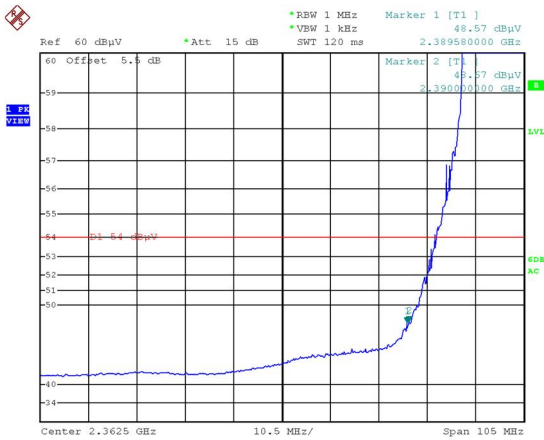


Date: 26.JAN.2018 10:07:04

Channel High
Horizontal
Peak

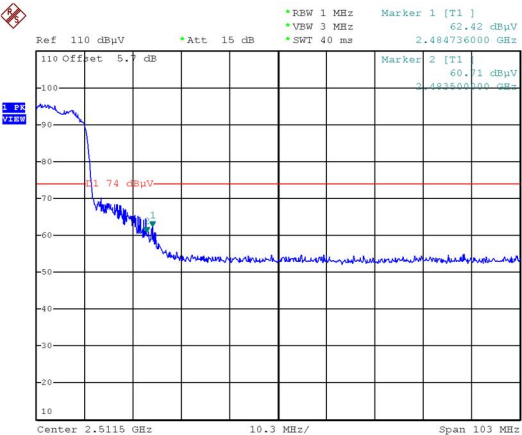


Date: 26.JAN.2018 10:12:19

Average

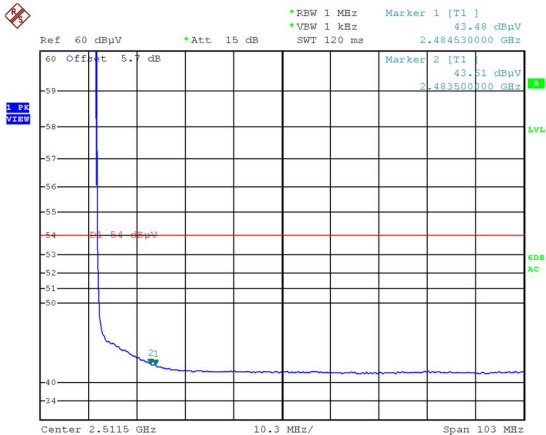


Date: 26.JAN.2018 10:14:33

Vertical
Peak

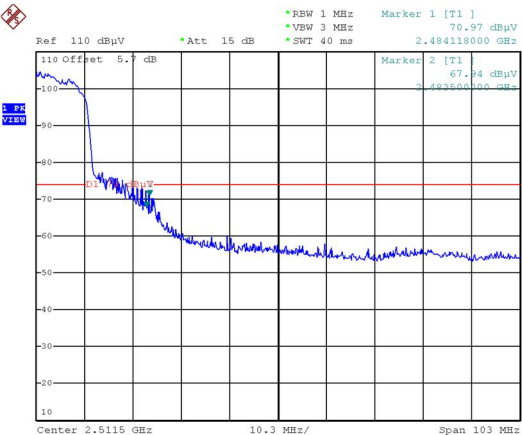

Date: 26.JAN.2018 10:18:44

Average

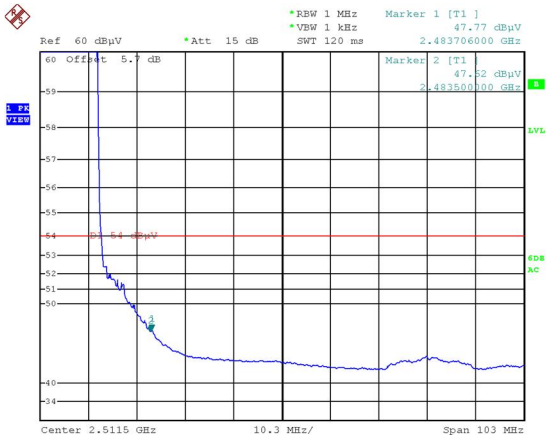

Date: 26.JAN.2018 10:20:24

10. Transmitter Power Spectral Density

10.1 Measurement procedure


[FCC 15.247(e), RSS-247 5.2(b), KDB 558074 D01 v04, Section 10.2]

The peak power is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to;

- a) Span = 1.5 times the 6 dB bandwidth.
- b) RBW = 3kHz - 100kHz.
- c) VBW $\geq 3 \times$ RBW.
- d) Sweep time = auto-couple.
- e) Detector = peak.
- f) Trace mode = max hold.

- Test configuration

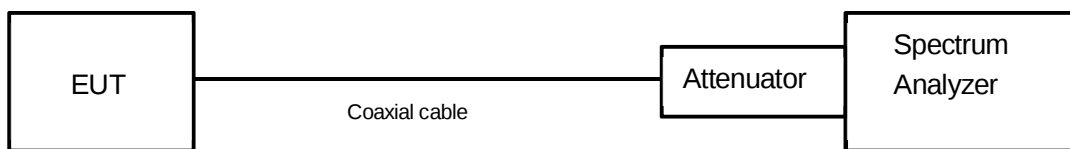

10.2 Limit

The peak power spectral density shall not be greater than 8dBm in any 3kHz band.

10.3 Measurement result

Date : January 9, 2018
 Temperature : 20.8 [°C]
 Humidity : 35.2 [%]
 Test place : Shielded room No.4

Test engineer :
 Chiaki Kanno

[IEEE802.11b]

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412	-19.43	10.62	-8.81	8.00	16.81	PASS
Middle	2437	-19.60	10.62	-8.98	8.00	16.98	PASS
High	2462	-18.86	10.62	-8.24	8.00	16.24	PASS

Calculation;

$$\text{Transmitter Power Spectral Density Level (Margin)} = \text{Limit} - (\text{Reading} + \text{Factor})$$

[IEEE802.11g]

Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412	-23.61	10.62	-12.99	8.00	20.99	PASS
Middle	2437	-23.22	10.62	-12.60	8.00	20.60	PASS
High	2462	-23.04	10.62	-12.42	8.00	20.42	PASS

Calculation;

$$\text{Transmitter Power Spectral Density Level (Margin)} = \text{Limit} - (\text{Reading} + \text{Factor})$$

[IEEE802.11n (HT20)]


Channel	Center Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dBm)	Result
Low	2412	-25.26	10.62	-14.64	8.00	22.64	PASS
Middle	2437	-24.79	10.62	-14.17	8.00	22.17	PASS
High	2462	-23.57	10.62	-12.95	8.00	20.95	PASS

Calculation;


$$\text{Transmitter Power Spectral Density Level (Margin)} = \text{Limit} - (\text{Reading} + \text{Factor})$$

10.4 Trace data [IEEE802.11b]


Channel Low

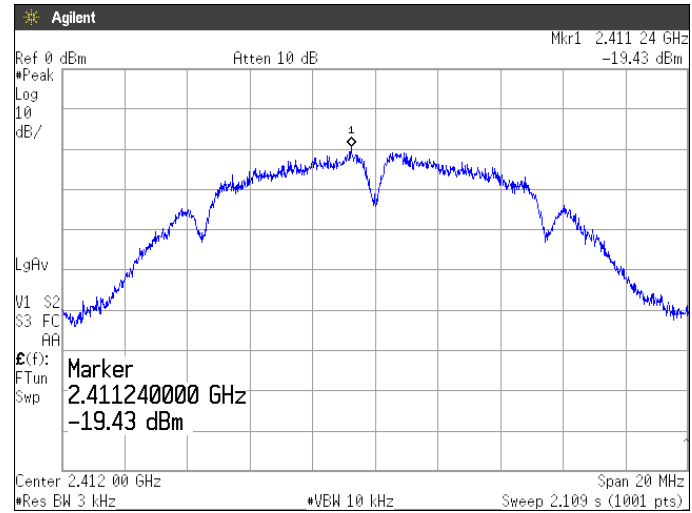




Channel Middle

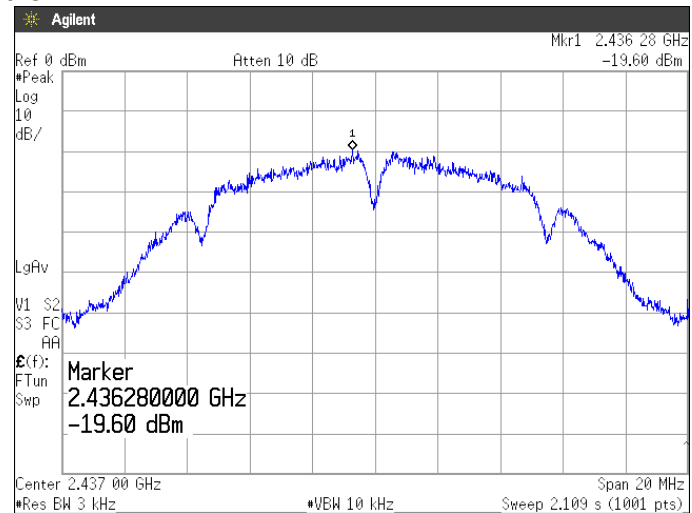

Channel High

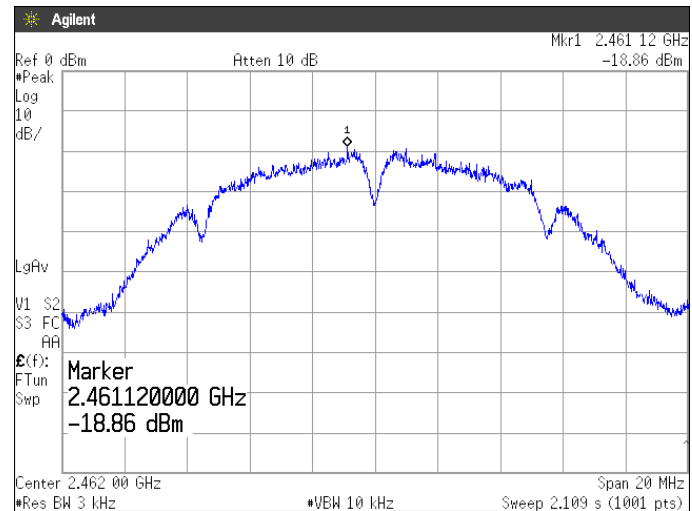


[IEEE802.11g]

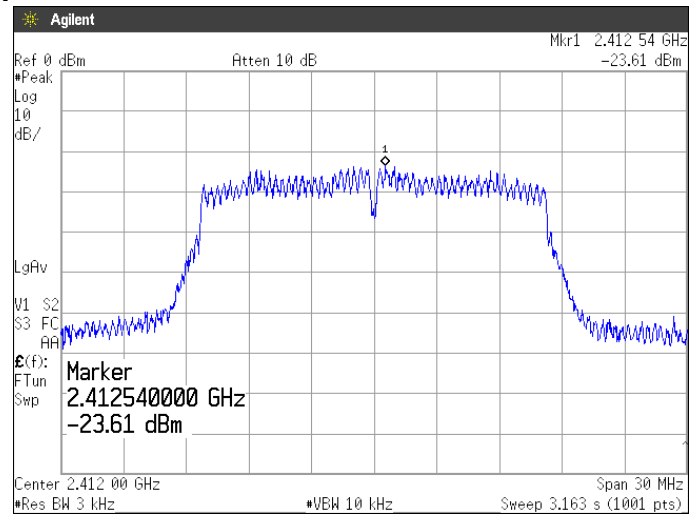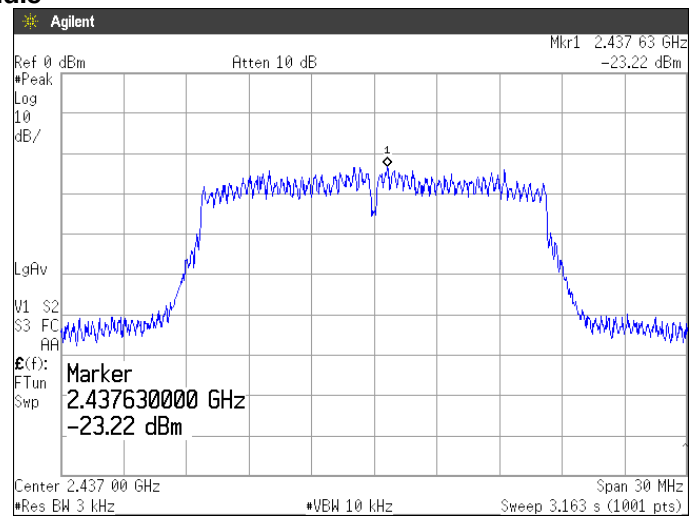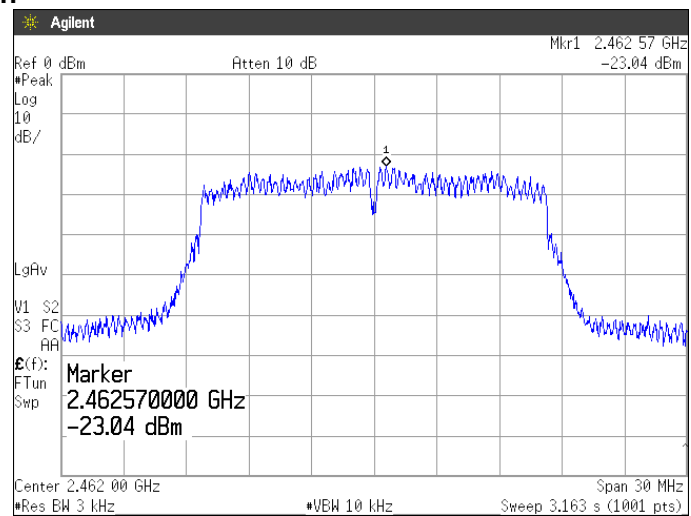
Channel Low**Channel Middle****Channel High**

[IEEE802.11n (HT20)]


Channel Low

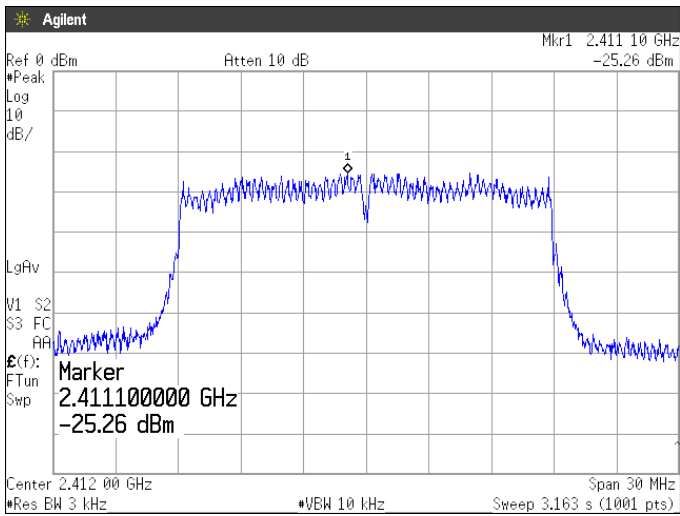

Channel Middle

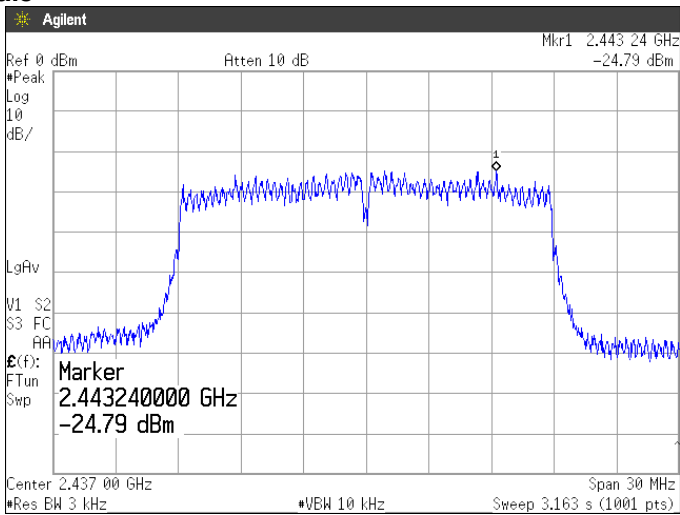

Channel High

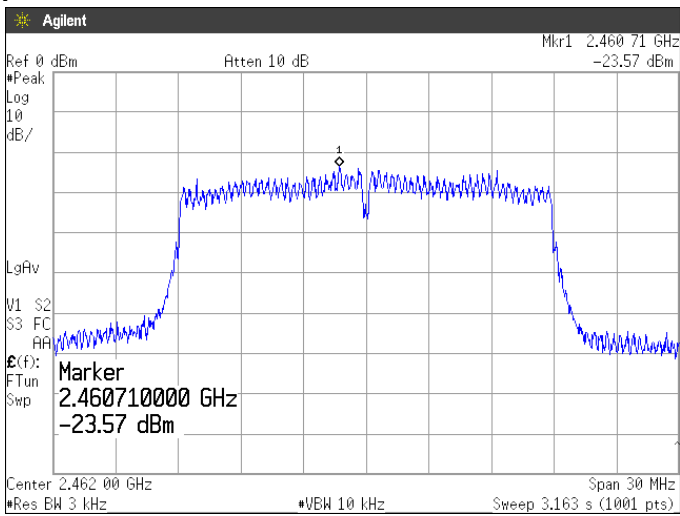


11.3 Limit

Frequency [MHz]	Limit	
	QP [dBuV]	AV [dBuV]
0.15-0.5	66-56*	56-46*
0.5-5	56	46
5-30	60	50

*: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

11.4 Test data

***** CONDUCTED EMISSION at MAINS PORT *****
[3m Semi-anechoic chamber]

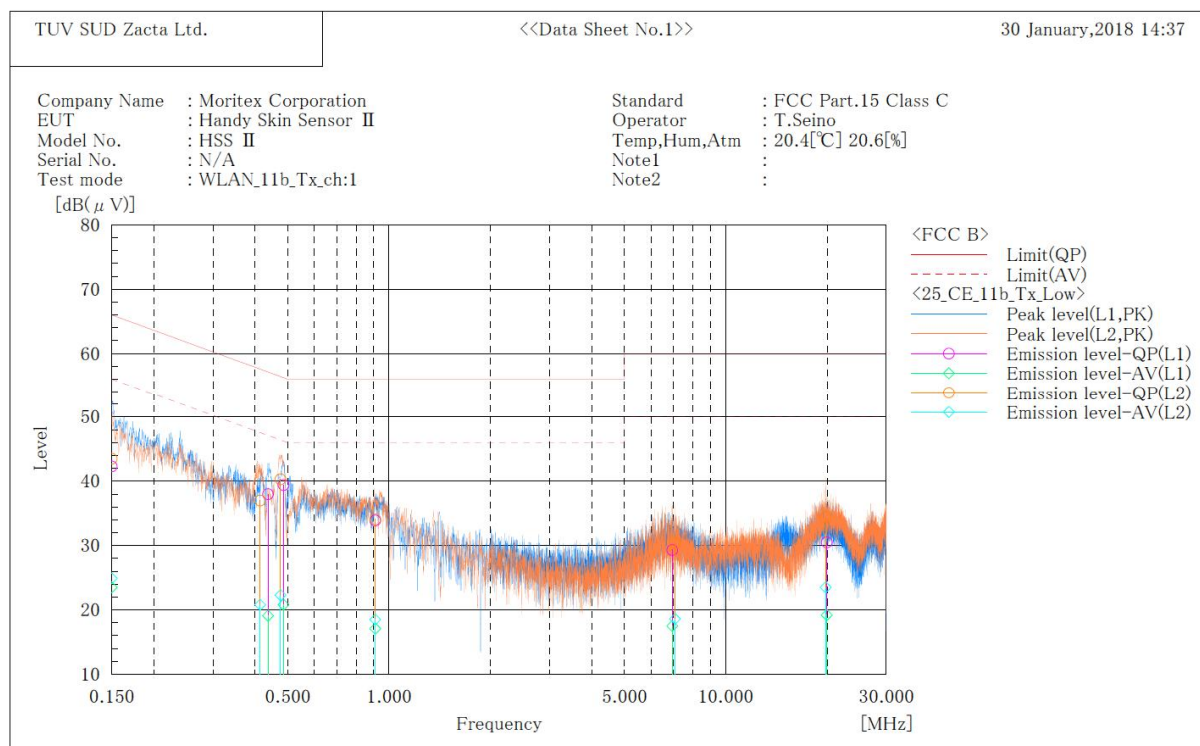

Final Result

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.150	31.8	13.0	10.5	42.3	23.5	66.0	56.0	23.7	32.5
2	0.437	27.6	8.7	10.4	38.0	19.1	57.1	47.1	19.1	28.0
3	0.486	29.0	10.4	10.4	39.4	20.8	56.2	46.2	16.8	25.4
4	0.910	23.5	6.7	10.4	33.9	17.1	56.0	46.0	22.1	28.9
5	6.936	18.5	6.7	10.8	29.3	17.5	60.0	50.0	30.7	32.5
6	19.960	18.7	7.4	11.8	30.5	19.2	60.0	50.0	29.5	30.8

--- L2 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.150	32.9	14.3	10.6	43.5	24.9	66.0	56.0	22.5	31.1
2	0.414	26.6	10.4	10.4	37.0	20.8	57.6	47.6	20.6	26.8
3	0.476	29.9	11.9	10.4	40.3	22.3	56.4	46.4	16.1	24.1
4	0.910	23.7	8.1	10.4	34.1	18.5	56.0	46.0	21.9	27.5
5	7.068	19.5	7.7	10.9	30.4	18.6	60.0	50.0	29.6	31.4
6	19.797	22.5	11.6	11.9	34.4	23.5	60.0	50.0	25.6	26.5



Zacta

12. Antenna requirement

According to FCC section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The antenna is a special antenna mounted inside of the EUT. Therefore, the EUT complies with the antenna requirement of FCC section 15.203.

13. Uncertainty of measurement

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.

Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028-0011 determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission, AMN (9kHz – 150kHz)	$\pm 3.8\text{dB}$
Conducted emission, AMN (150kHz – 30MHz)	$\pm 3.3\text{dB}$
Radiated emission (9kHz – 30MHz)	$\pm 3.0\text{dB}$
Radiated emission (30MHz – 1000MHz)	$\pm 4.7\text{dB}$
Radiated emission (1GHz – 6GHz)	$\pm 4.9\text{dB}$
Radiated emission (6GHz – 18GHz)	$\pm 5.2\text{dB}$
Radiated emission (18GHz – 40GHz)	$\pm 5.8\text{dB}$

14. Laboratory Information

1. Location

Name: Yonezawa Testing Center
 Address: 5-4149-7, Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan
 Phone: +81-238-28-2881
 Fax: +81-238-28-2888

2. Accreditation and Registration

- 1) VLAC
Accreditation No.: VLAC-013
- 2) NVLAP
LAB CODE: 200306-0
- 3) BSMI
Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

4) Industry Canada

Site number	Facility	Expiration date
4224A-4	3m Semi-anechoic chamber	2020-11-27
4224A-5	10m Semi-anechoic chamber No.1	2020-11-27
4224A-6	10m Semi-anechoic chamber No.2	2019-12-14

5) VCCI Council

Registration number	Expiration date
A-0166	2019-07-03

Appendix A. Test equipment

Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	Jun. 30, 2018	Jun. 28, 2017
Attenuator	HUBER+SUHNER	6810.19.A	N/A(S450)	Jan. 31, 2018	Jan. 20, 2017
Power meter	ROHDE&SCHWARZ	NRP2	103269	Jul. 31, 2018	Jul. 11, 2017
Power sensor	ROHDE&SCHWARZ	NRP-Z81	102459	Jul. 31, 2018	Jul. 11, 2017

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	Sep. 30, 2018	Sep. 13, 2017
Spectrum analyzer	Agilent Technologies	E4447A	MY46180188	Mar. 31, 2018	Mar. 15, 2017
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	Oct. 31, 2018	Oct. 19, 2017
Preamplifier	SONOMA	310	372170	Sep. 30, 2018	Sep. 12, 2017
Loop antenna	ROHDE&SCHWARZ	HFH2-Z2	100515	Feb. 28, 2018	Feb. 17, 2017
Attenuator	TDC	TAT-43B-06	N/A(S209)	May 31, 2018	May 23, 2017
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	2155	Jul. 31, 2018	Jul. 18, 2017
Log periodic antenna	Schwarzbeck	UHALP9108A	0560	Jul. 31, 2018	Jul. 18, 2017
Attenuator	TME	CFA-01NPJ-6	N/A(S275)	Feb. 28, 2018	Feb. 3, 2017
Attenuator	TME	CFA-01NPJ-3	N/A(S272)	Feb. 28, 2018	Feb. 2, 2017
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	Feb. 28, 2018	Feb. 3, 2017
Attenuator	AEROFLEX	26A-10	081217-08	May 31, 2018	May 24, 2017
Double ridged guide antenna	ETS LINDGREN	3117	00052315	Feb. 28, 2018	Feb. 23, 2017
Attenuator	Agilent Technologies	8491B	MY39268633	Feb. 28, 2018	Feb. 2, 2017
Double ridged guide antenna	A.H.Systems Inc.	SAS-574	469	Aug. 31, 2018	Aug. 8, 2017
Preamplifier	TSJ	MLA-1840-B03-35	1240332	Aug. 31, 2018	Aug. 8, 2017
Notch filter	Micro-Tronics	BRM50702	045	Apr. 30, 2018	Apr. 26, 2017
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY30037/4	Feb. 28, 2018	Feb. 3, 2017
		SUCOFLEX104/1m	my24610/4	Feb. 28, 2018	Feb. 3, 2017
		SUCOFLEX104/8m	SN MY30031/4	Feb. 28, 2018	Feb. 2, 2017
		SUCOFLEX104	MY32976/4	Feb. 28, 2018	Feb. 3, 2017
		SUCOFLEX104/1.5m	SNMY19309/4	Feb. 28, 2018	Feb. 3, 2017
		SUCOFLEX104/7m	41625/6	Feb. 28, 2018	Feb. 3, 2017
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.6.0	N/A	N/A
Absorber	RIKEN	PFP30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	May 31, 2018	May 30, 2017
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-SVSWR)	May 31, 2018	May 31, 2017

Conducted emission at mains port


Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	Sep. 30, 2018	Sep. 13, 2017
Attenuator	HUBER+SUHNER	6810.01.A	N/A(S411)	Feb. 28, 2018	Feb. 2, 2017
Line impedance stabilization network for EUT	Kyoritsu Electrical Works, Ltd.	KNW-407F2	12-17-110-2	Apr. 30, 2018	Apr. 25, 2017
Coaxial cable	FUJIKURA	5D-2W/4m	N/A(S350)	Feb. 28, 2018	Feb. 2, 2017
Coaxial cable	FUJIKURA	5D-2W/1m	N/A(S193)	Feb. 28, 2018	Feb. 3, 2017
Coaxial cable	HUBER+SUHNER	RG214/U/10m	N/A(S194)	Feb. 28, 2018	Feb. 3, 2017
PC	DELL	DIMENSION	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/CE-AJ	0611193/V5.4.11	N/A	N/A

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.

Appendix B. Duty Cycle


[Plot & Calculation]

11b

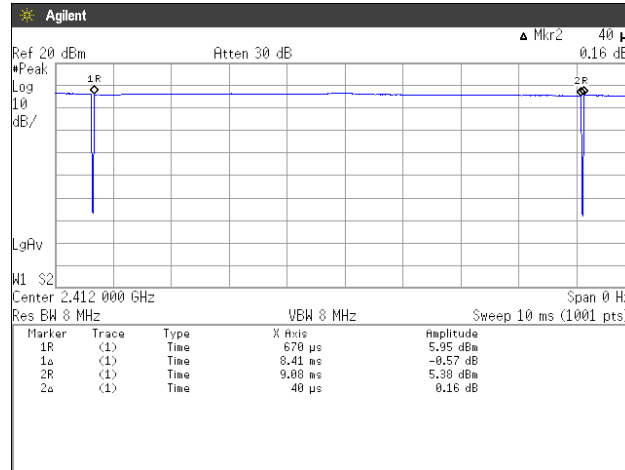


$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 8410[\mu\text{s}] / (8410[\mu\text{s}] + 40[\mu\text{s}]) = 99.53\%$$

11g

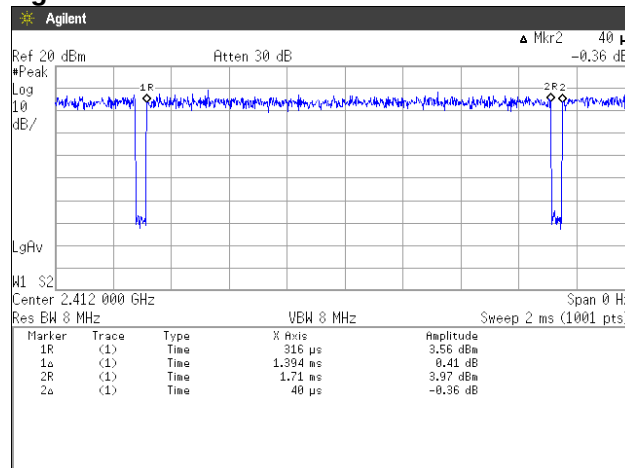

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 1394[\mu\text{s}] / (1394[\mu\text{s}] + 40[\mu\text{s}]) = 97.21\%$$

11n (HT20)

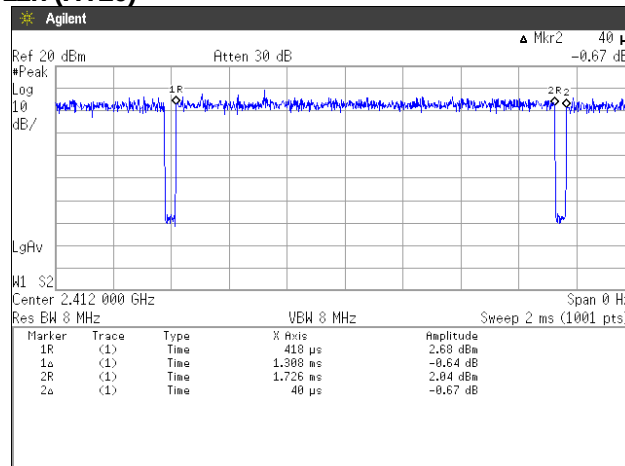

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff}) = 1308[\mu\text{s}] / (1308[\mu\text{s}] + 40[\mu\text{s}]) = 97.03\%$$