


| | | |
|----|-------------|----|
| A3 | 1 | 2 |
| | DRAWING NO. | 10 |

DO NOT SCALE. IF IN DOUBT, ASK.

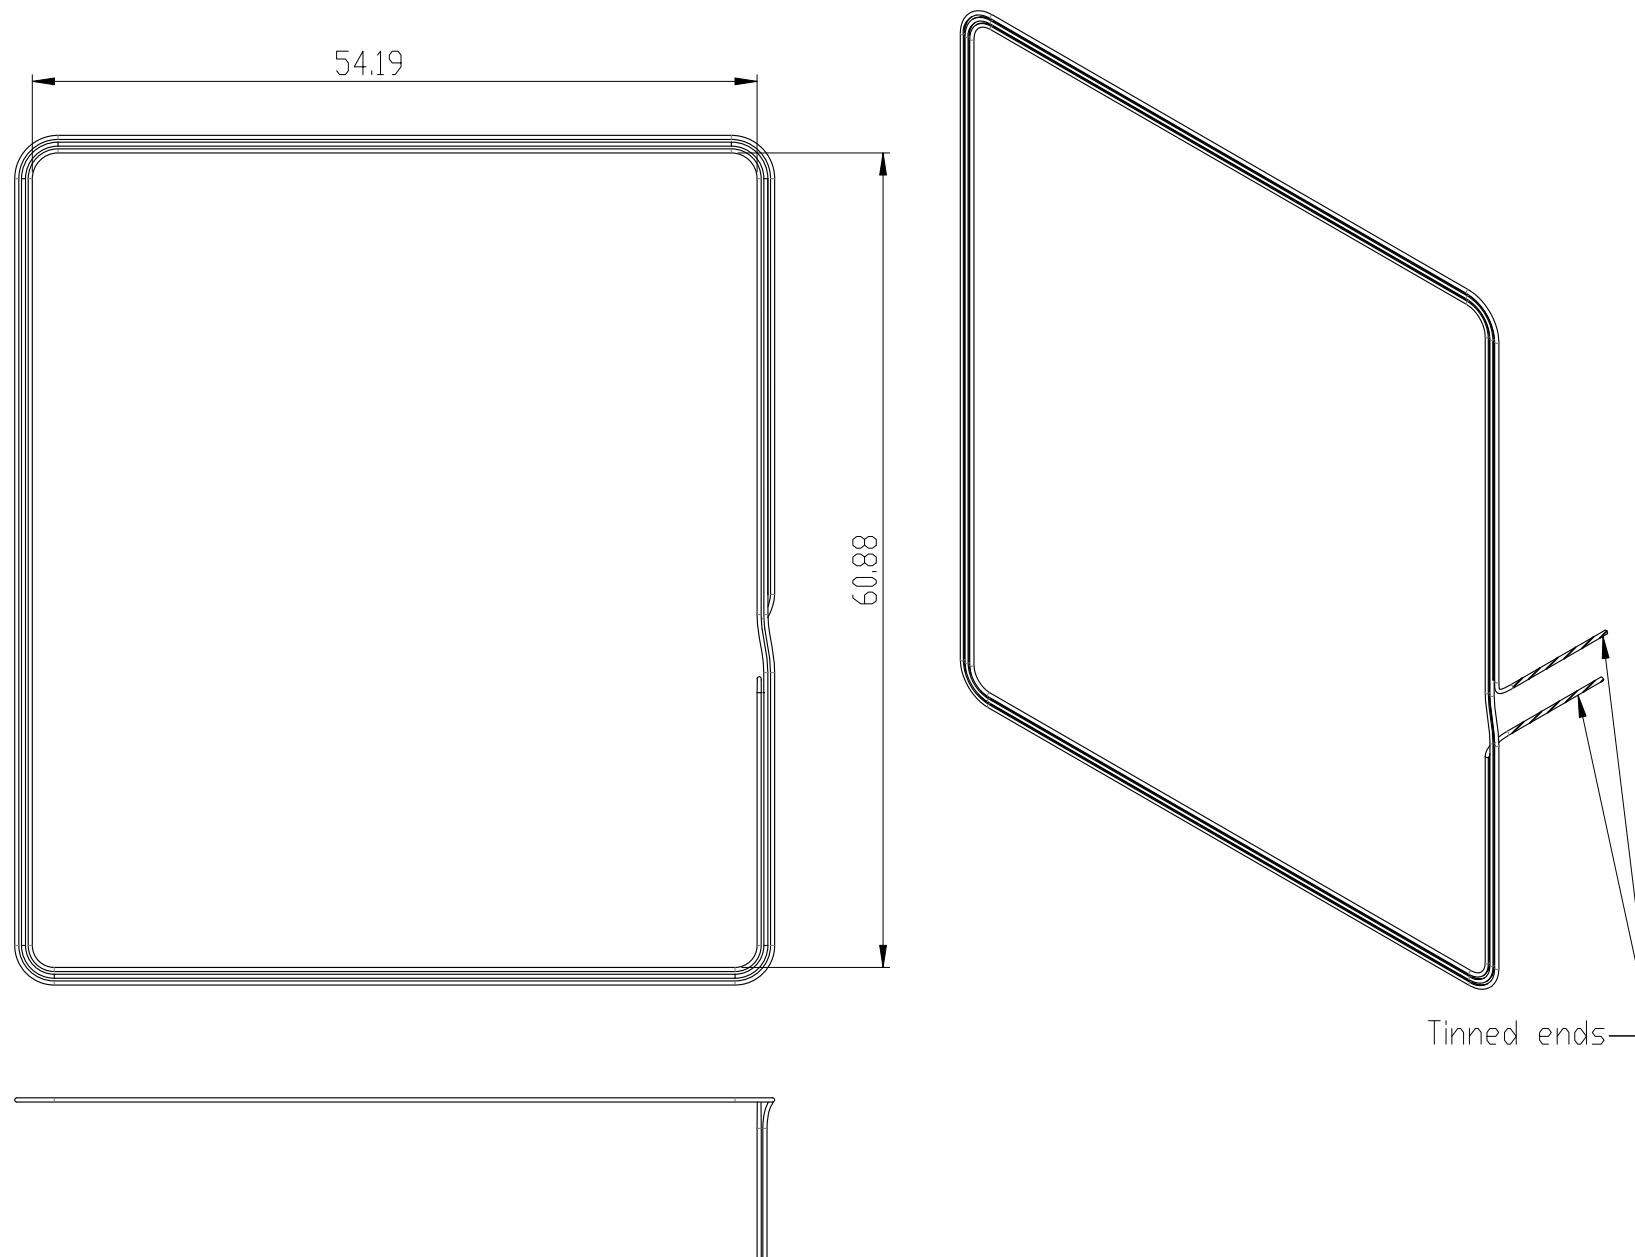

This drawing illustrates the antenna when formed around the antenna frame moulding, M020-MP02-Vx-x, not shown here. Wire to be wrapped 3 turns around the antenna frame moulding. Both ends to be tinned to a length of 10mm, +/-1mm.

Wire specification

Solderable enamelled copper wire. Length 700mm \pm 3mm. Conductor Dia: 0.3mm \pm 0.004mm. Max overall dia: 0.36mm

Resistance per m @20°C: 0.2420hm ± 4%

Total resistance (4-wire measurement @1A): 0.169Ωhm +/-7%

THE INFORMATION CONTAINED IN THIS DRAWING IS THE EXCLUSIVE INTELLECTUAL PROPERTY OF
THEREFORE IT MAY ONLY BE USED FOR THE PURPOSE FOR WHICH IT IS SUPPLIED AND MUST NOT BE REPRODUCED,
STORED OR DISSEMINATED TO THIRD PARTIES BY ANY MEANS, MANUAL, MECHANICAL, PHOTOGRAPHIC, ELECTRONIC,
CHEMICAL OR OTHERWISE, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN PERMISSION OF THEREFORE

© 2018 therefore Ltd

1

10

1

1

1

1

T

10