
Project 22738-15

Austin Devices, LLC
Kai Valve

Wireless Certification Report

Prepared for:

Austin Devices, LLC
5606 Shoalwood Avenue
Austin, TX 78756

By

Professional Testing (EMI), Inc.
1601 North A.W. Grimes Blvd., Suite B
Round Rock, Texas 78665

21 January 2022

Written by



Larry Finn
Chief Technical Officer

Revision History

| Revision Number | Description | Date |
|------------------------|----------------------------|-------------|
| Draft01 | Initial release for review | 3 Dec 2021 |
| Final01 | Release to Agency | 21 Jan 2022 |
| | | |
| | | |

Table of Contents

| | |
|---|----|
| Revision History..... | 2 |
| Compliance Certificate..... | 5 |
| 1.0 Introduction..... | 6 |
| 1.1 Scope..... | 6 |
| 1.2 EUT Description | 6 |
| 1.3 EUT Test Configuration..... | 6 |
| 1.4 Modifications to Equipment..... | 6 |
| 1.5 Test Site | 6 |
| 1.6 Radiated Measurements | 7 |
| 1.7 Additional Documents Applied..... | 7 |
| 2.0 Fundamental Power; Clause 15.247(a)(3); RSS-247 5.2 | 8 |
| 2.1 Test Procedure | 8 |
| 2.2 Test Criteria | 8 |
| 2.3 Test Results, Peak Power (dBm)..... | 8 |
| 2.4 Test Results, Duty Cycle..... | 10 |
| 3.0 Power Spectral Density; 15.247(e); RSS-247, 5.2 | 11 |
| 3.1 Test Procedure | 11 |
| 3.2 Test Criteria | 11 |
| 3.3 Test Results, Tabular..... | 11 |
| 4.0 Occupied Bandwidth; 15.247(a)(2), 2.1049; RSS-247, RSS-Gen 4.6 | 12 |
| 4.1 Test Procedure | 12 |
| 4.2 Test Criteria | 12 |
| 4.3 Test Results, Tabular..... | 12 |
| 4.4 Test Results, Recorded: 6 dB, 99% BW | 13 |
| 5.0 Band Edge; 15.247, 15.205; RSS-247 5.5; RSS-Gen 4.9 | 14 |
| 5.1 Test Procedure | 14 |
| 5.2 Test Criteria | 14 |
| 5.3 Test Results..... | 14 |
| 6.0 Conducted Antenna Port Spurious Emissions, Transmit Mode; 15.247, 15.209; RSS-247 5.5, RSS-Gen 4.9 & 4.10 17 | 17 |
| 6.1 Test Procedure | 17 |
| 6.2 Test Criteria | 17 |
| 6.3 Test Results..... | 17 |
| 7.0 Radiated Spurious Emissions, Transmit Mode; 15.247, 15.205; RSS-247 5.5; RSS-Gen 6.13 & 8.10 | 19 |
| 7.1 Test Procedure | 19 |
| 7.2 Test Criteria | 19 |
| 7.3 Test Results..... | 19 |
| 7.3.1 Bottom Channel, 30 MHz to 26.5 GHz | 20 |
| 7.3.2 Middle Channel, 30 MHz to 26.5 GHz..... | 23 |
| 7.3.3 Top Channel, 1GHz to 26.5 GHz | 25 |
| 8.0 Radiated Spurious Emissions, Receive Mode; 15.247, 15.209; RSS-247 5.5, RSS-Gen 4.9 & 4.10 | 27 |
| 8.1 Test Procedure | 27 |
| 8.2 Test Criteria | 27 |
| 8.3 Test Results..... | 27 |
| 8.3.1 Middle Channel, 30 MHz to 13 GHz..... | 28 |
| 9.0 Antenna Construction; 15.203, 15.247; RSS-Gen 8.3 | 30 |
| 9.1 Procedure | 30 |
| 9.2 Criteria | 30 |
| 9.3 Results..... | 30 |
| 10.0 Equipment..... | 31 |
| 10.1 Transmitter Radiated Spurious Emissions 30 MHz to 26.5 GHz | 31 |
| 10.2 Fundamental Power, Bandwidth, Duty Cycle, Band Edge, Conducted Spurious Emissions | 32 |
| 10.3 Receiver Spurious Emissions (30MHz – 18GHz)..... | 32 |
| 11.0 Measurement Bandwidths..... | 33 |
| Appendix: Policy, Rationale, and Evaluation of EMC Measurement Uncertainty | 34 |
| End of Report | 34 |

NOTICE: (1) This Report must not be used to claim product endorsement, by NVLAP, NIST, the FCC or any other Agency. This report also does not warrant certification by NVLAP or NIST. (2) This report shall not be reproduced except in full, without the written approval of Professional Testing (EMI), Inc. (3) The significance of this report is dependent on the representative character of the test sample submitted for evaluation and the results apply only in reference to the sample tested. The manufacturer must continuously implement the changes shown herein to attain and maintain the required degree of compliance.



Compliance Certificate

FCC MRA Designation Number: US5270 NVLAP Accreditation Number: 200062-0

| Applicant | Device & Test Identification |
|---|--|
| Austin Devices, LLC 5606 Shoalwood Avenue Austin, TX 78756 Certificate Date: 21 Jan 2022 | FCC ID: 2AO4VKV Industry Canada ID: 23667-KV Model(s): KV Laboratory Project ID: 22738-15 |

The device named above was tested utilizing the following standards and found to be in compliance with the required criteria:

| Requirement | Reference | Detail |
|----------------------|--|--|
| FCC 47 CFR Part 15 C | 15.247 | Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz. |
| FCC 47 CFR Part 15 C | 15.209 | Radiated emission limits; general requirements. |
| FCC 47 CFR Part 15 C | 15.205 | Restricted Bands of Operation |
| KDB 558074 D01 | DR01 | DTS Measurement Guidance v03r02 |
| KDB 412172 | D01 | Guidelines for Determining the ERP and EIRP of an RF Transmitting System |
| OET Bulletin 65* | Edition 97-01, and Supplement C, Ed. 01-01 | Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields |
| RSS-247 | Issue 2 | Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices |
| RSS-Gen | Issue 5 Amd 1 | General Requirements and Information for the Certification of Radio Apparatus |
| RSS-102 | Issue 5 | Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) |

*MPE is reported separately from this document. **Corresponding RSS references are listed in the body of the report.

I, Larry Finn, for Professional Testing (EMI), Inc., being familiar with the above requirements and test procedures have reviewed the test setup, measured data, and this report. I believe them to be true and accurate.

Larry Finn
CTO

NVLAP[®]
TESTING
NVLAP LAB CODE 200062-0

This report has been reviewed and accepted by the Applicant. The undersigned is responsible for ensuring that this device will continue to comply with the requirements listed above.

Representative of Applicant

1.0 Introduction

1.1 Scope

This report describes the extent to which the equipment under test (EUT) conformed to the intentional radiator requirements of the United States and Canada.

Professional Testing (EMI), Inc., (PTI) follows the guidelines of National Institute of Standards and Technology (NIST) for all uncertainty calculations, estimates, and expressions thereof for electromagnetic compatibility testing.


1.2 EUT Description

Table 1.2.1: Equipment Under Test

| Manufacturer / Model | Serial # | Description |
|----------------------------------|----------|---------------------------------|
| Austin Devices, LLC Model: KV | none | Remote control irrigation valve |

1.3 EUT Test Configuration

The EUT was exercised in a manner consistent with normal operations. The EUT is battery powered only (No AC Mains derived power used). An external +3VDC supply was used for testing.

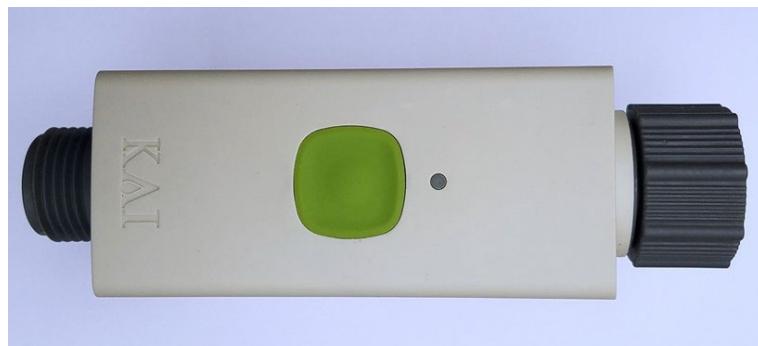

1.4 Modifications to Equipment

The PCB mounted chip antenna was removed, and a small coaxial cable was soldered in its place to facilitate conducted RF measurements.

1.5 Test Site

Measurements were made at the PTI semi-anechoic facility designated Site 45 (FCC 776781, IC 3036B-1) in Austin, Texas. The site is registered with the FCC under Section 2.948 and Industry Canada per RSS-GEN, and is subsequently confirmed by laboratory accreditation (NVLAP). The test site is located at 11400 Burnet Road, Austin, Texas 78758, while the main office is located at 1601 North A.W. Grimes Boulevard, Suite B, Round Rock, Texas, 78665. CAB Identifier: US 0123.

1.6 Radiated Measurements

| Table 1.6 1 Measurement Corrections | |
|--|---|
| Parameter | From Sums Of |
| Radiated Field Strength | Raw Measured Level + Antenna Factor + Cable Losses – Amplifier Gain |
| Conducted Antenna Port | Raw Measured Level + Attenuator Factor + Cable Losses |
| Conducted Mains Port | Raw Measured Level + LISN Factor + Cable/Filter/Limiter Losses |

Additionally, measurement distance extrapolation factors (such as 1/d above 30 MHz) are applied and documented where used.

1.7 Additional Documents Applied

| Table 1.7.1: Additional Documents Applied | |
|--|--|
| Document | Title |
| ANSI C63.10:2013 | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices |

2.0 Fundamental Power; Clause 15.247(a)(3); RSS-247 5.2

2.1 Test Procedure

The radio was connected through a 20dB attenuator to the spectrum analyzer for measurement. Low, mid, and high channel output power was measured. Power measurements were made on 10/19/2021.

2.2 Test Criteria


| Conducted Power Limit |
|--|
| 1 W peak (+30dBm) |
| Limit Restated as Field: 125.23 dB μ V/m @ 3 m |

2.3 Test Results, Peak Power (dBm)

| Peak Output Power - Conducted Test Data | | | | | | | | | | | | |
|---|-----------|----------------|-------------------|-----|-----------------|----|-----|---------------------|-------|-------------|----------|------|
| Environmental Conditions: | | Temperature | 22 | °C | Humidity | 53 | RH | Barometric Pressure | 30.00 | in Hg | | |
| EUT (6 or 20 dB) Bandwidth: | | 0.70 | MHz | | | | | | | | | |
| Measurement Parameters: | | RBW | 1 | MHz | VBW | 3 | MHz | Span | 3 | MHz | Detector | Peak |
| Channel | Frequency | Measured Power | Attenuator Factor | | Corrected Power | | | Limit | | Test Result | | |
| | (MHz) | (dBm) | (dB) | | (dBm) | | | (dBm) | | | | |
| 2 | 2402 | -10.12 | 20.12 | | 10 | | | 30 | | Pass | | |
| 40 | 2440 | -8.3 | 20.12 | | 11.82 | | | 30 | | Pass | | |
| 80 | 2480 | -7.12 | 20.12 | | 13 | | | 30 | | Pass | | |

The requirements were satisfied.


Peak output power test data:

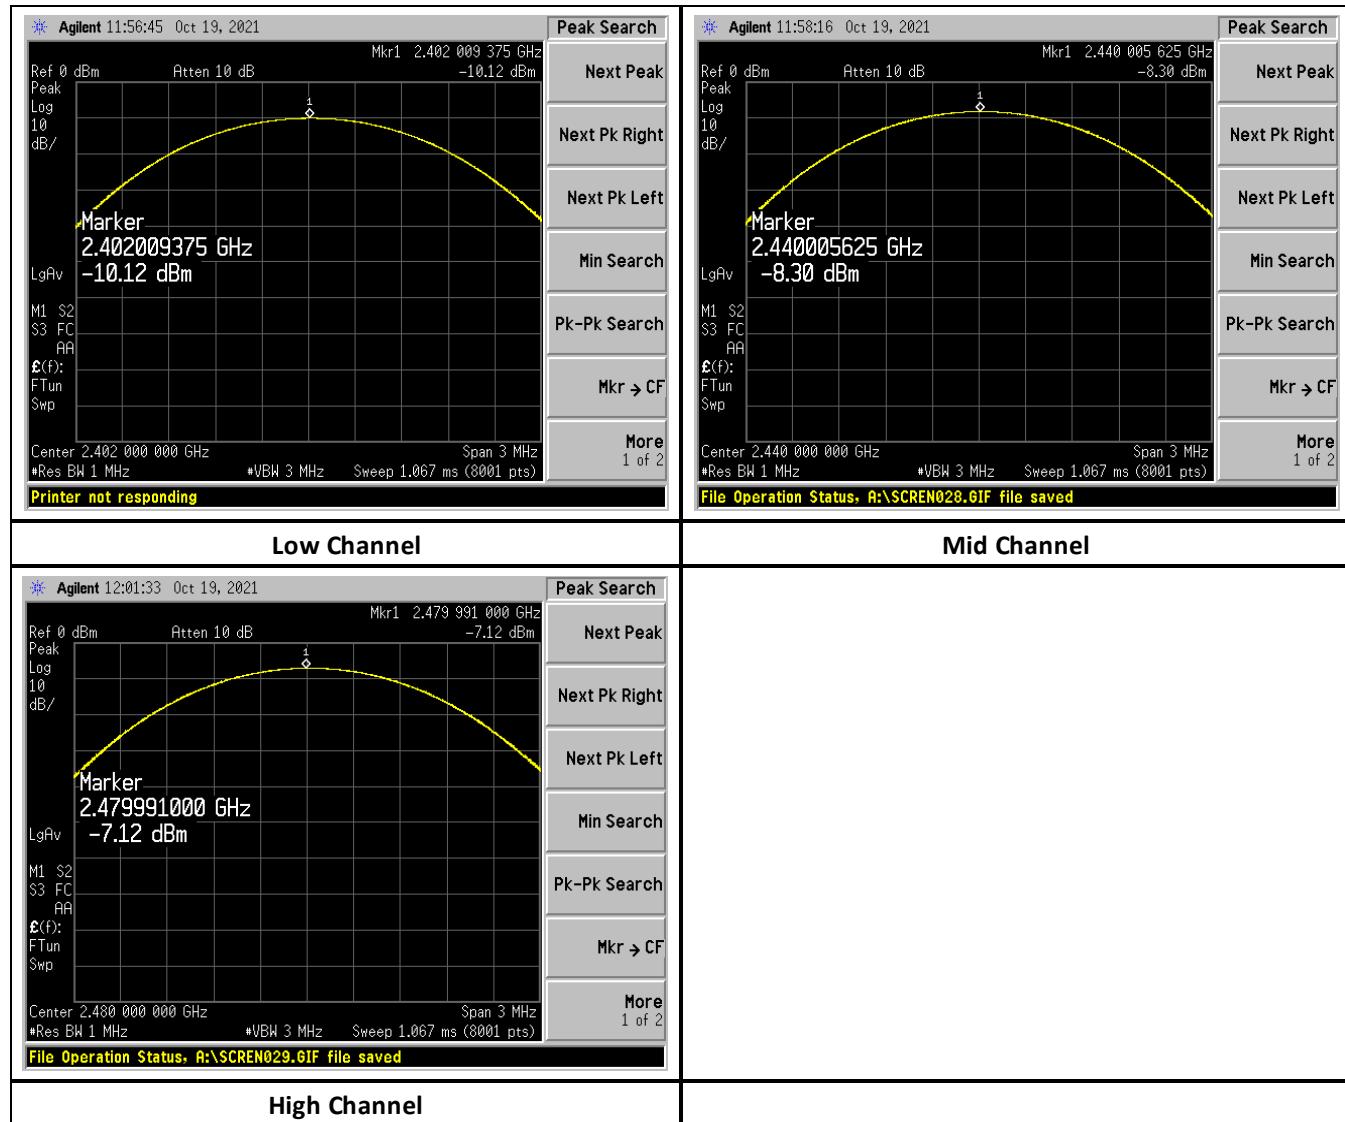

2.4 Test Results, Duty Cycle

Measurement is based on intervals not to exceed 100 msec. Maximum transmitter on time is divided by the lesser of 100 msec or the actual measured minimum transmitter interval time. The result is converted to dB and applied as needed to peak measurements of transmitter artifacts to determine average power. This is not a pass/fail measurement.

Continuous packet transmission mode was used for the duty cycle measurement, which would represent a worst-case operating scenario. Duty Cycle measurement was performed on 19 Oct, 2021.
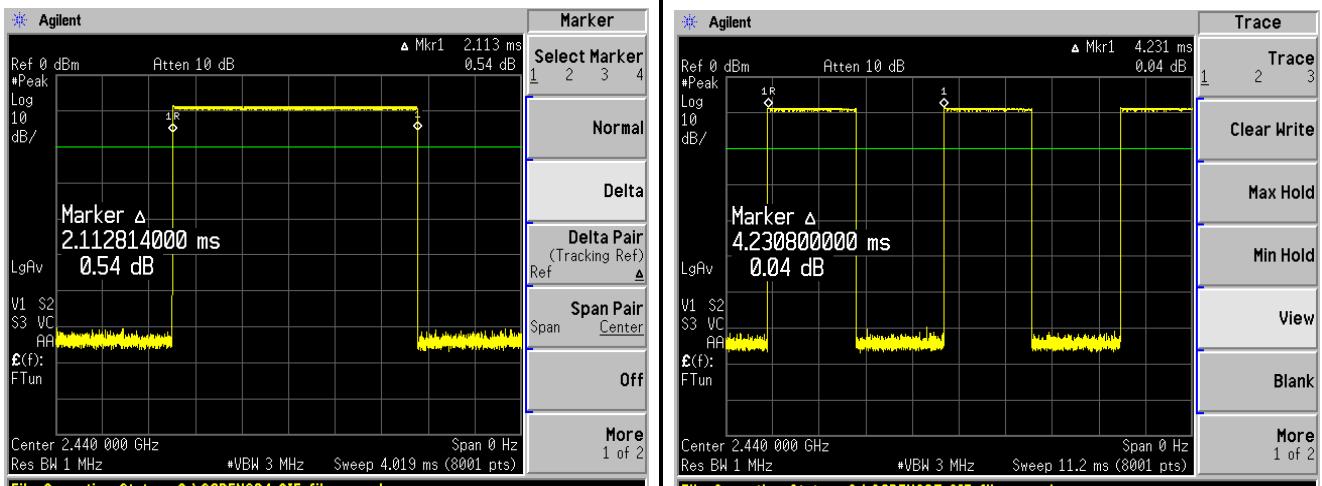
| Duty Cycle - Conducted Test Data | | | | | | | | | | | | | | |
|---|--------------------------|----------------|-----------------------------|---|--|------|-------|--------------------------------|------|--|--|--|--|--|
| Environmental Conditions: Temperature | | | | °C | Humidity | | RH | Barometric Pressure | | | | | | |
| Measurement Parameters: | | RBW | 100 kHz | VBW | 100 kHz | Span | 1 MHz | Detector | Peak | | | | | |
| Measured On Time (ms) | Max On Time Allowed (ms) | On Time Result | Measured Time Interval (ms) | Duty Cycle Factor (dB) (20 * Log(On time/Interval)) | | | | Duty Cycle Factor Allowed (dB) | | | | | | |
| 2.113 | 100 | Pass | 4.231 | -6.03 | | | | -6.03 | | | | | | |
| RF Exposure Allowable Duty Cycle Reduction (10*Log(On time/Interval)): | | | | | | | | -3.02 | | | | | | |
|  | | | | | | | | | | | | | | |
| Transmit Event Time | | | | | Time Interval (Return to channel time) | | | | | | | | | |

Duty Cycle Measurement

3.0 Power Spectral Density; 15.247(e); RSS-247, 5.2

3.1 Test Procedure




A spectrum analyzer is used to measure the power spectral density.

3.2 Test Criteria

| Power Spectral Density, Conducted Limit | |
|--|--|
| 8 dBm / 3 kHz | |
| Restated as field strength: 103.23 dB μ V/m at 3 m | |

3.3 Test Results, Tabular

The radio was connected through a 20dB attenuator to the spectrum analyzer for measurement. Low, mid, and high channel output power was measured. PSD measurements were made on 10/19/2021.
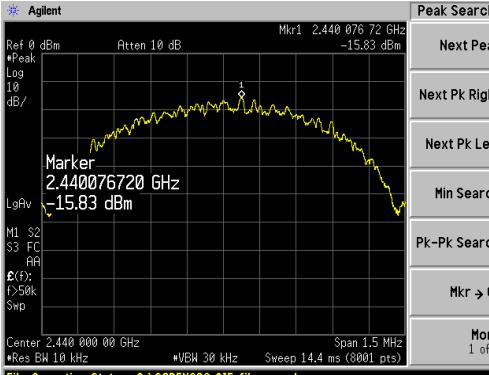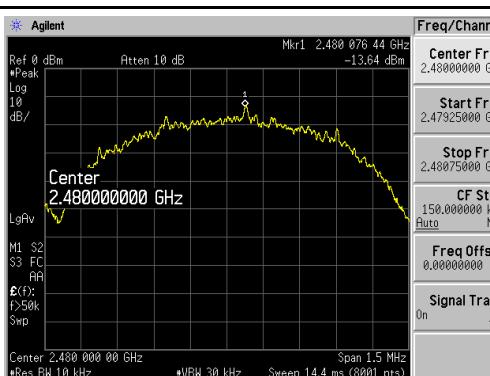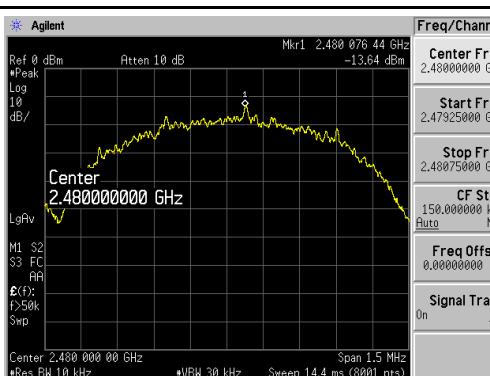
| Power Spectral Density - Conducted Test Data | | | | | | | | | | | | | | | |
|--|-----------|----------------|-------------------|-----------------|-------------|-------|-------------|---------------------|-------|-------|--|--|--|--|--|
| Environmental Conditions: | | Temperature | 22 | °C | Humidity | 53 | RH | Barometric Pressure | 30.00 | in Hg | | | | | |
| EUT Channel Bandwidth: | | 0.75 | MHz | | | | | | | | | | | | |
| Measurement Parameters: | | RBW | 10 kHz | VBW | 30 kHz | Span | 1.5 MHz | Detector | Peak | | | | | | |
| Channel | Frequency | Measured Power | Attenuator Factor | Corrected Power | | Limit | Test Result | | | | | | | | |
| | (MHz) | (dBm) | (dB) | (dBm) | | (dBm) | | | | | | | | | |
| 2 | 2402 | -16.2 | 20.12 | 3.92 | | 8 | Pass | | | | | | | | |
| 40 | 2440 | -13.83 | 20.12 | 6.29 | | 8 | Pass | | | | | | | | |
| 80 | 2480 | -13.64 | 20.12 | 6.48 | | 8 | Pass | | | | | | | | |
|   | | | | | | | | | | | | | | | |
|  | | | | | | | | | | | | | | | |
| Low Channel | | | | | Mid Channel | | | | | | | | | | |
|  | | | | | | | | | | | | | | | |
| High Channel | | | | | | | | | | | | | | | |

The requirements were satisfied.

4.0 Occupied Bandwidth; 15.247(a)(2), 2.1049; RSS-247, RSS-Gen 4.6

4.1 Test Procedure

Bandwidth is measured and recorded. The bandwidth measurement is used to verify DTS characteristics and/or for general reporting for agency application. Bandwidth measurements were made on 10/19/2021.

4.2 Test Criteria

| Bandwidth |
|----------------------|
| 6 dB 500 kHz minimum |
| 99% (all methods) |

In cases where the software function fails to find/mark the correct edge of the modulated envelope, a manual measurement (marker-delta over display line) is taken with the same spectrum analyzer settings.


4.3 Test Results, Tabular

The requirements were satisfied.

| Occupied Bandwidth - Conducted Test Data | | | | | | | | | | | | | |
|--|-----------|-------------|--------------------|-----|----------|----------------------------|-------|---------------------|-------------|--|--|--|--|
| Environmental Conditions: | | Temperature | 22 | °C | Humidity | 53 | RH | Barometric Pressure | 30.00 in Hg | | | | |
| Measurement Parameters: | | RBW | 100 kHz | VBW | 300 kHz | Span | 3 MHz | Detector | Peak | | | | |
| Measurement Bandwidth: | | | - 6 dB | | | | | | | | | | |
| Channel | Frequency | | Measured Bandwidth | | | Reported Minimum Bandwidth | | | | | | | |
| | (MHz) | | (kHz) | | | (kHz) | | | | | | | |
| 2 | 2402 | | 696.364 | | | 686.249 | | | | | | | |
| 40 | 2440 | | 686.249 | | | | | | | | | | |
| 80 | 2480 | | 697.351 | | | | | | | | | | |

The EUT met the requirements.

4.4 Test Results, Recorded: 6 dB, 99% BW

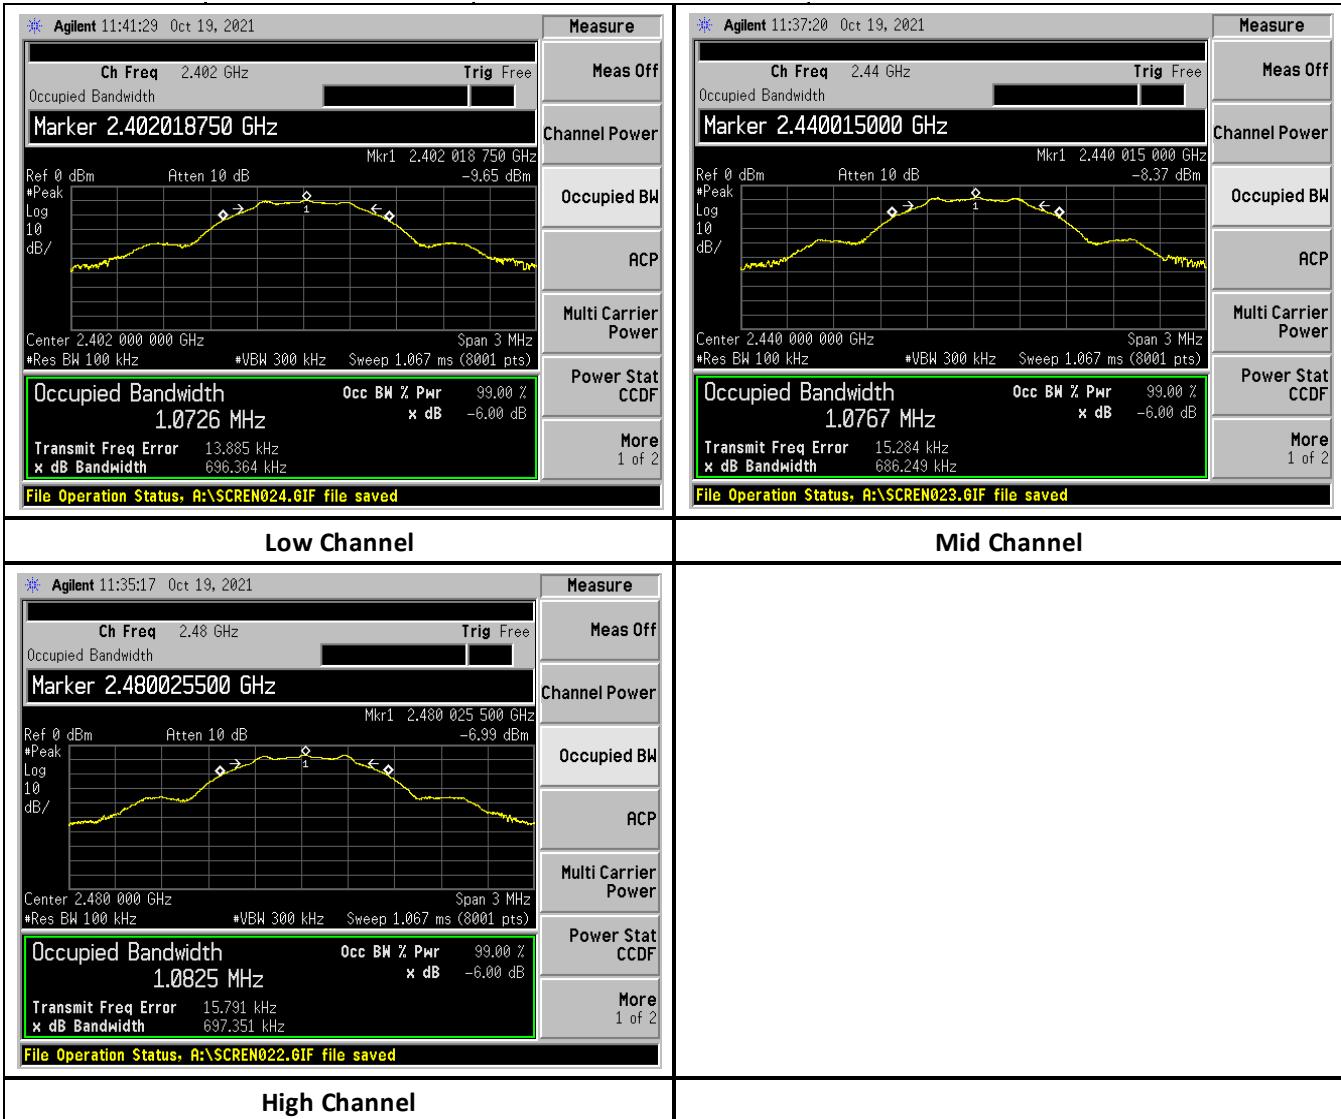

5.0 Band Edge; 15.247, 15.205; RSS-247 5.5; RSS-Gen 4.9

5.1 Test Procedure

EUT is placed into normal transmit operation on the nearest band edge channel. The spectrum analyzer is approximately centered on the band edge frequency with span sufficient to include the peak of the adjacent fundamental signal. Measurement includes at least two standard bandwidths from the respective band edge. If required, the band-edge marker-delta method is utilized. The radio was connected through a 20dB attenuator to the spectrum analyzer for measurement. Band Edge measurements were made on 10/19/2021.

5.2 Test Criteria

| Unwanted Emissions |
|---------------------------------------|
| Emissions Adjacent to Authorized Band |

5.3 Test Results

Measurements included fundamental and more than 2 standard bandwidths (standard bandwidth 1 MHz) beyond the band edges to provide a clear view of the fundamental and the declining emission levels. Beyond this point, the general emission limits are applied in the radiated emission tests reported elsewhere in the report.

This is a conducted measurement with limits derived from the general emission field strength limits. The far field path loss equation is utilized to convert the field strength limits to EIRP limits in dBm as follows:

$$\text{Given } \text{EIRP} = \text{E}_{\text{dB}\mu\text{V}/\text{m}} + 20\text{Log}_{10}(\text{d}) - 104.8$$


$$\text{EIRP} = 54 \text{ dB}\mu\text{V}/\text{m} + 20\text{Log}_{10}(3 \text{ m}) - 104.8 \text{ dB} = -41.25 \text{ dBm} \text{ (commonly -41 dBm is applied)}$$

Emissions below band were measured with peak detection in 100 kHz RBW.


Emissions above band measured with peak detection and 1 Hz video average in 1 MHz RBW if the peak emission exceeds the average limit.

The requirement was satisfied. Plotted results appear on the following pages.

Lower Band Edge:

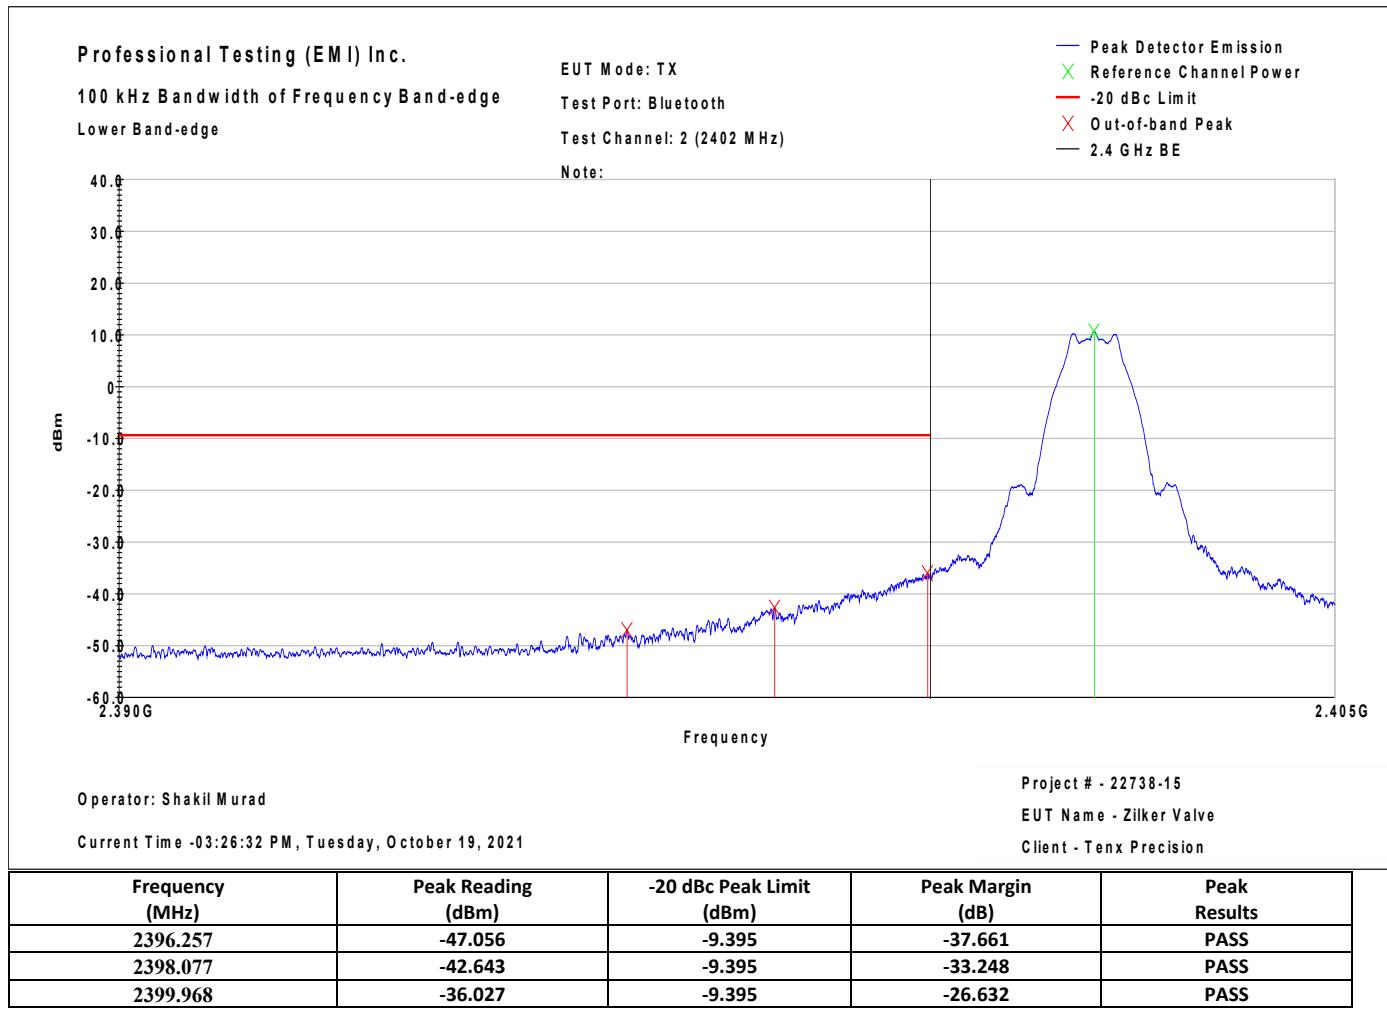

Upper Band Edge:

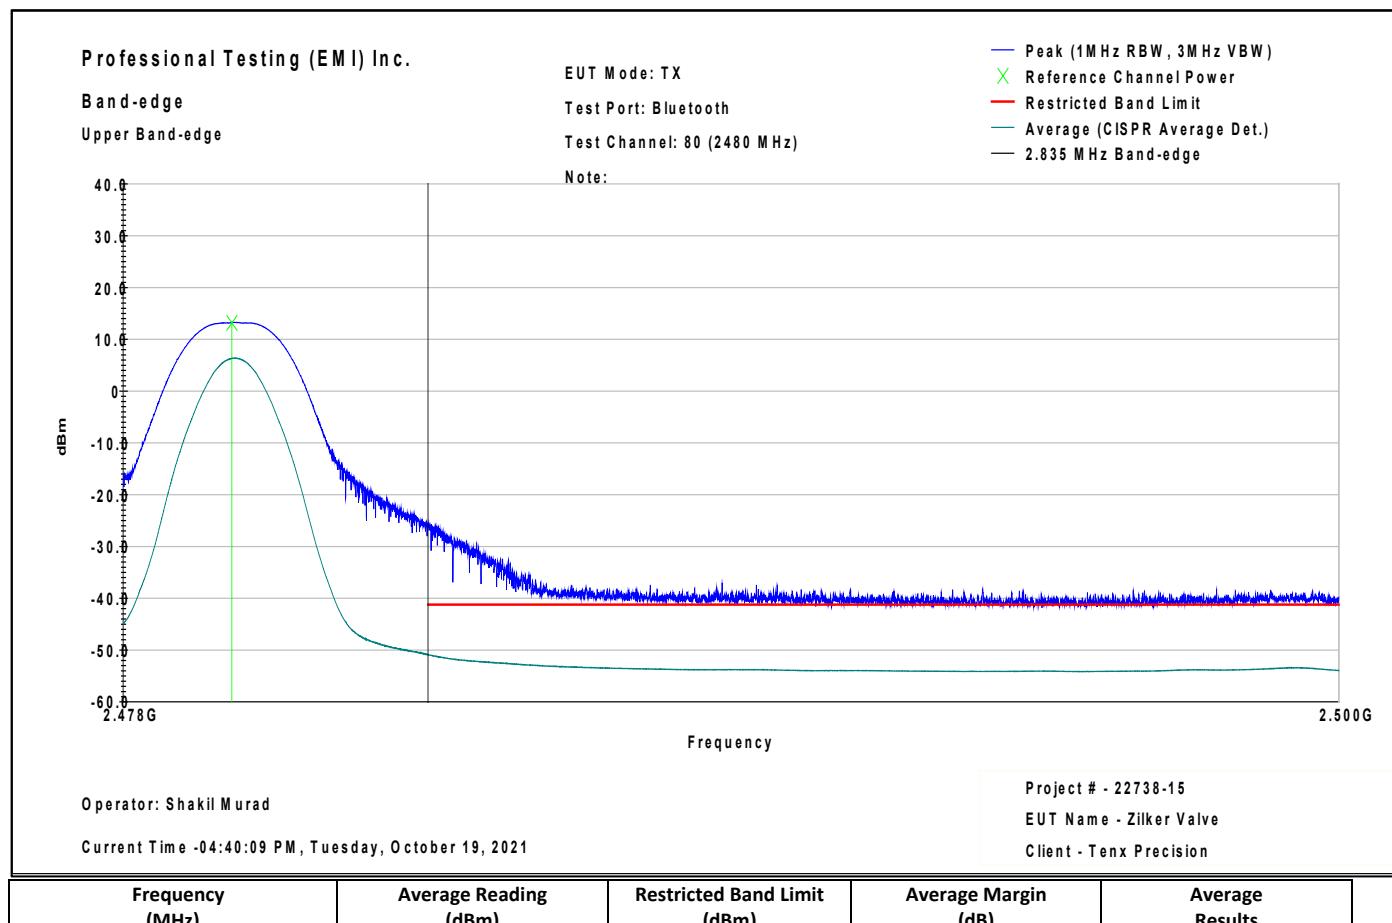

6.0 Conducted Antenna Port Spurious Emissions, Transmit Mode; 15.247, 15.209; RSS-247 5.5, RSS-Gen 4.9 & 4.10

6.1 Test Procedure

Conducted antenna port emissions are measured with the EUT transmitting on the required frequencies. Conducted antenna port measurements were made on 10/21/2021.

| 7.1.1 Test Parameters | | |
|-------------------------|---------------------|---------------------|
| 30 MHz to 1 GHz | 1 GHz to 18 GHz | 18 GHz to 25 GHz |
| 120kHz RBW / 300kHz VBW | 1MHz RBW / 3MHz VBW | 1MHz RBW / 3MHz VBW |
| Quasi-peak | Peak & Average | Peak & Average |

6.2 Test Criteria


| Unwanted Emissions |
|--|
| Antenna Port Conducted Spurious/Harmonic Emissions Transmit Mode |

6.3 Test Results


Three channels were tested. EUT was transmitting continuously and unmodulated.

The top, middle and bottom channels were tested. -20dBc limits were applied per 15.247(d). The EUT satisfied the requirements. Restricted band emissions evaluated in radiated transmitter spurious emissions section per 15.209. 100kHz RBW / 300kHz VBW used for measurements.


Bottom Channel:

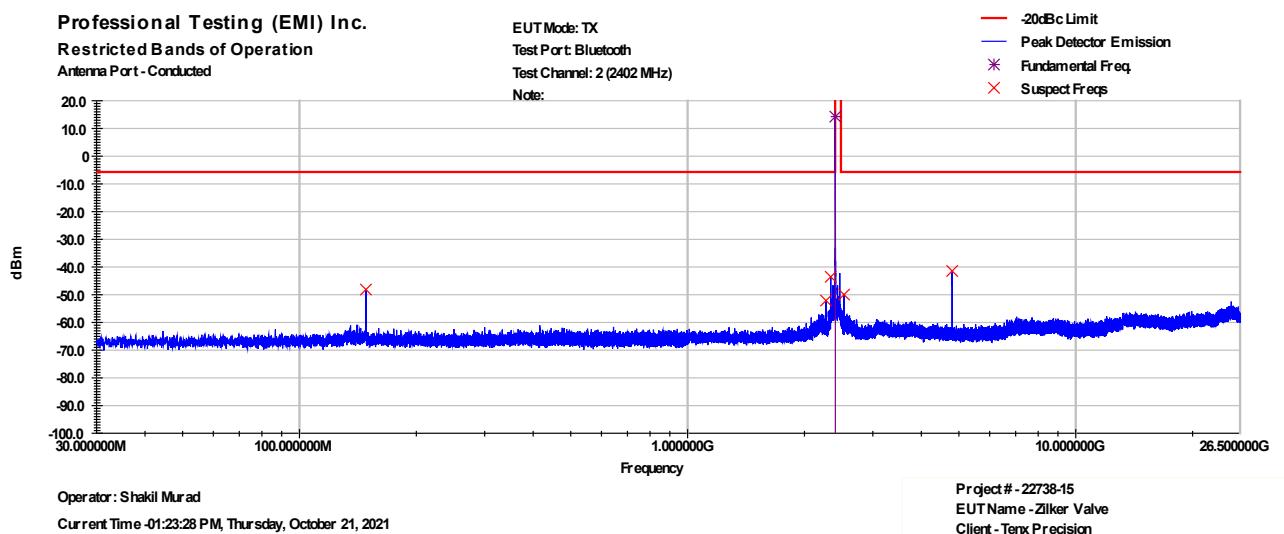

Middle Channel:

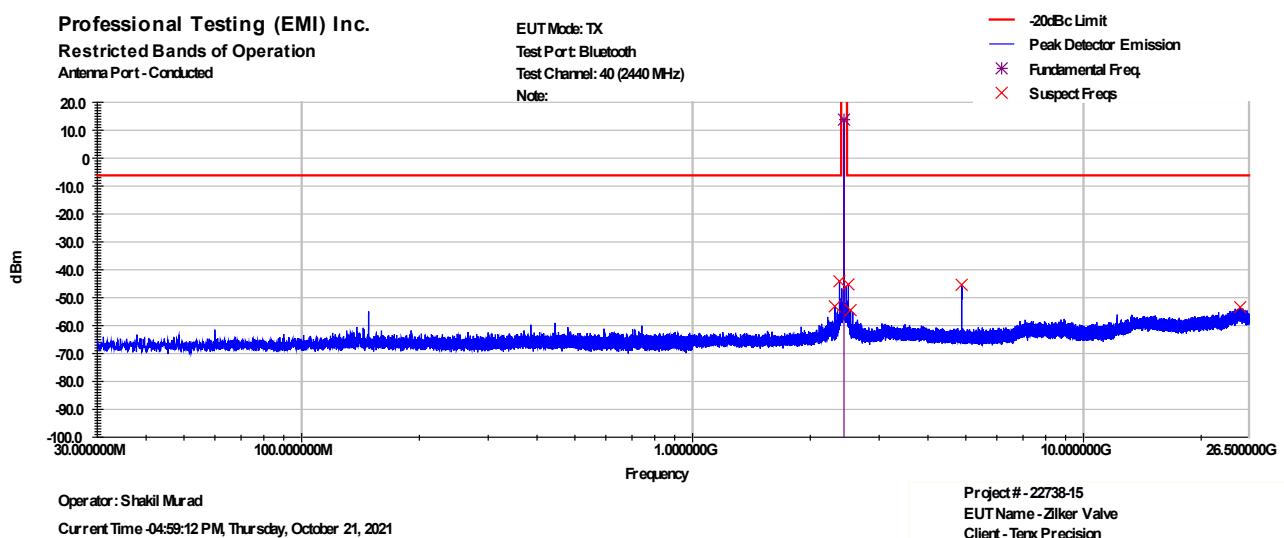


Top Channel:

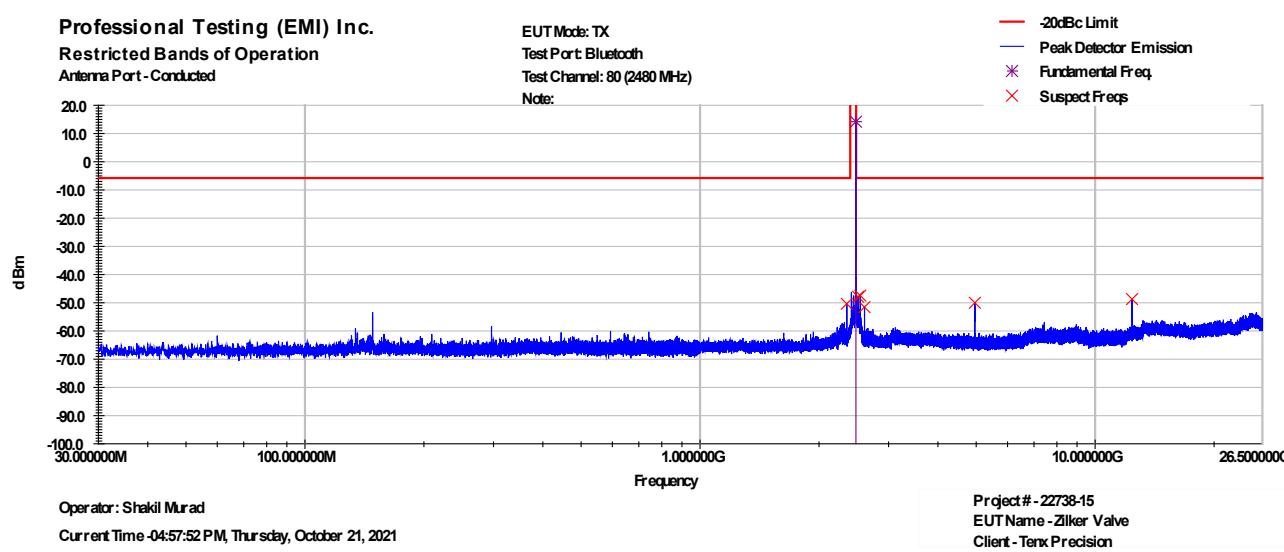

7.0 Radiated Spurious Emissions, Transmit Mode; 15.247, 15.205; RSS-247 5.5; RSS-Gen 6.13 & 8.10

7.1 Test Procedure

Radiated emissions are measured with the EUT transmitting on the required frequencies.

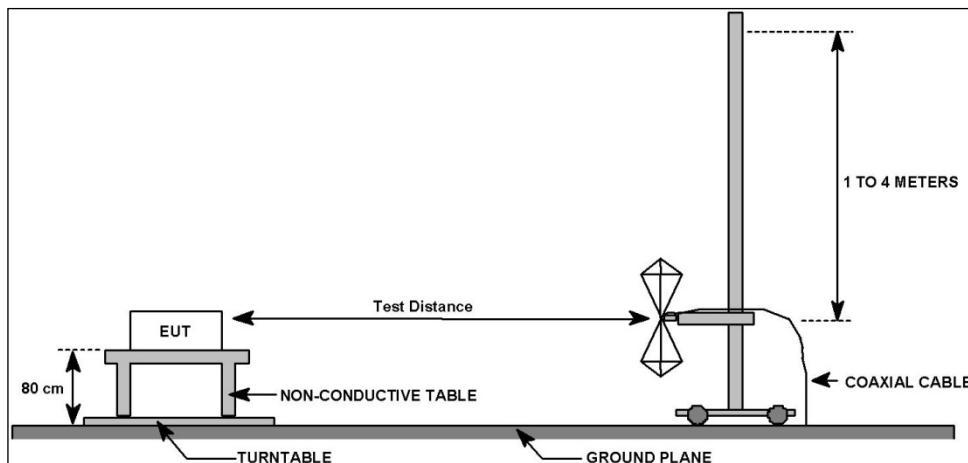

6.1.1 Test Distance and Detection Method

| 30 MHz to 1 GHz | 1 GHz to 18 GHz | 18 GHz to 26.5 GHz |
|-----------------|-----------------|--------------------|
| 10 m | 3 m | 1 m |
| Quasi-peak | Peak & Average | Peak & Average |

7.2 Test Criteria

| 47 CFR (USA) // IC (Canada) | | |
|--|---|-------------|
| Section Reference | Parameter | Date(s) |
| 15.247(d), 15.205 // RSS-247 5.5, RSS-Gen 6.13 & 8.10 | Field Strength of Radiated Spurious/Harmonic Emissions Transmit Mode | 14 Oct 2021 |


7.3 Test Results

Three channels were tested. EUT was transmitting continuously unmodulated. Device tested in normal operational orientation. Filters used to remove fundamental during testing.


The EUT satisfied the requirement. Graphical and tabular data appears below.

7.3.1 Bottom Channel, 30 MHz to 26.5 GHz


30MHz - 1GHz Vertical Polarity Measured Emissions Data

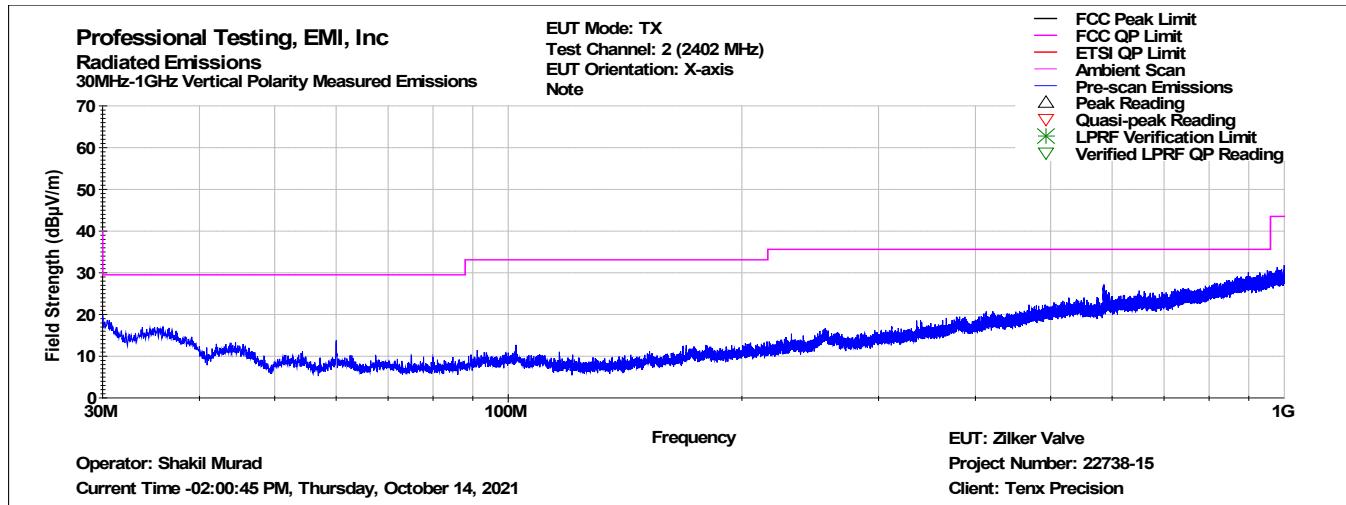

30MHz - 1GHz Horizontal Polarity Measured Emissions Data

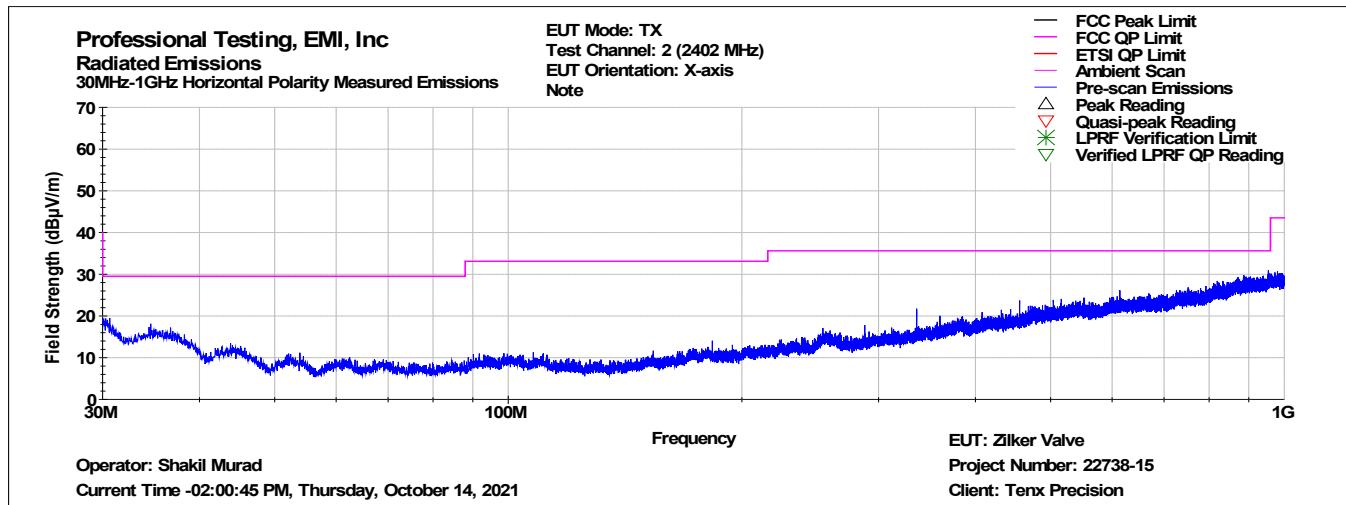


1GHz - 18GHz Vertical Polarity Measured Emissions Data

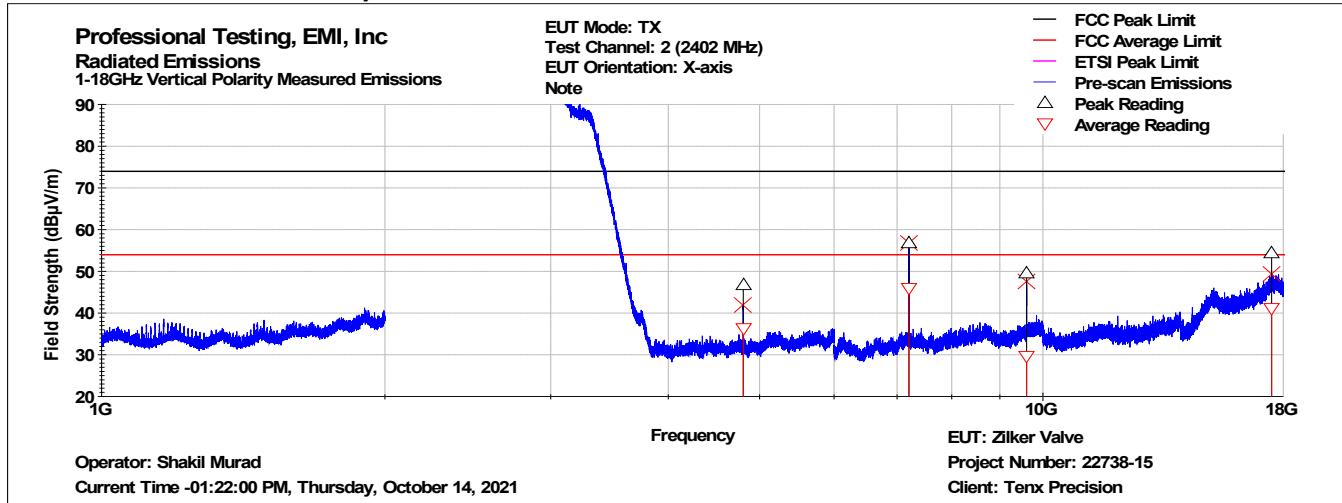

1GHz - 18GHz Vertical Polarity Measured Emissions Data - FCC

| Frequency (MHz) | EUT Direction (Degrees) | Antenna Height (cm) | Peak Reading (dB μ V) | Peak Limit (dB μ V) | Peak Margin (dB) | Peak Results | Average Reading (dB μ V) | Average Limit (dB μ V) | Average Margin (dB) | Average Results |
|-----------------|-------------------------|---------------------|---------------------------|-------------------------|------------------|--------------|------------------------------|----------------------------|---------------------|-----------------|
| 4804.37 | 93 | 102 | 46.814 | 73.958 | -27.144 | PASS | 36.283 | 53.958 | -17.675 | PASS |
| 7205.18 | 344 | 143 | 56.718 | 73.958 | -17.240 | PASS | 45.925 | 53.958 | -8.033 | PASS |
| 9609.07 | 223 | 101 | 49.629 | 73.958 | -24.329 | PASS | 29.592 | 53.958 | -24.366 | PASS |
| 17495.10 | 142 | 142 | 54.324 | 73.958 | -19.634 | PASS | 41.106 | 53.958 | -12.852 | PASS |


1GHz - 18GHz Horizontal Polarity Measured Emissions Data

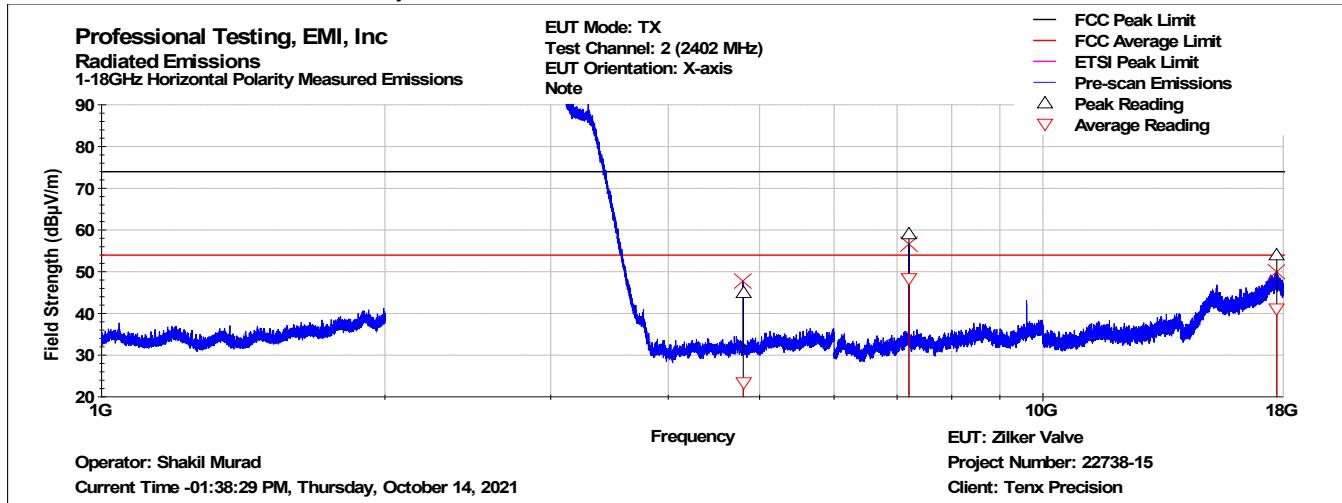

1GHz - 18GHz Horizontal Polarity Measured Emissions Data - FCC

| Frequency (MHz) | EUT Direction (Degrees) | Antenna Height (cm) | Peak Reading (dB μ V) | Peak Limit (dB μ V) | Peak Margin (dB) | Peak Results | Average Reading (dB μ V) | Average Limit (dB μ V) | Average Margin (dB) | Average Results |
|-----------------|-------------------------|---------------------|---------------------------|-------------------------|------------------|--------------|------------------------------|----------------------------|---------------------|-----------------|
| 4804.53 | 2 | 375 | 45.022 | 73.958 | -28.936 | PASS | 23.327 | 53.958 | -30.631 | PASS |
| 7205.23 | 315 | 102 | 59.001 | 73.958 | -14.957 | PASS | 48.374 | 53.958 | -5.584 | PASS |
| 17717.08 | 165 | 235 | 54.075 | 73.958 | -19.883 | PASS | 41.159 | 53.958 | -12.799 | PASS |


18GHz - 26.5GHz Vertical Polarity Measured Emissions Data

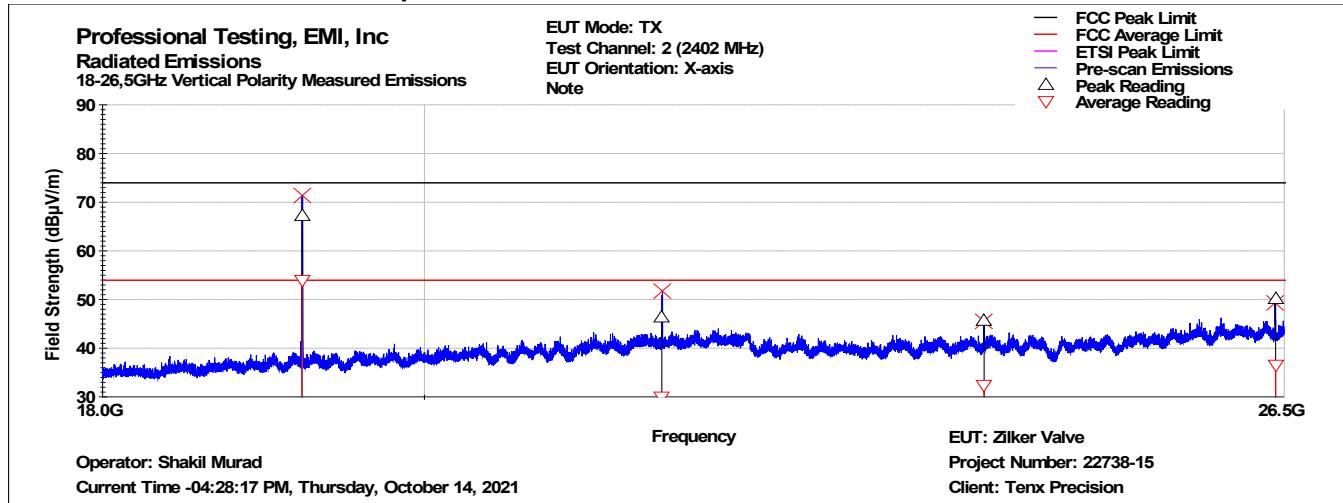

18GHz - 26.5GHz Vertical Polarity Measured Emissions Data - FCC

| Frequency (MHz) | EUT Direction (Degrees) | Antenna Height (cm) | Peak Reading (dB μ V) | Peak Limit (dB μ V) | Peak Margin (dB) | Peak Results | Average Reading (dB μ V) | Average Limit (dB μ V) | Average Margin (dB) | Average Results |
|-----------------|-------------------------|---------------------|---------------------------|-------------------------|------------------|--------------|------------------------------|----------------------------|---------------------|-----------------|
| 19214.18 | 1 | 100.000 | 67.278 | 73.958 | -6.680 | PASS | 53.877 | 53.958 | -0.081 | PASS |
| 21615.61 | 185 | 100.000 | 46.374 | 73.958 | -27.584 | PASS | 30.007 | 53.958 | -23.951 | PASS |
| 24020.35 | 145 | 100.000 | 45.662 | 73.958 | -28.296 | PASS | 32.483 | 53.958 | -21.475 | PASS |
| 26425.00 | 22 | 100.000 | 50.141 | 73.958 | -23.817 | PASS | 36.471 | 53.958 | -17.487 | PASS |

18GHz - 26.5GHz Horizontal Polarity Measured Emissions Data

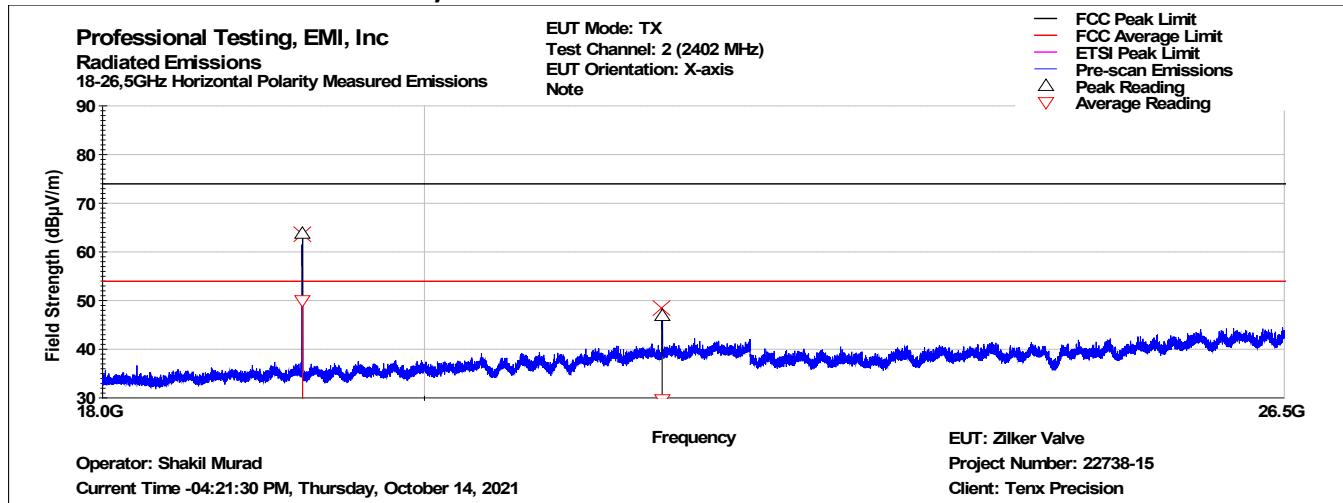


18GHz - 26.5GHz Horizontal Polarity Measured Emissions Data - FCC

| Frequency (MHz) | EUT Direction (Degrees) | Antenna Height (cm) | Peak Reading (dB μ V) | Peak Limit (dB μ V) | Peak Margin (dB) | Peak Results | Average Reading (dB μ V) | Average Limit (dB μ V) | Average Margin (dB) | Average Results |
|-----------------|-------------------------|---------------------|---------------------------|-------------------------|------------------|--------------|------------------------------|----------------------------|---------------------|-----------------|
| 19218.22 | 293 | 100.000 | 63.755 | 73.958 | -10.203 | PASS | 49.945 | 53.958 | -4.013 | PASS |
| 21618.14 | 313 | 100.000 | 46.820 | 73.958 | -27.138 | PASS | 29.739 | 53.958 | -24.219 | PASS |

7.3.2 Middle Channel, 30 MHz to 26.5 GHz


1GHz - 18GHz Vertical Polarity Measured Emissions Data

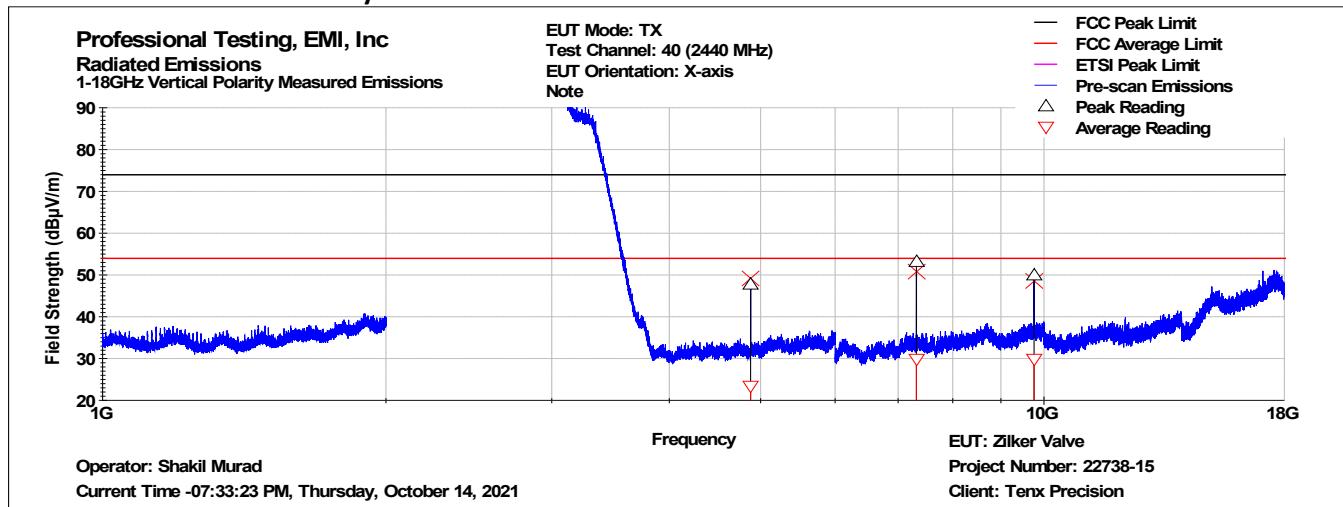

1GHz - 18GHz Vertical Polarity Measured Emissions Data - FCC

| Frequency (MHz) | EUT Direction (Degrees) | Antenna Height (cm) | Peak Reading (dB μ V) | Peak Limit (dB μ V) | Peak Margin (dB) | Peak Results | Average Reading (dB μ V) | Average Limit (dB μ V) | Average Margin (dB) | Average Results |
|-----------------|-------------------------|---------------------|---------------------------|-------------------------|------------------|--------------|------------------------------|----------------------------|---------------------|-----------------|
| 4879.44 | 224 | 102 | 47.671 | 73.958 | -26.287 | PASS | 23.386 | 53.958 | -30.572 | PASS |
| 7319.25 | 16 | 126 | 53.185 | 73.958 | -20.773 | PASS | 29.842 | 53.958 | -24.116 | PASS |
| 9761.11 | 227 | 174 | 50.002 | 73.958 | -23.956 | PASS | 29.888 | 53.958 | -24.070 | PASS |


1GHz - 18GHz Horizontal Polarity Measured Emissions Data

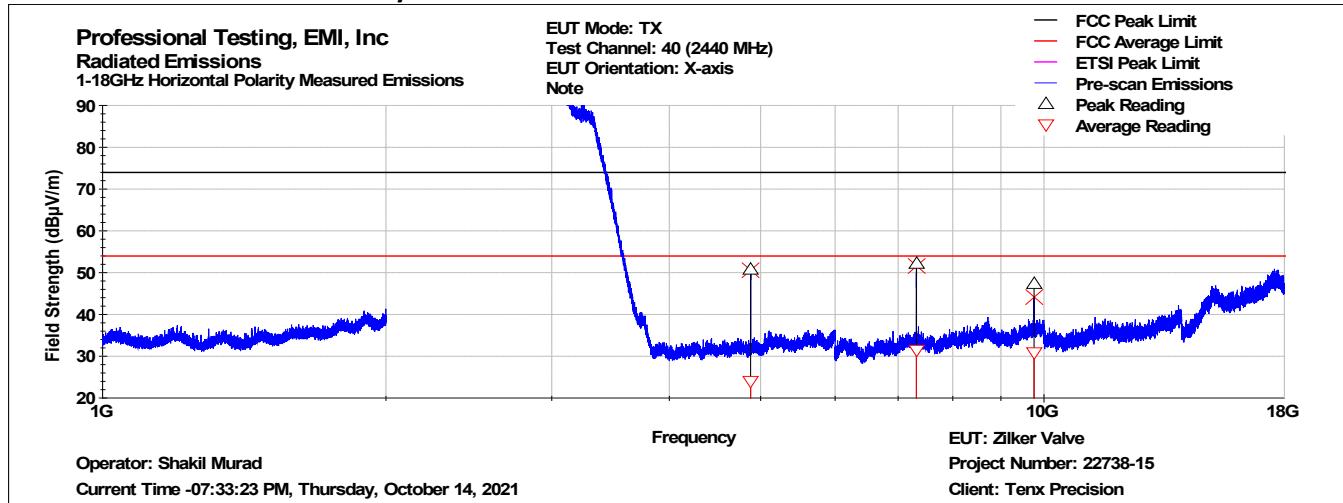

1GHz - 18GHz Horizontal Polarity Measured Emissions Data - FCC

| Frequency (MHz) | EUT Direction (Degrees) | Antenna Height (cm) | Peak Reading (dB μ V) | Peak Limit (dB μ V) | Peak Margin (dB) | Peak Results | Average Reading (dB μ V) | Average Limit (dB μ V) | Average Margin (dB) | Average Results |
|-----------------|-------------------------|---------------------|---------------------------|-------------------------|------------------|--------------|------------------------------|----------------------------|---------------------|-----------------|
| 4879.51 | 110 | 125 | 50.724 | 73.958 | -23.234 | PASS | 24.009 | 53.958 | -29.949 | PASS |
| 7319.20 | 316 | 149 | 52.073 | 73.958 | -21.885 | PASS | 31.435 | 53.958 | -22.523 | PASS |
| 9761.25 | 146 | 126 | 47.295 | 73.958 | -26.663 | PASS | 30.861 | 53.958 | -23.097 | PASS |


18GHz - 26.5GHz Vertical Polarity Measured Emissions Data

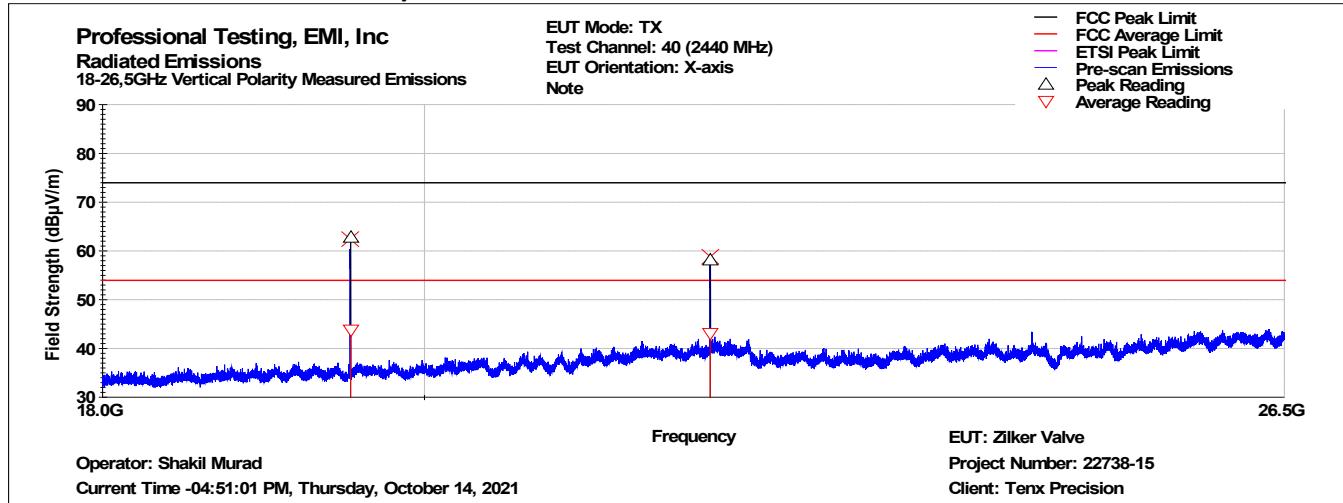

18GHz - 26.5GHz Vertical Polarity Measured Emissions Data - FCC

| Frequency (MHz) | EUT Direction (Degrees) | Antenna Height (cm) | Peak Reading (dB μ V) | Peak Limit (dB μ V) | Peak Margin (dB) | Peak Results | Average Reading (dB μ V) | Average Limit (dB μ V) | Average Margin (dB) | Average Results |
|-----------------|-------------------------|---------------------|---------------------------|-------------------------|------------------|--------------|------------------------------|----------------------------|---------------------|-----------------|
| 19522.22 | 0 | 100.000 | 62.672 | 73.958 | -11.286 | PASS | 43.831 | 53.958 | -10.127 | PASS |
| 21960.32 | 137 | 100.000 | 58.146 | 73.958 | -15.812 | PASS | 43.118 | 53.958 | -10.840 | PASS |

18GHz - 26.5GHz Horizontal Polarity Measured Emissions Data

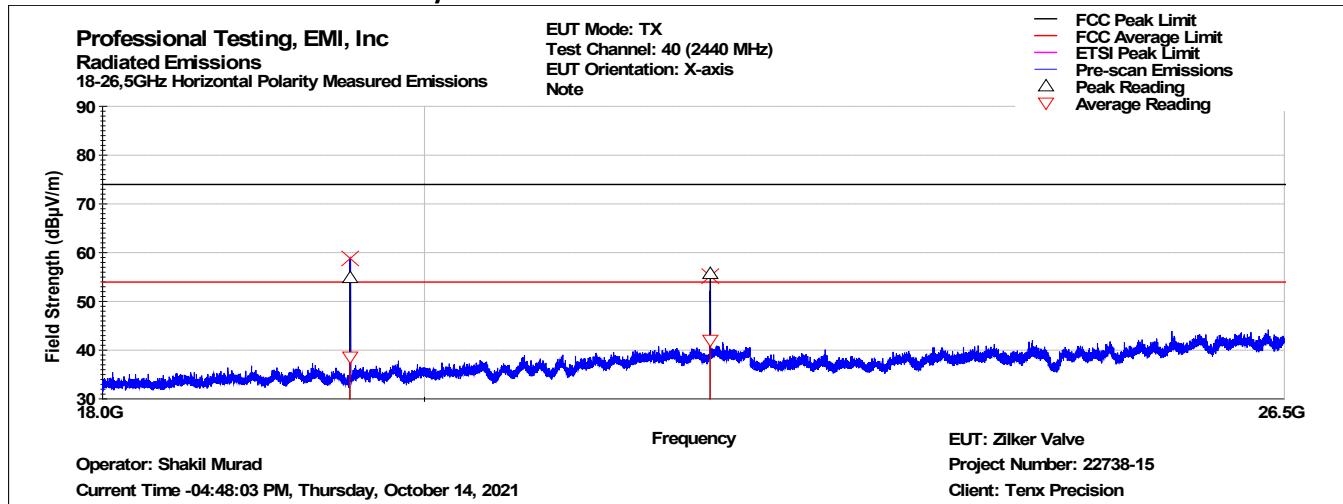


18GHz - 26.5GHz Horizontal Polarity Measured Emissions Data - FCC

| Frequency (MHz) | EUT Direction (Degrees) | Antenna Height (cm) | Peak Reading (dB μ V) | Peak Limit (dB μ V) | Peak Margin (dB) | Peak Results | Average Reading (dB μ V) | Average Limit (dB μ V) | Average Margin (dB) | Average Results |
|-----------------|-------------------------|---------------------|---------------------------|-------------------------|------------------|--------------|------------------------------|----------------------------|---------------------|-----------------|
| 19518.10 | 309 | 100.000 | 54.908 | 73.958 | -19.050 | PASS | 38.576 | 53.958 | -15.382 | PASS |
| 21960.20 | 0 | 100.000 | 55.623 | 73.958 | -18.335 | PASS | 42.008 | 53.958 | -11.950 | PASS |

7.3.3 Top Channel, 1GHz to 26.5 GHz


1GHz - 18GHz Vertical Polarity Measured Emissions Data

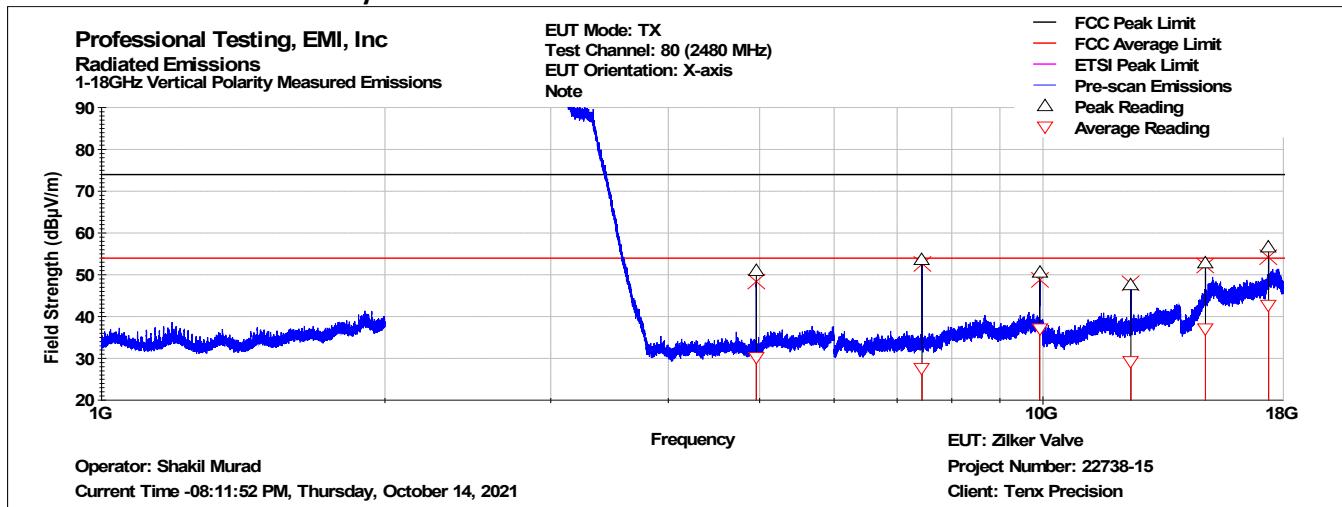

1GHz - 18GHz Vertical Polarity Measured Emissions Data - FCC

| Frequency (MHz) | EUT Direction (Degrees) | Antenna Height (cm) | Peak Reading (dB μ V) | Peak Limit (dB μ V) | Peak Margin (dB) | Peak Results | Average Reading (dB μ V) | Average Limit (dB μ V) | Average Margin (dB) | Average Results |
|-----------------|-------------------------|---------------------|---------------------------|-------------------------|------------------|--------------|------------------------------|----------------------------|---------------------|-----------------|
| 4960.51 | 225 | 154 | 51.025 | 73.958 | -22.933 | PASS | 30.294 | 53.958 | -23.664 | PASS |
| 7439.40 | 77 | 156 | 53.509 | 73.958 | -20.449 | PASS | 27.723 | 53.958 | -26.235 | PASS |
| 9920.16 | 229 | 204 | 50.561 | 73.958 | -23.397 | PASS | 37.121 | 53.958 | -16.837 | PASS |
| 12398.85 | 257 | 217 | 47.613 | 73.958 | -26.345 | PASS | 29.197 | 53.958 | -24.761 | PASS |
| 14879.97 | 51 | 257 | 52.688 | 73.958 | -21.270 | PASS | 37.017 | 53.958 | -16.941 | PASS |
| 17362.03 | 283 | 102 | 56.550 | 73.958 | -17.408 | PASS | 42.728 | 53.958 | -11.230 | PASS |


1GHz - 18GHz Horizontal Polarity Measured Emissions Data

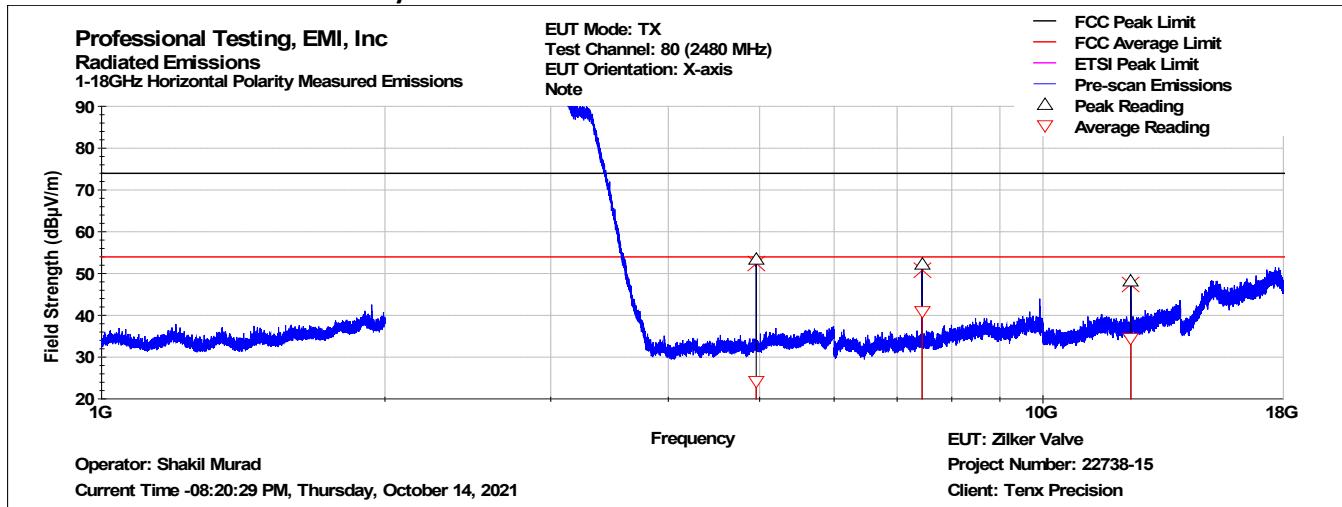

1GHz - 18GHz Horizontal Polarity Measured Emissions Data - FCC

| Frequency (MHz) | EUT Direction (Degrees) | Antenna Height (cm) | Peak Reading (dB μ V) | Peak Limit (dB μ V) | Peak Margin (dB) | Peak Results | Average Reading (dB μ V) | Average Limit (dB μ V) | Average Margin (dB) | Average Results |
|-----------------|-------------------------|---------------------|---------------------------|-------------------------|------------------|--------------|------------------------------|----------------------------|---------------------|-----------------|
| 4959.51 | 108 | 102 | 53.494 | 73.958 | -20.464 | PASS | 24.142 | 53.958 | -29.816 | PASS |
| 7440.78 | 124 | 151 | 52.128 | 73.958 | -21.830 | PASS | 40.890 | 53.958 | -13.068 | PASS |
| 12398.95 | 297 | 198 | 48.206 | 73.958 | -25.752 | PASS | 34.579 | 53.958 | -19.379 | PASS |


18GHz - 26.5GHz Vertical Polarity Measured Emissions Data

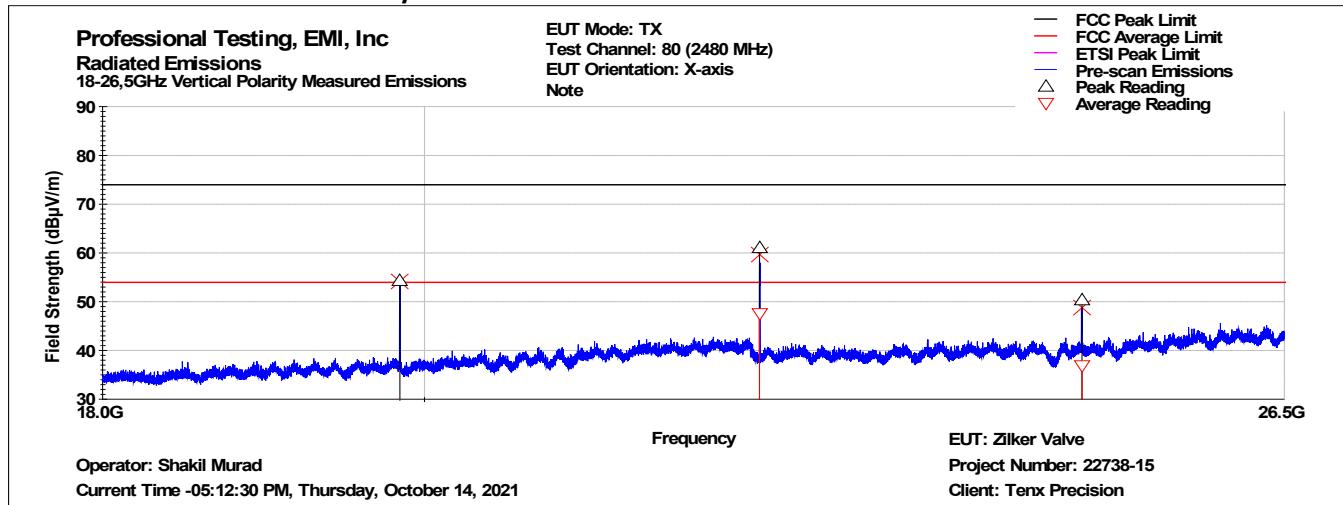

18GHz - 26.5GHz Vertical Polarity Measured Emissions Data - FCC

| Frequency (MHz) | EUT Direction (Degrees) | Antenna Height (cm) | Peak Reading (dB μ V) | Peak Limit (dB μ V) | Peak Margin (dB) | Peak Results | Average Reading (dB μ V) | Average Limit (dB μ V) | Average Margin (dB) | Average Results |
|-----------------|-------------------------|---------------------|---------------------------|-------------------------|------------------|--------------|------------------------------|----------------------------|---------------------|-----------------|
| 19839.84 | 44 | 100.000 | 54.268 | 73.958 | -19.690 | PASS | 27.549 | 53.958 | -26.409 | PASS |
| 22317.93 | 2 | 100.000 | 60.977 | 73.958 | -12.981 | PASS | 47.580 | 53.958 | -6.378 | PASS |
| 24802.42 | 38 | 100.000 | 50.297 | 73.958 | -23.661 | PASS | 36.901 | 53.958 | -17.057 | PASS |

18GHz - 26.5GHz Horizontal Polarity Measured Emissions Data

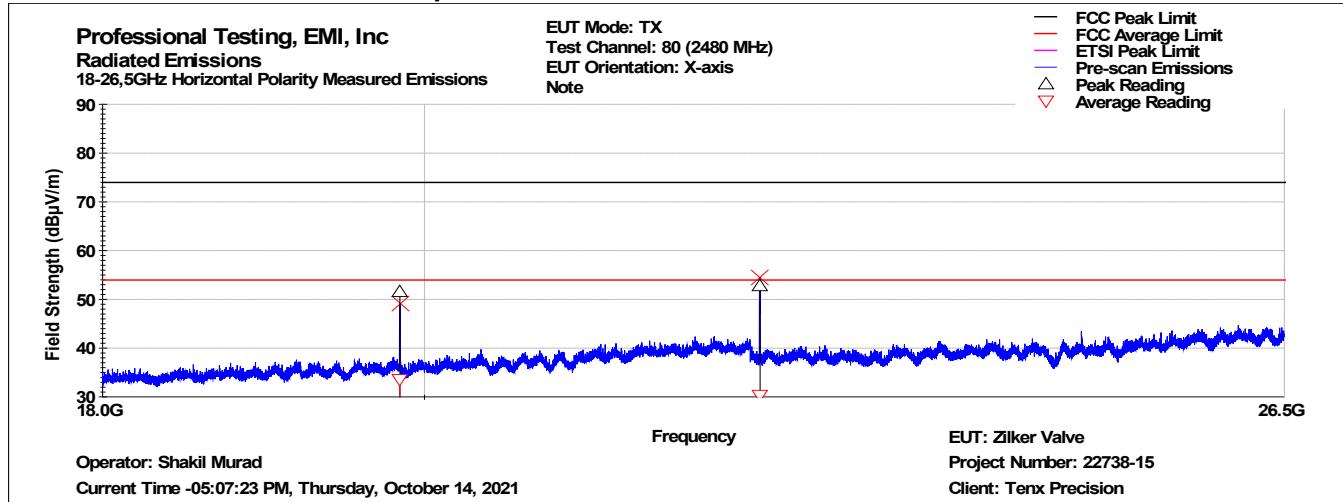

18GHz - 26.5GHz Horizontal Polarity Measured Emissions Data - FCC

| Frequency (MHz) | EUT Direction (Degrees) | Antenna Height (cm) | Peak Reading (dB μ V) | Peak Limit (dB μ V) | Peak Margin (dB) | Peak Results | Average Reading (dB μ V) | Average Limit (dB μ V) | Average Margin (dB) | Average Results |
|-----------------|-------------------------|---------------------|---------------------------|-------------------------|------------------|--------------|------------------------------|----------------------------|---------------------|-----------------|
| 19839.58 | 255 | 100.000 | 51.492 | 73.958 | -22.466 | PASS | 33.708 | 53.958 | -20.250 | PASS |
| 22322.26 | 309 | 100.000 | 52.701 | 73.958 | -21.257 | PASS | 30.396 | 53.958 | -23.562 | PASS |

8.0 Radiated Spurious Emissions, Receive Mode; 15.247, 15.209; RSS-247 5.5, RSS-Gen 4.9 & 4.10

8.1 Test Procedure

Receive mode radiated emissions were measured with the EUT receiving on the center channel on 22 Oct 2021.

| 7.1.1 Test Distance, Table Height, and Detection Method | | |
|---|-----------------|------------------|
| 30 MHz to 1 GHz | 1 GHz to 18 GHz | 18 GHz to 25 GHz |
| 10 m, 80 cm | 3 m, 80 cm | 1 m, 80 cm |
| Quasi-peak | Peak & Average | Peak & Average |

8.2 Test Criteria


| Unwanted Emissions |
|-----------------------------|
| Field Strength of Radiated |
| Spurious/Harmonic Emissions |
| Receive Mode |

8.3 Test Results


The requirement was satisfied.

8.3.1 Middle Channel, 30 MHz to 13 GHz


30MHz - 1GHz Vertical Polarity Measured Emissions Data

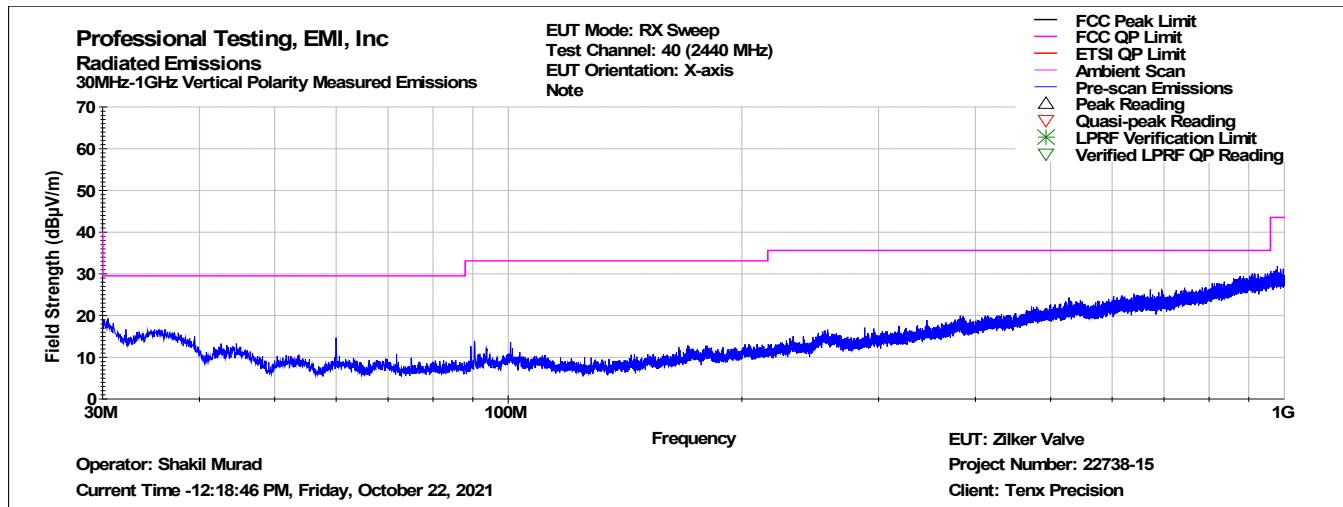


30MHz - 1GHz Horizontal Polarity Measured Emissions Data

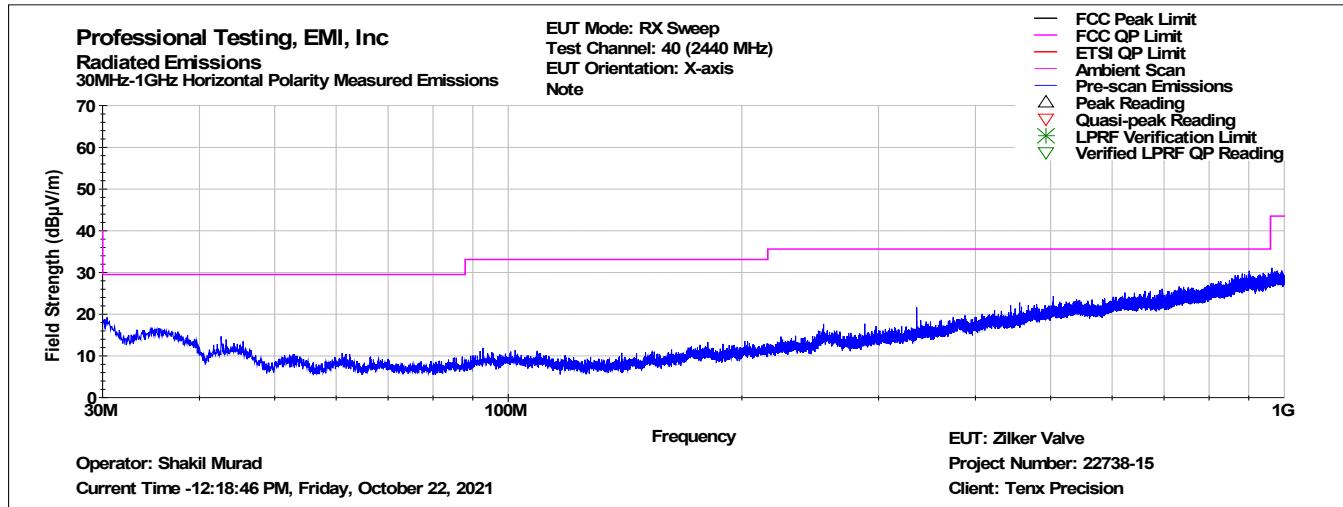

1GHz - 18GHz Vertical Polarity Measured Emissions Data

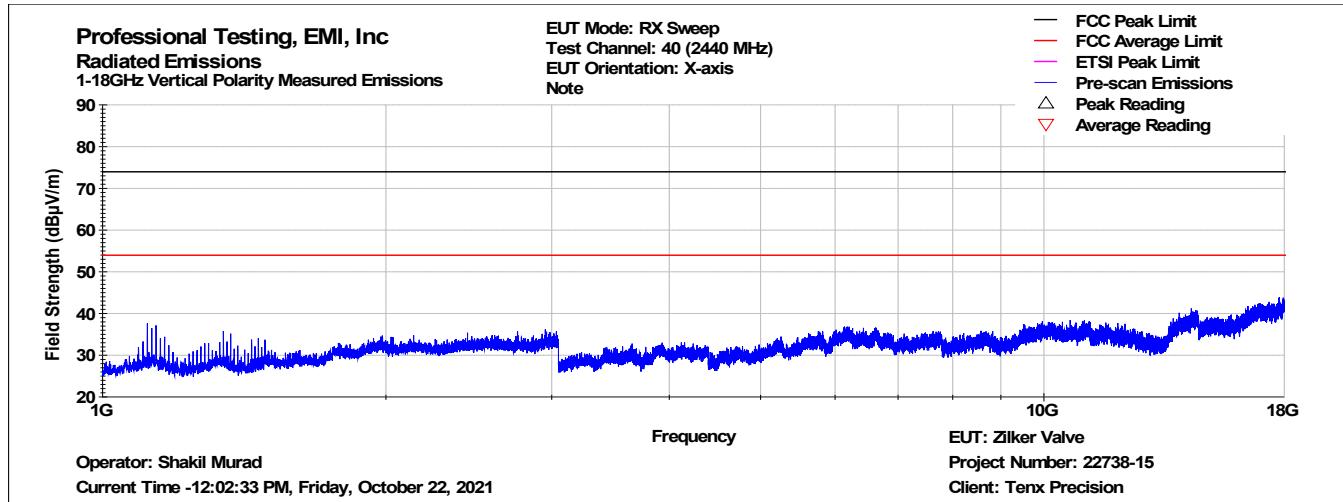

1GHz - 18GHz Horizontal Polarity Measured Emissions Data

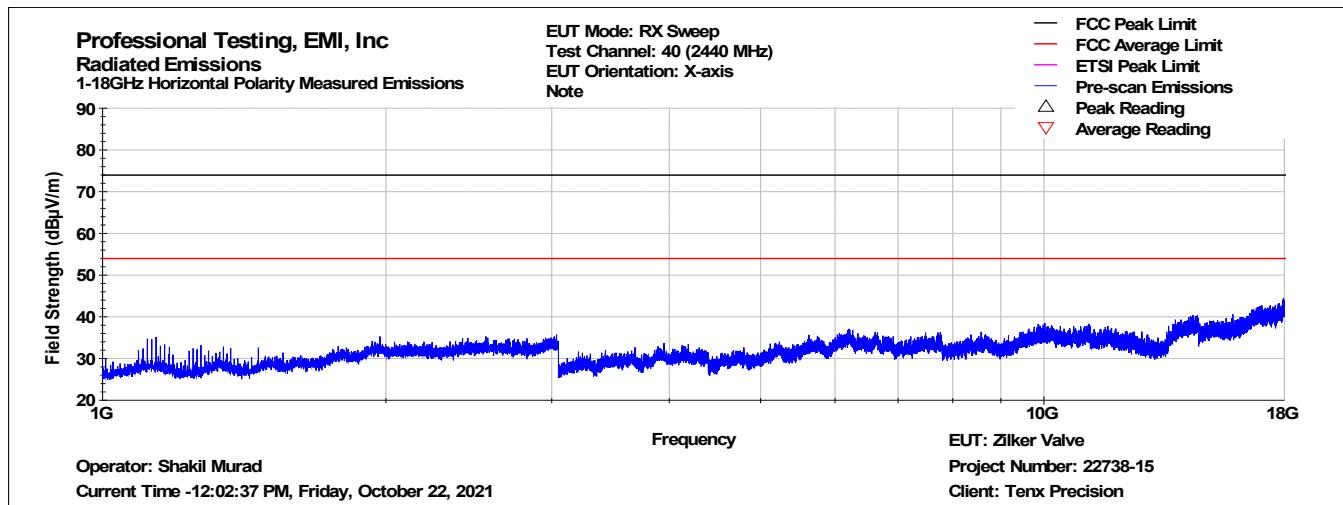

9.0 Antenna Construction; 15.203, 15.247; RSS-Gen 8.3

9.1 Procedure

A direct examination of the antenna construction is performed and compared to rule criteria that prevent wireless device antennas from being modified by end users.

9.2 Criteria

| Antenna Construction |
|----------------------|
| Type of Antenna(s) |
| Type of Connector |
| Gain |

9.3 Results

Table 8.3.1 Antenna Construction Details

Chip Antenna

Manufacturer: Johanson Technology

Model/PN: 2450AT18A100E

Antenna peak gain 0.5 dBi.

No connector.

Chip is soldered to circuit board.

https://www.johansontechnology.com/index.php?option=com_products&id=2450AT18A100E-AEC

User cannot substitute antenna.

Gain is under maximum limit of 6 dBi.

The requirement was satisfied.

10.0 Equipment

10.1 Transmitter Radiated Spurious Emissions 30 MHz to 26.5 GHz

| Tile! Software Version: | | Version: 7.1.2.17 (Jan 08, 2016 - 02:12:48 PM) or 4.1.A.0, April 14, 2009, 11:01:00PM | | | |
|-------------------------|-----------------|---|---|----------------|----------------------|
| Test Profile: | | 2020_RE_Unintentional_TILE7_v2.7.til | | | |
| Asset # | Manufacturer | Model | Equipment Nomenclature | Serial Number | Calibration Due Date |
| 1425 | Electro-Metrics | BPA-1000 | Preamp, Broadband 10k-1GHz | 123 | 3/13/2022 |
| 2295 | Keysight | E4440A-AYZ | PSA Spectrum Analyzer | MY46186204 | 11/10/2021 |
| 1926 | ETS-Lindgren | 3142D | Antenna, Biconilog, 26 MHz - 6 GHz | 135454 | 4/20/2022 |
| C027 | none | RG214 | Cable Coax, N-N, 25m, 25MHz - 1GHz | None | 9/14/2022 |
| 1327 | EMCO | 1050 | Controller, Antenna Mast | none | N/A |
| 942 | EMCO | 11968D | Turntable, 4ft. | 9510-1835 | N/A |
| 1969 | HP | 11713A | Attenuator/Switch Driver | 3748A04113 | N/A |
| C030 | none | none | Cable Coax, N-N, 30m, 1 - 18GHz | None | 9/15/2022 |
| 1509B | Braden | TDK 10M | TDK 10M Chamber,sVSWR > 1 GHz | DAC-012915-005 | 4/9/2023 |
| 2004 | Miteq | AFS44-00101800-2S-10P-44 | Amplifier, 40dB, 100MHz-18GHz | None | 1/9/2022 |
| C030 | none | none | Cable Coax, N-N, 30m, 1 - 18GHz | None | 9/15/2022 |
| 1325 | EMCO | 1050 | Controller, Antenna Mast | 9003-1461 | N/A |
| 1780 | ETS-Lindgren | 3117 | Antenna, Double Ridged Guide Horn, 1 - 18 GHz | 110313 | 4/16/2023 |
| 1973 | Agilent | 83017A | Amplifier, Microwave 0.5-26.5 GHz | MY39500497 | 11/10/2022 |
| 1542 | A.H. Systems | SAS-572 | Antenna, Horn 18-26.5GHz, 20dB gain | 225 | N/A |
| 1735 | Pasternack | PE9850-20 | Antenna, horn, WR28 | N/A | N/A |
| 2386 | RF-Lambda | RLPF13G02 | Low-pass Filter (DC-2GHz) | none | 1/12/2022 |
| 2387 | RF-Lambda | RHPF23G04G12 | High-pass Filter (4-12GHz) | none | 1/12/2022 |
| 2388 | RF-Lambda | RHPF23G08G40 | High-pass Filter (8-40GHz) | none | 1/12/2022 |

10.2 Fundamental Power, Bandwidth, Duty Cycle, Band Edge, Conducted Spurious Emissions

| Asset# | Manufacturer | Model | Equipment Nomenclature | Serial Number | Calibration Due Date |
|--------|--------------|--------------|-----------------------------------|---------------|----------------------|
| 1937 | Agilent | E4440A - AYZ | PSA , 3 Hz - 26.5 GHz, Opt. AYZ | MY44808298 | 11/11/2021 |
| A118 | Narda | 768A-20 | 20 dB 20 W Attenuator, DC - 11GHz | 105357 | 12/10/2022 |

10.3 Receiver Spurious Emissions (30MHz – 18GHz)

| Tile! Software Version: | | | Version: 7.1.2.17 (Jan 08, 2016 - 02:12:48 PM) or 4.1.A.0, April 14, 2009, 11:01:00PM | | |
|-------------------------|-----------------|--------------------------|---|----------------|----------------------|
| Test Profile: | | | 2020_RE_Unintentional_TILE7_v2.7.til | | |
| Asset # | Manufacturer | Model | Equipment Nomenclature | Serial Number | Calibration Due Date |
| 1425 | Electro-Metrics | BPA-1000 | Preamp, Broadband 10k-1GHz | 123 | 3/13/2022 |
| 2295 | Keysight | E4440A-AYZ | PSA Spectrum Analyzer | MY46186204 | 11/10/2021 |
| 1926 | ETS-Lindgren | 3142D | Antenna, Biconilog, 26 MHz - 6 GHz | 135454 | 4/20/2022 |
| C027 | none | RG214 | Cable Coax, N-N, 25m, 25MHz - 1GHz | None | 9/14/2022 |
| 1327 | EMCO | 1050 | Controller, Antenna Mast | none | N/A |
| 942 | EMCO | 11968D | Turntable, 4ft. | 9510-1835 | N/A |
| 1969 | HP | 11713A | Attenuator/Switch Driver | 3748A04113 | N/A |
| C030 | none | none | Cable Coax, N-N, 30m, 1 - 18GHz | None | 9/15/2022 |
| 1509B | Braden | TDK 10M | TDK 10M Chamber,sVSWR > 1 GHz | DAC-012915-005 | 4/9/2023 |
| 2004 | Miteq | AFS44-00101800-2S-10P-44 | Amplifier, 40dB, 100MHz-18GHz | None | 1/9/2022 |
| C030 | none | none | Cable Coax, N-N, 30m, 1 - 18GHz | None | 9/15/2022 |
| 1325 | EMCO | 1050 | Controller, Antenna Mast | 9003-1461 | N/A |
| 1780 | ETS-Lindgren | 3117 | Antenna, Double Ridged Guide Horn, 1 - 18 GHz | 110313 | 4/16/2023 |
| 1973 | Agilent | 83017A | Amplifier, Microwave 0.5-26.5 GHz | MY39500497 | 11/10/2022 |

11.0 Measurement Bandwidths

| Radiated Emissions Spectrum Analyzer Bandwidth and Measurement Time - Peak Scan | | | | |
|---|---------------------------|----------------------|-----------------------|----------------------------|
| Frequency Band Start (MHz) | Frequency Band Stop (MHz) | 6 dB Bandwidth (kHz) | Number of Ranges Used | Measurement Time per Range |
| 0.009 | 0.15 | 0.3 | 2 | Multiple Sweeps |
| 0.15 | 30 | 9 | 6 | Multiple Sweeps |
| 30 | 1000 | 120 | 2 | Multiple 800 mS Sweeps |
| 1000 | 6000 | 1000 | 2 | Multiple Sweeps |
| 6000 | 18000 | 1000 | 2 | Multiple Sweeps |
| 18000 | 26500 | 1000 | 2 | Multiple Sweeps |

*Notes:

1. The settings above are specifically calculated for the E4440A series of spectrum analyzers, which have 8,000 data points per range.
2. The measurement receiver resolution bandwidth setting was 300 Hz for quasi-peak measurements from 9-150 kHz.
3. The measurement receiver resolution bandwidth setting was 9 kHz for quasi-peak measurements from 0.15-30 MHz.
4. The measurement receiver resolution bandwidth setting was 120 kHz for quasi-peak measurements from 30-1000 MHz.
5. The measurement receiver resolution bandwidth setting was 1 MHz for average measurements from 1-18 GHz.

Appendix: Policy, Rationale, and Evaluation of EMC Measurement Uncertainty

All uncertainty calculations, estimates and expressions thereof shall be in accordance with NIST policy. Since PTI operates in accordance with NIST (NVLAP) Handbook 150-11: 2007, all instrumentation having an effect on the accuracy or validity of tests shall be periodically calibrated or verified traceable to national standards by a competent calibration laboratory. The certificates of calibration or verification on this instrumentation shall include estimates of uncertainty as required by NIST Handbook 150-11.

1. Rationale and Summary of Expanded Uncertainty.

Each piece of instrumentation at PTI that is used in making measurements for determining conformance to a standard (or limit), shall be assessed to evaluate its contribution to the overall uncertainty of the measurement in which it is used. The assessment of each item will be based on either a type A evaluation or a type B evaluation. Most of the evaluations will be type B, since they will be based on the manufacturer's statements or specifications of the calibration tolerances, or uncertainty will be stated along with a brief rationale for the type of evaluation and the resulting stated uncertainties.

The individual uncertainties included in the combined standard uncertainty for a specific test result will depend on the configuration in which the item of instrumentation is used. The combination will always be based on the law of propagation of uncertainty. Any systematic effects will be accommodated by including their uncertainties, in the calculation of the combined standard uncertainty; except that if the direction and amount of the systematic effect cannot be determined and separated from its uncertainty, the whole effect will be treated as uncertainty and combined along with the other elements of the test setup.

Type A evaluations of standard uncertainty will usually be based on calculating the standard deviation of the mean of a series of independent observations, but may be based on a least-squares curve fit or the analysis of variance for unusual situations. Type B evaluations of standard uncertainty will usually be based on manufacturer's specifications, data provided in calibration reports, and experience. The type of probability distribution used (normal, rectangular, a priori, or u-shaped) will be stated for each Type B evaluation.

In the evaluation of the uncertainty of each type of measurement, the uncertainty caused by the operator will be estimated. One notable operator contribution to measurement uncertainty is the manipulation of cables to maximize the measured values of radiated emissions. The operator contribution to measurement uncertainty is evaluated by having several operators independently repeat the same test. This results in a Type A evaluation of operator-contributed measurement uncertainty.

A summary of the expanded uncertainties of PTI measurements is shown as Table 1. These are the worst-case uncertainties considering all operative influence factors.

Table 1: Summary of Measurement Uncertainties for Site 45

| Type of Measurement | Frequency Range | Meas. Dist. | Expanded Uncertainty U, dB (k=2) |
|-----------------------------|-------------------|-------------|----------------------------------|
| Mains Conducted Emissions | 150 kHz to 30 MHz | N/A | 2.9 |
| Telecom Conducted Emissions | 150 kHz to 30 MHz | N/A | 2.8 |
| Radiated Emissions | 30 to 1,000 MHz | 10 m | 4.8 |
| | 1 to 18 GHz | 3 m | 5.7 |

End of Report