

MECHANICAL

Antenna Cover : PU


Antenna Base : PC UL 94V-0

Color : Black

ELECTRICAL

Frequency : 2400-2500MHz
5000-6000MHz


Connector : SMA-Male-RP

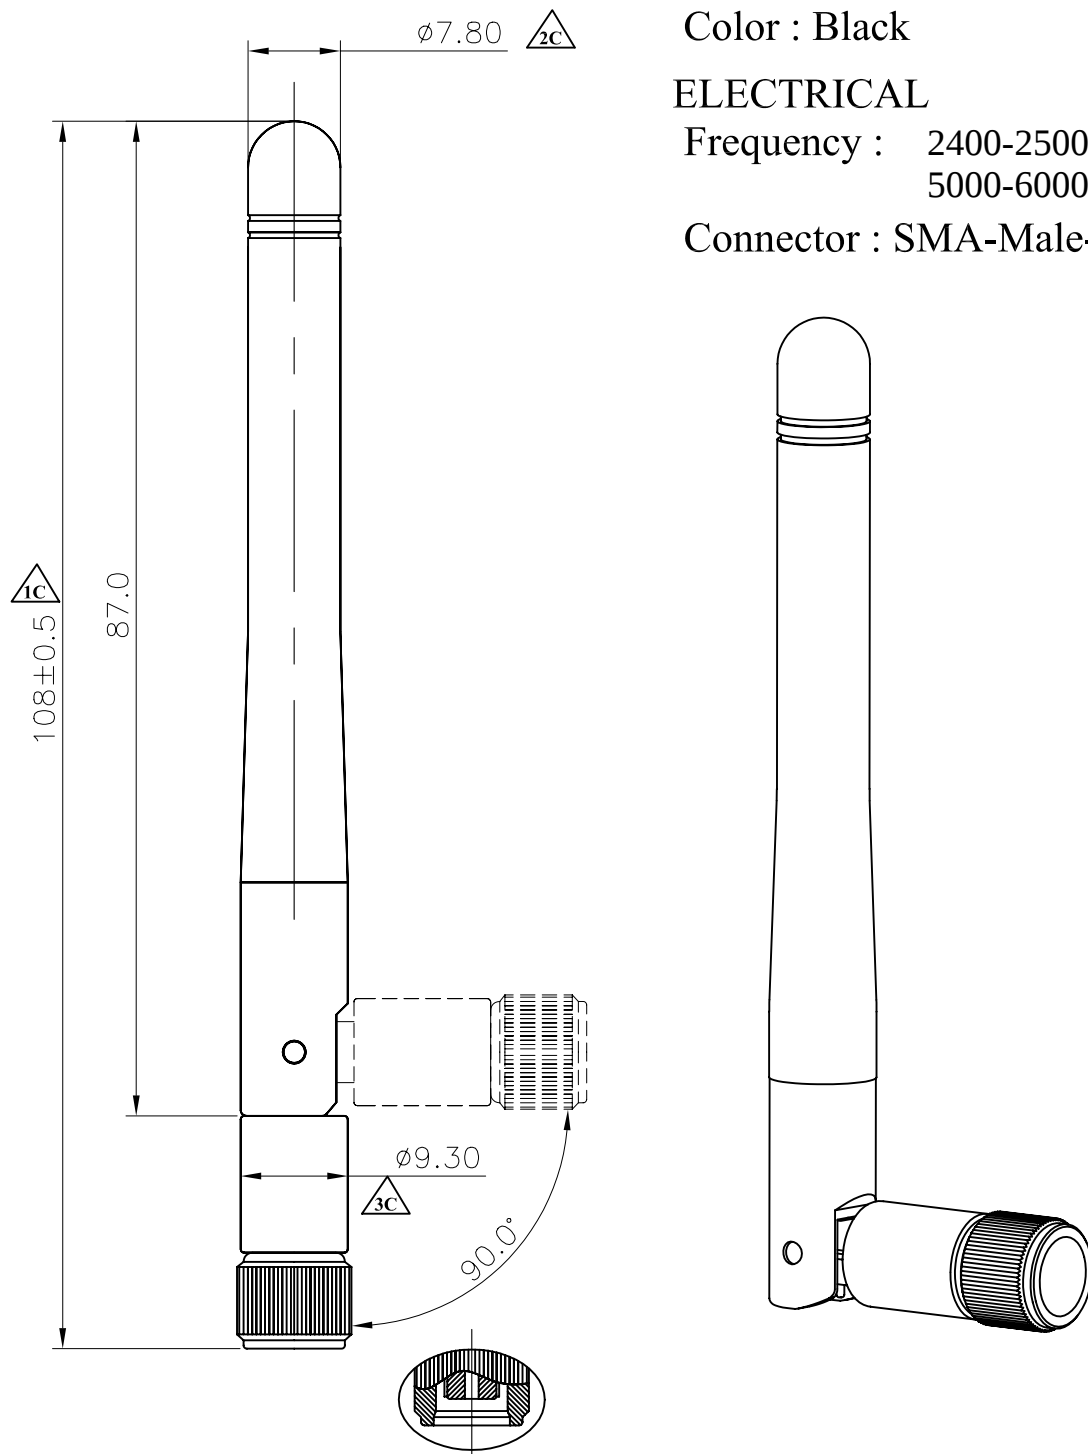

※凡標註△記號者，為品管檢驗之尺寸

設計DR. Marco 2004/10/27	核准APPD. Jerry 2004/10/27	容許公差 .XXX ±0.10 .XX ±0.25 .X ±0.38 X ±0.50 ANG ±3°	TOLERANCE	品名 ARTICLE 6602-2.4G&5.8G-SMA
版本說明	REVISION NOTE			圖號 DWG NO. 6602303081
KINSUN 慶陞		單位 UNIT mm 比例 SCALE 1.5/1 張數 SHEET 1/1 版本 REV. A		

Brand / Model : 6602303081-000
 Remark : 2450MHz
 Tested by : Allen Yu

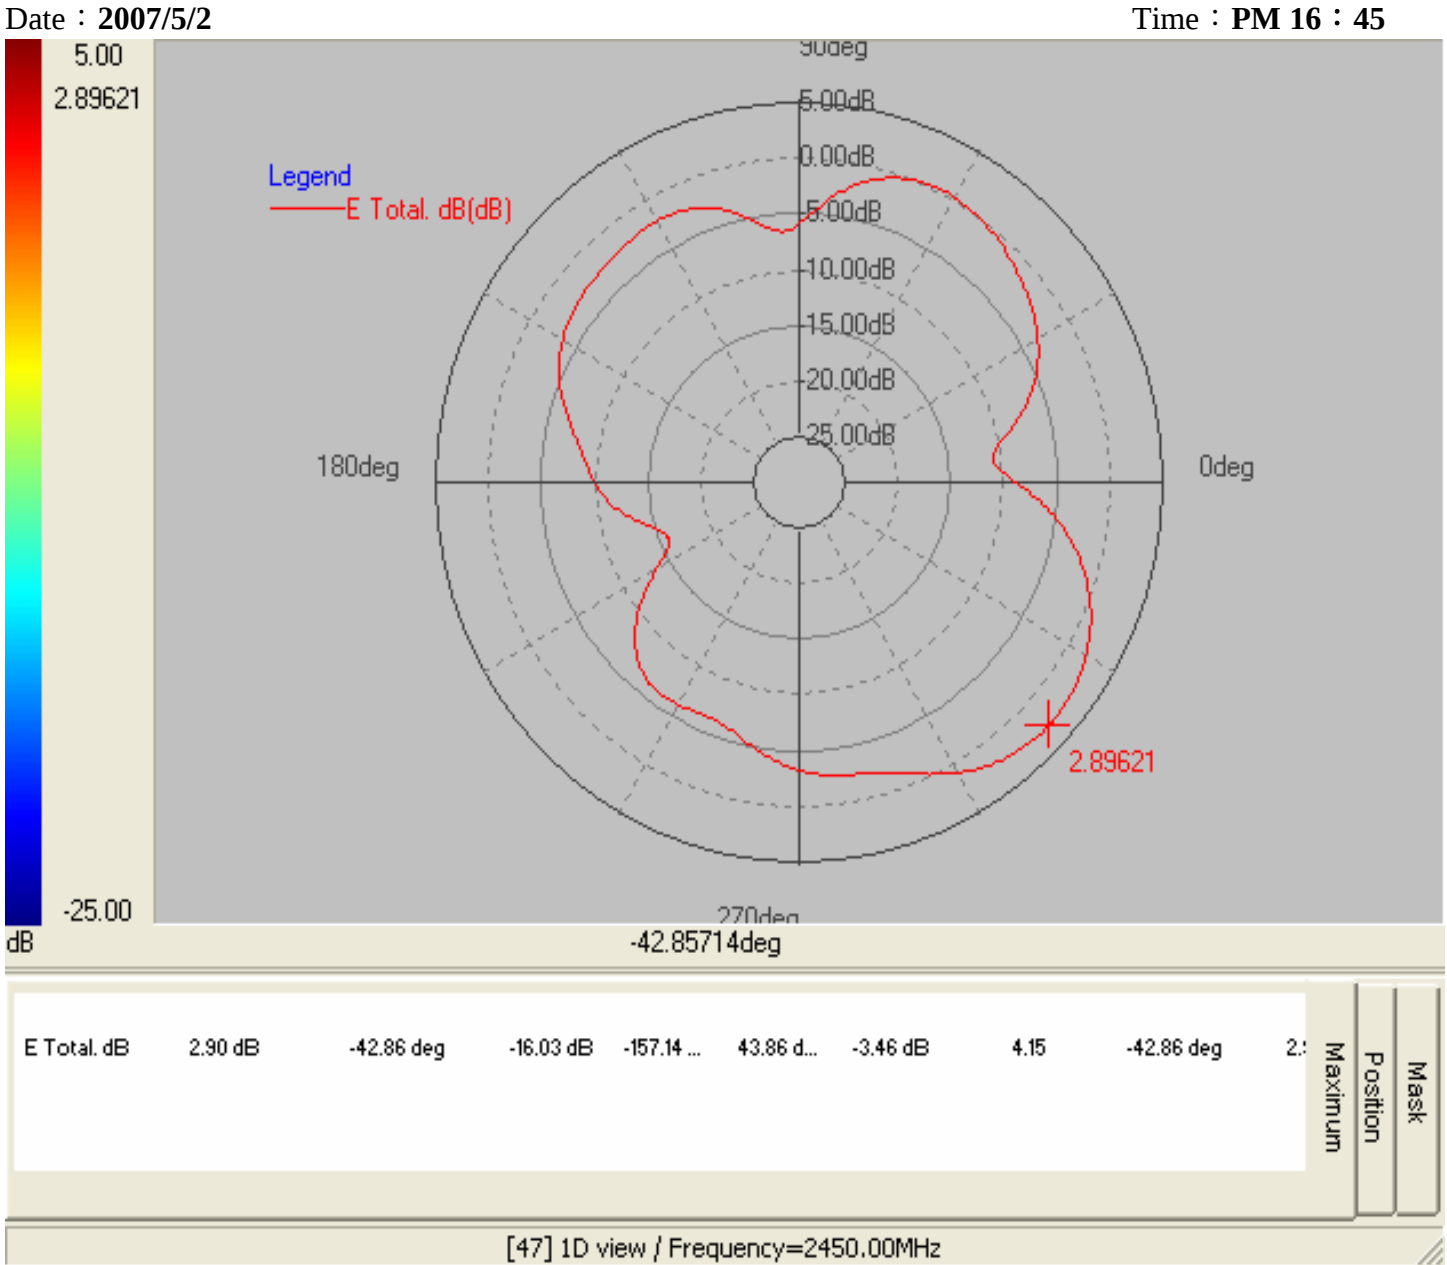

-- : Max. deg


*Unit : dBi

Frequency(MHz) : 2450.00
 Pattern Field : E plane
 Average Gain(dB) : -3.46dB

Maximum Gain(dB) : 2.90dB
 Maximum Gain(degree) : -42.86

Minimum Gain(dB) : -16.03dB
 Minimum Gain(degree) : -175.14

Brand / Model : 6602303081-000
 Remark : 2450MHz
 Tested by : Allen Yu

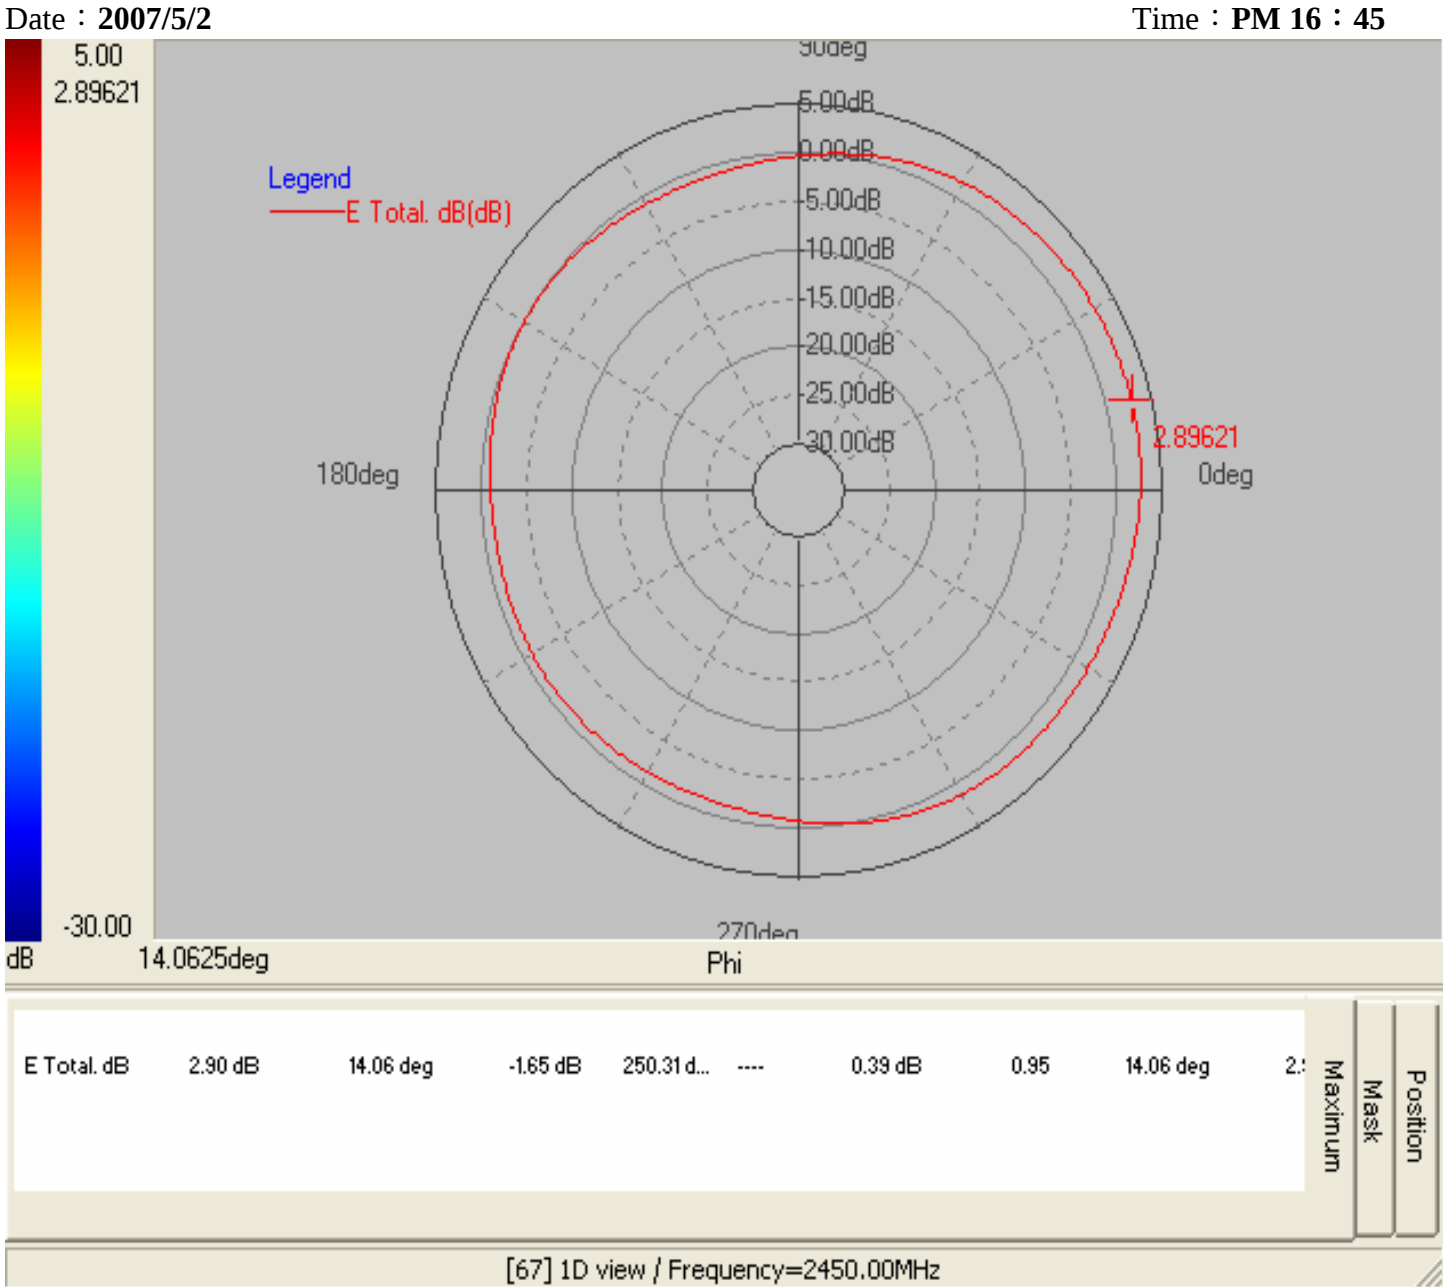


-- : Max. deg
 *Unit : dBi

Frequency(MHz) : 2450.00
 Pattern Field : H plane
 Average Gain(dB) : 0.39dB

Maximum Gain(dB) : 2.90dB
 Maximum Gain(degree) : 14.06

Minimum Gain(dB) : -1.65dB
 Minimum Gain(degree) : 250.31

Brand / Model : 6602303081-000
 Remark : 5800MHz
 Tested by : Allen Yu

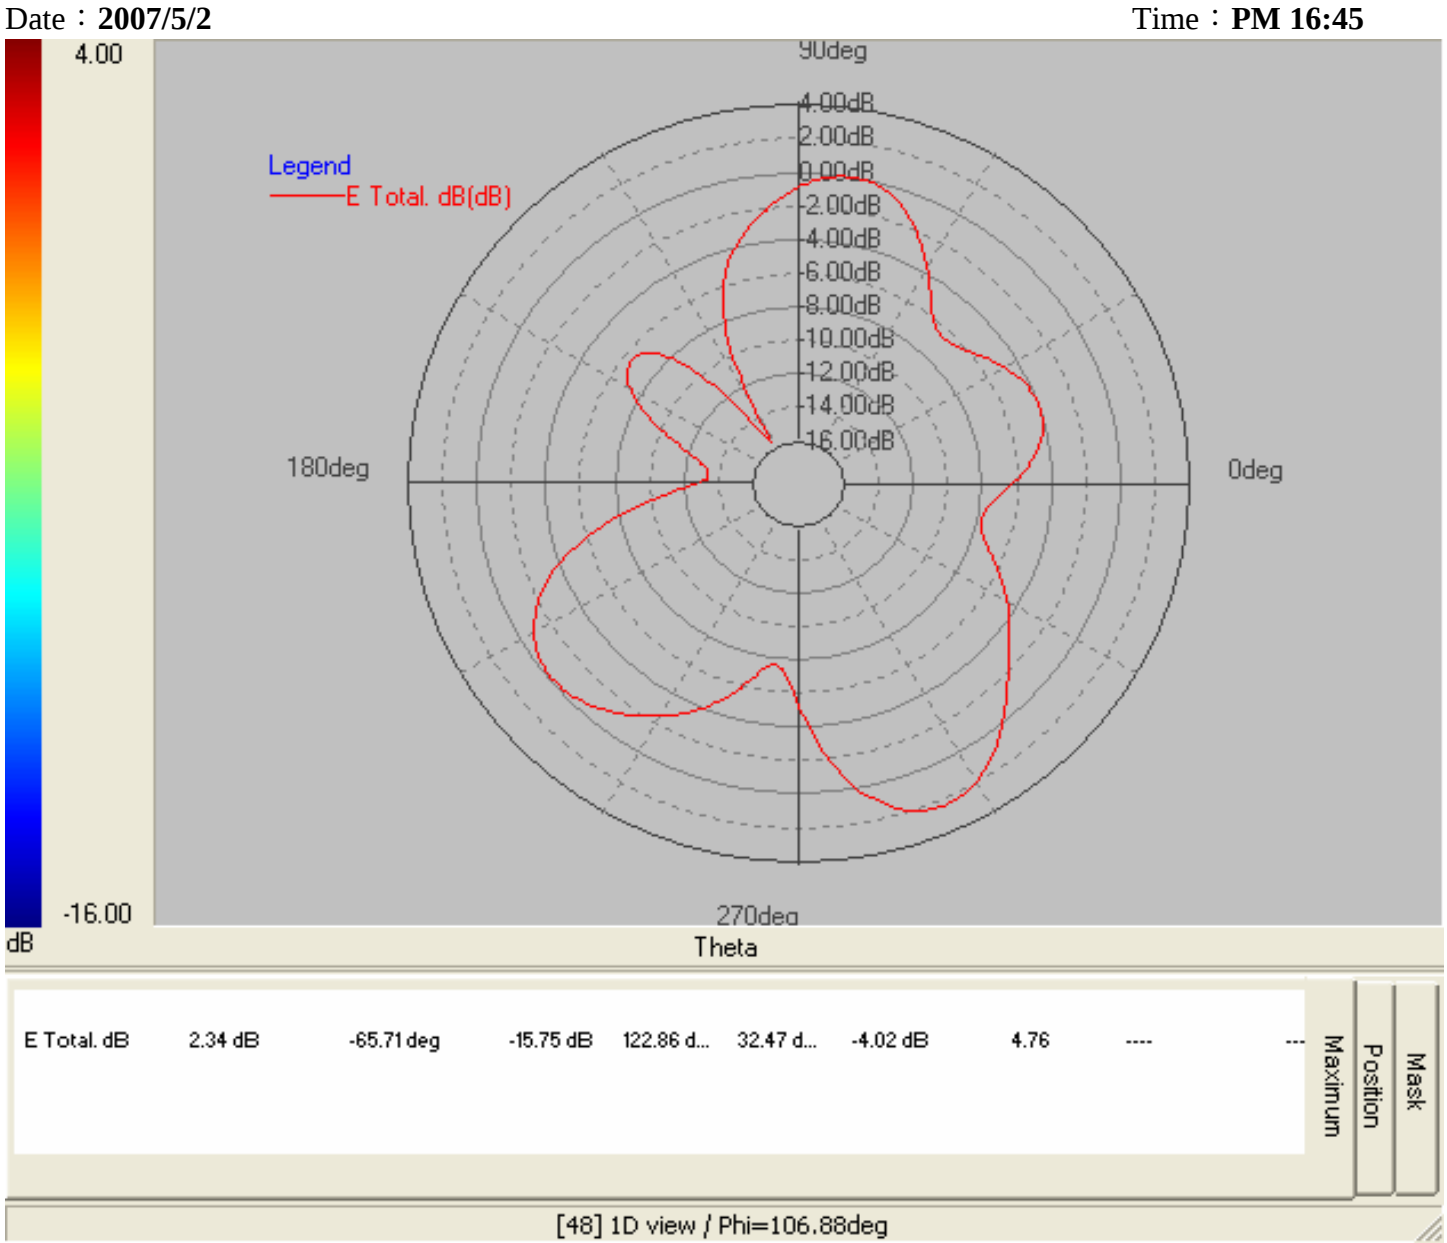

-- : Max. deg


*Unit : dBi

Frequency(MHz) : 5800.00
 Pattern Field : E plane
 Average Gain(dB) : -4.02dB

Maximum Gain(dB) : 2.34dB
 Maximum Gain(degree) : -65.71

Minimum Gain(dB) : -15.75dB
 Minimum Gain(degree) : 122.86

Brand / Model : 6602303081-000
 Remark : 5800MHz
 Tested by : Allen Yui

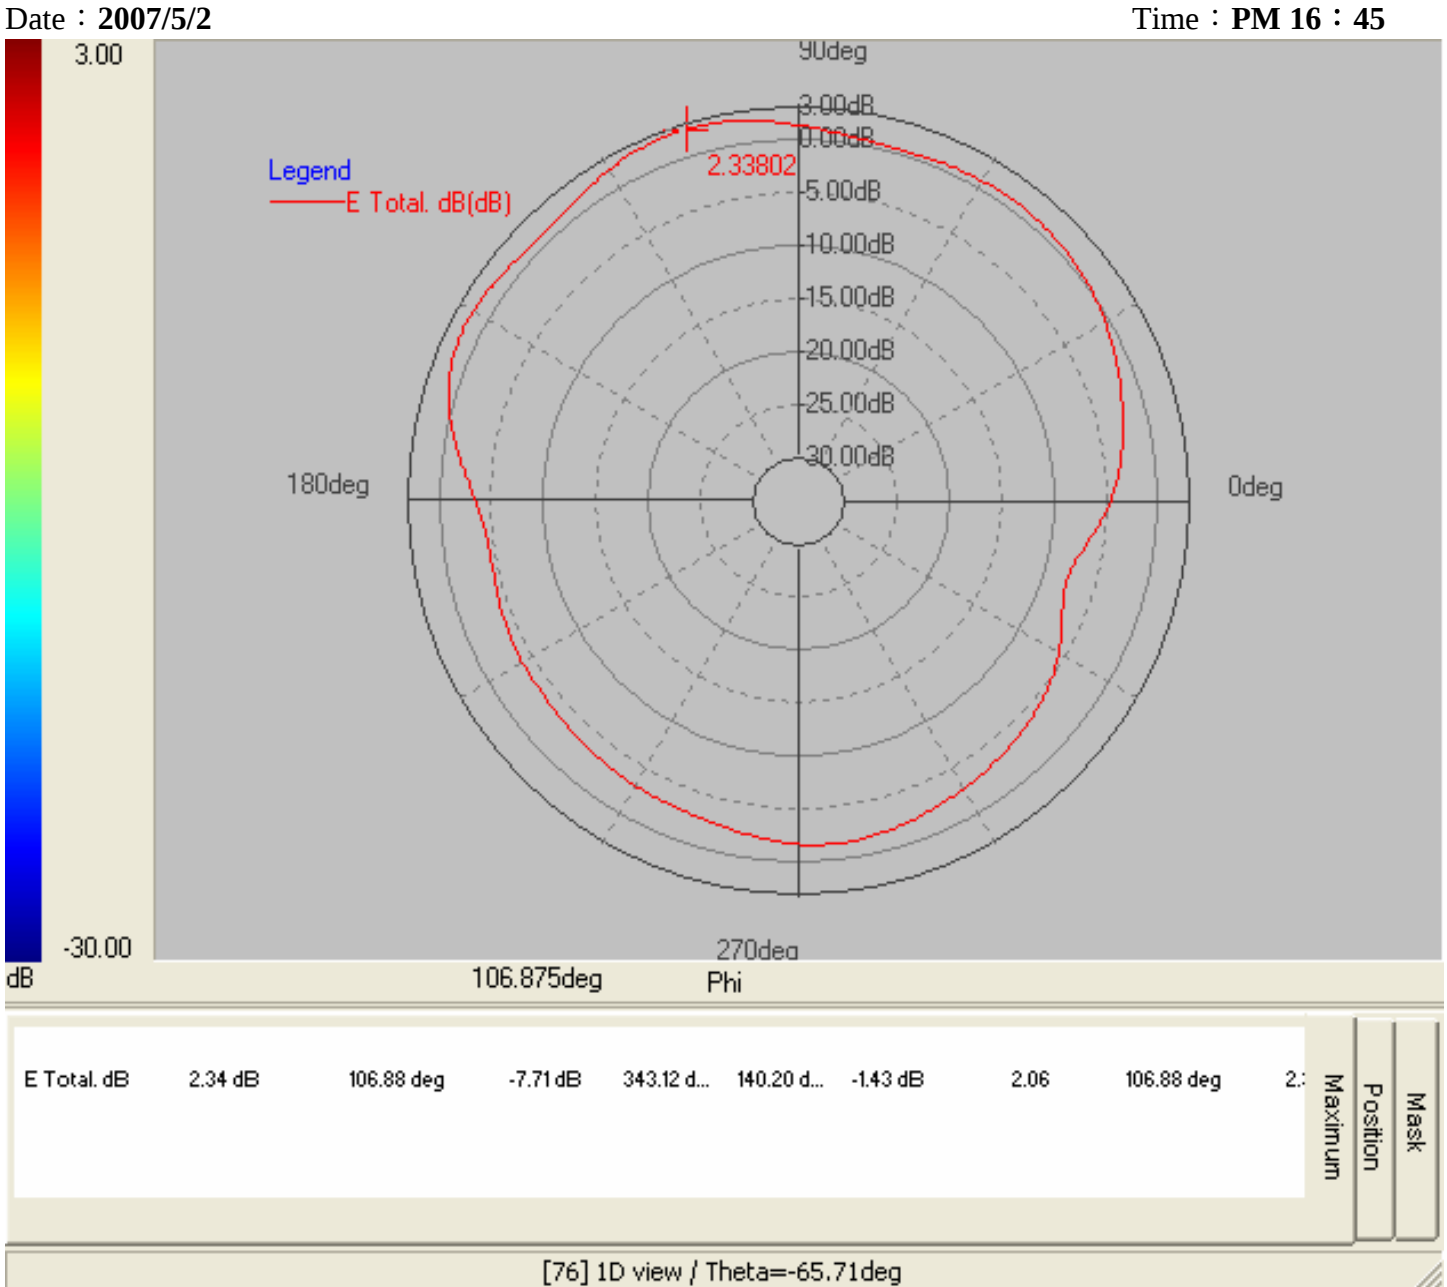

-- : Max. deg

*Unit : dBi


Frequency(MHz) : 5800.00
 Pattern Field : H plane
 Average Gain(dB) : -1.43dB

Maximum Gain(dB) : 2.34dB
 Maximum Gain(degree) : 106.88

Minimum Gain(dB) : -7.71dB
 Minimum Gain(degree) : 343.12

6602303081-000

S11

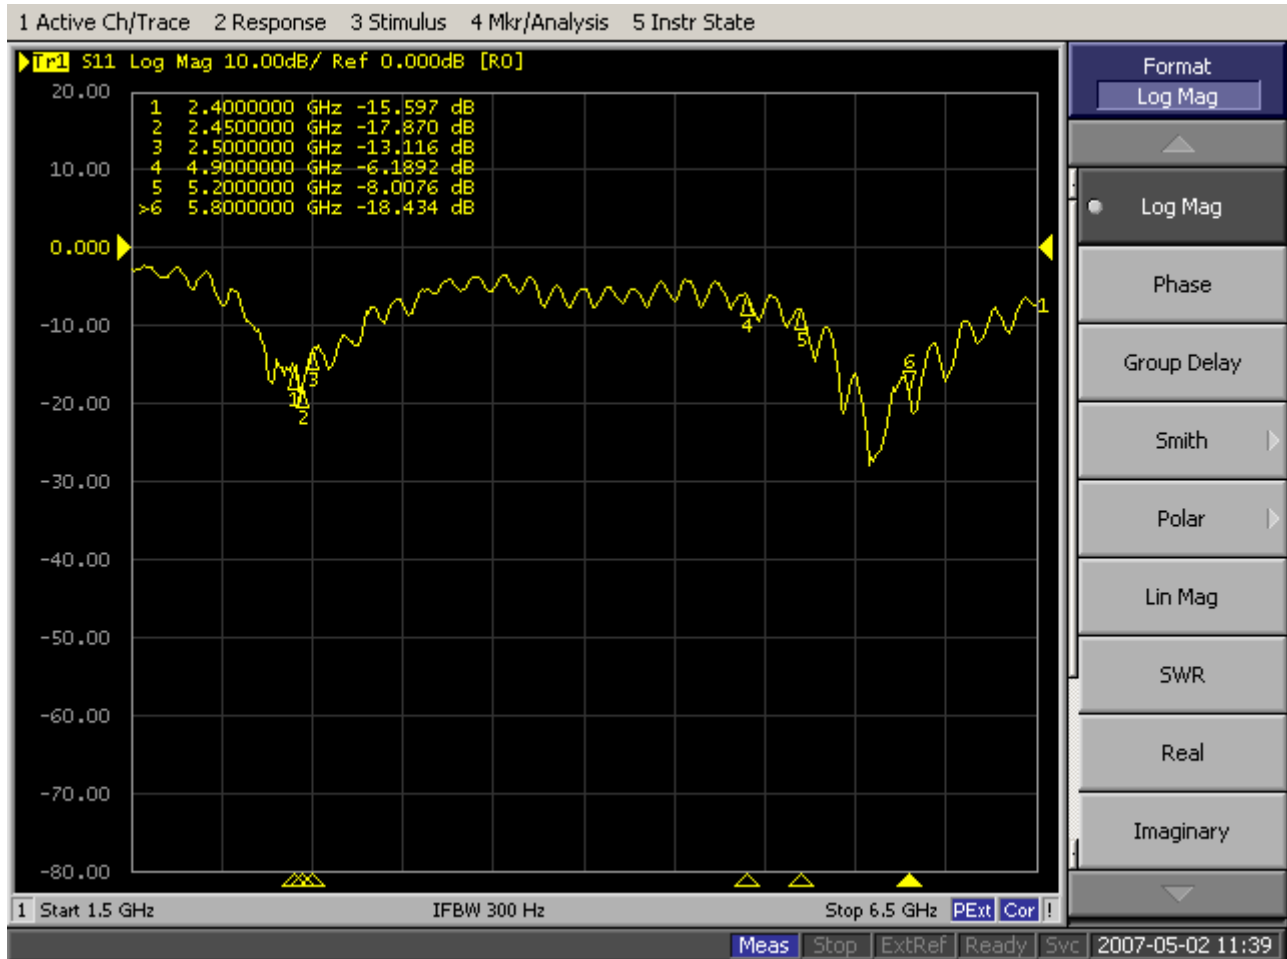

VSWR

