

承 认 书

SPECIFICATION FOR APPROVAL

客 户 名 称 :
CUSTOMER`S NAME

客 户 料 号 : Transmit coil
CUSTOMER`S P/N

产 品 规 格 : 20.5*41-43*0.8-6.5uh
PRODUCT SPEC

制 作 日 期 : May 05, 2023
ISSUE DATE

拟制 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY	客户承认 CUSTOMER APPROVE
张琳	陈源	钟向前	

东莞诚踏电子科技有限公司

DONG GUAN CHENG TA ELECTRONIC TECHNOLOGY CO.,LTD

工厂地址：东莞市东城区柏洲边村柏洲边大道40号2楼

Factory address: 2nd floor, No. 40 Baizhoubian Avenue, Baizhoubian Village, Dongcheng District, Dongguan City

TEL(电话): 15913813970

QQ: 2503218869

本承认书请在首批下单生产此机种前回签，否则视为贵方默认此承认书内所有内容

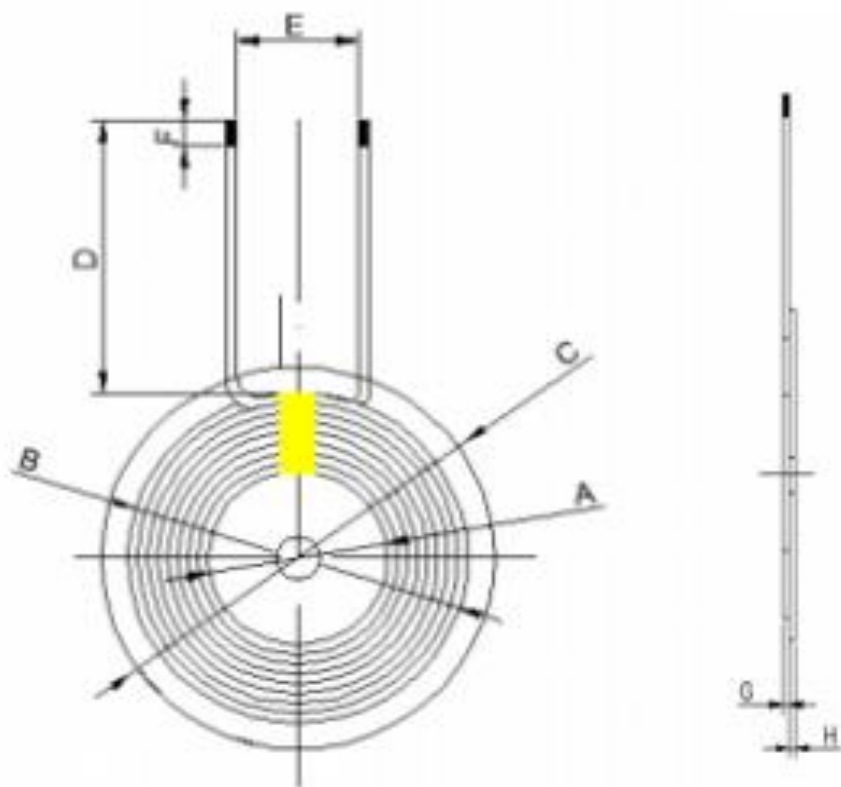
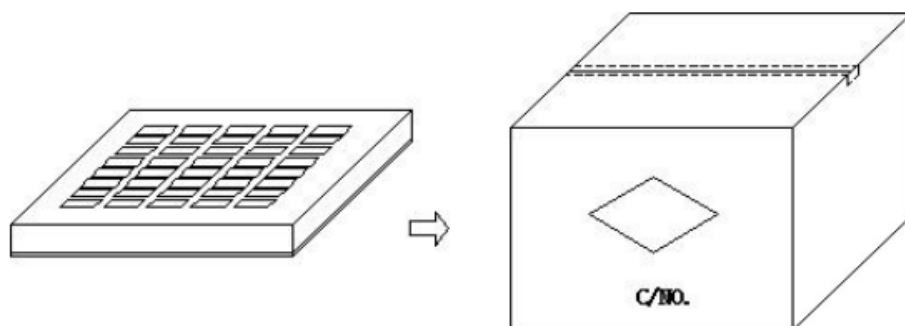
DONG GUAN CHENG TA ELECTRONIC TECHNOLOGY CO., LTD

[illegible]

东莞诚踏电子科技有限公司

DONG GUAN CHENG TA ELECTRONIC TECHNOLOGY CO., LTD

SPECIFICATION FOR APPROVAL

CUSTOMER		CUSTOMER`S P/N	Transmit coil																						
ISSUE DATE	May 05, 2023	PRODUCT SPEC	20.5*41-43*0.8-6.5uh																						
2.DIMENSION:			<table><tr><td>A</td><td>20.5±1.0</td></tr><tr><td>B</td><td>41±1.0</td></tr><tr><td>C</td><td>43.5±1.5</td></tr><tr><td>D</td><td>77±2.0</td></tr><tr><td>E</td><td>8±2</td></tr><tr><td>F</td><td>4±2.0</td></tr><tr><td>G</td><td>2.8MAX</td></tr><tr><td>H</td><td>0.8±0.2</td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr></table>	A	20.5±1.0	B	41±1.0	C	43.5±1.5	D	77±2.0	E	8±2	F	4±2.0	G	2.8MAX	H	0.8±0.2						
A	20.5±1.0																								
B	41±1.0																								
C	43.5±1.5																								
D	77±2.0																								
E	8±2																								
F	4±2.0																								
G	2.8MAX																								
H	0.8±0.2																								
			备注																						
																									
ISSUE BY	张琳	CHECK BY	陈源																						
		APPROVAL BY	钟向前																						

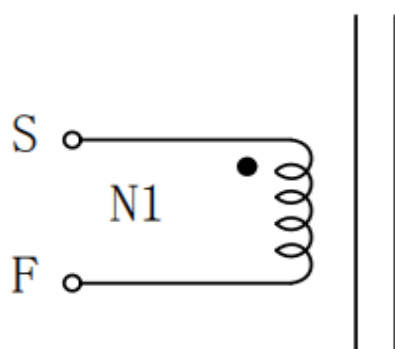
东莞诚踏电子科技有限公司

DONG GUAN CHENG TA ELECTRONIC TECHNOLOGY CO., LTD

SPECIFICATION FOR APPROVAL

CUSTOMER		CUSTOMER'S P/N	Transmit coil
ISSUE DATE	May 05, 2023	PRODUCT SPEC	20.5*41-43*0.8-6.5uh

4.CIRCUIT DIAGRAM



" • " : POLARITY/极性

5.WINDING

NO	WINDING	WIRE	TURNS	TAPE	WINDING CONDITION
N1	S-F	2UEW Ø0.08*105P	10Ts REF		密绕1层/CLOSE 1 layer

6.CHARACTERISTIC

ITEM	MEASURED POINT	TECHNICAL DATA	TESTING CONDITION & INSTRUMENT
LS	S-F	6.5UH±10% (带磁片)	100KHz/1V AT 25℃ ±2℃/同慧: TH2830
Q	S-F	≥75	
DCR	S-F	550mΩ MXA	