



# TEST REPORT

## Part 15 Subpart C 15.247

**Equipment under test** R2GEAR MK3

**Model name** MK3

**FCC ID** 2AO6GMK3

**Applicant** R2GEAR Inc.

**Manufacturer** R2GEAR Inc.

**Date of test(s)** 2018.02.12 ~ 2018.02.23

**Date of issue** 2018.03.11

**Issued to**

**R2GEAR Inc.**

01849 215, ASPIRINCENTER, 27, Dongil-ro 174-gil, Nowon-gu, Seoul, Korea

Tel: +82-2-972-2015 / Fax: +82-504-405-6215

**Issued by**

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,  
Gyeonggi-do, 14057, Korea

473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea

Tel: +82-31-425-6200 / Fax: +82-31-424-0450

<b>Test and report completed by :</b>	<b>Report approval by :</b>
Young-Jin Lee Test engineer	Hyeon-Su, Jang Technical manager



### Revision history

Revision	Date of issue	Test report No.	Description
-	2018.03.11	KES-RF-18T0035	Initial

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

## TABLE OF CONTENTS

1.	General information .....	4
1.1.	EUT description.....	4
1.2.	Test configuration .....	6
1.3.	Device modifications .....	6
1.4.	Frequency/channel operations .....	6
1.5.	Accessory information.....	6
1.6.	Measurement results explanation example .....	6
1.7.	Measurement Uncertainty.....	6
2.	Summary of tests .....	7
3.	Test results .....	8
3.1.	20 dB bandwidth .....	8
3.2.	Output power .....	11
3.3.	Carrier frequency separation.....	15
3.4.	Number of hopping frequency.....	17
3.5.	Time of occupancy.....	19
3.6.	Radiated restricted band and emissions .....	23
3.7.	Conducted band edge and out of band emissions .....	41
3.8.	AC conducted emissions.....	45
Appendix A.	Measurement equipment .....	47
Appendix B.	Test setup photo .....	48



## 1. General information

Applicant: R2GEAR Inc.  
Applicant address: 01849 215, ASPIRINCENTER, 27, Dongil-ro 174-gil, Nowon-gu, Seoul, Korea  
Test site: KES Co., Ltd.  
Test site address: 3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,  
Gyeonggi-do, 14057, Korea  
473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea  
Test Facility FCC Accreditation Designation No.: KR0100, Registration No.: 444148  
FCC rule part(s): 15.247  
FCC ID: 2AO6GMK3  
Test device serial No.:  Production  Pre-production  Engineering

### 1.1. EUT description

Equipment under test R2GEAR MK3  
Frequency range 2 402 MHz ~ 2 480 MHz (BDR/EDR)  
2 402 MHz ~ 2 480 MHz (LE)  
Model: MK3  
Modulation technique BT : GFSK,  $\pi/4$ DQPSK, 8DPSK  
Number of channels 2 402 MHz ~ 2 480 MHz (BDR/EDR) : 79 ch  
2 402 MHz ~ 2 480 MHz (LE) : 40 ch  
Antenna specification BDR/EDR Antenna type : PCB antenna, Peak gain : 3.55 dBi  
LE Antenna type : PCB antenna, Peak gain : -1.07 dBi  
Power source DC 3.7 V (Internal Rechargeable Battery)

---

15.247(a)(1) that the rx input bandwidths shift frequencies in synchronization with the transmitted signals.

15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.

15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

#### **Pseudorandom frequency hopping sequence**

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1 600 hops/s.

#### **Equal hopping frequency use**

The channels of this system will be used equally over the long-term distribution of the hopsets.

#### **Example of a 79 hopping sequence in data mode:**

02, 05, 31, 24, 20, 10, 43, 36, 30, 23, 40, 06, 21, 50, 44, 09, 71, 78, 01, 13, 73, 07, 70, 72, 35, 62, 42, 11, 41, 08, 16, 29, 60, 15, 34, 61, 58, 04, 67, 12, 22, 53, 57, 18, 27, 76, 39, 32, 17, 77, 52, 33, 56, 46, 37, 47, 64, 49, 45, 38, 69, 14, 51, 26, 79, 19, 28, 65, 75, 54, 48, 03, 25, 66, 05, 16, 68, 74, 59, 63, 55

#### **System receiver input bandwidth**

Each channel bandwidth is 1 MHz.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

## 1.2. Test configuration

The **R2GEAR Inc. MK3 FCC ID: 2AO6GMK3** was tested per the guidance of ANSI C63.10-2013 and DA 00-705. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## 1.3. Device modifications

N/A

## 1.4. Frequency/channel operations

Ch.	Frequency (MHz)	Rate(Mbps)
00	2402	1,2,3
.	.	.
40	2442	1,2,3
.	.	.
78	2480	1,2,3

## 1.5. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
-	-	-	-	-

## 1.6. Measurement results explanation example

For all conducted test items

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

$$\text{Offset(dB)} = \text{RF cable loss(dB)} + \text{attenuator factor(dB)}.$$

$$= 1.10 + 10.00 = 11.10 \text{ (dB)}$$

## 1.7. Measurement Uncertainty

Test Item	Uncertainty	
Uncertainty for Conduction emission test	2.62 dB	
Uncertainty for Radiation emission test (include Fundamental emission)	9kHz - 30MHz	4.54 dB
	30MHz - 1GHz	4.36 dB
	Above 1GHz	5.00 dB

Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 2. Summary of tests

Reference	Test description	Test results
15.247(a)(1)(iii)	20 dB bandwidth	Pass
15.247(b)(1)	Output power	Pass
15.247(a)(1)	Channel separation	Pass
15.247(a)(1)(iii)	Number of channels	Pass
15.247(a)(1)(iii)	Time of occupancy	Pass
15.205, 15.209	Radiated restricted band and emission	Pass
15.207(d)	Conducted band edge and out of band emissions	Pass
15.207(a)	AC conducted emissions	Pass


### 3. Test results

#### 3.1. 20 dB bandwidth

##### Test procedure

DA 00-705

##### Test setup




##### Test setting

1. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
2. RBW  $\geq$  1% of the 20 dB bandwidth
3. VBW  $\geq$  RBW
4. Sweep = auto
5. Detector function = peak
6. Sweep = auto couple
7. Trace mode = max hold


##### Limit

Not applicable

Frequency(MHz)	Channel no.	Data rate(Mbps)	Measured bandwidth(MHz)
2 402	00	1	0.808
2 442	39		0.812
2 480	78		0.812
2 402	00	2	1.255
2 442	39		1.255
2 480	78		1.255
2 402	00	3	1.255
2 442	39		1.259
2 480	78		1.263

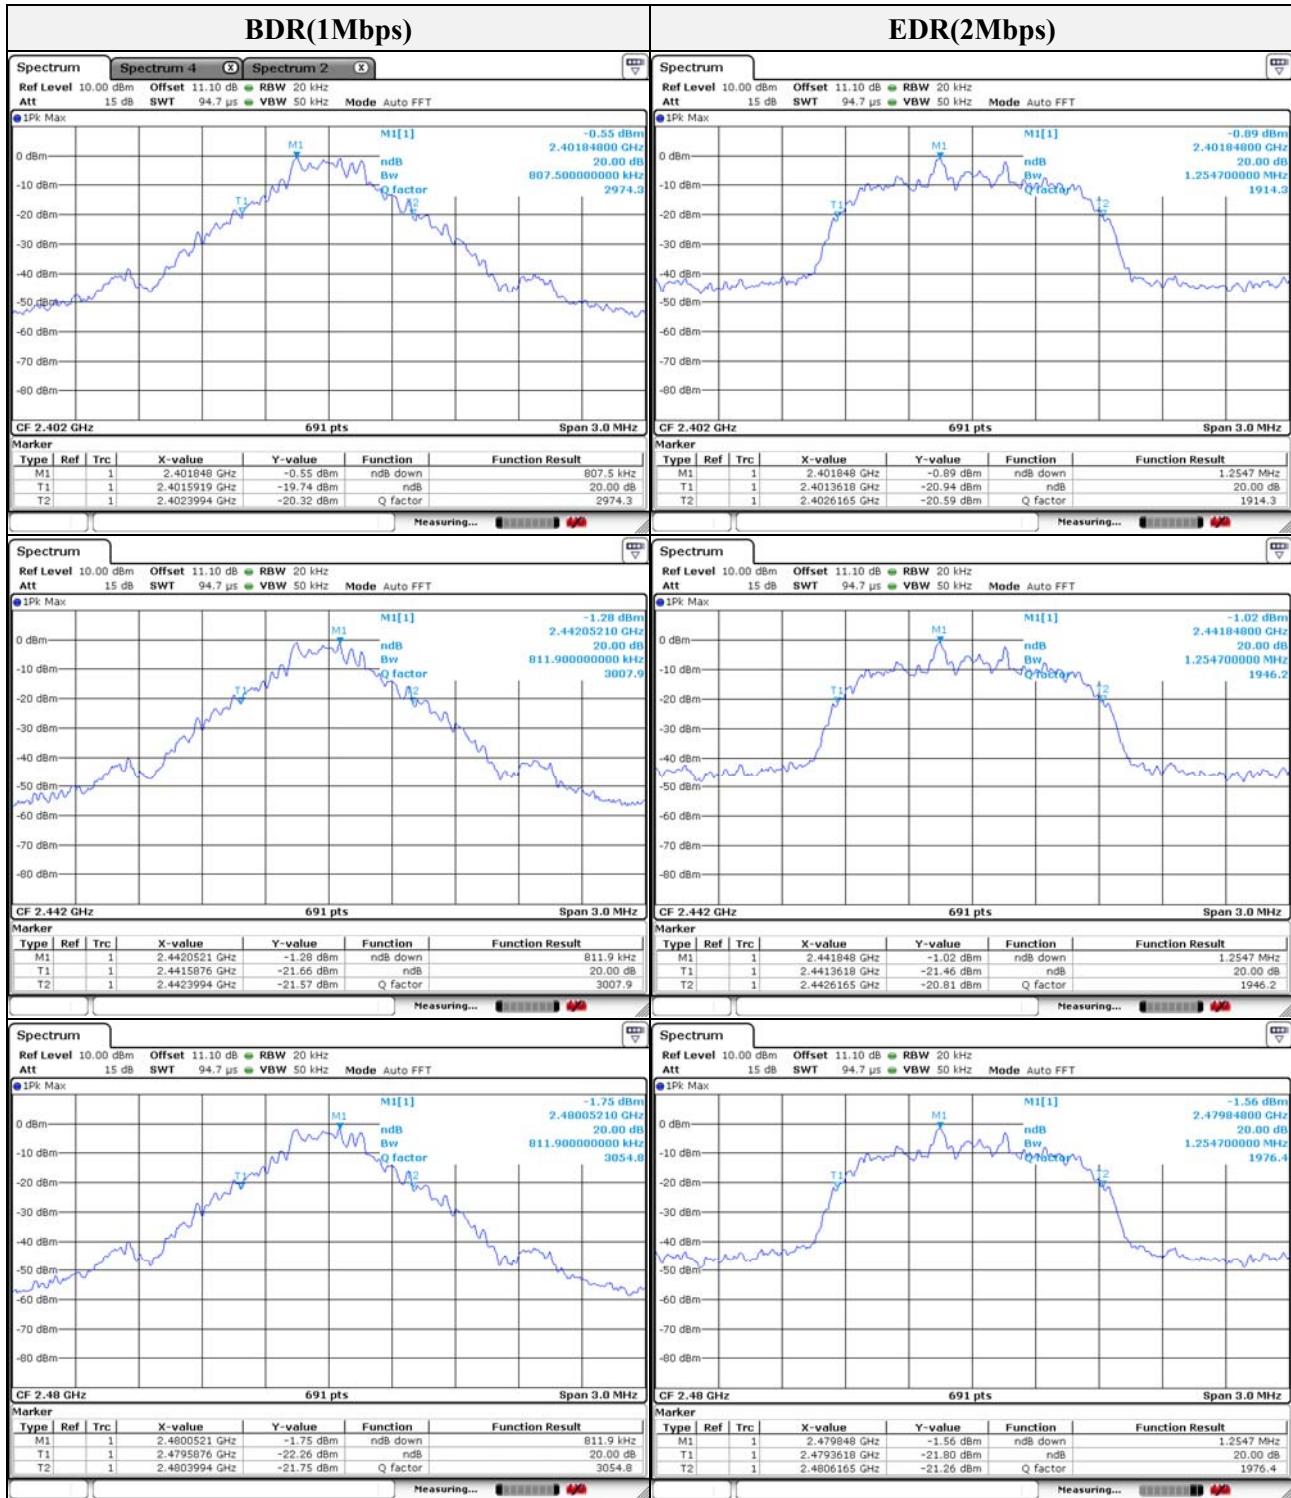

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

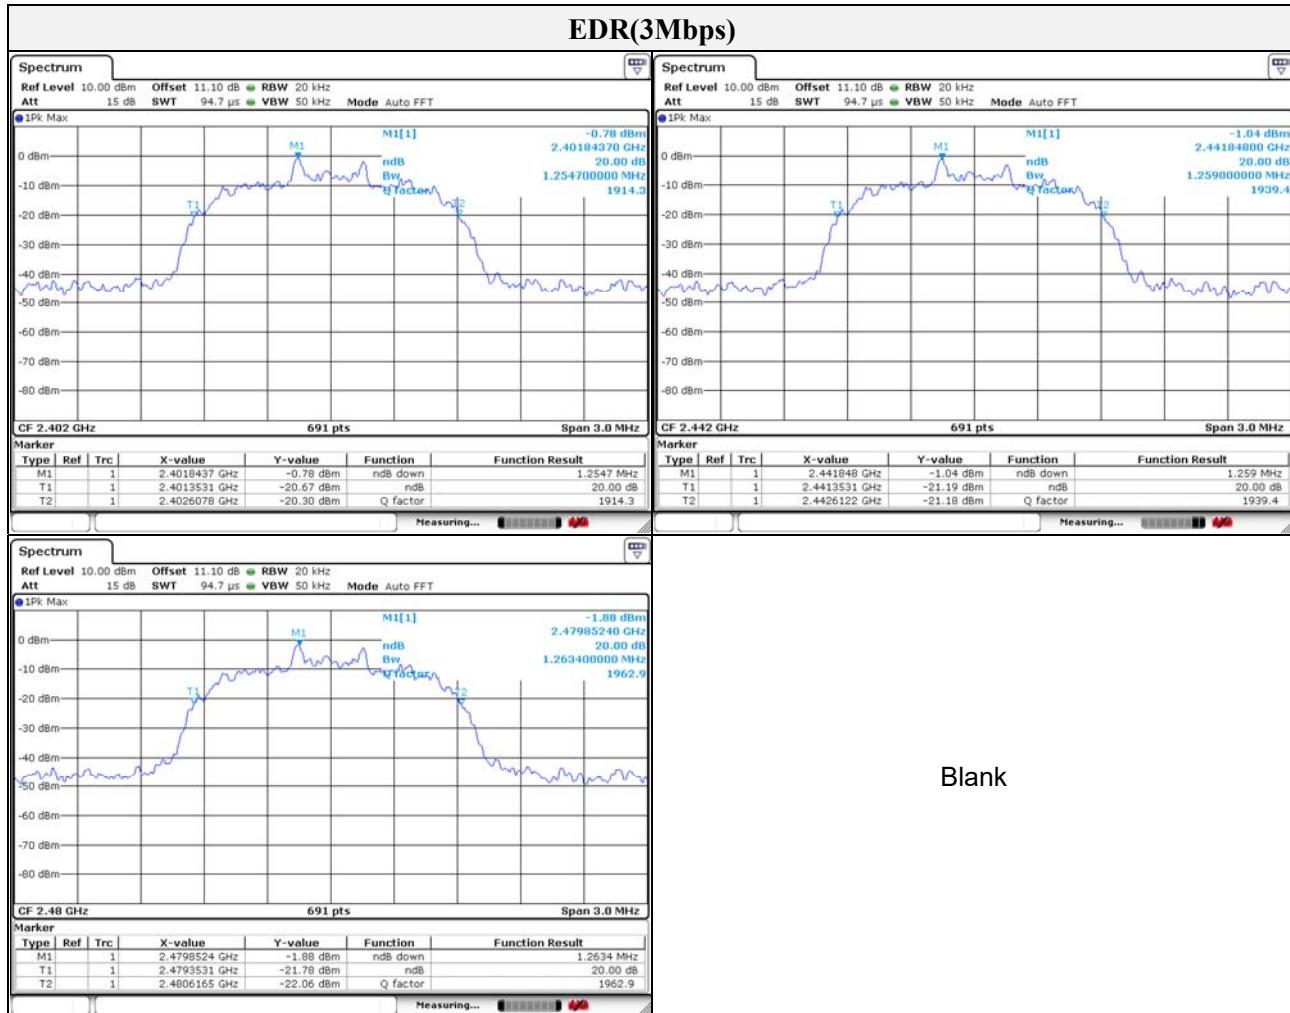


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

### 3.2. Output power

#### Test procedure

DA 00-705

#### Test setup

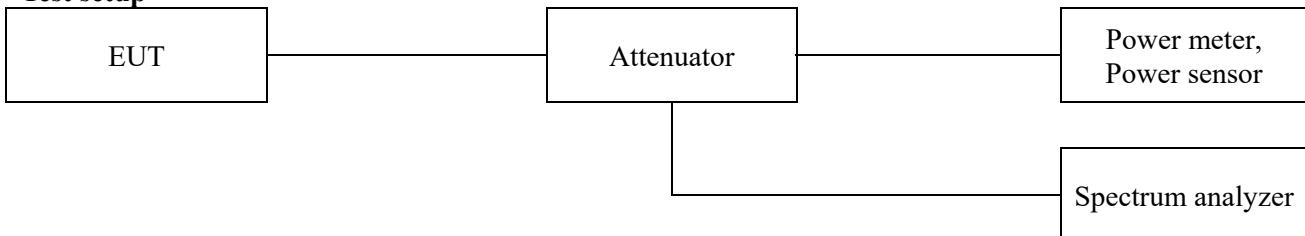

#### Test setting

1. Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
2. RBW > the 20 dB bandwidth of the emission being measured
3. VBW  $\geq$  RBW
4. Sweep = Auto
5. Detector function = Peak
6. Trace = Max hold

#### Limit

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(1), For frequency hopping systems operating in the 2 400 ~ 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 ~ 5 805 MHz band: 1 Watt.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr


Test report No.:  
KES-RF-18T0035  
Page (12 ) of (48)

Frequency(MHz)	Channel no.	Data rate(Mbps)	Peak Power (dBm)	Average Power (dBm) <sup>Note1</sup>	Power Limit (dBm)
2 402	00	1	2.70	1.64	20.97
2 442	39		2.45	0.83	20.97
2 480	78		1.96	0.41	20.97
2 402	00	2	3.22	0.61	20.97
2 442	39		2.91	-0.76	20.97
2 480	78		2.25	-0.41	20.97
2 402	00	3	3.26	0.53	20.97
2 442	39		3.01	-0.86	20.97
2 480	78		2.61	-0.46	20.97


**Note.**

1. The average power was tested using an average power meter.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

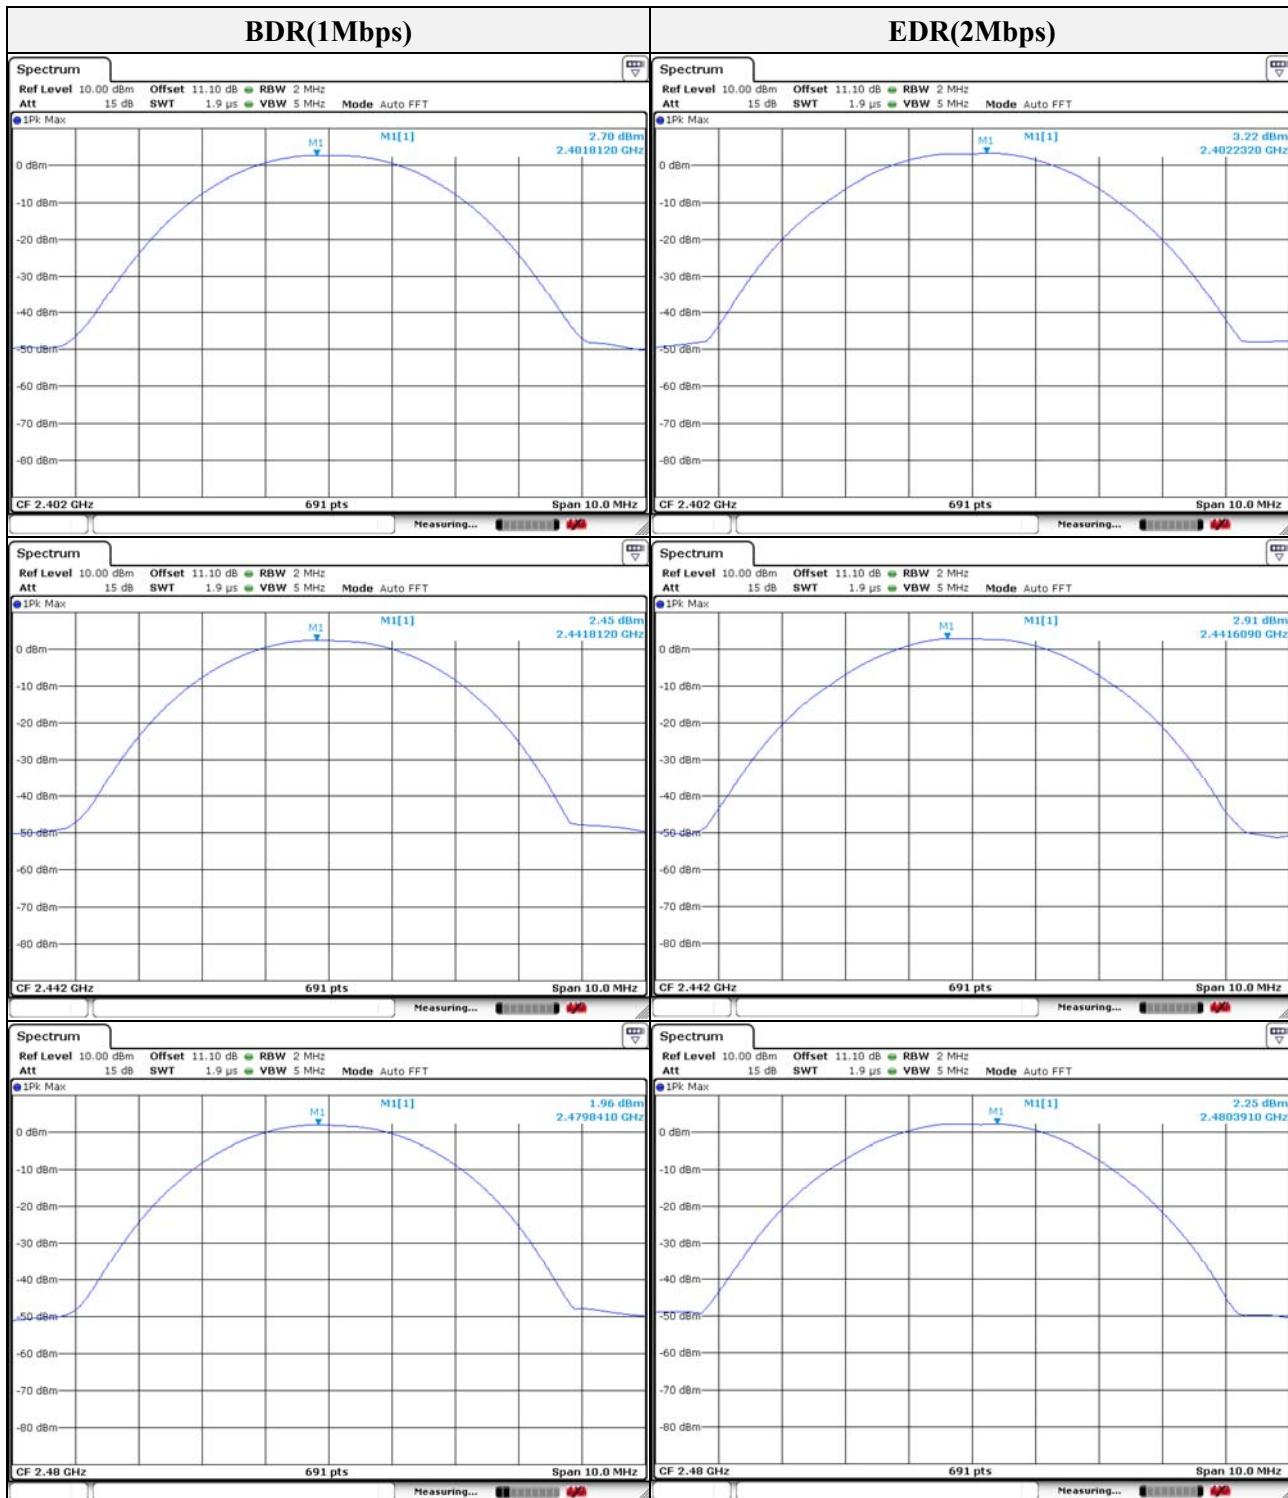

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

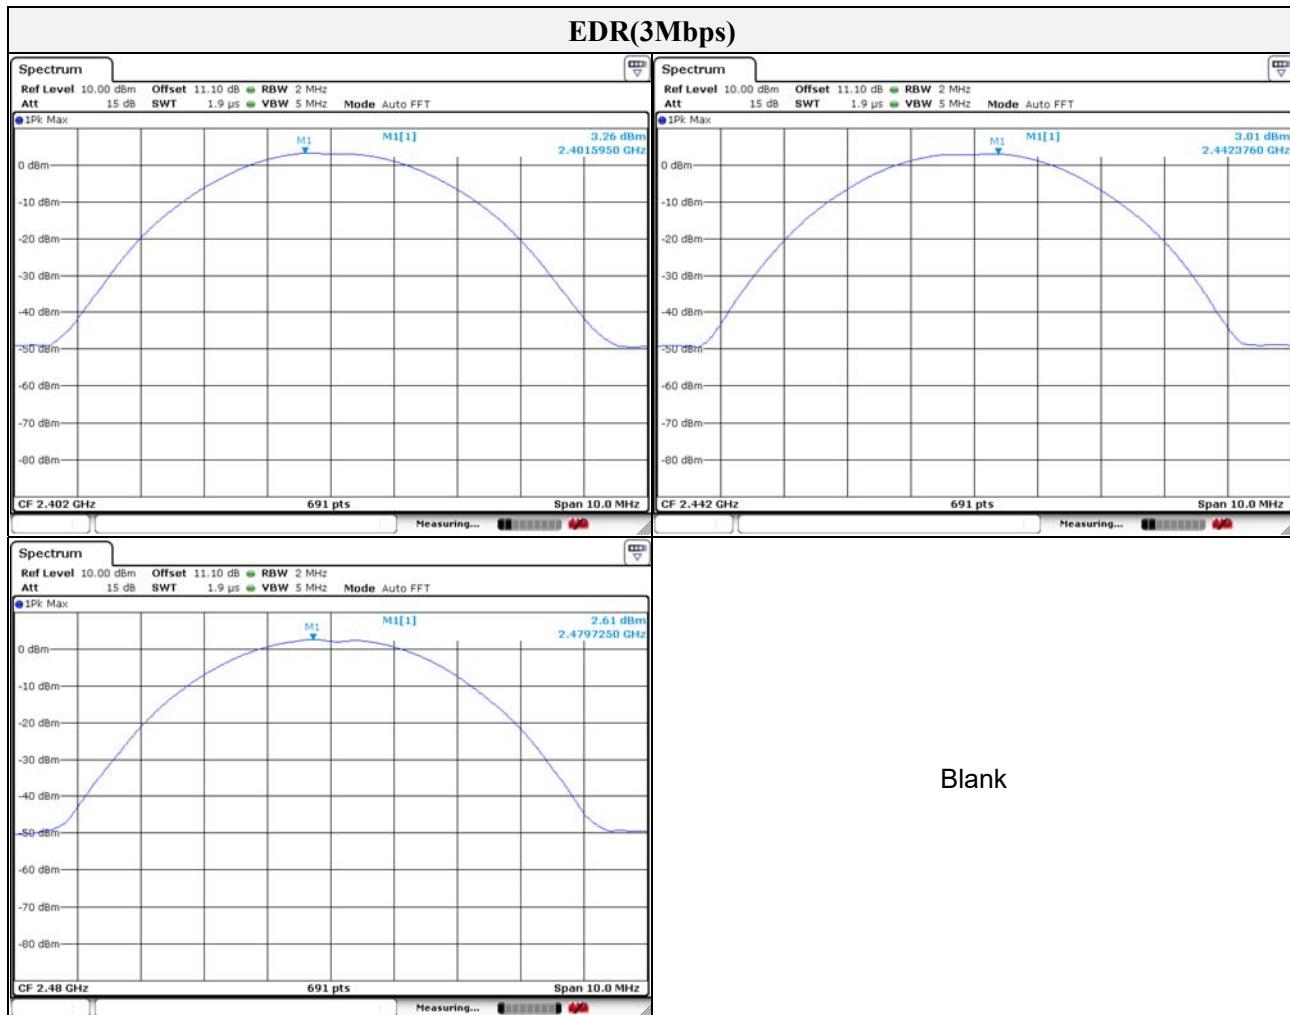


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

### 3.3. Carrier frequency separation

#### Test procedure

DA 00-705

#### Test setup



#### Test Setting

1. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
2. Span = wide enough to capture the peaks of two adjacent channels
3. Resolution (or IF) Bandwidth (RBW)  $\geq 1\%$  of the span
4. Video (or Average) Bandwidth (VBW)  $\geq$  RBW
5. Sweep = auto
6. Detector function = peak
7. Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.


#### Limit

According to 15.247(a)(1), frequency hopping system operating in 2 400 ~ 2 483.5 MHz. Band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Frequency(MHz)	Channel no.	Data rate(Mbps)	Channel Separation (MHz)
2 442	39	1	0.999
2 442	39	3	0.999

#### Note:

Measurement is made with EUT operating in hopping mode between 79 channels providing a worse case scenario as compared to AFH mode hopping between 20 channels.

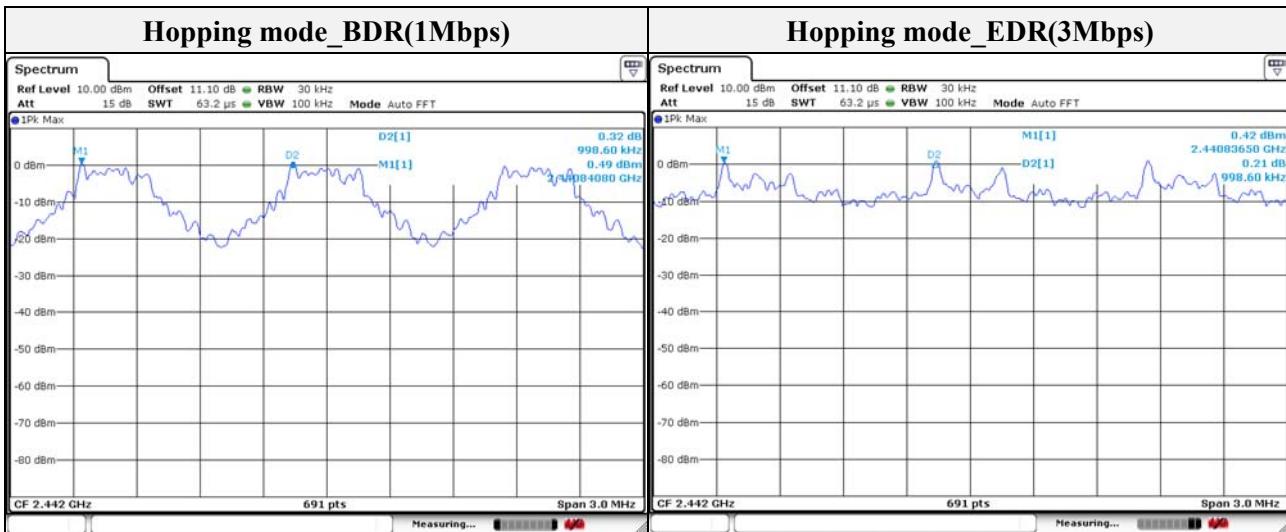


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

### 3.4. Number of hopping frequency

#### Test procedure

DA 00-705

#### Test setup



#### Test setting


1. The EUT must have its hopping function enabled.
2. Frequency range: 2 400 MHz ~ 2 483.5 MHz
3. Span = the frequency band of operation
4. RBW = 300 kHz ( $\geq 1\%$  of the span)
5. VBW = 1 MHz ( $\geq$  RBW)
6. Sweep = auto
7. Detector function = peak
8. Trace = max hold

All the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

#### Limit

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2 400 ~ 2 483.5 MHz bands shall use at least 15 hopping frequencies.

**Note:** In case of AFH mode, minimum number of hopping channels is 20.

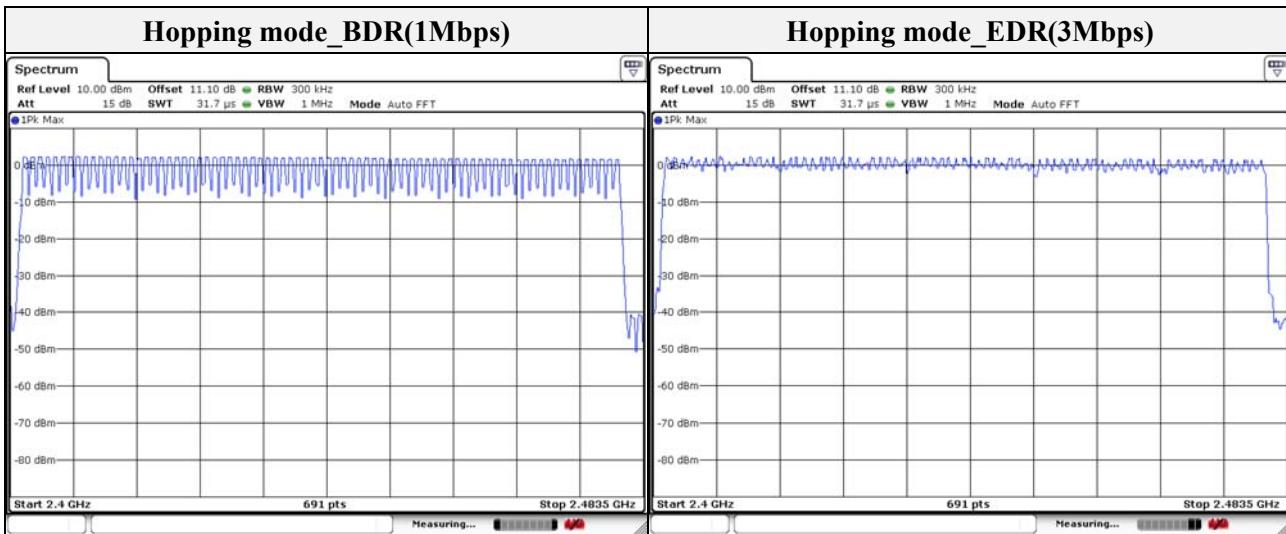


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

### 3.5. Time of occupancy

#### Test procedure

DA 00-705

#### Test setup



#### Test setting

1. The EUT must have its hopping function enabled.
2. Span = zero span, centered on a hopping channel
4. RBW = 1 MHz
5. VBW = 1 MHz ( $\geq$  RBW)
6. Sweep = as necessary to capture the entire dwell time per hopping channel
7. Detector function = peak
8. Trace = max hold

#### Limit

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2 400 ~ 2 483.5 MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

A period time =  $0.4(s) \times 79 = 31.6(s)$

Time of occupancy on the TX channel in 31.6 sec  
 = time domain slot length  $\times$  (hop rate  $\div$  number of hop per channel)  $\times$  31.6

#### • Adaptive Frequency Hopping

A period time =  $0.4(s) \times 20 = 8.0(s)$

Time of occupancy on the TX channel in 8.0 sec  
 = time domain slot length  $\times$  (hop rate  $\div$  number of hop per channel)  $\times$  8.0



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-18T0035  
Page (20 ) of (48)

### Operation mode: GFSK , $\pi/4$ -DQPSK, 8DPSK

Packet type	Frequency (MHz)	Dwell time (ms)	Time of occupancy on the Tx channel in 31.6 sec (ms)	Limit for time of occupancy on the Tx channel in 31.6 sec (ms)
DH1	2 442	0.409	130.88	400
DH3	2 442	1.666	266.56	400
DH5	2 442	2.916	311.04	400
2-DH1	2 442	0.414	132.48	400
2-DH3	2 442	1.664	266.24	400
2-DH5	2 442	2.917	311.15	400
3-DH1	2 442	0.414	132.48	400
3-DH3	2 442	1.667	266.72	400
3-DH5	2 442	2.925	312.00	400

#### Note:

#### Normal Mode

DH1: Dwell time (ms)  $\times$   $[(1600 \div 2) \div 79] \times 31.6(s) = 130.88$  (ms)

DH3: Dwell time (ms)  $\times$   $[(1600 \div 4) \div 79] \times 31.6(s) = 266.56$  (ms)

DH5: Dwell time (ms)  $\times$   $[(1600 \div 6) \div 79] \times 31.6(s) = 309.86$  (ms)

2-DH1: Dwell time (ms)  $\times$   $[(1600 \div 2) \div 79] \times 31.6(s) = 132.48$  (ms)


2-DH3: Dwell time (ms)  $\times$   $[(1600 \div 4) \div 79] \times 31.6(s) = 266.24$  (ms)

2-DH5: Dwell time (ms)  $\times$   $[(1600 \div 6) \div 79] \times 31.6(s) = 311.15$  (ms)


3-DH1: Dwell time (ms)  $\times$   $[(1600 \div 2) \div 79] \times 31.6(s) = 132.48$  (ms)

3-DH3: Dwell time (ms)  $\times$   $[(1600 \div 4) \div 79] \times 31.6(s) = 266.72$  (ms)

3-DH5: Dwell time (ms)  $\times$   $[(1600 \div 6) \div 79] \times 31.6(s) = 312.00$  (ms)

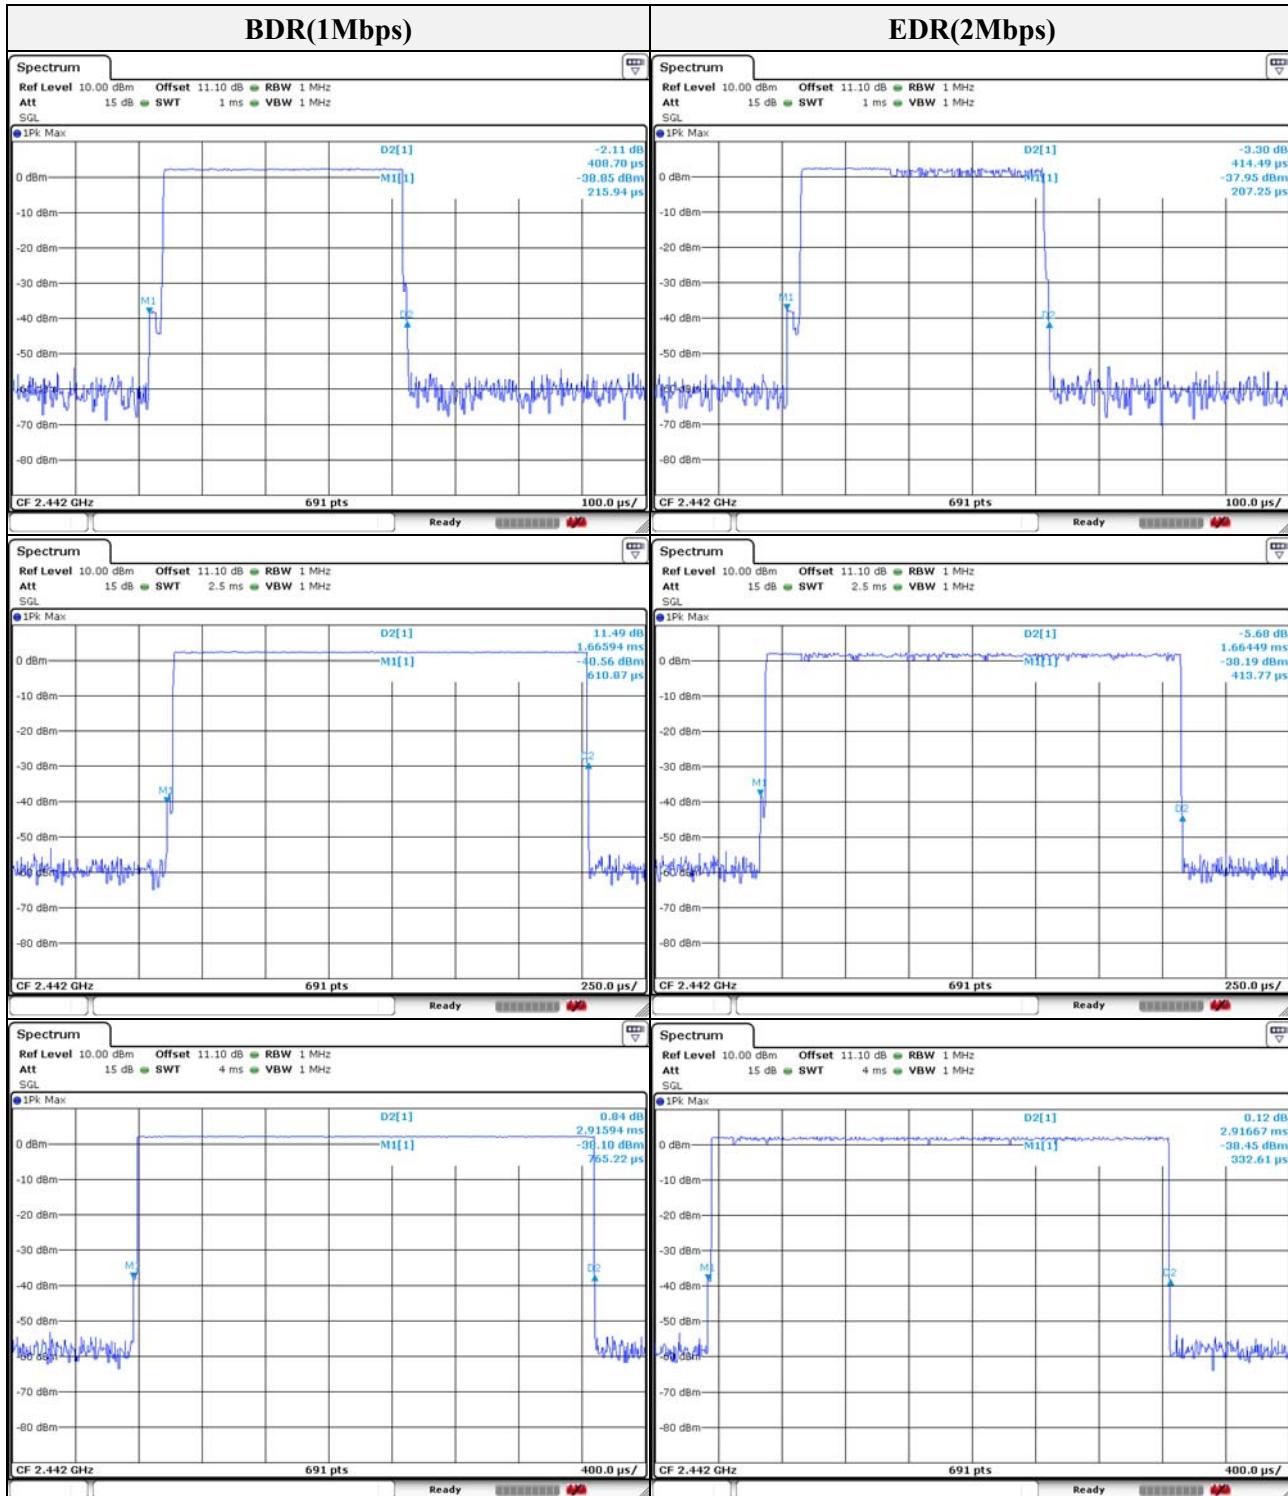

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

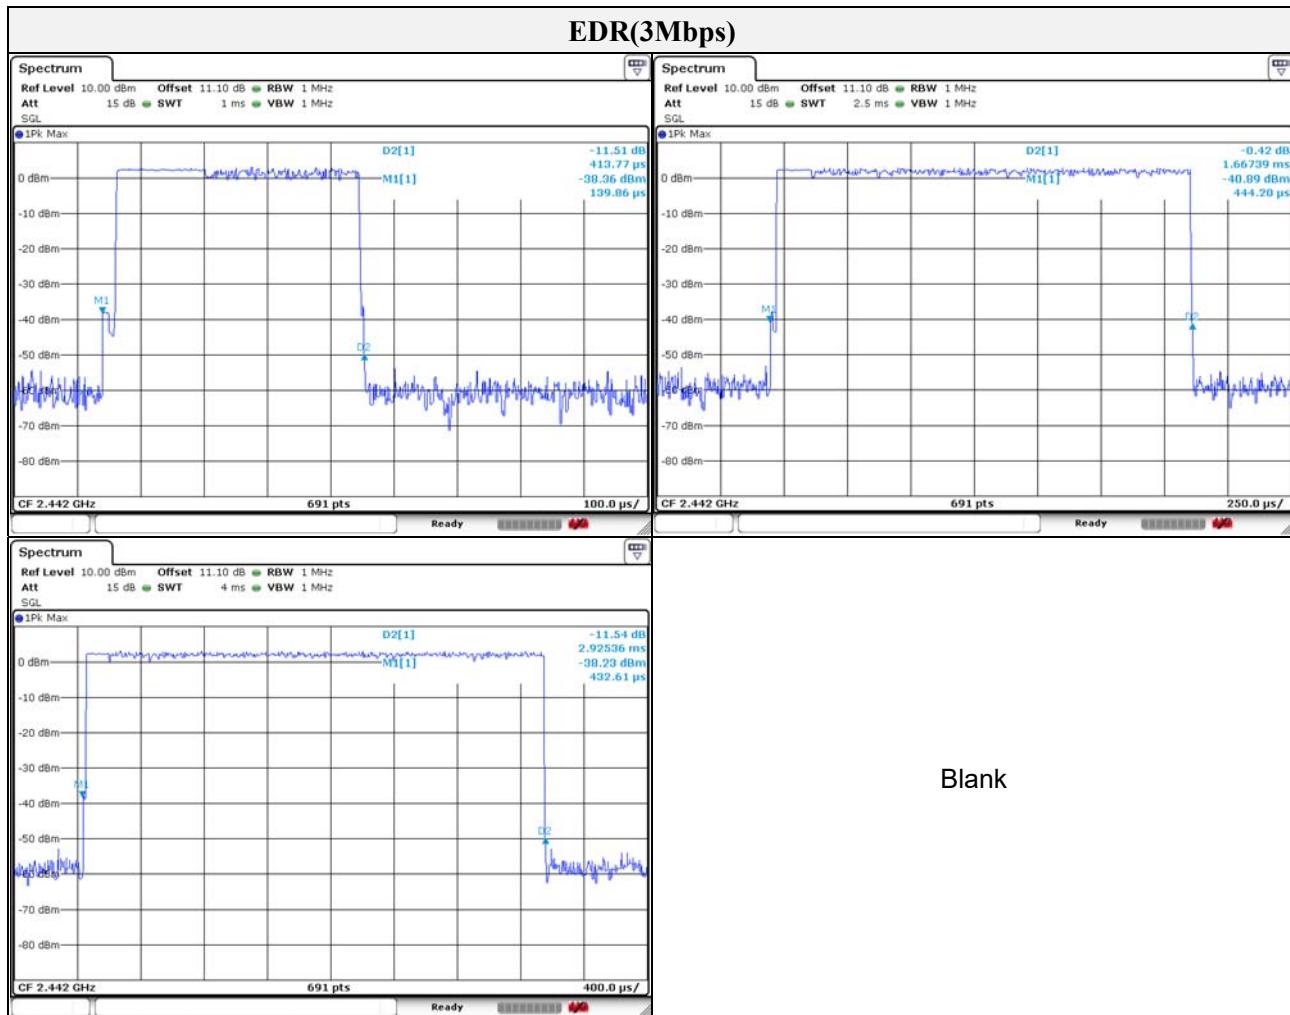


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


### 3.6. Radiated restricted band and emissions

#### Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

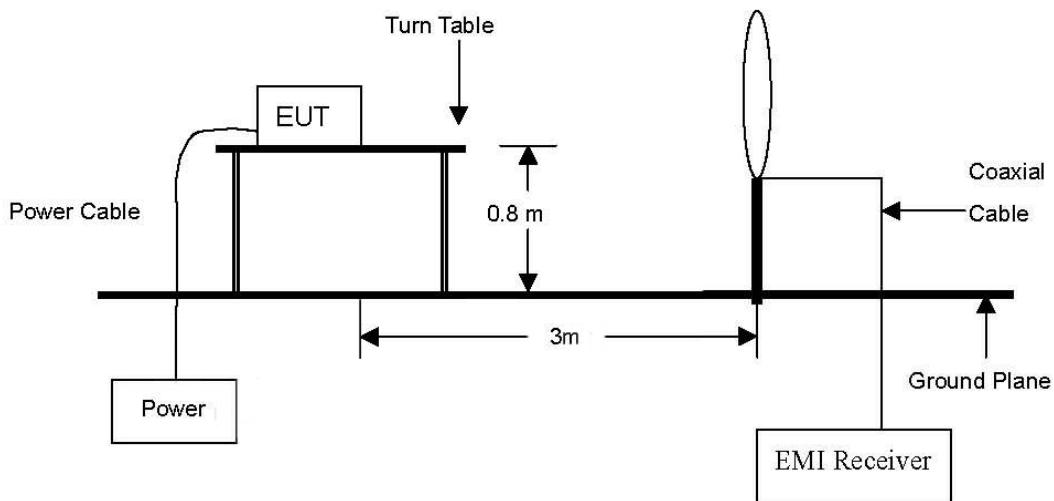

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

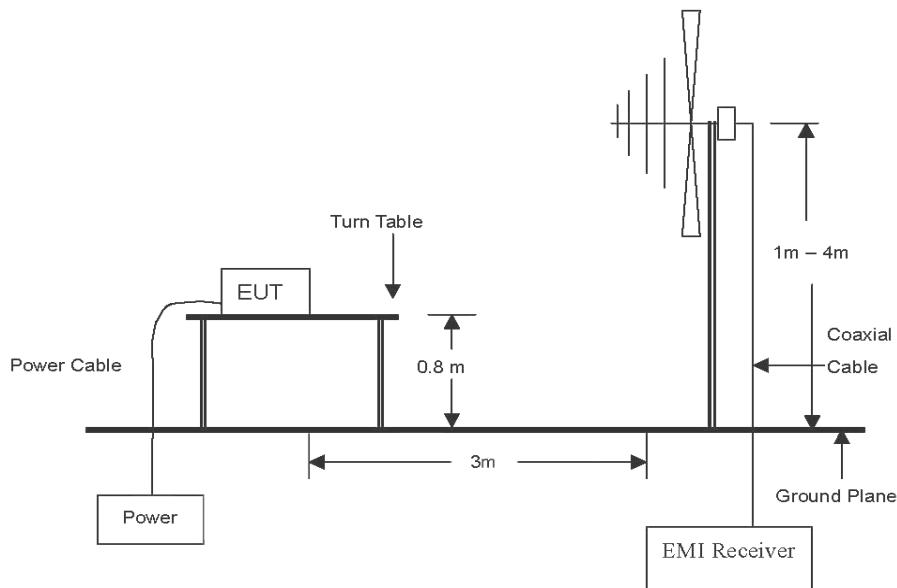

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

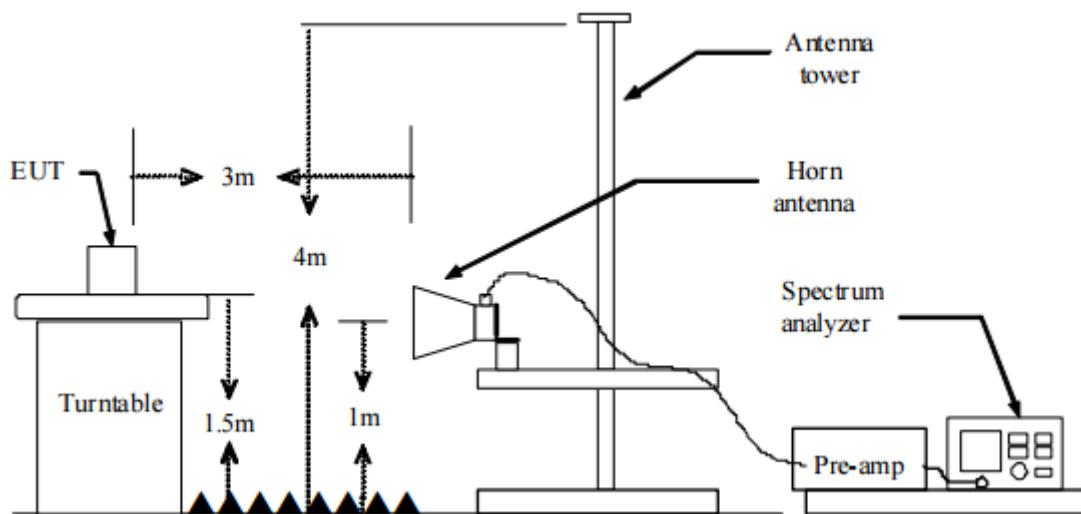

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

### Test procedure

1. The EUT is placed on a turntable, which is 0.8 m (below 1 GHz) and 1.5 m (above 1 GHz) ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum analyzer settings for  $f < 1$  GHz:  
Span = wide enough to fully capture the emission being measured  
RBW = 100 kHz  
VBW  $\geq$  RBW  
Sweep = auto  
Detector function = quasi peak  
Trace = max hold
8. Spectrum analyzer settings for  $f \geq 1$  GHz: Peak  
Span = wide enough to fully capture the emission being measured  
RBW = 1 MHz  
VBW  $\geq$  RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold
9. Spectrum analyzer settings for  $f \geq 1$  GHz: Average  
Span = wide enough to fully capture the emission being measured  
RBW = 1 MHz  
VBW  $\geq$  1/T Hz, where T= pulse width in seconds  
Sweep = auto  
Detector function = average  
Trace = max hold
10. Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels =  $\Delta t = \tau[\text{ms}] \times 79 \text{ channels} = 231.075 \text{ ms}$ , where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t[\text{ms}] = H \rightarrow$  Round up to next highest integer,  $H' = 1$
  - c. Worst Case Dwell Time =  $\tau[\text{ms}] \times H' = 2.925 \text{ ms}$
  - d. Duty Cycle Correction =  $20 \log (\text{Worst Case Dwell Time} / 100 \text{ ms}) \text{ dB} = -30.68 \text{ dB}$

**Note:**

1. The spectrum is measured from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1 GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20 dB of the respective limits were not reported.
2. When Average result is different from peak result over 20 dB (over-averaging), according to 15.35 (c), as a "duty cycle correction factor", pulse averaging with  $20 \log(\text{duty cycle})$  has to be used.  
Duty cycle correction factor =  $20 \log(\text{dwell time}/100 \text{ ms})$
3. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
4. Average test would be performed if the peak result were greater than the average limit.
5. Field strength(dB $\mu$ V/m) = Level(dB $\mu$ V) + Correction factors(dB/m) + Cable loss(dB) + or  $F_d$ (dB)
6. Correction factors(dB/m) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB)
7. Margin(dB) = Limit(dB $\mu$ V/m) - Field strength(dB $\mu$ V/m)
8. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.
9. All channels, modes (e.g. BDR, EDR), and modulations/data rates were investigated among DSS band.  
Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.
10. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
11.  $f < 30 \text{ MHz}$ , extrapolation factor of 40 dB/decade of distance.  $F_d = 40 \log(D_m / D_s)$   
 $f \geq 30 \text{ MHz}$ , extrapolation factor of 20 dB/decade of distance.  $F_d = 20 \log(D_m / D_s)$

Where:

$F_d$  = Distance factor in dB  
 $D_m$  = Measurement distance in meters  
 $D_s$  = Specification distance in meters



## KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,  
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-18T0035  
Page (27 ) of (48)

### Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated ( $\mu$ V/m)
0.009 ~ 0.490	300	2 400 / F(kHz)
0.490 ~ 1.705	30	24 000 / F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

### Test results (Below 30 MHz)


Mode: BDR

Transfer rate: 3 Mbps

Distance of measurement: 3 meter

Channel: 00(Worst case)

Frequency (MHz)	Level (dB $\mu$ V)	Ant. Pol. (H/V)	CF (dB)	F <sub>d</sub> (dB)	Field strength (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
No spurious emissions were detected within 20dB of the limit							

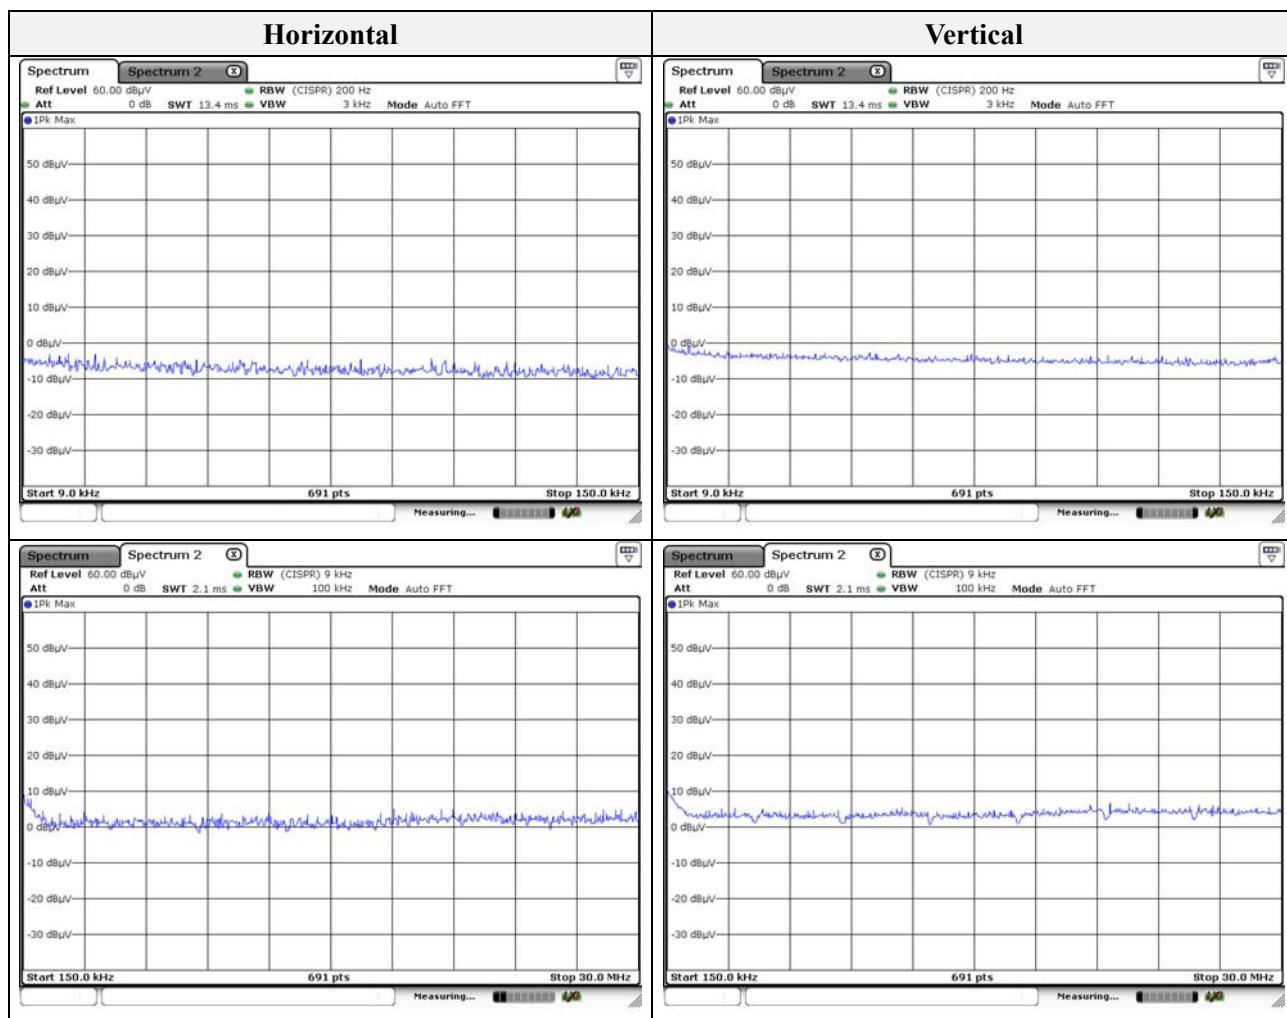

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


### Test results (Below 1 000 MHz) – Worst case

Mode: BDR

Transfer rate: 3 Mbps

Distance of measurement: 3 meter

Channel: 00(Worst case)

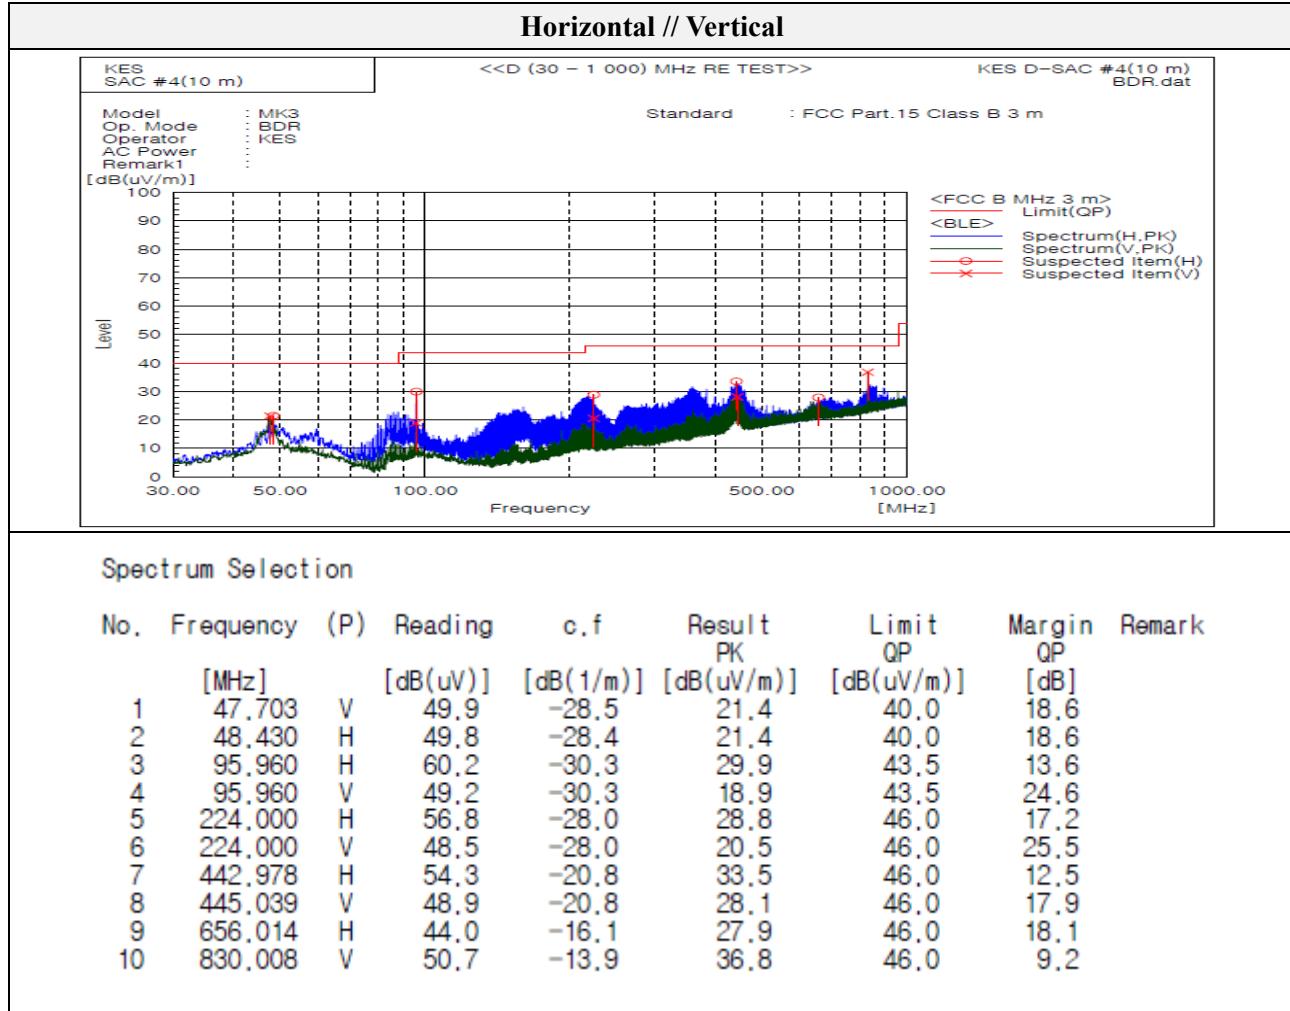

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

### Test results (Above 1 000 MHz)


Mode:	BDR
Transfer rate:	1 Mbps
Distance of measurement:	3 meter
Channel:	00

#### - Spurious


Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
1108.50	54.96	Peak	H	-8.44	-	46.52	74.00	27.48
2118.67	49.82	Peak	H	-0.74	-	49.08	74.00	24.92
2115.80	46.43	Peak	V	-0.74	-	45.69	74.00	28.31

#### - Band edge

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
2346.42	45.36	Peak	H	-0.30	-	45.06	74.00	28.94
2310.00	42.23	Peak	V	-0.37	-	41.86	74.00	32.14

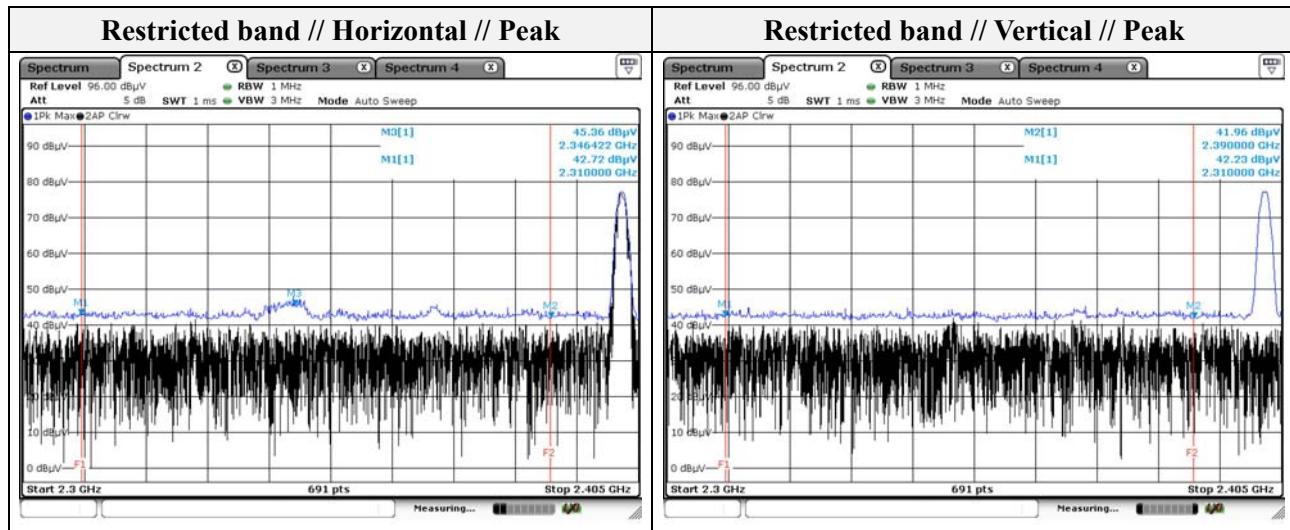

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

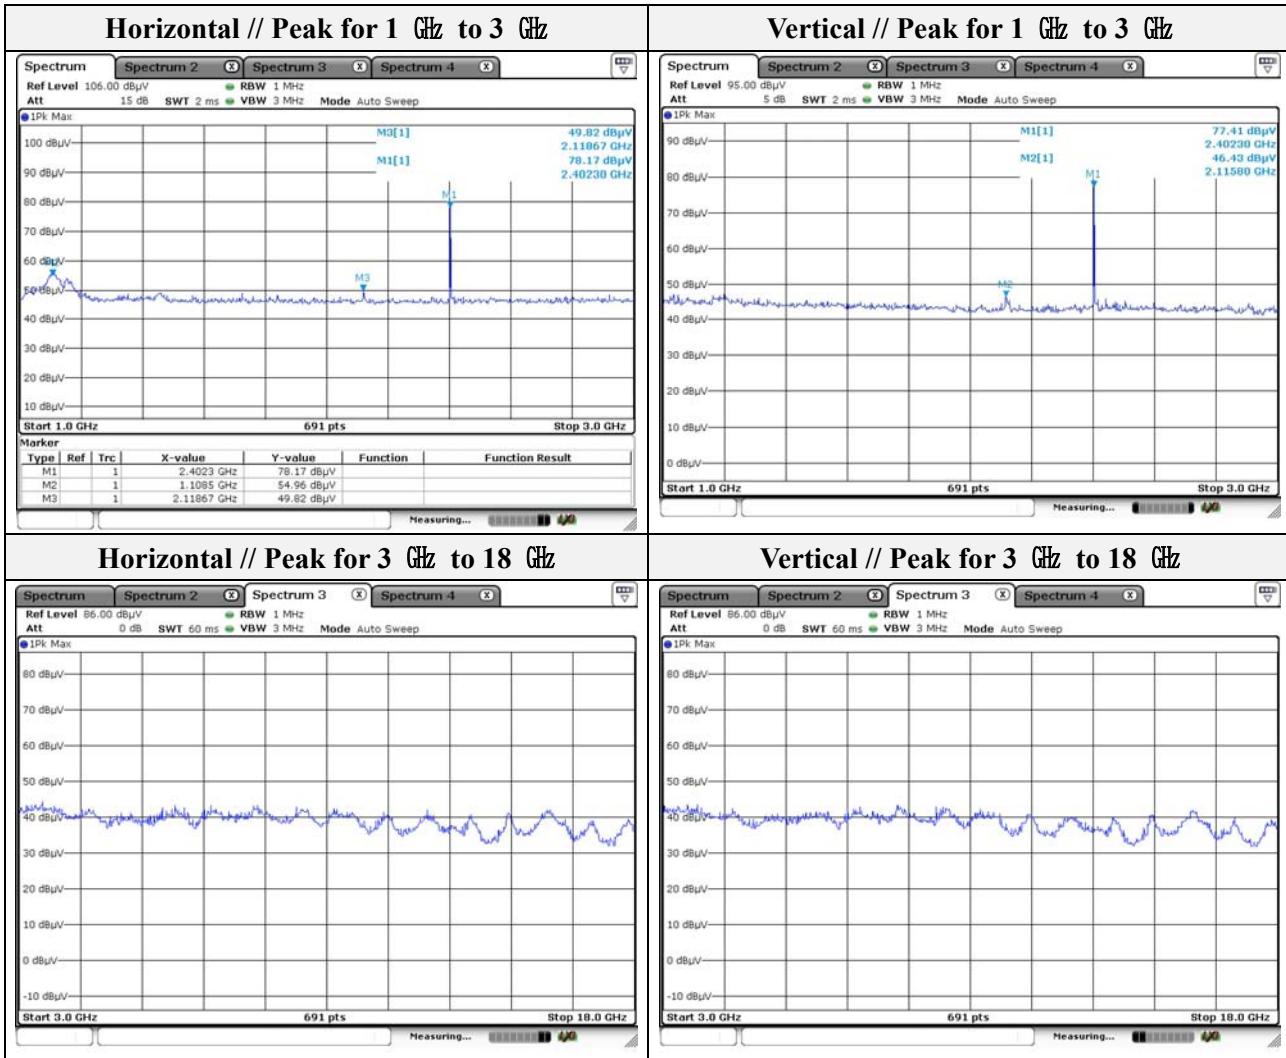


Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

Mode: **BDR**  
 Transfer rate: **1 Mbps**  
 Distance of measurement: **3 meter**  
 Channel: **40**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1108.54	53.37	Peak	H	-8.44	-	44.93	74.00	29.07
2118.70	46.42	Peak	H	-0.74	-	45.68	74.00	28.32
1811.90	46.49	Peak	H	-2.95	-	43.54	74.00	30.46

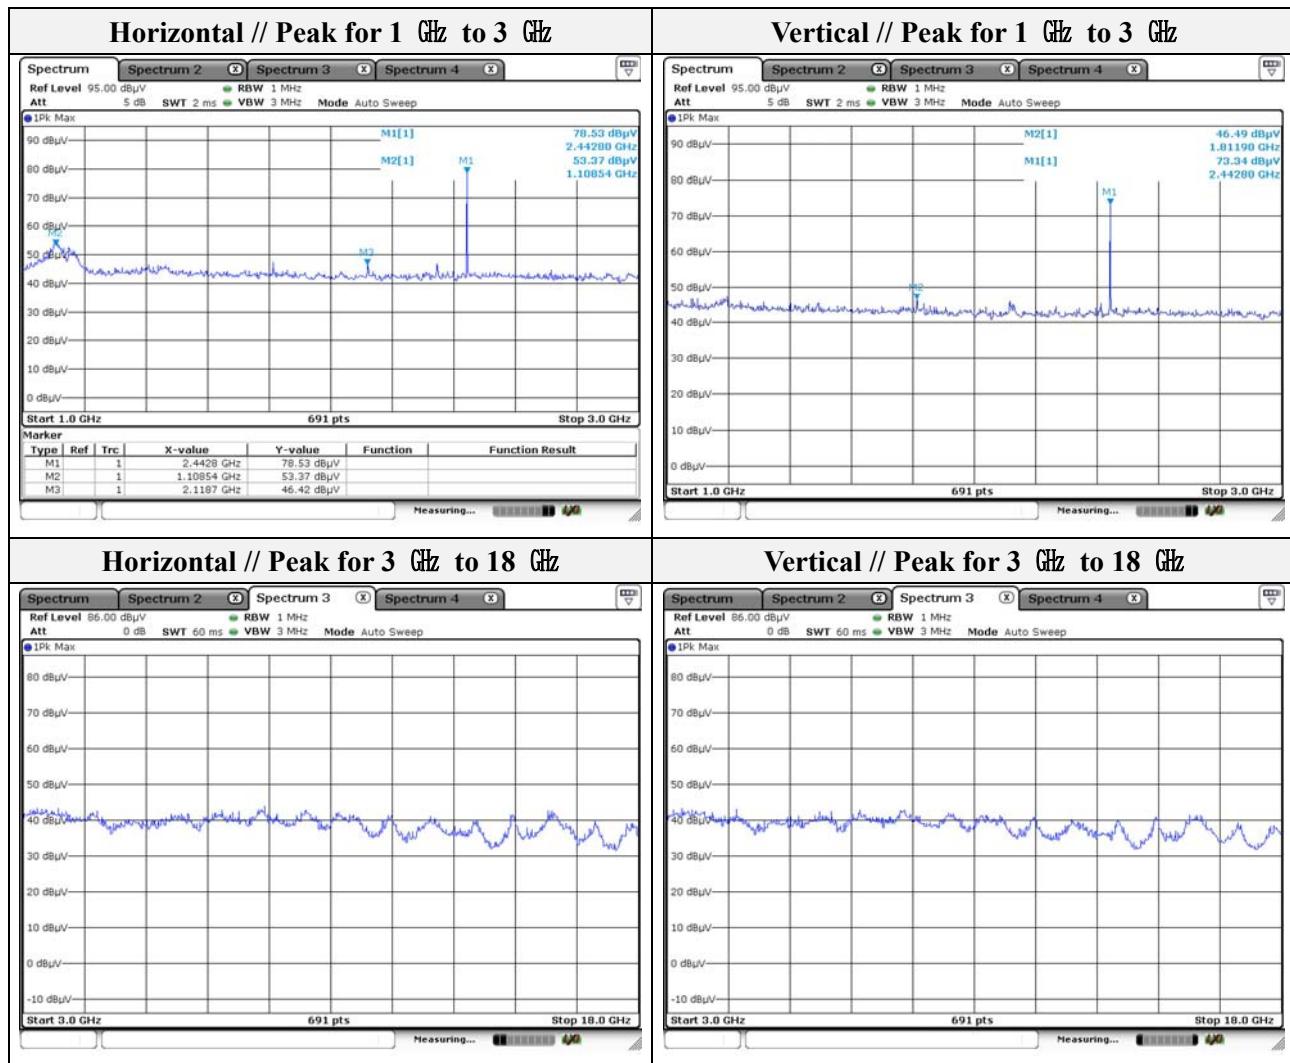

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


Mode: BDR  
 Transfer rate: 1 Mbps  
 Distance of measurement: 3 meter  
 Channel: 78

- Spurious


Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
1108.54	54.79	Peak	H	-8.44	-	46.35	74.00	27.65
2118.70	46.41	Peak	H	-0.74	-	45.67	74.00	28.33
2112.90	45.76	Peak	V	-0.75	-	45.01	74.00	28.99

- Band edge

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
2500.00	44.87	Peak	H	-0.02	-	44.86	74.00	29.15
2500.00	42.54	Peak	V	-0.02	-	42.53	74.00	31.48

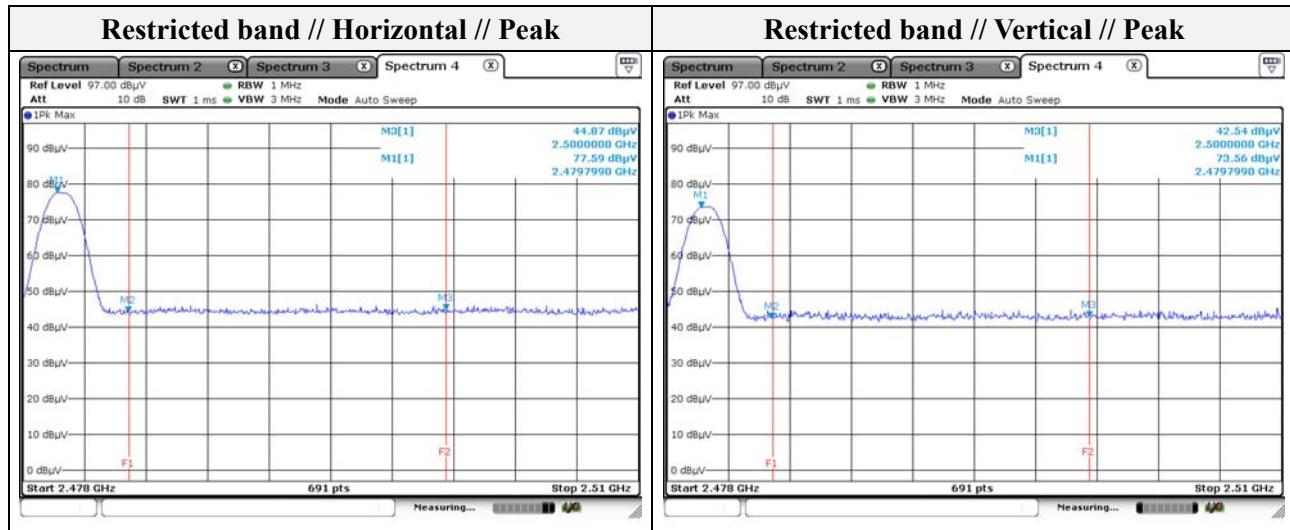

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

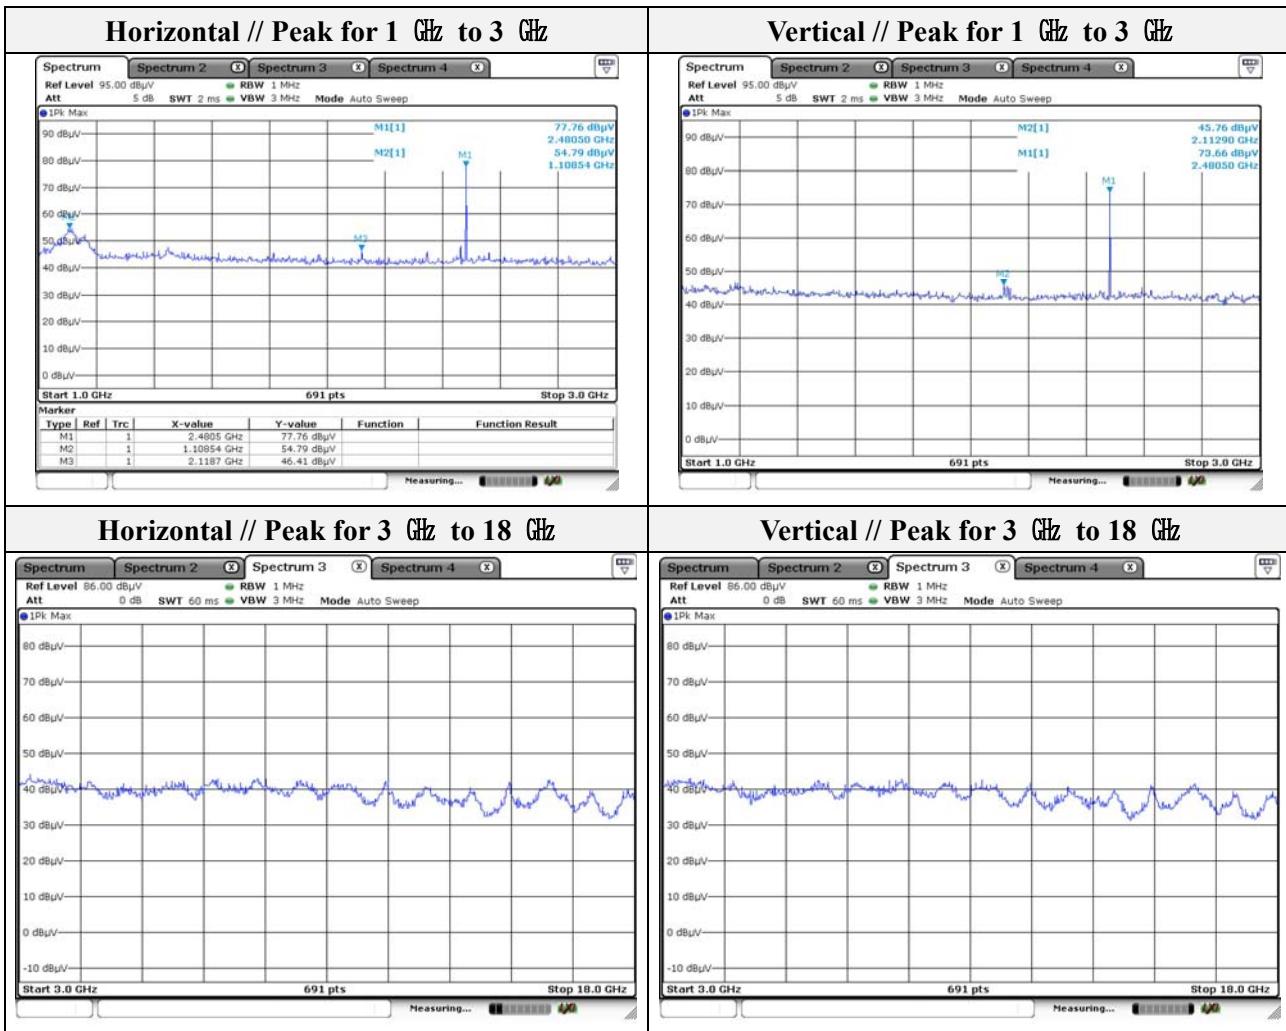

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


Mode:	EDR
Transfer rate:	3 Mbps(Worst case)
Distance of measurement:	3 meter
Channel:	00

**- Spurious**


Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
1123.00	56.50	Peak	H	-8.35	-	48.15	74.00	25.85
2112.90	46.88	Peak	V	-0.75	-	46.13	74.00	27.87

**- Band edge**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
2343.84	47.00	Peak	H	-0.31	-	46.69	74.00	27.31
2390.00	42.60	Peak	V	-0.22	-	42.38	74.00	31.62

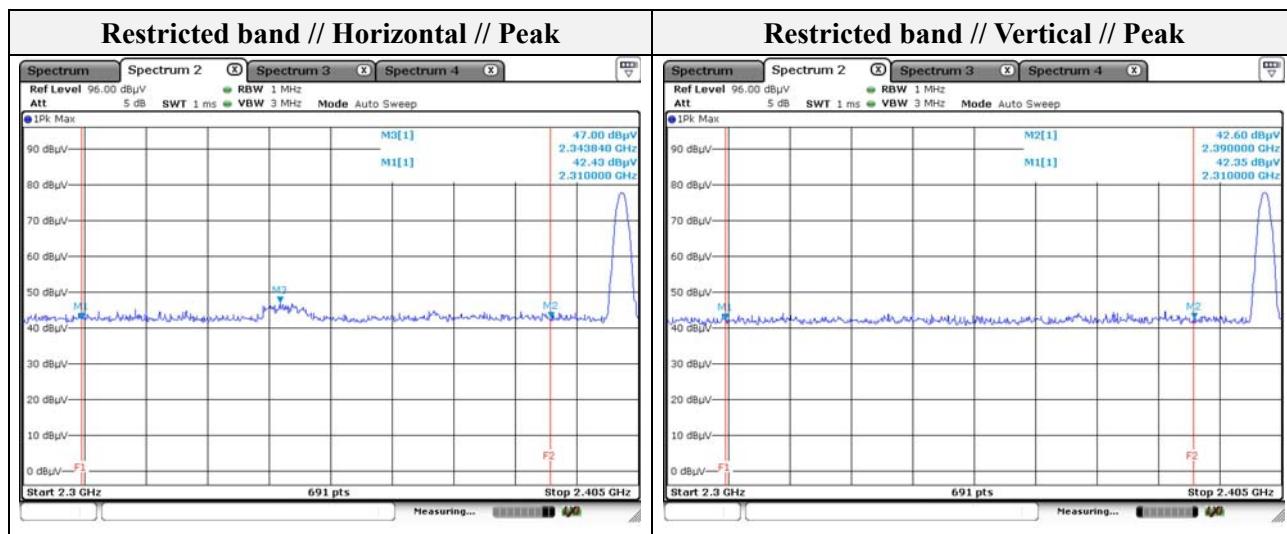

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

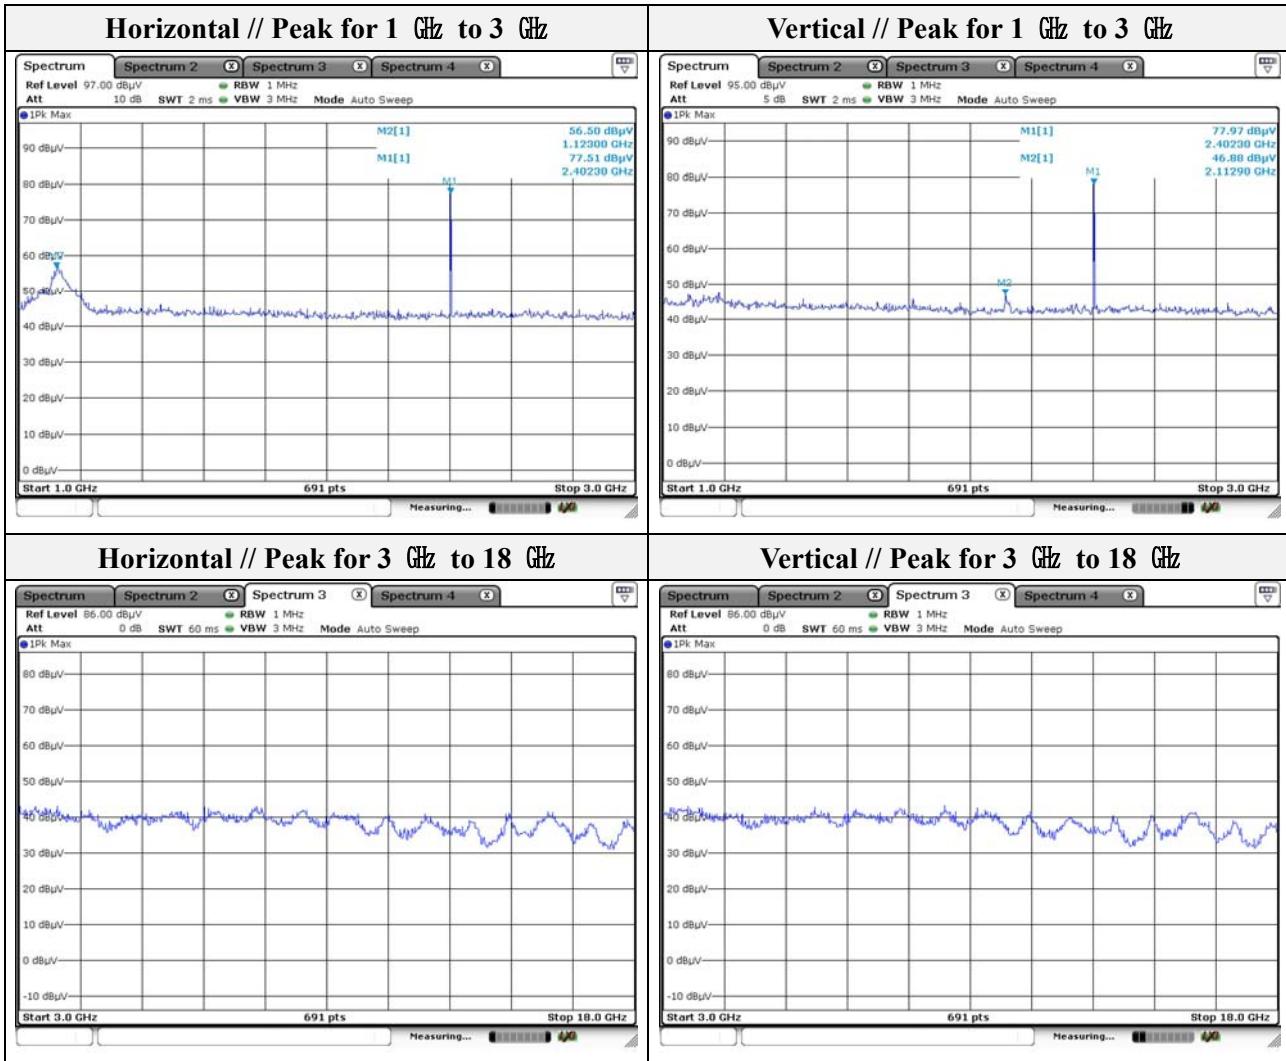


Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

Mode: **EDR**  
 Transfer rate: **3 Mbps(Worst case)**  
 Distance of measurement: **3 meter**  
 Channel: **40**

**- Spurious**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
1123.00	55.93	Peak	H	-8.35	-	47.58	74.00	26.42
1814.80	46.25	Peak	V	-2.92	-	43.33	74.00	30.67

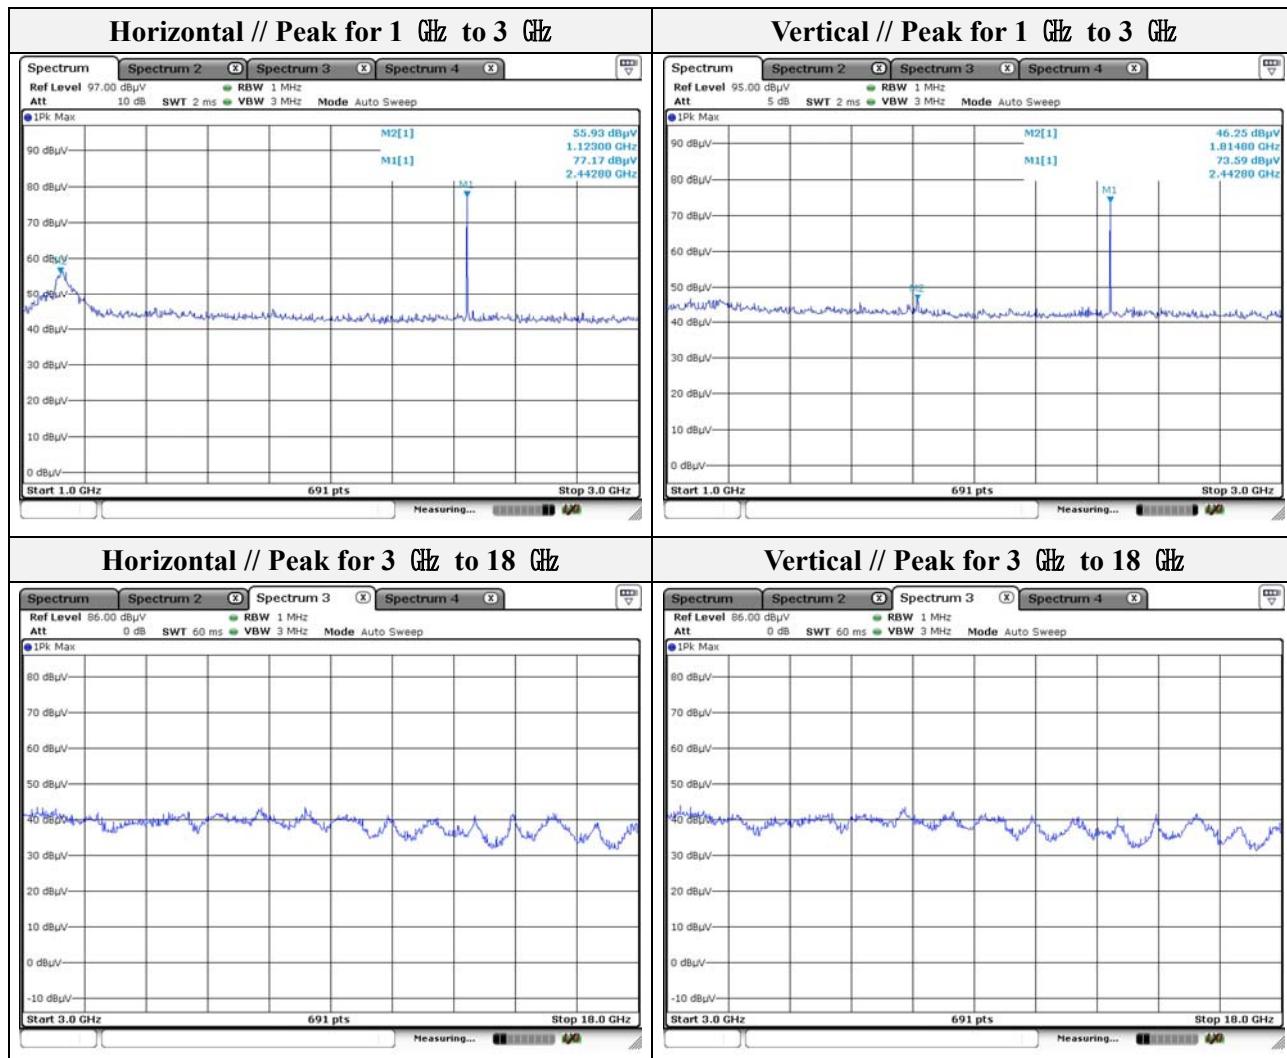

**Note.**

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.


Mode:	EDR
Transfer rate:	3 Mbps(Worst case)
Distance of measurement:	3 meter
Channel:	78

**- Spurious**


Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
1123.00	55.60	Peak	H	-8.35	-	47.25	74.00	26.75
1814.48	46.25	Peak	V	-2.93	-	43.32	74.00	30.68

**- Band edge**

Frequency (MHz)	Level (dB $\mu$ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
2500.00	43.49	Peak	H	-0.02	-	43.48	74.00	30.53
2500.00	42.78	Peak	V	-0.02	-	42.77	74.00	31.24

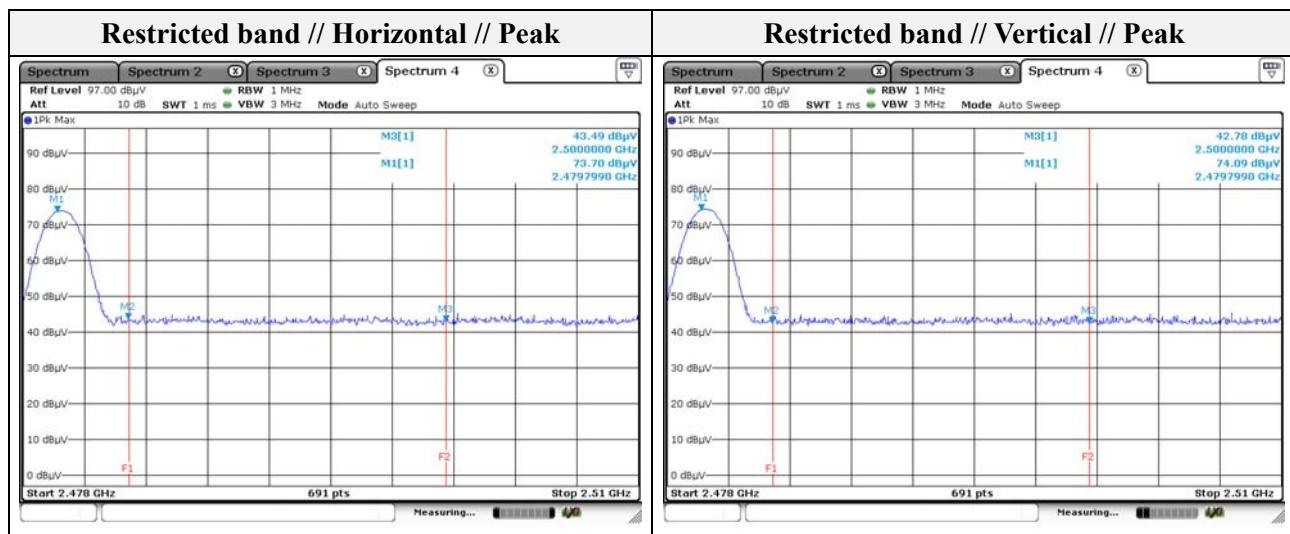

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

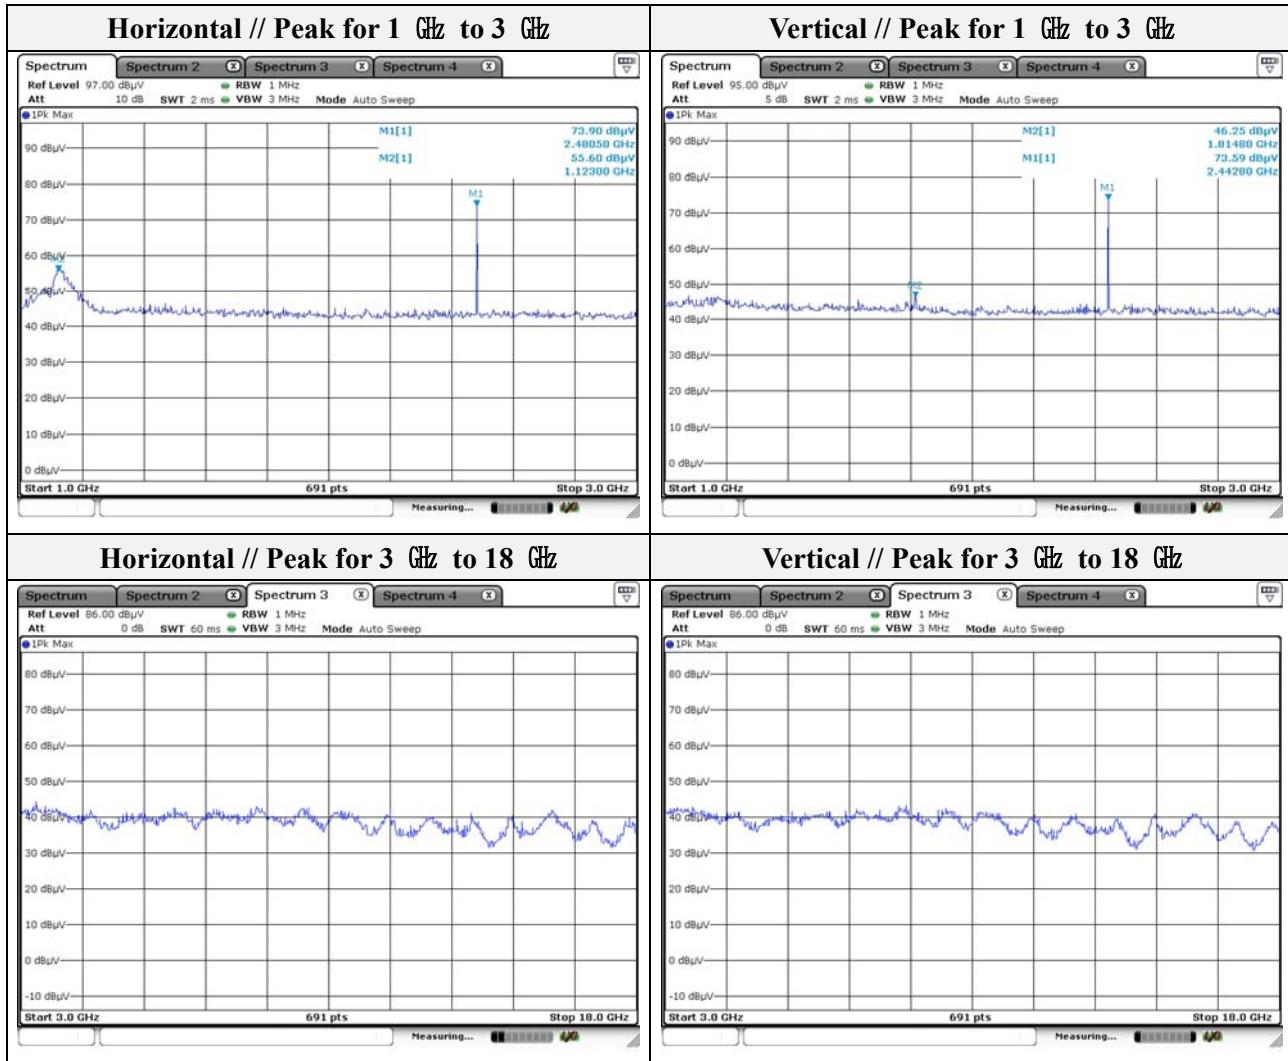


Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

**Test results (18 GHz to 30 GHz) – Worst case**

Mode:	EDR
Transfer rate:	3 Mbps
Distance of measurement:	3 meter
Channel:	00(Worst case)

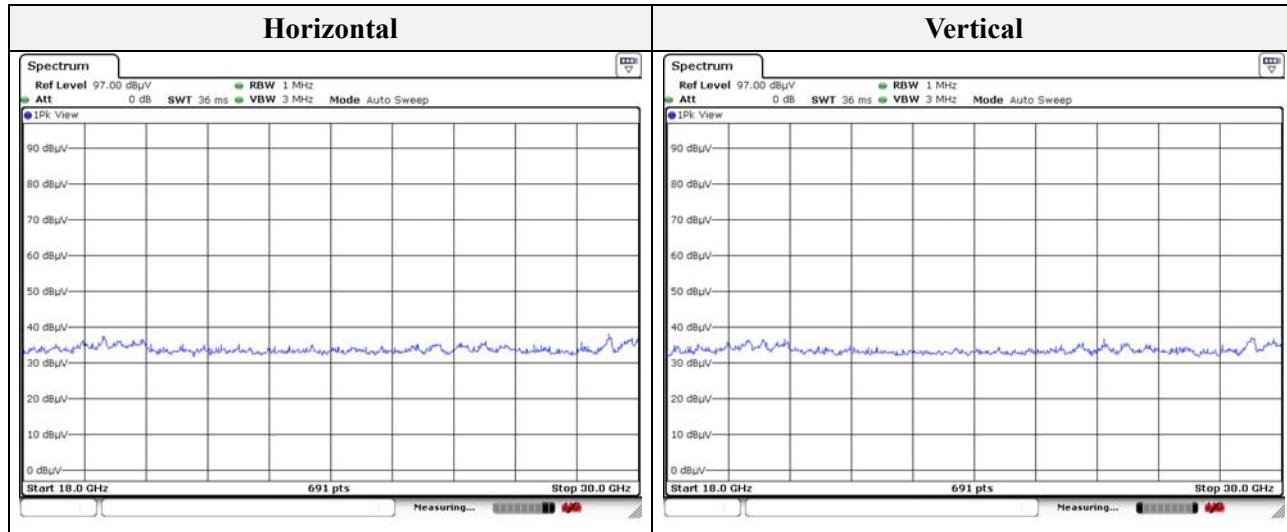

Note.


1. No spurious emission were detected above 18 GHz.

### 3.7. Conducted band edge and out of band emissions

#### Test procedure

DA 00-705

#### Test setup




#### Test setting

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions(e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.
2. RBW = 100 kHz
3. VBW  $\geq$  300 kHz
4. Detector = Peak
5. Number of sweep points  $\geq 2 \times$  Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize


#### Limit

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval , as permitted under paragraph(b)(3) of this section , the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section 15.205(a), must also comply the radiated emission limits specified in section 15.209(a) (see section 15.205(c))



## Test results

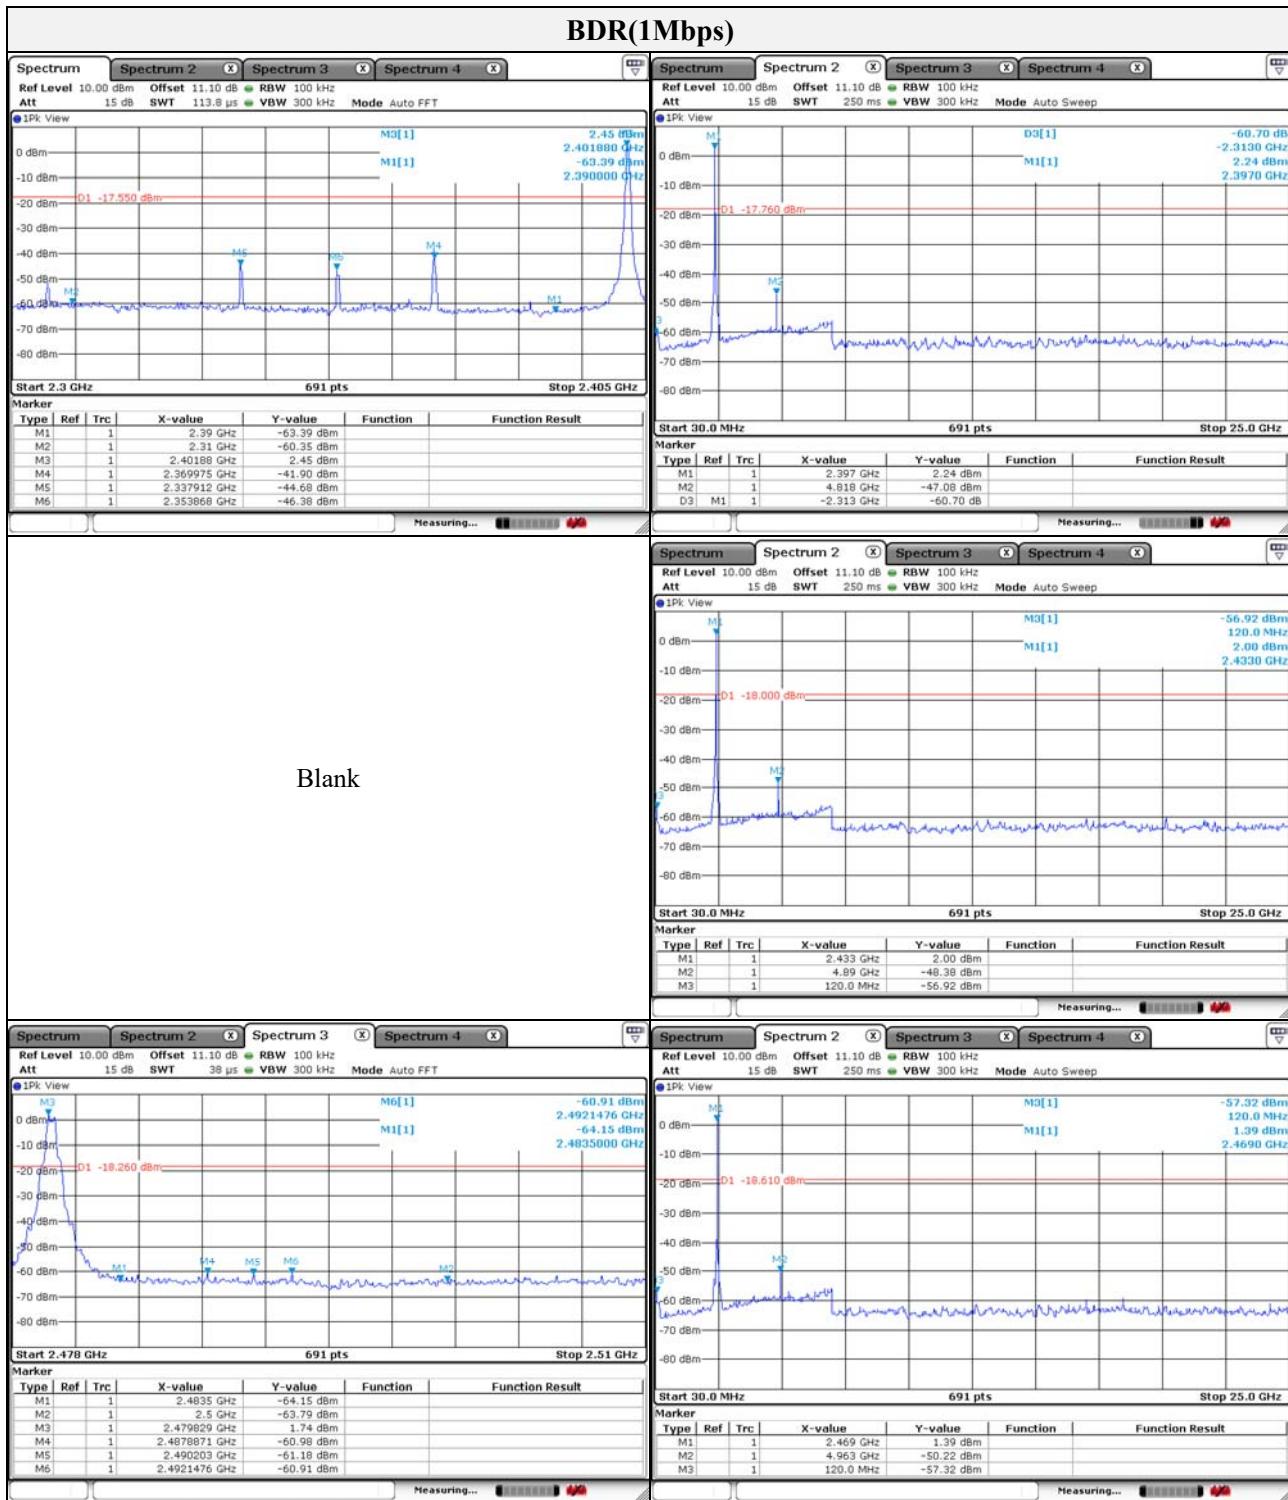

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

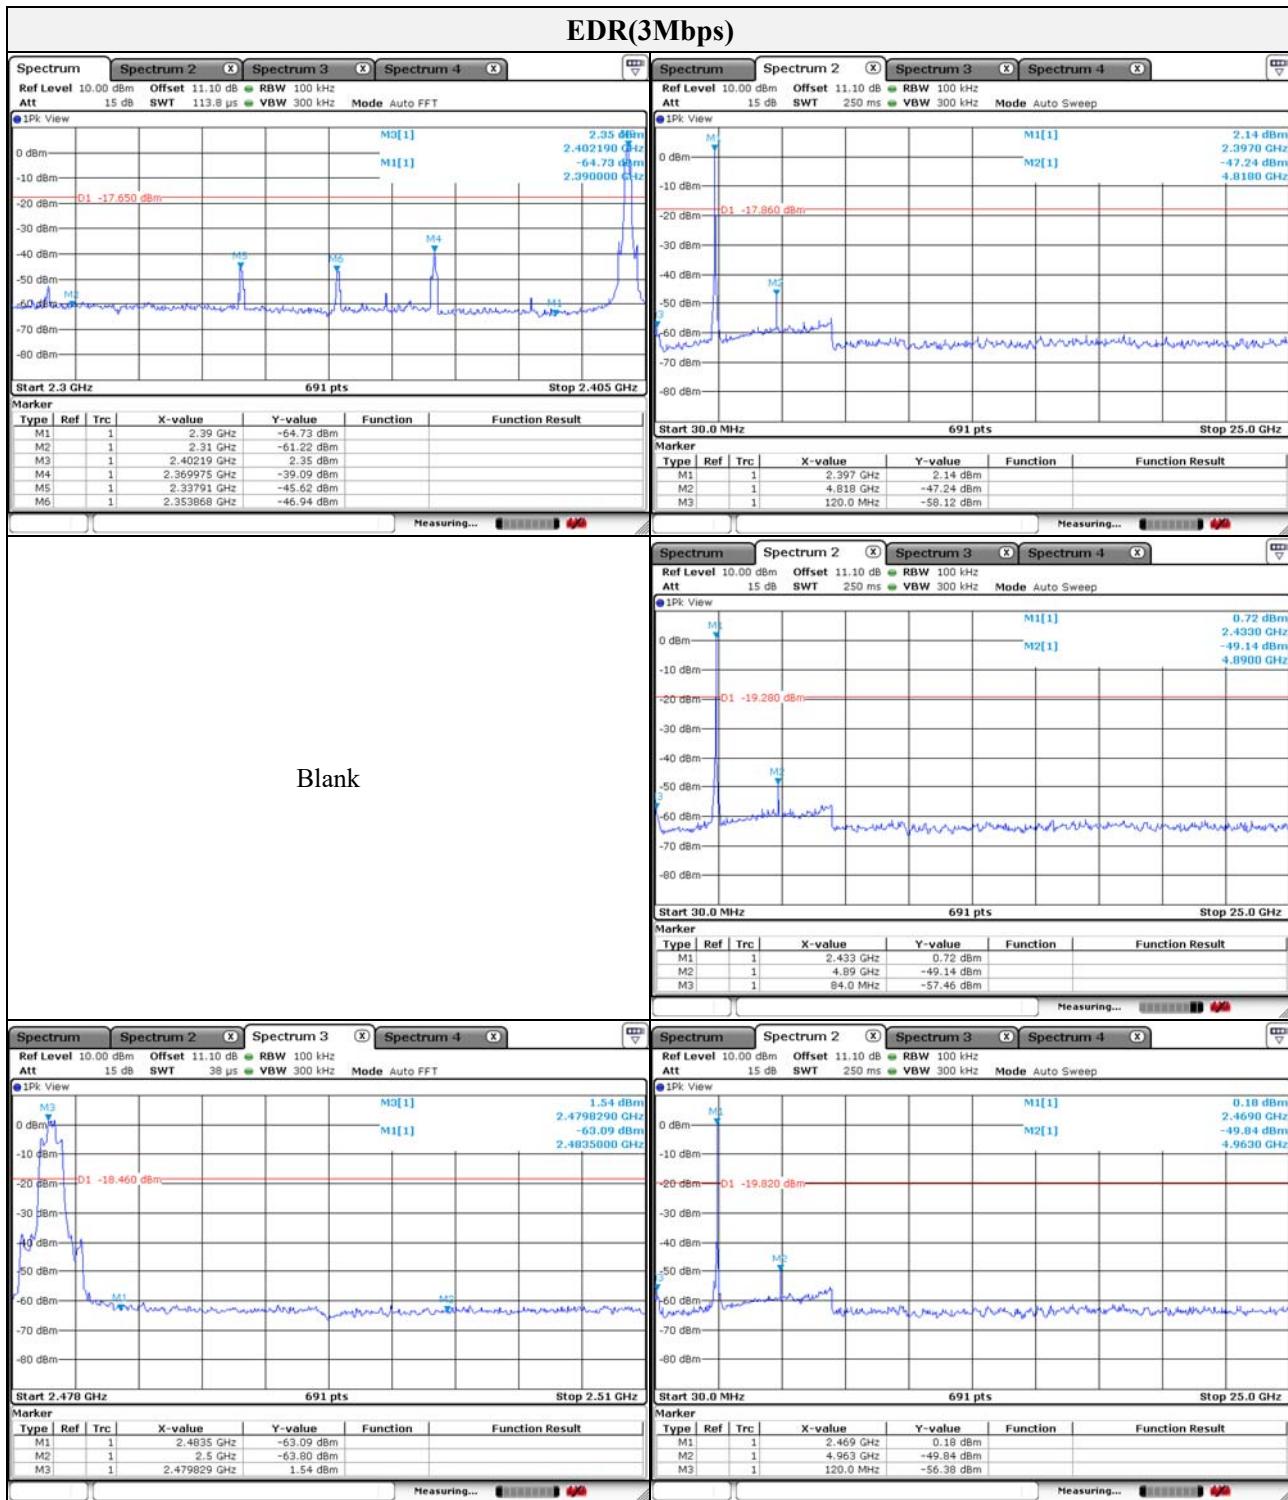


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

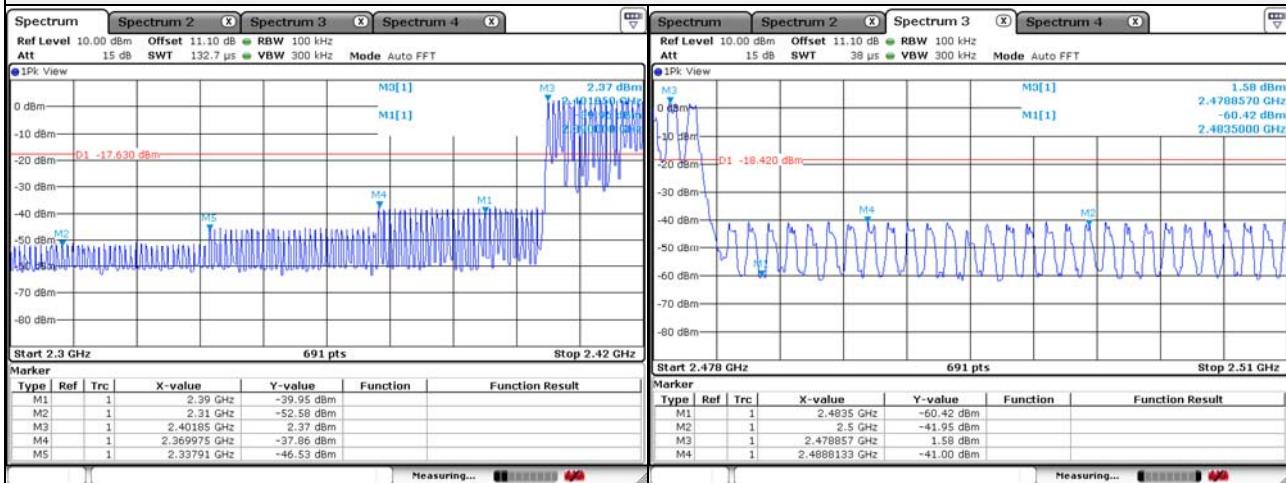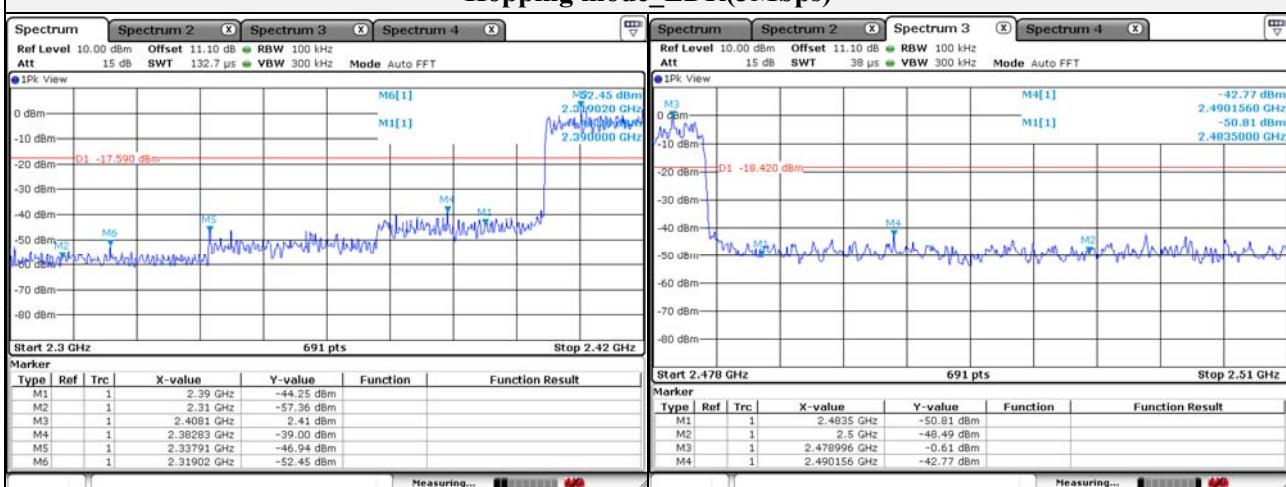**Hopping mode\_BDR(1Mbps)**

**Hopping mode\_EDR(3Mbps)**


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

### 3.8. AC conducted emissions
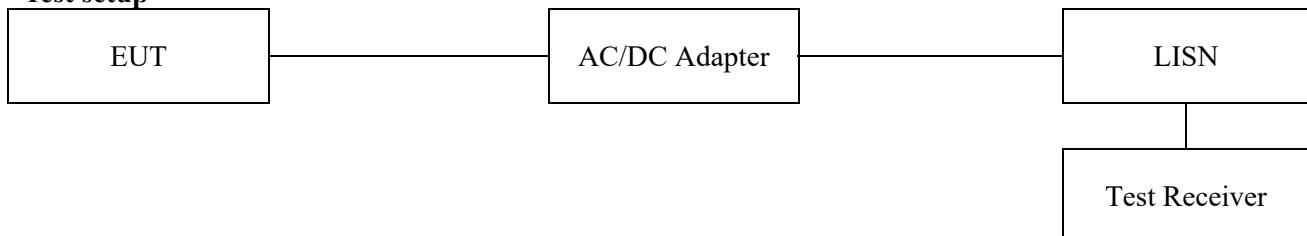
#### Test setup



#### Limit


According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted limit (dB $\mu$ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

#### Note:

1. All AC line conducted spurious emission are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and the appropriate frequencies. All data rates and modes were investigated for conducted spurious emission. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.
3. Both Cable loss and LISN factor are included in measurement level(QP Level or AV Level).

## Test results

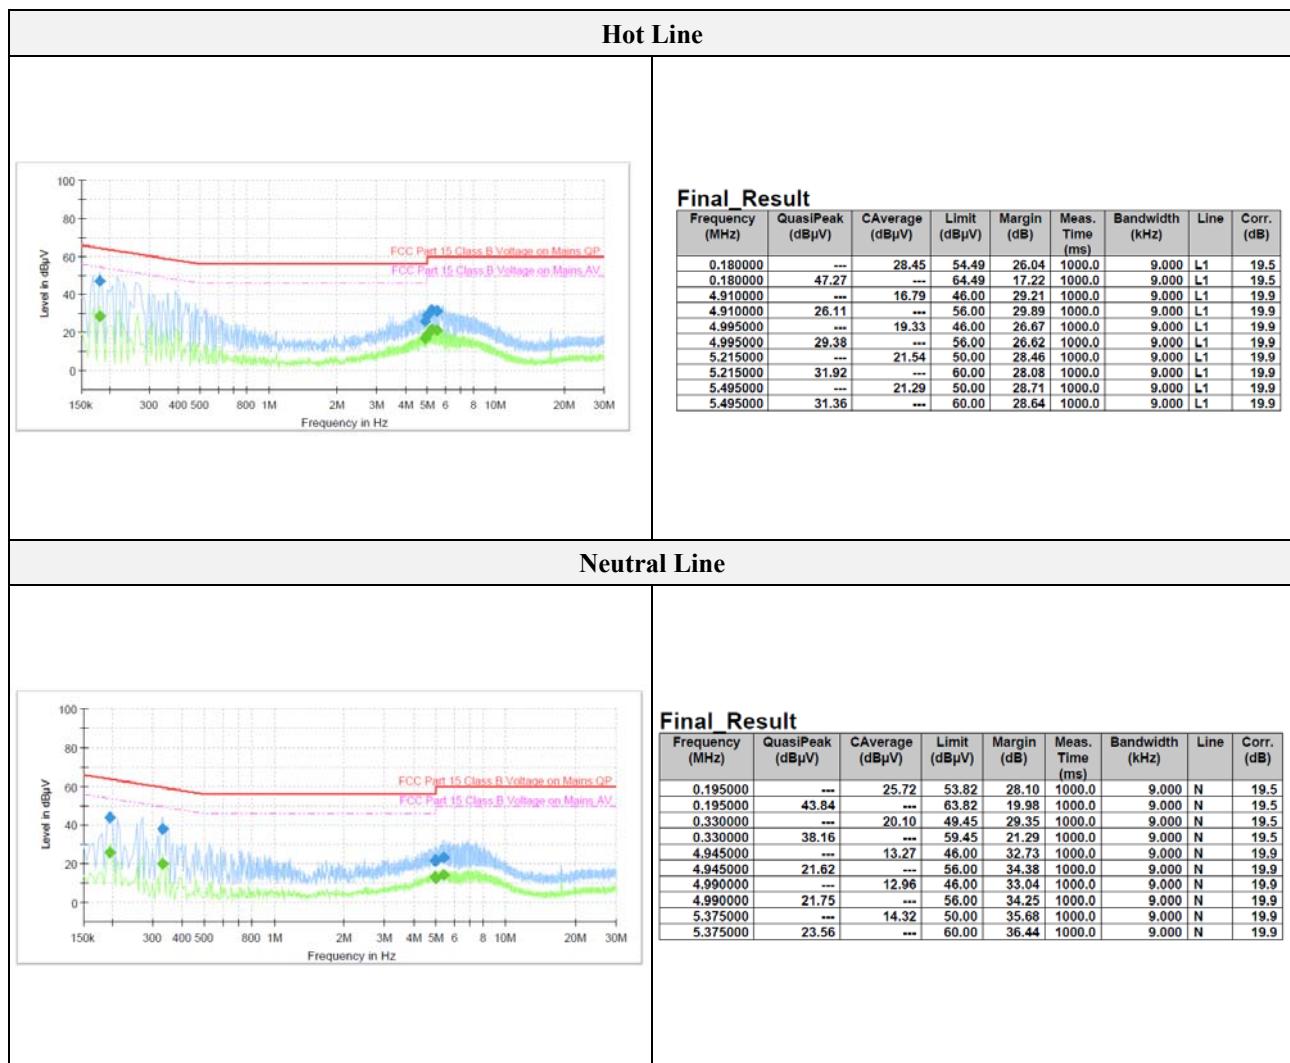

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.



## Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration date	Calibration due.
Spectrum Analyzer	R&S	FSV30	101389	1 year	2018.01.19	2019.01.19
Spectrum Analyzer	R&S	FSV40	101002	1 year	2017.07.04	2018.07.04
8360B Series Swept Signal Generator	HP	83630B	3844A00786	1 year	2018.01.22	2019.01.22
Power Meter	Anritsu	ML2495A	1438001	1 year	2018.01.25	2019.01.25
Pulse Power Sensor	Anritsu	MA2411B	1339205	1 year	2018.01.25	2019.01.25
Attenuator	Agilent	8493C	51401	1 year	2017.07.04	2018.07.04
Loop Antenna	Schwarzbeck	FMZB1513	225	2 years	2017.05.10	2019.05.10
Trilog-broadband antenna	SCHWARZBECK	VULB 9163	9168-714	2 years	2017.11.28	2018.11.28
Horn Antenna	A.H	SAS-571	414	2 years	2017.02.15	2019.02.15
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA 9170550	2 years	2017.02.15	2019.02.15
High Pass Filter	Wainwright Instrument GmbH	WHJS3000-10TT	1	1 year	2017.07.03	2018.07.03
Low Pass Filter	Wainwright Instrument GmbH	WLK1.0/18 G-10TT	1	1 year	2017.07.03	2018.07.03
Preamplifier	R&S	SCU01	100603	1 year	2017.11.27	2018.11.27
Preamplifier	AGILENT	8449B	3008A01742	1 year	2018.01.11	2019.01.11
EMI Test Receiver	R&S	ESR3	101781	1 year	2017.04.27	2018.04.27
EMI Test Receiver	R&S	ESU26	100552	1 year	2017.04.19	2018.04.19
Pulse Limiter	R&S	ESH3-Z2	101915	1 year	2017.11.27	2018.11.27
LISN	R&S	ENV216	101787	1 year	2018.01.15	2019.01.15

## Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook computer	Samsung Electronics Co., Ltd.	NT-R540-PS35S	ZSME93AZ700280W