

FCC Part 15C

Measurement and Test Report

For

GAMDIAS Technology Co., Ltd.

FCC ID: 2AO6PHADESM1

FCC Rule(s):	<u>FCC Part 15.249</u>
Product Description:	<u>Mouse</u>
Tested Model:	<u>Hades M1</u>
Report No.:	<u>BSL1801850200005Y-ER-3</u>
Tested Date:	<u>March 3~6, 2018</u>
Issued Date:	<u>March 6, 2018</u>
Tested By:	<u>Lisa. Li / Engineer</u>
Reviewed By:	<u>arno. Liu / EMC Manager</u>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u>
Prepared By:	

Lisa. Li
arno. Liu
Jandy So

BSL Testing Co.,LTD.

NO. 24, ZH Park, Nantou, Shenzhen, 518000 China

Tel: 86- 755-26508703

Fax: 86- 755-26508703

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE.....	5
1.6 MEASUREMENT UNCERTAINTY	5
1.7 TEST EQUIPMENT LIST AND DETAILS	6
2. SUMMARY OF TEST RESULTS	7
3. ANTENNA REQUIREMENTS.....	8
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
4. RADIATED EMISSIONS.....	9
4.1 STANDARD APPLICABLE.....	9
4.2 TEST PROCEDURE.....	9
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	11
4.4 ENVIRONMENTAL CONDITIONS	11
4.5 SUMMARY OF TEST RESULTS/PLOTS	11
5. OUT OF BAND EMISSIONS.....	16
5.1 STANDARD APPLICABLE.....	16
5.2 TEST PROCEDURE.....	16
5.3 ENVIRONMENTAL CONDITIONS	16
5.4 SUMMARY OF TEST RESULTS/PLOTS	16
6. EMISSION BANDWIDTH.....	18
6.1 STANDARD APPLICABLE.....	18
6.2 TEST PROCEDURE.....	18
6.3 ENVIRONMENTAL CONDITIONS	18
6.4 SUMMARY OF TEST RESULTS/PLOTS	19
7. CONDUCTED EMISSIONS	21
7.1 TEST PROCEDURE.....	21
7.2 BASIC TEST SETUP BLOCK DIAGRAM.....	21
7.3 ENVIRONMENTAL CONDITIONS	21
7.4 TEST RECEIVER SETUP	22
7.5 SUMMARY OF TEST RESULTS/PLOTS	22
7.6 CONDUCTED EMISSIONS TEST DATA.....	22

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: GAMDIAS Technology Co., Ltd.
 Address of applicant: 7F, No.113, Jian 2nd Rd., Jhonghe Dist., New Taipei City, Taiwan.

Manufacturer: GAMDIAS Technology Co., Ltd.
 Address of manufacturer: 7F, No.113, Jian 2nd Rd., Jhonghe Dist., New Taipei City, Taiwan.

General Description of EUT	
Product Name:	Mouse
Trade Name:	
Model No.:	Hades M1
Adding Model(s):	Hades P1
Rated Voltage:	DC 3.7V from battery
Battery capacity:	930mAh
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model Hades M1, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	2402-2480MHz
Max. Field Strength:	95.84dBuV/m@1.5m
Modulation:	FSK
Quantity of Channels:	16
Mini Channel Separation:	3MHz
Antenna Type:	PCB
Antenna Gain:	1dBi
Lowest Internal Frequency of EUT:	16MHz

1.2 Test Standards

The following report is prepared on behalf of the GAMDIAS Technology Co., Ltd. in accordance with FCC Part 15, Subpart B, Subpart C, and section 15.107, 15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.107,15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

BSL Testing Co.,LTD.

NO. 24, ZH Park, Nantou, Shenzhen, 518000 China

Designation Number : CN1217

Test Firm Registration Number: 866035

Tel: 86- 755-26508703

Fax: 86- 755-26508703

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Channel List							
1	2402	5	2422	9	2441	13	2463
2	2407	6	2426	10	2445	14	2466
3	2414	7	2436	11	2453	15	2473
4	2419	8	2439	12	2459	16	2480

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	2402MHz
TM2	Middle Channel	2439MHz
TM3	High Channel	2480MHz
Normal mode: the Bluetooth has been tested and recorded the worst case.		

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
Communication Tester	Rohde & Schwarz	CMW500	100358	2017-10-21	2018-10-20
Spectrum Analyzer	R&S	FSP40	100550	2017-10-21	2018-10-20
Test Receiver	R&S	ESCI7	US47140102	2017-10-21	2018-10-20
Signal Generator	HP	83630B	3844A01028	2017-10-22	2018-10-21
Test Receiver	R&S	ESPI-3	100180	2017-10-21	2018-10-20
Amplifier	Agilent	8449B	4035A00116	2017-10-22	2018-10-21
Amplifier	HP	8447E	2945A02770	2017-10-22	2018-10-21
Signal Generator	IFR	2023A	202307/242	2017-10-22	2018-10-21
Broadband Antenna	SCHAFFNER	2774	2774	2017-10-17	2018-10-16
Biconical and log periodic antennas	ELECTRO-METRIC	EM-6917B-1	171	2017-10-17	2018-10-16
Horn Antenna	R&S	HF906	100253	2017-10-17	2018-10-16
Horn Antenna	EM	EM-6961	6462	2017-10-17	2018-10-16
LISN	R&S	ESH3-Z5	100196	2017-10-17	2018-10-16
LISN	COM-POWER	LI-115	02027	2017-10-17	2018-10-16
3m Semi-Anechoic Chamber	Chengyu Electron	9 (L)*6 (W)* 6 (H)	BSL086	2017-10-21	2018-10-20
Horn Antenna	A-INFOMW	LB-180400KF	BSL088	2017-10-21	2018-10-20

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203	Antenna Requirement	PASS
§15.205	Restricted Band of Operation	PASS
§ 15.207(a)	Conducted Emission	PASS
§ 15.209(a)(f)	Radiated Spurious Emissions	PASS
§15.249(a)	Field Strength of Emissions	PASS
§15.249(d)	Out of Band Emission	PASS
§15.215 (c)	Emission Bandwidth	PASS

Note: PASS: applicable, N/A: not applicable.

3. Antenna Requirements

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a PCB antenna, fulfill the requirement of this section.

4. Radiated Emissions

4.1 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.



The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

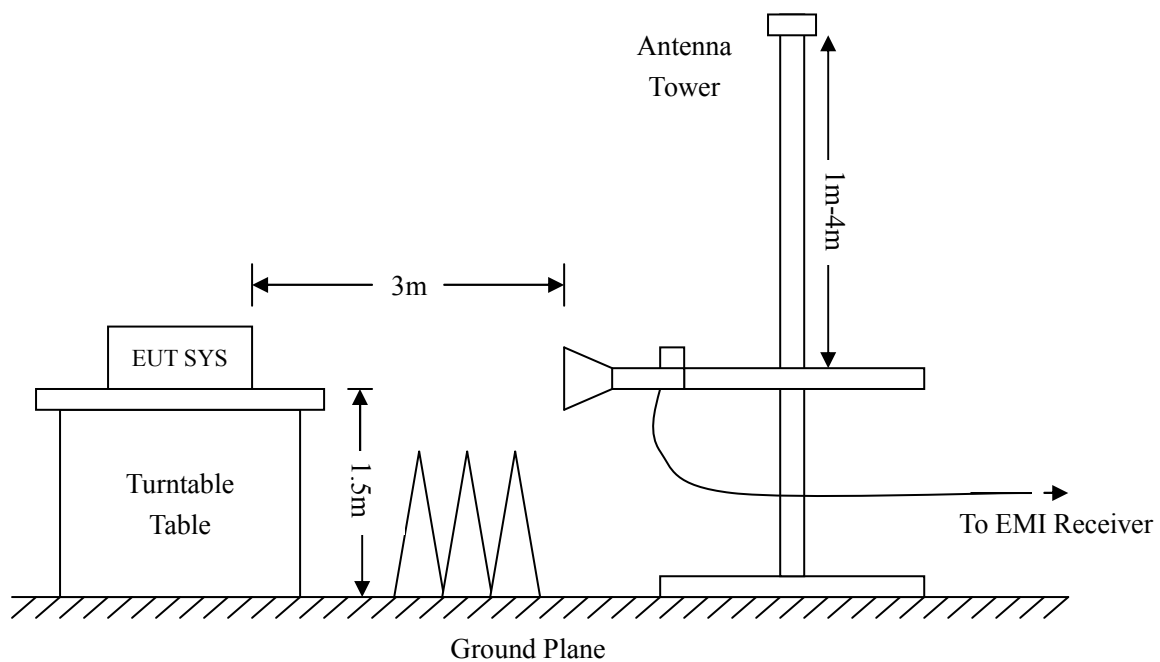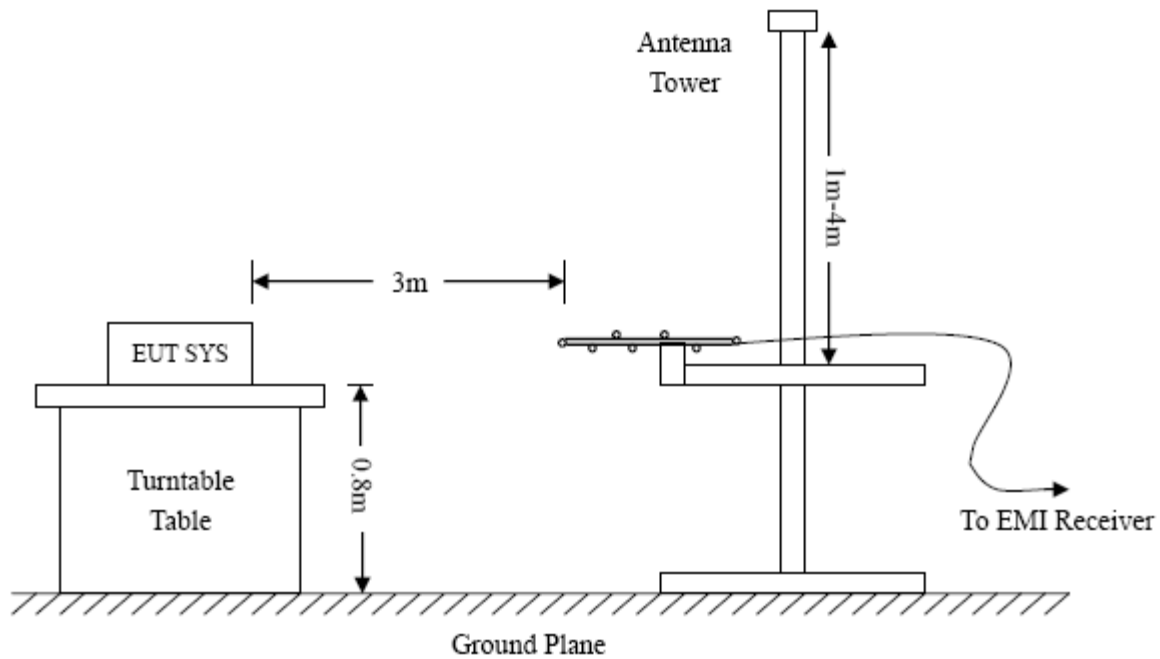

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

4.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar

4.5 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.249 standards, and had the worst cases.

Note:

- 1. Worst-case radiated emission below 1GHz is CH Low mode.*
- 2. Worst-case radiated emission above 1GHz is CH Low, Middle, High mode.*


Plot of Radiated Emissions Test Data (30MHz to 1GHz): GFSK (CH Low) mode:*Test Specification: Horizontal*

80.0 dBuV/m

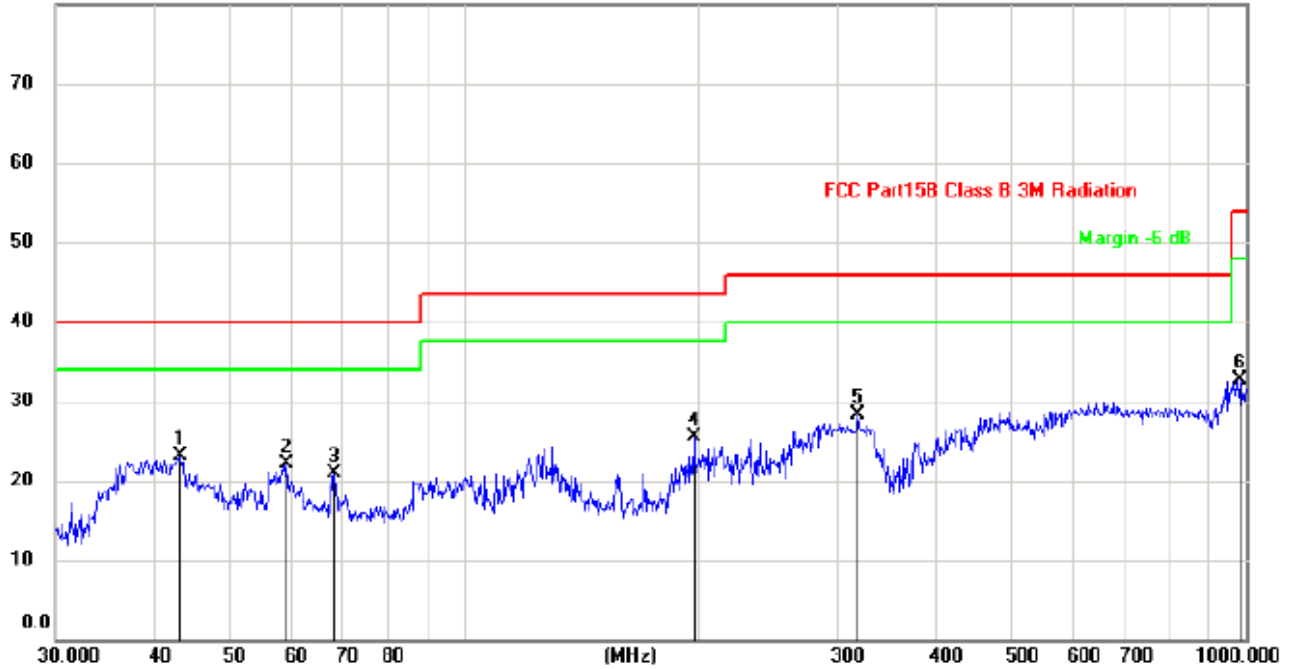

No.	Mk.	Freq.	Measure- ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	43.3534	23.19	40.00	-16.81	QP		Comment
2		59.2325	22.18	40.00	-17.82	QP		
3		68.1514	20.89	40.00	-19.11	QP		
4		196.5098	25.55	43.50	-17.95	QP		
5		318.8170	28.33	46.00	-17.67	QP		
6		982.6200	32.70	54.00	-21.30	QP		

Test Specification: Vertical

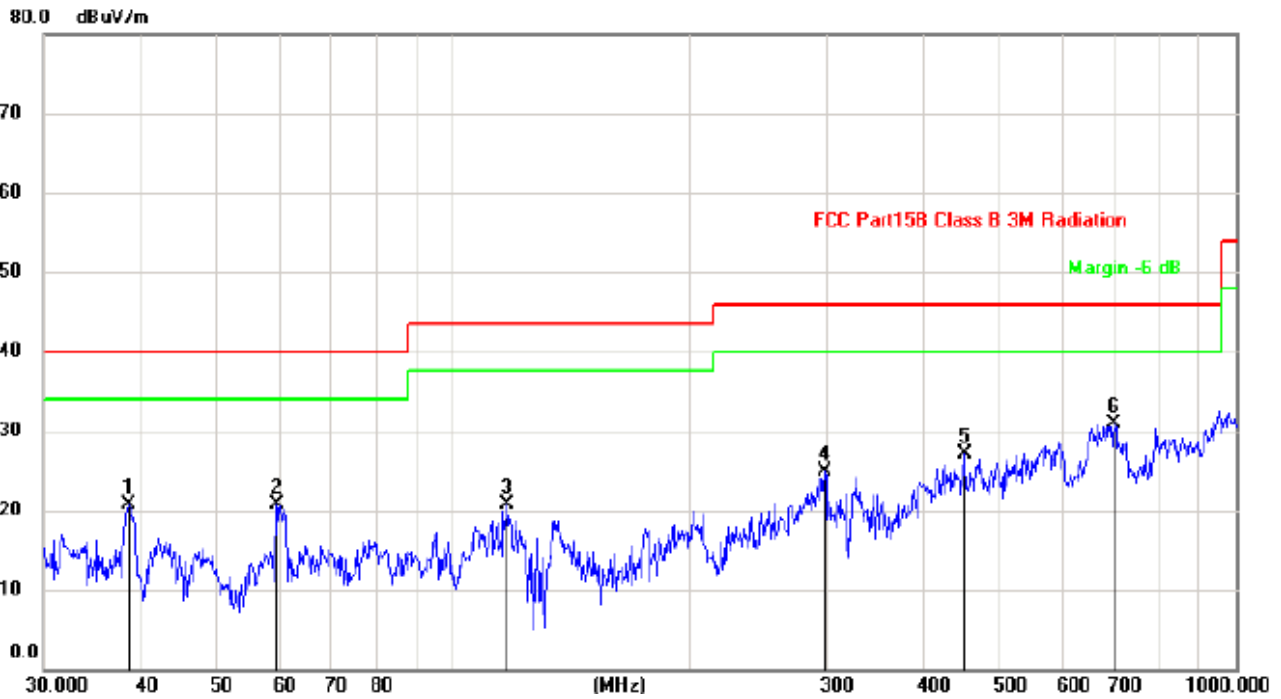

No.	Mk.	Freq.	Measure- ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		38.4809	20.62	40.00	-19.38	QP		
2		59.4405	20.68	40.00	-19.32	QP		
3		117.3603	20.64	43.50	-22.86	QP		
4		298.2681	24.85	46.00	-21.15	QP		
5		449.5558	27.02	46.00	-18.98	QP		
6	*	699.3046	30.86	46.00	-15.14	QP		

Spurious Emissions Above 1GHz : CH Low, Middle, High mode.

Frequency	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	H/V	
2402MHz-Low channel					
2402	95.84	114	-18.16	H	PK
2402	82.85	94	-11.15	H	AV
4804	58.18	74	-15.82	H	PK
4804	46.98	54	-7.02	H	AV
7206	59.08	74	-14.92	H	PK
7206	44.07	54	-9.93	H	AV
2402	94.78	114	-19.22	V	PK
2402	81.84	94	-12.16	V	AV
4804	55.91	74	-18.09	V	PK
4804	44.88	54	-9.12	V	AV
7206	59.93	74	-14.07	V	PK
7206	43.97	54	-10.03	V	AV
2439MHz-Middle					
2439	94.41	114	-19.59	H	PK
2439	80.47	94	-13.53	H	AV
4878	55.1	74	-18.9	H	PK
4878	44	54	-10	H	AV
7317	58.13	74	-15.87	H	PK
7317	43.02	54	-10.98	H	AV
2439	94.51	114	-19.49	V	PK
2439	80.49	94	-13.51	V	AV
4878	57.1	74	-16.9	V	PK
4878	45.99	54	-8.01	V	AV
7317	60	74	-14	V	PK
7317	45.03	54	-8.97	V	AV

Frequency	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	H/V	
2480MHz-High channel					
2480	94.2	114	-19.8	H	PK
2480	81.68	94	-12.32	H	AV
4960	61.21	74	-12.79	H	PK
4960	46.49	54	-7.51	H	AV
7440	53.38	74	-20.62	H	PK
7440	44.09	54	-9.91	H	AV
2480	92.52	114	-21.48	V	PK
2480	79.46	94	-14.54	V	AV
4960	54.62	74	-19.38	V	PK
4960	41.46	54	-12.54	V	AV
7440	59.04	74	-14.96	V	PK
7440	43.87	54	-10.13	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz..

5. Out of Band Emissions

5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC rules.

5.3 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar


5.4 Summary of Test Results/Plots

Channel	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	2400	52.83	74	-21.17	Peak
LOW	2400	36.67	54	-17.33	Average
	2483.5	49.72	74	-24.28	Peak
HIGH	2483.5	35.8	54	-18.2	Average


The edge emissions are below the FCC 15.209 Limits or complies with the 15.249 requirements.

Please refer to the test plots as below.

Lowest:

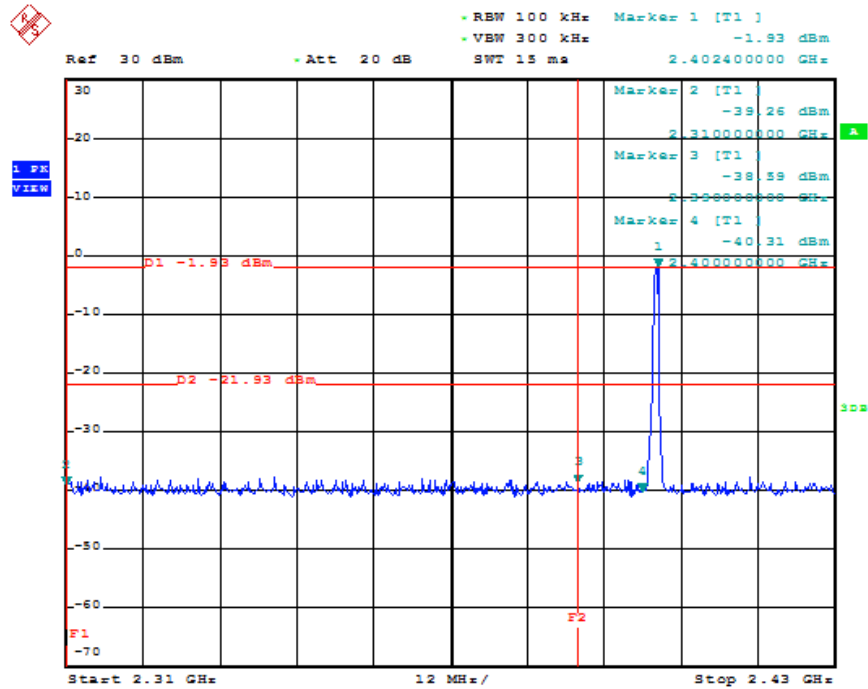

Highest:

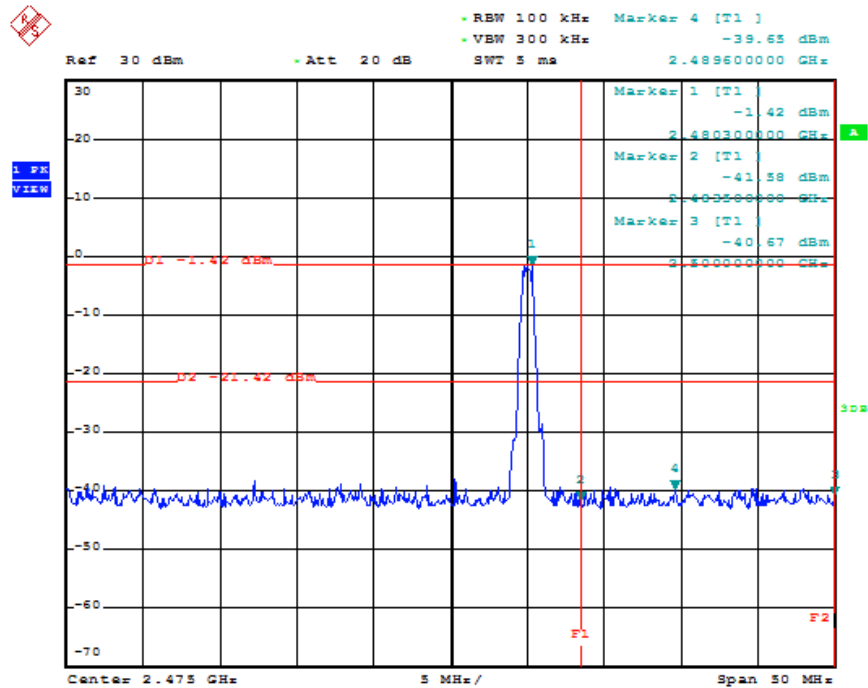

6. Emission Bandwidth

6.1 Standard Applicable

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

6.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel

RBW $\geq$ 1% 20dB Bandwidth, VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

6.3 Environmental Conditions


Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.4 Summary of Test Results/Plots


Channel	Frequency MHz	20dB Bandwidth kHz
Low Channel	2402	1134
Middle Channel	2439	1140
High Channel	2480	1134

Please refer to the following test plots


Low Channel:

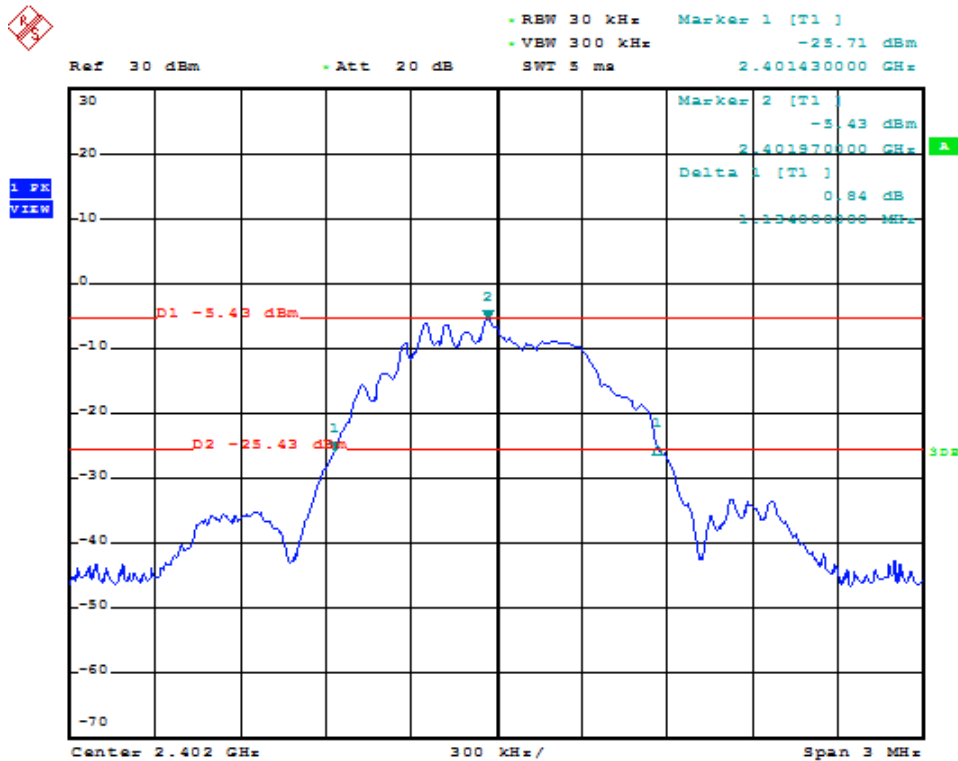

Middle Channel:

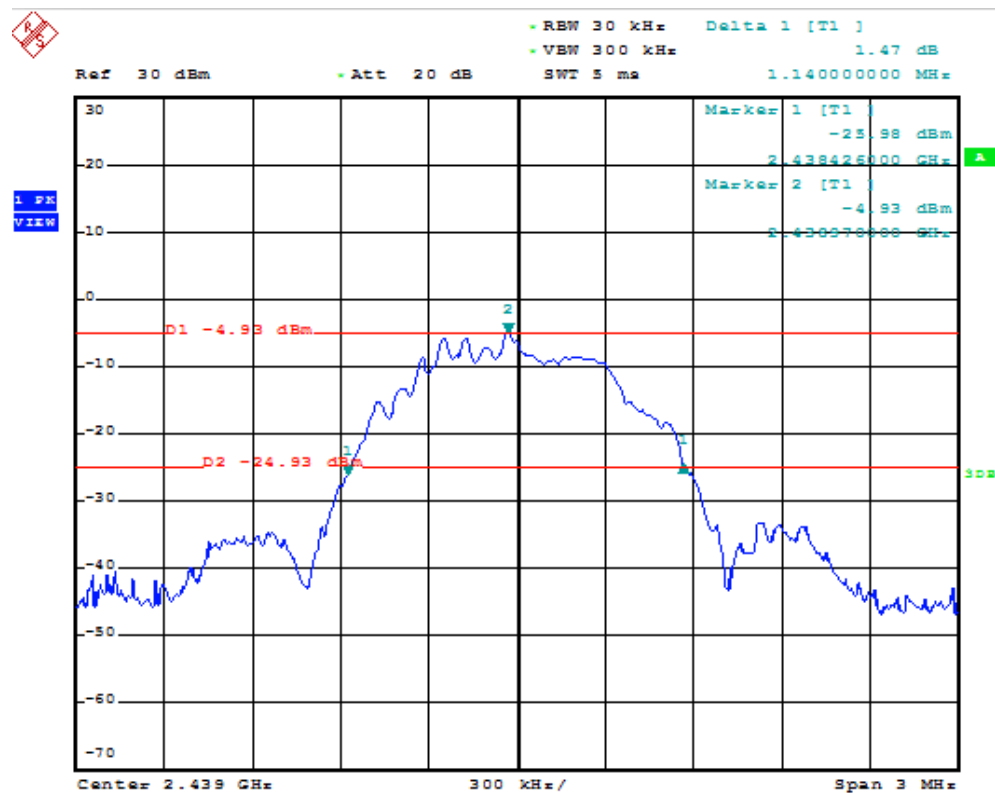

High Channel:

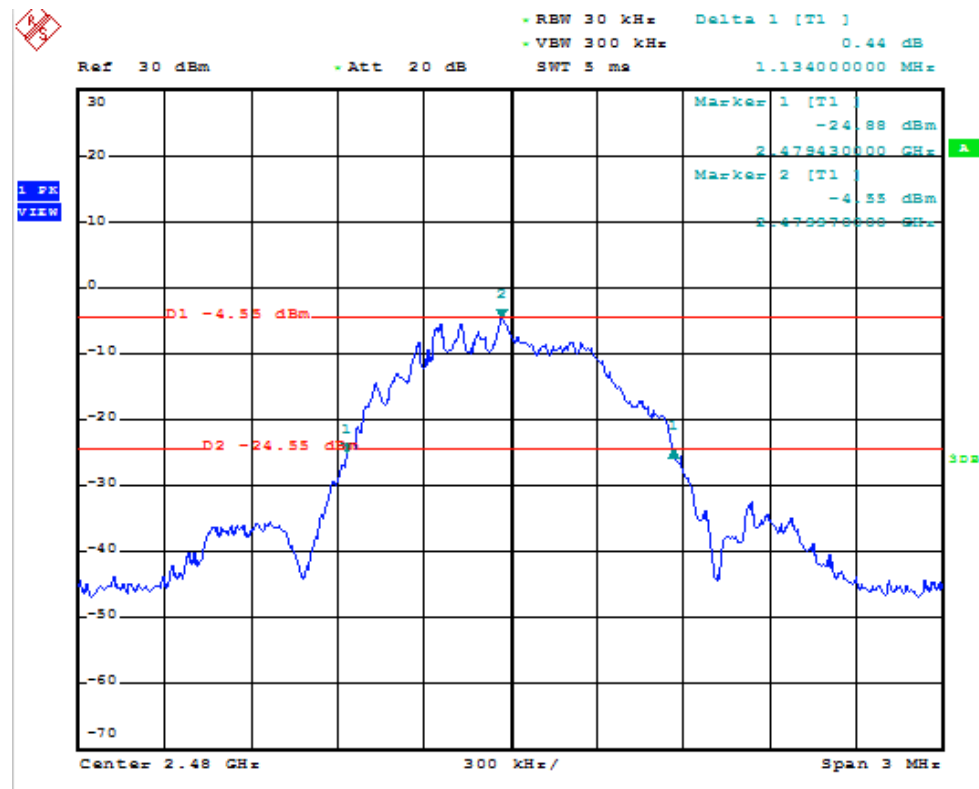

7. Conducted Emissions


7.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

7.2 Basic Test Setup Block Diagram

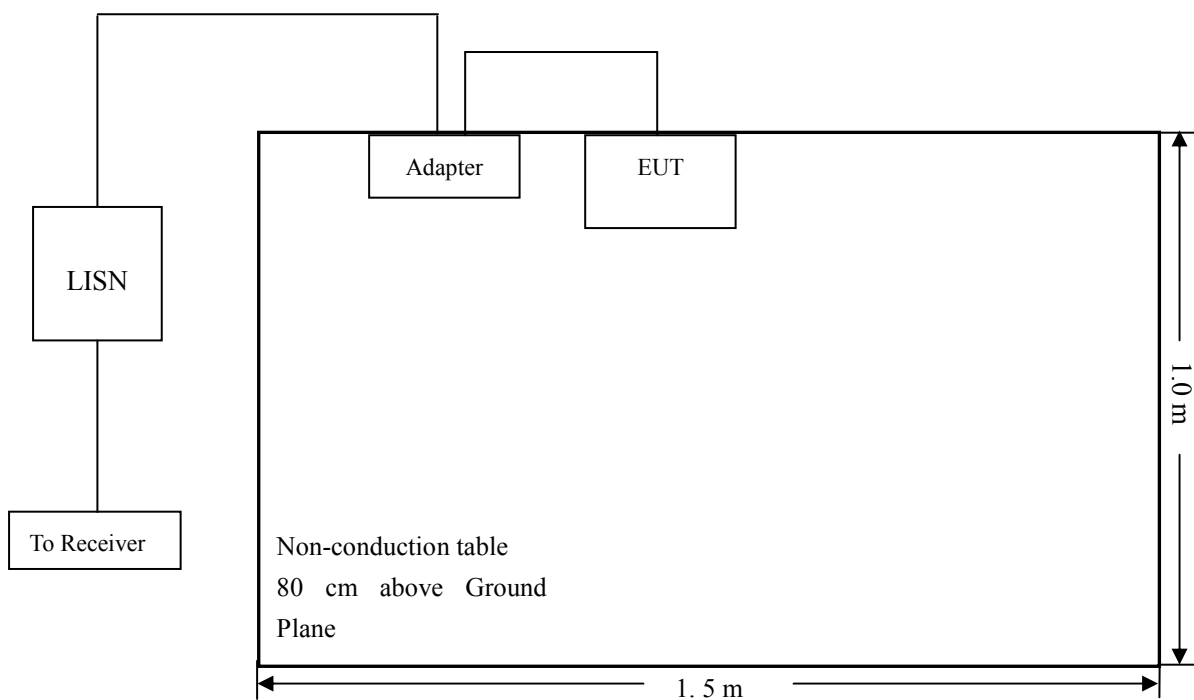

7.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

7.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:


Start Frequency	150 kHz
Stop Frequency.....	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal

7.5 Summary of Test Results/Plots

According to the data in section 7.7, the EUT complied with the FCC Part 15.207 Conducted margin for this device.

7.6 Conducted Emissions Test Data

Note: we are pre-scan all modes, the worst data is Low channel mode.

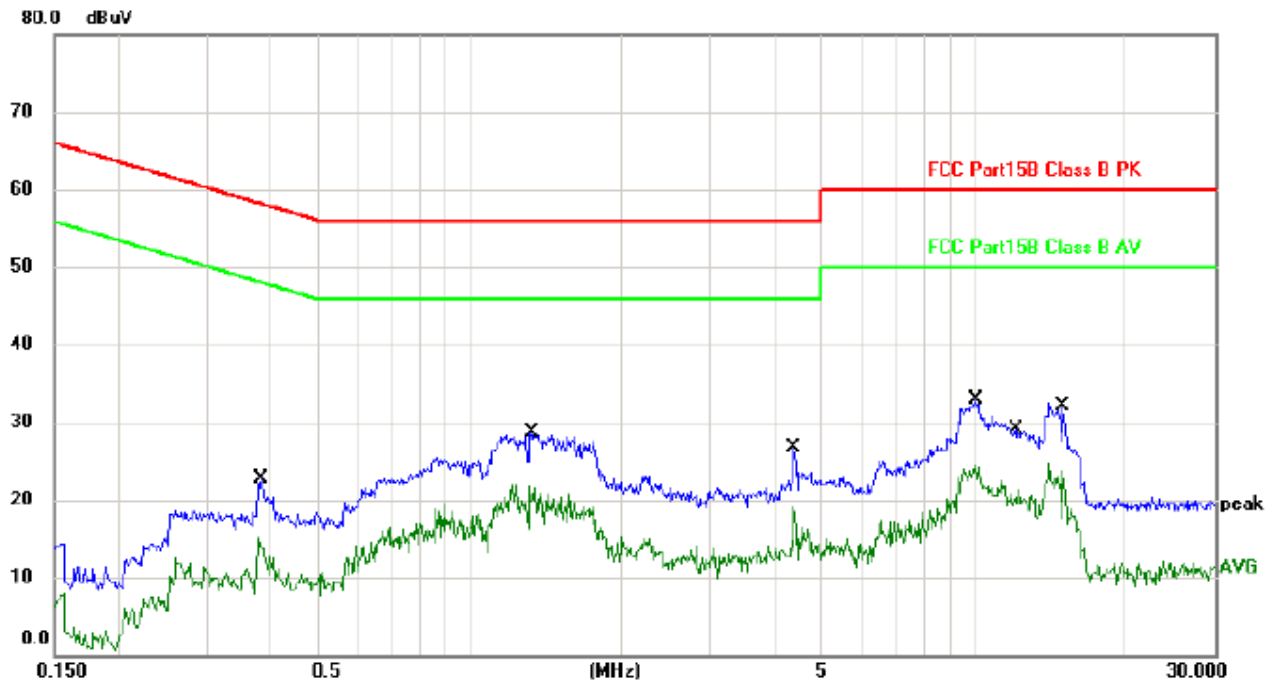Plot of Conducted Emissions Test Data: Low channelTest Specification: *Neutral*

No.	Mk.	Freq. MHz	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3860	22.69	58.15	-35.46	QP	
2		0.3860	9.35	48.15	-38.80	AVG	
3		1.3260	28.70	56.00	-27.30	QP	
4	*	1.3260	20.08	46.00	-25.92	AVG	
5		4.3859	26.78	56.00	-29.22	QP	
6		4.3859	13.75	46.00	-32.25	AVG	
7		10.1220	32.83	60.00	-27.17	QP	
8		10.1220	20.49	50.00	-29.51	AVG	
9		12.1260	29.00	60.00	-31.00	QP	
10		12.1260	20.16	50.00	-29.84	AVG	
11		15.0580	32.09	60.00	-27.91	QP	
12		15.0580	17.92	50.00	-32.08	AVG	

Test Specification: Live



No.	Mk.	Freq. MHz	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3860	23.69	58.15	-34.46	QP	
2		0.3860	11.81	48.15	-36.34	AVG	
3		0.7660	25.82	56.00	-30.18	QP	
4		0.7660	14.98	46.00	-31.02	AVG	
5		1.3260	28.70	56.00	-27.30	QP	
6		1.3260	20.08	46.00	-25.92	AVG	
7		4.3859	27.78	56.00	-28.22	QP	
8		4.3859	13.72	46.00	-32.28	AVG	
9		10.1220	33.83	60.00	-26.17	QP	
10	*	10.1220	25.33	50.00	-24.67	AVG	
11		14.1100	34.45	60.00	-25.55	QP	
12		14.1100	24.12	50.00	-25.88	AVG	

***** END OF REPORT *****