



# FCC REPORT

**Applicant:** Hang Zhou DingYu Electronic Technology Co.,Ltd

**Address of Applicant:** Rm901, Unit One, Union Plaza A, No.2 zi Jin hua Road Hangzhou 310012,China

**Manufacturer:** Hang Zhou DingYu Electronic Technology Co.,Ltd

**Address of Manufacturer:** Rm901, Unit One, Union Plaza A, No.2 zi Jin hua Road Hangzhou 310012,China

**Factory:** DONGGUAN DUOLI ELECTRONIC TECHNOLOGY CO., LTD

**Address of Factory:** F2,ZHENG WEI HI-TECH ZONES,JUN DA COMMUNITY,DONG KENG TOWN, Dong Guan, Guang Dong,China

## Equipment Under Test (EUT)

**Product description:** TRV 4 WAY WIRELESS REMOTE CONTROL SYSTEM

**Model No.:** 1292702

**FCC ID:** 2AO7P-1292702

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.231

**Date of sample receipt:** March 05, 2018

**Date of Test:** March 06-13, 2018

**Date of report issued:** March 15, 2018

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



A handwritten signature of Robinson Lo is overlaid on a circular blue stamp. The stamp contains the text 'GTS' at the top, 'Global United Technology Services Co., Ltd.' around the perimeter, and 'TESTING REPORT' at the bottom. The date '2018 March' is handwritten below the stamp.

**Robinson Lo**  
**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	March 15, 2018	Original

Prepared By:




Date:

March 15, 2018

**Project Engineer**

Check By:



Date:

March 15, 2018

**Reviewer**

### 3 Contents

	Page
1 COVER PAGE .....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
4.1 MEASUREMENT UNCERTAINTY .....	4
5 GENERAL INFORMATION .....	5
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 TEST MODE .....	6
5.3 TEST FACILITY .....	6
5.4 TEST LOCATION .....	6
5.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	6
5.6 DESCRIPTION OF SUPPORT UNITS .....	6
6 TEST INSTRUMENTS LIST .....	7
7 TEST RESULTS AND MEASUREMENT DATA .....	8
7.1 ANTENNA REQUIREMENT .....	8
7.2 RADIATED EMISSION METHOD .....	9
7.2.1 Field Strength of The Fundamental Signal .....	11
7.2.2 Spurious emissions .....	13
7.3 20dB OCCUPY BANDWIDTH .....	16
7.4 DWELL TIME .....	17
7.5 SILENT PERIOD .....	18
8 TEST SETUP PHOTO .....	19
9 EUT CONSTRUCTIONAL DETAILS .....	20

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
Conduction Emission	15.207	N/A
Field strength of the fundamental signal	15.231(e)	Pass
Spurious emissions	15.231(e) &15.209	Pass
20dB Bandwidth	15.231(c)	Pass
Dwell time	15.231(e)	Pass

Pass: The EUT complies with the essential requirements in the standard.

### 4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product description:	TRV 4 WAY WIRELESS REMOTE CONTROL SYSTEM
Model No.:	1292702
Test sample(s) ID:	GTS201803000053-1
Sample(s) Status	Engineer sample
Serial number:	27027
Operation Frequency:	315MHz
Modulation technology:	ASK
Antenna Type:	PCB Antenna
Antenna gain:	-3dBi (declare by Manufacturer)
Power supply:	DC 12V (1 x 12V"23A" Size battery)

## 5.2 Test mode

Transmitting mode	Keep the EUT in transmitting mode.
-------------------	------------------------------------

### Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

315MHz	Axis	X	Y	Z
	Field Strength(dBuV/m)	80.65	81.98	80.32

### Final Test Mode:

According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup”: Y axis (see the test setup photo)

## 5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.

## 5.4 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.  
No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone,  
Xixiang Road, Baoan District, Shenzhen, Guangdong, China  
Tel: 0755-27798480  
Fax: 0755-27798960

## 5.5 Other Information Requested by the Customer

None.

## 5.6 Description of Support Units

None.

## 6 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 28 2017	June 27 2018
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 28 2017	June 27 2018
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 28 2017	June 27 2018
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2017	June 27 2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 28 2017	June 27 2018
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 28 2017	June 27 2018
10	Coaxial Cable	GTS	N/A	GTS211	June 28 2017	June 27 2018
11	Coaxial cable	GTS	N/A	GTS210	June 28 2017	June 27 2018
12	Coaxial Cable	GTS	N/A	GTS212	June 28 2017	June 27 2018
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 28 2017	June 27 2018
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 28 2017	June 27 2018
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2017	June 27 2018
16	Band filter	Amindeon	82346	GTS219	June 28 2017	June 27 2018
17	Power Meter	Anritsu	ML2495A	GTS540	June 28 2017	June 27 2018
18	Power Sensor	Anritsu	MA2411B	GTS541	June 28 2017	June 27 2018

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 28 2017	June 27 2018


## 7 Test results and Measurement Data

### 7.1 Antenna requirement

<b>Standard requirement:</b>	FCC Part15 C Section 15.203
<b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>EUT Antenna:</b> The antenna is Integral antenna, the best case gain of the antenna is -3dBi	

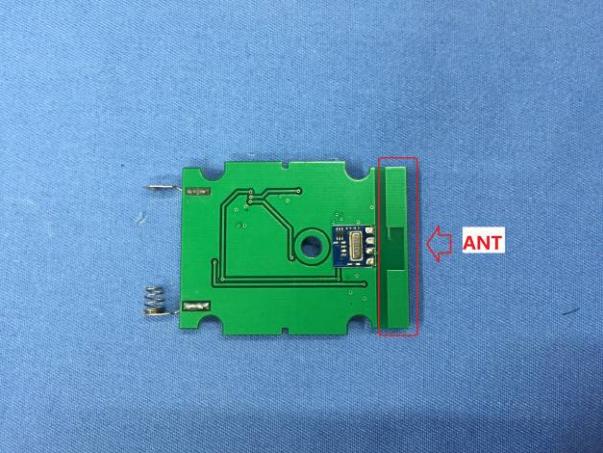

## 7.2 Radiated Emission Method

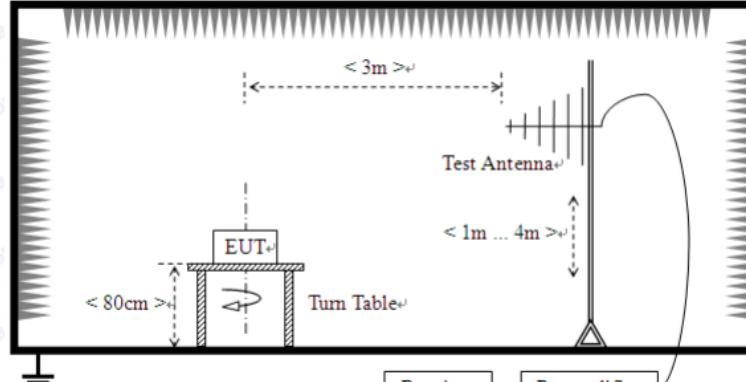Test Requirement:	FCC Part15 C Section 15.209								
Test Method:	ANSI C63.10:2013								
Test Frequency Range:	30MHz to 5000MHz								
Test site:	Measurement Distance: 3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Remark				
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value				
	Above 1GHz	Peak	1MHz	3MHz	Peak Value				
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark					
	315MHz	67.66		Average Value					
		87.66		Peak Value					
Limit: (Spurious Emissions)	Frequency	Limit (dBuV/m @3m)		Remark					
	30MHz-88MHz	40.00		Quasi-peak Value					
	88MHz-216MHz	43.50		Quasi-peak Value					
	216MHz-960MHz	46.00		Quasi-peak Value					
	960MHz-1GHz	54.00		Quasi-peak Value					
	Above 1GHz	54.00		Average Value					
		74.00		Peak Value					
Or The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level whichever limit permits a higher field strength.									
Test setup:	Below 1GHz								
									
	Above 1GHz								

Test Procedure:	<ol style="list-style-type: none"> <li>1. During the test, the New Battery was used.</li> <li>2. The EUT was placed on the top of a rotating table (0.8 meters for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>3. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>4. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>6. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>7. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

## 7.2.1 Field Strength of The Fundamental Signal

### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
315.00	103.08	13.90	2.44	37.44	81.98	87.66	-5.68	Horizontal
315.00	94.57	13.90	2.44	37.44	73.47	87.66	-14.19	Vertical


### Average value:

Frequency (MHz)	Peak Value (dBuV/m)	Duty cycle factor	Average value (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
315.00	81.98	-20.00	61.98	67.66	-5.68	Horizontal
315.00	73.47	-20.00	53.47	67.66	-14.19	Vertical


<b>Average value:</b>	
Calculate Formula:	Average value=Peak value + Duty Cycle Factor
	Duty cycle factor=20 log(Duty cycle)
	Duty cycle=on time/100 milliseconds or period, whichever is less
Test data:	T on time =10(ms)
	T period >10 (s)
	Duty cycle=0.1
	duty cycle factor=-20.00

Test plot as follows:

Ton time:

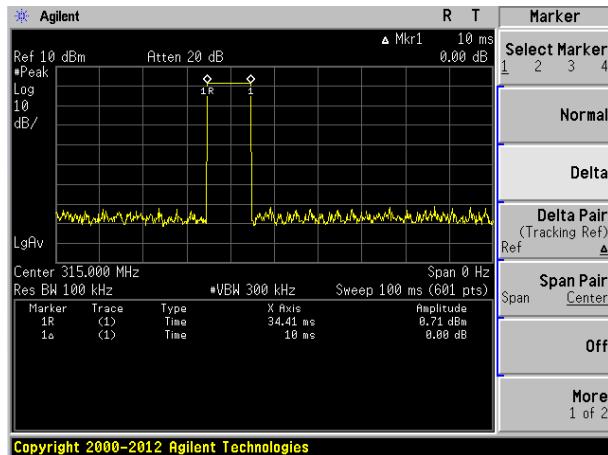


T period:

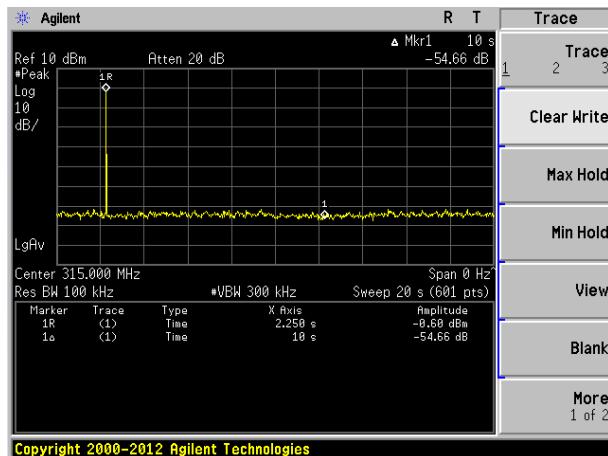

## 7.2.2 Spurious emissions


Below 1G

Horizontal:

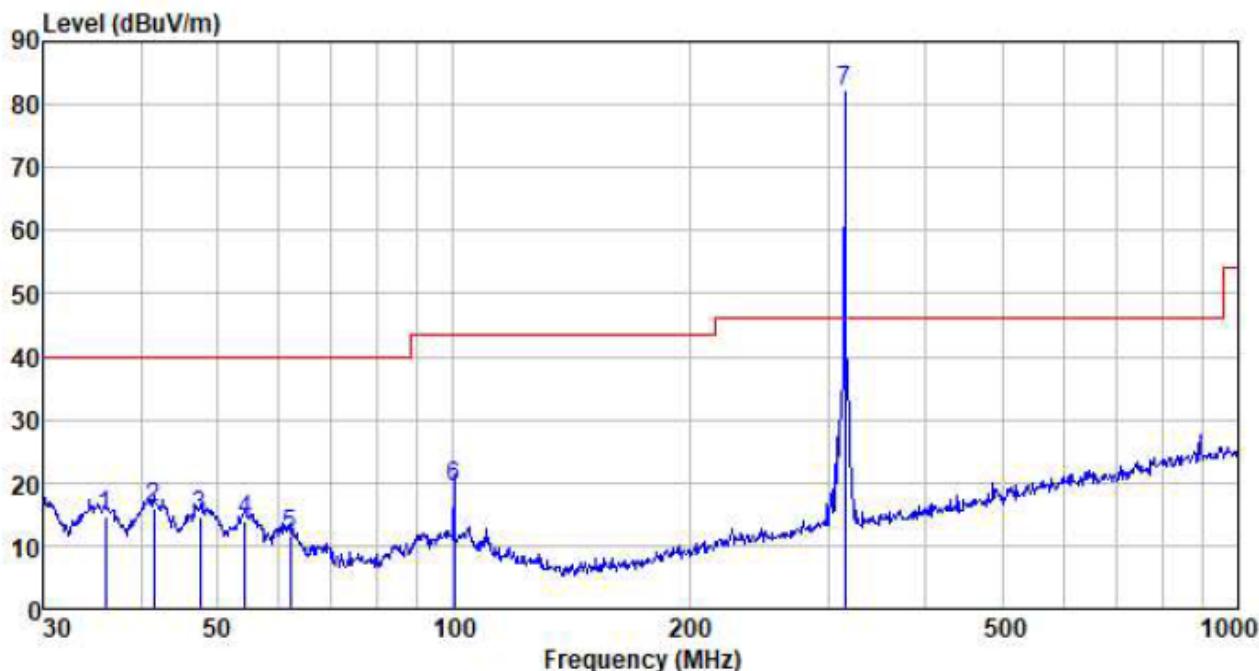

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
36.001	38.04	11.52	0.62	35.42	14.76	40.00	-25.24	QP
41.567	38.69	12.22	0.68	35.75	15.84	40.00	-24.16	QP
47.492	37.77	12.28	0.74	36.06	14.73	40.00	-25.27	QP
54.261	37.44	11.85	0.81	36.24	13.86	40.00	-26.14	QP
61.995	36.44	10.49	0.88	36.35	11.46	40.00	-28.54	QP
100.229	42.73	12.15	1.19	36.72	19.35	43.50	-24.15	QP
315.481	103.08	13.90	2.44	37.44	81.98	46.00	35.98	Peak

Vertical:

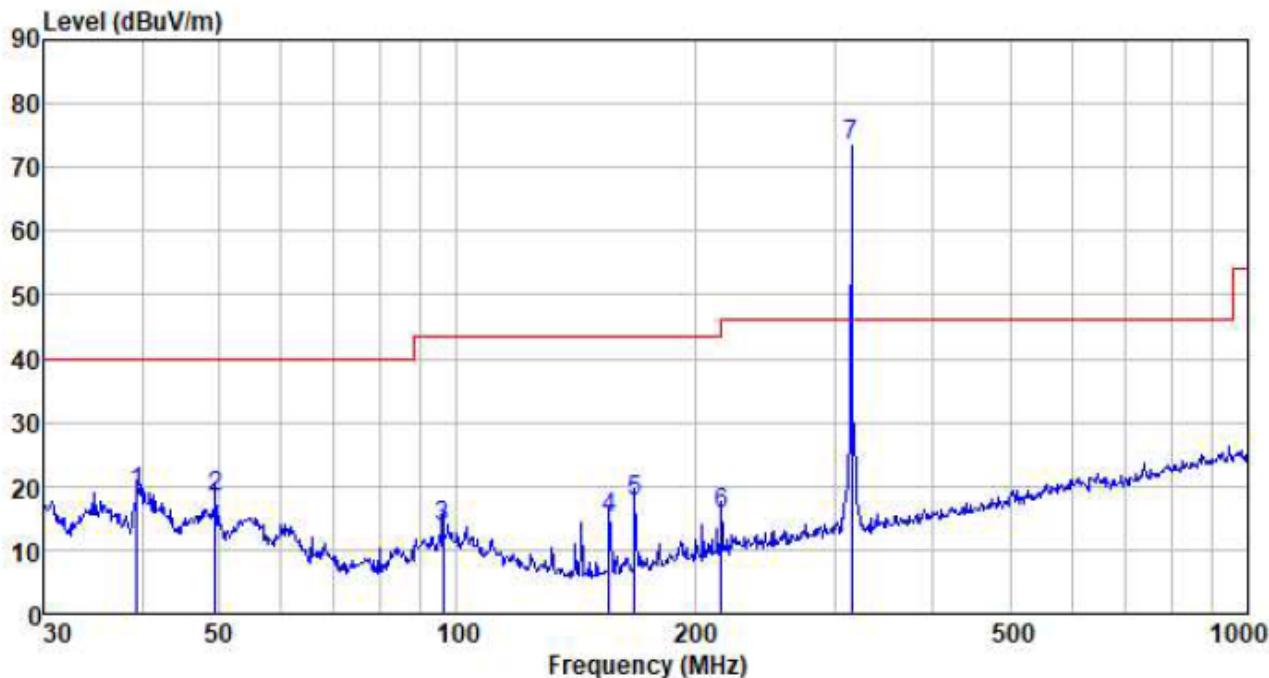


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
39.437	41.85	12.11	0.65	35.63	18.98	40.00	-21.02	QP
49.533	41.48	12.30	0.77	36.16	18.39	40.00	-21.61	QP
96.099	37.66	11.65	1.16	36.69	13.78	43.50	-29.72	QP
155.910	42.44	8.05	1.60	37.11	14.98	43.50	-28.52	QP
167.824	44.57	8.46	1.67	37.18	17.52	43.50	-25.98	QP
216.024	40.04	11.02	1.93	37.35	15.64	46.00	-30.36	QP
315.481	94.57	13.90	2.44	37.44	73.47	46.00	27.47	Peak

**Above 1G**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1940.00	39.73	25.90	4.93	34.34	36.22	74.00	-37.78	Vertical
2440.00	37.47	27.48	5.43	33.96	36.42	74.00	-37.58	Vertical
3960.00	34.05	29.62	7.79	32.23	39.23	74.00	-34.77	Vertical
4380.00	32.06	31.01	8.23	31.88	39.42	74.00	-34.58	Vertical
4915.00	29.81	31.89	8.69	32.14	38.25	74.00	-35.75	Vertical
5820.00	30.85	32.68	9.95	32.23	41.25	74.00	-32.75	Vertical
1550.00	40.11	25.10	4.71	33.68	36.24	74.00	-37.76	Horizontal
2490.00	38.99	27.54	5.48	33.90	38.11	74.00	-35.89	Horizontal
3390.00	34.50	28.57	6.74	32.87	36.94	74.00	-37.06	Horizontal
4335.00	30.53	30.88	8.18	31.86	37.73	74.00	-36.27	Horizontal
4885.00	30.79	31.86	8.67	32.13	39.19	74.00	-34.81	Horizontal
5755.00	28.87	32.59	9.86	32.27	39.05	74.00	-34.95	Horizontal

## 7.3 20dB Occupy Bandwidth

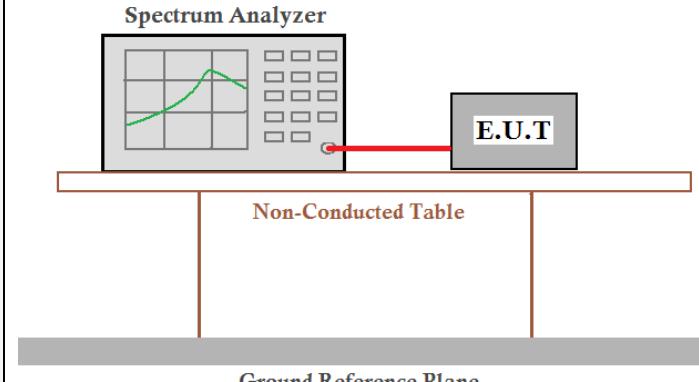
Test Requirement:	FCC Part15 C Section 15.231 (c)
Test Method:	ANSI C63.10:2013
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.
Test setup:	<p style="text-align: center;"><b>Spectrum Analyzer</b></p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data


Test Frequency (MHz)	20dB bandwidth (MHz)	Limit (MHz)	Result
315	0.041966	0.7875	Pass

Note: Limit(315MHz)= Fundamental frequency $\times$ 0.25% = 315 $\times$ 0.25% = 0.7875MHz

Test plot as follows:

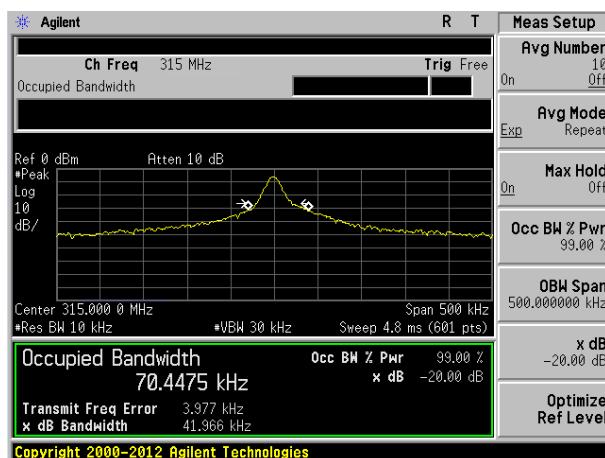


## 7.4 Dwell time

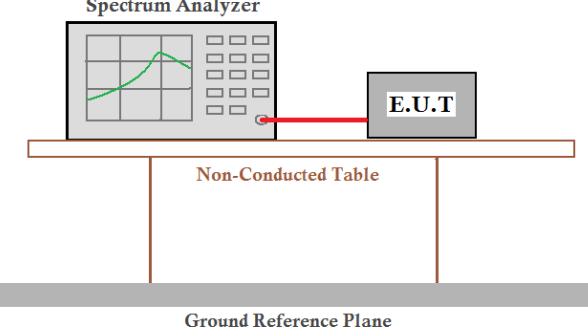Test Requirement:	FCC Part15 C Section 15.231 (e)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1000KHz, VBW=1000KHz, span=0Hz, detector: Peak
Limit:	Not more than 1 seconds
Test setup:	<p style="text-align: center;"><b>Spectrum Analyzer</b></p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


### Measurement data:

Test Frequency (MHz)	Duration of each TX (second)	Limit (second)	Result
315	0.01	<1.0	Pass

Test plot as follows:

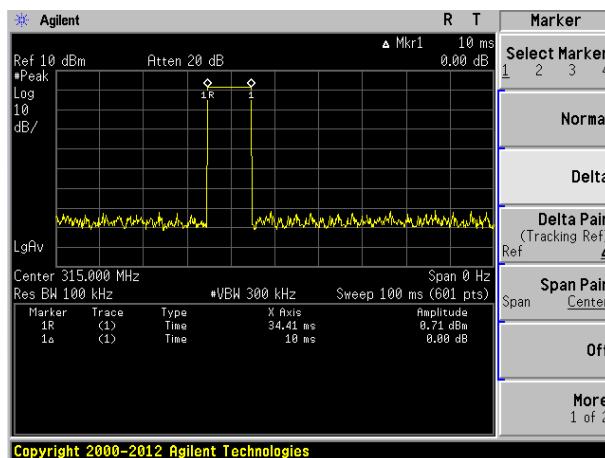


## 7.5 Silent period

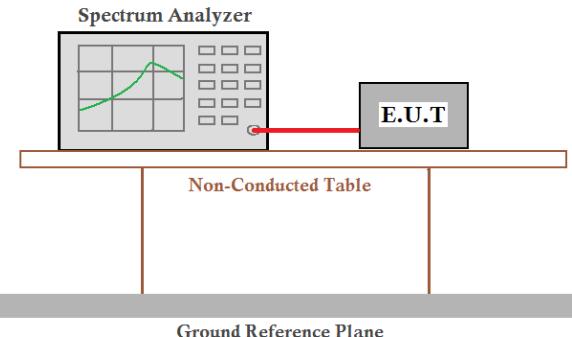Test Requirement:	FCC Part15 C Section 15.231 (e)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1000KHz, VBW=1000KHz, span=0Hz, detector: Peak
Limit:	at least 30 times the duration of the transmission or more than 10 seconds
Test Procedure:	<ol style="list-style-type: none"> <li>1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT.</li> <li>2. Set the EUT to proper test channel.</li> <li>3. Single scan the transmit, and read the transmission time.</li> </ol>
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement data:



Test Frequency (MHz)	Silent period (second)	Limit (second)	Result
315	59.5	>10	Pass
Remark	The manufacturer declared that the silent time is 1 minutes in normal working condition.		

Test plot as follows:

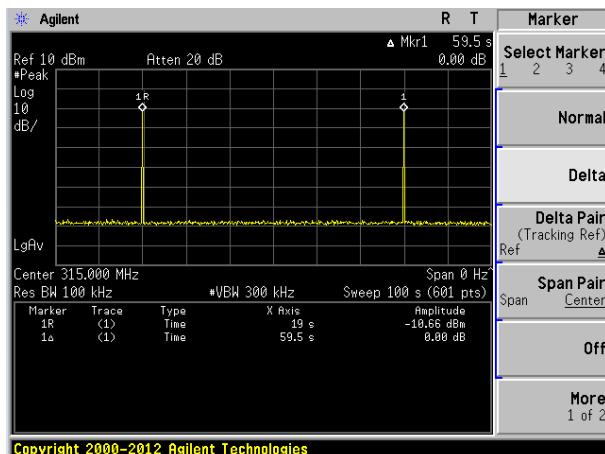


## 8 Test Setup Photo



Radiated Emission

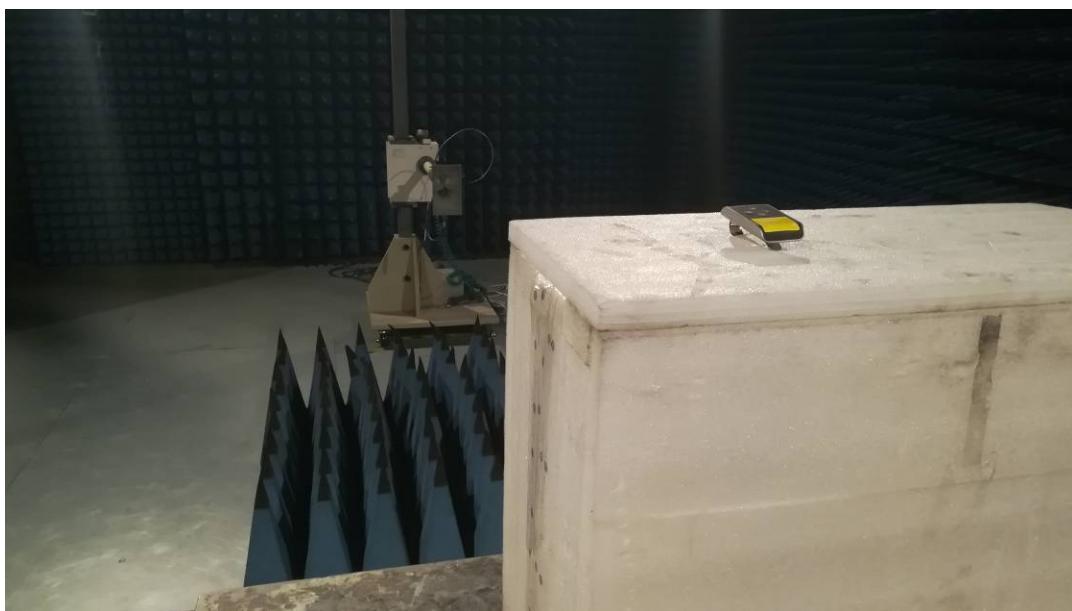
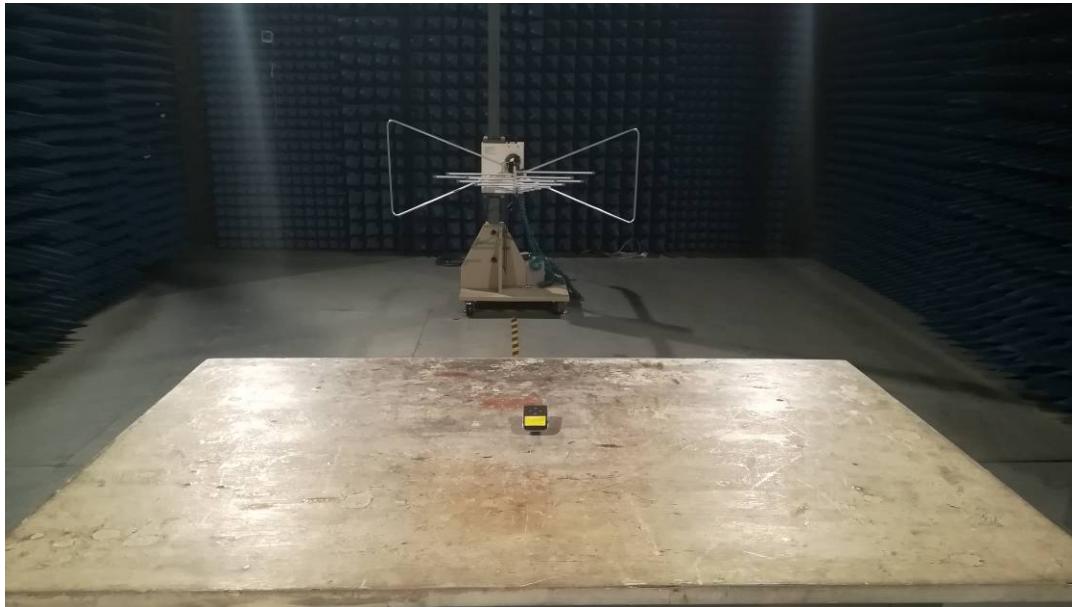


## 9 EUT Constructional Details



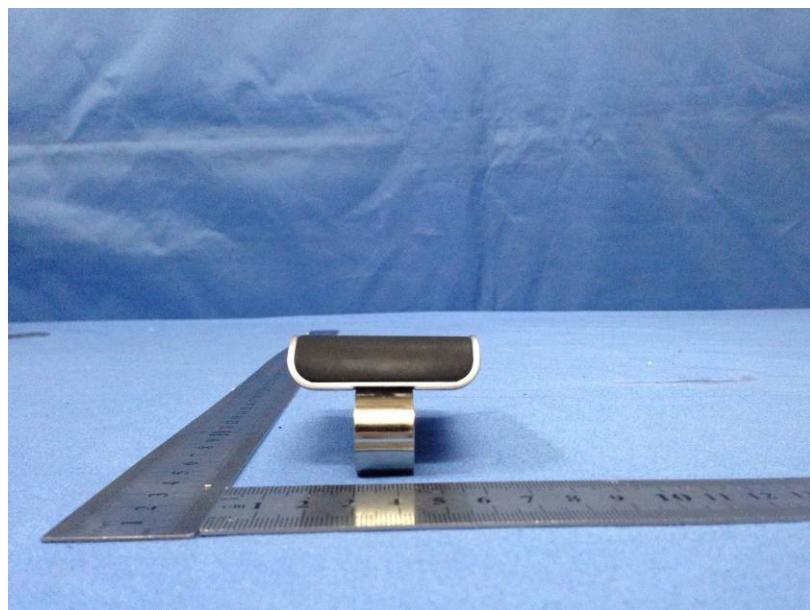

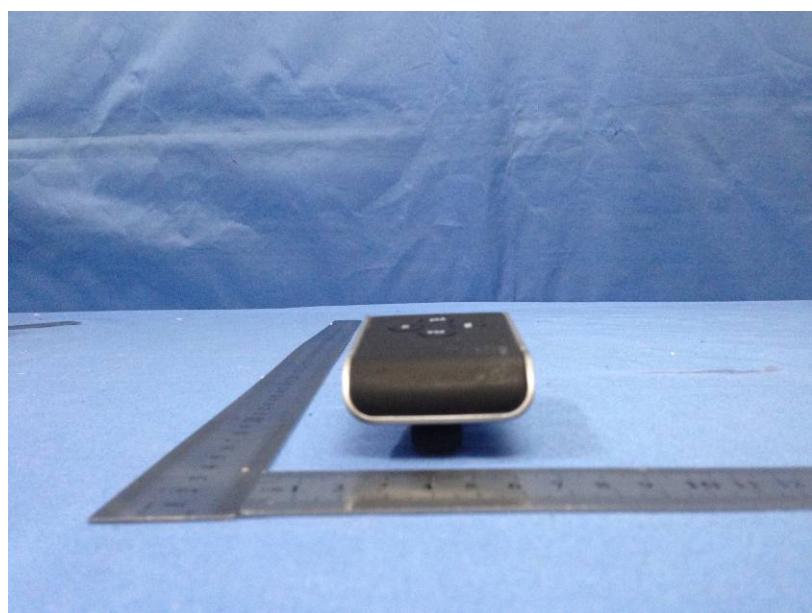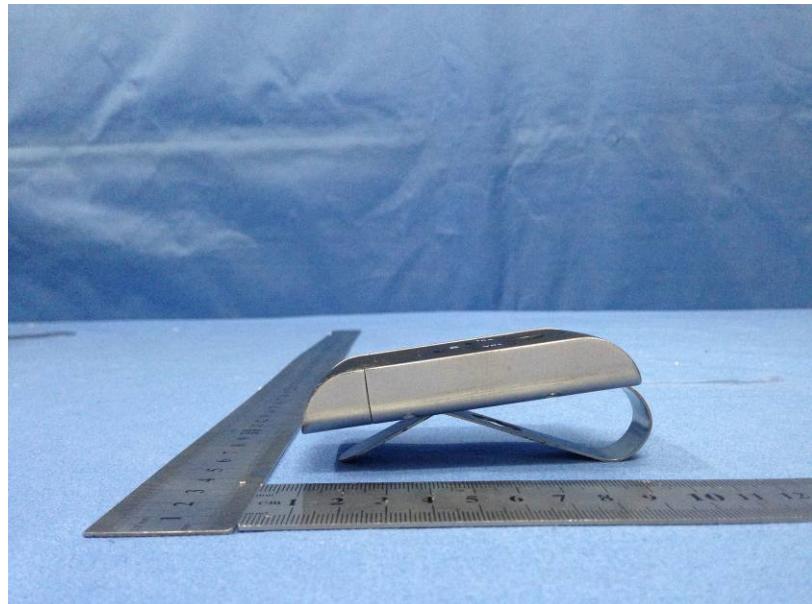

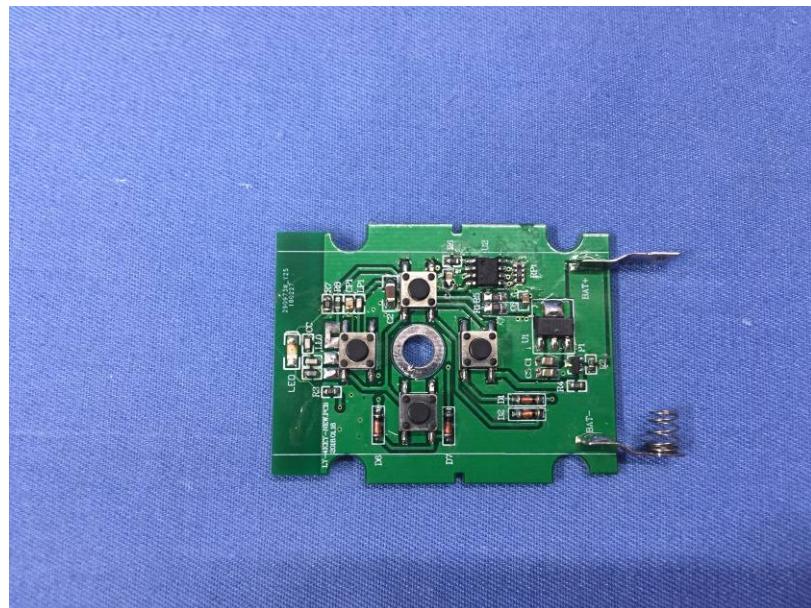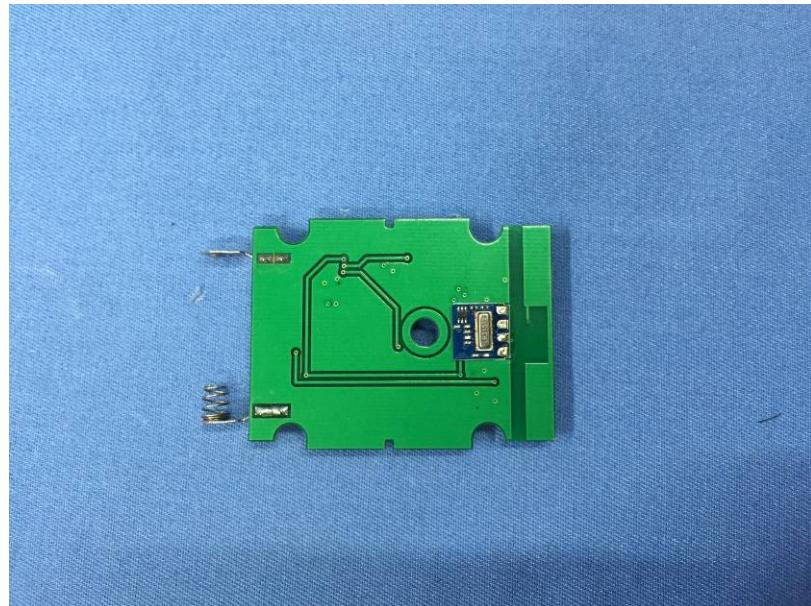

----- End -----