

APPLICATION CERTIFICATION FCC Part 15C
On Behalf of
Shenzhen Zelin Technology Co.,Limited

Coors Light Bluetooth Speaker
Model No.: 12168, 12172, 12171, 12173, 12175, 12176, 12177, 12178

FCC ID: 2AO8I-12168

Prepared for : Shenzhen Zelin Technology Co.,Limited
Address : 2TH Building HongYong Li Industrial Park, LongGuang District,
Shenzhen, China

Prepared by : Shenzhen Accurate Technology Co., Ltd.
Address : 1/F., Building A, Changyuan New Material Port, Science & Industry
Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report No. : ATE20180247
Date of Test : March 1-March 13, 2018
Date of Report : March 14, 2018

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Accessory and Auxiliary Equipment.....	5
1.3. Description of Test Facility	6
1.4. Measurement Uncertainty.....	6
2. MEASURING DEVICE AND TEST EQUIPMENT	7
3. OPERATION OF EUT DURING TESTING	8
3.1. Operating Mode	8
3.2. Configuration and peripherals	8
4. TEST PROCEDURES AND RESULTS	9
5. 20DB BANDWIDTH TEST.....	10
5.1. Block Diagram of Test Setup.....	10
5.2. The Requirement For Section 15.247(a)(1).....	10
5.3. EUT Configuration on Measurement	10
5.4. Operating Condition of EUT	10
5.5. Test Procedure	10
5.6. Test Result	11
6. CARRIER FREQUENCY SEPARATION TEST.....	15
6.1. Block Diagram of Test Setup.....	15
6.2. The Requirement For Section 15.247(a)(1).....	15
6.3. EUT Configuration on Measurement	15
6.4. Operating Condition of EUT	15
6.5. Test Procedure	16
6.6. Test Result	16
7. NUMBER OF HOPPING FREQUENCY TEST	20
7.1. Block Diagram of Test Setup.....	20
7.2. The Requirement For Section 15.247(a)(1)(iii).....	20
7.3. EUT Configuration on Measurement	20
7.4. Operating Condition of EUT	20
7.5. Test Procedure	20
7.6. Test Result	21
8. DWELL TIME TEST	22
8.1. Block Diagram of Test Setup.....	22
8.2. The Requirement For Section 15.247(a)(1)(iii).....	22
8.3. EUT Configuration on Measurement	22
8.4. Operating Condition of EUT	22
8.5. Test Procedure	22
8.6. Test Result	23
9. MAXIMUM PEAK OUTPUT POWER TEST	27
9.1. Block Diagram of Test Setup.....	27
9.2. The Requirement For Section 15.247(b)(1).....	27
9.3. EUT Configuration on Measurement	27
9.4. Operating Condition of EUT	27

9.5. Test Procedure	27
9.6. Test Result	28
10. RADIATED EMISSION TEST	32
10.1. Block Diagram of Test Setup.....	32
10.2. The Limit For Section 15.247(d)	33
10.3. Restricted bands of operation	34
10.4. Configuration of EUT on Measurement	34
10.5. Test Procedure	35
10.6. Data Sample.....	36
10.7. The Field Strength of Radiation Emission Measurement Results	36
11. BAND EDGE COMPLIANCE TEST	49
11.1. Block Diagram of Test Setup.....	49
11.2. The Requirement For Section 15.247(d)	49
11.3. EUT Configuration on Measurement	49
11.4. Operating Condition of EUT	49
11.5. Test Procedure	50
11.6. Test Result	50
12. AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A) ..	60
12.1. Block Diagram of Test Setup.....	60
12.2. Power Line Conducted Emission Measurement Limits.....	61
12.3. Configuration of EUT on Measurement	61
12.4. Operating Condition of EUT	61
12.5. Test Procedure	61
12.6. Data Sample.....	62
12.7. Power Line Conducted Emission Measurement Results	62
13. ANTENNA REQUIREMENT.....	67
13.1. The Requirement	67
13.2. Antenna Construction	67

Test Report Certification

Applicant : Shenzhen Zelin Technology Co.,Limited
Manufacturer : Shenzhen Zelin Technology Co.,Limited
EUT Description : Coors Light Bluetooth Speaker
Model No. : 12168, 12172, 12171, 12173, 12175, 12176, 12177, 12178

Measurement Procedure Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013**

The device described above is tested by Shenzhen Accurate Technology Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and Shenzhen Accurate Technology Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Accurate Technology Co., Ltd.

Date of Test :
Date of Report :

March 1-March 13, 2018

March 14, 2018

Prepared by :

Star Yang
(Star Yang, E. Signer)

Sean Liu

Approved & Authorized Signer :

(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Model Number	:	12168, 12172, 12171, 12173, 12175, 12176, 12177, 12178 (Note: We hereby state that these models are identical in interior structure, electrical circuits and components, Just model name is different, Therefore, only model 12168 is tested for EMC tests.)
Bluetooth version	:	BT V4.2 Single mode This report is for BT classic mode
Frequency Range	:	2402MHz-2480MHz
Number of Channels	:	79
Antenna Gain(Max)	:	-0.65dBi
Antenna type	:	PCB Antenna
Adapter Input Voltage	:	DC 3.7V (Powered by Lithium battery) or DC 5V (Powered by USB port)
Modulation mode	:	GFSK, $\pi/4$ DQPSK Because of firmware limitation, this device only supports Bluetooth V4.2(BR+EDR mode) without the BLE mode and EDR 8DPSK mode
Trade Mark	:	Coors Light
Applicant Address	:	Shenzhen Zelin Technology Co.,Limited 2TH Building HongYong Li Industrial Park, LongGuang District, Shenzhen, China
Manufacturer Address	:	Shenzhen Zelin Technology Co.,Limited 2TH Building HongYong Li Industrial Park, LongGuang District, Shenzhen, China

1.2. Accessory and Auxiliary Equipment

AC/DC Power Adapter (provided by laboratory)	:	Model:TEKA006-0501000UKU
		Input: 100-240V~50/60Hz 0.3A
		Output: DC 5V/1A

1.3. Description of Test Facility

EMC Lab : Recognition of accreditation by Federal Communications Commission (FCC)
The Designation Number is CN1189
The Registration Number is 708358

Listed by Innovation, Science and Economic Development Canada (ISED)
The Registration Number is 5077A-2

Accredited by China National Accreditation Service for Conformity Assessment (CNAS)
The Registration Number is CNAS L3193

Accredited by American Association for Laboratory Accreditation (A2LA)
The Certificate Number is 4297.01

Name of Firm : Shenzhen Accurate Technology Co., Ltd.

Site Location : 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

1.4. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty (9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty (30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty (Above 1GHz) = 4.06dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 06, 2018	1 Year
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 06, 2018	1 Year
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 06, 2018	1 Year
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 06, 2018	1 Year
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 06, 2018	1 Year
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 06, 2018	1 Year
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 06, 2018	1 Year
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 06, 2018	1 Year
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 06, 2018	1 Year
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 06, 2018	1 Year
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 06, 2018	1 Year
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 06, 2018	1 Year

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode

The mode is used: Transmitting mode

Low Channel: 2402MHz

Middle Channel: 2441MHz

High Channel: 2480MHz

Hopping

Note: The Bluetooth has been tested under continuous transmission mode.

3.2.Configuration and peripherals

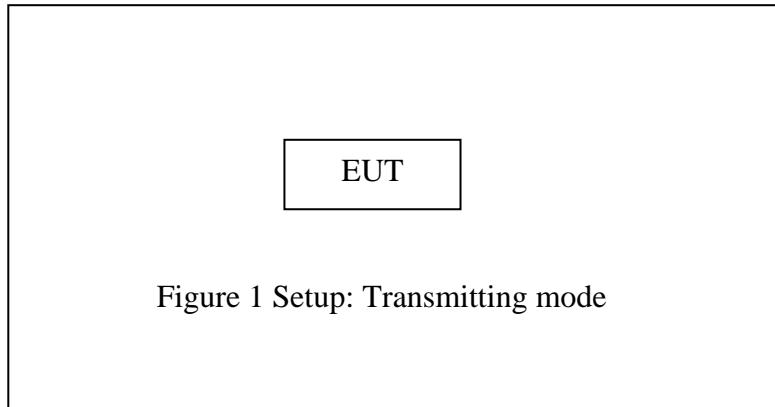



Figure 1 Setup: Transmitting mode

4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission Test	Compliant
Section 15.247(a)(1)	20dB Bandwidth Test	Compliant
Section 15.247(a)(1)	Carrier Frequency Separation Test	Compliant
Section 15.247(a)(1)(iii)	Number Of Hopping Frequency Test	Compliant
Section 15.247(a)(1)(iii)	Dwell Time Test	Compliant
Section 15.247(b)(1)	Maximum Peak Output Power Test	Compliant
Section 15.247(d) Section 15.209	Radiated Emission Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.203	Antenna Requirement	Compliant

5. 20DB BANDWIDTH TEST

5.1. Block Diagram of Test Setup

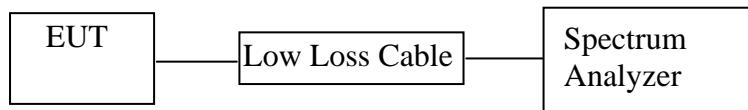

(EUT: Coors Light Bluetooth Speaker)

5.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

5.5. Test Procedure

5.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

5.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

5.5.3. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


5.6. Test Result

Channel	Frequency (MHz)	GFSK 20dB Bandwidth (MHz)	$\Pi/4$ -DQPSK 20dB Bandwidth (MHz)	Result
Low	2402	1.086	1.350	Pass
Middle	2441	1.086	1.356	Pass
High	2480	1.086	1.362	Pass

The spectrum analyzer plots are attached as below.


GFSK Mode

Low channel

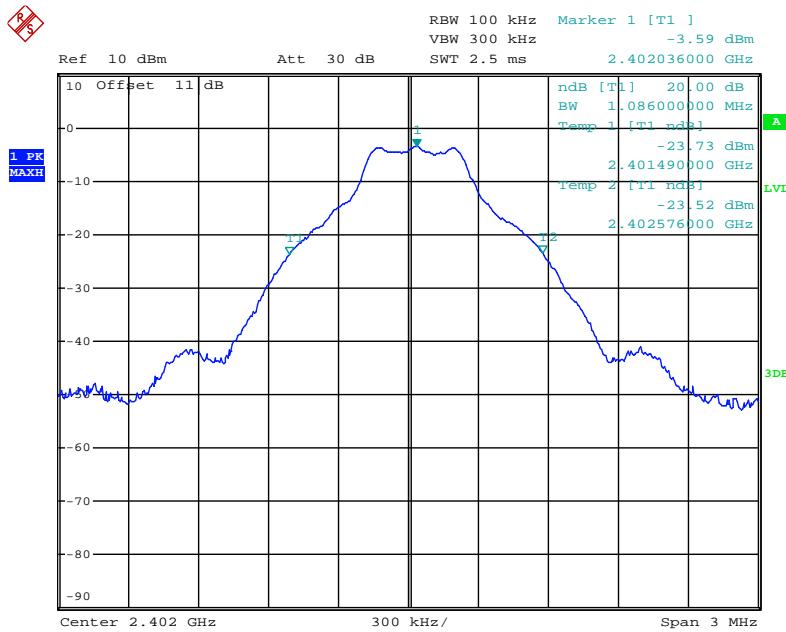


Date: 13.MAR.2018 10:05:49

Middle channel

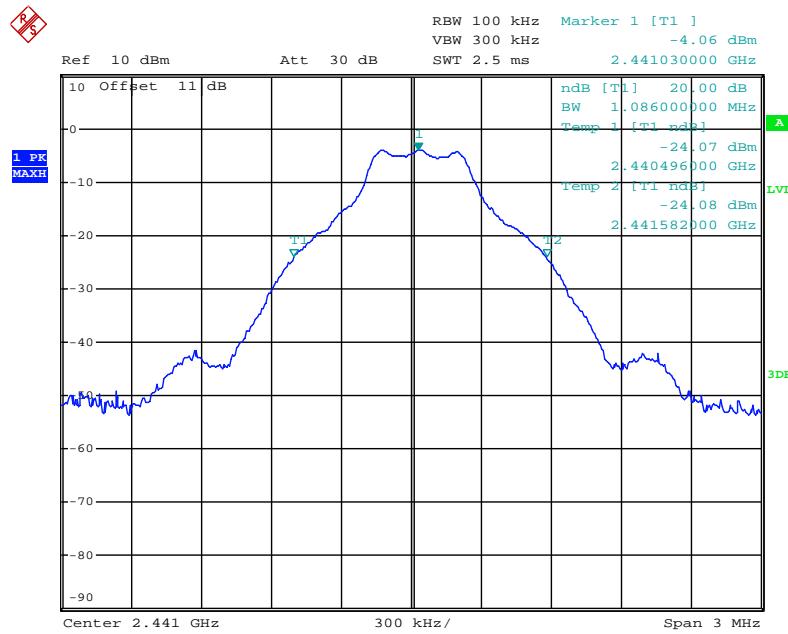

Date: 13.MAR.2018 10:08:02


High channel

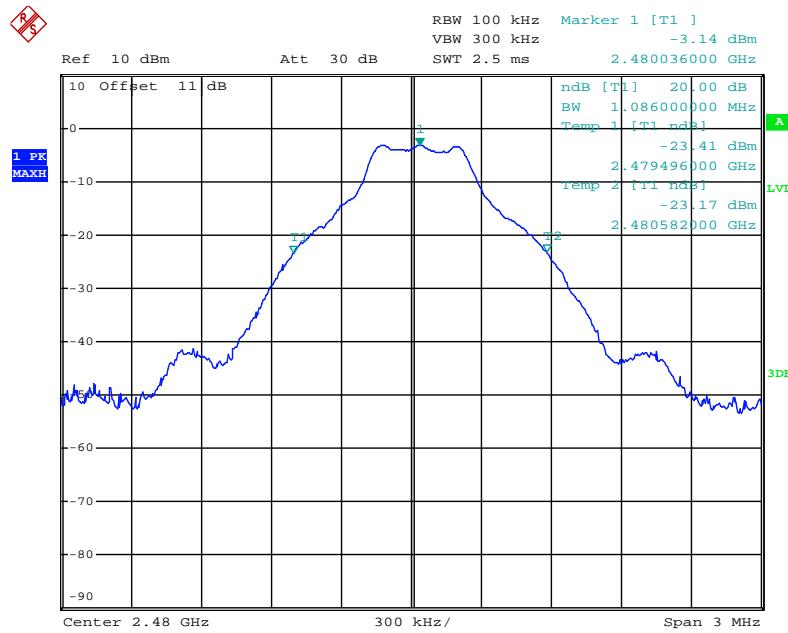

Date: 13.MAR.2018 10:09:07


$\Pi/4$ -DQPSK Mode

Low channel

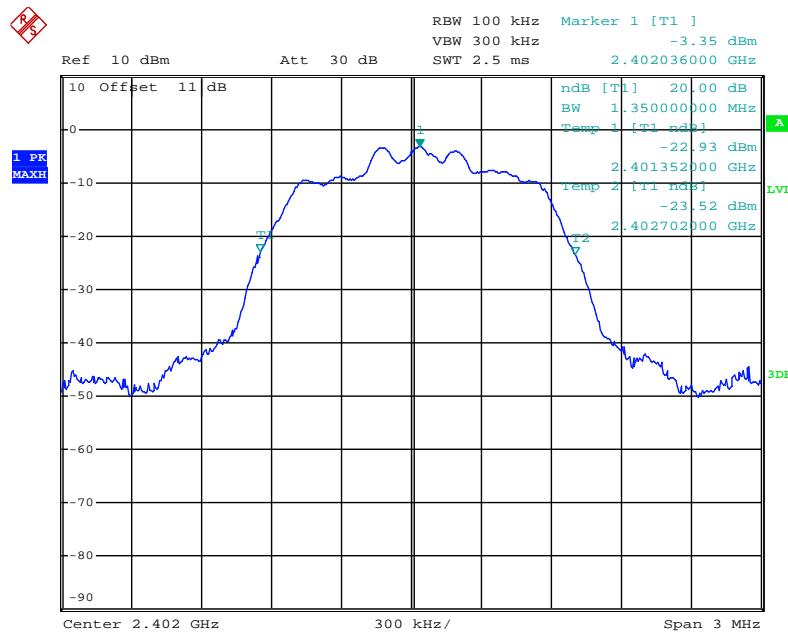


Date: 13.MAR.2018 10:12:16

Middle channel

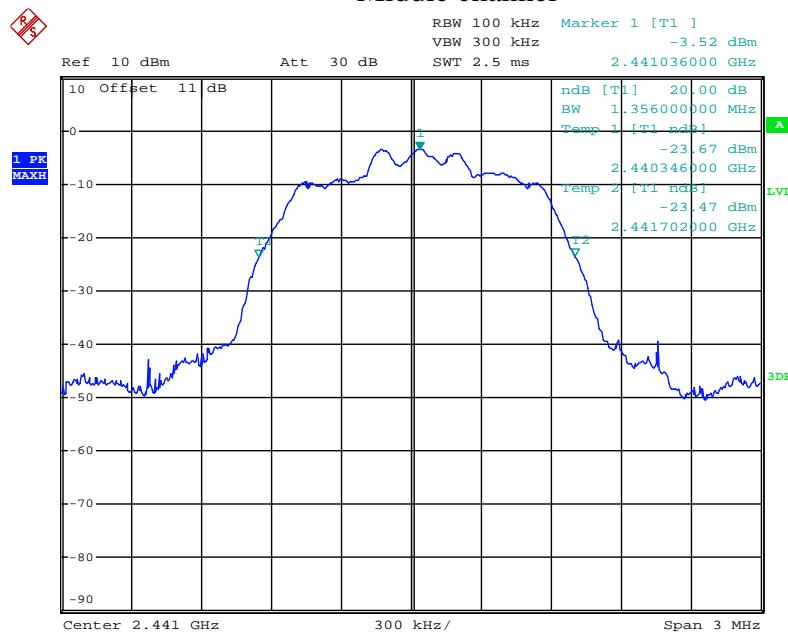

Date: 13.MAR.2018 10:11:08


High channel

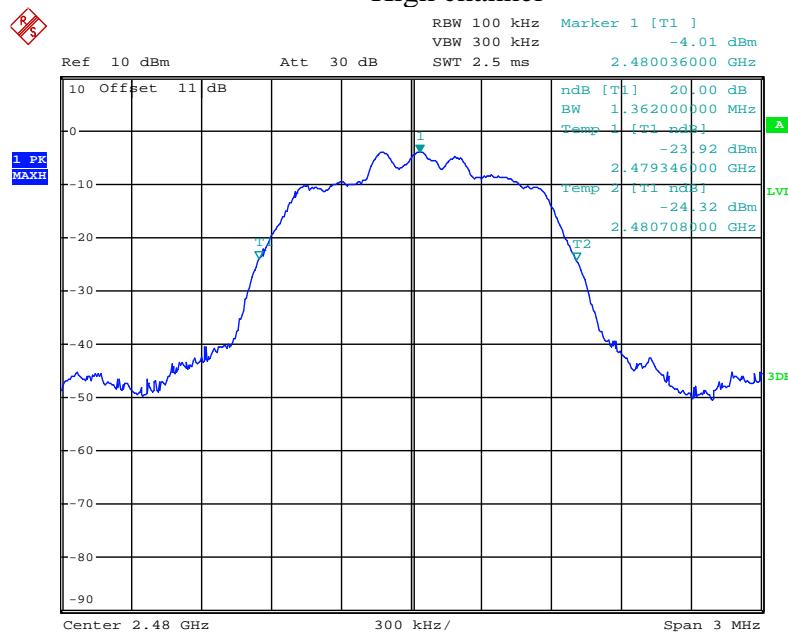

Date: 13.MAR.2018 10:09:54

6. CARRIER FREQUENCY SEPARATION TEST

6.1. Block Diagram of Test Setup



(EUT: Coors Light Bluetooth Speaker)

6.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

6.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Set RBW of spectrum analyzer to 30 kHz and VBW to 100 kHz. Adjust Span to 2MHz.

6.5.3. Set the adjacent channel of the EUT Maxhold another trace.

6.5.4. Measurement the channel separation

6.6. Test Result

GFSK

Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
Low	2402	1.002	25KHz or 2/3*20dB bandwidth	PASS
	2403			
Middle	2440	1.008	25KHz or 2/3*20dB bandwidth	PASS
	2441			
High	2479	1.002	25KHz or 2/3*20dB bandwidth	PASS
	2480			


Π/4-DQPSK

Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
Low	2402	1.008	25KHz or 2/3*20dB bandwidth	PASS
	2403			
Middle	2440	1.002	25KHz or 2/3*20dB bandwidth	PASS
	2441			
High	2479	1.002	25KHz or 2/3*20dB bandwidth	PASS
	2480			

The spectrum analyzer plots are attached as below.


GFSK Mode

Low channel

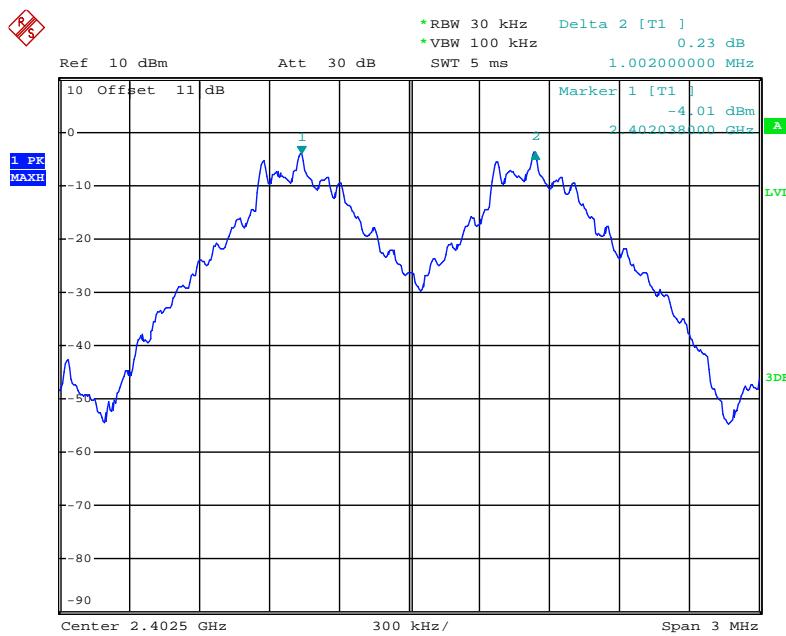


Date: 13.MAR.2018 10:37:57

Middle channel

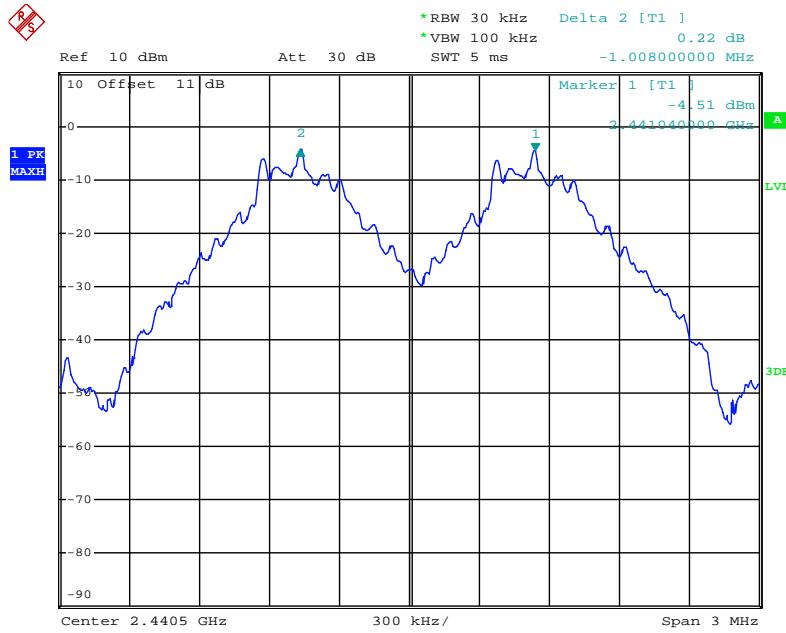

Date: 13.MAR.2018 10:39:20


High channel

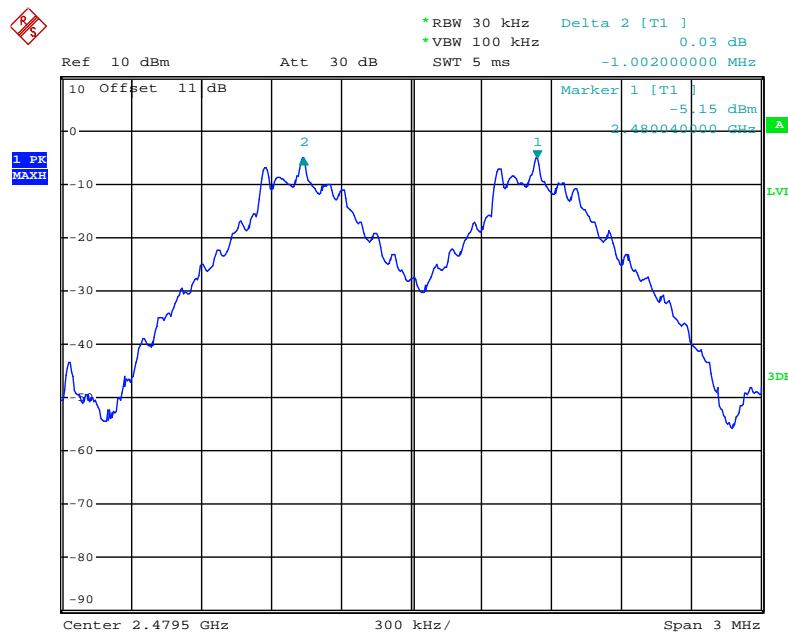

Date: 13.MAR.2018 10:40:03


Pi/4-DQPSK Mode

Low channel

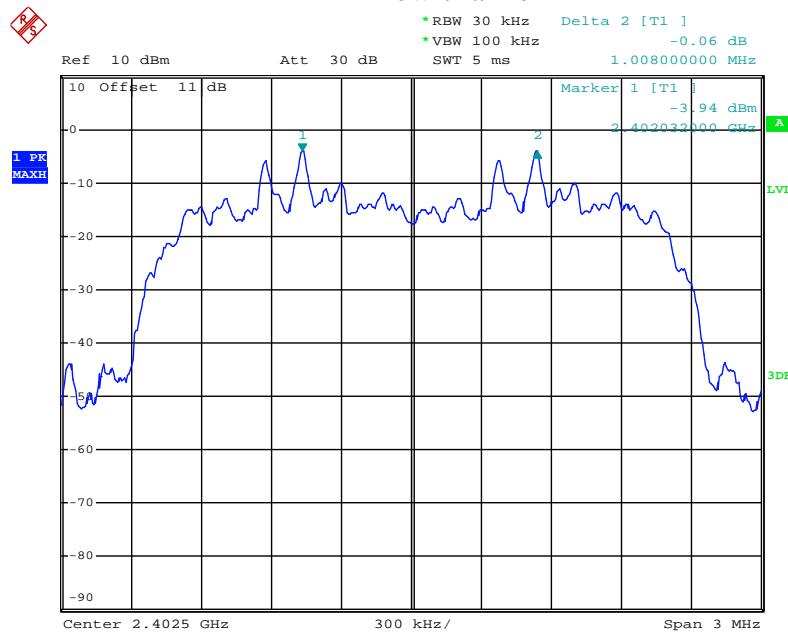


Date: 13.MAR.2018 10:42:18

Middle channel

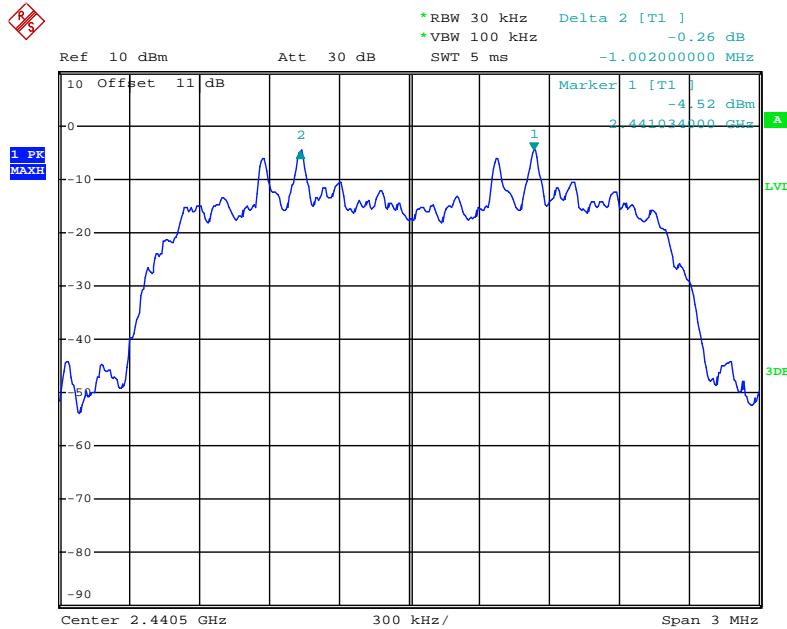

Date: 13.MAR.2018 10:41:38


High channel

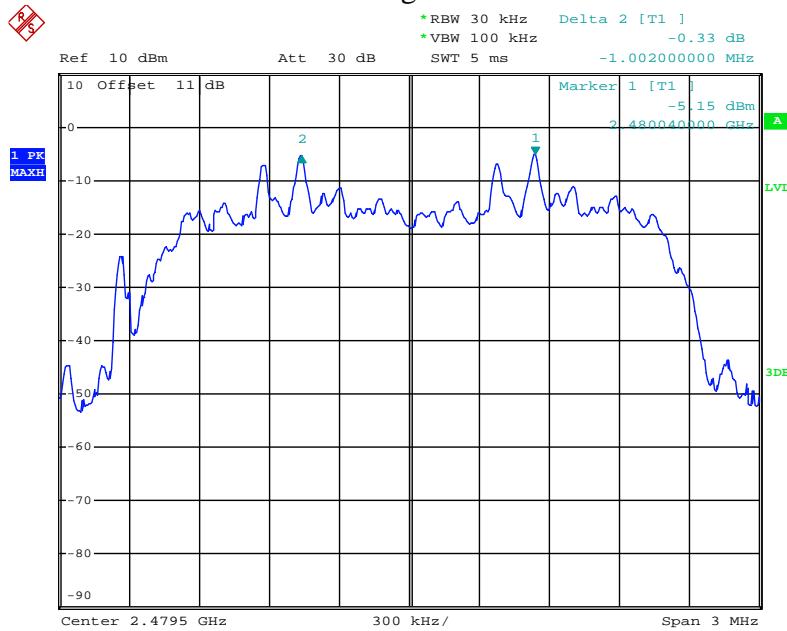

Date: 13.MAR.2018 10:40:52

7. NUMBER OF HOPPING FREQUENCY TEST

7.1. Block Diagram of Test Setup



(EUT: Coors Light Bluetooth Speaker)

7.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

7.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX (Hopping on) modes measure it.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.


7.5.2. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz.

7.5.3. Max hold, view and count how many channel in the band.

7.6. Test Result


Total number of hopping channel	Measurement result(CH)	Limit(CH)
	79	≥ 15

Number of hopping channels(GFSK)

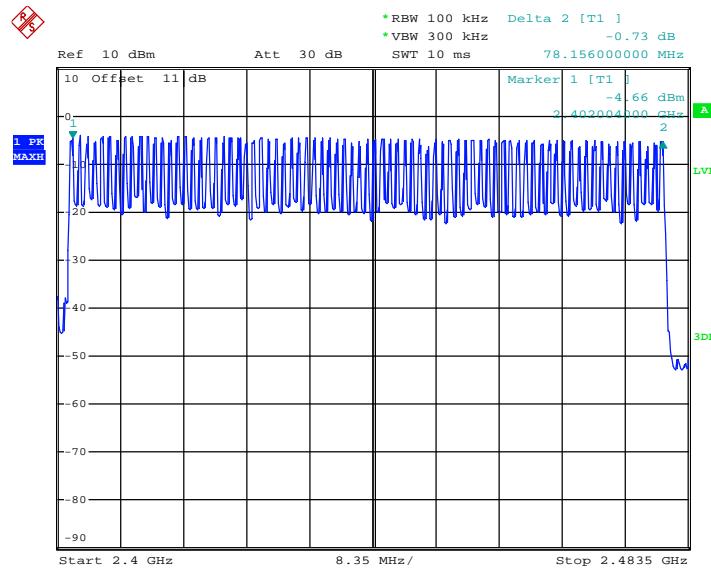

Date: 13.MAR.2018 10:36:27


Number of hopping channels($\Pi/4$ -DQPSK)

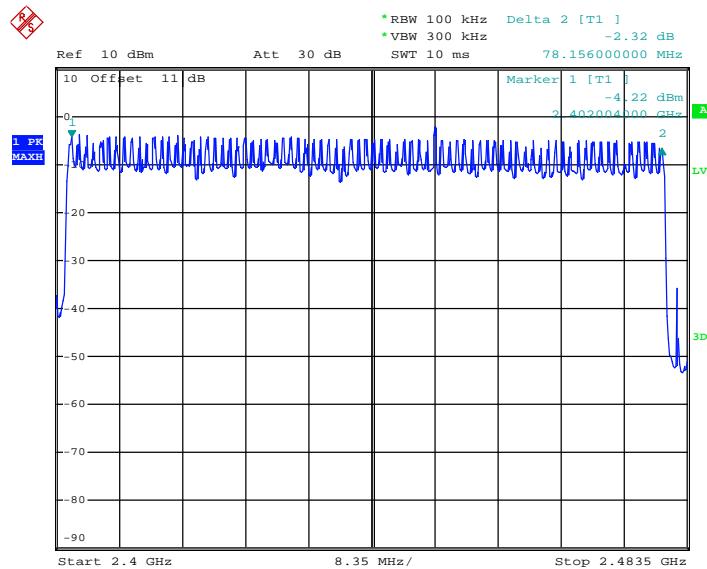

Date: 13.MAR.2018 10:34:32

8. DWELL TIME TEST

8.1. Block Diagram of Test Setup



(EUT: Coors Light Bluetooth Speaker)

8.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

8.3. EUT Configuration on Measurement

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

8.5. Test Procedure

8.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.5.2. Set center frequency of spectrum analyzer = operating frequency.

8.5.3. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span=0Hz, Adjust Sweep=5ms, 10ms, 15ms. Get the pulse time.

8.5.4. Repeat above procedures until all frequency measured were complete.

8.6. Test Result

GFSK Mode

Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2441	0.430	137.60	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(2*79)) \times 31.6$				
DH3	2441	1.710	273.60	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(4*79)) \times 31.6$				
DH5	2441	3.000	320.00	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(6*79)) \times 31.6$				

$\Pi/4$ -DQPSK


Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2441	0.440	140.80	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(2*79)) \times 31.6$				
DH3	2441	1.720	275.20	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(4*79)) \times 31.6$				
DH5	2441	2.980	317.87	400
A period transmit time = $0.4 \times 79 = 31.6$ Dwell time = pulse time $\times (1600/(6*79)) \times 31.6$				

Note: We tested GFSK mode and $\Pi/4$ -DQPSK mode the low, middle and high channel and recorded the worst case data for all test mode.

The spectrum analyzer plots are attached as below.


GFSK Mode

DH1 Middle channel

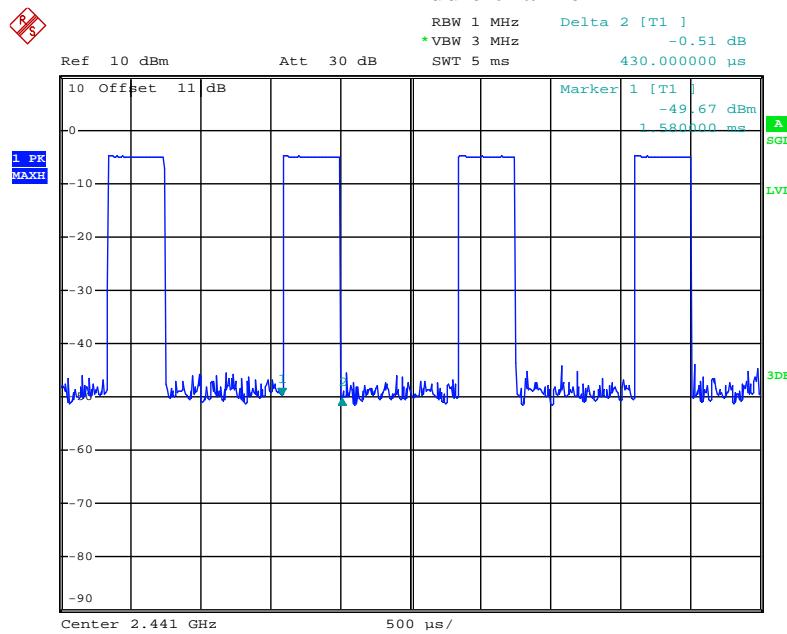


Date: 13.MAR.2018 10:20:02

DH3 Middle channel

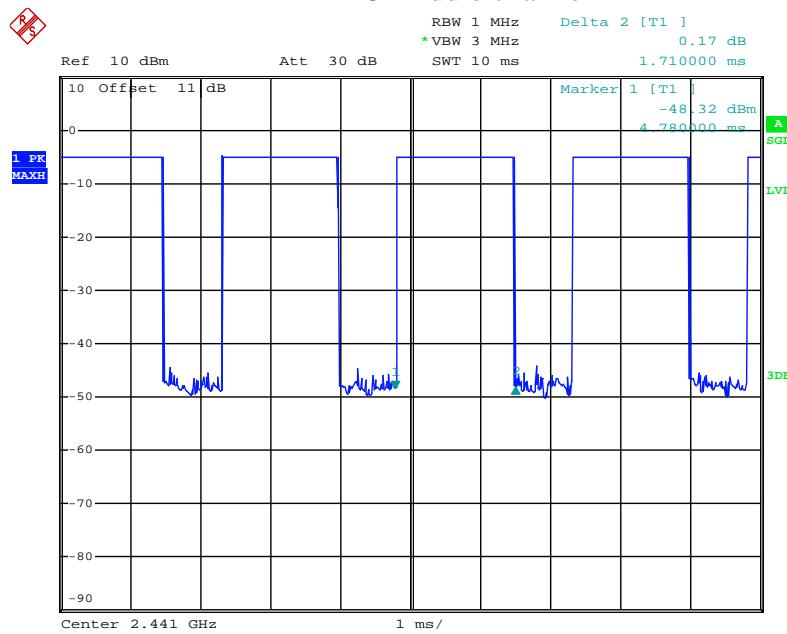

Date: 13.MAR.2018 10:21:20


DH5 Middle channel

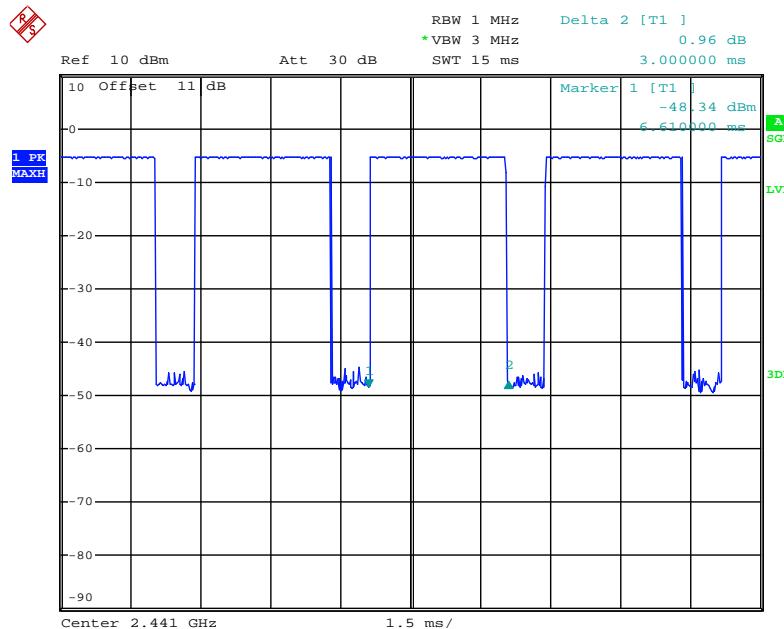

Date: 13.MAR.2018 10:22:26


Π/4-DQPSK

2DH1 Middle channel

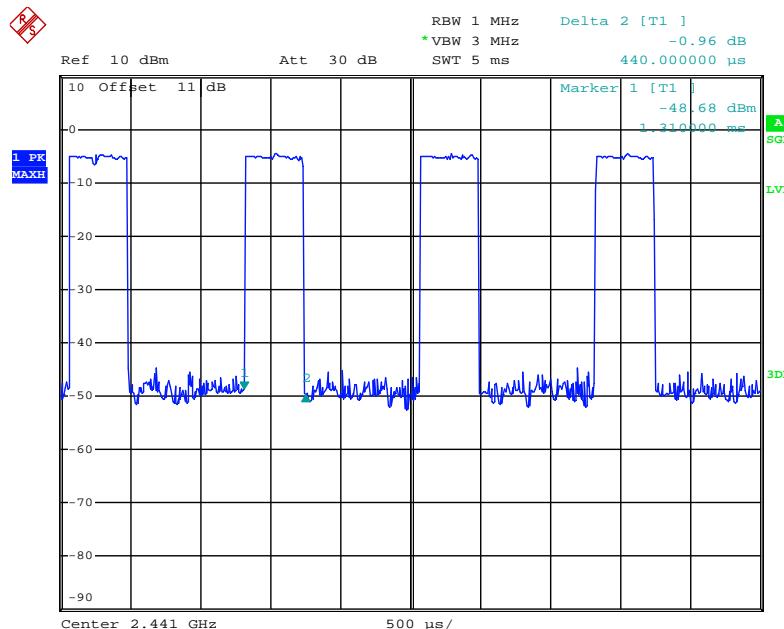


Date: 13.MAR.2018 10:23:45

2DH3 Middle channel

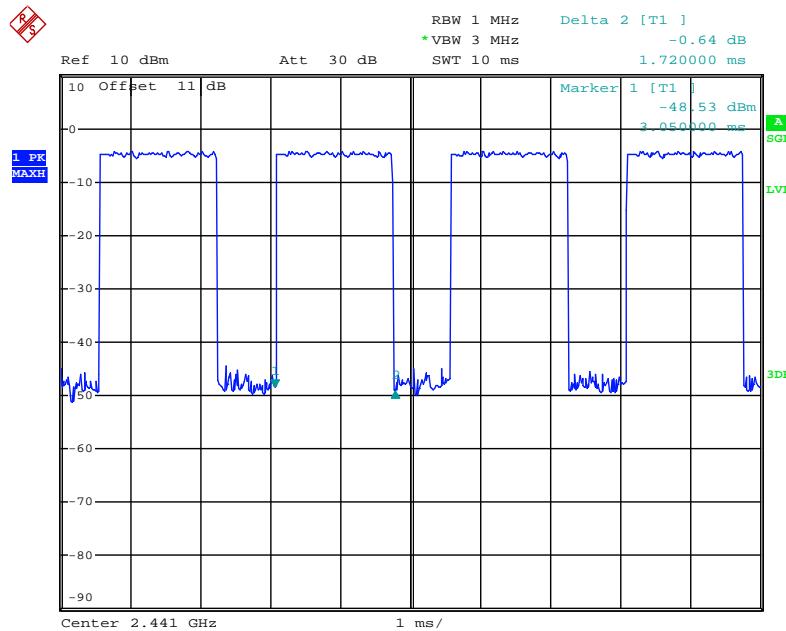

Date: 13.MAR.2018 10:25:13


2DH5 Middle channel

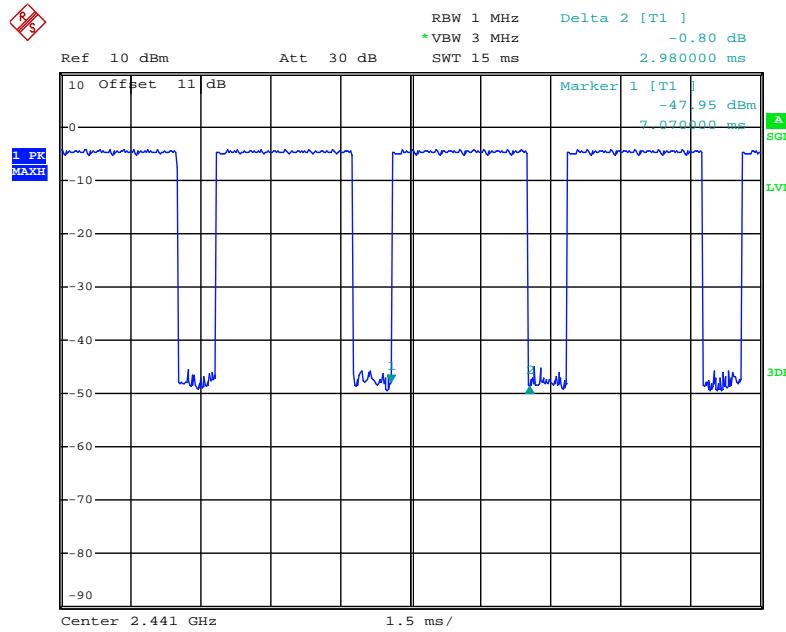

Date: 13.MAR.2018 10:25:58

9. MAXIMUM PEAK OUTPUT POWER TEST

9.1. Block Diagram of Test Setup



(EUT: Coors Light Bluetooth Speaker)

9.2. The Requirement For Section 15.247(b)(1)

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.4. Operating Condition of EUT

9.4.1. Setup the EUT and simulator as shown as Section 9.1.

9.4.2. Turn on the power of all equipment.

9.4.3. Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

9.5. Test Procedure

9.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

9.5.2. Set RBW of spectrum analyzer to 3MHz and VBW to 3MHz.

9.5.3. Measurement the maximum peak output power.

9.6. Test Result

GFSK Mode

Channel	Frequency (MHz)	Peak Output Power (dBm/W)	Limits dBm / W
Low	2402	-3.88/0.0004	21 / 0.125
Middle	2441	-3.94/0.0004	21 / 0.125
High	2480	-4.05/0.0004	21 / 0.125


Π/4-DQPSK Mode

Channel	Frequency (MHz)	Peak Output Power (dBm/W)	Limits dBm / W
Low	2402	-3.07/0.0005	21 / 0.125
Middle	2441	-3.59/0.0004	21 / 0.125
High	2480	-3.53/0.0004	21 / 0.125

The spectrum analyzer plots are attached as below.


GFSK Mode

Low channel

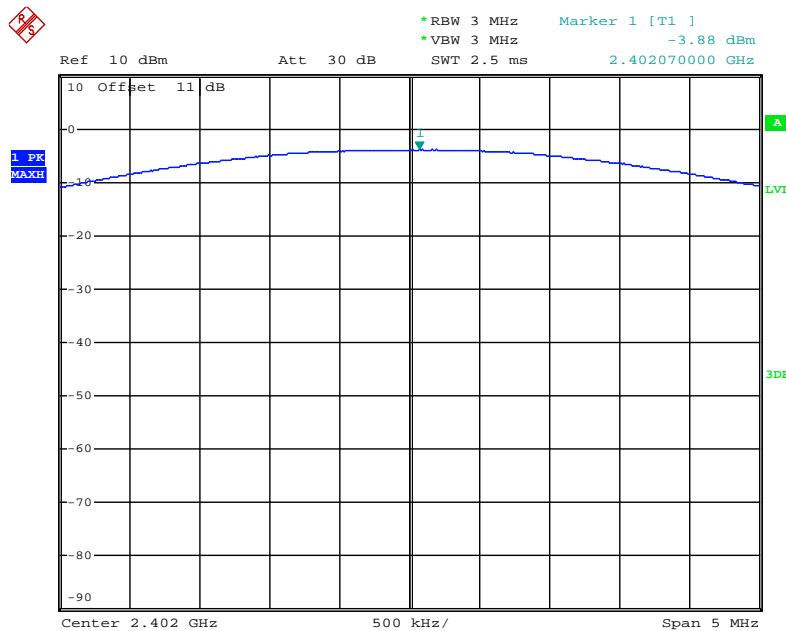


Date: 13.MAR.2018 10:43:00

Middle channel

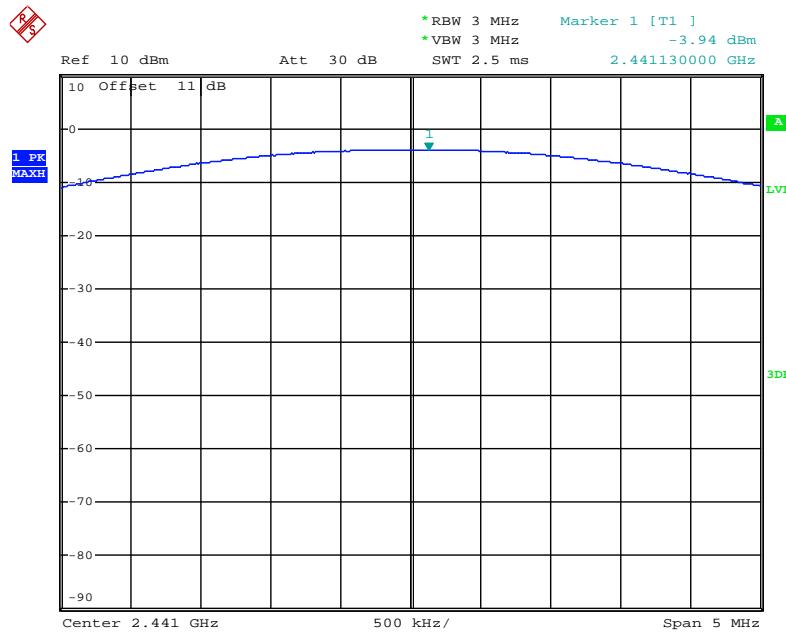

Date: 13.MAR.2018 10:44:04


High channel

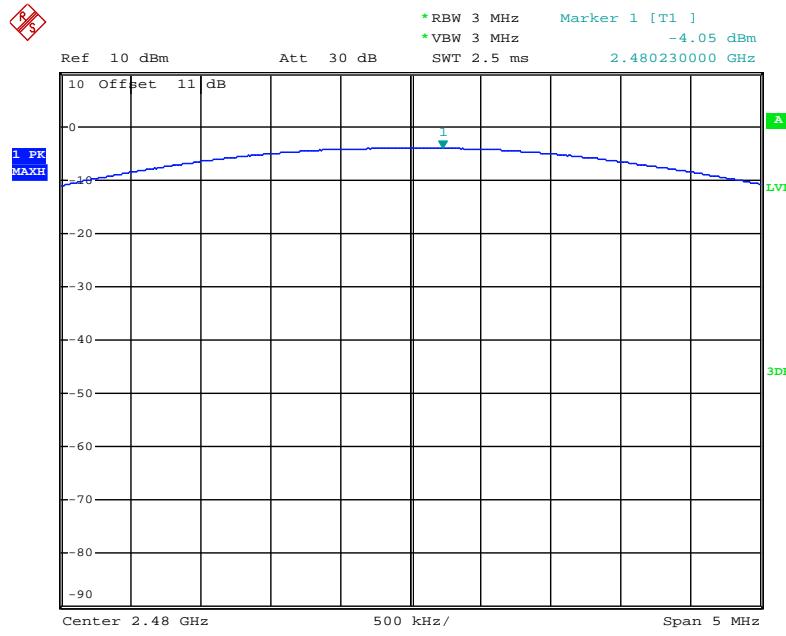

Date: 13.MAR.2018 10:44:52


$\Pi/4$ -DQPSK Mode

Low channel

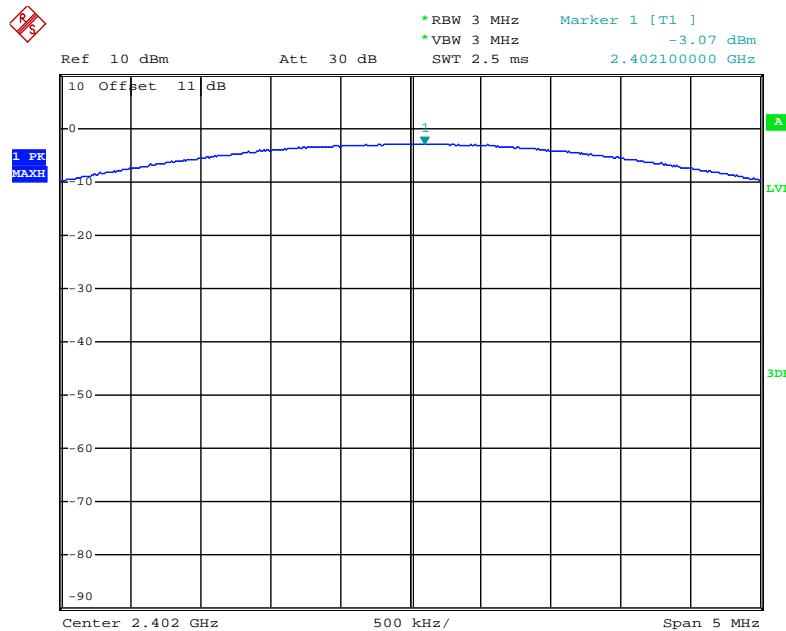


Date: 13.MAR.2018 10:48:09

Middle channel

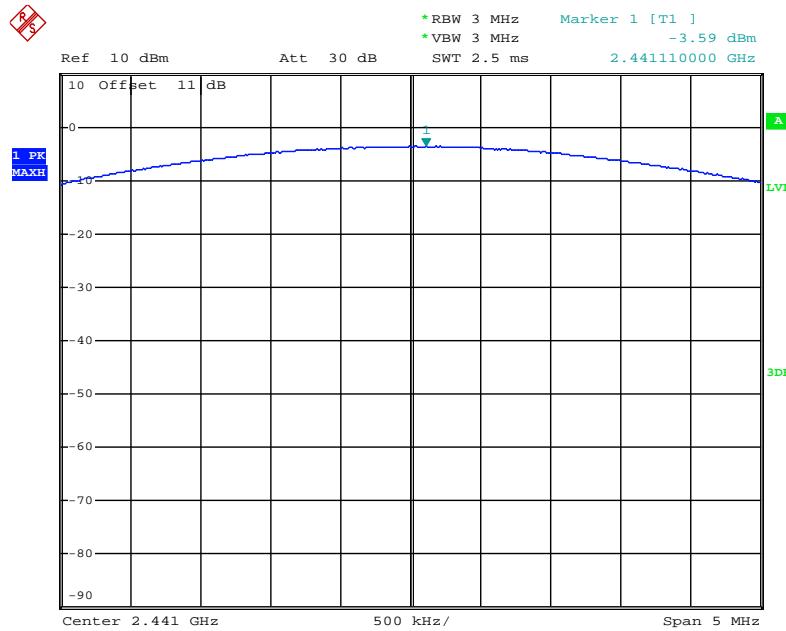

Date: 13.MAR.2018 10:46:36

High channel

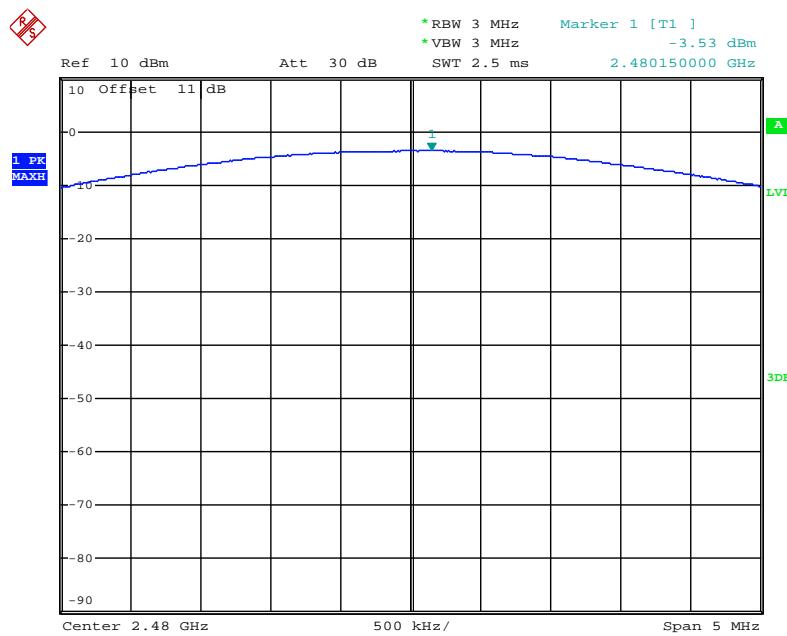

Date: 13.MAR.2018 10:45:46

10. RADIATED EMISSION TEST

10.1. Block Diagram of Test Setup

10.1.1. Block diagram of connection between the EUT and peripherals



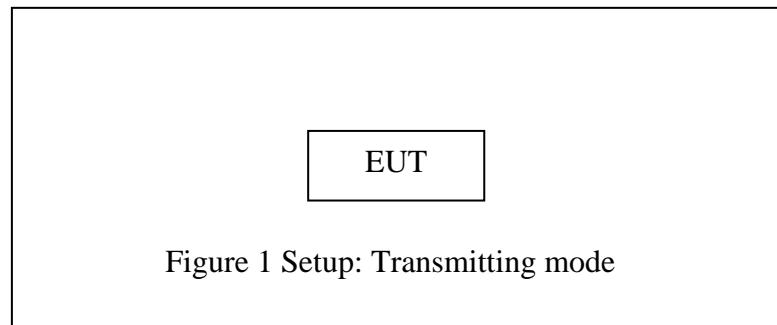


Figure 1 Setup: Transmitting mode


10.1.2. Semi-Anechoic Chamber Test Setup Diagram

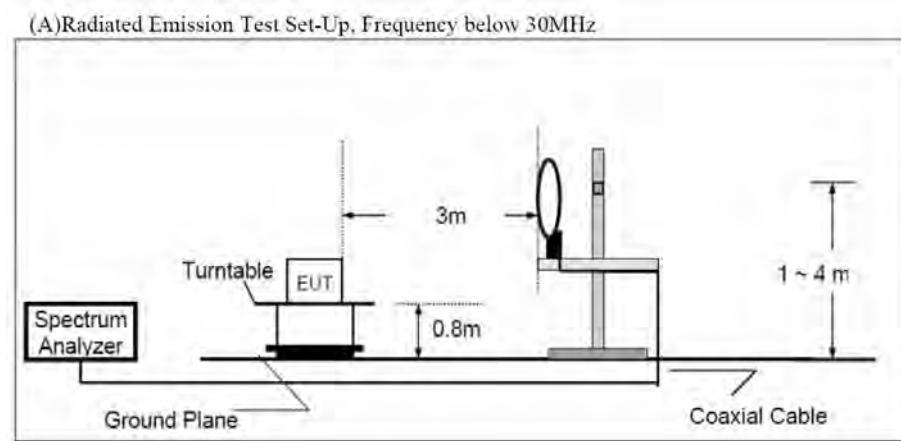

(B) Radiated Emission Test Set-Up, Frequency 30MHz-1GHz

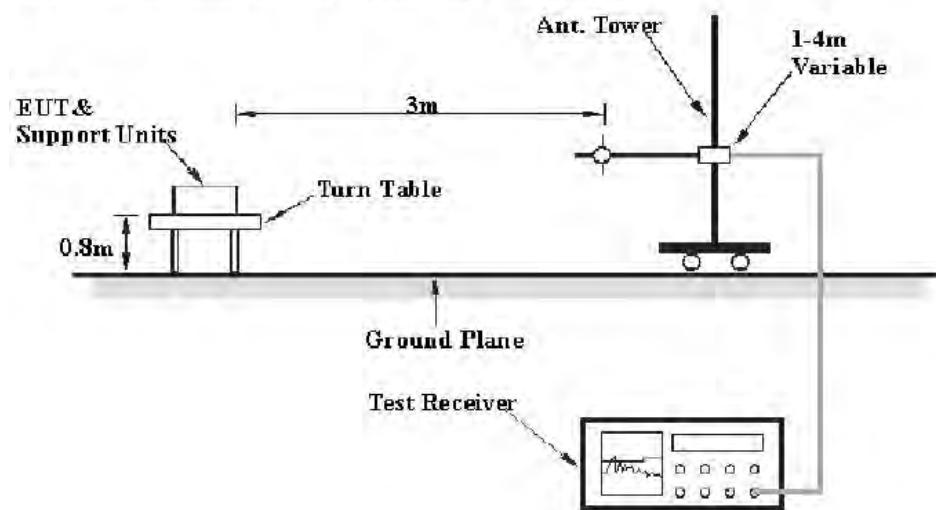

(C) Radiated Emission Test Set-Up. Frequency above 1GHz

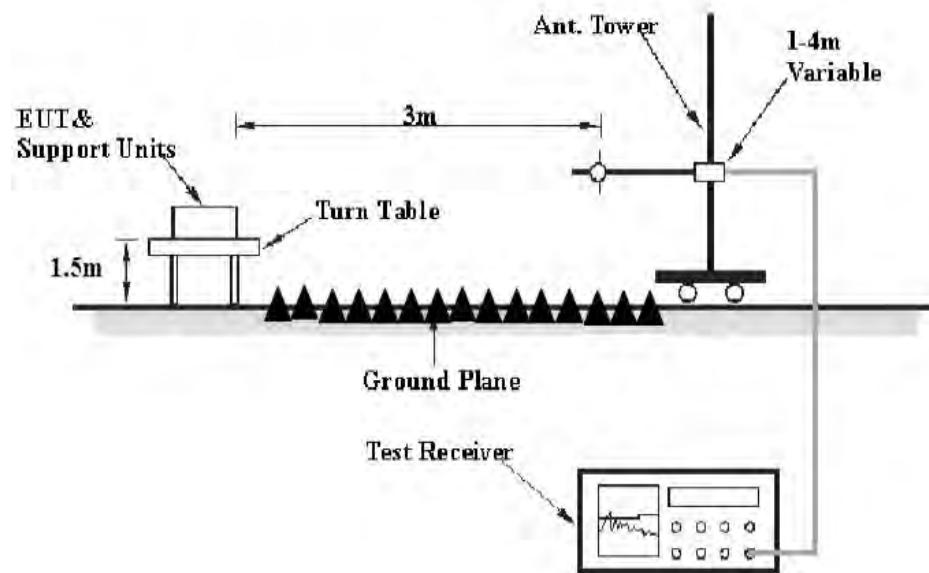

10.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3. Restricted bands of operation

10.3.1. FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

10.4. Configuration of EUT on Measurement

The equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground(Below 1GHz). The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground(Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

10.6.Data Sample

Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
X.XX	28.66	-15.19	13.47	40.0	-26.53	QP

Frequency(MHz) = Emission frequency in MHz

Reading(dB μ V) = Uncorrected Analyzer/Receiver reading

Factor (dB/m) = Antenna factor + Cable Loss – Amplifier gain

Result(dB μ V/m) = Reading(dB μ V) + Factor(dB/m)

Limit (dB μ V/m) = Limit stated in standard

Margin (dB) = Result(dB μ V/m) - Limit (dB μ V/m)

QP = Quasi-peak Reading

Calculation Formula:

Margin(dB) = Result (dB μ V/m)–Limit(dB μ V/m)

Result(dB μ V/m)= Reading(dB μ V)+ Factor(dB/m)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit.

10.7.The Field Strength of Radiation Emission Measurement Results

PASS.

Note: 1. We tested GFSK mode, $\Pi/4$ -DQPSK mode and recorded the worst case data

(GFSK mode) for all test mode.

2. The test frequency is from 9KHz to 26.5GHz, The 9KHz-30MHz and 18-26.5GHz emissions are not reported, because the levels are too low against the limit.

Below 1GHz



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2018 #26

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: DC 3.7V

Test item: Radiation Test

Date: 18/03/13/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 10/58/09

EUT: Coors Light Bluetooth Speaker

Engineer Signature: star


Mode: TX 2402MHz(GFSK)

Distance: 3m

Model: 12168

Manufacturer: Zelin

Note: Report No.:ATE20180247

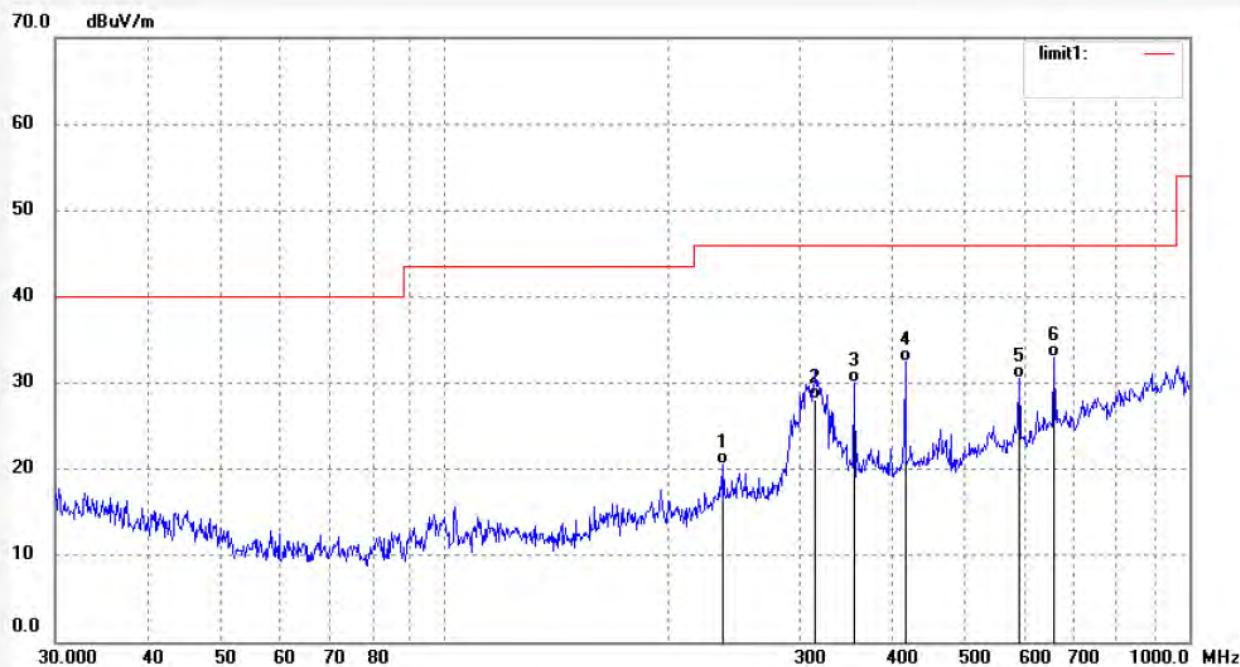

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	236.7927	38.82	-18.27	20.55	46.00	-25.45	QP	200	230	
2	316.9717	43.99	-15.88	28.11	46.00	-17.89	QP	200	175	
3	354.6911	44.46	-14.47	29.99	46.00	-16.01	QP	200	96	
4	415.4485	46.20	-13.74	32.46	46.00	-13.54	QP	200	211	
5	590.3510	40.60	-10.12	30.48	46.00	-15.52	QP	200	177	
6	658.2854	41.63	-8.69	32.94	46.00	-13.06	QP	200	142	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR2018 #25

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: DC 3.7V

Test item: Radiation Test

Date: 18/03/13/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 10/57/14

EUT: Coors Light Bluetooth Speaker

Engineer Signature: star


Mode: TX 2402MHz(GFSK)

Distance: 3m

Model: 12168

Manufacturer: Zelin

Note: Report No.:ATE20180247

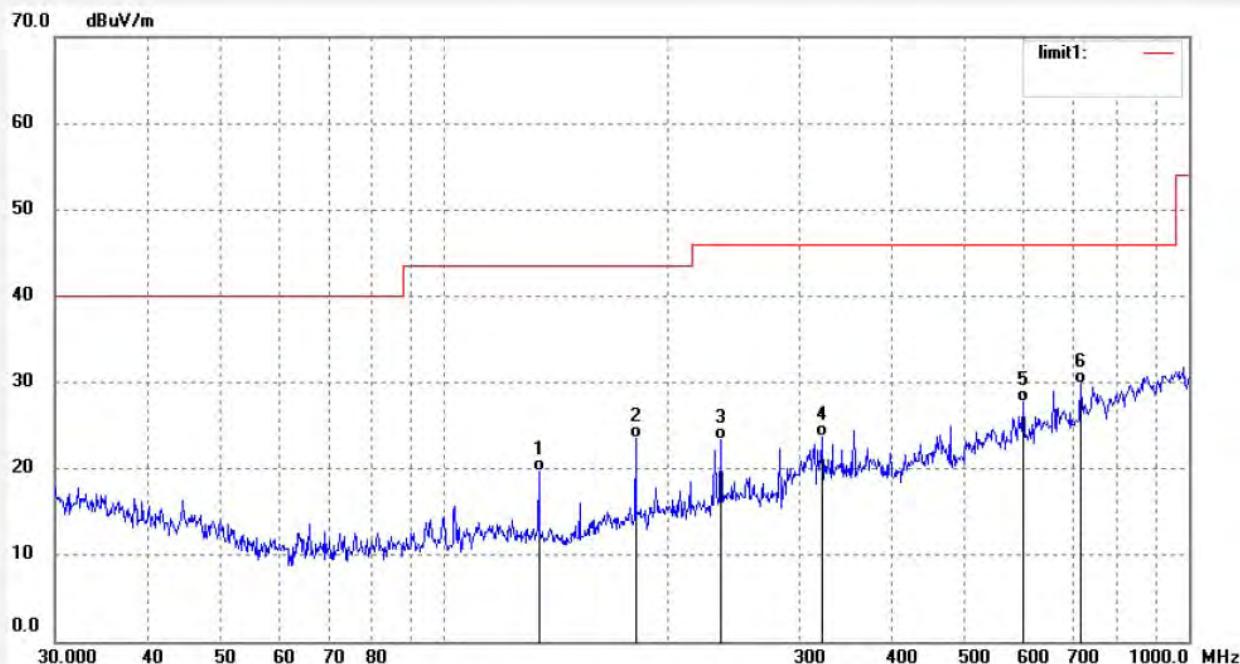

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	134.0193	41.57	-21.88	19.69	43.50	-23.81	QP	100	215	
2	180.6640	43.82	-20.27	23.55	43.50	-19.95	QP	100	236	
3	235.1346	41.65	-18.28	23.37	46.00	-22.63	QP	100	109	
4	321.4581	39.48	-15.73	23.75	46.00	-22.25	QP	100	145	
5	598.7066	37.70	-9.95	27.75	46.00	-18.25	QP	100	299	
6	716.2038	37.39	-7.58	29.81	46.00	-16.19	QP	100	310	




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR2018 #27	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 18/03/13/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 10/58/52
EUT: Coors Light Bluetooth Speaker	Engineer Signature: star
Mode: TX 2441MHz(GFSK)	Distance: 3m
Model: 12168	
Manufacturer: Zelin	

Note: Report No.:ATE20180247

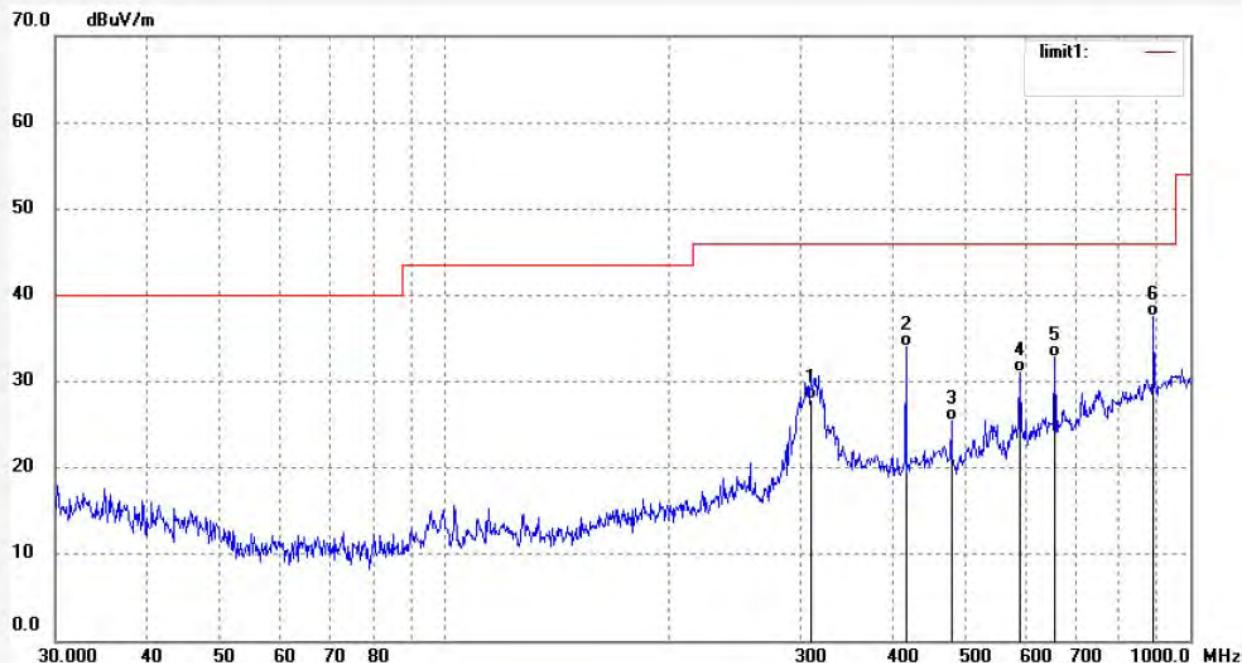

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	310.3594	44.05	-16.07	27.98	46.00	-18.02	QP	200	152	
2	415.4485	47.78	-13.74	34.04	46.00	-11.96	QP	200	44	
3	478.1394	37.92	-12.49	25.43	46.00	-20.57	QP	200	139	
4	590.3510	41.20	-10.12	31.08	46.00	-14.92	QP	200	241	
5	658.2854	41.46	-8.69	32.77	46.00	-13.23	QP	200	139	
6	893.6557	41.81	-4.28	37.53	46.00	-8.47	QP	200	255	




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.:	STAR2018 #28	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	DC 3.7V
Test item:	Radiation Test	Date:	18/03/13/
Temp.(C)/Hum.(%)	25 C / 55 %	Time:	11/00/04
EUT:	Coors Light Bluetooth Speaker	Engineer Signature:	star
Mode:	TX 2441MHz(GFSK)	Distance:	3m
Model:	12168		
Manufacturer:	Zelin		
Note:	Report No.:ATE20180247		

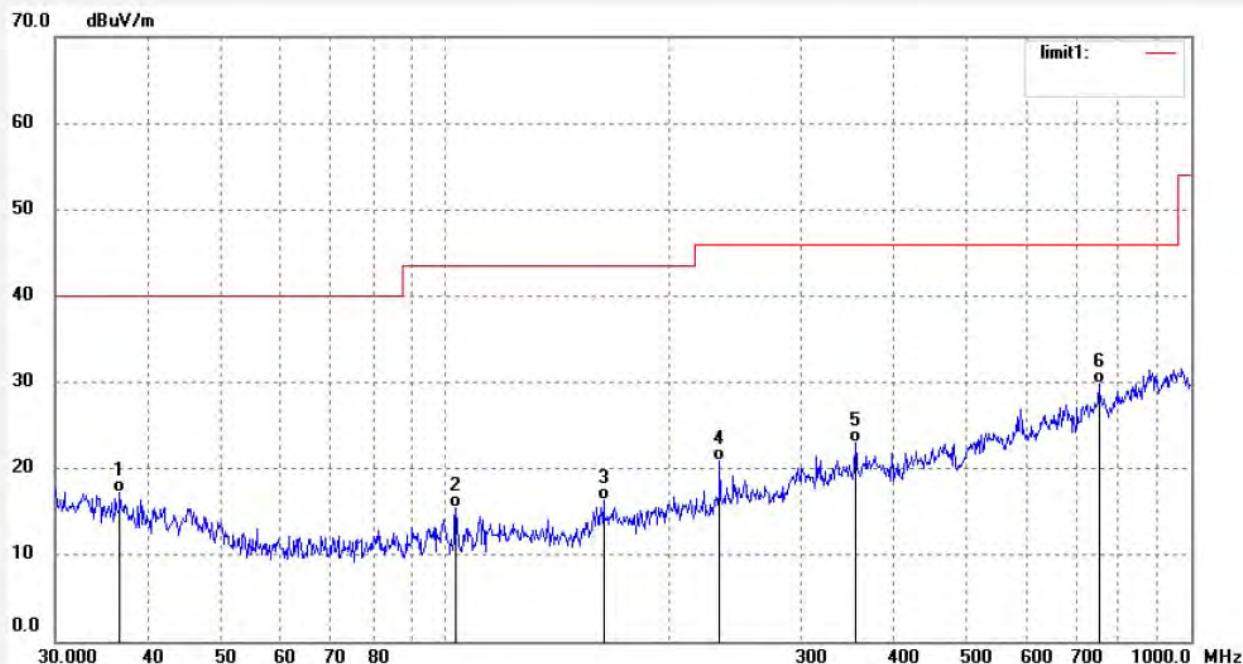

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	36.6520	35.29	-18.03	17.26	40.00	-22.74	QP	100	152	
2	103.3353	37.33	-21.83	15.50	43.50	-28.00	QP	100	45	
3	163.1622	37.34	-21.01	16.33	43.50	-27.17	QP	100	33	
4	233.4881	39.16	-18.29	20.87	46.00	-25.13	QP	100	289	
5	354.6911	37.52	-14.47	23.05	46.00	-22.95	QP	100	149	
6	752.3147	36.50	-6.71	29.79	46.00	-16.21	QP	100	225	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2018 #30

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: DC 3.7V

Test item: Radiation Test

Date: 18/03/13/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 11/02/02

EUT: Coors Light Bluetooth Speaker

Engineer Signature: star


Mode: TX 2480MHz(GFSK)

Distance: 3m

Model: 12168

Manufacturer: Zelin

Note: Report No.:ATE20180247

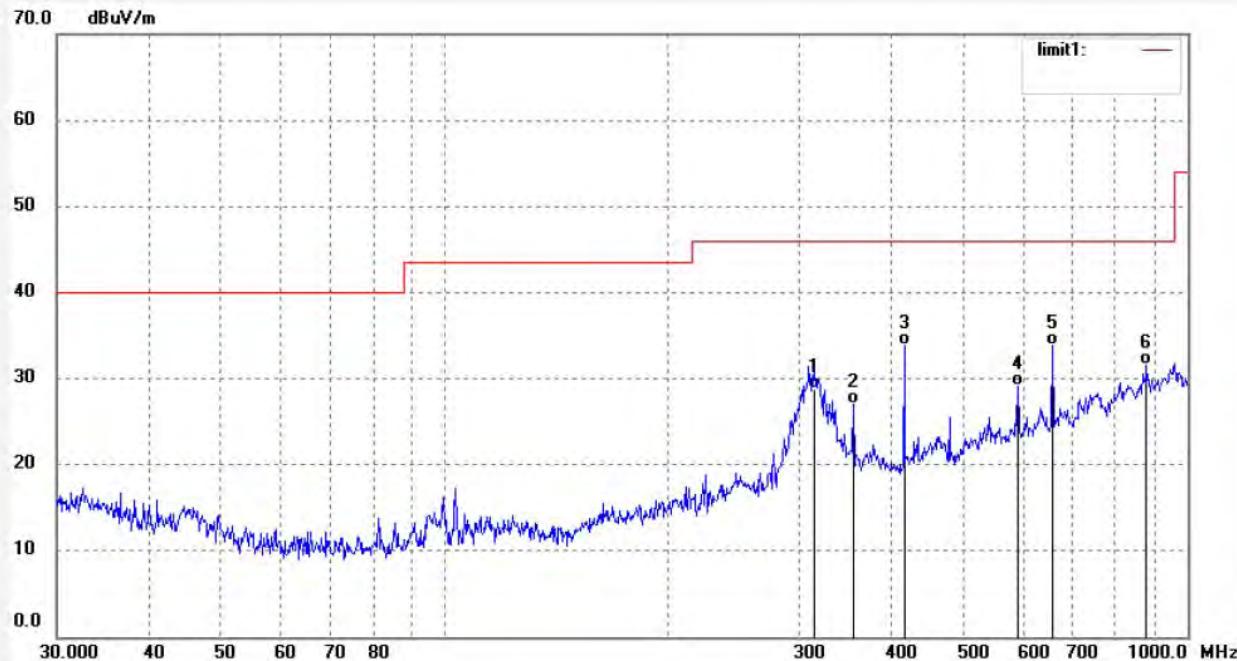

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	313.6482	44.69	-15.97	28.72	46.00	-17.28	QP	200	189	
2	354.6911	41.56	-14.47	27.09	46.00	-18.91	QP	200	99	
3	415.4485	47.57	-13.74	33.83	46.00	-12.17	QP	200	302	
4	590.3510	39.27	-10.12	29.15	46.00	-16.85	QP	200	258	
5	658.2854	42.61	-8.69	33.92	46.00	-12.08	QP	200	146	
6	881.1838	36.02	-4.49	31.53	46.00	-14.47	QP	200	311	



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	STAR2018 #29	Polarization:	Vertical
Standard:	FCC Class B 3M Radiated	Power Source:	DC 3.7V
Test item:	Radiation Test	Date:	18/03/13/
Temp.(C)/Hum.(%)	25 C / 55 %	Time:	11/01/11
EUT:	Coors Light Bluetooth Speaker	Engineer Signature:	star
Mode:	TX 2480MHz(GFSK)	Distance:	3m
Model:	12168		
Manufacturer:	Zelin		
Note:	Report No.:ATE20180247		

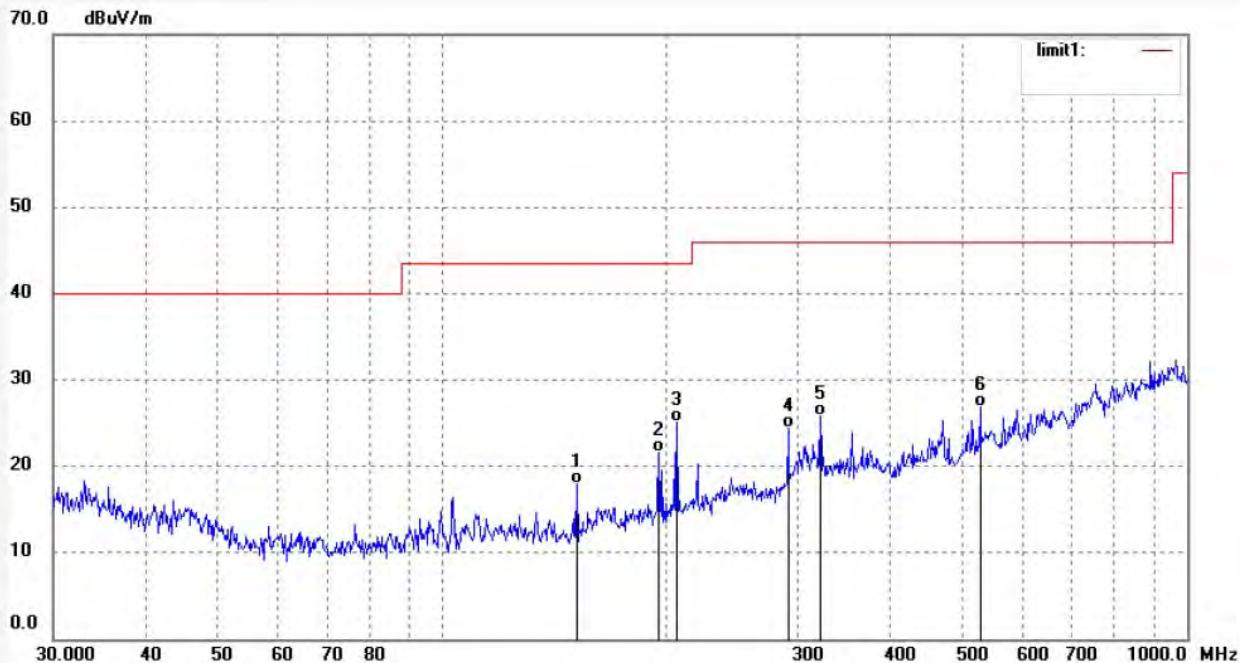

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	151.5567	40.10	-22.18	17.92	43.50	-25.58	QP	100	179	
2	195.1831	40.56	-18.96	21.60	43.50	-21.90	QP	100	325	
3	206.4701	43.54	-18.51	25.03	43.50	-18.47	QP	100	187	
4	291.3388	40.96	-16.47	24.49	46.00	-21.51	QP	100	111	
5	321.4581	41.50	-15.73	25.77	46.00	-20.23	QP	100	256	
6	527.5707	38.50	-11.61	26.89	46.00	-19.11	QP	100	203	

Above 1GHz



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.ChinaSite: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR2018 #32

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 3.7V

Test item: Radiation Test

Date: 18/03/13/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 11/07/57

EUT: Coors Light Bluetooth Speaker

Engineer Signature: star


Mode: TX 2402MHz(GFSK)

Distance: 3m

Model: 12168

Manufacturer: Zelin

Note: Report No.:ATE20180247

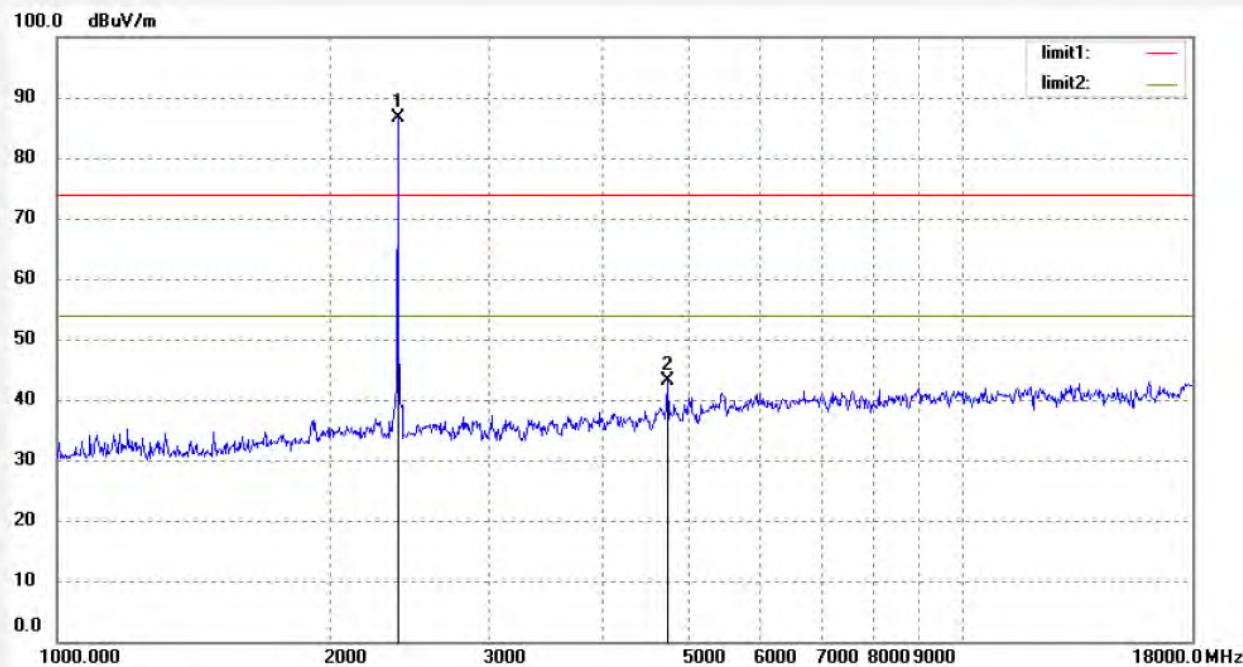

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.019	94.56	-8.03	86.53			peak	200	110	
2	4804.057	45.75	-2.53	43.22	74.00	-30.78	peak	200	46	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR2018 #31

Polarization: Vertical

Standard: FCC PK

Power Source: DC 3.7V

Test item: Radiation Test

Date: 18/03/13/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 11/06/30

EUT: Coors Light Bluetooth Speaker

Engineer Signature: star


Mode: TX 2402MHz(GFSK)

Distance: 3m

Model: 12168

Manufacturer: Zelin

Note: Report No.:ATE20180247

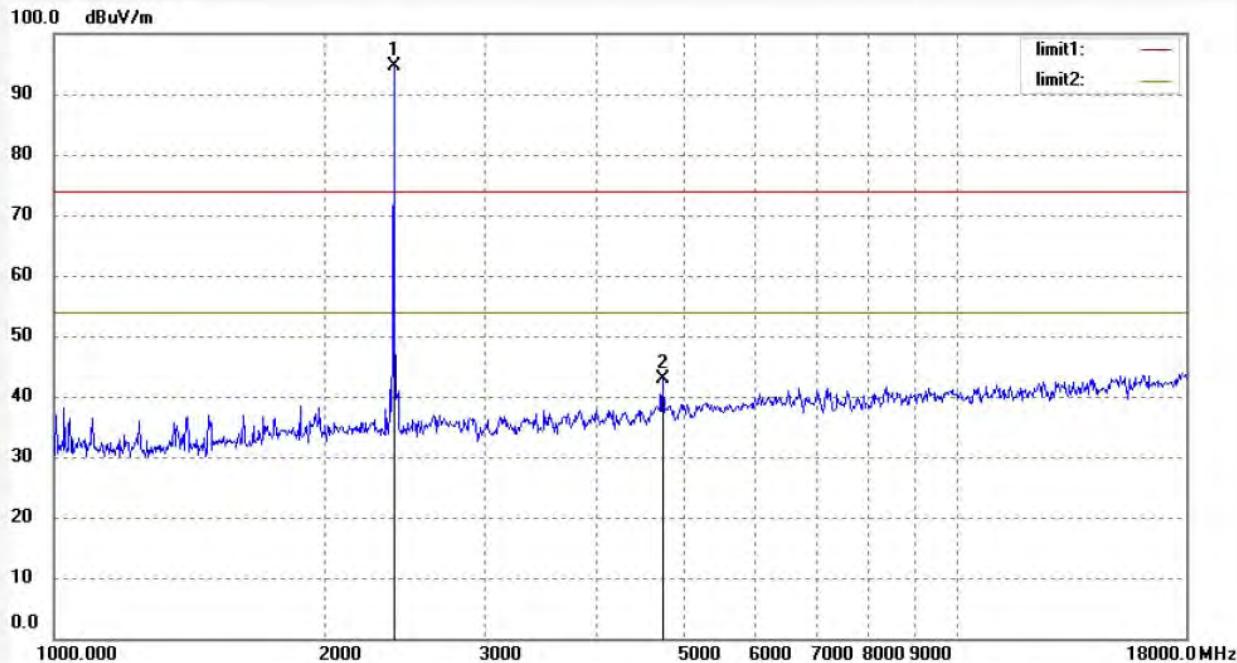

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.019	102.67	-8.03	94.64			peak	150	73	
2	4804.057	45.45	-2.53	42.92	74.00	-31.08	peak	150	148	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR2018 #33

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 3.7V

Test item: Radiation Test

Date: 18/03/13/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 11/09/45

EUT: Coors Light Bluetooth Speaker

Engineer Signature: star


Mode: TX 2441MHz(GFSK)

Distance: 3m

Model: 12168

Manufacturer: Zelin

Note: Report No.:ATE20180247

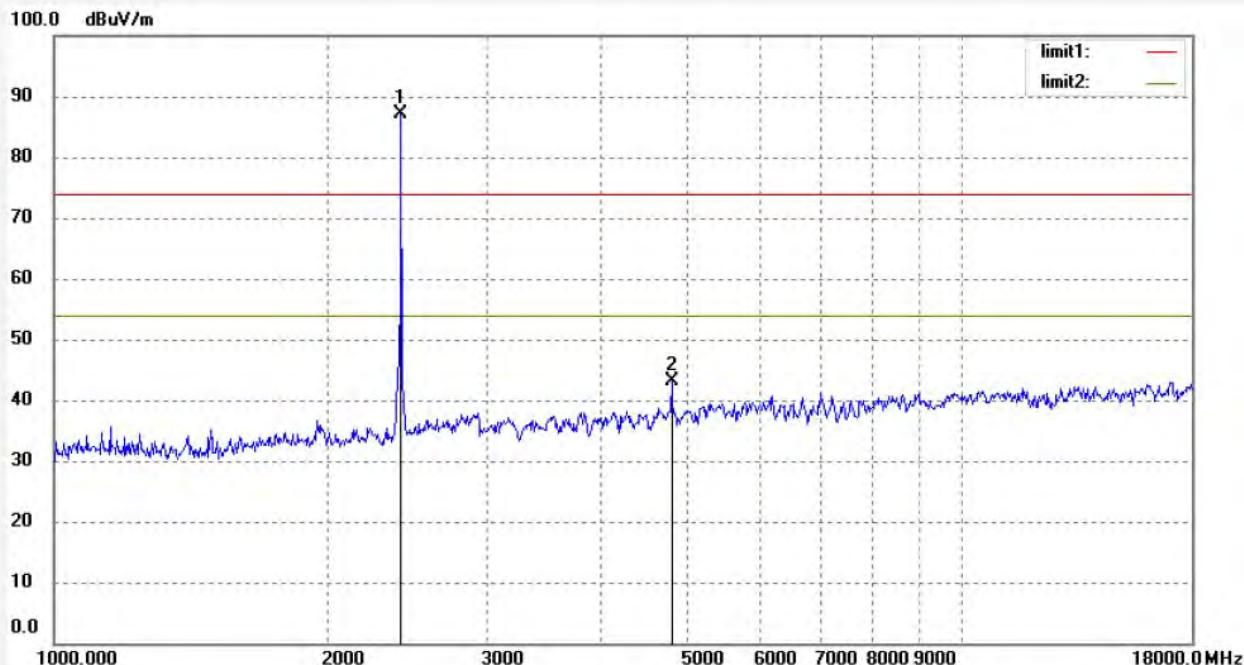

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.021	95.12	-7.93	87.19			peak	200	224	
2	4882.028	45.50	-2.30	43.20	74.00	-30.80	peak	200	146	



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.:	STAR2018 #34	Polarization:	Vertical
Standard:	FCC PK	Power Source:	DC 3.7V
Test item:	Radiation Test	Date:	18/03/13/
Temp.(C)/Hum.(%)	25 C / 55 %	Time:	11/11/05
EUT:	Coors Light Bluetooth Speaker	Engineer Signature:	star
Mode:	TX 2441MHz(GFSK)	Distance:	3m
Model:	12168		
Manufacturer:	Zelin		
Note:	Report No.:ATE20180247		

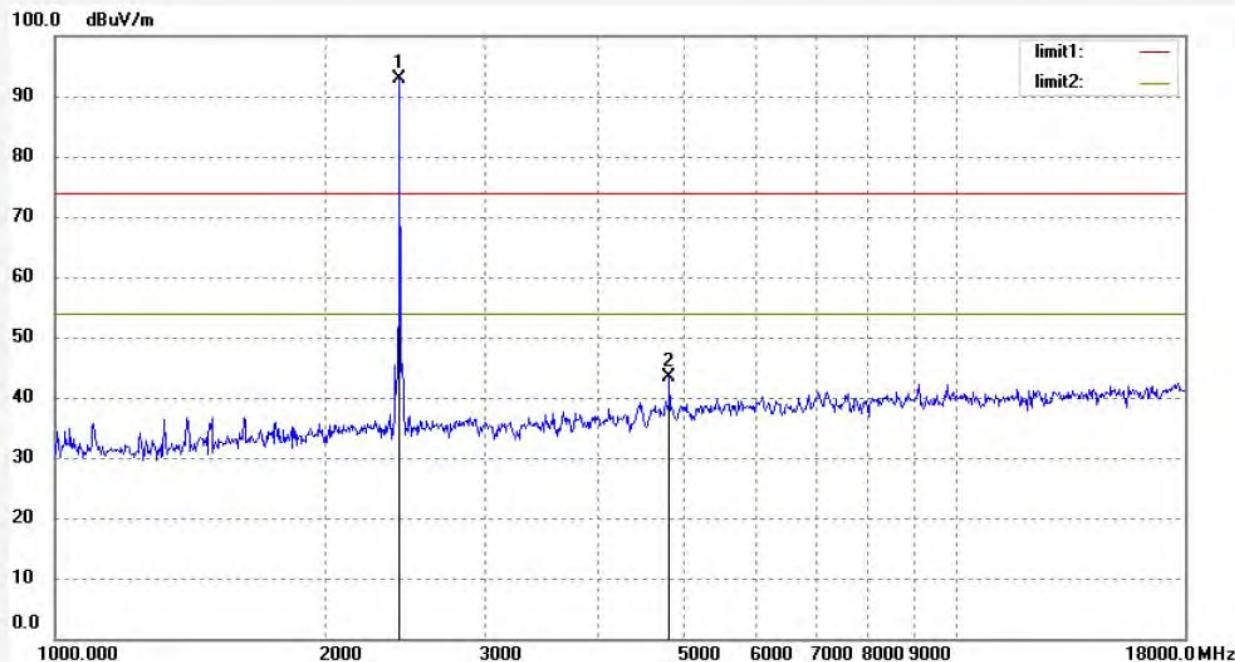

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.021	100.89	-7.93	92.96			peak	150	304	
2	4882.024	45.52	-2.25	43.27	74.00	-30.73	peak	150	274	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR2018 #36

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 3.7V

Test item: Radiation Test

Date: 18/03/13/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 11/14/34

EUT: Coors Light Bluetooth Speaker

Engineer Signature: star


Mode: TX 2480MHz(GFSK)

Distance: 3m

Model: 12168

Manufacturer: Zelin

Note: Report No.:ATE20180247

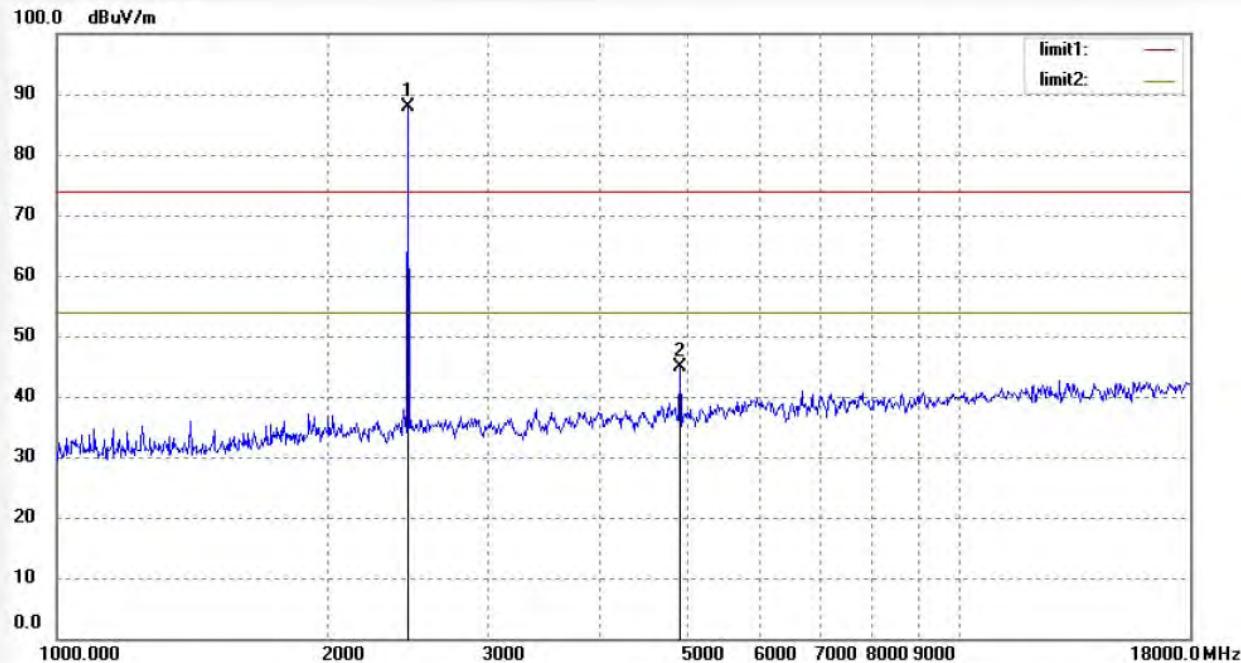

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.034	95.81	-7.84	87.97			peak	200	179	
2	4960.160	46.79	-1.97	44.82	74.00	-29.18	peak	200	266	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR2018 #35

Polarization: Vertical

Standard: FCC PK

Power Source: DC 3.7V

Test item: Radiation Test

Date: 18/03/13/

Temp. (C)/Hum.(%) 25 C / 55 %

Time: 11/13/08

EUT: Coors Light Bluetooth Speaker

Engineer Signature: star


Mode: TX 2480MHz(GFSK)

Distance: 3m

Model: 12168

Manufacturer: Zelin


Note: Report No.:ATE20180247

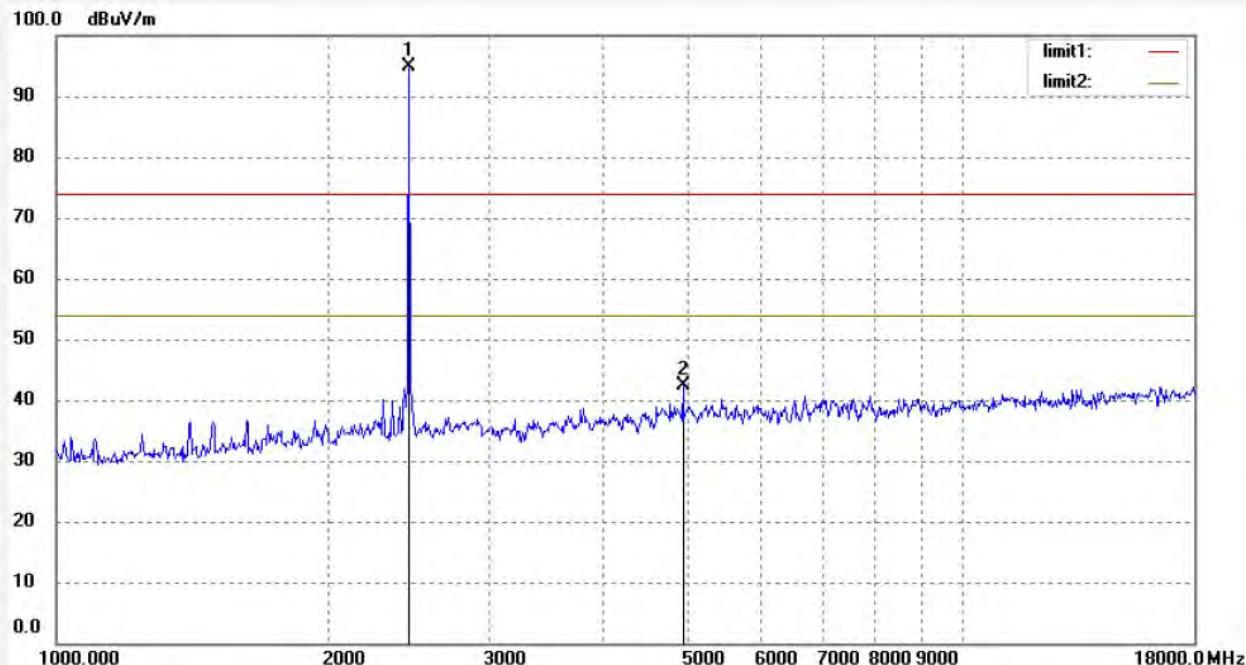

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.034	102.75	-7.84	94.91			peak	150	179	
2	4960.444	44.30	-1.92	42.38	74.00	-31.62	peak	150	83	

11.BAND EDGE COMPLIANCE TEST

11.1.Block Diagram of Test Setup



(EUT: Coors Light Bluetooth Speaker)

11.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

11.3.EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.4.Operating Condition of EUT

11.4.1.Setup the EUT and simulator as shown as Section 11.1.

11.4.2.Turn on the power of all equipment.

11.4.3.Let the EUT work in TX (Hopping off, Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

11.5. Test Procedure

- 11.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- 11.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz with convenient frequency span including 100 kHz bandwidth from band edge.
- 11.5.3. The band edges was measured and recorded.


11.6. Test Result

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
GFSK Mode		
2400.00	39.16	> 20dBc
2483.50	48.82	> 20dBc
$\Pi/4$ -DQPSK Mode		
2400.00	39.15	> 20dBc
2483.50	46.72	> 20dBc


Note: Both hopping-on mode and hopping-off mode had been pre-tested, and only the worst case was recorded in the test report.

The spectrum analyzer plots are attached as below.


GFSK Mode

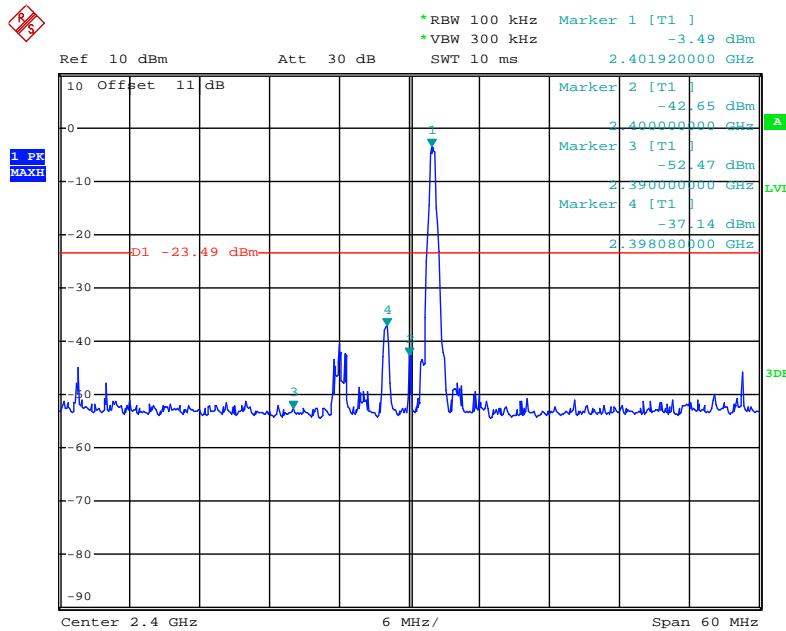


Date: 13.MAR.2018 10:28:25

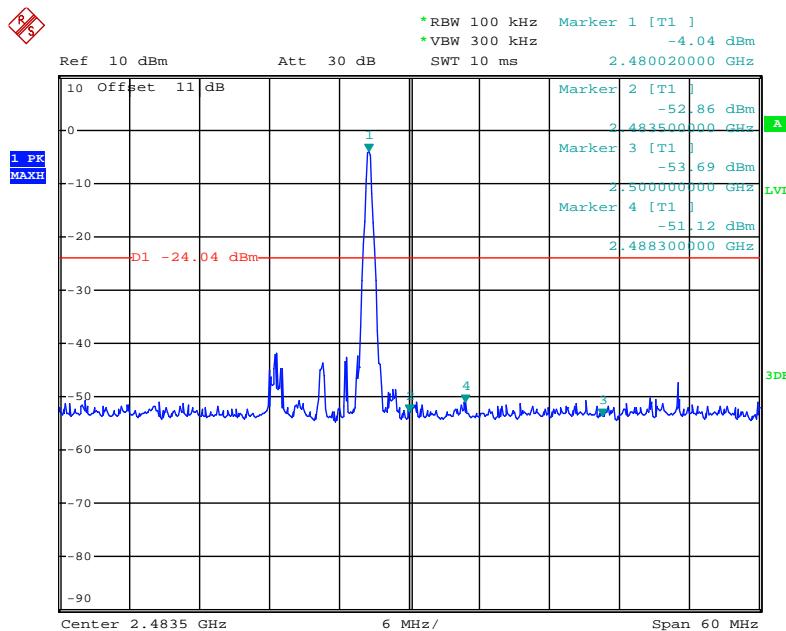

Date: 13.MAR.2018 10:29:41

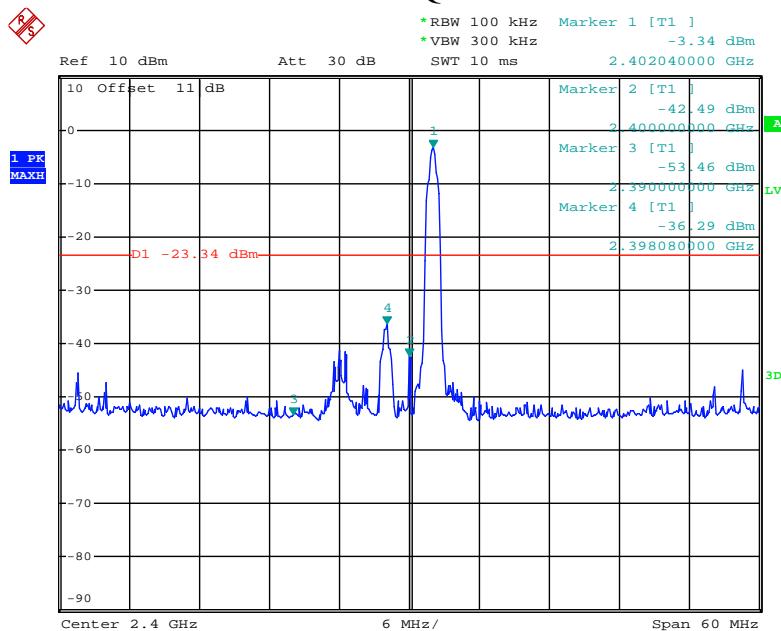$\Pi/4$ -DQPSK Mode

Date: 13.MAR.2018 10:31:51

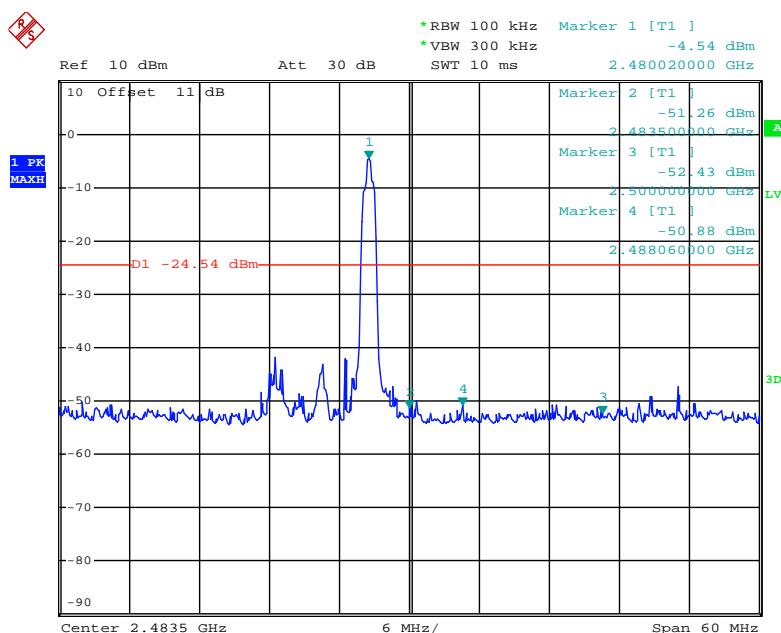

Date: 13.MAR.2018 10:30:35

Radiated Band Edge Result

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

3. Display the measurement of peak values.

Test Procedure:

The EUT and its simulators are placed on a turntable, which is 1.5 meter high above ground(Above 1GHz). The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI C63.10:2013 on radiated emission measurement. This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Let the EUT work in TX (Hopping off, Hopping on) modes measure it.

We select 2402MHz, 2480MHz TX frequency to transmit(Hopping off mode).

We select 2402-2480MHz TX frequency to transmit(Hopping on mode).

During the radiated emission test, the spectrum analyzer was set with the following configurations:

- 1.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz.
- 2.The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
- 3.All modes of operation were investigated and the worst-case(GFSK) emissions are reported.

The spectrum analyzer plots are attached as below.


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2018 #37

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 3.7V

Test item: Radiation Test

Date: 18/03/13/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 11/17/29

EUT: Coors Light Bluetooth Speaker

Engineer Signature: star


Mode: TX 2402MHz(GFSK)

Distance: 3m

Model: 12168

Manufacturer: Zelin

Note: Report No.:ATE20180247

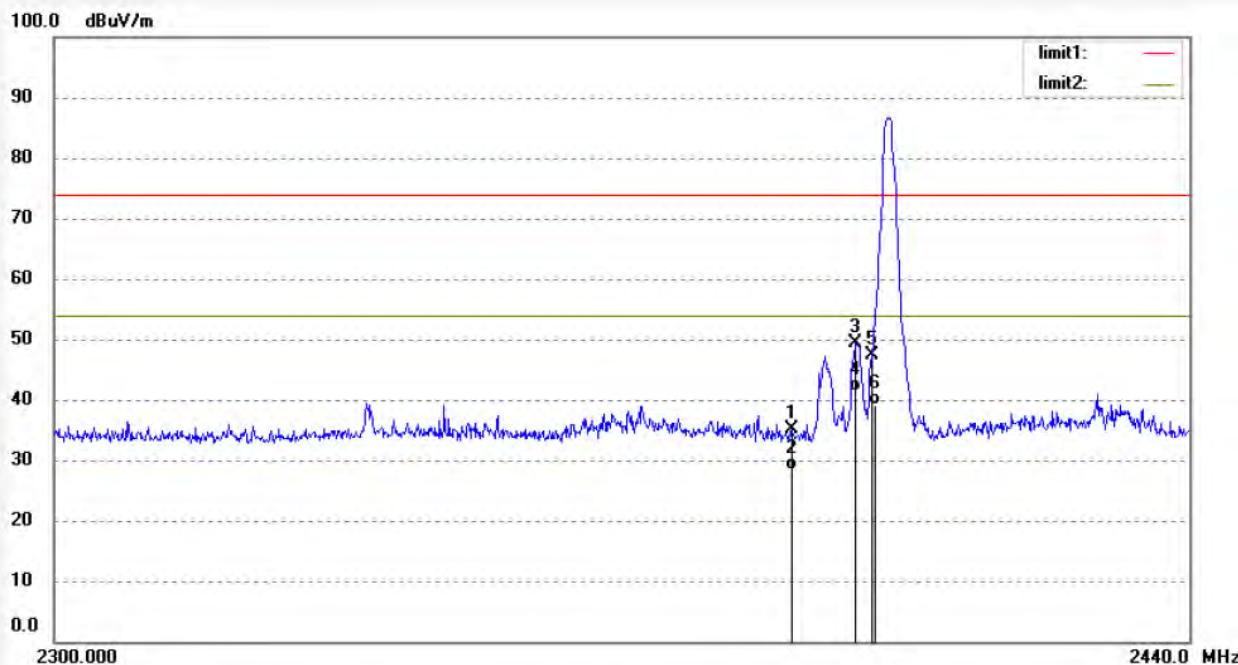

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	43.21	-8.00	35.21	74.00	-38.79	peak	200	144	
2	2390.000	36.42	-8.00	28.42	54.00	-25.58	AVG	200	139	
3	2398.037	57.48	-7.98	49.50	74.00	-24.50	peak	200	217	
4	2398.037	49.36	-7.98	41.38	54.00	-12.62	AVG	200	243	
5	2400.000	55.30	-7.97	47.33	74.00	-26.67	peak	200	285	
6	2400.000	47.04	-7.97	39.07	54.00	-14.93	AVG	200	277	

Note: Average measurement with peak detection at No.2&4




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.:	STAR2018 #38	Polarization:	Vertical
Standard:	FCC PK	Power Source:	DC 3.7V
Test item:	Radiation Test	Date:	18/03/13/
Temp.(C)/Hum.(%)	25 C / 55 %	Time:	11/18/48
EUT:	Coors Light Bluetooth Speaker	Engineer Signature:	star
Mode:	TX 2402MHz(GFSK)	Distance:	3m
Model:	12168		
Manufacturer:	Zelin		

Note: Report No.:ATE20180247

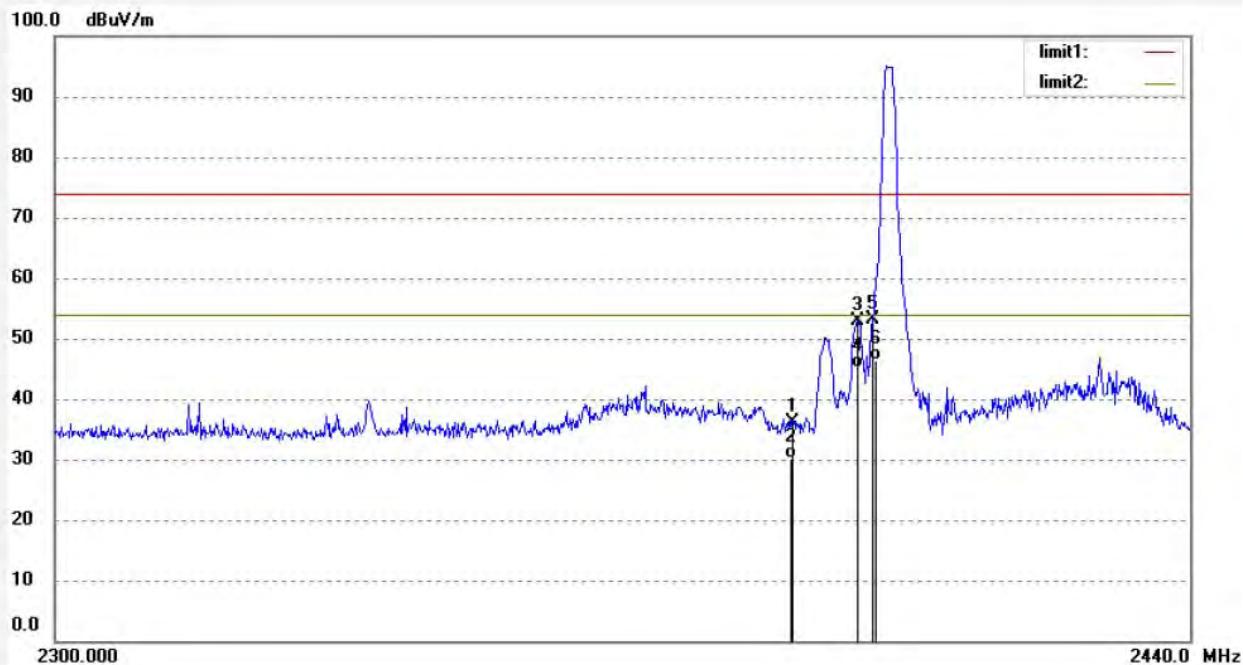

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	44.03	-8.00	36.03	74.00	-37.97	peak	150	111	
2	2390.000	38.25	-8.00	30.25	54.00	-23.75	AVG	150	320	
3	2398.178	60.74	-7.97	52.77	74.00	-21.23	peak	150	284	
4	2398.178	53.05	-7.97	45.08	54.00	-8.92	AVG	150	247	
5	2400.000	61.13	-7.97	53.16	74.00	-20.84	peak	150	108	
6	2400.000	54.36	-7.97	46.39	54.00	-7.61	AVG	150	136	

Note: Average measurement with peak detection at No.2&4



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2018 #40

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 3.7V

Test item: Radiation Test

Date: 18/03/13/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 11/22/13

EUT: Coors Light Bluetooth Speaker

Engineer Signature: star


Mode: TX 2480MHz(GFSK)

Distance: 3m

Model: 12168

Manufacturer: Zelin

Note: Report No.:ATE20180247

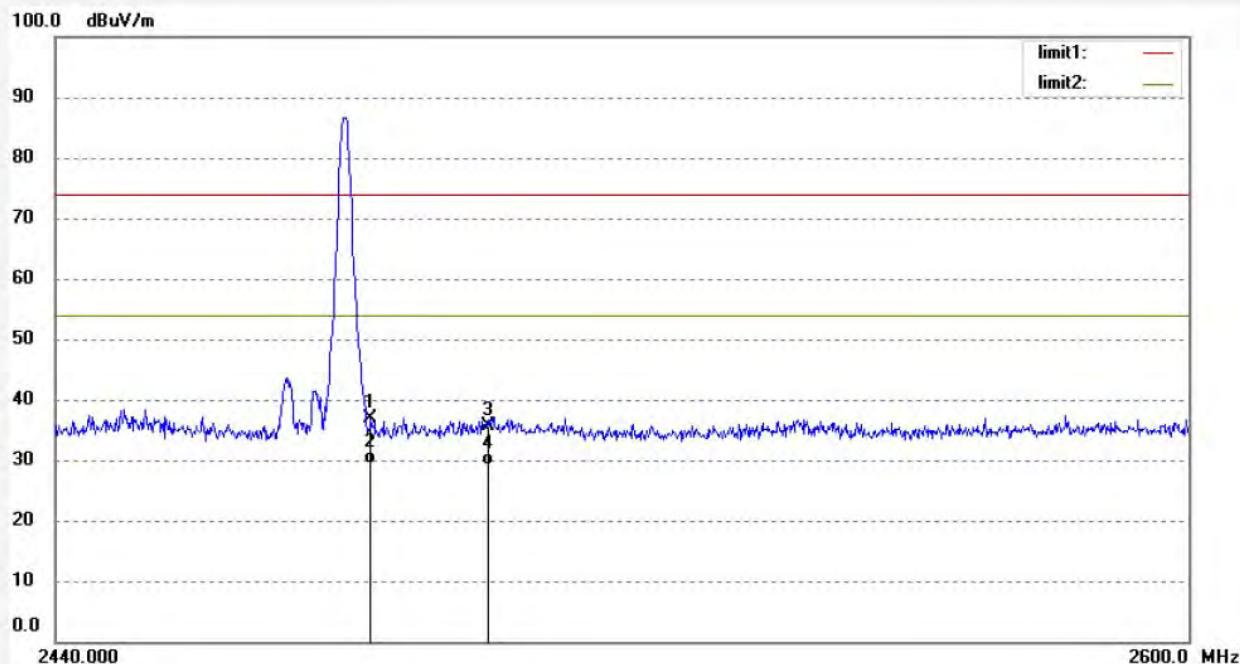

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	44.58	-7.76	36.82	74.00	-37.18	peak	200	189	
2	2483.500	37.03	-7.76	29.27	54.00	-24.73	AVG	200	92	
3	2500.000	43.31	-7.71	35.60	74.00	-38.40	peak	200	44	
4	2500.000	36.92	-7.71	29.21	54.00	-24.79	AVG	200	130	

Note: Average measurement with peak detection at No.2&4



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2018 #39

Polarization: Vertical

Standard: FCC PK

Power Source: DC 3.7V

Test item: Radiation Test

Date: 18/03/13/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 11/21/05

EUT: Coors Light Bluetooth Speaker

Engineer Signature: star


Mode: TX 2480MHz(GFSK)

Distance: 3m

Model: 12168

Manufacturer: Zelin

Note: Report No.:ATE20180247

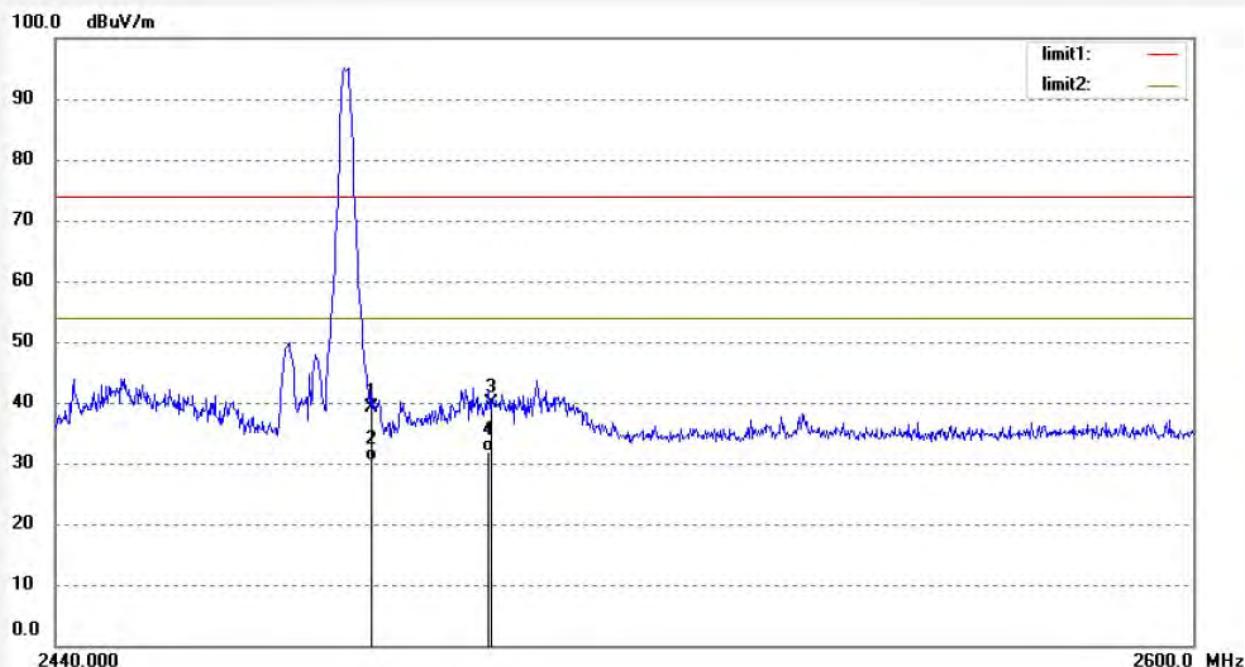

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	46.89	-7.76	39.13	74.00	-34.87	peak	150	239	
2	2483.500	38.22	-7.76	30.46	54.00	-23.54	AVG	150	211	
3	2500.000	47.49	-7.71	39.78	74.00	-34.22	peak	150	158	
4	2500.000	39.47	-7.71	31.76	54.00	-22.24	AVG	150	136	

Note: Average measurement with peak detection at No.2&4

Hopping mode



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: STAR2018 #45

Polarization: Horizontal

Standard: FCC PK

Power Source: DC 3.7V

Test item: Radiation Test

Date: 18/03/13/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 11/33/15

EUT: Coors Light Bluetooth Speaker

Engineer Signature: star


Mode: Hopping (GFSK)

Distance: 3m

Model: 12168

Manufacturer: Zelin

Note: Report No.:ATE20180247

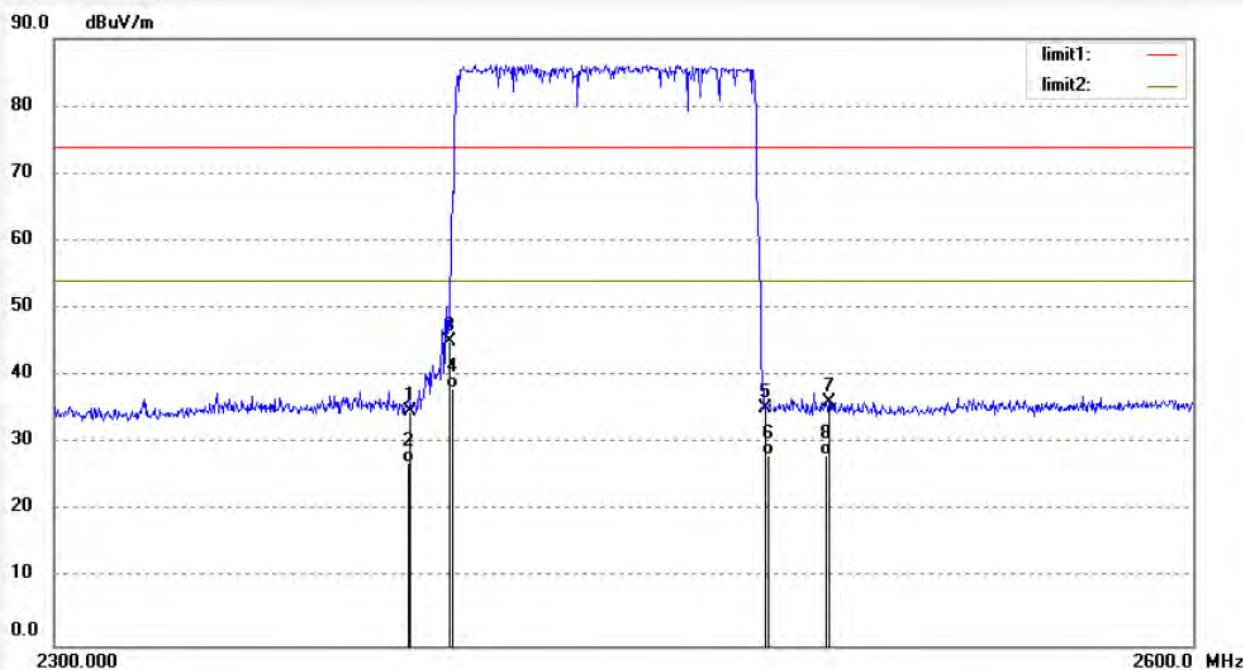

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	42.66	-8.00	34.66	74.00	-39.34	peak	200	196	
2	2390.000	35.16	-8.00	27.16	54.00	-26.84	AVG	200	236	
3	2400.000	53.13	-7.97	45.16	74.00	-28.84	peak	200	200	
4	2400.000	46.22	-7.97	38.25	54.00	-15.75	AVG	200	175	
5	2483.500	42.87	-7.76	35.11	74.00	-38.89	peak	200	236	
6	2483.500	35.90	-7.76	28.14	54.00	-25.86	AVG	200	314	
7	2500.000	43.90	-7.71	36.19	74.00	-37.81	peak	200	328	
8	2500.000	36.04	-7.71	28.33	54.00	-25.67	AVG	200	105	

Note: Average measurement with peak detection at No.2&4&6&8



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: STAR2018 #46

Polarization: Vertical

Standard: FCC PK

Power Source: DC 3.7V

Test item: Radiation Test

Date: 18/03/13/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 11/37/26

EUT: Coors Light Bluetooth Speaker

Engineer Signature: star


Mode: Hopping (GFSK)

Distance: 3m

Model: 12168

Manufacturer: Zelin

Note: Report No.:ATE20180247

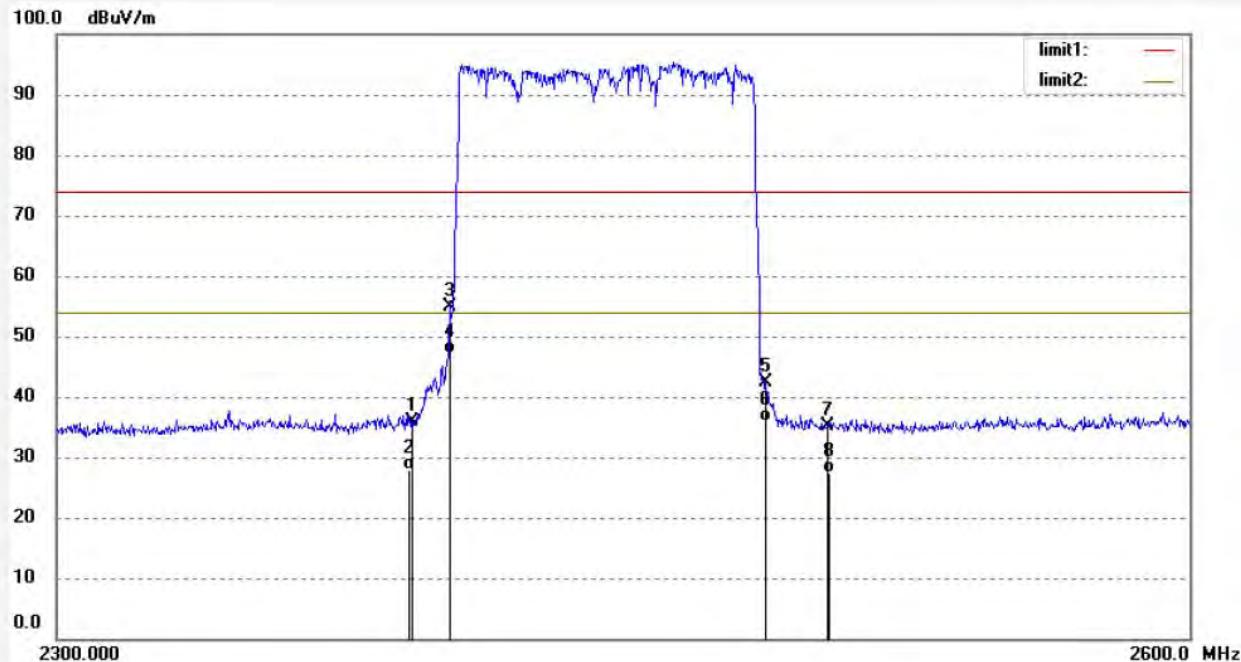

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2390.000	43.96	-8.00	35.96	74.00	-38.04	peak	150	179	
2	2390.000	35.90	-8.00	27.90	54.00	-26.10	AVG	150	254	
3	2400.000	62.97	-7.97	55.00	74.00	-19.00	peak	150	233	
4	2400.000	55.04	-7.97	47.07	54.00	-6.93	AVG	150	84	
5	2483.500	50.19	-7.76	42.43	74.00	-31.57	peak	150	136	
6	2483.500	43.69	-7.76	35.93	54.00	-18.07	AVG	150	102	
7	2500.000	42.91	-7.71	35.20	74.00	-38.80	peak	150	55	
8	2500.000	35.13	-7.71	27.42	54.00	-26.58	AVG	150	178	


Note: Average measurement with peak detection at No.2&4&6&8

12.AC POWER LINE CONDUCTED EMISSION FOR FCC PART

15 SECTION 15.207(A)


12.1.Block Diagram of Test Setup

12.1.1.Block diagram of connection between the EUT and simulators

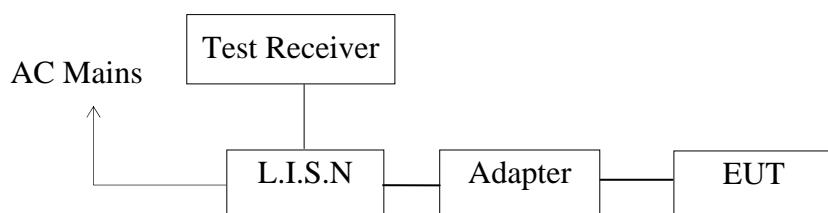

(EUT: Coors Light Bluetooth Speaker)

12.1.2.Test System Setup

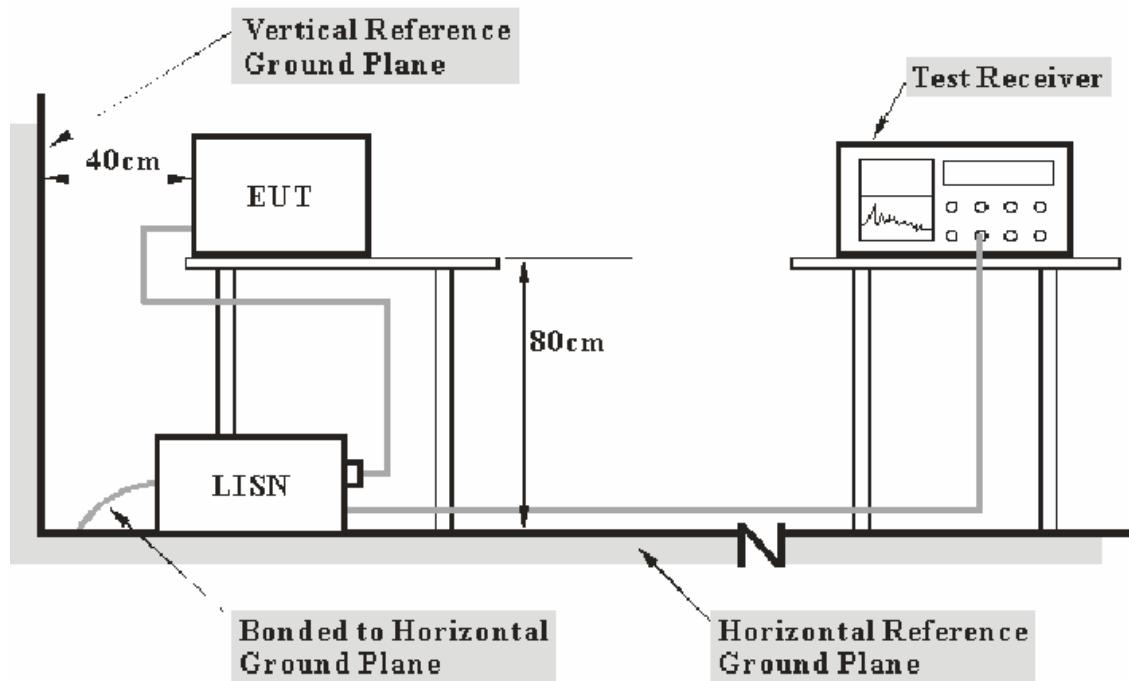

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

12.2. Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.

NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

12.3. Configuration of EUT on Measurement

The equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

12.4. Operating Condition of EUT

12.4.1. Setup the EUT and simulator as shown as Section 12.1.

12.4.2. Turn on the power of all equipment.

12.4.3. Let the EUT work in test mode and measure it.

12.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

12.6.Data Sample

Frequency (MHz)	Transducer value (dB)	QuasiPeak Level (dB μ V)	Average Level (dB μ V)	QuasiPeak Limit (dB μ V)	Average Limit (dB μ V)	QuasiPeak Margin (dB)	Average Margin (dB)	Remark (Pass/Fail)
X.XX	10.6	25.3	17.0	59.0	49.0	33.4	31.7	Pass

Frequency(MHz) = Emission frequency in MHz

Transducer value(dB) = Insertion loss of LISN + Cable Loss

Level(dB μ V) = Quasi-peak Reading/Average Reading + Transducer value

Limit (dB μ V) = Limit stated in standard

Margin = Limit (dB μ V) - Level (dB μ V)

Calculation Formula:

Margin = Limit (dB μ V) - Level (dB μ V)

12.7.Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Maximizing procedure was performed on the six (6) highest emissions of the EUT. Emissions attenuated more than 20 dB below the permissible value are not reported.

All data was recorded in the Quasi-peak and average detection mode.

The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Coors Light Bluetooth Speaker M/N:12168
 Manufacturer: Zelin
 Operating Condition: BT Communicanion
 Test Site: 1#Shielding Room
 Operator: star
 Test Specification: N 240V/60Hz
 Comment: Report No.:ATE20180247
 Start of Test: 3/1/2018 / 4:59:07PM

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
 Average
 150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

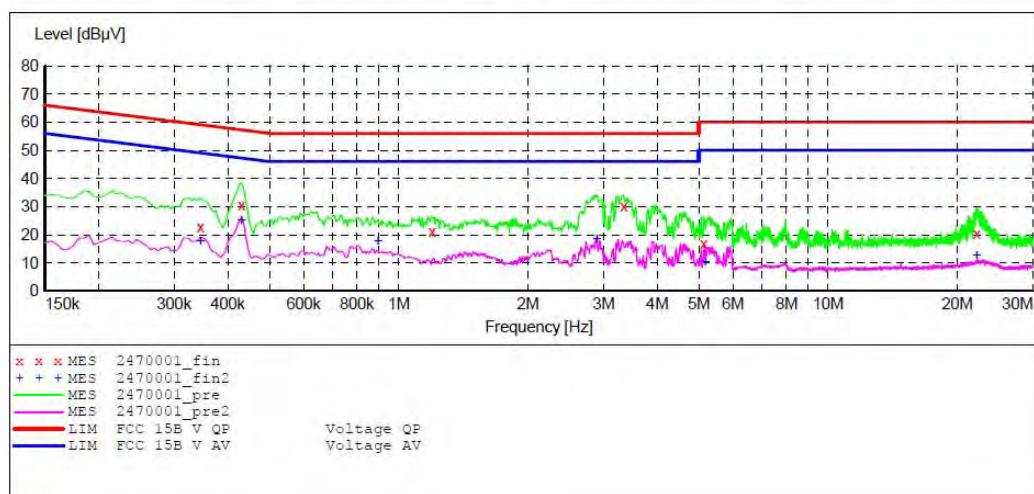

MEASUREMENT RESULT: "2470001_fin"

3/1/2018 5:00PM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.345000	22.70	10.6	59	36.4	QP	N	GND
	0.430000	30.40	10.7	57	26.9	QP	N	GND
	1.195000	21.10	10.9	56	34.9	QP	N	GND
	3.340000	30.00	11.1	56	26.0	QP	N	GND
	5.130000	16.80	11.2	60	43.2	QP	N	GND
	22.165000	20.30	11.4	60	39.7	QP	N	GND

MEASUREMENT RESULT: "2470001_fin2"

3/1/2018 5:00PM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.345000	17.70	10.6	49	31.4	AV	N	GND
	0.430000	25.10	10.7	47	22.2	AV	N	GND
	0.895000	17.80	10.8	46	28.2	AV	N	GND
	2.890000	18.40	11.0	46	27.6	AV	N	GND
	5.170000	10.30	11.2	50	39.7	AV	N	GND
	22.180000	12.70	11.4	50	37.3	AV	N	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Coors Light Bluetooth Speaker M/N:12168
 Manufacturer: Zelin
 Operating Condition: BT Communicanion
 Test Site: 1#Shielding Room
 Operator: star
 Test Specification: L 240V/60Hz
 Comment: Report No.:ATE20180247
 Start of Test: 3/1/2018 / 5:01:05PM

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
 Average
 150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

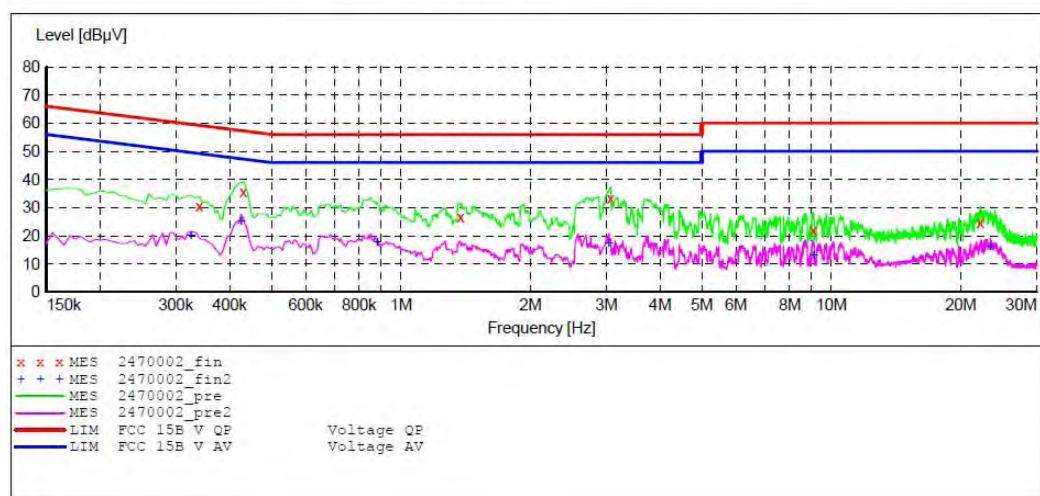

MEASUREMENT RESULT: "2470002_fin"

3/1/2018 5:07PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.340000	30.60	10.6	59	28.6	QP	L1	GND
0.430000	35.40	10.7	57	21.9	QP	L1	GND
1.375000	26.50	10.9	56	29.5	QP	L1	GND
3.070000	33.10	11.1	56	22.9	QP	L1	GND
9.080000	21.90	11.3	60	38.1	QP	L1	GND
22.150000	24.70	11.4	60	35.3	QP	L1	GND

MEASUREMENT RESULT: "2470002_fin2"

3/1/2018 5:07PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.325000	20.00	10.6	50	29.6	AV	L1	GND
0.425000	25.10	10.7	47	22.2	AV	L1	GND
0.880000	17.70	10.8	46	28.3	AV	L1	GND
3.040000	17.10	11.1	46	28.9	AV	L1	GND
9.110000	13.00	11.3	50	37.0	AV	L1	GND
23.425000	16.00	11.5	50	34.0	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Coors Light Bluetooth Speaker M/N:12168
 Manufacturer: Zelin
 Operating Condition: BT Communicanion
 Test Site: 1#Shielding Room
 Operator: star
 Test Specification: L 120V/60Hz
 Comment: Report No.:ATE20180247
 Start of Test: 3/1/2018 / 5:08:07PM

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
 Average
 150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

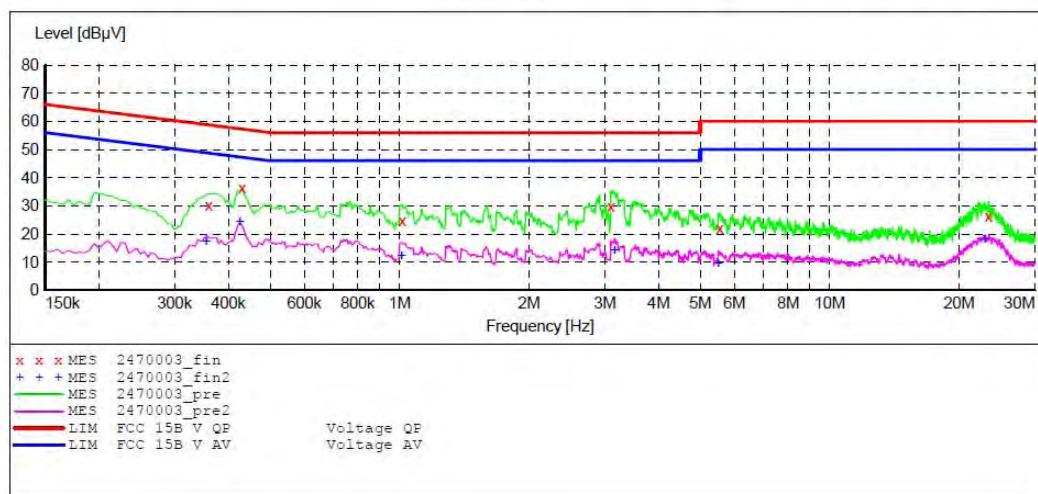

MEASUREMENT RESULT: "2470003_fin"

3/1/2018 5:11PM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.360000	30.10	10.6	59	28.6	QP	L1	GND
	0.430000	36.40	10.7	57	20.9	QP	L1	GND
	1.015000	24.50	10.8	56	31.5	QP	L1	GND
	3.100000	29.70	11.1	56	26.3	QP	L1	GND
	5.550000	21.90	11.2	60	38.1	QP	L1	GND
	23.380000	26.30	11.5	60	33.7	QP	L1	GND

MEASUREMENT RESULT: "2470003_fin2"

3/1/2018 5:11PM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.355000	17.40	10.6	49	31.4	AV	L1	GND
	0.425000	24.40	10.7	47	22.9	AV	L1	GND
	1.010000	12.00	10.8	46	34.0	AV	L1	GND
	3.160000	14.20	11.1	46	31.8	AV	L1	GND
	5.510000	9.60	11.2	50	40.4	AV	L1	GND
	22.960000	18.10	11.4	50	31.9	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15B

EUT: Coors Light Bluetooth Speaker M/N:12168
 Manufacturer: Zelin
 Operating Condition: BT Communicanion
 Test Site: 1#Shielding Room
 Operator: star
 Test Specification: N 120V/60Hz
 Comment: Report No.:ATE20180247
 Start of Test: 3/1/2018 / 5:12:29PM

SCAN TABLE: "V 9K-30MHz fin"

Short Description: -SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
 Average
 150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

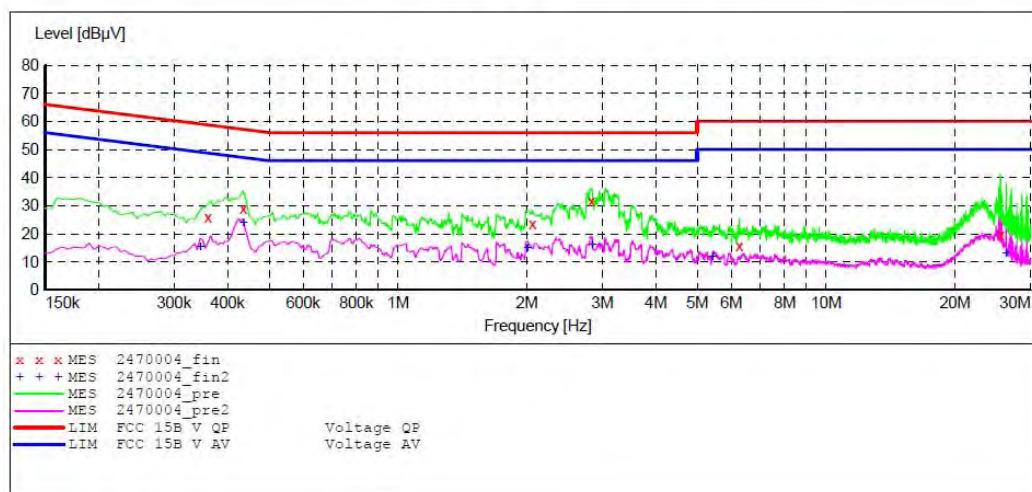

MEASUREMENT RESULT: "2470004_fin"

3/1/2018 5:16PM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.360000	25.60	10.6	59	33.1	QP	N	GND
	0.435000	29.10	10.7	57	28.1	QP	N	GND
	2.060000	23.40	11.0	56	32.6	QP	N	GND
	2.830000	31.50	11.0	56	24.5	QP	N	GND
	6.260000	15.70	11.2	60	44.3	QP	N	GND
	25.525000	19.50	11.5	60	40.5	QP	N	GND

MEASUREMENT RESULT: "2470004_fin2"

3/1/2018 5:16PM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	0.345000	15.30	10.6	49	33.8	AV	N	GND
	0.435000	23.90	10.7	47	23.3	AV	N	GND
	2.010000	14.80	11.0	46	31.2	AV	N	GND
	2.840000	16.20	11.0	46	29.8	AV	N	GND
	5.440000	11.90	11.2	50	38.1	AV	N	GND
	26.305000	12.90	11.5	50	37.1	AV	N	GND


13. ANTENNA REQUIREMENT

13.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

13.2. Antenna Construction

Device is equipped with permanent attached antenna, which isn't displaced by other antenna. The Max Antenna gain of EUT is -0.65dBi. Therefore, the equipment complies with the antenna requirement of Section 15.203.

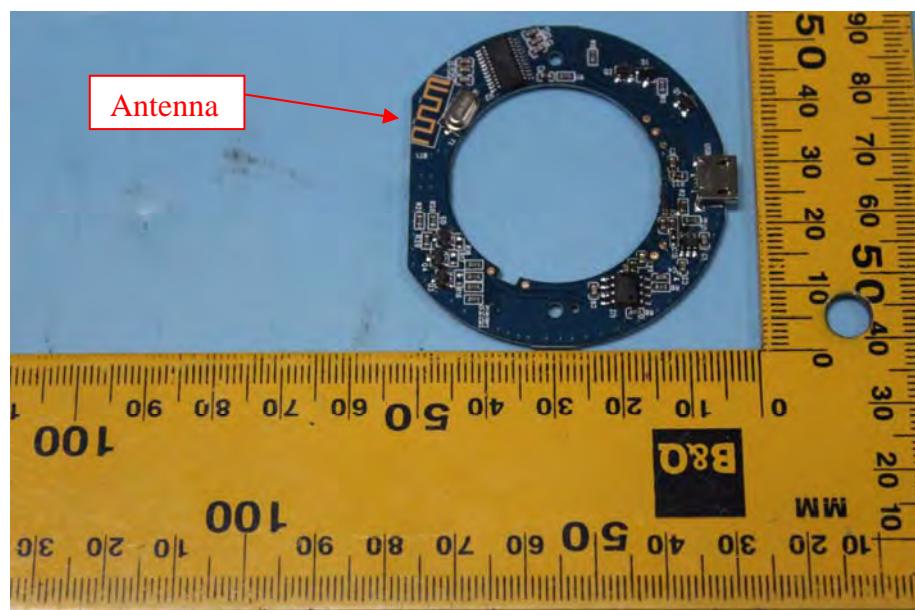

***** End of Test Report *****