



FCC RADIO TEST REPORT

FCC ID : 2AOAG-3668
Equipment : Digital Media Receiver
Model Name : D9N29T
Applicant : Moxham L.L.C.
1320 Main Street Suite 300 Columbia, South Carolina, 29201
Standard : FCC Part 15 Subpart C §15.247

The testing was completed on Jul. 05, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Reviewed by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT	5
1.4 Testing Location	6
1.5 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Descriptions of Test Mode.....	8
2.3 Test Mode.....	9
2.4 Connection Diagram of Test System.....	10
2.5 Support Unit used in test configuration and system	11
2.6 EUT Operation Test Setup	11
2.7 Measurement Results Explanation Example.....	12
3 Test Result.....	13
3.1 Number of Channel Measurement	13
3.2 Hopping Channel Separation Measurement	16
3.3 Dwell Time Measurement.....	27
3.4 20dB and 99% Bandwidth Measurement	30
3.5 Output Power Measurement.....	49
3.6 Conducted Band Edges Measurement.....	50
3.7 Conducted Spurious Emission Measurement	63
3.8 Radiated Band Edges and Spurious Emission Measurement	82
3.9 AC Conducted Emission Measurement.....	86
3.10 Antenna Requirements.....	88
4 List of Measuring Equipment	89
5 Uncertainty of Evaluation.....	91
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	



History of this test report

Report No.	Version	Description	Issued Date
FR831509-01A	01	Initial issue of report	Jul. 13, 2018



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)
3.1	15.247(a)(1)	Number of Channels	Pass
3.2	15.247(a)(1)	Hopping Channel Separation	Pass
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass
3.4	15.247(a)(1)	20dB Bandwidth	Pass
3.4	2.1049	99% Occupied Bandwidth	Reporting only
3.5	15.247(b)(1)	Peak Output Power	Pass
3.6	15.247(d)	Conducted Band Edges	Pass
3.7	15.247(d)	Conducted Spurious Emission	Pass
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass
3.9	15.207	AC Conducted Emission	Pass
3.10	15.203 & 15.247(b)	Antenna Requirement	Pass

Reviewed by: Joseph Lin

Report Producer: Yuping Lin

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Digital Media Receiver
Model Name	D9N29T
FCC ID	2AOAG-3668
EUT supports Radios application	WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE

1.2 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	<Ant. 1>: Bluetooth BR(1Mbps) : 5.97 dBm (0.0040 W) Bluetooth EDR (2Mbps) : 8.28 dBm (0.0067 W) Bluetooth EDR (3Mbps) : 8.67 dBm (0.0074 W) <Ant. 2>: Bluetooth BR(1Mbps) : 6.57 dBm (0.0045 W) Bluetooth EDR (2Mbps) : 8.86 dBm (0.0077 W) Bluetooth EDR (3Mbps) : 9.19 dBm (0.0083 W)
99% Occupied Bandwidth	<Ant. 1>: Bluetooth BR(1Mbps) : 0.832MHz Bluetooth EDR (2Mbps) : 1.164MHz Bluetooth EDR (3Mbps) : 1.164MHz <Ant. 2>: Bluetooth BR(1Mbps) : 0.832MHz Bluetooth EDR (2Mbps) : 1.164MHz Bluetooth EDR (3Mbps) : 1.160MHz
Antenna Type / Gain	<Ant. 1>: Fixed Internal Antenna type with gain 3.30 dBi <Ant. 2>: Fixed Internal Antenna type with gain 3.30 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

1.3 Modification of EUT

No modifications are made to the EUT during all test items.



1.4 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		
	TH05-HY	CO05-HY	03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-

2.2 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

<Ant. 1>

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	4.65 dBm	6.85 dBm	7.22 dBm
Ch39	2441MHz	5.40 dBm	7.65 dBm	8.06 dBm
Ch78	2480MHz	5.97 dBm	8.28 dBm	8.67 dBm

<Ant. 2>

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	6.18 dBm	8.44 dBm	8.88 dBm
Ch39	2441MHz	6.49 dBm	8.86 dBm	9.19 dBm
Ch78	2480MHz	6.57 dBm	8.78 dBm	9.13 dBm

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
 2. The data rate was set in 3Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). and the worst mode of radiated spurious emissions is Bluetooth 3Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.


2.3 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK		
	Mode 1: CH00_2402 MHz		
	Mode 2: CH39_2441 MHz		
	Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 :WLAN (2.4GHz) Link + Play News + Charging from Adapter		
	Mode 2 :Bluetooth Link + Play MP3 + Charging from Adapter		
Remark:			
1. For radiated test cases, the worst mode data rate 3Mbps was reported only since the highest RF output power in the preliminary tests. The conducted spurious emissions and conducted band edge measurement for other data rates were not worse than 3Mbps, and no other significantly frequencies found in conducted spurious emission.			
2. The worst case of conducted emission is mode 2; only the test data of it was reported.			


2.4 Connection Diagram of Test System

<Bluetooth Tx Mode>

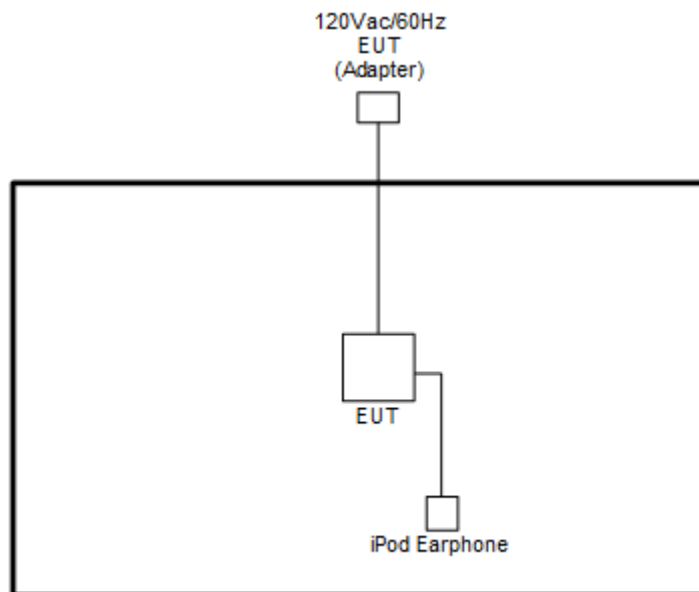

<AC Conducted Emission Mode for Notebook Playing News>

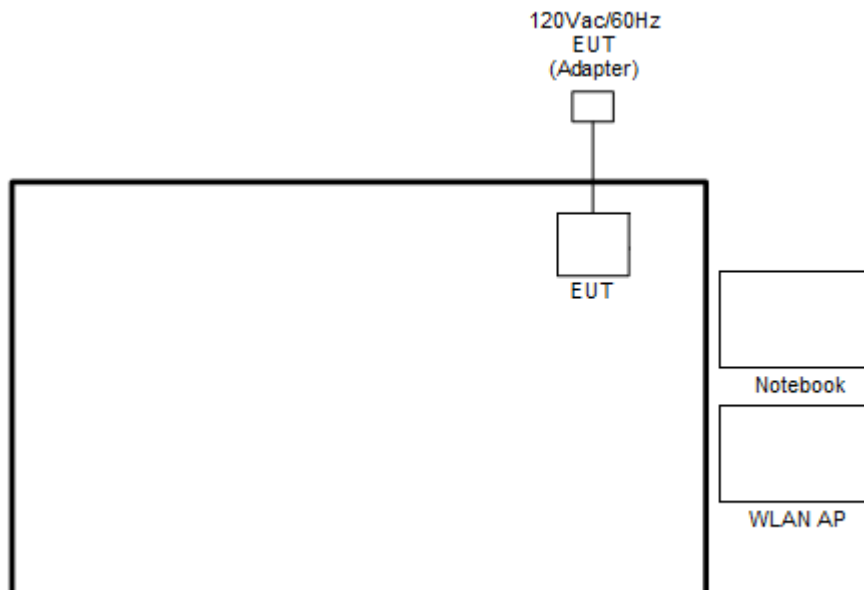
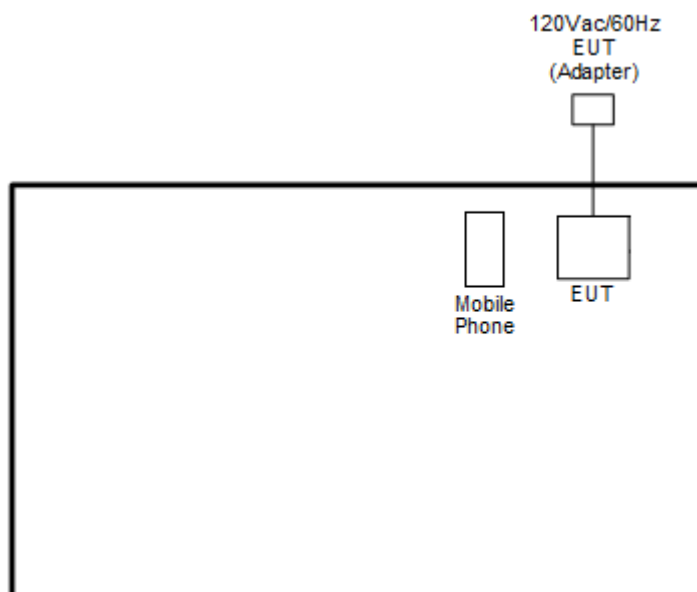
<AC Conducted Emission Mode for Mobile Phone Playing MP3>

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
2.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Smart Phone	Acer	Z530	HLZDMZ530	N/A	N/A
4.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

2.6 EUT Operation Test Setup

The RF test items, utility “Tool” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
RBW = 300kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

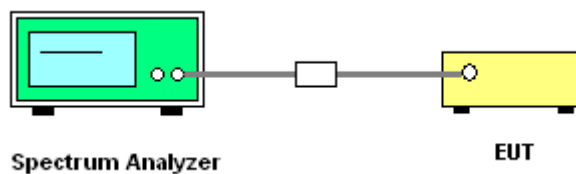




3.1.5 Test Result of Number of Hopping Frequency


Please refer to Appendix A.

<Ant. 1>

Number of Hopping Channel Plot on Channel 00 - 78

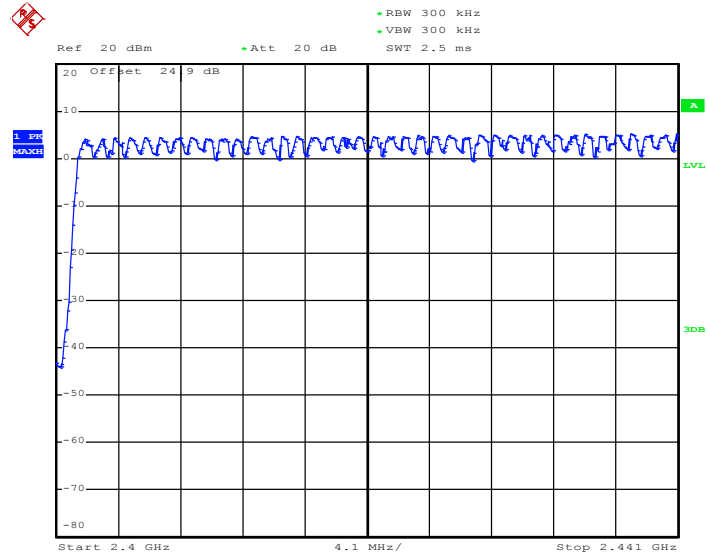


Date: 25.JUN.2018 23:44:33

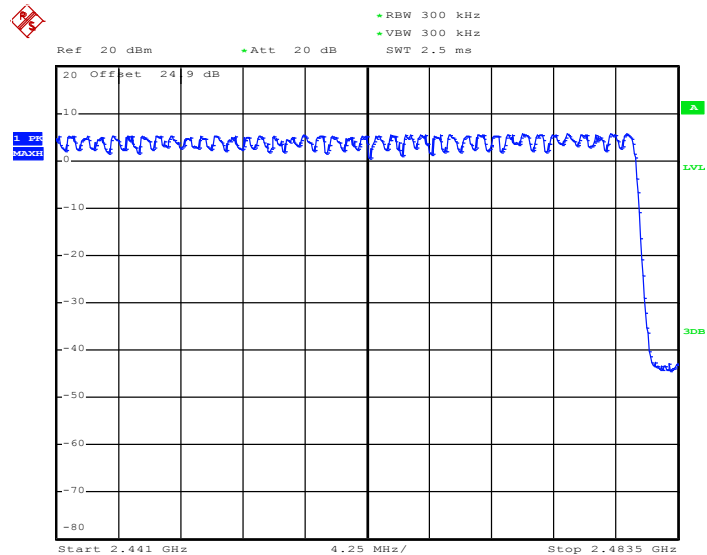


Date: 25.JUN.2018 23:46:47

<Ant. 2>

Number of Hopping Channel Plot on Channel 00 - 78

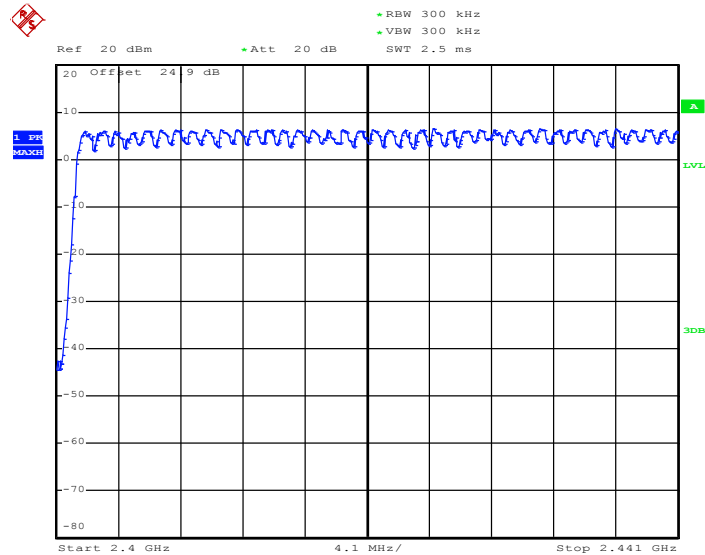

Date: 26.JUN.2018 02:09:47

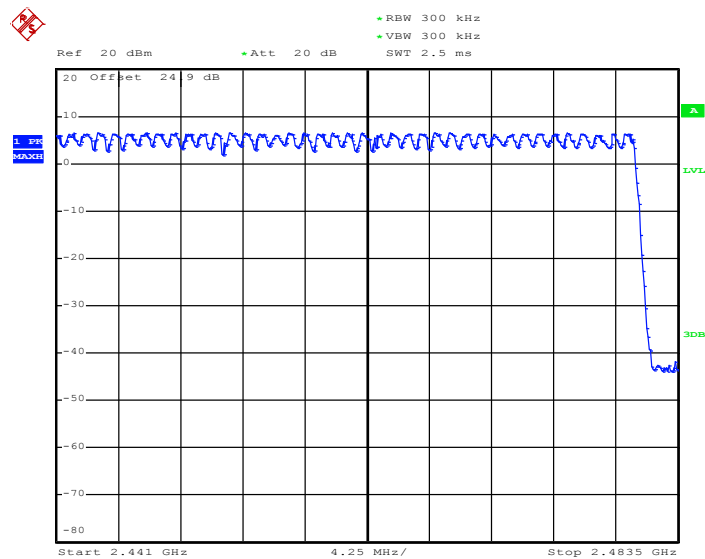

Date: 26.JUN.2018 02:12:51

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

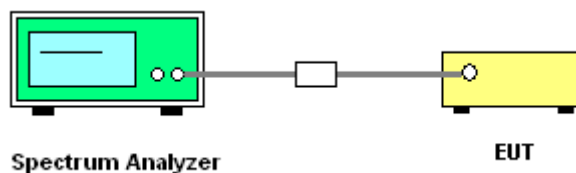

3.2.5 Test Result of Hopping Channel Separation


Please refer to Appendix A.



<Ant. 1>


<1Mbps>

Channel Separation Plot on Channel 00 - 01

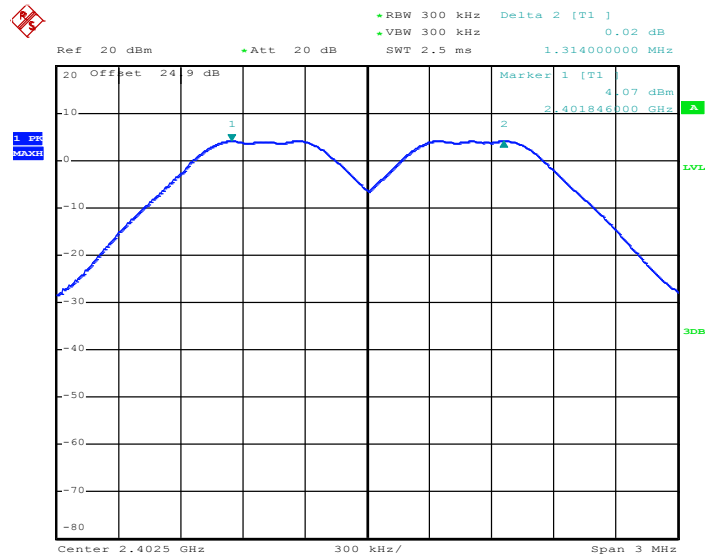

Date: 26.JUN.2018 00:05:53


Channel Separation Plot on Channel 39 - 40

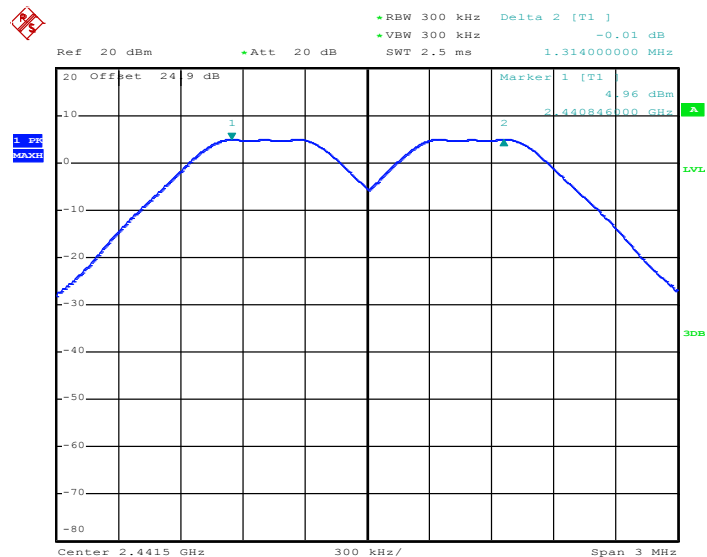

Date: 26.JUN.2018 00:07:07




Channel Separation Plot on Channel 77 - 78

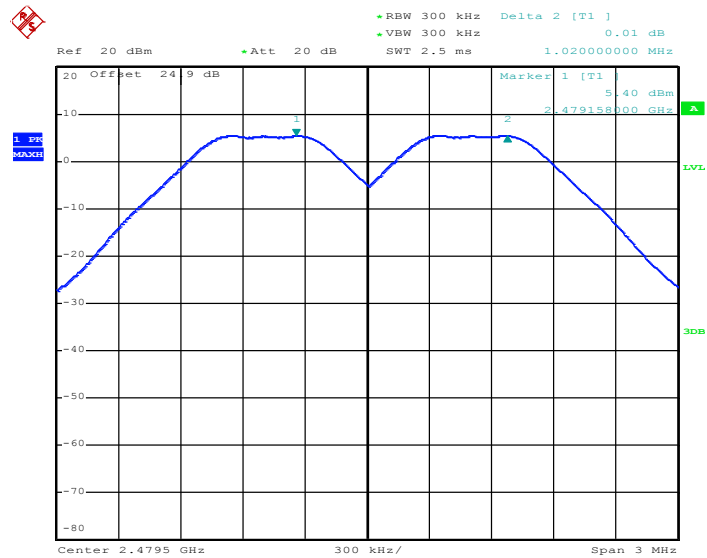

Date: 26.JUN.2018 00:08:59

<2Mbps>


Channel Separation Plot on Channel 00 - 01

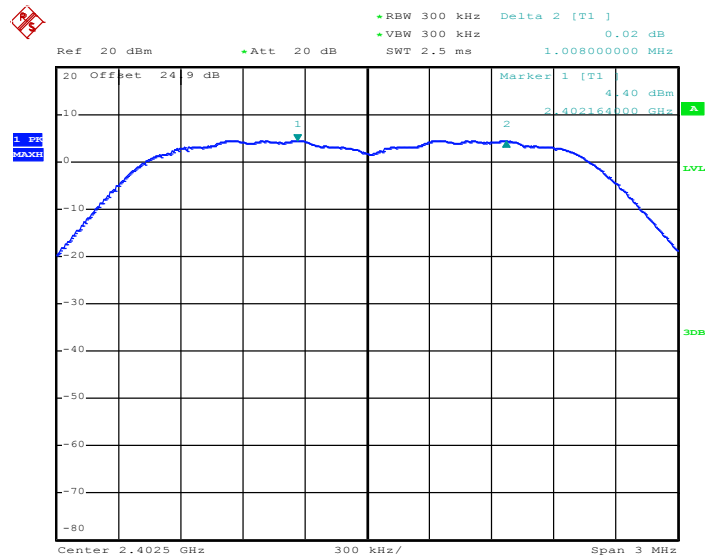

Date: 26.JUN.2018 00:10:54




Channel Separation Plot on Channel 39 - 40

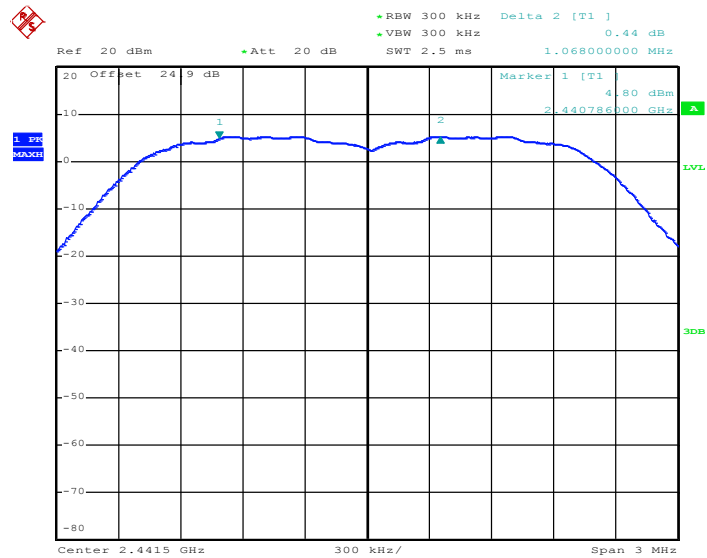

Date: 26.JUN.2018 00:12:06

Channel Separation Plot on Channel 77 - 78

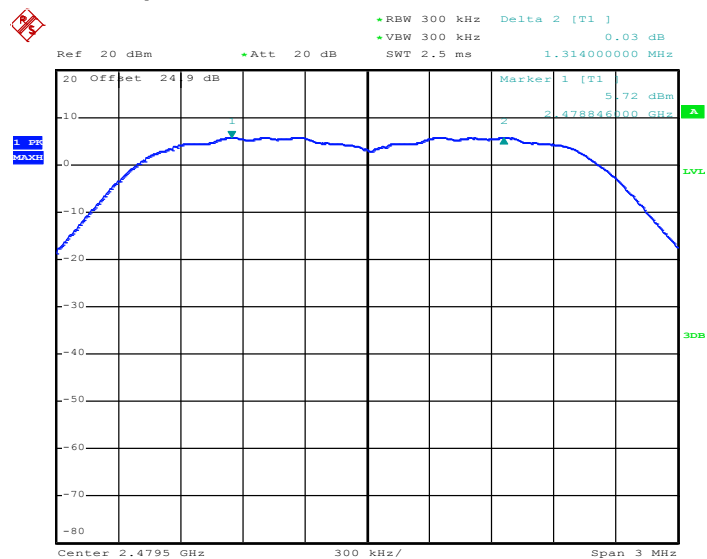


Date: 26.JUN.2018 00:14:04




<3Mbps>

Channel Separation Plot on Channel 00 - 01

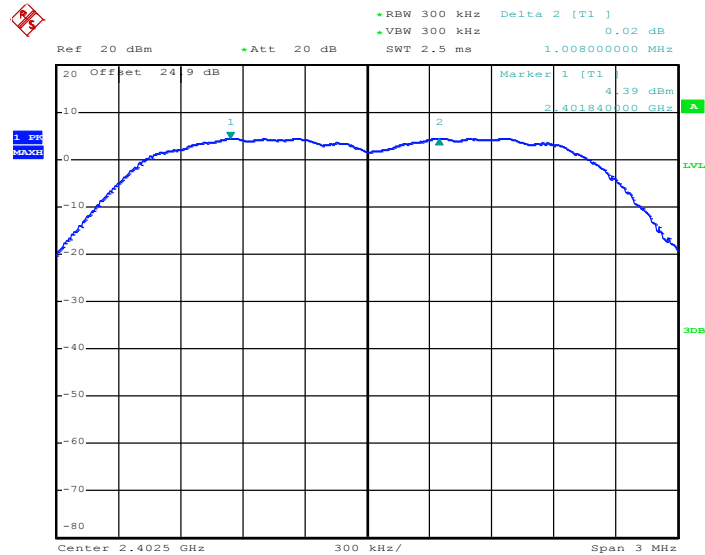

Date: 26.JUN.2018 00:15:52


Channel Separation Plot on Channel 39 - 40

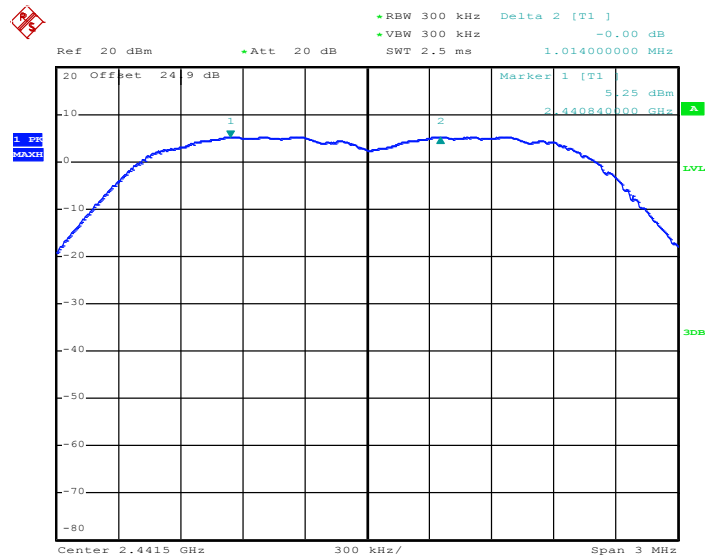

Date: 26.JUN.2018 00:16:57



Channel Separation Plot on Channel 77 - 78

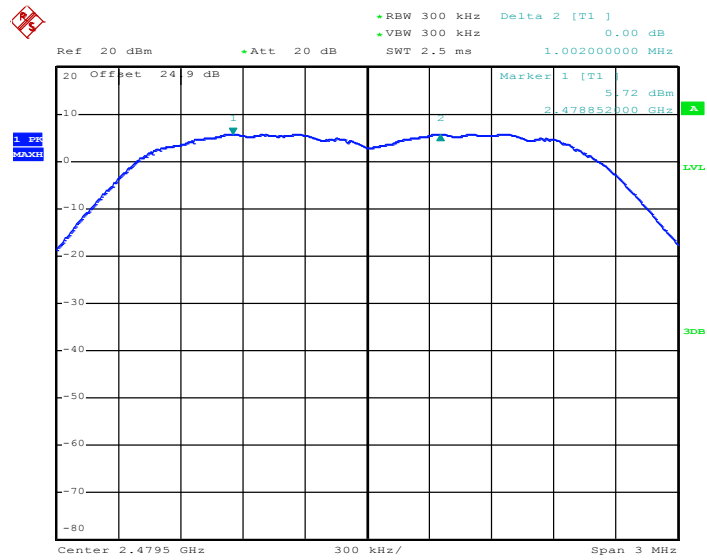


Date: 26.JUN.2018 00:17:54



<Ant. 2>


<1Mbps>

Channel Separation Plot on Channel 00 - 01

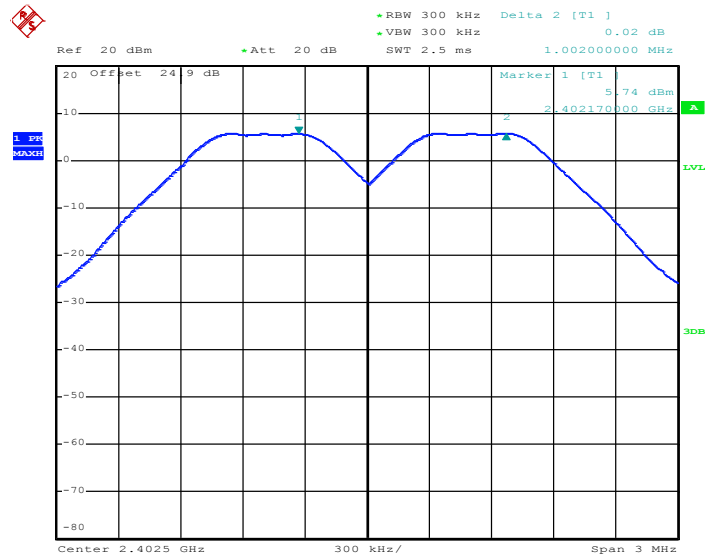

Date: 26.JUN.2018 02:35:09


Channel Separation Plot on Channel 39 - 40

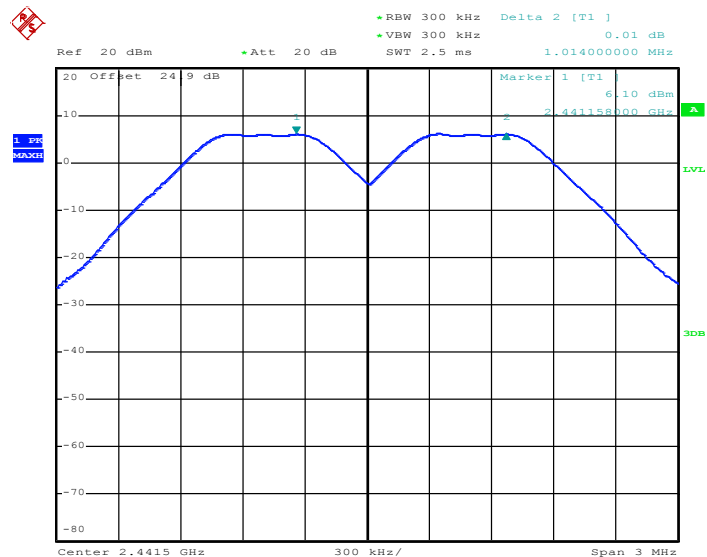

Date: 26.JUN.2018 02:36:33




Channel Separation Plot on Channel 77 - 78

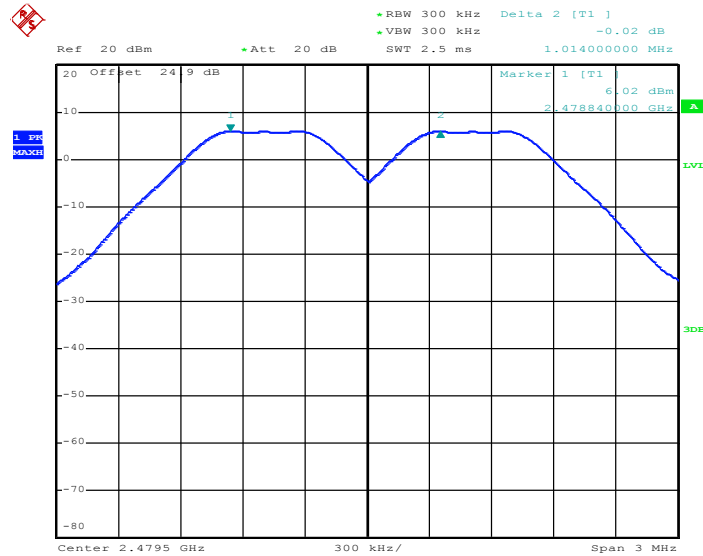

Date: 26.JUN.2018 02:37:36

<2Mbps>

Channel Separation Plot on Channel 00 - 01

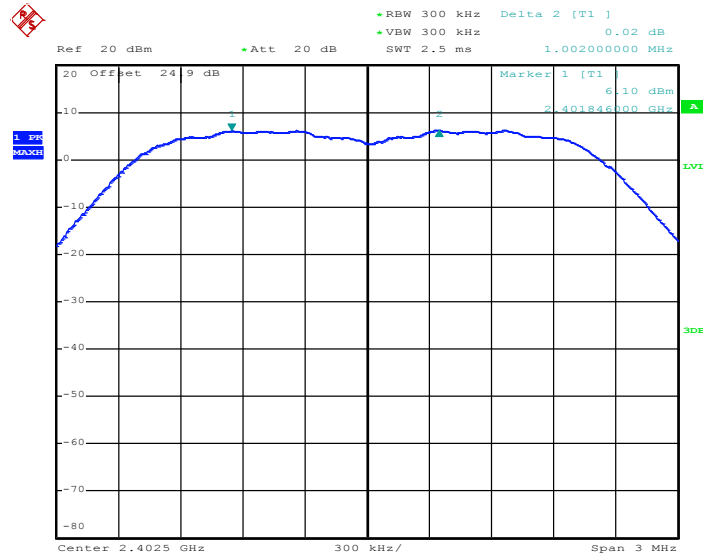


Date: 26.JUN.2018 02:39:00




<3Mbps>

Channel Separation Plot on Channel 00 - 01

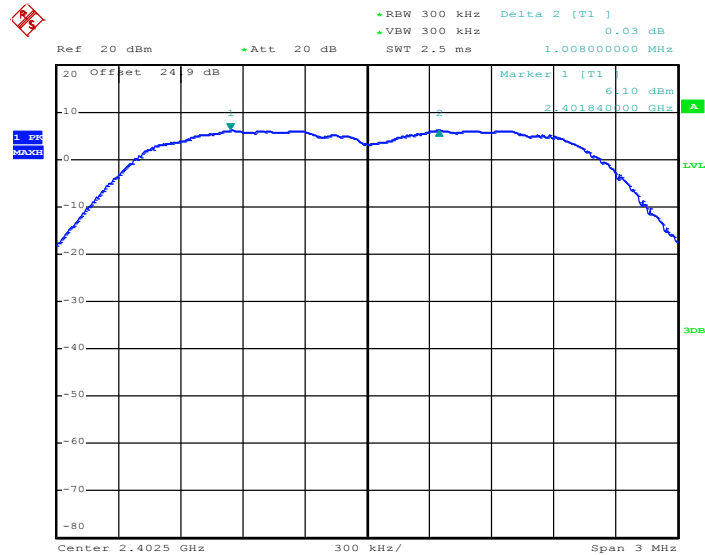


Date: 26.JUN.2018 02:42:45

Channel Separation Plot on Channel 39 - 40

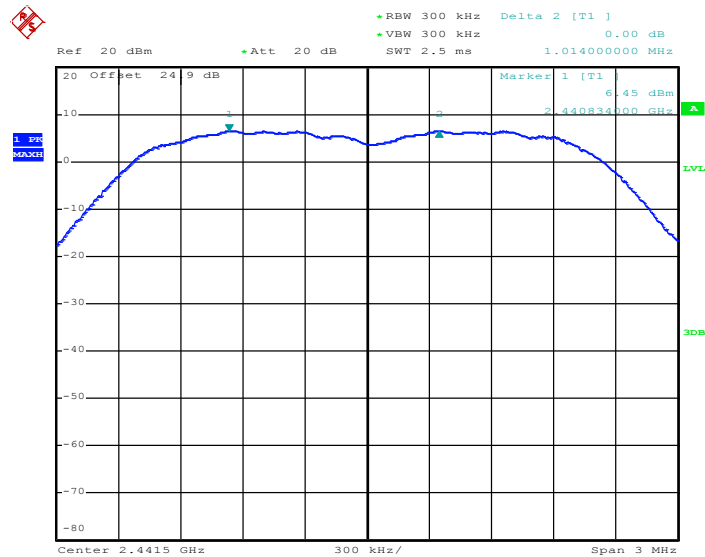

Date: 26.JUN.2018 02:43:52



3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

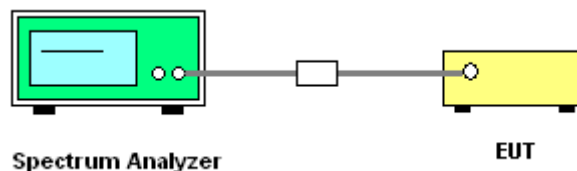


3.3.5 Test Result of Dwell Time

Please refer to Appendix A.



<Ant. 1>


Package Transfer Time Plot

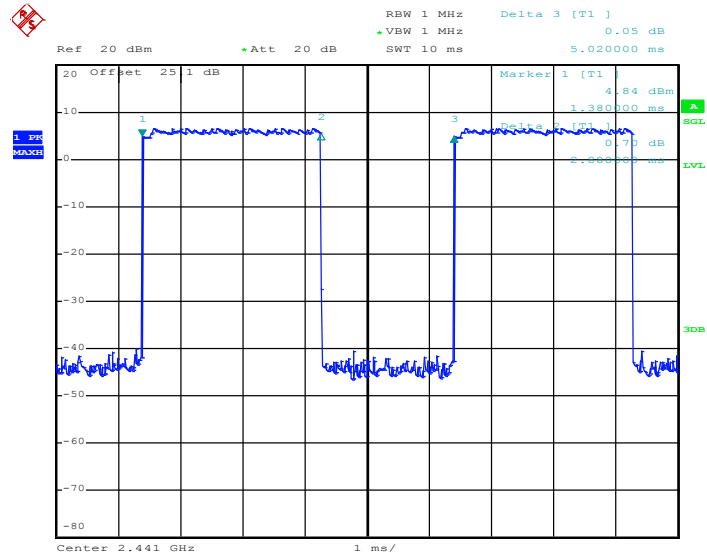

Date: 8.JUN.2018 01:21:36

<Ant. 2>

Package Transfer Time Plot

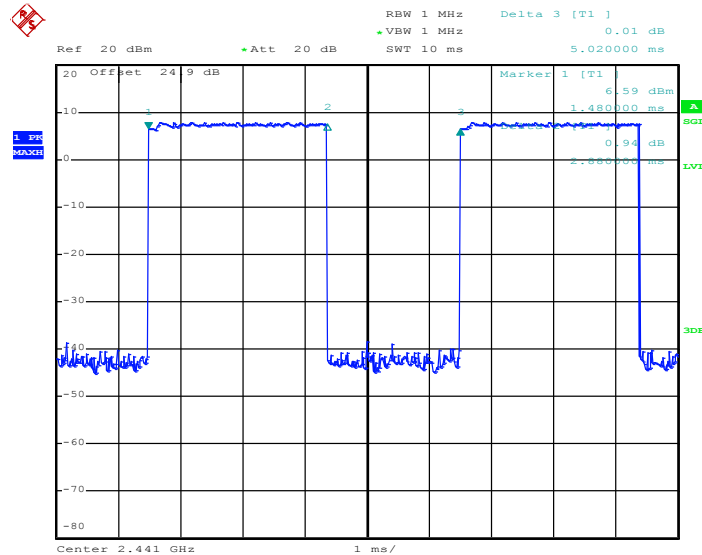

Date: 26.JUN.2018 01:35:07

Remark:

1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels. With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s), Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels. With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s), Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW $\geq$ 1-5% of the 99% bandwidth; VBW $\geq$ 3 * RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

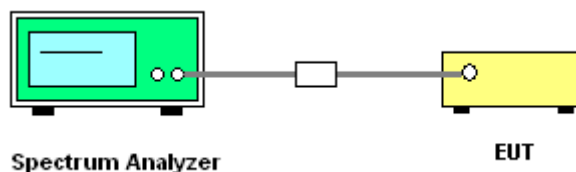

3.4.5 Test Result of 20dB Bandwidth


Please refer to Appendix A.



20 dB Bandwidth Plot on Channel 00




20 dB Bandwidth Plot on Channel 39






20 dB Bandwidth Plot on Channel 78

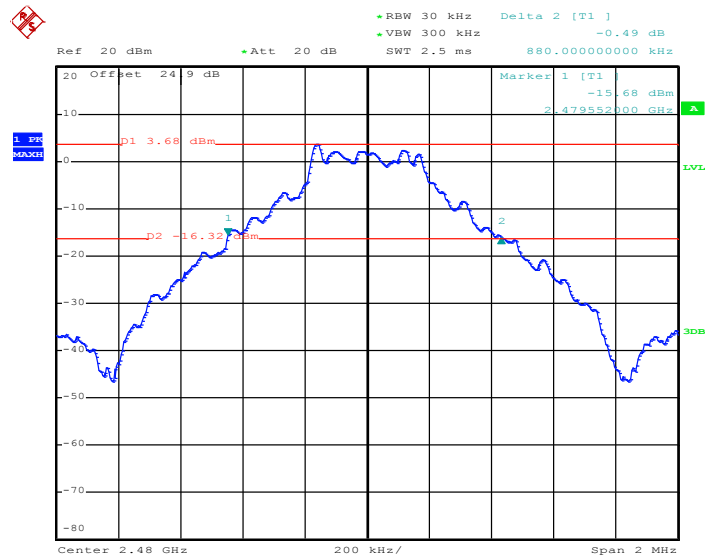

Date: 26.JUN.2018 00:36:23

<2Mbps>


20 dB Bandwidth Plot on Channel 00

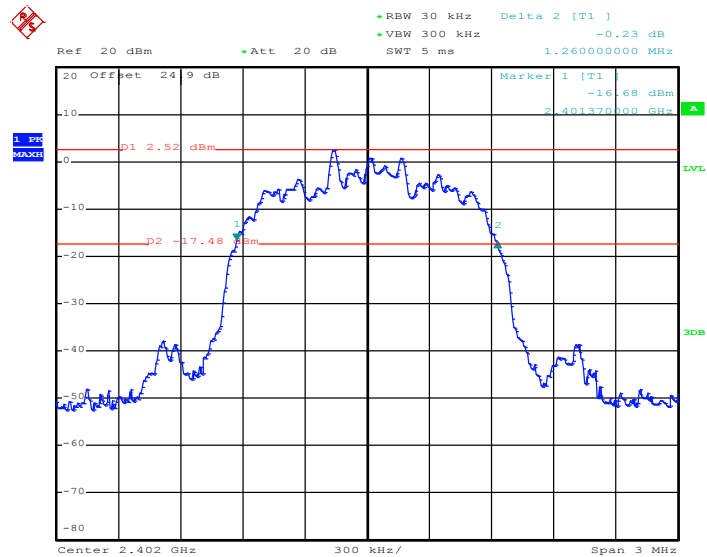

Date: 26.JUN.2018 00:46:51




20 dB Bandwidth Plot on Channel 39

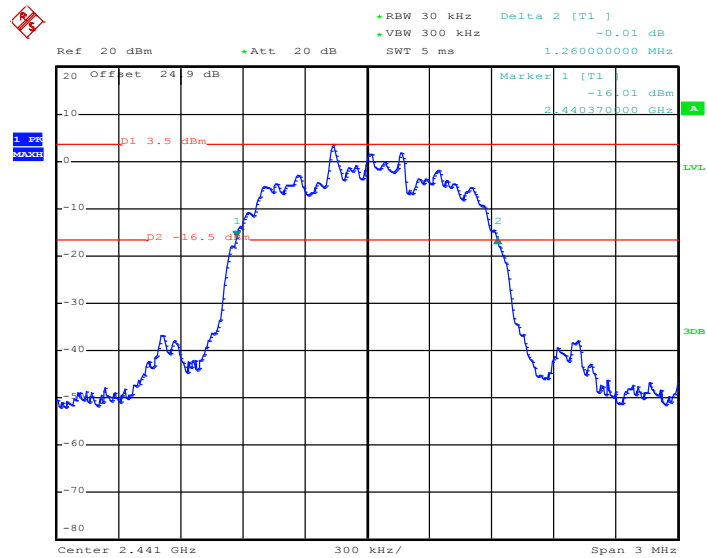

Date: 26.JUN.2018 00:49:43


20 dB Bandwidth Plot on Channel 78

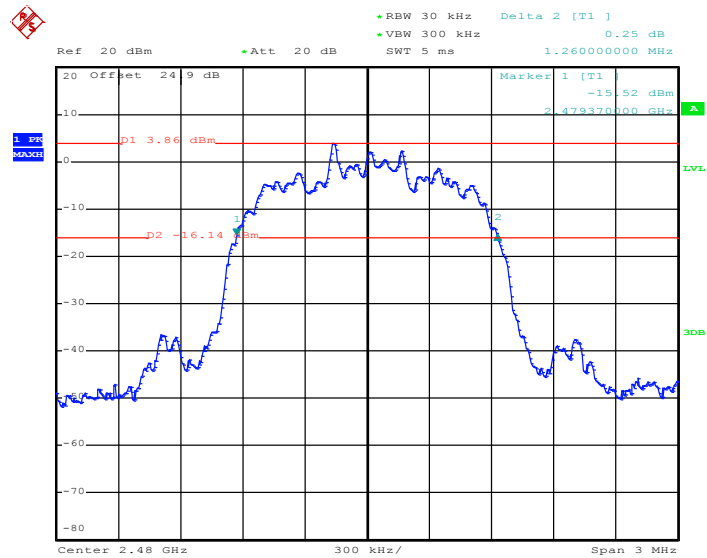


Date: 26.JUN.2018 00:53:34



20 dB Bandwidth Plot on Channel 00




20 dB Bandwidth Plot on Channel 39





20 dB Bandwidth Plot on Channel 78

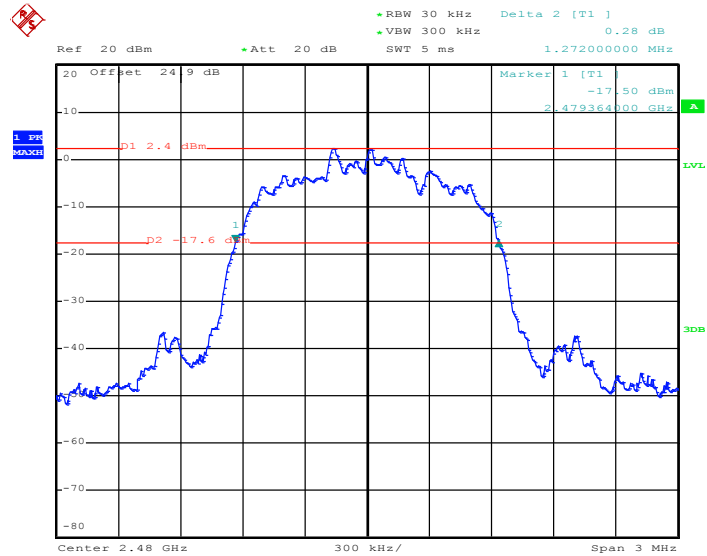


Date: 26.JUN.2018 01:10:57

<Ant. 2>

<1Mbps>


20 dB Bandwidth Plot on Channel 00

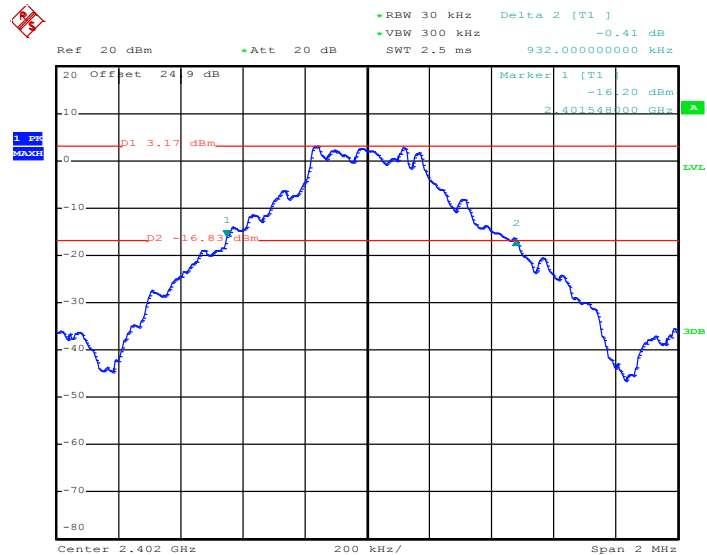

Date: 26.JUN.2018 02:59:03




20 dB Bandwidth Plot on Channel 39

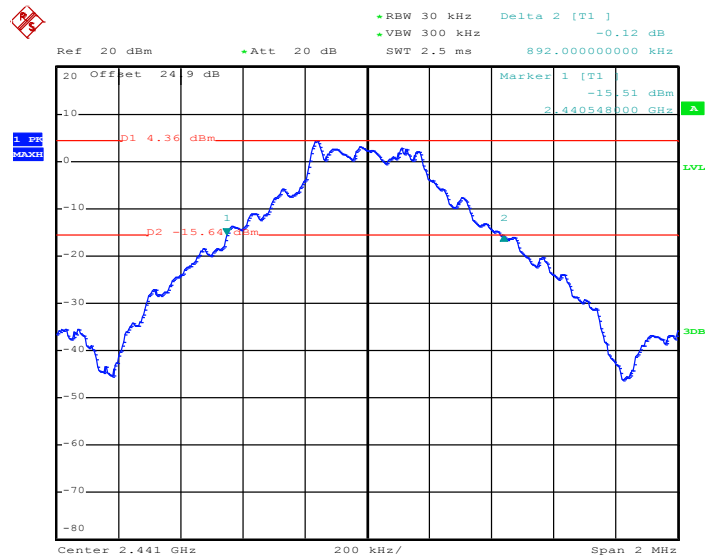

Date: 26.JUN.2018 03:02:19

20 dB Bandwidth Plot on Channel 78

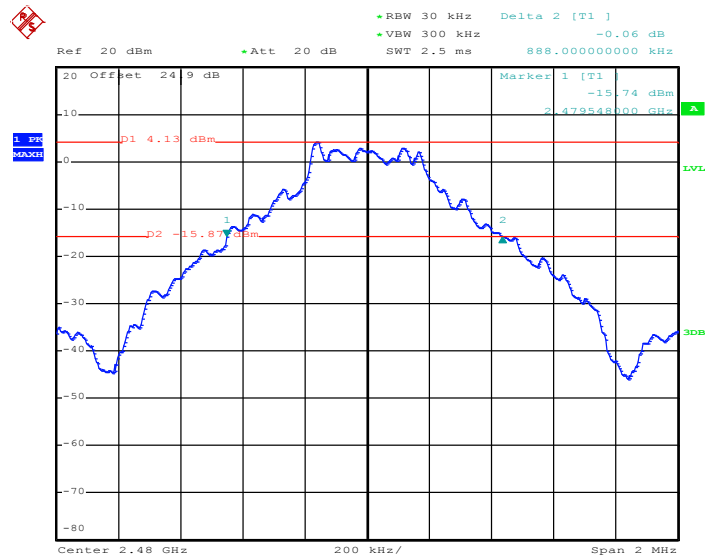


Date: 26.JUN.2018 03:07:56




<2Mbps>

20 dB Bandwidth Plot on Channel 00

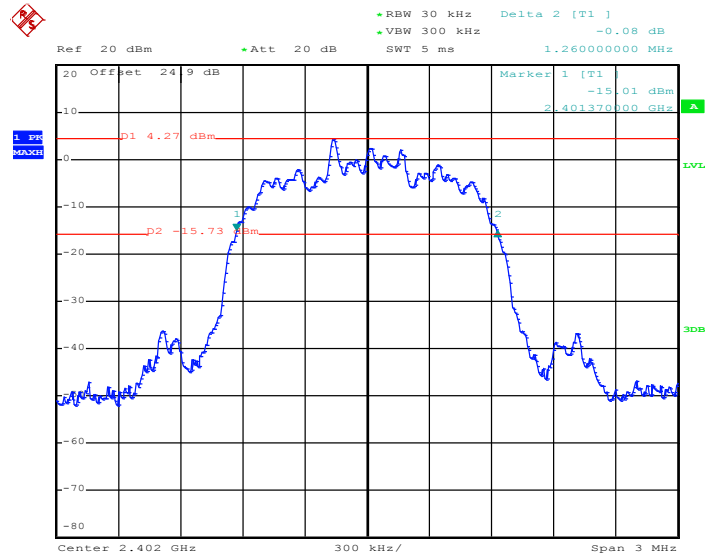

Date: 26.JUN.2018 03:13:59


20 dB Bandwidth Plot on Channel 39

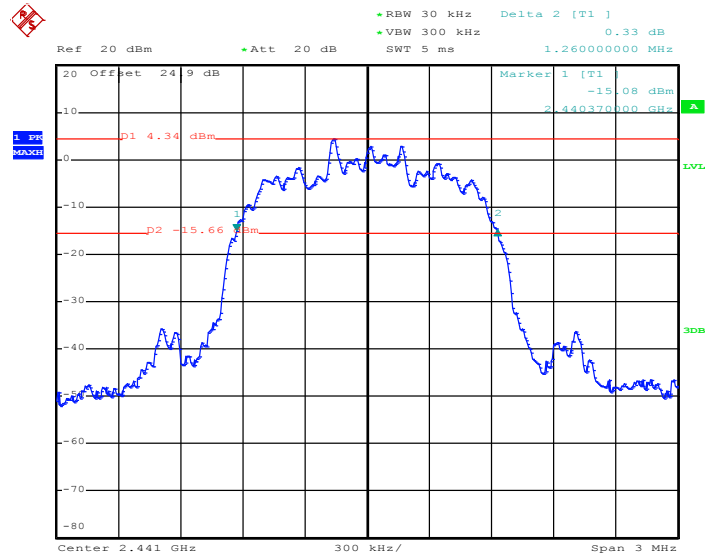

Date: 26.JUN.2018 03:18:18




20 dB Bandwidth Plot on Channel 78

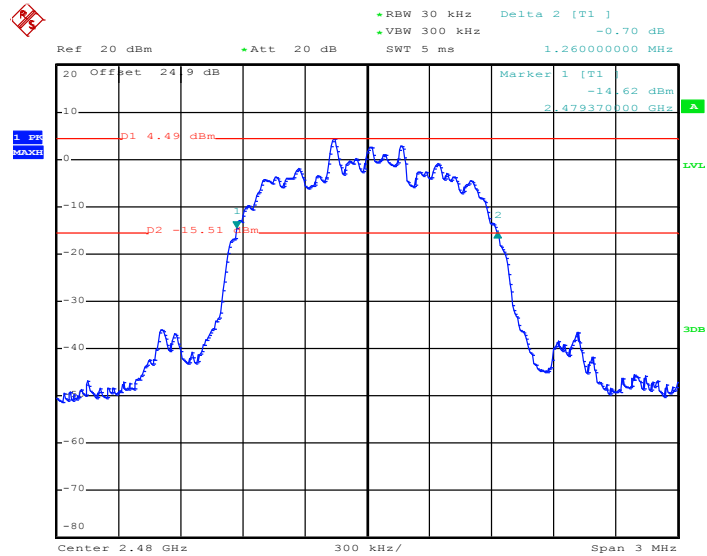

Date: 26.JUN.2018 03:29:39

<3Mbps>


20 dB Bandwidth Plot on Channel 00

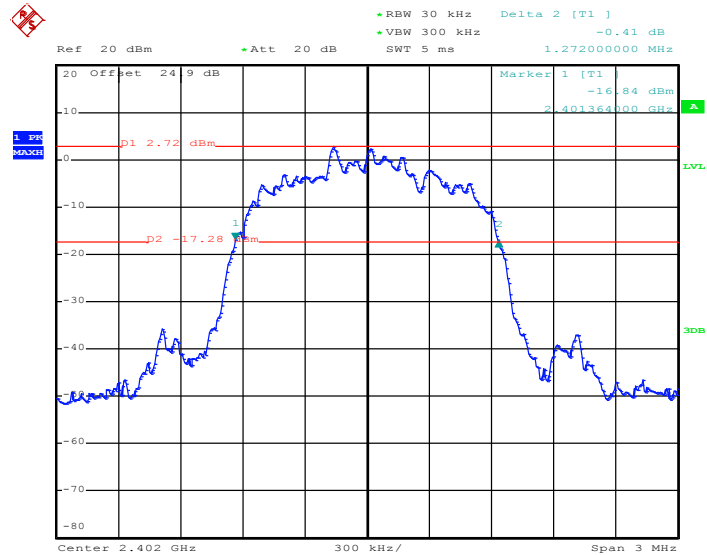

Date: 26.JUN.2018 03:35:27




20 dB Bandwidth Plot on Channel 39

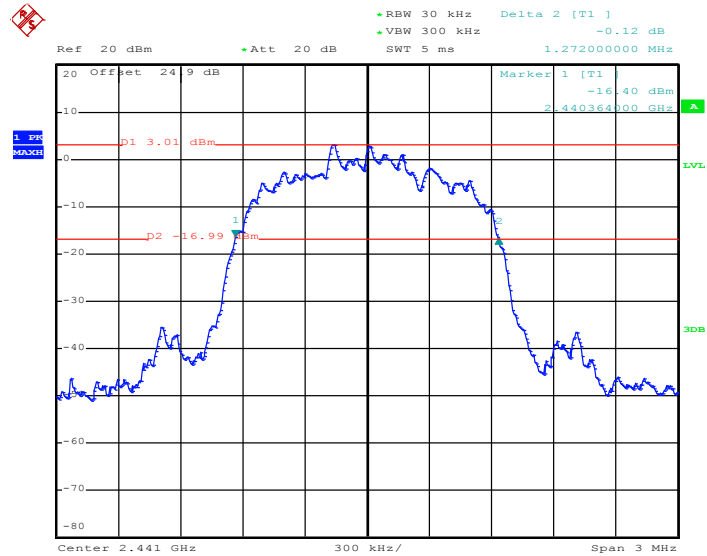

Date: 26.JUN.2018 03:39:15

20 dB Bandwidth Plot on Channel 78

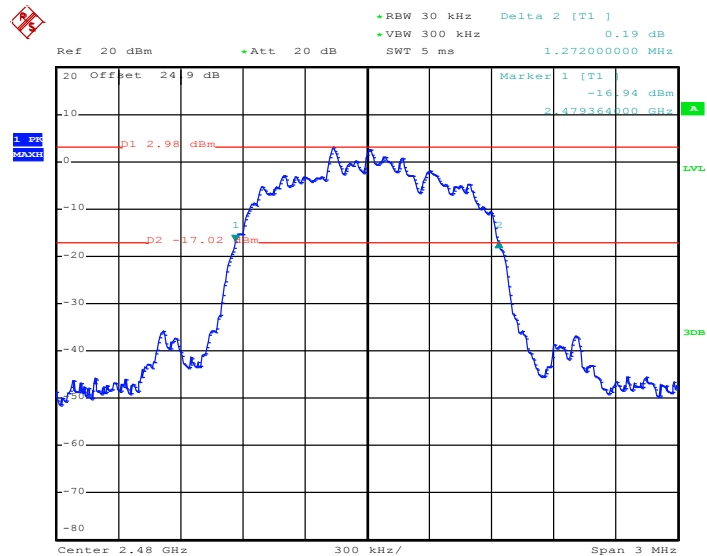

Date: 26.JUN.2018 03:44:55


3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

<Ant. 1>


<1Mbps>

99% Occupied Bandwidth Plot on Channel 00

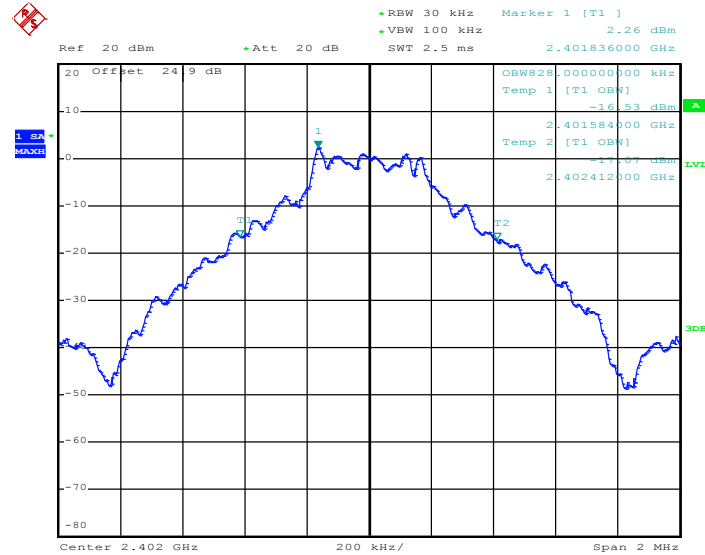

Date: 26.JUN.2018 00:23:22


99% Occupied Bandwidth Plot on Channel 39

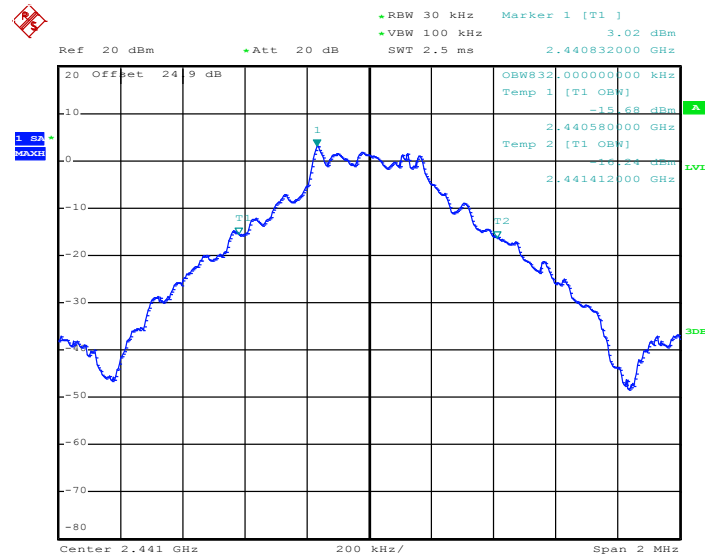

Date: 26.JUN.2018 00:30:32




99% Occupied Bandwidth Plot on Channel 78

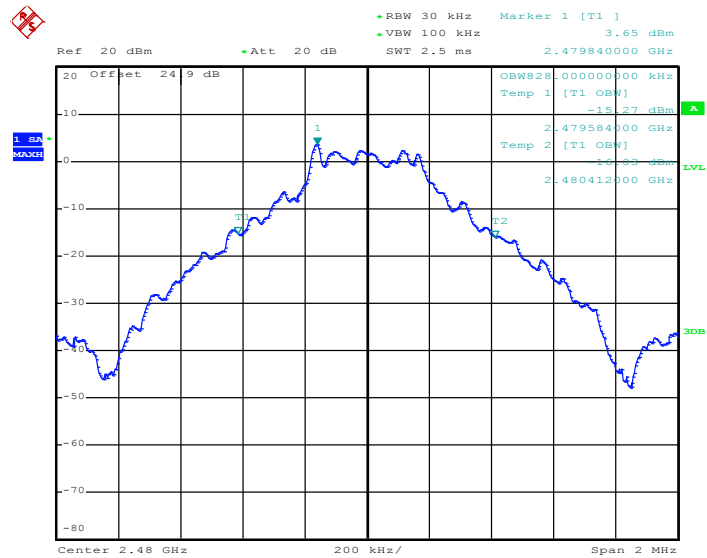

Date: 26.JUN.2018 00:34:08

<2Mbps>


99% Occupied Bandwidth Plot on Channel 00

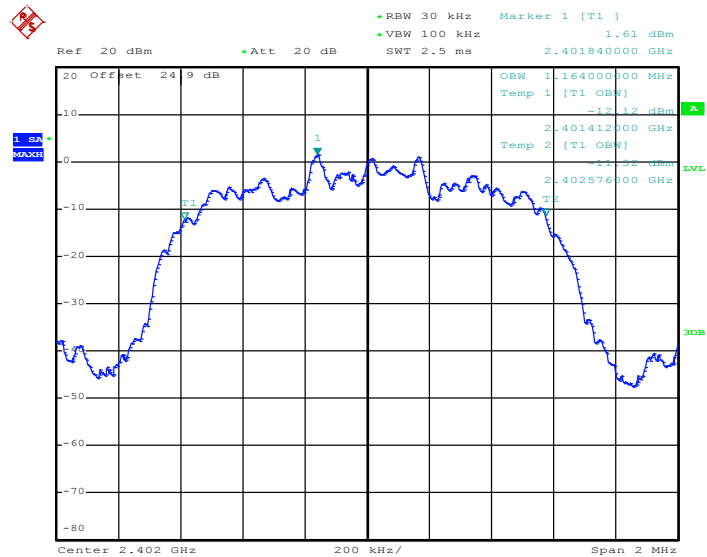

Date: 26.JUN.2018 00:45:18




99% Occupied Bandwidth Plot on Channel 39

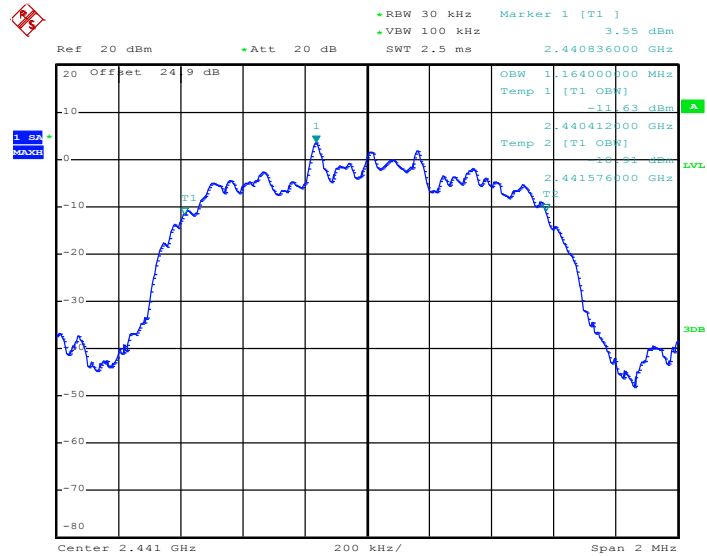

Date: 26.JUN.2018 00:48:43

99% Occupied Bandwidth Plot on Channel 78

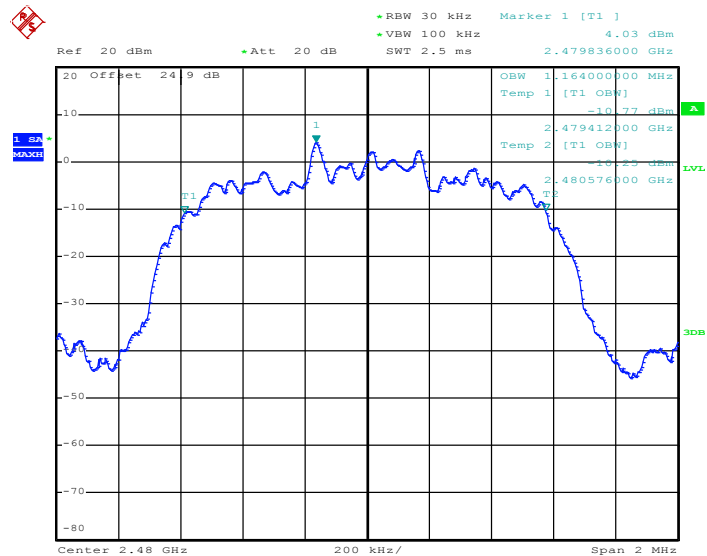


Date: 26.JUN.2018 00:51:52




<3Mbps>

99% Occupied Bandwidth Plot on Channel 00

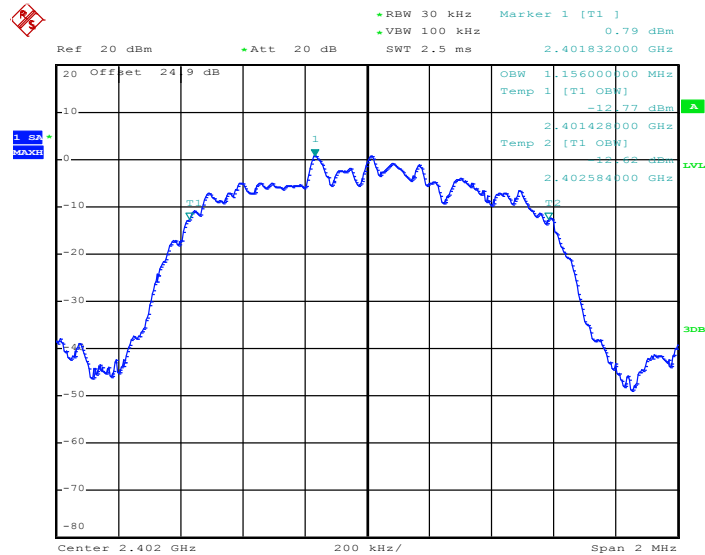

Date: 26.JUN.2018 00:58:15


99% Occupied Bandwidth Plot on Channel 39

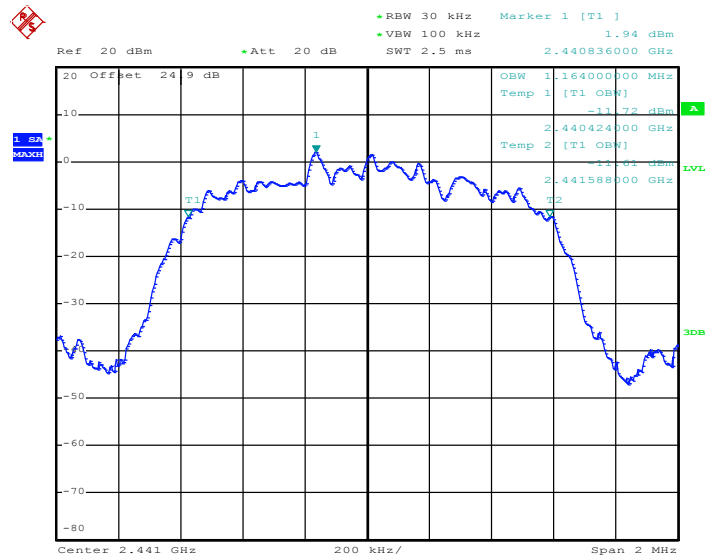

Date: 26.JUN.2018 01:04:28



99% Occupied Bandwidth Plot on Channel 78

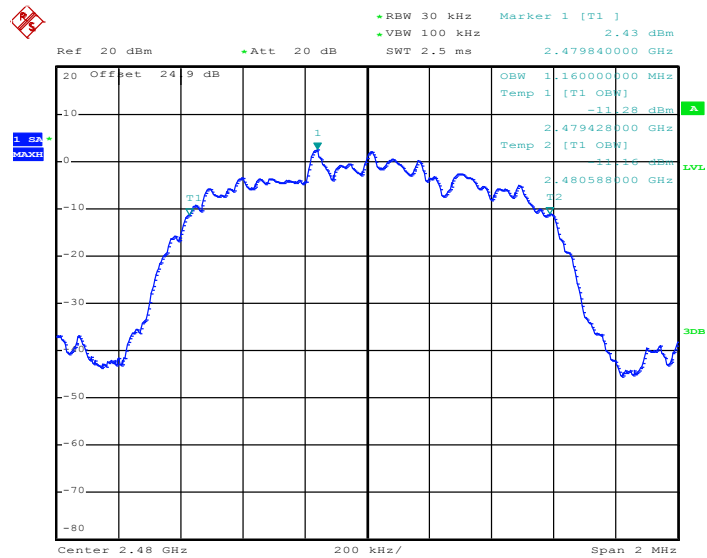


Date: 26.JUN.2018 01:09:20

<Ant. 2>

<1Mbps>


99% Occupied Bandwidth Plot on Channel 00

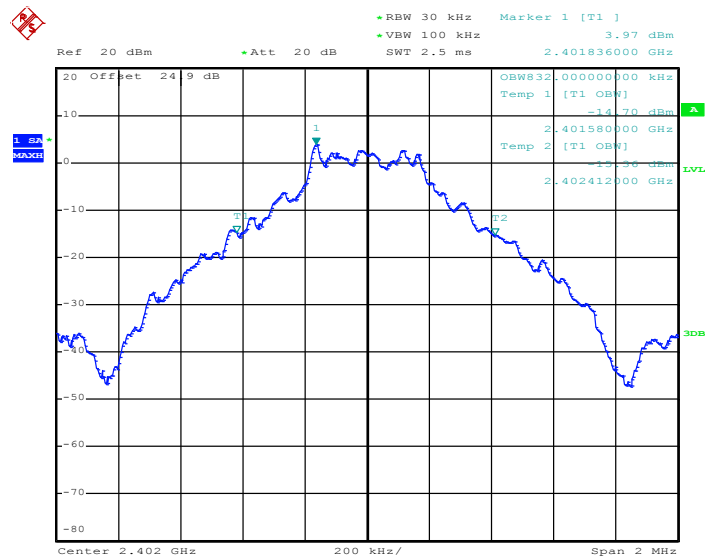

Date: 26.JUN.2018 02:47:11




99% Occupied Bandwidth Plot on Channel 39

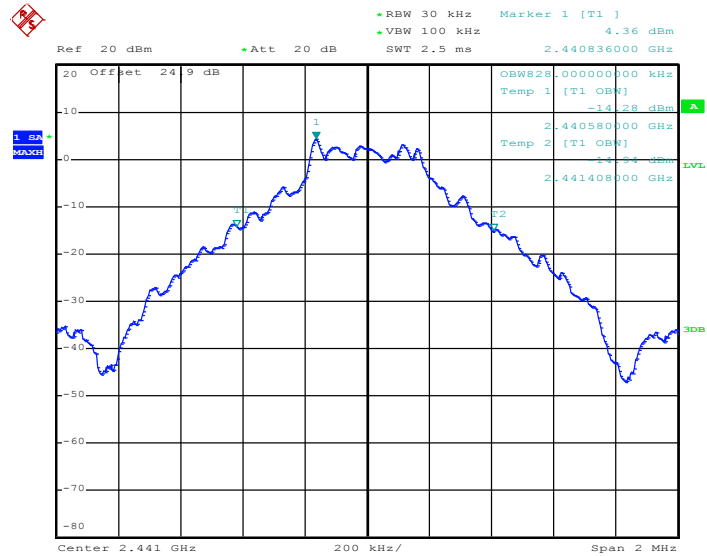

Date: 26.JUN.2018 03:01:01

99% Occupied Bandwidth Plot on Channel 78

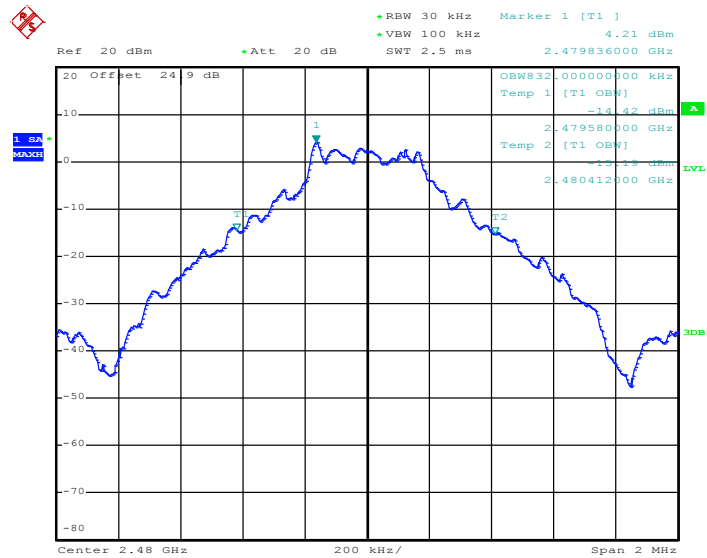


Date: 26.JUN.2018 03:05:54




<2Mbps>

99% Occupied Bandwidth Plot on Channel 00

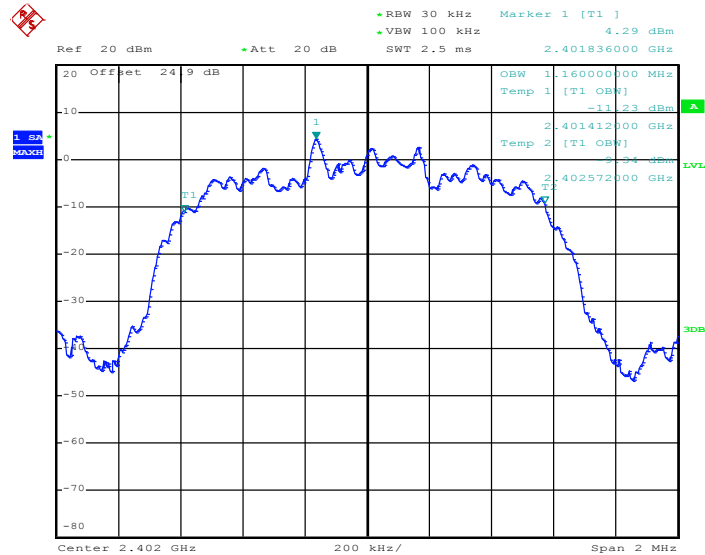

Date: 26.JUN.2018 03:11:19


99% Occupied Bandwidth Plot on Channel 39

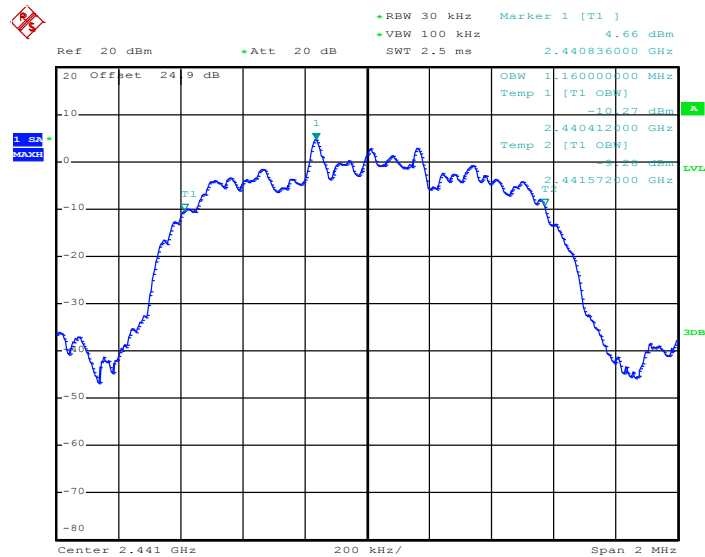

Date: 26.JUN.2018 03:17:11




99% Occupied Bandwidth Plot on Channel 78

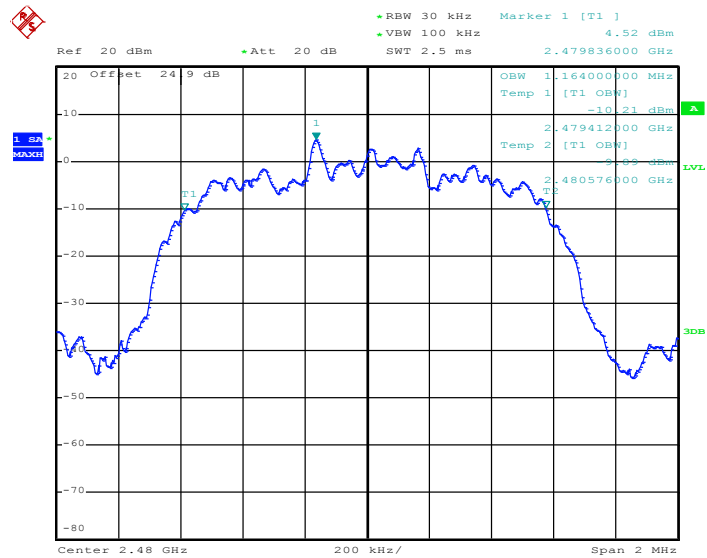

Date: 26.JUN.2018 03:25:39

<3Mbps>


99% Occupied Bandwidth Plot on Channel 00

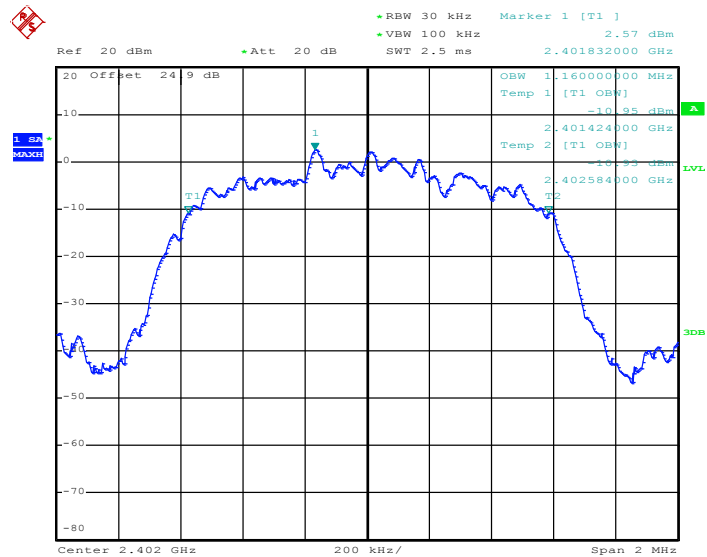

Date: 26.JUN.2018 03:34:03




99% Occupied Bandwidth Plot on Channel 39

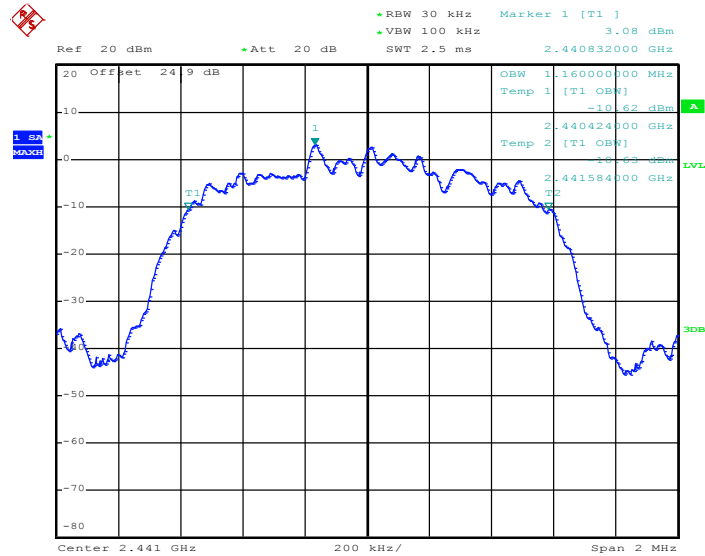

Date: 26.JUN.2018 03:37:41

99% Occupied Bandwidth Plot on Channel 78

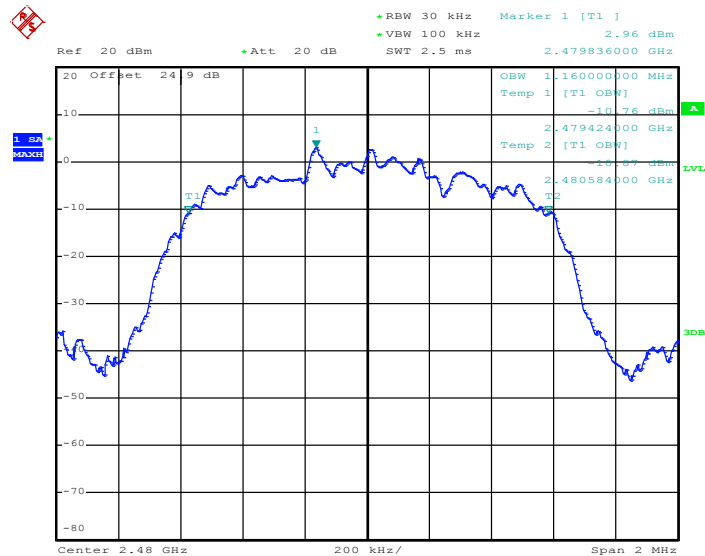

Date: 26.JUN.2018 03:42:44

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

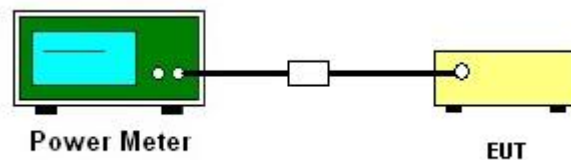

3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.5.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

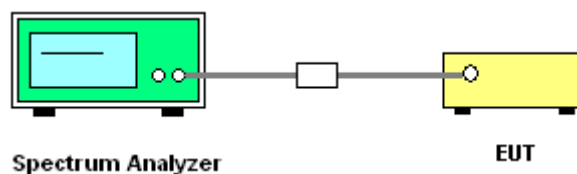



Ref 20 dBm +Att 20 dB SWT 2.5 ms 2.395220000 GHz

20 Offset 24 9 dB

1.98 MAXH


D1 4.28 dBm

D2 -15.72 dBm



3dB

Start 2.395 GHz 1 MHz/ Stop 2.405 GHz

High Band Edge Plot on Channel 78

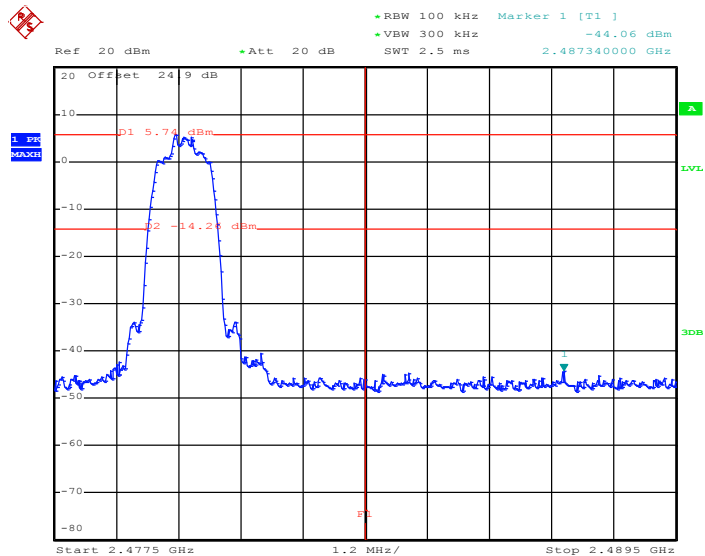

TEL : 886-3-327-3456
FAX : 886-3-328-4978
Report Template No.: BU5-FR15CBT Version 2.1





Low Band Edge Plot on Channel 00




Date: 26.JUN.2018 03:06:31




<2Mbps>

Low Band Edge Plot on Channel 00

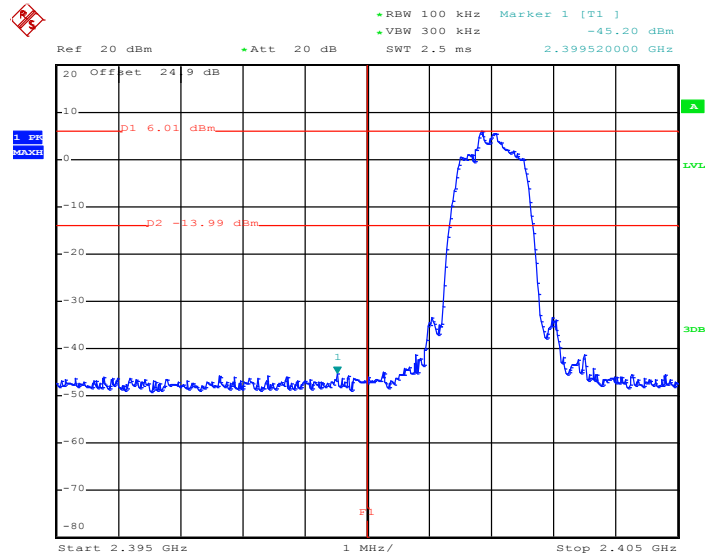

Date: 26.JUN.2018 03:12:01

High Band Edge Plot on Channel 78

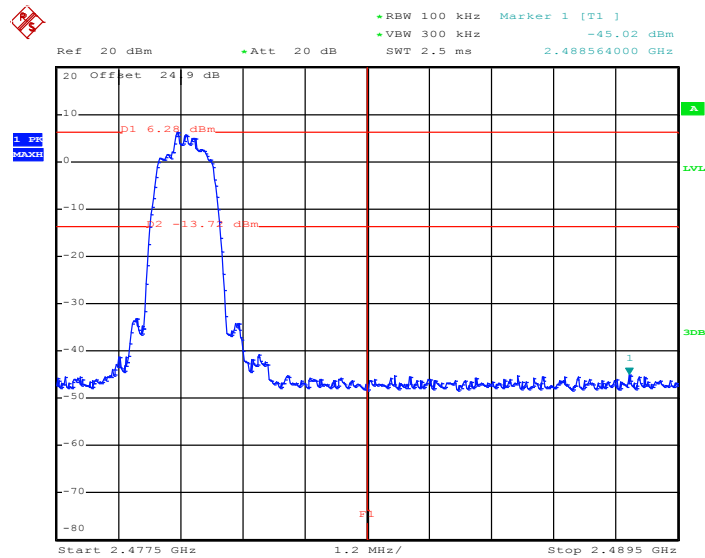


Date: 26.JUN.2018 03:27:36




<3Mbps>

Low Band Edge Plot on Channel 00

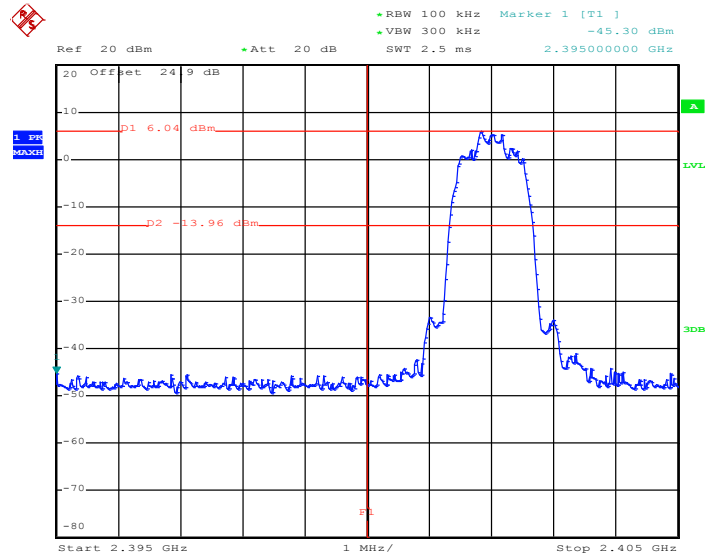

Date: 26.JUN.2018 03:34:25

High Band Edge Plot on Channel 78

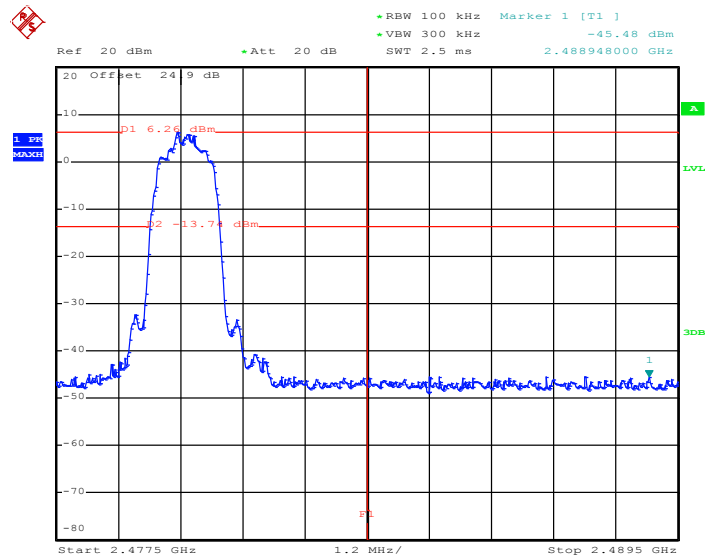


Date: 26.JUN.2018 03:43:04

3.6.6 Test Result of Conducted Hopping Mode Band Edges

<Ant. 1>


<1Mbps>

Hopping Mode Low Band Edge Plot

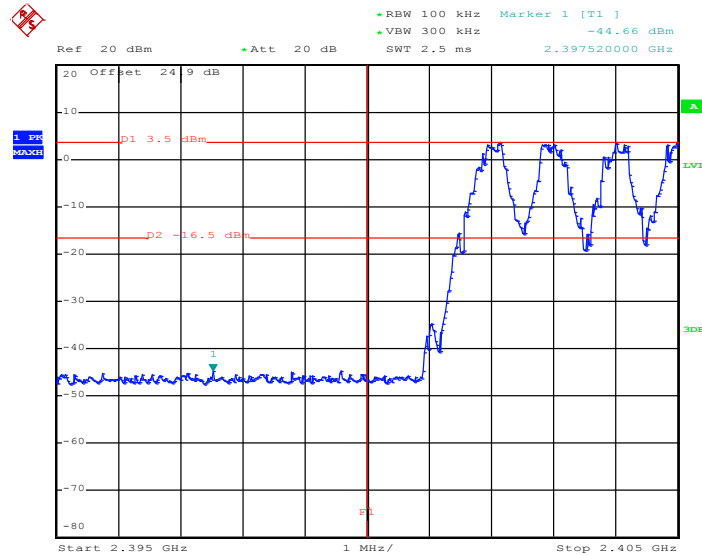

Date: 25.JUN.2018 23:59:29

Hopping Mode High Band Edge Plot

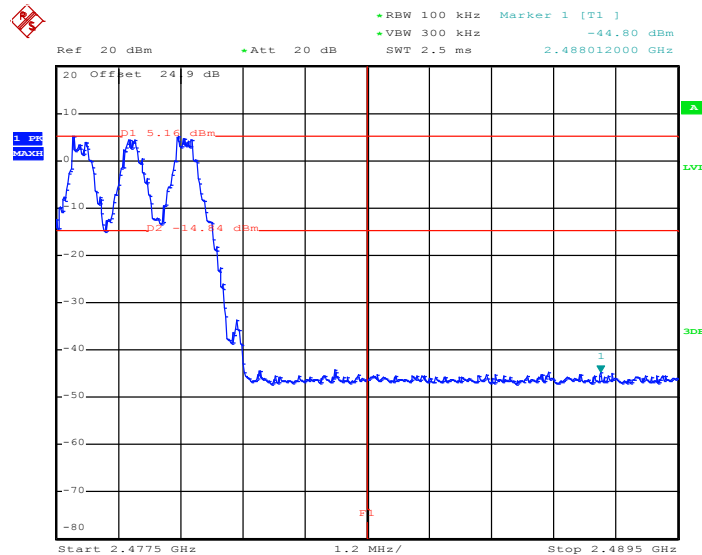


Date: 26.JUN.2018 00:01:07




<2Mbps>

Hopping Mode Low Band Edge Plot

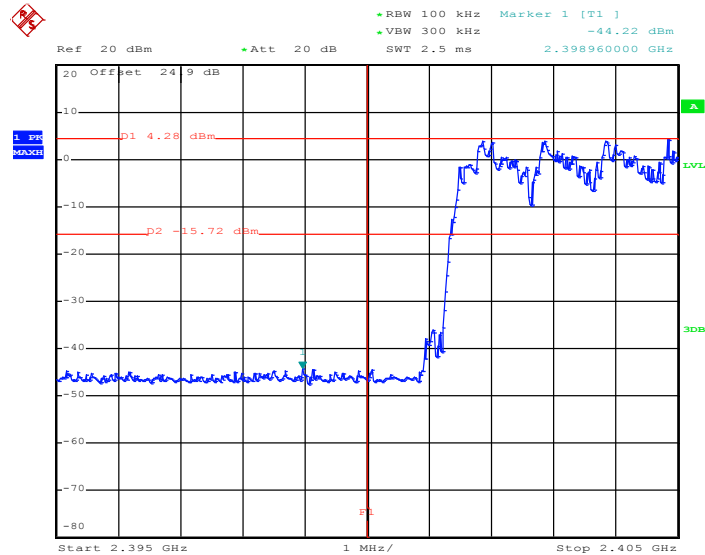

Date: 25.JUN.2018 23:54:35

Hopping Mode High Band Edge Plot

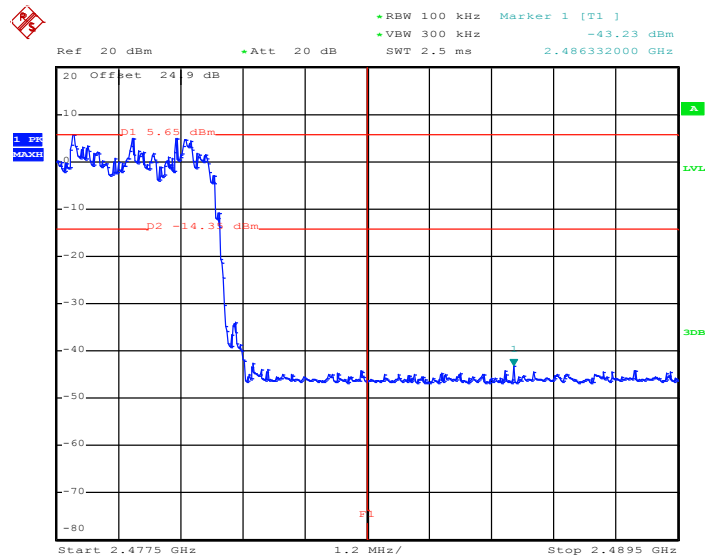


Date: 25.JUN.2018 23:57:10




<3Mbps>

Hopping Mode Low Band Edge Plot

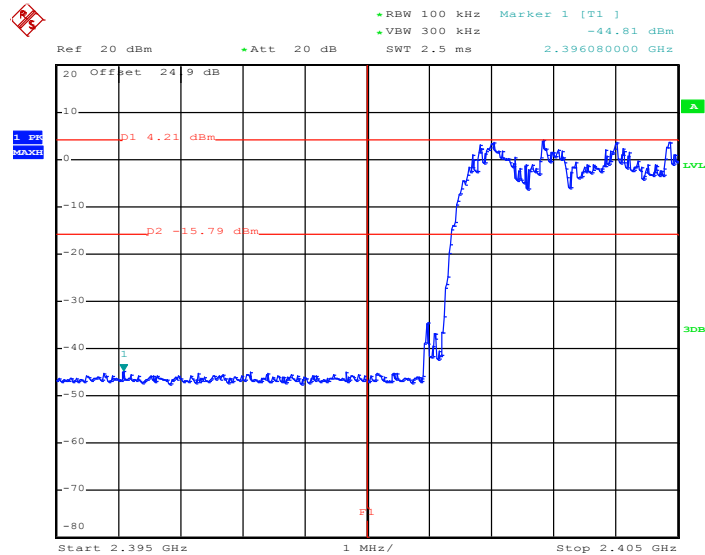

Date: 25.JUN.2018 23:49:26

Hopping Mode High Band Edge Plot

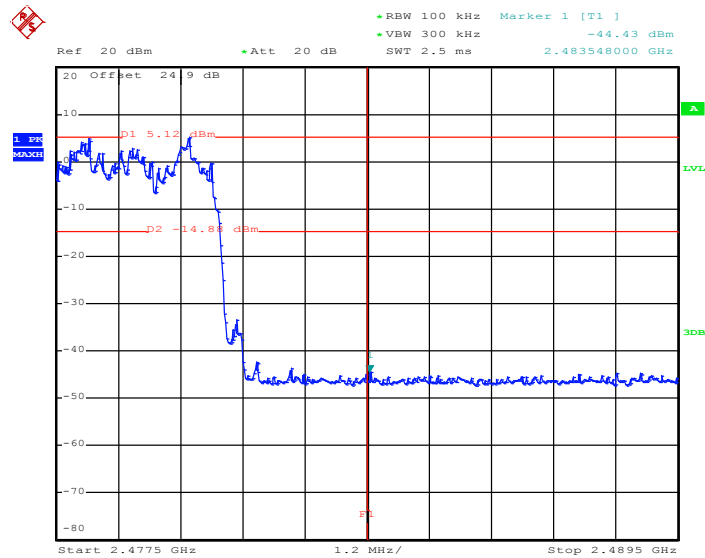


Date: 25.JUN.2018 23:51:28



<Ant. 2>


<1Mbps>

Hopping Mode Low Band Edge Plot

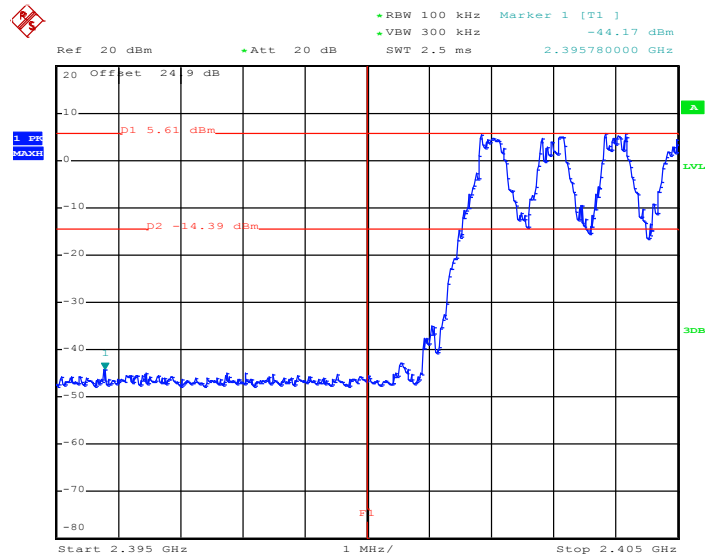

Date: 26.JUN.2018 02:30:42

Hopping Mode High Band Edge Plot

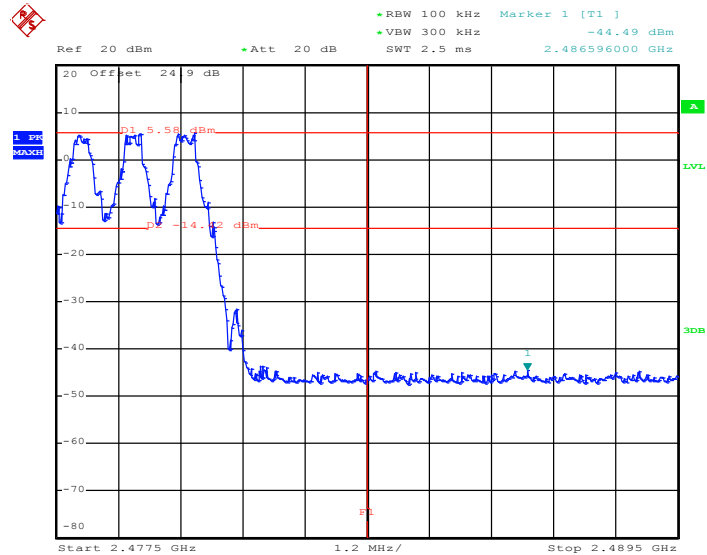


Date: 26.JUN.2018 02:32:10




<2Mbps>

Hopping Mode Low Band Edge Plot

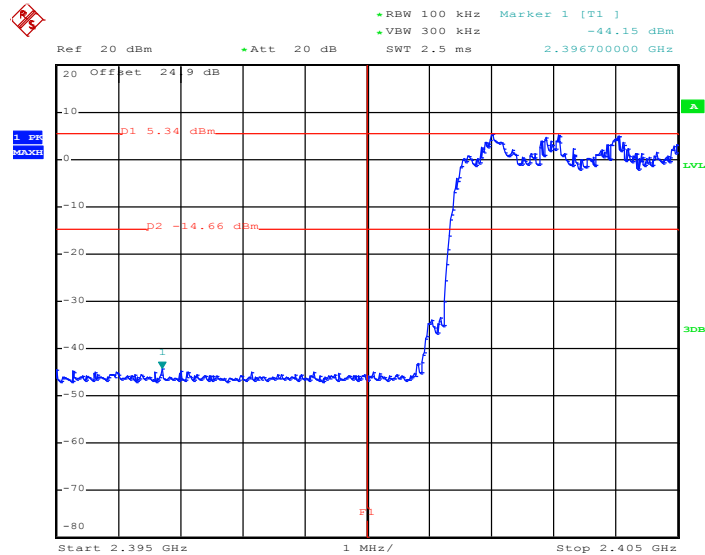

Date: 26.JUN.2018 02:26:29

Hopping Mode High Band Edge Plot

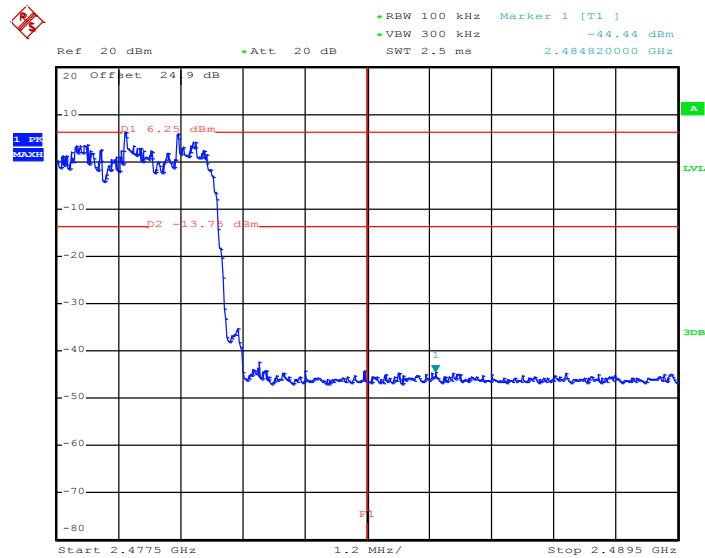


Date: 26.JUN.2018 02:28:51




<3Mbps>

Hopping Mode Low Band Edge Plot

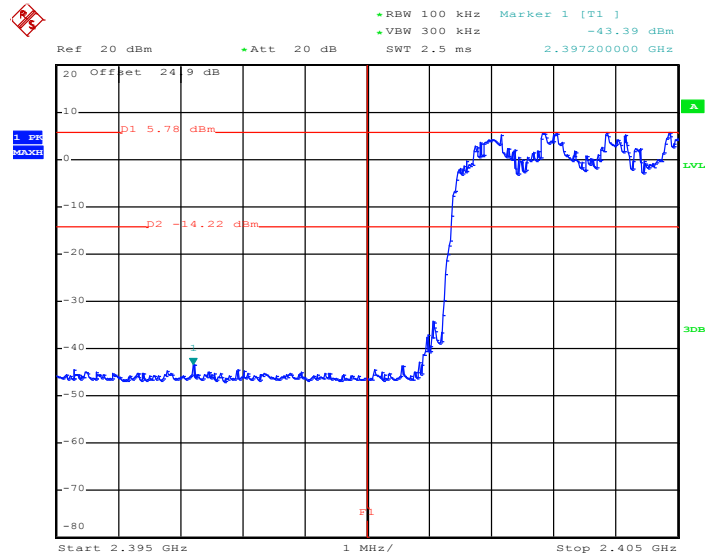

Date: 26.JUN.2018 02:17:27

Hopping Mode High Band Edge Plot

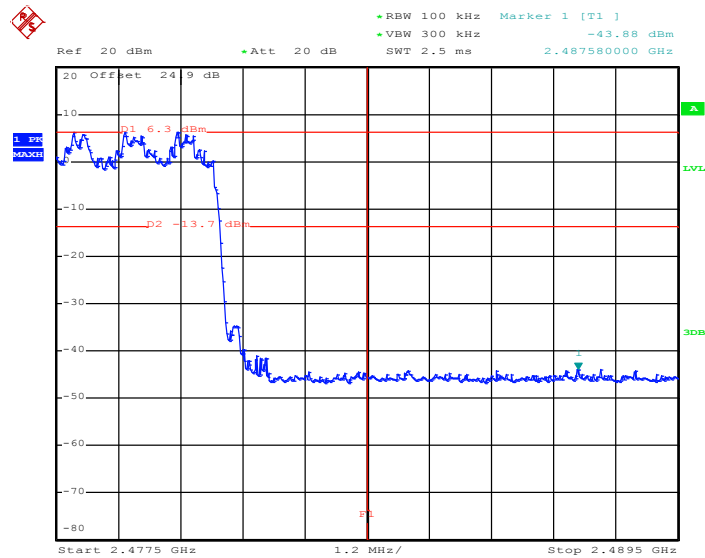

Date: 26.JUN.2018 02:21:57

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

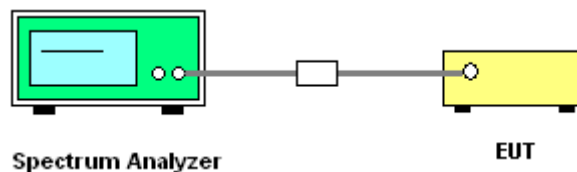


3.7.5 Test Result of Conducted Spurious Emission

<Ant. 1>


<1Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

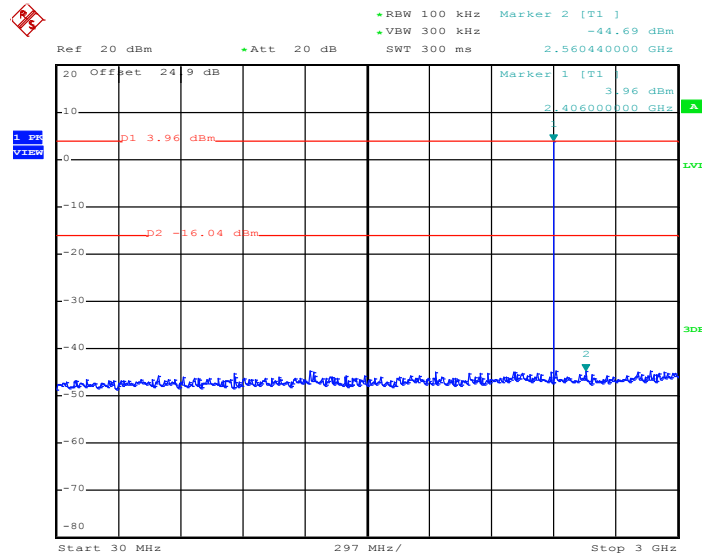

Date: 26.JUN.2018 00:20:50


1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

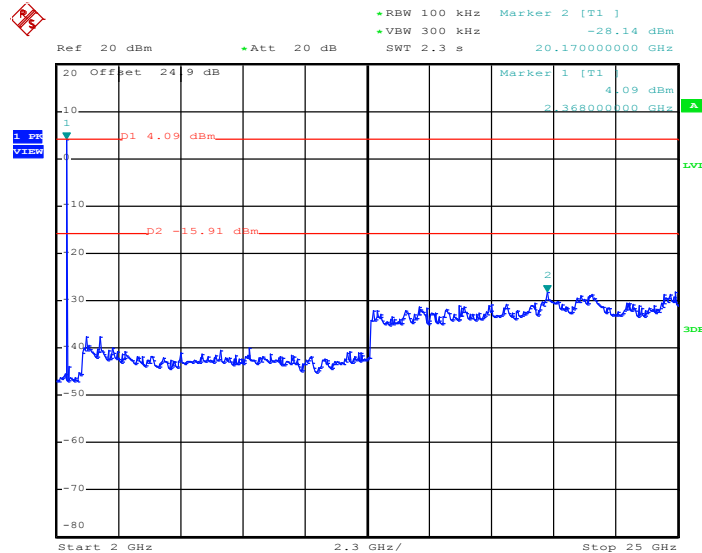

Date: 26.JUN.2018 00:21:24




CSE Plot on Ch 39 between 30MHz ~ 3 GHz

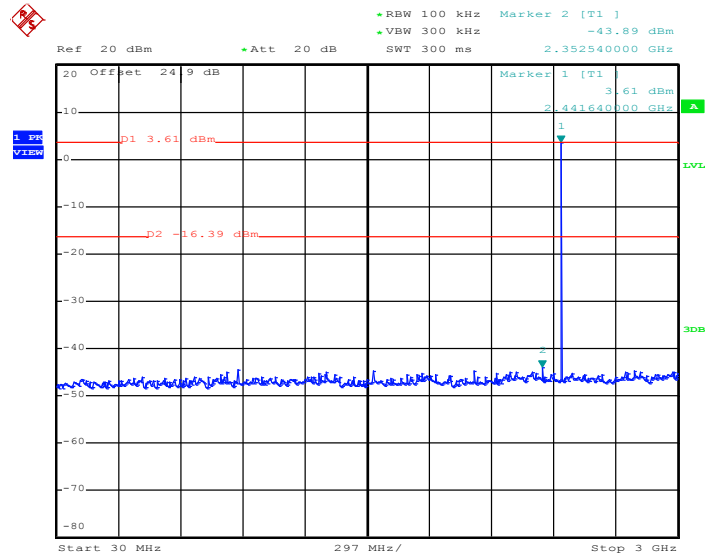


Date: 26.JUN.2018 00:29:07


CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

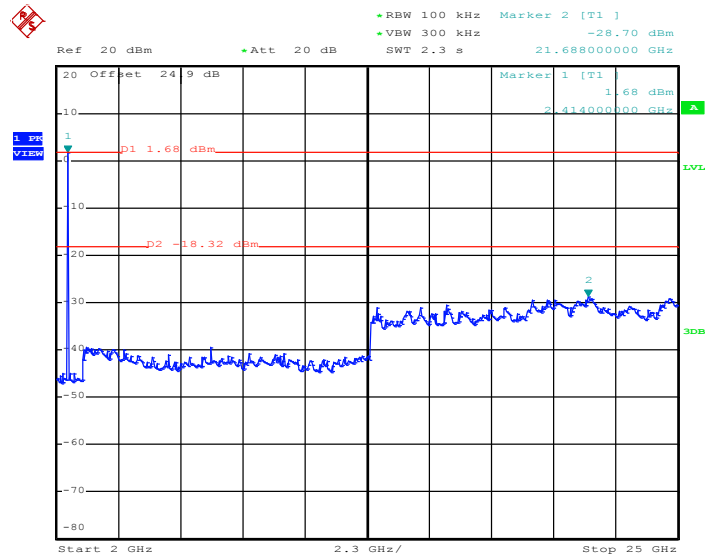

Date: 26.JUN.2018 00:29:39

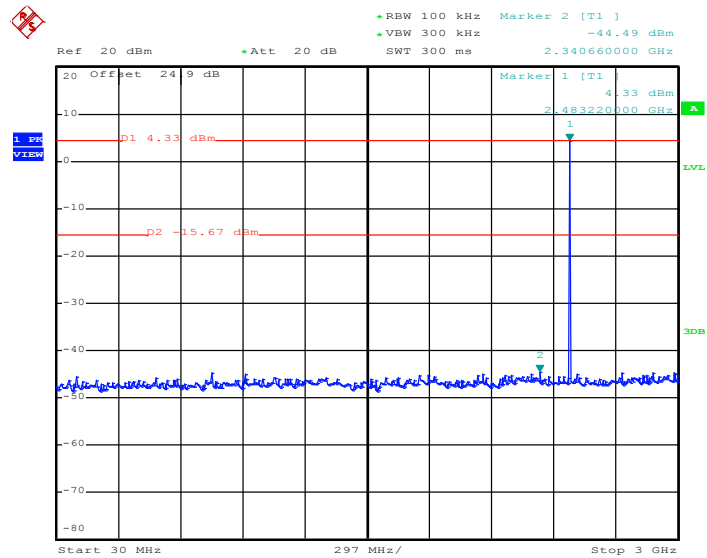**CSE Plot on Ch 78 between 30MHz ~ 3 GHz**

Date: 26.JUN.2018 00:33:00

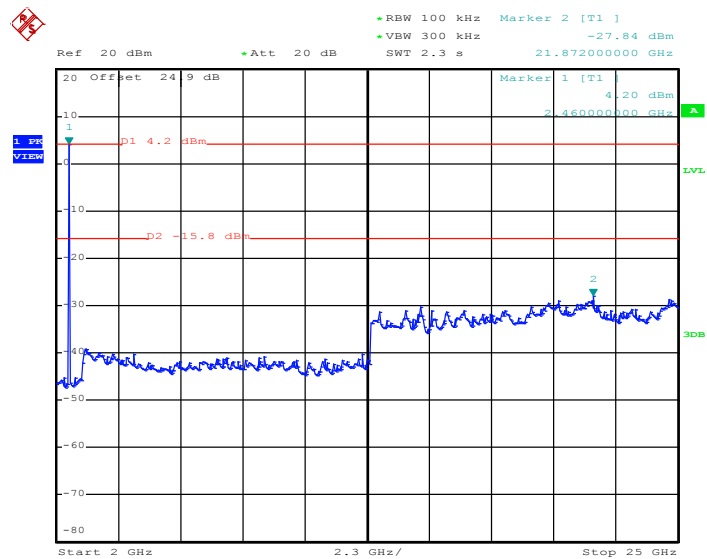
CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

Date: 26.JUN.2018 00:33:29




<2Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

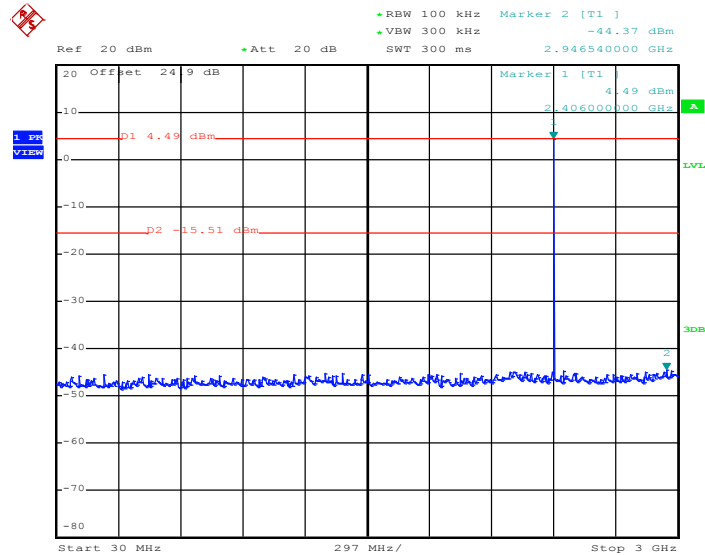


Date: 26.JUN.2018 00:44:01


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

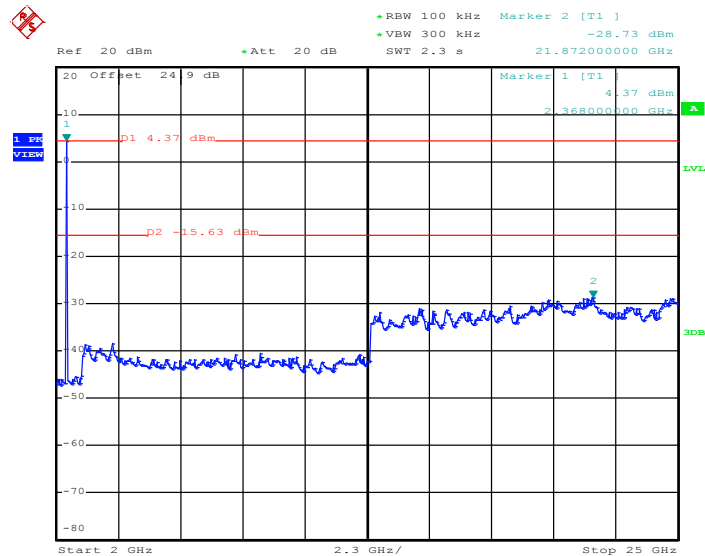


Date: 26.JUN.2018 00:44:29

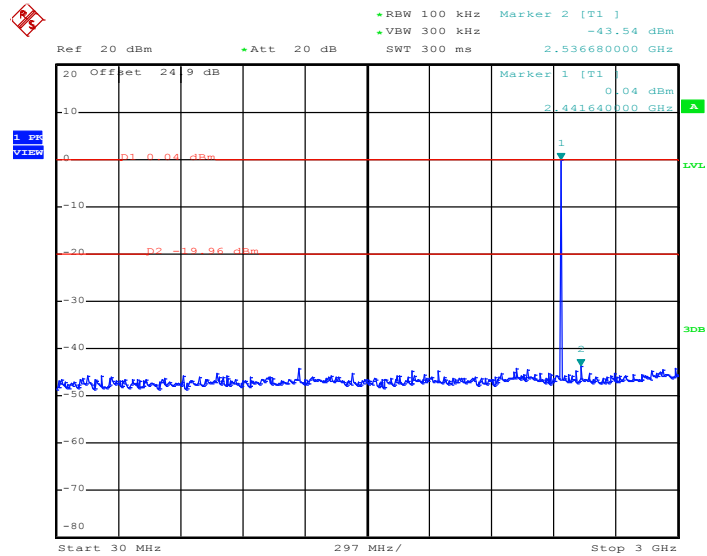**CSE Plot on Ch 39 between 30MHz ~ 3 GHz**


Date: 26.JUN.2018 00:47:38

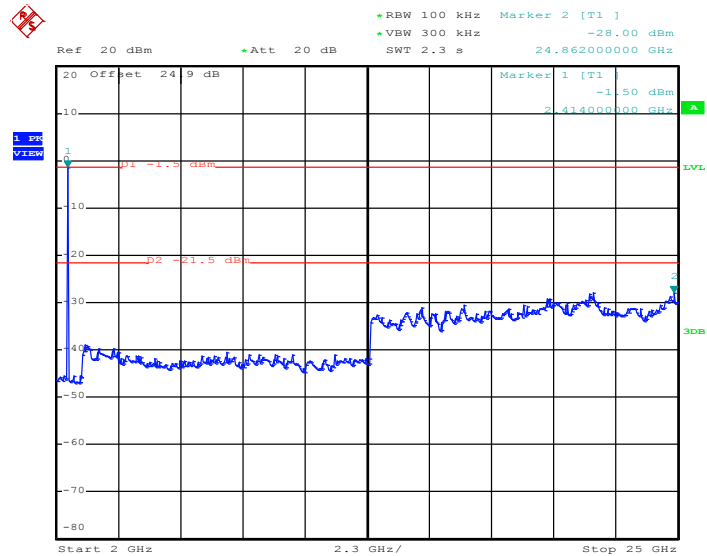CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

Date: 26.JUN.2018 00:48:05

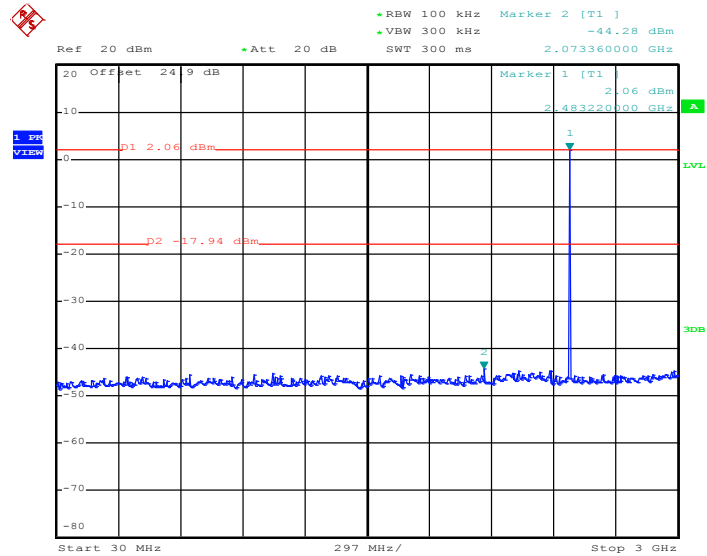**CSE Plot on Ch 78 between 30MHz ~ 3 GHz**

Date: 26.JUN.2018 00:50:37

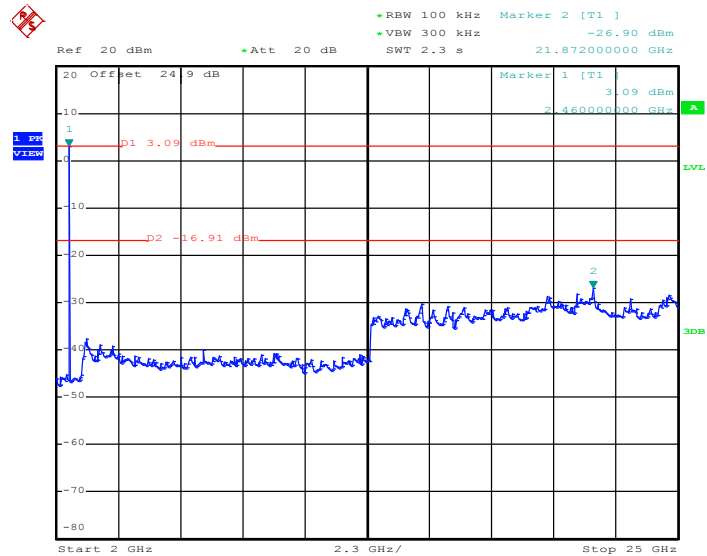
CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

Date: 26.JUN.2018 00:51:12




<3Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

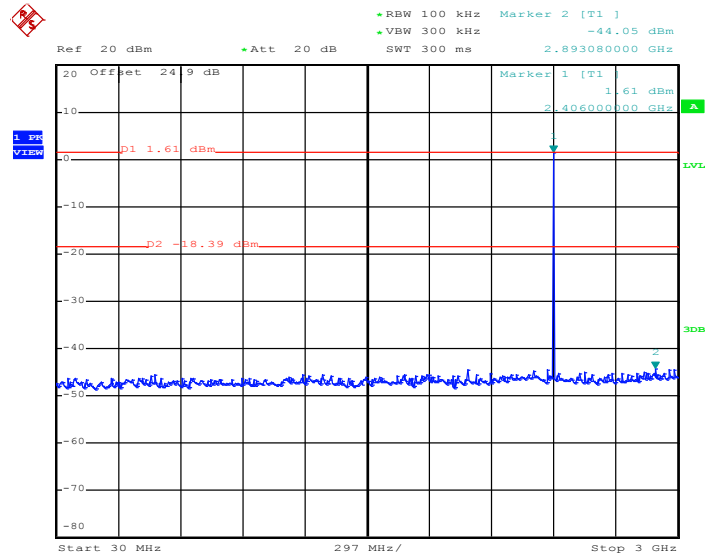


Date: 26.JUN.2018 00:57:07


CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

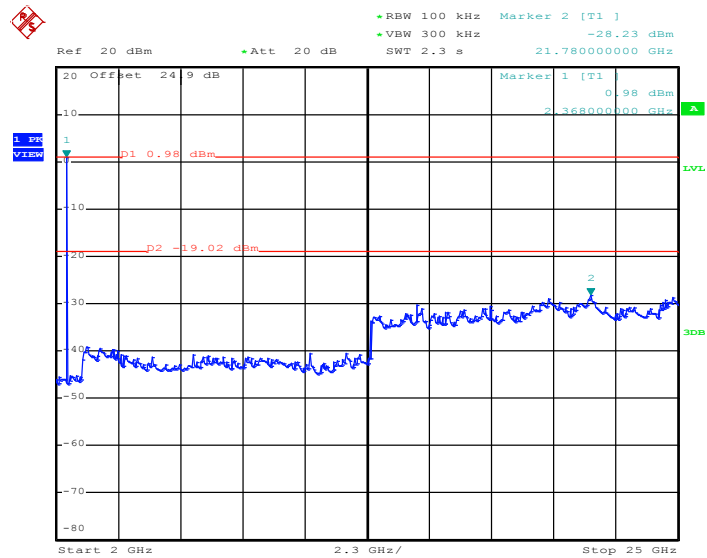


Date: 26.JUN.2018 00:57:36

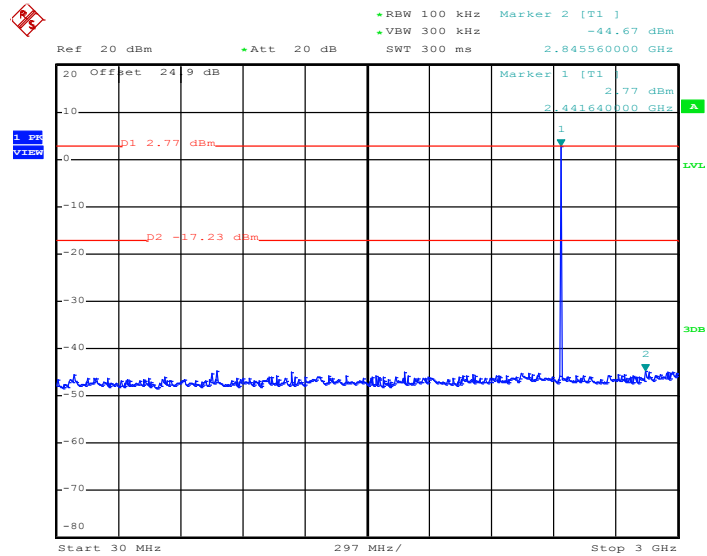**CSE Plot on Ch 39 between 30MHz ~ 3 GHz**


Date: 26.JUN.2018 01:03:17

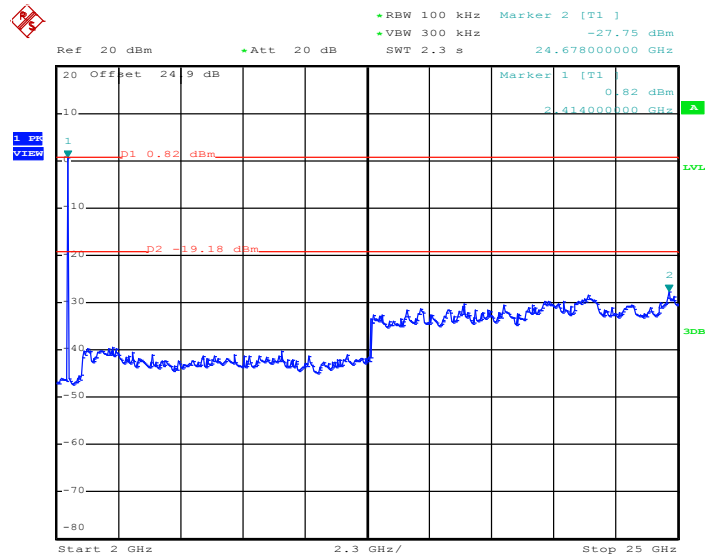CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

Date: 26.JUN.2018 01:03:48

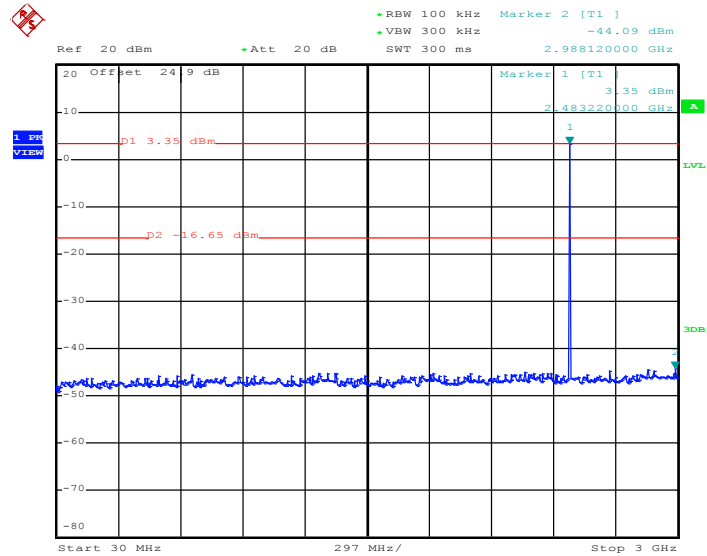**CSE Plot on Ch 78 between 30MHz ~ 3 GHz**

Date: 26.JUN.2018 01:08:08

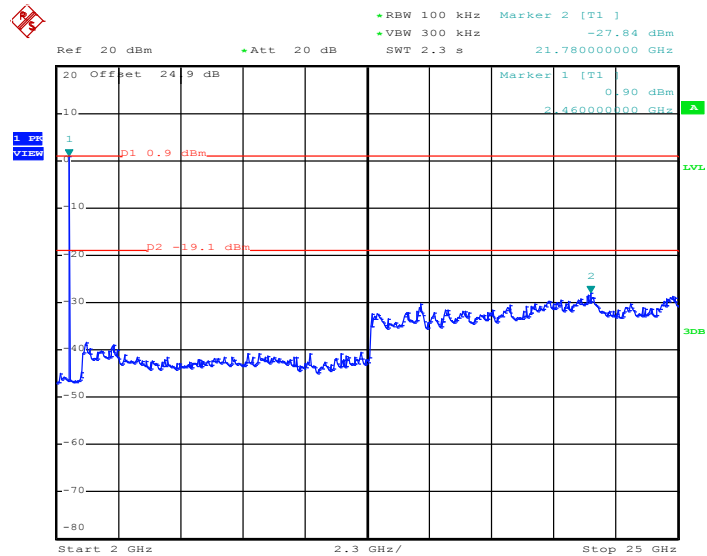CSE Plot on Ch 78 between 2 GHz ~ 25 GHz


Date: 26.JUN.2018 01:08:45



<Ant. 2>


<1Mbps>

CSE Plot on Ch 00 between 30MHz ~ 3 GHz

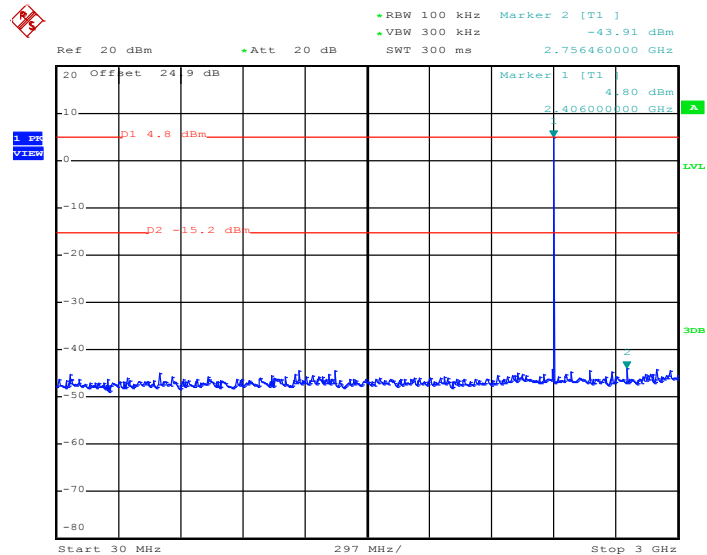


Date: 26.JUN.2018 02:57:09


1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

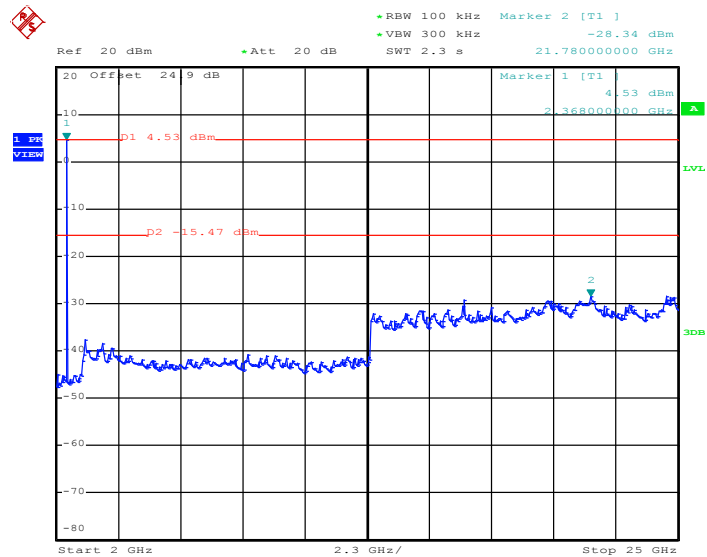

Date: 26.JUN.2018 02:57:38

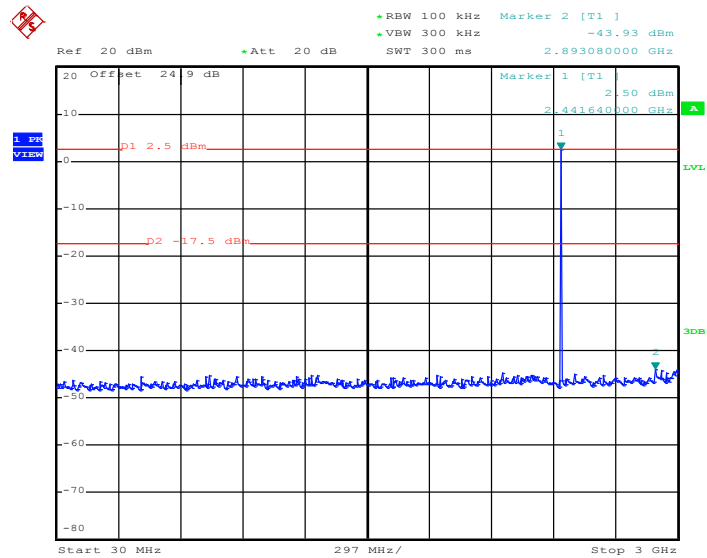**CSE Plot on Ch 39 between 30MHz ~ 3 GHz**


Date: 26.JUN.2018 02:59:58

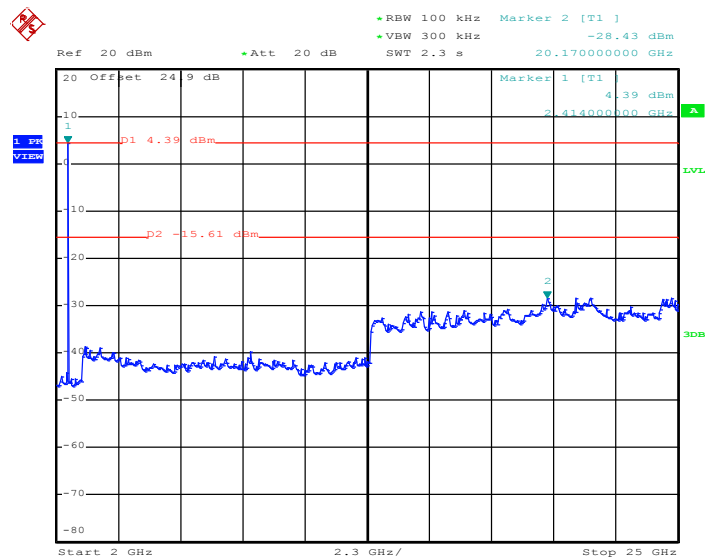CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

Date: 26.JUN.2018 03:00:25




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

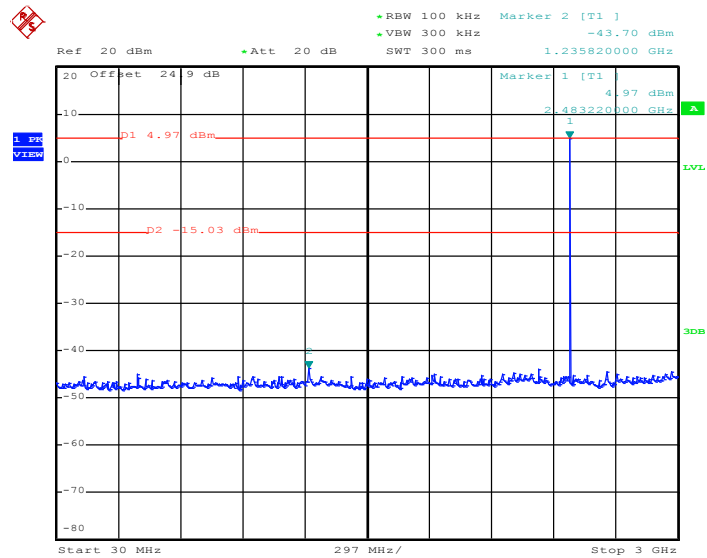

Date: 26.JUN.2018 03:04:12


CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

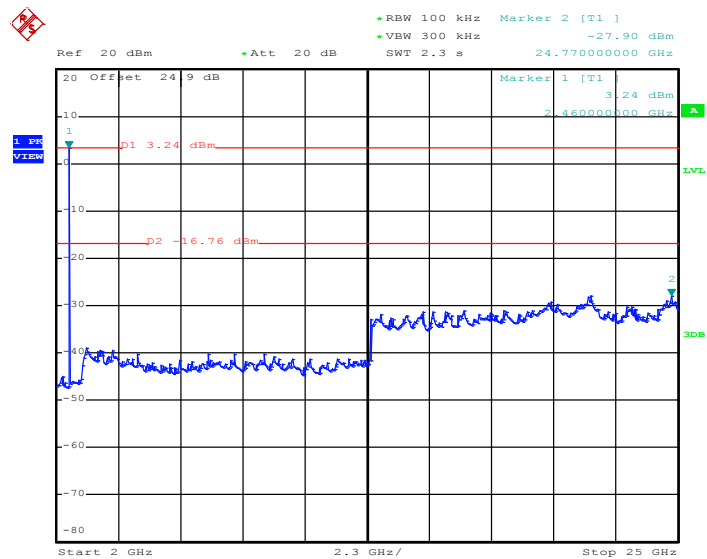


Date: 26.JUN.2018 03:05:04




<2Mbps>

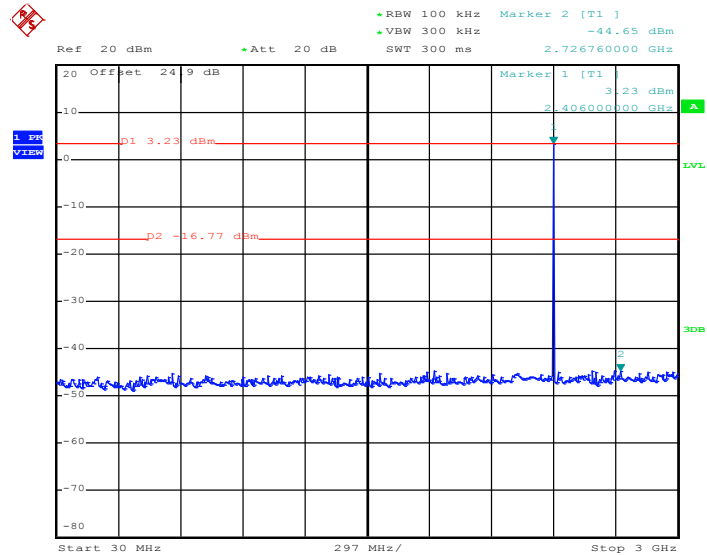CSE Plot on Ch 00 between 30MHz ~ 3 GHz


Date: 26.JUN.2018 03:10:11

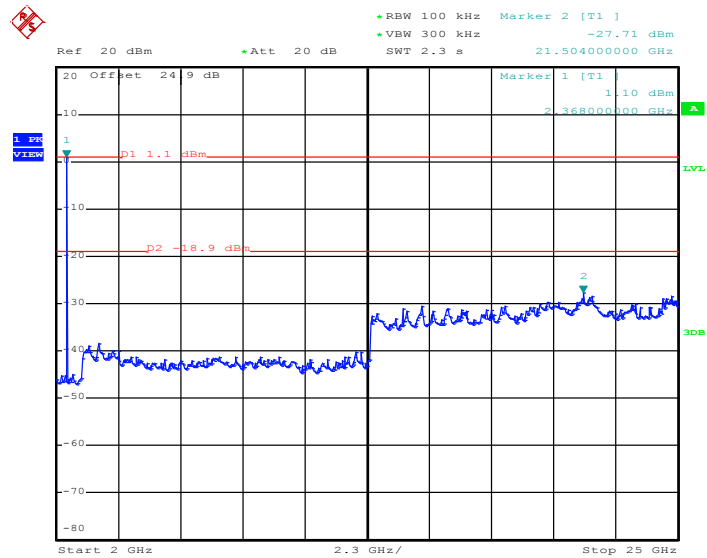CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

Date: 26.JUN.2018 03:10:40

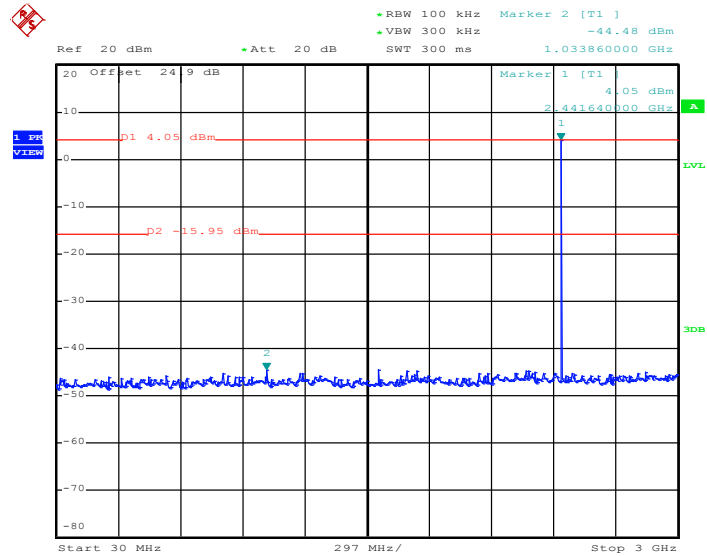**CSE Plot on Ch 39 between 30MHz ~ 3 GHz**


Date: 26.JUN.2018 03:16:10

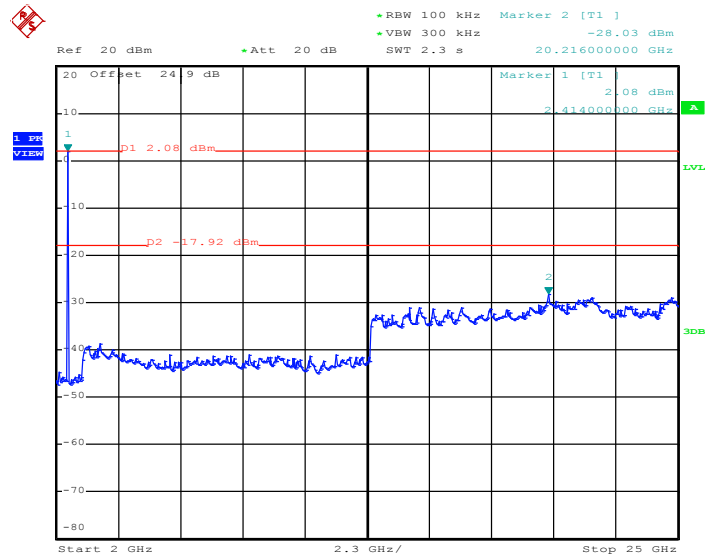CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

Date: 26.JUN.2018 03:16:38




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

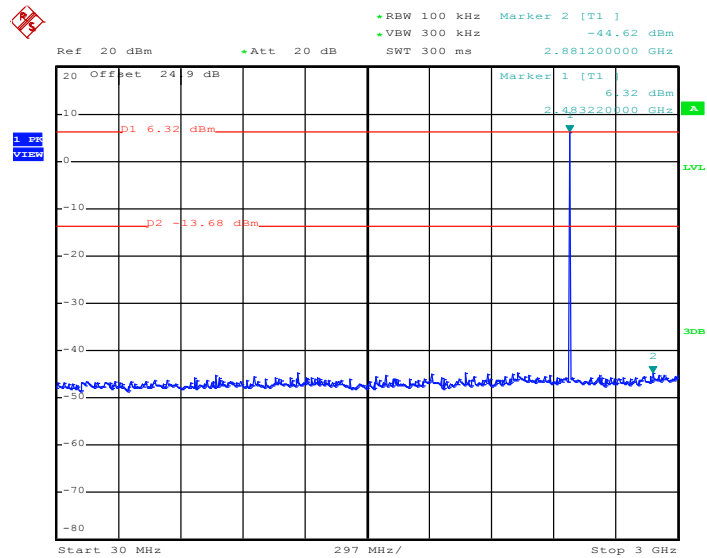


Date: 26.JUN.2018 03:22:48

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

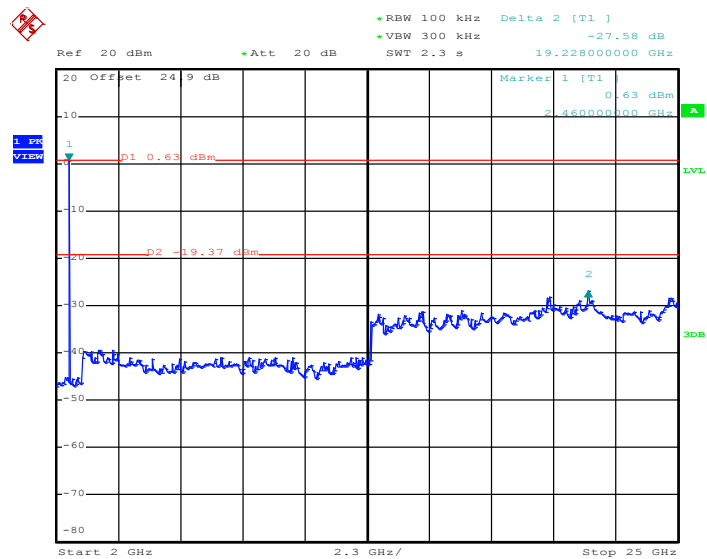


Date: 26.JUN.2018 03:24:54

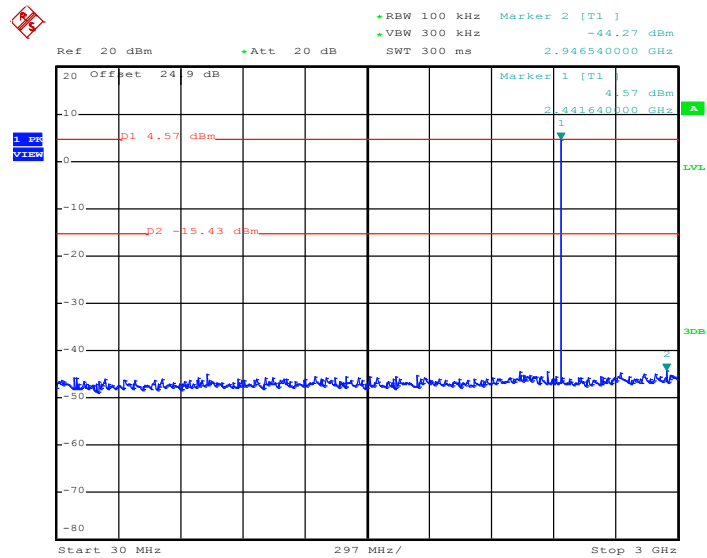

**CSE Plot on Ch 39 between 30MHz ~ 3 GHz**


Date: 26.JUN.2018 03:36:33

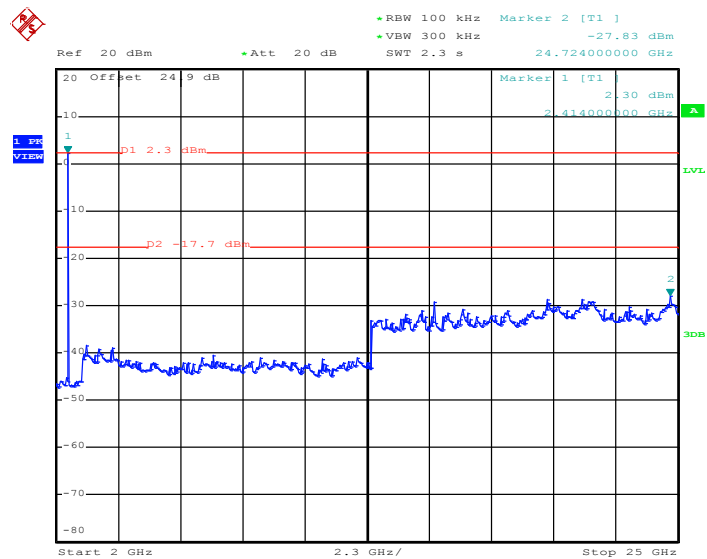CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

Date: 26.JUN.2018 03:37:07




CSE Plot on Ch 78 between 30MHz ~ 3 GHz

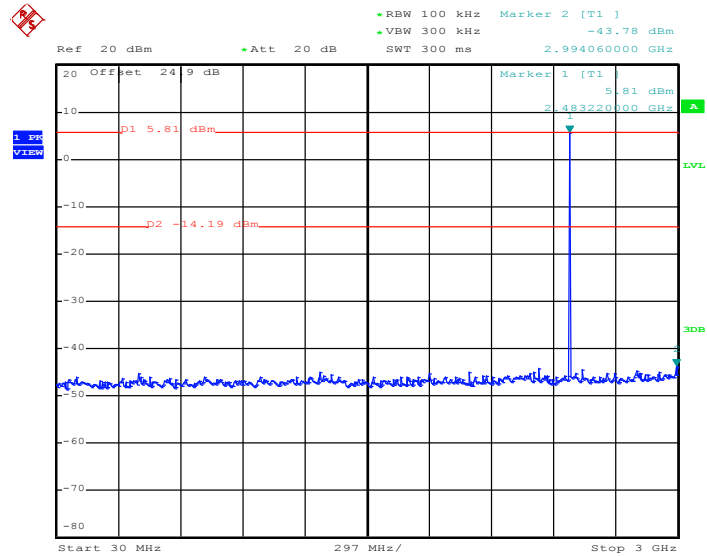

Date: 26.JUN.2018 03:40:26

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

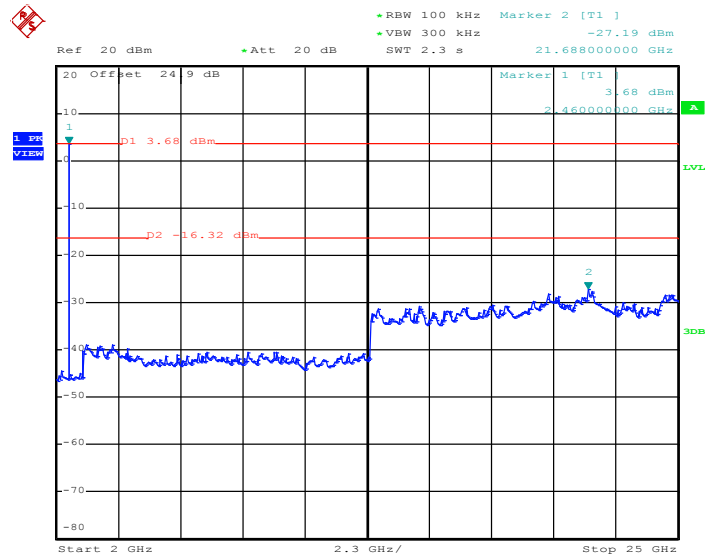

Date: 26.JUN.2018 03:42:07

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

See list of measuring equipment of this test report.


3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.75dB for Ant.1 and -24.79dB for Ant.2) derived from $20\log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

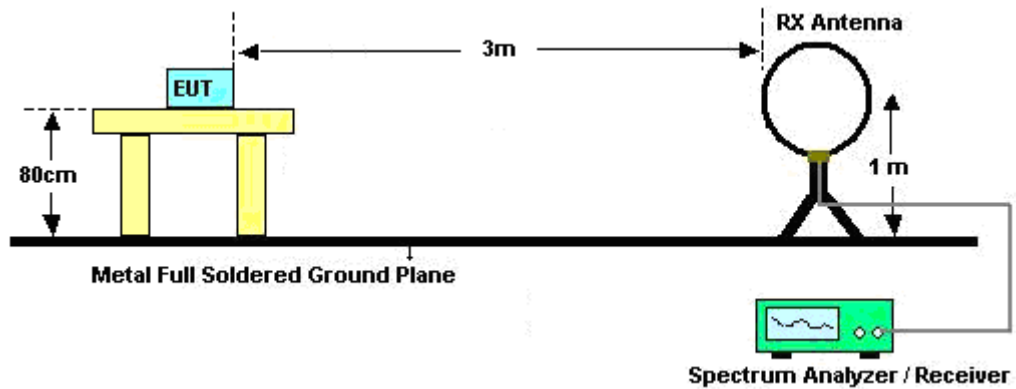

For radiated emissions from 30MHz to 1GHz

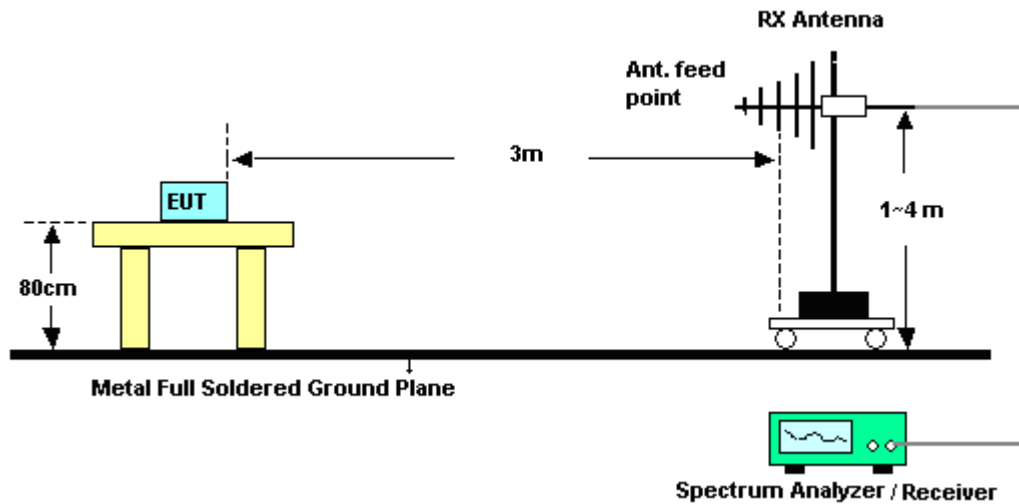

For radiated emissions above 1GHz

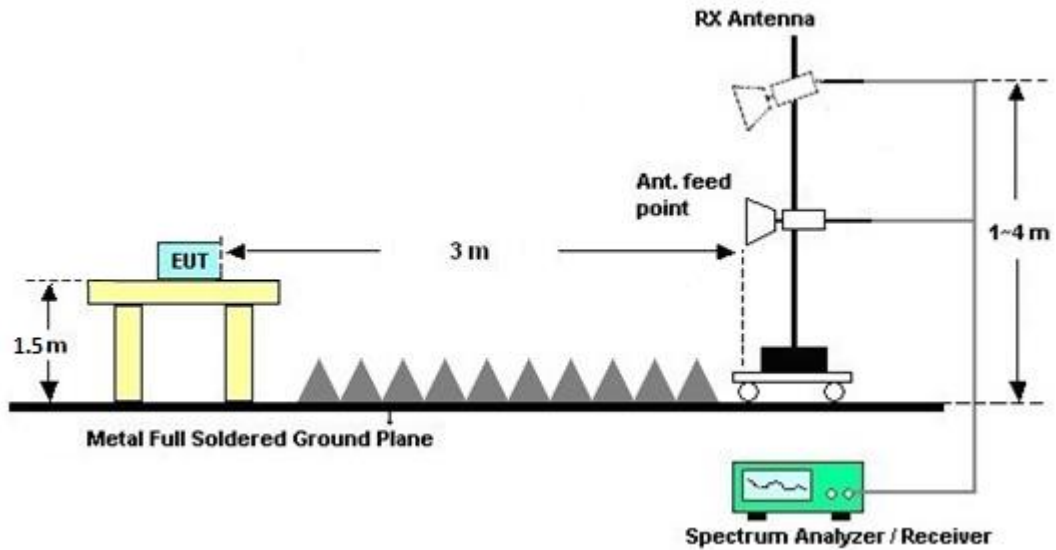

3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.8.7 Duty Cycle

Please refer to Appendix E.

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

See list of measuring equipment of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

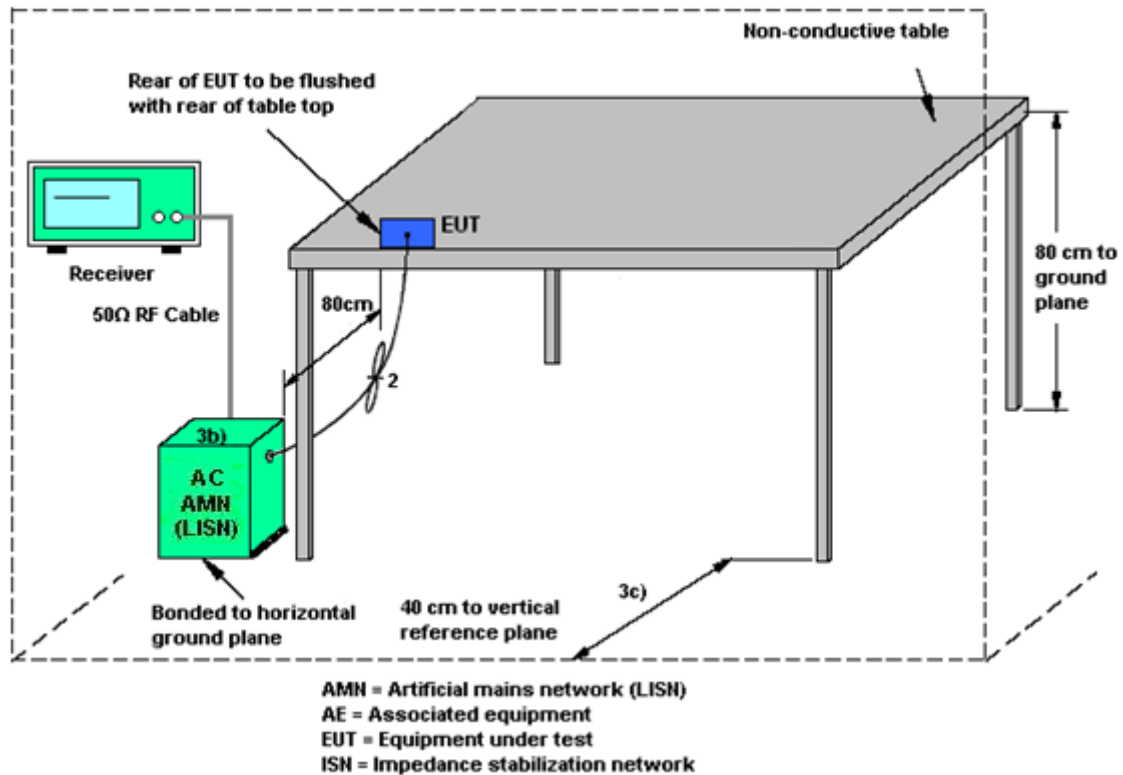

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB41292344	N/A	Dec. 20, 2017	Jun. 08, 2018~ Jun. 26, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Dec. 20, 2017	Jun. 08, 2018~ Jun. 26, 2018	Dec. 19, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9kHz ~ 30GHz	Nov. 13, 2017	Jun. 08, 2018~ Jun. 26, 2018	Nov. 12, 2018	Conducted (TH05-HY)
Switch Box & RF Cable	Burgeon	ETF-058	EC1300484	N/A	Mar. 01, 2018	Jun. 08, 2018~ Jun. 26, 2018	Feb. 28, 2019	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jun. 25, 2018	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	3.6GHz	Dec. 08, 2017	Jun. 25, 2018	Dec. 07, 2018	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 30, 2017	Jun. 25, 2018	Nov. 29, 2018	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jun. 25, 2018	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 03, 2018	Jun. 25, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 03, 2018	Jun. 25, 2018	Jan. 02, 2019	Conduction (CO05-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35419&03	30MHz to 1GHz	Dec. 18, 2017	Jun. 13, 2018~ Jul. 05, 2018	Dec. 17, 2018	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 23, 2017	Jun. 13, 2018~ Jul. 05, 2018	Aug. 22, 2018	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Nov. 10, 2017	Jun. 13, 2018~ Jul. 05, 2018	Nov. 09, 2018	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz ~ 18GHz	Apr. 25, 2018	Jun. 13, 2018~ Jul. 05, 2018	Apr. 24, 2019	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1GHz	May 21, 2018	Jun. 13, 2018~ Jul. 05, 2018	May 20, 2019	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Oct. 30, 2017	Jun. 13, 2018~ Jul. 05, 2018	Oct. 29, 2018	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Apr. 17, 2018	Jun. 13, 2018~ Jul. 05, 2018	Apr. 16, 2019	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Jun. 13, 2018~ Jul. 05, 2018	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Jun. 13, 2018~ Jul. 05, 2018	N/A	Radiation (03CH07-HY)
Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Jun. 13, 2018~ Jul. 05, 2018	Jul. 17, 2018	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917025 1	18GHz- 40GHz	Nov. 10, 2017	Jun. 13, 2018~ Jul. 05, 2018	Nov. 09, 2018	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A (MXE)	MY53290053	20Hz to 26.5GHz	Jan. 16, 2018	Jun. 13, 2018~ Jul. 05, 2018	Jan. 15, 2019	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	8050400465 6H	N/A	N/A	Jun. 13, 2018~ Jul. 05, 2018	N/A	Radiation (03CH07-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971/4, MY28655/4	9KHz~30MHz	Jan. 02, 2018	Jun. 13, 2018~ Jul. 05, 2018	Jan. 01, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	30MHz~1GHz	Feb. 27, 2018	Jun. 13, 2018~ Jul. 05, 2018	Feb. 26, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	1GHz~18GHz	Feb. 27, 2018	Jun. 13, 2018~ Jul. 05, 2018	Feb. 26, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SF102/2*11SK 252	MY4278/2	9kHz~40GHz	May 17, 2018	Jun. 13, 2018~ Jul. 05, 2018	May 16, 2019	Radiation (03CH07-HY)
Filter	Microwave	H1G013G1	SN477215	1.0G High Pass	Dec. 07, 2017	Jun. 13, 2018~ Jul. 05, 2018	Dec. 06, 2018	Radiation (03CH07-HY)
Filter	Microwave	H3G018G1	SN477220	3.0G High Pass	Nov. 21, 2017	Jun. 13, 2018~ Jul. 05, 2018	Nov. 20, 2018	Radiation (03CH07-HY)
Filter	Microwave	WHKX7.0/26.5 G-6SS	SN4	7G High Pass	Nov. 21, 2017	Jun. 13, 2018~ Jul. 05, 2018	Nov. 20, 2018	Radiation (03CH07-HY)
Filter	Wainwright	WLKS1200-8S S	SN3	1.2G Low Pass	Nov. 21, 2017	Jun. 13, 2018~ Jul. 05, 2018	Nov. 20, 2018	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.7
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Luffy Lin	Temperature:	21~25	°C
Test Date:	2018/06/08 ~ 2018/06/26	Relative Humidity:	51~54	%

<Ant. 1 >

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.880	0.828	1.314	0.5867	Pass
DH	1Mbps	1	39	2441	0.880	0.832	1.314	0.5867	Pass
DH	1Mbps	1	78	2480	0.880	0.828	1.020	0.5867	Pass
2DH	2Mbps	1	0	2402	1.260	1.164	1.008	0.8400	Pass
2DH	2Mbps	1	39	2441	1.260	1.164	1.068	0.8400	Pass
2DH	2Mbps	1	78	2480	1.260	1.164	1.314	0.8400	Pass
3DH	3Mbps	1	0	2402	1.272	1.156	1.008	0.8480	Pass
3DH	3Mbps	1	39	2441	1.272	1.164	1.014	0.8480	Pass
3DH	3Mbps	1	78	2480	1.272	1.160	1.002	0.8480	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.88	0.31	0.4	Pass
AFH	20	53.33	2.88	0.15	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	4.65	20.97	Pass
	39	1	5.40	20.97	Pass
	78	1	5.97	20.97	Pass
2DH1	0	1	6.85	20.97	Pass
	39	1	7.65	20.97	Pass
	78	1	8.28	20.97	Pass
3DH1	0	1	7.22	20.97	Pass
	39	1	8.06	20.97	Pass
	78	1	8.67	20.97	Pass

TEST RESULTS DATA**Average Power Table****(Reporting Only)**

DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	3.99	8.31
	39	1	4.84	8.31
	78	1	5.46	8.31
2DH1	0	1	3.98	8.20
	39	1	4.85	8.20
	78	1	5.45	8.20
3DH1	0	1	3.91	8.09
	39	1	4.78	8.09
	78	1	5.48	8.09

TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass

<Ant. 2>

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.932	0.832	1.002	0.6213	Pass
DH	1Mbps	1	39	2441	0.892	0.828	1.014	0.5947	Pass
DH	1Mbps	1	78	2480	0.888	0.832	1.014	0.5920	Pass
2DH	2Mbps	1	0	2402	1.260	1.160	1.002	0.8400	Pass
2DH	2Mbps	1	39	2441	1.260	1.160	1.008	0.8400	Pass
2DH	2Mbps	1	78	2480	1.260	1.164	1.008	0.8400	Pass
3DH	3Mbps	1	0	2402	1.272	1.160	1.008	0.8480	Pass
3DH	3Mbps	1	39	2441	1.272	1.160	1.014	0.8480	Pass
3DH	3Mbps	1	78	2480	1.272	1.160	1.014	0.8480	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.88	0.31	0.4	Pass
AFH	20	53.33	2.88	0.15	0.4	Pass

TEST RESULTS DATA**Peak Power Table**

DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	6.18	20.97	Pass
	39	1	6.49	20.97	Pass
	78	1	6.57	20.97	Pass
2DH1	0	1	8.44	20.97	Pass
	39	1	8.86	20.97	Pass
	78	1	8.78	20.97	Pass
3DH1	0	1	8.88	20.97	Pass
	39	1	9.19	20.97	Pass
	78	1	9.13	20.97	Pass

TEST RESULTS DATA**Average Power Table**
(Reporting Only)

DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	5.68	8.31
	39	1	5.94	8.31
	78	1	5.96	8.31
2DH1	0	1	5.69	8.20
	39	1	5.98	8.20
	78	1	5.97	8.20
3DH1	0	1	5.62	8.09
	39	1	6.00	8.09
	78	1	5.98	8.09

TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Arthur Hsieh	Temperature :	21~25℃
		Relative Humidity :	51~55%

EUT Information

Report NO : 831509-01
Test Mode : Mode 2
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

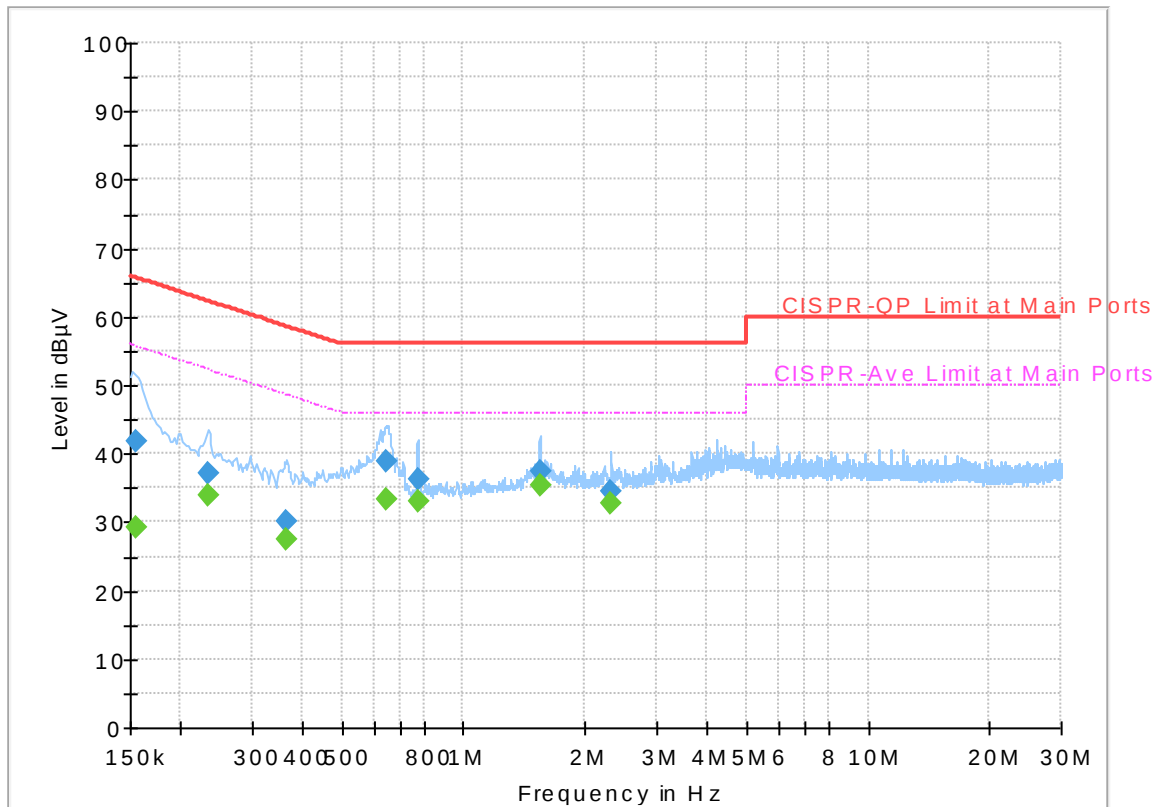


Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	29.17	55.75	26.58	L1	OFF	19.5
0.154500	41.83	---	65.75	23.92	L1	OFF	19.5
0.233250	---	33.78	52.33	18.55	L1	OFF	19.5
0.233250	37.04	---	62.33	25.29	L1	OFF	19.5
0.366000	---	27.38	48.59	21.21	L1	OFF	19.5
0.366000	30.10	---	58.59	28.49	L1	OFF	19.5
0.642750	---	33.38	46.00	12.62	L1	OFF	19.6
0.642750	38.84	---	56.00	17.16	L1	OFF	19.6
0.771000	---	33.17	46.00	12.83	L1	OFF	19.6
0.771000	36.19	---	56.00	19.81	L1	OFF	19.6
1.542750	---	35.35	46.00	10.65	L1	OFF	19.6
1.542750	37.46	---	56.00	18.54	L1	OFF	19.6
2.312250	---	32.82	46.00	13.18	L1	OFF	19.5
2.312250	34.52	---	56.00	21.48	L1	OFF	19.5

EUT Information

Report NO : 831509-01
Test Mode : Mode 2
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

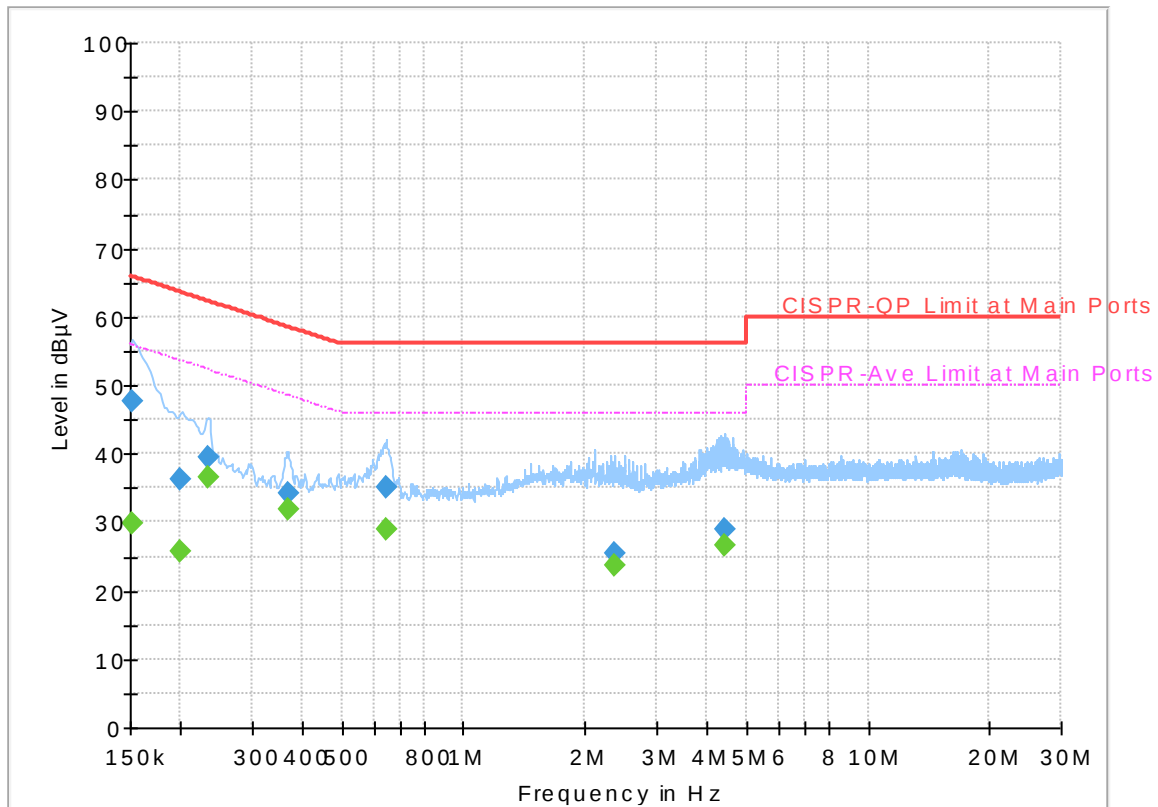

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	29.94	55.88	25.94	N	OFF	19.5
0.152250	47.65	---	65.88	18.23	N	OFF	19.5
0.199500	---	25.84	53.63	27.79	N	OFF	19.5
0.199500	36.17	---	63.63	27.46	N	OFF	19.5
0.233250	---	36.67	52.33	15.66	N	OFF	19.5
0.233250	39.50	---	62.33	22.83	N	OFF	19.5
0.368250	---	32.01	48.54	16.53	N	OFF	19.5
0.368250	34.15	---	58.54	24.39	N	OFF	19.5
0.645000	---	28.90	46.00	17.10	N	OFF	19.6
0.645000	35.03	---	56.00	20.97	N	OFF	19.6
2.366250	---	23.63	46.00	22.37	N	OFF	19.5
2.366250	25.39	---	56.00	30.61	N	OFF	19.5
4.445250	---	26.58	46.00	19.42	N	OFF	19.7
4.445250	29.09	---	56.00	26.91	N	OFF	19.7



Appendix C. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh and Nick Yu	Temperature :	24~26°C
		Relative Humidity :	51~53%

<For Ant. 1>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH00 2402MHz		2342.025	45.3	-28.7	74	41.12	31.83	7.38	35.03	300	281	P	H
		2342.025	20.55	-33.45	54	-	-	-	-	-	-	A	H
	*	2402	101.9	-	-	97.56	31.95	7.44	35.05	300	281	P	H
	*	2402	77.15	-	-	-	-	-	-	-	-	A	H
		2356.2	45.68	-28.32	74	41.46	31.87	7.38	35.03	394	311	P	V
		2356.2	20.93	-33.07	54	-	-	-	-	-	-	A	V
	*	2402	99.38	-	-	95.04	31.95	7.44	35.05	394	311	P	V
	*	2402	74.63	-	-	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		2382.66	44.43	-29.57	74	40.12	31.91	7.44	35.04	362	284	P	H
		2382.66	19.68	-34.32	54	-	-	-	-	-	-	A	H
	*	2441	103.16	-	-	98.64	32.08	7.5	35.06	362	284	P	H
	*	2441	78.41	-	-	-	-	-	-	-	-	A	H
		2486.49	45.51	-28.49	74	40.86	32.16	7.56	35.07	362	284	P	H
		2486.49	20.76	-33.24	54	-	-	-	-	-	-	A	H
		2363.48	44.67	-29.33	74	40.45	31.87	7.38	35.03	299	122	P	V
		2363.48	19.92	-34.08	54	-	-	-	-	-	-	A	V
	*	2441	101.32	-	-	96.8	32.08	7.5	35.06	299	122	P	V
	*	2441	76.57	-	-	-	-	-	-	-	-	A	V
		2492.93	44.94	-29.06	74	40.26	32.2	7.56	35.08	299	122	P	V
		2492.93	20.19	-33.81	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	103.81	-	-	99.16	32.16	7.56	35.07	396	272	P	H
	*	2480	79.06	-	-	-	-	-	-	-	-	A	H
		2484.52	46.65	-27.35	74	42	32.16	7.56	35.07	396	272	P	H
		2484.52	21.9	-32.1	54	-	-	-	-	-	-	A	H
	*	2480	101.97	-	-	97.32	32.16	7.56	35.07	399	336	P	V
	*	2480	77.22	-	-	-	-	-	-	-	-	A	V
		2484	46.4	-27.6	74	41.75	32.16	7.56	35.07	399	336	P	V
		2484	21.65	-32.35	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	42.37	-31.63	74	56.43	34.24	11.08	59.38	100	0	P	H
		4804	17.62	-36.38	54	-	-	-	-	-	-	A	H
		4804	42.03	-31.97	74	56.09	34.24	11.08	59.38	100	0	P	V
		4804	17.28	-36.72	54	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		4882	41.49	-32.51	74	55.35	34.22	11.16	59.24	100	0	P	H
		4882	16.74	-37.26	54	-	-	-	-	-	-	A	H
		7323	42.27	-31.73	74	51.12	35.7	13.61	58.16	100	0	P	H
		7323	17.52	-36.48	54	-	-	-	-	-	-	A	H
		4882	41.83	-32.17	74	55.69	34.22	11.16	59.24	100	0	P	V
		4882	17.08	-36.92	54	-	-	-	-	-	-	A	V
		7323	41.88	-32.12	74	50.73	35.7	13.61	58.16	100	0	P	V
		7323	17.13	-36.87	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	41.94	-32.06	74	55.54	34.21	11.26	59.07	100	0	P	H
		4960	17.19	-36.81	54	-	-	-	-	-	-	A	H
		7440	42.72	-31.28	74	51.71	35.63	13.71	58.33	100	0	P	H
		7440	17.97	-36.03	54	-	-	-	-	-	-	A	H
		4960	41.61	-32.39	74	55.21	34.21	11.26	59.07	100	0	P	V
		4960	16.86	-37.14	54	-	-	-	-	-	-	A	V
		7440	42.55	-31.45	74	51.54	35.63	13.71	58.33	100	0	P	V
		7440	17.8	-36.2	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		30	29.83	-10.17	40	35.38	24.6	1.2	31.35	100	0	P	H
		124.77	24.68	-18.82	43.5	36.58	17.69	1.94	31.53	-	-	P	H
		207.93	33.23	-10.27	43.5	47.35	15.07	2.25	31.44	-	-	P	H
		416.2	29.71	-16.29	46	35.13	22.4	3.29	31.11	-	-	P	H
		624.1	29.5	-16.5	46	30.6	25.64	4.05	30.79	-	-	P	H
		956.6	32.95	-13.05	46	27.74	30.69	5.03	30.51	-	-	P	H
		30	29.51	-10.49	40	35.06	24.6	1.2	31.35	100	0	P	V
		160.14	17.93	-25.57	43.5	30.6	16.57	2.25	31.49	-	-	P	V
		207.93	27.61	-15.89	43.5	41.73	15.07	2.25	31.44	-	-	P	V
		416.2	24.09	-21.91	46	29.51	22.4	3.29	31.11	-	-	P	V
		841.8	30.08	-15.92	46	27.41	28.56	4.67	30.56	-	-	P	V
		967.1	31.6	-22.4	54	26.2	30.87	5.04	30.51	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



<For Ant. 2>

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH00 2402MHz		2344.755	44.9	-29.1	74	40.72	31.83	7.38	35.03	376	144	P	H
		2344.755	20.11	-33.89	54	-	-	-	-	-	-	A	H
	*	2402	102.25	-	-	97.91	31.95	7.44	35.05	376	144	P	H
	*	2402	77.46	-	-	-	-	-	-	-	-	A	H
		2332.995	44.8	-29.2	74	40.71	31.79	7.32	35.02	212	350	P	V
		2332.995	20.01	-33.99	54	-	-	-	-	-	-	A	V
	*	2402	103.84	-	-	99.5	31.95	7.44	35.05	212	350	P	V
	*	2402	79.05	-	-	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		2388.54	45.04	-28.96	74	40.69	31.95	7.44	35.04	359	144	P	H
		2388.54	20.25	-33.75	54	-	-	-	-	-	-	A	H
	*	2441	103.46	-	-	98.94	32.08	7.5	35.06	359	144	P	H
	*	2441	78.67	-	-	-	-	-	-	-	-	A	H
		2492.09	45.17	-28.83	74	40.49	32.2	7.56	35.08	359	144	P	H
		2492.09	20.38	-33.62	54	-	-	-	-	-	-	A	H
		2378.32	44.86	-29.14	74	40.61	31.91	7.38	35.04	377	237	P	V
		2378.32	20.07	-33.93	54	-	-	-	-	-	-	A	V
	*	2441	102.65	-	-	98.13	32.08	7.5	35.06	377	237	P	V
	*	2441	77.86	-	-	-	-	-	-	-	-	A	V
		2493.28	45.21	-28.79	74	40.53	32.2	7.56	35.08	377	237	P	V
		2493.28	20.42	-33.58	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	103.2	-	-	98.55	32.16	7.56	35.07	314	140	P	H
	*	2480	78.41	-	-	-	-	-	-	-	-	A	H
		2484.04	46.91	-27.09	74	42.26	32.16	7.56	35.07	314	140	P	H
		2484.04	22.12	-31.88	54	-	-	-	-	-	-	A	H
	*	2480	102.87	-	-	98.22	32.16	7.56	35.07	358	237	P	V
	*	2480	78.08	-	-	-	-	-	-	-	-	A	V
		2483.56	46.31	-27.69	74	41.66	32.16	7.56	35.07	358	237	P	V
		2483.56	21.52	-32.48	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	42.82	-31.18	74	56.88	34.24	11.08	59.38	100	0	P	H
		4804	18.03	-35.97	54	-	-	-	-	-	-	A	H
		4804	42.38	-31.62	74	56.44	34.24	11.08	59.38	100	0	P	V
		4804	17.59	-36.41	54	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		4882	42	-32	74	55.86	34.22	11.16	59.24	100	0	P	H
		4882	17.21	-36.79	54	-	-	-	-	-	-	A	H
		7323	42.36	-31.64	74	51.21	35.7	13.61	58.16	100	0	P	H
		7323	17.57	-36.43	54	-	-	-	-	-	-	A	H
		4882	41.63	-32.37	74	55.49	34.22	11.16	59.24	100	0	P	V
		4882	16.84	-37.16	54	-	-	-	-	-	-	A	V
		7323	41.58	-32.42	74	50.43	35.7	13.61	58.16	100	0	P	V
		7323	16.79	-37.21	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	41.49	-32.51	74	55.09	34.21	11.26	59.07	100	0	P	H
		4960	16.7	-37.3	54	-	-	-	-	-	-	A	H
		7440	43.08	-30.92	74	52.07	35.63	13.71	58.33	100	0	P	H
		7440	18.29	-35.71	54	-	-	-	-	-	-	A	H
		4960	42.92	-31.08	74	56.52	34.21	11.26	59.07	100	0	P	V
		4960	18.13	-35.87	54	-	-	-	-	-	-	A	V
		7440	42.57	-31.43	74	51.56	35.63	13.71	58.33	100	0	P	V
		7440	17.78	-36.22	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		30	29.98	-10.02	40	35.53	24.6	1.2	31.35	100	0	P	H
		126.93	24.81	-18.69	43.5	36.8	17.59	1.95	31.53	-	-	P	H
		207.93	33.07	-10.43	43.5	47.19	15.07	2.25	31.44	-	-	P	H
		416.2	24	-22	46	29.42	22.4	3.29	31.11	-	-	P	H
		761.3	29.35	-16.65	46	27.75	27.85	4.37	30.62	-	-	P	H
		990.2	31.17	-22.83	54	26.06	30.53	5.09	30.51	-	-	P	H
		30.27	29.14	-10.86	40	34.69	24.6	1.2	31.35	100	0	P	V
		207.93	26.54	-16.96	43.5	40.66	15.07	2.25	31.44	-	-	P	V
		258.42	18.83	-27.17	46	28.38	19.31	2.5	31.36	-	-	P	V
		514.2	30.11	-15.89	46	33.49	23.92	3.66	30.96	-	-	P	V
		624.1	33.07	-12.93	46	34.17	25.64	4.05	30.79	-	-	P	V
		965	32.37	-21.63	54	26.96	30.88	5.04	30.51	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical

A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.





Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, Stan Hsieh and Nick Yu	Temperature :	24~26°C
		Relative Humidity :	51~53%



<For Ant. 1>

2.4GHz 2400~2483.5MHz




BT (Band Edge @ 3m)

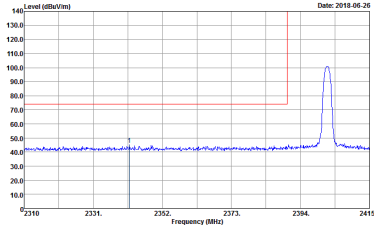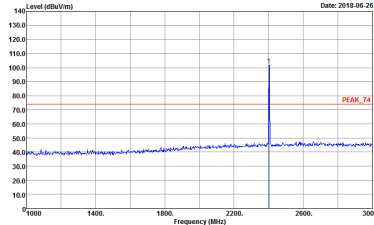BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 831509-01 Node : 1	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 831509-01 Node : 1


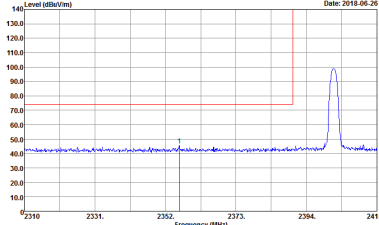
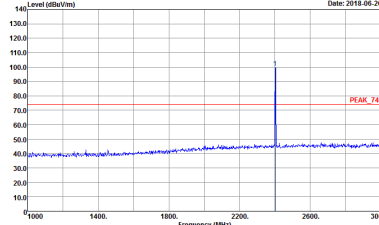


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 1	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 1

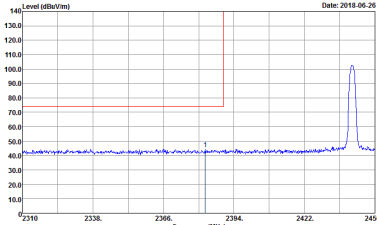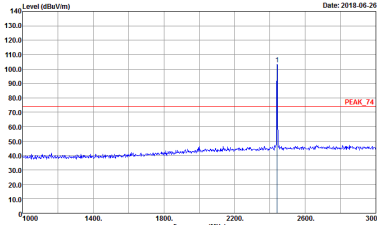
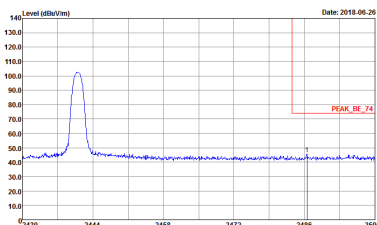


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 2	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 2
	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 2	Left blank

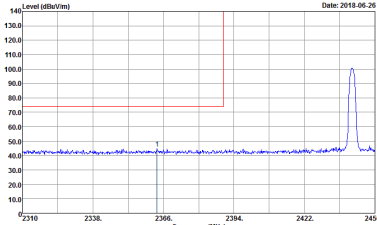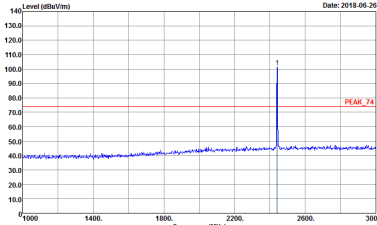
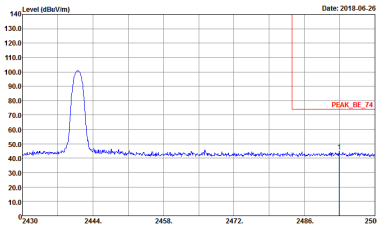


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 2	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 2
	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 2	Left blank

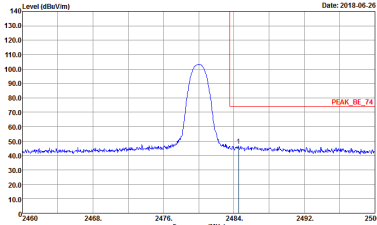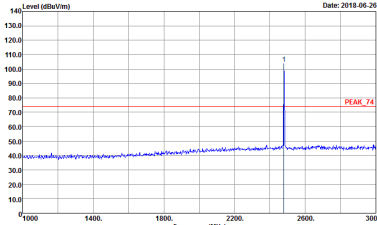

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : 3	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : Peak Project : 831509-01 Mode : 3

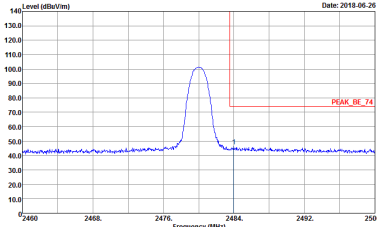
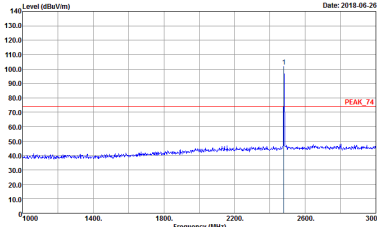


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 3	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 3



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

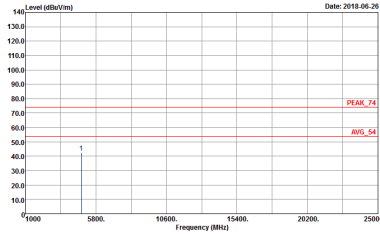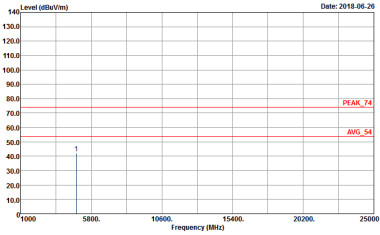BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH00 2402MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 1	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 831509-01 Mode : 1





BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH39 2441MHz	
1	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2018-06-26 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 2	Level (dBuV/m) Date: 2018-06-26 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 831509-01 Mode : 2



BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH78 2480MHz	
1	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2018-06-26 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 3	Level (dBuV/m) Date: 2018-06-26 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 831509-01 Mode : 3



Emission below 1GHz
2.4GHz BT (LF)

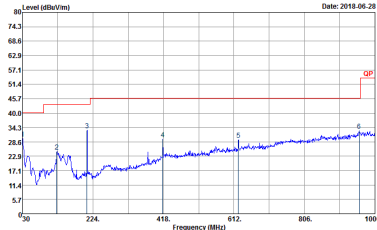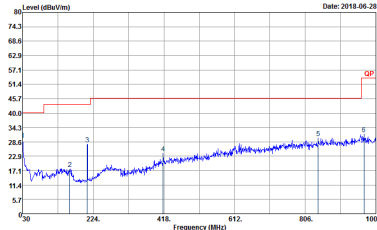BT	2.4GHz 2400~2483.5MHz	
ANT	BT LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CM07-HY Condition : QP 3m LF-ANT-35419(6) HORIZONTAL Detector : Peak Project : 831509-01 Mode : 49	 Site : 03CM07-HY Condition : QP 3m LF-ANT-35419(6) VERTICAL Detector : Peak Project : 831509-01 Mode : 49



<For Ant. 2>




2.4GHz 2400~2483.5MHz




BT (Band Edge @ 3m)

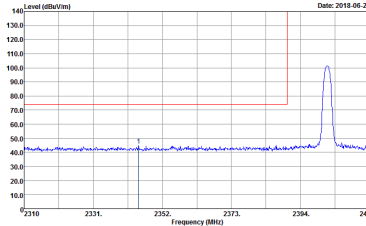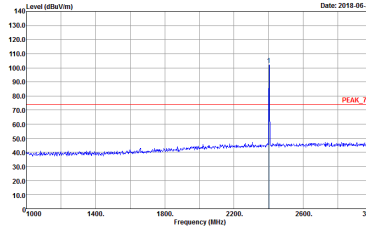BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
2	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SMT:Auto Detector : Peak Project : 831509-01 Node : 10	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SMT:Auto Detector : Peak Project : 831509-01 Node : 10

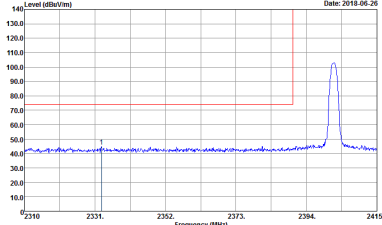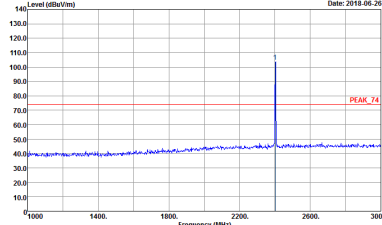

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH00 2402MHz	
2	Vertical	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 10	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 10

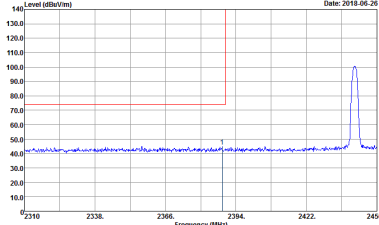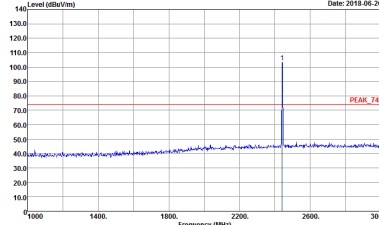
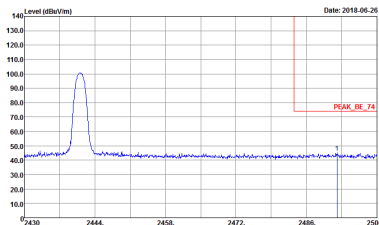
BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
2	Horizontal	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 11	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 11
	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 11	Left blank

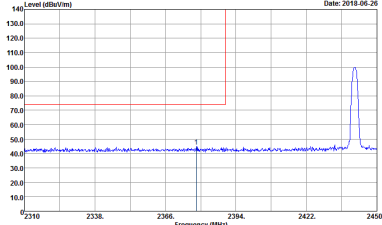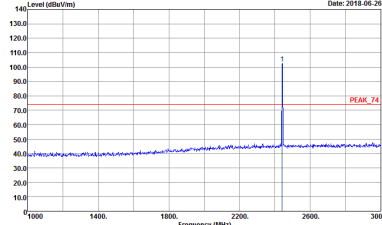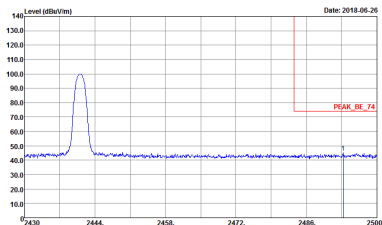BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH39 2441MHz	
2	Vertical	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 11	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 11
	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 11	Left blank



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
2	Horizontal	Fundamental
Peak	Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 12	Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 12

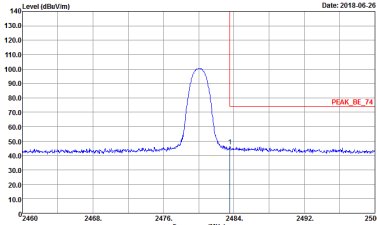
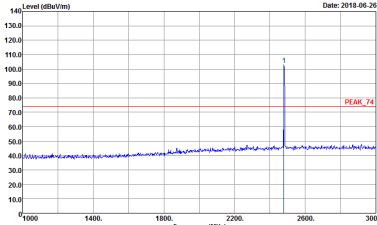


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT CH78 2480MHz	
2	Vertical	Fundamental
Peak	 Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 12	 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL Detector : Peak Project : 831509-01 Mode : 12





2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

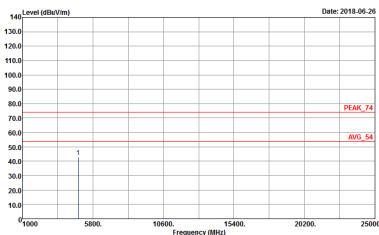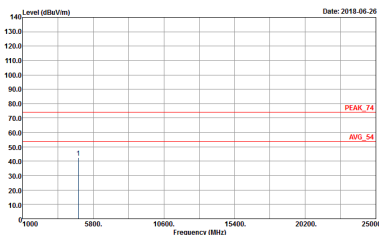BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH00 2402MHz	
2	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 10	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 831509-01 Mode : 10

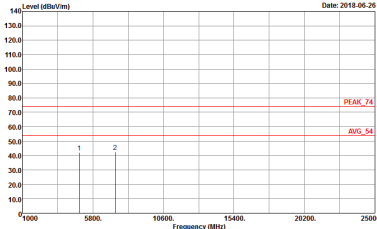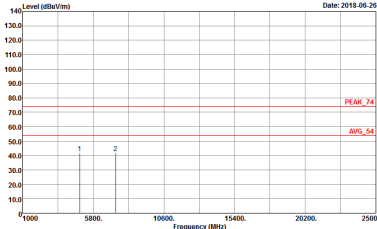

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH39 2441MHz	
2	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 11	 Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 831509-01 Mode : 11





BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT CH78 2480MHz	
2	Horizontal	Vertical
Peak Avg.	Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 831509-01 Mode : 12	Site : 03CH07-HY Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 831509-01 Mode : 12



Emission below 1GHz


2.4GHz BT (LF)

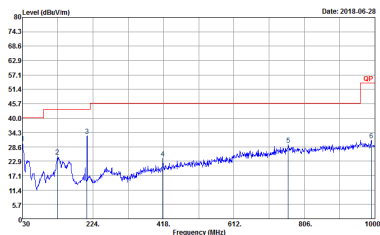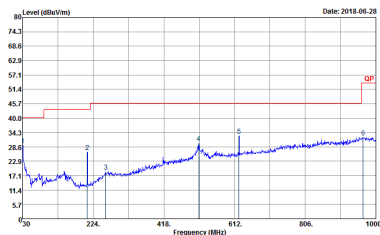BT	2.4GHz 2400~2483.5MHz	
ANT	BT LF	
2	Horizontal	Vertical
QP / Peak	 Site : 03CM07-HY Condition : QP 3m LF-ANT-35419(6) HORIZONTAL Detector : Peak Project : 831509-01 Mode : S1	 Site : 03CM07-HY Condition : QP 3m LF-ANT-35419(6) VERTICAL Detector : Peak Project : 831509-01 Mode : S1


Appendix E. Duty Cycle Plots

<Ant. 1>

3DH5 on time (One Pulse) Plot on Channel 39

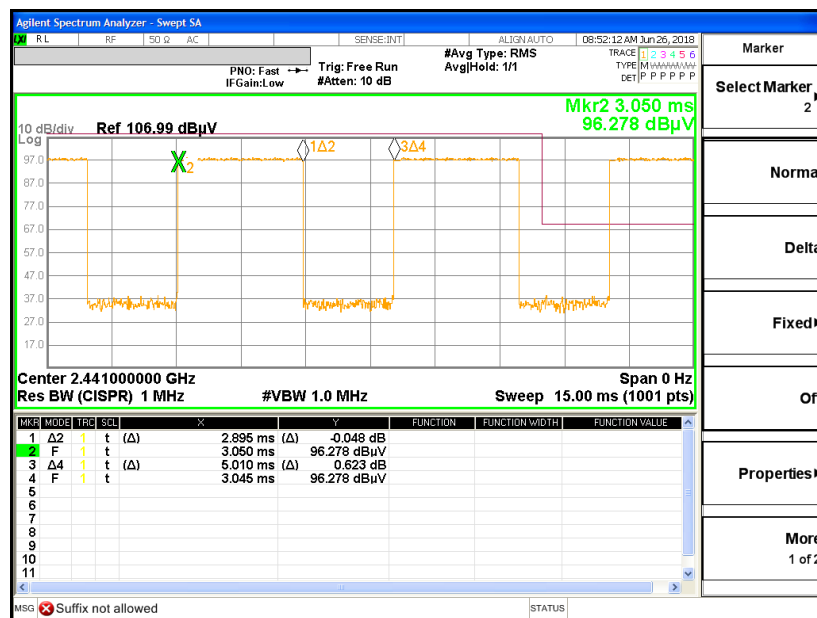

on time (Count Pulses) Plot on Channel 39

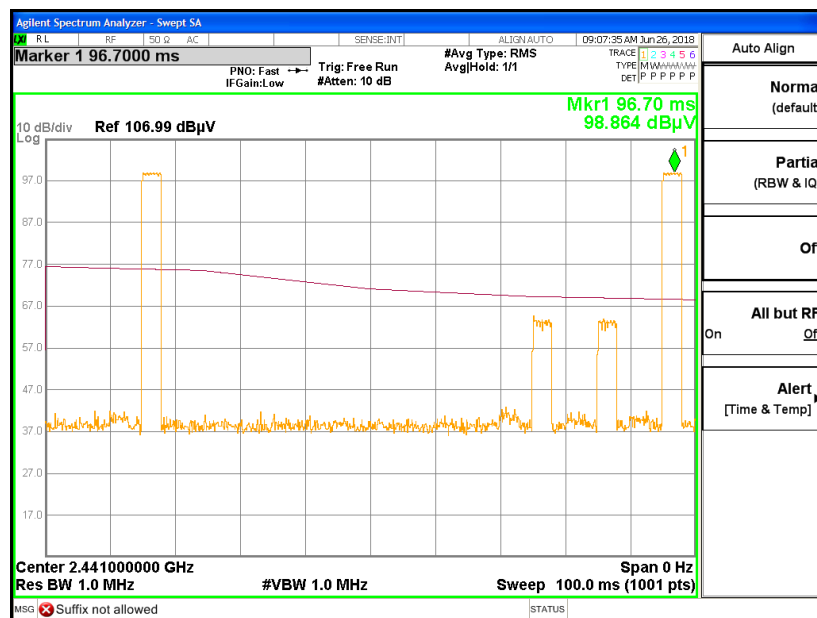


Note:


1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.895 / 100 = 5.79 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.75 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.

<Ant. 2>

3DH5 on time (One Pulse) Plot on Channel 39

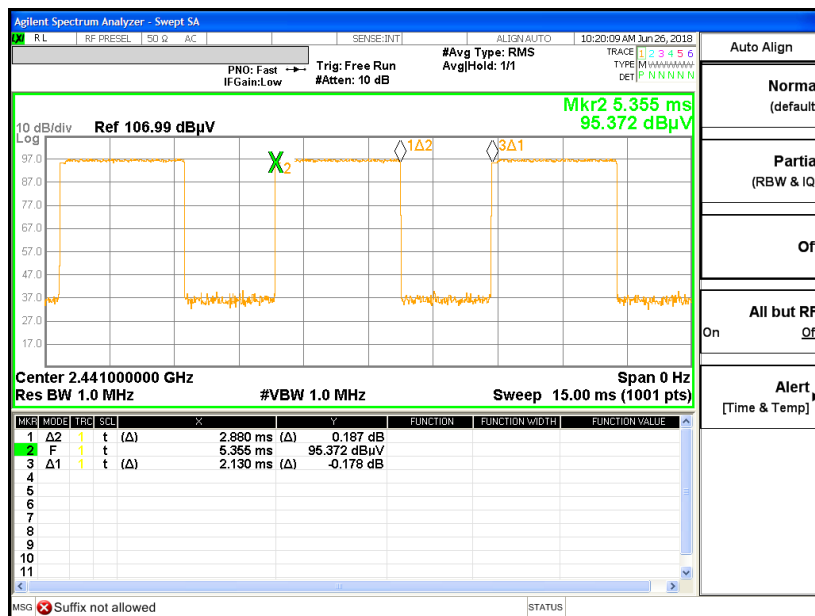

on time (Count Pulses) Plot on Channel 39

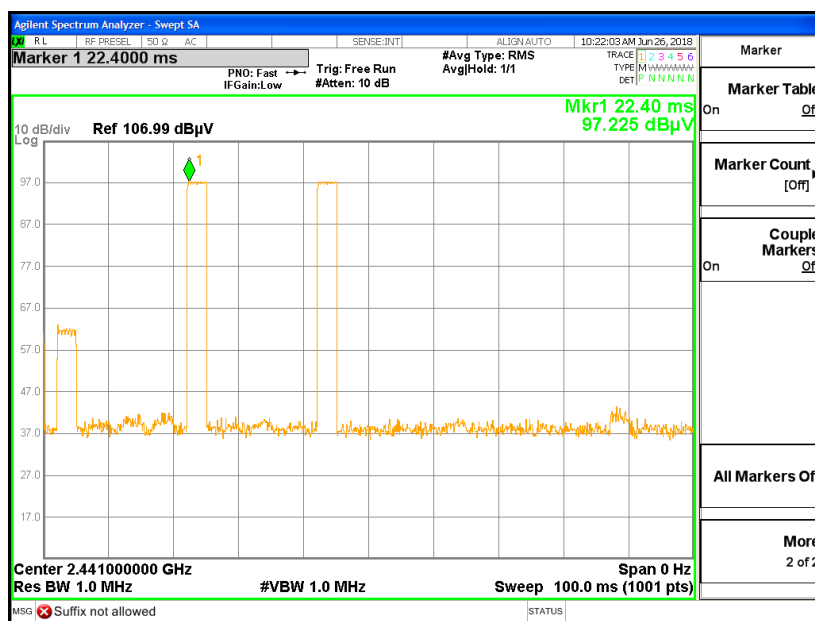

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.895 \text{ ms} \times 20 \text{ channels} = 57.9 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.895 \text{ ms} \times 2 = 5.79 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.79 \text{ ms}/100\text{ms}) = -24.75 \text{ dB}$$

—————THE END—————