

#01_WCDMA II_RMC 12.2Kbps_Edge 3_0mm_Ch9262;Ant 1

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_190119 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.522$ S/m; $\epsilon_r = 54.637$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.93, 7.93, 7.93) ; Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 16.8 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 70.06 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 20.4 W/kg

SAR(1 g) = 9.31 W/kg; SAR(10 g) = 4.17 W/kg

Maximum value of SAR (measured) = 16.7 W/kg

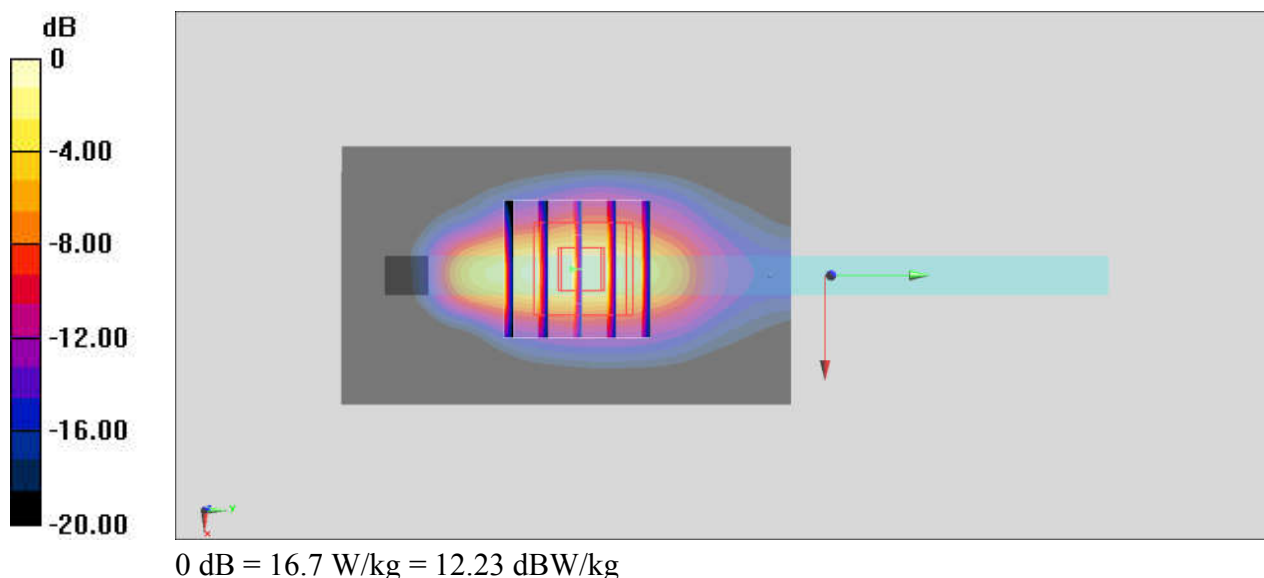

#02_WCDMA V_RMC 12.2Kbps_Bottom Face_0mm_Ch4182;Ant 1

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850_190121 Medium parameters used: $f = 836.4$ MHz; $\sigma = 1.004$ S/m; $\epsilon_r = 56.112$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.9 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(9.99, 9.99, 9.99) ; Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.14 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 52.59 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.88 W/kg

SAR(1 g) = 1.36 W/kg; SAR(10 g) = 0.705 W/kg

Maximum value of SAR (measured) = 2.37 W/kg

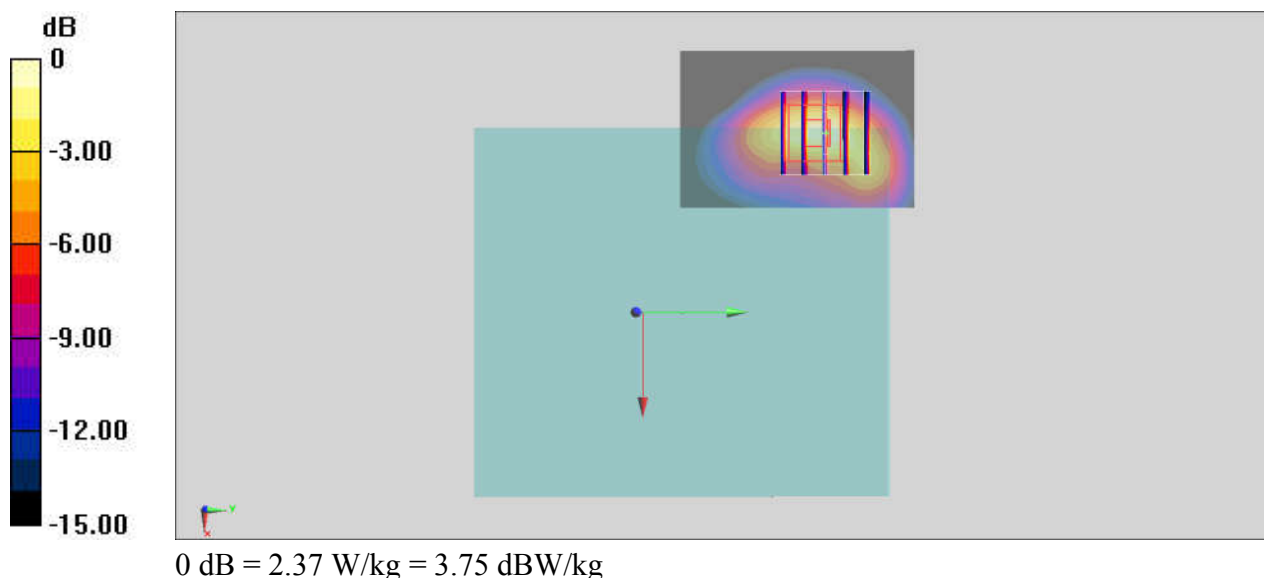

#03_LTE Band 2_20M_QPSK_1_0_Edge 3_0mm_Ch19100;Ant 1

Communication System: LTE; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_190119 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.577$ S/m; $\epsilon_r = 54.438$;
 $\rho = 1000$ kg/m³

Ambient Temperature : 23.8 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(7.93, 7.93, 7.93) ; Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 15.4 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 67.18 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 19.1 W/kg

SAR(1 g) = 8.92 W/kg; SAR(10 g) = 4.01 W/kg

Maximum value of SAR (measured) = 15.8 W/kg

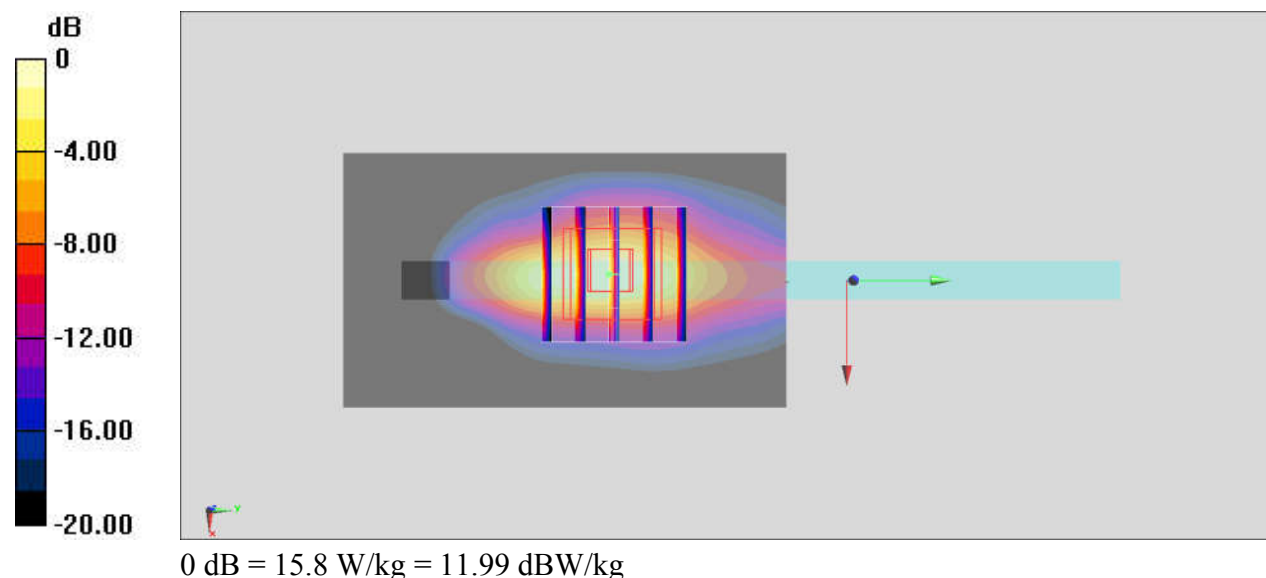

#04_LTE Band 4_20M_QPSK_1_0_Edge 3_0mm_Ch20175;Ant 1

Communication System: LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: MSL_1750_190121 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.497$ S/m; $\epsilon_r = 54.324$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(8.2, 8.2, 8.2) ; Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1041
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 15.1 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 94.33 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 18.8 W/kg

SAR(1 g) = 8.94 W/kg; SAR(10 g) = 4.1 W/kg

Maximum value of SAR (measured) = 15.7 W/kg

